


*Western Electric*


# 132-B Main Amplifier

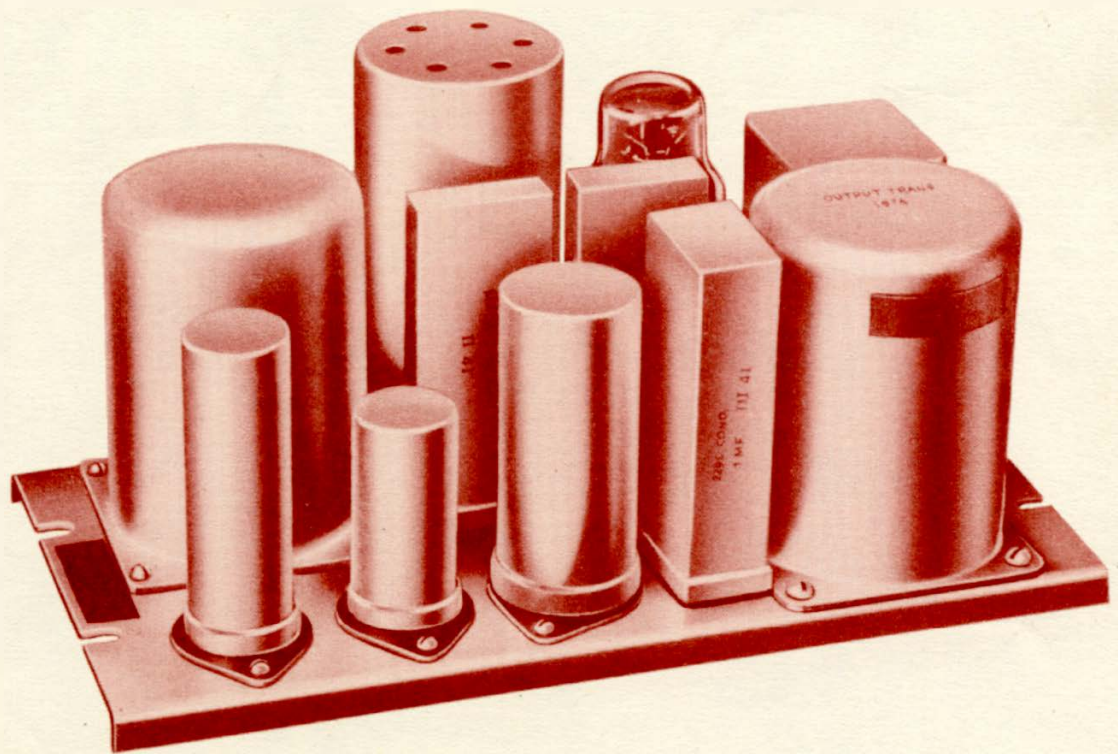

**I**DEALLY SUITED as a main amplifier in either AM or FM audio system installations, the Western Electric 132B Amplifier has a number of features which will help give the modern broadcaster high-quality, dependable service.

Compact physical dimensions — low signal-to-noise ratio — gain and output capable of providing a suitable margin above line level to allow for losses in coupling and equalizing devices — stabilized feedback to maintain fidelity over the full 50 to 15,000 cycle range — these are some of the outstanding qualities found in the Western Electric 132B Amplifier. The components are fully shielded to minimize self-generated noise, and the center-tapped input transformer is provided with an electro-static shield. It also has an extra electro-magnetic shield to reduce hum pickup from a-c magnetic fields which may exist from other apparatus. Resistors in the cathode circuit are provided to permit tube checks.

Adequate power is available to supply many program bus systems or studio auditioning facilities, in addition to feeding normally equalized transmission lines or master switching circuits. The 132B operates from an external power supply, and is suited for either desk or rack mounting.

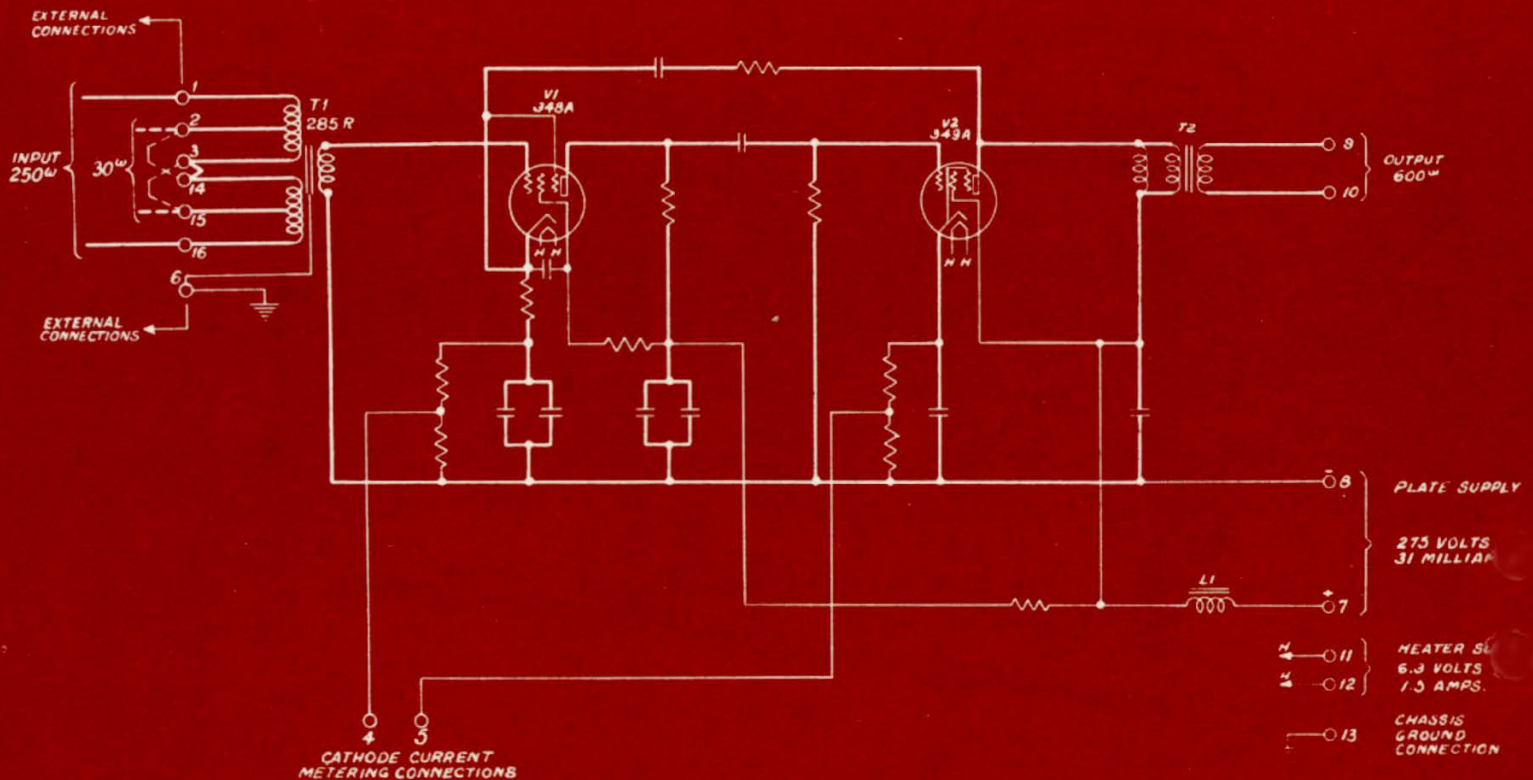

*Simplified Schematic 132B Main Amplifier*

## Features

- Latest design for Modern FM and AM Broadcasting
- Can supply program bus systems and studio auditioning facilities
- High signal-to-noise ratio
- Stabilized feedback
- Easy checking of tubes
- Compact

## Typical Specifications

**FREQUENCY RESPONSE:** (as measured from nominal impedances) Uniform within  $\pm 1$  db, 50 to 15,000 cycles.

**OUTPUT NOISE:** -50 dbm — unweighted  
-75 dbm — weighted\*

**SIGNAL-TO-NOISE RATIO:**  
73 db — unweighted  
83 db — weighted\*  
for + 18 dbm output.

**SOURCE IMPEDANCE:** Nominal 30 or 250 ohms — matching. For bridging, add suitable input pad. Range of  $\pm 20\%$  from these impedances will have a little effect on the frequency response characteristic.

**LOAD IMPEDANCE:** 600 ohms.

**MAXIMUM GAIN:** 51 db.

**OUTPUT POWER:** + 28 dbm, with 1% total harmonic distortion.

**POWER SUPPLY:** Filament 6.3 volts, 1.5 amperes a-c or d-c.

**PLATE:** 275 volts, 31 ma d-c

### VACUUM TUBES:

Quan. Req'd.	Western Electric	Commercial Receiver Type
1	348-A	or 6J7 or 1620
1	349-A	or 6F6
—		
2		

**MOUNTING:** Designed for console mounting, also for rack mounting through the use of 177, 190 or 206A Type mounting plate (Capacity 3, 132-B Amplifiers per plate). A 406A Type panel is required for each mounting plate.

**DIMENSIONS:** 10 $\frac{1}{2}$ " wide, 5 $\frac{1}{4}$ " deep, 7" high overall.

**WEIGHT:** 6 $\frac{1}{2}$  pounds.

**FINISH:** Light gray enamel.

\*The weighted measurements are those obtained with equipment having the ballistic and rectifier characteristics as specified by the American Standards Association for noise measurement, and Program Weighting characteristics of the Western Electric 2B Noise Measuring Set.

## Accessories

The following accessory equipment is recommended for use with this amplifier:

- KS-10003 Meter for measuring plate currents of the vacuum tubes.
- 18 or 20 Type rectifier.
- Western Electric 190 or 206A Type mounting plate.
- Western Electric 406A Type panel.

DISTRIBUTOR IN THE UNITED STATES

# Graybar

ELECTRIC COMPANY

Executive Offices: 420 Lexington Avenue, New York 17, N. Y.

ALABAMA  
Birmingham

ARIZONA  
Phoenix

ARKANSAS  
Little Rock

CALIFORNIA  
Los Angeles  
Oakland  
Sacramento  
San Diego  
San Francisco

COLORADO  
Denver

CONNECTICUT  
Hartford  
New Haven

DELAWARE  
Wilmington

DIST. OF COLUMBIA  
Washington

FLORIDA  
Jacksonville  
Miami  
Orlando  
Tampa

GEORGIA  
Atlanta  
Savannah

IDAHO  
Boise

ILLINOIS  
Chicago  
Peoria

INDIANA  
Evansville  
Hammond  
Indianapolis

IOWA  
Davenport  
Des Moines

KANSAS  
Wichita

KENTUCKY  
Louisville

LOUISIANA  
New Orleans

MAINE  
Portland

MARYLAND  
Baltimore

MASSACHUSETTS  
Boston

Springfield  
Worcester

MICHIGAN  
Detroit  
Flint  
Grand Rapids  
Lansing

MINNESOTA  
Duluth  
Minneapolis  
St. Paul

MISSISSIPPI  
Jackson

MISSOURI  
Kansas City  
St. Louis

NEBRASKA  
Omaha

NEW HAMPSHIRE  
Manchester

NEW JERSEY  
Newark

NEW YORK  
Albany  
Buffalo  
New York  
Rochester  
Syracuse

NO. CAROLINA  
Asheville  
Charlotte  
Durham  
Winston-Salem

OHIO  
Akron  
Cincinnati  
Cleveland  
Columbus  
Dayton  
Toledo  
Youngstown

OKLAHOMA  
Oklahoma City  
Tulsa\*

OREGON  
Portland

PENNSYLVANIA  
Allentown  
Harrisburg  
Philadelphia  
Pittsburgh  
Reading

RHODE ISLAND  
Providence

SO. CAROLINA  
Columbia

TENNESSEE  
Chattanooga  
Knoxville  
Memphis  
Nashville

TEXAS  
Amarillo  
Beaumont  
Corpus Christi  
Dallas  
Fort Worth  
Houston  
San Antonio

UTAH  
Salt Lake City

VIRGINIA  
Richmond  
Roanoke  
Norfolk

WASHINGTON  
Seattle  
Spokane  
Tacoma

WISCONSIN  
Milwaukee

\*Sales Office

A NATIONAL ELECTRIC SERVICE

DISTRIBUTOR FOR CANADA AND NEWFOUNDLAND

## Northern Electric

COMPANY LIMITED

General Offices: 1620 Notre Dame Street, W.

Plant: 1261 Shearer Street,  
Montreal, P. Q., Canada

TWENTY-FIVE BRANCHES FROM COAST TO COAST