

wireless world

JULY 1981 100p


Australia A\$ 2.40
Canada C\$ 2.25
Denmark Dkr. 20.25
Germany Dm. 6.00
Greece Dr. 125.00
Holland Dfl. 5.75
Italy L. 2300
Norway Nkr. 21.00
Singapore M\$ 5.50
Spain Ptas. 180.00
U.S.A. \$3.75

**Upgraded micro
trainer**

Digital speech

**Long-distance
television**

**Low-loss
coaxial cable**

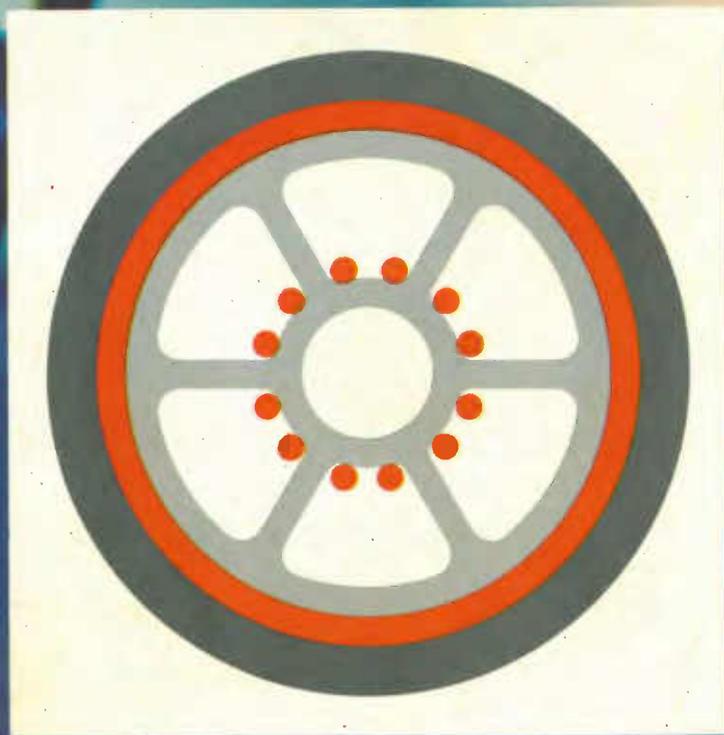

PROFESSIONAL TOOLCASES for Service Engineers

£43.70
inc. VAT

£39.90
inc. VAT



TL100 19" x 14" x 6"

Size TL99 17" x 12" x 6"

£13.75
inc. VAT



TLW4

The TL99 and TL100 are designed for the Professional Electronics, TV or Instrument Technician who needs to carry a large number of specialist tools. Constructed from hard wearing ABS with strong aluminium frames, twin handles and toggle locks. They offer a moulded tray in the base, a comprehensive 2 sided tool pallet that's reversible with space for up to 40 tools. — The TL100 will take quite a few more. There's space for documents and a heat sink for a hot soldering iron to prevent any damage being caused.

TLW4 Toolwallet measures 11" x 14" x 2½" when closed. Made from reinforced PVC with a heavy duty industrial zip. The TLW4 Toolwallet is a compact alternative when only tools are needed to be carried.

Mail Order

Please send

Enclosed my cheque **£** _____
(P&P £2.60 extra)

Name _____

Company _____

Address _____

Tools NOT included. British made.
Money back guarantee. Allow 7-21 days for delivery.

Telman Products Ltd
Ermine House, Post St, Godmanchester, Cambs. PE 18 8BA (0480) 65534

WIRELESS WORLD
JULY 1981
VOL 87
NO 1546

wireless world

JULY 1981 60p


Australia AS\$ 2.40
Canada C\$ 4.25
Denmark Dkkr. 20.25
Germany Dm 6.00
Greece Dr. 12.00
Holland Dfl. 5.75
Italy L. 2300
Norway Nkr. 21.00
Singapore S\$ 5.50
Spain Ptas. 160.00
U.S.A. \$3.75

Up-rated micro trainer

Digital speech

Long-distance television

Low-loss coaxial cable

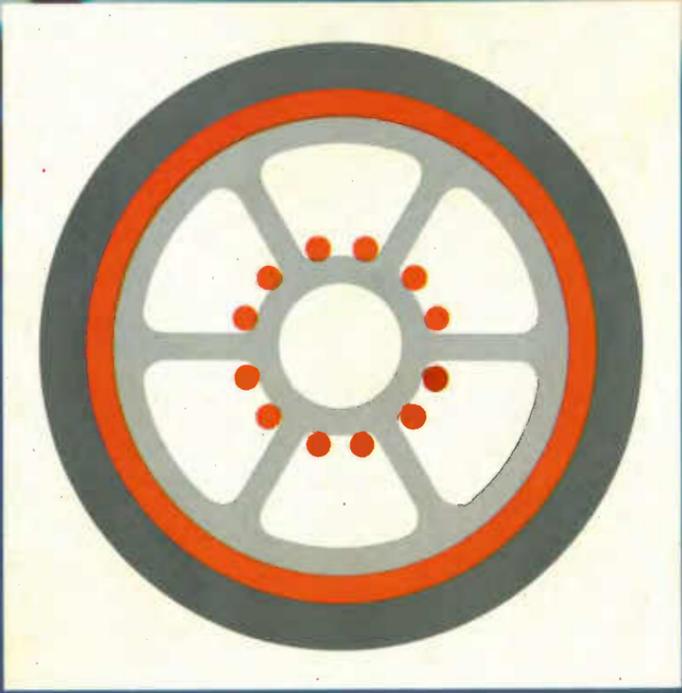



Autostore.

Low-cost voice-logging for people with more important things to do.

The problem: logging telephone and radio messages without spending a fortune on equipment or hiring an expensive technician to operate it.

The solution: the new Racal Recorders Autostore.

SIMPLICITY
With its automatic cassette-loading and fully automatic changeover from one deck to another, Autostore can—quite literally—be operated by whoever happens to be around.

And it provides over 24 hours of unattended continuous recording on eight channels.

VERSATILITY
Able to log radio and telephone messages simultaneously, Autostore can form part of a new system—or fit just as easily into an existing one.

And its uses vary from ambulance, fire, police and security applications to the recording of financial transactions, conferences, oil installation communications and taxi services.

Racal Recorders

Racal Recorders Limited, Hardley Industrial Estate, Hythe, Southampton, Hampshire SO4 6ZH, England.
Tel: (0703) 843265 Telex: 47600



RELIABILITY
Available in 4 or 8 channel versions, and with integral micro-processor controlled automatic Timesearch capability to enable rapid message retrieval, Autostore is engineered to the very highest standards by the company which pioneered air traffic control recording techniques.

FULL DETAILS
For full details of Autostore send off the coupon today.

I am interested in recording my communications accurately and reliably. Please:


- send me full details of Autostore
- arrange for a demonstration at my own premises

Name _____
Position _____
Company _____
Address _____
Tel: _____

Racal Recorders Limited, Hardley Industrial Estate, Hythe, Southampton, Hampshire SO4 6ZH, England

ww

WW-001 FOR FURTHER DETAILS

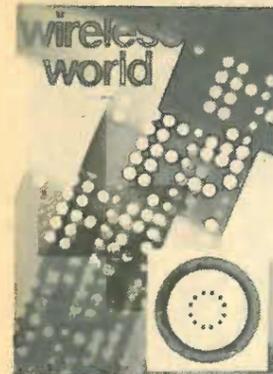

Front cover shows cross-section of the new type of coaxial cable described in this issue, superimposed on a photographic montage of punched tape symbolising the digital techniques in other articles. Photographer: Paul Brierley.

IN OUR NEXT ISSUE

Radio and the birth of the Universe. A review of the significance of the 3K cosmic microwave background in the Big Bang cosmological theory.

Electronics on the road. Broadly surveys electronic ignition, anti-lock brakes, cruise control, active suspension and other electronic systems; also social influences on design.

Correlator for angles. Measuring technique suitable for testing timing scatter in automobile ignition systems and other rotary mechanisms.

Current issue price 60p, back issues (if available) £1.00, at Retail and Trade Counter, Units 1 & 2, Bankside Industrial Centre, Hop-ton Street, London SE1. Available on microfilm; please contact editor.

By post, currently issue 96p, back issues (if available) £1.50, order and payments to EEP General Sales Dept., Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Editorial & Advertising offices: Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Telephones: Editorial 01-661 3500. Advertising 01-661 3129.

Telegrams/Telex: 892084 BISPRS G.

Subscription rates: 1 year £10.00 UK and \$33.80 outside UK. **Student rates:** 1 year £5.00 UK and \$16.00 outside UK.

Distribution: Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. Telephone 01-661 3500.

Subscriptions: Oakfield House, Perrymount Road, Haywards Heath, Sussex RH16 3DH. Telephone 0444 59188. Please notify a change of address.

USA mailing agents: Expeditors of the Printed Word Ltd, 527 Madison Avenue, Suite 1217, New York, NY 10022. 2nd-class postage paid at New York.

© IPC Business Press Ltd, 1981 ISSN 0043 6062

wireless world

ELECTRONICS/TELEVISION/RADIO/AUDIO

JULY 1981 Vol 87 No 1546

29 Decline of the philosophical spirit

30 New development in h.f. coaxial cable
by S. C. Carter and H. M. Barlow

33 6809 evaluation system for £100
by R. Coates

38 World of amateur radio

39 Leap seconds
by L. Essen

41 Parallel tracking pickup arm modifications
by R. Cooper

45 Digital storage and analysis of speech
by I. H. Witten

49 Long distance television reception
by K. Hamer and G. Smith

51 Letters to the editor
Radio Amateurs' Examination/James Clerk Maxwell/Science and society

57 Wafer-scale integration
by I. Catt

60 Sound synthesis using Walsh functions
by A. A. Thomas

65 Which way h.f. broadcast receivers?
by Y-C Heng and R. C. V. Macario

70 News of the month
Frequency hopping radio/Broadcasting satellites report


73 The twins paradox of relativity
by I. McCausland

75 Circuit ideas
Low-noise m.c. pre-amp/Plotting c.r.o. waveforms

77 Designing with microprocessors - 9
by D. Zissos and G. Stone

81 Electrical and mechanical units
by D. A. Bell

83 New products

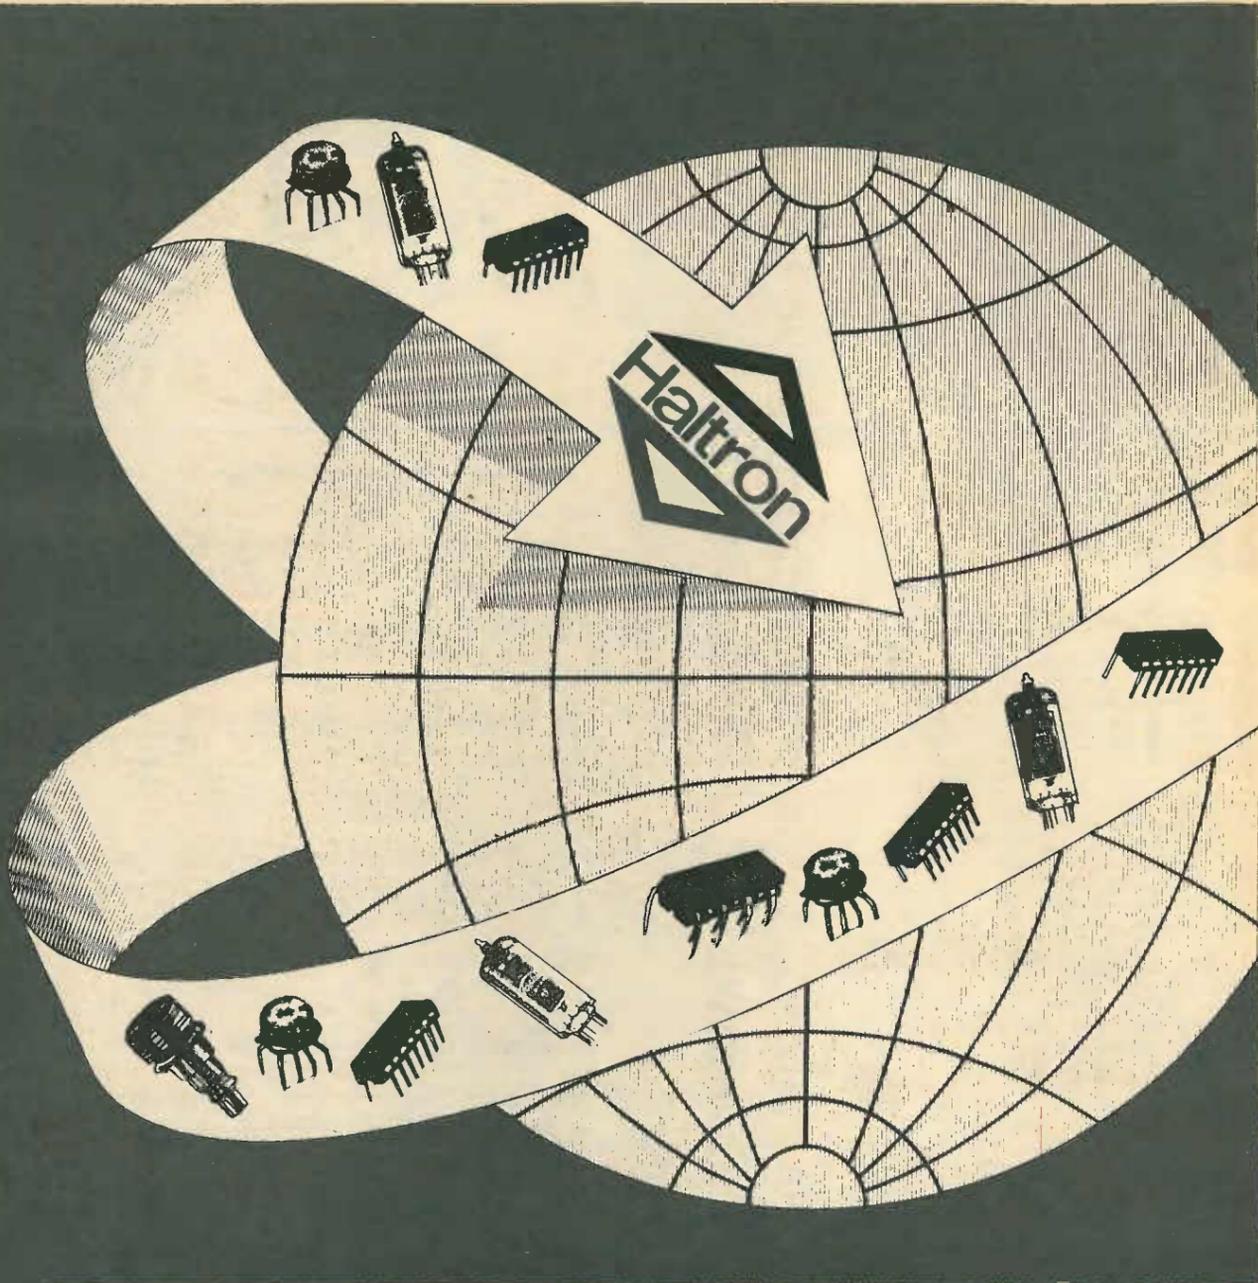


The Professionals

VALVES, SEMICONDUCTORS
& COMPONENTS for:-

Communications, Displays,
Radar, Computer,
Audio etc.

Hall Electric Limited,
Electron House,
Cray Avenue, St. Mary Cray,
Orpington, Kent BR5 3QJ.
Telephone: Orpington 27099
Telex: 896141

MIN DEF APPROVAL 0529/0531

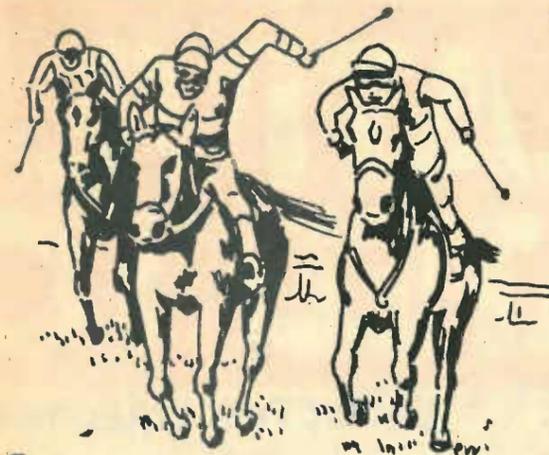


DON'T GAMBLE WITH PERFORMANCE BUY LEVELL OSCILLATORS




FREQUENCY 1Hz to 1MHz in 12 ranges.
ACCURACY 0 to 1% fine control on TG200DMP.
 $\pm 1.5\% \pm 0.01\text{Hz}$ up to 100kHz.
 $\pm 2\%$ up to 1MHz.
SINE OUTPUT 7V r.m.s. down to $< 200\mu\text{V}$ with $R_s = 600\Omega$.
DISTORTION $< 0.05\%$ from 50Hz to 15kHz,
 $< 0.1\%$ from 10Hz to 50kHz, $< 0.2\%$
from 5Hz to 150kHz, $< 1\%$ at 1Hz and
1MHz.
SQUARE OUTPUT TG200D, DM & DMP only, 7V peak
down to $< 200\mu\text{V}$. Rise time
 $< 150\text{ns}$.
SYNC OUTPUT $< 1\text{V}$ r.m.s. sine in phase with output
SYNC INPUT $\pm 1\%$ freq. lock range per volt r.m.s.
METER SCALES TG200M, DM & DMP only: 0/2V
0/7V & -14/+6dBm.
SIZE & WEIGHT 260 x 130 x 180mm. 4.3kg with
batteries.

TG200 TG200D TG200M TG200DM TG200DMP
£99 £108 £125 £130 £135

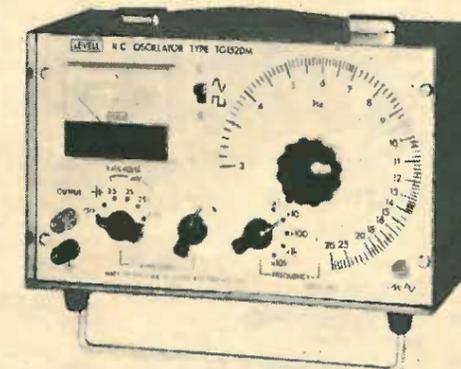

FREQUENCY 3Hz to 300kHz in 5 decade ranges.
ACCURACY $\pm 2\% \pm 0.1\text{Hz}$ to 100kHz.
Increasing to $\pm 3\%$ at 300kHz.
SINE OUTPUT 2.5V r.m.s. down to $< 200\mu\text{V}$
DISTORTION $< 0.2\%$ from 50Hz to 50kHz.
 $< 1\%$ from 10Hz to 200kHz.
SQUARE OUTPUT 2.5V peak down to $< 200\mu\text{V}$.
SYNC OUTPUT 2.5V r.m.s. sine.
METER SCALES 0/2.5V & -10/+10dB on
TG152DM.
SIZE & WEIGHT 260 x 130 x 180mm. 3.4kg with
batteries.

TG152D TG152DM
Without meter **£80** With meter **£99**

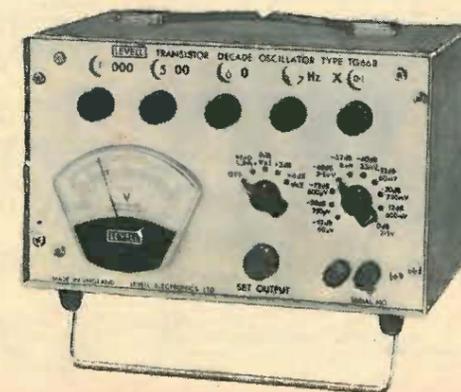

FREQUENCY 0.2Hz to 1.22MHz on four decade
controls.
ACCURACY $\pm 0.02\text{Hz}$ below 6Hz.
 $\pm 0.3\%$ from 6Hz to 100kHz.
 $\pm 1\%$ from 100kHz to 300kHz.
 $\pm 3\%$ above, 300kHz.
SINE OUTPUT 5V r.m.s. down to $30\mu\text{V}$ with $R_s = 600\Omega$.
DISTORTION $< 0.15\%$ from 15Hz to 15kHz.
 $< 0.5\%$ at 1.5Hz and 150kHz.
METER SCALES 2 Expanded voltage and -2/+4dBm
SIZE & WEIGHT 260 x 180 x 180mm. 5.4kg.

TG66B TG66A
Battery model **£265** Mains & battery model **£280**

Prices are ex works with batteries. Carriage, packing and VAT
extra.
Optional extras are leather cases and mains power units.
Send for data covering our range of portable instruments.

LEVELL ELECTRONICS LTD.

MOXON STREET, BARNET, HERTS., EN5 5SD.
TEL: 01-449 5028/440 8686

Electronic Brokers~Europe's Premier Test Equipment Company offer SUPERLATIVE USED EQUIPMENT CALIBRATED TO ORIGINAL SPECS

The Electronic Brokers GUARANTEE

Unless otherwise stated, all test equipment sold by us carries a 12 month warranty; For VDUs and Teletypes we offer a 90 days warranty, and computers are offered with on site acceptance and diagnostic tests (which may qualify them for independent on-going maintenance). When you buy from Electronic Brokers you know the equipment is in 'top notch' condition. It is refurbished in our own service laboratories and checked to meet the original manufacturer's sales specifications. And it's serviced by our own highly qualified technicians.

A copy of our Trading Conditions is available on request.

Electronic Brokers

..... July 1981 Latest Test Equipment.....

ANALOGUE VOLTMETERS AND MULTIMETERS

Boonton.
93A True RMS Voltmeter. 10Hz-20MHz. 1mV-300V**£295.00**

Fluke.
883AB AC/DC Differential Voltmeter. 20Hz-100KHz. 1mV-1kV. Very high accuracy**£975.00**

Hewlett Packard.
400E AC Millivoltmeter. 10Hz-10MHz. 1mV-300V DC o/p proportional to i/p**£235.00**

Fluke.
4815A Vector Impedance Meter. 500KHz-10MHz. 0-360° in 2 ranges. 2 range 10-100K Ω in 9 ranges**£2150.00**

Fluke.
7563A DC Log Voltmeter / Amplifier. Single i/p range 360 μ V-100V O/P 0-1.1V @ 10mV/div**£250.00**

Fluke.
8405A Vector Voltmeter. 1-1000MHz. 0-360° in 4 ranges**£1985.00**

Marconi.
TF2604 Electronic Voltmeter. AC 20Hz-1.5GHz. 300mV-1kV. DC 10mV-1kV. 0.2 Ω -500M Ω **£350.00**

Philips.
PM2454B AC Millivoltmeter. 10Hz-12MHz. 1mV-300V**£195.00**

ANALYSERS

Blomatom.
1650D 16 Channel Logic Analyser. Displays Timing. Map. hex. octal. Clock rate upto 50MHz. Supplied with display formatter and a Harneg HM312-B oscilloscope**£2500.00**

General Radio.
1911A Sound and Vibration Analyser. CW Graphic level recorder. 4.5Hz-25KHz. 1/3 or 1/10 octave**£950.00**

General Radio.
8407A/B412A Network Analyser. CW 8600A/B601A sweeper. 0.1-110MHz**£3500.00**

Hewlett Packard.
141T-8552B-8554B Spectrum Analyser. 100KHz-1250MHz. +10 to -122dBm. Variable persistence display**£4950.00**

Hewlett Packard.
141T-8552A-8554L Spectrum Analyser. 500KHz-1250MHz. Sensitivity -117dBm. Scan width 20KHz-1250MHz**£3500.00**

Hewlett Packard.
310A Wave Analyser. 1.5KHz-1.5MHz 10 μ V-100V F.S. Dynamic range > 75dB**£1050.00**

Hewlett Packard.
3580A LF Spectrum Analyser. 5Hz-50KHz. 30V sensitivity**£1950.00**

Hewlett Packard.
3581A Wave Analyser with Internal Sweep. 15Hz-50KHz. 100nV-30V F.S. Dynamic range > 80dB. Frequency indicated by 5 digit LED readout**£1500.00**

Hewlett Packard.
8553L Spectrum Analyser RF Section. 1KHz-110MHz Sensitivity -120dBm. Scan width 200Hz-10MHz**£1000.00**

Tektronix.
7L18 Spectrum Analyser Module. 1.5-18GHz with internal mixer. 18-60.5GHz with external mixer. Sensitivity -119dBm max reducing with frequency**£6900.00**

Tektronix.
491 Spectrum Analyser. 10MHz-2GHz direct. Up to 40GHz with optional mixers**£2700.00**

Wayne Kerr.
RA200 Frequency Response Analyser. Frequency range 20Hz-30KHz or 200Hz-200KHz. 1.1 in. crt display**£850.00**

BRIDGES & COMPONENT TESTERS

Boonton.
63H Inductance Bridge. 0-110mH. Bridge frequency 5-500KHz**£1250.00**

General Radio.
1608A LCR Bridge. Accuracy 0.05%. 0.05pF-110 μ F. 0.05 μ H-1100H. 0.05m Ω -1.1M Ω **£925.00**

Marconi.
TF1245-TF1246-TF1247 'Q' Meter and Oscillators. Q 5 to 500. 40KHz-300MHz**£950.00**

Rohde & Schwarz.
LRT (BN6100) Inductance Meter. 1pH-100 μ H. 2.2-285KHz**£395.00**

Wayne Kerr.
B642 0.1% LCR Autobalance Bridge. 10 μ Ω -100G Ω . 1F-10F. 1nH-10mH**£750.00**

CALIBRATION EQUIPMENT

Fluke.
332A DC Voltage Calibrator. 0 to 1111.1110V. 0.1ppm resolution. 0.003% calibration accuracy**£1495.00**

Fluke.
760 Meter Calibrator. DC/AC Volts and current in 4 ranges**£2150.00**

Tektronix.
191 Constant Amplitude Generator. 350KHz-100MHz**£350.00**

FREQUENCY COUNTERS

Advance.
TC15 & P1 Frequency Counter. DC - 500MHz. 9 digits**£275.00**

Fluke.
1900A-01 Frequency Counter. 5Hz-80MHz. 6 digits. Mains / battery operation**£195.00**

Fluke.
1925A Frequency Counter. 5Hz-125MHz. 9 digits. EMI proof case**£375.00**

Philips.
PM6664 Fully Auto Frequency Counter. 10Hz-520MHz. 8 digits**£250.00**

Racal.
9905 Timber Counter DC-200MHz. 8 digits**£235.00**

MULTIMETERS

Avo.
Test Set Number 1. 20K Ω /volt. very robust Full lead kit**£75.00**

S.E.I.
Super 50 Selectest. 20K Ω /volt**£77.00**

OSCILLOSCOPES

Hewlett Packard.
1223A Dual Trace Variable Persistence Storage Oscilloscope. DC-15MHz. 2mV-10V/div. Max writing speed 1cm/ μ s**£950.00**

Philips.
PM3212 Dual Trace Portable Oscilloscope. DC - 25MHz. 2mV-10V/div**£575.00**

SE Labs.
SM121 6 Channel Monitor. 12" crt. Internal sweep**£395.00**

Tektronix.
432 Dual Trace Portable Oscilloscope. DC - 25MHz. 1mV sensitivity. 20nS-5S. Auto setting mains input. 100-250V**£510.00**

Tektronix.
454A Dual Trace Portable Oscilloscope. DC - 150MHz. 2mV-5V/div. Full delayed sweep**£1200.00**

Tektronix.
455 Dual Trace Portable Oscilloscope. DC - 50MHz. 5mV-5V/div. Full delayed sweep. Super condition**£925.00**

Tektronix.
464 Dual Trace Portable Storage Oscilloscope. DC - 100MHz. 5mV-5V/div. Full delayed sweep. Max writing speed 110 div/ μ s**£2250.00**

General Radio.
466 Dual Trace Portable Storage Oscilloscope. Spec as per 464 but max writing speed 3000div/ μ s**£2875.00**

General Radio.
475 Oscilloscope DC-200MHz. 2mV-5V/div. Delayed sweep**£1495.00**

General Radio.
485 Oscilloscope DC - 350MHz. 5mV-5V/div. Delayed sweep**£2350.00**

General Radio.
521A PAL Vectorcscope. Measures Luminance Amplitude. Chrominance Phase. Chrominance Amplitude. Differential Phase and Gain. As new condition**£2650.00**

General Radio.
T935A Oscilloscope DC - 35MHz. 2mV-10V/div. Delayed sweep**£595.00**

General Radio.
7603 Oscilloscope CW 2 off 7426 and 7853A 4 Trace. DC - 100MHz**£2295.00**

General Radio.
7613 Storage Oscilloscope CW 2 off 7426 and 7853A. DC - 100MHz. Delayed sweep, max writing speed 4.9 cm/ μ s**£3575.00**

General Radio.
7704A Main Frame CW 7A26, 7880, 7885. Dual Trace DC - 200MHz**£3550.00**

General Radio.
D32 Dual Trace battery/mains Portable Oscilloscope. DC-10MHz. 10mV-5V/div**£310.00**

General Radio.
D34 Dual Trace Battery Portable Oscilloscope. DC-15MHz. 2mV-5V/div. 24nS signal delay**£445.00**

General Radio.
D63 Dual Beam Oscilloscope CW 2 Off V4 Modules. 4 Traces. DC-15MHz. 5mV-20V/div**£725.00**

General Radio.
D83 Oscilloscope Main Frame CW V4 and 52A plug-in units. DC - 50MHz. 5mV-20V/div**£725.00**

General Radio.
DM64 Dual Trace Split Screen Bistable Storage Oscilloscope. DC-10MHz. 10mV-50V/div. Max writing speed 250 div/ μ s**£715.00**

General Radio.
1016 Dual Trace Portable Oscilloscope DC-15MHz. 5mV-20V/div. XY Mode. 1 only**£310.00**

OSCILLOSCOPE PROBES

General Radio.
EB90 X1 Probe. 1.2 mtr length DC - 20MHz**£9.00**

General Radio.
EB91 X10 Probe. 1.2 mtr length DC - 100MHz**£11.00**

General Radio.
EB95 X1, X10 Probe. 1.2 mtr length DC - 10MHz or DC - 100MHz**£15.00**

POWER SUPPLIES

Advance.
MG5-60 5V @ 60A switching**£160.00**

Advance.
MG5-20 5V @ 20A switching**£120.00**

Advance.
MG5-10 5V @ 10A switching**£95.00**

Advance.
MG24-12 24V @ 12A switching**£130.00**

Weir.
762 Power Supply Unit 0-30V at 2A. Metered output**£90.00**

RECORDERS

Hewlett Packard.
7045A XY Recorder. Sensitivity 250 μ V-SV/cm. Electrostatic paper grip. A3 size**£950.00**

Watanabe.
MC641 6 Channel Chart Recorder. 1mV-100V. 250mm scan width**£1495.00**

Yokagawa.
3047 2 Channel Chart Recorder. 0.5mV-100V. 2cm/hr-60cm/min**£435.00**

SIGNAL SOURCES

Avo.
HF136 AM/FM Signal Generator. 4.0-120MHz. 0-100mV in 20dB steps plus fine control. O/P Z = 75 Ω **£410.00**

Hewlett Packard.
203A Variable Phase Oscillator. 0.005Hz-60KHz. 0-360°**£450.00**

Hewlett Packard.
4204A Decade LF Oscillator. 10Hz-1MHz. 1mV-10V into 600 Ω **£695.00**

Hewlett Packard.
608B AM Signal Generator. 50KHz-65MHz. AM 0-95%**£850.00**

Hewlett Packard.
616B UHF Signal Generator. 1.8 to 4.2GHz. Int pulse Mod.**£1000.00**

Hewlett Packard.
620B SHF Signal Generator. 7-11GHz. 0.1 μ V-0.224V into 50 Ω . Internal PM & FM**£2100.00**

Hewlett Packard.
658B Test Oscillator. 10Hz-10MHz. 0.1mV-3.16V**£415.00**

Hewlett Packard.
3310A Function Generator. 0.0005Hz-5MHz. 15V pk-pk into 50 Ω . Sine, square, triangle, ramp and + or - pulse waveforms**£385.00**

Hewlett Packard.
3320A Frequency Synthesizer. 0.01Hz-13MHz. O/P range 0 - +13dBm into 50 Ω . Long term frequency accuracy \pm 10 parts in 10⁶ of setting per year**£995.00**

Hewlett Packard.
B600A & B601A RV Sweeper + Markers. 100KHz-110MHz**£1500.00**

Hewlett Packard.
B614A UHF Signal Generator. 800-2400 MHz. Max O/P + 10dBm into 50 Ω . Int square wave mod. Ext AM-FM, pulse mod.**£1950.00**

Hewlett Packard.
B616A UHF Signal Generator. 1800-4500 MHz. Max O/P + 10dBm from 1800-3000 MHz. + 3dBm 3000 MHz-4500 MHz. Mod as per B614A**£1950.00**

Hewlett Packard.
B640B Phase Locked Signal Generator. 0.5 to 520MHz**£3200.00**

Hewlett Packard.
B654A AM/FM VHF Signal Generator. 10-520MHz. 0.7 μ V-0.7V into 50 Ω . AM 0-90%. FM 0-100KHz. Mod rate 400Hz and 1KHz**£895.00**

Hewlett Packard.
B690A/B699B RF Sweeper System. 0.1-4GHz in 2 ranges. Max O/P 10mW to 2GHz and 6mW to 4 GHz**£2300.00**

Marconi.
TF144H/4 AM Signal Generator. 10KHz-72MHz. 2 μ V-2V**£750.00**

Marconi.
TF995B/5 AM/FM Signal Generator. 200KHz-220MHz. 1 μ V-200mV. Narrow deviation for mobiles**£695.00**

Marconi.
TF1370A Wide Range RC Oscillator. 10Hz-10MHz. Sine wave. square wave upto 100KHz**£275.00**

Marconi.
TF2002B AM/FM Signal Generator. 10KHz-88MHz. 0.1 μ V-1V. 20Hz-20KHz Mod frequency**£1200.00**

Marconi.
TF2005R 2 Tone Signal Source. 20Hz-20KHz. 0-111dB in 0.1dB steps**£295.00**

Marconi.
TF2006 AM/FM Modular Signal Generator. 4-1000MHz. 0.2 μ V-200mV. O/P Z = 50 Ω **£1100.00**

Marconi.
TF2100 AF Oscillator. 20Hz-20KHz. 0.05% distortion**£150.00**

Tektronix.
148 PAL TV Insertion Generator. Provides all required signals to test and measure on video TX systems. Immaculate**£2500.00**

Tektronix.
1481C PAL Waveform monitor in as new condition**£2275.00**

SOUND LEVEL METERS

Bruel & Kjaer.
2203 Sound Level Meter CW 4165 1/2" Microphone. 26-140dBA. A, B or C weighting. Fast or slow response**£395.00**

Bruel & Kjaer.
2203 Sound Level Meter as per previous spec. but also with 6613 octave filter set with centre frequencies of 31.5Hz-35.5KHz in 11 settings. 1 Only**£565.00**

General Radio.
1981 Sound Level Meter. 70-120dB. Digital and analogue reading. Peak hold. A weighting**£300.00**

General Radio.
1983 Sound Level Meter. 70-120dB. A weighting**£195.00**

TRANSMISSION MEASURING EQUIPMENT

Marconi.
TF2332 AF Transmission Test Set. 20Hz-20KHz**£425.00**

Siemens.
D2040 Selective Level Analyser and Voltmeter. 10Hz-60KHz. -110dB to +50dB. 3 μ V-300V Lin and log indication. 5 digit frequency readout**£1200.00**

Siemens.
D2072 + W2072 Level Meter and Oscillator. 50KHz-100MHz. -110dB-0dB. Receive bandwidth 3, 1 and 10KHz**£2200.00**

Siemens.
W2006 + D2006 Carrier Level Test Set. 10KHz-17MHz. -100 to +10dB**£1650.00**

Siemens.
W2007 + D2007 Carrier Level Test Set. 6KHz-18.6MHz. -120 to +20dB**£1800.00**

Wandel and Goltermann.
PF-1 Digital Error Rate Measuring Set. Consisting of PFM-1 Digital Error Rate Meter and PFG-1 Pattern Generator**£2490.00**

Wandel and Goltermann.
PSO-5 and PMO-5 Level Measuring Set. 10KHz-36MHz. -110 to +20dB. CW/AZD-1 Scale expander**£2050.00**

Wandel and Goltermann.
SPM-6 and PS-6 Level Measuring Set. 6KHz-18.6MHz. -110dB to +20dB. Mains / battery operation**£1510.00**

Wandel and Goltermann.
Andimat (PSM-4) 2MHz Automatic PCM Testing System composed of the following PCM-1 PCM Test Set, PDA-64 PCM Signalling Analyser, PMD-1 Digital Level and Noise Measuring System, PDG-1 Digital Signal Generator, PDA-1 PCM Digital Signal Analyser, PSM-4 Level Measuring Set, MU-4 Scanner, RI-1 computer interface**£6500.00**

DVM's AND DMM's

Datron.
1051 5 1/2 Digit DMM. AC/DC Volts, Resistance. True RMS. 0.1 μ V resolution**£750.00**

Fluke.
8800A 5 1/2 Digit DMM. AC/DC volts, resistance. 1 μ V resolution**£450.00**

Hewlett Packard.
3490A 5 1/2 Digit DMM. AC/DC volts, resistance. 1 μ V resolution. 30 day warranty**£375.00**

Philips.
PM2527 4 1/2 Digit DMM. AC/DC volts, current and resistance. 10 μ V resolution. True RMS**£400.00**

Solartron.
A243 5 1/2 Digit DMM. AC/DC volts, resistance. 1 μ V resolution. 30 day warranty**£375.00**

Solartron.
7055 Microprocessor DMM. Scale length 1.400.000. AC/DC volts, resistance. 1 μ V resolution**£600.00**

Solartron.
7065 Microprocessor DMM. Scale length 1.400.000. AC/DC volts, resistance. 1 μ V resolution**£695.00**

Solartron.
7065 plus processor control and RS232 interface**£995.00**

MISCELLANEOUS

Data Laboratories.
DL905 Transient Recorder with Pre-Trigger facility. Ideal for viewing single shot voltage transients 1 only**£990.00**

Dranetz.
606-3 Power Line Disturbance Monitor. Ideal unit for computer maintenance and installation engineers**£2600.00**

Ferrograph.
RTS2 Recorder Test Set Measures Wow & Flutter, Distortion, Gain**£345.00**

Ferrograph.
RTS2 + ATU-1 Recorder Test Set and auxiliary test set**£375.00**

Hewlett Packard.
331A Distortion Meter. 5Hz-600KHz. 0.1%-100% FS**£615.00**

Hewlett Packard.
334A Auto Nulling Distortion meter. 5Hz-600KHz. 0.1%-100% FS. AM detector I/P

Electronic Brokers - Europe's Premier Used Computer Company offer

SUPERLATIVE USED COMPUTER EQUIPMENT - AS NEW CONDITION

July 1981

Latest Computer Equipment

PDP11 SYSTEMS

DEC
 VAX 11/780 with 1MB, RP06, TEE16, H9602, BA11, DD11, DZ11A, LA120 **£112,000.00**
 PDP11/34 System (non-A) with 256KB MOS, 2 x RK06 Disk Drive and control, LA36 console **£10,500.00**
 PDP11/34A 128KB MOS, KY11-LB Programmers Panel, DL11W Interface, 2 x RLO1 Disk Drives and Controller, 6ft. Cabinet, VT100 Console **£11,500.00**
 PDP11/34A 128KB MOS, KY11-LB Programmers Panel, DL11W Interface, RK05J and RK05F Disk Drives and Controller, 6ft. Cabinet, DECwriter IV Console **£9,950.00**
 PDP11/34A 256KB MOS, KY11-LB Programmers Panel, DL11W Interface, 2 x RK02 Disk Drives and Controller, 6ft. Cabinet, VT100 Console **£19,750.00**
 PDP11/34A 128KB MOS, KY11-LB Programmers Panel, DL11W Interface, 2 x RLO7 Disk Drives and Controller, 6ft. Cabinet, VT100 Console **£12,750.00**
 PDP11/60 System with 2 RK07 Disk Drives and Controller, choice of Console **P.O.A.**

PDP11 C.P.U.'s

DEC
 PDP11/03-SD Processor in 3 1/2" chassis complete with 16KW MOS memory and E15 option **£1,495.00**
BRAND NEW - ONLY
 PDP11/04 Processor in 10 1/2" chassis complete with 16KW MOS memory and DL11W Interface **£3,950.00**
BRAND NEW (can be enhanced to 28KW)
 PDP11/34A Processor, 5 1/4in. Chassis, 128KB MOS, KY11-LB Programmers Panel, DL11W Interface **£4,950.00**
 PDP11/34A Processor, 10 1/2in. chassis 128KB MOS, KY11-LB Programmers Panel, DL11W Interface **£6,250.00**

PDP11 MEMORY

DEC
 KK11A 11/34A Cache Memory option **£2,000.00**
 MF11L 8KW core memory c/w 9-slot system unit **£975.00**
 MK11CB 512Kb 11/70 expansion MOS memory including frame **£14,500.00**
 MM11L 8KW core memory **£795.00**
 MM11LP 8KW parity core memory **£750.00**
 MM11DP 16KW core (ex DEC-maintained 11/34 systems) **£395.00**
BARGAIN OFFER - ONLY
 MM11UP 16KW Parity core memory complete with 9-slot system unit **£1,500.00**
 MM11UP 16KW parity core memory (pre-requisite MF11UP) **£1250.00**
 MS11JP 16KW MOS memory **£395.00**
 MS11-LB 128KB MOS **£1,995.00**
 MS11-LD 256KB MOS **£3,500.00**
 MSV11C 16KW MOS memory (LSI11) **£495.00**
 MJ11-BE 64KW 11/70 memory **£4,500.00**
 MS11-BE 64KW MOS memory for 11/70 **£3,950.00**
 MS11-MB 256KB ECC MOS memory for 11/44 (NEW) **£3,942.00**

DISKS

DEC
 RK05J add-on disk drive 2 1/2 meg. Exchangeable cartridge type. From **£1,500.00**
 RK06-ED Add-on 14 Meg disk drive **£2,750.00**
 RK611-ED Unibus Controller + 1 RK06 drive **£4,500.00**

RK07-ED Add-on 28 Meg disk drive **£4,750.00**
 RK711-ED Unibus Controller + 1 RK07 disk drive **£6,500.00**
 RLO1-AK Add-on 5 Meg disk drive **£1,975.00**
 RLO2-AK Add-on 10 Meg Disk Drive **£2,500.00**
 RMO3-Add-on 67 Meg disk drive **£7,500.00**
 RPO4-AB Add-on 88 Meg Disk Drive **£4,950.00**
 RX11-BD RK01 Dual floppy + Unibus Controller **£1,350.00**
 Controllers usually available for above drives.

MAGNETIC TAPE

DEC
 Available from time to time - TU10, TU45, TE16 TS03 etc.

PDP11 OPTIONS

DEC
 AA11D VT01 Controller with 4-slot System Unit **£125.00**
 BA11-KF expander Box **£1,395.00**
 DD11A 4-slot System Unit **£125.00**
 DD11B 4-slot System Unit **£150.00**
 DD11-DK 9-slot backplane **£465.00**
 DL11-Serial Interface **£250.00**
 DL11W/AB Serial Interface/Line Clock **£395.00**
 DR11C General Purpose Interface **£250.00**
 DZ11A 8-line EIA MUX **£1,395.00**
 DZ11-B 8-Line Expander MUX **£995.00**
 FP11A Floating Point **£1,750.00**
 KL11 TTY Interface **£150.00**
 KW11L Real Time Clock **£150.00**
 KW11P Programmable Clock **£345.00**
 M792 ROM Diode Matrix **£195.00**
 M9301-YB Bootstrap **£325.00**

POWER SUPPLIES

DEC
 H720 Power supply for BA11 Expander Box, BRAND NEW SURPLUS **£175.00**

PDP8A C.P.U.

DEC
 PDP8A Processors, systems and add-on memory usually available.

PDP8A MEMORY

DEC
 MM8AA 8KW Core **£750.00**
 MM8AB 16KW Core **£995.00**

PDP8E CPU, MEMORY, OPTIONS

DEC
 DP8EB Communications Adaptor **£395.00**
 KABE Positive 110 Bus **£95.00**
 KDBE Databreak **£145.00**
 KLBE Asynchronous Interface **£250.00**
 KLBJA Asynchronous Interface **£275.00**
 KPBE Power fail/auto restart **£95.00**
 MM8E 4KW Core memory stack **£350.00**
 TABE Dual Cassette Drive and Controller **£525.00**
 VT8E Set graphics Control Modules **£250.00**

TERMINALS

DEC
 LA34 DECwriter IV, 30cps desk-top terminal, 132 columns, upper/lower case ASCII **£495.00**
 LA36 DECwriter 11 Keyboard Printer Terminal. The Terminal that has become an industry standard, with 132 column upper/lower case printing and switch-selectable speeds of 10, 15 & 30cps. Available with either 20mA or RS232 interface. NOW ONLY **£595.00**
 VT 52 SPECIAL PURCHASE of this outstanding Video Display Terminal featuring full upper/lower case ASCII character set, 24 x 80 display, auxiliary keypad, direct cursor addressing and tabulation, scroll or hold screen mode with X-off facility, 9 switch-selectable baud rates (75-9600 baud) choice of 20mA or RS232 interface. BRAND NEW SURPLUS. ONLY **£450.00**

VT55 Graphics VDU with integral hard copy unit, 20mA or RS232 Interface **£1,250.00**

LS-120 High speed keyboard terminal, 132-column printer with adjustable tractor feed and full upper and lower case ASCII printing (7 x 7 dot matrix), 180 cps print speed and operator-selectable baud rates up to 4800 baud. Integral stand, RS232 interface, BRAND NEW SURPLUS (limited quantity), ONLY **£750.00**
 VT100 - limited quantity in as-new condition **£650.00**
 DECwriter IV Desktop terminal complete with tractor feed, paper-out, cable and keypad options **£495.00**

PRINTERS

Centronics 101
 Heavy Duty Matrix printer with 64 ASCII upper case character set, 165 cps operation, 132 print positions with adjustable tractor feed. Parallel input, ONLY **£495.00**

Diablo Hyterm 1620
 Daisy-Wheel KSR (keyboard-send-receive) model with standard RS232 interface, 45 cps print speed, 110/150/300 baud, switch-selectable parity, top-of-form selector, Graphics capability under software control **£1,275.00**

Diablo 1355
 Receive-only daisy wheel printer with parallel interface **£895.00**

Seikosha GP80
BRAND NEW - LOW COST MATRIX PRINTER IDEAL FOR MICROPROCESSOR USERS SUCH AS HOBBYISTS & EDUCATIONALISTS OR ANY LOW-BUDGET APPLICATION

- ★ Full upper/lower case ASCII PLUS GRAPHICS Mode
- ★ 80-column printing with adjustable tractor feed
- ★ Standard and double-width characters (12 cpi and 6 cpi)
- ★ 30 cps print speed with 1-line buffer
- ★ Standard parallel (Centronics-type) interface
- ★ Optional interfaces available for RS232, IEEE488, Tandy, PET, Apple II
- ★ ONLY **£199.00** (Mail order total **£234.60**)

GP80 Optional Interfaces:
 RS232 **£55.00**
 IEEE **£55.00**
 PET **£55.00**
 Apple **£55.00**
 Tandy **£35.00**


GP80 Fanfold Paper
 Box of 2000 x 8in sheets **£15.00**

Hazeltine
 Thermal printer, 80 columns, 30 cps silent RO with parallel TTL input **£395.00**

Tally 1602
 160 cps Matrix Printer with full 96 upper/lower case ASCII character set, 7 x 7 dot matrix, 132 columns with adjustable tractor feed, bidirectional printing, double-width character feature, self-test facility, Centronics-type parallel interface **£875.00**

Teletype
 Reconditioned ASR33 Teletype Terminals with paper tape punch and reader, even parity keyboard and RS232 interface. SPECIAL OFFER - SEVEN DAY WARRANTY - CASH AND CARRY ONLY **£295.00**

July 1981 Latest Computer Equipment



Low Cost Printer Offer.
 Teletype 33 printer mechanism including case but no keyboard or electronics, 64 upper case ASCII, 10 cps, pinfeed platen, ideal for the electronic hobbyist ONLY **£85.00**

Texas
 745 Portable Data Terminal including keyboard, printer, integral acoustic coupler and carrying case. Total weight only 13 lbs **£750.00**

733 ASR terminal utilising high performance twin cassette drive for fast time-saving transmission and off-line storage.
 ★ Silent operation
 ★ Switch-selectable transmission speeds 10, 15, & 30 cps
 ★ Full tape editing capability
 ★ High-speed duplication and rewind
 ★ Standard RS232 interface **£1375.00**
 745 LIGHTWEIGHT (13lbs) terminal with integral acoustic coupler, 10/30 cps, carrying case **£750.00**

FLOPPY DISK DRIVES

Shugart SA400
 5 1/4" MINI-FLOPPY
 ★ Capacity (unformatted): 110Kb (single density) 220Kb (double density)
 ★ Power requirements +5VDC + 12VDC Dimensions 5 3/4" x 3 3/4" x 8", weight 3lbs **£195.00**

Shugart SA450
 Double-sided, double density minifloppy providing 440Kb unformatted storage capacity, yet the same compact size and weight as the SA400 **£299.00**

Shugart SA801
 8" FLOPPY
 ★ Capacity (unformatted): 400Kb (single density) 800Kb (double density)
 ★ Power requirements +24VDC + 5VDC -5VDC Dimensions 4 1/2" x 9 1/2" x 14 1/4" **£395.00**

PAPER TAPE PUNCHES
Digtronics
 P135/20 paper tape punch. Solenoid-actuated unit capable of punching 5 to 8 channel tapes at speeds up to 35 cps. Pulse amplitude 27 VDC. Compact table-top unit **£95.00**

Facit 4070
 The top quality punch that has become an industry standard. Asynchronous 75cps operation. Adjustable for punching 5, 6, 7 or 8 level tape. Self-contained desk-top unit incorporating supply and take-up spools, chad box, and TTL-compatible control logic **£650.00**

KEYBOARDS
New ASCII Keyboards
 KB756MF 56-station keyboard with full upper/lower case ASCII, parallel input, mounting frame for extra rigidity power requirements +5V, -12V **£39.00** (mail order total **£47.15**)
 KB771MF as per 756MF but with 71 keystations incorporating numeric pad and cursor control keys **£65.00** (mail order total) **£77.05**
 KB702 Steel enclosure for KB756 keyboard **£18.00** (mail order total) **£23.00**

SURPLUS ASCII KEYBOARDS
 Clare-Pendar KB3, 63 Station reed-switch ASCII Keyboard with ROM and tested working, circuit diagram supplied **£35.00** (mail order total **£41.98**)
 Clare-Pendar KB3 63-station reed-switch keyboard untested and without ROM (circuit supplied) **£15.00** (mail order total **£18.98**)

PROGRAMMABLE CALCULATORS
Hewlett Packard
 9830A with 8K Memory, Extended I/O ROM, String Variables ROM, 1 Serial and 3 parallel interfaces **£1695.00**

MODEMS
Racal Milgo
 Modem 26 Isi 1200/2400 baud, 2 or 4 wire, full/half duplex **P.O.A.**

GENERATORS
Mawdsley
 45KVA Generator system comprising AC Induction Motor, AC Generator, AC Exciter and Emreg Regulator. The alternator comprises of a screen-protected rotating field, complete with built in over-hung exciter of the brushless pattern. It is wound for 415V, 3 phase, 50Hz, 4 wire and developing 45KVA at 018 P.F. when running at a speed of 1500 rpm. The alternator and exciter are used in conjunction with the automatic transistorised voltage regulator, incorporating 3-phase sensing. The regulator is so designed that when the alternator is on balanced 3-phase load and with one phase switched off or disconnected, the phase voltage will not vary more than ± 6% under any conditions **£1250.00**

VDUs
Hazeltine
 H1000 The low, low priced teletypewriter-compatible video display terminal, offering you choice of transmission speeds up to 9600 baud as well as parity generation and checking, 12 x 80 display upper case ASCII, RS232 interface, choice of baud rates Standard baud rates either (a) 110/300 or (b) 300/1200. (£25 surcharge for other combinations up to 9600 baud). SUPER VALUE **£199.00**
 H2000 Superb spec, including full XY cursor addressing and edit facility, 27 x 74 display, upper case ASCII, RS232 interface, switch-selectable baud rates **£299.00**
 H2000C NOW ALSO AVAILABLE with 25 x 80 line format and C-MOS logic **£375.00**
 Modular One. Now with upper/lower case, XY cursor addressing, 24 x 80 line display, dual intensity detachable keyboard, choice of 8 transmission rates up to 9600 baud **£399.00**

Also available from time to time
 Hazeltine 1500 from **£575.00**
 Hazeltine 1510 from **£650.00**

Tektronix
 4010-1 Graphics Terminal with high-resolution graphics mode, standard alphanumeric mode, printer port, integral stand **£1,750.00**

Hours of Business: 9 a.m.-5 p.m. Mon-Fri: Closed lunch 1-2p.m.
ADD 15% VAT to ALL PRICES
Carriage and Packing charge extra on all items unless otherwise stated.
W/W-201 for further details

Electronic Brokers is the largest specialist buyer and seller of used computers in Europe

Our specialists deal daily in DEC Data General and many of the numerous and well-known manufacturers of related systems and peripherals such as Teletype, Hazeltine, Texas, Hewlett Packard, Tektronix. All computer equipment offered by Electronic Brokers is maintenance eligible by the original manufacturer

Our customers come from the fields of industry, education, research, government and general commerce. We have met their needs time and time again.

Whether your requirements are quick replacement, low cost development systems, additional capacity for existing equipment, or a cost-effective used configuration - we are only a phone call or telex away

Call us on 01 278 3461 and speak to one of our skilled sales specialists familiar with your equipment needs

Electronic Brokers

Electronic Brokers Limited
 61/65 Kings Cross Road
 London WC1X 9LN England
 Telephone: 01-278 3461
 Telex: 298694 Elebro G



WILMSLOW AUDIO

The firm for Speakers

EVERYTHING IN STOCK FOR THE SPEAKER CONSTRUCTOR!

BAF, LONG FIBRE WOOL, FOAM, CROSSOVERS, FELT PANELS, COMPONENTS, SPEAKER STANDS, BRACKETS, ETC. LARGE SELECTION OF GRILLE FABRICS.

(Send 22p in stamps for grille fabric samples)

HI-FI DRIVE UNITS



AUDAX HD12.9D25	£8.75
AUDAX HD11P25EBC	£7.50
AUDAX HD20825H4	£14.95
AUDAX HD13D34H	£12.95
AUDAX HD2454C	£21.95
AUDAX WFR15S	£23.95
CHARTWELL CEA205 pair	£61.25
COLES 4001	£7.65
COLES 3000	£7.85
COLES 3100	£7.95
COLES CE2000 6 1/2"	£14.95
CELESTION HF1300 II	£12.50
CELESTION HF2000	£13.60
DALESFORD D10 tweeter	£8.45
DALESFORD D10 ferrofluid	£8.95
DALESFORD D30/110	£11.25
DALESFORD D50/153	£12.25
DALESFORD D50/200	£12.25
DALESFORD D100/250	£29.95
DALESFORD D300	£35.75
DECCA London Hom	£79.95
ELAC 6NC204 6 1/2"	£7.50
ELAC 8NC298 8"	£8.95
EMI type 350, 13" x 8", 4 ohm	£9.45
EMI 14A/770, 14" x 9", 8 ohm	£19.50
ISOPHON KK8/8	£8.15
ISOPHON KK10/8	£8.45
JORDAN WATTS Module	£24.95
JORDAN WATTS Module Mk III	£28.50
JORDAN WATTS HF kit	£19.50
JORDAN 50mm Unit	£31.50
JORDAN crossover each	£15.95
KEF T27	£9.45
KEF B110	£12.25
KEF B200	£13.50
KEF B139	£27.75
KEF DN12	£9.40
KEF DN13	£6.75
LOWTHER PM6	£63.00
LOWTHER PM6 Mk I	£67.75
LOWTHER PM7	£99.00
PEERLESS K010DT	£10.95
PEERLESS DT10HFC	£10.50
PEERLESS K040MRF	£13.60
RICHARD ALLAN CG8T	£13.50
RICHARD ALLAN CG12T Super	£29.50
RICHARD ALLAN HP8B	£20.75
RICHARD ALLAN LP8B	£14.50
RICHARD ALLAN HP12B	£33.50
RICHARD ALLAN DT20	£9.95
RICHARD ALLAN DT30	£19.75
SEAS H107	£9.95
SEAS H211 ferrofluid	£10.95
SHACKMAN ES units	£138 pair
SHACKMAN ES units with cabs.	£170 pair

PA GROUP & DISCO UNITS



CELESTION G12/50TC	£19.50
CELESTION G12/80CE	£24.50
CELESTION G12/80TC	£23.75
CELESTION G12/125CE	£42.00
CELESTION G15/100CE	£37.95
CELESTION G15/100TC	£38.50
CELESTION G18/200	£64.75
CELESTION Powercel 12/150	£66.00
CELESTION Powercel 15/250	£88.00
FANE CLASSIC 45 12"	£13.95
FANE CLASSIC 55 12"	£15.50
FANE CLASSIC 80 12"	£19.75
FANE CLASSIC 85 15"	£26.00
FANE CLASSIC 150 15"	£37.95
FANE CLASSIC 125 18"	£43.95
FANE CLASSIC 175 18"	£47.95
FANE GUITAR 80B/2 12"	£26.25
FANE GUITAR 80B/2 12"	£27.25
FANE DISCO 100 12"	£28.75
FANE PA85 12"	£26.75
FANE BASS 100 15"	£39.00
FANE CRESCENDO 12E 12"	£57.50
FANE CRESCENDO 15E 15"	£74.50
FANE CRESCENDO 18E 18"	£94.75
FANE COLOSSUS 15E 15"	£99.95
FANE COLOSSUS 18E 18"	£107.00
FANE J44	£6.90
FANE J73	£10.90
FANE J104	£15.95
FANE J105	£23.95
GAUSS 3181A 10" 150 watts	£115.00
GAUSS 4281 12" 300 watts	£146.00
GAUSS 4581 15" 300 watts	£162.00
GAUSS 4583A 15" 400 watts	£162.00
GAUSS 4882 18" 400 watts	£220.00
GOODMANS 8PA	£5.05
GOODMANS PP12	£22.50
GOODMANS DI12	£25.50
GOODMANS GR12	£24.95
GOODMANS 18P	£48.45
GOODMANS HIFAX 50HX	£21.85
GOODMANS HIFAX 100HX	£24.50
McKENZIE C12100GP	£24.45
McKENZIE C12100TC	£24.45
McKENZIE C12100 bass	£24.45
McKENZIE C12125GP	£39.95
McKENZIE C12125TC	£39.95
McKENZIE GP15	£35.10
McKENZIE TC15	£35.10
McKENZIE C15 bass	£59.60
MOTOROLA PIEZO HORN 3 1/2"	£8.50
MOTOROLA PIEZO HORN 2" x 6"	£12.25
RICHARD ALLAN HD8T	£20.25
RICHARD ALLAN HD10T	£21.75
RICHARD ALLAN HD12T	£29.75
RICHARD ALLAN HD15	£52.75
RICHARD ALLAN HD15P	£52.75
RICHARD ALLAN 15"	£77.00
RICHARD ALLAN 18"	£96.00

WILMSLOW AUDIO



KITS FOR MAGAZINE DESIGNS

Kits include drive units, crossovers, BAF/long fibre wool, etc. for a pair of speakers

Carriage £3.95 unless otherwise stated

Practical Hi Fi & Audio PRO9-TL including felt panels and level controls	£152.75 carriage £5
Hi Fi Answers Monitor	£148.00
Hi Fi News State of the Art	£189.00
Hi Fi News Midline	£99.75
Hi Fi News Miniline	£49.00
Hi Fi News Tabor with J4 bass units	£66.00
Hi Fi News Tabor with H4 bass units	£70.00
Hi Fi for Pleasure Compact Monitor	£116.00
Hi Fi for Pleasure E.C.M. (including felt panels, foam etc)	£77.50 carriage £5
Popular Hi Fi Jordan System 1	£125.00
Popular Hi Fi Mini Monitor	£77.00
Popular Hi Fi Round Sound including complete cabinet kit	£74.00
Practical Hi Fi and Audio BSC3	£85.00
Practical Hi Fi and Audio Monitor	£180.00
Practical Hi Fi and Audio Triangle	£120.00
Practical Hi Fi & Audio DBS4	£85.00 carriage £5
Everyday Electronics EE20	£29.50
Everyday Electronics EE70	£150.00 carriage £5
Wireless World T.L. KEF	£125.00
Wireless World T.L. RADFORD	£190.00

Smart badges FREE with all the above kits (to give that professional touch to your DIY speakers). Reprints / construction details of the above designs 10p each.

WILMSLOW AUDIO BA1 sub bass amplifier / crossover kit £37.95 plus £1 carriage

SPEAKER KITS



PRICES PER PAIR CARRIAGE £3.95 UNLESS OTHERWISE STATED

COLES NIMBUS KIT (mounted on baffle)	£69.00
DALESFORD SYSTEM 1	£54.00
DALESFORD SYSTEM 2	£57.00
DALESFORD SYSTEM 3	£104.00
DALESFORD SYSTEM 4	£110.00
DALESFORD SYSTEM 5	£142.00
DALESFORD SYSTEM 6	£95.00
DALESFORD 'D' KIT (including cabinet)	£79.95
KEF Reference 104aB kit	£133.00 plus £5 carriage
KEF Cantata kit	£199.00 plus £5 carriage
LS3 Micro Monitor kit	£78.00
LOWTHER PM6 kit	£132.75
LOWTHER PM6 Mk 1 kit	£139.95
LOWTHER PM7 kit	£199.00
RADFORD Studio 90	£181.00
RADFORD Monitor 180	£243.00
RADFORD Studio 270	£309.00
RADFORD Studio 360	£450.00
RICHARD ALLAN Tango Twin	£55.50
RICHARD ALLAN Maramba	£77.50
RICHARD ALLAN Charisma	£111.00
RICHARD ALLAN Super Triple	£102.50
RICHARD ALLAN Super Saraband II	£159.95
RICHARD ALLAN RA8 kit	£62.75
RICHARD ALLAN RA82 kit	£98.75
RICHARD ALLAN RA82L kit	£108.00
SEAS 223	£42.50
SEAS 253	£67.00
SEAS 403	£79.95
SEAS 603	£134.95
WHARFEDALE DENTON XP2 kit	£31.45
WHARFEDALE SHELTON XP2 kit	£40.40
WHARFEDALE LINTON XP2 kit	£56.20
WHARFEDALE L80 kit	£72.00
WHARFEDALE L100 kit	£87.00
WHARFEDALE E50 kit	£129.00
WHARFEDALE E70 kit	£180.00
WHARFEDALE E90 kit	£249.50

CARRIAGE & INSURANCE

Tweeters / Crossovers 70p each

Speakers

4" to 6 1/2" 90p each

8" to 10" £1.10 each

12", 13" x 8", 14" x 9" £2.00 each

15" £3.00 each

18" £5.00 each

Speaker Kits £3.95 pair

Mag. Design Kits £3.95 pair unless otherwise stated

ALL PRICES INCLUDE VAT @ 15% and are correct at 1/2/81

SEND 50p FOR 56-PAGE CATALOGUE 'CHOOSING A SPEAKER' (or price list only free of charge) Export Catalogue £1 or \$3 U.S.

Tel. 0625 529599 for speaker drive units, kits, PA equipment, mail order enquiries, and all export enquiries.

Tel: 0625 526213 for Hi-Fi equipment and complete speaker enquiries.

Lightning service on telephoned credit card orders!



35/39 Church Street Wilmslow, Cheshire

SWIFT OF WILMSLOW
The firm for Hi-Fi
5 Swan Street
Wilmslow, Cheshire

WW - 032 FOR FURTHER DETAILS

Multimeters. what price excellence?

... certainly less than you think. By incorporating a custom made LSI chip, these fully auto-ranging 3 1/2 digit multimeters are available at prices from under £50.00.

SK-6110 (illustrated) £67.17 + VAT

SK-6220 £45.43 + VAT



Supplied complete with batteries, test leads, spare fuse and instruction manual.

Free Carrying Case supplied with every Meter

SK-6110 and SK-6220

- Full auto-ranging on both voltage and resistance
- Current measurement up to 10A DC and AC
- Unit and range automatically displayed
- Auto polarity and auto zero
- Only 5mW dissipation—200 hours continuous use
- Zero adjust key to correct for test leads on low value measurements
- High impact ABS case
- Low battery indication

SK-6110

- Audible continuity test function
- Range hold function
- Audible over-range indication



Telephone orders welcome for Access and Barclaycard and all account customers. All prices inc. P.&P.

WEST HYDE

West Hyde Developments Limited, Unit 9, Park Street Industrial Estate, Aylesbury, Bucks. HP20 1ET. Telephone: Aylesbury (0296) 20441/5.

WW - 044 FOR FURTHER DETAILS


Incredible Quality Incredible Performance Incredible Price!!!



HM312 Dual Trace Oscilloscope. DC-20MHz. Sensitivity 5mV-20V/cm. Time base range 0.5uS-0.2S/cm with x5 horiz mag to 100nS/cm, with variable control uncalibrated to 40nS/cm. CRT screen 8 x 10cm. Full XY using ch II as X input. Bandwidth 2.3MHz. TV trigger.

NOW BETTER VALUE THAN EVER AT

£220

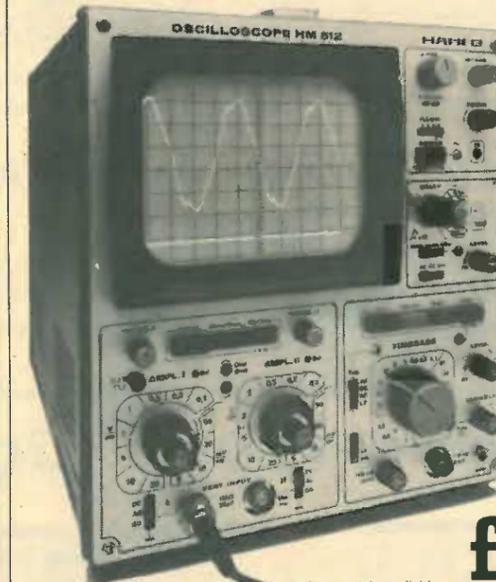

HM512 Dual Trace Oscilloscope with delayed sweep. DC-50MHz. Sensitivity 5mV-20V/cm Time base range 0.1uS-2.0S/cm with x5 horiz mag to 20nS/cm. Delay ranges 7 decade steps 100ns-1S with fine control CRT screen 8 x 10cm. Full XY using ch II as x input, bandwidth 4 MHz. Z input. Delay line allows viewing of leading edge. Vertical overscan indicated by 2 LED's.

£580

Other models available. HM307 10MHz plus component tester. £138.00
HM412 20 MHz with sweep delay. £350.00
HM812 50 MHz storage. £1458.00

All scopes can be fitted with a long persistence CRT at extra cost.

World-beating Oscilloscope Offers

FROM Electronic Brokers

61/65 Kings Cross Road, London WC1X 9LN. Tel: 01-278 3461. Telex 298694

Prices do not include carriage or VAT.

WW - 053 FOR FURTHER DETAILS

CX80 COLOUR MATRIX PRINTER

At last a low-cost Colour Matrix Printer for Text, Graphics, Histograms, Colour VDU Dumps, etc.



Colour printout is quickly assimilated, makes graphics more understandable and is an ideal medium for the presentation of complex data or concepts.

Compatible with most microprocessors, prints in 7 colours – sophisticated internal programme makes the CX80 easy to use.

Dot Addressable + 15 user programmable characters, 96 ASCII and 64 graphics characters in rom. Centronics interface with RS232 and IEEE488 options.

The CX80 is a product of our own design and development laboratories. It represents a British breakthrough in colour printer technology. Colour brochure on request. OEM pricing available.

NRDC-AMBISONIC UHJ SURROUND SOUND DECODER



The first ever kit specially produced by Integrex for this British NRDC backed surround sound system which is the result of 7 years' research by the Ambisonic team. W.W. July, Aug. '77. The unit is designed to decode not only UHJ but virtually all other 'quadro-phonics' systems (Not CD4), including the new BBC HJ. 10 input selections. The decoder is linear throughout and does not rely on listener fatiguing logic enhancement techniques. Both 2 or 2 input signals and 4 or 6 output signals are provided in this most versatile unit. Complete with mains power supply, wooden cabinet, panel, knobs, etc.

Complete kit, including licence fee **£57.70** + VAT or ready built and tested **£76.95** + VAT

INTRUDER 1 Mk. 2 RADAR ALARM


With Home Office Type approval

The original "Wireless World" published Intruder 1 has been re-designed by Integrex to incorporate several new features, along with improved performance. The kit is even easier to build. The internal audible alarm turns off after approximately 40 seconds and the unit re-arms. 240V ac mains or 12V battery operated. Disguised as a hard-backed book. Detection range up to 45 feet. Internal mains rated voltage free contacts for external bells etc.

Complete kit **£52.50** plus VAT, or ready built and tested **£68.50** plus VAT.

Wireless World Dolby noise reducer

Trademark of Dolby Laboratories Inc.

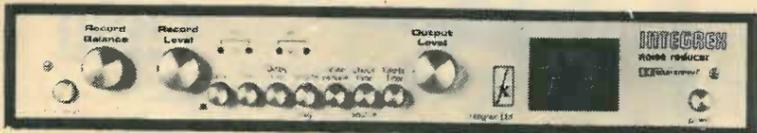

Complete Kit **PRICE: £49.95** + VAT (3 head model available)

Also available ready built and tested Price **£67.50** + VAT

Calibration tapes are available for open-reel use and for cassette (specify which) Price **£2.75** + VAT

Typical performance
Noise reduction better than 9dB weighted.
Clipping level 16.5dB above Dolby level (measured at 1% third harmonic content)
Harmonic distortion 0.1% at Dolby level typically 0.05% over most of band, rising to a maximum of 0.12%
Signal-to-noise ratio: 75dB (20Hz to 20kHz, signal at Dolby level) at Monitor output
Dynamic range >90dB
30mV sensitivity




All kits are carriage free

INTEGREX LIMITED

Please send SAE for complete lists and specifications
**Portwood Industrial Estate, Church Gresley,
Burton-on-Trent, Staffs DE11 9PT
Burton-on-Trent (0283) 215432 Telex 377106**

Quartz Crystals

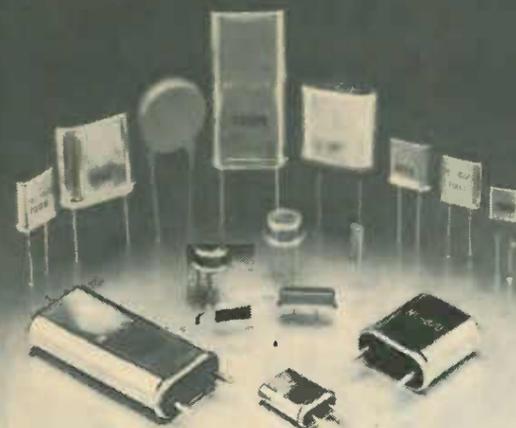

Stocks of standard items exceed a quarter of a million. Individual units to the tightest specification made to order.

Interface
Quartz
Devices
Limited

This technology is available now from




29 Market Street
Crewkerne
Somerset TA18 7JU

Crewkerne (0460) 74433
Telex 46283 infac g

WW - 034 FOR FURTHER DETAILS

MORE SPEC. FOR YOUR MONEY

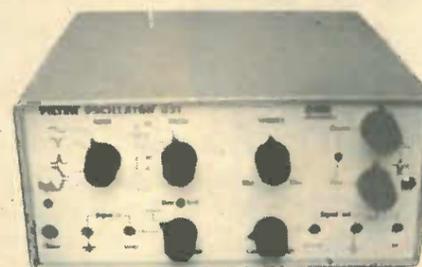

TYPE 631 FILTER OSCILLATOR

£112 & 2.50 carriage, ins. etc.

COVERS THE RANGE 0.1Hz to 100KHz

MODES -

ACCEPT	Q from less than 1 to over 300
REJECT	90 dB notch
HI and LO PASS	12 dB per octave
OSCILLATE	Sinewave and squarewave

TYPE 631LF - £118.13 & 2.50 carriage, ins. etc.

Low frequency version 0.01Hz to 10KHz

OMB ELECTRONICS, RIVERSIDE, EYNSFORD, KENT DA4 0AE
Tel. Farningham (0322) 863567

Prices, which are CWO and ex-VAT, are correct at the time of going to press and are subject to change without notice.

FROM OMB ELECTRONICS

WW - 049 FOR FURTHER DETAILS

EXTENSIVE RANGE OF NEW FLUKE DMM'S FROM ELECTRONIC BROKERS

IMMEDIATE DELIVERY



8050A 4 1/2 Digit LCD DMM with true RMS on AC volts and current DC volts 200mV-1KV, 10µV resolution AC volts. 200mV-750V, 10µV resolution. DC/AC current 200µA-2A, 0.01µA resolution resistance 200Ω-20MΩ, 0.01Ω resolution. Also reads dB direct referenced to 16 stored impedances. Conductance ranges 2mS and 200nS. **£245** mains model **£285** mains battery

8012A 3 1/2 Digit LCD DMM with true RMS on AC volts and current. DC volts 200mV-1KV, 100µV resolution. AC volts 200 mV-750V, 100µV resolution. DC/AC current 200µA-2A, 0.1µA resolution. Resistance 200Ω-20MΩ, 0.1Ω resolution Low resistance 2Ω and 20Ω, 1mΩ resolution Conductance ranges 2mS-20µS-200nS

£218.00 mains model **£244.00** mains battery.



8010A 3 1/2 Digit LCD DMM Same spec as 8012A plus a 10Amp AC/DC current range, but no low resistance range. **£167.00** mains model **£193.00** mains battery.

8024A 3 1/2 Digit hand held LCD DMM with peak hold Level Detector and continuity tester. DC volts 200mV-1KV, 100µV resolution. AC volts 200mV-750V, 100µV resolution. DC/AC current 2mA-2A, 1µA resolution. Resistance 200Ω-20MΩ, 0.1Ω resolution. Conductance 200nS. Peakhold of AC or DC volts and current. Level detector operates around +0.8V reference. Audio tone on level and continuity. **£155.00**, carrying case **£8.00** extra.

8020A 3 1/2 Digit hand held LCD DMM. spec as per 8024A with extra conductance range of 2mS but no peak hold, level or continuity ranges. Complete with carrying case. **£125.00.**



8022A 3 1/2 Digit hand held LCD DMM. Spec as per 8020A but no conductance ranges and slight reduction in accuracy, **£89.00** carrying case **£8.00** extra.

Also available a range of accessories including current shunts, EHT probe, rf probe, Temperature probe and touch and hold probe. Full details on request.

The warranty period on all items shown is 1 year other than the 8020A which is 2 years.

Electronic Brokers

**61-65 King's Cross Road
London, WC1X 9LN
Tel: 01-278 3461 - Telex 298694**

Prices do not include carriage or VAT.

WW - 054 FOR FURTHER DETAILS



DOUGLAS TRANSFORMERS FROM TITAN

NEW FRANCHISE AT FANTASTIC PRICES - EX STOCK

12/24V RANGE PRI 220/240V SEC: 0 12V 0V 12V				15/30V RANGE PRI 220/240V SEC: 0 12V 15V 0V 5V 5V 15V VOLTS AVAILABLE 3 15 0-15				25/50V RANGE PRI 120/220/240V SEC: 0 20V 25V 0V 8V 15V 25V VOLTS OUT 5 25 0-25				30/60V RANGE PRI 120/220/240V SEC: 0 24V 30V 0V 10V 18V 30V VOLTS 6 30 0-30			
TYPE	AMPS	PRICE	P/P	TYPE	AMPS	PRICE	P/P	TYPE	AMPS	PRICE	P/P	TYPE	AMPS	PRICE	P/P
242	0.3	1.70	0.40	112	1.0	2.47	0.95	102	1.0	2.88	1.43	124	1.0	2.92	1.43
213	10.50	2.32	0.70	79	2.1	3.16	0.95	103	2.1	3.60	1.43	126	2.1	5.78	1.43
71	2.1	2.51	0.90	3	4.2	5.84	1.43	104	4.2	7.04	1.73	127	4.2	7.13	1.73
18	4.2	3.24	1.43	20	6.3	6.59	1.73	105	6.3	8.33	1.90	128	6.3	10.73	1.90
68	3.15	3.15	1.43	21	8.4	7.80	1.73	106	8.4	11.18	1.90	129	8.4	12.28	2.20
85	5.25	5.52	1.43	51	10.5	9.68	1.90	107	10.5	14.79	2.20	40	10.5	15.55	2.20
70	6.3	6.26	1.43	117	12.6	10.97	2.05	118	12.6	20.49	2.55	120	12.6	17.72	2.35
108	8.4	7.36	1.73	88	16.8	14.65	2.20	119	20.10	24.52	2.55	121	16.8	25.09	2.65
116	12.6	8.57	1.90	89	20.10	16.93	2.35	122	20.10	29.07	4.00	189	24.12	33.51	4.60
117	16.8	10.53	2.05	90	24.12	18.84	2.55								
115	20.10	13.69	2.05	91	30.15	21.56	2.65								
187	30.15	17.72	2.45	92	40.20	30.08	3.50								
232	40.20	25.18	3.50												
226	60.30	35.35	4.00												

48/96V RANGE PRI 120/220/240V SEC: 0 36V 48V 0V 36V 48V VOLTS 12 48 0-48				AUTOTRANSFORMERS 240/220-115V 65VA-10KVA				CASED AUTOTRANSFORMERS 240V LEAD IN-115V 2PIN SOCKET OUT				LINE ADJUSTMENT AUTOTRANSFORMERS 0 200 210 220 230 240-250			
TYPE	AMPS	PRICE	P/P	TYPE	VA	PRICE	P/P	TYPE	VA	PRICE	P/P	TYPE	VA	PRICE	P/P
430	1.0	4.14	1.43	25	65	3.82	1.10	56W	20	5.52	0.58	415C	50	2.13	0.58
431	2.1	7.22	1.73	64	80	4.40	1.10	64W	80	7.63	1.43	416C	100	3.13	1.10
432	4.2	11.87	2.05	4	150	5.64	1.43	4W	150	9.63	1.73	417C	200	3.65	1.43
433	6.3	14.47	2.20	69	250	7.13	1.90	69W	250	11.98	1.90	418F	350	5.63	1.43
434	8.4	18.43	2.45	53	350	8.97	1.90	67W	500	18.67	2.20	419F	500	6.13	1.73
435	10.5	26.16	2.65	67	500	11.09	2.20	84W	1000	26.90	2.65	420E	750	7.60	1.90
436	12.6	32.75	4.00	83	750	12.42	2.20	95W	2000	48.45	7.00	421F	1000	10.55	2.05
437	16.8	35.77	4.60	84	1000	16.88	2.65	73W	3000	69.18	8.00				

MAINS ISOLATORS (SAFETY SCREEN)				MAINS ISOLATORS (SAFETY SCREEN)				INVERTOR				MAINS ADAPTORS			
TYPE	VA	PRICE	P/P	TYPE	VA	PRICE	P/P	In: 12v D.C. Nom.	Out: 240v A.C. square wave 100VA Con.	TYPE	VA	mA	PRICE	P/P	
149F	60	7.35	1.73	243F	60	7.35	1.43	150VA Peak	INV 1. Cased - pvc covered steel case with 13-amp. 3-pin socket £49.95 plus £2.50 carriage.	100	6-7.5-9v	250	3.85	0.58	
105F	100	8.61	1.73	244F	100	8.61	1.73	INV 2. Open frame for OEM £39.95 plus £2.50 carriage.	REGULATED	101	6-7.5-9v	300	4.70	0.58	
151F	200	12.15	2.05	245F	200	12.15	2.05								
152F	250	14.75	2.20	246F	250	14.75	2.20								
153F	350	18.22	2.55	247F	350	18.22	2.55								
154F	500	22.70	2.65	248F	500	22.70	2.65								
155F	750	32.08	7.00	249F	750	32.08	7.00								
156F	1000	41.26	7.00	250F	1000	41.26	8.00								

WW - 022 FOR FURTHER DETAILS

SEND TODAY 50p (REFUNDABLE WITH FIRST ORDER) FOR CATALOGUE
TITAN TRANSFORMERS AND COMPONENTS
 Dept. WW, CENTRAL HALL CHAMBERS, GRIMSBY
 S. HUMBERSIDE DN32 7EG
 MAIL ORDER ONLY - PRICES INCLUDE 15% VAT




WE CUT THE PRICE. WE CUT THE SIZE. WE LEFT THE OMRON QUALITY.

IMO can now offer you the high quality and reliability that you have come to expect in Omron relays, in their new series of low profile, printed circuit mounting subminiatures.

There's a tremendous range for every interface, communication and output application, suitable for mounting with sockets or directly onto printed circuit boards. There are low cost types like the LC1-NE, where price is a major consideration, and high reliability types like the LZN's with gold-clad, bifurcated crossbar contacts and card lift-off operation.

With contact ratings up to 10A and 240VAC and down to 10µA, all in a variety of housing styles and sizes, and up to four changeover contacts per relay, this range from IMO offers

you real design flexibility. All usual AC and DC coil voltages are available from stock.

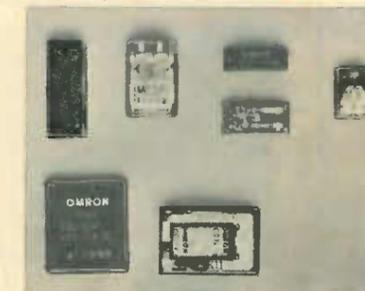

With the increased requirement for complete reliability in electronic circuitry, you'll need relays at the right price and the highest quality.

In a word, Omron—from IMO.

IMO

Much more than you may know


IMO Precision Controls Ltd.,
 349 Edgware Road, London W2 1BS.
 Tel: 01-723 2231/4 or 01-402 7333/6.

WW - 029 FOR FURTHER DETAILS

NEW DISTRIBUTORS WANTED

JUST WRAP™

Just wrap™ wire-wrapping tool
 Why cut? Why strip? Why slit? Why not just wrap?

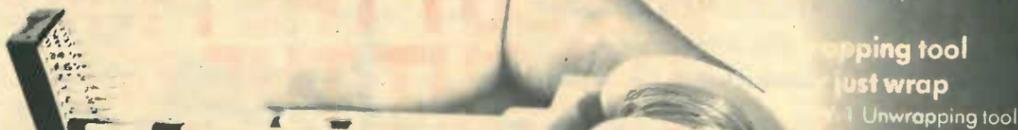

Just wrap™ replacement rolls

- R-JW-B Blue wire 50 foot roll
- R-JW-W White wire 50 foot roll
- R-JW-Y Yellow wire 50 foot roll
- R-JW-R Red wire 50 foot roll

- AWG 30 wire.
- 0.025" square posts.
- Daisy chain or point to point.
- No stripping.
- Built-in cut off.
- Easy loading of wire.
- Available wire colours: Blue, white, yellow and red.

- JW-1-B Blue 50 foot roll and just wrap tool.
- JW-1-W White 50 foot roll and just wrap tool.
- JW-1-Y Yellow 50 foot roll and just wrap tool.
- JW-1-R Red 50 foot roll and just wrap tool.

Just wrap™ kit

Contains: Just wrap tool. Roll of blue wire (50 ft). Roll of white wire (50 ft). Roll of yellow wire (50 ft). Roll of red wire (50 ft). Unwrapping tool.

JWK-6 Just wrap kit

ELECTROWARE*

DUTTON LANE EASTLEIGH SO5 4AA TEL(0703)610944/5

AVAILABLE FROM ALL LEADING ELECTRONIC DISTRIBUTORS

- Jee Distribution Ltd., Middlesex. 01-897-3429
- Watford Electronics Ltd., Watford. 0923-37774
- Technomatic Ltd., London. 01-452-1500

* A DIVISION OF OK MACHINE & TOOL UK LIMITED

Transom, London. 01-402-8137

Shell (London) Ltd., London. 01-624-0805

Components Ltd., London. 02403-22307

Store Ltd., London. 01-402-7333/6

For your FREE Catalogue
 Send 30p to cover P&P

- Cobbles Ltd., London. 01-699-2282
- Microdigital Ltd., Liverpool. 051-227-2535
- Electronica CG Ltd., Manchester. 061-788-0656
- Spectron Electronics (Manchester) Ltd., Salford. 061-834-4583

New! Sinclair ZX81 Personal Computer. Kit: £49.⁹⁵ complete

Reach advanced computer comprehension in a few absorbing hours

Built: £69.⁹⁵ complete

1980 saw a genuine breakthrough – the Sinclair ZX80, world's first complete personal computer for under £100. At £99.95, the ZX80 offered a specification unchallenged at the price.

Over 50,000 were sold, and the ZX80 won virtually universal praise from computer professionals.

Now the Sinclair lead is increased: for just £69.95, the new Sinclair ZX81 offers even more advanced computer facilities at an even lower price. And the ZX81 kit means an even bigger saving. At £49.95 it costs almost 40% less than the ZX80 kit!

Lower price: higher capability

With the ZX81, it's just as simple to teach yourself computing, but the ZX81 packs even greater working capability than the ZX80.

It uses the same micro-processor, but incorporates a new, more powerful 8K BASICROM – the 'trained intelligence' of the computer. This chip works in decimals, handles logs and trig, allows you to plot graphs, and builds up animated displays.

And the ZX81 incorporates other operation refinements – the facility to load and save named programs on cassette, for example, or to select a program off a cassette through the keyboard.

Higher specification, lower price – how's it done?

Quite simply, by design. The ZX80 reduced the chips in a working computer from 40 or so, to 21. The ZX81 reduces the 21 to 4!


The secret lies in a totally new master chip. Designed by Sinclair and custom-built in Britain, this unique chip replaces 18 chips from the ZX80!

Proven micro-processor, new 8K BASIC ROM, RAM – and unique new master chip.

Kit or built – it's up to you!


The picture shows dramatically how easy the ZX81 kit is to build: just four chips to assemble (plus, of course the other discrete components) – a few hours' work with a fine-tipped soldering iron. And you may already have a suitable mains adaptor – 600 mA at 9 V DC nominal unregulated (supplied with built version).

Kit and built versions come complete with all leads to connect to your TV (colour or black and white) and cassette recorder.

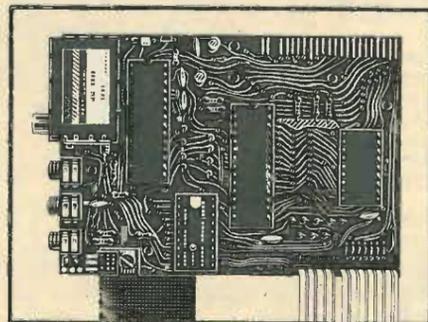

New Sinclair teach-yourself BASIC manual

Every ZX81 comes with a comprehensive, specially-written manual – a complete course in BASIC programming, from first principles to complex programs. You need no prior knowledge – children from 12 upwards soon become familiar with computer operation.

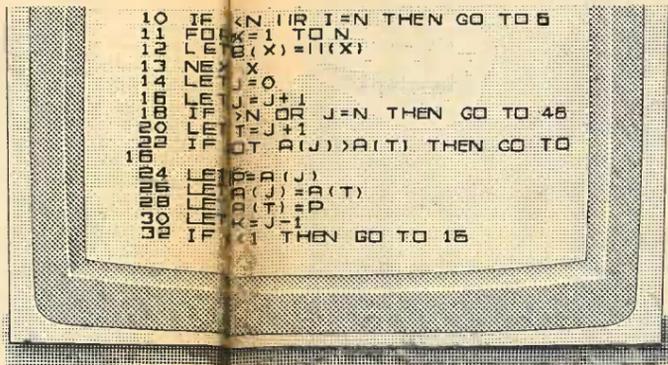

New, improved specification

● Z80A micro-processor – new faster version of the famous Z80 chip, widely recognised as the best ever made.

● Unique 'one-touch' key word entry: the ZX81 eliminates a great deal of tiresome typing. Key words (RUN, LIST, PRINT, etc.) have their own single-key entry.

● Unique syntax-check and report codes identify programming errors immediately.

● Full range of mathematical and scientific functions accurate to eight decimal places.

● Graph-drawing and animated-display facilities.

● Multi-dimensional string and numerical arrays.

● Up to 26 FOR/NEXT loops.

● Randomise function – useful for games as well as serious applications.

● Cassette LOAD and SAVE with named programs.

● 1K-byte RAM expandable to 16K bytes with Sinclair RAM pack.

● Able to drive the new Sinclair printer (not available yet – but coming soon!)

● Advanced 4-chip design: micro-processor, ROM, RAM, plus master chip – unique, custom-built chip replacing 18 ZX80 chips.

If you own a Sinclair ZX80...

The new 8K BASIC ROM used in the Sinclair ZX81 is available to ZX80 owners as a drop-in replacement chip. (Complete with new keyboard template and operating manual.)

With the exception of animated graphics, all the advanced features of the ZX81 are now available on your ZX80 – including the ability to drive the Sinclair ZX Printer.

Coming soon – the ZX Printer.

Designed exclusively for use with the ZX81 (and ZX80 with 8K BASIC ROM), the printer offers full alphanumerics across 32 columns, and highly sophisticated graphics. Special features include COPY, which prints out exactly what is on the whole TV screen without the need for further instructions. The ZX Printer will be available in Summer 1981, at around £50 – watch this space!



16K-BYTE RAM pack for massive add-on memory.

Designed as a complete module to fit your Sinclair ZX80 or ZX81, the RAM pack simply plugs into the existing expansion port at the rear of the computer to multiply your data/program storage by 16!

Use it for long and complex programs or as a personal database. Yet it costs as little as half the price of competitive additional memory.



How to order your ZX81

BY PHONE – Access or Barclaycard holders can call 01-200 0200 for personal attention 24 hours a day, every day. BY FREEPOST – use the no-stamp-needed coupon below. You can pay by cheque, postal order, Access or Barclaycard.

EITHER WAY – please allow up to 28 days for delivery. And there's a 14-day money-back option, of course. We want you to be satisfied beyond doubt – and we have no doubt that you will be.

To: Sinclair Research Ltd, FREEPOST 7, Cambridge, CB2 1YY.				Order
Qty	Item	Code	Item price £	Total £
	Sinclair ZX81 Personal Computer kit(s). Price includes ZX81 BASIC manual, excludes mains adaptor.	12	49.95	
	Ready-assembled Sinclair ZX81 Personal Computer(s). Price includes ZX81 BASIC manual and mains adaptor.	11	69.95	
	Mains Adaptor(s) (600 mA at 9 V DC nominal unregulated).	10	8.95	
	16K-BYTE RAM pack(s).	18	49.95	
	8K BASICROM to fit ZX80.	17	19.95	
	Post and Packing.			2.95
TOTAL £				

Please tick if you require a VAT receipt

*I enclose a cheque/postal order payable to Sinclair Research Ltd, for £ _____

*Please charge to my Access/Barclaycard/Trustcard account no. _____

Please print.

Name: Mr/Mrs/Miss _____

Address _____

FREEPOST – no stamp needed.

WRW07

sinclair ZX81

Sinclair Research Ltd,
6 Kings Parade, Cambridge, Cambs.,
CB2 1SN. Tel: 0276 66104.
Reg. no: 214 4630 00


- ORDER BY POST OR TELEPHONE WITH BARCLAYCARD/ACCESS
- ELECTRONIC TEST EQUIPMENT SPECIALISTS
- ALL PRICES INCLUDE VAT

AUDIO ELECTRONICS

- ALL MODELS ON DISPLAY
- RETAIL - MAIL ORDER - EXPORT - INDUSTRIAL
- OPEN SIX DAYS A WEEK
- CALL IN AND SEE FOR YOURSELF

SCOPES

A range of Scopes in stock from 5mHZ Single Trace to 50mHZ Dualtrace Mains and Battery/Mains portables. Many on demonstration

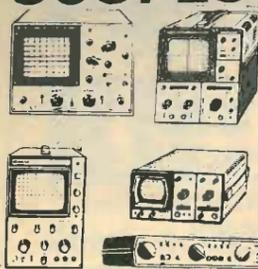

- SINGLE TRACE** (UK c/p etc £2.50)
 3030 15mHZ 5LV 6.6x6.6cm. display plus component test £166.75
 3035 10mHZ 5LV 5" display plus component test £189.75
 Hm 307-3 10mHZ. 5mV, 6x7 cm display plus component test £158.95
 CO1303D 5mHZ, 10mHZ, 7x7cm display £115.00
 SC110 10mHZ Battery portable, 10mV 3.2x2.6cm display £158.95
 (Optional case £8.86. Nicads £8.63 Mains unit £5.69)
 CS1559A 10mHZ 10mV, 5" display £232.00
- SAFGAN DUAL TRACE** C/P UK £2.50
 10mHZ £194.95, 12mHZ £201.25, 15mHZ £216.20
- OPTIONAL PROBES (ALL MODELS)**
 X1 £6.50, X10 £8.50, X100 £12.95, X1-X10 £10.95
 HAMEG • TRIO • SINCLAIR • LEADER • CROTECH

- DUAL TRACE** (UK c/p etc £3.50)
 CS1566A 10mHZ, 10mV 5" display £267.00
 CS1575 5mHZ 1mV 5" multi display £284.00
 Hm 312-8 20mHZ, 5mV 8x10cm display £253.00
 CS1560A II 15mHZ 10mV 5" display £315.00
 CS1566A 20mHZ, 5mV, 5" display £339.00
 ★LBO308S 20mHZ, 2mV, 5x6.3cm display. Battery/mains. Portable built-in Nicads with probes £538.20
 3034 15mHZ 5LV 6.6x6.6cm display battery/mains with Nicads and charger £385.25
 HMA12-4 20mHZ, 5mV, 8x10cm display plus Sweep Delay £399.50
 CS1577A 35mHZ, 2mV, 5" display £478.00
 CS1830 30mHZ, 2mV, 5" display plus sweep delay and delay line - new model £569.00
 Hm 512-8 50mHZ, 5mV, 10x8cm display. Delay Sweep £667.00
 ★LBO514 10mHZ, 1mV, (5mV) 5" display, with probes £322.00

ALL PRICES INCLUDE VAT

GENERATORS

(UK c/p £1.75)
 A range of Signal Generators to cover Audio, RF and Pulsing. Mains operated.




- RF**
 SG402 100 KHZ-30mHZ with AM modulation £68.00
 LSG16 100KHZ (300mHZ on Harmonics) £63.25
 LSG231 100m HZ 1mHZ (adjustable) FM stereo generator, pilot and mod £195.00
- PULSE**
 2001 1HZ-100KHZ (function) £89.70
 TG105 5HZ-5mHZ £92.50
 4001 0.5HZ-5mHZ £109.25
 200P 0.00 2HZ 5.5mHZ £253.00
 200SPC as 200P plus built-in freq. display/100mHZ counter £437
 TG100 (function 100KHZ) £90.85
 TG102 0.2HZ-2mHZ (function) £166.75
- AUDIO** (All sine/square)
 AG202A 20HZ-200KHZ £69.00
 LAG26 20HZ-200KHZ £73.60
 AG203 10HZ-1mHZ sine/sq £126.50
 LAG120A 10HZ-1mHZ £146.00

LEADER • TRIO • NEWTRONICS • LEVELL

DIGITAL MULTIMETERS


A range of LED and LCD Bench and Hand DMMs battery operated with optional Mains Adaptors, some with optional Nicads. All supplied with batteries and leads.

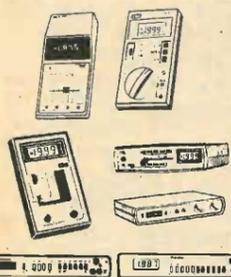

- HAND HELD** (UK post etc 85p)
 GL35C 3 1/2 Digit LCD in AC/DC with case £37.50
 TM352 3 1/2 Digit LCD plus 10A DC and Hfe checker £54.95
 LM2001 3 1/2 Digit LCD 2 amp AC/DC 0.1% £51.70
 6200 3 1/2 Digit LCD 0.2A AC/DC. Auto range £45.95
 6220 As 6200 plus 10A AC/DC £55.95
 6100 As 6200 plus Cont. test/range hold £69.95
 6110 As 6100 plus 10A AC/DC £85.95
 TM354 3 1/2 Digit LCD 2A DC £45.95
 130 3 1/2 digit LCD 10A. AC/DC £102.35

FREQUENCY COUNTERS

Portable and Bench LCD and LED Counters up to 600mHZ. Prices include batteries and leads.

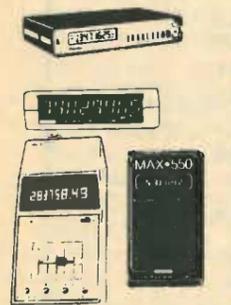

- HAND HELD** (UK post etc 85p)
 PFM200 20HZ to 200mHZ 8 Digit LED £57.27
 MAX50 100HZ to 50mHZ 6 Digit LED £56.35
 MAX550 30KHZ to 550mHZ 6 Digit LED £97.00
- BENCH PORTABLES** (UK c/p £1)
 MAX100 8 Digit LED 5HZ to 100mHZ £89.00
 TF200 8 Digit LCD 10HZ to 200mHZ £166.75
 7010A 9 Digit LED 10HZ to 600mHZ £184.00
 TP600 600mHZ Pre-Scaler £43.13
 200SPC 6 Digit 100mHZ LED built into 0.002HZ to 5.5mHZ Pulse Generator £437.00
 TF040 8 Digit LCD 40mHZ £126.50

CSC • SINCLAIR • OPTOELECTRONICS • NEWTRONICS

Stockists of electronic equipment, speakers/kits, PA equipment plus huge range of accessories • UK carriage/packing as indicated • Export - prices on request • All prices correct at 15.5.81 E & OE • All prices include VAT

AUDIO ELECTRONICS Cubegate Limited
 301 EDGWARE ROAD, LONDON, W2 1BN, ENGLAND. TELEPHONE 01-724 3564
 ALSO AT HENRYS RADIO, 404/406 EDGWARE ROAD, LONDON W2 1ED

OPEN SIX DAYS A WEEK

FREE CATALOGUE!
 Send large SAE (20p UK) Scho ls, Companies, etc. fr. e on request.

WW - 005 FOR FURTHER DETAILS

FAST ERECTING CLARK MASTS

Here is the expertise you can depend on-

25 years in this specialist field

When you choose a mast from the comprehensive Clarke range you are assured of a high standard of Engineering and operational reliability.

Why compromise?

Extended heights 4 metres-30 metres, capable of lifting headload 1 kg.-200 kgs. Sectional or telescopic air operated for field or vehicle mounting. Write or phone us for details today.

CLARK W.T.16 vehicle-mounted in a Saviem-Renault. An air-operated telescopic mast mainly used for raising heavy antennas and instruments. Extended heights 3.2m. to 30.5m.



CLARK MASTS LTD.
 Binstead, Isle of Wight, PO33 3PA, England.
 Telephone: Ryde (0983) 63691, Telex: 86686.

WW - 018 FOR FURTHER DETAILS

MICROCOMPUTER COMPONENTS

LOWEST PRICES - FASTEST DELIVERY

DEVICE	PRICE	DEVICE	PRICE	DEVICE	PRICE
CPUs		74LS14	0.51	CMOS	
6502	5.50	74LS15	0.15	4000	0.12
6800	3.82	74LS20	0.13	4001	0.12
6802	5.74	74LS21	0.15	4002	0.12
6803	14.53	74LS22	0.15	4006	0.69
6809	12.00	74LS26	0.19	4007	0.14
8085A	8.02	74LS27	0.15	4008	0.81
Z80 CPU	4.00	74LS28	0.17	4009	0.31
Z80A CPU	5.92	74LS30	0.14	4010	0.37
		74LS32	0.14	4011	0.13
		74LS33	0.17	4012	0.19
SUPPORT CHIPS		74LS37	0.17	4013	0.34
6520	3.15	74LS38	0.17	4014	0.62
6522	5.60	74LS39	0.14	4015	0.64
6532	7.75	74LS40	0.17	4016	0.28
6821	1.93	74LS42	0.40	4017	0.54
6840	5.87	74LS47	0.42	4018	0.59
6848BP	9.38	74LS48	0.70	4019	0.36
6850	1.95	74LS49	0.62	4020	0.66
6862	7.09	74LS51	0.14	4021	0.70
6871A1T	20.90	74LS54	0.15	4022	0.68
6875P	4.16	74LS55	0.15	4023	0.19
6880	1.07	74LS73	0.22	4024	0.39
6887	0.80	74LS74	0.18	4025	0.15
8212	1.95	74LS75	0.30	4026	1.12
8216	1.95	74LS76	0.22	4027	0.36
8224	2.50	74LS78	0.25	4028	0.64
8228	4.20	74LS83	0.54	4031	1.55
8251	4.75	74LS85	0.77	4034	1.30
8253	9.90	74LS86	0.18	4035	1.60
8255	4.20	74LS90	0.36	4036	2.25
Z80 CTC	4.00	74LS91	0.81	4039	2.45
Z80A CTC	4.90	74LS92	0.40	4040	0.67
Z80 DMA	11.52	74LS93	0.39	4041	0.70
Z80A DMA	17.25	74LS95	0.48	4042	0.56
Z80 DART	7.20	74LS109	0.26	4043	0.62
Z80A DART	7.67	74LS112	0.26	4044	0.62
Z80 P10	4.00	74LS113	0.26	4045	1.30
Z80A P10	4.40	74LS114	0.26	4046	0.75
Z80 S10-0	17.90	74LS122	0.45	4047	0.78
Z80 S10-1		74LS123	0.45	4048	0.44
Z80 S10-2		74LS124	1.07	4049	0.28
		74LS125	0.29	4050	0.27
		74LS126	0.29	4051	0.62
		74LS132	0.51	4052	0.62
		74LS136	0.29	4053	0.62
MEMORIES		74LS138	0.40	4054	1.02
2101	3.68	74LS139	0.40	4055	0.88
2102	2.54	74LS148	0.78	4060	0.94
2114 200ns low power	1.35	74LS151	0.35	4066	0.38
		74LS153	0.35	4067	0.22
2708	1.73	74LS155	0.50	4068	0.21
2716 (5v)	2.67	74LS156	0.36	4069	0.15
2732 2532 (specify)	7.59	74LS157	0.40	4070	0.23
4116 150ns	1.25	74LS160	0.43	4071	0.20
4116 200ns	1.20	74LS161	0.43	4072	0.20
6810P	1.43	74LS162	0.43	4073	0.20
		74LS163	0.43	4075	0.20
REGULATORS		74LS164	0.51	4076	0.67
7805	0.55	74LS166	0.37	4077	0.23
7812	0.55	74LS167	0.77	4078	0.20
7905	0.65	74LS174	0.78	4081	0.20
7912	0.65	74LS175	0.60	4082	0.20
		74LS180	1.50	4085	0.45
		74LS181	0.81	4086	0.56
CRT CONTROLLERS		74LS191	0.81	4093	0.43
9364AP	8.64	74LS192	0.69	4502	0.80
6845	11.72	74LS193	0.69	4507	0.37
		74LS194	1.25	4508	2.25
BUFFERS		74LS195	0.42	4510	0.67
81LS95	1.20	74LS196	0.68	4511	0.51
81LS96	1.25	74LS197	0.68	4512	0.63
81LS97	1.20	74LS240	1.01	4514	1.53
81LS98	1.25	74LS241	1.15	4515	2.38
8T26A	1.50	74LS242	0.85	4516	0.72
8T28A	1.50	74LS243	0.85	4518	0.72
8T95N	1.50	74LS244	0.84	4519	0.56
8T97N	1.50	74LS245	1.21	4520	0.71
8T98	1.50	74LS247	0.41	4521	1.65
		74LS248	0.74	4522	1.15
		74LS249	0.74	4526	0.75
		74LS251	0.46	4527	1.00
		74LS253	0.46	4528	0.79
MISC SUPPORT CHIPS		74LS257	0.57	4532	0.90
AY-3-1015 (or	3.49	74LS258	0.40	4541	1.15
AY-5-1013 (equiva-	3.19	74LS259	1.15	4543	1.15
AY-5-2376 (ent	7.00	74LS261	3.12	4553	2.50
MC1488	0.75	74LS266	0.25	4555	0.40
MC1489	0.75	74LS273	0.97	4556	0.47
MC14411	6.99	74LS279	0.37	4585	1.05
MC14412	7.99	74LS283	0.45		
		74LS285	0.60	CRYSTALS	
		74LS290	0.60	4MHz	1.80
		74LS293	0.53		
		74LS365	0.39	DIL SOCKETS	
		74LS366	0.38	8	0.07
		74LS367	0.38	14	0.08
		74LS368	0.38	16	0.09
		74LS373	0.79	18	0.14
		74LS374	0.79	20	0.16
		74LS375	0.50	22	0.18
		74LS377	0.97	24	0.20
		74LS378	0.73	28	0.24
		74LS379	0.56	40	0.32
		74LS386	0.29		
		74LS390	0.61		
		74LS393	0.68		

OFFICIAL ORDERS WELCOME QUANTITY DISCOUNTS AVAILABLE
MIDWICH COMPUTER CO. LTD. All prices exclude post and packing on orders under £10 (50p) and VAT (15%)
 (Dept. WW) HEWITT HOUSE, NORTHGATE STREET ALL ORDERS DESPATCHED ON DAY OF RECEIPT WITH FULL REFUND ON DAY OF STOCK ITEM'S IF REQUESTED
 BURY ST. EDMUNDS, SUFFOLK IP33 1HQ 24-hour Telephone Credit Card Orders
 TELEPHONE: (0284) 701321 TELEPHONE (0284) 701321

CREDIT CARD ORDERS WELCOME
 WW - 064 FOR FURTHER DETAILS

The EP4000 is not just an EPROM Programmer . . .

Not only does the EP4000 copy, store, program and duplicate the 2704/2708/2716(3)/2508/2758/2716/2516/2532 and 2732 EPROMs without personality cards or modules, but also includes a video output for memory map display to make the powerful editing facilities really useful (and this is in addition to the in-built LED display for stand-alone use), but it also comes as standard with comprehensive input/output - RS232, 20mA loop, TTL, parallel handshake, cassette, printer and direct memory access. Now the programming power can be expanded with our range of add-on accessories listed below.



Made in the U.K.

. . . but also a Real Time EPROM Emulator . . .

Real time EPROM Emulation is the second major function of the EP4000. This facility allows the machine to directly replace your in-circuit EPROMs during the process of program development - the EP4000 can be configured to look like any EPROM it is capable of programming. The press of a button isolates

the external system so that data changes, entries, editing and downloading can be implemented. When the program is complete and working, the simulator cable can be replaced by an EPROM programmed by the EP4000.

. . . with real technical back-up and service.

The EP4000 comes with a technical manual describing every aspect of the machine - its purpose, its use, and how to use it. It also has a section describing the whole process of program development.

And if you ever need technical help or advice, you can now dial direct to our technical department for instant attention - Tel. (0803) 863380.

Finally, a full range of accessories is now available - these include Bipolar programming

modules, multi-EPROM simulator adaptors, buffer pods, EPROM Erasers, video monitors, 2764/2564 programming satellite, printer and production programmers. The EP4000 is ex-stock. Price - £545 + VAT (+£12 for DATAPOST delivery). Telephone, telex, write or call for full data and Distributor list, or place your order for immediate despatch - Overseas customers, please telex or write for quotation and terms. Agents in some countries, and distributors in Britain required.

G.P. Industrial Electronics Ltd.

Unit 6, Totnes Industrial Estate Totnes, Devon TQ9 5XL

Tel. Sales (0803) 863360. Technical (0803) 863380

Telex: 42596 GPELEC

ONE UP ON THE COMPETITION.

Introducing the first 4½ digit handheld DMM in a market that's been the exclusive domain of 3½ digit models. Until now . . .


The new Keithley 135.

Combining outstanding specification with impeccable performance. And confirming Keithley's position as a major innovator in D.M.M. technology:

- 0.05% DCV accuracy
- Five functions
- Low battery indicator
- Full overload protection: 1000V max DCV, 1000V peak ACV, 300V max Ohms
- 10 amp range
- ACV bandwidth to 20 kHz

Need a bench unit? Then take a look at the new Keithley 176. Five functions, 4½ digits, ±0.05%, DCV accuracy, and full function annunciators. Built up to a standard - not down to a price. Yet the 176 gives quality, 4½ digit performance at a cost some 3½ digit manufacturers would dearly love to match.

To find out more, fill in the coupon. And see what keeps Keithley one step ahead.

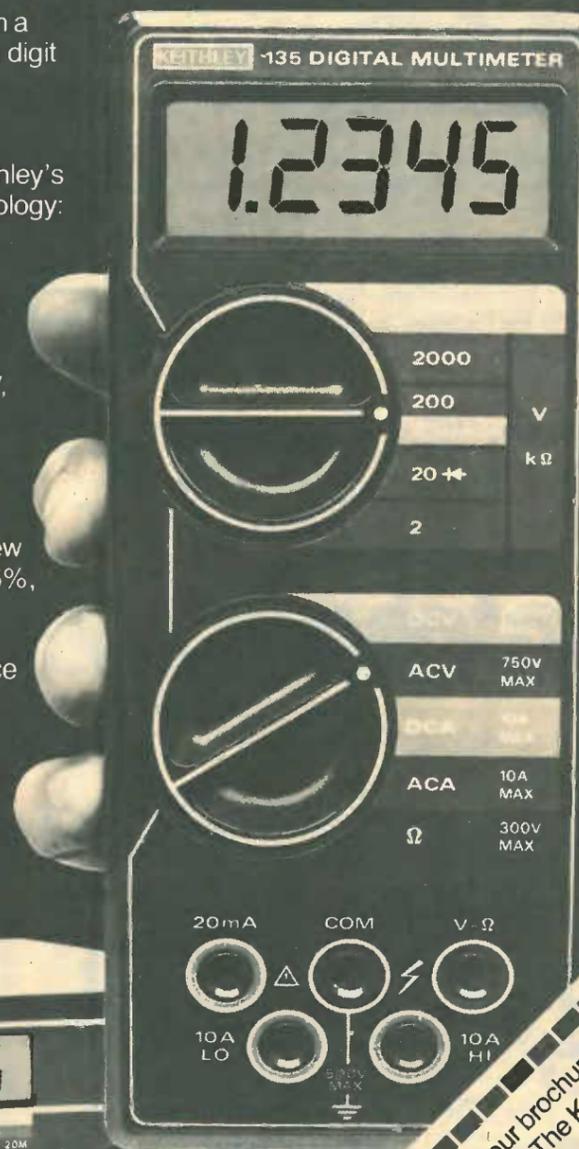

KEITHLEY

Keithley Instruments Ltd
1 Boulton Road Reading Berkshire RG2 0NL
Telephone (0734) 861287
Telex 847047

I'm interested. Please send me your brochures on

The Keithley 135 The Keithley 176 The Keithley Range

Name _____ Position _____

Company _____

Address _____

Tel _____ WWW7

Cut costs and speed trouble shooting



AFIT 1500 Automatic Fault Isolation Tester
A low cost complete PCB tester designed for quality control or service/repair work. Its powerful self-contained microprocessor provides rapid in-circuit fault isolation on complex digital PCBs.

MTL's comprehensive Programming Service will provide all the expertise required. 98% confidence level recorded in service applications. Solves 'wired or' problems.

MTL Microtesting Limited
1-15 Butts Road, Alton, Hampshire
Telephone: Alton (0420) 88022



WW - 019 FOR FURTHER DETAILS

FIVE NEW SENSES FOR YOUR MICRO



IEEE STANDARD A-D CONVERTERS
D-A CONVERTERS
RELAY UNITS
APPLE INTERFACES




CIL electronics Ltd
Decoy Rd, Worthing, Sussex,
Tel: Worthing (0903) 200673

WW - 051 FOR FURTHER DETAILS

sonimag 19

XIX INTERNATIONAL IMAGE, SOUND AND ELECTRONICS SHOW

TO SEE AND HEAR

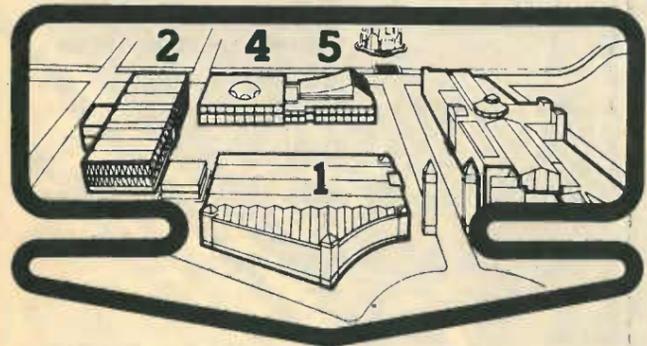

4 LARGE EXHIBITION PALACES DEALING WITH

- 1 Manufacturers of TV, Radio, Hi-Fi, Recording and 'play back' equipment.
- 2 Photo, Components, Professional Electronics.
- 4 Hi-Fi, Sound and Vision, Recording, Musical Instruments and Spectacular lighting systems.
- 5 Symposia, Conventions, Meetings, Hi-Fi and Video demonstrations.

BARCELONA (SPAIN) 28th SEPTEMBER - 4th OCTOBER 1981

INFORMATION: PLAZA DE ESPAÑA S/N BARCELONA-4 (SPAIN)
TEL. 223 31 01 - TELEX 50458 FOIMB-E



IBERIA TRANSPORTISTA OFICIAL

Get a great deal from Marshall's

WE ARE BROAD LINE DISTRIBUTORS FOR SIEMENS & THOMSON CSF WITH FULL INDUSTRIAL FRANCHISES AND CONSUMER FRANCHISES FOR: MULLARD, NATIONAL AND TEXAS.

WE ARE ESPECIALLY STRONG ON ITEMS LISTED AND INVITE YOUR ENQUIRIES. PLEASE SEND FOR STOCK LIST AND CLEARANCE LIST OF SEMICONDUCTORS.

COME TO US FOR YOUR REQUIREMENTS OF: SIEMENS CAPACITORS • SWITCHES & OPTO COMPONENTS. T.T.L. • C.M.O.S. • BAHCO TOOLS SINCLAIR TESTGEAR LEADER INSTRUMENTS PRESENSITISED LIGHT SENSITIVE PRINTED CIRCUIT BOARDS 4 SIZES BOTH DOUBLE & SINGLE.


A. MARSHALL (LONDON) LTD.,
KINGSGATE HOUSE, KINGSGATE PLACE,
LONDON NW6 4TA.
Industrial Sales: 01-328 1009
Mail Order: 01-624 8582 24hr service
Retail branches: London · Glasgow · Bristol

Carston

Second User Test Equipment, Calibrated to Manufacturer's original specification.

ACUSTIC & VIBRATION	MAINS TEST EQUIPMENT	TEKTRONIX	Prices from £
BRUEL & KJAER	COLE	466 100 MHz 5mV 2 Tr 2TB 1350cm/μs	2750
2203 Sound Level Meter	T1007 Volt/Freq/Spike Monitor Rec O/P	T912 10 MHz 2mV 2 Tr 1TB 250cm/ms	590
2215 Soundmeter inc Octave Filter	DATALAB	7313 25 MHz 3 Slot M/Frame split 5cm/μs	2100
2218 Soundmeter inc LEQ facility	DL019 Mains Interface for DL905	POWER MEASUREMENT	
2305 Level Recorder	DRANETZ	FLUKE	
4230 Sound Level Calibrator	606 3ch Volts-Av/Spike/Time/Printer	8921A 10 Hz-20 MHz 4 1/2 Digit & Analogue	885
4424 Noise Dosimeter	GAY	TRMS dBm/V meter 500-1200Ω & 10MΩ	885
2603 Mic amplifier 2 Hz-35 KHz	LDM AC/DC/Spike/Time inc Printer	HEWLETT PACKARD	
1014 BF Oscillator 20 Hz-20 KHz	MISCELLANEOUS	8481A Type N Coax sensor for 435A	200
CASTLE ASSOCIATES	AVO	478A Type N Coax sensor for 432A	90
CS181A Sound Level Meter & Calibrator	RM215 AC/DC Breakdown/Leakage Tester	MARCONI	
CEL	1601BLS Thermom 10ch 87 + 1000°C type K	TF2512 DC-500 MHz Powermeter	145
112 Environmental LEQ Meter Batt op	<i>N.B. Thermocouples not included</i>	TF893A 10 Hz-20 KHz Powermeter	135
144 Improved version of 112 model	BRIDGES & V and I STANDARDS	POWER SUPPLIES etc	
FLUKE	341 DC Voltage Calib 10μV to 1100V	ADVANCE	
DAS56 DC V and I Calib 1μV-10V 30mA	GENERAL RESISTANCE	1V5S Inverter 24V DC to 240V AC 500W	300
HEWLETT PACKARD	4342 QLC Meter 22 KHz-70 MHz	TEKTRONIX	
MARCONI	TF868A Universal LCR Bridge	1485C TV Waveform Monitor PAL/NTSC	2300
TF1245 Q Meter 1 KHz-300 MHz	TF1313 Universal LCR Bridge	FLUKE	
WAYNE KERR	8224 LCR Bridge 0.1%	4158 0-3.1 KV variable 30mA Metered	550
8500 LCR Bridge	8601 LCR Bridge RF Osc & Det not inc	ITT	
8601 LCR Bridge RF Osc & Det not inc	COMMS & CABLE TEST EQUIPMENT	Powerlab Dual 15V variable 1A	80
CHASE	35A Field Strength Meter 20-850 MHz		
8801S VHF Radio Telephone - Portable	DYMAR		
883 VHF Radio Telephone - Portable	1502 TDR Cable Tester CRT + Recorder		
BC282 Batt Charger for 880/883	WANDEL & GOLTERMANN		
HEWLETT PACKARD	LDS2 200 Hz-600 KHz sender for gp Delay		
MARCONI	LDEF2 Filters for DLM1		
TF2333 Trans Test Set 30 Hz-550 KHz	COUNTERS & TIMERS		
PYF2UB UHF Radio Telephone - Portable	FLUKE		
STC	1910 125 MHz 7 Digit Counter Timer		
74216A Noise Generator CCIT	1911 250 MHz 7 Digit Counter Timer		
74261A Psophometer CCIT	1912 520 MHz 7 Digit Counter Timer		
TEKTRONIX	1912A01 As 1912A but inc. re-charging batteries		
1502 TDR Cable Tester CRT + Recorder	1920A 520 MHz 9 Digit Counter inc. Brst. mode		
WANDEL & GOLTERMANN	1920A14 1250 MHz otherwise as 1920A		
LDS2 200 Hz-600 KHz sender for gp Delay	HEWLETT PACKARD		
LDEF2 Filters for DLM1	5300A 6 Digit Display Unit - P/in reqd.		
COUNTERS & TIMERS	5302A 50 MHz Counter Timer for 5300		
FLUKE	5305B 1300 MHz Counter for 5300		
1910 125 MHz 7 Digit Counter Timer	5308A 75 MHz Counter Timer for 5300B		
1911 250 MHz 7 Digit Counter Timer	5345 500 MHz 11 digit Counter Timer		
1912 520 MHz 7 Digit Counter Timer	10590A Adapter 5245 to 5345 Plug ins		
1912A01 As 1912A but inc. re-charging batteries	RACAL		
1920A 520 MHz 9 Digit Counter inc. Brst. mode	9024 600 MHz 7 1/2 digit Counter Timer		
1920A14 1250 MHz otherwise as 1920A	9025 1 GHz 8 digit Counter Timer		
HEWLETT PACKARD	SYSTRON DONNER		
5300A 6 Digit Display Unit - P/in reqd.	6053 3 GHz 9 digit Counter BCD O/P		
5302A 50 MHz Counter Timer for 5300	6054 18 GHz 11 digit Counter BCD O/P		
5305B 1300 MHz Counter for 5300	5103B Strip Printer for 6053/6054		
5308A 75 MHz Counter Timer for 5300B	DIGITAL TESTING EQUIPMENT		
5345 500 MHz 11 digit Counter Timer	HEWLETT PACKARD		
10590A Adapter 5245 to 5345 Plug ins	1600S Logic Analyser 32ch 20 MHz		
RACAL	1600A Logic Analyser 16ch 20 MHz		
9024 600 MHz 7 1/2 digit Counter Timer	1607 Logic Analyser 16ch 20 MHz		
9025 1 GHz 8 digit Counter Timer	5011T Logic troubleshooting kit		
SYSTRON DONNER	TEKTRONIX		
6053 3 GHz 9 digit Counter BCD O/P	7D01F Logic Analyser 16ch 50 MHz P/in		
6054 18 GHz 11 digit Counter BCD O/P	832 Datacom Test V24/R5232 1 loop		
5103B Strip Printer for 6053/6054	HEWLETT PACKARD		
DIGITAL TESTING EQUIPMENT	1600S Logic Analyser 32ch 20 MHz		
HEWLETT PACKARD	1600A Logic Analyser 16ch 20 MHz		
1600S Logic Analyser 32ch 20 MHz	1607 Logic Analyser 16ch 20 MHz		
1600A Logic Analyser 16ch 20 MHz	5011T Logic troubleshooting kit		
1607 Logic Analyser 16ch 20 MHz	TEKTRONIX		
5011T Logic troubleshooting kit	7D01F Logic Analyser 16ch 50 MHz P/in		
TEKTRONIX	832 Datacom Test V24/R5232 1 loop		
7D01F Logic Analyser 16ch 50 MHz P/in	HEWLETT PACKARD		
832 Datacom Test V24/R5232 1 loop	1600S Logic Analyser 32ch 20 MHz		
MAINS TEST EQUIPMENT	1600A Logic Analyser 16ch 20 MHz		
COLE	1607 Logic Analyser 16ch 20 MHz		
T1007 Volt/Freq/Spike Monitor Rec O/P	5011T Logic troubleshooting kit		
DATALAB	TELEQUIPMENT		
DL019 Mains Interface for DL905	D34 15 MHz 2mV 2 Trace Mains + int batts		
DRANETZ	D83 50 MHz 5mV 2 Trace 2T base Large crt		
606 3ch Volts-Av/Spike/Time/Printer	TEXSCAN		
GAY	DUI20 Large crt display unit		
LDM AC/DC/Spike/Time inc Printer	<i>Note: we hold a range of cameras</i>		
MISCELLANEOUS	OSCILLOSCOPES (STORAGE)		
AVO	HEWLETT PACKARD		
RM215 AC/DC Breakdown/Leakage Tester	1703A 35 MHz 10mV 2 Tr 2TB 1000 Div/ms		
BRIDGES & V and I STANDARDS	TELEQUIPMENT		
341 DC Voltage Calib 10μV to 1100V	D34 15 MHz 2mV 2 Trace Mains + int batts		
GENERAL RESISTANCE	D83 50 MHz 5mV 2 Trace 2T base Large crt		
DAS56 DC V and I Calib 1μV-10V 30mA	TEXSCAN		
HEWLETT PACKARD	DUI20 Large crt display unit		
4342 QLC Meter 22 KHz-70 MHz	<i>Note: we hold a range of cameras</i>		
MARCONI	OSCILLOSCOPES & ACCESSORIES		
TF868A Universal LCR Bridge	GOULD ADVANCE		
TF1245 Q Meter 1 KHz-300 MHz	OS1000A 20 MHz 5mV 2 Trace TV trig		
TF1313 Universal LCR Bridge	OS3300B 50 MHz 1mV 2 Trace 2T base		
WAYNE KERR	HEWLETT PACKARD		
8224 LCR Bridge 0.1%	1740A 100 MHz 5mV 2 Trace 2T base		
8500 LCR Bridge	Trig View		
8601 LCR Bridge RF Osc & Det not inc	1804A 50 MHz 20mV 4 Trace Plug-in		
COMMS & CABLE TEST EQUIPMENT	1825A Dual Timebase Plug-in		
CHASE	1805A 100 MHz 5mV 2 Trace Plug-in		
35A Field Strength Meter 20-850 MHz	PHILIPS		
DYMAR	PM3211 15 MHz 2mV 2 Trace TV trig		
1502 TDR Cable Tester CRT + Recorder	PM3212 25 MHz 2mV 2 Trace TV trig		
WANDEL & GOLTERMANN	PM3214 25 MHz 2mV 2 Trace 2T base		
LDS2 200 Hz-600 KHz sender for gp Delay	PM3233 10 MHz 2mV 2 Beam Ch sig delay		
LDEF2 Filters for DLM1	PM3244 50 MHz 5mV 4 Trace 2T base		
COUNTERS & TIMERS	PM3262 100 MHz 5mV 2 Trace 2T base		
FLUKE	Tr View		
1910 125 MHz 7 Digit Counter Timer	TEKTRONIX		
1911 250 MHz 7 Digit Counter Timer	453 50 MHz 5mV 2 Trace 2T Base		
1912 520 MHz 7 Digit Counter Timer	465 100 MHz 5mV 2 Trace 2T base		
1912A01 As 1912A but inc. re-charging batteries	475 200 MHz 2mV 2 Trace 2T base		
1920A 520 MHz 9 Digit Counter inc. Brst. mode	485 350 MHz 5mV 2 Trace 2T base		
1920A14 1250 MHz otherwise as 1920A	7603 100 MHz CRT r/out 3 slot M/Frame		
HEWLETT PACKARD	7704 200 MHz CRT r/out 4 slot M/Frame		
5300A 6 Digit Display Unit - P/in reqd.	7A12 105 MHz 5mV 2 Trace Plug-in		
5302A 50 MHz Counter Timer for 5300	7A22 1 MHz 10μV Differential Plug-in		
5305B 1300 MHz Counter for 5300	7A26 200 MHz 5mV 2 Trace Plug-in		
5308A 75 MHz Counter Timer for 5300B	7B53A 2 Timebase Plug-in 100 MHz Trig		
5345 500 MHz 11 digit Counter Timer	P6013A X1000 12KV Probe		
10590A Adapter 5245 to 5345 Plug ins	P6201 FET Probe DC-900 MHz		
RACAL	TELEQUIPMENT		
9024 600 MHz 7 1/2 digit Counter Timer	D34 15 MHz 2mV 2 Trace Mains + int batts		
9025 1 GHz 8 digit Counter Timer	D83 50 MHz 5mV 2 Trace 2T base Large crt		
SYSTRON DONNER	TEXSCAN		
6053 3 GHz 9 digit Counter BCD O/P	DUI20 Large crt display unit		
6054 18 GHz 11 digit Counter BCD O/P	<i>Note: we hold a range of cameras</i>		
5103B Strip Printer for 6053/6054	OSCILLOSCOPES (STORAGE)		
DIGITAL TESTING EQUIPMENT	HEWLETT PACKARD		
HEWLETT PACKARD	1600S Logic Analyser 32ch 20 MHz		
1600S Logic Analyser 32ch 20 MHz	1600A Logic Analyser 16ch 20 MHz		
1600A Logic Analyser 16ch 20 MHz	1607 Logic Analyser 16ch 20 MHz		
1607 Logic Analyser 16ch 20 MHz	5011T Logic troubleshooting kit		
5011T Logic troubleshooting kit	TEKTRONIX		
TEKTRONIX	7D01F Logic Analyser 16ch 50 MHz P/in		
7D01F Logic Analyser 16ch 50 MHz P/in	832 Datacom Test V24/R5232 1 loop		
832 Datacom Test V24/R5232 1 loop	HEWLETT PACKARD		
MAINS TEST EQUIPMENT	1600S Logic Analyser 32ch 20 MHz		
COLE	1600A Logic Analyser 16ch 20 MHz		
T1007 Volt/Freq/Spike Monitor Rec O/P	1607 Logic Analyser 16ch 20 MHz		
DATALAB	5011T Logic troubleshooting kit		
DL019 Mains Interface for DL905	TELEQUIPMENT		
DRANETZ	D34 15 MHz 2mV 2 Trace Mains + int batts		
606 3ch Volts-Av/Spike/Time/Printer	D83 50 MHz 5mV 2 Trace 2T base Large crt		
GAY	TEXSCAN		
LDM AC/DC/Spike/Time inc Printer	DUI20 Large crt display unit		
MISCELLANEOUS	<i>Note: we hold a range of cameras</i>		
AVO	OSCILLOSCOPES (STORAGE)		
RM215 AC/DC Breakdown/Leakage Tester	HEWLETT PACKARD		
BRIDGES & V and I STANDARDS	1703A 35 MHz 10mV 2 Tr 2TB 1000 Div/ms		
341 DC Voltage Calib 10μV to 1100V	TELEQUIPMENT		
GENERAL RESISTANCE	D34 15 MHz 2mV 2 Trace Mains + int batts		
DAS56 DC V and I Calib 1μV-10V 30mA	D83 50 MHz 5mV 2 Trace 2T base Large crt		
HEWLETT PACKARD	TEXSCAN		
4342 QLC Meter 22 KHz-70 MHz	DUI20 Large crt display unit		
MARCONI	<i>Note: we hold a range of cameras</i>		
TF868A Universal LCR Bridge	OSCILLOSCOPES & ACCESSORIES		
TF1245 Q Meter 1 KHz-300 MHz	GOULD ADVANCE		
TF1313 Universal LCR Bridge	OS1000A 20 MHz 5mV 2 Trace TV trig		
WAYNE KERR	OS3300B 50 MHz 1mV 2 Trace 2T base		
8224 LCR Bridge 0.1%	HEWLETT PACKARD		
8500 LCR Bridge	1740A 100 MHz 5mV 2 Trace 2T base		
8601 LCR Bridge RF Osc & Det not inc	Trig View		
COMMS & CABLE TEST EQUIPMENT	1804A 50 MHz 20mV 4 Trace Plug-in		
CHASE	1825A Dual Timebase Plug-in		
35A Field Strength Meter 20-850 MHz	1805A 100 MHz 5mV 2 Trace Plug-in		
DYMAR	PHILIPS		
1502 TDR Cable Tester CRT + Recorder	PM3211 15 MHz 2mV 2 Trace TV trig		
WANDEL & GOLTERMANN	PM3212 25 MHz 2mV 2 Trace TV trig		
LDS2 200 Hz-600 KHz sender for gp Delay	PM3214 25 MHz 2mV 2 Trace 2T base		
LDEF2 Filters for DLM1	PM3233 10 MHz 2mV 2 Beam Ch sig delay		
COUNTERS & TIMERS	PM3244 50 MHz 5mV 4 Trace 2T base		
FLUKE	PM3262 100 MHz 5mV 2 Trace 2T base		
1910 125 MHz 7 Digit Counter Timer	Tr View		
1911 250 MHz 7 Digit Counter Timer	TEKTRONIX		
1912 520 MHz 7 Digit Counter Timer	453 50 MHz 5mV 2 Trace 2T Base		
1912A01 As 1912A but inc. re-charging batteries	465 100 MHz 5mV 2 Trace 2T base		
1920A 520 MHz 9 Digit Counter inc. Brst. mode	475 200 MHz 2mV 2 Trace 2T base		
1920A14 1250 MHz otherwise as 1920A	485 350 MHz 5mV 2 Trace 2T base		
HEWLETT PACKARD	7603 100 MHz CRT r/out 3 slot M/Frame		
5300A 6 Digit Display Unit - P/in reqd.	7704 200 MHz CRT r/out 4 slot M/Frame		
5302A 50 MHz Counter Timer for 5300	7A12 105 MHz 5mV 2 Trace Plug-in		
5305B 1300 MHz Counter for 5300	7A22 1 MHz 10μV Differential Plug-in		

METER PROBLEMS?

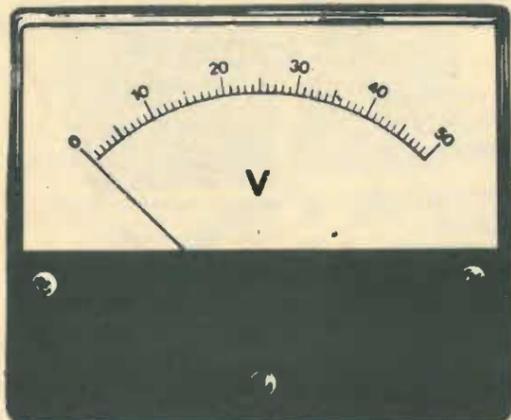


137 Standard Ranges in a variety of sizes and stylings available for 10-14 days delivery. Other Ranges and special scales can be made to order.

Full Information from:
HARRIS ELECTRONICS (London)
138 GRAYS INN ROAD, W.C.1 Phone: 01/837/7937
Telex: 892301 HARTRO G

WW - 033 FOR FURTHER DETAILS

METALFILM RESISTORS

1% Tolerance, 1/4 Watt



ONLY 3p EACH

Minimum order £10
Minimum 5 pcs per value
88 Values (E24)

100R	1k	10k	100k
110R	1k1	11k	110k
120R	1k2	12k	120k
130R	1k3	13k	130k
150R	1k5	15k	150k
160R	1k6	16k	160k
180R	1k8	18k	180k
200R	2k	20k	200k
220R	2k2	22k	220k
240R	2k4	24k	240k
270R	2k7	27k	270k
300R	3k	30k	—
330R	3k3	33k	330k
360R	3k6	36k	—
390R	3k9	39k	—
430R	4k3	43k	—
470R	4k7	47k	470k
510R	5k1	51k	—
560R	5k6	56k	560k
620R	6k2	62k	—
680R	6k8	68k	680k
750R	7k5	75k	—
820R	8k2	82k	820k
910R	9k1	91k	1M

Special Offer: 5 PCS OF EACH (445 RESISTORS) ONLY £11.50.
High Quality High Stability. Huge Strength.
VAT inclusive. Add £1.00 p&p all areas.

ORION SCIENTIFIC PRODUCTS LTD.
10 Wardour St., London W1

WW - 041 FOR FURTHER DETAILS

ONLY £48.50 Post free, inc VAT



LOW COST EPROM ERASURE

- HOLDS UP TO SIX EPROMS
- SAFETY INTERLOCKED TRAY
- FAST ERASE TIME
- QUALITY STEEL CASE
- MONEY-BACK GUARANTEE

Send cheque or official order for prompt delivery. Telephone orders will be dispatched C.O.D. at no extra charge. Distributor enquiries welcome.

NORTHERN ELECTRONICS
51 Arundel Street, Mossley, Lancashire. Tel: Mossley (04575) 4119
WW - 056 FOR FURTHER DETAILS

New Line of Wave Solderable Heat Sinks



Thermalloy International offers 35 different styles of wave solderable heat sinks for TO-3 and plastic packages. Styles include board mounted stampings and flat sided extrusions.

Solderable Stud™ Heat Sinks allow the heat sink/device to be preassembled and treated as a single component on your production line. It is dropped into plated-thru holes in the P.C. Board and wave soldered with other components. Eliminates hand soldering and extra inspections to reduce your production steps by 50%. All work can now be done from one side of the board, and less mounting hardware is required.

For contact samples and full technical literature contact MCP Electronics.



MCP Electronics Ltd.,
38 Rosemont Road, Alperton, Wembley, Middlesex.
Telephone 01-902 5941. Telex: 923455.

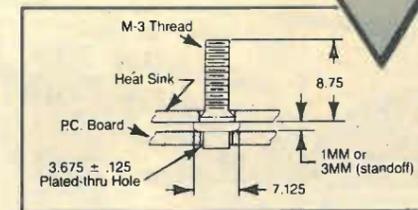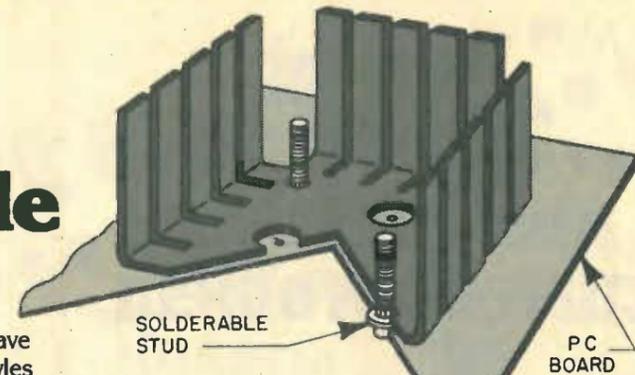


Thermalloy International
Advanced technology in semiconductor accessories.

WW - 026 FOR FURTHER DETAILS


Chokes, block filters, ceramic filters, resonators, IFTs, oscillator coils, audio filter blocks etc.

LOW PASS FILTERS

Now from 10kHz to 20MHz TOKO's recently expanded LPF series covers from the audio spectrum through to 20MHz in a series of LPFs for mpX, video, radio etc.




The LPFs are based on 7&10mm formats with up to 4 LC tuned elements per block. Many stock types available.



HELICAL FILTERS

2 & 3 elements available for VHF and UHF. Featuring low insertion losses, -80dB at the +/- 21.4MHz points. Ask for details.

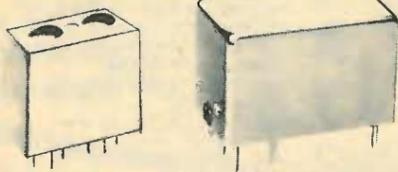


CERAMIC RESONATORS & PIEZO SOUNDERS

Audio buzzers now down to 1kHz - low cost 400-600kHz crystal replacements for MPUs, RCs etc. Low cost - wide range.



VIDEO FRAME STORES

- ★ 525/625 operation
- ★ 512 pixell/line
- ★ Local or remote control
- ★ Top/bottom & L/R reverse
- ★ Models available with digitized I/O

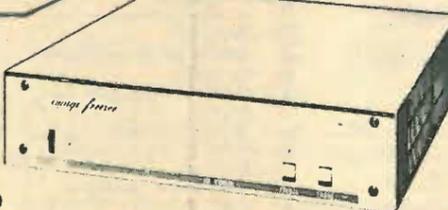

Video frame stores are a new addition to TOKO's memory product range. They permit easy analysis of low dose X-Ray pictures, digital processing of picture information (including the VFM10D with 8" disk drive) with much better resolution than available from VTR

TELEPHONE (STD 0277) 230909 TELEX 995194 AMBIT G POSTCODE CM14 4SG

AMBIT international 200 North Service Road, Brentwood, Essex

WW - 011 FOR FURTHER DETAILS

THE LOWEST PRICES FOR PRIME CMOS/TTL/74C IN THE UK

LINEAR ICs										TRANSISTORS															
TBA120S	1.00	SL1610P	1.60	HA11223	2.15	4000 series	4060	0.95	4566	1.59	7448	0.56	74125	0.40	74190	0.55	7405	3.14	7496	1.20	74190	0.60	74C CMOS	BF194	18p
L200	1.95	SL1611P	1.60	HA11225	1.45	4000	0.13	4063	1.15	4568	1.18	7450	0.14	74126	0.40	74191	0.55	7408	0.14	74107	0.25	74191	0.60	BF195	18p
U237B	1.28	SL1612P	1.60	HA12002	1.45	4001	0.13	4066	0.38	4569	2.15	7451	0.14	74128	0.65	74192	0.55	7409	0.14	74109	0.25	74192	0.68	BF224	22p
U247B	1.28	SL1613P	1.89	HA12017	0.80	4002	0.14	4067	4.30	4570	1.30	7453	0.14	74132	0.50	74193	0.55	7410	0.13	74112	0.25	74193	0.68	BF241	18p
LM301H	0.67	SL1623P	2.44	HA12412	1.55	4008	0.19	4068	0.18	4572	0.30	7454	0.14	74136	0.65	74194	0.55	7411	0.14	74113	0.25	74194	0.42	BF240	18p
LM301N	0.30	SL1624C	3.28	LF1241	3.33	4010	0.30	4071	0.22	4584	1.00	7470	0.28	74142	1.85	74196	0.55	7413	0.28	74122	0.40	74196	0.65	BF410	21p
LM308TC	0.66	SL1625P	2.17	SN7660N	0.80	4011	0.24	4072	0.22	4585	1.50	7472	0.27	74143	2.50	74197	0.55	7414	0.49	74123	0.55	74197	0.65	BF362	49p
LM339N	0.64	SL1626P	2.44	—	—	4011	0.15	4073	0.22	4703	4.48	7474	0.28	74145	0.75	74199	1.00	7420	0.13	74125	0.29	74202	0.45	BF479	66p
LM348N	1.86	SL1630P	1.62	—	—	4012	0.20	4075	0.28	4704	4.24	7475	0.28	74147	1.50	74221	1.00	7421	0.15	74126	0.29	74221	0.60	BF441	21p
LF351N	0.49	SL1641P	1.89	—	—	4013	0.35	4076	0.60	4705	4.24	7476	0.30	74148	1.09	74246	1.50	7422	0.15	74132	0.45	74240	0.99	BF481	13p
LM374N	3.75	SL1642P	1.25	SAA1056	3.75	4016	0.30	4078	0.25	4723	4.00	7481	0.20	74151	0.75	74247	1.51	7426	0.18	74133	0.30	74241	0.99	BF492	60p
LM380N-14	1.00	ULN2238B	1.00	SAA1059	3.35	4017	0.65	4082	0.25	4723	0.95	7482	0.75	74152	0.55	74248	1.89	7427	0.14	74136	0.25	74248	1.35	BF493	99p
LM381N	1.81	CA3088E	0.70	11C90DC	14.00	4020	0.68	4089	0.99	4724	0.95	7483	0.60	74154	0.55	74249	1.89	7428	0.35	74138	0.40	74249	1.55	BF494	90p
ZN419CE	1.98	CA3090AO	3.35	LN1242	19.00	4021	0.75	4175	1.15	4014	0.58	7486	0.24	74156	0.55	74273	2.67	7433	0.16	74147	2.10	74247	1.35	BF495	28p
NE544N	0.80	CA3123E	1.40	MSL2318	3.84	4023	0.19	4503	0.55	4008	0.59	7489	1.05	74157	0.55	74278	2.49	7437	0.17	74148	1.60	74248	1.35	BF679S	55p
NE555N	0.30	CA3130E	0.80	MSM5523	11.30	4024	0.45	4506	0.75	4016	0.54	7491	0.55	74160	0.55	74283	1.30	7440	0.13	74153	0.55	74251	0.46	BF692	60p
NE566N	0.50	CA3130T	0.90	MSM5524	11.30	4025	0.18	4507	0.45	4017	0.69	7492	0.55	74161	0.55	74284	3.50	7442	0.40	74154	0.99	74251	0.46	BF693	65p
NE569N	3.50	CA3140E	0.46	MSM5525	7.85	4026	0.65	4508	1.99	4018	0.69	7493	0.35	74162	0.50	74285	3.50	7447	0.42	74155	0.55	74252	0.55	BF694	65p
NE569N	2.05	CA189E	0.20	MSM5526	7.85	4028	0.60	4510	0.70	4019	0.69	7494	0.70	74163	0.50	74286	3.50	7447	0.42	74156	0.50	74253	0.39	BF695	49p
NE564N	4.29	CA3240	1.27	MSM5527	9.75	4029	0.75	4511	0.85	4016	0.69	7495	0.60	74164	0.55	74293	1.05	7449	0.61	74157	0.36	74254	0.39	BF696	54p
NE565N	1.00	MC3357P	2.85	MSM5527	9.75	4030	0.35	4512	0.70	4017	0.69	7496	0.45	74165	0.55	74297	2.36	7451	0.14	74158	0.40	74260	0.70	BF697	58p
NE566N	1.60	LM3900N	0.60	MSL2312	3.94	4035	0.75	4514	2.20	4018	0.69	7497	1.40	74166	0.90	74298	1.85	7454	0.15	74160	0.40	74261	0.70	BF698	1.24
NE570N	3.95	LM3900N	0.68	SP8629	3.85	4040	0.68	4515	2.50	4019	0.69	7498	1.10	74167	1.25	74365	0.85	7455	0.15	74161	0.40	74273	0.90	ME1660	70p
SL624	3.28	LM3914N	2.80	SP8647	6.00	4042	0.65	4516	0.75	4019	0.75	74104	0.62	74170	1.25	74366	0.85	7463	0.50	74162	0.40	74275	3.20	BF691	70p
TBA651	1.81	LM3915N	2.80	95H90PC	7.80	4043	0.68	4518	0.75	4014	0.58	74105	0.62	74173	1.10	74367	0.85	7473	0.21	74163	0.40	74279	3.20	BF692	8p
UA709HC	0.64	KB4400	0.80	HD10551	2.45	4043	0.93	4520	2.00	4015	0.58	74106	0.62	74174	0.75	74368	0.85	7474	0.18	74164	0.50	74280	2.50	BF693	8p
UA709PC	0.46	KB4406	0.60	HD4015	4.45	4044	0.68	4521	2.36	4016	0.69	74107	0.55	74175	0.75	74369	1.85	7475	0.28	74165	1.20	74283	0.44	BF694	8p
UA710HC	0.65	KB4412	1.95	HD12009	6.00	4046	0.69	4522	1.49	4017	0.69	74110	0.54	74176	0.75	74393	1.85	7476	0.22	74166	1.75	74280	0.58	BF695	8p
UA710PC	0.59	KB4413	1.95	HD44752	8.00	4047	0.69	4527	0.95	7400	0.10	74111	0.68	74177	0.75	74490	1.85	7478	0.24	74168	0.85	74293	1.30	BF696	8p
UA741CH	0.66	KB4417	1.80	MC145151	12.45	4049	0.30	4528	0.95	7401	0.10	74112	1.70	74178	0.90	7483	0.50	7479	0.25	74169	0.85	74295	1.50	BF697	8p
UA741CN	0.27	KB4420B	1.09	MC145156	8.75	4050	0.30	4529	1.40	7402	0.10	74116	1.98	74179	1.35	7485	0.70	74170	1.85	7483	0.50	74175	0.72	BF698	8p
UA747CN	0.70	TDA4420	2.65	—	—	4051	0.65	4539	1.10	7403	0.11	74118	0.85	74180	1.55	7486	0.18	74173	0.75	7486	0.35	74192	0.80	BF699	11p
UA748CN	0.36	KB4423	2.30	ICM7106CP	9.55	4052	0.69	4549	3.50	7404	0.12	74119	1.20	74181	1.22	7490	0.11	7480	0.32	74174	0.55	74			

Voltstab[®] The simple answer to your current problem.



If you are experiencing random faults and failures in your microprocessor-based equipment, they are probably caused by voltage irregularities. Even dedicated supplies may not be the answer - they will still suffer from momentary voltage transients and power supply breaks.

Galatrek have the simple answer. A plug-in VOLTSTAB Constant Voltage Transformer. Reliable, efficient and economical, the Galatrek VOLTSTAB offers you:

- Output stabilisation to $\pm 1\%$ from mains input fluctuations of $\pm 20\%$
- Transient attenuation
- Momentary power back-up

Available ex-stock from regional stockists in a choice of power ratings from 250VA to 5KVA, the Galatrek VOLTSTAB will keep your sensitive electronic equipment running smoothly. Both the factory and the regional stockists throughout the UK will assist you technically to ensure you match the VOLTSTAB unit exactly to your requirements.

Mr R Koffler, Galatrek International, Scotland Street, Llanrwst, nr Colwyn Bay, Gwynedd LL26 0AL, North Wales, Great Britain.
Tel No: 0492-640311/641298 Night Service: 0492-30592
Telex: 617114 A/B Galahu

Voltstab is the Registered Trademark of Galatrek International




Please send me the 18 page Galatrek VOLTSTAB catalogue, which includes details of your Mains Filters and Standby Power Supplies.

Name: _____
Position: _____
Company: _____
Address: _____

Tel No: _____

Trade OEM (please tick where appropriate) ww

WW - 021 FOR FURTHER DETAILS

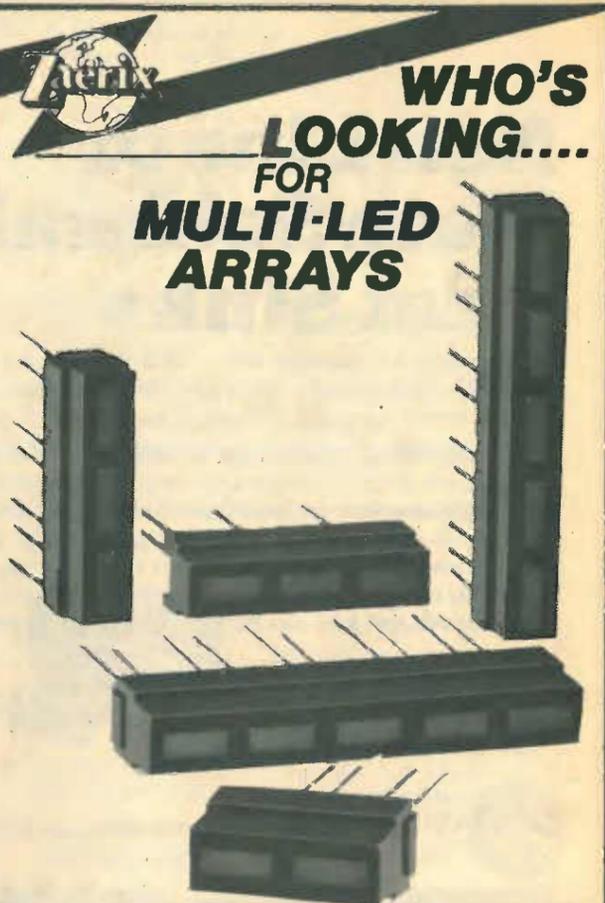

WHO'S LOOKING.... FOR MULTI-LED ARRAYS

OUR OFF THE SHELF RANGE OFFERS

...any combination and sequence of Red(GaP), Green(GaP) or Yellow (GaAsP/GaP) colours incorporated in one array,

...fully end-stackable, 2, 3, 4 or 5 segment options thereby enabling displays encompassing any number of segments to be created,

...black bezels as standard with white bezels to special order,

...push-fit mounting into correctly dimensioned panel cut-out,

...wide operating temperature range of -40°C to $+80^{\circ}\text{C}$.

So if you are into
TREND INDICATORS
BAR GRAPHS
or
EVENT DISPLAYS
Look at our

MULTI-LED ARRAYS

Our prices won't make your eyes water


Zaerix Electronics Limited
46 Westbourne Grove, London W2 5SF, England
Tel: 01-221 3642 Telex: 261306

WW - 014 FOR FURTHER DETAILS

MAPLIN make it easy



in
SOUTHEND
284 London Road
Westcliff-on-Sea
Essex
Tel: (0702) 554000
(Closed Mondays)

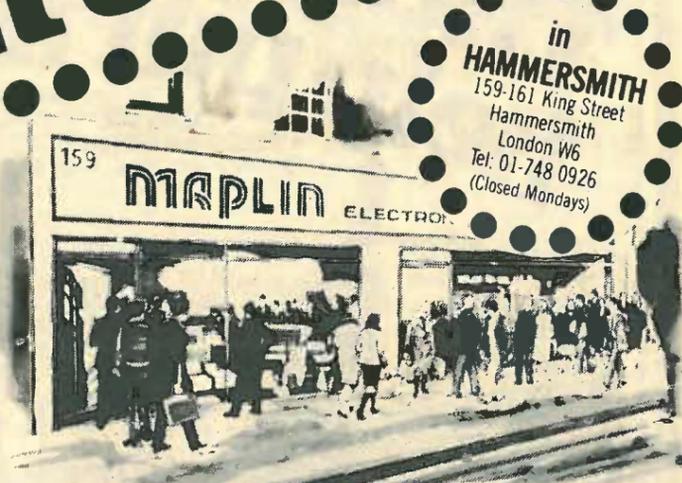

in
HAMMERSMITH
159-161 King Street
Hammersmith
London W6
Tel: 01-748 0926
(Closed Mondays)

For personal service visit one of our stores.
Our new store at Hammersmith is conveniently situated near the end of the M4 and the North and South Circular Roads. There is excellent street parking on meters a few steps away and Hammersmith Underground Station is nearby. Call in and see us soon.



in our
CATALOGUE
320 big pages packed with
data and pictures of
over 5,500 items

Over 100,000 copies sold already!

Don't miss out on your copy.

On sale now in all branches
WH Smith price £1.

In case of difficulty check the coupon below.

make it easy... with MAPLIN

The
Maplin Matinée
Amazing value for
only £299.95 plus £99.50
for cabinet if required

Easy to build,
superb specification.


Comparable with organs selling for
up to £1,000. Full construction details
in Electronics & Music Maker commencing
March, 1981 issue. Back numbers available.



MAPLIN ELECTRONIC SUPPLIES LTD.

All mail to: P.O. Box 3, Rayleigh, Essex SS6 8LR. Tel: Southend (0702) 554155 Sales: (0702) 552911

WW - 017 FOR FURTHER DETAILS

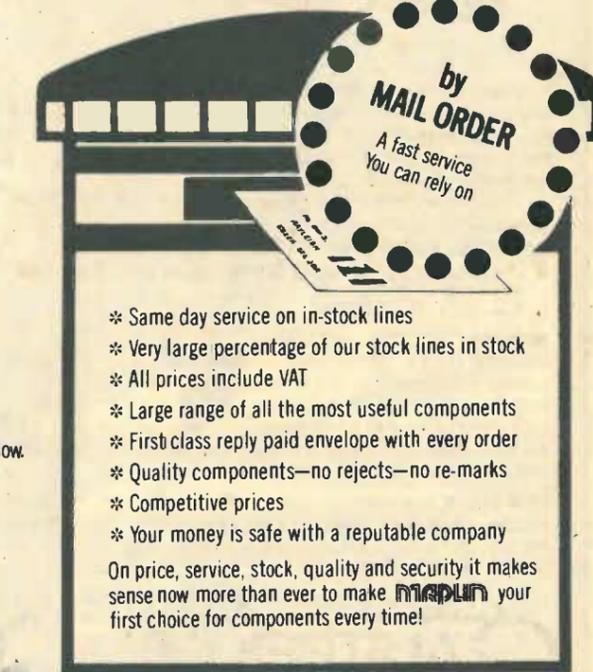

by
MAIL ORDER
A fast service
You can rely on

- * Same day service on in-stock lines
- * Very large percentage of our stock lines in stock
- * All prices include VAT
- * Large range of all the most useful components
- * First class reply paid envelope with every order
- * Quality components—no rejects—no re-marks
- * Competitive prices
- * Your money is safe with a reputable company

On price, service, stock, quality and security it makes sense now more than ever to make **MAPLIN** your first choice for components every time!

Post this coupon now.

Please send me a copy of your 320 page catalogue. I enclose £1.25 (incl. 25p p&p). If I am not completely satisfied I may return the catalogue to you and have my money refunded. If you live outside the U.K. send £1.68 or 12 International Reply Coupons.

Name: _____
Address: _____

(WW7/81)

The Brewster Family help put it together

S&R BREWSTER LIMITED
MANUFACTURE A WIDE RANGE OF
SOLDERING IRONS TO CATER FOR MOST TYPES OF
JOBS FOR HOBBIES, PROFESSIONAL & INDUSTRIAL USE.

MODEL K200
The largest standard
soldering iron in
our range
Power 200 Watts
Bit size 1 1/4"
£19.55
inc. VAT
Postage 93p extra

MODEL K500TC
A Temperature
controlled version
of the Model K200
Power 500 Watts
Bit size 1 1/4"
£25.30
inc. VAT
Postage 93p extra

MODEL H70
Our medium sized
general purpose
soldering iron with
interchangeable bits
6mm Bit fitted
Power 70 Watts
£11.50
inc. VAT
Postage 56p extra

MODEL H150TC
A temperature controlled
version of the H70
Power 150 Watts
£17.36
inc. VAT
Postage 56p extra
Spare bits for H series
£1.27 each inc. VAT
Postage 10p extra
Sizes available
4.5mm
6.0mm
9.5mm
11.0mm

All our range of soldering irons
are available in 100/110 volts and
220/240 volts. The type 1 and
model D are also available in
11/12 volts. (Please specify
when ordering)

The TYPE 1
The original
MIGHTY MIDGET
18 Watt
soldering iron
Fitted with
No. 20 (3mm) bit
£4.95
inc. VAT
Postage 28p extra
Spare Bits 69p
inc. VAT and postage
Sizes available
1.5mm (No. 19)
3.0mm (No. 20)
4.5mm (No. 21)
6.0mm (No. 22)
Special Bit
No. 78 I.C. Desoldering Bit
£1.27 inc. VAT
Postage 12p extra



MODEL D50
The smallest
temperature
controlled soldering
iron in our range with
interchangeable bits
Power 50 Watts
£12.07
inc. VAT
Postage 28p extra
Spare bits for model D
52p each inc. VAT
Postage 10p extra
Sizes available 1.5mm
3.0mm (fitted as standard)
4.5mm 6.0mm

Universal
**SOLDERING
IRON SAFETY
STAND**
Suitable for most
soldering irons
up to 50 watts

£4.49
Postage 80p extra. Inc. VAT

SOLDER
Postage
Savbit 22 S.W.G. 20ft. **70p 12p**
Savbit 22 S.W.G. 10ft. **40p 8p**
Low Melt 145°C 20 S.W.G. 10ft
(Suitable for white
metalkits) **80p 12p**



FROM YOUR LOCAL RETAILER OR DIRECT FROM MANUFACTURERS.

S&R BREWSTER LTD

86-88 UNION STREET PLYMOUTH PL1 3HG ENGLAND

Tel: (0752) 665011 Telex: 45311

Retail, wholesale & industrial enquiries welcome



CECO Vari-Stat



Precisely on time.


The Model 4401 Frequency Standard by Global Specialties: for precision and value, it's a source whose time has come.

The heart of the 4401 Frequency Standard is a unique 10MHz precision temperature controlled crystal oven oscillator (TCXO). Boasting an accuracy of $\pm 0.5\text{ppm}$ ($\pm 0.00005\%$) from 0 to 40°C, it offers exceptional long term stability—aging 1ppm per year. And it's directly traceable to the National Bureau of Standards via factory calibration to WWVB.

Two short-circuit protected 50-ohm BNC outputs are capable of driving 10 TTL loads into matched 50Ω lines, providing square waves from 0.1Hz to 10MHz in 9 decade steps, with LED indication of the decade in use. And a frequency multiplier switch (1X, 2X, 5X) enables you to select fractional frequencies in each decade.

Our new 4401 Frequency Standard sets a new value standard.

Giving you an exceptionally accurate, stable source for oscilloscope timebase calibration, frequency counter calibration, laboratory time-keeping and other high-precision timing applications... so whatever your application, the Global 4401 Frequency Standard is precisely £118.

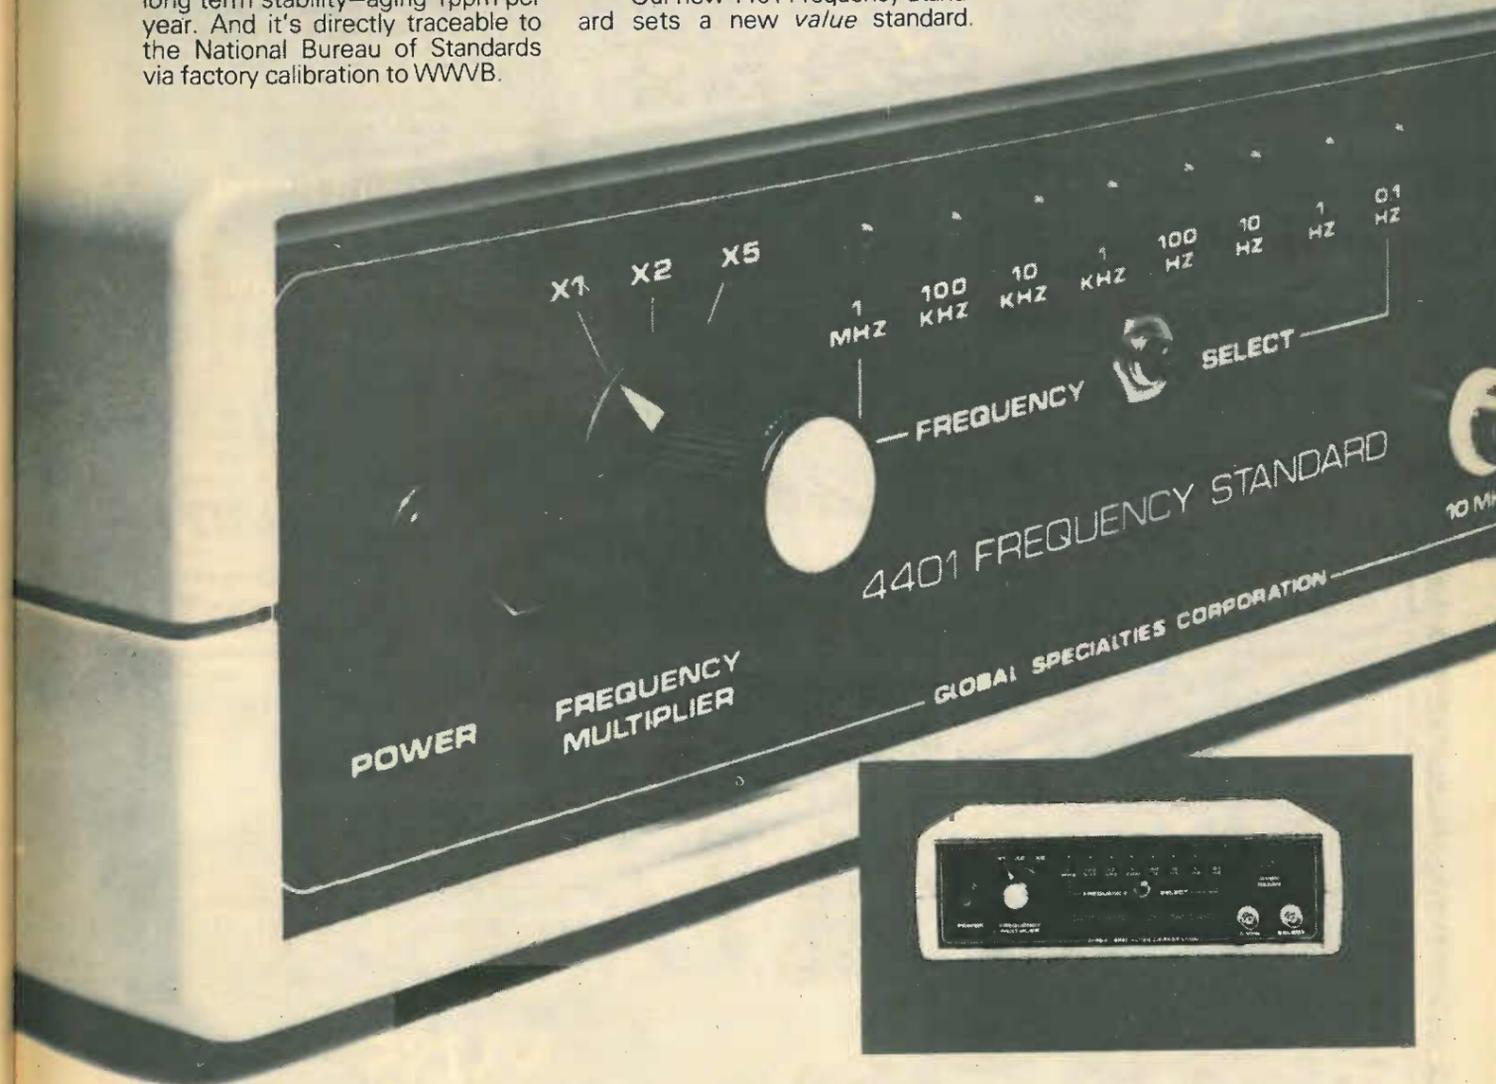

GLOBAL SPECIALTIES CORPORATION



G.S.C. (UK) Limited, Dept. 7R
Unit 1, Shire Hill Industrial Estate,
Saffron Walden, Essex CB11 3AQ.
Telephone: Saffron Walden (0799) 21682.
Telex: 817477.

G.S.C. (UK) Ltd., Dept 7R, Unit 1, Shire Hill Industrial Estate, Saffron Walden, Essex CB11 3AQ

Model 4401	FREQ STANDARD	Unit price inc P&P 15% VAT £138.58	Qty Recd
Name _____			
Address _____			
I enclose cheque/P.O. for £ _____		or debit my Barclaycard/Access/	
American Express card no. _____		exp. date _____	
FOR IMMEDIATE ACTION - The G.S.C. 24 hour, 5 day a week service.			
Telephone (0799) 21682 and give us your Barclaycard, Access, American			For Free
Express number and your order will be in the post immediately.			catalogue
			tick box <input type="checkbox"/>

wireless world

Decline of the philosophical spirit

Ampère's *Théorie mathématique des phénomènes électro-dynamiques* (1826) is still worth reading. It is known as the principal founding source of electrodynamics, but other features are just as instructive. It begins with an extensive homage to 'Newtonian philosophy', and continues with a long mixture of physical theory, mathematical analyses and reports of experimental procedures. Ampère sought not merely methods of explaining and calculating effects; he wanted to find out how the phenomena actually occurred. Indeed, in the naive tradition sometimes followed at the time, he thought of his theory as a truth, 'uniquement déduite de l'expérience', to complete the title of his book.

Ampère is remembered now only for this work, but in fact it was a small part of his output. He was a polymath, whose activities were unified by his philosophical spirit. This spirit informed all his writings and came to its zenith in his *Essai sur la philosophie des sciences* (1834). But he was an outsider in philosophical thought, for the 1830s also saw the rise of positivism in the hands of some of his former students at the Ecole Polytechnique: Auguste Comte, and engineer-scientists such as Dupin and Poncelet. Associated closely at that time with educational and social causes, positivism became one of the dominant philosophies of the 19th century and has maintained its influence, directly and indirectly, until today. Knowledge without metaphysics; rejection of abstract intellectual objects; even a lack of attention to the way in which mathematics is used in physics. It is a strange contrast to read Ampère's *Essai*, with its Kantian concern with phenomena and their causes, with man's knowledge and his cognitive power to know.

It was through movements such as positivism that philosophy and science became separated. Positivism and its cousins (mechanism, materialism, instrumentalism, behaviourism, and so on) do not solve philosophical problems so much as ignore them. Yet scientists accept

positivist tenets without much thought: facts are facts are facts; theories are useful *only* for predicting new facts; mathematics is just a fiction which *in principle* has nothing to do with physical reality; the aim of science is consensus (as a noted FRS contentedly put it on television recently); the history of science is bunk — and, above all, philosophising about science is time-wasting nonsense. At the same time philosophy itself has become an enclosed profession, largely concerned with footling 'puzzles' in ordinary language; its practitioners rarely know anything beyond the writings of their professional colleagues. There are exceptional figures in the communities of both science and philosophy; but they stand out as such, often nervously.

Meanwhile the real world seems to have remained the same as it was in Ampère's day, especially with regard to the phenomena studied in physics. Thus the objects of scientific study remain basically unchanged, and so does the need for philosophical as well as technical skill. We now know far more about the technicalities of electricity and magnetism than did Ampère and his contemporaries; but we no longer bring to our theoretical studies the sensitivity to philosophical questions which Ampère, and others of his time, could show. He and his contemporaries were not really scientists in the way that we understand the term; they often called themselves 'natural philosophers', enquirers into the nature around them and into the powers of man to think up theories about it. They may have fallen into optimistic naiveties such as the allegedly immediate deduction of theories from facts; but they did not succumb to our reflex dismissals of the non-experimental and our inattention to the place of mathematics in scientific knowledge. The imperatives which informed not only Ampère but also his contemporaries such as Faraday and Ohm, and successors like Kelvin and Maxwell, have faded; the traditions of natural philosophy have long been broken; reflection has given way to 'research'.

new SM 85 PRO TECH SOUND

brings a new dimension
to a hand-held
condenser microphone

This new high technology Shure microphone will change the way people think of condenser microphones. The SM85 is designed especially for on-stage, hand-held use. Its sound is unique—far more tailored to the special needs of the vocalist: sizzling highs and a shaped mid-range for superb vocal reproduction, and a gentle bass rolloff that minimizes handling noise and "boominess" associated with close-up use. Ultra-low distortion electronics make the SM85 highly immune to stray hum fields. An integral, dual-density foam windscreen provides built-in pop protection.

What's more, the SM85 Condenser Microphone must pass the same ruggedness and dependability tests required of Shure dynamic microphones. As a result, the SM85 sets a new standard of reliability for hand-held condenser microphones.

The SM85 is *extremely* lightweight, beautifully balanced—it feels good, looks good on-stage, on-camera, on-tour. Ask your dealer for a demonstration of the new SM85 PRO TECH Sound, or write to us (ask for AL664) for full details.

SM85
Cardioid Condenser
Hand-Held
Professional Microphone

The Sound of the Professionals®

® **SHURE** ®

Shure Electronics Limited Eccleston Road
Maidstone ME15 6AU
Telephone: Maidstone (0622) 59881

WW - 077 FOR FURTHER DETAILS

Editor:
TOM IVALL, M.I.E.R.E.

Deputy Editor:
PHILIP DARRINGTON
01-661 3039

Technical Editor:
GEOFF SHORTER, B.Sc.
01-661 3500 X3590

Projects Editor:
MIKE SAGIN
01-661 3500 X3588

Communications Editor:
MARTIN ECCLES
01-661 3500 X3589

News Editor:
DAVID SCOBIE
01-3500 3587

Drawing Office Manager:
ROGER GOODMAN

Technical Illustrator:
BETTY PALMER

Advertisement Manager:
BOB NIBBS, A.C.I.I.
01-661 3130

DAVID DISLEY
01-661 3500 X3593

BARBARA MILLER
01-661 3500 X3592

Northern Sales
HARRY AIKEN
061-872 8861

Midland Sales
BASIL MCGOWAN
021-356 4838

Classified Manager:
BRIAN DURRANT
01-661 3106

JAYNE PALMER
01-661 3033

BRIAN BANNISTER (*Make-up and copy*)
01-661 3500 X3561

Publishing Director:
GORDON HENDERSON

New development in h.f. coaxial cable

Structure offers lower losses and improved power handling

by S. G. Carter, M.Sc., Cable and Wireless and H. M. Barlow, F.R.S., University College, London

Recently it has become possible to make a high-frequency cable which is a cross between the conventional coaxial design and waveguides, a type of structure that exhibits much lower losses than is usual when based on attenuation per unit of cross-sectional area. This cable transmits in the dipole mode, well known for its application in optical fibres, and consists of an outer screen, as in the ordinary coaxial cable, with a group of parallel wires forming a concentric cylindrical structure for the inner in place of the more usual solid metal wire or tube.

At very low frequencies the guided transmission of telecommunication signals over long distances can be carried out by a single wire, using an earth return, or by pairs of parallel wires in space. However, as the frequency is increased the lack of electrical balance of the wires and the unrestricted spread of the field from them begins to present interference problems and a change has to be made to a screened transmission system. Up to the present, this has almost invariably taken the form of either TEM transmission in a coaxial cable or propagation in a hollow metal waveguide. Both of these arrangements have their own advantages and disadvantages but, as expected, signal attenuation has always been a major factor influencing system design. Any reduction of attenuation can lead to lower transmitted powers, small cables, an improved system noise performance and increased repeater spacing, either separately or in combination, according to design.

In the structure shown in Fig. 1, the currents set up the inner multi-wire structure are such as to provide for electric

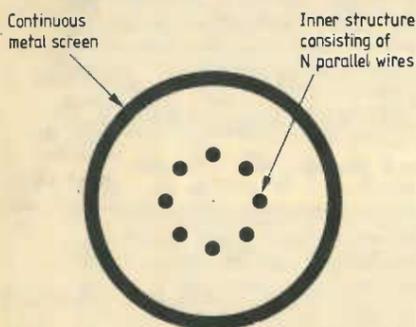


Fig. 1. Cross-sectional view of basic form of dipole-mode cable.

field across a diameter as well as a circumferential field: thus the arrangement supports a wave in the dipole mode. As a rule, a large part of the transmitted power is located within the wire-grid structure while, outside the grid, the field decays rapidly. In these circumstances the outer metal tube functions primarily as a screen and normally only produces a small perturbation of the field, even when its radius is reduced to about double that of the inner wire grid. Consideration of the operating conditions show that the inner multi-wire structure at u.h.f. behaves very much like the optical fibre at infra-red frequencies, where transmission is in the same HE_{11} mode with the power largely confined to the core and a rapid decay of field in the cladding. Further, like the large core-diameter optical fibre, the dipole mode cable can in principle support many different modes of propagation (as many as there are separate conductors) but, in practice, provision is made to ensure that only the lowest order dipole mode is carried. There is, however, one significant distinction between the behaviour of multi-conductor coaxial cable and optical fibre. Any attempt to screen a dielectric rod transmitting in the dipole mode in the u.h.f. region results in destruction of the field and inhibition of propagation in that mode. This is because the boundary conditions on the inside of the screen cannot be satisfied at such frequencies. The wire-grid coaxial cable suffers no such limitation. As with ordinary TEM transmission in conventional coaxial cables (and unlike tubular metal waveguides), the dipole-mode cable does not exhibit frequency cut-off and, in principle, can therefore be operated at any part of the spectrum down to d.c. However, it is in the high u.h.f. and s.h.f. regions that the losses are so much lower than those obtainable with current-day coaxial cables.

Cable structure

While Fig. 1 shows the basic structure of the dipole-mode cable, comprising a number of parallel wires to form a cylindrical grid, coaxial with an outer metal screen, it is of course necessary to support the inner conductors and separate them from the outer. Although regularly spaced disc insulators or beads may, when the cable is straight, keep the wires of the inner in position and also help to reduce the amount of dielectric employed, the

need for a flexible cable tends to demand a continuous dielectric tube to support the wires. So far two different types of cable structure have been developed experimentally and these are illustrated in Fig. 2. The polythene tube is extruded to include the group of parallel wires attached either to the outside or the inside of the tube and this inner structure is then, as a whole, located within the outer screen by one of the methods employed in the construction of ordinary low-loss coaxial cables; for example, a dielectric membrane helixed around the inner or, alternatively, a cartwheel-type dielectric spacer. For experimental purposes the method chosen was to support the inner structure by thin p.t.f.e. discs with a hole in the centre through which the inner cable structure was inserted. These supports were spaced approximately every 8 cm.

The cable attenuation is dependent not only on the number of wires included in the inner structure but also on their diameter. In general, the loss decreases as the number of wires increases and as more of the circumference of the inner is covered by metal. However, capacitive circumferential current is necessary for HE_{11} mode propagation and consequently the wires must always be spaced far enough apart to maintain this dipole mode at an adequate power level. Clearly, there are practical problems in fabricating a cable with a large number of very thin wires or strips of metal and therefore the experimental work was limited to structures having not more than 16 wires.

Cable terminations

Instruments and components available today for measurements all employ conventional, coaxial connectors and cables, so that the introduction of this new form of multi-conductor, dipole-mode cable requires special arrangements. Not only is a connector required to maintain the continuity of the multi-wire system, but transducers are necessary to convert the TEM waves of the supply to dipole-mode configuration prior to launching the wave on the cable. This operation has to be carried out with minimum loss and over as wide a band of frequencies as possible.

One method of launching into a dipole mode cable is to take the output from a conventional coaxial supply and, using a power divider, split it into as many parts as there are separate wires in the inner

structure of the dipole-mode cable. At the same time the amplitude and phase of each input is adjusted so that when superimposed they comprise the required dipole mode field distribution. This has been tried experimentally but it was found to be difficult to establish and maintain the precise amplitudes and phases required.

A more practical method of launching the required dipole mode from a TEM source is to use either electric or magnetic coupling into the multi-conductor cable. In general, transverse electric field coupling as shown in Fig. 3 gives more effective transfer of power but this tends to be at the expense of bandwidth when compared with the corresponding magnetic coupling shown in Fig. 4. In the electric field coupler (Fig. 3) a transverse wire fed from the coaxial input is located at approximately a quarter of the signal wavelength from a short-circuit termination formed by connecting together all the inner wires and the outer screen. Matching from the char-

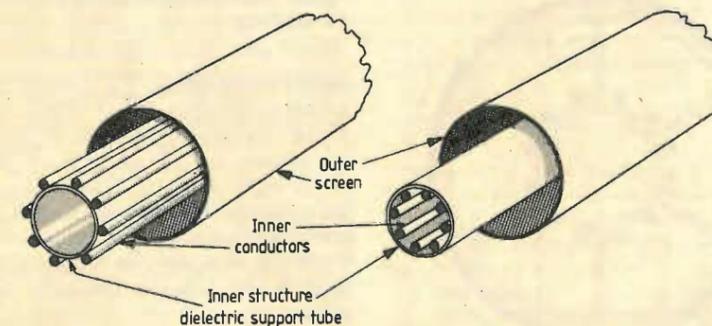


Fig. 2. Two different forms of dipole-mode cable.

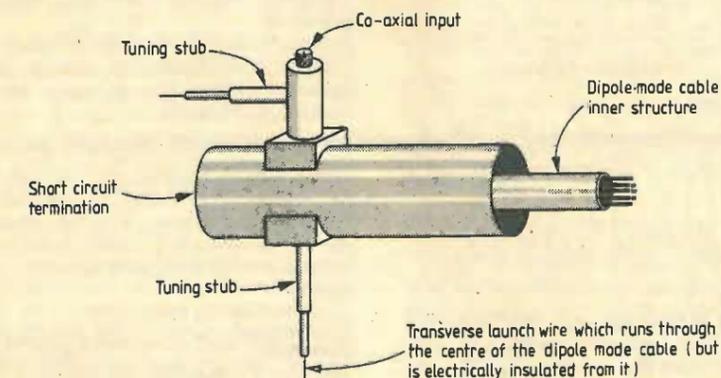


Fig. 3. TEM-to-dipole-mode transducer, using transverse-electric field coupling.

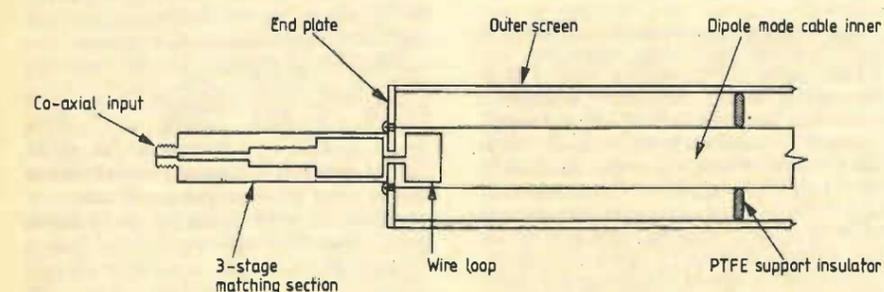


Fig. 4. Cross-section of dipole-mode launcher using magnetic coupling.

acteristic impedance of the coaxial feed to the dipole mode cable is obtained by suitably adjusting the series and shunt pistons shown in the diagram. The magnetic launcher (Fig. 4) is typified by a small loop of wire inserted into the end of the dipole mode cable and extending a short distance from the short-circuited end. A three-section matching unit is used to transform the impedance of the coaxial input down to the very low impedance of the loop. Table 1 shows the loss and bandwidths achieved in practice with these two different types of launcher.

Cable attenuation

Particular interest in dipole mode cables centres on the fact that their attenuation has been shown to be considerably lower than that of an equivalent, conventional coaxial cable. Furthermore, the dipole-mode cable has no cut-off frequency and, unlike a hollow metal waveguide, can be used satisfactorily at quite low frequencies.

Attenuation measurements having been made at various frequencies on two different dipole mode cable structures, both mounted inside a 2.22 cm-diameter copper tube. A simple substitution method was employed, consisting of a direct comparison between the loss of a known length of the cable with that of a back-to-back connexion between two dipole-mode launchers. Joints were made in the cable by employing short, thin, brass tubes to interconnect the individual wires and a sleeve was placed over the break in the outer.

The measured losses are shown in Fig. 5 and, while these display the very low attenuation obtainable, a more interesting result is a direct comparison between dipole mode and TEM losses in the same cable. The dipole-mode cable can be made to operate in the TEM mode, simply by joining them together, at each end, all the inner structure wires and then feeding between them jointly and the outer, as in a conventional coaxial cable. The use in TEM transmission of an inner structure, comprising parallel wires rather than a solid metal conductor, only causes between 7% and 10% increase in attenuation. The results of such a comparison made at a

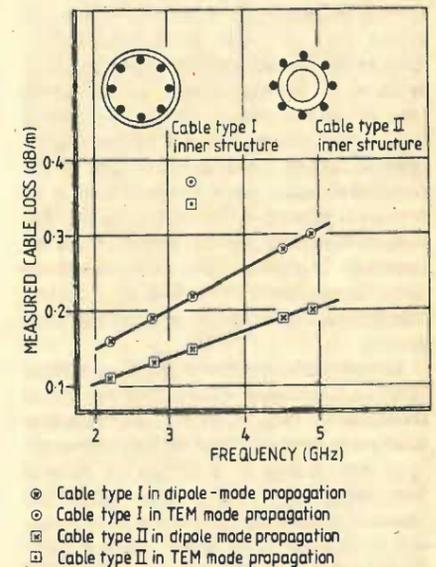


Fig. 5. Measured losses of multi-conductor cable in dipole-mode and TEM-mode transmission.

Table 1. Comparison of available bandwidth and losses for dipole-mode launchers shown in Figs. 3 and 4.

Launcher type	Bandwidth (between 3dB points) MHz	Nominal loss (TEM to dipole mode) dB
Magnetic coupling (see Fig. 4)	500	3.5
Electric coupling (see Fig. 3)	150	0.26

frequency of 3.3GHz on five different forms of cable are shown in Table 2. From these results it is clearly seen that when using an inner structure with a radius of about half that of the outer the losses are reduced to about 50% of those of the same cable operated in the TEM mode.

Practical applications

Optical-fibre transmission seems destined to take a large share of long-distance telecommunications and in due course to displace many of the coaxial line systems. However, there will always be a large number of circumstances in which conventional coaxial cable remains applicable and it is in these areas that the dipole-mode cable could find a useful place. The reduced attenuation characteristics of this cable reflects the more uniform energy-density distribution over the cross-section and the effective use made of the area occupied by the inner structure. Since the breakdown voltage of a cable is directly related to the uniformity of energy-density distribution within the cable, the expectation is that the power-handling capacity of dipole-mode cable will prove superior to that of the corresponding ordinary coaxial cable.

A typical example where this factor, together with the lower attenuation behaviour, could be particularly important is in application to high-power u.h.f. aerial feeders, such as those carrying the output from a television transmitter to the point of radiation. Here the size and weight of the transmitter equipment requires that it be located at ground level while the aerial has to be as high as possible consistent with the coverage required. The interconnecting cable has therefore to be both of considerable length and capable of handling high power.

Various structures have been considered over the development period for a practical dipole-mode cable, and the one that now emerges as likely to be of particular success is shown in Fig. 6. This has 12 parallel wires spiralled around an inner polythene tube and supported centrally within a concentric flexible outer screen using a 'cart-wheel' type dielectric spacer. This cable can be expected to exhibit the required low-loss characteristics while remaining flexible enough for all normal purposes. Joining the cable can be performed in a number of ways, ranging from the simple technique of soldering the individual wires together with small metal sleeves to the construction of a connector arrangement similar to that employed in conventional coaxial cables but with plug-in joints for each of the inner wires. An alternative joining technique has been used in which the separate wires are laid in metallized grooves cut longitudinally in a small length of dielectric tube.

In this new form of coaxial cable, transmitting in a wave mode not previously applied to such a purpose, an important development is foreseen, offering much lower losses, coupled with high-power operation at frequencies up to and including the bottom end of the

Table 2. Comparison of dipole-mode and TEM losses for five different types of cable contained within 2.22cm diameter outer screen.

Cable type number	Wire size (s wg)	Cross sectional view of inner structure	Measured losses at 3.3GHz (in dB/m)	
			Dipole mode	TEM mode
I	18		0.22	0.37
II	18		0.15	0.34
III	22		0.27	0.45
IV	18		0.29	0.39
V	22		0.20	0.36

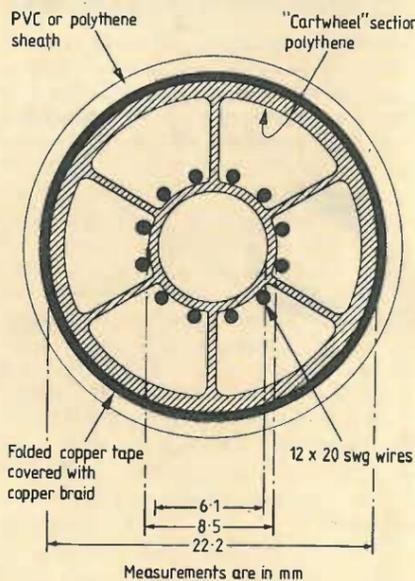


Fig. 6. Dipole-mode cable.

BOOKS

Handbook of Fiber Optics, Edited by Helmut T. Wolf. 558pp, hardback. Granada, £25.00. Ten authors from Germany, Japan and America, collaborated to produce this book, which is on the use of optical fibres in communications: applications for fibres conducting unmodulated light are largely ignored, except in the case of endoscopy.

The book is a concentration of a large body of widely scattered information, and is thus a convenient survey of the subject, with a large number of references. Each author undertakes a review of a particular facet of optical communications (the book was first published in 1979) and there are reviews of research activities in Europe, the USA and Japan. The writing is at a level which would be suitable for engineers and scientists in other disciplines who need to use optical fibres, and could be used by students. For the worker already involved, it is a useful reference source and guide to further reading.

After a long introduction to the subject by the

editor, four chapters describe the components of a system - waveguides, sources, detectors, connectors and switches. These are followed by sections on economics, applications in communication systems and a piece on medical endoscopes.

Acknowledgements. The authors are indebted to Professors A. L. Cullen and E. A. Ash of University College, London, for the facilities made available in the pursuit of this work. They also acknowledge with gratitude the most valuable collaboration provided by Cable & Wireless Ltd., in seconding for a year one of us (S.G.C.) to work full-time in the University on the project.

References

- Barlow, H. M. & Nouri, M., 'New forms of waveguide', *Wireless World*, February, 1976, p.p. 38-40.
Barlow, H. M., 'Multi-conductor coaxial cables operated in the dipole-mode and their possible applications', *Jour. Phys. D: Appl. Phys.*, Vol. 12, 1979, p.p. 321-333.

editor, four chapters describe the components of a system - waveguides, sources, detectors, connectors and switches. These are followed by sections on economics, applications in communication systems and a piece on medical endoscopes.

Ferromagnetic Core Design and Application Handbook, by M. F. DeMaw. 256pp., hardback. Prentice-Hall International, £12.95. The emphasis in the title of this book ought, perhaps, to have been on the applications of cores rather than on their design, since the majority of the text is devoted to very practical information on the specification and use of inductors which employ iron or ferrite cores.

Properties of materials and the physics of cores are covered in the first chapter, the succeeding three being concerned with the use of cores in the forms of rods and bars, toroids, beads, sleeves and pots. Chapter 5 deals with permanent magnetic materials. A good bibliography, a list of references and a number of appendices complete a most helpful book. The circuit diagrams used throughout the book to illustrate the use of cores, and reference to commercial cores by type number are especially useful, though the references are to American components.

6809 evaluation system for £100

Upated Nanocomp and cassette interface

by R. Coates

The 6809 is a recent 8-bit microprocessor which uses a 16-bit architecture to considerably improve the performance available from an 8-bit device. Because development of conventional 16-bit processors is accelerating, many designers think that the 6809 represents the practical limit for an 8-bit device.

Unfortunately, few potential users have been able to evaluate this processor because there is very little hardware available at present and information is still scarce. This design is based on the well-tried and tested Nanocomp (Jan. 81) and provides a useful low-cost evaluation system for the 6809.

The 6809 is the most recent addition to the M6800 family of microprocessors, and provides a much more advanced architecture than the 6802. Internally the device is a 16-bit processor, which can perform 16-bit operations, with several extra registers and other improvements. However, because the device retains an 8-bit external data bus, the hardware is very similar to the 6802 and can therefore be used with a slightly modified Nanocomp.

The improved performance of the 6809 is attributable to several factors besides the potential of 16-bit operations. An important advantage is the addition of extra and more powerful addressing modes which enable the processor to recognize 1464 different variations of instructions and addressing modes from a basic instruction set of 59. Despite this large number of instructions, the improved architecture makes the device easier to program.

To preserve software compatibility with earlier Motorola microprocessors, the 6809 is compatible at source-code level with the 6800 so all but a few of the existing mnemonics are included. Exceptions such as INX have been excluded to maintain as rigidly as possible the regularity of the architecture. Extra addressing modes have been provided for the existing instructions and new instructions, unique to the 6809, have been added. Therefore, source programs written for the 6800 can be re-assembled using the 6809 op-codes, (not all are the same as the 6800) and existing software can be transferred. All mnemonics excluded from the 6809 can be performed by new instructions. Although it may seem pointless to transfer existing software to a more powerful processor, it allows users to upgrade their systems with-

Table 1. Revised memory map

eprom	monitor	7FFF	
	user	7C00	
	eprom	7800	
		7400	
		7000	
		4003	
2114 rams	pia	4000	
		13FF	
	display buffer	13FA	
	monitor workspace	13E0	
		13D0	
	monitor stack	13B0	
	user stack		
	program ram	1000	
pia			
4000 output/data direction register A			
4001 output/data direction register B			
4002 control register A			
4003 control register B			

out having to re-learn completely.

Branch instructions have been improved by adding 16-bit 2's complement offsets as well as 8-bit. This permits a branch to be made from anywhere to anywhere in the full 64K address range, which makes the writing of position independent programs much easier.

Circuit modifications

The block diagram of this design is identical to the original version except that the 6809 does not have an on-chip r.a.m. and the 128 bytes at address 0000 to 007F are not available. The circuit diagram in Fig. 1 is almost identical to the original and, apart from the obvious change of c.p.u. chip, the main difference is that the 74LS00, which generated the VMA.E signal, is omitted. This i.c. is not required because there is no valid memory address signal on the 6809, and invalid memory addresses are forced to FFFF. The E output can be used directly in place of VMA.E. Another alteration is the provision of an extra interrupt input, the fast interrupt request FIRQ. This input is not used in the present design, but is brought out to a pin for possible future use. Reset on the 6809 has a Schmitt-trigger input which, with capacitor C₉, provides automatic power-on reset. Because the c.p.u. on-chip r.a.m. is not available, the

memory map has been revised and is shown in Table 1. The monitor workspace is now positioned at the top of the 1K memory and therefore about 40 bytes are lost for user programs. All other aspects of the circuit and testing are as described for the 6802 version.

Operation

Operation is more or less the same as the 6802 version. As the monitor software listing now includes cassette-tape handling routines, the full 1K allocated to the monitor program, 7C00-7FFF, is now used. These routines use the L and P keys and are described later. The main alteration to the monitor is the register display command R which has been revised to take account of the increased number of c.p.u. registers. This command is automatically entered after a SW1, but may be re-entered with the R key. The condition-code register contents are first displayed with the right-hand digit denoting the register being displayed as shown,

- C = condition-code register
- A = acc A
- B = acc B
- D = direct page register
- H = X register (index)
- Y = Y register
- U = user stack pointer
- P = program counter
- S = hardware stack pointer

The I key will increment through the various registers, and their contents will be shown on the left four digits. After displaying S, the unit automatically returns to the monitor start. The two new software interrupt instructions, SW12 and SW13, are not used by the monitor but, with the hardware interrupts, the program can jump to and continue from a specified address in certain memory locations. These are listed in Table 2.

When an interrupt occurs, the continuation address is fetched, which is usually the interrupt service routine, and proces-

Table 2. Interrupt jump locations

When an interrupt occurs, an address is fetched from the memory shown and processing continues from that address.

Interrupt	Address
SW13	13E5/6
SW12	13E7/8
FIRQ	13E9/A
NMI	13F2/3
IRQ	13F4/5

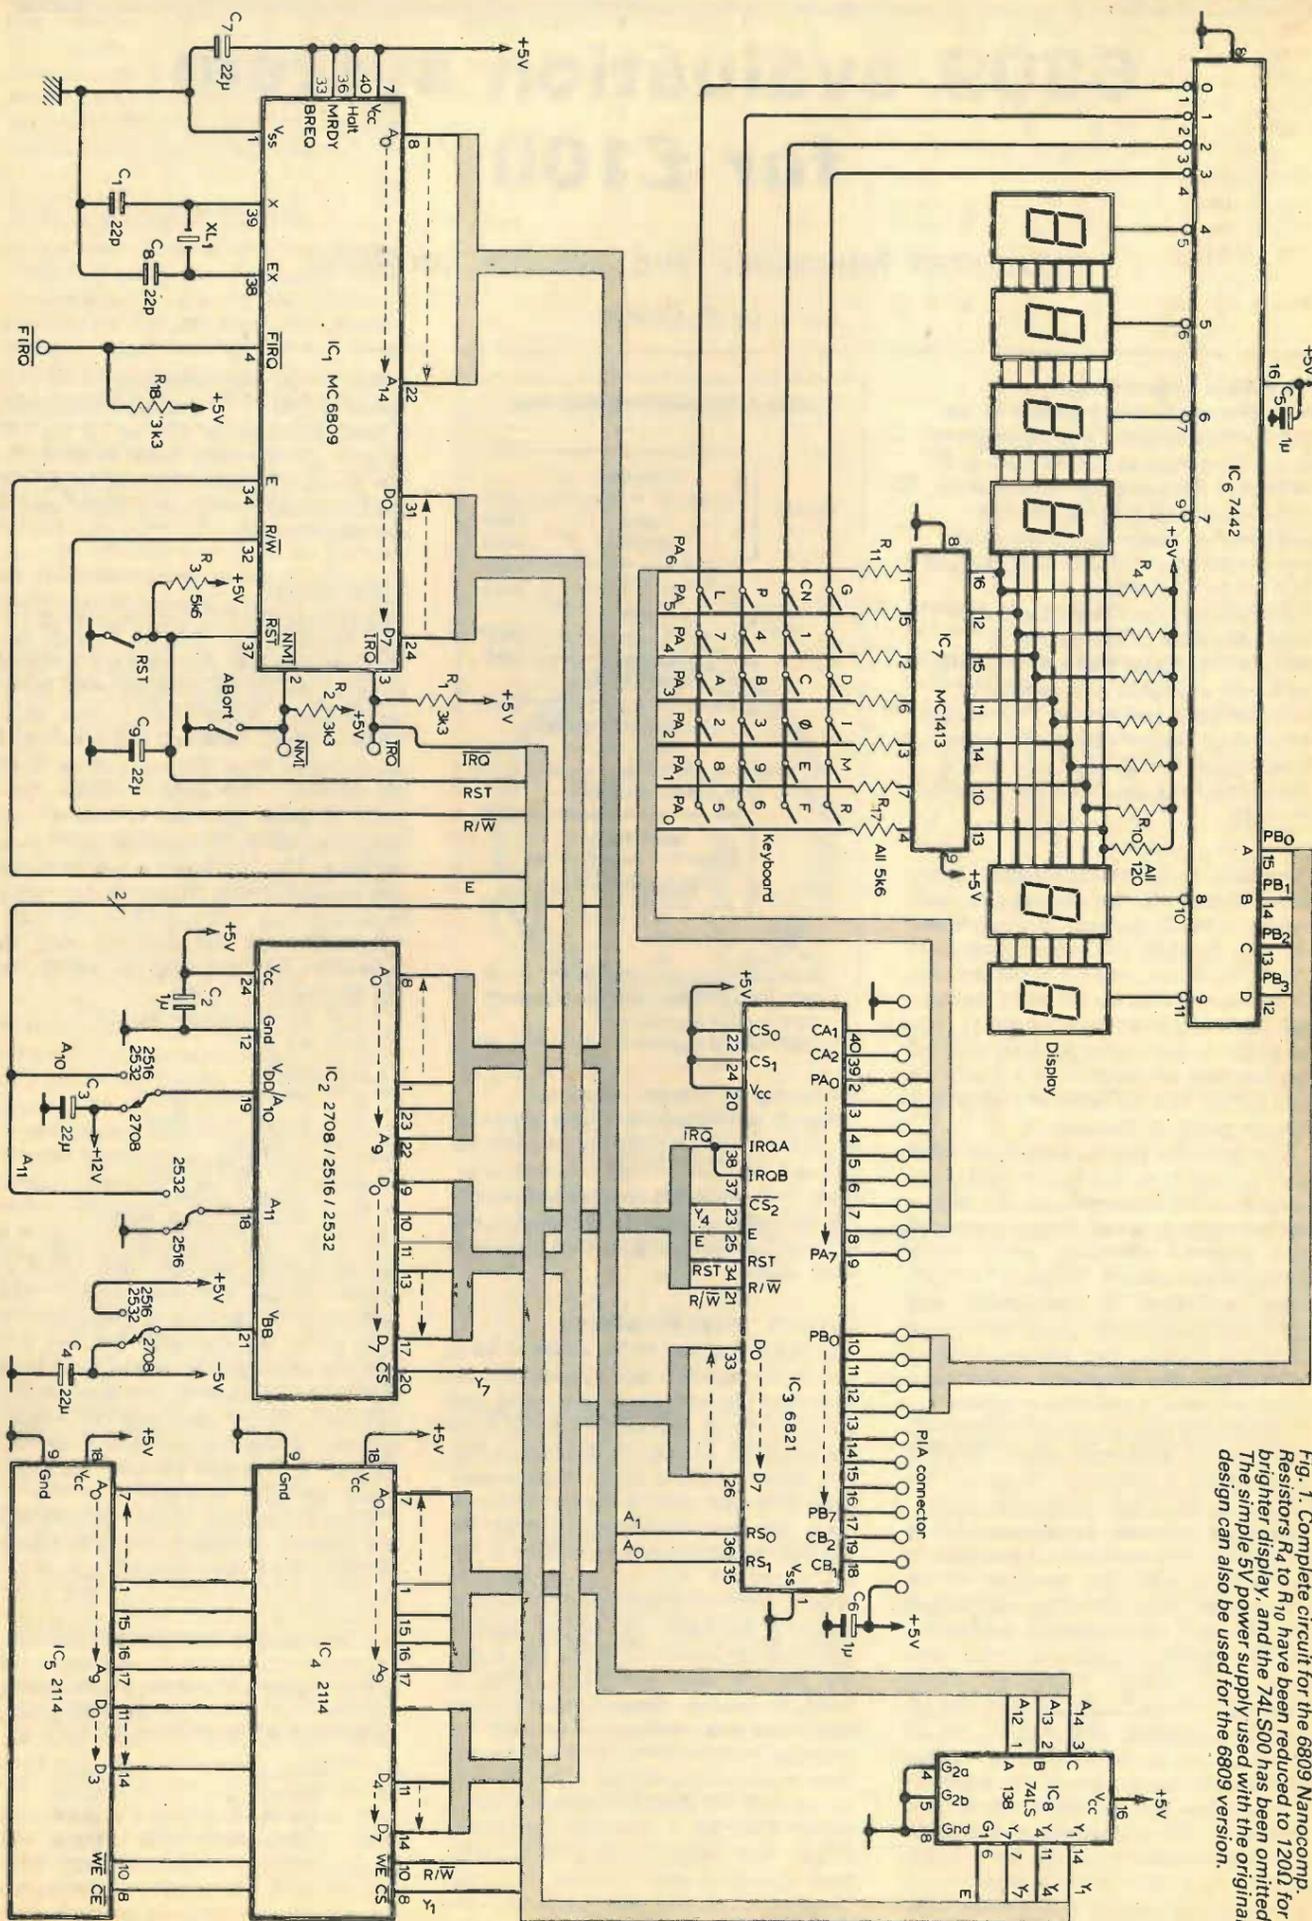


Fig. 1. Complete circuit for the 6809 Nanocomp. Resistors R₁ to R₁₀ have been reduced to 120Ω for a brighter display, and the 74LS00 has been omitted. The simple 5V power supply used with the original design can also be used for the 6809 version.

sing continues from that point. The NMI input, however, is used for the abort key and its jump address is set automatically when a reset occurs, but it may be modified for other purposes by a users program. The monitor has been written to ensure that the useful monitor subroutines, listed in Table 2 of the original article, function identically and have the same entry address points. The re-entry point to the monitor from a user program is 7D97, which also applies to the 6802 version.

The four original programs can be included if a 2 or 4K e.p.r.o.m. is used. The start address for hex-decimal/decimal-hex converter is 7800, duckshoot - 7940, branch calculator - 7A00 and mastermind - 7A80. For duckshoot, the speed is set at location 1000 and 1 because there is no memory at 0000 in the 6809 version. Two's complement offsets used by the branch instructions of the 6802 are limited to 8 bits but the 6809 also uses 16-bit offsets, with the PC relative addressing mode, therefore the branch calculator program now caters for these. In addition to requesting the start and destination addresses, the program requests the number of bytes in the instruction, b in the right-hand display, which must be entered. If an instruction has only two bytes, it must be an 8-bit offset so an 8-bit value is given or two dashes if it is out of range.

An instruction which requires a 16-bit offset must be three bytes or more, so a 16-bit answer is displayed if a byte value of three or greater is given.

Programming

Because programming information for the 6809 is not widely available yet, a brief description of the architecture is given together with the instruction set and programming details. However, for serious programming, Motorola's MC6809 Preliminary Programming Manual is essential.

A programming model of the 6809 is shown in Table 3, and details of the registers are given below.

Accumulators (A, B, D)

The A and B registers are general purpose 8-bit accumulators for arithmetic calculations and data manipulation. Some instructions link the registers to form a

single 16-bit accumulator (D) with A as the most significant byte.

Direct page register

The direct addressing mode in the 6800 allows a shorter form of instruction to be used for accessing the bottom 256 bytes of memory. This facility has been enhanced in the 6809 so that the 8-bit direct page register is used as the most significant byte for direct addressing. This allows the direct mode to be used under program control at any place in memory.

Index registers (X, Y)

These are the same as the single 6800 register. The 16-bit address in the register takes part in the calculation of effective addresses and can be used to point to data directly. The address can also be modified by an optional constant or register offset. The 8-bit constant offsets are supplemented with 5 and 16-bit offsets. All four pointer registers (X, Y, U, S) can be used as index registers.

Stack pointers (U, S)

The hardware stack pointer, S, is used by the processor during subroutine calls and interrupts, and points to the top of the stack instead of the next free location as in the 6800.

The user stack pointer, U, allows arguments to be passed to and from subroutines. Both stack pointers can also be used as index registers, and have additional Push and Pull instructions which can operate on any or all of the registers (except themselves).

Program counter

Used by the processor to point to the address of the next instruction to be executed.


Condition code register

This register, also known as the flag register, defines the state of the processor at any time. The register comprises C (bit 0) CARRY. Indicates that a carry occurred on the last ALU operation, or a borrow from subtraction instructions. V (bit 1) OVERFLOW. Set by an operation which causes a two's complement arithmetic overflow.

Z (bit 2) ZERO. Set if the result of the previous operation was zero.

N (bit 3) NEGATIVE. Contains the m.s.b. from the result of the preceding

Table 3. Programming model of the 6809

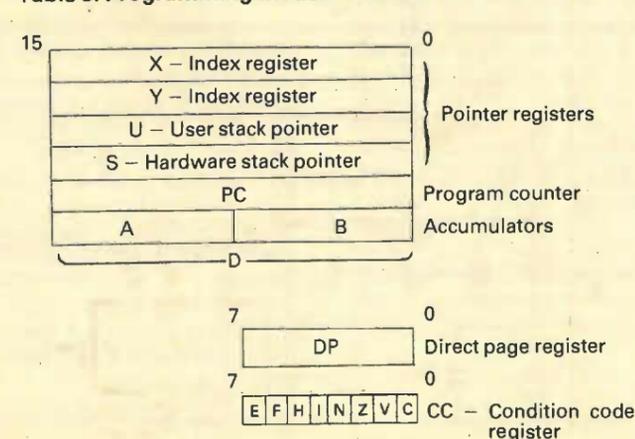

operation. Therefore, a negative two's complement will leave N set.

I (bit 4) IRQ mask bit. Interrupts on this line will not be recognised if I is set. NMI, FIRQ, IRQ, RESET and SWI all set the I bit, but SW12 and SW13 do not affect it. H (bit 5) HALF CARRY. Indicates a carry from bit 3 in the ALU after an 8-bit addition. Used by the decimal adjust instruction to perform the b.c.d. decimal add adjust operation.

F (bit 6) FIRQ mask bit. Interrupts on this line will not be recognised if I bit is set. NMI, FIRQ, SWI and RESET set the F bit. IRQ, SWI and SW13 do not affect it. E (bit 7) ENTIRE FLAG. Used to indicate whether all the registers were stacked or a subset (PC and CC) performed by a FIRQ. The E bit of the stacked condition code register is used on return from interrupt (RTI) to determine the extent of unstacking.

The main improvement offered by the 6809 is the proliferation of addressing modes which are summarised below.

INHERENT. In this mode the opcode contains all necessary address information (single byte instruction).

IMMEDIATE. The data to be used by the instruction immediately follows the opcode in memory. Can be an 8-bit or 16-bit value depending on the instruction.

EXTENDED. The contents of the two bytes following the opcode specify the 16-bit effective address used by the instruction.

EXTENDED INDIRECT. A special case of indexed addressing where one level of indirection is added to extended addressing, ie, the two bytes following the postbyte of an indexed instruction contain the address of the address of the data.

DIRECT. Similar to extended but only the lower 8 bits of the effective address are specified in the byte following the opcode. The upper 8 bits of the effective address are supplied by the direct page register. Therefore, programs using this mode rather than extended will use less memory.

INDEXED. The most complex addressing mode. In all indexed addressing, one of the pointer registers (X, Y, U, S and sometimes PC) is used in a calculation of the instruction. The postbyte of an indexed instruction specifies the basic type and variation of addressing mode, and the pointer register to be used. Table 4 gives the details necessary for calculating the postbyte opcode for all forms of indexed addressing. The five basic types of indexing are Zero Offset. The selected pointer register contains the effective address of the data to be used by the instruction.

Constant Offset. A two's complement offset and the contents of one of the pointer registers are added to produce the effective address of the operand. The pointer register's initial content is unchanged by the addition.

Three sizes of offset are available, ± 4-bit (-16 to +15), ± 7-bit (-128 to +127) and ± 15-bit (-32768 to +32767). The 5-bit offset is included in the postbyte, whereas 8-bit and 16-bit offsets require 1

Table 4. Indexed addressing modes

Type	Forms	Non indirect				Indirect			
		Assembler form	Postbyte op-code	+	#	Assembler form	Postbyte op-code	+	#
Constant offset from R (signed offsets)	no offset	R	1RR00100	0	0	[R]	1RR10100	3	0
	5-bit offset	n, R	0RRnnnnn	1	0	defaults to 8-bit			
	8-bit offset	n, R	1RR01000	1	1	[n, R]	1RR11000	4	1
	16-bit offset	n, R	1RR01001	4	2	[n, R]	1RR11001	7	2
Accumulator offset from R (signed offsets)	A - register offset	A, R	1RR00110	1	0	[A, R]	1RR10110	4	0
	B - register offset	B, R	1RR00101	1	0	[B, R]	1RR10101	4	0
	D - register offset	D, R	1RR01011	4	0	[D, R]	1RR11011	7	0
Auto increment/decrement R	increment by 1	,R+	1RR00000	2	0	not allowed			
	increment by 2	,R++	1RR00001	3	0	[,R++]	1RR10001	6	0
	decrement by 1	,-R	1RR00010	2	0	not allowed			
	decrement by 2	,--R	1RR00011	3	0	[,--R]	1RR10011	6	0
Constant offset from PC	8-bit offset	n, PCR	1XX01100	1	1	[n, PCR]	1XX11100	4	1
	16-bit offset	n, PCR	1XX01101	5	2	[n, PCR]	1XX11101	8	2
Extended indirect	16-bit address	-	-	-	-	[n]	10011111	5	2

R = X, Y, U or S X = 00 Y = 01 X = don't care U = 10 S = 11
+ and # indicate the number of additional cycles and bytes for the particular variation

or 2 bytes respectively after the postbyte for the offset.

Accumulator Offset. Similar to constant offset indexed except that the two's complement value in one of the accumulators (A, B or D) is used as the offset, the postbyte specifies which. Neither register is altered by the operation.

Auto Increment/Decrement. Similar to zero offset, but with auto increment. After the pointer register is used it is incremented by 1 or 2 and then used.

Indexed Indirect. All indexing modes, except auto increment/decrement-by-one and 5-bit offset, can have an additional level of indirection. This means that the effective address is contained at the location specified by the content of the index register plus any offset.

RELATIVE. Branch instructions use the relative addressing mode, i.e. the byte(s) following the branch opcode is a signed offset which is added to the program counter. If the branch condition is true, the calculated address (PC + signed offset) is loaded into the program counter. Execution then continues from the new address. Short branches require a 1-byte offset and long branches require 2 bytes.

PROGRAM COUNTER RELATIVE. Another type of indexed addressing where the program counter is used as the pointer, with an 8 or 16-bit offset. This is very useful for pointing to blocks of data in a program which must be relocatable, i.e. runs anywhere in memory. The Load Effective Address instruction makes use of this mode. For example, to point the X register to a block of data by specifying an offset, relative to the current PC position, where the data block resides. This offset

will remain constant wherever the program is run, whereas with a LDX instruction the absolute address must be specified. An additional level of indirection is available with this mode.

New instructions

PSH/PUL. These instructions allow any combination of registers to be pushed onto or pulled off the hardware (S) or user (U) stack. Which registers are pushed or pulled is defined by an immediate byte

after the opcode. Each bit in the byte specifies a register.

C C = bit 0
A, D = bit 1
B, D = bit 2
D P = bit 3
X = bit 4
Y = bit 5
U, S = bit 6
PC = bit 7

TFR/EXG. Any register may be transferred or exchanged with any other register of the same size, i.e. 8-bit to 8-bit or 16-bit to 16-bit. Also, a 16-bit register can be transferred to an 8-bit. The registers to be

Fig. 2. Cassette interface. This circuit is powered from the Nanocomp via the p.i.a. connector.



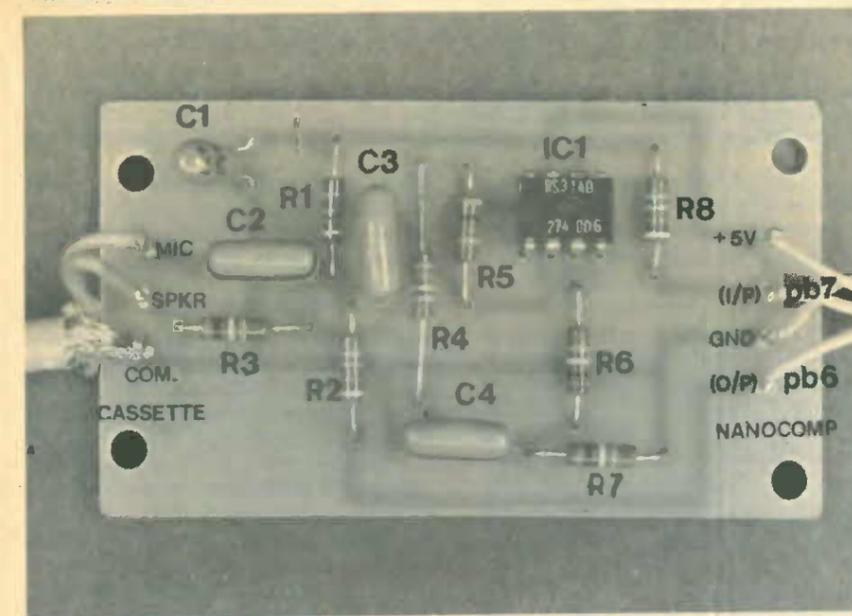


Fig. 3. Layout and component placement for the cassette interface.

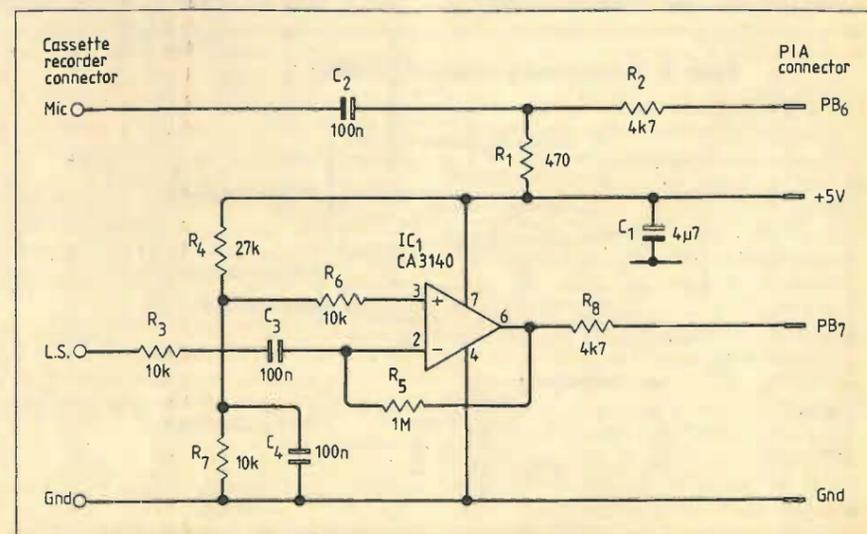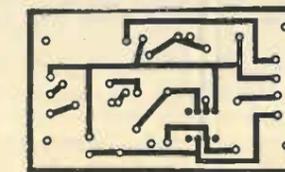

transferred are specified in an immediate byte. A code contained in the most significant four bits specifies the first register and the least significant four bits specify the second.

The register codes are

0000 = D
0001 = X
0010 = Y
0011 = U
0100 = S
0101 = PC
1000 = A
1001 = B
1010 = CC
1011 = DP

MUL. Multiplies the unsigned binary numbers in the A and B accumulators and places the unsigned result into the 16-bit D accumulator.

Although this short account of the 6809 is by no means complete, it should enable the constructor to start programming this very powerful processor.

Cassette tape interface

One facility which is more or less essential with any computer system is a means of storing programs. The cheapest convenient method of storage is a cassette tape and, as most users will have access to a cassette recorder, all that is required is the appropriate interface and software. This simple interface can be used with either version of the Nanocomp and will load the 1K memory in about 15s. An important part of the tape storage system is a set of routines, so readers using the original monitor will need to reprogram their e.p.r.o.m.

Data to be stored is transmitted to the recorder from a p.i.a. output line in the usual asynchronous serial format of a start

stranded wire can be used and soldered onto the connector.

Operation

The L and P keys are used to load and dump data respectively. To save a program, key P and the display will request the start address of the memory block to be saved S, followed by the finish address F. Transmission will start immediately the last key is released, so the recorder should be started before this. When the recording is finished, F will appear in the left of the display which indicates that the recorder can be stopped. Abort or Reset will return the monitor prompt.

To load a program, key L and start the recorder just before the beginning of the program. To provide a form of feedback, the top and bottom segments of the left-hand display are turned on as data is received. When a 1 is received, the top segment is on and when a 0 is received, the bottom segment is on. If the program is loaded correctly, when the end-of-file code is received F is displayed. Abort or Reset returns the prompt. If a checksum error is encountered in one of the data blocks, a C is displayed and loading is stopped. If this occurs the tape must be rewound and restarted.

With some experimentation the record and playback levels can be optimised although, with a reasonable recorder, they are not critical. It should be noted that the requirements for recording data on a cassette tape are high so only high quality audio cassettes or, preferably, certified data quality should be used. Also, a worn recorder which does not give an acceptable performance with speech or music is unlikely to produce reliable data recordings. Auto record-level machines may also cause problems because their circuits are not designed to be used with a low mean-to-peak ratio square wave.

Although the Nanocomp was originally intended as a microprocessor trainer, many constructors may want to update the unit as shown, and interface the circuit to other systems. We intend to support this design with a further article describing extra peripheral devices such as a-to-d and d-to-a converters and a simple e.p.r.o.m. programmer.

The original monitor/utility program has been revised to remove a potential bug in the master mind program, and to improve the performance if poor quality keys are used. A hex list of the new monitor, which also contains the cassette interface software, can be obtained from the editorial office by sending a large s.a.e. clearly marked 6802 or 6809.

A set of p.c.b.s for the 6809 Nanocomp (power supply and logic board) will be available for £9.00 and a cassette interface board for £1.50, inclusive of v.a.t. and UK postage, from M. R. Sagin, 23 Keyes Road, London N.W.2.

Technomatic Ltd, 17 Burnley Road, London N.W. 10, 01-452 1500, and Magenta Electronics Ltd, 135 Hunter Street, Burton-on-Trent Staffs, 0283-65435, will be offering a kit of components. Both companies will also reprogram e.p.r.o.m.s for both versions of the Nanocomp.

+5V 7a
0V 2a
PB6 12a
PB7 12b

If a ribbon cable is not available, ordinary

WORLD OF AMATEUR RADIO

CB — so close to 28MHz

One factor arising from the Home Office's draft 'performance specification' for 27MHz f.m. equipment, for what is now officially termed the "Citizens Band Radio Service", will be viewed with some dismay by many radio amateurs: the minimal frequency gap between "Channel 40" (27.99125MHz nominal carrier frequency) and the 28.000MHz low-frequency end of the 28MHz amateur band. This represents an unexpectedly savage turn-down of the RSGB request that any such service should not be located close to an amateur band.

It can be argued of course that if c.b.ers stick to the proposed conditions — for example that all equipment must be covered by a licence of which it will be a condition that "the apparatus fulfils, and is maintained to, certain minimum technical standards" — then there may be few problems. But there seem certain to be "social problems" when licensed c.b.ers find, as almost certainly they will, that their low-power, low-cost rigs cannot be expected to function satisfactorily when one of their neighbours is legally running a 28MHz amateur transmitter at 150 watts d.c. input or 400 watts p.e.p. output only a few kHz away from the c.b. channel!

Although the latest Home Office plans have received a good deal of criticism one cannot help feeling that if the same proposals had been made several years ago they would have been warmly welcomed by almost all those interested in the development of c.b. What remains to be seen is whether the proposed regulations will be obeyed or enforced.

For example, it is difficult to imagine even an otherwise conscientious c.b. operator actually taking care to insert a 10dB attenuator when using a high aerial!

Amateur television

The latest issue of *CQ-TV*, journal of the British Amateur Television Club, reports an increasing number of television contacts with Continental amateurs. Andrew Emerson, G8PTH, of Canterbury mentions his successful reception of lockable SE-CAM colour transmissions from F1EDM at Le Havre. Several British amateurs are experimenting with video transmissions on the 1.3 and 10 GHz bands. In Melbourne, Australia a television repeater accepts signals on 440MHz and retransmits them on 579MHz and can thus be received on unmodified domestic television receivers. In the USA the FCC is continuing to permit a handful of amateurs to experiment with "medium scan television" on 29.150MHz with a maximum bandwidth of 36kHz. This concession is resulting in the exploitation of a number of novel techniques, including frame grabbing at an eighth of the 60 fields per second of standard American television. It has been found that at least

7.5 fields per second are needed to give a reasonable illusion of movement. One of the amateurs concerned in this work (W3EFG) was the originator, several years ago, of the General Electric (USA) "Sampledot" narrow-band system and plans are now being made to use some of the original Sampledot equipment in conjunction with a digital scan converter and frame grabbing to provide a 7.5 rather than 60 Hz field rate.

Slow-scan land and sea image data with a format of 256 by 256 pixels and 16 grey levels with digital transmission on the beacon signal at 145.825MHz are among the facilities that will be provided by the British amateur satellite UOSAT (University of Surrey) due to be launched in a few months time. UOSAT will carry an earth-pointing c.c.d. two-dimensional imaging array.

Amateurs at British Telecom's research centre at Martlesham are planning tv transmissions both for local "news" and for regular contacts with Holland. BATC deserves congratulations on the new "Amateur-Television Handbook" edited by John Wood, G3YQC and Trevor Brown, G8CJS. This excellent 96-page booklet is packed with eminently practical information and designs provided by some 20 amateurs and covering principles, aerials, receivers, transmission, vision sources, video processing and colour television (non-members £2 plus 35p postage from I. Pawson, 14 Lilac Avenue, Leicester LE5 1FN).

IARU Region 1 Conference

The many sessions of the IARU Region 1 Conference at Brighton, at which the national amateur radio societies of some 36 countries were represented among the 150 or so delegates, resulted in many recommendations that in the coming years should help to make as effective as possible both operating and technical investigations. But less happily this conference will also be remembered for the deaths of two of the delegates: Peter Balestrini, G3BPT and the Dutch amateur PAoOK. Peter Balestrini was the 1980 President of the RSGB and was attending the conference in his capacity of RSGB Emergency Communications Manager. Professionally engaged with Port of London Authority telecommunications, he was for many years one of the leading enthusiasts who built up the "Raynet" emergency system.

Although there can be few amateurs who did not wish the Conference well, some criticism has been expressed of the Home Office decision to permit the use of a special call sign, GB1IARU, since the use of "four-letter" call signs is not specified in the international Radio Regulations. However the Home Office clearly regarded

this as a very special "special event" and even gave blanket permission for the station to be operated by foreign delegates not holding a reciprocal British licence.

April solar storms

Highly disturbed h.f. propagation conditions were experienced during April, particularly during the periods April 7 to 13 and April 21 to 27, following intense solar flares. On some days F2 critical frequencies remained abnormally low and on April 13 between 0600 and 1700 hours the F2 layer was not detectable at The Appleton Laboratory, and the amateur h.f. bands remained virtually unusable during much of the day. A considerable number of severe h.f. blackouts and auroral conditions were experienced during the month. Such ionospheric disturbances tend to take place most frequently during the early decreasing phase of a sunspot cycle, but the events of April were unusual by almost any standard.

Observations made on 3.5MHz by G3XRJ and VK7AE in Tasmania, Australia during an eclipse of the sun on February 4 around 2030 hours showed a very marked enhancement of this low h.f. path between England and Australia during the total eclipse period. The effect, during the Australian "dawn", was to keep the path open almost an hour longer than normal, although there was a very rapid fadeout of signals after the sun re-emerged.

In brief

A weekend 'Hamfest' from Friday to Sunday, 26-28 June, is being organized by the Leeds & District Amateur Radio Society, opening with a "welly disco" and with arrangements for overnight camping and caravan facilities. A demonstration station, GB2WYR, will operate . . . The RSGB's v.h.f. national field day, probably now the biggest UK contest event of the year, is on July 4 to 5 . . . Mobile rallies include three on June 28: Longleat Park, Warminster, Wilts; Rolls Royce Sports and Social Club, Barnoldswick; and Crawfordsburn Scout Camp, Crawfordsburn County Park, near Bangor, Co. Down; July 12 Droitwich High School, Droitwich; July 19 Brighton Raceground, Brighton and Cornwall Technical College, Pool, Camborne. . . Abuse of the South London 144 MHz repeater continues, including the weekend of the Brixton disturbances . . . J.T. Dolan of Seattle, USA, was fined \$750 for operating the pirate broadcast station "RX4M Voice of Clipperton" after FCC engineers traced him using sophisticated mobile direction finders. In California, David Lee Grimm was fined \$1500 for illegal c.b. operation after repeated warnings and equipment valued at about \$8000 seized, including four linear amplifiers, two amateur radio transceivers and one c.b. radio transceiver. PAT HAWKER, G3VA

Leap seconds

Story of the transfer from astronomical to atomic time


by L. Essen, D.Sc., F.R.S.

Most people now know that all time measurements and time signals throughout the world are based on atomic clocks but the need to adjust them by one second at the end of the year is not well understood. It follows from the fact that the signals must not only give precise uniform intervals of time but must also give the time of day which is determined by the non-uniform rotation of the earth. The transfer from astronomical to atomic time and the co-ordination of the two systems was an important step in the advance of science and it is surprising that the full story has never been told. The requirements of radio engineers were always prominent in the discussions.

The time of day is not required very accurately for civil purposes — it is changed by an hour, twice a year — but for navigation at sea it should be fairly close to the time scale based on the position of the stars, known as UT1. Time intervals, on the other hand, are required to be as precise and uniform as possible, particularly for air navigation and the control of the frequencies of radio transmitters. For these applications the actual time or epoch of the signals is irrelevant.

These two requirements are so different that it might be asked why two separate sets of signals are not used, giving astronomical time for sea navigation and civil purposes and atomic time for everything else. This was indeed suggested by Dr G.M. Clemence of the US Naval Observatory who proposed that two units of time should be defined, adding, probably not very seriously, that the atomic unit should be called the Essen. The fundamental objection to this is that it would constitute a duplication of one of the basic units of measurement; and a practical objection is that the use of two time scales would undoubtedly lead to confusion, as our experience with standard frequency transmissions had shown. It was therefore worth while to make an effort to construct a single time scale, which would give the full accuracy of the atomic clock and the time of day as accurately as needed. This principle was accepted but it took 16 years to get international agreement on the details.

The first caesium atomic clock was put into operation at the National Physical Laboratory, Teddington, in June 1955; and it was immediately obvious to us that

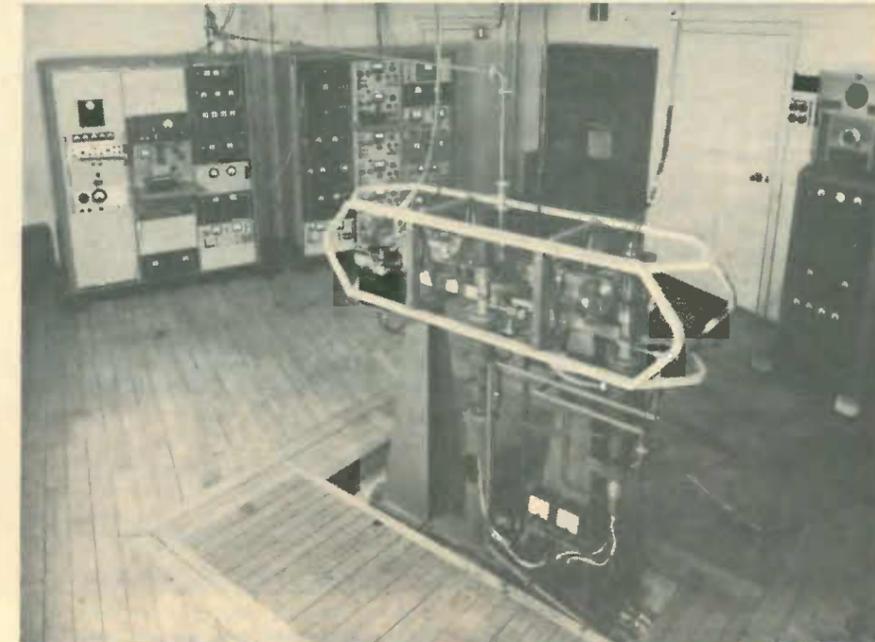

The original caesium resonator, designed at the NPL by the author and J. V. L. Parry, which led to the development of the atomic standard of time.

the necessary checks on its performance under different conditions could not be made in terms of astronomical time. A provisional atomic unit was defined and an atomic scale maintained by quartz clocks checked by the atomic clock, under standard conditions, as often as necessary.

It happened that the International Astronomical Union was meeting in Dublin that summer and through the courtesy of the Astronomer Royal, Sir H. Spencer Jones, I was able to attend this meeting to describe the clock and the initial results. One of the main topics of discussion at the meeting was a proposal to redefine the unit of time, making it in effect a fraction of the time of revolution of the earth round the sun instead of a fraction of the time of rotation on its axis. It was believed that this unit, the second of ephemeris time (ET) would be more constant than the second of universal time (UT1). It is difficult to measure it and the value being

recommended was in effect the average value of the second of UT1 over a period of 200 years. Such a unit might be useful for astronomical work but it is not of the slightest use to the physicist and radio engineer. I suggested that it might be wise to delay a decision until agreement was obtained on the definition of an atomic unit which would certainly be required in the future.

However, the proposal to change to ET was adopted and was confirmed at the General Conference of Weights and Measures in 1956. It was a strange decision and it meant that from 1956 until 1967, when an atomic unit was defined, the definitive unit of time existed only on paper. The unit used in practice was the second of UT1; and at the NPL this was defined in terms of the provisional atomic unit, which was made available throughout the world by our standard frequency transmissions and their 1s timing pulses derived from the standard. These were used at the International Bureau de l'Heure to smooth out the irregularities of the astronomical signals.

Although the atomic clock had a luke-warm reception at the Dublin meeting an important resolution was passed with the advocacy of Dr W. Markowitz. It was agreed that when the relationship between the atomic frequency and the second of ET had been established the atomic clock

The next leap second will be on 30th June 1981 in the last minute of the day. The minute before midnight will contain 61 seconds instead of 60 seconds.

would be used to make ET available. We planned together a programme of measurements to obtain this relationship: the time interval between certain agreed signals about a month apart was to be measured at the NPL in terms of the atomic clock and at the USNO in terms of ET. Markowitz had developed a method of obtaining ET more quickly than by direct observations of the sun; but even so the measurements were continued for three years before it was decided that further averaging was not likely to improve the accuracy of the result which was therefore announced. The result expressed as the frequency of the caesium atomic transition in terms of the second of ET was:

$$9192631770 \pm 20 \text{ cycles}$$

The second of atomic time was therefore the time occupied by 9192631770 cycles of the caesium line, the limits of error being omitted since they were due almost entirely to the astronomical measurements. This value was used at the NPL in place of the provisional value, from 1958, in accordance with the Dublin resolution.

There was still strong opposition from astronomers to the formal adoption of the atomic unit. They regarded the atomic clock as a kind of superior quartz clock which could be used to smooth astronomical time, and ignored the fundamental difference between them. The quartz clock is simply a stable oscillator which can be adjusted to have any frequency by altering its dimensions, whereas the atomic clock has a frequency determined with great precision by natural constants. It is reproducible anywhere in the world and provides a unit of time which is immediately and readily available. It is ideally suited to be a definitive standard of measurement. It must be admitted, as was often pointed out, that unlike the earth, it does sometimes stop, but this is an academic point of no practical significance. When one clock stops it can be reset by reference to one that has not, with a precision enormously greater than any astronomical mea-

surement. And even if they all stop they can be reset by reference to the stars so that one is no worse off.

It must be remembered too that the major observatories, including the Royal Greenwich Observatory, were founded with the specific object of providing the navy and merchant ships with time. Their responsibility was later extended to providing a uniform time scale for scientific purposes. The determination of astronomical time became a complex operation, the measurement made at many observatories being correlated at the Bureau de l'Heure which published the definitive corrections to time signals about 12 months in arrears. There was a considerable vested interest in retaining astronomical time as the definitive system. As several of those concerned jokingly said, there was no doubt that we must change to atomic time, but not before we retire, please.

Another question to be settled was the type of atomic clock to choose. In spite of the known performance of the caesium standard at the NPL and then at laboratories in Canada, the USA, and Switzerland, clocks based on the same spectral line of hydrogen and thallium were possible contenders. A lot of attention was also devoted to the study of a spectral line of ammonia; and although this was never a serious contender as a time standard it led to the development of the maser and the laser. The advantages of the caesium clock prevailed and in 1967 it was accepted for defining the unit of time, with the value given above.

The co-ordination of the 1s pulses carried on standard frequency transmissions with astronomical time signals presented some awkward problems. The first step was taken when they were made to coincide on 1st January 1958. It was realised that they would diverge because of the variations in the rate of rotation of the earth, and the question to be resolved was the amount of divergence that could be tolerated. The first figure suggested was

0.1s and to keep within this tolerance the actual frequency of the transmissions was offset from its nominal value by a stated amount each year, and in addition occasional step adjustments of 0.1s had to be made to the timing pulses. A further move towards co-ordination was made in 1960 when it was agreed with the RGO that all time signals transmitted from the UK would have the same epoch.

It was of course rather illogical to offset the constant unit in order to accommodate the variations of the astronomical unit and strong efforts were made to end this situation particularly through the International Scientific Radio Union. A satisfactory solution became possible when astronomers agreed that the signals could diverge by as much as 0.7s from astronomical time UT1. The frequency offset was eliminated, standard frequency transmissions operated on their true nominal values and the timing pulses on them gave true atomic time intervals. The divergence of the pulses from UT1 was compensated by a step adjustment of precisely 1s, when necessary on 30th June or 31st December. This enabled the pulses to continue undisturbed but the marker distinguishing the 1 minute pulse was moved along by 1s. The use of these leap seconds enables the time signals to be maintained within 0.7s of UT1, and for those who need it, the difference from UT1 is given more accurately by a code or Morse announcement. The only inconvenience caused to those measuring time interval is the need to check whether there have been any leap seconds if the interval extends through June or December. The astronomer no longer had to struggle to derive a uniform time scale from the complex and non-uniform periodicities of the solar system, but could measure these periodicities in terms of the atomic clock.

If I may finish on a personal note, I often think how lucky I was to work in a branch of science which was advancing rapidly, which exploited many different techniques and in which there was full international co-operation. The problem being tackled at the NPL when I joined in 1929 was the measurement of radio frequencies. The first solution was to measure them in terms of a tuning fork maintained in continuous oscillation. The accuracy achieved was 1 part in 10^7 which was considered by the Radio Research Board to be adequate for the foreseeable future, making further financial support unnecessary. The next advance was the quartz clock, which proved to be much more stable than the observatory pendulum clocks and gradually replaced them. They revealed an annual periodic change of 1 part in 10^8 in the rate of rotation of the earth. It was clear that any further improvement was prevented by the uncertainty in the value of the astronomical second. In 1945 I.I.Rabi, at Columbia University, suggested that the atomic beam magnetic technique might be adapted to form the basis of an atomic unit of time. The atomic clock has not only made the measurement of time and frequency far easier but has increased its accuracy by about one million times.

Parallel-tracking pickup arm modifications and improvements



Construction is not as difficult as you might think: "precision assembly is simply not required"

By Rod Cooper

A working model of the parallel-tracking pick-up arm, first described in the December 1979 and January 1980 issues, drew widespread interest at a recent exhibition as well as several constructive proposals for improvements, some of which are detailed in this article.

Two curious facts emerged from a showing of the parallel-tracking arm at the last Breadboard exhibition. Firstly, many people expressed doubts about their ability to construct an arm with sufficient accuracy, even when building from a kit of parts. This problem seems to have magnified out of all proportion. The parallel-tracking arm is far more tolerant of mechanical shortcomings in construction because of the "cleaning-up" effect of the servo system, and because of this particular design of gimbals, the inherent advantages of which were explained in the original article.

In addition, as the basic accuracy of the servo system is ± 0.2 degrees which represents about 1mm at the stylus, precision assembly is simply not required. The human eye is very good at detecting parallelism and it is therefore not at all difficult to set up the reference arm and parallel track to well within this limit using an ordinary set-square and a straight rule.

Moreover, the parts have specifically been designed to be adjusted — they are

not pre-set — and so any error in assembly can be adjusted out. The wear points such as bearings and pivots have been given particular attention in design so that any slack introduced by wear can also be adjusted out. It is salutary to compare this to the lack of serviceability and the built-in obsolescence of much of the equipment on the market today.

The second emergent fact was that the principle of parallel tracking had been dismissed out-of-hand, even by those who had read the original article and the analysis by Randhawa on the grounds that "it only saves 0.7% distortion, which isn't audible anyway". Nothing could be further from the truth! There is in fact not one isolated advantage to this technique but a package of benefits as listed below.

- Reduction of tracking distortion, as already mentioned.
- Reduction of stereo delay-distortion with elliptical styli.
- Capability for re-centering eccentric records. This deserves some comment as the design is the only one, as far as I know, which permits rapid and accurate correction of eccentricity. There are two important effects of eccentricity. On some types of music, the "wow" introduced by this defect is audible. That re-centering makes an audible difference I know to be true, from results obtained from my record collection. Also, the eccentric record is constantly levering the arm to the left and right every revolution, working against the

inertia of the arm and the friction of the pivots. Unfortunately the audible effects of wear from this source cannot yet be quantified, but the loading on the record surface can be calculated in a similar manner to that given later in this article for record warp, and is not negligible.

- Low inertia of the arm means that seriously warped records, eg 6mm warp, can be tracked. The benefits gained by low inertia are similar to those achieved from re-centering the record — reduced wow and record wear. Again, the audible effects of wear are not quantifiable, but an analysis of the loading due to inertia is given at the end of this article.

While the reduction in tracking distortion is probably not audible on its own to most people, when it is added to the audible effects of the other three points, the result is noticeable. Add to this the increased "trackability" and reduction in record wear, and the parallel tracking technique can be justified on all grounds except that of cost. And the cost factor can be reduced to a minimum by building your own!

Improvements

Pivot system. On the original design, the cup-type horizontal pivot tended to be a natural collector of dust. By inverting the cup and placing the pivot pin underneath, this problem can be avoided. However it is then no longer possible to use the pivot height adjustment to help correct for neu-

Louis Essen was born in 1908 and educated at High Pavement School in Nottingham and Nottingham University College, gaining a London external degree. Joining the NPL in 1929, he worked with D. W. Dye on tuning-fork and quartz oscillators and has continued to investigate frequency standards throughout his career. Working with A. C. Gordon-Smith from 1946 to 1950, he was able to establish, using a cavity resonator, a new value for the velocity of light, which is still accepted.

Taking up a proposal by I. I. Rabi in the United States, Dr Essen collaborated with J. V. L. Parry at the NPL to produce, in 1955, the first atomic caesium frequency standard: a later design now serves as the British national standard. Work in this field brought an involvement with relativity, which led to a belief that Einstein was wrong in one important respect and to a different interpretation of the Michelson-Morley experiment.

Dr Essen gained a Ph.D in 1941, a



D.Sc. in 1948 and was elected FRS in 1960. He was awarded the Popov Gold Medal of the USSR Academy of Sciences in 1959 and, in the same year, the OBE.

tral equilibrium as suggested in the January 1980 article because the effective height of the tracking arm above the horizontal pivot cannot now be altered. This is not so important as it might seem because the majority of modern cartridges can be set up for neutral equilibrium without having to resort to adjusting the horizontal pivots. With heavier-than-usual cartridges which cannot be set up by adjusting the vertical pivot, filing away some metal from the underside of the counterweight will help.

Light slit. The light slit is also the cue rest, but it can also be adapted to perform a third function as dust bug. It is in the perfect position to do this as a brush attached to the light slit will clean the record just in advance of the stylus. It can be raised for cleaning simply by cue-ing the arm, and as it is earthed can be used to remove static by incorporating carbon fibres in the brush.

Lead-out wiring. Litz wire can be used to greater effect than first realised. Because individual strands of litz wire are insulated it is possible to conduct most of the signals in just a couple of wires. The soldering technique for such fine wire is more demanding, but the unwanted forces introduced by the lead-out wires at the point where they exit from the tracking arm are reduced, considerably.

Tracking arm. The diameter of the duralumin tube used for the tracking arm has been increased to 9.5mm. The original smaller-diameter tubing performed well with most types of cartridge, but with the increased use of moving-coil cartridges I felt that a much stiffer tube was needed. A comparison of the new arm with a conventional arm is given at the end of this article.

Slider (part 19). The material now recommended for this part is Nylon 66, which is a high-tensile grade of nylon and has far superior low-friction and low-wear properties compared with the original brass/steel

arrangement. It is also very easy to cut to shape.

Drive cords. A superior material has been found in the form of round-section expanded neoprene cord. This is a soft, resilient cord which has excellent vibration absorbing properties, and which is designed to be joined with cyanoacrylate "super-glue" to form a fitted drive band.

Acoustic isolation of the servo motor and gearbox was neatly solved by the introduction of Sorbothane. This is a remarkable visco-elastic compound (modestly described by the manufacturer as "a significant advance in polymer technology") which can recover from deformations of more than 500% and which is very lossy to any mechanical excitation, typically 90% absorption. The texture is somewhere between that of plasticene and soft rubber. Used as mounting pads for the servo assembly in place of the rubber grommets first specified, it gives superior results. It is also an excellent material for decoupling the counterweight.

Gimbals. On the original model, if the horizontal pivot of the gimbals was knocked off the support pillars, there was nothing to stop them from going completely adrift. The design of the support pillars has therefore been modified to incorporate the pivot pins in a U-shaped recess so that this cannot happen. The improved design is shown on page 43.

Fast traverse. The criticism most often voiced concerned the two-minute return time, which was found by many to be inconveniently long, even for transcription purposes. This simple modification has been developed for a traverse time of just a few seconds. It can be retro-fitted to existing machines.

The modification consists of a second motor which drives the lead screw at speed without the assistance of the servo motor. Several constructors appear to have tried this method already, by driving the lead

Modifications and improvements shown on page 43 include simplified side supports and pivots, new tracking arm, and fast traverse action and slipping clutch, as well as a suggested alternative parallel track (bottom).

The track, which uses two steel rods instead of a long slot in a strip of aluminium alloy, is easier to make if you have a drilling stand for an electric drill. Accuracy of the assembled track depends on the straightness of the steel rods and not so much on the accuracy of drilling (drill both plates together); this simplifies the task of producing a well-trued track. Precision-ground steel rod of 1/4in diameter is readily available from engineers merchants and is not expensive. The rods are fixed into the end plates with Loctite, which is allowed to set with the assembly resting on a flat surface such as a piece of plate glass.



screw direct and simply slipping the drive band from the servo motor —not good practice because of the stretching and generally increased wear of the drive band. It also puts an unfair strain on the miniature gears in the worm gear transmission. A much more acceptable method is to drive the lead screw indirectly as on page 43.

By using a double-groove pulley wheel with a slipping clutch on the output shaft of the servo gearbox, the drive bands are operated within their limits, and the slipping clutch relieves the gear wheels inside the gearbox of excessive strain. Such a slipping clutch is easy to construct from a couple of wavy-type spring washers and set collars, as shown on page 43.

The servo motor now has to overcome the magnetic drag of the second motor during normal operation, if this second motor is a permanent-magnet type. This is avoided by applying a small bias current to the second motor of a value that will overcome the drag but not make the motor revolve. This can be done by a suitable resistor via the switching network. Alternatively, a motor with a field coil can be used, avoiding this requirement altogether. But whichever type of motor is used, it needs to be sufficiently powerful to overcome the slipping clutch and drive the lead screw, without the advantage of the reduction gearbox that the servo motor employs. There is no requirement for it to be vibration-free or quiet running like the servo motor, so a relatively robust and inexpensive motor can be used.

The new arm is of the same aluminium alloy as the Mk 1, HT30TF, which is a hard alloy fully heat-treated and cannot be manipulated (eg drawn, bent or compressed) in the usual way without cracking. The diameter of the 9.5mm tube was chosen to give an increase in overall stiffness over the Mk 1 arm. Wall

Alternative to original parallel track comprising two steel rods is easier to make if you have an electric drill and stand.

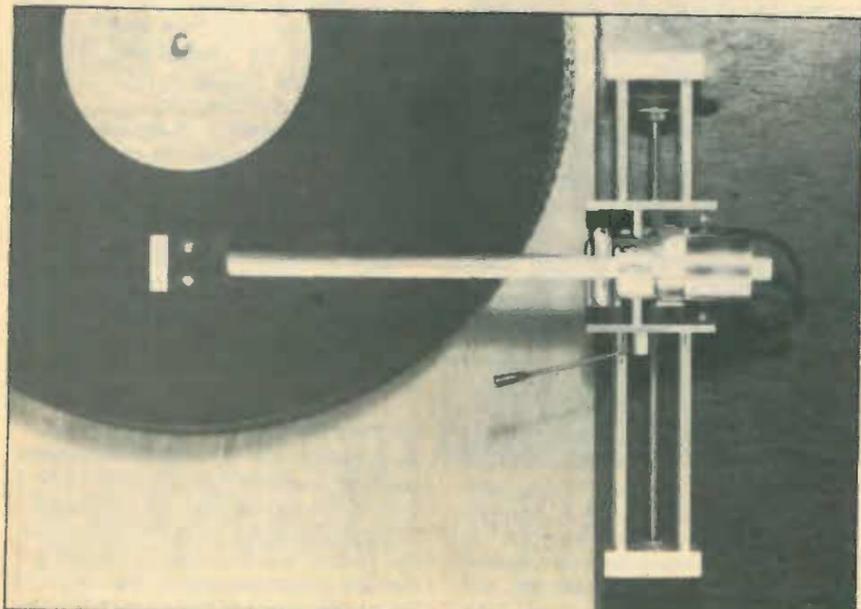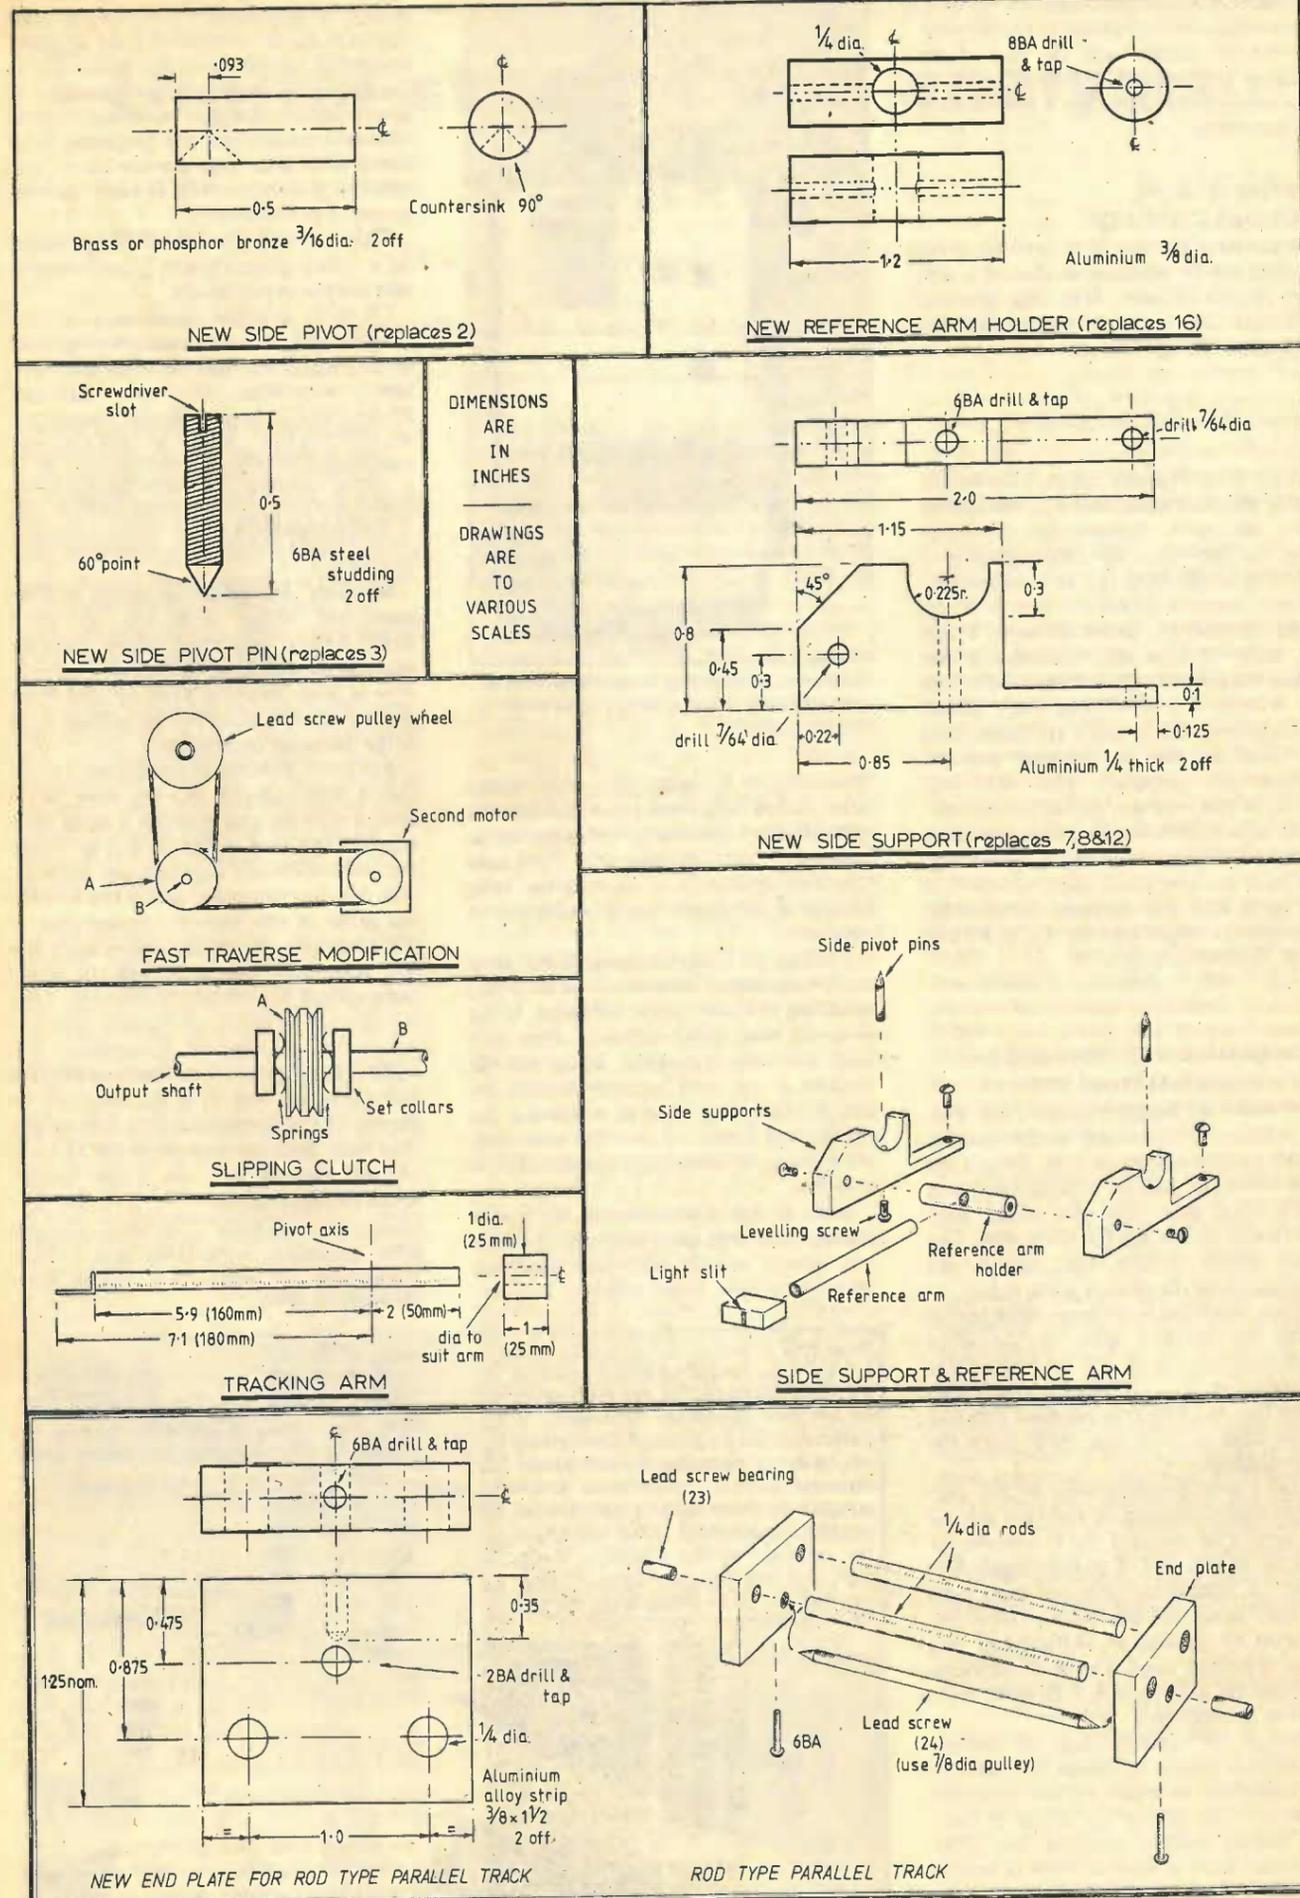

thickness remains the same at 22s.w.g. The cartridge holder design has been modified to fit directly onto the end of the tracking arm instead of sliding along it. The weight of 100cm of the 9.5mm tubing is a mere 55gm.

Inertia of arm without cartridge

The inertia of the arm from pivot to stylus position can be assumed as that of a uniform circular cylinder 18cm long, ignoring difference in mass between cartridge holder and tubing. This is

$$I_{\text{arm}} = M \left(\frac{a^2}{4} + \frac{l^2}{3} \right)$$

where a is the cylinder radius, l the length and M the total mass, and I_{arm} the inertia about the pivot. Substituting the value 10gm for M , 18cm for l and ignoring a (which is small) then I_{arm} is 1080gm cm². To this must be added the inertia of the counterweight, I_{cw} , about the pivot. Using the same formula and substituting the values 80gm for M , 2.5cm for l and 1.2cm for a then I_{cw} is 185gm cm². These measurements for a and l are taken with the arm in the equilibrium position without the cartridge. Thus the total inertia is 1080+185gm cm²=1265gm cm². Now $M_c = I_{\text{tot}}/R^2$, where M_c is the mass referred to the stylus point, I_{tot} is the total inertia of the arm about the pivot and R is the pivot to stylus distance. Substituting the values 1265gm cm² for I_{tot} and 18cm for R , then M_c is 3.9gm.


Comparison of new arm with conventional arm

As R and l are roughly equal in any arm, the terms in R^2 cancel out in the equation for M_c which becomes $M_c \propto M$. Thus if the same tubing is used for both an 18cm arm and a 23cm arm, then the overall mass will clearly be less for the 18cm arm. The actual figure is 22% less, but is not meaningful for the reasons given below.

More important is the large reduction in inertia for the 18cm arm. As $I_{\text{arm}} \propto R^2$ a small reduction in R will lead to a large reduction in I_{arm} . A simple calculation shows that an 18cm arm will have 39% less inertia than a 23cm arm made from the same material.

This effect is exaggerated by the cartridge being mounted at the very end of the arm. The inertia I_c of a cartridge of mass M_c at the end of an arm length R is $M_c R^2$. A typical cartridge of mass 5gm mounted at the end of an arm of 18cm has therefore an I_c value of 1620gm cm² due solely to its own mass. The same cartridge mounted on a 23cm arm will have an I_c value of 2645gm cm²!

Because the manufacturers of conventional arms cannot influence the mass of the cartridges as made by the specialist firms, or even reduce the length of their arm designs without running into other problems, most of them attempt to reduce inertia by using exotic materials for con-

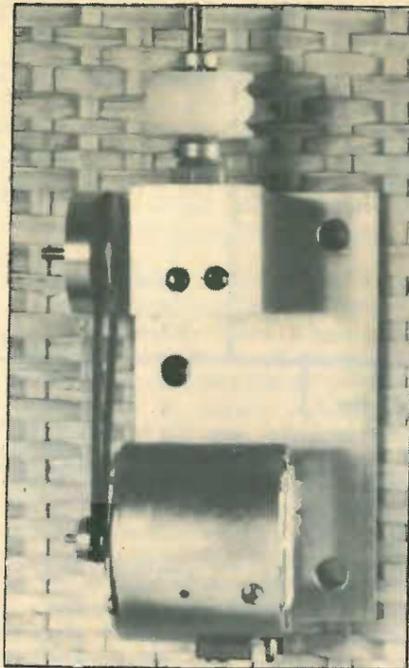


One way of achieving faster traverse is to use a second, inexpensive, motor with slipping clutch.

struction, or by using ultra-thin walled tube. As has been shown above, this is the least effective method of reducing inertia because it only reduces M . The most effective method is to shorten the arm, because of the presence of R^2 in the inertia equations.

Making use of exotic materials has good marketing appeal because of the aura surrounding titanium, carbon fibre etc. but it does not make good economic sense as it costs a lot for little gain. Using thinner sections is not good practice because the arm becomes less able to withstand the knocks and bumps of everyday use. Also, the thinner the material, the more likely it is to flex.

In the design of the new arm, the design principle has been quite different. A relatively robust straight stiff tube has been specified to give good rigidity. A light-

Born and raised in Birmingham, Rod Cooper now lives in Lichfield, working as Sales Manager for the electronics repair and calibration laboratory of DMR Ltd of Nottingham. A mechanical engineering background and an interest in applying electronics to the solution of mechanical problems undoubtedly contribute to the success of his parallel-tracking pickup arm design (not forgetting the mercury pickup switch, April 1980) and, coming soon, an electronic ignition circuit.

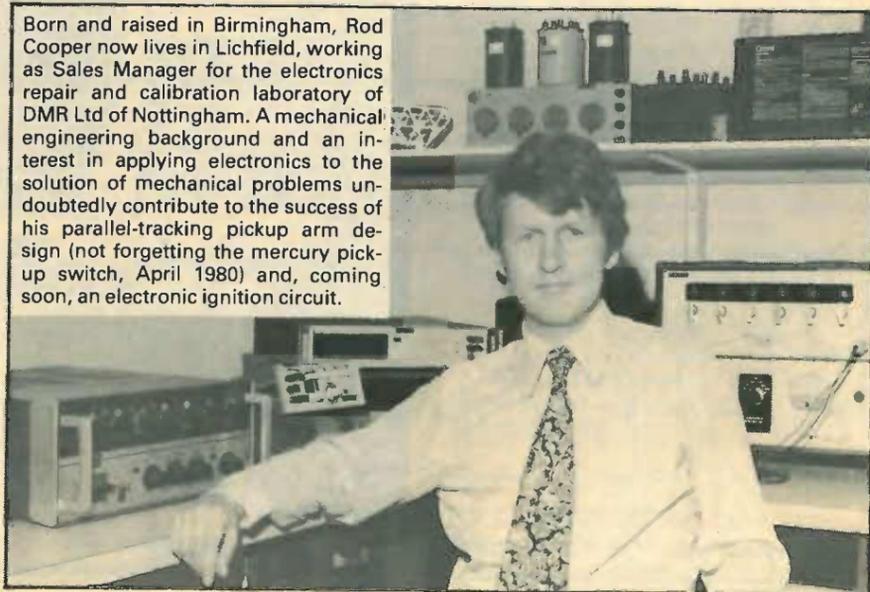

weight but inexpensive material has been chosen to get the economics right, and give reasonable overall mass. But more important, the arm length has been specified to give a large reduction in overall inertia without running into the problems associated with arms that are too short (e.g. stability, and the need for fail-safe tracking in case of servo failure).

This approach provides all the potential for a radical improvement in performance over the conventional arm.

Of what practical importance is M_c ? Firstly it influences the resonant frequency of the pickup arm and cartridge combination, according to the equation $f_0/2\pi\sqrt{M_c C}$ where C is the compliance of the stylus. With modern high-compliance cartridges a low value of M_c is a prime requirement for avoidance of resonance problems. (See page 64 of April 1978 *Wireless World* for an analysis of these problems.)

Secondly, M_c influences record wear as mentioned earlier. Take the case of a record with a 1mm warp, which is not an uncommon amount even on a new record. This is taken to mean 1mm up and 1mm down from the mean record surface level in the following calculation.

For every revolution the record surface has to work against M_c , the work done against g by moving distance d being $M_c d$ ergs. In this case d will be 0.2cm. Now, one state-of-the-art conventional tracking arm that has just appeared on the market has an M_c of just 9gm. If a typical disc of 650 grooves is played say once a week for five years with this arm then the work done against M_c will be 315,900 ergs. This is equivalent to lifting a 63kg man approximately 5cm into the air. Remember, this work is being done by the delicate playing surfaces of the record! If the same disc is played with a parallel-tracking arm of M_c only 4gm, then the work done will be only 140,400 ergs, or 56% less. These figures speak for themselves.

Carbon fibre, neoprene cord, Nylon 66, and other components are available from J. Biles Engineering, 120 Castle Lane, Solihull, West Midlands B92 8RN.

Digital storage and analysis of speech

1 - Storing waveforms digitally

by Ian H. Witten, M.A., M.Sc., Ph.D., M.I.E.E. University of Calgary

One of the difficulties with digital speech storage and analysis is that new signal-processing techniques have been developed to handle digital signals. Since these only appeared recently, and are rather mathematical, they are not understood very widely. Concepts like the z-transform, the discrete Fourier transform, and digital filters are quite unfamiliar to many practising electronic engineers. Although there are several textbooks on the subject, nearly all of them treat it in a frighteningly theoretical and abstract way. The aim of this article is to introduce some of these ideas in a down-to-earth manner by putting them in the practical context of the speech waveform.

Computer-generated speech is still a rather esoteric subject, despite the explosive growth in practical applications that we are witnessing. Texas Instrument's Speak 'n Spell toy - now about three years old - is probably the best example of a consumer device that uses speech output. But there are others. Cheap speech synthesizers intended for hobby computers have been on the market for several years now, as has a talking calculator. Digital transmission of speech is used in the telephone network, and the new System X exchange developed by the Post Office uses messages stored in digital form to guide the user and tell him what is happening to his call. Note that analogue storage of speech has been used in the telephone service for many years, for the speaking clock, weather forecasts, and even bedtime stories.

Analogue storage of speech. The most familiar device that produces speech output is the ordinary tape recorder. However, this is unsuitable for speech output from computers. One reason is that it is difficult to access different utterances quickly: although random-access tape recorders do exist, they are expensive and subject to mechanical breakdown because of the stresses associated with frequent starting and stopping.

Storing speech on a rotating drum instead of tape offers the possibility of access to any track within one revolution time. For example, the IBM 7770 Audio Response Unit, employs drums rotating twice a second which are able to store up to thirty-two 500 ms words. These can be accessed randomly, within half a second at

most. Although one can arrange to store longer words by allowing overflow on to an adjacent track at the end of the rotation period, the discrete time-slots provided by this system make it virtually impossible for it to generate connected utterances by assembling appropriate words from the store.

The Cognitronics Speechmaker has a similar structure, but with the analogue speech waveform recorded on photographic film. Storing audio waveforms optically is not an unusual technique, for this is how soundtracks are recorded on ordinary films. The original version of the "speaking clock" of the British Post Office used optical storage in concentric tracks on flat glass discs. This was developed in the mid 1930s, and synchronization of utterances with real time was achieved in an intriguing manner. A 4 Hz signal from a pendulum clock was used to supply current to an electric motor, which drove a shaft equipped with cams and gears that rotated the glass discs containing utterances for seconds, minutes and hours at appropriate speeds!

A second reason for avoiding analogue storage is price. It is difficult to see how a random-access tape recorder could be incorporated into a talking pocket calculator or child's toy without considerably inflating the cost. Solid-state electronics is much cheaper than mechanics.

But the best reason is that, in many applications of speech storage, it is necessary to form utterances by linking together separately recorded parts. It is totally infeasible, for example, to store every possible telephone number as an individual recording! And utterances that are formed by linking individual words which were recorded in isolation, or in a different context, do not sound completely natural. For example, in an experiment performed in 1960, individual words were recorded on acoustic tape, which was spliced with the words in a different order to make sentences. The result was played to subjects who were scored on the number of key words which they identified correctly. The overall conclusion was that while embedding a word in normally spoken sentences increases the probability of recognition (because the extra context gives clues about the word), embedding a word in a constructed sentence, where intonation and rhythm are not properly rendered, decreases the probability of recognition. When the speech was uttered

slowly, however, a considerable improvement was noticed, indicating that if the listener has more processing time he can overcome the lack of proper intonation and rhythm.

Nevertheless, many present-day voice response systems do store what amounts to a direct recording of the acoustic wave. However, the storage medium is digital rather than analogue. This means that standard computer storage devices can be used, providing rapid access to any segment of the speech at relatively low cost - for the economics of mass-production ensures a low price for random-access digital devices compared with random-access analogue ones. Furthermore, it reduces the amount of special equipment needed for speech output. One can buy very cheap speech input/output interfaces for home computers which connect to standard hobby buses. Another advantage of digital over analogue recording is that solid-state r.o.ms can be used for hand-held devices which need small quantities of speech. Hence this article begins by showing how waveforms are stored digitally, and then describes some techniques for reducing the data needed for a given stretch of speech.

Digital storage. When an analogue signal is converted to digital form, it is made discrete both in time (sampling) and in amplitude (quantizing). Much of the theory of digital signal processing investigates signals which are sampled but not quantized (or quantized into sufficiently many levels to avoid inaccuracies). The operation of quantization, being non-linear, is not very amenable to theoretical analysis, since it introduces issues such as accumulation of round-off noise in arithmetic operations, which, although they are very important in practical implementations, can only be treated theoretically under certain somewhat unrealistic assumptions (in particular, independence of the quantization error from sample to sample).

Sampling

A fundamental theorem of telecommunications states that a signal can only be reconstructed accurately from a sampled version if its highest component frequency is less than half the frequency at which the sampling takes place. Figure 1(a) shows how a component of slightly greater than half the sampling frequency can masquerade, as far as an observer with access only to the sampled data can tell, as a compo-

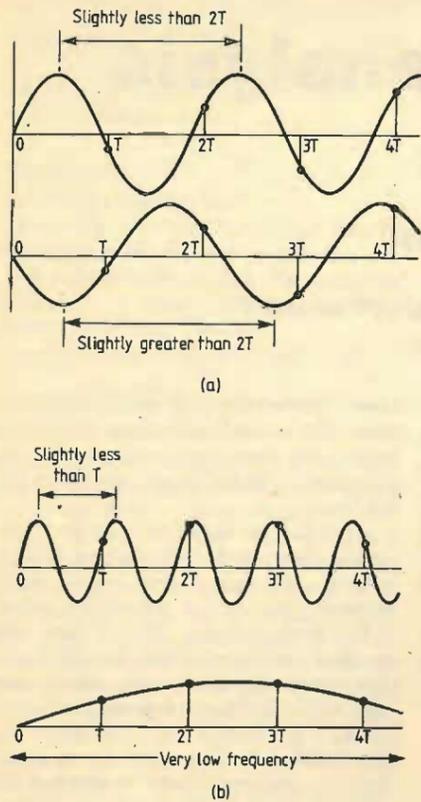


Fig. 1 Different sine waves which appear the same when sampled (a) components near half the sampling frequency (b) a component at just under the sampling frequency and its low-frequency equivalent

nent at slightly less than half the sampling frequency. Call the sampling interval T seconds, so that the sampling frequency is $1/T$ Hz. Then components at $1/2T + f$, $3/2T - f$, $3/2T + f$ and so on all masquerade as a component at $1/2T - f$. Similarly, components at frequencies just under the sampling frequency masquerade as very low-frequency components, as shown in Fig. 1(b). This phenomenon is often called "aliasing".

Thus the continuous, infinite, frequency axis for the unsampled signal, where two components at different frequencies can always be distinguished, maps into a repetitive frequency axis when the signal is sampled. As depicted in Fig. 2, the frequency interval $[1/2T, 2/2T]^*$ is mapped back into the band $[0, 1/2T]$, as are the intervals $[2/2T, 3/2T]$, $[3/2T, 4/2T]$, and so on. Furthermore, the interval $[1/2T, 1/2T]$ between half the sampling frequency and the sampling frequency, is mapped back into the interval below half the sampling frequency; but this time the mapping is backwards, with frequencies at just under $1/2T$ being mapped to frequencies slightly greater than zero, and frequencies just over $1/2T$ being mapped to ones just under $1/2T$. The best way to represent a repeating frequency axis like this is as a circle.

* Intervals are specified in brackets, with a square bracket representing a closed end of the interval and a round one representing an open one. Thus the interval $[1/2T, 2/2T]$ specifies the range $1/2T < \text{frequency} < 2/2T$.

Figure 3 shows how the linear frequency axis for continuous systems maps on to a circular axis for sampled systems. For present purposes it is easiest to imagine the bottom half of the circle as being reflected into the top half, so that traversing the upper semicircle in the anticlockwise direction corresponds to frequencies increasing from 0 to $1/2T$ (half the sample frequency), and returning along the lower semicircle is actually the same as coming back round the upper one, and corresponds to frequencies from $1/2T$ to $1/T$ being mapped into the range $1/2T$ to 0.

As far as speech is concerned, then, we must ensure that before sampling a signal no significant components at greater than half the sample frequency are present. Furthermore, the sampled signal will only contain information about frequency components less than this, so the sample frequency must be chosen as twice the highest frequency of interest. The telephone network aims to transmit only frequencies lower than 3.4 kHz. This region will contain the information-bearing formants, and some - but not all - of the fricative and aspiration energy*. Transmitting speech through the telephone system degrades its quality very significantly, probably more than you realize since everyone is so accustomed to telephone speech - try the dial-a-disc service and compare it with high-fidelity music for a striking example of the kind of degradation suffered.

Since speech contains significant amounts of energy above 3.4 kHz, it should be filtered before sampling to remove this. Otherwise, the higher components would be mapped back into the base-band and distort the low-frequency information. Because it is difficult to make filters that cut off very sharply, the sampling frequency is chosen to be rather greater than twice the highest frequency of interest; for example, the digital telephone network samples at 8 kHz. The pre-sampling filter should have a cutoff frequency of 4 kHz; aim for negligible distortion below 3.4 kHz; and transmit negligible components above 4.6 kHz - for these are reflected back into the band of interest, namely 0 to 3.4 kHz. Figure 4 shows a block diagram for the input hardware.

Quantization

Before considering specifications for the pre-sampling filter, let us turn from sampling in time to amplitude quantization. This is performed by an a-to-d converter

*See "The Chatterbox," *Wireless World* 84 and 85 (December 1978 and January 1979), for a simple explanation of formants, frication, and aspiration.

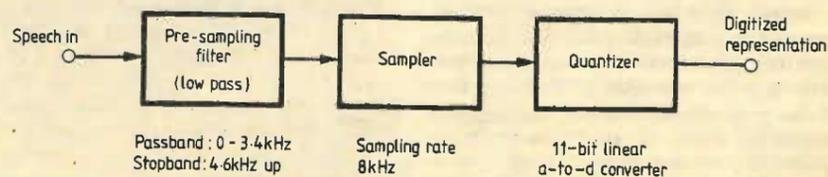


Fig. 4 Block diagram of input hardware for speech digitization

(analogue-to-digital), which takes as input an analogue voltage (produced by the sampler) and generates a corresponding binary value as output. The simplest correspondence is uniform quantization, where the amplitude range is split into equal regions by points termed "quantization levels", and the output is a binary representation of the nearest quantization level to the input voltage. Typically, 11-bit conversion is used for speech, giving 2048 quantization levels, and the signal is adjusted to have zero mean so that half the levels correspond to negative input voltages and the other half to positive ones.

It is, at first sight, surprising that as many as 11 bits are needed for adequate representation of speech signals. Research on the digital telephone network, for

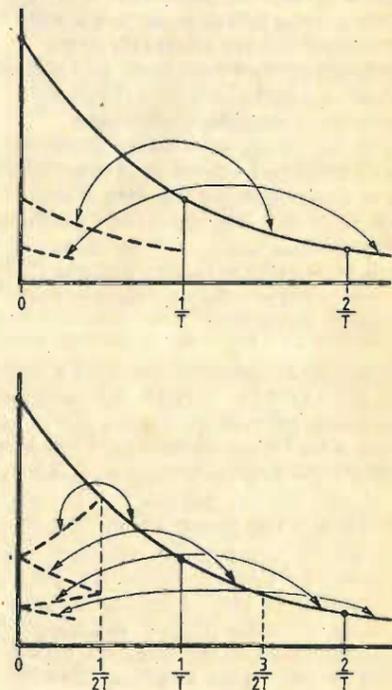


Fig. 2 How sampling "folds" the frequency spectrum

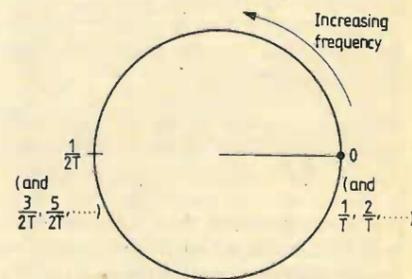


Fig. 3 The circular frequency axis of sampled systems

example, has concluded that a signal-to-noise ratio of some 30 dB is enough to avoid poor speech quality, loss of intelligibility, and listener fatigue for speech at a normal level. But 11-bit quantization seems to give a very much better signal-to-noise ratio than this figure. To estimate its magnitude, note that for N -bit quantization the error for each sample will lie between

$$-1/2 \cdot 2^{-N} \text{ and } +1/2 \cdot 2^{-N}.$$

Assuming that it is uniformly distributed in this range - an assumption which is likely to be justified if the number of levels is sufficiently large - leads to a mean-squared error of

$$\int_{-2^{-N-1}}^{2^{-N-1}} e^2 p(e) de,$$

where $p(e)$, the probability density function of the error e , is a constant which satisfies the usual probability normalization constraint, namely

$$\int_{-2^{-N-1}}^{2^{-N-1}} p(e) de = 1.$$

Hence $p(e) = 2^N$, and so the mean-squared error is $2^{-2N}/12$. This is $10 \log_{10}(2^{-2N}/12)$ dB, or around -77 dB for 11-bit quantization.

This noise level is relative to the maximum amplitude range of the conversion. A maximum-amplitude sine wave has a power of -9 dB relative to the same reference, giving a signal-to-noise ratio of some 68 dB. This is far in excess of that needed for telephone-quality speech. However, look at the very peaky nature of the typical speech waveform given in Fig. 5. If clip-

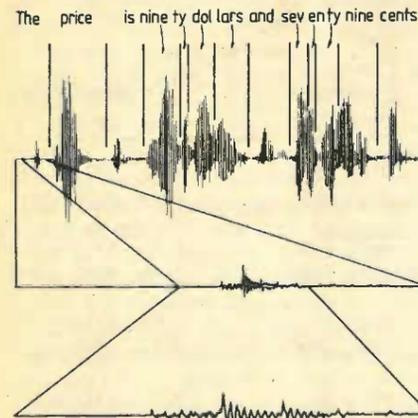


Fig. 5 Typical speech waveform

ping is to be avoided, the maximum amplitude level of the a-to-d converter must be set at a value which makes the power of the speech signal very much less than a maximum-amplitude sine wave. Furthermore, different people speak at very different volumes, and the overall level fluctuates constantly with just one speaker. Experience shows that while 8- or 9-bit quantization may provide sufficient signal-to-noise ratio to preserve telephone-quality speech if the overall speaker levels are carefully controlled, about 11 bits are generally required to provide high-quality representation of speech with a uniform quantization. With 11 bits, a sine wave whose

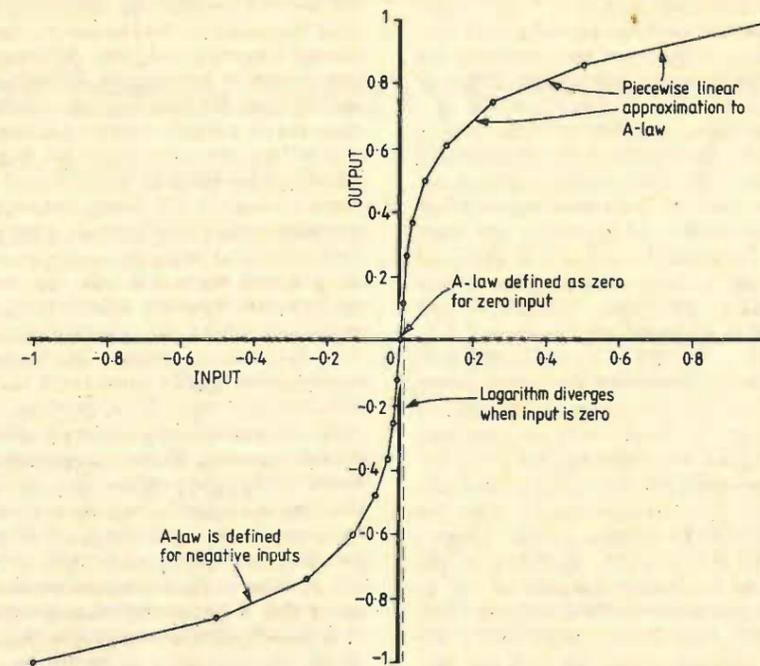


Fig. 6 Piecewise linear approximation to the A-law input/output relationship

amplitude is only 1/32 of the full-scale value would be digitized with a signal-to-noise ratio of around 36 dB, which is not much greater than the figure mentioned above for adequate quality. Even then it is useful if the speaker is provided with an indication of the amplitude of his speech: a traffic-light indicator with red signifying clipping overload, orange a suitable level, and green too low a value, is often convenient for this.

Logarithmic quantization

For the purposes of speech processing, it is essential to have the signal quantized uniformly. This is because all of the theory applies to linear systems, and nonlinearities introduce complexities which are not amenable to analysis. Uniform quantization, although a nonlinear operation, is linear in the limiting case as the number of levels becomes large, and for most purposes its effect can be modelled by assuming that the quantized signal is obtained from the original analogue one by the addition of a small amount of uniformly-distributed quantizing noise, as in fact was done above. Usually the quantization noise is disregarded in subsequent analysis.

However, the peakiness of the speech signal illustrated in Fig. 5 leads one to suspect that a non-linear representation, for example a logarithmic one, could provide a better signal-to-noise ratio over a wider range of input amplitudes, and hence be more useful than linear quantization - at least for speech storage (and transmission). And indeed this is the case. Linear quantization has the unfortunate effect that the absolute noise level is independent of the signal level, so that an excessive number of bits must be used if a reasonable ratio is to be achieved for peaky signals. It can be shown that a logarithmic representation like

$$y = 1 + k \log x,$$

where x is the original signal and y is the value which is to be quantized, gives a signal-to-noise ratio which is independent of the input signal level. This relationship cannot be realized physically, for it is undefined when the signal is negative and diverges when it is zero. However, realizable approximations to it can be made which retain the advantages of constant signal-to-noise ratio within a useful range of signal amplitudes, one widely used approximation being called the A-law. The idea of non-linearly quantizing a signal to achieve adequate signal-to-noise ratios for a wide variety of amplitudes is called "companding", a contraction of "compressing-expanding". The original signal can be retrieved from its A-law compression by antilogarithmic expansion.

Figure 6 shows one common 8-bit coding scheme which is a piecewise linear approximation to the A-law. This provides an 8-bit code, and gives the equivalent of 12-bit linear quantization for small signal levels. It approximates the A-law in 16 linear segments, 8 for positive and 8 for negative inputs. Consider the positive part of the curve. The first two segments, which are actually collinear, correspond exactly to 12-bit linear conversion. Thus the output codes 0 to 31 correspond to inputs from 0 to 31/2048, in equal steps. (Remember that both positive and negative signals must be converted, so a 12-bit linear converter will allocate 2048 levels for positive signals and 2048 for negative ones.) The next segment provides 11-bit linear quantization, output codes 32 to 47 corresponding to inputs from 16/1024 to 31/1024. Similarly, the next segment corresponds to 10-bit quantization, covering inputs from 16/512 to 31/512. And so on, the last section giving 6-bit quantization of inputs from 16/32 to 31/32, the full-scale positive value. Negative inputs are converted similarly. For signal levels of

less than $32/2048$, that is 2^{-8} , this implementation of the A-law provides full 12-bit precision. As the signal level increases, the precision decreases gradually to 6 bits at maximum amplitudes.

Logarithmic encoding provides what is in effect a floating-point representation of the input. The conventional floating-point format, however, is not used because many different codes can represent the same value. For example, with a 4-bit exponent preceding a 4-bit mantissa, the words 0000:1000, 0001:0100, 0010:0010, and 0011:0001 represent the numbers 0.1×2^0 , 0.01×2^1 , 0.001×2^2 , and 0.0001×2^3 respectively, which are the same. (Some floating-point conventions assume that an unwritten "1" bit precedes the mantissa, except when the whole word is zero; but this gives decreased resolution around zero - which is exactly where we want the resolution to be greatest.) Table 1 shows the 8-bit A-law codes, according to the piecewise linear approximation of Fig. 6, written in a notation which suggests floating point. Each linear segment has a different exponent except the first two segments, which as explained above are collinear.

Logarithmic encoders and decoders are available as single-chip devices called "coders" (for "coder/decoder"). Intended for use on digital communication links, these generally provide a serial output bit-stream, which should be converted to parallel by a shift register if the data is intended for a computer. Because of the potentially vast market for coders in telecommunications, they are made in great quantities and are consequently very cheap. Estimates of the speech quality necessary for telephone applications indicate that somewhat less than this accuracy is needed - 7-bit logarithmic encoding was used in early digital communications links, and it may be that even 6 bits are adequate. However, during the transition period when digital networks must coexist with the present analogue one, it is anticipated that a particular telephone call may have to pass through several links, some using analogue technology and some being digital. The possibility of several successive encodings and decodings has led telecommunications engineers to standardize on 8-bit representations, leaving some margin before additional degradation of signal quality becomes unduly distracting.

Unfortunately, world telecommunications authorities cannot agree on a single standard for logarithmic encoding. The A-law, which we have described, is the European standard, but there is another system, called the μ -law, which is used universally in North America. It also is available in single-chip form with an 8-bit code. It has very similar quantization error characteristics to the A-law, and would be indistinguishable from it on the scale of Fig. 6.

The pre-sampling filter

Now that we have some idea of the accuracy requirements for quantization, let us discuss quantitative specifications for the pre-sampling filter. Figure 7 sketches the

characteristics of this filter. Assume a sampling frequency of 8 kHz and a range of interest from 0 to 3.4 kHz. Although all components at frequencies above 4 kHz will fold back into the 0-4 kHz baseband, those below 4.6 kHz fold back above 3.4 kHz and are therefore outside the range of interest. This gives a "guard band" between 3.4 and 4.6 kHz which separates the passband from the stopband. The filter should transmit negligible components in the stopband above 4.6 kHz. To reduce the harmonic distortion caused by aliasing to the same level as the quantization noise in 11-bit linear conversion, the stopband attenuation should be around -68 dB (the signal-to-noise ratio for a full-scale sine wave). Passband ripple is not so critical, for two reasons. Whilst the presence of aliased components means that information has been lost about the frequency components within the range of interest, passband ripple does not actually cause a loss of information but only a distortion, and could, if necessary, be compensated by a suitable filter acting on the digitized waveform. Secondly, distortion of the passband spectrum is not nearly so audible as the frequency images caused by aliasing. Hence one usually aims for a passband ripple of around 0.5 dB.

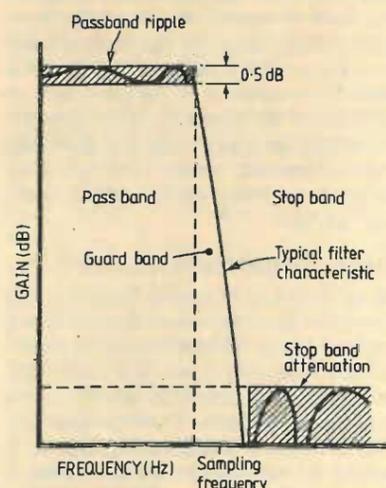


Fig. 7 General characteristics of the pre-sampling filter

The pass and stopband targets we have mentioned above can be achieved with a 9th order elliptic filter. While such a filter is often used in high-quality signal-processing systems, for telephone-quality speech much less stringent specifications seem to be sufficient. Figure 8, for example, shows a template which has been recommended by telecommunications authorities. A 5th order elliptic filter can easily meet this specification. Such filters, implemented by switched-capacitor means, are available in single-chip form. Integrated c.c.d. filters which meet the same specification are also marketed. Indeed, some codecs provide input filtering on the same chip as the a-to-d converter.

Instead of implementing a filter by analogue means to meet the aliasing specifications, digital filtering can be used. A high sample-rate a-to-d converter, operating at,

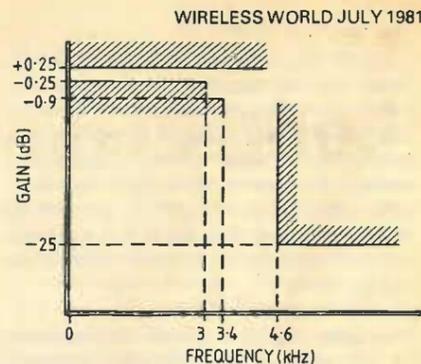


Fig. 8 Specifications of the pre-sampling filter for telephone-quality speech

say, 32 kHz, and preceded by a very simple low-pass pre-sampling filter, is followed by a digital filter which meets the desired specification, and its output is subsampled to provide an 8 kHz sample rate. While such implementations may be economic where a multichannel digitizing capability is required, as in local telephone exchanges where the subscriber connection is an analogue one, they are unlikely to prove cost-effective for a single channel.

continued on page 59

Table 1. 8-bit A-law codes, with their floating-point equivalents.

8-bit codeword			interpretation
sign bit	exponent	mantissa	
0000	0000	0000	$.0000 \times 2^{-7}$
0000	1111	0000	$.1111 \times 2^{-7}$
0001	0000	0000	$2^{-7} + .0000 \times 2^{-7}$
0001	1111	0000	$2^{-7} + .1111 \times 2^{-7}$
0010	0000	0000	$2^{-6} + .0000 \times 2^{-6}$
0010	1111	0000	$2^{-6} + .1111 \times 2^{-6}$
0011	0000	0000	$2^{-5} + .0000 \times 2^{-5}$
0011	1111	0000	$2^{-5} + .1111 \times 2^{-5}$
0100	0000	0000	$2^{-4} + .0000 \times 2^{-4}$
0100	1111	0000	$2^{-4} + .1111 \times 2^{-4}$
0101	0000	0000	$2^{-3} + .0000 \times 2^{-3}$
0101	1111	0000	$2^{-3} + .1111 \times 2^{-3}$
0110	0000	0000	$2^{-2} + .0000 \times 2^{-2}$
0110	1111	0000	$2^{-2} + .1111 \times 2^{-2}$
0111	0000	0000	$2^{-1} + .0000 \times 2^{-1}$
0111	1111	0000	$2^{-1} + .1111 \times 2^{-1}$
1000	0000	0000	$-.0000 \times 2^{-7}$
1000	1111	0000	$-2^{-1} - .1111 \times 2^{-1}$

Negative numbers treated as above, with a sign bit of 1

Long distance television reception

1 - An introduction

by Keith Hamer and Garry Smith

In these occasional articles, the authors will introduce readers to the hobby of long-distance television reception, or DX-tv as it is often called, and pass on their experiences as dedicated amateurs. This first part discusses how tv signals are affected by weather and atmospheric conditions, basic tv set requirements, simple aerials and signal identification.

There are many factors, such as transmitter powers and terrain, which will influence the range over which a television signal can be reliably received, but in general, the strength of the signal becomes weaker as the distance between the transmitter and receiver increases. Reliable reception is normally limited to approximately 70 miles from the transmitter.

Readers have probably noticed that the strengths of signals from the more distant transmitters vary during certain weather conditions. Distant signals, which are normally very weak, may become comparable in strength to that of the local transmitter for a matter of hours, or even days.

Sometimes a distant signal will be received on the same channel as the local transmitter. This is termed 'co-channel reception' (or interference, depending on whether you are an enthusiast or a viewer). These temporary extensions in the range of distant signals are connected with variations in the troposphere, which extends from the earth's surface to about 20,000ft above. For example, when an anticyclonic weather condition exists, together with a cold front stretching between Scandinavia and the UK, a temperature inversion in the troposphere usually takes place. Temperature inversions enhance long-distance television reception.

Fortunately for the average viewer, but not for the DX-tv enthusiast, widespread interference on u.h.f. television caused by tropospheric conditions of the type described above is relatively rare. Enhanced reception on Bands I and III is also associated with these conditions.

Ionized patches in the E layer of the atmosphere often cause interference on Band I frequencies between early May and September. The E layer is between about 60 and 80 miles above the earth's surface. Before BBC 1 transmissions were duplicated on u.h.f., viewers had to rely on 405-line UK Band I transmissions, on which sporadic E signals would cause quite

a lot of interference. This interference often manifested itself as a herringbone pattern superimposed on the picture which could last for up to several hours. At times, the BBC 1 picture was totally obliterated. Viewers relying on channel 2 might also have experienced a loud buzz on the sound channel from the video signal of foreign transmissions on the same frequency. Unfortunately, there was little the viewer could do apart from switch over to ITV or turn off the set! Later, in some areas, the BBC duplicated their BBC 1 transmissions on higher frequencies in Band III to help overcome the problem.

If the viewer was curious enough to tune through the Band I frequencies while sporadic E signals were present, he/she would obtain video information resembling a mass of unlocked white lines without the sound channel. At other frequencies, a distorted sound signal may have been present. The reason for the unlocked video is fairly simple: The 405-line system, as used on the v.h.f. channels in the UK, employs positive video modulation whilst most Continental countries employ a 625-line system with negative video modulation. This is in some ways similar to our own 625-line system but with different sound and vision spacings and channel bandwidths. Also, most Continental countries employ the 625-line system on both v.h.f. and u.h.f. channels, unlike our own system which is only used on the u.h.f. channels. We will cover the difference in transmission standards in greater detail in a subsequent article.

Some readers will have already realised that, as the European 625-line system is similar to our own, we should, at certain times, be able to resolve u.h.f. television signals from the Continent on a standard u.h.f. receiver designed for use in the UK. This is precisely the case and if your existing u.h.f. receiving aerial is already directed towards the Continent, you should be able to receive Continental transmissions when the right atmospheric conditions exist. It is unlikely that the sound channel will be received because of the different sound and vision spacings in use but good quality colour pictures may be received. It is possible to re-tune the sound stages of the receiver but, unless you are well versed in foreign languages, there is little point.*

Resolving signals enhanced by sporadic

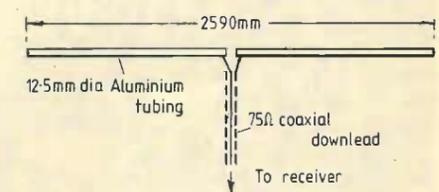


Fig. 1. A simple dipole for frequencies around 55MHz.

E in Band I is slightly more difficult due to the greater differences in transmission standards. We have already said that a 625-line signal received under sporadic E conditions will show up as a mass of unlocked white lines when displayed on the screen of a British receiver operating on 405-line v.h.f. To resolve these signals the receiver will need to operate on the 625-line system but with the tuner covering v.h.f. frequencies. Fortunately the problem can be overcome in several ways.


Certain portables are available which were originally intended for the European market. These sets have 625-line coverage on Bands I and III and this is probably the easiest way round the problem.

If an old dual-standard receiver is on hand it may be modified so that band selection, that is u.h.f. to v.h.f., is independent of the system switch setting. The system switch is left permanently in the 625-line position.

If a single-standard receiver is available, it is possible to fit an additional inexpensive tuner and incorporate a change-over switch at the i.f. input to select the output from the existing u.h.f. tuner or the additional v.h.f. tuner. The latter two suggestions will of course depend on the competence of the individual to carry out such modifications.


Another way is to employ a frequency converter which is connected directly to the aerial input of a single-standard receiver. Such converters are sometimes used in conjunction with communal aerial distribution systems, in which translated u.h.f. signals are distributed at v.h.f. frequencies, to minimise cable losses, and a converter at the receiver converts the signals back to u.h.f. Hence, if we feed the input of the converter with a DX signal in Bands I or III, the unit will translate the signals to a u.h.f. frequency to enable a single-standard receiver to be used for both systems. Suitable converters may be obtained from aerial suppliers currently advertising in various magazines.

* On Dutch television many programmes are in English with Dutch subtitles. - Ed.

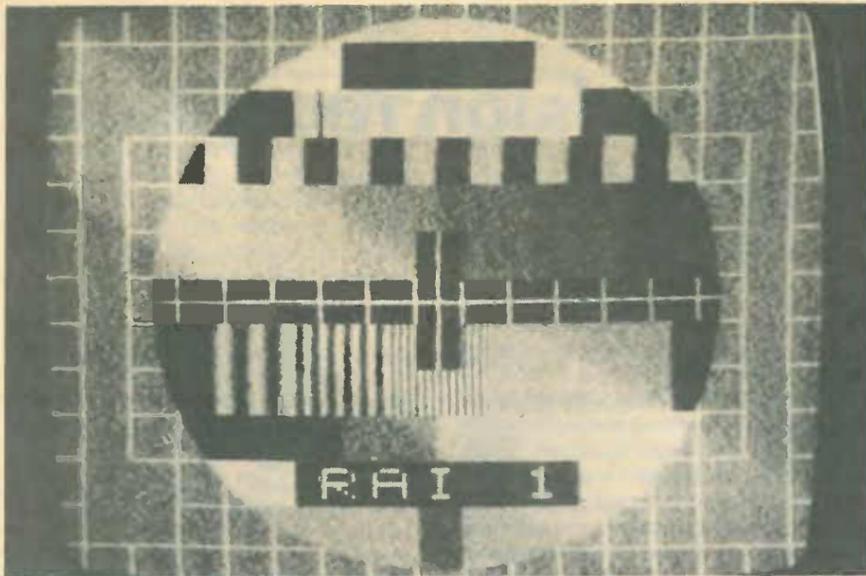

◀ Fig. 2. The Philips PM5544 electronically generated test pattern. This photograph, taken directly from the screen, shows typical reception quality of the Italian RAI under sporadic E conditions.

Fig. 3. A photograph of the FuBK electronically generated test pattern used by the West German Bayerischer Rundfunk. This signal was also received under sporadic E conditions.

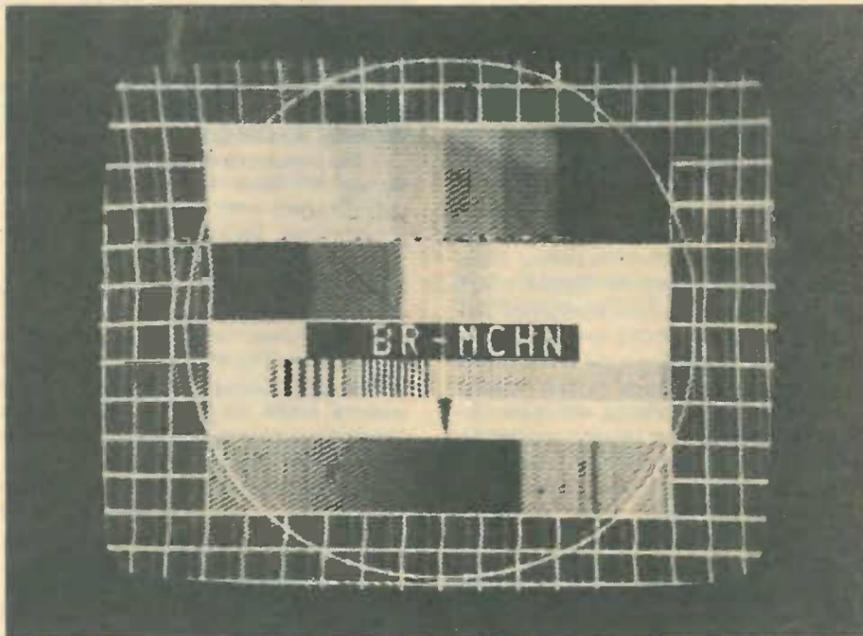

Aerials

In the minds of most people, the very mention of receiving television signals from other countries conjures up an elaborate array of aerials atop an enormous lattice mast. This need not be the case. Sporadic E enhanced signals can attain very high signal strengths, especially during an intense opening, and consequently the simplest of aerials will suffice.

It should be noted that for serious DX work and the reception of weak signals, an outdoor multi-element system should be considered. Use can be made of the directional properties of the aerial if some method of rotation is used. As the majority of Continental transmissions are horizontally polarized, the receiving aerial should be mounted in the same plane, i.e. with its elements horizontal.

A simple aerial system for the beginner can consist merely of a half-wave dipole, as shown in Fig. 1, mounted outside for best results. The rods can be cut to suit a frequency in the centre of Band I, i.e. around 55MHz. As a horizontal dipole will be directional to some degree, best results will be obtained if the aerial can be rotated.

Signal identification

After a distant signal has been received, one will automatically want to identify its source. This can be difficult if the source happens to be a programme, but if a test pattern is received the chances of identification are greatly improved.

Until fairly recently there were many different test patterns in use throughout the world and almost every country had its own design. Unfortunately a growing number of broadcasting organizations have introduced similar electronically generated test patterns and at present there are two main types; the Philips PM5544 and the FuBK-type as shown in Figures 2 and 3 respectively. But most services now incorporate some form of station identification and so during sustained reception it is relatively easy to identify the country of origin and sometimes even the transmitter.

Readers wishing to respond to the authors' invitation should write to them c/o WW editorial dept.

Books

Until recently there was very little information available for the would be television DXer, but the situation has now changed. One publication which should be of interest to both the beginner and the established DXer is 'Long Distance Television Reception For The Enthusiast' by Roger Bunney, published by Babani. Other books and publications which may be of interest to television DXers will be mentioned in due course.

The authors will be pleased to hear from readers with experiences of long-distance television reception and will hopefully be able to assist with any identification problems. Reception reports and any photographic examples of DX reception will be welcomed. □

Literature received

Application note 757-4, from Ailtech, describes the use of the Ailtech 757-57 GPIB Interface Unit in conjunction with their 757 spectrum analyser. Copies are available from Eaton Ltd, EID, Sherwood House, High Street, Crowthorne, Berkshire. WW405

Reference guide to HBM strain gauges, which lists hundreds of types and presents information on mounting adhesives and accessories, can be had from Carl Schenck (UK) Ltd, Stonefield Way, Ruislip, Middlesex HA4 0JT. WW406

A great many housings and accessories from the UK and overseas, together with tools, instruments and small components are described in the new West Hyde catalogue, which is obtainable from West Hyde Developments Ltd, Unit 9, Park Street Industrial Estate, Buckinghamshire HP20 1ET.

LETTERS TO THE EDITOR

CB PIRATES – OR PROTESTERS?

In your editorial in the May issue you were rather hard on the c.b. pirates. If a reasonable request is unreasonably refused it is unreasonable to expect the applicant to accept the decision. The applicant therefore has a moral right to ignore the decision and the blame for the consequences lies with the person who made the wrong decision.

You admit that the request for a citizens' band service was reasonable and that the initial refusal of the Home Office was unreasonable. The blame for the effects on the community therefore rests with the negligent robots in the Home Office, and the pirates have every reason to grumble at the expense of changing to the new system. Indeed, if logic ruled the world the officials in the Home Office would be made to pay for the new equipment out of their own pockets. That would teach them to be reasonable in the future.

S. Frost
Edinburgh 2

JAMES CLERK MAXWELL

Mr Wellard's recent two-part appreciation of James Clerk Maxwell published in your March and May issues was rather forceful in depreciating the work of Albert Einstein. Undoubtedly it will evoke reaction from the disciples of Relativity but, in my view, Wellard is to be applauded for his forthright contribution. It was indeed deplorable that the 1979 celebration of the centenary of Einstein's birth did not take into account the memory of Maxwell who died in the same year. More to the point, however, it is fitting to note that in 1980 experimental proof showing that the ether can assert a force was reported in *Nature* (G. M. Graham and D. G. Lahoz, *Nature*, 285, 154 (1980) and it was Maxwell and not Einstein that was supported.

I hope we will see further acceptance of Maxwell's principles in the years ahead, perhaps in regard to the third of the four alternative empirical laws of electrodynamics presented in Maxwell's treatise. This particular law is an inverse-square law of attraction with force acting directly between like charged bodies when moving at the same velocity. It can, therefore, give physical basis to Newton's law of gravitation and may even extend to provide accord with the equations, but not the underlying philosophy, of General Relativity (H. Aspden, *J. Phys. A*, 13, 3649 (1980)).

H. Aspden
Chilworth
Southampton

It pains me to find two glaring fallacies in M. G. Wellard's discussion in the March issue of the Michelson-Morley aether-drift "experiment", as it is generally termed. The first, that a mirror may function as a frequency-changer, is probably peculiar to Mr Wellard alone; the second, that the Doppler effect may be produced by the movement of the medium across the source, appears to be quite widely held.

With respect, I would merely comment on the first fallacy by saying that a fortune awaits the inventor of so simple a means of providing superheterodyne radio reception; for the second

fallacy, may I perhaps be granted a slightly more comprehensive comment? For our argument we require confidence in one assumption, however: that energy manifested in a simple coherent wave train may be represented by a set of uniform material objects, which may be arranged in a regular pattern in space and in particular in a line representing the line of advance of the wave, each object standing for either a peak, zero-crossing or other phase-state. We could construct a mechanical model, then, with a launcher which rolls a series of balls at regular intervals onto a straight level track, along which they would propel themselves at a steady velocity to a reception device with a counting mechanism, which would be matched by a similar counter on the launcher. We could then say what is the frequency of dispatch, and of arrival at the receiver, and how many balls are in transit. Now suppose that the track is the surface of a continuous transporter-belt, and that this is set to run steadily towards the launcher (to match Mr Wellard's example); what would then have changed? Not necessarily either the rate of dispatch or arrival at the end of the track. The balls would be more closely spaced along the track, in accordance with its speed, but they would travel between launcher and receiver more slowly in a compensating measure. Would we expect to detect the equivalence of the Doppler-effect in this model?

Now suppose the belt to be halted, but either the launcher or receiver to be moving along it. What would be changing in this case? Not necessarily the rate of dispatch. But the rate of reception would have to change, because the number of balls in transit would be constantly changing in proportion to the speed with which the effective track-length was either increasing or decreasing. Now could we be said to recognise the change of frequency at the receiver of this model as the equivalent of the Doppler effect?

Surely the implication of this, and of Mr Wellard's discussion (erroneous though it may be in some details) is that the designers of the aether-drift "experiment" were suspending their principles of scientific method. If this were so, the members of the scientific faculties have been somewhat slow in offering criticism of this lapse. Perhaps it is pertinent to mention here that Fizeau's aether-drag "demonstration" should be subjected to closer inspection; the use of a "control" beam of light propagated in static water, to be compared with its "twin" in water flowing in either one or the other direction relative to the light's direction would, I rather suspect, provide indications against the drag hypothesis.

To conclude, could I suggest, with all due respect, that criticism be always welcome, as is needed if the scientific ideal is to be upheld, but that criticism should be more critically examined before publication? And that applies to this, if it is considered worthy of print!

If by trial and error we may learn, then let us by all means make errors – and then learn to recognise them!

C. B. V. Francksen
Farnborough
Hants

The author replies:

In C. B. V. Francksen's working model of the Michelson and Morley experiment the balls represent the energy of consecutive cycles of a

light wave, the launcher the source of light and the semi-transparent mirror, the receiver represents the reflecting mirror, and the stationary or moving track represents the stationary or moving ether. The model can be improved by allowing the launcher and receiver to change positions when the light beam is reflected in the experiment. In the fourth paragraph of the letter the receiver's changed rate of reception is analogous with the frequency changing effect of the moving reflecting mirror.

Mr Francksen need have no fear that his letter is unworthy of print. In the fifth paragraph he has pinpointed the basic flaw in the reasoning that gave rise to the experiment. The history of this experiment is dealt with by Dr Berkson in his "Fields of Force" from page 261 onwards. Fresnel had explained the phenomenon of stellar aberration by assuming the ether did not interact with the Earth. When Arago discovered that this phenomenon did not occur when light passed through a prism, Fresnel said that the ether was trapped within the volume of the prism and dragged along the light. Fresnel calculated his 'dragging coefficient', and by passing light through a moving column of water Fizeau proved Fresnel's 'dragging coefficient'. The moving volume of water dragged along the light wave. Stokes had already proposed an alternative theory to explain stellar aberration – the ether was dragged along by the moving Earth – and Stokes's theory cannot explain Fresnel's 'dragging coefficient'.

Michelson and Morley ignored Fresnel and Fizeau and accepted Stokes's theory that the Earth created an ether wind. If the Michelson-Morley experiment is repeated, effectively immersed in a flowing volume of water, their interferometer will show signs of interference.

M. G. Wellard

TELEVISION FOR NO-SIGNAL AREAS

Mr Osborne's case history of a practical application of an 'active deflector' system (May issue) was read with great interest but with some apprehension. This article could well give the impression that such schemes are very simple and demand little more than redundant aerials, salvaged coaxial cables and modified standard television distribution amplifiers employed with ingenuity by an experienced amateur.

My company has become very involved with 'self help' schemes and supplies standard, and specialised equipment together with engineering advice and assistance where necessary. As a result of our involvement and experience, I would like to make the following points:

1. Communities forced to consider 'self help' systems, usually of populations less than 200, are entitled to the best possible television reception, with a target of standards comparable to well-engineered cable systems.
2. Cable systems should be used whenever possible with the advantages of multi television channels, v.h.f./f.m. radio, teletext operation and provision for future channel services.
3. Active deflector systems should be engineered to the same standard as cable systems, where we comply with BS 5603 and CTVR/1. Due regard must be paid to filtering of received channels, minimum transmitter power, and cal-

ulation of s/x and s/n ratios, for broadband amplifiers, relative to all known variations of signal levels due to 'off air' and cable/equipment temperature variations.

4. As advised under "Licences", full use should be made of the BBC/IBA transmitting authorities, who share the difficult task of assisting the remaining unserved 0.1% population not catered for under Phase 3 of the UK television coverage plan which is projected to 1986.

Please be assured that this is not a criticism of Mr Osborne's article and successful endeavours.

V. Lewis
Wolsey Electronics
Porth, Rhondda
Mid Glamorgan

SCIENCE AND SOCIETY

The quotation from the policy statement by the British Society for Social Responsibility in Science (BSSRS) in May letters contains serious ambiguities, if not explicit errors, which do great harm to the Society's good cause, and which must therefore not pass unchallenged. The policy statement declares: "Science is not neutral. It cannot be separated from politics. It both reflects and helps to determine the values of society." Now if the term "science" is used to denote the activities of the members of a social group known as the "scientific community", then these assertions are essentially true. For the activities in question are inextricably linked to the society within which they take place.

Unfortunately, the definition of science as "the set of all activities by scientists" is rather problematic, because one will then have to specify what this peculiar breed of social species, the scientist, is. And if one naturally says that the scientist is a person who practises science, then the circle becomes obvious. In fact, there has taken place inside BSSRS a debate on whether "Science is a labour process" or "Science is not just social relations" (see *Science for People* No 43/44, 1979). Sadly, it is now evident that the former slogan has overwhelmingly prevailed.

I would argue that the BSSRS in particular, and a wide spectrum of political and philosophical opinion in general, in going out of their way to stress the social influences on scientific research and the impact of scientific discoveries upon society, have been carried away by their bubbling enthusiasm for radical or revolutionary policies, have thus missed the more fundamental content of the meaning of science, have therefore fallen inevitably in serious errors, and so have generated a great deal of dangerous confusion.

Science is best defined as, in the first place, objective knowledge, plus, in the second place, the activity to enlarge, and make use of, this permanent and universal knowledge. Scientific objectivity stubbornly and irrefutably exists and refers to the permanent and universal knowledge of facts and phenomena of nature which are independent of any individual's whim: political affiliations, ideological persuasions, moral convictions, religious beliefs, and so on. Facts and phenomena of nature are always the same for every member of the human race.

If one disregards, as so often is the case, the existence of objective knowledge (upon which all scientific activity, of any political orientation, must securely rest) one will unhappily be forced to say that science is just another ideology, a mere branch of politics, not better and not worse than religion, ethics, and the like. It is true that scientific facts are discovered usually as a result of the activities of scientists, which, we agree, are prone to (good or bad) political influences. It is also true that there are certain

difficulties in one's attempt to state the scientific facts objectively — free, that is, of experimental, theoretical, and linguistic limitations or uncertainties, and independently of any political context. For these reasons, many people, not being competent enough to surmount these difficulties, and having gone out of their way to lay great emphasis on the political influences on scientific research, have ridiculously concluded that objective facts do not exist, and they have declared that one cannot separate (the supposedly) certain facts from uncertain theories or from political prejudices. I have very strong feelings about these issues, and suggest that those who are incapable of distinguishing fact from theory or from context should admit their incompetence, rather than cynically persist with these preposterous assertions.

The mix-up between science and ideology is confounded by the fact that all sorts of dubious science (e.g. race and IQ studies, astrology, cosmology) or faulty science (e.g. relativity, duality) are frequently mistaken as authentic science. This badly misguides philosophers into creating dismally erroneous theories of science. Conversely, the realization of the full extent of the confusion between science and ideology is necessary if one wishes to understand why *impossible* hypotheses have been foolishly accepted as tenable and even as true ones (especially in the sphere of theoretical physics).

The most striking instance of the mix-up between science and ideology, and that which generated the greatest harm is the following: Many elements of so-called "modern physics" (relativity, quantum) were rejected by the Nazis because many (but by no means all) of their creators happened to be Jews or socialists or both. In this way, the military defeat of Hitler sealed the fate of twentieth century theoretical physics. As Hitler was (morally) wrong, those who criticise modern physics must be (scientifically) wrong, too. This is one reason why so much scientific criticism of relativity went into deaf ears. The sooner these and other facts are recognised, the earlier the vagaries of relativity will be retired to their well-deserved resting place in the history of science, next to epicycles, phlogiston and the like.

By speaking out in this way, I run the risk of being dubbed a reactionary. But for the sake of truth I do take the risk and I suggest that BSSRS should correctly understand first the full and exact meaning of science, if they really want to ensure, as I do, that science serves the people as a whole. And I earnestly appeal to the comrades of the BSSRS to re-examine the issues I have raised with their brains, not with their hearts; otherwise they will continue to alienate the rank and file scientist, and allow the political establishment to strengthen its position.

T. Theoharis
London SW18

ENGINEERING EDUCATION

The article by Professor D. A. Bell in the January issue reviews the technologist vs theoretician question. In the USA we have recently taken a different path, with separate schools and degrees for technologists and engineers. Whether this is better or worse than the drop down to "pass" level of the UK is yet to be determined.

The question is so old that it should have been solved. This is shown by the editorial in your near-relative publication, *The Electrician*, in volume 21, page 579, September 14, 1888:

"Lord Armstrong, like most captains of industry, knows exactly what he wants and how to get it; but he is rather afraid of getting more than he wants, which he

probably would do if Sir Lyon Playfair had his own way . . . Lord Armstrong approves of technical and even scientific training only when and where they are needed; Sir Lyon Playfair would scatter these accomplishments broadcast in case they may be needed.

"We suspect that the chief value of technical training in the estimation of the artisan is that it will help him to better his condition — to rise above his fellow workers. The case of 39,000 workmen being thrown out of employment by the invention of a new method of making steel does not help the argument, unless we are to believe that those men would have been kept in work had they understood the process as well as Bessemer.

"The learned doctor hopes to create an unlimited supply of Watts, Stephensons, Arkwrights, Cartwrights, and Bessemeres, by giving the multitude technical education, whilst his practical opponent apprehends that there would be nobody left to work their inventions if we succeeded, and everybody left discontented if we failed."

Somehow, I feel that a definition of *inertia*, conveniently placed on the same page of that musty old volume, applies. This is attributed to Prof Ayrton:

"There are two possible definitions of *inertia*: in this country (England) it is defined as resistance to motion, and in America as resistance to standing still."

It appears that the motion on this question has been a circular orbit for 92 years, and it is time that we selected a re-entry point!

J.D. Ryder
Ocala
Florida, USA

The writer was formerly Dean of Engineering at Michigan State University, USA — Ed.

The author replies:

If the problem has been with us for nearly a century, and yet such a leading figure as John D. Ryder cannot give an authoritative answer, one's first reaction is that the problem is insoluble. However, I think it is worth while pointing out that my remarks were made within the context of the British university system. Firstly, it appears that as the comparison between "technologist" and "engineer" in American terminology is set against our honours/pass discrimination, it must distinguish between "technician" and "professional engineer" rather than between "technologist-engineer" and "engineer-scientist". (In Britain the term "technologist" is of top ranking and covers both professional engineers and their equivalents in other types of technology, in contrast to "technician" which implies lower academic standing, whatever the value to industry and to society.) Secondly, all British universities have in theory the same academic standards: this is supposed to be ensured by the general use of the system of external examiners, i.e. every degree examination is monitored by a senior member of some other university. None the less, special prestige attaches to some universities: one might perhaps compare Oxford, Cambridge and Imperial College with Harvard, Yale and MIT. The inhibition here of any further discriminatory classification is part of a very deep-rooted reluctance in Britain to declare openly that anyone is inferior to others or is finally and irrevocably judged incapable of reaching the highest level.

A personal view is that the British university pass degree is too often no more than a safety net for those who (for one reason or another) fail to reach honours standards. It is responsible for the comparatively low drop-out rate from British universities. (The system of financial grants to students must also influence drop-out rates.) There is little doubt that separate institutions could produce better technicians, but the question is how much human unhappiness would be created by the forcible separation of school leavers (high-school graduates in US ter-

minology) into two streams, professional engineers versus technicians. It would depend partly on the opportunities for exchange between the two streams, which would seem to be minimised if separate institutions are involved. In any case, I do not believe that the vocational content of education is such an important factor in national prosperity as is sometimes assumed, for example in the Finniston Report on engineering education.

D.A. Bell

RADIO AMATEURS' EXAMINATION

I was glad to see the validity of the Radio Amateurs' Examination queried at last (May issue, p.54). Since the Nuffield foundation introduced many changes — even corrections — in the way Physics is taught, many examiners have persisted in regarding the "new approach" as wrong, and marking it so.

"Traditional" and "modern" answers to a question such as "describe the changes which take place when a capacitor is discharged through an inductor" may be quite different at first glance, whilst both could be right. Unfortunately there are too many in authority who would dismiss the latter.

W. H. Jarvis, G8APX
Preston
Lancs

I agree with Pat Hawker (May 1981 issue) that the two errors in the December 1980 Radio Amateurs' Examination Paper 2 were inexcusable, but that is about the only point with which I can agree. Even his comment about the proposed c.b. arrangements permitting radiotelephony on 27MHz whilst Amateur Licence B holders may only operate on frequencies above 30MHz has no relevance since the amateur service is an international service while c.b. is a national one and completely different considerations apply. However, this is no concern of the City of Guilds of London Institute.

I would very much like to see RAE question papers published but the City and Guilds of London Institute has its difficulties here which are entirely connected with the integrity of the examination and are not due to a desire for secrecy in the way the examination is conducted. One is tempted to ask whether what Mr Hawker calls his good fortune did not, in fact, arise from someone breaking faith with undertakings given to the Institute.

As for the charge of a lottery, what of the old written type examinations where only a very few topics from the syllabus could be tested at each examination? In spite of being reasonably well prepared a candidate could find that the questions were all on his weakest topics and he or she had no opportunity to demonstrate their strong points.

The present multiple choice scheme tests every topic in each section of the syllabus at every examination and candidates know they will have a chance of demonstrating their strongest topics as well as being tested in the weakest. As long as they have as many strong topics as weak ones they have some chance of passing.

Multiple choice questions were not dreamed up for the RAE; they have been widely used for many years and the principles are well established. The setting up of a bank of question items is a long process and each item is tested and edited at several stages and finally pre-tested by volunteers in a mock examination before being accepted for the bank.

The question items are so constructed that the correct answer cannot be selected simply because the alternatives are obviously wrong.

Each option offering an incorrect answer must have some credibility so that the candidate must use knowledge of the topic to select which of the options is correct in all respects and fully answers the stem of the question. Errors and omissions typical of those expressed by candidates in the pre-1979 written answers are used in the incorrect options to give them credibility.

Multiple choice is not an easy way out and the candidate needs as much knowledge of the syllabus as he or she did when writing essay type answers. If all this is thought to be unfair to candidates, what is the explanation for the number of candidates having increased from about 1850 in May 1978 and 900 in December 1978 to some 3000 in May 1980 and 2800 in December 1980 and that the percentage of successful candidates has increased slightly?

As regards syllabus content, there has always been a section on electrical theory and it has always been supported by lecturers and other interested bodies, in particular the RSGB, as being valuable groundwork. The volume of such theory has been reduced over the years as technical considerations have changed and the units now involved consist of volt, coulomb, ampere, ohm, watt, hertz, farad and henry and this does not seem excessive. Neither does there seem any reason why knowledge of licence conditions should be less under multiple choice conditions than it was under written answer conditions.

As regards valves, the alternative would have been a massive increase in training time, and I for one see no need to ask would-be radio amateurs to undertake a two-year training course.

Wilfred Dunell, G3BYW
City and Guilds Radio Amateurs'
Examination Subject Committee
Cambridge

The views expressed are those of Mr Dunell and not necessarily those of the Subject Committee. — Ed.

Pat Hawker, G3VA, comments:

Wilfred Dunell seems to have misunderstood the point of my criticisms of the RAE held in December. I am all in favour of the multiple-choice form of examination, although, as in the equivalent American exam, it might be worth adding some requirement for candidates to draw a few very simple diagrams. But there are good multiple-choice papers and bad multiple-choice papers. Too many of the questions seem irrelevant to deciding whether somebody should be entrusted with operating an amateur transmitter; and unless one knows the "pass" marks then one cannot avoid the suspicion that a lucky pin would have been almost as useful as careful preparation.

So I remain convinced that not all the questions were either fair or relevant; that it is ridiculous to include coulombs but omit valves; and that at least some questions should be concerned with safety. Far from wishing that would-be amateurs should have to take a two-year training course, it would seem better to scrap the RAE altogether than to continue to set such unsatisfactory papers. As to anyone "breaking faith" to show me the papers, surely such a charge would be better levelled at those in any way responsible for approving the papers! I notice that Mr Dunell does not comment on the question I quoted about s.w.r. meters.

SCIENTIFIC COMPUTER

In the eighteen months since I first wrote to you (December 1979 issue) considerable evolution of John Adams' scientific computer design has occurred.

At the time of my first letter, the high level language available (BASIC using Reverse Polish — "BURP") was very restricted in its facilities

and therefore attracted my criticism. Subsequently, Mr Adams has made available a Mark II and then a Mark III version of BURP and I understand that Mark IV is about to appear. A floppy disc interface has been described (October and December 1980) and a 32K memory expansion board is about to become available.

The presently available high level language (Mk III BURP) represents a vast improvement on the original and has answered virtually all the criticisms I made. It now offers a full range of variables, multi-dimensional arrays and virtually all of the statements that one would expect of an "8K BASIC", yet occupies only 4K of memory. It is certainly more than adequate for all "scientific" purposes and one imagines that the Mk IV will be even better.

Much of the evolution of the design has been facilitated by the creation of a users' group associated with a monthly newsletter. Through this medium, many advances in hardware, firmware and software have been made available to users of the computer; the updated BURP interpreter is available via the users' group.

Anyone still using the original, or even the Mk II, monitor is struggling under unnecessary difficulties. Those wishing to remedy this and/or ensure that they keep abreast of future advances would be strongly advised to contact the users' group c/o Mr Phillip Probetts, 50 Cromwell Road, London SW19.

What was originally a very sound basis for development has now blossomed into a very satisfactory and useful machine and, as a final comment, I would like to express the gratitude of all concerned for the tremendous efforts made by Mr Adams and Mr Probetts.

John Whittington
North Harrow
Middlesex

MICROCHIPS AND MEGADEATHS

I was absolutely delighted to read your November editorial both because of your stand on the matter and because you have raised the issue in the technical press.

It seems particularly sad that such high levels of effort and intellect must be employed on the mutually assured destruction of mankind. Those of us who have bothered to inform ourselves and are astride the technology of nuclear warfare can do nought but agree that a halt must be called.

John B. Gibson
Winchester
Hants

I am absolutely appalled by the sentiments expressed in the editorial "Microchips and Megadeaths" (November 1980 issue), the article in *Sidebands* (May issue) and a great many of the published letters.

Can any of these people put together a viable programme of action which would be completely successful in persuading the world's engineers to stop working on "defence" projects? Obviously no less than one hundred percent success is acceptable, and equally obviously that is not possible.

Lately we engineers have been attempting to improve the status of our profession; e.g. the Finniston Report. If we do not wake up and stop behaving like naive children, we will neither get nor deserve any respect at all. True engineers have to operate in the real world, not in the rarefied atmosphere of the ideal one.

The only way to preserve world peace is to maintain a balance of power. The West has already fallen dangerously behind; therefore en-

gineers should be redoubling their efforts to make maximum use of their limited budgets.

Jack Anderson
Dunmurry
Belfast

I do hope that the proportion of letters in favour of your editorial "Microchips and megadeaths" in the November 1980 issue is typical of your postbag and of engineers in general.

I am sorry to recall that, for two years after leaving university, I too worked in 'defence' projects for a leading electronics manufacturer. However, engineers and computer scientists are fortunate in having a wide range of job opportunities available. I would encourage anyone who is employed on 'defence' work (especially projects for other countries which help to fuel wars in which Britain has no interest!) to look for more useful employment. When one leaves defence projects it is a great joy to be able to talk freely about one's work, and to contemplate its use without envisaging catastrophe.

Could *Wireless World* take matters further by publishing one or more detailed articles listing the firms students should avoid when looking for employment? The Campaign Against Arms Trade (5 Caledonian Road, Kings Cross, London N1 9DX, tel: 01-278 1976) would be only too happy to supply information to any other interested readers.

David Bailey
Manchester 16

OPTO-ELECTRONIC CONTACT BREAKER

Your article on opto-electronic contact breakers (April issue) suggests that they can be fitted to any make of distributor. My own Hillman Hunter uses a distributor in which vacuum advance moves one of the contacts of the contact breaker and, as you can see from the enclosed pages of the maintenance manual, all vacuum advance would be lost if the contact breaker were changed as the author suggests.

M.D. Samain
University of Salford

The author replies:

Mr Samain is, of course, correct in saying that the opto-electronic contact breaker is not suitable for sliding contact type distributors. This type of contact breaker is designed to extend contact life by spreading the area of contact erosion, but must be regarded as a palliative rather than a cure for the well known problems of conventional ignition systems. It is particularly unfortunate that no proprietary devices are available to replace such a contact breaker, for the same reasons which rule out my own device.


On re-reading the article as published I could not, however, see where it was suggested that any make of distributor was suitable for conversion.

J.R. Watkinson

DIVIDING BY FRACTIONS

Referring to the article by Gilbert Pearson in your April 1981 issue, which described a method of division from PAL sub-carrier frequency to line frequency by digital counters, I would like to suggest a simpler way to accomplish this.

By using the dual pulse synchronizer SN74120 together with a dual D flip-flop SN74S74, you can easily "remove" a single period of the 4.43MHz signal 25 times per second. After counting down by 1.135 you have a frequency of 3906.25Hz with very low jitter. Using a simple phase locked loop, either a

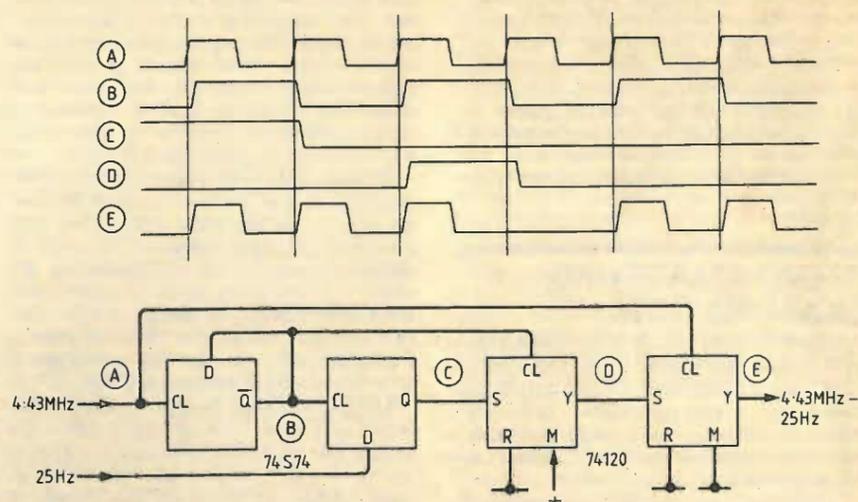

4MHz master clock or a 31250Hz double line frequency is easily produced.

Looking at the signal diagram and the 74120's truth table, you can see how the circuit works with only two digital integrated circuits.

Knut A. Lyster,
Lyster Elektronnikk
Royken
Norway

With reference to the article "Dividing by fractions" in your April 1981 issue, I would like to draw your attention to a more general method of generating a sequence of p pulses, as regularly-spaced as possible in q clock periods. The technique is described in a paper 'The use of digital techniques in television waveform generation' presented at the 1974 International Broadcasting Convention and it is the subject of British Patent No. 1 455 821.

A particular feature of this method is that it generates a 'residue' function, which represents the time difference (jitter) between each output pulse and its ideal position. This residue can be added with appropriate polarity, amplitude and timing to the control loop of a voltage-controlled oscillator in such a way as to eliminate the need to filter any of the systematic jitter components in the phase-locked loop.

This technique is used in commercial equipment (such as the HP 8662A Synthesised Signal Generator described in February 1981 *Hewlett-Packard Journal*) and the associated counting methods are used frequently in digital television processing when a line harmonic clock rate is used to handle signals related to PAL subcarrier, whether or not it is 'mathematically' locked.

John Chambers
BBC Research Department
Tadworth
Surrey

ETHICS IN ACTION

There is no escaping the moral responsibility placed on all of us to examine our role and function in society (June letters). We should see whether we are contributing directly or indirectly to the design and manufacture of armaments, or other socially unacceptable products, and then reconcile this role with our conscience, ethics, religious beliefs, or whatever standards we live by, and then act upon the outcome. All my life I have refused to work on anything whatsoever to do with armaments or warfare, and any price I may have paid has been trifling in comparison to the degree of sympathy and respect I have encountered, often from the most

unexpected quarters.

Western civilisation and technology cannot continue much longer without facing the facts and realising that there will be consequences arising directly from its actions - mostly, I fear, very unpleasant ones - but faced they must be, and your courageous editorials will do much to start electronic engineers thinking.

Robin H. Mann
C.E.G.B.
Barnet
Herts

PICKABACK SPARKS


Regarding Mr A.R. Churchley's remarks in April letters, it may be of interest to refer to the paper in the *Journal of the Institution of Electrical Engineers*, vol. 93, part IIIa, no. 5, 1946, "The development of triggered spark gaps for high power modulators" by J.D. Craggs, M.E. Haine and J.M. Meek. This paper describes the development of triggered spark gaps, during the war years, for use in short pulse modulators for magnetrons for radar applications.

The pulses generated by the discharge of artificial transmission lines were one or two microseconds in duration and up to a few megawatts power. Repetition frequencies up to 2,500Hz were achieved. Early work was on three electrode spark gaps in air. Later this was extended to similar gaps sealed in glass vessels containing a pressure of up to three atmospheres of a mixture of argon with a 6-7% oxygen; the latter to suppress the long lived metastable state in argon which inhibited deionisation. The ratio of the trigger pulse energy to that of the main pulse was 10^3 - 10^4 to 1.

The transmission lines were charged from a d.c. source through a choke. At first this was done at the resonant frequency of the choke and the transmission line capacitance, so that the line charged to twice the direct voltage. To achieve a variable frequency system a series diode allowed the line to charge to twice the direct voltage and then await the occurrence of the trigger pulse. However, it was later found that, without the diode, the frequency could be increased to any value above the resonant frequency and still give the doubling of voltage. The charging waveform then tends to a linear rise.

It may be of interest that patents were applied for and granted only for the sealed systems. The open air gaps system was rejected by the Patent Office because of a similar system patented in the last century for a lightning arrestor.

M.E. Haine
Much Hadham, Herts

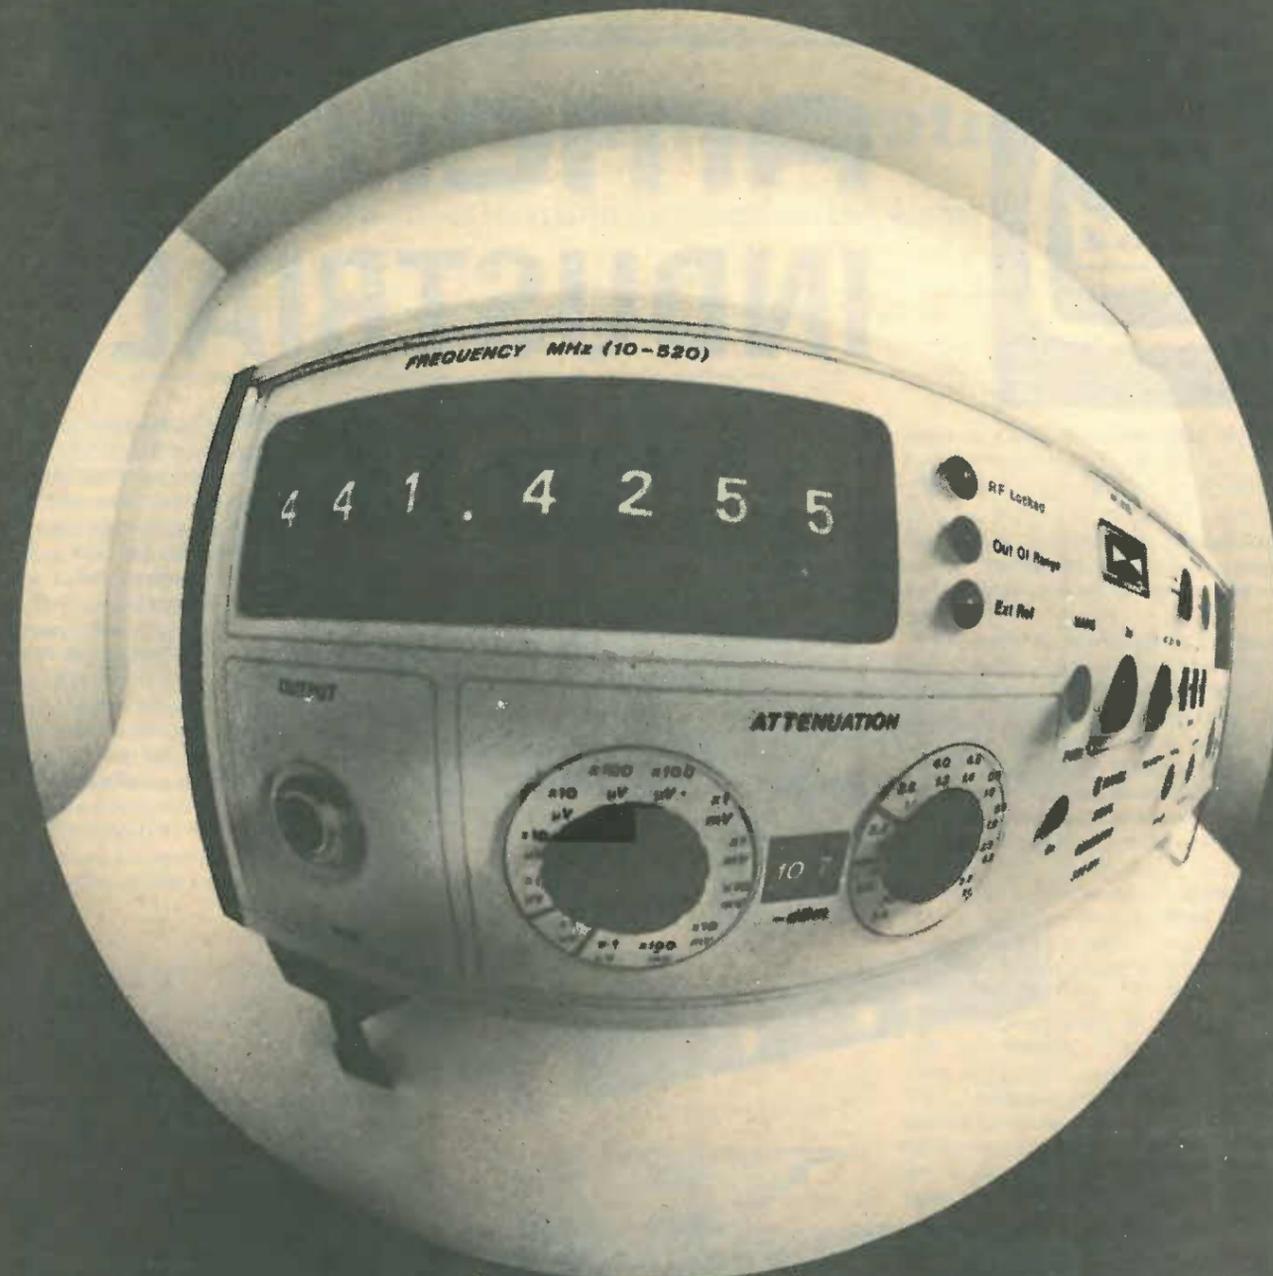

flexible

The SSG520 10 to 520MHz synthesized signal generator is flexible enough to meet your need

REMOTE PROGRAMMING

This option simplifies remote control of all major functions

IEEE488 INTERFACE

Add-on module for low cost microcomputer controlled A.T.E. Switching module and other IEEE488 accessories available

TRANSMITTER TESTING

Compatible with TTS520 transmitter test set for complete testing of base stations, mobile or fixed radios up to 100 watts rating, pocketphones, pagers, etc.

Send for our comprehensive folder of r.f. test equipment NOW!




Farnell

FARNELL INSTRUMENTS LIMITED
SANDBECK WAY · WETHERBY
WEST YORKSHIRE LS22 4DH
TEL. (0937) 61961 · TELEX 557294
OR HARPENDEN · TEL. (05827) 69071

WW - 075 FOR FURTHER DETAILS



AMCRON INDUSTRIAL MUSCLE

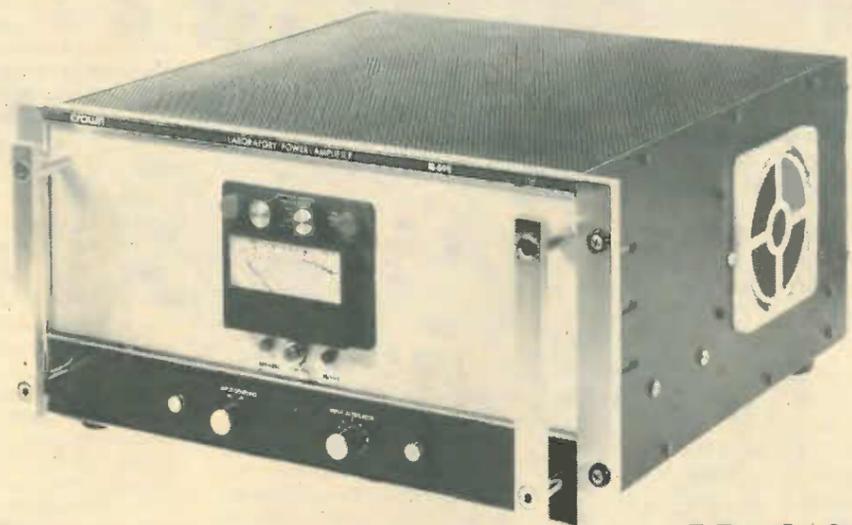

Model — M600

- ★ POWER RESPONSE DC — 45KHz ± 1dB.
- ★ OUTPUT POWER IN EXCESS OF 1.5KW INTO 2.75 Ohm LOAD (CONTINUOUS R.M.S.).
- ★ D.C. OUTPUT 20 AMPS AT 100 VOLTS OR 2KVA.
- ★ HARMONIC DISTORTION LESS THAN 0.05% DC-20KHz AT 1kW INTO 6 OHMS.
- ★ PLUG-IN MODULES: CONSTANT VOLTAGE/CURRENT, PRECISION OSCILLATORS ★ UNIPOLAR AND BIPOLAR DIGITAL INTERFACES, FUNCTION GENERATORS, AND MANY OTHERS.
- ★ OUTPUT MATCHING TRANSFORMERS AVAILABLE TO MATCH VIRTUALLY ANY LOAD.
- ★ FULL OPEN AND SHORT CIRCUIT PROTECTION GUARANTEED STABLE INTO ANY LOAD.
- ★ TWO UNITS MAY BE CONNECTED TO PROVIDE UP TO 4kW.
- ★ INTERLOCK CAPABILITY FOR UP TO EIGHT UNITS.
- ★ 3-YEAR PARTS AND LABOUR WARRANTY.
- ★ UNITS AVAILABLE FROM 100VA-12KVA.

For full details on all Amcron Products write or phone Chris Flack



Analogue Associates

PROFESSIONAL AUDIO AND INDUSTRIAL ELECTRONICS

P.O. BOX 3
ATTLEBOROUGH
NORFOLK NR17 2PF
Tel: 0953-452477

WW — 031 FOR FURTHER DETAILS

Wafer-scale integration

Reducing costs by using i.c. chips on the wafer

by Ivor Catt
Microprocessor Applications Project, Watford College

Much of the cost of manufacturing electronic equipment with integrated circuits lies in making connections to the chips and interconnecting them. Considerable reduction in this cost is claimed for the method proposed here in which memory chips are used while they are still on the semiconductor wafer, the whole of which is permanently built into equipment. On the wafer, a chain of good chips is formed under external control to produce a long serial memory. Any bad chips are automatically by-passed without requiring programming of the metallization that interconnects them or advance knowledge of the distribution of the bad chips on the wafer.

The traditional method of manufacture of a "silicon chip" microcircuit is as follows. A wafer of pure silicon material several inches in diameter is sent through a series of furnaces where hot gases are diffused into selected areas of the surface, creating some 500 identical two-dimensional microcircuits ("chips") on the surface, half of them perfect and half of them faulty. At this stage, a minute fraction, perhaps 1%, of the total manufacturing cost of a complete computer system has been spent.

The microcircuits are tested using a wafer probe and marked to distinguish the good from the bad. The wafer is then cut up into individual microcircuits measuring perhaps one tenth of an inch square, and each good one individually packaged in a one inch long black box with about fourteen contacts. The black boxes are tested and assembled into printed circuit boards. Then the boards are tested and assembled into systems which are also tested (see Fig.1).

What is being called "the microelectronics revolution" is the successful attempt to reduce the cost of all these stages by squeezing more and more circuitry into each microcircuit (or black box) so that a complete deliverable system can be made with fewer of them. However, more circuitry on a chip means that each chip must be larger and more likely to be useless as a result of its including a faulty spot on the wafer. This leads to lower yield and increased cost, and the practical limit to the size of a chip is in the region of one or two tenths of an inch square. Also, as the complexity of a microcircuit increases, the cost

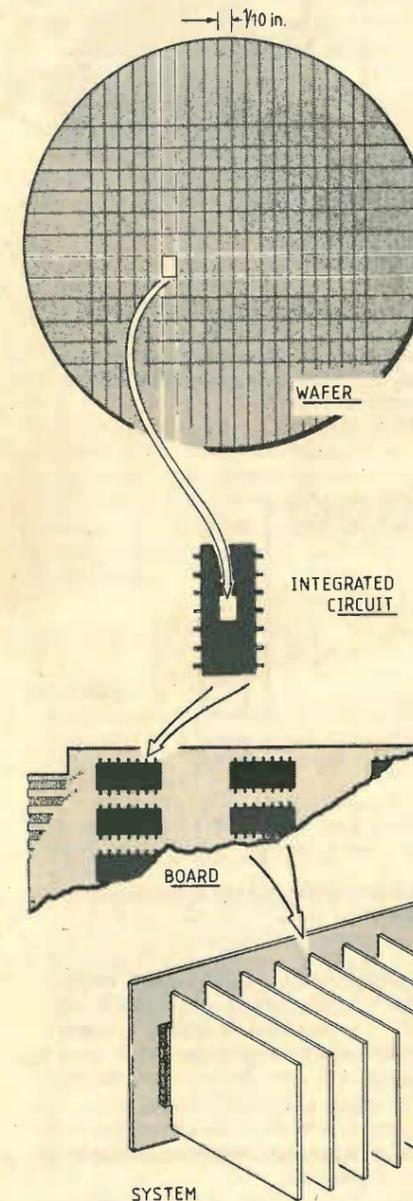


Fig. 1. Main steps in the construction of electronic equipment from the conventional silicon chip.

of testing escalates in geometric proportion, so that even today's conventional, relatively simple microprocessors and r.a.ms are expensive because of appalling testing problems.

Wafer scale integration is an alternative approach to the above. Although nominally divided up into "chips", the

wafer is never dissected, and there are built-in interconnections between chips. The full wafer, including faulty chips, is installed in the final electronic system. All the costly conventional manufacturing stages — testing the wafer, dicing, packaging, testing, interconnection, testing — are omitted.

The wafer is conventional except that metallization overlaps between chips to give the inter-chip connections mentioned above. Grids of metallization lines across the wafer distribute voltage supplies and clocks. Crossovers between grids are achieved by two layer metallization. An array of fusible links on the grids localizes the effect of any shorts between voltage supplies. Each chip contains bonding pads for voltage supplies and clock inputs, but only a small number of these pads are connected to the outside.

There are four classes of w.s.i. as shown in the chart in Fig.2. Of these, two were tried and abandoned or found wanting. One is a possible dream for the future. That leaves the fourth, "fault tolerant w.s.i." Now that everyone realizes that the more complex microcircuits already on the market are untestable, it is coming to the fore as the main contender for further advance in microelectronic technology.

The "fault tolerant" interconnection approach is based on the fact that today's "chip" contains a massive quantity of circuitry — more than 5,000 transistors — the same amount of logic as was contained in a complete general purpose computer in the 1960s. The process of getting rid of bad chips and linking up good chips into a perfect machine is delayed until after the wafer has been installed in a working machine, and even after the machine has been switched on for use in the morning. Further, the interconnections between good chips are "broken" when the machine is switched off, so that every time it is switched back on the machine is rebuilt from virgin circuitry during the first five minutes of operation. A very small proportion (some 5%) of the circuitry in each chip is devoted to this reconstruction process after switch on. The reconstruction is under the control of a control board containing logic of conventional design (100 packages which could of course be integrated into a single microcircuit). This control board is called "chip Z". The rest of this article describes the author's approach to fault tolerant w.s.i.

The aim is to build up on the wafer a

spiral of interconnected good chips which avoids the bad chips. This is achieved by a gradual growth process, shown in Fig.3, where additional chips (for example F) are added to the growing spiral, one by one; the latest chip being tested and discarded if found by chip Z to be faulty. Chip Z communicates with it *via* the good chips ABCDE already in the spiral.

We end up with one or more spirals of perfect tested chips (Fig.4), which for architectural purposes might just as well lie on a straight line.

In the simplest machine, of which the working model has already been built under Russell C. Aubusson at the Middlesex Polytechnic, the wafer accommodates one (or more) shift registers which can usefully replace computer disc memory and get rid of the inconvenience of rotating parts.

The next machine in the family has the addition of a fast (or control) line to the previous slow (or data) line, as shown schematically in Fig.5. Serial commands travel rapidly down the spiral along the fast line, checking the address field in each chip they pass and completing a read or write with the appropriate word. The addition of the fast line speeds up memory access from 20 milliseconds to about 5 microseconds, a speed approaching that of conventional random access memory. Although somewhat slower than r.a.m. of conventional design it is attractive because of its extremely low cost, between 10 and 100 times cheaper than what conventional fabrication can achieve, and also because it is self-repairing. If a fault develops, it is only necessary to switch off the machine and the memory will be repaired on switch-on, the newly failed chip being avoided when the new spiral is formed. Because of cost reduction and reliability improvement, computers could be expected to incorporate r.a.ms using w.s.i. as a matter of course when the memory size is 256,000 words or more.

The rest of this article outlines the opportunities open to us via w.s.i. once we break out of the stranglehold of the Von Neumann computer architecture, an archaic design more than a third of a century old which has set the pattern for all computers, microprocessors and microcomputers up to the present time (see editorial, February 1981 issue, p.31).

Over the years the idea has become entrenched that electronic computers are 'information processing' devices, a phrase which implies sequential processing in the same way as a doctor sees his patients sequentially, forgetting all about one patient when he turns to the next. To develop the analogy further, it has become accepted that the doctor should have no recollection of what the patient's third finger looked like when he examines the fourth, and so on. Before moving on to examine the fourth finger, the doctor notes down in the record the state of the third finger, and then forgets all about it.

It is remarkable, and in my opinion unfortunate, that the conventional, schizoid computer is regarded as able to make a reasonable showing at performing quite complex tasks in spite of its being virtually

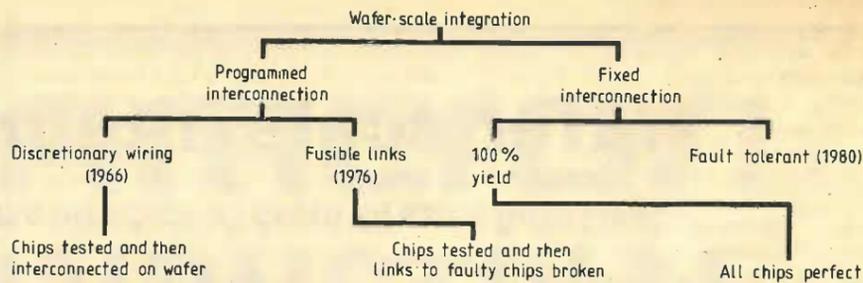


Fig. 2. Chart showing variants of wafer-scale integration and the condition of the chips resulting from these methods.

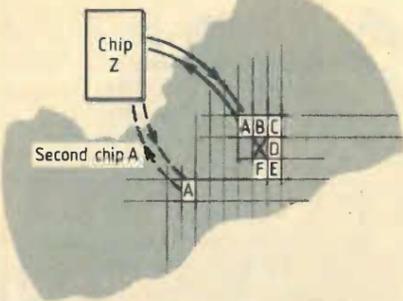


Fig. 3. Process of building up a spiral (or spirals) of chips on a wafer by adding contiguous good chips and avoiding faulty chips. This is done by external control via the external chip Z.




Fig. 4. Schematic of a spiral built up on a wafer.

completely split down the middle, between memory and processing. However, my book "Computer Worship" lists a number of applications in which such a machine will not perform satisfactorily. These are generally applications where it is required to operate on data according to its content rather than merely according to its address location.

Wafer scale, fault tolerant hardware leads us to the possibility of a very cheap, reliable machine of a different kind. It is clear that more sophisticated operations than "read" and "write" could easily be performed in a processing node. For instance, the data field on the fast line in Fig.5 could be added to the data field on the slow line rather than merely replace it. That is, we could have an "add" command instead of a "write" command. This is the first step towards operating on more than one word in the store at the same time—that

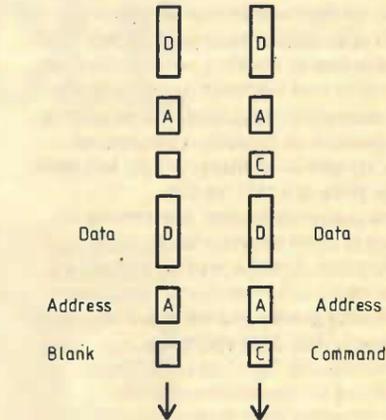


Fig. 5. Schematic of a more advanced system in which a fast, or control, line is added to the slow, or data, line. This fast line carries commands to the data line and allows more rapid memory access than with the simple memory system.

is, towards distributed processing (a much misused phrase). A number coming down the fast line can be added to more than one word in memory at the same time.

A major break with tradition should be noted. Whereas a word in memory has traditionally been addressed (accessed) by its physical location, words in this kind of memory are addressed by one field within the word. That is, each word carries its address around with it. We actually have a content addressable memory (=associative memory) masquerading as a r.a.m.

We can consider moving forward towards even more powerful, more complex machines. Basic principles are sketched in Fig.7. It is possible to send a "loop" com-

mand down the fast line, with the result that all words get trapped in tiny loops rather than continuing in a "follow my leader", barrelling mode. Further, a "mixed mode", or "precess" command can be sent down the fast line, causing words of one class to loop while words not of that class barrel.

The "mixed mode" makes it possible for any word in memory to have rapid access to all other words in the memory. For example, in the case of a machine used to monitor aircraft circling above an airport, one word, containing the co-ordinates of one aircraft, could be caused to barrel past the records of all other aircraft stacked up waiting to land, so that co-ordinates could be compared and a collision risk by that aircraft foreseen.

The next step in sophistication comes when we realise that when a barrelling word passes by a looping word, the situation is similar to a word on the fast line passing a word on the slow line. It is possible to cause barrelling words to act as commands and operate on looping data words so that the overhead on the fast line is reduced.

Methods have been worked out whereby segments of the slow line behave as auto-


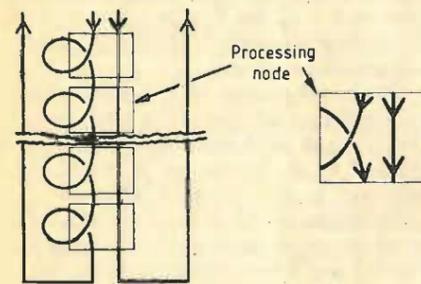


Fig. 6. The idea of a processing node, involving both the slow line (left) and fast line (right) and allowing more advanced operations than simply "read" and "write".

Fig. 7. Different modes of processing: (left) "follow-my-leader" or barrelling mode; (middle) mode in which words are trapped in tiny loops; (right) mixed mode in which some words loop and others barrel.

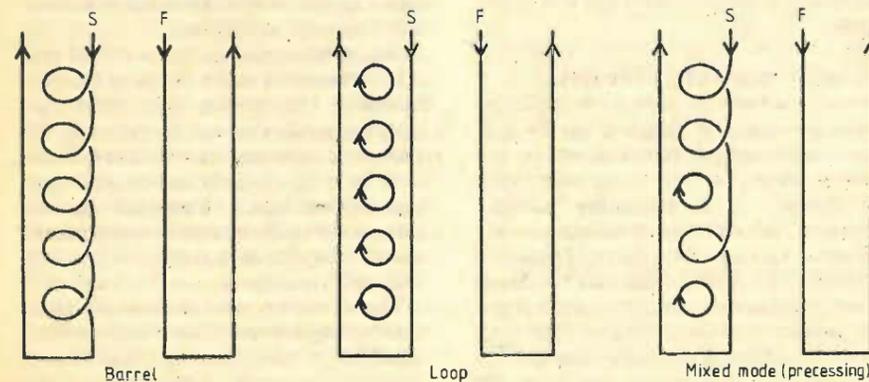

nomous subroutines, the relevant words leaping past each other like a line of children, and flagging when a computational task is completed. We can get an extremely powerful machine which performs many processes at the same time although the hardware is very cheap and self-repairing.

The first project based on the principles described here proved the feasibility of the microelectronics aspects of the subject. With E.A. Newman as its technical head, ACTP (Advanced Computer Technology Project), a section of the Department of Industry) financed the project in the Microelectronics Centre at the Middlesex Polytechnic, where it was led by Dr R.C. Aubusson. ACTP then funded projects to develop a computer architecture. These were at Brunel University under R.M. Lea, and at Prestwick Circuits Ltd.

The Royal Signals and Radar Establishment, Malvern, has funded two projects on the airborne digital signal processing implications of the computer architecture. This work, at Prestwick Circuits Ltd, is led by Ken Wood. Burroughs Corporation, Cumbernauld and San Diego, is now investing in the development of both the microelectronics and of the computer architecture. This work is led by Dr Malcolm Wilkinson. Wafers designed at Cumbernauld, processed in San Diego and then tested in Cumbernauld have successfully generated spirals of more than 200 chips on an imperfect wafer. This lays to rest any technological doubts about the overall feasibility of the invention.

References

1. Aubusson, R. C. and Catt, I. "Wafer-scale integration - a fault-tolerant procedure", *IEEE Journal Solid-State Circuits*, vol. SC-13, no. 3, June 1978.
2. Catt, I. German Patent Application no. P 23 39 089.8-53. US Patent no. 3913072. British Patent no. 1377859. British Patent no. 1525048.
3. Sutherland, I. E. and Mead, C. A. "Microelectronics and computer science", *Scientific American*, September 1977, pp. 210-228.
4. Manning, F. B. "An approach to highly integrated, computer-maintained cellular arrays", *IEEE Trans. Comput.*, vol. C-26, pp. 536-552, June 1977.
5. Catt, I. "Computer Worship," Pitman, London 1974.

Digital storage and analysis of speech

continued from page 48

Reconstructing the analogue waveform

Having digitized and stored a signal, it needs to be passed through a d-to-a converter (digital-to-analogue) and low-pass filter when replayed. D-to-a converters are cheaper than a-to-d ones, and the characteristics of the low-pass filter for output can be the same as those for input. However, the desampling operation introduces an additional distortion, which has an effect on the component at frequency *f* of

$$\frac{\sin(\pi f/f_s)}{\pi f/f_s}$$

where *f_s* is the sampling frequency. An "aperture correction" filter is needed to compensate for this, although many systems simply do without it. Such a filter is sometimes incorporated into the codec chip.

For telephone-quality speech, existing codec chips, coupled if necessary with integrated pre-sampling filters, can be used, at a remarkably low cost. For higher-quality speech storage the analogue interface can become quite complex. Comprehensive studies of the problems as they relate to digitization of audio, which demands much greater fidelity than speech, have identified the following sources of error:

- slew-rate distortion in the pre-sampling filter for signals at the upper end of the audio band;
 - insufficient filtering of high-frequency input signals;
 - noise generated by the sample-and-hold amplifier or pre-sampling filter;
 - acquisition errors because of the finite settling time of the sample-and-hold circuit;
 - insufficient settling time in the a-to-d conversion;
 - errors in the quantization levels of the a-to-d and d-to-a converters;
 - noise in the converters;
 - jitter on the clock used for timing input or output samples;
 - aperture distortion in the output sampler;
 - noise in the output filter as a result of limited dynamic range of the integrated circuits;
 - power-supply noise injection or ground coupling;
 - changes in characteristics as a result of temperature or ageing.
- Care must be taken with the analogue interface to ensure that the precision implied by the resolution of the a-to-d and d-to-a converters is not compromised by inadequate analogue circuitry. It is especially important to eliminate high-frequency noise caused by fast edges on nearby computer buses.

To be continued

Sound synthesis using Walsh functions

Simple introduction to the synthesis of complex vibration modes

by Alan A. Thomas

An experimental approach to additive synthesis employing digital techniques is described. The system enables an infinite number of waveshapes to be generated by a basic fixed Walsh function generator feeding a set of digitally programmed attenuators. By mathematical analysis of known waveshapes the system may be used as a source of sound for music synthesis, provided that a voltage-controlled oscillator and filter are added to the basic system. Using additional hardware, time-dependent spectrum changes are possible.

A sound may be represented by a series of sinusoidal components of particular frequency, amplitude and phase. The lowest frequency component is referred to as the fundamental, first mode, or first partial. Remaining components are then related to this fundamental frequency by simple ratios. Such a relationship is termed harmonic. Not all musical sounds are entirely composed of harmonically related partials; non-harmonic components, that is partials which do not bear simple direct integral ratios to the fundamental, may also be present. This is the reason that simple harmonic analysis may result in a synthesized sound which lacks some of the character of the original, even though care is taken to mimic all other basic properties.

In harmonic analysis, each partial is given the corresponding value of N in the harmonic series; the fundamental is the first harmonic. For a sound composed of frequencies in the ratios 1: 3: 5 for example, the second and fourth harmonics have zero amplitude, and it follows that the frequencies three and five may be referred to as the non-zero coefficients in the harmonic series of the sound under analysis.

Consider now a further sound composed of frequencies in the ratios 6: 12: 15. Can this series be termed harmonic? It is always possible to find a fundamental frequency of which a given series are harmonics; in this example the ratios are all multiples of three and can therefore be regarded as the second, fourth and fifth harmonics respectively of a fundamental frequency, three. In this case both the fundamental and third harmonic are said to have zero coefficients. The fundamental of a harmonic series need not necessarily be present; if the fundamental is present it

should be considered as a non-zero coefficient in the normal manner. An interesting point is that if frequencies of 6, 12 and 15Hz were combined, the resulting complex function would repeat exactly three times per second although the fundamental has zero amplitude. In general therefore, any collection of frequencies can be arranged to fit into a harmonic series, although the fundamental may not be present.

A second important point which must now be made is that there is only one characteristic phase and amplitude for each harmonic which will result in the desired waveshape being realised. How therefore can a harmonic series be set down such that both phase and amplitude information is given for all non-zero coefficient harmonics? A wave of arbitrary phase can be represented as the sum of a sine and cosine wave both of zero phase with amplitudes given by the phase relationship of the original. It follows that a complex periodic function may be represented by a series of sine and cosine functions whose amplitude and period are dependant variables. All that remains is to derive some method whereby the relevant amplitudes may be located. This is Fourier analysis and was first formalized from the basic ideas of other workers by Fourier in 1822 during his work on heat flow. The series of terms derived by Fourier analysis for a particular function is terms the Fourier series and indicates the magnitude of the sinusoidal components. In short, a complex periodic function such as a musical sound may be represented by a series of sine and cosine functions. But first it is necessary to perform harmonic analysis of the waveform to locate the non-zero coefficient sinusoidal components and then apply the Fourier analysis to determine the amplitude of the individual sine and cosine terms.

Fourier sound synthesis

By using a bank of quadrature oscillators—the frequency of which is set by harmonic analysis and amplitude set by the Fourier series of the waveform to be synthesized—a reasonably accurate synthetic sound corresponding to the mode of vibration may be produced. To maintain the same characteristic sound when fundamental frequency is changed the frequency of the generated harmonics must be altered proportionately. In practice this requirement has been the

death knell of Fourier synthesis in commercial electronic instruments. For accurate synthesis, a large number of oscillators are required and the task for the electronic engineer, while not impossible, is complex since it is necessary to arrange that all oscillators remain in quadrature and track each other accurately in frequency while maintaining constant amplitudes.

Clearly some method is desirable whereby the attributes of Fourier analysis as applied to sound synthesis may be maintained but the method of waveform generation altered to remove the inherent practical limitations. The method discussed removes these limitations by transformation of the sine and cosine functions associated with the Fourier series to the rectangular functions of the Walsh closed normal orthogonal set.

The transformation from Fourier series to Walsh/Fourier series for a given function is purely mathematical, and has been detailed by K. Simens and R. Kitai, see reference 1. The principal advantage in transforming to the Walsh/Fourier series as far as sound synthesis is concerned is that the bank of quadrature oscillators employed in direct Fourier synthesis is replaced by a single master oscillator controlling an appropriate digital function generator. Thus by using a single voltage-controlled oscillator the facility to play tunes is realised and the analogous Walsh harmonics, derived within the function generator, automatically track the master oscillator maintaining the characteristic sound of the synthesized mode of vibration, independent of pitch.

Properties of Walsh functions

Walsh functions were first investigated by J. L. Walsh in 1923 and are of purely mathematical origin². Collectively, they form a closed set of orthonormal functions. The functions are defined on a basic interval, in this case time. The sequence may then be repeated to form a set of periodic functions. During each interval the functions may only take on the values of ± 1 and are thus rectangular in form. If the basic interval is subdivided into 2^n equal segments where n is an interger, then the corresponding number of Walsh functions which may be incorporated within the basic interval is $2^n - 1$.

The recursion relationship governing the form of individual functions has been translated to the appropriate digital form by H. F. Harmuth³. Harmuth has shown

that once Walsh functions have been converted to zero and one logic levels, the recursion relationship reduces to modulo-two addition, the logical exclusive-or function.

Certain Walsh functions are analogous to a further set of mathematical functions: Rademacher functions. Rademacher functions are a set of square waves in simple geometrical progression, the recursion relationship for Rademacher functions, and hence the analogous Walsh functions, once translated in a similar manner to the appropriate digital form reduces to modulo-two counting, the logical binary function. It follows that a digital representation of the complete Walsh orthonormal set for a given value of n may be produced by a logic system comprising of exclusive-or gates and binary counters driven from a master oscillator.

Before producing a suitable function generator it is necessary to decide on a suitable value of n . If harmonic followed by Fourier analysis is performed to obtain the appropriate Fourier series for a given function, the resulting series tends toward infinity; that is, the number of sine and cosine functions should ideally be infinite for perfect harmonic representation.

It is no surprise that when the parallel mathematical analysis is performed to obtain the Walsh/Fourier series the number of Walsh functions required for perfect representation also tends toward infinity. This implies that the greater the value chosen for n , the more accurate the final waveform synthesis. In practice n must be limited to a value which is a compromise between acceptable accuracy of synthesis and the amount of hardware involved in the function generator. The effect of limiting n to a finite value will be considered in more detail later.

Basic Walsh function generator

Given $n=5$ a generator will produce $2^5 - 1$ Walsh functions and the number of Rademacher functions will be equal to n , that is 5. The first requirement is to produce the five Rademacher functions. This is achieved by a simple five-bit synchronous binary down counter driven by the master oscillator. The analogous Walsh functions thus produced are wal31, wal15, wal7, wal3 and wal1 at consecutive outputs of the binary counter. The remaining Walsh functions are formed by performing modulo-two addition of the functions so far derived in the appropriate order. Wal2 for example is formed by modulo-two addition of wal1 and wal3. The three functions lying between wal7 and wal3 are formed as follows: wal6 is formed by modulo-two addition of wal7 and wal1; wal5 is formed by modulo-two addition of wal7 and wal2 and wal4 is formed by modulo-two addition of wal7 and wal3. The sequence is straightforward from the examples given. The table lists the complete arrangement for all 31 Walsh functions when $n=5$. The system may be extended for higher orders of n if desired by simply increasing the number of counter sections and exclusive-

Generation of first 32 Walsh functions (wal0 excluded) using binary counters and exclusive-or gates.

Function	Modulo - 2 Division	Modulo - 2 Addition	Function	Modulo - 2 Division	Modulo - 2 Addition
wal31	Oscillator		wal15	wal31	
wal30		wal31, wal1	wal14		wal15, wal1
wal29		wal31, wal2	wal13		wal15, wal2
wal28		wal31, wal3	wal12		wal15, wal3
wal27		wal31, wal4	wal11		wal15, wal4
wal26		wal31, wal5	wal10		wal15, wal5
wal25		wal31, wal6	wal9		wal15, wal6
wal24		wal31, wal7	wal8		wal15, wal7
wal23		wal31, wal8	wal7	wal15	
wal22		wal31, wal9	wal6		wal7, wal1
wal21		wal31, wal10	wal5		wal7, wal2
wal20		wal31, wal11	wal4		wal7, wal3
wal19		wal31, wal12	wal3	wal7	
wal18		wal31, wal13	wal2		wal3, wal1
wal17		wal31, wal14	wal1	wal3	
wal16		wal31, wal15			

or gates and using the same basic sequence.

Synthesis of functions using Walsh harmonic bank

To synthesize a function it is necessary to resolve the Walsh/Fourier series. The non-zero coefficient functions of the series which lie within the range of the generator are then selected and mixed in the proportions indicated by the series.

For example, the non-zero coefficient functions in the range 0 to 31 for the triangular wave given by the Walsh/Fourier series are wal2, wal6, wal14 and wal30. Their relative amplitudes are +0.5, +0.25, +0.125 and +0.0625 respectively. Thus, by selecting these four functions from the Walsh harmonic bank and summing them in the relevant proportions, a triangular wave is synthesized.

The frequency of the waveform depends on the basic interval chosen for the Walsh functions which is in turn determined by the frequency of the master oscillator. If the waveform is to have a frequency f , then the master oscillator frequency must be $2^n f$, where n is as previously defined.

Perfect harmonic synthesis is only possible when an infinite number of Walsh functions are employed. When a finite number is used the synthesized waveform appears in a sampled form, the sample rate being 2^n per period. This results in the wave having 2^n discrete levels within each period. To remove this appearance, it is necessary to integrate the function; in practice this can usually be achieved by simple low-pass filtering. Fig. 1 shows the appearance of the triangular wave just discussed before low-pass filtering. Naturally the number of samples and

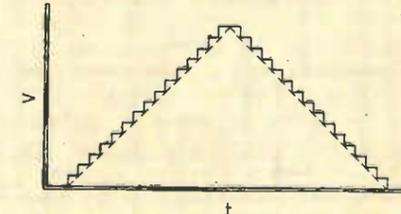


Fig. 1. Triangular wave is synthesized by selecting four functions, wal2, wal6, wal14 and wal30, and summing in relevant proportions

therefore the accuracy of the waveform can be increased by employing a higher order of n but at the expense of more hardware.

Summing of the various Walsh functions may be performed by a standard virtual-earth operational amplifier arrangement, the proportions of mix being scaled to best suit the practical device.

If the master oscillator is made voltage-controlled the frequency of synthesized waveform may be adjusted in the traditional manner. If large variations of frequency are required, the low-pass filter must also be voltage-controlled.

Digitally programmable attenuators

If each of the Walsh functions are fed to a digitally programmable attenuator the outputs of which are then mixed an entirely flexible system is produced which can produce virtually any desired waveshape. This, coupled with a voltage-controlled master oscillator and filter, enables a musical device with infinite tonal qualities to be realised. Further, by altering the program of the attenuators during the life of the wave, the spectrum may be made time-dependent, enabling wave shapes such as that of the piano to be synthesized.

An experimental system is shown in Fig. 2. Referring to this figure, a voltage-controlled oscillator generates a rectangular waveform at a frequency 2^n times higher than the frequency desired for the synthesized waveform. A Walsh function generator comprising binary counters and exclusive-or gates then generates, under control of the v.c.o., $2^n - 1$ Walsh functions. Each Walsh function is then fed to a digitally programmable attenuator (d.p.a.); only one path is shown in Fig. 2. The d.p.a. is controlled by a read-only memory (r.o.m.) which stores up to 32 eight-bit digital words. This enables up to 256 levels of attenuation to be programmed, any 32 of which may then be selected by addressing the appropriate digital word. The order in which the digital words are selected is controlled by a sequencer which comprises of JK flip-flops and logic gates; the sequencer may also be made programmable if desired. The voltage-controlled oscillator which

feeds the Walsh function generator also feeds a divide-by-*n* counter. In this manner the period over which the coefficient of the particular Walsh function is varied is controllable. Once again, the counter cycle is made programmable.

The output of each d.p.a. is then summed in a traditional virtual earth summing amplifier, the output of which is fed to a voltage-controlled filter (v.c.f.), this being controlled by the same control voltage which controls the v.c.o. Thus, the v.c.o. and v.c.f. track together. The total system results in a waveform being synthesized in which the spectrum may be altered in a programmable manner, both in terms of type and rate of spectrum change. In practice the sequence is initiated by the keyboard controller.

Polyphonic waveform synthesis

By the application of appropriate Walsh/Fourier series both triangular and sawtooth waveforms may be synthesized in a manner compatible with existing organ divider techniques.

The principle by which polyphonic operation is achieved in electronic organs is well known. Briefly, pitches ratioed in accordance with the scale of equal temperament are generated for the highest octave; either 12 independent oscillators are employed or a single master oscillator working in conjunction with a digital function generator. Lower octaves of each scale member may then be generated by the use

of binary dividers, as tones spaced at octave intervals have a 2:1 frequency ratio. By this method, any number of pitches may be generated polyphonically, while the number of oscillators required need not exceed 12. Being of digital form the method has the disadvantage that only one waveshape is directly available at the divider outputs, namely a squarewave. For reasonable additive sound synthesis a minimum of two additional waveshapes should also be simultaneously available: triangular and sawtooth waves.

If the organ dividers are arranged to be of the form shown in Fig. 3, the signals present at the various outputs become not only octave-related but also take the form of useful Walsh functions and may be employed in direct Walsh/Fourier synthesis, enabling a practical circuit for the simultaneous generation of square, triangular and sawtooth waveforms to be constructed.

Referring to Fig. 3, given that the index *n* = 5, five Walsh functions are directly available from the divider chain wal31,

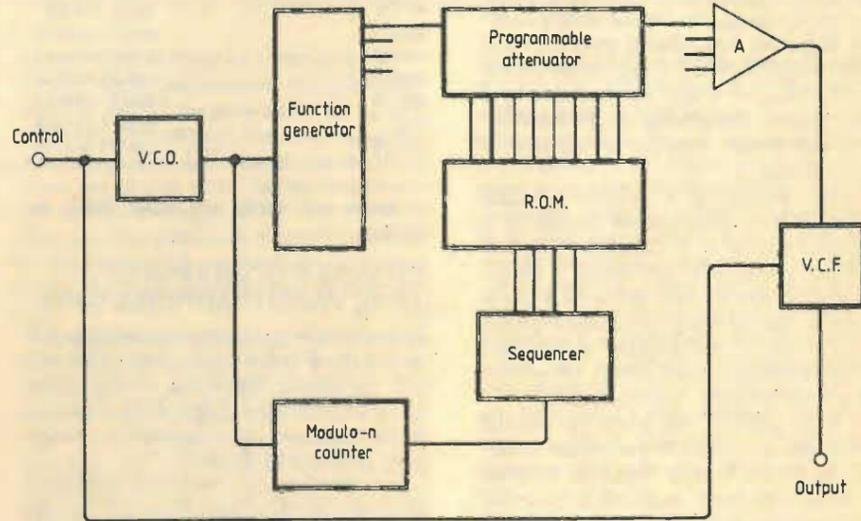


Fig. 2. If each of the Walsh functions are fed to a digitally programmable attenuator and the outputs mixed virtually any waveshape can be produced.

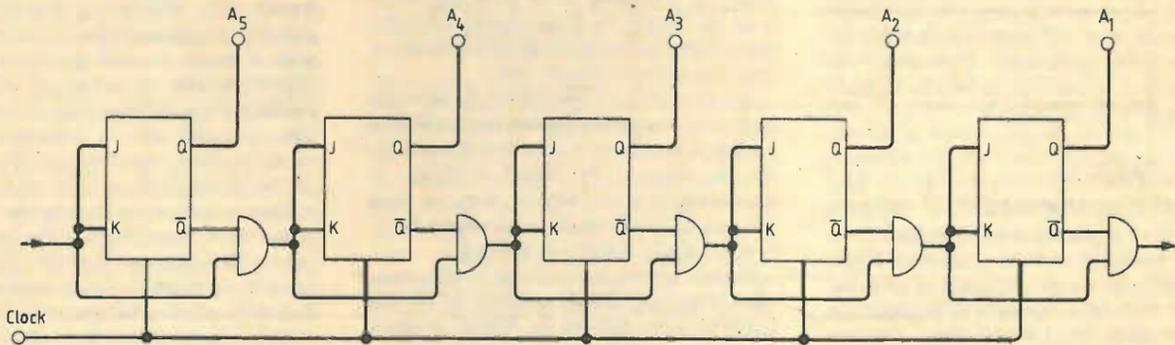


Fig. 3. Binary divider chain providing wal31, wal15, wal7, wal3 and wal1 at consecutive outputs.

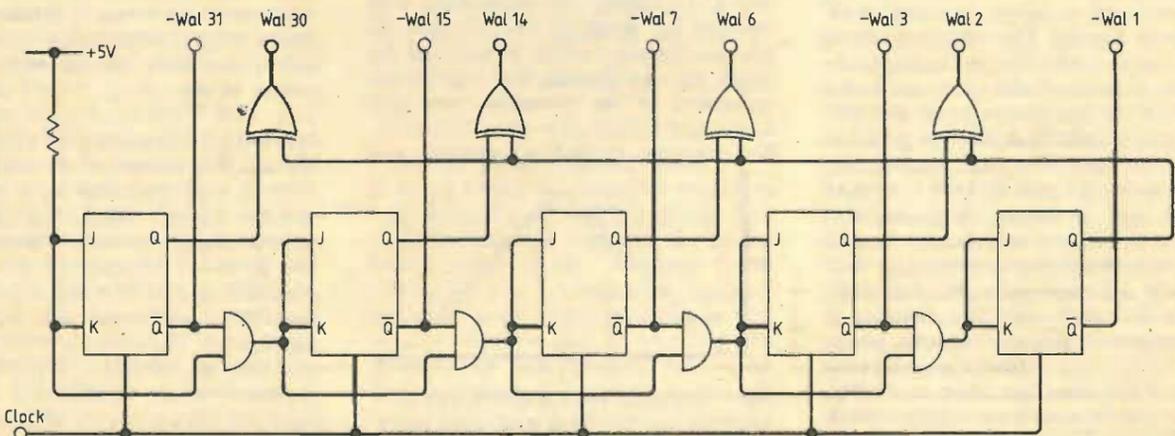


Fig. 4. By adding inverters and four exclusive-or gates triangle and sawtooth waveforms can be synthesized.

wal15, wal7, wal3 and wal1 at consecutive outputs of the divider. The Walsh/Fourier series of a sawtooth waveform, limited to the first 32 functions applicable when *n* = 5 is as follows

$$-1wal1, -0.5wal3, -0.25wal7, -0.125wal15, -0.0625wal31.$$

The negative signs in the series are interpreted as function inversion for practical purposes. All the necessary functions for sawtooth waveform synthesis are directly available from the divider outputs, provided function inversion is taken into account.

Now consider the Walsh/Fourier series of a triangular waveform:

$$+0.5wal2, +0.25wal6, +0.125wal14, +0.0625wal30.$$

None of these four functions are directly available at the divider outputs. But the table shows that these four functions may be derived by the use of only four exclusive-or gates. The complete arrangement for deriving all the necessary function for synthesis of both triangular and sawtooth waveforms is detailed in Fig. 4.

To sum these functions accurately in the relevant proportions they are rewritten in more familiar binary-weighted form:

$$+2^4wal2, +2^3wal6, +2^2wal14, +2^1wal30.$$

and for the sawtooth wave:

$$-2^4wal1, -2^3wal3, -2^2wal7, -2^1wal15, -2^0wal31.$$

By applying the functions to the appropriate inputs of two d-to-a converters, accurate summation of the functions may be realised. Although of higher cost, d-to-a converters have two distinct advantages over operational amplifier summators. Firstly, as the output of a converter is in binary-weighted proportion to a single reference voltage or current, the accuracy of summation becomes independent of any variations in the logical 1 or 0 levels present at the outputs of the dividers or exclusive-or gates. Secondly, high accuracy summation resistors need not be fabricated.

Fig. 5 shows a practical circuit developed for evaluation of the system using readily available integrated circuits. For economy, the facility for simultaneous waveform generation has been dropped during evaluation; only a single d-to-a converter is employed together with some additional data selection logic.

Digital-to-analogue conversion

The d-to-a converter is the six-bit Motorola MC1406L, whose digital inputs are compatible but inverting which must be taken into account when selecting appropriate outputs from the dividers. The device requires an external reference for its operation and, as the output is in the form of a current ratio, current-to-voltage conversion is also necessary in this particular application. The reference for the MC1406L device, IC₈, consists of the tem-

perature-compensated zener diode with a current of 7.5mA supplied through R₁, with C₁ providing a.c. decoupling. Because the negative reference input (pin 13) of IC₈ is the high impedance node of the internal reference amplifier, buffering is not necessary. The device requires its reference in the form of a current, determined by resistors to pin 12 and the reference voltage. With the potentiometer set to mid-position, the values are selected to produce a reference current of -2mA. The value of R₃ is selected so that both reference input points have the same source impedance, to reduce reference current error and temperature drift. The internal reference amplifier also requires compensation to maintain stability; with the values selected for the input resistances, the compensation capacitor C₂ must have a minimum value of 180pF to maintain an acceptable phase margin.

The output of IC₈ (pin 4) provides a current which is a linear product of a six-bit digital word and an analogue reference voltage. The output current is negative and is defined from the equation

$$-I_o = I_{ref} \left(\frac{A_1}{2} + \frac{A_2}{2^2} + \frac{A_3}{2^3} + \frac{A_4}{2^4} + \frac{A_5}{2^5} + \frac{A_6}{2^6} \right)$$

where *I_{ref}* is the reference current and A₁ through to A₆ are the digital inputs, m.s.b. through l.s.b. respectively, A_{*n*} = 0 if the input is at logical 1, and A_{*n*} = 1 if the input is at logical 0. As the voltage at the

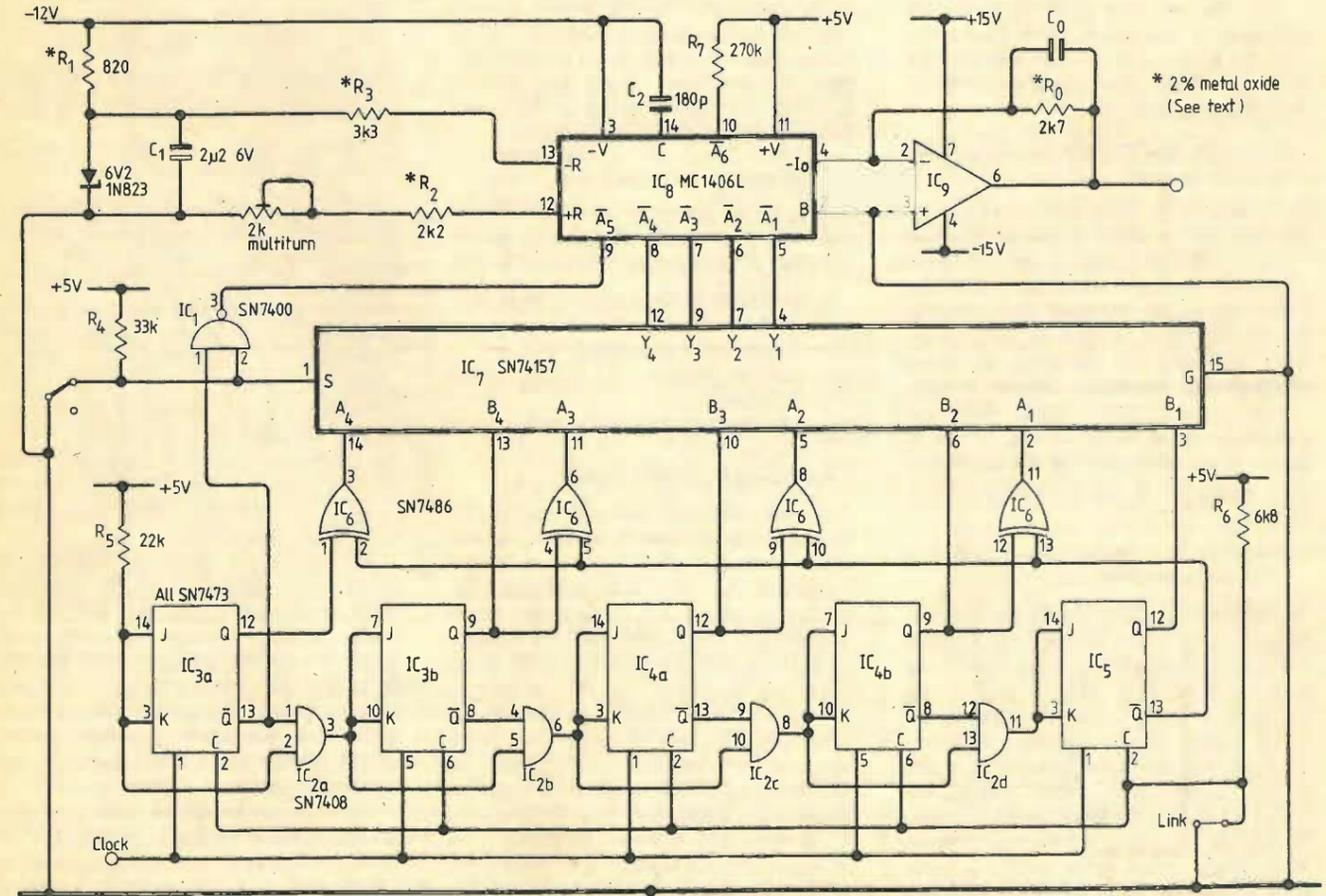


Fig. 5. Practical circuit for system evaluation omits simultaneous waveform generation for economy.

output must not rise above $\pm 0.4V$ for accurate conversion, simple resistive current-to-voltage conversion is not practical and an op-amp converter IC₉ is used. The virtual-earth effect of the amplifier maintains the voltage at pin 4 of IC₈ within the permitted value, while the output voltage ($-I_o R_o$) may be set to any reasonable value by the suitable selection of R_o . With R_o set at $2.7k\Omega$, the output voltage may be set to a peak value of $+5V$ by adjustment of the reference current control. Capacitor C_o provides low-pass filtering of the output waveform; the operational amplifier is a 741 general-purpose device.

Digital function generation and selection logic

Although the MC1406L device is a six-bit d-to-a converter, only five-bit conversion is required in this application. To maintain maximum accuracy during conversion, the input corresponding to the least-significant-bit is dropped and disabled by connecting to $+5V$ through R_7 . The remaining most-significant-bits are supplied through data selection gates. The four most-significant-bits are supplied with an SN74157N, quadruple 2-to-1-line data selector, IC₇. Hence either of two functions may be presented to each of these inputs as required. The least-significant fifth-bit is a special case, since it is not required during triangular waveform synthesis if the desired sample-rate is defined on the time axis. This bit is therefore supplied through a simpler nand-gate arrangement, IC₁.

The data selectors and nand-gate are controlled by the switch. With it open-circuit, the B-inputs of the data selectors are allowed to their respective d-to-a conversion points, namely:

wal1 to A₁, wal3 to A₂, wal7 to A₃, and wal15 to A₄.

In the case of the least-significant fifth-bit, the nand-gate is allowed and the function -wal31 is inverted and transferred to the respective d-to-a conversion point A₅. After taking into account the inversion provided by the d-to-a inputs, all the functions necessary for sawtooth waveform synthesis are presented, namely -wal1, -wal7, -wal15, and -wal31. With the switch closed, as shown in Fig. 5, the A-inputs of the data selectors are allowed to their respective d-to-a conversion points, namely:

-wal2 to A₁, -wal6 to A₂, -wal14 to A₃, and -wal30 to A₄.

In the case of the least-significant fifth-bit, the nand-gate is now disabled and a logical 1 is applied to disable the respective d-to-a conversion point A₅. Hence, after taking into account the inversion provided by the d-to-a inputs, all the functions necessary for triangular waveform synthesis are presented, namely wal2, wal6, wal14, and wal30. Dropping the least-significant fifth-bit during triangular waveform synthesis must result in this wave having a lower peak amplitude than that of the sawtooth wave. The amplitude variation is only around 3%, and is sufficient to warrant the

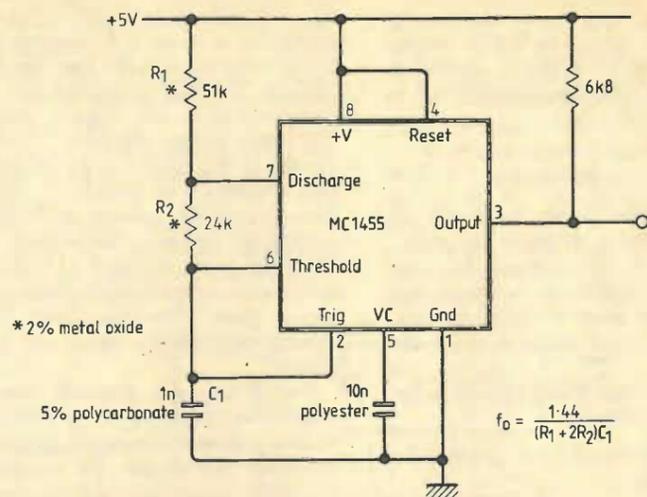


Fig. 6. Clock generator frequency is set to $2^5 f$ for testing dynamic operation of Fig. 5.

otherwise necessary switching of the current reference.

The divider, comprising IC₃, IC₄ and IC₅, is a series of individually clocked master/slave flip-flops controlled appropriately at their JK inputs via and-gates IC₂. Collectively they constitute a five-bit synchronous ripple-through gated binary down-counter which generates the control of a clock-generator, five basic Walsh functions. Four true functions are supplied to the appropriate B-inputs of the data selectors, while a fifth and inverse function is supplied to the nand-gate as required. Four true functions are also fed to the exclusive-or gating where, in conjunction with a common function -wal1, the necessary four additional inverse functions are generated. These four inverse functions are then supplied to the appropriate A-inputs of the data selectors.

Setting-up procedure

Setting up the generator is straightforward and only requires the adjustment of the reference potentiometer. The procedure is

- set switch to open position as in sawtooth waveform synthesis
- fit temporary link shown
- monitor positive d.c. output of the generator
- adjust potentiometer to set d.c. output to $+5V$
- remove temporary link.

The generator may now be tested for correct dynamic operation using a suitable clock generator, Fig. 6. For an output frequency f_o , the clock generator frequency is set to $2^5 f_o$. Using the values suggested in Fig. 6, the output frequency is approximately 440Hz. Maximum operating frequency of the divider is around 5MHz, while the maximum operating frequency of the d-to-a conversion section is predominantly limited by the slew-rate of the operational amplifier current-to-voltage converter. The value of C_o depends on the output frequency f_o . It is suggested that initially the $-3dB$ point of the operational amplifier is set to $2^5 f_o$. Thus $C_o = 1/2\pi 2^5 f_o R_o$. This gives a value of $4.7nF$.

Practical extension for full polyphonics

By applying appropriate Walsh functions to separate summators any number of different waveshapes may be synthesized simultaneously at a given frequency. But for full polyphonics, simultaneous multi-frequency generation of these waveshapes must also be arranged. As an aid to locating functions which form a useful geometrical progression in frequency, an analogy with sine and cosine notation is again useful. Designating the odd and even indexed functions sal and cal respectively, one obtains

$$sal(a') = sal(2a+1)$$

where the sal function of index a' has twice the frequency of the sal function of index a , and

$$cal(b') = cal(2b)$$

where the cal function of index b' has twice the frequency of the cal function of index b . From this it may be deduced that the functions at consecutive outputs of the divider are octavely related and form a geometrical progression in frequency. For multi-octave generation of the functions -wal31, -wal15, -wal7, -wal3, and -wal1 therefore, it is only necessary to select the correct extended-divider outputs. -wal1, for synthesis purposes at pitch $A_2(880Hz)$ for example, is the identical function -wal3, for synthesis purposes at pitch $A_1(440Hz)$, and so forth.

To extend the generator scheme for multi-octave generation of the functions wal30, wal14, wal6, and wal2 however requires separate groups of exclusive-or gates. For correct frequency, wal2 at pitch $A_2(880Hz)$ for example should be formed by modulo-two addition of the functions wal1 and wal3 at pitch A_2 , giving frequencies of 880Hz and 1760Hz for wal1 and wal3 respectively.

Thus extension of the basic generator scheme to full polyphonic capability, while viable, requires a formidable amount of hardware in m.s.i. form. With a view to

continued on page 82

Which way h.f. broadcast receivers?

Proposals for the development of s.w. sets

by Y.-C. Heng and R. C. V. Macario, University College of Swansea

With a vast number of shortwave receiver sets around the world, estimated as being over 100 million sets in regular use, and with a majority of listeners with little or no technical knowledge, using their sets in a wide variety of environments, it is worth taking a look at methods for improving the design of h.f. sets. The use of digital tuning techniques and the incorporation of microprocessors are discussed.

According to conservative estimation, there exist in the world today between 200 and 300 million radio sets capable of shortwave broadcast reception. A regular audience approaching 100 million is also estimated. The figure must surely encourage shortwave broadcasters, but also indicates how important is the function of shortwave broadcasting. It is also estimated that there are one million amateur radio enthusiasts (class A) around the world, but as this is only 1% of the suggested audience clearly the majority of shortwave broadcast listeners have relatively little technical interest or perhaps background and accept comparatively inexpensive receivers. In addition, listeners operate their sets either in an environment with a high level of man-made noise or have a very inefficient aerial. On the other hand, they are usually hampered by difficult tuning operation, undefined signal reception, and poor receiver stability, yet form the majority of shortwave broadcast listeners. This article therefore sets out to discuss which way a shortwave broadcast receiver designer might go with regard to alternative design approaches and the discussion is supported by practical demonstrations. The possibility of applying microprocessors in popular shortwave broadcast receiver designs must also be considered and views on this approach are also included.

What is required?

In this section, difficulties of both manufacturers and users of shortwave broadcast receivers are mentioned, but firstly requirements of users and recommendations of broadcast unions are also set down.

In order to bring out the difficulties facing the shortwave service, it is reasonable to know the distribution of shortwave broadcast frequencies in the radio spectrum. It seems that the arrangement of radio spectrum has never been able to

TABLE 1. Current proposals of h.f. broadcasting service

PRESENT FREQUENCY ALLOCATION	PROPOSAL FROM E.B.U. (1)	PROPOSAL FROM U.K. (2)	PROPOSAL FROM A.B.U. (1)
3900 to 3950 (2)	3900 to 4060	2300 to 2495 3200 to 3400 (except 3260 to 3265)	3900 to 3950 (2) 3950 to 4000 (2)
3950 to 4000 (2)	4750 to 4995 (2)	3900 to 4000 4750 to 5060 (except 4995 to 5005)	4750 to 4995 (2) 5005 to 5060 (2)
4750 to 4995 (2)	5005 to 5060 (2)	5740 to 6200 7100 to 7500 9400 to 9900 9400 to 9800 9500 to 9775 11500 to 12025 13600 to 14000 15100 to 15450 17500 to 17900 21450 to 21850 25600 to 26100	5830 to 6200 7100 to 7500 9400 to 9800 9500 to 9775 11600 to 12000 13360 to 13560 15100 to 15600 17500 to 17900 21450 to 21850 25600 to 26100

- (1) E.B.U.: European Broadcast Union
U.K.: United Kingdom
A.B.U.: Asian-Pacific Broadcast Union
(2) Shared with other services
(3) Frequency in kHz

TABLE 2. Present and proposed h.f. broadcasting frequency spectrum

CURRENT HF BANDS	WARC PROPOSAL (AFTER 1982)
3.900 to 4.000 (2)	3.200 to 3.400 (2) BAND 1
4.750 to 4.995 (2)	3.950 to 4.000 (2) BAND 2
5.005 to 5.060 (2)	4.750 to 4.850 (2) BAND 3
5.950 to 6.200	4.850 to 4.995 (2) BAND 3
7.100 to 7.300 (2)	5.005 to 5.060 (2) BAND 4
9.500 to 9.775	5.950 to 6.200 BAND 4
11.700 to 11.975	7.100 to 7.300 BAND 5
15.100 to 15.450	9.500 to 9.900 BAND 6
17.700 to 17.900	11.650 to 12.050 BAND 7
21.450 to 21.750	13.600 to 13.800 BAND 8
25.600 to 26.100	15.100 to 15.600 BAND 9
	17.550 to 17.990 BAND 10
	21.450 to 21.850 BAND 11
	25.670 to 26.100 BAND 12

- (1) Frequencies are in MHz
(2) Shared with other services

shortwave from the Asian Broadcasting Union (ABU), the European Broadcasting Union (EBU) and the United Kingdom before the 1979 World Administration Radio Conference (WARC) are listed on Table 1. At WARC 1979, the frequency allocations in Table 2 were agreed and these will be available for allocation from January 1982. Table 2 also lists the present band planning. A glance at Table 2, and Table 1 for that matter, shows that the broadcast bands are scattered between 3 and 27MHz, with no simple arithmetic relation among them.

Design difficulties

Despite the general difficulties faced by radio receiver designers, there are some distinct problems for a popular low-cost shortwave receiver design.

In 1959, there were only a few transmitters with transmitting powers of over 200kW, but during the last 20 years, their number has increased to about 400. They generate tens, in some cases hundreds, of millivolts at the antenna terminals when received. The trouble caused in the receiver is that strong signals generate a large number of intermodulation products, strong enough to give the appearance of liveliness, yet masking weak wanted signals. How to distinguish the wanted weak signal from massive strong unwanted signals is always a major technical task.

totally satisfy any shareholder of the spectrum. "How to best share the radio spectrum for each different service?" will always be a difficult technical and political exercise. Shortwave broadcasting in particular is briefly considered here.

In the past twenty years, the total shortwave broadcasting service (including in-band and out-of-band) has grown up from 11,000 to 27,000 daily frequency hours¹, and the problem of congestion is well understood. Re-allocation and expansion suggestions of the broadcast bands on

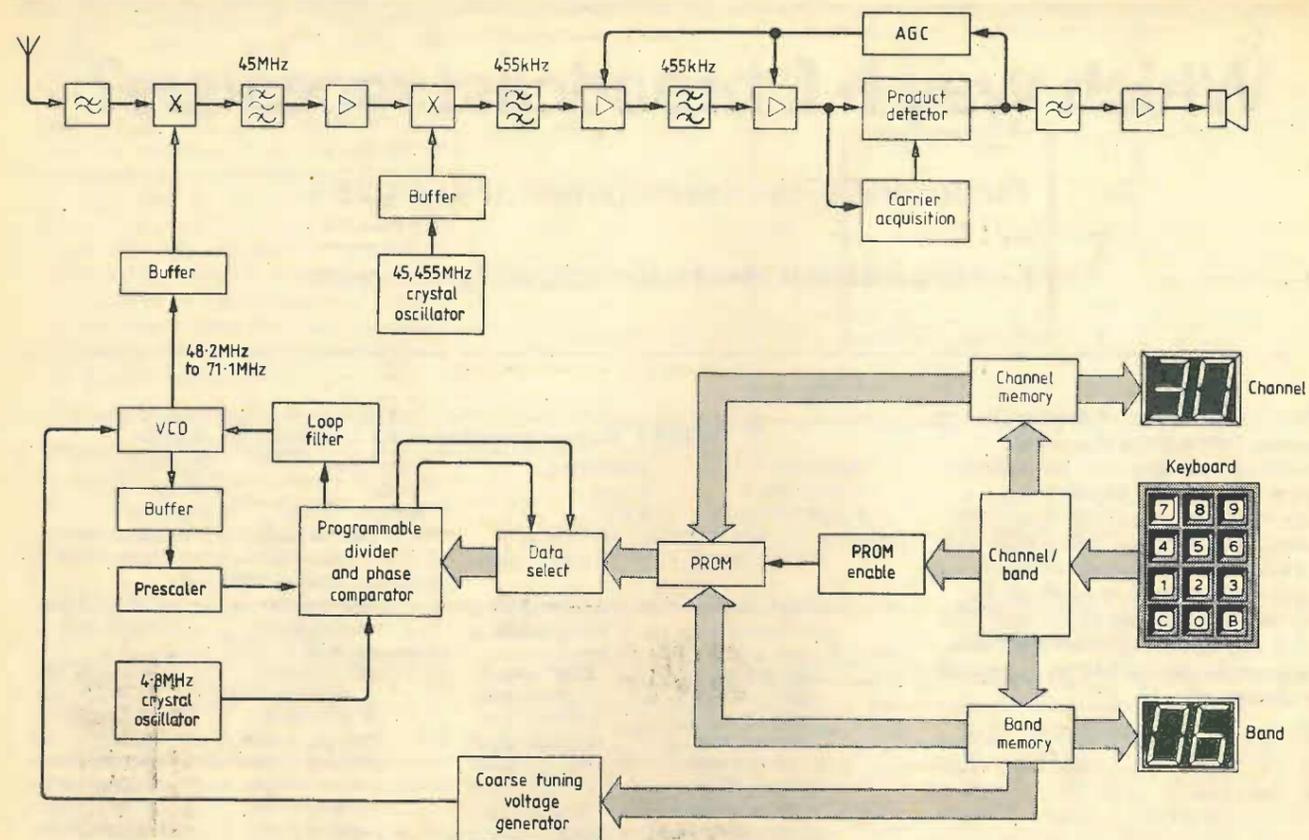


Fig. 1. First approach for a functional system.

A free-running local oscillator in a superhet receiver is always troublesome, especially when the first intermediate frequency is set to a high frequency to improve image rejection ratio.

Even with the most sophisticated mechanical tuning dial design, a resolution of 10Hz at 30MHz can really never be achieved. One can therefore imagine the outcome of the accuracy of a normal popular shortwave broadcast receiver.

Good shaping of the selectivity curves of the r.f. and i.f. stages offer a direct way of rejecting unwanted signals, but cost is a factor when seeking good selectivity curves.

Due to skywave transmission, a fading phenomenon is inherent with shortwave broadcast reception; a way to conquer this problem should always be considered.

User's difficulties and requirements

No need to say, as often as not the designer's difficulties mentioned above are overcome in a popular-model shortwave broadcast receiver design by being transferred to user operation and reception difficulties.

Difficulties to tune to a desired station, and maintain that listening station from drifting, unavoidable interference and spurious signals due to poor linearity and selectivity, audio output variations due to fading effects, are some of the major difficulties facing users. What do the users want? The users simply want easy operation, good performance and low cost re-

ceivers, requirements of course, in almost direct conflict with manufacturers.

After a joint meeting between representatives of national receiver and transmitter manufacturers associations and an EBU study group concerned with h.f. broadcasting, a brief and pertinent description was suggested for a popular shortwave broadcast receiver design: it should be reasonably-priced, stable with product demodulator and easy-tuned.

Following this suggestion, the design philosophy is divided into four sections: easy operation, high stability, low cost and good performance.

One way and better way to relieve the difficult task of mechanical tuning is to apply a digital tuning technique. Digital tuning can make it possible to tune quickly and accurately over a large number of shortwave broadcast stations. Incorporation by means of frequency synthesizer circuits is discussed below.

Tuning a station can be achieved by keying in frequency information, wavelength information, or a pre-assigned code. Before the idea of programme-labelling^{3,4,5} can be widely implemented, listeners still need to look up from a handbook or simply memorize the identity information of a station. It is tiresome to find out station identity information from a handbook each time, but it is also impractical to memorize such things as 5.339MHz or 56.19 meters of more than a few stations. Therefore a station assignment plan similar to the m.f. could be considered^{10,11}. For instance, one plan is to divide the whole shortwave broadcast spectrum into several "fre-

quency bands". Then in each band, stations with agreed channel spacing are given unique channel numbers. For example, the above-mentioned station could now have a pre-assigned code such as Band 3, Channel 79. With a station identity information simpler than a telephone number and using a keyboard entry technique, the user could tune to a favourite programme station easily and accurately.

After tuning to a given frequency, an ideal shortwave broadcast receiver should stay tuned to that frequency without readjustment over an extended period. By applying the frequency synthesis technique, the ideal condition can be approached.

A frequency synthesiser can generate a very large number of local oscillator frequencies by programming and have the stability and accuracy equal to that of a single master crystal oscillator. Today, a crystal oscillator stability of 1 part in 10^6 is easily achieved in a non-ovened but room-type environment; this implies remaining within ± 5 Hz when tuned to 10MHz. Many interesting synthesiser devices are now appearing on the open market, not necessarily originally developed for shortwave receivers, but which can be readily adapted for such purposes. In this article the Philips LN 123 and Plessey NJ 8811 synthesisers are used in two different design approaches.

To keep receiver cost down is almost mandatory. In general, manufacturing cost can be subdivided into material cost, testing cost and assembly cost. By using cheaper components, such as integrated

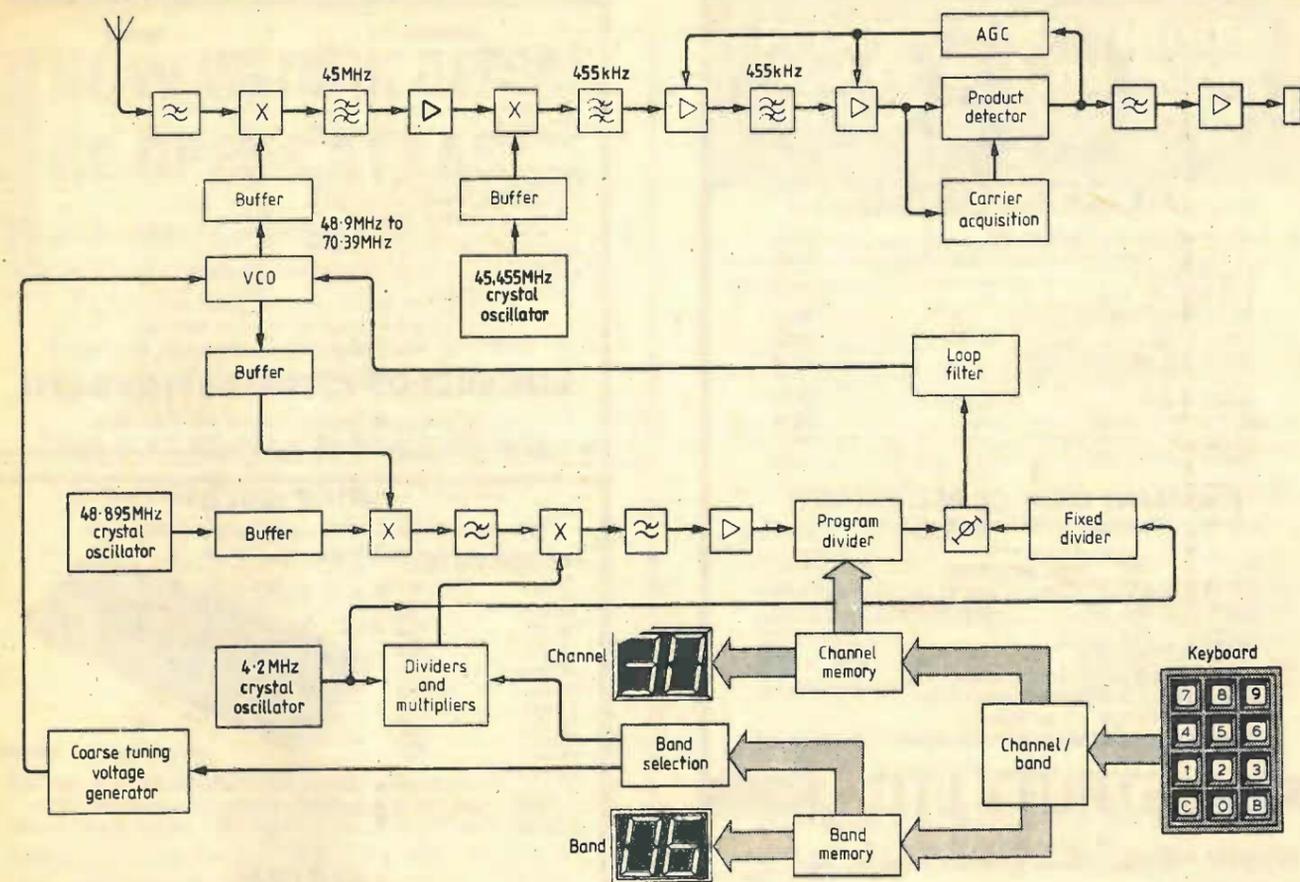


Fig. 2. Second approach for a functional system.

circuits, ceramic filters, etc., not only the material cost, but also the testing and assembly costs can be reduced. A suggested frequency allocation proposal which can reduce the price of the receiver system design is given in design approach 2.

Good performance and low cost are not easy to reach at the same time by a designer, sometimes the two requirements are in direct conflict, but this does not mean a low cost receiver need not have good performance. To some extent, the art is how to distribute the expense over the design. Nevertheless, some specifications which should be considered as a "must be good" are listed here:

- (1) Linearity
- (2) Sensitivity
- (3) Selectivity
- (4) Image rejection ratio
- (5) Frequency stability

H.f. Receiver Design Approaches

Having just specified the design requirements, we now describe two designs which achieve the requirements, but which are based on quite different approaches.

Fig. 1 shows a system block diagram. In this first system design approach, frequency allocation is based on the WARC 1979 new agreement, listed in Table 2. The whole frequency spectrum is arranged to have 12 frequency bands and a channel spacing of 5kHz is assumed. Under this scheme, a broadcast station with a transmitting frequency at 9.645MHz would now have an identity code: Band 6;

Channel 30. To tune to this station, the operator presses the key 'B' first, opening the gate to the band memory unit and at the same time closing the gate to channel memory unit. The number '6' is then pressed and the memory display unit then shows this band number. The user then presses key 'C' reversing the above gate switch functions and then the number '30'. The channel display unit should then show this channel number. The actual digits stored in the band and channel memory units are b.c.d. coded. These b.c.d. numbers are then used as address codes to fetch the correspondent set of words from the eeprom to program the programmable divider. The vco (voltage-controlled oscillator) output, via a buffer and prescaler stages, is divided down in the programmable divider and then sent to the phase comparator unit to compare with the reference frequency signal. If a different of frequency or phase exists, an error voltage is generated through the loop filter to correct v.c.o. frequency or phase in the usual way. With the correct v.c.o. frequency, the receiver is tuned to the wanted station frequency.

The antenna r.f. signal is selectable by converting to the i.f. frequency. An up-conversion superhet system with a first i.f. of 45MHz and second i.f. of 455kHz has been adopted so as to ensure a high image rejection ratio. Double-balanced modulators are used in these two conversion stages to improve various interference characteristics such as intermodulation products, spurious noise, etc. New low-voltage high-level balanced modulators, with which the

manufacturers claim a third-order intermodulation of -60dB and a 1dB compression point of 15dBm, are currently available.

Although at the forthcoming WARC HF conference in 1983, any possible planning of the shortwave broadcasting bands will be based on a double-side band (d.s.b.) sound broadcasting system, the introduction of single-side band (s.s.b.) transmissions has to be taken into account². A carrier reduction in excess of 6dB, with respect to peak envelope power, is also likely. A residual carrier is necessary for the operation of automatic-gain-control circuits in the receiver and for frequency-locking or carrier acquisition purposes. On the other hand, a 12dB reduction makes for a sensible reduction of transmitter power consumption and running costs⁸.

The upper-side band (u.s.b.) transmitting mode is likely to be used in the future shortwave broadcast s.s.b. transmission, therefore only u.s.b. detection is considered in the s.s.b. detector design. As indicated a regenerated carrier signal from the carrier acquisition circuit mixes with the received carrier signal in the product detector stage. The audio information is then amplified after a low-pass filter to the required level through audio amplifiers. The nature of possible carrier acquisition circuits is not discussed here for two reasons. Firstly such circuits are not easy to devise and secondly they deserve a long separate discussion.

continued on page 80

CB

ACCESSORIES

THE BIG DUMMY'S GUIDE TO CB.....£2.50
 DV 27 ANTENNA FROM.....£4.40
 K-40 ANTENNA.....£27.99
 MAG MOUNTS K-40.....£8.80
 S.W.R./POWER METERS FROM.....£6.10
 PATCH LEADS.....£2.00
 2 AMP POWER SUPPLY FROM.....£10.12
 3-5 AMP POWER SUPPLY FROM.....£11.80
 ROGER-BLEEP.....£4.75
 POWER MIKE FROM.....£8.44
 EXTENSION SPEAKERS from.....£2.77
 AM/CB CONVERTER.....£7.29

AND MANY MORE CB ACCESSORIES
 All prices exclude Carriage and V.A.T.

OPENING HOURS:
 Mon.-Sat. 8 a.m. - 5.30 p.m. Sun. 10 a.m.-12.30 p.m.

Just give us a ring on:
 Tavistock 0822-5865, ask for Transistor Kid.
 Tavistock 0822-5247, ask for Silicon Chip
 London 01-520 7236, ask for Rifleman.
 Bognor Regis 0234 828473, ask for Big Daddy

STRUTT LTD.

3d Barley Market Street
 Tavistock, Devon PL19 0JF. Telex 45263

WW - 037 FOR FURTHER DETAILS

MEMORIES		MICROS	
8 x 4116, 250ns.....	£9.00	8035L.....	£3.50
8 x 4116, 200ns.....	£9.50	8243.....	£2.00
2716.....	£3.00	8085A.....	£5.00
2732.....	£7.00	8085A-2.....	£6.00
2114L, 200ns.....	£1.50	8155.....	£6.00
6514, 200ns.....	£4.00	8155-2.....	£7.00
6116L, 200ns.....	£20.00	8251A.....	£4.00
µPD765 (8272).....	£20.00	8253-5.....	£3.50
µPD7002 (A-D converter).....	£3.00	8255A-5.....	£3.50
TTL delay lines, 100ns-10ns taps.....	£4.00	8257-5.....	£8.00
TTL delay lines, 200ns, 20ns taps.....	£4.00	8259-5.....	£5.00
Crystals - 5, 6 and 10MHz.....	£2.00	8279-5.....	£5.00
All components guaranteed new, full specification devices.		Z80.....	£4.00
		Z80 PIO.....	£4.00
		Z80 CTC.....	£4.00
		Z80 DMA.....	£15.00
		Z80 SIO/0, SIO/2.....	£19.00

All above are special offers while stocks last
 Please add P&P 30p. Add VAT to total

BDS MICROSYSTEM DESIGNS LTD.
 28 Pinewood Close, St. Albans, Herts. AL4 0DS

PURE GOLD!

Top-quality, low-profile, gold-plated contacts,

IC SOCKETS

8 pin	8p
14 pin	14p
16 pin	16p
18 pin	18p
20 pin	20p
22 pin	22p
24 pin	24p
28 pin	28p
40 pin	40p



Unbeatable value!

Minimum Order £10. Add £1 P.&P.
 500 + and one type less 5%. 1,000 + any mix less 10%.
 Special offer 10 x 8 pin, 20 x 14 pin, 20 x 16 pin. 5 x all others
 £11.50

ORION

Orion Scientific Products Ltd., 10 Wardour St., London, W.1

WW - 042 FOR FURTHER DETAILS

THE W.W. DISK OFFER RE-OPENS AT LAST

We have obtained a limited stock of European single sided drives so please get orders in soon

Circle the enquiry number for data
 Total U.K. price including VAT at 15% and carriage, CWO

ONLY £155 EACH INCLUSIVE

(Drive £132, P and P £2.78, VAT £20.22)

Please make cheques and P.O.s payable to
W.W. Disk Offer and send to:
W.W. DISK OFFER
 49 Milford Hill
 Batford
 Herts

Please call **0582-429122** to check on availability before ordering

Allow 21 days for delivery. This offer applies to U.K. only and is subject to availability. For non U.K. orders send SAE for quotation

WW - 020 FOR FURTHER DETAILS

FLOPPY DISK DRIVES NOW EVEN LOWER PRICES UNBELIEVABLE BUT TRUE! READ ON!

SIEMENS FDD - 100-8/FDD - 200-8

Fully Shugart Compatible Siemens 8" single and double sided disk drives are available now with unbeatable prices at single unit pricing.

Note these specifications:

★ TRACK 00 SENSING	★ WRITE PROTECT CIRCUITRY
★ ACTIVITY INDICATION	★ AUTO DISK EJECTION
★ MECHANICAL END STOPS AT TRACKS 00 AND 76	★ FAIL SAFE INTERLOCK WHICH PREVENTS THE COVER FROM CLOSING ON A PARTLY INSERTED DISKETTE
★ AUTO WRITE CURRENT SWITCHING AT TRACK 43	

FDD 100-8 Single Sided	Single 250 K	or	Double Density 500 K	FROM	£249.95
FDD 200-8 Double Sided	Single 500 K	or	Double Density 1 MByte	FROM	£349.95

OTHER PRODUCTS C.W.O. 30 DAYS


CP/M 2.2	71.50	75.00
BASIC 80	156.75	165.00
BASIC COMPILER	175.75	185.00
WORD STAR	218.50	230.00
MAIL MERGE	66.50	70.00
SUPERSORT	94.05	99.00

Full range of SD SYSTEMS S-100 CARDS & KITS ALSO AVAILABLE

Send S.A.E. for further details

IRVINE BUSINESS SYSTEMS

P.O. BOX 5
 IRVINE, Ayrshire
 TEL: (0294) 75000
 TELEX: 777582



SIEMENS


A quiet word from Siemens

Siemens produces a range of electronic teleprinters and printer terminals which are quiet, rugged and require little maintenance thanks to a plug-in fault diagnosis and modular design and construction.

TELEPRINTERS are available in various configurations with, or without, paper tape facilities or keyboard, or with magnetic tape attachments that will take the place of a tape reader and punch and provide a convenient method of storing messages.

The Model 1000 Teleprinter uses a plastic type wheel for high print quality, whereas the PT80-5 is a version of the PT80 but using the ITA (No 2) telegraphy code can be supplied with either needle or ink-jet matrix printing. Military orientated versions of the Model 1000 Teleprinter (1000V) are available for specialised applications along with the Teleprinter 1000 CA crypto teleprinter and ancillary equipment covering error correction and modulation and demodulation.

PRINTER TERMINALS using the ITA (No 5) code, which is used with most computer installations can be

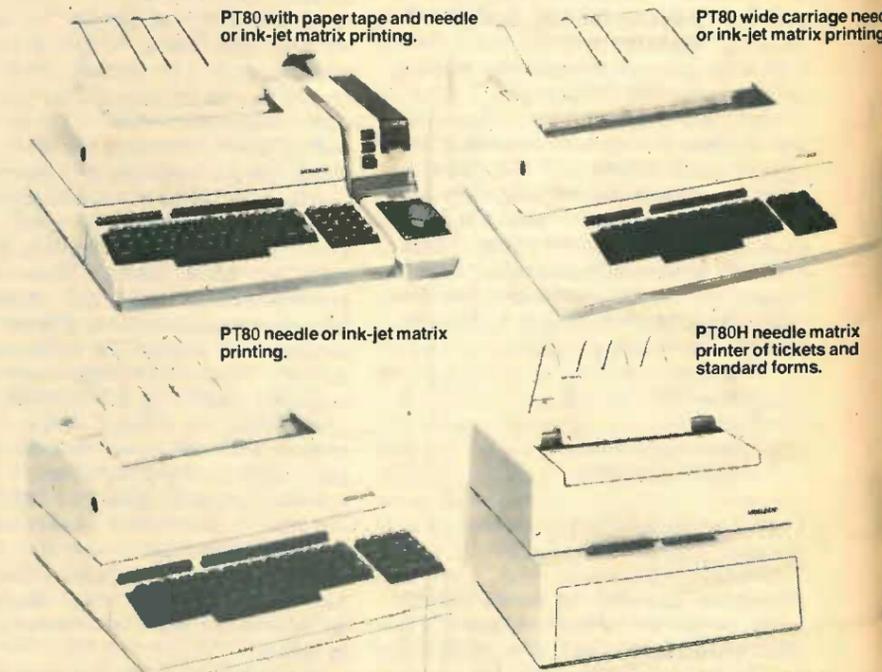


supplied with full tape facility with, or without, a keyboard, or either needle or ink-jet matrix printing.

The PT80i is a special high-speed bi-directional ink-jet matrix printer producing good quality prints at speeds of up to 4,800 Baud. This machine can be supplied with or without a key pad and with either serial or parallel connections.

Ink-jet printing is a method of printing in which Siemens has had a large involvement. It operates at very low noise levels (less than 50 dB) using plain paper.

For complete details contact:
 Siemens Ltd., Siemens House, Windmill Road,
 Sunbury-on-Thames, Middlesex TW16 7HS
 Tel: Sunbury-on-Thames (09327) 85691
 Telex: 8951091

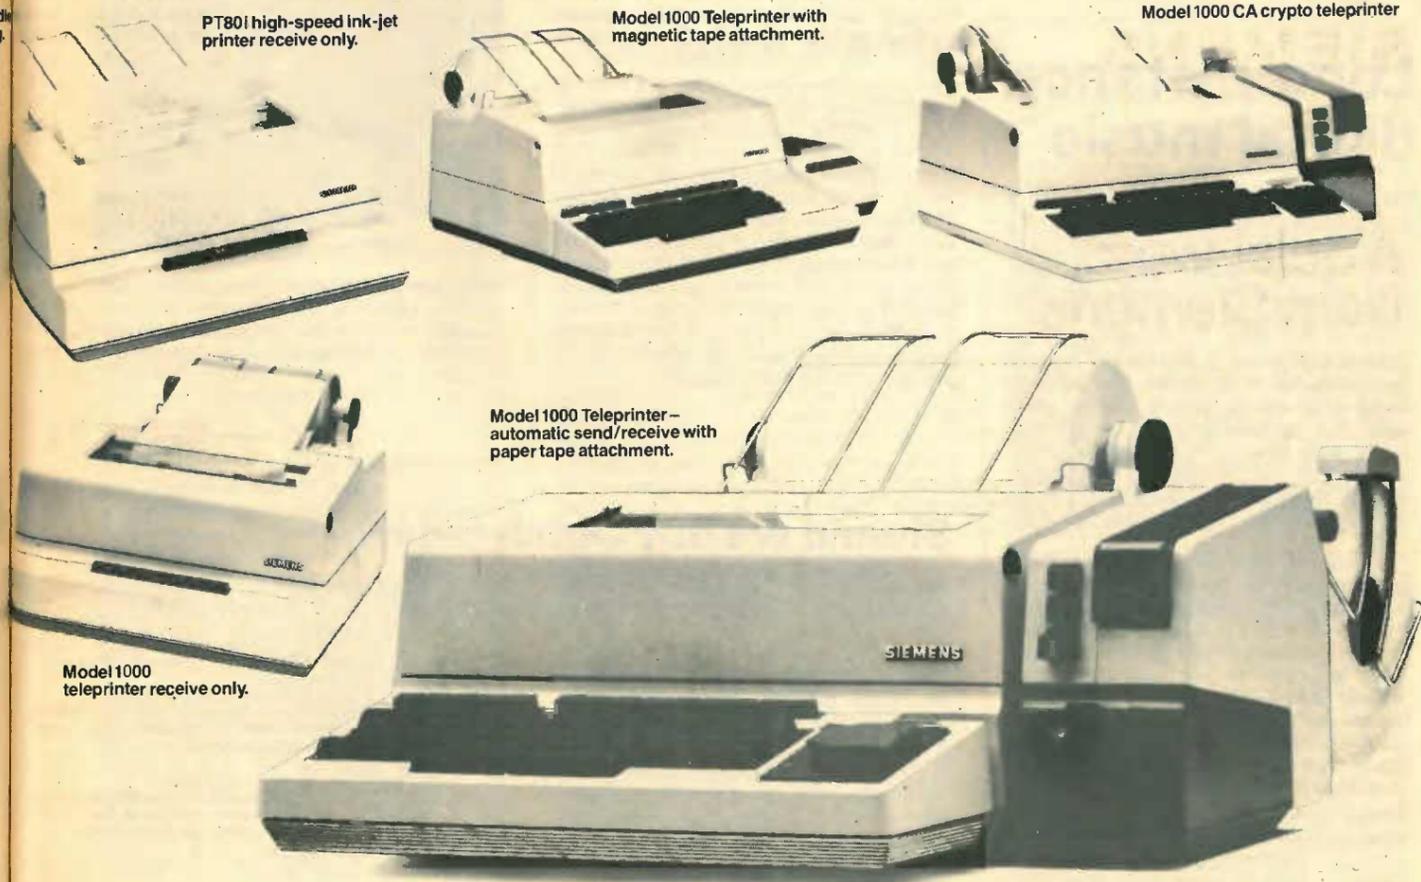

Model 1000 teleprinter receive only.

All models available for OEM as complete units or modules; also floppy disc drives.

WW - 007 FOR FURTHER DETAILS

Siemens-printer terminals are our business

NEWS OF THE MONTH

Frequency-hopping military radio produced

A British firm, Racal-Tacticom Ltd, claims to be the first in the world to go into production with a frequency-hopping military radio. Some of the first models, which operate at v.h.f., have been ordered by the Ministry of Defence for evaluation by the British Army. Some are going to other NATO member countries and, according to the company, will be in service in Europe within the next few months. The purpose of frequency-hopping (an "electronic counter-countermeasure" in military jargon) is to avoid the unwelcome attention of jamming or interception of messages (known as "electronic countermeasures"). Instead of operating continuously in one channel, the radio communication system is designed so that the frequency, of both transmitter and receiver, automatically jumps about from channel to channel in a random sequence. The equipment developed by Racal-Tacticom is a speculative commercial venture which they have been working on for only three years. Gerry Whent, chairman and managing director of the company, says confidently that sales of the product, which includes vehicle and manpack versions, "throughout the 1980s are likely to run into hundreds of millions of pounds from our traditional markets alone".

Parts of the v.h.f. band from 30 to 88MHz are available for use by military communications.

Long distance digital music

Casually switching on my tuner to Radio 3 around lunchtime on the 17th May, I heard a superb performance of a Vaughan Williams symphony. Consulting the *Radio Times*, I discovered that the music was coming live from Shanghai as part of a tour made by the BBC Symphony Orchestra. The second half of the concert consisted of Beethoven's Fifth Symphony, and as an encore, the orchestra played a rip-roaring bravura Chinese piece called 'How the good news was brought from Peking to the villages'. All through the concert one was aware that the quality of the transmission was superb and it astonished me to realise that it was coming from the other side of the world.

On checking with the BBC, I learned that they had used for the first time NICAM-3 (Near Instantaneously Companded Audio Multiplex) which converts the stereo signals to digital form and then compresses them so that up to three stereo pairs may be sent over conventional 2048kbps digital telephone systems. The signal was encoded at Shanghai, sent through a radio link to Peking, transmitted again via the geostationary Intelsat over the Indian Ocean, received at the British Telecom station at Madley, sent through 'conventional' circuits to the BBC where it was decoded and retransmitted to us. It took about a quarter of a second for sound made in China to reach our ears at home in the U.K.


Within this range nine 6.4MHz bands have been selected by Racal for frequency hopping; and within a chosen 6.4MHz "hop band" the frequency hops among 256 channels, each 25kHz wide. The method of achieving this, and the necessary synchronization between transmitter and receiver, were outlined in our earlier report on the prototype (December 1979 issue, p.85). The hopping rate is described by the maker as "medium", which means somewhere between 50 and 500 hops per second. Some idea of the spread-spectrum character of the transmission can be gained from the spectrum analyser display here. The horizontal, frequency axis represents the extent of one "hop band" of 6.4MHz. The small peaks are signal spectra and are a record of the successive frequency positions of the signal in about 35 of the 256 channels over a fraction of a second. The large-amplitude peak in the middle of the screen is the spectrum of a strong jamming signal, and it can be seen how this is avoided by most of the positions of the frequency-hopped communication signal.

Up to 50 "hopping nets", each using a different hopping code, can be operated in the same hop band simultaneously — and possibly up to about 200 if they are not all working at the same time. Fixed frequency nets can also be operated in a hop band. The system can function with one third of the available channels occupied by other signals, such as fixed frequency, other hopping transmissions or jammers. Transceivers are controlled by a keyboard (see photo) and three rotary switches. The keyboard is used for changing the mode of operation, for entering codes and for checking. Day-to-day operation requires the use of only two of the rotary switches. Transmission modes are: F3 simplex, voice, analogue information, and digital data at rates up to 16kbit/s. To protect certain frequencies in the hop band, or to avoid strong signals, up to 16 frequencies may be barred from the hopping sequence in any hop band. Racal say that the price of their frequency hopping radio set is about 20% higher than that of a conventional military transceiver.

Should we buy Dutch radar?

Although the value of the defence industry may be questioned in its ability to actually defend us against any potential enemies, one thing in its favour is that it provides work for the manufacturers of defence equipment. All the more puzzling then is the proposal by the MoD to purchase missile tracking radar from the Netherlands. The radar would be used in place of the Marconi GWS25 Seawolf tracker. The MoD seems to be willing to accept a degraded performance and a lower environmental standard in exchange for lighter weight.

Marconi Radar Systems are, understandably, upset about this; the Seawolf has been in use

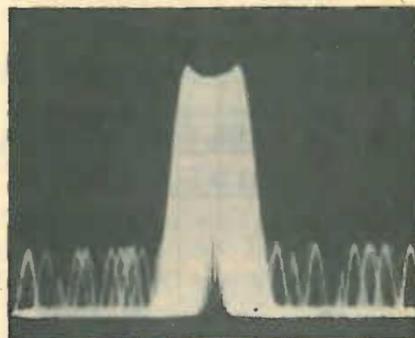

Spectrum analyser display shows a frequency hopping signal (small peaks) spread out over a 6.4MHz hop band. The large amplitude signal in the middle is from a jammer.



A 50-watt vehicle station. The central unit, with the keyboard, is the transceiver (output 10mW or 4W) which is common to both the vehicle station and the manpack version.

with the Royal Navy and is in full-scale production. Over the past 35 years they have built up an expertise in tracking systems and have been working to enhance the performance of the system against low level missiles.

Marconi have proposed a series of modifications to make the Seawolf lighter while retaining the performance improvements at a comparable price. They point out that such equipment would also have considerable export potential, but if the Navy's decision goes against them there would follow the destruction of the design team and loss of employment in various factories.

TV direct by satellite

It seems that we are going to need to learn another set of initials to denote yet another medium for telecommunications. This one is DBS, for direct broadcasting by satellite. The Home Office has issued a report on the options available and a possible strategy for instituting a system.

Under a plan drawn up by the International Telecommunications Union (ITU) in 1977, the UK has been allocated five DBS channels which could be beamed towards the UK from a geostationary satellite of 31° west. Each channel would be capable of providing one tv service or a number of radio services with national coverage. Reception could be by individual households, in which case an antenna and the appropriate converter would cost around £150 to £200; alternatively there could be a community receiving station, distributed to households by cable.

Various satellite systems are discussed in the document and their likely cost. For instance, a two channel system using ESA's European Communications Satellite would cost about £15m per channel per year over a ten-year period; a five-channel system broadcast via the L-Sat, ESA's large satellite would cost about £10.5m per channel. Cost could be reduced by starting with a pre-operational system with a spare satellite held for launching, though if there were a breakdown in the operational satel-

Component supplies

It is annoying to need a particular component and not to be able to find a supplier. We have received two catalogues from new suppliers and any new source is always welcome. Anglia Components originally started as a supplier of spare parts to retail radio and tv repair shops they have now expanded into a general component and tools supplier and still have some emphasis (a whole separate section) on tv replacement parts. They have installed a computer and offer to deliver all catalogued items by return of first class post. They can cater for low and high volume orders and can offer regular deliveries to high volume users. The newest issue of the catalogue describes in its 110 pages resistors, capacitors, semiconductors and industrial integrated circuits, opto-electronics, electromechanical components, tools, test equipment and linear i.c.s. The catalogue is available from Anglia Components, Burdett Road, Wisbech, Cambs PE13 2PS.

Another catalogue, from M.S. Components, also emphasises that all catalogued parts are dispatched on the day that the order is received. The catalogue is of a similar size to that from Anglia; it contains some 2,500 separate items and it is promised that there will be a new edition soon which will be increased to over 3,000 items. Among the many products one particular service worthy of note is a transformer prototyping service. M.S. can supply, within 48 hours, transformers within the range 3 to 50VA with the secondary voltage and current specified by the customer, with a set price for each transformer of £5.99. Another notable point is that M.S. encourage the amateur constructor. You do not need to be an account holder and can buy components over the counter on a Saturday morning, if you can get to M.S. Components, Zephyr House, Waring Street, West Norwood, London SE27 9LH.

lite, there would be no service until the replacement was launched.

Also discussed at length is the content and quality of any proposed DBS service. With a worldwide reputation or the high quality of our domestic tv services and any new service should maintain that standard. Competition for the sake of audience figures can lead to a reduction in the range and quality of programmes available to the public. With the introduction of the fourth tv channel in the UK and the pilot cable services recently announced, there could be many channels available to the public. Another possibility is the extension of cable tv to a national service to provide broadcast programmes and other telecommunications services to the home. Bearing all this in mind, the report suggests that a modest start would be preferable, with perhaps only two channels.

The report goes on to discuss some of the programme options. The BBC has proposed that it should provide television programme services on two channels, one would be a subscription films, and other BBC special productions, opera, drama, music and extended coverage of sporting events; all these would be to run in the normal schedules. This service would not be financed from the net revenue of the tv licence fees. The second BBC DBS channel would be used for a service of retransmissions of 'the best of BBC-1 and BBC-2' especially for those who are unable to view the programmes at the time of the original transmission. Another proposal for a subscription chan-

nel has come from the Granada group to consist principally of recent feature films. The Open University has proposed that priority should be given to an educational channel and this idea has been supported by a number of other organisations. Teletext and information services are also mentioned.

As regards the kinds of DBS serves that might be provided, the general consensus seems to be for a 625-line standard tv signal with the possibility of adding additional sound channels for stereo, sound tracks in different languages or separate radio services.

Financing such a service poses major problems and it is suggested that it may be operated by a separate body acting as a common carrier which leased the individual channels to the broadcasting bodies. The establishment of the system would require considerable initial capital outlay, and there is the continuing running cost. Licensing and subscription and advertising revenues are some of the possible sources.

Finally there are environmental aspects of DBS to be discussed. The receiving antennae are likely to have some visual impact on our skylines although a dish as small as 40 to 50cm in diameter might be possible under favourable conditions. A community reception centre with cable distribution to the individual household might be preferable. For transmission to the satellite only one transmission station would be needed compared with the 1,000 or so, currently in use for the terrestrial service.

EBU proposes a world digital television standard

Western European broadcasters, through their organization the European Broadcasting Union, have proposed a set of parameters as a digital television standard for studio equipment. They hope it will be adopted throughout the world. It will in fact be submitted to the final meeting of CCIR study groups on this subject due to be held in September this year in Geneva. The need for such a standard has arisen because more and more television studio equipment is going digital and compatibility between different units is desirable. The EBU says that an agreed world standard would "mean less expensive equipment, because of the economies of scale, and benefit international programme exchange. It would have important financial advantages for users and manufacturers, lead to improvements in the technical quality of programmes shown in a country with a different television system from the originating country, and assist the international exchange of technical information on television production".

The EBU standard is based on coding of the separate components of the colour tv signal rather than the other possible approach, coding of the composite PAL, SECAM or NTSC colour signal. (Both of these methods have been studied by broadcasters for several years.) In the EBU proposal the luminance signal component is sampled at a frequency of 13.5MHz and the two colour-difference signals are each sampled at 6.75MHz. Thus the standard is called "13.5:6.75:6.75" in shortened form. The EBU hopes these parameters will be applicable to both 525-line and 625-line television systems and hence that the number of samples per television line

will then be very similar. Because of the different field rates, of course, the number of samples per picture will be different.

The need for a worldwide standard in this field was the subject of a recommendation by all the unions at the 3rd World Conference of Broadcasting Unions held in Tokyo in 1980. In the USA the SMPTE has been studying the problem for some years, and the EBU has coordinated its work with the investigations of this society. There are now indications of support for the EBU proposal from several of the broadcasting unions. For example, the Organización de la Televisión Iberoamericana (OTI) has already given its support and this is particularly significant because both 525-line and 625-line countries exist in the OTI area. Encouraging reactions are also said to have come from the North American National Broadcasters Association and the Union of National Radio and Television Organizations of Africa.

● Another digital standard soon to be established in the field of television is for viewdata terminals — but in Europe only. Its purpose is to standardize television sets as far as public viewdata is concerned so that a common set of integrated circuits can be used with any of the different viewdata systems, such as Prestel in the UK, Bildschirmtext in West Germany and Teletel in France. At the time of writing the standard is expected to be ratified in June by the central organization of the European telecommunication authorities, the Conférence Européenne des Postes et des Télécommunications (CEPT) at Bern.

Technologists detained in USSR

Two professional workers in the field of electronics have been arrested in the USSR after unsuccessful attempts to obtain exit visas to enable them to emigrate from the country. Both are Jews. Kim Fridman, an electronics engineer, was head of the test department in the Kiev Radio Works. Viktor Brailovsky, a computer scientist, was a senior research fellow in the Institute of Electronic Control Machines, Moscow.

Both men appear to have run foul of the Soviet authorities by holding cultural and scientific seminars in their homes, in spite of the fact that these meetings were conducted on strictly legal lines and had no political content. Kim Fridman's wife Henrietta, who visited these offices recently, told us it is common practice for "Refuseniks"* to hold such seminars, mainly to continue their scientific education and keep their professional knowledge up to date. The charge against Fridman is "parasitism";

*"Refuseniks" are Soviet Jews who, having been consistently refused permission to emigrate to Israel, are harassed by the KGB, usually dismissed from their work, and live in fear of arrest and trumped-up charges resulting in imprisonment.

that against Brailovsky "defaming the Soviet state and public order".

Kim Fridman voluntarily left his job in October 1969 in anticipation of a three-year wait before he would be allowed to submit his application to emigrate. The official reason for refusing him permission to leave the USSR is "secrecy" — presumably it was considered he had knowledge of Soviet radio technology which might be useful to an enemy of the state. Considering the date he left his job, *Wireless World* has expressed scepticism on the validity of this reason, which seems more like an excuse; and on the strength of our view the UK Foreign Office is arranging to have the Fridman case heard at the Madrid conference. Up to the time of his arrest in March 1981, Kim Fridman had been doing temporary, unskilled work but had been finding it more and more difficult to obtain employment.

Viktor Brailovsky asked for an exit visa in 1972. This was refused in 1973 and shortly afterwards he was dismissed from his post at the Institute of Electronic Control Machines. It is thought that his arrest, in December 1980, resulted from his editing of a cultural journal "Jews in the USSR", but the charge of defaming the Soviet state appears to be contrived



because the journal, which ceased publication in June 1979, was not political. After his arrest, other scientists tried to go to his home for further seminars, at the invitation of his wife Irina, also a computer scientist, but were turned away by KGB officers. Some time in 1981 the IEEE expects to publish a paper by Brailovsky in their *Transactions on Pattern Analysis and Machine Intelligence*.

All professional workers in electronics will be distressed to hear of the way these colleagues in the USSR are being treated by the authorities and will hope for success in the efforts currently being made to help them.

New satellite earth station

British Telecom are to build a new satellite communications earth station in Wiltshire. An 87-acre site at Stert, near Devizes, has been purchased, and the first dish aerial is expected to be operating by early 1986. About six aerials should be working on the site by 1990. This is BT's third satellite tracking station, and has become necessary because capacity of Goonhilly Downs and Madley is limited. There will soon be further Intelsat satellites placed into geostationary orbits. Apart from these, Inmarsat, the international maritime satellite communication system, which the new station will also serve, is expected to grow rapidly in the next few years, becoming operational in early 1982.

At the time of writing Intelsat V-B, the second of a new series of nine international communications satellites, was scheduled to be launched on May 21 from Cape Canaveral. Like its predecessor, Intelsat V-B weighs 1,928 kg and has almost double the communications capability of early satellites in the Intelsat series — 12,000 voice circuits and two colour television channels. It will be positioned in geosynchronous orbit over the Atlantic Ocean as the main satellite to provide communications services between the Americas, Europe, the Middle East and Africa.

Dennis Baker has been awarded the Martlesham Medal for 1981. Given by British Telecom to present or former members of its staff, the medal is awarded for 'outstanding achievement in telecommunications science and engineering.' Mr Baker was responsible for introducing silicon transistors into submarine cable repeaters. He developed a system for bonding the extremely thin wires used in transistors onto the silicon chip. The repeater amplifiers used may be at depths of three miles with pressures of up to three tonnes per square inch. They need to have a guaranteed life of 25 years. The transistors developed by Mr Baker and his team have been in use in cables all round the world without failure for the past ten years. Mr Baker is also involved with integrated circuits and computer logic. He leads the team which is credited with coining the word 'microprocessor', and is currently working on small geometry circuits for the System X telephone exchanges, and on computer-aided design for large-scale integrated circuits. He is shown here holding microphotographs of the metal-to-silicon bonds used in the submarine amplifier transistors.

The twins paradox of relativity

A composite reply to correspondence arising from Professor Dingle's October article

from Professor Ian McCausland

Department of Electrical Engineering, University of Toronto

I am grateful for the opportunity to reply to various letters that have been sent to the Editor in response to Professor Herbert Dingle's article¹. I shall start with Dr Tom Wilkie's letter (June issue), since it was in response to discussion with him that the article came to be written.

I am sorry if Dr Wilkie feels that he has been singled out in an undesirable way by Dingle's article. I understand that Dingle had planned to rewrite the article in more general terms, without specific reference to Dr Wilkie, but he did not live to do this. I did think of making such alterations myself, but I was reluctant to tamper with what Dingle had written.

Since Dr Wilkie describes his conviction that Dingle is wrong as being "unshakable", there is little that I can reply to him; but I would like to make some comments about his letter which may say something to others who may view the question as being still open.

In reply to Wilkie's comment that "most academic journals have for some years rightly viewed the matter as settled and regarded more discussion of it as a waste of paper", and his final plea to "let it rest", I would simply observe that he was the one who published the item entitled "The Twin Paradox revisited" in *Nature* in 1977, which led directly to the writing of Dingle's paper².

One of the interesting features of the responses to Herbert Dingle's criticisms of special relativity has been the variety of attempts to answer Dingle's question about the relative rates of the equatorial and polar clocks mentioned by Einstein in his original paper. Wilkie's answer is to say that it may be that there is an error or ambiguity in this example in Einstein's paper, and he later states that original papers may not be definitive because "second thoughts may change the author's mind". It is interesting to note that, in the very example mentioned, we do have Einstein's second thoughts available to us. If one studies that example in the generally-accepted English version of Einstein's first paper³ (translated from the text in a German collection published in 1922), one finds a footnote which excludes the case of pendulum clocks, but that footnote does not appear in the originally published version of the paper. The later addition of the footnote seems to me to confirm that Einstein did mean exactly what he said, and also confirms that the statement about the slowing of the equatorial clock was intended to refer to a real slowing, not merely something that depended on the point of view of the observer.

According to Wilkie, Max Born answered in technical terms whose meanings were precise and well-defined. As an example of Born's precision, consider the following statement, referring to the special theory⁴: "The simple fact that all relations between space co-ordinates and time expressed by the Lorentz transformation can be represented geometrically by Minkowski diagrams should suffice to show that there can be no logical contradiction in the theory." Since the Lorentz transformation is contained in the special theory, but is not the whole theory, it is illogical to claim that any property of the Lo-

rentz transformation is a sufficient condition for the whole theory to be free of logical contradiction.

With reference to Wilkie's statement that the language of relativity is geometry, not English or German, Dingle did not question the impeccability of the mathematics of special relativity. But the theory is based on postulates expressed in words, and the mathematics is not the whole theory; it was the theory as a whole that Dingle criticized, not its geometry.

I agree with Dr Wilkie that some of Dingle's critics have tripped themselves up by their use of words. However, this is not always because of the difficulty of expressing abstruse technical matters in words. Consider, for example, a case that I have documented elsewhere⁵, in which, in *The Listener* in 1971, one scientist stated that the results of the Hafele-Keating experiment supported special relativity, and another stated that the experiment had no relevance whatever to the special theory. Now, a statement that the results of a certain experiment support a certain theory is a perfectly simple factual statement (however abstruse and technical may be the reasoning that led to that conclusion), and the same applies to the contrary statement. The fact that the two statements are contraries of one another (they cannot both be true, though they might both be false) shows that one or other of the scientists (or both) misunderstood either the theory or the experiment (or both). Or it might mean that there is a contradiction in the theory.

In the note mentioned above⁴, I documented several other unsatisfactory statements that have been published by defenders of the theory. These cannot be dismissed as being merely poorly worded, since most of them were uttered by scientists who are prolific authors of books and who may therefore be reasonably expected to be able to write what they mean. I think we should keep in mind the words of the anonymous diplomat (quoted by Sir Bruce Fraser in his revision of Sir Ernest Gowers' *The Complete Plain Words*) who said: "What appears to be a sloppy or meaningless use of words may well be a completely correct use of words to express sloppy or meaningless idea."

Wilkie's paragraph about all the scientists who did not choose to seek fame by dethroning Einstein is very interesting, but totally devoid of scientific basis. The pursuit of scientific truth is not aided by statements such as: "That no young student over the last 20 years has seen the chance to make his name by developing Professor Dingle's ideas is eloquent testimony to the erroneousness of these ideas."

Several other letters were received by the Editor with varying degrees of relevance to the problem at hand. Before dealing with individual letters, examine the nature of the problem. According to Dingle⁵ a paradox arises when, from the same premises P, two (or more) apparently contradictory conclusions X and Y seem inescapably to follow. It can be resolved only if one of the following four things can be shown: (1) the conclusions are not in fact contradictory; (2) conclusion X does not follow; (3) conclusion Y does not follow; (4) the premises P contain an internal contradiction.

Furthermore, if we start with a pair of contradictory premises, then, as Popper⁶ has pointed out, we can infer any conclusion we like using valid rules of inference.

How does this apply to our problem? Suppose that we have a set of premises P, and suppose that one scientist (D) deduces from those premises a conclusion X, and that another (E) deduces from the same premises a conclusion Y, which is directly contradictory to X. Each scientist may believe that he has shown by his own deduction that the other's deduction is faulty, but in fact both deductions might be perfectly valid deductions from premises P which contain an internal contradiction. Furthermore, even if hundreds of supporters of E come forth, each with a different argument showing that Y does in fact follow from P, these do nothing whatever to show that D's deduction of X from P is faulty. To refute D's argument it is necessary to examine that argument itself and show that there is an error in it — in other words, to show that conclusion X does not follow from the premises P.

In reading the literature on the twin paradox, one finds many articles showing ingenuity, with varying degrees of originality, and picturesque detail, that asymmetrical ageing can be deduced from Einstein's theory. Many of these articles present the arguments in such a way as to imply that they refute the deduction of the opposite conclusion (symmetrical ageing), when in fact their results merely contradict the opposite result and, for the reasons discussed above, contradiction does not imply refutation unless it is first proved that the theory from which the contradictory results have been derived is itself free from contradiction.

For example, one of the correspondents, T. de Limelette, writes: "But I agree that the solutions to the paradox found in some texts are not all one could wish. I propose here my own. It is contained entirely within the special theory." I think it is clear from the foregoing that yet another presentation of the derivation of asymmetrical ageing, without showing what is wrong with the other argument, is not a solution to the problem that Dingle raised. T. de Limelette also comments on Dingle's article as follows: "I wonder where Professor Dingle picked up the strange idea that two different observable descriptions of the same events are not permissible. A description requires observers, apparatus and measurement procedures before it can be observed. These are not left unchanged by a change in the reference coordinate system. So why should the results of the measurements have to remain the same?" I am not quite sure that is the point of this comment, unless it is to suggest that the rather bizarre set of observations envisaged by Dingle are in fact feasible.

N. Thomas comes closer to dealing with Dingle's argument. The relevant paragraph of his letter is as follows:

The situation according to Special Relativity is as follows (for instance, see Introduction to Relativity by L. Marder, Longmans 1968). According to Paul the outward and return journeys take 1½ days each, whilst according to Peter they take 15 years each. Thus Peter judges Paul's clock to be running slow by the factor $15 \times 365 / 1.5 = 3650$. According to Paul, Peter's clock runs slow by the same factor, and at the end of his outward journey Paul says that 35½ seconds have elapsed on Peter's clock whilst 1½ days have elapsed on his own clock. Now suppose that Peter had previously placed a stationary clock synchronized with his own at the point where Paul reverses his journey. Both Peter and Paul will say that this clock reads 15 years at the end of the outward journey, and this is how Peter assigns a duration of 15 years to the outward journey. However, be-

cause he is moving relative to Peter, Paul says that this additional clock is not synchronized with Peter's own clock but rather leads it by 15 years minus 35½ seconds: this is an example of the relativity of simultaneity. As soon as Paul reverses direction he judges that Peter's clock now leads the local clock (which reads 15 years) by 15 years minus 35½ seconds. Paul measures 1½ days on his own clock for the return journey (making a total of 3 days) whilst he judges that only a further 35½ seconds elapse on Peter's clock (making a total for the trip of 30 years). According to Paul, Peter's clock therefore races forward by 30 years minus 71 seconds during the reversal; as discussed by Einstein this can be explained using General Relativity. (Alternatively, since Paul changes inertial frames it can be attributed within Special Relativity to a change in his definition of simultaneity). Special Relativity does not therefore predict that Paul is rejuvenated at the beginning of the return journey, and Dingle's refutation of the theory on this basis is not valid.

It seems to me that his is not a satisfactory answer to Dingle's article. It should be recalled that Dingle was discussing Einstein's own resolution of the twin paradox, and that this resolution required the use of general relativity. (Einstein's article takes the form of a discussion between a relativist and a critic; the discussion of the paradox starts from special relativity but the critic asks for a resolution that satisfied the general theory, and it was that resolution that Dingle discussed in his article¹.) This seems to me to suggest that Dingle's argument must be met in terms of the general theory, not the special theory.

The other point to be noted about Einstein's resolution is that he agreed that it is perfectly valid to consider Paul to be fixed throughout the whole course of events, provided that the appropriate fields of force are invoked. This means that we could rephrase a passage in N. Thomas's letter as follows: "Now suppose that Paul had previously placed a stationary clock synchronized with his own at the point where Peter reverses his journey. Both Peter and Paul will say that this clock reads 15 years at the end of the outward journey, and this is how Paul assigns a duration of 15 years to the outward journey." (In case it may be argued that the fields of force associated with the initial parting of Peter and Paul might upset the synchronization of that clock, one can assume that Peter and Paul are moving uniformly relative to one another at the start of the process, so that no fields of force are needed at the original parting.)

W. James writes that "Dingle gives a wholly spurious symmetry to the problem by assuming that the Universe is empty but for the two clocks in his analysis (although in the statement of the problem he also refers to the earth.)" I can find no such assumption stated; in fact Dingle talks about the earth and a distant planet, whereas Einstein's statement of the same problem defines it wholly in terms of reference frames. Einstein's article does not use any other objects except the travelling twins to resolve the paradox, except that later in his paper, when his supposed critic suggests that the gravitational fields are fictitious, he states that "all the stars in the firmament can be conceived as participating in the creation of the gravitation fields". I do not think that Dingle would have objected to this statement, and the fact that Dingle did not happen to mention all the stars in the firmament can scarcely be taken as equivalent to an assumption on his part that the universe is empty except for the two clocks.

W. James also states: "The clock paradox of special relativity is stated in McCausland's

article 'if there are two clocks in uniform relative motion the special theory of relativity requires each clock to run faster than the other'. . . . In fact my article³ does not even mention the clock paradox, much less state it. In the relevant context I quoted a passage from Davies⁹, and then suggested that passage provided strong support for Dingle's claim that "if there are two clocks in uniform relative motion, the special theory requires each clock to run (not merely seem to run) faster than the other." If the passage I quoted from Davies does not support that claim of Dingle's, then I think that someone should state clearly what it does mean.

I. M. Crann states that Dingle tacitly assumes some form of universal time, and that this assumption of "absolute" time guarantees that contradictory results will be obtained. I do not think that Dingle makes such an assumption, any more than Einstein did. Einstein stated quite clearly, in the passage Dingle quoted, that retardation of a clock during one phase of the experiment was over-compensated by faster working during another phase, and that a clock works faster if located at a point of higher gravitational potential. I think that Dingle merely followed Einstein's argument to its inevitable conclusion.

K. Burnett (May letters) asks "Am I the only reader of *Wireless World* with an interest in physics who finds the long series of articles on special relativity somewhat boring?" After making some interesting comments about theories of modern physics, he ends his letter by writing: "When a new more inclusive theory arises, which will embrace quantum mechanics and general relativity, I suspect that few 'anti-relativists' will like the result. But boring it won't be."

I do not know the grounds on which Burnett bases his suspicion that few anti-relativists would like such a result. There seems to me to be a suggestion here that those who criticize relativity are like Luddites longing for a retreat to pre-Einstein physics, whereas in fact they are trying to suggest that it is time for the scientific world to consider the possibility of moving on to post-Einstein physics.

Some correspondents, such as W. James, M.H. de la Rica, R. V. Harvey, and A. B. Starks-Field, present alternative resolutions, or partial resolutions, of the clock paradox. For the reasons given in my earlier comments, I believe that they do not meet Dingle's argument, because they do not identify a fault in his reasoning. M.M. Albahari (February letters) suggests a new experiment to test the validity of relativity by a test of the constancy of the velocity of light, using time intervals four orders of magnitude greater than those in the Michelson-Morley experiment. A.H. Winterflood states that Dingle is wrong in believing that the mathematics of special relativity is impeccable; he states that the mathematics of the theory is wrong, and refers to his recently-published book "Einstein's Error". Other correspondents, such as C.L. Thomson, W.T. Morris, J. de Pièrre, F. Allen and J.A. MacHarg, contributed interesting comments and suggestions, and V. Halsall contributed a discussion relating to Dr Essen's article in *Wireless World* dated October 1979.

There is another letter which I think requires comment, namely a letter by J.H. Fremlin, which appeared in *New Scientist* last year¹⁰. Some of the comments below were made in a letter that I sent to the editor of *New Scientist* in October 1980, but to the best of my knowledge my letter has not been published.

Professor Fremlin stated that he would "like very much to refute the suggestion that opponents of the theory of relativity find it difficult to get a proper hearing". He might like to refute the suggestion, but his letter certainly does not do so. The only evidence he presents in support

of his "refutation" is about things that were published, whereas the suggestion that he claims to refute is related to the fact that papers have been denied publication. There is no contradiction between the fact that some papers have been published and the fact that others have been denied publication. Unfortunately few people, except those who have direct experience, are aware of the difficulty of having any paper published if it is critical of relativity. Part of the problem is that almost all the evidence about papers that have been rejected is hidden from public view.

To take a specific example, Professor Dingle's paper¹ was rejected by another journal before his death. I have in my possession a copy of the relevant correspondence (which spanned a period of several months) between Dingle and the journal, but the journal has refused my request for permission to publish its part of the correspondence.

Professor Fremlin's letter also dealt with his own personal correspondence with Dingle, and his (Fremlin's) demonstration of the difference to be expected between the ages of the pair of twins in the twin paradox. Although it is difficult to comment on this without seeing all of the relevant correspondence, I suspect that Dingle considered the finding of an error in Fremlin's analysis to be a non-existent problem. He was convinced that the special theory contained an internal contradiction, and he knew that meant that it was possible, using valid rules of inference, to deduce from the theory any conclusion that one wished.

Dr Wilkie did not think it was wise to publish Professor Dingle's article, because Dingle is unable to defend himself. As I pointed out in my note accompanying the article, Professor Dingle sent the article to me in the hope that it would eventually be published. I am conscious of the inferiority of my qualifications as a defender of Herbert Dingle, but perhaps I may excuse my attempts by quoting a sentence from his last book, *The Mind of Emily Brontë*: "To disinter from a mass of diverse writing a common substratum demands penetration of a far higher order, and the only ground on which I claim justification for attempting the task is the absence of competitors."

In fact there is a significant number of scientists dissatisfied with the special theory of relativity. Anyone who doubts this should read the August 1979 and October 1980 issues of the journal *Speculations in Science and Technology*. I happen to believe that Herbert Dingle was right in his thesis that the special theory is untenable, but I would not be so rash as to claim that I have an "unshakable conviction" on this. I am, however, firmly convinced that the problems raised by Professor Dingle have not been satisfactorily solved.


References

1. Dingle, H. The "twins" paradox of relativity. *Wireless World*, vol.86, October 1980, pp. 54-6.
2. Einstein, A. On the electrodynamics of moving bodies, in *The Principle of Relativity* by H. A. Lorentz et al, Methuen, 1923.
3. Born, M. Special theory of relativity. *Nature*, vol. 197 1963, p. 1287.
4. McCausland, I., Science on the defensive. *Canadian Electrical Engineering Journal*, vol.5, April 1980, pp. 3/4.
5. Dingle, H. Science at the Crossroads. Martin Brian & O'Keefe, 1972, p. 185.
6. Popper, K. R. Conjectures and Refutations. Harper Torchbooks, 1968, p. 319.
7. Einstein, A. Dialog über Einwände gegen die Relativitätstheorie. *Naturwissenschaften*, vol.6, 1918, pp. 697-702.
8. McCausland, I. Why not discuss relativity. *Wireless World*, vol.86, October 1980, p.55.
9. Davies, P. C. W. Space and time in the modern universe. Cambridge University Press, 1977, p.39.
10. Fremlin, J. H. Special theory. *New Scientist*, vol.87, 25 September 1980, p. 950.

CIRCUIT IDEAS


Low noise moving-coil preamp

Noise performance of this design is about 3dB below many similar commercial units, and the high-frequency response is -1dB at 150kHz without the 3n3 output capacitor. The output clips at about 500mV and, below 150mV, distortion is caused solely by the push-pull input stage. Cartridges with high impedances will give lower distortion. High quality components must be used throughout and the circuit layout should be neat with no long connections. The circuit shown has been optimised for an Ortofon moving-coil cartridge, but other types should also be suitable.

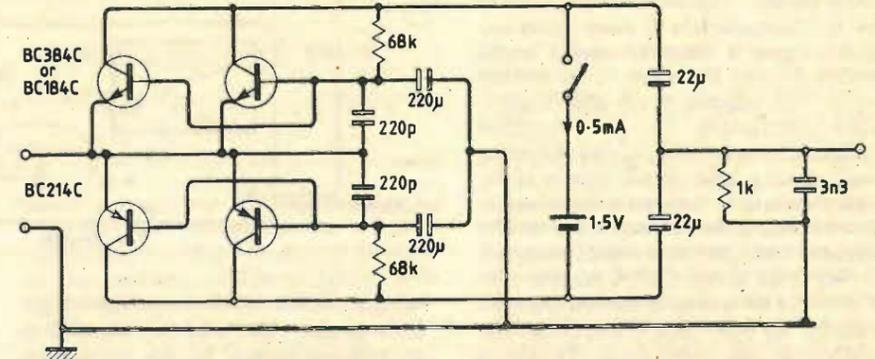

Performance

Voltage gain	35dB
Input impedance	20Ω
Output harmonic distortion (mainly 3rd)	
400mV	3Ω R _s 6Ω
150mV	0.13% 0.32%
100mV	0.1% 0.056%
50mV	0.05%
Noise (unweighted 10Hz to 15.7kHz) referred to input (includes hum)	
o.c.	74nV
s.c.	52nV 4 transistors as shown
	74nV 2 transistors only
Frequency response	
-1dB at 15Hz	
-3dB at 50kHz (see text)	
R. Lee	
Bradford	

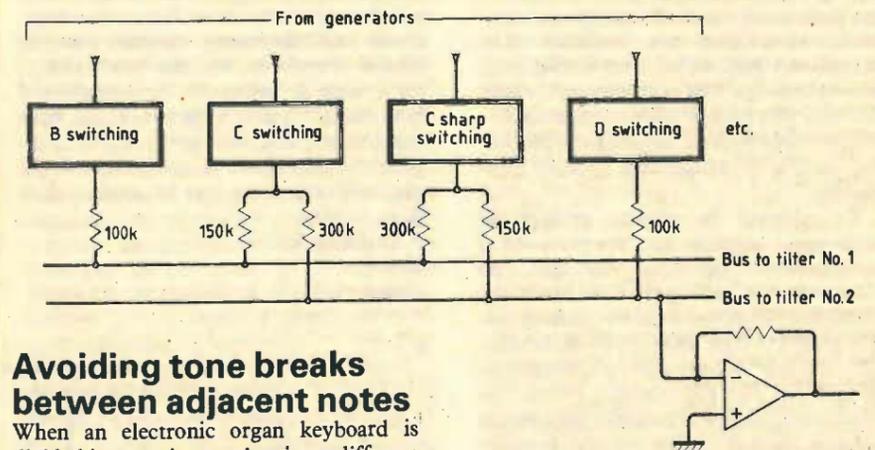

Avoiding tone breaks between adjacent notes


When an electronic organ keyboard is divided into sections each using a different filter, as described by Dr Pykett, there is a noticeable change in tone when a single-note step is made from one filter to the next. This can be overcome very effectively by grading the change. In the diagram, note B drives filter no. 1, note C drives 66% filter 1 and 33% filter 2, note C sharp drives 66% filter 2 and 33% filter 1, and note D drives only filter 2. The change

from one filter to the next is therefore spread between four notes and the abrupt change of tone is eliminated. Mixing from the notes driving one filter should be at a low impedance input to avoid signals being fed back.
J. H. Asbery
Wembley
Middx.

Video summing amplifier

A simple video summing amplifier and limiter with an adequate bandwidth for modest c.c.tv applications can be built using one LM318 op-amp. Because a sharp cut-off is required, to avoid overloading the monitor, the emitter-base junction of a transistor is used as a limit sensing element. Emitter current is (β+1)×base current provided by the clip-level potentiometer, which reduces the limiting slope by the factor β.

The circuit can be assembled on Vero-board provided that tracks to the op-amp are kept short. It is recommended that the 10kΩ feedback resistor is mounted across the top of the i.c. and the 5pF capacitor mounted underneath the board. The LM318 can drive directly into a 75Ω load.
P. Newman
Glasgow

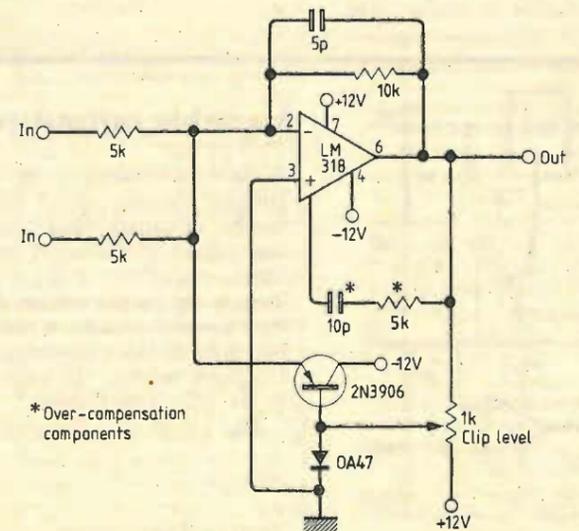


Plotting oscilloscope waveforms

This system enables a display to be plotted from an oscilloscope which has a delayed sweep facility. The oscilloscope is set in the A-intensified-by-B mode so an unknown signal is displayed with a bright portion showing the extent of the delayed sweep. The delayed sweep gate, a pulse which corresponds to the intensified portion of the waveform, is used to operate a sample and hold circuit whose output voltage is equal to the waveform voltage at the end of the delayed sweep interval. The output is measured by a digital voltmeter and fed to the Y axis of a X/Y recorder. An X drive for the plotter is derived from the wiper of the delay-time multiplier potentiometer in the oscilloscope. To plot a waveform, the potentiometer is rotated through its full range, which drives the pen horizontally while the sample and hold circuit drives the pen vertically. The sample and hold circuit can be fed from the oscilloscope ChI out terminal, which provides the plotter with vertical deflection features such as adjustable scale factor, ac/0/dc coupling, and variable positioning.

To calibrate the plotter, ground the scope input, position the trace vertically at an appropriate reference point and scan horizontally using the delay-time multiplier control to write a reference line. The plotter is then adjusted for full deflection, i.e. one inch for one c.r.t. horizontal division. As with any sampling system, the waveform must be repetitive, and trigger jitter on the oscilloscope will blur the plotter waveform.

This arrangement can form the basis of a powerful computer controlled waveform acquisition system. In this case, the position of the B gate pulse is set by a control voltage from the computer.


As the waveform samples are digitized by the computer, the control voltage is increased and the sampling position is scanned across the waveform. Although this is a slow data acquisition system, the progress of digitization is visible. The

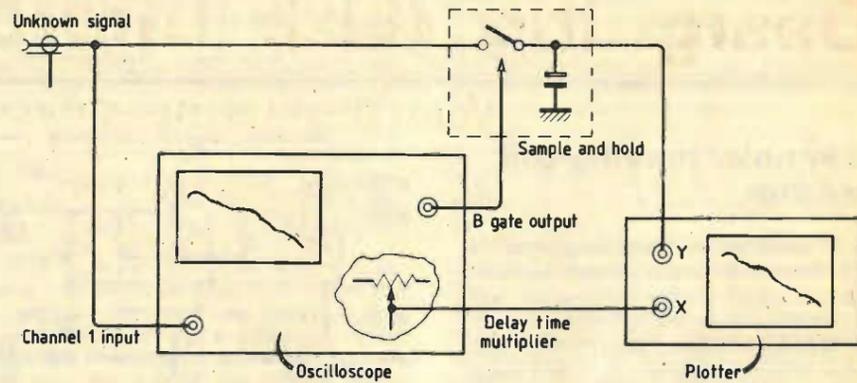



voltage which controls the position of the B sweep gate pulse must be derived from an external source, so the oscilloscope needs to be slightly modified.

The computer can determine many waveform parameters such as peak, mean, r.m.s. and harmonic content via the Fourier transform, but the bandwidth of the system is limited by the sample and hold circuit. A prototype system has been constructed using two ports in a PET computer to control the converters, and the digitization process was programmed in Basic.

P. D. Hiscocks
Toronto
Canada

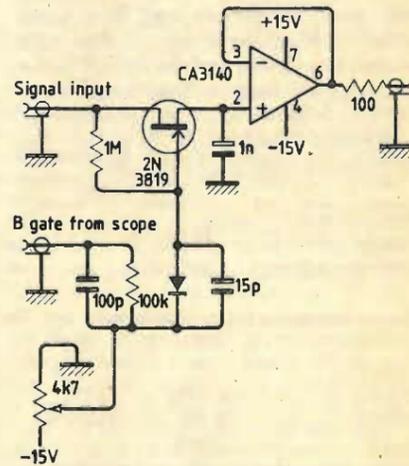

Lead from delay time multiplier pot broken and connected externally.

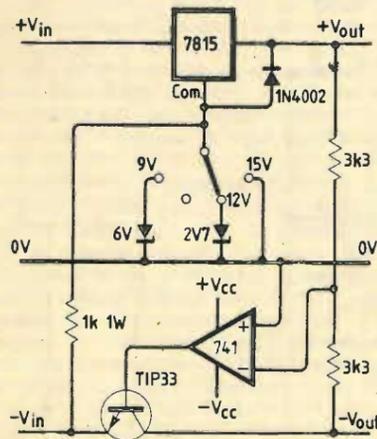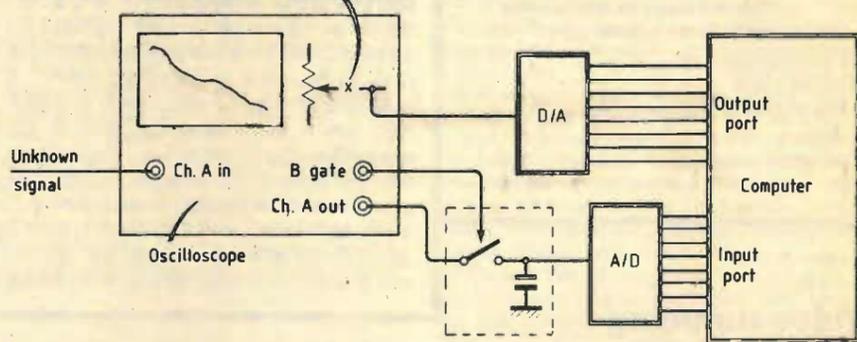

Variable output regulator

A small modification to the normal three terminal regulator circuit will provide a number of output voltages and retain the short-circuit protection of the regulator. Many designs have been published which increase the output voltage by returning the common terminal to a positive pedestal but, if the common terminal is returned to a negative pedestal, the output is reduced by the value of the pedestal.

This circuit uses Zener diodes to pro-

vide switched outputs below 15V, however, the diodes could be replaced by an adjustable low power regulator. A 1N4002 protects the regulator from reverse voltage if the output is shorted. Dual supplies can be provided by adding the op-amp and transistor shown, but the negative rail is not protected.

J. McDonald
Portsmouth
Hants.

Designing with microprocessors

9 - More on interrupt-driven circuits

by D. Zissos and G. Stone

Department of Computer Science, University of Calgary, Canada

Procedures for the step-by-step design and implementation of interfaces in interrupt-driven microprocessor-based systems are described in this article. The authors show that the interface hardware is the same for both vectored and non-vectored interrupts, and that it is almost independent of the microprocessor chip used. Fully-worked out examples, using the Intel 8080 and the Motorola 6800 chips are used to demonstrate these statements.

As explained in the first article on this subject (June issue), interrupt-driven circuits are used when sensitivity to the environment is needed. This would be the case with equipment and/or processes which, when they malfunction, require fast corrective action to avoid catastrophes that may result in damaging equipment, shutting down systems and so on.

The concepts we used to develop such systems are straightforward, involving basically the equipment or the process signalling the micro-processor when it wishes to communicate with it, and waiting for the microprocessor to respond. This resulted in the development of an uncomplicated interrupt configuration, whose block diagram is shown in Fig. 7 in the June article. For ease of reference this diagram is reproduced here as Fig. 1.

The function of the interrupt controller in Fig. 1 is to generate the interrupt request signal, IRQ, when one or more flags are present, and to provide the microprocessor, when it responds to the interrupt request, with some meaningful information which allows it to vector to the appropriate service routine. The meaningful information is denoted variable i . The design and implementation of interrupt controllers and a review of support chips implementing their function will be considered in a later article.

Interface hardware

Although at first sight the design and implementation of the interface hardware might appear complex (particularly to the uninitiated), in practice it turns out to be a straightforward process, as we shall demonstrate next. Our starting point is Fig. 1, which clearly indicates that the interface hardware is a logic circuit whose function is to monitor the status signals of the peripheral (which may be either equip-

ment or a process) and generate flag f_n when the status signals indicate to it that the peripheral wishes to communicate with the microprocessor. The interface then simply waits for the microprocessor to respond electronically.

Note that the flag simply requests a response from the microprocessor, which may well be ignored, if masked by the programmer. To avoid blocking microprocessor responses to emergencies, an interrupt pin, which cannot be disabled by software, is also provided in most cases. The interrupt signal using this pin is referred to as a **non-maskable interrupt**, to discriminate it from **maskable interrupts**, which represent requests rather than commands for microprocessor responses.

When the microprocessor responds, it generates the electronic 'go ahead' signal which, as explained in the June article, consists of i/o signal(s) associated with predetermined i/o address(es) - see Fig. 1. The nature of the 'go ahead' signal is described in detail in article 5, published in the October 1980 issue. On receipt of the i/o signal(s), the interface generates the command signals that drive the peripheral. In order to prevent the flag from continuously interrupting the microprocessor, the interface must clear the flag.

Since the interrupt controller does not send a signal back to the interface, it follows that interrupt interfaces are independent of the nature of the interrupt controllers. That is, the interface hardware in


interrupt systems depends only on the peripheral and not on whether vectored or non-vectored interrupts are being used. Furthermore, because the microprocessor response consists of i/o signals, whose nature does not vary greatly from microprocessor to microprocessor, the interface hardware is almost identical for all types of microprocessors.

Interrupt interfaces, in common with all other interfaces, are designed and implemented using well-established procedures that always work¹. We shall demonstrate the simplicity of the design procedures and lack of complexity of their implementation by means of a design problem, after we describe the nature of the interrupt software.

Interface software

As in the case of the interface hardware, the interrupt software is relatively uncomplicated and should present no difficulty to the reader who possesses some knowledge of programming. In the author's experience, the primary cause of misoperation in practice is lack of proper initialization procedures, which results in unwanted signal spikes (glitches) that are generated on interrupt lines during hardware and/or software initialization of interrupt in-

Fig. 1. Basic configuration of an interrupt system (a repeat of Fig. 7 in the June issue).

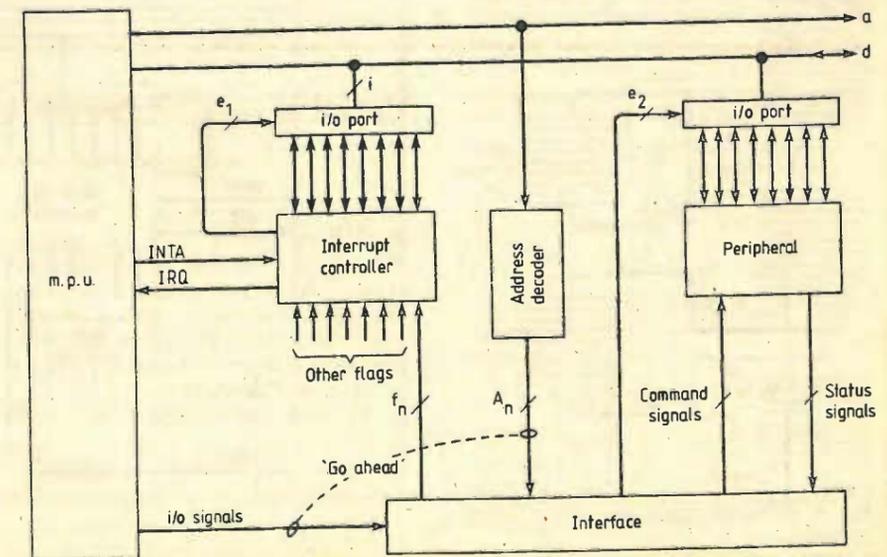

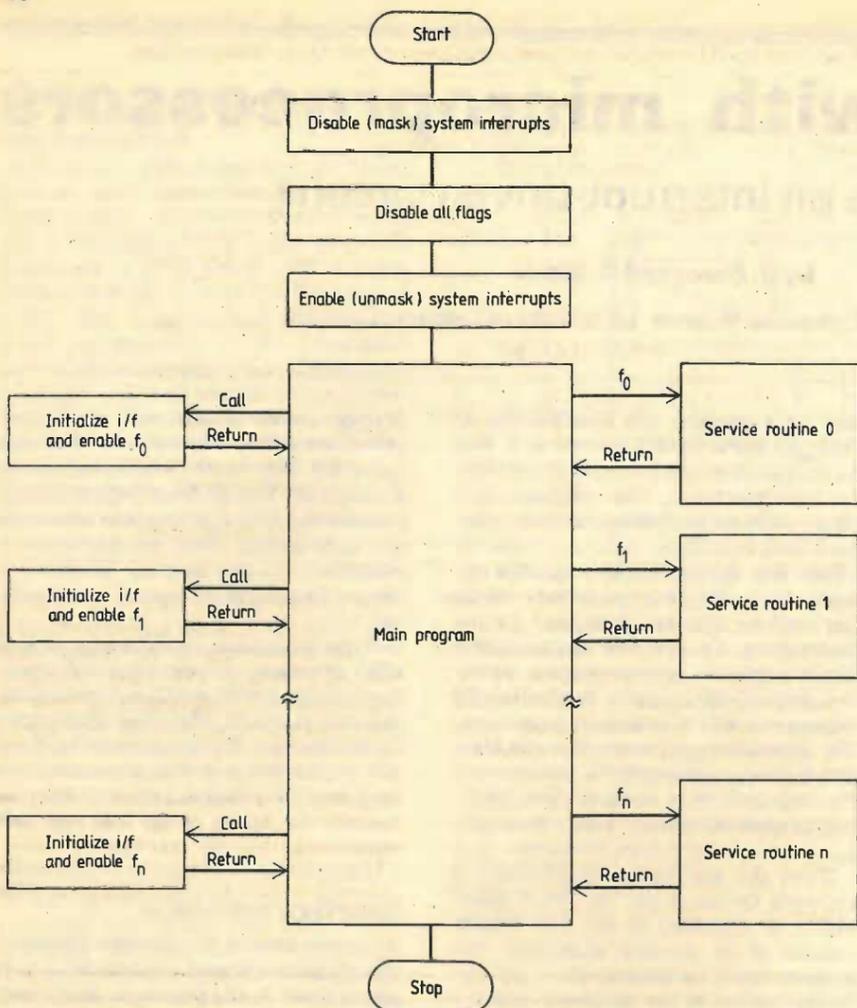


Fig. 2. System initialization.

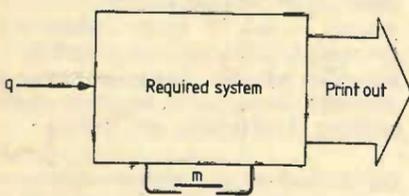


Fig. 3. Block diagram of the event counter.

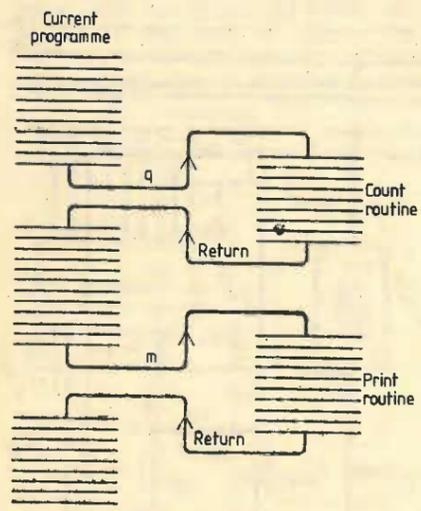


Fig. 4. Software responses of the event counter.

interfaces. An initialization procedure that avoids this problem is flowcharted in Fig. 2. As an additional precaution, all interfaces that are not being used should be disabled.

We mentioned earlier that during a program interruption, the re-entry point, consisting of

1. The return address;
2. The condition flags, and;
3. The working registers;

must be preserved during program interruption. In practice this information is stored in **stack**, which is a block of consecutive locations in r.a.m. that can be accessed from one end on a last-in-first-out (lifo) basis. A stack is established in r.a.m. by loading a **base address** into the stack pointer. Every time a new item is put on stack the stack pointer is 'advanced' (decremented) and everytime an item is removed the stack pointer is 'retarded' (incremented)². This means that the base address points to the highest location in stack.

PUSH, POP and RETURN instructions, explained earlier, refer to explicit operations in which information is transferred between the microprocessor chip and locations in stack specified by the stack pointer.

In summary, for the purpose of writing the interface software the only system feature that one has to know, is the vectoring address associated with each of the interrupt flags one is generating.

We shall now give an example to demonstrate the steps used to design and implement interrupt-driven microprocessor systems.

Design example - an event counter

Pulses representing events arrive randomly on line *q* in Fig. 3. Our problem is to design an interrupt-driven system that would allow a print-out of the event-count to be produced each time switch *m* is activated. Activation of the switch, which can be assumed to be infrequent, resets the count.

Fig. 5. Block diagram of our solution of the event counter.

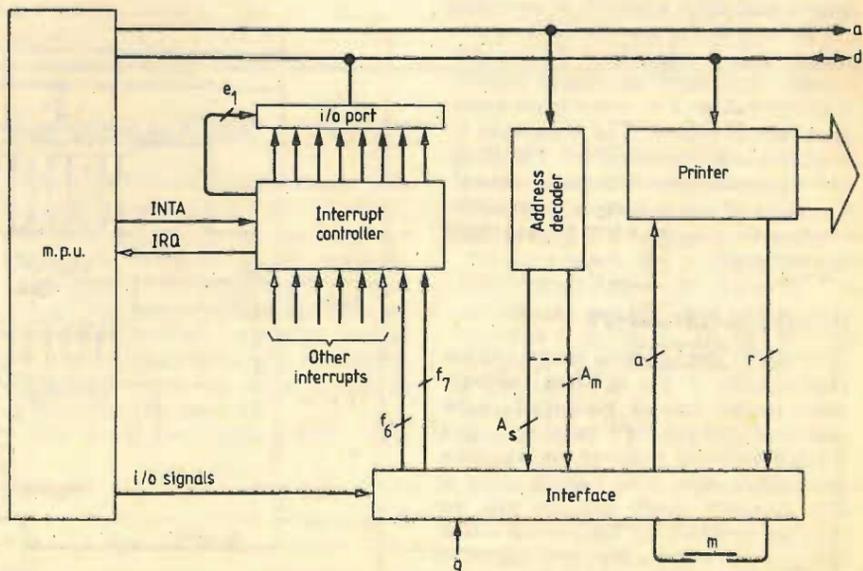


Table 1: Mnemonic and hex listings of the count and print routines used in the event counter

INTEL 8080				MOTOROLA 6800				COMMENTS
Code	Mnemonics	Machine code	Operands	Code	Mnemonics	Machine code	Operands	
COUNT ROUTINE				COUNT ROUTINE				
PUSH	PSW	F5		INC	COUNT	7C	06 50	Save program status
INR	C	0C						Increase count
OUT	62	D3	62	STA	A	F002 B7	F0 02	Clear count flag
POP	PSW	F1						Restore program status
EI		FB		CLI		0E		Enable interrupts
RET		C9		RTI		3B		Return to interrupted program
PRINT ROUTINE				PRINT ROUTINE				
PUSH	PSW	F5		LDA	A	COUNTB6	06 50	Save program status
MOV	A	C						Copy word count into A
OUT	63	D3	63	STA	A	F003 B7	F0 03	Print and clear flag
MVI	C	00	00	CLR	COUNT	7F	06 50	Clear count
POP	PSW	F1						Restore program status
EI		FB		CLI		0E		Enable interrupts
RET		C9		RTI		3B		Return to interrupted program

We will implement the design using an action/status printer, and either the Intel 8080 or the Motorola 6800.

Solution

Step 1: aim of the design. To demonstrate the steps used in designing and implementing interrupt interfaces.

Step 2: resources. A microprocessor-based system and an action/status character printer.

Step 3: our solution. Our solution consists of evoking a COUNT routine when an



event is detected, and a PRINT routine each time switch *m* is activated, as shown in Fig. 4. The COUNT routine will be given a higher priority than the PRINT routine should signals *q* and *m* be both present before the program is interrupted. The block diagram of our solution is shown in Fig. 5.

8080 implementation

Step 4: hardware design. Reference to Fig. 5 shows that the basic functions of the interface hardware is to generate interrupt

flag *f6* when switch *m* is activated and signal *f7* when a pulse is received on terminal *q*, and allow them to be cleared under program control. The most straightforward method of implementing these two functions is to use two JK flip-flops, as

Fig. 6. (a) Interface hardware of the event counter problem using the Intel 8080 microprocessor; (b) interface hardware of the event counter using the Motorola 6800. Note that the two interfaces are almost identical.

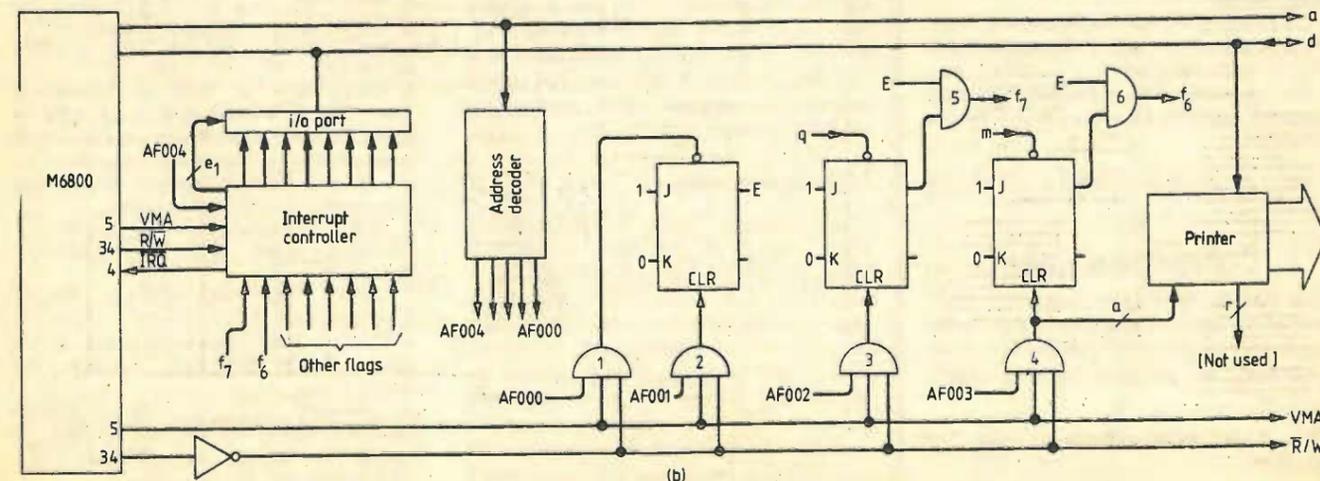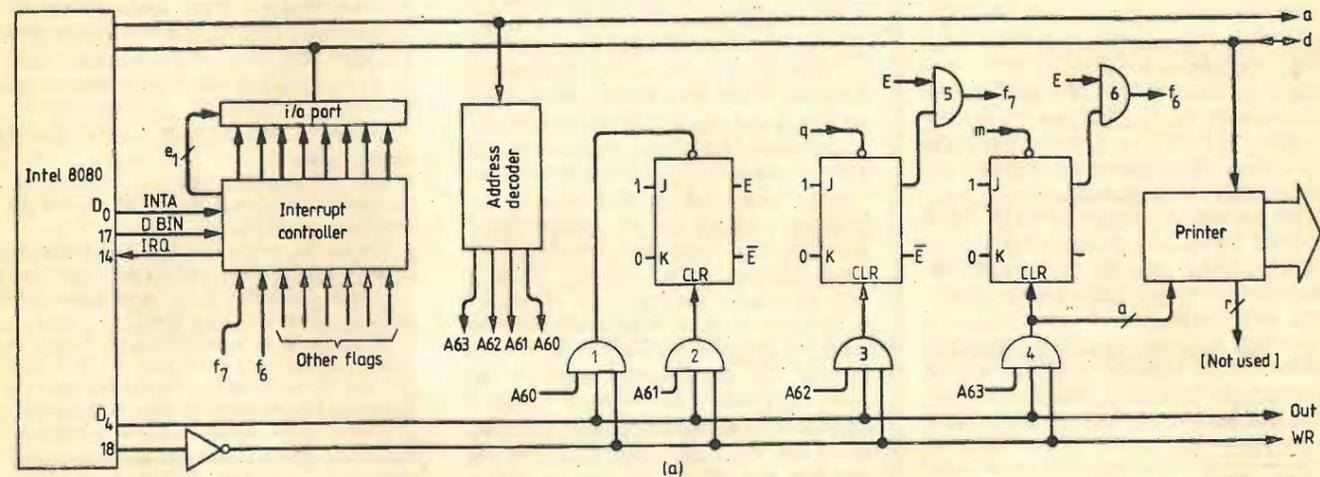

shown in Fig. 6(a). Switch m is connected directly to the clock terminal of flip-flop 6, allowing it to be set each time switch m is pushed and released. Similarly the output of the sensor is connected directly to the clock terminal of flip-flop 7, which also allows it to set each time the sensor generates a pulse.

We can allow the programmer to reset the two flip-flops by simply routing software-generated i/o pulses to their clear terminal. For this purpose, we can use two AND gates, 3 and 4, as shown in Fig. 6(a). The i/o addresses 63 and 62 are used for this purpose. That is, flip-flop 6 is reset by executing an OUT instruction with address 63 and flip-flop 7 by executing also an OUT instruction with address 62.

To allow the programmer to enable or disable the interface, we can introduce a third JK flip-flop which is set by executing an OUT instruction with address 60, and reset by executing an OUT instruction with address 61, as shown in Fig. 6(a). We use the output E of this flip-flop to AND flags f_6 and f_7 .

The final function of the interface is to activate the printer. We can either use a separate OUT instruction for this purpose or simply connect the output of gate 4 to the action terminal of the printer. This causes execution of OUT 63 both to clear f_6 and activate the printer at the same time. This, in addition to saving an extra gate, also avoids using an extra i/o instruction.

Step 5: software design. The COUNT and PRINT routines are shown in Table 1.

6800 implementation

Step 4: hardware design. We use the same procedures to derive the interface hardware of the Motorola 6800. The reader's attention is drawn to the fact that the two interfaces are almost identical.

Step 5: software design. The PRINT and COUNT routines are shown in Table 1.

Well-defined steps for the design and implementation of interrupt interfaces have been demonstrated. Specifically, it has been shown that the interface hardware is the same for both vectored and non-vectored interrupts and that it is almost independent of the microprocessor chip used.

References

- Zissos, D. "Problems and Solutions in Logic Design," Edition 2, Oxford University Press, 1979.
- Duncan, F. G. "Microprocessor Programming and Software Development", Pentice-Hall, 1979.

The next article in the series will deal with interrupt controllers.

Correction note

Data store by running average, May 1981, contained three incorrect hex bytes in the machine-code list. The correct values are underlined. We apologise for these errors.

Address

02E4	B5	28
036D	B0	E5
03D0	A6	26

Which way h.f. broadcast receivers

continued from page 67

The prescaler and prom devices used in the first system approach design are quite expensive at present. A 'direct entry without calculation' method could be used to replace the prom devices, but the cost reduction would be balanced out by adding twelve different crystal oscillators due to the fact that no simple arithmetic relation exists among the shortwave broadcasting bands. An alternative approach is, however, to ask whether a rearranged frequency allocation plan could end up with a cheaper system design. Fig. 2 shows the system functional block diagram. The suggested frequency allocation proposal is listed in Table 3. The amount of spectrum allocated is the same; but the band edge starting frequencies are slightly offset from the current and proposed WARC frequencies.

TABLE 3. Suggested proposal

rf (MHz)	osc (MHz)	offset (MHz)
3.900 to 4.390	48.900 to 49.390	48.895
4.600 to 4.945	49.600 to 49.945	48.895 + 0.700
4.950 to 5.440	49.950 to 50.440	48.895 + 1.050
6.000 to 6.490	51.000 to 51.490	48.895 + 2.100
8.100 to 8.590	53.100 to 53.590	48.895 + 4.200
10.200 to 10.690	55.200 to 55.690	48.895 + 6.300
12.300 to 12.790	57.300 to 57.790	48.895 + 8.400
14.400 to 14.890	59.400 to 59.890	48.895 + 10.500
16.500 to 16.990	61.500 to 61.990	48.895 + 12.600
20.700 to 21.190	65.700 to 66.190	48.895 + 16.800
24.900 to 25.390	69.900 to 70.390	48.895 + 21.000

Prior to the programmable divider, the v.c.o. output is converted down twice, first by a fixed 48.895MHz frequency signal, then by a correspondent band offset frequency signal generated from a one signal source and selected through multiplier or dividers. After these conversions, the v.c.o. frequency is equal to the channel number times and channel spacing frequency; therefore the programmable divider can be programmed directly by the b.c.d. number in the channel memory unit. Because of the low v.c.o. frequency at the input terminal of programmable divider, no prescaler is required. After comparison with the reference signal in the phase comparator unit, an error voltage is generated through the loop filter to correct the v.c.o. frequency. The fact that the prescaler and PROM devices are not required, the whole system cost is greatly reduced because of the frequency allocation. The r.f., i.f. signal amplification and selection, sideband detection and audio amplification are the same as the first system approach.

Microprocessors

Microprocessors have invaded almost every branch of electronic technology which includes radio communications as well. There is no doubt about some advantages of using microprocessors in product design, such as: "intelligent" products, easy design modification and reduced assembly and testing cost, is a long-term prospect. To see whether a popular shortwave broadcast receiver could benefit from this new technology or not, we check

the necessity of using microprocessors against the basic requirement of the majority shortwave broadcast listeners.

(1) Easy operating: microprocessors could be used to replace Ch/Band switching unit, memory unit and prom unit.

(2) Good performance: no improvement after using microprocessors unless a sophisticated self-adaptive receiver⁶ design is implemented.

(3) Low cost: one of the disadvantages of using microprocessors is the requirement of reinvestment for new tools and resources and possible re-training in production engineering. Although the unit cost of the microprocessor is low, the overall unit receiver cost could be the same as when a specially developed l.s.i. device is produced for a large number receiver market⁹.

Today, due to the advanced integration technique, most parts of the system block diagram could be integrated as a few l.s.i. modules, and consequently the assembly and testing cost could also be reduced. Therefore, unless a multi-functional receiver is demanded^{6,7}, we do not see a desire to use microprocessors in popular shortwave broadcast receiver design.

Conclusion

Two system approaches have been described for a popular shortwave broadcast receiver design. Both demonstrate the simple "tuning by channel" operating philosophy. They also bring out realization of an easy-operating, good performance and low-cost shortwave broadcast receiver.

References

- E.B.U. Document SPB 108, "Statistics on the present occupancy of the h.f. bands for broadcasting", Sept. 1979.
- E.B.U. Document SPB 130, "joint meeting between representatives of national receiver and transmitter manufacturers' associations and EBU sub-group R1", Feb. 1980.
- PEEK, J. B. H. and SCHMIDT, J. M., "A station programme identification (s.p.i. system for f.m. sound broadcasting)", International Broadcast Convention, No. 166, 1978, pp.321-323.
- The P.I. System, leaflet issued by the Swedish Telecommunication Administration, 1979.
- WHYTHE, D. J. and ELY, S. R., "Data and identification signalling for future radio receivers", IEE/IBC Conf. No. 166, Sept. 1978, pp.324-326.
- WINN, R. F. E., "H.f. radio communication", Wireless World, Jan. 1980, pp.54-58.
- FUKUK, et al., "Portable all-band radio receiver using microcomputer controlled PLL synthesizer", IEEE Transactions on Consumer Electronics, Vol. CE-26, Aug. 1980.
- E.B.U. Document SPB 66, Appendix 2, "Economic aspects of s.s.b. Transmitters", June 1978.
- SYED, I. A., "Simplified l.s.i. Design", New Electronics, Jan. 27th, 1981.
- Long- and medium-wave Broadcasting Conference, Geneva 1975, EBU Document 140F, Annex 1.
- Macario, R. C. V., "An all digitally operated receiver for the new medium frequency broadcasting plan", IEE/IBC Conference No 166, Sept 1978, pp 330-332.

Electrical and mechanical units — are they the same?

by D. A. Bell, F.Inst.P., F.I.E.E.

SI units, with L,M,T,Q dimensions, provide a single consistent set for both mechanical and electrical applications. The presence of the Q dimension distinguishes electrical from purely mechanical phenomena.

"Units of the world unite: you have nothing to lose but your dimensions!" If scientists used slogans as politicians do, this might have been the call for the introduction of SI (Système International) units which unify electrical and mechanical units. As far as electrical units are concerned, they appear to involve little change from MKS units, though there is a change in the status of those odd but essential constants, ϵ_0 and μ_0 . The change is more drastic in mechanical units, which might be said to have been brought into line with electrical practice. In particular, it is now recognised that heat and mechanical energy are within limits interchangeable, something which was demonstrated by Rumford in 1798 and first quantified by Joule in 1842. The result is that heat energy is in future to be measured in joules* instead of in calories. The equivalence is 'within limits' because the experiments of Rumford and Joule were concerned with the transformation of mechanical energy into heat; but the converse transformation is subject to Carnot's law, that the proportion of heat which can be transformed to mechanical energy cannot exceed $(T_1 - T_2)/T_1$ where T_1 and T_2 are the upper and lower temperatures, e.g. temperatures of boiler and condenser of steam plant. It is this limitation which gives rise to the allegation that electric power stations have an "efficiency" of only about one-third.

To return to electrical units, we now have only one set of units instead of three: for example current is now measured only in amperes, discarding the c.g.s. electromagnetic unit of current which was equal to ten amperes and the c.g.s. electrostatic unit which was equal to one-third of a nanoampere. (The reason for the ratio between electromagnetic and electrostatic c.g.s. units being numerically equal to the velocity of light will appear later.) A separate idea which has been absorbed via MKS into the SI system is that of rationalised units. This idea is that a factor involving π can reasonably be expected in circumstances involving spherical or circular geometry, e.g. the electric field around a charged sphere or the capacitance between concentric cylinders, but not where the geometry is planar, e.g. the capacitance between two parallel plane electrodes. (C.g.s. formulae are exactly the reverse of this.) The simplest electrical formula is that for the potential V at distance r from a point charge q :

$$V = \frac{q}{4\pi\epsilon_0 r} \quad (1)$$

4π is the rationalising factor, since the system has spherical symmetry; and if q is in coulombs and r in metres, then V is in volts. How does this happy coincidence of units come about?

Through choice of a suitable value of ϵ_0 of course! So the first function of ϵ_0 is to be of the right size as a unit-forming constant. Mechanical units also are brought in through the formula for the force F between two charges:

$$F = \frac{q_1 q_2}{4\pi\epsilon_0 r^2} \quad (2)$$

The force F will be in Newtons. It is convenient also to introduce the idea of an electric field E such that $F = qE$ and E in volts per metre is given by

$$E = \frac{q}{4\pi\epsilon_0 r^2} \quad (3)$$

So far it has been assumed that nothing else is present apart from the charges represented in the formulae, i.e. that the charges are in a vacuum. (The results are very nearly the same if they are in air.) Now suppose the charges are immersed in a fluid having a property described as relative permittivity ϵ_r (relative to a vacuum) which is none other than what we have long known as "dielectric constant": its value is usually dependent on frequency and temperature, but is around 2.3 for benzene, 7 for porcelain and 80 for water at low frequency and room temperature. It is an experimental fact that equation (2) now becomes

$$F = \frac{q_1 q_2}{4\pi\epsilon_r \epsilon_0 r^2} \quad (2a)$$

and so (3) is changed to

$$E = q/4\pi\epsilon_r \epsilon_0 r^2 \quad (3a)$$

* For large quantities of heat energy, which have often been expressed in tonnes of coal equivalent or tonnes of oil equivalent, the unit much bigger than a megajoule is the *exajoule* (EJ) which is 10^{18} joules.

In order to obtain a quantity which depends only on q and r , not on the surrounding medium, (3a) is transposed into the form

$$\epsilon_r \epsilon_0 E = q/4\pi r^2 = D \quad (3b)$$

The new quantity D was originally called the flux of electric induction. It has the useful property that the integral of D over any closed surface is equal to the charge enclosed (Gauss's theorem in rationalised units): this is obvious in (3b) if the charge is imagined to be surrounded by a sphere of radius r and therefore surface $4\pi r^2$. D is measured in coulombs per square metre in SI units. Note that ϵ_0 , as well as ϵ_r , has been transferred to the left-hand side of (3b); and ϵ_0 , which we originally introduced as a constant serving to give the right size of unit, is commonly called "the permittivity of free space", which is where the controversy begins. Some physicists argue that permittivity is a property of matter, and therefore free space cannot have a permittivity. Accordingly, they claim that the c.g.s. system of units is inherently correct in putting $\epsilon_0 = 1$, because in free space D must then be the same as E , not merely numerically equal to it. Engineers find it convenient to distinguish between D and E because engineering is concerned with the behaviour of material objects.† (It is also a link with displacement current, but that is another story.) However, there is also a conceptual argument that D is a causal property of charge and that E is an effect which may be modified by the interposition of a material medium having the property described by the constant ϵ_r ; and ϵ_0 is not necessarily a pure number but is the constant factor relating effect E to cause D . This makes D appear to be more fundamental than E , though in practice it may be difficult to say which is the hen and which is the egg!

It is now known that magnetic phenomena are manifestations of currents, which can usually be identified with charges in motion. The relevant formulae look more complicated because a current, unlike a static charge, has direction as well as magnitude; and the equations therefore have to be in vector form. Most of them, however, can be obtained from the analogous

† Perhaps one should qualify this as "old-fashioned engineering", since there is now talk of "software engineering".

electrostatic equations by the rule-of-thumb procedure "replace scalars and scalar operations by vectors and vector operations and replace $1/\epsilon_0$ by μ_0 ." Thus the magnetic equation analogous to (3) is

$$d\mathbf{B} = \mu_0 \mathbf{idl} \times \mathbf{a}_r / 4\pi r^2 \quad (4)$$

and the analogue of (2) is

$$d\mathbf{F} = \mu_0 \mathbf{idl} \times \mathbf{i}' d\mathbf{l}' \times \mathbf{a}_r / 4\pi r^2 \quad (5)$$

Because the different parts of the current (circuit) may be at different distances from the point of observation, equation (4) gives only the contribution $d\mathbf{B}$ to the total magnetic effect \mathbf{B} at a given point, the contribution being that due to a short element \mathbf{idl} of the current, which is at distance r from the point. The quantities in bold type are vectors, the symbol \times here represents vector multiplication and \mathbf{a}_r is a unit vector in the direction of r . Equation (4) means that the direction of $d\mathbf{B}$ is at right-angles to both the direction of current flow and the direction of r . (This is part of the definition of 'vector multiplication'.) Note that an equation for \mathbf{B} has been offered as analogous to the one for \mathbf{E} , a consequence of replacing $1/\epsilon_0$ by μ_0 . In fact \mathbf{H} is the property of current which is independent of surrounding medium (the analogue of Gauss's theorem for \mathbf{D} is that the line integral of \mathbf{H} round a closed circuit is equal to the current enclosed) and therefore analogous to \mathbf{D} . This time we are accustomed to regarding \mathbf{H} as a cause and \mathbf{B} as its effect. Initially μ_0 also can be regarded as a unit-forming constant, the function of which is to ensure that the force between two currents comes out in Newtons.

So much for units; but what of "dimensions"? It is familiar that all mechanical units can be related back to the fundamentals of length, mass and time: for example, force = mass \times acceleration leads to a dimensional relation $[F] = [MLT^{-2}]$. Some quantity additional to L, M and T may be needed for electrical phenomena and in the c.g.s. system this was taken as either ϵ or μ so that every quantity had two sets of dimensions as well as two sizes of unit. What can be demonstrated experimentally, by giving a capacitor a charge which is measured in c.g.s. electrostatic units and discharging it through a meter which measures the current in c.g.s. electromagnetic units, is that the ratio of numerical values in the two sets of units is equal to the numerical value of the speed of light. It is, moreover, implicit in Maxwell's equations that the velocity of propagation of electromagnetic radiation is $1/(\mu\epsilon)^{1/2}$ from which it is deduced that the inverse of the product of μ and ϵ has the dimensions of the square of velocity.

There is no certain method of dividing the dimensions $L^{-2}T^2$ between μ and ϵ . But it seemed a plausible conjecture (no more) that since magnetic effects are due to charges in motion the dimensions of velocity squared should be associated with equation (5). Since current = charge/time, the current-length product \mathbf{idl} is equivalent to a charge-velocity product; and if μ_0 has dimensions which differ from those of

ϵ_0 by $L^{-2}T^2$ then μ_0 will cancel out the velocities in \mathbf{idl} and $\mathbf{i}'d\mathbf{l}'$ and we shall have force related to charge²/distance² in both (5) and (2). It is tempting to suggest that if μ_0 has only the dimensions of velocity⁻² and ϵ_0 is purely numeric, then the dimensions of charge can be expressed in terms of L, M, T through either equation. But this could be a trap for the unwary. It is equally possible that there is an electrical dimension which appears equally in μ_0 and $1/\epsilon_0$ and therefore cancels out in the product $\mu\epsilon$. It is equally plausible, however, the electrical phenomena must involve more than the purely mechanical dimensions of length, mass and time. In SI units, therefore, one takes the reasonable step of taking Q as a further dimension to add to L, M, T . On this basis it is found from equations (2) and (5) that ϵ_0 and μ_0 have dimensions $L^{-3}M^{-1}T^2Q^2$ and LMQ^{-2} respectively. M and Q cancel out in the product $\mu_0\epsilon_0$, leaving the dimensions $L^{-2}T^2$ of velocity⁻². One might wonder how this squares with the specification of ϵ_0 and μ_0 in units of farads per metre and henries per metre respectively. The fact is that both farads and henries involve all four L, M, T, Q dimensions (as can be seen from the fact that $1/2CV^2$ and $1/2Li^2$ are energies) so that these specifications are still valid in the self-consistent system of SI units. The important difference between the MKS and SI systems is the SI postulate that Q should be taken as the electrical 'dimension', in contrast to both the c.g.s. and MKS μ systems, though the MKSA system (A for ampere) was half-way there. But incidentally, ϵ_0 and μ_0 now have dimensions which is contrary to the c.g.s.-based argument that D and E are identical in free space. I wonder how long the matter will be allowed to rest there. \square

Literature received

Engineering Bulletin 3539A from Sprague describes a range of Tanite chip capacitors with conformal plated terminations. The capacitors are of the solid-electrolyte type, for use in hybrid circuits. The bulletin can be obtained from the UK distributor, Hy-Comp Ltd, 7 Shield Road, Ashford Industrial Estate, Ashford, Middlesex TW15 1AV. **WW401**

Catalogue of components and instruments is available from HRS Components, Ltd, Brasshouse Passage, Birmingham B1 2HR. **WW402**

Short catalogue describing a range of plastic-film capacitors with values in the range 100pF to 20 μ F can be obtained from Ashcroft Electronics Ltd, 28 Somerford Road, Cirencester GL7 1TW. **WW403**

Leaflet on the 3M Videodata communication system for installation in buildings is available. This is nothing to do with a videotext system, but is concerned with the use of coaxial cables instead of multicore types to carry video and data throughout a building. The system is broadband, which allows the connexion of new equipment relatively cheaply. Copies from Mike Bellamy, Interactive Systems Group, 3M (UK) Ltd., 3M House, PO Box 1, Bracknell, Berkshire RG12 1JU. **WW404**

Sound synthesis using Walsh functions

continued from page 64

I.s.i. implementation, interested readers may like to consider the application of computer-generated Walsh functions. Clearly a microprocessor-based system could be realised enabling the software implementation of fully polyphonic musical sounds.

Effects of relative phase of harmonics

If a sine-wave oscillator is set to a frequency of 220Hz and its output summed after passing through a variable phase shift network with that of a second sine-wave oscillator of frequency 440Hz, the resulting waveshape, displayed on an oscilloscope, alters as the relative phase of the two components is varied. If the waveform is also listened to however no apparent change in sound is perceived by the ear, regardless of the phase relationship. Therefore as far as steady-state sounds are concerned, the relative phase of the individual partials in direct Fourier synthesis is irrelevant.

With regard to Walsh harmonics, B. A. Hutchins, whose work first prompted my interest in Walsh synthesis, has conducted synthesis experiments using different Walsh/Fourier series for the same waveform and has demonstrated differences in tone colour which are directly attributable to the use of different phase relationships. The effect is connected with the problem of monaural phase.⁴ Interested readers may like to generate the triangular wave mentioned earlier using the Walsh/Fourier series than quoted, and compare the sound perceived when the alternative Walsh/Fourier series +0.5wal1, -0.25wal5, -0.125wal13, -0.063wal29 is used.

Acknowledgment. The concept of using Walsh functions for musical synthesis was first suggested by Dr C. Frederick of the Centre for Radiophysics and Space Research, Cornell University. \square

References

- 1 K. Siemens and R. Kitai, Digital Walsh/Fourier analysis of periodic waveforms, *IEEE Trans.*, vol. IM-18, December 1969, p. 316.
- 2 J. L. Walsh, Closed set of normal orthogonal functions, *American Journal of Mathematics*, vol. 45, 1925, p. 5.
- 3 H. F. Harmuth, Transmission of Information by Orthogonal Functions, 2nd Edition, Springer-Verlag DDR 1972, pp. 90, 91.
- 4 V. Lozhkin, Monaural phase effects, *Soviet Physics Acoustics*, vol. 17, no. 1, July-Sept 1971.

NEW PRODUCTS

LCR bridge

Combined inductance/capacitance, resistance and Q are the LCR Data-bridge 410's three manually selectable function ranges. On the LC range the bridge distinguishes between inductors and capacitors and gives the value and the appropriate units automatically. All four functions have overridable auto-ranging through eight decades. Measuring frequencies of 100Hz and 1kHz are selected manually, but an indication is given when the component under test can be measured more accurately using the frequency not selected. A similar indication is given for series and parallel measurement modes when the best mode for a given component is not selected. Range limits are 1m Ω to 100M Ω , 0.1 μ H to 9999H, 0.1pF to 9999 μ F and 0.1 to 99 for Q measurements, all with a basic accuracy

of 0.25%, ± 1 digit. Six push-buttons are the only controls and the reading, obtained within one second of insertion of the component, is given on a 4-digit l.e.d. display. The unit of measurement is indicated by one of nine l.e.d.s, except in the case of the Q range when all range l.e.d.s are extinguished. Input protection, a switchable polarizing voltage for electrolytics and a socket for external test leads or fixtures are also provided. Internally, a Z80 microprocessor carries out the control functions. An option is available with digital outputs for use with limits comparators, and the standard version costs £495. AIM Cambridge Ltd, Burrei Rd, Indust. Est., St Ives, Huntingdon, Cambs PE17 4LF.

WW301



Video editing interface

Trigger Happy is designed to help organisations who have a U-matic edit pair of video recorders but who want to use material shot on low-gauge cassette or open-reel format. Built to a Fantasy Factory specification, it "bridged the editing gap between consumer and U-matic formats", allowing fast editing from 1/2in feed decks (VHS, Beta, Sony 3670, National 3150) direct onto a 3/4in U-matic edit deck via a normal edit controller.

Trigger Happy obviates the need for a transfer first onto U-matic with a resulting loss of quality, or for tedious stop-watch editing. It contains two counter-displays, one which counts control track pulses from the feed deck, the other which is preset to a number specific to the edit controller being used. A start pulse causes the U-matic edit deck to roll down to the edit point at precisely the right time.

According to its designer,



WW303



A.m./f.m. signal generator

A fully programmable microprocessor-controlled signal generator covering the range 10kHz to 1024MHz has been introduced to the market by Marconi Instruments Ltd. The manufacturers claim that the 2017 gives signals that are completely free from non-harmonic spurious additions from 4 to 1024MHz, ± 1 dB level accuracy, 4V output across the complete frequency range and a sideband noise figure better than -136dB/Hz at 20kHz offset in the range 256 to 512MHz. A slow-sweep facility provides an analogue sweep between any two frequencies on one of nine carrier ranges so that spurious responses within a receiver can

easily be found. The carrier frequency can be stepped up or down in steps of any size and the total shift at any point indicated on depression of a key. Two methods of manual control are used: one digital using a keyboard, and one analogue using rotary controls. Programming via a general purpose interface bus (IEEE-488) extends the range of applications to include a.t.e. systems. The 2017 is said to be simple to use and a memory facility is provided so that up to ten frequencies can be stored for later use. Marconi Instruments Ltd, Longacres, St Albans, Herts AL4 0JN.

WW302

Richard Monkhouse of Costronics, Trigger Happy Mk2 is easy to interface as modification data and kits are provided (state feed deck and controller), no mechanical modifications being needed except for fitting sockets. Price is £440 from sole distributors Fantasy Factory Video Ltd (a registered charity company), at 42 Theobalds Road, London WC1 8NW.

WW303

High-temperature thermistors

The range of thermistors available from Electrautom has been expanded by the inclusion of the Mid-Temp series for temperatures from 200 to 600°C. These devices can be used as temperature sensing elements in cookers, soldering irons and photo-copier fuser rollers. Electrautom Ltd, Etom House, Queens Rd, Maidstone, Kent ME16 0JG.

WW304

Microcomputer


Both a microcomputer for business and personal use and applications software are available from LSI Computers Ltd. The standard M Three computer, manufactured in Great Britain, is based on the Z80 microprocessor with 64K r.a.m., two double-density 51/4in floppy disc drives, v.d.u. and keyboard with 109 keys, fourteen of which are programmable.

Versions with the two 51/4in disc drives replaced with two 8in double-density drives and Centronix matrix printers for use with the system can also be supplied. A CP/M operating system is included as standard. The basic system costs under £3000, excluding v.a.t. LSI Computers Ltd, Copse Rd, St Johns, Woking, Surrey GU21 15X.

WW305

IEEE data bus connectors

Up to fifteen programmable measurement or instrumentation devices can be interconnected using the Amphenol terminated cable assemblies to IEEE 488 interface standards. Each assembly comprises a 24-core screened cable and two rack and panel type connectors, i.e. connectors with combined plug and socket, which can be mounted upon each other in 'piggy-back' fashion. Of the 24 conductors, 16 are used for signal lines and eight for logic ground returns and shielding. Celdis Ltd, 37 Loverock Rd, Reading, Berks RG3 1ED.

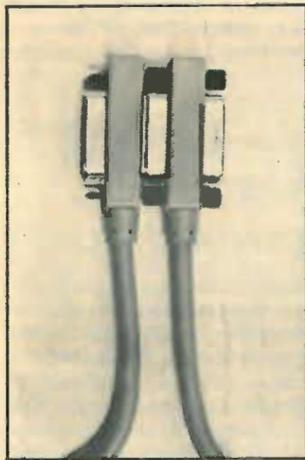

WW306

Power supplies

Voltage stabilized, current limited power supplies ranging from 2.5A, 10-15V internally adjustable units to '19in' laboratory types capable of delivering more than 15A from 0 to 65V are available in the UK through Big Ears (seriously). EA-Produktion, the German manufacturers, claim that the complete range consists of more than 150 models, each of which has a two year guarantee. The latter type mentioned above has fine and




WW305

coarse controls for both current and voltage, 40mV maximum output variation from 0 to 100% mains variation, an output temperature coefficient of 0.01%/°K and resistor or voltage programmable output voltage and current. All laboratory types have s.c.r. pre-regulation for low dissipation and can be supplied with either l.c.d. or analogue meters. Plug-in supplies for covering 5-24V and 0.5-10A, converters for 12V d.c. to 220V a.c. and combined variable a.c. and d.c. supplies are included in the range. As far as we know, all these supplies are designed for 220V±10% mains operation. Four 'low-price' units were tested by us using a 240V mains supply, and found to perform well under all loads. Two weeks delivery is quoted for units that cannot be supplied from stock. Big Ears, 68 Narborough Rd, Leicester.

WW307

Brushless d.c. motor

Drive electronics of the GAE 43.14 brushless Hall effect controlled d.c. motor are mounted on the stator for compactness. This unit, measuring 56x30mm, can produce up to 2Ncm torque and has a nominal running speed of 2000 r.p.m. which can be varied using an external control circuit. Supply voltages range from 18 to 30V; for a 24-volt version the supply current is 200mA. Ball bearings are used on the 4mm diameter drive shaft for the dynamically balanced high inertia rotor. Papst Motors Ltd, Parnell Court, East Portway, Andover, Hamps SP10 3LX.

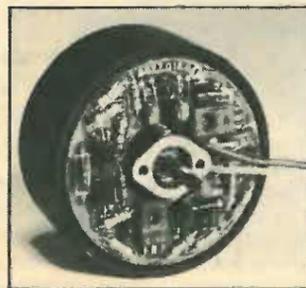

WW308

Four-layer p.t.h. board for prototypes

A four-layer plated-through printed circuit board suitable for prototype or small production runs has been introduced by Logiclayer, a subsidiary of ICL. The p.c.b., known as Multiboard, is arranged as a matrix of 60x88 drilled pads spaced at 0.1in. The component side, or X tracking, has pads connected at regular intervals in columns, and the underside, or Y tracking, has different pads connected at regular intervals in rows. Sandwiched between the X and Y layers are a ground or 0V layer, and a power supply layer which provides two interleaved supply rails. The ground and supply rails are connected to three sets of pads regularly spaced throughout the board.

To assemble a circuit, the components are placed in their optimum positions and they are then interconnected by linking and cutting tracks on pads using isolated pads where necessary.


Multiboard is manufactured in a standard Eurocard size, 233.4 x 160mm, and will accept DIN connectors at the front or rear. The board has a characteristic impedance of 50Ω which is maintained after customising. When a completed board has been tested, Logiclayer can produce a production run of customised boards from layout drawings or cut and link information supplied with pad addresses. Logiclayer, Plymouth Grove, Manchester M13 9LN.



WW309

R.f.i. suppression filters


Negligible d.c. and low frequency voltage drop coupled with high insertion loss for a wide range of frequencies are features quoted for the 1.5 and 5nF radio-frequency interference filters from Oxley Developments Co. Ltd. Minimum insertion losses from 200MHz to 1GHz are 45dB for the 1.5nF type and 50dB for the 5nF type. Maximum limits of these pi-section ceramic devices are 350V d.c., 10A d.c. or low-frequency a.c. and -55 to 85°C operating temperature. Both the FLT/M/P/1500 (1.5nF) and FLT/M/P/5000 (5nF) types have stud mounting packages with M5 threads. Versions with 12UNEF threads are also available. Oxley Developments Co. Ltd, Ulverston, Cumbria LA12 9QG.

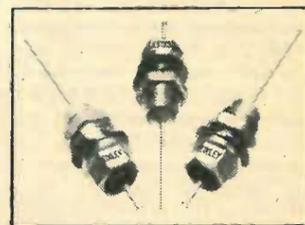

WW310

Silicone-free thermal grease

In applications where silicone contamination from thermal grease causes problems, Thermalcote II could provide an alternative. This grease, which at 36°C provides a minimum thermal conductivity of 16.7 x 10⁻⁴ cal/s cm²°C, is said not to dry out, melt or give migration problems. A high-lubricity oil base is used which permits the compound to flow into small gaps and the working temperature is 165°C (200°C max). The manufacturers, Thermalloy, have also introduced a 1/2in high heat sink, for mounting on top of T03 transistor packages, which can be used on its own or combined with existing p.c.b. mounting heat-sinks for additional cooling. MCP Electronics Ltd, 38 Rosemont Road, Alperton, Wembley, Middx HA0 4PE.

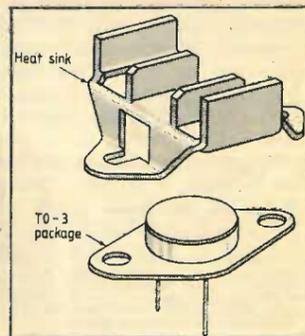

WW311

TRANSCENDENT 2000 single-board synthesizer

Complete Kit £168.50



Designed by consultant Tim Orr (formerly synthesizer designer for EMS Ltd.) and featured as a constructional article in ETI, this live performance synthesizer is a 3-octave instrument transposable 2 octaves up or down giving sweep control, a noise generator and an ADSR envelope shaper. There is also a slow oscillator, a new pitch detector, ADSR repeat, sample and hold, and special circuitry with precision components to ensure tuning stability amongst its many features.

The kit includes fully-finished metalwork, fully assembled solid teak cabinet, filter sweep pedal, professional quality components (all resistors either 2% metal oxide or 1/2% metal film), and it really is complete - right down to the last nut and bolt and last piece of wire! There is even a 13A plug in the kit - you need buy absolutely no more parts before plugging in and making great music! Virtually all the components are on the one professional quality fibreglass PCB printed with component locations. All the controls mount directly on the main board, all connections to the board are made with connector plugs and construction is so simple it can be built in a few evenings by almost anyone capable of neat soldering! When finished you will possess a synthesizer comparable in performance and quality with ready-built units selling for many times the price. Comprehensive handbook fully describes construction and tells you how to set up your synthesizer with nothing more elaborate than a multi-meter and a pair of ears!

TRANSCENDENT DPX MULTI-VOICE SYNTHESIZER Complete Kit £299



The Transcendent DPX is a really versatile 5 octave keyboard instrument. These are two audio outputs which can be used simultaneously. On the first there is a beautiful harpsichord or reed sound - fully polyphonic, i.e. you can play chords with as many notes as you like. On the second output there is a wide range of different voices, still fully polyphonic. It can be a straightforward piano or a honky tonk piano or even a mixture of the two! Alternatively you can play strings over the whole range of the keyboard or brass over the whole range of the keyboard or should you prefer - strings on the top of the keyboard and brass on the lower end (the keyboard is electronically split after the first two octaves) or vice versa or even a combination of strings and brass sounds simultaneously. And on all voices you can switch in circuitry to make the keyboard touch sensitive! The harder you press down a key the louder it sounds - just like an acoustic piano. The digitally controlled multiplexed system makes practical touch sensitivity with the complex dynamics law necessary for a high degree of realism. There is a master volume and tone control, a separate control for the brass sounds and also a vibrato circuit with

TRANSCENDENT POLYSYNTH

expandable polyphonic synthesizer

Complete Kit £320

(single voice)
Plug-in extra voices £52 (or £48 - if ordered with kit)



By brilliant design work and the use of high technology components the Polysynth brings to the reach of the home constructor a machine whose versatility and range of sounds is matched only by ready-built equipment costing thousands of pounds. Designed by synthesizer expert Tim Orr and published in Electronics Today International, this latest addition to the famous Transcendent family is a 4-octave transposable over 7 1/2 octaves polyphonic synthesizer with internally up to 4 voices making it possible to play simultaneously up to 4 notes, whereas conventional synthesizers handle only one at a time.

The basic instrument is supplied with 1 voice and up to 3 more may be plugged in. A further 4 voices may be added by connecting to an expandable unit, the metalwork and woodwork of which is designed for side-by-side matching with the main instrument. Each voice is a complete synthesizer in itself, with 2 VCOS, 2 ADSRS, a VCA and a VCF (requiring only control voltages and power supply, the voice boards are also very suitable for modular systems). One of these voices is automatically allocated to a key as it is operated. There are separate tuning controls for each VCO of each voice. All other controls are common to all the voices for ease of control and to ensure consistency between the voices.

Although using very advanced electronics the kit is mechanically very simple with minimal wiring, most of which is with ribbon cable connectors. All controls are PCB mounted and the voice boards fit with PCB quality components (resistors 2% metal oxide or metal film of 0.5% and 0.1%), nuts, bolts, etc.

variable depth control together with a variable delay control so that the vibrato comes in only after waiting a short time after the note is struck for even more realistic string sounds. To add interest to the sounds and make them more natural there is a chorus/ensemble unit which is a complex phasing system using CCD (charge coupled device) analogue delay lines. The overall effect of this is similar to that of several acoustic instruments playing the same piece of music. The ensemble circuitry can be switched in with either strong or mild effects.

Although the DPX is an advanced design using a very large amount of circuitry, much of it very sophisticated, the kit is mechanically extremely simple with excellent access to all the circuit boards which interconnect with multiway connectors, just four of which are removed to separate the keyboard circuitry and the panel circuitry from the main circuitry in the cabinet. The kit includes fully finished metalwork, solid teak cabinet, professional quality components (all resistors 2% metal oxide), nuts, bolts, even a 13A plug!

PORTWAY INDUSTRIAL EST.
ANDOVER, HANTS, SP10 3MM

POWERTRAN
WORLD LEADERS IN
ELECTRONIC KITS


Our Catalogue is FREE!
Write or phone now!
ANDOVER (0264) 64455

DE LUXE LINSLEY HOOD 75W STEREO AMPLIFIER



Complete Kit
£85

This easy-to-build version of our world-wide acclaimed 75W amplifier kit based upon circuit boards interconnected with gold plated contacts resulting in minimal wiring and construction delightfully straightforward. The design was published in Hi-Fi News and Record Review and features include rumble filter, variable scratch filter, versatile tone controls and tape monitoring while distortion is less than 0.01%.

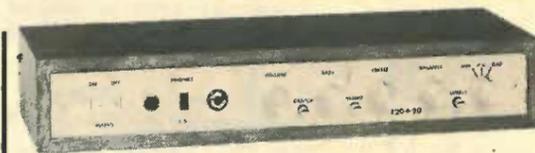

T20 + 20 20W STEREO AMPLIFIER £33.10

This kit, based upon a design published in Practical Wireless, uses a single printed circuit board and offers at very low cost, ease of construction and all the normal facilities found on quality amplifiers. A 30 watt version of this kit (T30 + 30) is also available for £38.40+VAT. MATCHING TUNERS - See our FREE CATALOGUE!

MPA 200 100W. (rms into 8 ohms) MIXER/AMPLIFIER

COMPLETE KIT
£49.90



Featured as a constructional article in ETI, the MPA 200 has an exceptionally low priced - but professionally finished - general purpose high

power amplifier. It features adaptable input mixer which accepts a wider range of sources such as microphone, guitar, etc. There are wide range tone controls and a master volume control. Mechanically the MPA 200 is simplicity itself with minimal wiring needed making construction very straightforward. The kit includes fully finished metalwork, fibreglass PCBs, controls, wire, etc. - complete down to the last nut and bolt.

SP2-200 2-CHANNEL 100W. AMPLIFIER

COMPLETE KIT
£64.90




The power amplifier section of the MPA 200 has proved not only very economical but very rugged and reliable too. This new design uses two of these amplifier sections powered by separate power supplies fed from a common toroidal transformer. Input sensitivity is 775mV. Even simultaneously driven, each channel delivers over 100W rms into 8 ohms. The kit includes fully finished metalwork, fibreglass PCBs, controls, wire, etc. - complete down to the last nut and bolt!

NEW KITS!

Programmed from a synthesizer, our latest design to be featured in ELECTRONICS TODAY INTERNATIONAL, the 1024 COMPOSER controls the synth, with a sequence of up to 1024 notes or a large number of shorter sequences e.g. 64 of 16 notes all with programmable note length. In addition a rest or series of rests can be entered. It is mains powered but an automatically trickle charged Nickel-Cadmium battery supplying the memory, preserves the program after switch off. The kit includes fully finished metalwork, fibreglass PCB, controls, wire, etc. - Complete down to the last nut and bolt!

1024 COMPOSER
Complete Kit £89.50

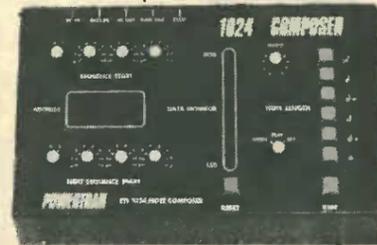

DJ90 DISCO SYSTEM - COMING SHORTLY!

READ ALL ABOUT IT!

In Electronics Today International July issue




All kits also available as separate packs (e.g. PCB, component sets, hardware sets, etc.). Prices in our FREE CATALOGUE.

PRICE STABILITY: Order with confidence! Irrespective of any price changes we will honour all prices in this advertisement until August 31, 1981, if this month's advertisement is mentioned with your order. Errors and VAT rate change excluded.

EXPORT ORDERS: No VAT. Postage charges at actual cost plus £1 handling and postal documentation.
U.K. ORDERS: Subject to 15% surcharge for VAT. NO charge is made for carriage.

SECURICOR DELIVERY: For this optional service (U.K. mainland only) add £2.50 (VAT inclusive) per kit.
SALES COUNTER: If you prefer to collect your kit from the factory. Call at Sales Counter, Open 9 a.m. to 12 noon, 1 to 4.30 p.m. Monday to Thursday.

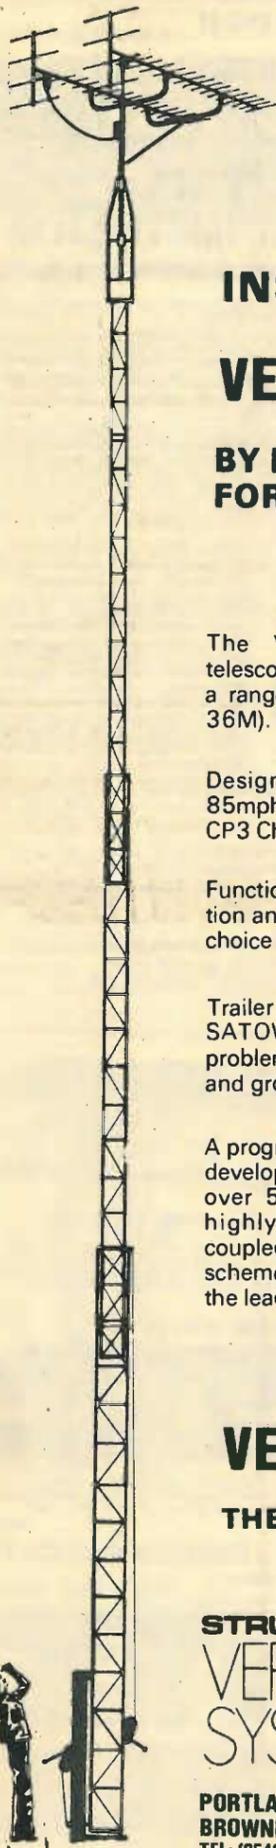

INSIST ON VERSATOWER

BY PROFESSIONALS—
FOR PROFESSIONALS

The VERSATOWER range of telescopic and tilt-over towers cover a range of 25ft to 120ft (7.5M to 36M).

Designed for Wind Speeds from 85mph to 117mph conforming with CP3 Chapter V, part 11.

Functional design, rugged construction and total versatility make it first choice for telecommunications.

Trailer mounted or static, the VERSATOWER solves those difficult problems of antenna support, access and ground level maintenance.

A programme of continuous product development has led to a range of over 50 models, all available at highly competitive prices. This coupled with our quality assurance scheme ensures that we maintain the leader position we enjoy today.

VERSATOWER THE PROFESSIONALS' CHOICE

STRUMECH
VERSATOWER
SYSTEM

PORTLAND HOUSE, COPPICE SIDE
BROWNHILLS, WEST MIDLANDS
TEL: (05433) 4321. TELEX: 335243 SEL

WW-067 FOR FURTHER DETAILS

MAINS INTERCOM NEW IMPROVED

£37.99 + VAT £5.70 per pair
NO BATTERIES, NO WIRES. Made to high Safety and Telecommunications Standard. The modern way of instant 2-way communications. Just plug into power socket. Ready for use. Crystal clear communications from room to room. Range 1/4 mile on the same mains phase with call buzzer and light indicator. On-off switch. Volume control. Useful as inter-office intercom between office and warehouse, in surgery and in homes, between house and garage. Also useful as burglar alarm. 6 months' service guarantee. P&P £1.95. Also F.M. 2 channel model £55.95 + VAT £8.40 + P&P £2.15 per pair.

NEW! AMERICAN TYPE CRADLE TELEPHONE AMPLIFIER

ONLY £18.95 + VAT £2.85 + P&P £1.65

New improved battery operated Telephone Amplifier with detached plug-in speaker. Placing the receiver on to the cradle activates on/off switch for immediate two-way conversation without holding the handset. Many people can listen at a time. Increases efficiency in office, shop, workshop. Perfect for conference calls, leaves the user's hands free to make notes, consult files. No "holding on", save money and long-distance calls. Volume control. Model with conversation recording facilities. Price £20.95 + VAT £3.15, post and packing for either model £1.65.

10 days' price refund guarantee. Barclaycard and Access welcome.

WEST LONDON DIRECT SUPPLIES (WW)
169 KENSINGTON HIGH STREET, LONDON W8 6SN. TEL. 01-937 5548.

FOTOLAK

POSITIVE LIGHT SENSITIVE AEROSOL LACQUER

Enables YOU to produce perfect printed circuits in minutes! Method Spray cleaned board with lacquer. When dry, place positive master of required circuit on now sensitized surface. Expose to daylight, develop and etch. Any number of exact copies can of course be made from one master. Widely used in industry for prototype work.

FOTOLAK	£2.00	Pre-coated 1/16" Fibre-glass board	
Developer	30p	204mm x 114mm	£1.50
Ferric Chloride	50p	204mm x 228mm	£3.00
		408mm x 228mm	£6.00
		467mm x 305mm	£9.00

Plain Copper-clad Fibre-glass.		Single-sided	Double-sided
Approx. 3.18mm thick sq. ft.			£1.50
Approx. 2.00mm thick sq. ft.	£2.00		
Approx. 1.00mm thick sq. ft.	£1.50		£1.75
Clear Acetate Sheet for making master, 260mm x 260mm			12p

Postage and packing 80p per order. VAT 15% on total
G. F. MILLWARD ELECTRONIC COMPONENTS LIMITED
P.O. Box 19, Praa Sands, Penzance, Cornwall. Telephone GERM0E (073-678) 2329

WATCH OUR TELEVISION

...the only magazine in Britain that gives the amateur enthusiast and professional engineer alike a comprehensive up-to-date coverage of TV technology. Coverage includes the latest developments in circuitry, video and long distance television...with a special emphasis on servicing and fault finding.

Regular construction articles have included test equipment, monochrome & colour receivers, monitors and a video camera.

THIS MONTH

VIDEO EFFECTS GENERATOR
A versatile monochrome studio set-up for the amateur TV programme maker.

ELECTRONIC AERIAL SWITCHING
Roger Bunney's latest ingenious design.

COLOUR PORTABLE PROJECT - part 3

SERVICING THE GEC HYBRID COLOUR SETS

Well worth a closer look

TELEVISION

ON SALE NOW 70p

ELECTROVALUE

BEST SELLERS...

Rechargeable Cells by SANYO-CAONICA. Size AA 99p; C 2.27; D 3.76; PP3 4.10. With tags: AA 1.06, C 2.43, D 3.99
Chargers PP3 4.75, AA 4.95, A.C.D 7.60. Plastic boxes PB1 116 x 77 x 35mm 62p.

Breadboards Euro 5.70N, Veroblock 3.63, Bimboard 8.03, Buzzer 6-15V 80p.
CAPACITORS Polystyrene 47-4700pF ea 7p, C280 01 6p, 1 7p, 22 9p (full range). Polyester (PCM 7.5mm), .001 5p, .0047 7p, .056 8p, 1 9p, (PCM 10mm) 1uF 26p. (Many more values in this range). Variable Dilecon 100pF 2.08, 500pF 3.21.

ELECTROLYTICS Full range.
CONNECTORS - 1/4" jack plug 32p, skt 12p, 3.5mm jack plug 17p, skt 14p, 2.5mm 12p, DIP header 14 pin 38p, 16 pin 43p. Quick test mains block 5.25.
Fuse holders 20mm panel 22p, chassis 5p. Hall-effect devices from 1.80N.
Heat sinks Power 1.25° C/W 2.85, finger type 103 25p, TG220 25p.

INTEGRATED CIRCUITS - Hundreds of types 741 18p, 555 23p, CA3140E 40p, LM380N 99p, LM3914N 2.68, S566B 2.14, TCA965 1.20. IC holders 8 pin 9p, 14-40 pin 1p per pin. Knobs, screw fitting 1/4" from 15p. Loudspeakers 2 1/2" 8 or 64 ohms 93p. Magneto resistors from 1.60N. Meters, panel 60x45mm 50uA-1A ea 4.80. Opto LEDs red 7p, yellow 9p, green 11p, ultrabright 21p all colours. LED drivers UAA170/UAA180 ea 1.52.

POTENTIOMETERS - Carbon 20mm dia, 100R-2M2 1in, 220R-4M7 log single 29p, 1K-2M2 1in, 4K7-2M2 log duals, ea 91p. Add 51p if required with switch. Sliders mono 72p, stereo 1.18, bezel 34p. Wirewound 25R-10K, 3watt ea 1.50.

PRINTED CIRCUIT MATERIALS
300 x 150mm S/S SRBP 1.25, 1/gl 1.90, 500gm ferric chloride lab grade 3.40.
Positiv 20 photo resist 74ml 1.65. Etch resist pen 1.05, silver paint 3g 4.14N.
Relays 12v coil 3P2W 10A contacts 2.90. Resistors 1/3W, 1/2W, 3/4W 5% ea 2p. Metal oxide TR5 2% 5p, film MR25 5P. Semiconductors 1N4007 6p, 1N4148 3p, RCA2N3055 70p, BC107-9 family 14p, BC182/212 family 9p, BFR34A 63p, BFT65 1.19, C106D1 45p, TIP31A/32A ea 44p, TIP41A/42A ea 45p, TIP2955/TIP3055 ea 55p. Solder 500gm 60/40 20SWG 7.30N. Irons Antex C, CCN, CX or X25 ea 4.40N. Oryx50 temperature controlled 11.50N. ISO-TIP cordless with charger 24.00N.

SWITCHES - Slider DPDT min 18p, std 20p. Wavechange 1P12W, 2P6W, 3P4W, 4P3W ea 40p. Time Switch 13A 30n/30p per day 14.68N. Min toggles silver contacts SPDT 57p, DPDT 80p, 3PDT 1.64, 4PDT 2.75. DIL gold plated 4PST 95p, 10PST 2.10.

Miniature drills - 12Vdc TITAN 10.28N. TITAN kit 17.06N. Stand 12.00N.
Tools CK pliers 4.70, cutters 6.10, strippers 4.95. Vero wiring system kit 4.42, wire 1.17. Computer Nescom 1 built £140.00N.

NASC0M
2 kit £295.00 complete (less 8X4118's £225.00N). P/S kit, 3amp 32.50N, 16K RAM kit 110.00N.
Add VAT at 15% to all prices.
Small order surcharge 40p if under 5.75. No inland P&P on CWO orders.

ELECTROVALUE LTD. DEPT. WW6, 28 St. Judes Road, Englefield Green, Egham, Surrey TW20 0HB. Phone Egham 33603 (STD 0784. London 87). Telex 284475.
Northern Branch (Personal Shoppers only) 680 Burnage Lane, Burnage, Manchester M19 1NA. Phone (061) 432 4945.

BEST SERVICE

★ FOR KEEN BUYERS! S.A.E. brings comprehensive price list (Valid 3 mths), covering catalogue '81

Access and Barclaycards accepted

Everything brand new & guaranteed

Hard to find items

Keen prices & discounts

Special quantity discounts

★ Speedy turn round on orders

No P/P charges on U.K. C.W.D. orders over £5.75. (Add handling charge of 40p if under)

★ Please add 15% V.A.T. to total value of all orders

★ Shop hours: 9-5.30; Sats. to 9-1p.m.

10 OUT OF 10.— IT'S ELEKTRIK!

- Whose amplifiers sound **audibly** superior?
- Who supplies the BBC, IBA, top loudspeaker manufacturers: international recording studios etc?
- Which power amplifier modules feature high speed, electronic protection, virtually zero TIM, negligible THD, 110dB S/N ratio, and a range of power outputs from **60-300 WRMS?**
- Which amplifiers are **guaranteed** unconditionally stable thermally, electrically and mechanically?
- Whose reputation for back-up, service and **friendly** advice is second to none?
- Who makes amplifiers OEM capable of driving motors, magnets, vibrators etc?
- Who offers a complete hi-fi kit amplifier at **half** the cost of any comparable units?
- Who also specialise in **active** amplification?
- Who offers a complementary range of ancillary equipment such as heatsinks, bridge drivers and toroidal power supplies etc?
- Who is the **leading** name in innovative and proven amplification?

A **Crimson Elektrik**

If you would like further details on our complete range send a 7" x 10" sae + 50p cheque or PO for our comprehensive users / application manual to:
CRIMSON ELEKTRIK, (WW), 9 CLAYMILL ROAD, LEICESTER LE4 7JJ. Telephone 0533-761920 Telex 34694 CRIMLEK

SALE BY AUCTION

Due to a shift in concentration and production, the machines, assembly lines and also the entire plant and business equipment of a works are available. On behalf of the management of the firms GTE/Sylvania and Schwarzwälder Elektronik Werk I am selling by auction the plant of the firm.

SABA - Werk III
Aussere Ailinger Strasse 14
7990 Friedrichshafen, West Germany

Tuesday, 7th July, 1981, 10 a.m.
Wednesday, 8th July, 1981, 9.30 a.m.

For auction:
Flow soldering plant with immersion bath, armament lines, ceiling circular conveyor, paint spray stations, drying kilns, ultrasonic degreasing plant, assembly lines, modern electroplating equipment, winding machines, de-insulating presses, bending and cutting automatic machines, testing compartments, transformers, hydraulic and pneumatic punches and presses, (Lifetestwagen) spot welding machines, rotary heat kiln, aerosol recovery plant, freon degreasing plant, mixer, Wolfram welding equipment, continuous heating kiln, hydrogen hatch kiln, eight and ten head lock and seal machines for 90° and 110° colour tubes as well as shelves, canteen equipment, machine tools, fork lift truck and over 1,000 items measuring and testing equipment for many more items.

Viewing: Monday, 6th July, 1981, from 10.00 to 17.00 hours; Tuesday, 7th July, 1981, from 8.00 to 9.45 hours; Wednesday, 8th July, 1981, from 8.00 to 9.15 hours. Preview can be arranged by telephone call. Catalogue with over 3,000 items on request.

HORST F. G. ANGERMANN HAMBURG
VEREIDIGTER U. ÖFFENTLICH BESTELLTER VERSTEIGERER
SCHÄTZER FÜR IMMOBILIEN, MASCHINEN UND INDUSTRIEANLAGEN
2000 Hamburg 11 · Mattenwiete 5
Telefon: (040) 36 76 91-93 · Telex: 02-13 303 02-15 272



SIMPLY AHEAD
and staying there

The range grows bigger... better...

New Profile Amplifiers - Two New Series



HY120



HY60

MOSFET

CHOOSE AN I.L.P. MOSFET POWER AMP when it is advantageous to have a faster slew rate, lower distortion at higher frequencies, enhanced thermal stability, the ability to work with complex loads without difficulty and complete absence of cross-over distortion. I.L.P.'s exclusive encapsulation technique within fully adequate heatsinks has been taken a stage further with specially developed computer-verified 'New Profile' extrusions. These ensure optimum operating efficiency from our new MOSFETS, and are easier to mount. Connection is via five pins on the underside. **I.L.P. MOSFETS ARE IDENTICAL IN PERFORMANCE TO THE CHEAPEST AMPLIFIERS IN THIS EXCITING NEW CATEGORY BUT ARE ONLY A FRACTION OF PRICES CHARGED ELSEWHERE.**


Model	Output Power RMS	Distortion Typical at 1KHz	Slew Rate	Rise Time	Signal/Noise Ratio DIN AUDIO	Price & VAT
MOS120	60W into 4-8Ω	0.005%	20V/μs	3μs	100dB	£25.88 + £3.88
MOS200	120W into 4-8Ω	0.005%	20V/μs	3μs	100dB	£33.46 + £5.02

BIPOLAR


(Standard O-P Transistors)

CHOOSE AN I.L.P. BIPOLAR POWER AMP where power and price are first consideration while maintaining optimum performance with hi-fi quality and wide choice of models. From domestic hi-fi to disco and P.A., for instrument amplification, there is an I.L.P. Bipolar to fill the bill, and as with our new Mosfets, we have encapsulated Bipolars within our New Profile extrusions with their computer-verified thermal efficiency and improved mounting shoulders. Connections are simple, via five pins on the underside and with our newest pre-amps and power supply units, it becomes easier than ever to have a system layout housed the way you want it.


Model	Output Power RMS	Distortion Typical at 1KHz	Slew Rate	Rise Time	Signal/Noise Ratio DIN AUDIO	Price & VAT
HY30	15W into 4-8Ω	0.015%	15V/μs	5μs	100dB	£7.29 + £1.09
HY60	30W into 4-8Ω	0.015%	15V/μs	5μs	100dB	£8.33 + £1.25
HY120	60W into 4-8Ω	0.01%	15V/μs	5μs	100dB	£17.48 + £2.62
HY200	120W into 4-8Ω	0.01%	15V/μs	5μs	100dB	£21.21 + £3.18
HY400	240W into 4Ω	0.01%	15V/μs	5μs	100dB	£31.83 + £4.77

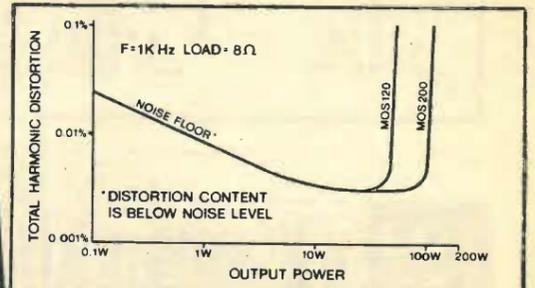

Load impedance both models 4Ω - ∞ Input impedance both models 100KΩ
4Ω - ∞ Input sensitivity both models 500mV Frequency response both models 15Hz-100KHz - 3dB

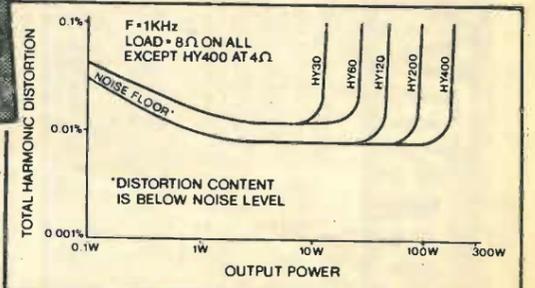

Load impedance all models 4Ω - ∞ Input impedance all models 100KΩ
Input sensitivity all models 500mV Frequency response all models 15Hz-50KHz - 3dB



THE NEW PROFILE EXTRUSIONS
The introduction of standard heatsink extrusion for all I.L.P. power amplifiers achieves many advantages:— Research shows they provide optimum thermal dissipation and stability. Slotted shoulders allow easy mounting; standardisation enables us to keep our prices competitive. Surfaces are matt black, anodised for higher thermal conductivity. Extrusions vary in size according to module number.

NEW PRE-AMPS

HY6 (mono) and HY66 (stereo) are new to I.L.P.'s range of advanced audio modules. Their improved characteristics and styling ensure their being compatible with all I.L.P. power-amps both MOSFET and BIPOLAR, giving you chance to get the best possible reproduction from your equipment. HY6 and HY66 pre-amps are protected against short circuit and wrong polarity. Full assembly instructions are provided. Mounting boards are available as below.
Sizes - HY6 - 45 x 20 x 40 mm. HY66 - 90 x 20 x 40 mm.
Active Tone Control circuits provide ±12dB cut and boost.
Inputs Sensitivity - Mag. P.U. - 3mV; Mic - selectable 1-12mV; All others 100mV. Tape O/P - 100mV; Main O/P - 500mV; Frequency response - D.C. to 100KHz - 3dB.

HY6 mono £6.44 + 97p VAT Connectors included
HY66 stereo £12.19 + £1.83 VAT Connectors included
B6 Mounting Board for one HY6 78p + 12p VAT
B66 Mounting Board for one HY66 99p + 15p VAT

NEW POWER SUPPLY UNITS

Of the eleven power supply units which comprise our current range, nine have toroidal transformers made in our own factory. Thus these I.L.P. power supply units are space-saving, more efficient and their better overall design helps enormously when assembly building. All models in the range are compatible with all I.L.P. amps and pre-amps with types to match whatever I.L.P. power amps you choose.

- PSU30 ±15V at 100mA to drive up to 12 x HY6 or 6 x HY66 £4.50 + 0.68p VAT
- THE FOLLOWING WILL ALSO DRIVE I.L.P. PRE-AMPS
- PSU36 for use with 1 or 2 HY30's £8.10 + £1.22 VAT
- ALL THE FOLLOWING USE TOROIDAL TRANSFORMERS
- PSU50 for use with 1 or 2 HY60's £10.94 + £1.64 VAT
- PSU60 for use with 1 HY120 £13.04 + £1.96 VAT
- PSU65 for use with 1 MOS120 £13.32 + £2.00 VAT
- PSU70 for use with 1 or 2 HY120's £15.92 + £2.39 VAT
- PSU75 for use with 1 or 2 MOS120 £16.20 + £2.43 VAT
- PSU90 for use with 1 HY200 £16.20 + £2.43 VAT
- PSU95 for use with 1 MOS200 £16.32 + £2.45 VAT
- PSU180 for use with 1 HY400 or 2 HY200 £21.34 + £3.20 VAT
- PSU185 for use with 1 or 2 MOS200 £21.46 + £3.22 VAT


★ Freepost facility

When ordering or writing about I.L.P. products, you do not need to stamp the envelope. Mark it FREEPOST plus the code shown in the address below. We pay the postage for you.

★ TO ORDER

Send cheque or money order payable to I.L.P. Electronics Ltd and crossed. Or pay by ACCESS or BARCLAYCARD. Cash payments must be in registered envelope; if C.O.D. payment is wanted, please add £1.00 to TOTAL value of order.

* See also our ad. on page 101

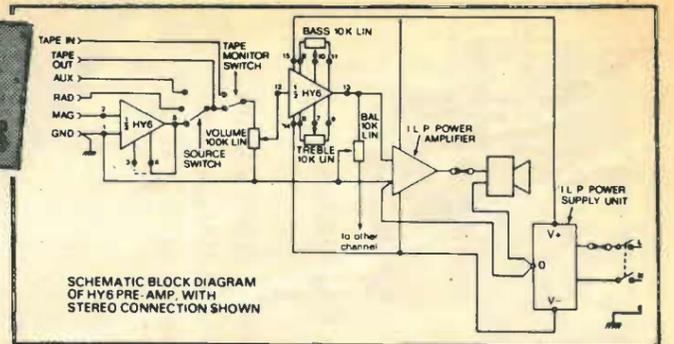

- DISTORTION TYPICALLY 0.005%
- S/N RATIO - 90dB (Mag. P.U. - 68 dB)
- 38 dB overload margin on Mag. P.U.

- LATEST DESIGN HIGH QUALITY CONNECTORS
- ONLY POTS, SWITCHES AND PLUGS/SOCKETS NEED ADDING
- NEEDS ONLY UNREGULATED POWER SUPPLY ±15 to ±60v

IN A RANGE OF 11 MODELS USING LATEST TOROIDAL TRANSFORMERS

We want to know

We have always maintained good working relations with our customers, and therein lies a large measure of the company's success and growth. Now that we are running our most exciting programme yet, we would like to have your comments about our current products and any others you would like to see coming from I.L.P. Send us your letter (with your age, job, etc., if you don't mind) to: Customer Liaison, I.L.P. Electronics Ltd., FREEPOST, Roper Close, Canterbury CT2 7EP (No stamp required).

BRITAIN'S FOREMOST QUALITY MODULE SUPPLIERS

To: I.L.P. ELECTRONICS LTD. CANTERBURY CT2 7EP

Please supply Total purchase price £.....

I enclose Cheque Postal Orders International Money Order

Please debit my Access/Barclaycard Account No.

NAME

ADDRESS

Signature WW7

NO QUIBBLE 5 YEAR GUARANTEE
7-DAY DESPATCH ON ALL ORDERS
BRITISH DESIGN AND MANUFACTURE
FREEPOST SERVICE



I.L.P. ELECTRONICS LTD.

FREE POST 5 Graham Bell House, Roper Close, Canterbury, Kent CT2 7EP.
Telephone (0227) 54778 [Technical (0227) 64723] Telex 965780

Available also from MARSHALLS, WATFORD ELECTRONICS and certain other selected retailers

WW - 074 FOR FURTHER DETAILS

ALL U.K. ORDERS DESPATCHED POST FREE

TEST INSTRUMENTS

- THANDAR-**
DIGITAL MULTIMETERS (LED)-
PDM35 £39.68 DM235 £60.38
DM350 £83.38 DM450 £136.85
- DIGITAL MULTIMETERS (LCD):
TM351 £113.85 TM352 £57.44
TM353 £96.60 TM354 £45.94
- FREQUENCY METERS:
PFM200 £57.27 TF040 £126.50
TF200 £166.75
- PRE-SCALER: TP600 £43.13
- OSCILLOSCOPE: SC110 £159.85
- PULSE GEN.: TG105 £97.75
- FUNCTION GEN.: TG100 £90.85
- Instrument Case £10.29
- Bench Instrument Rack £22.94
- Carrying Cases:
DM235, DM350, DM450 £8.86
PDM35, TM354, PFM200 £3.45
TM351, TM353, TF040 £8.84
TF200, TG105, TG100 £6.84
TM352 £2.01 SC110 £8.86
- Mains Adaptors:
PDM35, DM450, PFM200 £5.69
- DM235, DM350, TF040 £5.69
TF200, TP600, SC110 £5.69
- Rechargeable Battery Pack:
DM235, DM350, DM450 £8.63
SC110 £8.63
- Universal Test Lead Set £11.27
- 40 KV Probe £34.44
- Connector Pack (PFM200) £11.27
- Probe
(For SC110, TF040, TF200)
X1 £8.05
X10 £8.86
- Sprung Hook/Trimmer Pack
(For SC110) £2.88
- SERVICE MANUALS (each)
* No V.A.T. on manuals
- All prices include V.A.T. For
orders over £20, p. & p. FREE
(U.K.); under £20 p. & p. £1
(U.K.).
- All prices correct at 1-4-81. E
& OE.

Many more instruments available in the LEADER and TMK
ranges
Send for catalogue 30p (including postage)
Cash with order

DAROM SUPPLIES

Open: Monday to Friday 9 a.m.-5.30 p.m.

4 Sandy Lane, Stockton Heath
WARRINGTON, WA4 2AY, CHESHIRE

Telephone: (0925) 64764

WW - 048 FOR FURTHER DETAILS

PRODUCTION TESTING

POWER UNITS

Now available with
3 OUTPUTS



Type 250VRU/30/25

- OUTPUT 1: 0-30v, 25A DC
OUTPUT 2: 0-70v, 10A AC
OUTPUT 3: 0-250v, 4A AC

ALL
Continuously
Variable

Valradio

VALRADIO LIMITED, BROWELLS LANE, FELTHAM
MIDDLESEX TW13 7EN
Telephone: 01-890 4242/4837

WW - 047 FOR FURTHER DETAILS

B. BAMBER ELECTRONICS

COMMUNICATIONS HOUSE

5 STATION ROAD, LITTLEPORT, CAMBS. CB6 10E

PHONE: ELY (0353) 860185 (TUESDAY TO SATURDAY)



RADIO TELEPHONES

- Pye Westminster W15AM high band and low band
available. Sets complete and in good condition but are
less speakers, mikes, cradles and LT leads (sets only)
£80.00 ea.
- Pye Westminster W15AM Mid Band crystal and
converted to 129.9MHz, 130.1MHz and 130.4MHz. Very
good condition £140.00 ea.
- Pye Westminster W15AMB (Boot Mount) low band
complete with control gear and accessories. Good con-
dition £92.00 ea.
- Pye Westminster W30AM low band, sets only no
control gear, complete and in good condition. £195.00 ea.
- Pye Base Station F30AM low and high band, with
and without remote and T/T. Prices from £220.00
- Pye RTC Controller Units, for remotely controlling a
VHF or UHF fixed station radiotelephones over
landlines. £35.00 ea.
- Pye PC1 Controller Units, similar to above but more
modern. £100.00 ea.
- Pye Olympic M201 Multi Channel AM sets complete but
less mike, speaker and cradle. £120.00 ea.
- Pye Reporter MF6AM High band mobile, very good
condition. £175.00 ea.
- Pye Motophones MF5AM high band and low band
available. Sets complete and in good condition. £55.00
- Pye Cambridge AM10D Dash Mount sets complete and
in good condition but untested. £40.00 ea.
- Pye Cambridge AM10B Boot Mount sets, high band
12.5kHz. sets only, no control gear, good condition.
£25.00 ea.
- Please note all sets are sold less crystals unless
otherwise stated. Sets can be crystalized on your fre-
quency at £20 per channel extra.

AMATEUR RADIO

- Yaesu FRG7700 0.15-30MHz general coverage receiver,
AM/FM/SSB/CW £309.00
- Yaesu FRG7 0.5-30MHz. general coverage receiver
AM/SSB £199.00
- Yaesu FT707 digital 8 bander £529.00
- Yaesu FT902DM 10-160m, SSB/CW/AM/FM, deluxe
digital keyer, fan, variable bandwidth £799.00
- Yaesu FT101ZDFM 10-160m, SSB/CW, variable IF band-
width, FM or AM £599.00
- Yaesu FT480R 2m synthesised 25, 12.5, or 1kHz steps
FM, 1kHz 100 or 10Hz steps SSB, 10w PEP £359.00
- Yaesu FT780R 70cm synthesised 100, 25 or 1kHz steps*
FM, 1kHz 100 or 10Hz steps SSB 10w PEP £409.00
- Yaesu FT207R 2m synthesised handheld 12.5kHz 3w.
£195.00
- Yaesu FT708R 70cm synthesised 25kHz 1w. £199.00
- Scanning Receiver SN200N new model, plug-in mo-
dules, increased of auto, improved image rejection,
increased selectivity. Covers 26-88MHz, 108-180Hz, 380-
514MHz, AM+FM with scanning and memories £264.00

CB ACCESSORIES

- MOBILE ANTENNAS**
- K40 Antenna £31.00
- Avanti 6' Moonraker (Mag.) £49.95
- Avanti 6' Moonraker (Mag.) £28.56
- Avanti 6' Moonraker (Std.) £44.92
- Avanti 4' Moonraker (Std.) £21.98
- Valor 736 5' Road Hog Rod £12.24
- Valor 520 5' Half Breed (Whip) £13.70
- Valor 301 Ant. Magnetic Base £12.93
- Valor 401 Ant. Magnetic Base £15.43
- Valor Antennas complete range in stock.
- BASE STATION ANTENNAS**
- Alcomms DPA11VR. Very popular 4dBs £24.95
- Avanti Sigma II £62.00
- Avanti Sigma IV £69.95

POWER SUPPLIES

- Bremi 3/5 amp 13.8v £14.24
- Bremi 3/5 amp Deluxe 13.8v £17.70
- Bremi 5/7 amp 13.8v £19.90
- Bremi 10 amp 13.8v £47.60

LINEARS (BURNERS)

- Skipmaster 100w AM 180w SSB £118.90
- Skipmaster 150w AM 190w SSB £137.00

ACCESSORIES

- PA Horns (large) £12.50
- PA Horns (medium) £9.22
- RP20 RF Pre-Amplifier £16.45

TRANSISTORS

- 2SC495 £1.10 BA521 £4.16
- 2SC496 £1.31 LA4031P £3.21
- 2SC1096 £1.72 LC7120 £5.87
- 2SC1173 £1.69 LC7130 £5.93
- 2SC1306 £2.73 MC3712 £4.71
- 2SC1449 £1.67 MB1496P £2.63
- 2SC1678 £2.67 TA7205 £3.72
- 2SC1923 £0.43 TA7222 £4.07
- 2SC2029 £2.60 TA7310 £2.78
- 2SC2186 £2.73 TC9100 £7.91
- 2SC2314 £1.41 UPC1156H £4.26

Hameg Oscilloscope HN307 bandwidth DC to 10MHz
with component tester, 7cm dia. CRT, an ideal service
instrument £170.00

Standard C8900 2m FM mobile, digital readout, two
speed scan rate for memories in 5 or 25kHz steps, 150w
RF output £250.00

LANGREX SUPPLIES LTD

Climax House, Fallsbrook Rd., Streatham, London SW16 6ED
Tel: 01-677 2424 Telex: 946708

SEMICONDUCTORS	AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	2N3772 1.84
AA119 0.12	AS215 1.38	BC172 0.13	BD131 0.51	BF257 0.31	CRS360 1.04	OA2201 1.73	OC205 3.45	ZTX502 0.21	2N1309 1.38	2N3771 1.61	

VALVES		Minimum Order £1		VALVES VAT IS INCLUDED	
A1065	1.40	EL509	2.70	QOV06/40A	6.50
A2293	8.80	EL802	1.70	6ALS	11.22
AF8	0.75	EL821	8.20	6ALS5V	19.50
ARP3	0.70	EM32	9.95	6AM5	0.85
ATP4	0.60	EM80	0.85	6AM6	1.50
B12H	3.90	EM81	0.85	6AM7A	2.50
CY31	1.40	EM84	0.85	6AN8A	3.40
DAF86	0.70	EY87	0.95	6AQ4	1.80
DET22	26.95	EY81	0.95	6AQ5	1.80
DF96	0.70	EY81	0.65	6AOSV	1.80
DK96	1.20	EY86/87	0.60	6AS6	1.15
DH76	0.75	EZ90	0.70	6AS7	1.15
DL32	0.40	EZ90	0.70	6AUGT	0.60
DY86/87	0.65	EZ81	0.70	6AUGT	1.30
DY80	0.70	GM4	5.90	6BE6	0.60
E55L	14.90	GY501	1.30	6BE6	1.20
E88CC	1.80	GZ32	1.05	6BG6G	1.60
E88CC/01	3.10	GZ33	4.20	6BJ6	1.30
E92CC	1.20	GZ34	2.75	6BR7A	0.85
E180CC	2.80	GZ37	3.95	6BR7	4.80
E180C	6.30	KT66	6.30	6BW6	6.20
E182CC	4.95	KT88	9.20	6BW7	0.90
EA76	2.25	KT88	9.20	6C4	0.50
EABC80	0.60	MH4	2.50	6C6	0.55
EB91	0.60	MH4	2.50	6C6	0.55
EB93	1.15	ML6	2.50	6C8	0.55
EB93D	0.90	MX10/01	21.50	6CX8	3.80
EBF80	0.60	N78	9.90	6CY5	1.15
EBF83	0.60	OA2	0.70	6D6	0.70
EBF89	0.80	OB2	0.80	6E8A	3.20
EC2	0.65	PA3C8D	0.60	6F6	1.60
EC31	3.40	PC84	0.95	6F6B	1.10
EC82	0.85	PC86	0.95	6F7	2.80
EC88	0.65	PC88	0.95	6F8G	0.85
ECC82	0.65	PC97	1.50	6F12	1.50
ECC88	0.65	PC90	1.15	6F14	1.15
ECC84	0.60	PC90	1.15	6F15	1.30
ECC85	0.60	PC98	1.50	6F17	1.15
ECC86	1.70	PC189	1.05	6F24	1.75
ECC88	0.80	PCF80	0.80	6F33	10.50
ECC89	0.90	PCF84	0.75	6F48	4.20
ECC804	0.85	PCF86	1.50	6F8B	0.90
ECC80	0.65	PCF87	0.50	6G8A	0.95
ECC81	0.65	PCF87	0.50	6G8A	0.95
ECC82	0.65	PCF87	0.50	6G8A	0.95
ECC83	0.65	PCF87	0.50	6G8A	0.95
ECC84	0.65	PCF87	0.50	6G8A	0.95
ECC85	0.65	PCF87	0.50	6G8A	0.95
ECC86	0.65	PCF87	0.50	6G8A	0.95
ECC87	0.65	PCF87	0.50	6G8A	0.95
ECC88	0.65	PCF87	0.50	6G8A	0.95
ECC89	0.65	PCF87	0.50	6G8A	0.95
ECC90	0.65	PCF87	0.50	6G8A	0.95
ECC91	0.65	PCF87	0.50	6G8A	0.95
ECC92	0.65	PCF87	0.50	6G8A	0.95
ECC93	0.65	PCF87	0.50	6G8A	0.95
ECC94	0.65	PCF87	0.50	6G8A	0.95
ECC95	0.65	PCF87	0.50	6G8A	0.95
ECC96	0.65	PCF87	0.50	6G8A	0.95
ECC97	0.65	PCF87	0.50	6G8A	0.95
ECC98	0.65	PCF87	0.50	6G8A	0.95
ECC99	0.65	PCF87	0.50	6G8A	0.95
ECC00	0.65	PCF87	0.50	6G8A	0.95

VALVES AND TRANSISTORS
Telephone enquiries for valves, transistors, etc. retail 749 3934, trade and export 743 0899.

FIELD TELEPHONES TYPE "J".
Tropical, in metal cases.

MAGNETO SWITCHBOARD. Can work with every type of magneto telephones.

POSTAGE: £1-£3 45p; £3-£5 55p; £5-£10 60p; £10-£15 75p; £15-£20 90p; over £20 free.

COLOMOR (ELECTRONICS LTD.)
170 Goldhawk Rd., London W.12
Tel. 01-743 0899 or 01-749 3934
Open Monday to Friday 9 a.m.-5.30 p.m.

TV TUBE REBUILDING

Faircrest Engineering Ltd. manufacture a comprehensive range of equipment for processing all types of picture tubes, colour and mono. Standard or custom built units for established or new businesses. We export world-wide and have an excellent spares service backed by a strong technical team.

Full training courses are individually tailored to customers' requirements.

For full details of our service contact Neil Jupp

FAIRCREST ENGINEERING LTD.
Willis Road, Croydon, CR0 2XX.
01-684 1422/01-684 0246

WW-069 FOR FURTHER DETAILS

THE COMPLETE SOLUTION TO STRAIN GAUGE AMPLIFICATION

- COMPLETE WITH BRIDGE SUPPLY
- COMPLETE WITH ALL ADJUSTMENTS (SPAN ZERO BRIDGE VOLTAGE)
- COMPLETE (NO EXTERNAL COMPONENTS NEEDED)

The series SGA 700 provides the complete solution to Strain Gauge Amplification. Simply connect the bridge, connect the power supplies and the SGA 700 does the rest. It also offers high stability. Miniature size, good supply rejection — in fact a specification as good as many instruments many times the price and size.

CIL Electronics Ltd
14 Willowbrook Road,
Worthing, Sussex BN14 8NA.
Tel: Worthing (0903) 204646
Telex: 87515 WISCO G ATT CIL

WW - 052 FOR FURTHER DETAILS

MULLARD MODULES
LP1171 PLUS LP1179 IF, Strip. AM, FM. Pair £5.75. FRONT END

ULTRASONIC TRANSDUCERS
40K/GS Complete on 18in. screened cable £1.75 ea. Pairs £2.95.

LP1157 MED. & LONG TUNER, £2.50
Complete with Data

ULTRASONIC TRANSMITTER
Complete unit (uncased requires 1.5V) £3.25.

FOSTER DYNAMIC MICROPHONES
200 ohm impedance. Moving coil. £1.75 pair. Complete on chassis

STEREO CASSETTE TAPE HEADS
Quality replacement for most recorders with mounting plate. Record/Replay. £2.80.

HEWLETT-PACKARD DISPLAYS
Half-inch red common anode. Definitely the brightest will replace (DL707). (5082-7650) high efficiency and very bright. Excellent character appearance, evenly lighted segments, wide viewing angle, body colour improves 'Off' segment contrast. Categorized for luminous intensity, use of like categories yields a uniform display. Consumption as low as 3mA per segment, designed for multiplex operation. Standard 14-pin dual-in-line package configuration.

At less than half of manufacturers current price **ONLY £1 EA.**

VERO COMPUTER FRAMES
19 x 8in. with 64 runners and guides. List price £43. Our price £17.95.

NATIONAL 4116 Dynamic (16K RAM)
200 N/seconds, £1.95. Less 10% per 4. 15% per 8.

MONSANTO + 1 display. Half inch common anode, intensity, 14 pin DIL. £1 each. Set of 4 for £3.50.

SCOOP ONLY £29.95

BRITISH MADE

- 52 KEY 7 BIT ASCII CODED
- POSITIVE STROBE. +5V - 12V.
- FULL ASCII CHARACTERS
- PARALLEL OUTPUT WITH STROBE
- POWER LIGHT ON CONTROL
- CHP BY GENERAL INSTRUMENT (G.I.) TTL OUTPUT
- SUPERBLY MADE SIZE 13 x 5.5 x 1.5 ins.

The 'CHERRY' Computer Keyboard

- BLACK KEYS WITH WHITE LEDGENS
- ESCAPE, SHIFT RETURN & RESET KEYS
- CONTROL REPEAT & BELL
- Complete with DATA

Ideal for use with TANGERINE, TRITON, TUSCAN, APPLE and most computers. Ex-Stock from HENRY'S

This is definitely the BEST BUY. FULLY GUARANTEED. Supplied BRAND NEW in manufacturers original packing. Just post remittance total £35.95 (incl. V.A.T. & Post)

404 Edgware Road London W2, England. 01-723 1008

COMPUTER WAREHOUSE NOW OPEN MONDAY-SATURDAY 9.30-5.30

In stock now test equipment, microprocessors, teletypes, transformers, power supplies, scopes, sig. gen's, motors, peripheral equipment, I.C.'s, tools, components, variacs, keyboards, transistors, microswitches, V.D.U.'s sub-assemblies + thousands of other stock lines. Just a mere fraction of our vast range, is displayed below: 100's of bargains for callers.

RAM AND EPROM NEW LOW VAT INCLUSIVE PRICES

2716 5v Rail	£7.50	4116	200 NS 16KX1 DYN.	8 for £19.95
2716 3 Rail	£8.50	2114L-3	300 NS 1KX4 ST.	8 for £22.50
2708 450 NS	£4.50	2102L-3	650 NS 1KX1 ST.	8 for £ 5-50
2708 Ex Equip	£2.25	TMS4030JL	300 NS 4KX1 DYN	8 for £ 9-95

All devices full spec. and guaranteed. Bulk enquiries welcome.

TELETYPE ASR33 I/O TERMINALS

From £195 + CAR + VAT

Full fledged industry standard ASR33 data terminal. Many features including: ASCII keyboard and printer for data I/O, auto data detect circuitry, RS232 serial interface, 110 baud, 8 bit paper tape punch and reader for off line data preparation and ridiculously cheap and reliable data storage. Supplied in good condition and in working order. Options: Floor stand £12.50 + VAT. Sound proof enclosure £25.00 + VAT

ICL TERMIPRINTER 300 BAUD TERMINALS

MADE UNDER LICENCE FROM THE WORLD FAMOUS GE CO. The ICL Termiprinter is a small attractive unit with so many features it is impossible to list them in the space available! Brief spec. as follows: RS232 serial interface, switchable baud rates 110, 150, 300, (30 cps), upper and lower case correspondence type face, standard paper, almost silent running, form feed, electronic tab settings, suited for word processor applications plus many more features. Supplied in good condition and in working order. Limited quantity.

PRICES REDUCED ONLY £295 + CAR + VAT

SCOOP PURCHASE 12" VIDEO MONITORS

Software development system invaluable tool for designers, hobbyists, etc. Enables open heart surgery on 2716, 2708 etc. Blows, copies, reads EPROMS or emulates EPROM/ROM/RAM in situ whilst displaying contents on domestic TV receiver. Many other features. £115 + carr. + VAT. Optional 2716, 2716 Function Card £40 + VAT. PSU £20 + £1.50 carr. + VAT. Write or phone for more details.

CONNECT DIRECT TO YOUR MICRO

Made by the "BALL MIRATEL" CORPORATION USA the CD12 is a self contained, mains powered chassis professional monitor. All controls are inbuilt on a single PCB with exception of the brightness control which can be brought out for external use. Many features such as composite video, quoted bandwidth of 19 MHz, superb linearity and definition make this a must for any MICRO/CCTV application. Brand new and boxed only + carriage £7.50 + VAT. Input harness, brightness pot and connector £2.50 + VAT. Dimensions 9" x 11" x 11" W. HURRY WHILE STOCKS LAST

EX STOCK SOFTY EPROM BLOWER

Software development system invaluable tool for designers, hobbyists, etc. Enables open heart surgery on 2716, 2708 etc. Blows, copies, reads EPROMS or emulates EPROM/ROM/RAM in situ whilst displaying contents on domestic TV receiver. Many other features. £115 + carr. + VAT. Optional 2716, 2716 Function Card £40 + VAT. PSU £20 + £1.50 carr. + VAT. Write or phone for more details.

JUST IN

Secondhand chassis 9" Blue-beam mains powered, video monitors, composite video input with inbuilt 5v 3 amp DC P.S.U. Tested, but unguaranteed. £39.99 + £7.50 carriage Complete with circuit.

EQUIPMENT CASES

GIVE YOUR M.P.U. A HOME ONLY £9.95 + 1.85 pp

Superb professional fully enclosed, made for the G.P.O. to the highest standard, offered at a fraction of their original cost they feature aluminium sides, hinged removable front panel, which can be secured by 2 screws to prevent prying fingers. All are finished in two tone G.P.O. grey and although believed brand new may have minor scuff marks/scratches due to bad storage. Dimensions 16" D x 6 1/2" H x 14 1/2" W

THE PRINTER SCOOP OF THE YEAR THE LOGABAX Z80 MICROPROCESSOR CONTROLLED LX180L MATRIX PRINTER

A massive bulk purchase enables us to offer you this superb professional printer at a fraction of its recent cost of over £2000. Utilising the very latest in microprocessor technology, it features a host of facilities with all electronics on one plug in P.C.B. Just study the specification and you will instantly realise it meets all the requirements of the most exacting professional or hobbyist user.

STANDARD FUNCTIONS ★ Full ASCII character set ★ Standard ink ribbon ★ RS232/V24 serial interface - 7 xtl controlled baud rates up to 9600 ★ 194 characters per line ★ Parallel interface ★ Handshakes on serial and parallel ports ★ 4 type fonts, italic script, double width, italic large, standard ★ Internal buffer ★ Internal self test ★ 170 CPS ★ Variable paper tractor up to 17.5" wide ★ Solid steel construction ★ All software in 2708 eproms easily reconfigured for custom fonts etc.

All this and more, not refurbished but BRAND NEW At Only **£525 + VAT** + carriage and ins. £18.00 + VAT

OPTIONAL EXTRAS ★ Lower case £25.00 ★ 16K buffer £30.00 ★ Second tractor for simultaneous dual forms £85.00 ★ Logabax maintenance. P.O.A.

STEP INTO THE 80's WITH TOMORROW'S WORLD TECHNOLOGY TODAY

THE TANTEL PRESTEL-VEWDATA ADAPTOR

At last this amazing piece of micro technology is available at a price you can afford. Just connect to the aerial socket of any colour or black and white domestic TV receiver and to your Post Office installed jack socket and you are into the exciting world of PRESTEL. Via simple push button use you are able to view a staggering 170,000 pages of up to the minute information on many services and utilities, order goods from companies, even play games!! All this and more without ever leaving your armchair!

ONLY £170 + £1.75 carr. + VAT SEND £197.51

NATIONAL MA1012 LED CLOCK MODULE

★ 12 HOUR
★ ALARM
★ 50/60 HZ

The same module as used in most ALARM/CLOCK radios today, the only difference is our price! All electronics are mounted on a PCB measuring only 3" x 1 1/2" and by addition of a few switches and 5/16 volts AC you have a multi function alarm clock at a fraction of cost. Other features include snooze timer, am pm, alarm set, power fail indicator, flashing seconds cursor, modulated alarm output etc. Supplied brand new with full data only **£5.25**

MAJOR SAVINGS HARD DISK DRIVES

Another major purchase allows us to bring you the professional technology of hard disk drives at a price you can now afford. Just imagine absolutely masses of correct data transferred or saved on your system by the time your finger leaves the carriage return key! All drives offered are OEM to the highest professional standard by the DRE CO., perhaps the largest of UK OEM peripheral manufacturers. All components are batch selected to obtain the utmost reliability and after having run two series 30 and a 4000 drive continuously 24 hours a day for over a year without a single read/write error we can most certainly vouch for the quality.

DIABLO/DRE series 30. Fully refurbished this 2.5 MB drive accepts 2315 exchangeable (via removing top cover) disk cartridges. Sectoring is a feature of the disk pack and may range from 8-48. Fully DEC RK05, Nova, Texas, system compatible. Requires +5 & -15V DC Supply.

Series 30 Drive £475 + VAT Series 30 Front Loader £695 + VAT

DRE 4000 B Series. Model 4044. Technology at its finest, this drive currently manufactured by DRE features 10 MBs of on line storage split into two disk platters, 1, 5 MB fixed and 1 top load 5 MB type 5440 exchangeable cartridge. Features, DC drive motor, built in air conditioning system, write protect, mains powered, etc. Supplied Brand New and Boxed complete with Manual and Rack Slides. Manufacturers current price £3100, our price £1495 + VAT

Series 30 Drive £475 + VAT Series 30 Front Loader £695 + VAT

DRE 4000 B Series. Model 4044. Technology at its finest, this drive currently manufactured by DRE features 10 MBs of on line storage split into two disk platters, 1, 5 MB fixed and 1 top load 5 MB type 5440 exchangeable cartridge. Features, DC drive motor, built in air conditioning system, write protect, mains powered, etc. Supplied Brand New and Boxed complete with Manual and Rack Slides. Manufacturers current price £3100, our price £1495 + VAT

RCA FULLY CASED ASCII CODED KEYBOARDS

IDEAL - TANGERINE, OHIO ETC.

Straight from the U.S.A. made by the world famous R.C.A. Co. the VP600 Series of case freestanding keyboards meet all requirements of the most exacting user, right down to the price! Utilising the latest in switch technology. Guaranteed in excess of 5 million operations. The keyboard has a host of other features including full ASCII 128 character set, user definable keys, upper/lower case, rollover protection, single 5V rail, keyboard impervious to liquids and dust, TTL or CMOS outputs, even an on-board tone generator for keypress feedback, and a 1 year full R.C.A. backed guarantee.

VP601 7 bit fully coded output with delayed strobe, etc. **£43.95**

VP611 Same as VP601 with numeric pad. **£54.95**

VP606 Serial, RS232, 20MA and TTL output, with 6 selectable Baud Rates. **£60.95**

VP616 Same as VP606, with numeric pad, Plug and cable for VP601, VP611 £2.25 **£72.50**

Plug for VP606, VP616 £2.10

Post, Packing and Insurance. **£1.95**

ORDER NOW OR SEND FOR DETAILS.

SEMICONDUCTOR 'GRAB BAGS'

Amazing value mixed semiconductors, include transistors, digital, linear I.C.'s, triacs, diodes, bridge recs. etc. All devices guaranteed brand new, full spec. with manufacturers markings, fully guaranteed. 50 + BAG £2.95 100 + BAGS £5.15

MUFFIN FANS

Keep your equipment Cool and Reliable with our tested ex-equipment "Muffin Fans" almost silent running and easily mounted. Available in two voltages 110 V.A.C. £5.05 + pp 90p OR 240v A.C. £8.15 + pp 90p DIMENSIONS 4 1/2" x 4 1/2" x 1 1/2"

ELECTRONIC COMPONENTS & EQUIPMENT 66% DISCOUNT

Due to our massive bulk purchasing programme which enables us to bring you the best possible bargains, we have thousands of I.C.'s, Transistors, Relays, Cap's, P.C.B.'s, Sub-assemblies, Switches, etc. etc. surplus to our requirements. Because we don't have sufficient stocks of any one item to include in our ads., we are packing all these items into the "BARGAIN PARCEL OF A LIFETIME" Thousands of components at giveaway prices! Guaranteed to be worth at least 3 times what you pay plus we always include something from our ads. for unbeatable value!! Sold by weight

2.5kls £ 4.75 + pp £1.25 5kls £ 6.75 + pp £1.80 10kls £11.75 + pp £2.25 20kls £19.99 + pp £4.75

MAIL ORDER INFORMATION

Dept. WW. 64-66 Melfort Rd., Thornton Heath, Croydon, Surrey. Tel: 01-689 7702 or 01-689 6800

Unless otherwise stated all prices inclusive of V.A.T. Cash with order. Minimum order value £2.00. Prices and Postage quoted for UK only. Where post and packing not indicated please add 60p per order. Bona Fida account orders minimum £10.00. Export and trade enquiries welcome. Orders despatched same day where possible. Access and Barclaycard Visa welcome.

5v D.C. POWER SUPPLIES

Following the recent "SELL OUT" demand for our 5v 3 amp P.S.U. we have managed to secure a large quantity of ex-computer systems P.S.U.'s with the following spec.: 240 or 110v A.C. input. Outputs of 5v @ 3-4 amps, 7.2v @ 3 amps and 6.5v @ 1 amp. The 5v and 7.2v outputs are fully regulated and adjustable with variable current limiting on the 5v supply. Unit is self contained on a P.C.B. measuring only 12" x 5" x 3". The 7.2v output is ideal for feeding "on board" regulators or a further 3 amp LM323K regulator to give an effective 5v @ 7 amp supply. Supplied complete with circuit at only **£10.95 + £1.75pp.** Believed working but untested, unguaranteed.

ELECTRONICS

Dept. WW. 64-66 Melfort Rd., Thornton Heath, Croydon, Surrey. Tel: 01-689 7702 or 01-689 6800

MAIL ORDER INFORMATION

Following the recent "SELL OUT" demand for our 5v 3 amp P.S.U. we have managed to secure a large quantity of ex-computer systems P.S.U.'s with the following spec.: 240 or 110v A.C. input. Outputs of 5v @ 3-4 amps, 7.2v @ 3 amps and 6.5v @ 1 amp. The 5v and 7.2v outputs are fully regulated and adjustable with variable current limiting on the 5v supply. Unit is self contained on a P.C.B. measuring only 12" x 5" x 3". The 7.2v output is ideal for feeding "on board" regulators or a further 3 amp LM323K regulator to give an effective 5v @ 7 amp supply. Supplied complete with circuit at only **£10.95 + £1.75pp.** Believed working but untested, unguaranteed.

WW - 076 FOR FURTHER DETAILS

New KONTAKT Sprays

for the Electronics & Electrical Industries



KALTRON 601

A new cleaner for Magnetic Recording Units. Kaltron 601 has an extremely low surface tension thereby enabling the cleaning of magnetic sound heads leaving no deposit or other traces.

It is chemically pure (99.8%) - non conductive - non-flammable.

It can be used on energised electrical installations and electronic equipment, e.g. video units, tape recorders, data processing systems etc.

Also NEW

PRINTER 66

Spray cleaner for type wheel printers, matrix printers and chain printers. Can also be used for cleaning normal typewriters.

SCREEN 99

Specially for the cleaning of all types of screens, including data terminals and T.V. Screens.

VASELINE SPRAY 701

For use in communications engineering and construction of antennae. Proved successful as corrosion inhibitor for cable clamps, connecting screw joints etc. Application from spray can with capillary tube is clean and simple. Distributed by:

Special Products Distributors Ltd.
81 Piccadilly, London, W1V 0HL

Tel: 01-629 9556 : Cables: Specipro, London, W.1
Telex: 265200 (answerback RACEN)

WW - 059 FOR FURTHER DETAILS

Digital Video Noise Measurement System

The Digital D4060 Noise Measurement System offers an accurate and economical method of measuring video signal to noise ratio on broadcast or industrial TV systems.



£700+VAT

Accurate to ± 1.5dBs from 20dBs to 60dBs

- Measures signal to noise ratio down to 65dBs SNR
- Field interval SNR measurements are possible with the D4060 option 01
- SNR measurement is possible in the presence of sync pulses, some test signals or free running
- Visual display on oscilloscope ensures measurement confidence
- Full CCIR weighting filter sets are available

DIGI-TEL ELECTRONICS
20 Trenches Road
Crowborough, Sussex
Tel: Crowborough 5069

WW - 030 FOR FURTHER DETAILS

Sowter Transformers

With 40 years' experience in the design and manufacture of several hundred thousand transformers we can supply

AUDIO FREQUENCY TRANSFORMERS OF EVERY TYPE

YOU NAME IT! WE MAKE IT!

OUR RANGE INCLUDES:

Microphone transformers (all types), Microphone Splitter/Combiner transformers, Input and Output transformers, Direct Injection transformers for Guitars, Multi-Secondary output transformers, Bridging transformers, Line transformers, Line transformers to G.P.O. Isolating Test Specification, Tapped impedance matching transformers, Gramophone Pickup transformers, Audio Mixing Desk transformers (all types), Miniature transformers, Microminiature transformers for PCB mounting, Experimental transformers, Ultra low frequency transformers, Ultra linear and other transformers for Transistor and Valve Amplifiers up to 500 watts, Inductive Loop transformers, Smoothing Chokes, Filter, Inductors, Amplifier to 100 volt line transformers (from a few watts up to 1,000 watts), 100 volt line transformers for speakers, Speaker matching

transformers (all powers), Column Loudspeaker transformers up to 300 watts or more.

We can design for RECORDING QUALITY, STUDIO QUALITY, HI-FI QUALITY OR P.A. QUALITY. OUR PRICES ARE HIGHLY COMPETITIVE AND WE SUPPLY LARGE OR SMALL QUANTITIES AND EVEN SINGLE TRANSFORMERS. Many standard types are in stock and normal despatch times are short and sensible.

OUR CLIENTS COVER A LARGE NUMBER OF BROADCASTING AUTHORITIES, MIXING DESK MANUFACTURERS, RECORDING STUDIOS, HI-FI ENTHUSIASTS, BAND GROUPS AND PUBLIC ADDRESS FIRMS. Export is a speciality and we have overseas clients in the COMMONWEALTH, EEC, USA, MIDDLE EAST, etc. Send for our questionnaire which, when completed, enables us to post quotations by return.

E. A. Sowter Ltd.

Manufacturers and Designers

E. A. SOWTER LTD. (Established 1941), Reg. No. England 303990
The Boat Yard, Cullingham Road, Ipswich IP1 2EG, Suffolk, P.O. Box 36, Ipswich IP1 2EL, England
Phone: 0473 52794 & 0473 219390

WW - 010 FOR FURTHER DETAILS

PM COMPONENTS LTD. VALVE & COMPONENTS SPECIALISTS

DEPT. A, CONINGSBY HOUSE, WROTHAM RD, MEOPHAM, KENT DA13 0HN
PHONE 0474 813225. TELEX 965966 WEST ST G

SEMICONDUCTORS										INTEGRATED CIRCUITS																																																																																																																																																																																																																																																																																																																																										
AC126 0.22	BC109B 0.10	BC212 0.09	BD140 0.30	BF194 0.11	BFX84 0.26	BCA16335 0.80	LA4031P 2.70	SL490 1.96	TBA120SQ 0.70	TCA270 1.10	AC127 0.22	BC109C 0.11	BC213 0.09	BD159 0.55	BF195 0.11	BFX85 0.28	LA400 0.42	SL901B 4.35	TBA120 1.00	TCA270S 1.10	AC128 0.28	BC114 0.11	BC214 0.09	BD179 0.72	BF197 0.11	BFX98 0.25	LA403 0.40	SL917B 6.25	TBA139 1.50	TCA800 2.15	AC128K 0.32	BC116A 0.12	BC214L 0.09	BD201 0.83	BF199 0.14	BFY51 0.21	LA403P 0.40	SL1310 1.80	TBA440N 2.55	TCA940 1.65	AC141K 0.34	BC117 0.19	BC227 0.09	BD202 0.65	BF200 0.30	BFY52 0.25	LA403P 0.40	SL1327 1.10	TBA480Q 1.25	TD4440 2.20	AC142K 0.30	BC126 0.12	BC238 0.09	BD203 0.78	BF241 0.15	BFY56 0.48	LA403P 0.40	SL1327Q 1.10	TBA480Q 1.25	TD4440 2.20	AC176 0.22	BC140 0.31	BC252A 0.12	BD204 0.70	BF256 0.28	BR100 0.19	LA403P 0.40	SL1430 1.09	TBA510Q 1.65	TD4100 1.85	AC176K 0.31	BC140 0.31	BC252A 0.12	BD222 0.46	BF256/LC 0.28	BR100 0.19	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AC187 0.26	BC141 0.25	BC258A 0.39	BD223 0.48	BF257 0.28	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AC187K 0.28	BC142 0.21	BC300 0.30	BD225 0.46	BF258 0.25	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AC188 0.22	BC143 0.24	BC301 0.30	BD226 0.46	BF259 0.26	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AC188K 0.22	BC147 0.09	BC303 0.26	BD234 0.35	BF271 0.26	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AD142 0.90	BC148A 0.09	BC307 0.09	BD236 0.45	BF273 0.13	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AD143 0.82	BC148B 0.09	BC327 0.10	BD237 0.30	BF273 0.13	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AD149 0.70	BC149 0.09	BC337 0.10	BD238 0.33	BF337 0.29	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AD162 0.39	BC158 0.09	BC461 0.30	BD434 0.55	BF355 0.37	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AD161/2 1.04	BC159 0.09	BC478 0.20	BD437 0.50	BF362 0.38	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AF124 0.34	BC160 0.28	BC547 0.10	BD438 0.60	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AF125 0.32	BC161 0.28	BC548 0.10	BD439 0.60	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AF126 0.32	BC170B 0.10	BC549 0.10	BD440 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AF127 0.32	BC171 0.08	BC550 0.07	BD441 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AF139 0.42	BC171A 0.10	BC550B 0.07	BD442 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AF150 0.42	BC171B 0.10	BC557 0.07	BD443 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AF239 0.42	BC172 0.09	BC557B 0.07	BD444 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AU106 2.06	BC172B 0.10	BC557C 0.07	BD445 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AU107 1.75	BC172C 0.10	BC557D 0.07	BD446 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AU110 2.00	BC173 0.10	BC557E 0.07	BD447 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	AU113 1.48	BC174 0.09	BC557F 0.07	BD448 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	BC107A 0.10	BC182 0.08	BC557G 0.07	BD449 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	BC107B 0.10	BC182L 0.10	BC557H 0.07	BD450 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	BC108 0.10	BC183 0.12	BC557I 0.07	BD451 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	BC108A 0.10	BC183L 0.09	BC557J 0.07	BD452 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	BC108B 0.10	BC184 0.09	BC557K 0.07	BD453 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95	BC109 0.10	BC208B 0.13	BC557L 0.07	BD454 0.58	BF363 0.31	BR101 0.30	LA403P 0.40	SL1432 1.37	TBA520Q 1.10	TD4110 1.95

NEW BRANDED VALVES																																																																																																																																																																																																																																																																																																																																																		
A1714 14.00	E81CC 3.90	ECH83 0.78	EM81 0.70	OC3 1.05	QOV06-40A 13.95	6B0E 0.60	6SA7GT 1.00	20P4 1.05	20P5 1.15	A1998 11.50	E82CC 1.50	ECH84 0.93	EM82 0.75	OD3 1.15	QOV06-40A 13.95	6B0GA 2.00	6SH7 0.80	20P6 1.25	20P7 1.85	A2087 11.50	E83CC 1.50	ECL80 0.66	EM85 0.85	OM4 1.00	OM5B 3.60	OS150/45 7.00	6B07A 0.72	6SK7 0.80	30 1.85	A2134 9.00	E83F 2.50	ECL82 0.58	EM87 1.10	OM5B 3.60	OS150/45 7.00	6B08 0.85	6SL7GT 0.72	30C15 0.40	A2293 7.20	E86C 6.00	ECL83 1.13	EM88 0.50	OM6 2.00	OS150/45 7.00	6B09 0.85	6SN7GT 0.69	30C17 0.40	A2321 15.00	E88C 4.00	ECL84 0.74	EM89 0.50	OM7 2.00	OS150/45 7.00	6B10 0.85	6SN7GT 0.69	30C18 0.95	A2900 10.90	E88CC 2.60	ECL85 0.74	EM90 0.50	OM8 2.00	OS150/45 7.00	6B11 0.85	6SN7GT 0.69	30C19 0.95	ACP 3.00	E130L 13.00	ECL86 0.74	EM91 0.50	OM9 2.00	OS150/45 7.00	6B12 0.85	6SN7GT 0.69	30C20 0.95	AC/HL/DO	E180F 5.25	EF22 2.50	EM92 0.50	OM10 2.00	OS150/45 7.00	6B13 0.85	6SN7GT 0.69	30C21 0.95	AC/PEN 3.50	E280F 19.50	EF37A 3.50	EM93 0.50	OM11 2.00	OS150/45 7.00	6B14 0.85	6SN7GT 0.69	30C22 0.95	AC/SP3 4.50	E283CC 8.25	EF40 1.20	EM94 0.50	OM12 2.00	OS150/45 7.00	6B15 0.85	6SN7GT 0.69	30C23 0.95	AC/VP1 3.50	E810F 8.25	EF41 1.25	EM95 0.50	OM13 2.00	OS150/45 7.00	6B16 0.85	6SN7GT 0.69	30C24 0.95	AC/VP2 1.50	E8A0 1.00	EF42 1.95	EM96 0.50	OM14 2.00	OS150/45 7.00	6B17 0.85	6SN7GT 0.69	30C25 0.95	AR8 0.70	E8A1 0.50	EF43 1.95	EM97 0.50	OM15 2.00	OS150/45 7.00	6B18 0.85	6SN7GT 0.69	30C26 0.95	ARP12 0.70	E8BC30 0.50	EF44 1.20	EM98 0.50	OM16 2.00	OS150/45 7.00	6B19 0.85	6SN7GT 0.69	30C27 0.95	ARP34 2.00	E8C91 0.90	EF45 1.20	EM99 0.50	OM17 2.00	OS150/45 7.00	6B20 0.85	6SN7GT 0.69	30C28 0.95	ARP35 1.50	EAF42 1.40	EF46 1.50	EM100 0.50	OM18 2.00	OS150/45 7.00	6B21 0.85	6SN7GT 0.69	30C29 0.95	ARP37 1.00	E841 2.30	EF47 1.50	EM101 0.50	OM19 2.00	OS150/45 7.00	6B22 0.85	6SN7GT 0.69	30C30 0.95	AU3 1.50	E842 0.52	EF48 1.50	EM102 0.50	OM20 2.00	OS150/45 7.00	6B23 0.85	6SN7GT 0.69	30C31 0.95	B36 1.85	E8C33 1.00	EF49 1.50	EM103 0.50	OM21 2.00	OS150/45 7.00	6B24 0.85	6SN7GT 0.69	30C32 0.95	B729 1.20	EBC41 0.85	EF50 1.50	EM104 0.50	OM22 2.00	OS150/45 7.00	6B25 0.85	6SN7GT 0.69	30C33 0.95	BT58 33.00	EBC81 0.85	EF51 1.22	EM105 0.50	OM23 2.00	OS150/45 7.00	6B26 0.85	6SN7GT 0.69	30C34 0.95	CB131 2.00	EBC82 0.85	EF52 5.00	EM106 0.50	OM24 2.00	OS150/45 7.00	6B27 0.85	6SN7GT 0.69	30C35 0.95	CIK 14.00	EBC83 0.85	EF53 5.00	EM107 0.50	OM25 2.00	OS150/45 7.00	6B28 0.85	6SN7GT 0.69	30C36 0.95	C3JA 10.00	EBC84 0.85	EF54 5.00	EM108 0.50	OM26 2.00	OS150/45 7.00	6B29 0.85	6SN7GT 0.69	30C37 0.95	D3A 30.00	EBC85 0.85	EF55 5.00	EM109 0.50	OM27 2.00	OS150/45 7.00	6B30 0.85	6SN7GT 0.69	30C38 0.95	DAC32 1.20	EBC86 0.85	EF56 5.00	EM110 0.50	OM28 2.00	OS150/45 7.00	6B31 0.85	6SN7GT 0.69	30C39 0.95	DAF91 0.45	EBC87 0.85	EF57 5.00	EM111 0.50	OM29 2.00	OS150/45 7.00	6B32 0.85	6SN7GT 0.69	30C40 0.95	DAF96 0.85	EBC88 1.00	EF58 5.00	EM112 0.50	OM30 2.00	OS150/45 7.00	6B33 0.85	6SN7GT 0.69	30C41 0.95	DC90 1.20	EBC89 0.85	EF59 5.00	EM113 0.50	OM31 2.00	OS150/45 7.00	6B34 0.85	6SN7GT 0.69	30C42 0.95	DCX4/1000	EC91 3.00	EF60 5.00	EM114 0.50	OM32 2.00	OS150/45 7.00	6B35 0.85	6SN7GT 0.69	30C43 0.95	DD620 5.00	EC92 0.80	EF61 5.00	EM115 0.50	OM33 2.00	OS150/45 7.00	6B36 0.85	6SN7GT 0.69	30C44 0.95	DE110 6.00	EC93 4.80	EF62 5.00	EM116 0.50	OM34 2.00	OS150/45 7.00	6B37 0.85	6SN7GT 0.69	30C45 0.95	DF33 1.20	EC94 2.30	EF63 5.00	EM117 0.50	OM35 2.00	OS150/45 7.00	6B38 0.85	6SN7GT 0.69	30C46 0.95	DF91 0.45	EC95 0.55	EF64 5.00	EM118 0.50	OM36 2.00	OS150/45 7.00	6B39 0.85	6SN7GT 0.69	30C47 0.95	DF92 0.60	EC96 0.55	EF65 5.00	EM119 0.50	OM37 2.00	OS150/45 7.00	6B40 0.85	6SN7GT 0.69	30C48 0.95	DF96 0.65	EC97 0.60	EF66 5.00	EM120 0.50	OM38 2.00	OS150/45 7.00	6B41 0.85	6SN7GT 0.69	30C49 0.95	DH77 2.20	EC98 0.60	EF67 5.00

HBED

L.E.D.s .125 and .2

1+	100+	1000+	RED	1+	100+	1000+
.02	.016	.013	Y. or G.	.08	.069	.058
				.11	.10	.09

CARBON FILM RESISTORS E12 SERIES

Prices per 100. Larger and Mixed. Quantity prices available.

	25W	5W
100 off one type	.70	.90
500 off one type	.62	.78
1000 off one type	.54	.68

LOW PROFILE I.C. SOCKETS

	TEXAS			SCANBE		
	1+	100+	500+	1+	100+	1000+
8 pin	.075	.068	.06	.059	.049	.044
14 pin	.09	.082	.073	.082	.07	.064
16 pin	.10	.096	.085	.091	.078	.07
18 pin	.125	.113	.10	.104	.089	.081
20 pin	.14	.126	.113	.12	.10	.092
22 pin	.15	.135	.12	.143	.122	.111
24 pin	.15	.135	.12	.146	.132	.116
28 pin	.16	.145	.125	.155	.14	.12
40 pin	.24	.215	.19	.23	.195	.176

Please add £1.50 handling charge and 15% V.A.T.

We also stock Microprocessors, CMOS, TTL, Transistors, Capacitors, Potentiometers, Connectors, etc. Free catalogue available to trade customers only. Enquiries welcome.

Harrison Bros.

Electronic Distributors

22 Milton Road, Westcliff-on-Sea
Essex SS0 7JX, England
Tel: Southend-on-Sea (0702) 32338

WW - 035 FOR FURTHER DETAILS

TELEPRINTER TYPE 7B: Pageprinter 24v. d.c. power supply. Speed 50 bauds per min. S/hand, good cond. (no parts broken), £28.75. OR G.P.O. MODEL, as above except motor, 110/230v. a.c., £34.50. Carriage either type £9.50. Send S.A.E. for list of Teleprinter spares available.

TS.147 RADAR TEST SET Combination Sig. generator and frequency meter and power meter. Provides C.W. and F.M. signals, 115v. a.c., £225. Carr. £7.

HEWLETT PACKARD Signal Generator HP608B. Freq. 10-400MHz C.W. and A.M. Output 1 microvolt to 8v.50. Mod. 400-1000Hz. 230v. a.c., £225. Carr. £10.

TRANSISTORISED 3cm. RADAR AMPLIFIER SWITCH: with 24v. waveguide switch, 9 x 4cm ins. with crystal CV. 2355 and spark gap VX 1046, £17.95 + £1 post.

INSULATION TEST SET 0 to 10KV, negative earth, with Ionisation Amplifier, 100/230 volts a.c., £48.87 + carr.

BC-221 FREQUENCY METER: 125-20,000kc/s, complete with original calibration charts, £24.15 + carr.

ROTARY INVERTER TYPE: PE218E: Input 24-28v DC, 80 amps, 4,800r.p.m. Output 11v AC, 13 amp 400 c/s. 1Ph. P.F. 9. £23 + carr.

RESONATOR PERFORMANCE CTC 424 8.5 to 9.0 kmc/s 3 cm. £80.50 + post £2.

INVERTER 24v. DC input 400 cycles lph 6600 r.p.m. 200v. peak. £8.05 + £2 post.

OXYGEN BOTTLE 1800lb, w.p. £11.50 + carr.

NOISE SOURCE UNIT with CV.1881 noise source mount. Produces thermal noise 15.5dB 200/250v. AC. £80.50.

SIEMENS POWER METER REL3U/84/Alb: 0-12kmHz 1mw 500mw 6 ranges. 0.17db 50 ohms, £92 + carr.

CV.1596 CATHODE RAY TUBE: (09D, 09G), 4in. screen, green electrostatic base B12B. HT1200 volts, heater 4 volts, £11.50.

VACUUM AND PRESSURE DEAL TEST EQUIPMENT: complete with 2 x 4in. gauges indicating 0.20lb. p.s.i. 0.30lb. vacuum. With stand, hand pump, etc., £34.50 + carr.

TX-RX RADAR UNIT, 3cm, complete with magnetron, pulse transformers, crystals, waveguides, blower unit, etc. £126.50 + carr.

MARCONI RF POWER METER. 1020A/1 dualrange 50 or 100W £69 + carr.

HEWLETT PACKARD POWER METER Type 431C, £75.50 + carr.

TWENTY MILLION MEGOMETER, £95 + carr.

GAUSS METER Type G1, 3 ranges, 5,000/10,000/25,000. £85 + carr.

SPERRY TRANSISTORISED SERVO-AMPLIFIERS TYPE C1 with circuit diagram, £11.50 + £1.50 post.

X-Y PLOTTER, £74.75 + £7 carriage.

C.C.T.V. EHT UNIT, 50Kv. £75 + £10 carr.

C.C.T.V. CABLE, 22-Way, 500 metres, £650 + carriage.

BARGAIN MAPS

Large stocks of unused U.S.A.F. surplus maps, weather charts, etc. including:

- ONC-E1 - U.K. in full and part N.W. Europe. Scale 1:1,000,000.
- JNC-9N - N. Europe, U.K., Scandinavia. Scale 1:2,000,000.
- JN-21N - Europe (Mediterranean). Scale 1:2,000,000.
- SIZE 58" x 42" colour. Many others. Please send S.A.E. for list. Price each 75p (inc. P&P).
- 25 x Maps (either same type OR assorted), £10 + £1.60 P&P.
- 10 x Maps (either same type OR assorted), £6.50 (in. P&P).

All prices include VAT at 15%

Carriage quotes given are for 50-mile radius of Herts.

W. MILLS

The Maltings, Station Road
SAWBURIDGEWORTH, Herts.
Tel: Bishop's Stortford (0279) 725872

WW - 009 FOR FURTHER DETAILS

RADIATION DETECTORS

BE PREPARED

VIEW THRU LENS

- Ideal for the experimenter
- THIS DOSIMETER WILL AUTOMATICALLY DETECT GAMMA AND X-RAYS
- UNIT IS SIZE OF FOUNTAIN PEN & CLIPS ONTO TOP POCKET
- PRECISION INSTRUMENT
- MANUFACTURERS CURRENT PRICE OF A SIMILAR MODEL OVER £25 EACH

British design & manufacture.

Tested and fully guaranteed. Ex-stock delivery.

Henry's

01-723 1008/9

404 EDGWARE ROAD, LONDON W2 1ED



FREE RECHARGE SERVICE AFTER PURCHASE

£6.95

inc. VAT Post & Pack 60p

COMPLETE WITH DATA

REGULATED POWER SUPPLIES

Protection: All models internal feedback, overload, thermal and short circuit protected. Fully fused.

Type AD12-AD24 (Illustrated) TYPES AVAILABLE

MODEL NO.	AD12	AD24	AD2412	ADV30
OUTPUT CURRENT	8 amp	8 amp	16 amp	5 amp
NOMINAL OUTPUT VOLTS	12	24	12	0 to 30
INPUT VOLTS	15-230-250	115-230-250	24 DC	Fully variable and metered
TOLERATED MAINS VARIATION	15%	15%		15%

1 off - AD 12-AD24 £88.50
1 off - AD 2412 £54.00
1 off - ADV30 £118.00
All subject to VAT @ 15%

SOUTHERN ELECTRONICS

6 WESTCLIFF ARCADE, RAMSGATE, KENT
TEL. THANEY (0843) 57888

WW - 060 FOR FURTHER DETAILS

Catronics VHF FREQUENCY COUNTERS

SUPER VALUES!

For quality of construction, un-failing efficiency and sheer good value this

200MHz, 7 digit D.F.M.

is unequalled for direct readings up the mobile radio VHF Band. Will operate on mains or 12v supply, making it ideal for use with mobile equipment.

Model DFM5 £119.55 + £5 carr + 15% VAT

Write for illustrated leaflet

HIGH STABILITY OVENED VERSION with better than 1 in 10⁷ reference oscillator DFM 5/S also available at £154.35 + £5 carr. + 15% VAT

Our popular 500 MHz Counter still available at only £142.50 + £5 carr. + 15% VAT

In addition to our famous 250MHz and 500MHz counters we have also produced a

200MHz COUNTER KIT SPECIALLY FOR HOME CONSTRUCTORS

Our new KF200 counter, although small is a no-compromise design. It offers:

- A full 8-digit LED display
 - A frequency range of 10Hz to 200MHz
 - An accuracy of 10Hz at 30MHz, 50Hz at 150MHz in normal home environments
 - 5/6 volt operation from batteries or mains PSU (not supplied)
 - Power consumption of only 1W maximum
 - Small size 4" x 2" x 1"
 - Assembled in about 2 hours
 - Full illustrated instructions
- The KF200 is supplied as 1 PCB assembly, which may be split, if required, to give a separate display unit. (Suitable for direct driving an 8 digit common cathode display.) The unit is available in kit or assembled / tested module form. Prices (INCLUDING V.A.T.):

Counter Kit £72 Module £85

(Add 75p for Post and Packing)

Barclaycards & Access Welcome. Please quote card no.

Catronics

CATRONICS LTD. (Dept. 127)
Communications House
20 WALLINGTON SQUARE
WALLINGTON, SURREY SM6 8RG
Tel. 01-669 6700

WW - 009 FOR FURTHER DETAILS

ALWAYS A CHANGING RANGE OF OSCILLOSCOPES, COMPUTERS, TERMINALS ETC.

- Item No.
- TEKTRONIX STORAGE OSCILLOSCOPE Type 434. Current Model. As new. 12 months warranty (No warranty £1,400) £1,850
 - TEKTRONIX STORAGE OSCILLOSCOPE type 564 with 3A6 & 3B4 £350
 - HAMEG OSCILLOSCOPE type 412. Dual Trace 20 MHz £250
 - TELEQUIPMENT OSCILLOSCOPE type D61A. Dual Trace 10MHz £220
 - SCOPEX OSCILLOSCOPE type 4D10. Dual Trace 10MHz £170
 - HEWLETT PACKARD OSCILLOSCOPE type 120B. (X-Y) £120
 - MARCONI WAVE ANALYSER TF2330. Good condition £150
 - AVO UNIVERSAL BRIDGE B150 with adaptor A151 £90
 - ADVANCE SIGNAL GENERATOR type E2 100KHz-100MHz £50
 - B & K AUTO VIBRATOR EXCITER CONTROL type 1018 £20
 - SOLARTRON Digital Voltmeter type LM1450 £40
 - SOLARTRON PULSE GENERATOR type G0101.2 £35
 - ADVANCE V.H.F. Millivoltmeter type VM79 - No probes £25
 - ADVANCE A.F. SIGNAL GENERATOR type J2 £25
 - KNIGHT RF Sig Gen KG886 with Sweep Marker Gen KG687. The Pair £90
 - ADVANCE Audio Signal Generator HIE 15Hz to 50KHz £45
 - BEULAH VIDEO MONITOR £50
 - LYONS PULSE GENERATOR type PG-25 £40
 - COSSOR SINE SQUARE WAVE GENERATOR 20Hz-1MHz £75
 - AVO UNIVERSAL BRIDGE Type 1 £90
 - P.S.I. RMS VOLTMETER type A1301 £30
 - LABGEAR 625 COLOUR MATCH GENERATOR CM 6004-PG £75
 - ADVANCE LF OSCILLATOR type S665A £25
 - TAYLOR AM/FM SIGNAL GENERATOR type 62A Mk II £200
 - MARCONI UNIVERSAL BRIDGE type TF1313 1/4% £90
 - MARCONI WIDE RANGE OSCILLATOR type TF1370 10Hz-10MHz £75
 - SOLARTRON TRUE RMS VOLTMETER type VM1484 £25
 - RANK V.H.F. SIGNAL STRENGTH INDICATOR £75
 - RACAL COUNTER ELECTRONIC FREQUENCY 32MHz type 836 £40
 - WAYNE KERR CAPACITANCE BRIDGE type B541C £45
 - WAYNE KERR COMPONENT BRIDGE type B121 £25
 - HEWLETT PACKARD DC CURRENT SOURCE type 6181B 0-100V-0-250MA £175
 - MARCONI SAUNDERS LEVELLING AMPLIFIER type 6587 £175
 - TEKTRONIX PRE TRIGGER PULSE GENERATOR type 111 £85
 - RACAL H.F. SELECTIVE ANALYSER type 9056 £375
 - MARCONI STANDARD SIGNAL GENERATOR type TF144H 10KHz-72MHz £225
 - SCHLUMBERGER/SOLARTRON AUTOMATIC COUNTER type FB2602 £150
 - BRANDENBURG PHOTOMULTIPLIER POWER UNIT 0-2500Volts £70
 - SCHLUMBERGER/SOLARTRON COMPUTING VOLTMETER type JM1776 £90
 - HEWLETT PACKARD AC CONVERTOR type 3461A £90
 - MURHEAD WAVE ANALYSER K-134-A 30-310Hz £90
 - PHILIPS COMPARATOR 278KHz £75
 - HEATHKIT CAPACITOR CHECKER IT-28 £25
 - HEWLETT PACKARD DIGITAL VOLTMETER type 3440A £80
 - HEWLETT PACKARD FREQUENCY CONVERTOR type 8729A £130
 - RACAL AUTO FREQUENCY CONVERTOR type B03R 500MHz £35
 - AIRMEC ELECTRONIC VOLTMETER type 314A £75

- VARIAN RUBIDIUM FREQUENCY STANDARD 100KHz/1MHz/5MHz £600
- KEITHLEY INSTRUMENTS REGULATED HIGH VOLTAGE SUPPLY TYPE 241 Accuracy +/- 0.05% or 1mv. £250
- T.O.A. ELECTRONIC POLYRECORDER type EPR-2T £90
- STODOLSKY AIRCRAFT Radiometer and Field Intensity Meter type NM-52A 375-1000MHz (2 pieces) £275
- TAYLOR VALVE TESTER type 45D £45
- RHODE & SCHWARZ UHF TEST RECEIVER BN1523 280-940MHz (450MHz) £120
- R & S Z-g DIAPHRAGM 300-2400 MHz BN3562 £25
- R & S Unbalanced Standard ATTENUATOR BN18042/50 £45
- R & S VHF-UHF FREQUENCY METER 30-3000MHz BN442 £60
- R & S DIRECT CAPACITANCE METER BN5201 £75
- WAYNE KERR UNIVERSAL BRIDGE type B521 (CT375) £50
- B & K HETERODYNE VOLTMETER type 2005 £290
- HEWLETT PACKARD CLIP ON DC MILLIAMPMETER type 428A with probe £70
- SOLARTRON DIGITAL VOLTMETER type LM1420.2 £30
- SOLARTRON DIGITAL VOLTMETER type 1420.2 with Mean AC Unit. £35
- MARCONI SIGNAL GENERATOR type TF995A/3/S (CT402) £225
- JARROLD SWEEP GENERATOR 20-112 MHz £40
- HEWLETT PACKARD VALVE VOLTMETER type 412A £18
- HATHFIELD SELECTIVE LEVEL METER type 1001 £35
- COSSOR NOISE LEVEL METER CT484 £15
- HEATHKIT DECADE RESISTANCE BOX DR1U £10
- MARCONI VARIABLE ATTENUATOR type TF1073A/S (CT421) £40
- ROCHAM UNIVERSAL COUNTER TIMER type A1149 £40
- WAYNE KERR UNIVERSAL BRIDGE type B521 £221
- WAYNE KERR AF SIGNAL GENERATOR type S121 10Hz-120KHz £80
- SIGNAL GENERATOR type CT344.0 1Hz-10MHz £30
- CLARE FLASH TESTER type Q103B £15
- MARCONI RF ATTENUATOR type TF1073A £35
- HATHFIELD SELECTIVE LEVEL METER AV-SU £30
- TELEON SWEEPER 450-900MHz £55
- COSSOR SWEEP OSCILLATOR type CT202 £35
- DEW DIGITAL VOLTMETER type 500 Mk 3 £20
- AIRMEC AM/FM SIGNAL GENERATOR type 204 1-320MHz £130
- HATHFIELD SELECTIVE LEVEL METER SPO 7820 £90
- S.T.C. LEVEL MEASURING SET type 74309B £90
- AVO TRANSISTOR ANALYSER type CT446 £30
- SIEMENS SUPERHET RECEIVER 30Hz-1MHz £35
- R & S MICROWAVE POWER METER BN2412/50 0-3200MHz £80
- ADVANCE SIGNAL GENERATOR B48 100KHz-100MHz £80
- HEWLETT PACKARD DIGITAL RECORDER type 5050B £25

JUST IN

- B. & K. LEVEL RECORDER type 2305. 50db Potentiometer Brand New. With accessories. £9.50 ea.
- HEWLETT PACKARD X-Y RECORDER type 7015B. £600 ea.
- GENERAL RADIO type 1360-B Microwave Osc. 1.7-4.1GHz. £750
- GR type 1142-A Frequency/Discriminator Meter 0-1.5Mhz. £225
- GR type 1807 DC Microvoltmeter/Nanoammeter 1.5Kv max. £175
- GR OSCILLATORS type 1209-C, 1209-OL, 1215-C (50-900MHz) with Power Unit type 1269-A. £225

PLEASE CHECK AVAILABILITY BEFORE ORDERING

CONVERT THIS UNIT TO A SUPER BATTERY CHARGER

An active green ministry quality case with removable top and bottom plates - heavy duty power switches, high powered resistors to control current, good quality centre mounted amp meter, strip of wing nut terminals on front panel which can be used for connecting leads. All this for £3.50. P&P £3. Four units £12. Carriage £6.

SOME TEKTRONIX 500 RANGE OSCILLOSCOPES

with Single Trace Plug-ins Working. From £100. Phone for details

DIODES

All new full spec. devices IN3063 BAX. 13, 1544, 1N4148, 1N3470, 1N4151. 100 off £1.50, 1,000 off £10

MULTIMETER Russian Type 4324

AC/DC volts; AC/DC current; Ohms, etc.

Brand New, boxed. £12.50 each P&P £2.50

METROHM INSULATION AND CONTINUITY TESTER 500 volts

Portable, Battery Operated, Standard P.P.7 (Battery not supplied). Complete with carrying case.

As new £40 each Used but good condition £25 each. P&P £3.

STEPPING MOTORS

6/12 position with additional where the rotor is coils. Device can be used as a tacho. Diagram supplied. Will actually work on 5 volts. 12/24 recommended. £1.50 each P&P 75p or 5 for £5 P&P £1.50.

STEPPING MOTORS

200 Steps. 20 oz/in. torque, 12/24 volt input 5-wire £12 ea. P&P £1.50

KEYBOARD PAD

Size 3x2 1/2x2 1/2" with 12 Alma Reed Switches. Blue keys marked in green 0-9 and a star with one blank. £4 each. P&P £1, or 5 for £15 P&P £2.

MINIATURE KEYBOARD

Push contacts, marked 0-9 and A-F and 3 optional function keys. £1.75 each.

CRYSTALS 50p each

Flat metal case - 19.2KHz; 844.8KHz; B7G - 10MHz.

PULSE TRANSFORMER. Sub min. Size 1/2 x 5/16 x 1/4". Secondary centre tapped. New 20p ea.

REMO TY TYPE MULTIPLIER. Two high voltage outputs and focus. £1 each.

DON'T TAKE CHANCES. Use the proper EHT CABLE. 10p per meter or £7.50 per 100 metre drum. P&P £2.

PHOTOGRAPHIC LAMPS. Fesal 230V 500 watt. Screw cap. 75p ea. Box of 12 £5.50. P&P £1.50.

INFRA RED QUARTZ LAMPS. 230V 620 watts. Size 1 1/2" x 1/8" dia. £1.50 ea. 240V 1650 watts. Size 2 3/4" x 1/2" dia. £3 ea.

BRIDGE RECTIFIER. 2 Amp 50p ea.

PHOTOGRAPHIC DETECTOR 4" flyleads, 25p ea.

AMP-HENGL. 17-way chassis mount edge connectors 0.1 spacing 15p ea.

I.E.C. Standard MAINS LEAD. Moulded (3 vertical flat pins centre offset) 60p ea.

FANS. 115V 13 watts. Size 3/4 x 3/4 x 1 1/2" BRAND NEW. £4.50 ea. Saeonhand £2.50 ea.

DELAY LINE. 50 nanoseconds. 3 connections - ground-in-out. Size 2 x 7/16 x 1/16" New 25p ea.

MOTOR 12V DC with pulley and integral semiconductor. Speed Control. New £1 ea.

LEDEX ROTARY SOLENOIDS. 115V DC. No switch assembly. 15p ea.

DIAMOND H CONTROLS ROTARY SWITCH. Single pole 10-way. Printed Circuit Mount. New 10p ea. 100 for £7.50.

RAPID DISCHARGE capacitors 8mf 4kV £5 each. P&P £2.

DECOUPLING CAPACITORS 0.05mf 10V; 0.01mf; 0.047mf 250V; 33K, 330pf. All values. 100 for £1.50.

E.H.T. Capacitor 500pf 8KV 20p each.

10-WAY MULTI COLOUR RIBBON CABLE. New 40p per metre. 10 metres for £3.

GEC UHF 4-button tuner £1.50 each.

CENTAUR 115V FANS. 4 1/2x4 1/2". £4.50 ea. Ex-equipment, tested 60p each.

CONTACTORS. Heavy Duty 24V DC 5 make £1 each.

GEC UHF/VHF 6-button tuner £2 ea.

931A PHOTO MULTIPLIER £2 ea. P&P £1.

RANCO 250V 18A THERMOSTATS with Control knobs calibrated 50-200 degree C £2.50 each.

SOLID STATE UHF TUNERS. 36MHz. £1 each.

BRAND REX blue wire wraps. 30 metres for £1. P&P 25p.

TRANSFORMERS

AUTO 240V input 115V. 1 Amp output £1.25 each. P&P £1.25.

240V input. Soc. 6V, 1.86A. Size 2 1/2x2 1/2". Good quality £1.50 ea. P&P £1.

240V input Soc. 12V 0.92A. Size 2 1/2x2 1/2". Good quality. £1.50 ea. P&P £1.

240V input 12V 100MA. Size 60x40x42mm 50p each.

240V input. Soc. 12V 50MA. Size 53 x 45 x 40mm. £1 ea.

115V input. Soc. 5V 250MA. Size 1 1/16 x 1 1/2 x 1 1/4. 2 for 50p.

115V input. Sec. 10-0-10V1A. Size 2 1/2 x 2 x 2 1/2. 2 for £1.50.

SEMICONDUCTORS 1N4005 - 5p; 1N4002 - 3p.

At 5p each: BC147, BC157, BC158, BC237, BF197, OA90, OA81, BC148B, BA154, BA243.

At 25p each: BT127 10p; BF181 20p; BD239 49p; BD241 40p; MA343AT 49p; BD228 50p; BD233 & BD234 Comp Pair 25W - 80p per pair at 50p each.

REGULATOR TBA625 8 to 10v - 5V out 100MA T05 Con. 50p each BF256C 20p.


TV AMPLIFIER TBA 120 20p each.

CREED MODEL 75


Printer with keyboard. Late model. Still the cheapest way to get a printout from your microprocessor. Basic data and connections supplied.

Used, good condition

ONLY £25 each

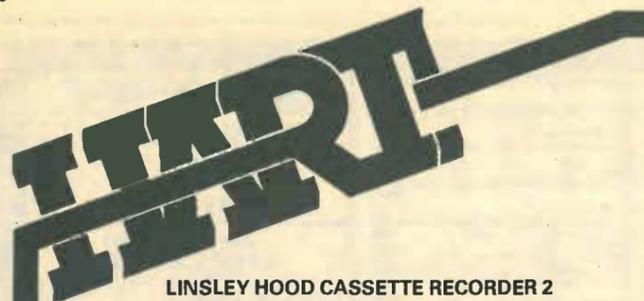

LINSLEY HOOD CASSETTE RECORDER 2

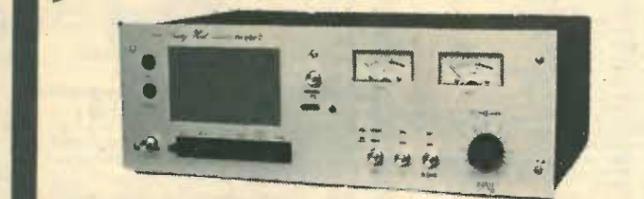

LINSLEY HOOD CASSETTE RECORDER 1

Our new improved performance model of the Linsley Hood Cassette Recorder incorporates our VFL 910 vertical front mechanism and circuit modifications to increase dynamic range. Board layouts have been altered and improved but retain the outstandingly successful mother-and-daughter arrangement used on our Linsley-Hood Cassette Recorder 1.


This latest version has the following extra features: Ultra low wow-and-flutter of .09% - easily meets DIN Hi-Fi spec. Deck controls latch in rewind modes and do not have to be held. Full Auto-stop on all modes. Tape counter with memory rewind. Oil damped cassette door. Latching record button for level setting. Dual concentric input level controls. Phone output. Microphone input facility if required. Record interlock prevents rerecording on valued cassettes. Frequency generating feedback servo drive motor with built-in speed control for thermal stability. All these desirable and useful features added to the excellent design of the Linsley-Hood circuits and the quality of the components used makes this new kit comparable with built-up units of much higher cost than the modest £34.80 + V.A.T. we ask for the complete kit.

We are the Designer Approved suppliers of kits for this excellent design. The Author's reputation tells all you need to know about the kit. Advanced features include: High-quality separate VU meters with excellent ballistics. Controls, switches and sockets mounted on PCB to eliminate difficult wiring. Proper moulded enclosure for cassette aperture improves appearance and removes the need for the cassette transport to be set back behind a narrow finger trapping slot. Easy to use, robust Lenco mechanism. Switched bias and equalisation for different tape formulations. All wiring is terminated with plugs and sockets for easy assembly and test. Sophisticated modular PCB system gives a spacious, easily-built and tested layout. All these features added to the high-quality metalwork make this a most satisfying kit to build. Also included at no extra cost is our latest HS16 Sendust Alloy super head, available separately at £8.20 but included free with the complete kit at £78 plus VAT.

Reprints of the 3 original articles describing this design 45p. No VAT. Reprint of the subsequent postscript article 30p. No VAT. Part Cost of Post, Packing and Insurance Order up to £10 - 50p Orders £10 to £49 - £1 P&P Export Orders - Postage or shipping at cost plus Over £50 - £1.50

Please send 9 x 4 S.A.E. or telephone for lists giving fuller details and price breakdowns. Instant easy ordering, telephone your requirements and credit card number to us on Oswestry (0691) 2894

RECHARGEABLE BATTERIES PRIVATE & TRADE ENQUIRIES WELCOME Full range available to replace 1.5 volt dry cells and 9 volt PP type batteries, SAE for lists and prices. £1.45 for booklet, "Nickel Cadmium Power," plus catalogue. * New sealed lead range now available * Write or call at: SANDWELL PLANT LTD. 2 Union Drive, Boldmere Sutton Coldfield, West Midlands, 021-354 9764 WW - 043 FOR FURTHER DETAILS

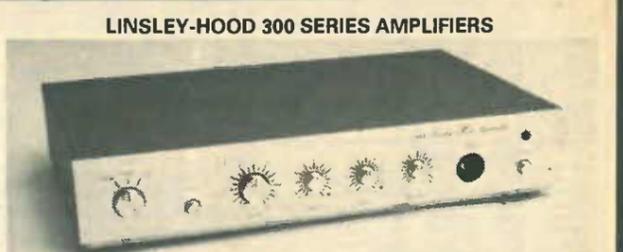

LINSLEY HOOD 300 SERIES AMPLIFIERS

These latest designs from the drawing board of John Linsley-Hood, engineered to the very highest standard, represent the very best that is available on the kit market today. The delicacy and transparency of the tone quality enable these amplifiers to outperform, on a side-by-side comparison, the bulk of amplifiers in the commercial market-place and even exceed the high standard set by his earlier 75-watt design. Three versions are offered, a 30-watt with Darlingtone output transistors, and a 35- and 45-watt, both with Mosfet output devices. All are of identical outside appearance which is designed to match and stack with our Linsley-Hood cassette recorder 2. As with all Hart kits the constructors interests have been looked after in a unique way by reducing the conventional (and boring) wiring almost to the point of extinction. Any of these kits represents a most cost-effective route to the very highest sound quality with the extra bonus of the enjoyment of building a sophisticated piece of equipment. 30-watt Darlingtone amplifier, fully integrated with tone controls and magnetic pick-up facility. Total cost of all parts is £81.12. Special offer price for complete kits £72. 35-watt Mosfet amplifier. Total cost of parts £98.41. Special offer for complete kits, £87.40. 45-watt Mosfet amplifier. Total cost of parts £104.95. Special offer price for complete kits £94.80. Reprints of original Articles from Hi-Fi News 50p. Post free. No VAT. Reprints of MOSFET Article 25p. No V.A.T. Post free.



FEED YOUR MICRO BYTES WITH OUR SOLENOID CONTROLLED CASSETTE DECK

Front loading deck with full solenoid control of all functions including optional search in fast wind modes. 12 volt operation. Fitted 3-digit memory counter and Hall IC Motion Sensor. Standard erase and stereo R/P Heads. Cheapest price ever for all these features. Only £38.90 plus VAT. Full technical specification included.

HART TRIPLE-PURPOSE TEST CASSETTE TC1 One inexpensive test cassette enables you to set up VU level, head azimuth and tape speed. Invaluable when fitting new heads. Only £2.70 plus V.A.T. and 50p postage.

CASSETTE HEADS HS16 SENDUST ALLOY SUPER HEAD. Stereo R/P. Longer life than Permalloy. Higher output than Ferrite. Fantastic frequency response. Complete with data. £8.20 HC20 Stereo Permalloy R/P head for replacement uses in car players, etc. £4.25 HM50 Stereo R/P head for METAL tape. Complete with data. £4.90 H524 Standard Ferrite Erase Head. £1.50 4-Track R/P Head. Standard Mounting. £4.50 R484 2/2 (Double Mono) R/P Head. Std. Mtg. £4.90 ME151 2/2 Ferrite Erase. Large Mtg. £4.25 CCE/8M 2/2 Erase. Std. Mtg. £7.90

HART ELECTRONIC KITS LTD OSWESTRY SHROPSHIRE phone (0691) 2894 Telex 35661 Hartel G

10 OUTLET DISTRIBUTION AMPLIFIER 2 One floating input. 10 independent floating outputs at 500 Ohms for general studio work or feeding multiple slave pa amplifiers. Electronic input circuit which withstands mains or static voltages on the signal lines. Total Harmonic Distortion, all outputs loaded at 1.6dBV 7 - 80dB 0.01 - 100Hz 20kHz 7dB 0.015 - 10kHz Static Intermodulation Distortion: 100Hz + 7kHz Output +1.2dBV 7 - 86dB 0.005 The unit meets the IBA signal path specifications and is available as a complete unit or as a set of all parts excluding the case and XLR connectors. STEREO DISC AMPLIFIER 2 SUPERLATIVE PERFORMANCE FOR BROADCASTING DISC MONITORING AND TRANSFER May be connected to balanced lines with Hi-Fi and Hi-Fi filtering. Meets IBA specification. Reviewed in Studio Sound, May issue. Also an unbalanced model and Moving Coil Preampifier. PEAK PROGRAMME METERS Drive boards PPM2 and PPM3 * High quality Ernest Turner movements 640, 642, 643 and TWIN * Peak Deviation Meter Programme and Deviation Chart Recorders. * Illuminated PPM Boxes. STABILIZER FOR HOWL REDUCTION, BALANCED AND UNBALANCED VERSIONS BOXED OR RACK MOUNTING PUBLIC ADDRESS: SOUND REINFORCEMENT 4000 SERIES 4000 15p 4001 18p 4002 20p 4003 22p 4004 25p 4005 28p 4006 30p 4007 32p 4008 35p 4009 38p 4010 40p 4011 42p 4012 45p 4013 48p 4014 50p 4015 52p 4016 55p 4017 58p 4018 60p 4019 62p 4020 65p 4021 68p 4022 70p 4023 72p 4024 75p

Table of electronic components including: TRANSISTORS, MEMORIES, VOLTAGE REGULATORS, OTHER REGULATORS, OPTO-ELECTRONICS, OPTO-ISOLATORS, INTERFACE ICs, LEADS, DISPLAYS, DRIVERS, TRIACS, DIODES, RECTIFIERS, LOW PROFILE DISC SOCKETS BY TEXAS, WIRE WRAP SOCKETS BY TEXAS, SOFTY Ideal Software/Hardware Development Tool, MINI FLOPPY DISC DRIVE MECHANISM, KEYBOARD ENCODER, CRYSTALS, EPROM ERASERS, ACORN ATOM, VEROBORDS 0.1, COUNTERS, SPEECH SYNTHESISER, and SPECIAL OFFERS.

NEW RETAIL SHOP 305 Edgware Road, W2 Open: 9.30 - 5.30 Please add 30p P&P & VAT 15%. CALLERS WELCOME. TECHNOMATIC LTD. 17 BURNLEY ROAD, LONDON NW10 (2 minutes Dollis Hill tube station) (ample street parking) Tel: 01-452 1500/01-450 6597 Telex: 922800

HERE IT IS! THE BRAND NEW 8022A HAND-HELD DMM

Consider the following features:
6 resistance ranges from 200 ohm-20 ohms
8 current ranges from 2mA-2A AC/DC
10 voltage ranges from 200 mv-1000v DC-200 mc-750V AC
Pocket size — weighing only 370 gms.
Full overload protection — will withstand 6kv spikes
Rugged construction — virtually indestructible
Meets tough military specs — drop proof
In line, pushbutton operation for single-handed use
Incorporates low power CMOS chip for low power consumption
All this plus a 2-year full guarantee



For only £89 + VAT **SOFT CARRYING CASE £7 extra**
Carriage and Insurance £3

Even more sophisticated the Fluke 8020A
Identical in most respects to the 8022A but in addition incorporates a conductance range from 2mS-200nS

Price £125
Carriage and insurance £3.00
A handsome soft carrying case is included (this model only)

Y7206 EN
20,000 OPV
AC Volts: 0-10, 50, 250, 500, 1000.
DC Volts: 0-0.5, 5, 25, 125, 250, 500, 1000.
DC Current: 0-0.05, 5, 250mA.
Resistance: 0.3k ohms, 300k ohms, 3 meg ohms.
Decibels — 20 — +63dB
Dims: 127 x 80 x 32mm.
£14.95 (inc. VAT)
P&P £1

TMK500
30,000 OPV
A sturdy and reliable instrument. Has internal buzzer.
AC volts: 0 to 2.5, 10, 25, 100, 250, 500, 1000.
DC volts 0 to 0.25, 1, 2.5, 10, 25, 100, 250, 1000 DC current: 0 to 50 µa, 5 ma, 50 ma, 12 amp.
Resistance: 0 to 6K, 60K, 6 meg, 60 meg.
Decibels: — 20 to +56dB.
Short test: Internal buzzer.
Size: 160 x 110 x 55 mm.
£27.95 (inc. VAT)
P&P £1



DIGITAL MULTIMETERS BRAND NEW FROM FLUKE!! NOW AVAILABLE THE 8024A HAND HELD DMM

This model incorporates all the features of the 8020A but in addition has:
A peak hold switch which can be used in AC or DC for volts and current functions.
Audible continuity testing and level detection for sensing logic levels.
A temperature (°C) range for use with a thermocouple. **£155**
Carriage and Insurance £3

The following accessories are in stock now
Y8008 Touch and Hold Probe **£29**
80K-40 High Voltage Probe **£51**
81RF RF Probe to 100 MHz **£35**
80T-150C Temperature Probe (C) **£86**
801-600 Clamp-on AC Current Probe **£61**



8010A AND 8012A BENCH MODEL D.M.M.s

The 8010A is a general purpose, bench/portable digital multimeter with more functions and features than ever offered for such a low price. Its companion, the 8012A, has identical characteristics except that it has two additional low resistance ranges, 2Ω and 20Ω to replace the 8010A's 10 ampere current range.
The 8010A and 8012A feature:
10 voltage ranges from 200mv - 1000v dc, 200mv - 75v ac.
3 conductance ranges from 2mS - 200 nS.
8 resistance ranges from 200Ω - 20mΩ — the 8012A has two additional resistance ranges 2Ω and 20Ω.
10 current ranges from 200µA - 2A AC/DC — the 8010A has two additional current ranges 10A AC and 10A DC.

8010A £167 **8012A £218**
Carriage and insurance £3
The 8010A is also available with two rechargeable Nicad size C batteries installed in option 8010 at £193.00.

LOW COST, AUTORANGING MULTI-FUNCTION COUNTER MODEL 1900A

- Autoranging in both frequency and period measurement modes
- Wide Frequency range — 5 Hz to 80 MHz
- High sensitivity — 25 mV, typically 15 mV
- Six digit LED display with leading zero suppression, automatic annunciation and overflow
- Optional internal battery pack providing 4 hours continuous operation
- Autoreset on all gate times, all function switches
- Four manually selected gate times providing resolution to 0.1 Hz
- Event counting to 10⁶ events with overflow indicator
- Signal input conditioning with switchable 1 MHz low pass filter and attenuator
- Autoreset on all gate times, all function switches
- Optional parallel data output with decimal point and annunciation
- Traditional high Fluke quality
- Self check

£235 Carriage and Insurance £3

PLEASE ADD 15% VAT TO ALL ORDERS EXCEPT WHERE ITEMS MARKED "VAT INCLUDED." CALLERS WELCOME
We are open 9 a.m. - 6 p.m. Monday-Saturday
We carry a very large selection of electronic components and electro-mechanical items. Special quotations on quantities

ROTARY STUD SWITCH
PLESLEY 30-way, 2 bank. Single pole. Contacts 1 amp 240v, AC/DC. 0050 res. Make before break. Stop infinitely adjustable allowing for any desired arc of travel. Ideal for instrument and model switching. Size 2 1/4" dia overall x 2 1/8" deep plus 1 1/4" x 1/4" dia spindle. **£3.75 (inc. VAT)** P&P 50p

BENDIX MAGNETIC CLUTCH
Superb example of electro-mechanics. Coil body in two sections, coil section fixed with 3/4" sleeve, drive section rotating on outer perimeter. Uniting plate has 3/8" ID bearing concentric with main section and 18-tooth cog wheel. Extremely powerful transmission 24V D.C. 240 m/s. **£4.75 (inc. VAT)** P & P 75p

ELECTRO-TECH COMPONENTS LTD.
364 EDGWARE ROAD, LONDON, W.2. TEL: 01-723 5667

Happy Memories

4116	200ns	£1.70
2114	200ns	£2.95
2708	450ns	£3.35
2114	450ns	£1.95
2716	5 volt	£3.70

Soft-sectored mini-discs for PET, TRS-80 etc. Supplied in FREE LIBRARY CASE, £19.95 per 10

Low Profile I.C. Sockets by "Texas"
Pins 8 14 16 18 20 22 24 28 40
Pence 10 11 12 16 17 20 21 28 37

Memory Upgrade Kits for Apple, 2020, TRS-80, etc., from £13.60, please phone. Quantity prices available on request. Government and Educational Orders welcome. Trade accounts opened

All prices include VAT. Postage FREE on orders over £15, otherwise add 30p Access and Barclaycard welcome

HAPPY MEMORIES, DEPT. W.W. GLADESTRY, KINGTON HEREFORDSHIRE HR5 3NY Tel. (054422) 618

FYLDE TRANSDUCER and RECORDER AMPLIFIERS and SYSTEMS



FYLDE Fylde Electronic Laboratories Limited.
49/51 Fylde Road Preston PR1 2XQ Telephone 0772 57560

reliable high performance & practical controls. individually powered modules— mains or dc option single cases and up to 17 modules in standard 19" crates small size—low weight—realistic prices.

WW-072 FOR FURTHER DETAILS

P.&R. COMPUTER SHOP

EPSON MX-80 80.GPs DOT MATRIX PRINTER WITH SPECIAL INTERFACES. 3982 IBM I/O PRINTERS. VDUs, ASCII KEYBOARDS, ASR, KSR, TELETYPE, PAPER TAPE READERS, PAPER TAPE PUNCHES, SCOPES, TYPEWRITERS, FANS 4" 5" 6". POWER SUPPLIES, STORE CORES, TEST EQUIPMENT AND MISCELLANEOUS COMPUTER EQUIPMENT. OPEN: MONDAY TO FRIDAY 9am-5pm SATURDAY TILL 1pm.

COME AND LOOK AROUND
SALCOTT MILL, GOLDHANGER ROAD HEYBRIDGE, ESSEX.
PHONE MALDON (0621) 57440

WW - 024 FOR FURTHER DETAILS

CLEF ELECTRONIC MUSIC

PIANOS SPECIALISTS SINCE 1972 DOMESTIC & STAGE TYPES KITS OR MANUFACTURED

£79 KIT **MASTER RHYTHM** User Programmable. Twenty-four patterns. Eight parallel tracks. Twelve instruments. sequence operation.

£114 Built

The most advanced form of Touch Sensitive action simulating piano key inertia by patented technique. Four mixable voices for serious tone variation plus electronic chorus and flanger effects. See lists for Cabinets, P.A. and Manufacture.

Write or Phone for full details of our range of high quality Kit and manufactured Electronic Musical Instruments. Prices include V.A.T., Carr. & Ins. and we operate Telephone BARCLAYCARD. Visit our Showroom.

CLEF PRODUCTS (ELECTRONICS) LIMITED
Dept. W, 44a Bramhall Lane South Bramhall, Stockport, Cheshire SK7 1AH
061-439 3297

WW - 025 FOR FURTHER DETAILS

TRANSFORMERS
INCREASED PRODUCTION CAPACITY BRINGS LOWER PRICES

TOROIDAL IN A RANGE OF 76 TYPES FROM 30VA TO 500VA AND IN CHOICES OF THREE PRIMARIES 110V, 220V or 240V

TYPE	SERIES No.	SECONDARY RMS Volts	CURRENT	PRICE
30VA 70x30mm 0.45 Kg	1X010	6+6	2.50	£4.48 +0.87p P/P +0.80p VAT
	1X011	9+9	1.66	
	1X012	12+12	1.25	
	1X013	15+15	1.00	
	1X014	18+18	0.83	
	1X015	22+22	0.68	
	1X016	25+25	0.60	
50VA 80x35mm 0.9 Kg	2X010	6+6	4.16	£4.93 +£1.10 P/P +0.90p VAT
	2X011	9+9	2.77	
	2X012	12+12	2.08	
	2X013	15+15	1.66	
	2X014	18+18	1.38	
	2X015	22+22	1.13	
	2X016	25+25	1.00	
80VA 90x30mm 1 Kg	3X010	6+6	6.64	£5.47 +£1.43 P/P +£1.04 VAT
	3X011	9+9	4.44	
	3X012	12+12	3.33	
	3X013	15+15	2.66	
	3X014	18+18	2.22	
	3X015	22+22	1.81	
	3X016	25+25	1.60	
120VA 90x40mm 1.2 Kg	4X010	6+6	10.00	£6.38 +£1.43 P/P +£1.17 VAT
	4X011	9+9	6.66	
	4X012	12+12	5.00	
	4X013	15+15	4.00	
	4X014	18+18	3.33	
	4X015	22+22	2.72	
	4X016	25+25	2.40	

TYPE	SERIES No.	SECONDARY RMS Volts	CURRENT	PRICE
160VA 110x40mm 1.8 Kg	5X012	12+12	6.66	£8.44 +£1.43 P/P +£1.48 VAT
	5X013	15+15	5.33	
	5X014	18+18	4.44	
	5X015	22+22	3.63	
	5X016	25+25	3.20	
	5X017	30+30	2.66	
	5X018	35+35	2.28	
225VA 110x45mm 2.2 Kg	6X014	18+18	6.25	£10.06 +£1.73 P/P +£1.77 VAT
	6X015	22+22	5.11	
	6X016	25+25	4.50	
	6X017	30+30	3.75	
	6X018	35+35	3.21	
	6X026	40+40	2.81	
	6X028	110	2.04	
300VA 110x50mm 2.6 Kg	7X016	25+25	6.00	£11.66 +£1.73 P/P +£2.01 VAT
	7X017	30+30	5.00	
	7X018	35+35	4.28	
	7X026	40+40	3.75	
	7X025	45+45	3.33	
	7X028	110	2.72	
	7X029	220	1.36	
500VA 140x60mm 4 Kg	8X017	30+30	8.33	£15.53 +£2.05 P/P +£2.64
	8X018	35+35	7.14	
	8X026	40+40	6.25	
	8X025	45+45	5.55	
	8X033	50+50	5.00	
	8X028	110	4.54	
	8X029	220	2.27	

+ A NEW SERIES OF P.C.B MOUNTING LAMINATED TYPES

TYPE	SERIES No.	SECONDARY RMS Volts	CURRENT	PRICE
3VA	P2401	3+3	0.50	0.92p +24p P/P +17p VAT
	P2402	4.5+4.5	0.33	
	P2403	6+6	0.25	
	P2404	7.5+7.5	0.20	
	P2405	9+9	0.17	
	P2406	12+12	0.12	
	P2407	15+15	0.10	
6VA	P3401	3+3	1.00	£1.91 +£30p P/P +33p VAT
	P3402	4.5+4.5	0.67	
	P3403	6+6	0.50	
	P3404	7.5+7.5	0.40	
	P3405	9+9	0.33	
	P3406	12+12	0.25	
	P3407	15+15	0.20	
12VA	P4401	3+3	2.00	£2.09 +58p P/P +40p VAT
	P4402	4.5+4.5	1.33	
	P4403	6+6	1.00	
	P4404	7.5+7.5	0.80	
	P4405	9+9	0.66	
	P4406	12+12	0.50	
	P4407	15+15	0.40	

ABOUT THE NEW LAMINATES

I.L.P. LAMINATED I.L.P. printed-circuit mounted mains transformers have two independent primary windings which can be connected in series for 240V or parallel for 120V operation. The two independent secondaries can also be connected in series or parallel to give a wide range of output voltage/current configurations. All are wound on split bobbins, eliminating need for an inter-winding screen. Breakdown tested to 2000 VAC minimum.
Regulation — 3VA typically 21%; 6VA typically 15%; 12VA typically 10%

GOODS DESPATCHED WITHIN 7 DAYS OF RECEIPT OF ORDER

FOR SINGLE AND SMALL QUANTITY ORDERS.

- * CUSTOMER DESIGN ENQUIRIES INVITED. QUANTITY PRICE LIST AVAILABLE.
- * FREEPOST FACILITY (U.K. only). Simply send your order in envelope to FREEPOST to address below. NO STAMP REQUIRED.
- * TO ORDER Enclose cheque/Postal Order/Money Order payable to I.L.P. Electronics Ltd or quote your ACCESS or BARCLAYCARD account No. To pay C.O.D. add £1 extra to TOTAL value of order.
- * Also available from ELECTROVALUE and MARSHALLS.



FREEPOST 5, GRAHAM BELL HOUSE, ROPER CLOSE CANTERBURY CT2 7EP - Phone (0227) 54778 - Technical (0227) 64723 - Telex 985 780

WW - 055 FOR FURTHER DETAILS

To: I.L.P. ELECTRONICS LTD. CANTERBURY CT2 7EP
Please supply Transformer(s)..... No.(s).....
Total purchase price £.....
I enclose Cheque Postal Orders International Money Order
Debit my Access/Barclaycard Account No.....
NAME.....
ADDRESS.....
Signature.....

BULK EPROM PROGRAMMING

14000 PRODUCTION EPROM PROGRAMMER


2-YEAR WARRANTY



This unit provides simple, reliable programming of up to 8 EPROMS simultaneously. It has been designed for ease of operator use — a single 'program' key starts the self check — blank check — program — verify sequence. Independent blank check & verify controls are provided along with mode, pass/fail indicators for each copy socket and a sounder to signal a correct key command & the end of a programming run. Any of the 2704/2708/2716 (3 rail) & 2508/2758/2516/2716/2532/2732 (single rail) EPROMS may be selected without hardware or personality card changes. **PRICE £545 + VAT.** Postage paid

BULK EPROM ERASING

EX-STOCK

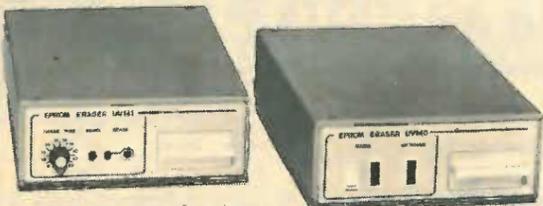

MODEL UV141 EPROM ERASER

- 14 EPROM capacity
- Fast erase time
- Built-in 5-50 minute timer
- Convenient slide-tray loading of devices
- Safety interlocked to prevent eye and skin damage
- Rugged construction
- MINS & ERASE indicators
- Price £78 + VAT postage paid.

MODEL UV140 EPROM ERASER

Similar to Model UV141 but without timer. **Price £61.50 + VAT** post paid

BULK EPROMS

EX-STOCK

	1-9	10-24	25-49	50-99	100 up
2716 (450ns) (single rail)	£5.00	£4.50	£4.00	£3.55	£2.95
2708 (450ns)	£3.90	£3.50	£3.10	£2.90	

Postage and Packing is included in all prices. ADD VAT at 15%. All our EPROMS are manufactured by leading companies and are fully guaranteed, branded and to full specification.

WRITE OR TELEPHONE FOR FURTHER DETAILS OR SEND OFFICIAL COMPANY ORDERS/CHEQUES TO:

Overseas customers, please telex or write for quotation and terms.

GP INDUSTRIAL ELECTRONICS LTD.

Unit 6, Burke Road, Totnes Industrial Estate, Totnes, Devon
Telephone: Totnes (0803) 863360 sales, 863380 technical
Telex: 42596

DISTRIBUTORS REQUIRED - EXPORT ENQUIRIES WELCOME

WW - 039 FOR FURTHER DETAILS

The new name in power operational amplifiers

Apex Microtechnology of Tucson Arizona, whose products are available through Pascall, offer a comprehensive range of hybrid power op amps with high input sensitivity and high voltage and current outputs.

High voltage—up to 280 volts output swing

PA 08 PA 08A — Fet input
PA 83 PA 83A — High accuracy

Applications

Features

- High voltage instrumentation
- Programmable power supplies up to 300V
- Electrostatic deflection
- Test equipment
- Wide supply range - ±15V to ±150V
- Programmable output current limit up to 300V (PA08 only).
- Low bias current
- Protected output stage—Thermal shutoff
- Fully protected input - Up to ±150V (PA83 only)



Send for full product listings of Apex Microtech's exciting product range

Pascall Electronics Limited, Hawke House, Green Street, Sunbury-on-Thames, Middlesex TW16 6RA
Telephone: (09327) 87418 Telex: 8814536

Def Stan 05-31/BS9000/CECC approved

WW - 065 FOR FURTHER DETAILS

reprints

If you are interested in a particular article/special Feature or advertisement published in this issue of

WIRELESS WORLD

why not take advantage of our reprint service.

Reprints can be secured at reasonable cost to your own specifications providing an attractive and valuable addition to your promotional material. (Minimum order 250.)

For further details contact Martin Bloomfield, IPC Electrical-Electronic Press Ltd. Phone 01-661 3036 or simply complete and return the form below.

To Martin Bloomfield, Reprints Department
Quadrant House, The Quadrant
Sutton, Surrey, SM2 5AS

I am interested in copies of the article/advertisement headed featured in

WIRELESS WORLD

on page(s) in the issue dated

Please send me full details of your reprint service by return of post.

Name

Company

Address

Tel. No.

U.K. RETURN OF POST MAIL ORDER SERVICE, ALSO WORLDWIDE EXPORT SERVICE

BSR DE LUXE AUTOCHANGER

Plays 12", 10" or 7" records. Auto or Manual. A high quality unit backed by BSR reliability. Stereo Ceramic Cartridge. AC 200/250V. Size 13 1/2 x 11 1/4 in. 3 speeds. Above motor board 3 3/4 in. Below motor board 2 1/2 in. with Ceramic Stereo cartridge. **£20** Post £2



Ready cut Mounting Board £1 extra

HEAVY METAL PLINTHS

Cut out for most BSR or Garrard decks. Silver grey finish. Size 16x13 3/4 in. **£4**

WOOD PLINTH, TEAK EFFECT

with board cut for B.S.R. (Post £1) **£4**

PIONEER and J.V.C. etc. TEAK VENEERED PLINTH

19 x 14 1/2 in. with Plastic Cover 17 3/4 x 13 in. **£10.50** Post £2

TINTED PLASTIC COVERS

Inside sizes: 14 1/2 x 12 1/2 x 3 in. **£4**, 18 1/4 x 12 1/2 x 3 in. **£6**, 18 x 13 1/4 x 4 in. **£6**, 17 1/4 x 9 1/2 x 3 1/2 in. **£3**.

BSR SINGLE PLAYER DECKS

BSR P200 2 speeds flared aluminium turntable. "S" shape arm, cueing device. **£20** Post £2

Less cartridge £27

Belt Drive Post £2.

BSR P172 RIM DRIVE QUALITY DECK

Manual or automatic play. Three speeds. Precision ultra slim arm. Cueing device. Bargain price **£20** Post £2

BSR P207 BUDGET SINGLE PLAYER

ideal for disco or small two-speed Hi-Fi system with stereo cartridge and cueing device. **£17** Post £2

BSR ready cut mounting board. Only £1 extra.

GARRARD 6-200 SINGLE PLAYER DECK

Brushed Aluminium Arm with stereo ceramic cartridge and Diamond Stylus, 3-speeds. Manual and Auto Stop/Start. Large Metal Turntable. Cueing Device and Pause Control. Ready cut mounting board £1 extra. **£22** Post £2

ELAC HI-FI SPEAKER

8in. TWIN CONE **£5.95**

Large ceramic magnet. 50-16,000 c/s. bass resonance 40 c/s. 8 ohm impedance, 10 watts

10in. TWIN CONE **£7.95** Post 99p

POTENTIOMETERS Carbon Track

5K Ω to 2M Ω . LOG or LIN. L/S **50p**. DP **90p**. Stereo L/S **£1.10**. DP **£1.30**. Edge Pot 5K. SP **45p**. Sliders Mono **85p**. Stereo **85p**.

EMI 13 1/2 x 8in. LOUSPEAKERS

With tweeter and With tweeter and crossover. crossover. 10 watt. 8 ohm. 15 watts, 3 or 8 ohm.

£9.50 Post 99p

Basas woofer, EMI **£10.95** Post 99p

15 ohm. 20 watt. **£10.95** Post 99p

SUITABLE BOOKSHELF CABINET **£10.50**. Post £2

THE "INSTANT" BULK TAPE ERASER

Suitable for cassettes, and all sizes of tape reels. AC mains 200/250V. Hand held size with switch and lead. **£8** Post 99p

Will also demagnetise small tools

Head Demagnetiser only **£5** Post 99p

RELAYS. 12V DC £1.25. 6V DC 95p. 18V £1.25.

BLANK ALUMINIUM CHASSIS. 6 x 4 - **£1.20**; 8 x 6 - **£1.50**;

10 x 7 - **£1.90**; 12 x 8 - **£2.20**; 14 x 9 - **£2.50**; 16 x 6 - **£2.40**;

16 x 10 - **£2.70**. All 2 1/2 in. deep. 18 swg.

ANGLE ALL. 6 x 3 1/4 x 3/4 in. 18 swg. 25p.

ALUMINIUM PANELS. 18swg. 6 x 4 - **30p**; 8 x 6 - **60p**;

14 x 3 - **80p**; 10 x 7 - **80p**; 12 x 8 - **90p**; 12 x 5 - **60p**;

16 x 6 - **90p**; 14 x 9 - **£1.20**; 12 x 12 - **£1.30**; 16 x 10 - **£1.40**.

PLASTIC AND ALL BOXES IN STOCK. MANY SIZES

ALUMINIUM BOXES. 4 x 4 x 1 1/2 in. **£1**; 4 x 2 1/2 x 2 1/2 in. **3 x 2 x 2** **1.80p**; 6 x 4 x 2 **£1.30**; 7 x 5 x 2 1/2 in. **£1.45**; 8 x 6 x 3 **£2.20**; 10 x 7 x 3 **£2.50**; 12 x 5 x 3 **£2.30**; 12 x 8 x 3 **£3**. All 18swg.

BRIDGE RECTIFIER 200V PIV 4 amp **£1.50**. 8 amp **£2.50**.

TOGGLE SWITCHES SP 30p. DPST 40p. DPDT 50p.

RESISTORS. 100 to 10M. 1/4W, 1/2W, 1W, 1p. 2W 10p.

HIGH STABILITY. 1/2w 2% 10 ohms to 1 meg. 8p.

Ditto 5%. Preferred values. 10 ohms to 10 meg. 3p.

WIRE-WOUND RESISTORS 5 watt, 10 watt, 15 watt 15p

PICK-UP CARTRIDGES SONATONE 9TAHC **£2.50**.

BSR Stereo Ceramic SC7 Medium £2. SC8 High £2.

PHILIPS PLUG-IN HEAD. AU1020 (G306 - GP310 - GP233 - AG3306 - AG3310) **£2**.

LOCKTITE SEALING KIT DECCA 118. Complete **£1**.

SOLDERING IRON 240V 40W. 5mm bit **£2.95**.

CAR SPEAKERS on Baffles 7 x 4 1/2 x 1 1/2 in. deep. 4 ohms. Twin Units Bass and Treble 10 watts, RMS. Door Mounting. Stereo pair **£14**. Complete with black/silver fronts.

IN-CAR GRAPHIC EQUALISER. Power Booster. Stereo 20 watts RMS per channel. 5 sliders Graphic Equalisation 5 1/2 wide x 7 1/2 deep x 2 in. high. 12 volt D.C. suitable for Car Radio or Cassette **£30**. Post **£1.50**.

MINI-MULTI TESTER

Deluxe pocket size precision moving coil instrument. Impedance - Capacity - 2000 ohms. Battery included. 11 instant ranges measure: DC volts 10, 50, 250, 1000. AC volts 10, 50, 250, 1000. DC amps 0-100mA. Continuity and resistance to 1 meg ohms in two ranges. **£6.50** Post 65p

De-Luxe Range Doubler Model, 50,000 ohms p.v. £18.50. 7 x 5 x 2 in. Post £1

PANEL METERS £4 each

50 μ a 100 μ a 500 μ a, 1ma, 5ma, 50ma, 100ma, 25 volt, 50 volt, VU Meter. Facia 2 3/8 x 1 3/4 x 1 1/2 in. Fixing hole 1 1/2 in. dia. Lighting kit 6 or 12v 90p extra. 1ma (240° scale) 2 1/4 in. sq. **£5** Post 65p

RCS SOUND TO LIGHT CONTROL KIT

Kit of parts to build a 3 channel sound to light unit 1,000 watts per channel. Suitable for home or disco. **£15** Post 95p

Easy to build. Full instructions supplied. Cabinet **£4.50** extra. Will operate from 200MV to 100 watt signal. 200 Watt Rear Reflecting White Light Bulbs. Ideal for Disco Lights, Edison Screw. 6 for £4, or 12 for **£7.50**. Post 65p.

"MINOR" 10 watt AMPLIFIER KIT £14

This kit is suitable for record players, guitars, tape playback, electronic instruments or small PA systems. Two versions available: Mono, £14; Stereo, £20. Post 65p. Specification 10W per channel; input 100mV; size 9 1/2 x 3 x 2 in. approx. SAE details. Full instructions supplied. AC mains powered. Input can be modified to suit guitar.

RCS STEREO PRE-AMP KIT. All parts to build this pre-amp.

Inputs for high, medium or low imp per channel. with volume control and PC Board **£2.95** Post 65p

Can be ganged to make multi-way stereo mixers

MAINS TRANSFORMERS

250-0-250V 70mA, 8.5V 2A **£4.50** £2

250-0-250V 80mA, 6.3V 3.5A, 6.3V 1A **£6.00** £2

350-0-350V 250mA, 6.3V 4A, 4A CT, 5V 2A **£14.50** £2

300-0-300V 120mA, 2x6.3V 2A C.T.; 5V 2A **£10.00** £2

220V 45mA, 6.3V 2A **£2.50** £1

GENERAL PURPOSE LOW VOLTAGE

1 tapped outputs available **£5.00** £2

2 amp. 6, 8, 10, 12, 15, 18, 25 and 30V **£6.00** £2

1 amp. 6, 8, 10, 12, 15, 18, 20, 24, 30, 36, 40, 48, 60 **£8.00** £2

2 amp. 6, 8, 10, 12, 15, 18, 20, 24, 30, 36, 40, 48, 60 **£9.50** £2

3 amp. 6, 8, 10, 12, 15, 18, 20, 24, 30, 36, 40, 48, 60 **£12.50** £2

5 amp. 6, 8, 10, 12, 15, 18, 20, 24, 30, 36, 40, 48, 60 **£18.00** £2

12V, 100mA **£1.30** 80p

12V, 750mA **£2.00** 80p

10-0-10V 2a **£3.00** £1

30V, 5a and 20V, 1a **£3.00** £1

0.5, 8, 10, 15V, 1/2a **£4.00** £2

9V, 3a **£3.50** £1

25-0-25V 2a **£4.50** £1

30V, 1 1/2a **£3.50** £1

9V, 1/2a **£2.00** £1

15-0-15V, 2a **£3.75** £1

AUTO WOUND 115V to 240V 150W **£8**

400W **£10** 500W **£12** £2

CHARGER TRANSFORMERS Post

8-12 volt 3a **£4.00**+£2

8-12 volt 4a **£6.50**+£2

RECTIFIERS Post

6-12 volt 2a **£1.10**+80p

6-12 volt 4a **£2.00**+80p

OPUS COMPACT SPEAKERS

FLUTED WOOD FRONTS

TEAK VENEERED CABINET

11x8 1/2x7 1/2 in. 4 or 50 to 14,000 cps. 15 watts 8 ohm

£20 pair Post £2

LOW VOLTAGE ELECTROLYTICS

1mf, 2mf, 4mf, 8mf, 10mf, 16mf, 25mf, 30mf, 50mf, 100mf, 250mf. All 15 volts. 22mf/6v/10v; 25mf/6v/10v; 47mf/10v; 50mf/6v; 68mf/6v; 100mf/10v; 150mf/6v/10v; 200mf/10v/16v; 220mf/4v/10v/16v; 330mf/4v/10v; 500mf/6v; 680mf/6v/10v/16v; 1000mf/2.5v/4v/10v; 1500mf/6v/10v/16v; 2200mf/6v/10v; 3300mf/6v; 4700mf/4v. ALL 10p.

500mF 12V 15p; 25V 20p; 50V 30p.

1000mF 12V 20p; 25V 35p; 50V 50p; 100V 70p.

2000mF 6V 25p; 25V 42p; 40V 60p; 1200mF 7V 80p.

2500mF 50V 70p; 3000mF 50V 65p; 2000mF 100V £1.

4500mF 64V £2. 4700mF 63V £1.20. 2700mF 76V £1.

HIGH VOLTAGE ELECTROLYTICS

8/450V **45p** 8+8/450V **75p** 32+32+16/350V **90p**

8/800V **£1.20** 8+16/450V **75p** 100+100/275V **65p**

16/350V **45p** 20+20/450V **75p** 150+200/275V **70p**

32/500V **75p** 32+32/350V **50p** 220/450V **95p**

32/350V **50p** 32+32/500 **£1.80** 80+40/500V **£2**

50/500V **£1.20** 50+50/300V **50p**

VALVE OUTPUT Transformers (small) 90p.

TRIMMERS 10pF, 30pF, 50pF, 5p. 100pF, 150pF, 15p.

CAPACITORS Various 10pF to 100,000pF 5p.

PAPER 350V-0.1 7p; 0.5 13p; 1mF 150V 20p; 2mF 150V 20p;

Superior Quality Precision Made NEW POWER RHEOSTATS

New ceramic construction, heavy duty brush assembly, continuously rated.

25 WATT 10/25 50/100/150/250/500/1K1 1.5kΩ
£2.80. Post 30p (£3.56 inc. VAT & P).

50 WATT 250Ω £4.50. Post 50p (£5.75 inc. VAT & P).

100 WATT 1/5/10/25/50/100/250/300/500/1K1/1.5kΩ/2.5kΩ/5kΩ/10kΩ £6.90. Post 75p (£8.80 inc. VAT & P)

Black Silver Skirted Knob calibrated in Nos. 1-9, 1 1/2in dia. brass bush. Ideal for above Rheostats 24p ea.

SOLID STATE E.H.T. UNIT
Input 230V A.C. Fully isolated. Approx. 15kV. Built-in 10 sec. Timer. Easily modified for 20 sec. 30 sec. to continuous operation. Size 155x85x50mm. Price £5 + 75p P&P. (Total inc. VAT £6.61)

MINIATURE SOLENOID FLUID VALVE
12V DC 150hm coil normally closed. Stainless steel body with variable flow adjuster 1/8" B.S.T. inlet and outlet. Size: 58x27x25mm. Weight: 130gr. Price: £2.80 + 35p P&P (Total inc. VAT £3.39)

METERS (New) - 90mm DIAMETER
AC Amp. Type 62T2: 0, 1A, 0-5A, 0-10A, 0-20A, 0-50A, 0-15V, 0-150V, 0-300V.
DC Amp. Type 65C50-5A, 0-10A, 0-50A. DC Volt. 15V, 30V. All types £3.60 ea + P&P 75p (£5.00 inc. VAT) except 0-50A DC, 0-100A DC. Price £5.00 plus 75p P&P (£6.61 inc. VAT).

ULTRA VIOLET BLACK LIGHT
FLUORESCENT TUBES
4ft 40 watts £8.70 inc. VAT £10 (callers only).
2ft 20 watts £6.20. Post £1.25 (£8.57 inc. VAT & P).

Complete ballast unit for either 6V, 9V or 12V tube 230V AC op. £4.50 Post 55p (£6.61 inc. VAT & P). Also available for 12V DC £4.50 Post 55p (£6.96 inc. VAT & P).

400W UV LAMP AND BALLAST complete £38.00 Post £3.50 (£47.73 inc. VAT & P). 400 WATT UV LAMP only £14.00. Post £2.00 (£18.40 inc. VAT & P).

SANGAMO WESTON TIME SWITCH
Type S251 200/250 AC 2 on/2 off every 24 hours. 20 amps contacts with override switch. Diameter 4" x 3", price £8.50 P&P £1.00 (£10.93 inc. VAT & P). Also available with solar dia. R&T.

VEEDER-ROOT PRE-SET COUNTER
Type MG 1636 3 fig. countdown any number from 999 to 001 230V AC. 2 Wheel setting Changeover Microswitch to inform external circuitry on completion of countdown. Size: Width 85mm. Ht. 65mm. Dpth. 70mm. Price £4.00 + 75p P&P (Total incl. VAT £5.46)

VARIABLE VOLTAGE TRANSFORMERS

INPUT 230/240V a.c. 50/60 OUTPUT 0-260V

200W 1 amp inc. a.c. voltage	£14.50
0.5 KVA (2 1/2 amp MAX)	£18.00
1 KVA (5 amp MAX)	£24.00
2 KVA (10 amp MAX)	£39.00
3 KVA (15 amp MAX)	£47.00
5 KVA (25 amp MAX)	£76.00
10 KVA (50 amp MAX)	£163.00
15 KVA (75 amp MAX)	£260.00

3-PHASE VARIABLE VOLTAGE TRANSFORMERS

Dual input 200-240V or 380-415V. Star connected
3 KVA 5 amp per phase max £106.43
6 KVA 10 amp per phase max £159.37 Carriage, packing & VAT extra
10 KVA 16 amp per phase max £237.43

LT TRANSFORMERS

13.0 13V at 1 amp £2.80 P&P 75p (£4.08 inc. VAT).
0.12V at 20 amp or £18.20 at 10 amp £14.90 P&P £2.00 (£19.43 inc. VAT & P).
0.6V/12V at 20 amp £18.20 P&P £2.00 (inc. VAT £20.93).
0.12V at 20 amp or £14.20 at 10 amp £11.90 P&P £2.00 (£13.93 inc. VAT & P).
0.6V/12V at 10 amp £9.10 P&P £2.00 (inc. VAT £11.76).
0.6V/12V/17V/18V/20V at 20 amp £20.90 P&P £2.00 (£26.68 inc. VAT & P).
0.10V/17V/18V at 10 amp £11.55 P&P £2.00 inc. P&P (£15.58 inc. VAT).
Other types in stock, phone for enquiries or send SAE for leaflet.

INCREDIBLE OFFER

Geared Motor 120 r.p.m. 1/10 h.p. approx. 150 in. 230V AC. Cont. Rating. Non-reversible. Size 150mm by 90mm by 85mm. Spindle 8mm dia. 30mm long. Complete with capacitor and relay for max. load starting. Offered at mere fraction of mfrs. price. £11.50 incl. P&P and VAT.

N.E.C. GEARED MOTOR. 152 R.P.M. 200lb. Inch 230 AC 50 Hz. Ratio 9.2 to 1. Non-reverse incl. capacitors. Fraction of maker's price £35 P&P £4 (£44.85 inc. VAT). Also available 230 AC 60Hz 182 R.P.M. 200lb. in as above N.M.S.

REVERSIBLE MOTOR. 42 rpm 110V AC 100lb. in. Will operate on 230V AC. Speed remains at 42 rpm but torque reduces by 50%. Price £16.50 + £2.00 P&P. (Total incl. VAT £21.28).

ROTARY CARBON VANE VACUUM & COMPRESSOR
Direct coupled to 1/3 h.p. 110/115V AC Motor 4.2 amp. 1380 rpm. Motor manuf. by A.E.I. Pump by Williams. Max. Vac. 2566 H.G. Max. pressure cont. 10 p.s.i. Int. 15 p.s.i. Max. airflow 3 c.f.m. at 60066 H.G. Price £30.00 + P&P £4.00 (£39.10 inc. VAT). N.M.S.

Suitable transformer for 240V op. £10.00 P&P £2.00 (£13.80 incl. VAT). N.M.S.

WATER PUMP
Mfg. by S.P.A. Astairi of Italy. 220/240V AC 50 Hz. 2800 R.P.M. approx. 1/3hp. Centrifugal pump with 1 1/2" inlet/outlet. Delivery approx. 40 gals per min. at 10lbs head. (Non-self-priming). Price £16.50. P&P £2.50 (£21.85 inc. VAT). N.M.S.

HY-LIGHT STROBE KIT Mk IV
Approx. 4 outlets. Adjustable speed. Price £27 + £2 P&P. (Total inc. VAT £33.38). Case and reflector price £3 + £2 P&P. (Total inc. VAT £12.85). Foolscap s.a.e. for further details including Super Hi-Light.

INSULATION TESTERS (NEW)
500 VOLTS 500 megohms £49.00 P&P £2.00 (£56.65 inc. VAT & P) 1000 VOLTS 1000Ω £55.00 P&P £2.00 (£66.55 inc. VAT & P). SAE for leaflet.

TIME SWITCH VENNER TYPE ERD
Time switch 200-250V a.c. 30 amp contact 2 on/2 off every 24 hrs. at any manually pre-set time 36 hour spread reserve and day omitting device. Built to highest Electricity Board Specification. Price £10.00 P&P £1.50 (£13.25 inc. VAT). R&T.

SUB-MINIATURE PRECISION BUILT GEARED MOTOR
3-9v. D.C. Operation. Speed 2-6 R.P.M. Current consumption incredibly low! 2-5 mA. Ratio 1670:1. Torque approx 2lb inch lbs. Motor: German. Gearbox: Swiss. Size: L. 48mm. Dia. 16mm. Shaft L. 5mm. Shaft dia. 2mm. Weight 30 gm. Price £8.50 inc. p&p (Total inc. VAT £9.78).

N.M.S. - New Manufacturers' Surplus. R&T - Reconditioned and Tested.

All Mail Orders - Callers

Ample parking space

Showroom open Monday-Friday

SERVICE TRADING CO

57 BRIDGMAN ROAD, CHISWICK, LONDON W4 5BB, 01-995 1560

ACCOUNT CUSTOMERS MIN. ORDER £10

Personal callers only. Open Saturdays

9 Little Newport Street

London WC2H 7JJ

Tel: 01-437 0576

PRINTED CIRCUITS


FOR WIRELESS WORLD PROJECTS

Stripline r.f. power amp—Sept. 1975—1 d.s.	£5.00
Audio compressor/limiter—Dec. 1975—1 s.s. (stereo)	£4.25
F.m. tuner (advanced)—April 1976—1 s.s.	£5.00
Cassette recorder—May 1976—1 s.s.	£5.00
Audio compander—July 1976—1 s.s.	£4.25
Time code clock—August 1976—2 s.s. 3 d.s.	£15.00
Date, alarm, b.s.t. switch—June 1977—2 d.s. 1 s.s.	£9.50
Audio preamplifier—November 1976—2 s.s.	£8.50
Additional circuits—October 1977—1 s.s.	£4.00
Stereo coder—April 1977—1 d.s. 2 s.s.	£8.50
Morse keyboard and memory—January 1977—2 d.s. (logic board 10 1/4 in. x 5 in.) (keyboard and matrix 13 in. x 10 in.)	£14.00
Low distortion disc amplifier (stereo)—September 1977—1 s.s.	£2.00
Low distortion audio oscillator—September 1977—1 s.s.	£3.50
Synthesized f.m. transceiver—November 1977—2 d.s. 1 s.s.	£12.00
Morsemaker—June 1978—1 d.s.	£4.50
Metal detector—July 1978—1 d.s.	£3.75
Oscilloscope waveform store—October 1978—4 d.s.	£18.00
Regulator for car alternator—August 1978—1 s.s.	£2.00
Wideband noise reducer—November 1978—1 d.s.	£5.00
Versatile noise generator—January 1979—1 s.s.	£5.00
200MHz frequency meter—January 1979—1 d.s.	£7.00
High performance preamplifier—February 1979—1 s.s.	£5.50
Distortion meter and oscillator—July 1979—2 s.s.	£5.50
Moving coil preamplifier—August 1979—1 s.s.	£3.50
Multi-mode transceiver—October 1979—10 d.s.	£35.00
Amplification system—Oct. 1979—3 preamp 1 poweramp	£42.00 each
Digital capacitance meter—April 1980—2 s.s.	£7.50
Colour graphics system—April 1980—1 d.s.	£18.50
Audio spectrum analyser—May 1980—3 s.s.	£10.50
Multi-section equalizer—June 1980—2 s.s.	£8.00
Floating-bridge power amp—Oct. 1980—1 s.s. (12V or 40V)	£4.00
Nanocomp—Jan. 1981—1 d.s. 1 s.s.	£9.00
Logic probe—Feb. 1981—2 d.s.	£6.00
Modular frequency counters—March 1981—8 s.s.	£20.00
Opto-electronic contact breaker (Delco)—April 1981—2 s.s.	£4.00

Boards are glassfibre, roller-tinned and drilled. Prices include V.A.T. and U.K. postage.

Airmail add 20%, Europe add 10%, Insurance 10%. Remittance with order to:

M. R. SAGIN, 23 KEYES ROAD, LONDON, N.W.2

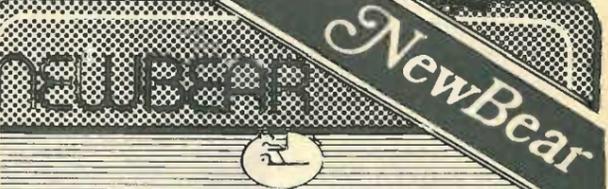

2708	£1.99	2716	£2.99
4116	£1.99	4027	£0.45
SFF96364	£8.00	6821	£3.10
6402	£5.00	6800	£4.99
80 0.1" Pitch edge connector			£2.30 (NASCOM & 77/68)

SEND/PHONE FOR EXTENSIVE special offer LISTS
74LS, 6800, 6502, Z80, 6809
CONNECTORS, CRYSTALS, SWITCHES,
DISK DRIVES, MEMORIES
"LOW PRICES"

Fast Delivery

40 BARTHOLOMEW STREET, NEWBURY, BERKS. (0635) 30505. PLEASE ADD V.A.T., P. & P. 30p BARCLAYCARD, ACCESS & OFFICIAL ORDERS WELCOME.

TRANSFORMERS

CONTINUOUS RATINGS

Please add 15% VAT after P&P

12 or 24-VOLT
Separate 12V windings Pri 220-240V

Ref.	12v	24v	£	P&P
111	0.5	0.25	2.42	9.5
213	1.0	0.5	2.90	1.00
71	2.0	1.0	3.86	1.00
18	4.0	2.0	4.46	1.20
85	5.0	2.5	6.16	1.20
70	6.0	3.0	6.99	1.20
108	8.0	4.0	8.16	1.44
72	10.0	5.0	8.93	1.60
116	12.0	6.0	9.99	1.60
117	16.0	8.0	11.79	1.72
115	20.0	10.0	15.87	1.84
187	30.0	15.0	19.72	2.04
226	60.0	30.0	40.41	0A

30 VOLT RANGE (Split Sec)
Pri 220-240V. Voltages available 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30V or 12V-0-12V and 15V-0-15V

Ref.	30v	15v	£	P&P
112	5	1	2.90	1.00
79	1	2	3.93	1.00
3	2	4	6.35	1.20
20	3	6	7.39	1.44
21	4	8	8.79	1.60
51	5	10	10.86	1.60
117	6	12	12.29	1.72
88	8	16	16.45	1.96
89	10	20	18.98	1.84
90	12	24	21.09	0A
91	15	30	24.18	0A
92	20	40	32.40	0A

50 VOLT RANGE
Pri 220-240V. Voltages available 5, 7, 8, 10, 13, 15, 17, 20, 25, 30, 33, 40 or 20V-0-20V and 25V-0-25V.

Ref.	50v	25v	£	P&P
102	5	1	3.75	1.20
103	1	2	4.57	1.20
104	2	4	7.88	1.44
105	3	6	9.42	1.60
106	4	8	12.82	1.72
107	6	12	16.37	1.84
118	8	16	22.29	2.20
119	10	20	27.48	0A
109	12	24	32.89	0A

60 VOLT RANGE
Pri 220-240V (Split Sec). Voltages available 6, 8, 10, 12, 16, 18, 20, 24, 30, 36, 40, 48, 60V, or 24V-0-24V and 30V-0-30V

Ref.	60v	30v	£	P&P
124	5	1	4.27	1.20
126	1	2	6.50	1.20
127	2	4	8.36	1.60
125	3	6	12.10	1.72
123	4	8	13.77	1.96
4	5	10	17.42	1.84
120	6	12	19.87	2.04
121	8	16	27.92	0A
122	10	20	32.51	0A
189	12	24	37.47	0A

SCREENED MINIATURES Pri 240V
Ref. mA Sec Volts £ P&P

Ref.	mA	Sec Volts	£	P&P
238	200	3-0-3	2.83	5.00
212	1A, 1A	0-6-0-6	3.14	1.00
1	100	9-0-9	2.35	5.00
235	330, 330	0-9-0-9	2.19	6.00
207	500, 500	0-8-9, 0-8-9	3.05	9.5
208	1A, 1A	0-8-9, 0-8-9	3.88	1.20
236	200, 200	0-15-0-15	2.19	6.00
239	50MA	12-0-12	2.88	5.00
214	300, 300	0-20-0-20	3.08	1.00
221	700 (DC)	20-12-0-12-20	3.75	1.00
206	1A, 1A	0-15-20, 0-15-20	5.09	1.20
203	500, 500	0-15-27, 0-15-27	4.39	1.20
204	1A, 1A	0-15-27, 0-15-27	6.64	1.20

AUTO TRANSFORMERS
Voltages available 105, 115, 190, 200, 210, 220, 230, 240. Voltages for step up or step down.

Ref.	VA (Watts)	TAPS	£	P&P
113*	15 0-115-210-240V	2	17.00	1.00
64	80 0-115-210-240V	4	4.41	1.20
4	150 0-115-200-220-240V	5	5.89	1.20
67	500	12-0-12	12.09	1.84
64	1000	20-0-20	20.64	2.20
93	1500	30-0-30	25.61	0A
95	2000	40-0-40	38.31	0A
73	3000	60-0-60	65.13	0A
80s	4000 0-10-115-200-220-240	8	84.55	0A
57s	5000	10-0-10	98.45	0A

CONSTANT VOLTAGE TRANSFORMERS ± 1%
For 'clean' mains to computers, peripherals.

Ref.	VA	£95.00 +	£127.00 +	£147.00 +	£229.00 +
250VA					
500VA					
1kVA					
2kVA					

SPLIT BOBBIN TRANSFORMERS
Pri 0-115; x2 (70010). Sec voltages available: 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30V, or 12-0-12V or 15-0-15V, 1 Amp £2.06 + 98p p&p + VAT. 2 Amps £4.11 + £1.20 p&p + VAT.

End of line offers - M678 120V-2; 36V 1 6A £3 pp 78p + VAT. BE7 0-110-120 220 240V Sec 20V 1 Amp £1.80. P&P 32p + VAT.

OTHER PRODUCTS
Mains Neon test screwdrivers 61p 20p
Long-nosed pliers £2.17 35p
6 precision screwdriver set £2.17 75p

ANTEX SOLDERING IRONS 15W and 25W £4.58
Stand for above £1.75. P&P 53p. VAT 15%

PANEL METERS
43mm x 43mm 82mm x 78mm

Ref.	£	Ref.	£
0-50µA	£6.20	0-50µA	£6.70
0-500µA	£6.70	0-500µA	£6.70
0-1mA	£6.70	0-1mA	£6.70
0-30V	£6.70	0-30V	£6.70
VU Panel Ind. 48 x 45mm, 250µA FDS	£2.60		

TELEPHONES - Latest model 746, brand new, boxed, 2 tone grey £11.50, Ivory £12.50, PP £1.20 + VAT.

METAL OXIDE RESISTORS £1/100
Special Offer TR4 5% (100s only). Use in place of c.film. 47Ω - 75Ω - 180Ω - 360Ω - 390Ω - 430Ω - 470Ω - 510Ω - 580Ω - 820Ω - 1K - 1K2 - 1K3 - 1K5 - 1K8 - 2K - 2K4 - 3K - 3K6 - 4K - 4K7 - 5K - 5K6 - 6K - 6K8 - 7K - 8K - 8K2 - 10K - 11K - 12K - 13K - 15K - 18K - 20K - 22K - 24K - 27K - 3

NEW! Thurlby 1503 high resolution multimeter £139

Greater resolution, greater accuracy, and greater versatility + VAT

- 4½ digits (±32,768 counts)
- 10uV, 10mΩ, 1nA resolution
- 0.05% basic DCV accuracy
- LCD, fully field portable
- 7 functions including Frequency
- Outstanding price/performance ratio



Thurlby
designed and built in Britain

available ex-stock. Full data and distributor list from **Thurlby Electronics Ltd.**
Coach Mews, St. Ives, Huntingdon, Cambs.
PE17 4BN. ENGLAND. Tel: (0480) 63570

WW-062 FOR FURTHER DETAILS

SWITCHERAF **XLR CONNECTORS**

Line Female A3F.....£1.07
Line Male A3M.....£0.93

Chassis Female D3F.....£1.34
Chassis Male D3M.....£0.77

4, 5 and 6 pin versions and large selection audio adaptors available

NEUTRIK **XLR CONNECTORS**

Latchless Chassis NC3-FZ.....£0.67
Line Female NC3-SC.....£1.34
Line Male NC3-MC.....£1.34
Female Chassis NC3-FP.....£1.65
Chassis Male NC3-MP.....£0.87

4, 5 and 6 pin versions and large selection of Audio Audio Adaptors available

XLR LNE MAIN SERIES

XLR LNE 11C.....£3.87
XLR LNE 32.....£2.89

XLR LNE 12C.....£3.76
XLR LNE 31.....£4.14

BELCLERE AUDIO TRANSFORMERS

EN6422 Ratio + 1.2 + 2. Freq. 40Hz-35KHz. PRI 150/6000. sec. 600/2.4KΩ.....£3.64
EN6423 Ratio 1 + 1.6:45 + 6.45. Freq. 40Hz-25KHz. PRI 150/6000. sec. 6.25K/25KΩ.....£3.64
SKT-723 MuMetal Screening can. 39dB reduction 50Hz ext. field.....£1.05

Trade enquiries welcome; quantity discounts available. All prices subject to V.A.T. Call, write or phone. Min. order £10. Please add £1 postage. Access, Amex, Barclaycard.

KELSEY ACOUSTICS LTD.
28 POWIS TERRACE, LONDON W11 1JH
01-727 1046

WW-023 FOR FURTHER DETAILS

Wirewound Ceramic Resistors
Axial or vertical mounting
5w-17w OR5-39K
from **£9.35**
per 100

QUICK ACTING & ANTI SURGE CARTRIDGE FUSES
from **£3.15** per 100.

Carbon Film Resistors ¼w 5%
£2.50 per 1,000, per value, carriage and VAT extra.
6R8 33R 100R 120R 360R 470R
560R 2K4 2K7 4K7 5K6 7K5 8K2
100K 120K 150K 220K 300K 390K 820K.

Also ½w 5% or 10% 100R 300R
1K 2K2 3K9 24K 33K 75K 2M4
3M3 4M7 5M6.

Cable Sleeves and Markers from **£1.38** per 1,000.
Crimp Terminals from **£9.60** per 1,000.
Audible Warning Devices. Buzz-tone, Bleep-tone, Banshee, Bed-lam, etc, from **£1.14** each.
Self-adhesive Pcb guides from **£5.04** per 100.

PBRA LTD.
Golden Green, Tonbridge
Kent TN11 0LH
Hopfield (073274) 345
Member Crystalate Group

WW-068 FOR FURTHER DETAILS

LOW VOLTAGE POWER DRILLS AND ACCESSORIES

Illustration shows Titan Drill and Stand (Price £27 inc. VAT and Postage) which is One of the combinations which can be purchased from our comprehensive range of Drills and Accessories.
Prices from **£8.34** (Reliant Drill only) inc. VAT and Postage.
Send 25p for Catalogue.

A. D. BAYLISS & SON LTD.
PFERA WORKS, REDMARLEY
GLOUCESTER GL19 3JU
Barclaycard. Access Welcome

Tel. Bromesburrow (053 181) 273

Stockists: Richards Electric, Gloucester
D & D Models, Hereford
Hoopers of Ledbury
Hobbs of Ledbury

CHERRY E51 sub-miniature micro switches. 5 amp, 250 volt no/nc, 100 pcs, £15; 500 pcs **£67.50**; 1,000 pcs **£125**; 5,000 pcs **£550**; 10,000 pcs **£1,000**.

GRAMPIAN h/duty telescopic p/a speaker stands, £60 ea.; 5 for **£287.50**; 10 for **£550**; 50 for **£2,500**.

GRAMPIAN 100 watt, cast all, finned heatsinks, drilled to take five, TD.3 driver devices, **£7.50** ea.; 5 for **£35**; 10 for **£65**; 50 for **£300**; 100 for **£550**. Size L292, W153, D32. Weight 4lb. 1oz. approx.

RECORD LEVEL METERS, EDGE TYPE WV35, H21, D32. Resistance 500Ω, **£1.50** ea.; 10 for **£14**; 100 for **£125**; 500 for **£550**; 1,000 for **£950**.

COMPUTER GRADE ALUMINIUM ELECTROLYTIC. 7500 μf + 7500 μf 25 volt -10 + 50%. H80, D40 **£1.25** ea.; 10 for **£12**; 100 for **£110**; 500 for **£500**; 1,000 for **£900**; 2,000 for **£1,700**.

MINIATURE TOGGLES. 6A 125v. a.c. D.P.D.T. with centre "off" position, **£1** ea.; 10 for **£9**; 50 for **£42.50**; 100 for **£80**; 500 for **£350**.

100V. LINE TRANSFORMERS. Tapped 0.5-1-3 watts into 16 Ω speaker fitted with 6-way terminal block for easy connections, **£2.50** ea.; 10 for **£24**; 50 for **£112.50**; 100 for **£220**; 500 for **£1,050**; 1,000 for **£2,000**.

Terms c.w.o. Add 5% to all orders for p. and p. + 15% V.A.T. Export enquiries welcome.

ELECTRONIC EQUIPMENT CO.
Springfield House
Tyssen Street, London E8 2ND
Telephone: 01-249 5217
Telex: 8953906 EECO.G

Are you having problems in obtaining components at the right prices? If so let us have your enquiry. We probably have it in stock.

WW-073 FOR FURTHER DETAILS

CHILTERN ELECTRONICS

BCM BOX 8085, LONDON WC1N 3XX. TEL. 0494 714483

VIDEO MONITOR BARGAIN

Due to bulk surplus purchase, we are able to offer these professional video monitors brand new in original boxes at a fraction of their original cost:

- ★ 12-inch screen, green phosphor with anti-glare shield.
- ★ Ideal for graphics or alphanumeric display.
- ★ Standard composite video in, 240 volt operation.
- ★ Extremely attractive anodised aluminium case.
- ★ Auxiliary Power Supply for keyboard.
- ★ Resolution better than 600 lines.
- ★ Ideal for home use - just plug into your micro system.
- ★ As used by many large mainframe computers.

We believe these are the finest monitors available anywhere at any price. Full data and cables included. Only £75. Please phone for cost of carriage.

ASCII KEYBOARDS

Top quality 84-key ASCII keyboards, with numeric and control key clusters. Brand new, but may have minor scratches and no circuit, so only £15. Postage £2.

TELETYPES

The famous model 33 Teletypes, ASCII coding with 20mA loop interface, in good working order, now available at these very low prices. As sold elsewhere for up to £500.
KSR Model 33 £65. ASR Model 33 £120 with pedestal.

DEC PDP8 COMPUTERS

PDP8E. Latest version with TTY and DMA cards, fully overhauled. £450. Complete with 8K Core expandable up to 32K.
PDP8L. Earlier version of above, with TTY interface. Only £120.

ICL TERMIPRINTERS

Letter quality silent printing terminals, ideal for word processors. Upper and lower case ASCII, RS232 interface. 30 ch/sec. New £250. Used from £100.

CENTRONICS LINE PRINTERS

(Model 101A)
The heavy duty professional line printers, 165 ch/sec. Only £250.

DISKS & MAGTAPES

Diablo/DRI Series 30 2.5 MByte Cartridge drives available ex-stock. Fully overhauled. Exchangeable £500. Fixed cartridge £425.
Fixed 5 MByte disk with controller for 8080 system £350.
PERTEC Industry Standard Magnetic Tape Drives: 7 Track £120. 9 Track £450.
We stock a large amount of DEC equipment, please telephone for details. All equipment may be viewed at our office near High Wycombe. Prices exclude VAT, heavy items must be collected.

WW-066 FOR FURTHER DETAILS

Cotswold Electronics
Toroidal Power Transformers
Budget range for the amateur and professional

Type	VA	Secondary		Dimensions Dia. Height	Weight Kg	Price
		Volts RMS	Current RMS			
C1000	30	6+6	2.50	70mm 30mm	0.45	
C1001	30	9+9	1.67	70mm 30mm	0.45	£4.55
C1002	30	12+12	1.25	70mm 30mm	0.45	
C1003	30	15+15	1.00	70mm 30mm	0.45	(+£1.10 p.p. + 0.84 VAT)
C1004	30	18+18	0.83	70mm 30mm	0.45	
C1005	30	22+22	0.68	70mm 30mm	0.45	
C1006	30	25+25	0.60	70mm 30mm	0.45	
C1007	30	30+30	0.50	70mm 30mm	0.45	
C1010	60	9+9	3.33	87mm 33mm	0.75	
C1011	60	12+12	2.50	87mm 33mm	0.75	£4.86
C1012	60	15+15	2.00	87mm 33mm	0.75	
C1013	60	18+18	1.67	87mm 33mm	0.75	(+£1.43 p.p. + 0.94 VAT)
C1014	60	22+22	1.36	87mm 33mm	0.75	
C1015	60	25+25	1.20	87mm 33mm	0.75	
C1016	60	30+30	1.00	87mm 33mm	0.75	
C1017	60	110	0.55	87mm 33mm	0.75	
C1018	60	220	0.27	87mm 33mm	0.75	
C1019	60	240	0.25	87mm 33mm	0.75	
C1020	100	12+12	4.17	88mm 40mm	1.00	
C1021	100	15+15	3.33	88mm 40mm	1.00	£5.70
C1022	100	18+18	2.78	88mm 40mm	1.00	
C1023	100	22+22	2.27	88mm 40mm	1.00	(+£1.43 p.p. + £1.07 VAT)
C1024	100	25+25	2.00	88mm 40mm	1.00	
C1025	100	30+30	1.67	88mm 40mm	1.00	
C1026	100	110	0.91	88mm 40mm	1.00	
C1027	100	220	0.45	88mm 40mm	1.00	
C1028	100	240	0.42	88mm 40mm	1.00	
C1030	160	18+18	4.44	108mm 42mm	1.5	
C1031	160	22+22	3.64	108mm 42mm	1.5	£8.40
C1032	160	25+25	3.20	108mm 42mm	1.5	
C1033	160	30+30	2.67	108mm 42mm	1.5	(+£1.73 p.p. + £1.52 VAT)
C1034	160	35+35	2.29	108mm 42mm	1.5	
C1035	160	110	1.46	108mm 42mm	1.5	
C1036	160	220	0.73	108mm 42mm	1.5	
C1037	160	240	0.67	108mm 42mm	1.5	
C1040	230	25+25	4.60	115mm 50mm	2.2	
C1041	230	30+30	3.83	115mm 50mm	2.2	£10.20
C1042	230	35+35	3.29	115mm 50mm	2.2	
C1043	230	40+40	2.88	115mm 50mm	2.2	(+£1.73 p.p. + £1.78 VAT)
C1044	230	110	2.09	115mm 50mm	2.2	
C1045	230	220	1.05	115mm 50mm	2.2	
C1046	230	240	0.96	115mm 50mm	2.2	
C1050	330	25+25	6.60	130mm 52mm	2.8	
C1051	330	30+30	5.50	130mm 52mm	2.8	£11.90
C1052	330	35+35	4.71	130mm 52mm	2.8	
C1053	330	40+40	4.13	130mm 52mm	2.8	(+£1.90 p.p. + £2.07 VAT)
C1054	330	45+45	3.67	130mm 52mm	2.8	
C1055	330	110	3.00	130mm 52mm	2.8	
C1056	330	220	1.50	130mm 52mm	2.8	
C1057	330	240	1.38	130mm 52mm	2.8	
C1060	530	30+30	8.83	145mm 60mm	3.8	
C1061	530	35+35	7.57	145mm 60mm	3.8	£15.80
C1062	530	40+40	6.63	145mm 60mm	3.8	
C1063	530	45+45	5.89	145mm 60mm	3.8	(+£2.05 p.p. + £2.68 VAT)
C1064	530	50+50	5.30	145mm 60mm	3.8	
C1065	530	110	4.82	145mm 60mm	3.8	
C1066	530	220	2.41	145mm 60mm	3.8	
C1067	530	240	2.21	145mm 60mm	3.8	

NOTE: All types normally supplied with 240 V primary 110 V, 220 V or other voltage supplied on request.

24 hour answering service: You may telephone your order throughout 24 hours quoting your Access or Barclaycard number. Phone number 0242-41313.

FREEPOST(UK) only: We pay postage on all enquiries and orders. Address your envelope: Dept W Cotswold Electronics Ltd, FREEPOST, Cheltenham Glos. GL51 1BR (No stamp required)

Cotswold Electronics Ltd, Cheltenham GL51 9NX

WW-016 FOR FURTHER DETAILS

Children know more about computers than their parents. True or False?

Well, true enough for Practical Computing to propose a twinning scheme for schools and businesses, bringing pupil brainpower to bear on business problems. Read all about it in the July issue.

Also in this issue of Practical Computing:
Reviews of Explorer 85, a modular system which can be built up from a single board to a full disc configuration. And Gemini - a large capacity business system.
Prokit - a package of subroutines to ease data entry on the Pet.

How a freight forwarding company started with an Apple but ended up with an IBM mini.
Business software - first of a four-part series on how to write your own.
Education. How to write a Pet program to provide a framework for multiple choice tests.

All this plus the usual Apple, Tandy, Pet and ZX80 advice pages in the July issue of Practical Computing. Price 80p. At your newsagent or complete the coupon:

To Marketing Department, IPC Electrical-Electronic Press, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Please send me Practical Computing for one year. I enclose Cheque/P.O. for £10 (U.K.)/£16 (overseas) made payable to IPC Business Press Ltd.

Name

Address

40 years

DANAVOX

DANAVOX (GT. BRITAIN) LTD.
1 CHEYNE WALK,
NORTHAMPTON NN15PT
TEL. NORTHAMPTON (0604) 36351

of research... "on components and accessories for dictating machines, tele-communications, hearing aids and electroacoustic equipment etc."



STETOCLIP JUNIOR 60 HEADSET



STETOCLIP LIGHTWEIGHT HEADSET



SENIOR STETOCLIP HEADSET



STETOMIKE BOOM MICROPHONE HEADSET




STANDARD & SUB-MINOR EARPHONES




PLASTIC EARHANGERS



DANAMIC FIDELITY EARSET

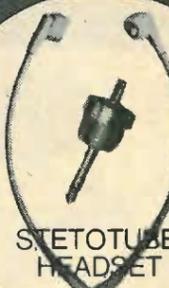


STETOTUBE HEADSET



2.5 mm and 3.5 mm JACK PLUGS & SOCKETS



DANASOUND HEADSET

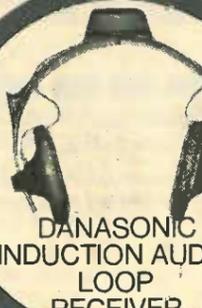

DANASONIC INDUCTION AUDIO LOOP RECEIVER



SUBMINIATURE SWITCHES

WW-079 FOR FURTHER DETAILS

Memories	Price
2114L-300ns	£2.10
4116-200ns	£1.89
2708-450ns	£3.15
2716-450ns	£4.99

74LS series	Price
74LS240	£1.54
74LS243	£1.54
74LS244	£1.54
74LS245	£1.70

Bridge Rectifiers	Price
25 Amp 50 volt	£0.74
25 Amp 100 volt	£0.94
25 Amp 200 volt	£1.26
25 Amp 400 volt	£1.68
25 Amp 600 volt	£2.10
25 Amp 800 volt	£2.63

Please add 50 pence for carriage.
All prices EXCLUDE VAT
Please send s.a.e. for price list.

STRUTT LTD.
ELECTRONIC COMPONENT DISTRIBUTORS
ETC.
3c BARLEY MARKET STREET, TAVISTOCK
DEVON, ENGLAND PL19 0JF
Tel. Tavistock (0822) 5439/5548. Telex: 45263

WW-038 FOR FURTHER DETAILS

SCOOP ONLY £29.95 +VAT

BRITISH MADE

The 'CHERRY' Computer Keyboard



52 KEY 7 BIT ASCII CODED
POSITIVE STROBE: +5V - 12V
FULL ASCII CHARACTERS
PARALLEL OUTPUT WITH STROBE
POWER LIGHT ON CONTROL

CHIP BY GENERAL INSTRUMENT (G.I.)
TTL OUTPUT
SUPERBLY MADE SIZE 13 x 5.5 x 1.5 ins.
BLACK KEYS WITH WHITE LEDGENS

ESCAPE. SHIFT RETURN & RESET KEYS
CONTROL REPEAT & BELL
Complete with DATA

Ideal for use with TANGERINE, TRITON, TUSCAN, APPLE and most computers. Ex-Stock from HENRY'S

This is definitely the BEST BUY FULLY GUARANTEED. Supplied BRAND NEW in manufacturers original packing. Just post remittance total £39.95 (incl. V.A.T. & Post)

The 'Apple' Power Supply Suitable for use with most computers

A PROFESSIONAL BUILT & TESTED, CASED & VENTILATED POWER UNIT WITH BUILT IN OVERLOAD & CUT OUT PROTECTION CIRCUITS

The Apple Power Supply is a high-voltage 'switching' power supply. While most other power supplies use a large transformer with many windings to convert the input voltage into many lesser voltages and then rectify and regulate these lesser voltages, the Apple Power Supply first converts the AC line voltage into a DC voltage, and then uses this DC voltage to drive a high-frequency oscillator. The output of this oscillator is fed into a small transformer with many windings. The voltages on the secondary windings are then regulated.

PREVENTS DAMAGE & RETURNS UNIT TO NORMAL WORKING CONDITIONS

LIST PRICE £60 OUR PRICE £32.50 +VAT

Just post remittance £39.50 (includes V.A.T. post & packing) for delivery by return

'Cherry' Add-on Keypad

A COMPACT 12 BUTTON KEYPAD SUITABLE FOR USE WITH CHERRY KEYBOARD TO EXTEND ITS FUNCTIONS PLUS FOUR EXTRA KEYS. SUPPLIED BRAND NEW WITH DATA

A 3 x 4 non-encoded single node keyboard in sloped format

LIST PRICE £22.00 OUR PRICE £10.95 PLUS VAT

HENRY'S COMPERKIT DIVISION
404 Edgware Road, London, W2, England
Telephone: 01-402 6822
Telex: 262284 Mono Transonics

MasterCard VISA




Switch to Amplivox and receive the best

The advanced design of the 410 Headset has placed the product far ahead in the world of radio communications. Its light weight, low ear pressure and trim design make the headset ideal where long periods of continued use are required. A pliable sliding headpad reduces head-pressure to an absolute minimum and as the earpads are constructed of non-hardening tropicalised material they give an excellent low pressure seal as well as providing optimum comfort whilst in use.

The headband is constructed of nylon covered stainless steel spring wire and will prevent any form of wire snagging and also carries the receiver signal. Tinsel wiring has been incorporated to give extended electrical life under high vibration movements.

Special features can usually be incorporated to meet specific requirements.

The first name in Audiometric Equipment.
Amplivox Limited
Amplivox Limited, 13A Station Field Ind. Est., Kidlington, Oxford, England OX5 1LJ.

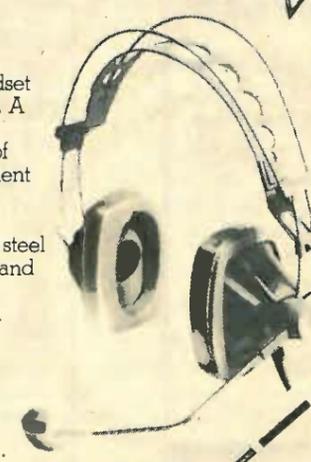

Model 410 Specifications

- Receive IMP 400 OHMS
- Microphone Imp 200 OHMS
- Mic Sensitivity at 800Hz in respect to 80dB
- Input - 30dB
- Weight 350 grams

Please send me details of the Amplivox 410 Headset

Name _____
Company _____
Address _____

Amplivox Limited
FREEPOST
13a Station Field Ind. Est.
Kidlington OXFORD
OX5 1BJ.

WW-071 FOR FURTHER DETAILS

NEW LOW PRICES

NEW HITACHI OSCILLOSCOPES

V151B

- 15MHZ bandwidth
- Single channel
- 2-year warranty
- X10 probe supplied

£135

V302B

- 30MHZ bandwidth
- Dual channel
- 2-year warranty
- 2 x 10 probes supplied

£285

V202B

- 20MHZ bandwidth
- Dual channel
- 2-year warranty
- 2 x 10 probes supplied

£260

V550B

- 50MHZ bandwidth
- Dual channel
- 2-year warranty
- 2 x 10 probes supplied

£645

Ex-demonstration bargains. Full 2-year warranty!
Hurry - few only!
V152B - 15MHZ dual channel **£189**
V302B - 30MHZ dual channel **£250**
V550B - 50MHZ dual channel **£589**

WW - 080 FOR FURTHER DETAILS

SECOND USER BARGAINS

SCOPES TELE-EQUIPMENT

- D61A 10MHZ dual channel **£155**
- D67 25MHZ dual channel delay **£275**
- D75 50MHZ dual channel delay **£550**

TEKTRONIX

- 549 Storage (with trolley) **£350**
- 454 150MHZ portable **£750**
- 453A 60MHZ portable **£550**
- 531A Mainframe **£50**
- 1A1 Dual channel plug-in **£100**
- 1A4 Four channel plug-in **£150**
- IL30 Spectrum analyser **£395**
- 3S7 TDR plug-in **£120**
- 3T7 TDR plug-in **£120**
- 1A2 Dual trace plug-in **£75**
- HP 141 complete **£175**

VAT extra. Carriage £5 per item



TIMEBASE
94 ALFRISTON GARDENS
SHOLING, SOUTHAMPTON
SO2 8FU
TEL. 431323

Callers welcome
Access, Barclaycard
Telephone your order


BECOME AN INSTANT MUSICIAN NO EXPERIENCE NECESSARY

As featured on "TOMORROW'S WORLD"

Create your own music with a VL-TONE. You combine the sound, rhythm and tempo and the VL-TONE plays it back... beautifully!

CASIO VL-TONE (VL-1)

Electronic Musical Instrument and Calculator

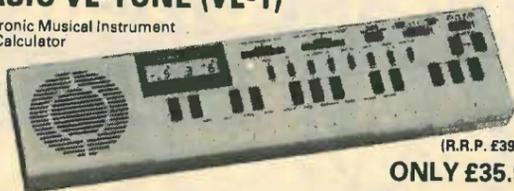

(R.R.P. £39.95)
ONLY £35.95

Thanks to Casio's V.L.S.I. advanced technology you can compose and play music with one finger. Simply enter the notes of a melody into the memory (maximum 100 notes). Recall the notes in sequence with the One Key Play button, varying tempo and duration of each keystroke to create a melody.

Select an Auto Rhythm, adjust the Tempo Control by means of the LCD Digital Display readout and record your best performance back into the memory. Mistakes can be corrected and individual notes added or deleted. The Auto Play function lets you play back the melody you have recorded. Add auto rhythm and you can vary the tempo of both. Pitch can be varied and you can select any one of the 5 built-in instrument sounds, or switch to ADSR and create your own sounds with over 80 million variations.

VL-1 29-note synthesiser records and plays back MANUAL or ONE KEY playing. The octave shift expands the range to almost 5 octaves.

Presets sounds: Piano, Violin, Flute, Guitar, Fantasy and ADSR.

Facilities: LC Display of notes, tempo and calculations. Battery saving Auto Power Off with protection of the stored melody and the preset ADSR data (or calculator memory total). A.C. adaptor socket. Built-in amplifier/speaker. Output jack (0.5 v rms). Pitch control.

Dimensions: 30 x 300 x 75mm (1 1/8 x 11 3/4 x 3 in.). Weight: 438g., 15.4oz.

NEW! CT-202 Polyphonic. 49 instrument sounds. Vibrato/sustain £275.

Send 20p for details of Casio, Casiotone and Seiko products.

PRICES include V.A.T., P. & P. Return of post service. Send cheques, P.O. or phone your ACCESS or BARCLAYCARD number to:

TEMPUS Dept. WW, Beaumont Centre, 164-167 East Road
Cambridge CB1 1DB. Tel: 0223 312866

HASBROOK TRADING

POSTAL ADDRESS: P.O. BOX 25,
CLEMENTI CENTRAL, SINGAPORE 9112.

Lowest Prices - Prompt Delivery - Quality Products

LINEAR ICs.

TBA 120	0.55	TBA 810	0.80	TDA 1060	1.59	TDA 2523	1.70
TBA 120T	0.67	TBA 890	0.67	TDA 1170	1.50	TDA 2540	1.60
TBA 120S	0.67	TBA 900	1.20	TDA 1190	1.50	TDA 2541	1.60
TBA 120AS	0.55	TBA 920	1.20	TDA 1270	1.50	TDA 2560	1.60
TBA 240B	1.12	TBA 940	1.25	TDA 2002	1.17	TDA 2570	1.60
TBA 395	1.20	TBA 950	1.60	TDA 2010	1.55	TDA 2571	1.60
TBA 510	1.20	TBA 990	1.16	TDA 2140	1.55	TDA 2580	1.55
TBA 520	1.05	TBA 1440	1.15	TDA 2150	1.55	TDA 2590	1.70
TBA 540	1.05	TBA 1441	1.15	TDA 2151	1.55	TDA 2591	1.60
TBA 550	1.20	TCA 270	1.15	TDA 2160	1.55	TDA 2593	1.65
TBA 560	1.20	TCA 540	1.15	TDA 2161	1.65	TDA 2611	1.56
TBA 570	1.05	TCA 800	1.48	TDA 2510	1.55	TDA 2640	1.60
TBA 720	1.80	TDA 440	1.60	TDA 2520	1.65	TDA 2652	1.65
TBA 750	0.96	TDA 1037	1.60	TDA 2522	1.70	TDA 2661	1.60

74 LS SERIES

SN 74 LS 48N	0.56	SN 74 LS 197N	0.52	OA 47	0.10	IN 916	0.04
SN 74 LS 85N	0.65	SN 74 LS 241N	0.69	OA 90	0.05	IN 4001	0.04
SN 74 LS 107N	0.29	SN 74 LS 248N	0.58	OA 91	0.06	IN 4002	0.04
SN 74 LS 123N	0.42	SN 74 LS 249N	0.58	OA 95	0.06	IN 4003	0.05
SN 74 LS 124N	0.55	SN 74 LS 259N	0.85	OA 200	0.06	IN 4004	0.05
SN 74 LS 132N	0.42	SN 74 LS 260N	0.32	OA 202	0.08	IN 4005	0.05
SN 74 LS 148N	0.56	SN 74 LS 280N	1.07	IN 914	0.04	IN 4006	0.06
SN 74 LS 173N	0.49	SN 74 LS 290N	0.47				
SN 74 LS 174N	0.56	SN 74 LS 298N	0.60				
SN 74 LS 175N	0.45	SN 74 LS 375N	0.40	IN 4007	0.06	IN 5404	0.10
SN 74 LS 190N	0.47	SN 74 LS 378N	0.60	IN 4148	0.04	IN 5405	0.17
SN 74 LS 191N	0.47	SN 74 LS 395N	0.85	IN 5401	0.09	IN 5406	0.17
SN 74 LS 192N	0.56	SN 74 LS 399N	0.94	IN 5402	0.10	IN 5407	0.17
SN 74 LS 193N	0.47	SN 74 LS 670N	1.85	IN 5403	0.10	IN 5408	0.18

L.E.D.s

Round 3mm/5mm	
Priced by colour:	
Red	0.05
Green	0.07
Yellow	0.07
Orange	0.10

Quantity discount available. Trade enquiries welcome. All components brand new and subject to availability. Please add 50p for carriage on all orders. Terms: Money Order/Postal Order or Bankers draft with orders please. All orders despatched on day of receipt with full refund guarantee for out of stock items.

Digital Quartz Clock for your car, boat and caravan £7.20
Size: 102 x 42 x 40mm

E. & O. E.

C.T. ELECTRONICS (ACTON) LTD.

Registered in England 1179820

267 & 270 ACTON LANE, LONDON W4 5DG. Telephone: **01-747 1555**
01-994 6275

9.30 a.m.-6 p.m.
MON.-SAT.
CONTINUOUS

STABILISED POWER SUPPLIES

FARNELL A15: 210/240V IP. Dual Op. 12-17v per rail at 100mA. Remote sensing, current limit protection. (164 x 130 x 38mm), with manual. **£12.**

FARNELL 7/3SC: 120/240V IP. Adjustable current limit. Remote sensing. (188 x 96 x 93mm). Two versions available: 15V at 2A or 30V at 1A. **£15 ea.**

COUTANT OA2: Op. amp, psu, 120/240V IP. Dual Op. 12-15v at 100mA. (138 x 80 x 45mm). **£12 ea. or 2 for £22.**

BRANDENBURG Photomultiplier PSU. 19in. rack mounting. Metered, current limit protection.

374,374R 300V-1KV at 5mA.

375 500V-1K5V at 6mA.

376 660V-1K6V at 10mA.

Model 374R has reversible polarity op. All others have negative polarity op.

All models **£40.**

Some photo multiplier tubes available.

COUTANT ESM3: 105/115/220/240V IP. Four separate ops: 5V at 3A stabilised with current limit, overvoltage crowbar protection and remote sensing.

±12 to ±15V at 500mA stabilised.

12 or 24V unstabilised. (125 x 80 x 275mm). **£30.**

SPECIAL OFFER. 10MFD 500v ECC 20p ea., 10,000 MFD 16v Mullard 35p ea., 3,300 MFD 40v Mullard 35p ea. 10µF/63v MIMA polyester 10% 50p ea. Large quantities available.

ELECTROLYTIC CAPACITORS. Very large stock holding. Mostly ITT EN1212m EN1235 types.

Please send for our electrolytic list, e.g.: 220/50VA, 2200/25R, 470/25R, 4700/25A, 470/50A, 2200/100 CAN.

CAPACITORS-DISC CERAMIC
Over 2 million now in stock, mostly ITT. Many high-voltage types, e.g.:

210p 8KV, 1n 1KV, 2n2 2KV, 10n 2KV.

220p 1KV, 1n5 3KV, 4n7 1K5V.

Please send for our ceramic capacitor lists.

PYE HEAD CLEANING CASSETTES. Brand new or boxed, **50p ea.**

CASSETTE DECKS: With stereo heads, mechanically complete, but with no electronics. Smart black modern finish. **£5.00**

We have **VERY LARGE QUANTITIES** available 0.1µ/16v disc ceramic by ITT. Pitch 5mm. Price **£20/£1,000.** Brand new and boxed.

PIHER PRESETS
Very large stocks, PT10, PT15 enclosed types. Please send for our preset list. Most values 100R-5M

HEAVY DUTY SWITCHES
2P 12A 600V AC **£1.50**
8P 10A 380V AC **£3.00**
10P 12A 600V AC **£3.00**
49mm □ Fascia.

ROTARY POTS
Good range stocked. Please phone your requirements. Large stocks of the following:
100K LIN + push switch **30p**
22K LOG + switch **30p**
2K2 LIN **30p**

CANNON 15w sockets, D type or Souvrian/McMurdo Dais **60p ea.** Also Cannon 9w plug, brand new, **60p ea.**

WELWYN STRAIN GAUGE. (Precision micro-measurements). Romulus Michigan type MA-09-500B4-350. Our price **£1.25 ea.** List price **£3.85.** Large quantities available.
3/4 1S Turn Ceremet Trimpot 100K. 1 off price, **20p.** By Beckman & A.B.
REDPOINT HEATSINK, Type TV4 15p ea. 1 off price. Discount on quantity.
We have the following **Welwyn .1% Resistors** available, 2K, 3K, 10K, 20K, 30K, 1 Meg. Price **25p ea.** Type 4802.

BURROWS CONNECTOR (LH) 1701, 41c, 20p; Burrows Connector (RH) 1201, 41c 25p. Large quantities available.

METWAY P.C. CONNECTOR, 3-way type P95/3DS, **10p ea.**

ITT TEMPKIT Electronic thermostat ZBI.5669. Brand new. **£4 ea.**

4-WAY DPDT AND 5-WAY DPDT DIL SWITCHES, by ERG Components and CTS. Gold contacts **£1 ea.** Brand new and boxed.

BUZZERS, 6v and 12v, **50p ea.**

WIRE ENDED NEONS **£20/£1,000.**

SPECIAL OFFER. Mini-toggle switch by C. & K., 3 Pc/o. Long dolly or short, **50p ea.**

D TO A CONVERTERS

15MHZ, 8 BIT

By Micro Consultants Ltd. 50Ω cable drive op. Linearity 0.25%, max. 0.125% typ. Settling time: 2V step 70nS typ. 2MV step 50nS colour television transmission standard. Diff. gain 0.5% diff. phase shift 0.5° types rad 802 and MC2208/8. Unused. Ex-maker's pack.

SPECIAL OFFER PRICE: £20

TRANSFORMERS:	ALUMINIUM BOXES:
5-0-5V 400mA £1.25	AB7 134x64x38mm 70p
6-0-6V 100mA £1.25	AB8 102x102x38mm 70p
8-0-8V 400mA £1.25	AB9 102x57x38mm 70p
9-0-9V 3A £3.00	AB10 102x133x38mm 70p
11V 2A, 22V1A £2.00	AB11 102x64x51mm 85p
12V 130mA 80p	AB12 76x51x25mm 70p
12V 1A5 £1.25	AB13 152x102x51mm £1.00
0-12, 0-12 96VA £8.00	AB14 178x127x51mm £1.20
15V 100mA £1.00	AB15 203x152x76mm £1.55
17V 300mA £1.50	AB16 254x179x76mm £1.75
20-0-20 400mA £1.80	AB17 254x114x76mm £1.45
22-0-22 50mA £1.00	AB18 305x127x76mm £1.75
24V 100mA £1.00	AB19 305x203x76mm £2.40
24V 250mA £1.50	
30V 250mA £1.50	
30-25-0-25-30, 1A6 £6.00	
0-2-4-6-8-10 5A £6.00	

BLUE REXINE COVERED ALUMINIUM BOXES

RB1 152x114x64mm £1.45
RB2 203x127x76mm £1.70
RB3 229x127x89mm £1.80
RB4 279x152x102mm £2.40
RB5 279x190x114mm £2.70

BLACK PLASTIC BOXES

75x50x25mm 65p
80x60x40mm 92p
90x70x40mm 99p
115x75x30mm 90p
110x90x45mm £1.18
170x100x50mm £1.65
200x120x80mm £3.55

METAL OXIDE/FILM: Most values in E24 range, 1/4-2W 5, 2 or 1%. A few values in 0.1% tolerance available.

LICON ILLUMINATED SWITCHES
01-800 Rectangular Snap-in Series.
2PCO Latching **£1.50**
2PCO Momentary **£1.50**
Indicator only **50p**
Lenses available in red or white only.

MINIATURE PUSH-BUTTON SWITCHES
PTM 20p, PTB 25p, PT M/B 40p.

HEAVY DUTY ROTARY SWITCHES
9P3W 25A 500V AC **£3.00**
18P6W 25A 500V AC **£3.00**
18P6W 40A 600V AC **£3.00**

STEREO RECORD/REPLAY CASSETTE HEADS **£1.00**

WIREWOUND POTS
10R-100K by A.B., Colvern, etc. 1 1/2W 40p, 3W 60p, 5W 80p.

TRIMPOTS
10R-500K 10/20 turn. 1 1/4in. or 3/4in. rectangular **60p ea.**

JEAN RENAULD SWITCH BANKS
Many types available, e.g.:

4x2PCO	40p
6x2PCO	60p
5x2 PCO + 2x4 PCO	70p

VU METERS
40 x 30 x 23mm deep. White/red scale on black background. Brand new. **60p ea.**

A MATTER OF LIFE OR DEATH

When an accident occurs involving severe electric shock, people on the spot may be suffering from a kind of shock themselves. The realisation that one has literally only seconds to save a life can itself be momentarily paralysing. That's why Electrical Review has completely re-styled its Electrical Shock Chart. The new chart, prepared in consultation with St. John's Ambulance Brigade, highlights the main points

in red, and explains and illustrates the actions to be taken so clearly that they can be grasped instantaneously even in a crisis. It also includes vital instruction on what to do if the casualty does not respond to artificial respiration—with a section on external heart compression. Action this second could save a life. Post this coupon NOW.

VIVID RED AND BLACK. PLASTIC, CARD OR PAPER.
 SIZE 19 in x 13½ in (474mm x 346mm)

ELECTRIC SHOCK ACT AT ONCE - DELAY IS FATAL

make sure it is safe to approach

If the casualty is not clear of the source of the shock break the contact by switching off the current, removing the plug, or wrenching the cable free. If this is not possible, stand on dry insulating material (rubber, wood, brick, thickly folded newspaper, books) and try to push or pull the casualty clear of the contact using similar insulating material (such as a broomstick) as a lever. Do not touch him with bare hands.

if the casualty is breathing

Place the casualty in the recovery position and give first aid.

recovery position



if the casualty is NOT breathing

Give full medical aid while you perform artificial respiration—speed is essential

3. Take a deep breath. Pinch casualty's nostrils together with your fingers. Seal your lips around his mouth and blow air steadily into his lungs. Watch his chest rise.



4. Remove mouth and watch chest fall. 5. Repeat and continue inflations at your natural rate of breathing. When casualty starts breathing place him immediately in the recovery position.

ELECTRICAL REVIEW SHOCK FIRST AID CHART

To General Sales Dept., Room 205 Quadrant House, The Quadrant, Sutton, Surrey

Please send me the copies of the Electrical Review First Aid Chart indicated below:

..... paper charts at 70p each

..... Plastic charts at £2.10 each

..... card charts at £1.40 each

I enclose cheque money order for

Name _____


Address _____

All prices include postage and packing. Cheques should be made payable to IFC Business Press Ltd.

if the casualty does not respond to artificial respiration

Take care! Too small a thump will be ineffective but too large a thump could injure the casualty. Assess the casualty - a thin person will require less force than a fat person.

Check again for the carotid pulse. If the pulse is present continue inflations. When the casualty breathes on his own, place him immediately in the recovery position. If the pulse is still absent start external heart compression.

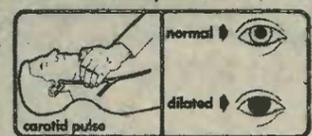

Check the pulse again. If it is present continue with inflations until casualty breathes on his own, then place him immediately in the recovery position. If the pulse is absent repeat the 15 inflations and two inflations until there is a response from the casualty.

doctor:-

phone:-

ambulance:-

phone:-

hospital:-

phone:-

nearest first aid:-

phone:-

on recovery continue to watch casualty carefully as breathing may stop. If it does, turn casualty on his back and start artificial respiration again. Cover casualty with one blanket only.

Prepared in co-operation with St. John Ambulance.

electrical review
 Davost House, Stamford St, London, SE1 7UU
 Tel: 01-475 3000

RHODE & SCHWARZ
 Selective UHF V/Meter. Bands 4 & 5. USVF Selectomat Voltmeter USWV £450.
 UHF Sig. Gen. type SDR 0.3-1GHz £750.
 UHF Signal Generator SCH £175.
 XUD Decade Synthesizer & Exciter.
 POLYSKOPS SWOB I and II.
 Modulator/Demodulator BN17950/2.
 UHF Sig. Gen. type SCR. 1-1.9GHz..

MARCONI
 TF995B/2 AM/FM Signal Generator.
 TF2500 Audio power meter
 TF1101 RC oscillators £65.
 6551 SAUNDERS. 1400-1700MHz. FM.
 TF1066B/1. 10-470MHz. AM/FM.
 TF1152A/1. Power meter. 25W. 500MHz. £50.
 TF1370A RC Oscillator £135.
 TF791D Carrier Deviation Meter.

U.H.F. SIGNAL GENERATORS
 TF1066B/2 400-555MHz. Deviation to 300KHz.
 TF1060/2 450-1250MHz.
 TF1058 1.6-4000MHz.

BECKMAN TURNS COUNTER DIALS
 Miniature type (22mm diam.). Counting up to 15 turn "Helipot." Brand new with mounting instructions. Only £2.50 each.


PRINTED CIRCUIT MOTORS
 'Printed Motors Ltd' type G16M4. 60V DC. 5.5 amps. Continuous torque 140oz. in. 2350 rpm. Diameter 7.5". Depth 2.5". Shaft diam. ½ & ¾". Price from Printed Motors is now over £150 ea. Supplied in good, used condition, tested & guaranteed £25 each (postage £3).

AUDIO & RF SIGNAL GENERATORS
 ADVANCE types H1, H1E, C2, SG62B, J4A.
 TAYLOR 62A (AM/FM). AVO HF134.
 AIRMEC 352 Sweep Generator.
 MARCONI TF1066B/1 (AM/FM 10-470MHz).

LABORATORY OVENS. - Gallenkamp 3 cu. ft. £145. Also Morgan Grundy 1 cu. ft. £55.
20-WAY JACK SOCKET STRIPS. 3 pole type with two normally closed contacts £2.50 each (+25p pp). Type 316 three pole plugs for above - 20p ea. (pp free).

P. F. RALFE ELECTRONICS

10 CHAPEL STREET, LONDON, NW1
 TEL: 01-723 8753

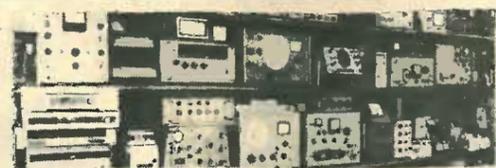

RANK KALEE 1742 Wow & Flutter Meter.
 AIRMEC 314A Voltmeter. 300mV (FSD)-300V.
 AIRMEC Wave Analysers types 853 & 248A.
 DERRITRON 1KW Power Amplifier with control equipment for vibration testing, etc.
 HEWLETT-PACKARD 8551B/851B Spectrum Analyser. 10MHz-40GHz.
 HEWLETT-PACKARD tuned amp & null detector.
 HEWLETT-PACKARD 331A Distortion Meter
 RADIOMETER Distortion Meter BKF6 £125.

TELEVISION TEST EQUIPMENT
 TEXSCAN VS-60B Sweep Generator. 0-1000MHz £250.
 TEXSCAN DU-88 X-Y Display units £95.
 TELONIC 2003 Sweep Generator System £225.
 TELONIC 101 X-Y Display units £75.
 TELONIC 1204 Sweepers 0-500MHz £150.
 TELONIC 121 X-Y Display units £95.

OSCILLOSCOPE SALE
 ADVANCE OS250. Dual Beam 10MHz £185
 HEWLETT-PACKARD 1707A. 75MHz £450.
 TELEQUIPMENT D75.
 TELEQUIPMENT DM64 Storage scope.
 DYNAMCO D7100.
 HEWLETT-PACKARD 122A SB. Audio.
 AIRMEC 279. 4 Beam Display Scope.
 TEKTRONIX 581A, 545A & B, 544, 661, 515A.

NOTICE. All the pre-owned equipment shown has been carefully tested in our workshop and reconditioned where necessary. It is sold in first-class operational condition and most items carry our three months' guarantee. Calibration and certificates can be arranged at cost. Overseas enquiries welcome. PLEASE ADD 15% VAT TO ALL PRICES.

DC POWER SUPPLIES
 ★APT 10459/8, 12-14V @ 5 Amps £25 (£2 p.p.)
 ★APT 10459/8, 24V @ 5 Amps £25 (£2 p.p.)
 ★We can supply the above power supply at any fixed voltage between 5V and 36V at 5A £25.
 ★Mullard Dual supplies. Brand new with handbook. Pos & Neg 12V at 1A and 0.4A respectively. Dimensions 9x4x5ins. £10 + (£1 p.p.)
 ★FARNELL Current limited. Dimensions 7x5x4ins. Following types available: 13-17 Volts @ 2A £15. 27-32 Volts @ 1A 5V £15. 5V @ 3A £15. (pp £1.50).

SPECIAL PURCHASE LAMBDA POWER SUPPLIES
 Excellent LXS Series DC power units at less than a tenth of new price. The snag? - they're all 110V AC Input. Prices as follows:
 5V at 24A. LXS D5 0V R. £25. (List £350).
 15V at 12A. LXS D15 R. £20. (£339).
 5V at 14A. LXS CC 5 0V. £20. (£258).
 24V at 3.1A. LXS C 24. £15. (£223).
 Carriage each £2.50 extra

MODULATION METERS
 AIRMEC 210 3-300MHz. AM/FM. £125
 RADIOMETER AFM/1 3.5-320MHz. AM/FM. £145
 RACAL 409 3-600MHz. AM/FM.

ROTRON INSTRUMENT COOLING FANS
 ★ Supplied in excellent condition, fully tested:
 ★ 115V. 4.5 x 4.5 x 1.5" £4.50. 230V
 ★ £5. 115V. 3 x 3 x 1.5" £4 + postage
 ★ ea. 35p.

CT212 RF Signal Generators. 85KHz-32MHz £55.


BELL & HOWELL MICROFICHE VIEWERS
 ★ Type SR5. Screen size 9 x 5in. New condition. £50.

DIGITAL MULTI-METERS
 DE FOREST ELECTRONICS TYPE MM200. DC V 0-1KV. AC V 0-700. DC 1.0-1A. AC 1.0-1A. Each in 4 ranges. Resistance 0-19.99 Mohms. 5 ranges. LED Display 1999.
 BRAND NEW. SPECIAL REDUCED PRICE OF £39, INCLUDING VAT & P.P.

Who's Who and What's What in the Electrical Industry

Famous for its total coverage, detail and accuracy, the ELECTRICITY SUPPLY HANDBOOK usually sells out fast - so ensure your copy and post the coupon below, today!

- Over 2,000 names and locations of executive personnel in the Electricity Council, C.E.G.B., Area Boards and other organisations.
- Major authorities, government departments associated with the electrical industry.
- U.K. power stations, Area Board statistics, electricity tariffs, electrical associations.
- Pull out map of C.E.G.B. Regions, power stations and transmission lines.
- Bound in maps of Area Boards.

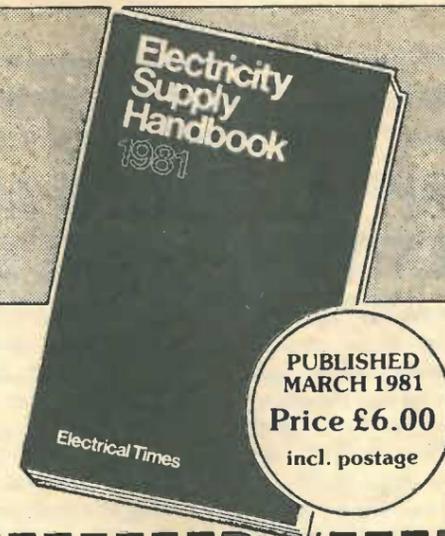

To: General Sales Department, Room 205, Quadrant House, The Quadrant, Sutton, Surrey, SM2 5AS.


Please send me.....copy/ies of ELECTRICITY SUPPLY HANDBOOK 1981

Name _____

Address _____

Company registered in England No. 677128. Reg. Office: Quadrant House, The Quadrant, Sutton, Surrey, SM2 5AS.

What meter?

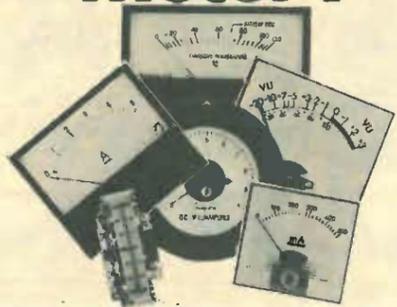

No matter what panel meter you may be looking for we can give you the meter you want. The Bach-Simpson range of standard models represents the largest selection of meters you will find anywhere. See our new catalogue and you will see what we mean. You may of course, have a need for customised meters. Do you require special sensitivities, special movement ballistics or special scales?

No problem! you tell us we can supply.

With our UK manufacturing facilities and our new Mod-Centre, we can produce meters to meet your requirements.

If you would like to know more - write or phone now and ask for Colin Williams.



Bach-Simpson (U.K.) Limited,
Trenant Estate, Wadebridge, Cornwall, PL27 6HD.
Telephone: (020881) 2031 Telex: 45451

WW - 081 FOR FURTHER DETAILS

Special Offer



85 pence each
in 1,000 lots!
While stocks last

STRUTT LTD.

Electronic Component Distributors
Manufacturers and sub-contractors
to the Electronic Industry
3d BARLEY MARKET STREET, TAVISTOCK
DEVON PL19 0JF ENGLAND
Tel: Tavistock (0822) 5439 - Telex: 45263

WW - 082 FOR FURTHER DETAILS

C.T. ELECTRONICS (ACTON) LTD.

Registered in England 1179820

267 & 270 ACTON LANE, LONDON W4 5DG. Telephone: 01-747 1555
01-994 6275

9.30 a.m.-6 p.m.
MON.-SAT.
CONTINUOUS

STABILISED POWER SUPPLIES

FARNELL A15: 210/240V IP. Dual Op. 12-17v per rail at 100mA. Remote sensing, current limit protection. (164 x 130 x 38mm), with manual. £12.

FARNELL 7/3SC: 120/240V IP. Adjustable current limit. Remote sensing. (188 x 96 x 93mm). Two versions available: 15V at 2A or 30V at 1A. £15 ea.

COUTANT OA2: Op. amp, psu, 120/240V IP. Dual Op. 12-15v at 100mA. (138 x 80 x 45mm). £12 ea. or 2 for £22.

BRANDENBURG Photomultiplier PSU. 19in. rack mounting. Metered, current limit protection.

374.374R 300V-1KV at 5mA.

375 500V-1K5V at 6mA.

376 660V-1K6V at 10mA.

Model 374R has reversible polarity op. All others have negative polarity op.

All models £40.

Some photo multiplier tubes available.

COUTANT ESM3: 105/115/220/240V IP. Four separate ops: 5V at 3A stabilised with current limit, overvoltage crowbar protection and remote sensing. ±12 to ±15V at 500mA stabilised. 12 or 24V unstabilised. (125 x 80 x 275mm). £30.

SPECIAL OFFER. 10MFD 500v ECC 20p ea., 10,000 MFD 16v Mullard 35p ea., 3,300 MFD 40v Mullard 35p ea. 10µF/63v MIMA polyester 10% 50p ea. Large quantities available.

ELECTROLYTIC CAPACITORS. Very large stock holding. Mostly ITT EN1212m EN1235 types.

Please send for our electrolytic list, e.g.: 220/50VA, 2200/25R, 470/25R, 4700/25A, 470/50A, 2200/100 CAN.

CAPACITORS - DISC CERAMIC

Over 2 million now in stock, mostly ITT. Many high-voltage types, e.g.:

210p 8KV, 1n 1KV, 2n2 2KV, 10n 2KV.

220p 1KV, 1n5 3KV, 4n7 1K5V.

Please send for our ceramic capacitor lists.

PYE HEAD CLEANING CASSETTES. Brand new or boxed, 50p ea.

CASSETTE DECKS: With stereo heads, mechanically complete, but with no electronics. Smart black modern finish. £5.00

We have **VERY LARGE QUANTITIES** available 0.1µ/16v disc ceramic by ITT. Pitch 5mm. Price £20/£1,000. Brand new and boxed.

PIHER PRESETS

Very large stocks, PT10, PT15 enclosed types. Please send for our preset list. Most values 100R-5M

HEAVY DUTY KEYSWITCHES

2P 12A 600V AC £1.50
8P 10A 380V AC £3.00
10P 12A 600V AC £3.00
49mm □ Fascia.

ROTARY POTS

Good range stocked. Please phone your requirements. Large stocks of the following:

100K LIN + push switch 30p
22K LOG + switch 30p
2K2 LIN 30p

CANNON 15w sockets, D type or Souvrian/McMurdo Daiss 60p ea. Also Cannon 9w plug, brand new, 60p ea.

WELWYN STRAIN GAUGE.

(Precision micro-measurements). Romulus Michigan type MA-09-500B4-350. Our price £1.25 ea. List price £3.85. Large quantities available.

¾ 1S Turn Ceremet Trimpot 100K. 1 off price, 20p. By Beckman & A.B.

REDPOINT HEATSINK, Type TV4 15p ea. 1 off price. Discount on quantity.

We have the following **Welwyn .1% Resistors** available, 2K, 3K, 10K, 20K, 30K, 1 Meg. Price 25p ea. Type 4802.

BURROWS CONNECTOR (LH) 1701, 41c, 20p; Burrows Connector (RH) 1201, 41C 25p. Large quantities available.

METWAY P.C. CONNECTOR, 3-way type P95/3DS, 10p ea. ITT TEMPKIT Electronic thermostat ZBI.5669. Brand new. £4 ea.

4-WAY DPDT AND 5-WAY DPDT DIL SWITCHES, by ERG Components and CTS. Gold contacts £1 ea. Brand new and boxed.

BUZZERS, 6v and 12v, 50p ea.

WIRE ENDED NEONS £20/£1,000.

SPECIAL OFFER. Mini-toggle switch by C. & K., 3 Pc/o. Long dolly or short, 50p ea.

D TO A CONVERTERS

15MHz, 8 BIT

By Micro Consultants Ltd. 50Ω cable drive op. Linearity 0.25%, max. 0.125% typ. Settling time: 2V step 70nS typ. 2MV step 50nS colour television transmission standard. Diff. gain 0.5% diff. phase shift 0.5° types rad 802 and MC2208/8. Unused. Ex-maker's pack.

JUST IN!

SEMICONDUCTORS, BRAND NEW AND BOXED . . . TEXAS, FAIRCHILD, SIGNETICS, NATIONAL, MOTOROLA, FER-RANTI, SGS, MULLARD . . . OVER A MILLION, AT PRICES YOU'VE NEVER SEEN BEFORE . . .

INTEGRATED CIRCUITS

Type	Stock	Each	Type	Stock	Each
7401	12,400	.08	74LS76	7,000	.20
7402	4,400	.08	74LS138	13,900	.36
7405	5,400	.10	74LS157	3,800	.34
7420	1,200	.10	74LS175	4,800	.68
7425	4,500	.20	74LS192	29,200	.50
7473	1,500	.20	74LS193	6,650	.65
7475	10,000	.25	74LS221	30,800	.65
7486	6,200	.25	74LS251	600	.65
7489	7,200	1.55	74LS273	10,000	.75
74123	15,150	.45	74LS290	40,300	.45
74125	2,000	.26	74LS293	35,000	.45
74154	1,900	.60	74LS390	2,100	.65
75452	19,700	.40	UA709	25,400	.25
74LS00	39,600	.10	UA709A	18,600	.25
74LS01	11,200	.10	*TMS1000	9,555	1.00
74LS02	2,650	.10	TMS4036	3,400	1.00
74LS10	14,500	.10	DS8889	12,100	1.00
74LS11	53,300	.20	MC3491	6,000	1.00
74LS30	9,600	.12	40085BPC	23,000	POA
74LS73	18,600	.20			
74LS75	4,750	.25			

* 4-bit Comparator

TRANSISTORS

Type	Stock	Each	Type	Stock	Each
2N1306	10,400	POA	BC184L	248,000	.08
2N1307	c 2,000	POA	BFR86	68,400	POA
2N3055	12,500	.45	BD240C	16,200	.22
FRB876	7,400	POA	BCY70	51,800	POA
FRB877	17,600	POA	ZTX342K	149,000	.08
R1076	7,350	POA	ZTX542K	128,000	.08

YES, IT'S TRUE! . . . AND with do-it-yourself DISCOUNTS PER ITEM: 100 up, 10%; 1000 up, 25%; 10,000 or more, PLEASE RING . . .

★★★ Before you grab calculator and chequebook, please note: **AT THESE PRICES, MINIMUM ORDER ON SEMICS IS £10 . . . plus p. & p. and V.A.T.**

SPECIAL OFFER: Filmet SC65 1MΩ 0.1% metal film resistors 20p ea.

CERMET PRESETS 15p ea.

MINIATURE AB16 POTS PCB mounting 16mmØ
100K LOG DG
220K LOG DG
100K LIN SG

10A 250V AC ILLUMINATED ROCKER SWITCH
Red, DP ST 26x30mm rect. Snap-in type 75p

16A 250V AC ILLUMINATED ROCKER SWITCH
(Amber). 14x30mm rectangular snap-in type. SPST 30p

WIREWOUND POTS
10R-100K by A.B., Colvern, etc. 1½W 40p, 3W 60p, 5W 80p.

TRIMPOTS
10R-500K 10/20 turn. 1¼in. or ¾in. rectangular 60p ea.
JEAN RENAULD SWITCH BANKS

Many types available, e.g.:
4x2PCO 40p
6x2PCO 60p
5x2 PCO + 2x4 PCO 70p

VU METERS
40 x 30 x 23 mm deep. White/red scale on black background. Brand new. 60p ea.

READ ALL ABOUT IT — all the latest on home entertainment equipment and ideas in . . .


HI FI YEARBOOK AND HOME ENTERTAINMENT 1981

Published again in November, this new 1981 edition in larger magazine size means more comprehensive coverage of the whole range of home entertainment equipment, from aeriols to headphones, from microphones to video recorders and from radios to electronic organs.

Backed by authoritative articles on developments in the world of Hi Fi, plus details of stockists, Hi Fi Yearbook and Home Entertainment 1981 is essential reading for enthusiasts and buffs.

Available from leading newsagents and bookshops from 1st November 1980. Price £3.00.

If you have difficulty in obtaining your copy order direct from the publishers @ £3.50 inclusive.

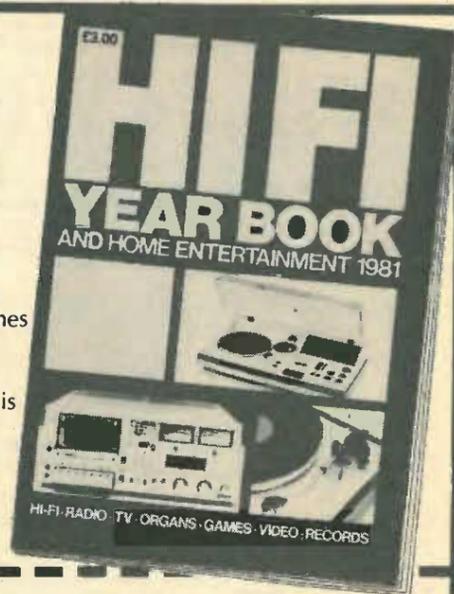

ORDER FORM

To: General Sales Manager, Room 205, Quadrant House, The Quadrant, Sutton, Surrey, SM2 5AS.

Please send me copy/copies of the Hi Fi Yearbook and Home Entertainment 1981 @ £3.50 including postage and packing. Cheque/postal order should be made payable to IPC Business Press Ltd.

Name _____
(please print)

Address _____

Registered in England No. 677128.

WW7

This advertisement is mainly of our excess stock holding. We also have excellent stocks of semiconductors, hardware, cables, etc, etc. For further details send for our lists and retail price catalogue, phone or visit our shop. All prices are exclusive of VAT (and P&P). Minimum Mail Order £5 + P&P + VAT. Government departments, schools, colleges, trade and export welcome.

(7479)

WW - 083 FOR FURTHER DETAILS

Guide to Broadcasting Stations

18th Edition

Around the world some thousands of radio stations are sending signals. If you're receiving, this standard guide will tell you who's where. It lists stations broadcasting in the long, medium, short wave and vhf bands, dealing with them by frequency, geographical location and alphabetical order. Sections are helpfully cross referenced. The Wireless World Guide to Broadcasting Stations is the eighteenth edition of a publication which has sold over 270,000 copies. In addition to the stations data, it includes much useful information on aerials, propagation, signal identifications and reception reports.

£3.25 inc. postage.

To: General Sales Dept., Room 205
Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS

Please send me _____ copy/ies of the Wireless World Guide to Broadcasting Stations (18th edition) @ £3.25 a copy inclusive, (U.K.), \$8 overseas, remittance enclosed. Cheque/P.O. payable to IPC Business Press Ltd.

Name _____
(please print)
Address _____

Registered in England No. 677128
Registered Office: Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS

Appointments

Advertisements accepted up to 12 noon Monday, June 29, for August issue, subject to space being available.

DISPLAYED APPOINTMENTS VACANT: £12 per single col. centimetre (min. 3cm).
LINE advertisements (run on): £2 per line, minimum 5 lines (pre-payable).
BOX NUMBERS: £1 extra. (Replies should be addressed to the Box Number in the advertisement, c/o Quadrant House, The Quadrant, Sutton, Surrey SM2 4AS.)
PHONE: JAYNE PALMER, 01-661 3033 (DIRECT LINE)
Classified Advertisement Rates are currently zero rated for the purpose of V.A.T.



ALWAYS AHEAD WITH THE BEST!

£5,000-£15,000

PDP 11: NOVA: ECLIPSE: Z80: 8080: 6800: BIT-SLICE: TTL: ECL: RADAR: SONAR: SATCOM: Phototypesetters: Wordprocessors: Flight Simulators: ATE: Electro-Medical: Teletext: Data-Comms: Automation: Microwave?

Where does your skill and interest lie - Design? Test? Service? Software? Consultancy? or perhaps Research?

- * Our clients are drawn from all sectors of industry:
- * There are opportunities for Managers, Project Managers, Engineers and Technicians.
- * Most UK locations and some Overseas.
- * Make your first call count - Contact MIKE GERNAT on 076 384 676/7 (usually until 8 p.m.)

ELECTRONIC COMPUTER AND MANAGEMENT APPOINTMENTS LIMITED
148-150 High St., Barkway, Royston, Herts SG8 8EG.

(1118)

APPOINTMENTS IN ELECTRONICS to £15,000

MICROPROCESSORS
COMPUTERS - MEDICAL
DATA COMMS - RADIO

Design, test, field and support engineers - for immediate action on salary and career advancement, please contact:

Technomark
Engineering and Technical Recruitment
11, Westbourne Grove
London W2. 01-229 9239 (9257)

DIGITAL EXPERIENCE? FIELD, SUPPORT AND PRODUCTION. VACANCIES IN COMPUTERS, NC, COMMS., MEDICAL, VIDEO, ETC.

For free registration ring
0453 883264
01-290 0267

LOGEX

ELECTRONICS RECRUITMENT SERVICE
LOGEX HOUSE, BURLEIGH, STROUD
GLOUCESTERSHIRE GL5 2PW
TEL. 0453 883264, 01-290 0267 (921)

Electronic Engineers - What you want, where you want!

TJB Electrotechnical Personnel Services is a specialised appointments service for electrical and electronic engineers. We have clients throughout the UK who urgently need technical staff at all levels from Junior Technician to Senior Management. Vacancies exist in all branches of electronics and allied disciplines - right through from design to marketing - at salary levels from around £4000 to £12000 p.a.

If you wish to make the most of your qualifications and experience and move another rung or two up the ladder we will be pleased to help you. All applications are treated in strict confidence and there is no danger of your present employer (or other companies you specify) being made aware of your application.

TJB ELECTROTECHNICAL PERSONNEL SERVICES,
12 Mount Ephraim,
Tunbridge Wells,
Kent. TN4 8AS.

Tel: 0892 39388



Please send me a TJB Appointments Registration form:

Name

Address

(861)

Service & Installation Engineers

An Electronic Defence Systems company in the South of England is seeking Service & Installation Engineers to be engaged on the installation and technical support of complex medical electronic equipment, both at home and abroad.

They are looking for adaptable self-reliant engineers who are prepared to spend periods of up to approximately four months overseas. The successful candidates will have a good knowledge of semi-conductor circuitry, be qualified to H.N.C. or equivalent standard and will preferably have worked on such equipment as modern high-power radar systems.

Please write quoting ref: WW/386 giving full details of career to date, listing any companies to whom you do not wish your application forwarded, to: John Maines, Riley Advertising (Southern) Limited, Old Court House, Old Court Place, Kensington, London, W8 4PD.

A member of the Rex Stewart Group
LONDON BIRMINGHAM BRISTOL EDINBURGH GLASGOW
LIVERPOOL MANCHESTER NEWCASTLE NOTTINGHAM PERTH

Confidential Reply Service
Riley

(1164)

**APPOINTMENTS
IN
ELECTRONICS
to £12,000 +**

**MESSAGE SWITCH
DATA COMMS-TELEMETRY
TELEGRAPHY-RF COMMS**

Interesting and varied opportunities, U.K. and overseas. For immediate action on salary and career advancement, contact:

Technomark
Engineering and Technical Recruitment
11, Westbourne Grove
London W2. 01-229 9239 (1080)

Electronics R&D

£7,999

Join us in the forefront of technology

Take your pick

HF-VHF-UHF

Microwave Optics & Acoustics
A challenging and full career in Government Service

Candidates, normally aged under 30, should have a good honours degree or equivalent in a relevant subject, but any candidates about to graduate may be considered.

Appointments as Higher Scientific Officer (£6,075-£7,999) or Scientific Officer (£4,805-£6,480) according to qualifications and experience. Promotion prospects.

Please apply for an application form to the Recruitment Officer (Dept I.E.1), H M Government Communications Centre, Hanslope Park, Milton Keynes MK19 7BH.

(1028)

TECHNICIAN (MOBILE RADIO)

£6500-£7500 Western Home Counties

This subsidiary of a world-wide group markets a diverse range of electrical and electronic products throughout the UK.

They are looking for a Technician to install and service a range of radio telephone products. The successful candidate will be responsible for the service support needed by the Sales Team and may also be called upon to develop a contribution to the customer training programme.

Applications are invited from candidates qualified by experience of installation and service work in the mobile radio telephone field and with the ability to develop as a member of a dynamic team.

Candidates should be prepared to travel widely in the course of these duties, a mobile workshop being provided.

The benefits package includes a contributory pension scheme, life assurance plus generous relocation assistance.

Please write with full career details or telephone for an application form in strict confidence quoting ref WW/546 to: Ray Diamond

GERRARDS

Gerrard Recruitment Service,

10 Argyll Street, London W1V 2BQ. Tel: 01-437 6816

COLOUR VIDEO SERVICES

have a vacancy for an enthusiastic

BROADCAST VIDEO ENGINEER

Experience in maintenance and operation of 2in. quad VTR is essential. Knowledge of 1in. "C" format VTR would be very useful. There would be opportunities to gain experience on flying spot telecine and other equipment on the station. Salary between £6,427 and £8,246 according to experience.

Applicants please telephone:

Mr. F. H. Weinel

on 01-486 2881, or write to:

COLOUR VIDEO SERVICES LIMITED

22-25 Portman Close, Baker Street, London, W.1

(1183)

UNIVERSITY OF OXFORD
DEPARTMENT OF PSYCHIATRY

ELECTRONICS TECHNICIAN

Electronics Technician required for varied and challenging post in medical research. Duties include the design and construction of equipment used in psychological and physiological experimentation. Applicant must be thoroughly conversant with discrete components, micro circuit amplifiers, TTL and c.mos techniques and be able to design both analogue and digital circuits. Knowledge of microprocessors an advantage.

Salary scale: Whitley Council Medical Physics Technician III £5223-£6750 or II £6291-£7845 p.a., dependent on age and experience.

Further details from Dr. D. Johnston, Psychological Treatment Research Unit, The Warneford Hospital, Oxford OX3 7JX (Tel. Oxford 45651, extension 218).

(1152)

URGENT ELECTRONICS ENGINEERS FOR HUNDREDS OF VACANCIES INCLUDING...

SENIOR SOFTWARE ENGINEER for rapidly expanding company, involved in mpu based instrumentation for quality control. 8080/8085 Machine Code, Assembler and Basic. W. LONDON, to £10,000.

YOUNG ENGINEERS for applied research connected with sonar, radar, RF microwave, signal processing and opto-electronic circuitry. SOUTH COAST, to £8,000.

VIDEO ENGINEERS complex projects associated with moving picture processing and transmission, complex signal processing, frame and picture storage techniques. BERKS, to £10,000.

DES/DEV ENGINEERS for data communications projects including: network management systems and colour graphics. BUCKS, to £10,000.

Charles Airey Associates

4 Hammersmith Grove, London W6 0NA. Tel: 01-741 4011 (1175)

GOVERNMENT OF DUBAI DUBAI RADIO AND COLOUR TELEVISION TELEVISION ENGINEERING DEPARTMENT

Applications are invited from suitably qualified Engineers with several years' proven experience in the field of Television Engineering to fill the following vacancies:

1. TELEVISION STUDIO ENGINEER

To be responsible to the Chief Engineer for the maintenance of all equipments within the Television Studio Complex and Outside Broadcast Units. Candidates should preferably have some experience of Memory Modulated Lighting Systems. All studios are equipped with EMI 2005 Cameras and Richmondhill Laboratory Mixers. LDK 14 Cameras are used in the Eng. Unit and Ampex BCC-20 Cameras in the OB Unit.

Salary shall be sterling £13,000-£14,000 depending on experience.

2. V.T.R. ENGINEER

To be responsible to the Chief Engineer for the maintenance of all VTR Equipments within the Studio Complex and Outside Broadcast Unit. Candidates should preferably have experience in AMPEX 1200B, AVR2, VPR2 and VPR20 machines.

Salary shall be sterling £13,000-£14,000 depending on experience.

3. LIGHTING DIRECTOR

To be responsible to the Chief Engineer for the lighting of all drama and light entertainment productions and shall act in the capacity of Technical Manager.

Salary shall be sterling £17,000-£18,000 depending on experience.

Salaries quoted are annual and are tax-free. The initial contract shall be for a period of 2 years and further details regarding conditions of service may be obtained from Mr. J. Billett, Falcon Television, 7a Grafton Street, London, W1X 3LA. Tel. 01-629 6848.

Applications, which shall be treated with the strictest confidence, should be sent, accompanied with full c.v. and U.K. telephone contact, to:

Chief Engineer - Television
DUBAI RADIO AND COLOUR TV
P.O. Box 1695
Dubai, United Arab Emirates

(1179)

Technicians in Communications

GCHO We are the Government Communications Headquarters, based at Cheltenham. Our interest is R & D in all types of modern radio communications - HF to satellite - and their security.

THE JOB All aspects of technician support to an unparalleled range of communications equipment, much of it at the forefront of current technology.

LOCATION Sites at Cheltenham in the very attractive Cotswolds and elsewhere in the UK; opportunities for service abroad.

PAY Competitive rates, reviewed regularly. Relevant experience may count towards increased starting pay. Promotion prospects.

TRAINING We encourage you to acquire new skills and experience.

QUALIFICATIONS You should have a TEC Certificate in Telecommunications, or acceptable equivalent, plus practical experience.

HOW TO APPLY For full details on this and information on our special scheme for those lacking practical experience, write now to

**Robby Robinson, Recruitment Office
GCHO, Oakley, Priors Road, Cheltenham
Glos. GL52 5AJ**

or ring
0242 21491
ext 2269

(666)

GCHO

Due to further expansion
HUMPHRIES VIDEO SERVICES


have vacancies for the following positions:

SENIOR ENGINEER ENGINEERS TECHNICAL OPERATORS

Applicants should have experience in the maintenance or operation of Quadruplex and Helical Scan VTR, and Mk. III Telecines. Humphries Video Services are one of the major video cassette duplication houses in the U.K., with an increasing involvement in post production and facilities services, and offer an excellent salary to successful applicants. Please reply in writing to:

The Technical Manager
HUMPHRIES VIDEO SERVICES LTD.
32 Eveline Road, Mitcham, Surrey CR4 3LE

(1155)

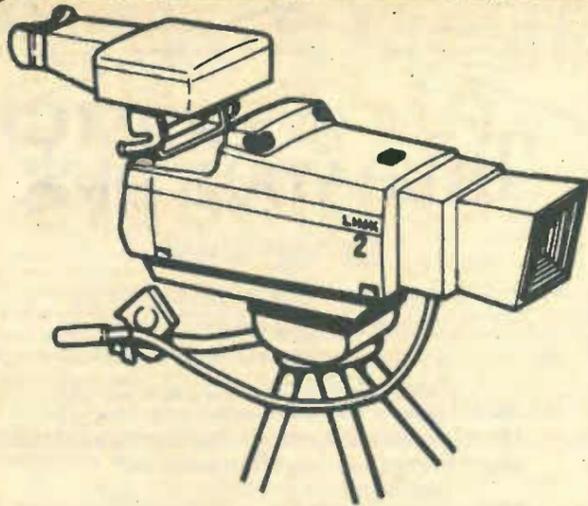

LINK

As a well-established designer and manufacturer of equipment to TV broadcast companies worldwide, we urgently require experienced engineers to fill the following demanding positions, both of which offer a high degree of job satisfaction.

SALES SUPPORT ENGINEER — VISION MIXERS

We need an electronic engineer with a background in TV studio engineering to work on the commissioning, acceptance, demonstration and after-sales activities of broadcast standard vision mixers. Direct experience of mixers, whilst not essential, would be a definite advantage. Alternatively you should have worked on video switching systems and be familiar with the performance requirements of modern colour TV routing and switching.

Considerable involvement with customers will be necessary and the position would necessitate occasional travel within the U.K. Minimum age would be 28.

DESIGN AND DEVELOPMENT ENGINEER — VIDEO

Experienced engineers, to be involved in the design of TV studio products, including a new range of colour cameras, using the very latest analogue and digital techniques. You will have the opportunity to see your designs made in volume production, fulfilling the high technology requirements of the '80s.

We are looking for engineers, minimum age 25, who are qualified to degree level and who have at least four years' experience of electronic equipment. A knowledge of microprocessor techniques and video engineering would be added advantages.

Salaries offered are extremely competitive and are backed by free life and health insurance plus a contributory pension scheme. Generous financial assistance with relocation will be given where appropriate to help successful candidates move to this pleasant rural part of Hampshire which offers easy access to London and major towns in the South of England.

Please phone Jacqui Cornall at Andover (0264) 61345 and ask her to send you an application form or, alternatively, let us have full details of your background and experience.

LINK

ELECTRONICS

Walworth Industrial Estate,
Andover, Hampshire, England

Telephone: Andover (0264) 61345

(1151)

PRODUCTION ENGINEER

We have a vacancy for an Engineer with experience of quartz crystal production. The successful applicant will be responsible for manufacturing methods and the maintenance of top standards in our Southampton factory.

Education to H.N.C. standard is desirable, a practical approach and the ability to work without supervision is essential.

Above-average salary for the right applicant, plus relocation allowance if necessary and normal company benefits.

Apply in writing to:
The Personnel Director
IQD CRYSTAL ELECTRONICS
29 Market Street, Crewkerne
Somerset, TA18 7JU



(1180)



CAPITAL

APPOINTMENTS LTD.

THE UK's No. 1 ELECTRONICS AGENCY

Design, Dev. and Test to £10,000
Ask for Brian Cornwell

SALES to £12,000 plus car
Ask for Maurice Wayne

FIELD SERVICE to £10,000 plus car
Ask for Paul Wallis

We have vacancies in ALL AREAS of the UK

Telephone: 01-637 5551 (3 lines)

(291)

Gresham Executive Appointments

D.E.C. EXPERIENCE?

Real Time Mini/Micro Applications.
Industrial Computer Systems.
Experience and your personality create progression
in the following areas:

- SALES ENGINEER
- SENIOR SOFTWARE ENGINEER
- APPLICATIONS ENGINEER
- DEVELOPMENT ENGINEER

Contact Keith Diprose on 021-643 5231
GRESHAM EXECUTIVE APPOINTMENTS
5th Floor, New Street Chambers
67a New Street, Birmingham

(1163)

The Middlesex Hospital, London W1N 8AA

JUNIOR MEDICAL PHYSICS TECHNICIAN

Applications are invited for the above post in the Department of Clinical (Physiological) Measurement. Applicants should have 2 GCE 'A' levels or at least 4 'O' levels, three of which must be in scientific subjects, as well as two years' technical experience in electronics or some allied scientific subject. The job is essentially that of a junior technician in the electronics laboratory but a suitably motivated candidate may be required to take part in patient-monitoring activities in the Intensive Care Unit and the Operating Theatres. Day Release may be available for those studying for approved qualifications. Salary: £3614-£4523 p.a. Further information is available from Miss B. Smith, Personnel Officer, The Middlesex Hospital, Mortimer Street, London W1N 8AA. Tel: 01-636 8333 Ext. 7462.

(1165)

DEVELOPMENT OPPORTUNITIES

COMMUNICATIONS WEST SUSSEX

Our Research & Development Laboratories in Crawley, West Sussex, are actively involved in developing the Communications technology and equipment of the future.

To meet the demands of our expanding programme, we are currently seeking additional R & D personnel with proven expertise in any of the following areas:


- HF Transmitters and Linear Wideband Amplifiers
- VHF/Mobile Radio Systems
- Signal Processing & Control
- Communications Hardware/Software

All positions are at Senior/Principal Engineer level and we offer highly competitive salaries together with attractive benefits.

If you are seeking a progressive Development opportunity, make this your next move.

For further details and application forms, please telephone or write to:

David Bird, Personnel Department,
Rediffusion Radio Systems Limited,
Broomhill Road, London, SW18 4JQ.
Telephone: 01-874 7281



REDIFFUSION

Radio Systems

... great to communicate with

Trent Polytechnic RESEARCH ASSISTANT/ DEMONSTRATORS

DEPARTMENT OF ELECTRICAL AND ELECTRONIC ENGINEERING

Good honours graduates desirous of working for a higher degree are invited to apply for research posts in the following areas:

- 1) Three-dimensional television.
- 2) Photovoltaic cells using organic semiconductors.
- 3) Bipolar charging of powders for use in electrostatic powder coating.
- 4) Low frequency noise in instrumentation systems.

Salary Currently: £4683-£4884-£5085 rising to £5034-£5250-£5466 from 1 September, 1981.

Further details of project and form of application available from The Assistant Director (Administration) Trent Polytechnic, Burton Street, Nottingham NG1 4BU. Applications to be returned as soon as possible.

(1153)

ARTICLES WANTED

WANTED

Test equipment, receivers, valves, transmitters, components, cable and electronic scrap, any quantity. Prompt service and cash. Member of A.R.R.A.

M & B RADIO
86 Bishopgate Street
Leeds LS1 4BB
0532-35649

WE BUY FOR CASH: Components, PCBs, etc. Good prices paid. Quick decision, money by return. Ring (0703) 785862. (1172)

SPOT CASH

paid for all forms of electronics equipment and components.

FRG General Supplies Ltd.
Unit 3
Longhill Industrial Estate
March, Cambridgeshire
Tel: March 56614
Tel: 01-404 5011
Tel: 24224. Quote Ref. 3165 (8742)

STORAGE SPACE is expensive, why store redundant and obsolete equipment? For fast and efficient clearance of all test gear, power supplies, PC boards, components, etc., regardless of condition or quantities. Call 01-771 9413. (8209)

Air Traffic Engineers

The Civil Aviation Authority has vacancies for men and women as Air Traffic Engineers Grade 2 in its Telecommunications Division offering a variety of work on a wide range of electronic systems and specialised equipments.

Air Traffic Engineers Grade 2 are involved in the installation and maintenance of radio, radar, air navigational and landing aids, and data processing systems. Staff are employed at some Civil Airports, Air Traffic Control Centres and Radar Stations and other locations throughout the UK but at present most of the vacancies are likely to be in the South of England with a few vacancies elsewhere in the UK.

Qualifications and Experience

You should be at least 20 years of age and have obtained either the O.N.C. (Eng.) with an electronic bias or C. & G. Telecommunications Technician T3 Certificates or other similar technical qualifications.


Skilled working experience in radio, radar or data processing is essential.

Salary

Salaries are on an incremental scale £5,683-£8,783. Posts in the London area attract an additional allowance (Inner London £1,082 - Outer London £452). Grade 1 posts (maximum salary £10,610) are normally filled by promotion from Grade 2.

For full details and an application form complete and send the coupon to: CAA, Personnel (Tels), Room T 1206, CAA House, 45-59 Kingsway, London, WC2B 6TE.

Name.....
Address.....
..... WW



Civil Aviation Authority

(1125)

R & D OPPORTUNITIES. Senior level vacancies for Communications Hardware and Software Engineers, based in West Sussex. Competitive salaries offered. Please ring David Bird at Rediffusion Radio Systems on 01-874 7281. (1162)

UNIVERSITY OF OXFORD, ELECTRONICS TECHNICIAN. Electronics technician required for work on mass spectrometers and other equipment in the Department of Geology and Mineralogy, under the technical direction of the Electronics Group in the Physics Department. Applicants should have wide experience in fault-finding and building of modern electronic equipment. Appointment in the first instance until July 31, 1985. Salary range, from July 1, 1981, £6,532-£7,802. Applications with full personal and professional details as soon as possible, to the Administrator, Department of Geology, Parks Road, Oxford OX1 3PR. (1168)

£25,000?

1. REAL TIME SOFTWARE ENGINEERS. Avionic applications. £11,000. Herts.
 2. DEVELOPMENT MANAGER, working with microprocessor-based detection systems. £12,000. Middlesex.
 3. SALES ENGINEERS, selling range of microprocessor-based test equipment. £10,000 plus car. Various.
 4. SENIOR DESIGN ENGINEERS, to work on Z80-based systems, for entertainment industry, £10,000. Middlesex.
 5. DESIGN ENGINEER to work on Digital/Analogue Systems. Some microprocessor. £8,500. Surrey.
 6. PRODUCT SUPPORT ENGINEER microcomputers. Experience of Z80 or 8080 Software. £9,000 plus car. London.
- HUNDREDS OF OTHER ELECTRONICS AND COMPUTER VACANCIES TO £25,000

Phone or write:
ANTHONY GILES, M.Sc., C. Eng., M.I.E.E.
CLIVEDEN CONSULTANTS
87 St Leonard's Road, Windsor, Berks
Windsor (07535) 57818
24-hour Ansaphone (1119)

CLIVEDEN

TOP JOBS IN ELECTRONICS

Posts in Computers, Medical, Comms, etc. ONC to Ph.D. Free service.

Phone: 01-906 0251 (8994)

By order of Rank Television Limited
Plant & Equipment surplus to requirements

IMPORTANT 4-DAY SALE BY AUCTION

of

TELEVISION MANUFACTURER'S EXCELLENT MODERN MACHINERY & EQUIPMENT

at the works ERNESETTLE LANE, PLYMOUTH at 10 a.m. each day

DAY ONE

TUESDAY, 30 JUNE, 1981
WIRE WOUND COMPONENTS
MANUFACTURING PLANT

including:
AUMANN WPA 70 12-STATION SEQUENTIAL WINDERS
UNIVERSAL 3LS & 1980 GORMAN 920A TOROID WINDERS
ROTAWINDER SEQUENTIAL CHOKE WINDER, LESSONA 104 COIL
WINDERS
BENCH COIL WINDERS by Ko-lectric, Avo & Douglas, ARTOS WIRE
CUTTERS AND STRIPPERS
1980 ZEVATRON TL3 DIP SOLDER MACHINE, FLOW SOLDER MACHINES
GENERAL ENGINEERS VACUUM IMPREGNATION PLANTS
BARLOW WHITNEY ELECTRIC CURING OVENS & WAX
IMPREGNATION PLANTS
DALE 255 KVA DIESEL GENERATOR, BROOMWADE V300F2 AIR COMPRESSOR
LANSING-BAGNALL 2000LB ELECTRIC FORK LIFT TRUCK
FLOOR & OVERHEAD CONVEYOR SYSTEMS, DEXION SPEEDLOCK PALLET RACKING
FLOOR CLEANING EQUIPMENT, BENCHES, STORAGE BINS & FACTORY FURNITURE
EXTENSIVE RANGE OF MODERN CANTEEN FURNITURE AND KITCHEN EQUIPMENT

DAY TWO

WEDNESDAY, 1 JULY, 1981
TELEVISION MANUFACTURING PLANT
MACHINE TOOLS, OFFICE FURNITURE
FORK LIFT TRUCKS & MOTOR VEHICLES

including:
BLAKELL PALLETISER with SIGNODE STRAPPING EQUIPMENT
NIKON PROFILE PROJECTOR, KURTZ RT25 CABINET FOILING MACHINE
TOP & BOTTOM CARTON STAPLER, SILK SCREEN PRINTER
FRY 75 FLOWSOLDER MACHINE with chain conveyor & 3 solder bath lines
POWER BELT, GRAVITY ROLLER AND GLIDEWHEEL CONVEYOR SYSTEMS
LOW LEVEL CAROUSEL CHAIN CONVEYORS
Q&S 10" HACKSAWING MACHINE, SS&SC LATHES by Kerry & Wyvern
BEAVER VBRP TURRET MILL, UNIVERSAL MILLS by Adcock & Shipley and Parkson
BENCH & PILLAR DRILLS by Arboga, Kerry, Meddings, Progress and Webo
EDWARDS SHEET METALWORKING MACHINERY, GUYSON SAND BLAST CABINET
TRENKJAEGER COLD SAW, VIRAX 604 PIPE THREADER, CHAIN HOISTS
SEYMOUR 2000LB VERTICAL PLASTICS INJECTION MOULDING MACHINE
AEW ELECTRIC MUFFLE FURNACES, SPRAY BOOTHS, AVERY WEIGHING MACHINES
BTH 330 KVA DIESEL GENERATOR, BROOMWADE V500 AIR COMPRESSOR
PERMUTIT CTP WATER TREATMENT PLANT, DEXION SPEEDLOCK PALLET RACKING
SAFES, AIR CONDITIONER, KITCHEN EQUIPMENT & EXTENSIVE RANGE OF OFFICE FURNITURE
ROVER 3.5 AND JAGUAR 3.4 AUTOMATIC SALOON CARS
FORD GRANADA 2.3L AND CITROEN CX2000 & GLS PALLAS SALOON CARS
FORD CORTINA 1.6 & 2.0 GLESTATE CARS
FORD 2817 ARTIC UNITS, D1311 RIGID AND TRANSIT COMMERCIAL VEHICLES
ELECTRIC & LPG FORK LIFT TRUCKS & PALLET CONVEYORS by BT Rolatrac, Coventry Climax, Lansing Bagnall, Linde and Montgomerie Reid

ON VIEW: Monday 22 to Friday 26 June, 1981; Monday 29 June and mornings of sale.
Catalogues, when ready, from the Agents:

**Weatherall
Green & Smith**
Chartered Surveyors

22 Chancery Lane, London WC2A 1LT
01-405 6944. Telex 22446

29 King Street, Leeds LS1 2HP
(0532) 442066 Telex 557544

Auctioneers and Valuers of Industrial Property, Plant and Machinery

London Leeds Paris Frankfurt Munich New York

TO MANUFACTURERS, WHOLESALERS & BULK BUYERS ONLY

Large quantities of Radio, I.V. and Electronic Components.
RESISTORS CARBON & C/F 1/8, 1/4, 1/2, 1 Watt from 1 ohm to 10 meg.
RESISTORS WIREWOUND. 1 1/2, 2, 3, 5, 10, 14, 25 Watt.
CAPACITORS. Silver mica, Polystyrene, Polyester, Disc Ceramics, Metalamite, C280, etc.
Convergence Pots, Slider Pots, Electrolytic condensers, Can Types, Axial, Radial, etc.
Transformers, chokes, hopts, tuners, speakers, cables, screened wires, connecting wires, screws, nuts, transistors, ICs, Diodes, etc., etc.
All at Knockout prices. Come and pay us a visit. Telephone 445 2713. 445 0749.

BROADFIELDS & MAYCO DISPOSALS
21 Lodge Lane, N. Finchley, London, N.12. 5 mins. from Tally Ho Corner (9461).

THE ART OF ELECTRONICS

by Horowitz & Hill
Price £13.50

THE PPL SYNTHESIZER COOK-BOOK, by H. Kinley Price: £5.25
THE MC6809 COOKBOOK, by C. D. Warren Price: £5.00
DIGITAL ICS... HOW THEY WORK AND HOW TO USE THEM, by A. W. Barber Price: £5.75
ELECTRONIC DESIGN WITH OFF THE SHELF INTEGRATED CIRCUITS, by Z. H. Meiksin Price: £6.25

EXPERIMENTER'S GUIDE TO SOLID STATE ELECTRONICS PROJECTS, by A. W. Barber Price: £5.50
COMPLETE GUIDE TO READING SCHEMATIC DIAGRAMS, by J. Douglas-Young Price: £5.50
PRACTICAL SOLID STATE CIRCUIT DESIGN, by J. E. Oleksy Price: £6.50
WORLD RADIO/T.V. HANDBOOK, by J. M. Frost Price: £10.50
1981 THE RADIO AMATEUR'S HANDBOOK, by A.R.R.L. Price: £8.00

ALL PRICES INCLUDE POSTAGE

THE MODERN BOOK CO.
Specialist in Scientific & Technical Books
19-21 PRAED STREET
LONDON W2 1NP
Phone 402-9176
Closed Sat. 1 p.m. (8974)

SHADED POLE MOTORS for immediate disposal, complete plant and cooling capable of producing over 5,000 shaded pole motors per week, 2 pole and 4 pole. Tel: 053181 273. (1177)

TEKTRONIX OSCILLOSCOPES in tip-top condition. 545A DC-15MHz £120, 545B DC-33MHz £180, D/trace amplifiers, CA £60, LA2 £120. Supplied calibrated with full handbooks. Prices inclusive. Carriage extra. Bournemouth (0202) 472376/291481. (1157)

FR DX-400 AMATEUR BAND RECEIVER. 160m to 2m including CB and 4m. AM, FM, SSB with matching speaker, mint condition. £135. — Telephone Swanley (Kent) 63968. (1087)

ENCAPSULATING, coils, transformers, components, degassing, silicone rubber, resin, epoxy. Lost wax casting for brass, bronze, silver, etc. Impregnating coils, transformers, components. Vacuum equipment low cost, used and new. Also for CRT regunning metallising. Research & Development. Barratts, Mayo Road, Croydon, CRO 2QP. 01-684 9917. (9678)

BUGGED? UNDER SURVEILLANCE?

THE BUGGING GAME
is a unique, previously restricted book describing modern counter-surveillance and eavesdropping techniques. A virtual encyclopedia of "hidden knowledge" it tells ALL YOU NEED TO KNOW about professional and secret service methods! PART 1 - TELEPHONE SYSTEMS. PART 2 - RADIO & MICROPHONE SYSTEMS. PART 3 - ELECTRONIC SURVEILLANCE & COUNTERMEASURES. 300 pages of unobtainable information! DON'T WAIT!... this book could easily disappear from the market. Price £9 per set plus £1 p. & p. CYBERSAC INTERNATIONAL, 35 Dell Farm Road, Ruislip, Middlesex HA4 7TX. Tel. (085-56) 73265. (1034)

TIME WRONG?

MSF CLOCK IS ALWAYS CORRECT - never gains or loses, SELF-SETTING at switch-on, 8 digits show date, hours, minutes and seconds, can expand to years, months and milliseconds, auto GMT/BST and leap year, also parallel BCD and audio outputs, receives Rugby 60KHz atomic time signals, built-in antenna, 1000Km range, ABSOLUTE TIME, £54.80.
V.L.F. 7 10-150KHz Receiver £13.70.
60KHz RUGBY RECEIVER, as in MSF Clock, serial data output, £15.70.
Each fun-to-build kit includes all parts, printed circuit, case, postage, etc. money back assurance so GET yours NOW.

CAMBRIDGE KITS
45 (WU) Old School Lane
Milton, Cambridge (1156)

SURPLUS STOCK

Omron Relays, Crouzet Timing Motors, Crouzet Micro Switches, Bulgin Lep and Panel Lampholders, Transformers -

For details please write to or phone:
Mr. P. Givens
c/o R. G. MITCHELL LTD.
HEATH ROAD, SKEGNESS, Lincs.
TEL: 0754 67373 (1184)

Belling & Lee L3000 Screened Room, dimensions 24ft. x 16ft. x 12ft. Air conditioned with double door and four shielded fluorescent lights complete with 8 x 60 amp filters and flooring, £1,000. Re-erection can be arranged. Contact: R. A. UPTON, F.C.A., 325 Clifton Drive South, Lytham St. Annes, Lancashire FY8 1HN. (1178)

HAVE YOU SEEN THE GREEN LIST?

1000s of components (radio, audio, CB and electronic) and electronic items and accessories at unbelievably low prices, something for everyone. Send 25p for list and receive FREE RECORD SPEED INDICATOR.

MYERS (Dept. W.W.)
14-16 Clifton Grove, Harehills, Leeds 9 (1167)

500 MHz SCOPE £100. HP185 sampling scope, dual beam with high-z probes, circuit diagrams, etc. Tel: Bracknell 59435 (evenings). (1159)

RACAL COMMUNICATIONS RECEIVERS. 500kc/s 30mc/s in 30 bands 1MHz wide. RA17 £1.50, RA17L £200. Or a few as new £250. RA17E £300, all air tested, supplied with full manual, dust covers, in fair condition, new metal louvered case for sets £25. RA98A SSB-USB adaptors, new and boxed with manual £75. RA98D used with manual, £75. RA218 SSB-USB adaptors and fine tune units for RA117 £85.

MARCONI SIGNAL GENERATOR TF801D/1 TO 85 £85 to £150.

MARCONI R.F. RADIATION & POWER METER. OA1430 (CT477), as new, in grey metal case with full manual, power meter FX range, 10mc/s to 10gc/s, complete with X-S-L band aerials, £50.

FERROGRAPH TAPE RECORDERS SERIES 4-5-6 and 7 - Mono and stereo. Series 4 to £6 £10 to £20 ea. Series 7 £100 to £200 ea. Collected.

EXTEL TRANSEL MATRIX PRINTERS. 5 level Baudot Code. Accepts speeds up to 300 bauds. Supplied set to 50 and 75 bauds switched. Tested with manual, £165.

All items are bought direct from H.M. Government, being surplus eqpt. Price is ex-work. S.A.E. all enquiries. Phone for appointment for demonstration of any item. **JOHNS RADIO, WHITEHALL WORKS, 84 WHITEHALL ROAD, BIRKENSHAW, BRADFORD. TEL. BRADFORD 684007 (9.30 a.m.-1 p.m.).** (848)

THE SCIENTIFIC WIRE COMPANY

P.O. Box 30, London, E.4

ENAMELLED COPPER WIRE			
SWG	1b.	2oz.	2oz.
8 to 29	2.75	1.50	80
30 to 34	3.20	1.80	90
35 to 40	3.40	2.00	1.10
41 to 43	4.75	2.60	1.42
47	8.37	5.32	3.19
48 to 49	15.96	9.58	6.38
SILVER PLATED COPPER WIRE			
14 to 30	6.50	3.75	2.20
TINNED COPPER WIRE			
14 to 30	3.38	2.36	1.34

Prices include P&P, VAT and Wire Data SAE for list. Dealer enquiries welcome. Reg Office: 22 Comingshy Gardens. (9063)

INVERTERS

High quality DC-AC. Also "no break" (2ms) static switch, 19" rack. Auto Charger.



COMPUTER POWER SYSTEMS
Interport Mains-Store Ltd.
POB 51, London W11 3BZ
Tel: 01-727 7042 or 0225 310916 (9101)

LAB CLEARANCE: Signal Generators: Bridges: Waveform. transistor analysers: calibrators: standards: millivoltmeters; dvna-meters: KW meters: oscilloscopes: recorders; Thermal, sweep. low distortion true RMS. audio FR. deviation. Tel. 040-378238. (8250)

LAB TEST EQUIPMENT Clearance. Environmental oven, Digivision VDU, remote recording thermometer, related instruments and accessories, channel analyser transducer and thermocouple indicators. View at Melksham Court, Stinchcombe, Dursley, Glos. 0453 46446. (1161)

IBM MT 72 WORD PROCESSORS. Incorporating a golf ball I/O typewriter and magnetic tape cassette memory module. Stop code search and edit functions, margin control, £375 plus VAT. Other ex-word processor printers available. Autotype. Tel: Haywards Heath (0444) 414484. (1176)

OSCILLOSCOPES, signal generators, DVMS, analysers, etc. for sale. Real savings on new cost. Cash also paid for good test equipment. Tel: Hertford 50427. (1158)

TEKTRONIX 465 oscilloscope, mint condition, calibrated, other test equipment. — Phone 0582-425721.

WIRELESS WORLD 1949 to 1979 inclusive, good condition, offers. Phone Stevenage (Herts) 2171. (1160)

Quartz Crystal Units
ACCURATE RELIABLE
Private enquiries, send 13p in stamps for brochure
THE QUARTZ CRYSTAL CO. LTD.
Q.C.C. WORKS, WELLINGTON CRESCENT,
NEW MALDEN, SURREY. 01-942 6334 & 2983.

TELETEXT, TV SPARES & TEST EQUIPMENT, TELETEXT. Latest external unit kit incl. Texas XM11 Decoder 6101VML and infra-red remote control £248, p/p £2.80 (further details on request). Also MK1 external unit kit incl. Texas XM11 decoder, special offer price £168 p/p £2.80. Both kits incl. UHF modulator, and plug into TV set aerial socket. **SPECIAL OFFER TEXAS XM11 Decoder**, new and tested, limited quantity at 1/2 price, £60 p/p £1.40. Stab. power supply (5v) for Teletext decoders, £5.80, p/p £1. Thorn design XM11 interface unit, £1.80, p/p 80p. **NEW SAW FILTER IF AMP PLUS TUNER** (complete & tested for sound & vision), £28.50, p/p £1. **COLOUR BAR & CROSS HATCH GENERATOR KIT (MK4) PAL**, UHF aerial input type, 3 vertical colour bars, R-Y, B-Y, grey scale, etc. P/B controls £35. Batt holders £1.50 or stab. mains power supply kit £4.80. De-luxe case £5.20 or alum. case £2.90, p/p £1.40. Built & tested in De-luxe case (battery) £58 (mains) £70, p/p £1.60. **CROSS HATCH KIT UHF** aerial input type also gives peak white & black levels, batt. op. £11, p/p 45p. Add-on **GREY SCALE KIT** £2.90, p/p 35p. De-luxe case £5.20. **UHF SIGNAL STRENGTH METER KIT** £17.50. Alum. case £1.80. De-luxe case £5.20, p/p £1.40. **CRT TEST & REACTIVATOR KIT** for colour & mono £24.40, p/p £1.80. **COLOUR PANELS**, large selection of tested panels for popular makes (part-ex in shop). **TV SOUND IF TRANSD.** Tested, £6.80, p/p 85p. **BUSH SURPLUS IF PANELS** A816 £1.80, TV312 (single I.C.) £5. Z718/BC6100 £5. A823 (Exp) £2.80, p/p 85p. **BUSH 161 series TB panel** A634 £2.80, p/p £1.20. **GEC Series 1 mono panels**, £1.80, p/p £1.30. **GEC 2040 CDA panel** £4.50, p/p £1.20. **PHILIPS G6 S/S conv. panel** £2.50, p/p £1.20. **G8 Decoder panels** for spares £1.80, p/p £1.20. **G9 Signal panels** for small spares £3.80, p/p £1.20. **THORN 3500 Line TB panel** £5, p/p £1. 3000 ex-rental panels IF, VIDEO, DECODER, £5, p/p £1.20. 8000/8500/9000 Decoders Salvaged £7.50, p/p £1.60, 9000 Line TB (incl. LOPT) sal/v/spares £7.50, p/p £1.60. **VARICAP UHF TUNERS**, Mullard U321 £6.80, ELC1043/06 £6.80, ELC1043/05 £5.50, G.I. £3.50. **Salv. (asstd)** £1.50, p/p 60p. **Varicap UHF/VHF ELC2000S** £8.50. **Bush (dual)** £7.50, p/p 70p. **TOUCH TUNE CONTROL** units, Bush (6 pos) £4.50, p/p 80p. **VARICAP CONTROL UNITS** 3 pos. £1.20, 4 pos. £1.50, 5 pos. £1.80, 6 pos. £1.80, 8 pos. special offer £1, p/p 45p. **UHF transd.** Tuners (rotary) incl. s/m drive £2.50, 4 pos. P/B £2.50, 6 pos. P/B £4.20, p/p £1.20. (Special types available, details on request). **DL50** Delay Line £2.50, p/p 50p. Large selection of LOPTS, Triplers, Scancells, Mains Droppers, and other spares for popular makes of colour and mono receivers. **PLEASE ADD 15% VAT TO ALL PRICES** — MANOR SUPPLIES, 172 WEST END LANE, WEST HAMPSHIRE, LONDON, N.W.6. SHOP PREMISES. Tel. 01-794 8751, 794 7346. Easily accessible W. Hampstead Jubilee Tube & Brit. Rail N. London (Richmond-Broad St.) and St. Pancras-Bedford. Buses 28, 159, 2, 13. Callers welcome. Thousands of additional items not normally advertised available at shop premises. Open daily all week incl. Saturday (Thursday half day). **MAIL ORDER: 64 GLEDERS MANOR DRIVE, LONDON NW11 9HT. PLEASE ADD 15% VAT to all prices.** (60)

SAFGAN presents **DT-400** series from **£169 + VAT**
HIGH-QUALITY DUAL TRACE OSCILLOSCOPES
A BRITISH PRODUCT EVERYONE CAN AFFORD

Model DT-410 DUAL TRACE 5mv/div 10MHz @ **£169 + VAT**
 Model DT-412 DUAL TRACE 5mv/div 12MHz @ **£175 + VAT**
 Model DT-415 DUAL TRACE 5mv/div 15MHz @ **£188 + VAT**

SPECIFICATION FOR ALL MODELS

- * CH1, CH2: 5mv/div — 20v/div in 12 col 1-2-5 — steps. Input impedance 1MΩ + 22pF
- * BANDWIDTH: 10MHz (DT-410), 12MHz (DT-412), 15MHz (DT-415)
- * TIME BASE: 0.5μs/div—200ms/div in 18 cal steps X5 Expansion to 100 ns/div X5 Multiplier to 15/div
- * XY FACILITY: Matched Inputs X = CH1, Y = CH2
- * TRIGGER: Level Control, ± Slope, Bright Line AUTO, NORMAL, TV Triggering CH1, CH2 0.5 div, EXT Trig 100mv
- * Z Modulation
- * Cal output/probe compensation.
- * Graticule blue ruled 8 × 10 div (6.4 × 8cm²)
- * SIZE: H215mm W165mm D280mm Weight 4.5 kg. PROBE (X1-REF-X10) **£11.50 + V.A.T.**

Orders to: **SAFGAN ELECTRONICS LTD.** (Goods + 15% + £3.50 P&P). Or £6.50 parcel service
56 Bishop's Wood, St. John's, Woking, Surrey, GU21 3QB Tel: Woking 89560 or Woking 66836
 London Stockist: Audio Electronics, Edgware Road, London. Tel. 01-724 3564

DT-400 Series

WW - 050 FOR FURTHER DETAILS

INDEX TO ADVERTISERS JULY

Appointments Vacant Advertisements appear on page 119-127

PAGE	PAGE	PAGE
Ambit International 22, 23	Galatrec International 24	Pascal Electronics Ltd. 102
Amplivox Ltd. 109	Global Specialties Corporation 27	PBRA Ltd. 106
Analogue Associates 56	G P Industrial Electronics Ltd. 18, 102	PM Components Ltd. 95
Anglia Components 112	Guide to Broadcasting Stations 118	Powertran Electronics 85
Antex Electronics Cover iii	Hall Electric Ltd. 2	Practical Computing 107
ASA Ltd. 112	Happy Memories 100	P&R Computershop 101
Audio Electronics 16	Harris Electronics (London) Ltd. 22	Racal Recorders Cover ii
Avel Lindberg Ltd. 106	Harrison Brothers 96	Radio Component Specialists 103
Bach-Simpson (U.K.) Ltd. 116	Hart Electronic Kits Ltd. 98	Ralfe, PF Electronics 115
Bamber, B. Electronics 90	Hasbrook Trading 110	Reprints 102
Barrie Electronics Ltd. 105	Henry's Radio 92, 96, 109	RST Valve 91
Bayliss, A.D. and Sons Ltd. 107	Horst F.G. Angermann 87	Safgan Electronics Ltd. 128
B D S Microsystem Designs Ltd. 68	HiFi Yearbook 1981 116	Sagin, M. R. 104
Brewster, S&R Ltd. 26	ILP Electronics Ltd. 88, 89	Sandwell Plant Ltd. 98
Carston Electronics Ltd. 21	ILP Transformers Ltd. 101	Scopex Instruments 113
Catronics Ltd. 96	IMO 13	Service Trading Co. Ltd. 104
Chiltern Electronics 107	Interface Quartz Devices Ltd. 11	Shure Electronics Ltd. 28
Chilmead Ltd. 97	Intergrex Ltd. 10	Siemens Ltd. 68, 69
CIL Electronics Ltd. 20, 92	Irvine Business Systems 69	Sinclair Research Ltd. 14, 15
Clark Masts Ltd. 17	Keithley Instruments Ltd. 19	Sonimag 19 20
Clef Products (Electronics) Ltd. 101	Kelsey Acoustics Ltd. 106	Southern Electronics 96
Colomor Electronics Ltd. 92	Langrex Supplies Ltd. 91	Sowler, E. A. Ltd. 94
Crotech Instruments Ltd. 112	Levell Electronics Ltd. 3	Special Products Distributors Ltd. 94
Crimson Elektrik 87	Maplin Electronic Supplies Ltd. 25	Strumech 86
CT Electronics (Acton) Ltd. 111, 117	Marshall, A. (London) Ltd. 20	Strutt Ltd. 68, 109, 116
Darom Supplies 90	MCP Electronics 23	Surrey Electronics 98
Danavox (Gt. Britain) 108	Micro Times 105	Technomatic Ltd. 99
Digi-Tel Electronics 94	Midwich Computer Co. Ltd. 17	Television 86
Disk Offer 69	Mills, W. 96	Teloman Products Ltd. Cover iv
Display Electronics 93	Milward, G.F. Electronic Components Ltd. 86	Tempus 110
Dutchgate Ltd. 110	MTL Microtesting Ltd. 20	Thurby Electronics Ltd. 106
Electronic Brokers 4, 5, 6, 7, 9, 11	Newbear 104	Titan Transformers 12
Electronic Equipment Co. 107	Northern Electronics 22	Valradio Ltd. 90
Electro-Tech Components Ltd. 100	OK Machine and Tool UK Ltd. 12	West Hyde Development Corp. 9
Electrovalue Ltd. 87	OMB Electronics 11	West London Direct Supplies 86
Electricity Supply Hand Book 1981 115	Orion Scientific Products Ltd. 22, 68	Wilmslow Audio 8
Electrical Review Shock Charts 114	Japan: Mr. Inatsuki, Trade Media - IBPA (Japan), B.212, Azabu Heights, 1-5-10 Roppongi, Minato-ku, Tokyo 106. Telephone: (03) 585 0581.	Zaerix Electronics Ltd. 24
Faircrest Engineering Ltd. 92	United States of America: Ray Barnes, IPC Business Press, 205 East 42nd Street, New York, NY 10017 - Telephone: (212) 867-2080, Telex: 238327.	
Farnell Instruments Ltd. 55, Reader Card	Mr Jack Farley Jr., The Farley Co., Suite 1584, 35 East Walker Drive, Chicago, Illinois 60601 - Telephone: (312) 63074.	
Fyde Electronic Laboratories Ltd. 100	Mr Victor A. Jauch, Elmatex International, P.O. Box 34607, Los Angeles, Calif. 90034, USA - Telephone (213) 821-8581 - Telex: 18-1059.	
	Mr Jack Mentel, The Farley Co., Suite 650, Ranna Building, Cleveland, Ohio 44115 - Telephone: (216) 621 1919.	
	Mr Ray Rickles, Ray Rickles & Co., P.O. Box 2028, Miami Beach, Florida 33140 - Telephone (305) 532 7301.	
	Mr Tim Parks, Ray Rickles & Co., 3116 Maple Drive N.E., Atlanta, Georgia 30305. Telephone: (404) 237 7432.	
	Mike Loughlin, IPC Business Press, 15055, Memorial Ste 119, Houston, Texas 77079 - Telephone (713) 783 8673.	
	Canada: Mr Colin H. MacCulloch, International Advertising Consultants Ltd., 915 Carlton Tower, 2 Carlton Street, Toronto 2 - Telephone (416) 364 2269.	
	* Also subscription agents.	

OVERSEAS ADVERTISEMENT AGENTS:
 France & Belgium: Norbert Hellin, 50 Rue de Chemin Veat, F-9100, Boulogne, Paris.
 Hungary: Mrs Edit, Bajusz, Hungexpo Advertising Agency, Budapest XIV, Varosliget.
 Telephone: 225 008 - Telex: Budapest 22-4525 INTFOIRE
 Italy: Sig C. Epis, Etas-Kompass, S.p.a. - Servizio Estero, Via Mantegna 6, 20154 Milan.
 Telephone: 347051 - Telex: 37342 Kompass.

Printed in Great Britain by QB Ltd., Sheepen Place, Colchester, and Published by the Proprietors IPC ELECTRICAL-ELECTRONIC PRESS LTD., Quadrant House, The Quadrant, Sutton, Surrey SM25AS, telephone 01-661 3500. *Wireless World* can be obtained abroad from the following: AUSTRALIA and NEW ZEALAND: Gordon & Gotch Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service Ltd, Gordon & Gotch Ltd. SOUTH AFRICA: Central News Agency Ltd: William Dawson & Sons (S.A.) Ltd. UNITED STATES: Eastern News Distribution Inc., 14th floor, 111 Eighth Avenue, New York, N.Y. 10011.

Plugin* for Fingertip Control!

take the heat out of a delicate situation.

Ready to use Antex new model XS-BP soldering iron comes with a fitted plug, ready to switch on.

The new handle in extra-tough material features a detachable finger-guide for precise control in operation and a hexagonal moulding to prevent the iron rolling on the work bench.

We have retained our well-proven heating element. Efficiency of heat transfer and ease of fitting slide-on, slide-off bits make this the professional's choice of soldering instrument. The iron is also available for 115, 50, 24 or 12 volt.

* fitted with the NEW safety plug.

Send now!



ANTEX (ELECTRONICS) LIMITED

MAYFLOWER HOUSE, ARMADA WAY, PLYMOUTH, DEVON TELEPHONE 0752 667377 · TELEX 45296

Please send the ANTEX New Range full colour brochure to: NAME _____

ADDRESS _____

WW-002 FOR FURTHER DETAILS

WW7

PROFESSIONAL TOOLCASES for Service Engineers

£43.70
inc. VAT

£39.90
inc. VAT

Size TL100 19" x 14" x 6"



The TL99 and TL100 are designed for the Professional Electronics, TV or Instrument Technician who needs to carry a large number of specialist tools. Constructed from hard wearing ABS with strong aluminium frames, twin handles and toggle locks. They offer a moulded tray in the base, a comprehensive 2 sided tool pallet that's reversible with space for up to 40 tools. — The TL100 will take quite a few more. There's space for documents and a heat sink for a hot soldering iron to prevent any damage being caused.

Size TL99 17" x 12" x 6"

TLW4 Toolwallet measures 11" x 14" x 2½" when closed. Made from reinforced PVC with a heavy duty industrial zip. The TLW4 Toolwallet is a compact alternative when only tools are needed to be carried.

£13.75
inc. VAT

Mail Order

Please send

Enclosed my cheque **£** .
(P&P £2.60 extra)

Name

Company

Address

Tools NOT included. British made.
Money back guarantee. Allow 7-21 days for delivery.



TLW4

Teloman Products Ltd
Ermine House, Post St, Godmanchester, Cambs. PE 18 8BA (0480) 65534