




# POWER GRID TUBES

QUICK REFERENCE CATALOG  
EIMAC division of varian

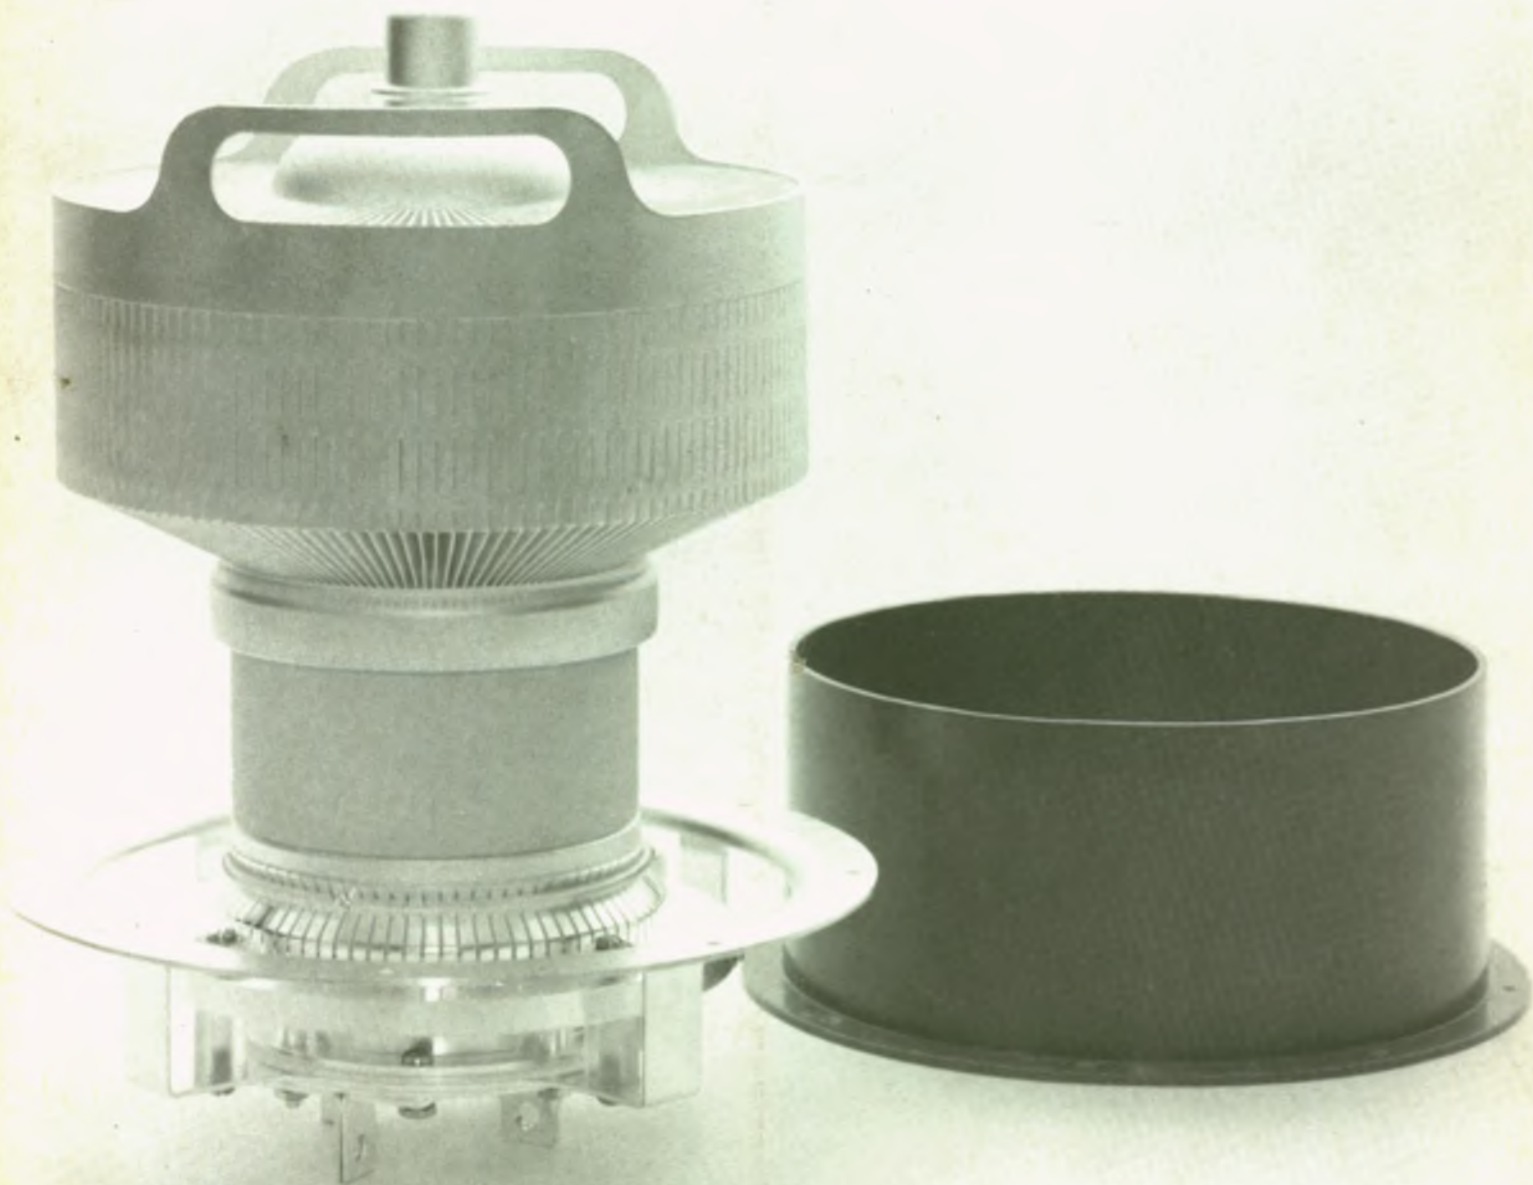

Contents	Page
Eimac Facilities . . . . .	1
Eimac Tube Numbering System . . . . .	6
Eimac Replacement Tubes . . . . .	7
Diodes . . . . .	7
2-01C . . . . .	7 322 7
Triodes . . . . .	8
UHF	
2C39A . . . . .	8 7289/3CX100A5 9 8533 10
2C39WA . . . . .	8 8250/3CX100F5 9 8745 10
7211 . . . . .	8 7B15R/3CPX100A5 9 8755 11
7B15/3CPN10A5 . . . . .	8 7855 10 8756 11
7698 . . . . .	9 8403 10 8757 11
INTERNAL ANODE	
254W . . . . .	11 6580 12 3-500Z 13
5867A . . . . .	12 8163/3-400Z 12 8164/3-1000Z 13
6569 . . . . .	12
EXTERNAL ANODE, FORCED AIR COOLED	
8283/3CX1000A7 . . . . .	13 8162/3CX3000F7 15 8160/3CX10,000A7 16
8161/3CX2500A3 . . . . .	13 3CX5000A3 15 3CX15,000A3 17
8251/3CX2500F3 . . . . .	14 3CX5000H3 15 3CX15,000H3 17
3CX2500H3 . . . . .	14 8158/3CX10,000A1 16 3CX20,000A3 17
8238/3CX3000A1 . . . . .	14 8159/3CX10,000A3 16 3CX20,000H3 17
8239/3CX3000F1 . . . . .	14 3CX10,000H3 16 6697A 18
3CX3000A7 . . . . .	15
EXTERNAL ANODE, WATER COOLED	
8240/3CW5000A1 . . . . .	18 3CW10,000A3 19 3CW20,000H3 20
8241/3CW5000F1 . . . . .	18 3CW10,000H3 19 3CW25,000A3 21
8242/3CW5000A3 . . . . .	18 3CW20,000A1 20 3CW30,000H3 21
8243/3CW5000F3 . . . . .	19 3CW20,000A3 20 3CW40,000H3 21
3CW5000H3 . . . . .	19 3CW20,000A7 20 6696A 21
EXTERNAL ANODE, VAPOR COOLED	
3CV30,000A1 . . . . .	22 3CV30,000H3 22 7480 22
3CV30,000A3 . . . . .	22
Tetrodes . . . . .	23
INTERNAL ANODE	
8165/4-65A . . . . .	23 5D22/4-250A 23 7527 24
4D21/4-125A . . . . .	23 6156 24 6775 24
6155 . . . . .	23 8438/4-400A 24 8166/4-1000A 25
EXTERNAL ANODE, CONDUCTION COOLED	
4CN15A . . . . .	25 8560A 25 4CS250HA 26
7843 . . . . .	25 4CS250H 26
EXTERNAL ANODE, FORCED AIR COOLED	
4CX125C . . . . .	26 7609 28 8168/4CX1000A 31
4CX125F . . . . .	26 8245/4CX250K 28 8352/4CX1000K 31
6816 . . . . .	26 8246/4CX250M 28 4CX1500A 31
6884 . . . . .	26 4CPX250K 29 8660/4CX1500B 31
7034/4X150A . . . . .	27 8167/4CX300A 29 8169/4CX3000A 32
7035/4X150D . . . . .	27 4CX300Y 29 8170/4CX5000A 32
8172/4X150G . . . . .	27 8072 29 4CX5000J 32
8296/4X150R . . . . .	27 8121 30 8170W/4CX5000R 32
8297/4X150S . . . . .	27 8122 30 8171/4CX10,000D 33
7203/4CX250B . . . . .	27 8321/4CX350A 30 8281/4CX15,000A 33
7204/4CX250F . . . . .	27 8322/4CX350F 30 4CX15,000J 33
8621/4CX250FG . . . . .	28 4CX600B/F 30 8349/4CX35,000C 33
7580W/4CX250R . . . . .	28 4CX600J 30 4X500A 34
EXTERNAL ANODE, WATER COOLED	
4CW800B . . . . .	34 4CW25,000A 35 4CW250,000A 36
4CW800F . . . . .	34 4CW50,000E 35 4CW250,000V 36
8244/4CW2000A . . . . .	34 4CW100,000D 35 8249/4W300B 36
4CW10,000A . . . . .	34 4CW100,000E 35 8173/4W20,000A 36
EXTERNAL ANODE, VAPOR COOLED	
4CV1500B . . . . .	36 4CV50,000E 37 4CV100,000E 38
4CV8000A . . . . .	37 4CV75,000A 38 4CV250,000A 38
4CV20,000A . . . . .	37 8351/4CV100,000C 38 4CV250,000V 38
4CV35,000A . . . . .	37
Pentodes . . . . .	39
4E27A/5-125B . . . . .	39 8295/172 40 5CX3000A 41
175A . . . . .	39 8295A 40 8576/264 41
177WA . . . . .	39 8432 40 290 41
5-500A . . . . .	39 5CX1500A 40
Pulse Modulators . . . . .	42
6C21 . . . . .	42 8247/4PR125A 42 8189/4PR1000A 43
8252/4PR60B . . . . .	42 8248/4PR250C 43 8189/4PR1000B 43
8252W/4PR60C . . . . .	42 8188/4PR400A 43 284 43
8187/4PR65A . . . . .	42
Sockets and Accessories . . . . .	44
Vapor Phase Cooling . . . . .	47
Heat Dissipating Connectors . . . . .	48
Preformed Contact Finger Stock . . . . .	48
Vacuum Switches . . . . .	48
Data Request Cards . . . . .	49
Sales Office Listing . . . . .	50



## **EIMAC division of Varian POWER GRID TUBES**

EIMAC Division of Varian manufactures a complete line of vacuum tubes and accessories, including rectifiers, triodes, tetrodes, pentodes, pulse modulators, and associated equipment.

When Eitel-McCullough, Inc., merged with Varian Associates in 1965, the brand significance of the widely-known EIMAC symbol was retained, and EIMAC now operates as a division of Varian's Electron Tube and Device Group. EIMAC employs over 800 persons at the division's main plant in San Carlos, California, and another 350 at a recently-expanded factory in Salt Lake City, Utah.

Major production activity at the San Carlos plant covers the manufacture of ceramic / metal triodes, tetrodes and pentodes; glass and ceramic envelope tubes and a wide line of planar triodes are major production items at the Salt Lake City plant.

These two factories, among the most modern electronic tube production facilities in the country, have

all manufacturing areas designed on a "flow" system for maximum efficiency. Clean rooms for critical assembly work are ventilated with filtered and pressurized air, for maximum tube yield and reliability. Giant EIMAC-developed rotary vacuum pumps are in operation to produce high vacuums in thousands of tubes per day. Facilities for fabricating and processing ceramic materials include some of the most modern equipment available. Extensive environmental test equipment is also available for checking tube performance under unusual conditions of shock, vibration, humidity, and high altitude.

Quality assurance procedures are very rigid, and include both operator surveillance, batch sampling, and statistical controls.

The division's tube development and circuit techniques laboratories are especially designed for production of experimental tube types and for modification of existing designs to meet special customer requirements.

Applications and marketing services are available from division headquarters in San Carlos, or from any of the 16 Varian Electron Tube and Device Group field offices throughout the country.




1. Hand-winding grid for 4CX250B—San Carlos
2. Sealing tube structure on glass lathe—Salt Lake City
3. Metallizing ceramic blanks in hydrogen furnace—San Carlos
4. Nitrogen atmosphere welder—San Carlos







5. Carburizing 4-400A filaments—Salt Lake City
6. Aging racks—San Carlos
7. Measuring tube linearity—San Carlos
8. Rotary exhaust furnaces—San Carlos
9. Curve plotter in development laboratory—San Carlos

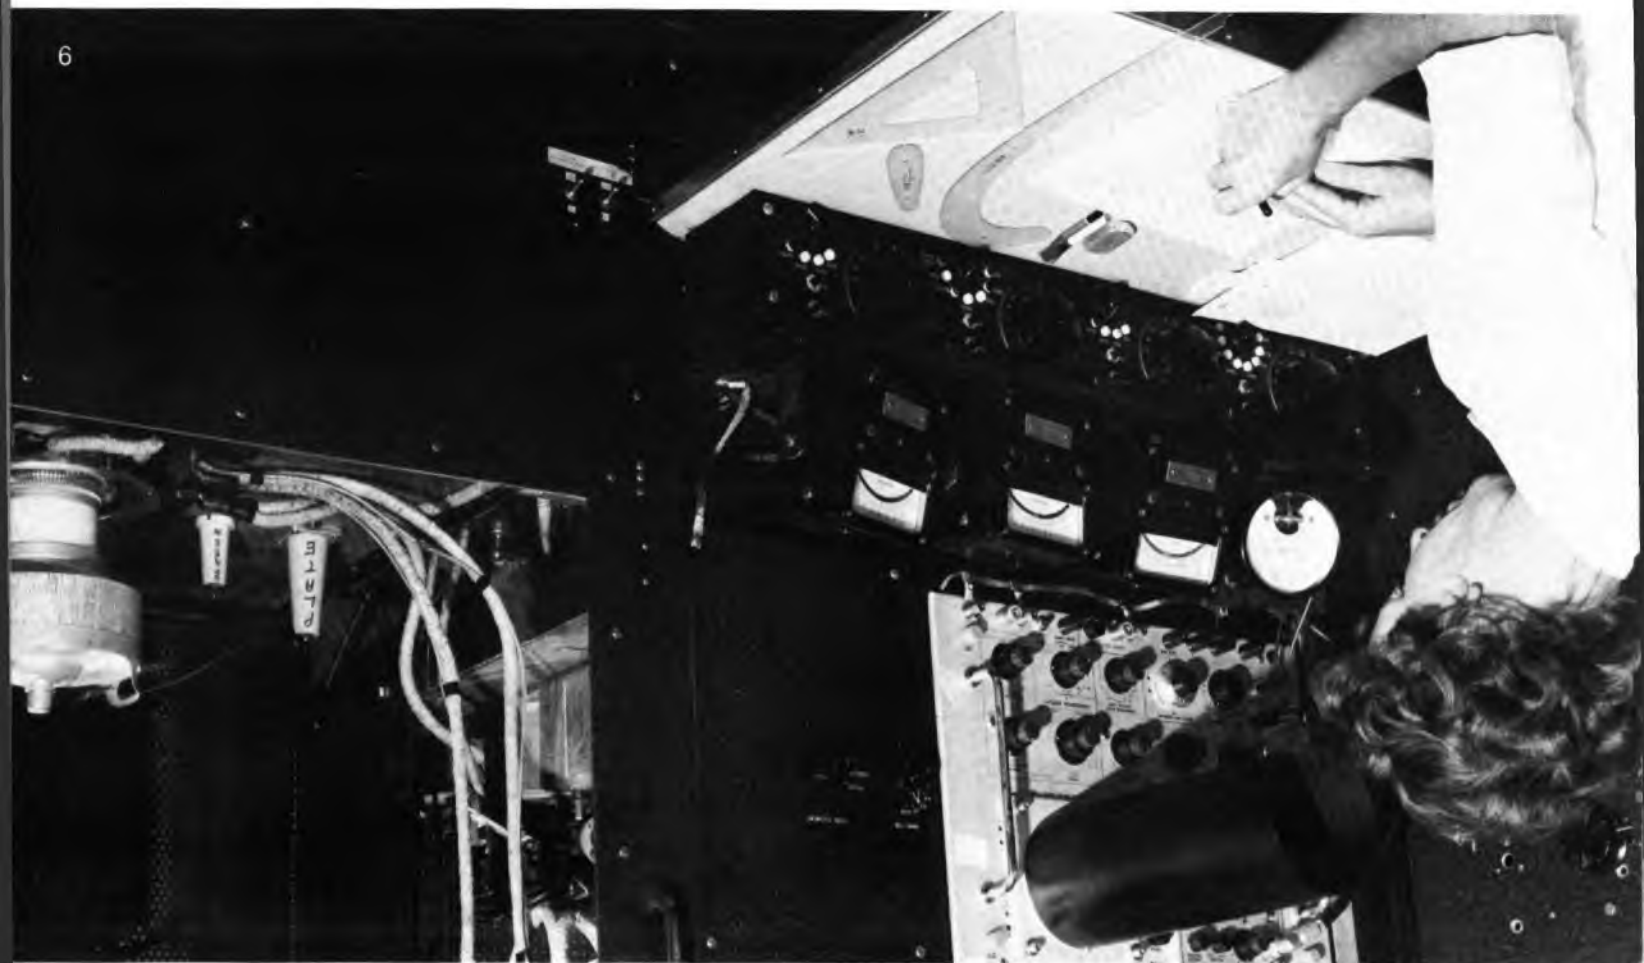






10. Aerial view of development and manufacturing plant in San Carlos, California; over 150,000 square feet. The EIMAC Salt Lake City facility occupies another 100,000 square feet.

## Eimac Power Grid Tube Numbering System

Since 1945 all new tube types developed by Eimac have been given a type number chosen according to a coded number system. This system is designed to convey descriptive information about the tube.

In general, the type numbers consist of: a numeral indicating the number of electrodes, one or more letters denoting special characteristics, a numeral representing the plate dissipation, and a final letter to distinguish the tube from others bearing similar preceding letters and numerals. Triode types carry an additional number to indicate their approximate amplification factor.

To illustrate the method of coding and the information the type number conveys, a 100-watt, ceramic, external-anode, forced-air cooled Eimac triode, type number 3CX100A5, is broken down as follows:

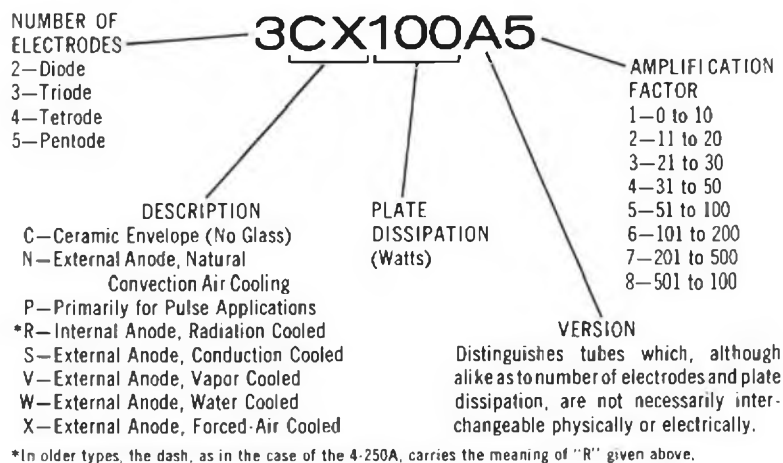



This group of Eimac Power Grid Tubes are recommended for direct replacement only, and not for new equipment design.

### DIODES AND RECTIFIERS

#### INTERNAL ANODE

2-25A	253
2-50A	2-240A
8020/100R	250R
2-150D	2-2000A

#### EXTERNAL ANODE

2X1000A	2X3000F
---------	---------

#### MERCURY VAPOR

RX21A	KY21A
-------	-------

### TRIODES

#### INTERNAL ANODE

25T	3-200A3
35T	250TH
35TG	250TL
826	304TH
75TH	304TL
75TL	450TH
100TH	450TL
100TL	750TL
152TH	1000T
152TL	1500T
592	2000T

The following Eimac Power Grid Tubes are current for new equipment design.

## DIODES



### 2-01C

A general purpose UHF instrument diode capable of maintaining an accuracy of  $\pm 1$  db to 700 megacycles. This diode is well suited to probe mounting and is useful as an indicator at frequencies as high as 3000 megacycles. The 2-01C is cooled by convection and radiation.

#### MAXIMUM RATINGS

PEAK INVERSE	1000 volts
D-C CURRENT	0.001 ampere
PLATE DISSIPATION	0.1 watt

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	
Heater:	
Voltage	5.0 volts
Current	0.31 to 0.39 ampere
Max. Seal Temp.	175 °C
Length	1.813 inches
Diameter	0.563 inches
Net Weight	0.2 ounce



### 322

The 322 is a ceramic and metal diode. This tube is widely used in T-R networks and as a demodulator in VHF omni range equipment.

#### MAXIMUM RATINGS

PEAK INVERSE	800 volts
PLATE CURRENT	0.125 amperes
PLATE DISSIPATION	100 watts

#### CHARACTERISTICS

Cathode: Oxide coated, unipotential	
Heater:	
Voltage	6.3 volts
Current	0.9 to 1.0 amperes
Capacitance (Cpk)	3.1 to 3.8 pf
Base	Coaxial
Socket	Special
Max. Seal Temp.	250 °C
Max. Anode-Core Temp.	250 °C
Length	2.75 inches
Diameter	1.265 inches
Net Weight	2.5 ounces

# TRIODES

UHF



## 2C39A

The 2C39A is a ceramic-metal high- $\mu$  planar triode with a plate dissipation rating of 100 watts, designed for use as a power amplifier, oscillator, or frequency multiplier at frequencies to above 2500 MHz.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Forced Air

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential			Base Socket		Coaxial Special
Heater: Voltage 6.3 volts			Maximum Seal Temp.		250 °C
Current 0.95 to 1.10 amperes			Maximum Anode Core Temp.		250 °C
Capacitances: Grid-Cathode 5.60 to 7.60 pf			Maximum Height		2.75 inches
Grid-Plate 1.86 to 2.16 pf			Maximum Diameter		1.27 inches
Plate-Cathode 0.035 pf			Net Weight		2.5 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier	1000	0.125	100	2.0	800	0.08	6.0	27
C	Plate-Modulated Radio-Frequency Amplifier or Oscillator	600	0.10	70	2.0	600	0.065	5.0	16
C	Radio-Frequency Oscillator	800	0.125	100	2.0	900	0.09	—	12



## 2C39WA

The 2C39WA is essentially the same as the 2C39A planar triode. It is recommended for replacement in equipment calling for this type.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Forced Air

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential			Base Socket		Coaxial Special
Heater: Voltage 6.3 volts			Maximum Seal Temp.		250 °C
Current 0.95 to 1.10 amperes			Maximum Anode Core Temp.		250 °C
Capacitances: Grid-Cathode 5.60 to 7.60 pf			Maximum Height		2.75 inches
Grid-Plate 1.86 to 2.16 pf			Maximum Diameter		1.27 inches
Plate-Cathode 0.035 pf			Net Weight		2.5 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier	1000	0.125	100	2.0	800	0.08	6.0	27
C	Plate-Modulated Radio-Frequency Amplifier or Oscillator	600	0.10	70	2.0	600	0.065	5.0	16
C	Radio-Frequency Oscillator 2500 MHz	800	0.125	100	2.0	900	0.09	—	12



## 7211

A planar triode featuring one third more cathode current than the 3CX100A5. The 7211 is of all ceramic-metal construction. The plate-grid ceramic is longer than the 3CX100A5 making the tube more useful in pulse service or high altitude environments. Power output of 30 watts is available at 2500 MHz.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Forced Air

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential			Base		Coaxial
Heater: Voltage 6.3 volts			Maximum Seal Temp.		250 °C
Current 1.3 amperes			Maximum Anode Core Temp.		250 °C
Capacitances: Grid-Cathode 8.0 pf			Maximum Height		2.75 inches
Grid-Plate 2.25 pf			Maximum Diameter		1.27 inches
Plate-Cathode 0.06 pf			Net Weight		2.5 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier 500 MHz	2500	0.19	100	2	900	0.14	9	65
C	Radio-Frequency Power Amplifier 2500 MHz	2500	0.19	100	2	900	0.14	—	30



## 7815/3CPN10A5

This ceramic and metal, UHF, planar triode is designed primarily for use in low-duty pulse applications. It is capable of delivering 1600 watts pulse output power at 3000 MHz at a duty of 0.0025.

The electrical characteristics of the 3CPN10A5 are similar to those of the 3CX100A5. The nominal plate dissipation rating of 10 watts may be exceeded if sufficient additional cooling is provided to maintain the anode and seal temperatures below the specified limits.

**PLATE DISSIPATION** 10 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 3000 MHz  
**COOLING** Conduction or Forced Air

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential			Base		Coaxial
Heater: Voltage 6.0 volts			Maximum Seal Temp.		250 °C
Current 0.90 to 1.05 amperes			Maximum Anode Temp.		250 °C
Capacitances: Grid-Cathode 5.60 to 7.00 pf			Maximum Height		2.70 inches
Grid-Plate 1.86 to 2.15 pf			Maximum Diameter		1.195 inches
Plate-Cathode 0.035 pf			Net Weight		1.6 ounces

Class of Operation	Type of Service	Maximum Pulse Ratings				Typical Pulse Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Duty	Output Power (watts)
C	Plate-Pulsed Power Oscillator—3000 MHz	3500	3.0	10	2	3500	3.0	0.0025	1600
C	Grid Pulsed Amplifier—1100 MHz	2500	3.0	10	2	2200	1.9	0.001	2000

# TRIODES

UHF



## 7698

A ceramic-metal pulse planar triode usable to 3000 MHz. As a grid-pulsed amplifier at 1100 MHz or a plate pulsed amplifier at 3000 MHz, 2500 watts of power output is attainable. Cooling is by convection and conduction to a suitable heat sink.

**PLATE DISSIPATION** 10 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 3000 MHz  
**COOLING** Conduction and Convection

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential		Base	Coaxial
Heater:		Maximum Seal Temp.	250 °C
Voltage	6.3 volts	Maximum Anode Core Temp.	250 °C
Current	1.3 amperes	Maximum Height	2.276 inches
Capacitances:		Maximum Diameter	1.195 inches
Grid-Cathode	8.0 pf	Net Weight	1.6 ounces
Grid-Plate	2.25 pf		
Plate-Cathode	0.06 pf		

Class of Operation	Type of Service	Maximum Pulse Ratings				Typical Pulse Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Duty	Output Power (watts)
C	Plate-Pulsed Power Oscillator—3000 MHz	3500	5.0	10	2	3500	4.8	0.0025	2500
C	Grid-Pulsed Amplifier—1100 MHz	2000	5.0	10	2	2000	3.0	0.001	2500



## 7289/3CX100A5

The 3CX100A5 ceramic and metal planar UHF triode is intended to supersede all tubes in the 2C39A family. Narrow mechanical tolerances plus exacting electrical testing assure tube-to-tube uniformity. The tube unilaterally replaces 2C39A's and other associated tube types in most equipments without requiring electrical or mechanical modification.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Forced Air

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential		Base	Coaxial
Heater:		Maximum Seal Temp.	250 °C
Voltage	6.0 volts	Maximum Anode-Core Temp.	250 °C
Current	0.90 to 1.05 amperes	Maximum Height	2.701 inches
Capacitances:		Maximum Diameter	1.264 inches
Grid-Cathode	5.6 to 7.0 pf	Net Weight	2.5 ounces
Grid-Plate	1.95 to 2.15 pf		
Plate-Cathode	0.035 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator—500 MHz	1000	0.125	100	2	900	0.090	6	40
C	Radio-Frequency Power Amplifier or Oscillator—2500 MHz	1000	0.125	100	2	900	0.090	—	17
C	Plate-Modulated Radio-Frequency Power Amplifier or Oscillator—500 MHz	600	0.100	70	2	600	0.065	5	16



## 8250/3CX100F5

The 3CX100F5 ceramic and metal planar UHF triode features narrow mechanical tolerances plus exacting electrical testing assures tube-to-tube uniformity.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Forced Air

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential		Base	Coaxial
Heater:		Maximum Seal Temp.	250 °C
Voltage	26.5 volts	Maximum Anode-Core Temp.	250 °C
Current	0.2 to 0.24 amperes	Maximum Height	2.701 inches
Capacitances:		Maximum Diameter	1.264 inches
Grid-Cathode	5.6 to 7.0 pf	Net Weight	2.5 ounces
Grid-Plate	1.95 to 2.15 pf		
Plate-Cathode	0.035 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator—500 MHz	1000	0.125	100	2	900	0.090	6	40
C	Radio-Frequency Power Amplifier or Oscillator—2500 MHz	1000	0.125	100	2	900	0.090	—	17
C	Plate-Modulated Radio-Frequency Power Amplifier or Oscillator—500 MHz	600	0.100	70	2	600	0.065	5	16



## 7815R/3CPX100A5

A ceramic-metal UHF planar triode intended for pulse and high altitude applications. It is similar to the popular 3CX100A5 but features a longer grid-anode ceramic insulator with a higher voltage breakdown rating. The pulse ratings are applicable to 70,000 feet altitude making the 3CPX100A5 especially suitable for airborne applications.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 3000 MHz  
**COOLING** Forced Air

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential		Base	Coaxial
Heater:		Maximum Seal Temp.	250 °C
Voltage	6.0 volts	Maximum Anode-Core Temp.	250 °C
Current	0.90 to 1.05 amperes	Maximum Height	2.701 inches
Capacitances:		Maximum Diameter	1.264 inches
Grid-Cathode	5.6 to 7.0 pf	Net Weight	2.5 ounces
Grid-Plate	1.86 to 2.15 pf		
Plate-Cathode	0.035 pf		

Class of Operation	Type of Service	Maximum Pulse Ratings				Typical Pulse Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Duty	Output Power (watts)
C	Plate-Pulsed Power Oscillator—3000 MHz	3,500	3.0	100	2	3,500	3.0	0.0025	1,600
C	Grid Pulsed Amplifier—1100 MHz	2,000	3.0	100	2	1,700	1.9	0.01	1,500

# TRIODES

UHF



## 7855

The 7855 is a ruggedized, high- $\mu$  planar triode of ceramic-metal construction, designed for use as a grid-pulsed, plate-pulsed, or CW oscillator, frequency multiplier, or amplifier in radio transmitting service from low frequency to 3 GHz. In addition to low interelectrode capacitance, high transconductance and high  $\mu$ , this tube incorporates design features which help to assure frequency-stable operation.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Coaxial
Heater:	Socket	Special
Voltage 6.0 volts	Maximum Seal Temp.	250 °C
Current 1.0 amperes	Maximum Anode Core Temp.	250 °C
Capacitances:	Maximum Height	2.386 inches
Grid-Cathode 6.3 pf	Maximum Diameter	1.264 inches
Grid-Plate 2.5 pf	Net Weight	2.5 ounces
Plate-Cathode 0.06 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Telegraphy RF Power Amplifier and 500 MHz Oscillator	2500	0.100	100	2.0	900	0.09	6.0	40
C	Plate-Pulsed RF Amplifier and 2500 MHz Oscillator	3500	3.0	35	1.5	3500	3.0	—	2000
C	Grid-Pulsed RF Oscillator and 1100 MHz Amplifier	2500	3.0	20	1.5	1700	1.9	400*	1500

\*During Pulse



## 8403

The 8403 is a ruggedized, high- $\mu$  planar triode of ceramic-metal construction, designed for use as a grid-pulsed, plate-pulsed or CW oscillator, frequency multiplier or amplifier from low-frequency to 3 GHz. A distinguishing characteristic of this tube is its high cathode-current capability. In addition to low interelectrode capacitance, high transconductance and high  $\mu$ , this tube incorporates design features which help to assure frequency-stable operation.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 3 GHz  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Coaxial
Heater:	Socket	Special
Voltage 6.3 volts	Maximum Anode Temp.	250 °C
Current 1.3 amperes	Maximum Height	2.386 inches
Capacitances:	Maximum Diameter	1.195 inches
Grid-Cathode 8.0 pf	Net Weight	2.5 ounces
Grid-Plate 3.1 pf		
Plate-Cathode .065 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier and Oscillator	2500	0.150	100	2.0	900	0.140	9.0	65
C	Grid-Pulsed RF Oscillator and Amplifier	2500	5.0 pk	33	2.0	2000	4.0	—	1000pk



## 8533

The 8533 is a high- $\mu$  planar triode designed for use as a grid-pulsed or plate-pulsed oscillator, frequency multiplier, power amplifier or as a switch tube at high plate voltages. Noteworthy differences in this tube as compared to similar types are an extended grid-cathode insulator and a special cathode design, permitting operation with up to 8000 Vdc plate voltage.

**PLATE DISSIPATION** 100 watts average  
**FREQUENCY FOR MAXIMUM RATINGS** 3 GHz  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Coaxial
Heater:	Socket	Special
Voltage 6.3 volts	Maximum Envelope Temp.	250 °C
Current 1.3 amperes	Maximum Height	2.701 inches
Capacitances:	Maximum Diameter	1.195 inches
Grid-Cathode 8.0 pf	Net Weight	2.5 ounces
Grid-Plate 1.65 pf		
Plate-Cathode .06 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
—	Pulse Modulator or Pulse Amplifier	8000	5.0 pk	100	1.5	—	—	—	—
C	Grid-Pulsed or Plate-Pulsed RF Oscillator and Amplifier	8000	5.0 pk	100	1.5	—	—	—	—



## 8745

A ceramic-metal UHF planar triode intended for pulse and high altitude applications. It is similar to the popular 3CX100A5 but features a longer grid-anode ceramic insulator with a higher voltage breakdown rating.

The pulse ratings are applicable to 70,000 feet altitude making the 8745 especially suitable for airborne applications.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Coaxial
Heater:	Socket	Special
Voltage 6.0 volts	Maximum Seal Temp.	250 °C
Current 0.90 to 1.05 amperes	Maximum Anode-Core Temp.	250 °C
Capacitances:	Maximum Height	2.701 inches
Grid-Cathode 5.6 to 7.0 pf	Maximum Diameter	1.264 inches
Grid-Plate 1.86 to 2.15 pf	Net Weight	2.5 ounces
Plate-Cathode 0.035 pf		

Class of Operation	Type of Service	Maximum Pulse Ratings				Typical Pulse Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Duty	Output Power (watts)
C	Plate-Pulsed Power Oscillator—3000 MHz	3,500	3.0 pk	100	2	3,500	3.0	0.0025	1,600pk
C	Grid-Pulsed Amplifier—1100 MHz	2,000	3.0 pk	100	2	1,700	1.9	0.01	1,500pk



# TRIODES

## UHF

### 8755



The 8755 is a miniature, frequency-stable planar triode for advanced airborne and space applications up to 3000 MHz at full ratings. The rugged ceramic-metal pulse tube is designed for high-voltage, high-pulse current operation and features large contact areas for improved electrical paths. The tube may be used as an amplifier or an oscillator and employs an arc-resistant cathode.

**PLATE DISSIPATION** 150 watts\*  
**FREQUENCY FOR MAXIMUM RATINGS** 3000 MHz  
**COOLING** Forced Air or Conduction

### CHARACTERISTICS

Cathode: Arc-Resistant Oxide-coated, unipotential		Base	Coaxial
Heater:		Socket	Special
Voltage	6.3 volts	Maximum Seal Temp.	250 °C
Current	1.3 amperes	Maximum Anode Core Temp.	250 °C
Capacitances:		Maximum Height	1.47 inches
Grid-Cathode	9.3 pf	Maximum Diameter	0.83 inches
Grid-Plate	1.25 pf	Net Weight	0.67 ounces
Plate-Cathode	0.06 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Grid Pulsed Oscillator or Amplifier	8000	5.0**	150*	1.5	5000	5.0	1850	7000**
C	Pulse Plate Oscillator or Amplifier	10,000	5.0**	150*	1.5	—	—	—	—
—	Pulse Modulator or Amplifier	8000	5.0**	150*	1.5	—	—	—	—

\*\* peak

\*With suitable cooler

### 8756



The 8756 is a miniature frequency-stable planar triode for pulse applications up to 2500 MHz at full ratings. The tube is designed for high pulse current operation.

**PLATE DISSIPATION** 100 watts (average)  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Conduction or Forced Air

### CHARACTERISTICS

Cathode: Oxide coated, unipotential		Base	Coaxial
Heater:		Socket	Special
Voltage	6.0 volts	Maximum Seal Temp.	250 °C
Current	0.7 amperes	Maximum Anode Core Temp.	250 °C
Capacitances:		Maximum Height	1.54 inches
Grid-Cathode	7.0 pf	Maximum Diameter	0.83 inches
Grid-Plate	1.6 pf	Net Weight	0.67 ounces
Plate-Cathode	0.04 pf		

Class of Operation	Type of Service	Plate Voltage (volts)	Cathode Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator	2500	0.125	150*	1.5	1250	0.50	3.0	60
C	Grid Pulsed Oscillator or Amplifier	2500	3.0**	150*	1.5	2500	2.0	350	2000pk

\*With suitable cooler

\*\*Pulse Plate Current

### 8757



The 8757 is a miniature, ceramic and metal planar triode designed primarily for CW amplifier and oscillator application. This tube will also perform well as a grid or a plate-pulsed amplifier or oscillator at frequencies up to at least 3000 MHz.

**PLATE DISSIPATION** 150 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 MHz  
**COOLING** Conduction or Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential			Base	Coaxial
Heater:			Socket	Special
Voltage	6.3 volts		Maximum Seal Temp.	250 °C
Current	1.3 amperes		Maximum Anode Core Temp.	250 °C
Capacitances:			Maximum Height	1.35 inches
Grid-Cathode	9.5 pf		Maximum Diameter	0.83 inches
Grid-Plate	2.25 pf		Net Weight	0.67 ounces
Plate-Cathode	0.06 pf			

Class of Operation	Type of Service	Plate Voltage (volts)	Cathode Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator (2500 MHz)	2500	0.225	150*	1.5	1400	0.215	4.0	100
C	Grid Pulse RF Amplifier or Oscillator	2500	5.0**	150*	1.5	2500	3.0	450	1960

\*With suitable cooler

\*\*Pulse Plate Current

## INTERNAL ANODE

### 254W



The 254W is a radiation-cooled tube suitable for use as an RF power amplifier, frequency multiplier or oscillator, and as an AF power amplifier and modulator. The tube is widely used in base-station communications equipment and is exceptionally efficient in VHF operation.

**PLATE DISSIPATION** 100 watts  
**COOLING** Radiation

### CHARACTERISTICS

Filament: Thoriated tungsten		Base	Jumbo 4-pin JETEC A4-29
Voltage	5.0 volts	Socket	Johnson 123-211
Current	7.5 amperes	Maximum Height	7.13 inches
Capacitances:		Maximum Diameter	2.69 inches
Grid-Filament	3.4 pf	Net Weight	6 ounces
Grid-Plate	2.5 pf		
Plate-Filament	0.43 pf		

Class of Operation	Type of Service	Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Current (amps)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier	4000	0.225	100	0.06	3000	0.165	18	400
C	Telephony	3000	0.180	85	0.06	2500	0.168	23	335

# TRIODES

## INTERNAL ANODE

### 5867A



A new medium-mu triode, the 5867A is capable of over one kilowatt input to 100 Mc. It is useful as a Class AB amplifier, Class C amplifier or industrial oscillator. The plate dissipation rating is 375 watts.

**PLATE DISSIPATION** 350 watts  
**GRID DISSIPATION** 20 watts  
**COOLING** Radiation and Forced Air

Filament: Thoriated tungsten  
Voltage 5.0 volts  
Current 14.1 amperes  
Capacitances:  
Grid-Filament 7.2 pf  
Grid-Plate 5.6 pf  
Plate-Filament 0.5 pf

Base Socket  
Maximum Base Seal Temp. 180 °C  
Maximum Anode Seal Temp. 220 °C  
Maximum Height 5.875 inches  
Maximum Diameter 3.438 inches  
Net Weight 6 ounces

5-pin  
Eimac SK-410

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier or Oscillator	4000	0.400	350	30	3000	0.365	27	840
C	Oscillator, Industrial Application, Single Phase, Full Wave Rectifier, Unfiltered	3800	0.360	350	30	2750	0.340	—	685
C	Oscillator, Industrial Application, Self-Rectified	4500	0.210	350	30	3000	0.180	—	415

### 6569



The 6569 is a high-mu power triode designed especially for grounded-grid RF amplifier service, but is also capable of good performance in other applications. Because of its high amplification factor and high perveance, the 6569 will give power gains as high as ten in grounded-grid amplifier applications. Because of internal shielding, neutralization is not required.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 60 MHz  
**COOLING** Forced Air

Filament: Thoriated tungsten  
Voltage 5.0 volts  
Current 14.5 amperes  
Capacitances:  
Grid-Filament 7.6 pf  
Grid-Plate 3.7 pf  
Plate-Filament 0.10 pf

Base Socket  
Maximum Plate Cap Temp. 170 °C  
Maximum Height 6.38 inches  
Maximum Diameter 3.56 inches  
Net Weight 8 ounces

5-pin Metal Shell  
Johnson 122-275

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Current (amps)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier Grounded Grid	4000	0.300	250	0.12	3500	0.285	85	805
B	Linear RF Amplifier, SSB, Suppressed Carrier, Grounded Grid	4000	0.300	250	0.12	3500	0.270	75	760

### 6580



The 6580 is a 400-watt high-mu power triode designed especially for grounded-grid RF amplifier service, but is also capable of good performance in other applications. Because of its high amplification factor and high perveance, the 6580 will provide power gains as high as ten in grounded-grid amplifier applications. Because of internal shielding, neutralization is not required.

**PLATE DISSIPATION** 400 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 60 MHz  
**COOLING** Forced Air

Filament: Thoriated tungsten  
Voltage 5.0 volts  
Current 14.5 amperes  
Capacitances:  
Grid-Filament 7.6 pf  
Grid-Plate 3.9 pf  
Plate-Filament 0.10 pf

Base Socket  
Maximum Plate Cap Temp. 170 °C  
Maximum Height 6.38 inches  
Maximum Diameter 3.56 inches  
Net Weight 8 ounces

5-pin Metal Shell  
Johnson 122-275

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Current (amps)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier Grounded Grid	4000	0.350	400	0.12	3000	0.350	87	745
B	Linear RF Amplifier, SSB, Suppressed Carrier, Grounded Grid	4000	0.350	400	0.12	3500	0.300	68	765

### 8163/3-400Z



The Eimac 3-400Z is a new zero-bias triode intended for linear amplifier applications. This tube may be used as a Class B R-F amplifier in either the grid-driven or cathode-driven connection, or two 3-400Z's may be used in push-pull as a grid-driven Class B audio amplifier or modulator. At a plate voltage of 3000 volts 1KW PEP input can be run with a single 3-400Z, providing a power gain of over 20 in the cathode-driven connection.

**MAXIMUM PLATE DISSIPATION** 400 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Radiation and Forced Air

Filament: Thoriated tungsten  
Voltage 5.0 volts  
Current 13.5 to 14.7 amperes  
Capacitances (Grounded Filament):  
Grid-Filament 6.0 to 9.0 pf  
Grid-Plate 4.0 to 5.3 pf  
Plate-Filament 0.11 pf

Base Socket  
Maximum Base Temp. 200 °C  
Maximum Plate Seal Temp. 225 °C  
Maximum Height 5.25 inches  
Maximum Diameter 3.57 inches  
Net Weight 7 ounces

5-pin, Special  
Eimac SK-410

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	3000	0.400	400	20	3000	0.666*	26	1310*
B	Radio-Frequency Linear Power Amplifier—SSB Grounded-Grid	3000	0.400	400	20	3000	0.333	32	655
C	Radio-Frequency Power Amplifier and Oscillator	4000	0.350	400	20	3000	0.333	25	730
C	Plate-Modulated R-F Power Amplifier	3000	0.275	270	20	3000	0.245	18	550

\*Two tubes.

# TRIODES

## INTERNAL ANODE

### 3-500Z



The 3-500Z is a compact power triode intended for use as a zero-bias Class B amplifier in audio or radio-frequency applications. Operation with zero grid bias simplifies associated circuitry by eliminating the bias supply. In addition, grounded-grid operation is attractive because a power gain as high as twenty times can be obtained with the 3-500Z in a cathode-driven circuit.

**PLATE DISSIPATION** 500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	5.0 volts	Base	5-pin Special
Voltage	14.5 amperes	Socket	Special
Current		Maximum Seal Temp.	Plate 225 °C
Capacitances:			Base 200 °C
Grid-Filament	7.4 pf	Maximum Height	5.875 inches
Grid-Plate	4.1 pf	Maximum Diameter	3.438 inches
Plate-Filament	0.07 pf	Net Weight	7 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	RF Linear Amplifier, Grounded Grid	4000	0.400	500	20	3000	0.370	30	750
B	AF Amplifier or Modulator	4000	0.400	500	20	3000*	0.770	25	1420*
C	RF Power Amplifier or Oscillator	4000	0.350	500	20	3500	0.300	22	850
C	RF Power Amplifier Plate Modulated	3000	0.275	320	20	3000	0.275	25	640

\*Two tubes

### 8164 / 3-1000Z



The Eimac 3-1000Z is a zero-bias triode intended for linear amplifier applications. This tube may be used as a class-B R-F amplifier in either the grid-driven or cathode-driven connection, or two 3-1000Z's may be used in push-pull as a grid-driven class-B audio amplifier or modulator. At a plate voltage of 3000 volts, 2KW PEP input can be run with a single 3-1000Z, providing a power gain of over 20 in the cathode driven connection.

**MAXIMUM PLATE DISSIPATION** 1000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base	5-pin, Special
Voltage	21.3 amperes	Socket	Eimac SK-510
Current		Maximum Base Temp.	200 °C
Capacitances (Grounded Filament):		Maximum Plate Seal Temp.	225 °C
Grid-Filament	17.0 pf	Maximum Height	7.88 inches
Grid-Plate	6.9 pf	Maximum Diameter	5.25 inches
Plate-Filament	0.12 pf	Net Weight	1.2 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	3000	0.800	1000	50	3000	1.340*	42	2570*
B	Radio-Frequency Linear Power Amplifier—SSB Grounded-Grid	3000	0.800	1000	50	3000	0.670	65	1360
C	Radio-Frequency Power Amplifier and Oscillator	6000	0.700	1000	50	6000	0.700	57	3300
C	Plate-Modulated R-F Power Amplifier	4500	0.550	670	50	4500	0.500	35	1765

\*Two tubes

## EXTERNAL ANODE ■ FORCED-AIR COOLED

### 8283 / 3CX1000A7



The 3CX1000A7 zero-bias triode features ceramic-metal construction and a mesh thoriated-tungsten filament. Positive socketing is provided by three breechblock terminal surfaces. This tube is intended for class-B linear amplifier service in either the grid-driven or cathode-driven connection. It is equally attractive for use at audio frequencies or at radio frequencies through the TV broadcast bands. It is recommended for use in new equipment.

**PLATE DISSIPATION** 1000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 220 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated Tungsten Mesh	5.0 volts	Base	Special, breechblock
Voltage	34 amperes	Socket	Eimac SK-860 or SK-870
Current		Maximum Seal Temp.	250 °C
Capacitances (In Shielded Fixture):		Maximum Anode Core Temp.	250 °C
Grid-Filament	35 pf	Maximum Height	4.68 inches
Grid-Plate	14 pf	Maximum Diameter	3.36 inches
Plate-Filament	0.08 pf	Net Weight	2.0 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Radio-Frequency Linear Power Amplifier, Grounded-Grid—SSB	2500	1.0	1000	45	2500	0.800	65	1250

### 8161/3CX2500A3



This popular high-power triode is widely employed in AM, FM, and TV service. Its coaxial filament and grid terminals insure low-inductance connection to these electrodes and allow operation at maximum ratings through 75 MHz. The use of an external forced-air-cooled anode results in a compact structure with high power-handling capability.

**PLATE DISSIPATION** 2500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base	Coaxial
Voltage	49 to 54 amperes	Socket	
Current		Maximum Seal Temp.	175 °C
Capacitances:		Maximum Anode-Core Temp.	175 °C
Grid-Filament	29.2 to 40.2 pf	Maximum Height	8.594 inches
Grid-Plate	16.8 to 23.2 pf	Maximum Diameter	4.156 inches
Plate-Filament	0.6 to 1.2 pf	Net Weight	6.25 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	6000	2.5	2500	150	6000	3.0*	113*	13,000*
C	Radio-Frequency Power Amplifier, and Oscillator	6000	2.5	2500	150	6000	2.08	136	10,000
C	Radio-Frequency Power Amplifier Grounded-Grid 85 to 110 mc.	4000	2.0	2500	150	4000	1.85	1900	7500
C	Plate-Modulated Radio-Frequency Power Amplifier	5000	2.0	1670	150	5000	1.25	115	5300

\*Two tubes.

# TRIODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED



### 8251/3CX2500F3

This compact, high-power triode has electrical characteristics identical to those of the 3CX2500A3. Coaxial basing is not used, however, and special socketing is not required; conventional grid and filament leads are attached. This tube is frequently employed in industrial-heating or other radio-frequency equipments operating below 30 MHz.

**PLATE DISSIPATION** 2500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Maximum Seal Temp.	175 °C
Voltage	49 to 54 amperes	Maximum Anode Core Temp.	175 °C
Current		Maximum Height	18.0 inches
Capacitances:		Maximum Diameter	3.625 inches
Grid-Filament	29.2 to 40.2 pf	Net Weight	7.5 pounds
Grid-Plate	16.8 to 23.2 pf		
Plate-Filament	0.6 to 1.2 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	6000	2.5	2500	150	6000	3.0*	113*	13,000*
C	Radio-Frequency Power Amplifier and Oscillator	6000	2.5	2500	150	6000	2.08	136	10,000
C	Plate Modulated Radio-Frequency Power Amplifier	5000	2.0	1670	150	5000	1.25	115	5300

\*Two tubes.



### 3CX2500H3

The 3CX2500H3 is an air-cooled ceramic metal power triode designed primarily for use in industrial radio-frequency heating services. Its air-cooled anode is conservatively rated at 2500 watts of plate dissipation with low air flow and pressure drop. The tube's grid structure is rated at 150 watts making it an excellent choice for severe applications.

**PLATE DISSIPATION** 2500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base Socket	Special
Voltage	53 amperes (max)	Maximum Seal Temp.	250 °C
Current		Maximum Height	18.437 inches
Capacitances:		Maximum Diameter	4.156 inches
Grid-Filament	40.2 pf (max)	Net Weight	6.5 pounds
Grid-Plate	23.2 pf (max)		
Plate-Filament	1.2 pf (max)		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	6000	2.5	2500	150	6000	2.08	136	10,000



### 8238/3CX3000A1

This high-power compact triode was specifically designed to be used in class-AB<sub>1</sub> audio-amplifier service. Two tubes will typically deliver 10,000 watts output in such service. The 3CX3000A1 uses coaxial electrode terminals and may be installed or removed with a minimum of delay.

**PLATE DISSIPATION** 3000 watts  
**GRID DISSIPATION** 50 watts  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base	Coaxial
Voltage	49 to 54 amperes	Maximum Seal Temp.	175 °C
Current		Maximum Anode-Core Temp.	175 °C
Capacitances:		Maximum Height	8.594 inches
Grid-Filament	29 pf	Maximum Diameter	4.156 inches
Grid-Plate	17 pf	Net Weight	6.25 pounds
Plate-Filament	2.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	3000	—	6000	2.65*	0	10,000*

\*Two tubes.



### 8239/3CX3000F1

This low mu high power triode is electrically identical to the 3CX3000A1. Physically, however, coaxial terminals have been replaced by heavy leads and a special socket is not needed. Typically, 10,000 watts audio may be obtained from two tubes in a class-AB<sub>1</sub> amplifier.

**PLATE DISSIPATION** 3000 watts  
**GRID DISSIPATION** 50 watts  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Maximum Seal Temp.	175 °C
Voltage	49 to 54 amperes	Maximum Anode-Core Temp.	175 °C
Current		Maximum Diameter	4.156 inches
Capacitances:		Net Weight	7.5 pounds
Grid-Filament	29 pf		
Grid-Plate	17 pf		
Plate-Filament	2.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	3000	—	6000	2.65*	0	10,000*

\*Two tubes.



# TRIODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED



### 3CX3000A7

The Eimac 3CX3000A7 is a zero bias triode intended for class-B linear amplifier applications. Operation with zero grid bias offers circuit simplicity by eliminating the bias supply. In addition, grounded-grid operation is attractive since a power gain of over twenty times can be obtained with the 3CX3000A7 in the cathode-driven connection. Because of its very high  $\mu$  (200), this tube is also attractive for certain pulse modulator and voltage regulator applications.

**PLATE DISSIPATION** 3000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten		Maximum Seal Temp	175 °C
Voltage	7.5 volts	Maximum Anode Core Temp	175 °C
Current	51 amperes	Maximum Height	8.594 inches
Capacitances:		Maximum Diameter	4.156 inches
Grid-Filament	38 pf	Net Weight	7.5 pounds
Grid-Plate	24 pf		
Plate-Filament	0.6 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier or Modulator	5000	2.5	3000	225	4000	4.0*	120	11,000*
B	Radio-Frequency Linear Power Amplifier, Grounded-Grid—SSB	5000	2.5	3000	225	5000	1.56	215	5500
B	Radio-Frequency Linear Power Amplifier, Carrier Conditions	5000	2.5	3000	225	4000	0.815	15	1100

\*Two tubes



### 8162/3CX3000F7

This tube is identical to the 3CX3000A7 except for the addition of heavy grid and filament leads to simplify socketing problems. A pair of these tubes as audio amplifiers will deliver over 10 kilowatts output power.

**PLATE DISSIPATION** 3000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten		Maximum Seal Temp	175 °C
Voltage	7.5 volts	Maximum Anode Core Temp	175 °C
Current	51 amperes	Maximum Height	8.594 inches
Capacitances:		Maximum Diameter	4.156 inches
Grid-Filament	38 pf	Net Weight	7.5 pounds
Grid-Plate	24 pf		
Plate-Filament	0.6 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier or Modulator	5000	2.5	3000	225	4000	4.0*	120	11,000*
B	Radio-Frequency Linear Power Amplifier, Grounded-Grid—SSB	5000	2.5	3000	225	5000	1.56	215	5500
B	Radio-Frequency Linear Power Amplifier, Carrier Conditions	5000	2.5	3000	225	4000	0.815	15	1100

\*Two tubes.



### 3CX5000A3

The 3CX5000A3 is a medium- $\mu$  triode designed primarily for use in industrial radio-frequency heating service. A socket is not required because a grid contact flange is provided for bolting the tube directly to the grid deck.

**PLATE DISSIPATION** 5000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten		Base Socket	Special
Voltage	7.5 volts	Maximum Seal Temp	250 °C
Current	78 amperes	Maximum Height	8.750 inches
Capacitances:		Maximum Diameter	6.4 inches
Grid-Filament	53 pf	Net Weight	10 pounds
Grid-Plate	2.5 pf		
Plate-Filament	1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	10,000	3.0	5000	0.5	9000	2.53	208	18,600



### 3CX5000H3

The 3CX5000H3 is an air-cooled ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its air-cooled anode is conservatively rated at 5000 watts maximum plate dissipation with low pressure drop. The grid structure is rated at 150 watts making this tube an excellent choice for severe applications.

**PLATE DISSIPATION** 5000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten		Base Socket	Special
Voltage	7.5 volts	Maximum Seal Temp.	250 °C
Current	78 amperes (max)	Maximum Height	17.750 inches
Capacitances:		Maximum Diameter	6.400 inches
Grid-Filament	53 pf	Net Weight	10 pounds
Grid-Plate	25 pf		
Plate-Filament	1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	10,000	3.0	5000	150	9000	2.52	208	18,600

# TRIODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED

### 8158 / 3CX10,000A1



The Eimac 3CX10,000A1 is a ceramic-metal low-mu power triode intended for use as a linear amplifier in audio or RF applications requiring high output power with zero driving power. It features a large thoriated-tungsten filament with ample reserve emission and an integral anode cooler with the inherent ability to withstand large overloads. This tube is particularly well suited for use in audio modulators and vibration testing equipment amplifiers supplying up to 25 KW of output power (two tubes, push-pull).

**PLATE DISSIPATION** 12,000 watts  
**GRID DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 140 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base Socket	Coaxial Eimac SK-1300
Voltage	94.0 to 104.0 amperes	Maximum Seal Temp.	250 °C
Current		Maximum Anode-Core Temp.	250 °C
Capacitances (Grounded Filament):		Maximum Height	8.50 inches
Grid-Filament	45.0 to 57.0 pf	Maximum Diameter	7.00 inches
Grid-Plate	25.0 to 32.0 pf	Net Weight	12 pounds
Plate-Filament	3.4 to 4.2 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier or Modulator	7000	5.0	12,000	100	7000	7.40*	0	29,100*
C	Radio-Frequency Industrial Oscillator	5000	4.0	10,000	100	5000	2.75	—	11,000
A	Voltage Regulator Service	7000	**	12,000	100	0-5000	**	0	—

\*Two tubes. \*\*Up to 5 amperes depending on voltage drop across tube.

### 8159 / 3CX10,000A3



Here is a ceramic-metal medium-mu triode designed for industrial-heating oscillator service. It features a large thoriated-tungsten filament with ample reserve emission and an integral anode cooler with the inherent ability to withstand large overloads. It is intended for use through 140 MHz, also as a grounded-grid FM amplifier developing 20 kilowatts useful output power.

**PLATE DISSIPATION** 12,000 watts  
**GRID DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 140 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base Socket	Coaxial Eimac SK-1300
Voltage	94 to 104 amperes	Maximum Seal Temp.	250 °C
Current		Maximum Anode-Core Temp.	250 °C
Capacitances (Grounded Filament):		Maximum Height	8.50 inches
Grid-Filament	48.0 to 58.0 pf	Maximum Diameter	7.00 inches
Grid-Plate	30.0 to 38.0 pf	Net Weight	12 pounds
Plate-Filament	1.20 to 1.50 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Industrial Oscillator	7000	4.0	10,000	250	7000	4.0	—	22,400
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB, Grounded-Grid	7000	5.0	12,000	250	7000	4.0	2050	20,000
C	Radio-Frequency Power Amplifier, Grounded-Grid	7000	4.0	10,000	250	7000	4.0	4100	24,500
C	Plate-Modulated R-F Power Amplifier	5500	3.0	6500	250	5000	3.0	515	12,400

### 3CX10,000H3



The 3CX10,000H3 is an air-cooled ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its air-cooled anode is conservatively rated at 10,000 watts of plate dissipation. Input of 40,000 watts is permissible up to 90 MHz. Plentiful reserve emission is available from its 750 watt filament. The grid structure is rated at 250 watts.

**PLATE DISSIPATION** 10,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base Socket	Special Special
Voltage	104 amperes (max)	Maximum Seal Temp.	250 °C
Current		Maximum Height	15.8 inches
Capacitances:		Maximum Diameter	7.050 inches
Grid-Filament	58 pf	Net Weight	12 pounds
Grid-Plate	38 pf		
Plate-Filament	1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	10,000	4.0	10,000	250	9000	4.0	570	29,000

### 8160 / 3CX10,000A7



The Eimac 3CX10,000A7 is a ceramic-metal zero-bias triode intended for use in grounded-grid linear amplifiers delivering 20 kilowatts of useful output power. Because of its low intermodulation distortion characteristics the 3CX10,000A7 is particularly well suited for single-sideband amplifiers. Two tubes operating in a push-pull audio amplifier under class B zero-bias conditions will deliver up to 45 kilowatts of useful output power.

**PLATE DISSIPATION** 12,000 watts  
**GRID DISSIPATION** 500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 140 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base Socket	Coaxial Eimac SK-1300
Voltage	94.0 to 104.0 amperes	Maximum Seal Temp.	250 °C
Current		Maximum Anode-Core Temp.	250 °C
Capacitances (Grounded Filament):		Maximum Height	8.5 inches
Grid-Filament	63 pf	Maximum Diameter	7.0 inches
Grid-Plate	41 pf	Net Weight	12 pounds
Plate-Filament	0.05 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier or Modulator	7000	5.0	12,000	500	7000	10.0*	560*	47,700*
B	Radio-Frequency Linear Power Amplifier, Grounded-Grid—SSB	7000	5.0	12,000	500	7000	5.0	1540	24,200
C	Radio-Frequency Power Amplifier or Oscillator	7000	4.0	10,000	500	7000	4.0	430	21,300
C	Plate-Modulated R-F Power Amplifier	5500	3.0	6500	500	5000	3.0	380	11,900

\*Two tubes

# TRIODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED

### 3CX15,000A3



The 3CX15,000A3 is a medium-mu triode designed especially for rf heating service. Six amperes of dc plate current is available from a one kilowatt filament and the grid structure is rated at 500 watts. Adequate forced-air cooling permits 15 kilowatts of plate dissipation. The 3CX15,000A3 is also useful as a linear or plate-modulated rf amplifier.

**PLATE DISSIPATION** 15,000 watts  
**GRID DISSIPATION** 500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 100 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	6.3 volts	Base Socket	Coaxial Eimac SK-1300
Voltage	152 to 168 amperes	Maximum Seal Temp	250°C
Current		Maximum Anode-Core Temp.	250°C
Capacitances (Grounded Filament):		Maximum Height	8.5 inches
Grid-Filament	40.0 to 58.0 pf	Maximum Diameter	7.0 inches
Grid-Plate	30.0 to 38.0 pf	Net Weight	12 pounds
Plate-Filament	1.2 to 1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps.)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps.)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Oscillator or Amplifier	10,000	6.0	15,000	500	10,000	4.3	75	33,000
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier	10,000	6.0	15,000	500	10,000	4.8	2050	33,000
C	Plate Modulated RF Power Amplifier	7000	5.0	10,000	500	7000	5.0	750	27,500



### 3CX15,000H3

The 3CX15,000H3 is an air-cooled ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its air-cooled anode is rated at 15,000 watts of plate dissipation. Plentiful reserve emission is available from its 1000 watt filament. The grid structure is rated at 500 watts making this tube an excellent choice for severe applications.

**PLATE DISSIPATION** 15,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	6.3 volts	Base Socket	Special Eimac SK-1300
Voltage	172 amperes (max)	Maximum Seal Temp	250°C
Current		Maximum Height	17.750 inches
Capacitances:		Maximum Diameter	7.050 inches
Grid-Filament	58 pf	Net Weight	13 pounds
Grid-Plate	38 pf		
Plate-Filament	1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	12,000	6.0	15,000	500	10,000	5.0	650	41,200

### 3CX20,000A3



The 3CX20,000A3 is a ceramic and metal air-cooled power triode intended for use in radio frequency heating, plate-modulated AM transmitters and grounded grid FM transmitter service.

**PLATE DISSIPATION** 20,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	10 volts	Base Socket	Coaxial Eimac SK-1300
Voltage	160 amperes	Maximum Seal Temp.	250°C
Current		Maximum Anode Temp.	250°C
Capacitances (Grounded Cathode):		Maximum Height	10 inches
Grid-Filament	65 to 75 pf	Maximum Diameter	8 inches
Grid-Plate	38.0 to 48.0 pf	Net Weight	19.5 pounds
Plate-Filament	2.0 to 2.6 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier or Oscillator	12,000	9.0	20,000	750	11,000	6.8	1620	60,000
C	Plate-Modulated Radio-Frequency Power Amplifier (Carrier Conditions)	6500	5.5	13,000	750	6500	5.0	1500	25,000
AB	Radio-Frequency Linear Amplifier	12,000	9.0	20,000	750	10,000	6.0	215	40,000



### 3CX20,000H3

The 3CX20,000H3 is a ceramic and metal air-cooled power triode intended for use in radio frequency heating and plate-modulated AM transmitters.

**PLATE DISSIPATION** 20,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	10 volts	Base	Special Eimac SK-1300
Voltage	160 amperes	Maximum Seal Temp.	250°C
Current		Maximum Anode Temp.	250°C
Capacitances (Grounded Cathode):		Maximum Height	10 inches
Grid-Filament	65 to 75 pf	Maximum Diameter	8 inches
Grid-Plate	38.0 to 48.0 pf	Net Weight	21 pounds
Plate-Filament	2.0 to 2.6 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier or Oscillator	12,000	9.0	20,000	750	11,000	6.8	1620	60,000
C	Plate-Modulated Radio-Frequency Power Amplifier (Carrier Conditions)	6500	5.5	13,000	750	6500	5.0	1500	25,000
AB	Radio-Frequency Linear Amplifier	12,000	9.0	20,000	750	10,000	6.0	215	40,000

# TRIODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED



### 6697A

This popular triode finds wide use in industrial and broadcast equipment. The 6697A is all ceramic-metal construction for increased tube reliability. The anode is constructed of copper disk fins; forced-air cooling is required for rated plate dissipation of 35 kilowatts.

PLATE DISSIPATION 35,000 watts  
GRID DISSIPATION 750 watts  
FREQUENCY FOR MAXIMUM RATINGS 30 MHz  
COOLING Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	13 volts	205 amperes	Maximum Seal Temp. 250°C	Coaxial 250°C
Voltage	76 pf		Maximum Anode-Core Temp. 250°C	19.75 inches
Current	55 pf		Maximum Height	5.3 inches
Capacitances (Grounded Filament):	2.7 pf		Maximum Diameter	45 pounds
Grid-Filament			Net Weight	
Grid-Plate				
Plate-Filament				

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier or Modulator	16,000	11.0	35,000	750	10,000	17.4*	550*	110,000*
C	Radio-Frequency Power Amplifier or Oscillator	16,000	11.0	35,000	750	10,000	10.0	1400	70,000
C	Plate-Modulated RF Power Amplifier	10,000	8.5	23,000	750	10,000	8.2	2080	60,000

\*Two tubes.

## EXTERNAL ANODE ■ WATER COOLED



### 8240/3CW5000A1

The 3CW5000A1 is a water-cooled version of the 3CX3000A1 and is useful in audio service when reserve anode dissipation is needed or when water is easily employed as a coolant. It has coaxial terminals which allow rapid tube installation or removal.

PLATE DISSIPATION 5000 watts  
GRID DISSIPATION 50 watts  
COOLING Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	49 to 54 amperes	Base Maximum Seal Temp. 250°C	Coaxial 250°C
Voltage	29 pf		Maximum Height	12.562 inches
Current	17 pf		Maximum Diameter	3.625 inches
Capacitances:	2.5 pf		Net Weight	3.5 pounds
Grid-Filament				
Grid-Plate				
Plate-Filament				

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	—	6000	2.65*	0	10,000

\*Two tubes.



### 8241/3CW5000F1

The 3CW5000F1 is a water-cooled version of the 3CX3000F1. Conventional grid and filament leads allow installation without special socketing. It is designed for use in audio-amplifier applications where plate dissipation may be as high as 5000 watts or for similar service when water cooling is preferred.

PLATE DISSIPATION 5000 watts  
GRID DISSIPATION 50 watts  
COOLING Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	49 to 54 amperes	Maximum Seal Temp. 250°C	Coaxial 250°C
Voltage	29 pf		Maximum Diameter	3.625 inches
Current	17 pf		Net Weight	4.8 pounds
Capacitances:	2.5 pf			
Grid-Filament				
Grid-Plate				
Plate-Filament				

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	—	6000	2.65*	0	10,000

\*Two tubes.



### 8242/3CW5000A3

This water-cooled version of the 3CX2500A3 is for use in equipments where water is the preferred cooling medium or where additional plate-dissipation capability is required. It, too, is coaxial based and may be employed at maximum ratings through 75 MHz.

PLATE DISSIPATION 5000 watts  
FREQUENCY FOR MAXIMUM RATINGS 75 MHz  
COOLING Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	49 to 54 amperes	Base Maximum Seal Temp. 250°C	Coaxial 250°C
Voltage	36 pf		Maximum Height	12.562 inches
Current	20 pf		Maximum Diameter	3.625 inches
Capacitances:	1.2 pf		Net Weight	3.5 pounds
Grid-Filament				
Grid-Plate				
Plate-Filament				

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	150	5000	2.26*	59*	8000*
B	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	150	6000	3.0*	113*	13,000*
C	Radio-Frequency Power Amplifier and Oscillator	6000	2.5	5000	150	6000	2.08	136	10,000
C	Plate-Modulated Radio-Frequency Power Amplifier	5000	2.0	3350	150	5000	1.45	76	5580

\*Two tubes.



# TRIODES

## EXTERNAL ANODE ■ WATER COOLED



### 8243/3CW5000F3

The 3CW5000F3 is electrically identical to the 3CX2500F3 except for plate-dissipation rating. Its water-cooled anode with 5000-watt capability makes it an ideal choice for equipments where high power must be dissipated or where it is more convenient to cool with water than forced air. Conventional grid and filament leads allow installation without special socketing.

**PLATE DISSIPATION** 5000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 MHz  
**COOLING** Water and Forced Air

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 49 to 54 amperes  
 Capacitances:  
 Grid-Filament 36 pf  
 Grid-Plate 21 pf  
 Plate-Filament 1.2 pf

### CHARACTERISTICS

Maximum Seal Temp. 250 °C  
 Maximum Height 22.0 inches  
 Maximum Diameter 3.625 inches  
 Net Weight 4.8 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	150	5000	2.26*	59*	8000*
B	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	150	6000	3.0*	113*	13,000*
C	Radio-Frequency Power Amplifier and Oscillator	6000	2.5	5000	150	6000	2.08	136	10,000
C	Plate-Modulated Radio-Frequency Power Amplifier	5000	2.0	3350	150	5000	1.45	76	5580

\*Two tubes.



### 3CW5000H3

The 3CW5000H3 is a water-cooled ceramic-metal power triode designed primarily for use in industrial radio-frequency heating services. Its water-cooled anode is conservatively rated at 5000 watts of plate dissipation with low water flow and pressure drop. A power input of 12,500 watts is permissible up to 75 MHz. Plentiful reserve emission is available from its 375 watt filament.

**PLATE DISSIPATION** 5000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 MHz  
**COOLING** Water and Forced Air

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 53 amperes (max)  
 Capacitances:  
 Grid-Filament 40.2 pf  
 Grid-Plate 24.2 pf  
 Plate-Filament 1.20 pf

### CHARACTERISTICS

Base Maximum Seal Temp. 250 °C  
 Maximum Height 9.93 inches  
 Maximum Diameter 5.42 inches  
 Net Weight 7.5 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	6000	2.5	5000	150	6000	2.08	136	10,000



### 3CW10,000A3

The 3CW10,000A3 is a medium-mu water-cooled triode designed primarily for use in industrial radio-frequency heating service.

**PLATE DISSIPATION** 10,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Water and Forced Air

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 78 amperes (max)  
 Capacitances:  
 Grid-Filament 53 pf  
 Grid-Plate 25 pf  
 Plate-Filament 1.5 pf

### CHARACTERISTICS

Base Socket SK-1300  
 Maximum Seal Temp. 250 °C  
 Maximum Height 10 inches  
 Maximum Diameter 6.05 inches  
 Net Weight 10 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	RF Industrial Oscillator	10,000	3.0	10,000	0.5	9000	2.9	215	20,000



### 3CW10,000H3

The 3CW10,000H3 is a water-cooled ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its water-cooled anode is conservatively rated at 10,000 watts plate dissipation with low water flow and pressure drop. Input of 30,000 watts is permissible up to 90 MHz. Plentiful reserve emission is available from its 560 watt filament. A grid contact flange is provided for bolting the tube directly to a strap or grid deck, eliminating the need for a socket.

**PLATE DISSIPATION** 10,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Water and Forced Air

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 78 amperes (max)  
 Capacitances:  
 Grid-Filament 53 pf  
 Grid-Plate 25 pf  
 Plate-Filament 1.5 pf

### CHARACTERISTICS

Base Maximum Seal Temp. 250 °C  
 Maximum Height 17.9 inches  
 Maximum Diameter 5.090 inches  
 Net Weight 10 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	RF Industrial Oscillator	10,000	3.0	10,000	150	9000	2.9	215	20,600

# TRIODES

## EXTERNAL ANODE ■ WATER COOLED



### 3CW20,000A1

The Eimac 3CW20,000A1 is a ceramic-metal low-mu power triode intended for use as a linear amplifier in audio or rf applications requiring high output power with zero driving power. It features a large thoriated-tungsten filament with ample reserve emission and an integral anode cooler with the inherent ability to withstand large overloads. This tube is particularly well suited for use in audio modulators and vibration testing equipment amplifiers supplying up to 25 kw of output power (two tubes, push-pull).

**PLATE DISSIPATION** 20,000 watts  
**GRID DISSIPATION** 100 watts  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base Socket	Coaxial Eimac SK-130C
Voltage Current	94.0 to 104.0 amperes	Maximum Seal Temp.	250 °C
Capacitances (Grounded Filament):		Maximum Anode-Core Temp.	250 °C
Grid-Filament	45.0 to 57.0 pf	Maximum Height	8.50 inches
Grid-Plate	25.0 to 32.0 pf	Maximum Diameter	7.00 inches
Plate-Filament	3.4 to 4.2 pf	Net Weight	12 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier or Modulator	7000	5.0	20,000	100	7000	7.40*	0	29,100*
A	Voltage Regulator Service	10,000	**	12,000	100	0-5000	**	0	—

\*Two tubes. \*\*Up to 5 amperes depending on voltage drop across tube.



### 3CW20,000A3

Here is a ceramic-metal medium-mu triode designed for industrial-heating oscillator service. It features a large thoriated-tungsten filament with ample reserve emission and an integral anode cooler with the inherent ability to withstand large overloads. It is intended for use through 140 MHz, also as a grounded-grid FM amplifier developing 20 kilowatts useful output power.

**PLATE DISSIPATION** 20,000 watts  
**GRID DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 140 MHz  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base Socket	Coaxial Eimac SK-130C
Voltage Current	94 to 104 amperes	Maximum Seal Temp.	250 °C
Capacitances (Grounded Filament):		Maximum Anode-Core Temp.	250 °C
Grid-Filament	48.0 to 58.0 pf	Maximum Height	8.50 inches
Grid-Plate	30.0 to 38.0 pf	Maximum Diameter	7.00 inches
Plate-Filament	1.20 to 1.50 pf	Net Weight	12 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Industrial Oscillator	7000	4.0	20,000	250	7000	4.0	—	22,400
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB, Grounded-Grid	7000	5.0	20,000	250	7000	4.0	2050	20,000
C	Radio-Frequency Power Amplifier, Grounded-Grid	7000	4.0	20,000	250	7000	4.0	4100	24,500
C	Plate-Modulated RF Power Amplifier	5500	3.0	13,500	250	5000	3.0	515	12,400



### 3CW20,000A7

The Eimac 3CW20,000A7 is a ceramic-metal zero-bias triode intended for use in grounded-grid linear amplifiers delivering 20 kilowatts of useful output power. Because of its low intermodulation distortion characteristics the 3CW20,000A7 is particularly well suited for single sideband amplifiers. Two tubes operating in a push-pull audio amplifier under class-B zero-bias conditions will deliver up to 45 kilowatts of useful output power.

**MAXIMUM PLATE DISSIPATION** 20,000 watts  
**GRID DISSIPATION** 500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 140 MHz  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base Socket	Coaxial Eimac SK-13
Voltage Current	94.0 to 104.0 amperes	Maximum Seal Temp.	250 °C
Capacitances (Grounded Filament):		Maximum Anode-Core Temp.	250 °C
Grid-Filament	63 pf	Maximum Height	8.5 inches
Grid-Plate	41 pf	Maximum Diameter	7.0 inches
Plate-Filament	0.05 pf	Net Weight	12 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier or Modulator	7000	5.0	20,000	500	7000	10.0*	560*	47,700
B	Radio-Frequency Linear Power Amplifier, Grounded-Grid—SSB	7000	5.0	20,000	500	7000	5.0	1540	24,200
B	Radio-Frequency Linear Power Amplifier, Carrier Conditions, Grounded-Grid	7000	5.0	20,000	500	7000	2.4	330	565
C	Radio-Frequency Power Amplifier or Oscillator	7000	4.0	20,000	500	7000	4.0	430	21,300
C	Plate-Modulated RF Power Amplifier	5500	3.0	13,500	500	5000	3.0	380	11,900

\*Two tubes.



### 3CW20,000H3

The 3CW20,000H3 is a water-cooled, ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its water-cooled anode is conservatively rated at 20,000 watts plate dissipation with low water flow and pressure drop. The grid structure is rated at 250 watts making this tube an excellent choice for severe applications.

**PLATE DISSIPATION** 20,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base	Flexible Le.
Voltage	104 amperes (max)	Maximum Seal Temp.	250 °C
Current		Maximum Height	17.750 inch
Capacitances:		Maximum Diameter	5.090 inch
Grid-Filament	58 pf	Net Weight	12 pounds
Grid-Plate	38 pf		
Plate-Filament	1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	12,000	4.0	20,000	250	10,000	4.0	340	28,000

# TRIODES

## EXTERNAL ANODE ■ WATER COOLED



### 3CW25,000A3

An integral water jacket allows an anode dissipation rating of 25 kilowatts with this new medium-mu, ceramic-metal triode. A 500 watt grid structure makes this tube attractive for industrial heating service. The tube is rated at 60 kilowatts of input power to 100 Mc with operation at slightly reduced ratings to 140 Mc.

**PLATE DISSIPATION** 25,000 watts  
**GRID DISSIPATION** 500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 100 MHz  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten		Base	Coaxial
Voltage	6.3 volts	Socket	Eimac SK 1300
Current	152 to 168 amperes	Maximum Seal Temp	250°C
Capacitances (Grounded Filament):		Maximum Height	11.4 inches
Grid-Filament	48.0 to 58.0 pf	Maximum Diameter	4.7 inches
Grid-Plate	30.0 to 38.0 pf	Net Weight	12 pounds
Plate-Filament	1.2 to 1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps.)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps.)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Oscillator or Amplifier	10,000	6.0	25,000	500	10,000	6.0	365	42,000
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier	10,000	6.0	25,000	500	10,000	6.0	250	41,000
C	Plate-Modulated RF Power Amplifier	7000	6.0	16,500	500	7000	5.0	750	27,500



### 3CW30,000H3

The 3CW30,000H3 is a water-cooled ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its water-cooled anode is conservatively rated at 30,000 watts plate dissipation with low water flow and pressure drop. Input of 60,000 watts is permissible up to 90 MHz. The grid structure is rated at 500 watts.

**PLATE DISSIPATION** 30,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten		Base	Flexible Leads
Voltage	6.3 volts	Maximum Seal Temp.	250 °C
Current	172 amperes (max)	Maximum Height	17.750 inches
Capacitances:		Maximum Diameter	5.090 inches
Grid-Filament	48 pf	Net Weight	12 pounds
Grid-Plate	38 pf		
Plate-Filament	1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	12,000	6.0	30,000	500	10,000	6.0	365	42,000



### 3CW40,000H3

The 3CW40,000H3 is a water-cooled ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its water-cooled anode is conservatively rated at 40,000 watts plate dissipation with low water flow and pressure drop. The grid structure is rated at 750 watts making this tube an excellent choice for severe applications.

**PLATE DISSIPATION** 40,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 90 MHz  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten		Base	Flexible Leads
Voltage	10 volts	Maximum Seal Temp.	250 °C
Current	168 amperes (max)	Maximum Height	19.050 inches
Capacitances:		Maximum Diameter	5.090 inches
Grid-Filament	75 pf	Net Weight	14 pounds
Grid-Plate	48 pf		
Plate-Filament	2.6 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	12,000	9.0	40,000	750	10,000	9.0	1040	70,000



### 6696A

A rugged, all ceramic-metal, water-cooled triode, the 6696A is rated at 120 kilowatts input and 60 kilowatts plate dissipation to 30MHz. It is attractive for general broadcast or industrial service where a high-power, medium mu triode is required. Accessories such as water jackets and terminal connectors are available from Eimac.

**PLATE DISSIPATION** 60,000 watts  
**GRID DISSIPATION** 750 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten		Terminals	Coaxial
Voltage	13 volts	Maximum Seal Temp.	250°C
Current	205 amperes	Maximum Height	19.75 inches
Capacitances (Grounded Filament):		Maximum Diameter	4.8 inches
Grid-Filament	76 pf	Net Weight	20 pounds
Grid-Plate	55 pf		
Plate-Filament	2.7 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps.)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier or Modulator	16,000	11.0	60,000	750	12,000	20.0*	600*	150,000*
C	Radio-Frequency Power Amplifier or Oscillator	16,000	11.0	60,000	750	15,000	7.0	600	80,000
C	Plate-Modulated RF Power Amplifier	10,000	8.5	40,000	750	10,000	8.2	2080	60,000

\*Two tubes.

# TRIODES

## EXTERNAL ANODE ■ VAPOR COOLED



### 3CV30,000A1

The 3CV30,000A1 is a vapor-cooled triode with characteristics similar to the 3CX10,000A1. It has low  $\mu$  value and is recommended for Class AB<sub>1</sub>, audio, or regulator service.

**PLATE DISSIPATION** 30,000 watts  
**COOLING** Vapor Phase and Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Maximum Envelope Temp.	250 °C
Voltage	100 amperes	Maximum Height	8.750 inches
Current	Coaxial	Maximum Diameter	7.750 inches
Base	SK 1310	Net Weight	18 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio Frequency Power Amplifier and Modulator	7000	5.0	30,000	100	7000	7.0*	—	29,000*

\*Two tubes



### 3CV30,000A3

A vapor-cooled triode with a heavy, one kilowatt filament and 30 kW anode dissipation capability. It is highly recommended for heavy duty applications such as industrial, rf heating service. A complete line of accessories is available including boiler, condenser, etc. for simplified systems installation.

**PLATE DISSIPATION** 30,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 100 MHz  
**COOLING** Vapor and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	6.3 volts	Base	Coaxial
Voltage	158 amperes	Socket	Eimac SK-1310
Current		Maximum Seal Temp.	250 °C
Capacitances (Grounded Filament):		Maximum Height	8.75 inches
Grid-Filament	48.0 to 58.0 pf	Maximum Diameter	7.75 inches
Grid-Plate	30.0 to 38.0 pf	Net Weight	22 pounds
Plate-Filament	1.2 to 1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (amps)	Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Output Power (watts)
C	Radio-Frequency Industrial Oscillator	10,000	6.0	30,000	1.0	10,000	6.0	18,000	42,000



### 3CV30,000H3

The 3CV30,000H3 is a ceramic-metal power triode designed primarily for use in industrial radio-frequency heating service. Its vapor-cooled anode is conservatively rated at 30,000 watts plate dissipation when mounted in an Eimac BR-200 boiler.

**PLATE DISSIPATION** 30,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 100 MHz  
**COOLING** Vapor and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	6.3 volts	Base	Special
Voltage	172 amperes (max)	Socket	SK-1310
Current		Maximum Seal Temp.	250 °C
Capacitances (Grounded Cathode):		Maximum Height	8.75 inches
Grid-Filament	48 to 58 pf	Maximum Diameter	7.75 inches
Grid-Plate	30 to 38 pf	Net Weight	18 pounds
Plate-Filament	1.2 to 1.5 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Industrial Oscillator	10,000	6.0	30,000	500	10,000	6.0	365	42,000



### 7480

This triode is rated at 140 kilowatts input and 80 kilowatts of plate dissipation at frequencies to 30 Mc. Boilers and other accessories are available for the 7480 from Eimac.

**PLATE DISSIPATION** 80,000 watts  
**GRID DISSIPATION** 750 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Vapor and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	13.0 volts	Terminals	Coaxial
Voltage	205 amperes	Maximum Seal Temp.	250 °C
Current		Maximum Height	20.2 inches
Capacitances (Grounded Filament):		Maximum Diameter	7.1 inches
Grid-Filament	76 pf	Net Weight	50 pounds
Grid-Plate	55 pf		
Plate-Filament	2.7 pf		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier or Modulator	16,000	11.0	80,000	750	12,000	20.0*	600*	150,000*
C	Radio-Frequency Power Amplifier or Oscillator	16,000	11.0	80,000	750	15,000	7.0	600	80,000
C	Plate-Modulated RF Power Amplifier	10,000	8.5	53,000	750	10,000	8.2	2080	60,000

\*Two tubes



# TETRODES

## INTERNAL ANODE

### 8165 / 4-65A

A general-purpose radial-beam power tetrode, the 4-65A is cooled by radiation and convection and may be used without forced air in most installations. Maximum ratings extend to 150 MHz.

**PLATE DISSIPATION** 65 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 150 MHz  
**COOLING** Convection and Radiation

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: 5-pin
Voltage: 6.0 volts	Socket: National HX29 or Johnson 122-101
Current: 3.2 to 3.8 amperes	Max. Base-Seal Temp: 170 °C
Capacitances (Grounded Filament):	Max. Envelope Temp: 225 °C
Input: 6.0 to 8.3 pF	Max. Height: 4.38 inches
Output: 1.9 to 2.6 pF	Max. Diameter: 2.38 inches
Feed-Through: 0.12 pF	Net Weight: 3 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.150	65	10	—	1750	500	0.170*	0	175*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	0.150	65	10	—	3000	360	0.065	0	130
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.150	65	10	5	1800	250	0.220*	1.3*	270*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.150	65	10	5	3000	250	0.115	1.7	280
C	Plate-Modulated R-F Power Amplifier	2500	0.120	45	10	5	2500	250	0.110	2.6	230

\*Two Tubes

### 4D21 / 4-125A

This 125-watt general-purpose power tetrode is usable at maximum ratings to 120 MHz. Its low interelectrode capacitances make it ideal for r-f amplifier service but it is equally useful in audio applications.

**PLATE DISSIPATION** 125 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 120 MHz  
**COOLING** Radiation and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: 5-pin metal shell
Voltage: 5.0 volts	Socket: National HX100 or Johnson 122-275
Current: 6.0 to 7.0 amperes	Max. Base-Seal Temp: 170 °C
Capacitances (Grounded Filament):	Max. Envelope Temp: 225 °C
Input: 9.2 to 12.4 pF	Max. Height: 5.69 inches
Output: 2.5 to 3.5 pF	Max. Diameter: 2.81 inches
Feed-Through: 0.07 pF	Net Weight: 6.5 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	125	20	—	2500	600	0.232*	0	330*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	0.225	125	20	—	3000	510	0.105	0	200
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	125	20	5	2500	350	0.260*	1*	400*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.225	125	20	5	3000	350	0.167	2.5	375
C	Plate-Modulated R-F Power Amplifier	2500	0.200	85	20	5	2500	350	0.152	3.3	300

\*Two Tubes

### 6155

This 125-watt general-purpose power tetrode is usable at maximum ratings to 120 MHz. Its low interelectrode capacitances make it ideal for r-f amplifier service but it is equally useful in audio applications.

**PLATE DISSIPATION** 125 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 120 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: 5-pin
Voltage: 5.0 volts	Socket: National HX100 or Johnson 122-275
Current: 6.0 to 7.0 amperes	Max. Base-Seal Temp: 170 °C
Capacitances (Grounded Filament):	Max. Envelope Temp: 225 °C
Input: 9.2 to 12.4 pF	Max. Height: 5.69 inches
Output: 2.5 to 3.5 pF	Max. Diameter: 2.81 inches
Feed-Through: 0.07 pF	Net Weight: 6.5 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	125	20	—	2500	600	0.232*	0	330*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	0.225	125	20	—	3000	510	0.105	0	200
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	125	20	5	2500	350	0.260*	1*	400*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.225	125	20	5	3000	350	0.167	2.5	375
C	Plate-Modulated R-F Power Amplifier	2500	0.200	85	20	5	2500	350	0.152	3.3	300

\*Two Tubes

### 5D22 / 4-250A

The Eimac 4-250A enjoys a 250-watt plate dissipation rating and is usable at maximum ratings through the FM broadcast band. Its low interelectrode capacitances make it an ideal choice for high-frequency applications but it is often used in audio-amplifier work as well.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 megacycles  
**COOLING** Radiation and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: 5-pin metal shell
Voltage: 5.0 volts	Socket: Eimac SK 400
Current: 13.5 to 14.7 amperes	Max. Base-Seal Temp: 170 °C
Capacitances (Grounded Filament):	Max. Envelope Temp: 225 °C
Input: 10.7 to 14.5 pF	Max. Height: 6.38 inches
Output: 3.7 to 5.1 pF	Max. Diameter: 3.56 inches
Feed-Through: 0.14 pF	Net Weight: 8 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	4000	0.350	250	35	—	3000	600	0.417*	0	750*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	4000	0.350	250	35	—	4000	510	0.165	0	450
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	4000	0.350	250	35	10	3000	300	0.473*	1.9*	1040*
C	Radio-Frequency Power Amplifier and Oscillator	4000	0.350	250	35	10	4000	500	0.312	2.46	1000
C	Plate-Modulated R-F Power Amplifier	3200	0.275	165	35	10	3000	400	0.225	3.2	510

\*Two Tubes.

# TETRODES

## INTERNAL ANODE

### 6156

The Eimac 6156 is a compact, ruggedly constructed power tetrode having a maximum plate dissipation rating of 250 watts. It is intended for use as an amplifier, oscillator or modulator.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Radiation and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base	5-pin metal shell
Voltage 5.0 volts	Socket	Eimac SK 400
Current 13.5 to 14.7 amperes	Max. Base Seal Temp.	170 °C
Capacitances (Grounded Filament):	Max. Envelope Temp.	225 °C
Input 10.7 to 14.5 pf	Max. Height	6.38 inches
Output 3.7 to 5.1 pf	Max. Diameter	3.56 inches
Feed-Through 0.14 pf	Net Weight	8 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio Frequency Power Amplifier and Modulator	4000	0.350	250	35	—	3000	600	0.417*	0	750*
AB <sub>1</sub>	Radio Frequency Linear Power Amplifier—SSB	4000	0.350	250	35	—	4000	510	0.165	0	450
AB <sub>2</sub>	Audio Frequency Power Amplifier and Modulator	4000	0.350	250	35	10	3000	300	0.473*	1.9*	1040*
C	Radio Frequency Power Amplifier and Oscillator	4000	0.350	250	35	10	4000	500	0.312	2.46	1000
C	Plate-Modulated R-F Power Amplifier	3200	0.275	165	35	10	3000	400	0.225	3.2	510

\*Two Tubes.

### 8438/4-400A

A 400-watt general-purpose radial-beam tetrode, the 4-400A is ideal for any r-f application below 110 MHz. Its ratings allow an input power of up to 1400 watts in such service or in others where lower radio frequencies or audio frequencies are to be amplified.

**PLATE DISSIPATION** 400 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Radiation and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base	5-pin metal shell
Voltage 5.0 volts	Socket	Eimac SK 400
Current 13.5 to 14.7 amperes	Max. Base Seal Temp.	170 °C
Capacitances (Grounded Filament):	Max. Envelope Temp.	225 °C
Input 10.7 to 14.5 pf	Max. Height	6.38 inches
Output 4.2 to 6.6 pf	Max. Diameter	3.56 inches
Feed-Through 0.17 pf	Net Weight	9 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio Frequency Power Amplifier and Modulator	4000	0.350	400	35	—	4000	750	0.585*	0	1540*
AB <sub>1</sub>	Radio Frequency Linear Power Amplifier—SSB	4000	0.350	400	35	—	4000	705	0.250	0	650
AB <sub>2</sub>	Audio Frequency Power Amplifier and Modulator	4000	0.350	400	35	10	4000	500	0.638*	3.5*	1750*
C	Radio Frequency Power Amplifier and Oscillator	4000	0.350	400	35	10	4000	500	0.350	5.8	1100
C	Plate-Modulated R-F Power Amplifier	3200	0.275	270	35	10	3000	500	0.275	3.5	630

\*Two Tubes.

### 7527

The 7527 is an all glass power tetrode designed for amplifier, oscillator or modulator service. This tube is capable of operation at full ratings up to 110 MHz.

**PLATE DISSIPATION** 400 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Radiation and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base	5-pin special
Voltage 5.0 volts	Socket	Johnson 122-275
Current 14.5 amperes	Max. Base Seal Temp.	170 °C
Capacitances (Grounded Filament):	Max. Envelope Temp.	225 °C
Input 12.5 pf	Max. Height	5.962 inches
Output 4.7 pf	Max. Diameter	3.422 inches
Feed-Through 0.12 pf	Net Weight	6.7 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio Frequency Power Amplifier and Oscillator	4000	0.350	400	35	10	3000	500	0.350	6.0	800
C	Plate Modulated Radio Frequency Amplifier	3200	0.275	400	35	10	3000	500	0.275	3.5	630
AB	Audio Frequency Power Amplifier and Modulator*	4000	0.350	400	35	10	4000	750	0.585	—	1500

\*Two tubes

### 6775

The 6775 is a ruggedized version of the 4-400A power tetrode which can be used as a direct replacement.

**PLATE DISSIPATION** 400 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Radiation and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base	EIA A5 97
Voltage 5.0 volts	Socket	Eimac SK 400
Current 14.5 amperes	Max. Base Seal Temp.	170 °C
Capacitances (Grounded Filament):	Max. Envelope Temp.	225 °C
Input 12.5 pf	Max. Height	6.375 inches
Output 4.5 pf	Max. Diameter	3.562 inches
Feed-Through 0.12 pf	Net Weight	9 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio Frequency Power Amplifier and Oscillator (CW or FM)	4000	0.350	400	35	10	3000	500	0.350	5.9	800
C	Plate Modulated Radio Frequency Amplifier	3200	0.275	270	35	10	3000	500	0.275	3.5	630
AB	Audio Frequency Power Amplifier and Modulator (Two tubes)	4000	0.350	400	35	10	4000	750	0.585	—	1550

# TETRODES

## INTERNAL ANODE

### 8166 / 4-1000A

This high-power, general purpose tetrode is capable of dissipating 1000 watts from its radiation-cooled anode. Maximum ratings apply through the FM broadcast band but its low drive-power requirements make it an ideal choice for audio and low-frequency applications as well.

**PLATE DISSIPATION** 1000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Radiation and Forced Air

#### CHARACTERISTICS

Filament	Thoriated tungsten	Base	5-pin metal shell
Voltage	7.5 volts	Socket	Eimac SK 500
Current	20.0 to 22.7 amperes	Max. Base Seal Temp.	250 °C
Capacitances (Grounded Filament):		Max. Envelope Temp.	150 °C
Input	23.8 to 32.4 pF	Max. Height	9.63 inches
Output	6.8 to 9.4 pF	Max. Diameter	5.25 inches
Feed Through	0.35 pF	Net Weight	1.5 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio Frequency Power Amplifier and Modulator	6000	0.700	1000	75	—	6000	1000	0.950*	0	3840*
AB <sub>1</sub>	Radio Frequency Linear Power Amplifier—SSB	6000	0.700	1000	75	—	6000	1000	0.475	0	1920
AB <sub>1</sub>	Audio Frequency Power Amplifier and Modulator	6000	0.700	1000	75	25	6000	500	0.950*	4.7*	3900*
C	Radio Frequency Power Amplifier and Oscillator	6000	0.700	1000	75	25	6000	500	0.700	15	3400
C	Plate-Modulated R-F Power Amplifier	5000	0.600	670	75	25	5500**	500	0.600	9	2630

\*\*Below 30 mc.

\*Two Tubes.

## EXTERNAL ANODE ■ CONDUCTION COOLED

### 4CN15A

A special version of the popular 4CX300A intended for use in low-duty pulse applications or where size and weight are important. The 4CN15A carries a nominal plate-dissipation rating of 15 watts but this may be extended by employing liquid immersion or another suitable heat sink. Its rugged design makes it ideal for applications where shock and/or vibration are encountered.

**PLATE DISSIPATION** 15 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 MHz  
**COOLING** Convection or Conduction

#### CHARACTERISTICS

Cathode	Oxide-coated, unipotential	Base	Special breechblock
Heater	6.0 volts	Socket	Eimac SK 700 series
Voltage	2.6 to 3.1 amperes	Maximum Seal Temp.	250 °C
Current	25 to 33 pF	Max. Anode Core Temp.	250 °C
Capacitances (Grounded Cathode):		Max. Height	2.5 inches
Input	3.5 to 4.5 pF	Max. Diameter	0.894 inches
Output	0.06 pF	Net Weight	2.5 ounces
Feed-Through			

Class of Operation	Type of Service	Maximum Ratings					Typical Operation
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	
C	Radio Frequency Power Amplifier or Oscillator	2000	0.250	15*	12	2	Values dependent upon allowable plate dissipation (determined by heat sink)
C	Plate-Modulated Radio Frequency Amplifier	1500	0.200	9.5*	12	2	
AB <sub>1</sub>	Radio Frequency Linear Power Amplifier—SSB	**	0.250	15*	12	2	

\*\*Below 250 Mc

\*May be increased by conduction cooling

### 7843

The 7843 is a small coaxial power tetrode designed for UHF power amplifier and oscillator service up to 1200 MHz. The coaxial construction makes this tube suitable for cavity circuits.

**PLATE DISSIPATION** 115 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 1200 MHz  
**COOLING** Conduction

#### CHARACTERISTICS

Cathode	Oxide-coated, unipotential	Base	Coaxial
Heater	26.5 volts	Max. Seal Temp.	250 °C
Voltage	0.45 to 0.57 amperes	Max. Anode Core Temp.	250 °C
Current	28.7 to 36.2 pF	Max. Height	1.805 inches
Capacitances (Grounded Cathode):		Max. Diameter	1.085 inches
Input	4.0 to 5.0 pF		
Output	0.065 pF		
Feed-Through			

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier and Oscillator	1000	0.180*	115	4.5	—	900	300	0.170	5.0	40

\*With suitable cooler or heat sink

### 8560A

The 8560A is a conduction cooled, general purpose tetrode. This compact power tube can be used at maximum ratings at frequencies up to 500 MHz. It is recommended for use in equipments of new design.

**PLATE DISSIPATION** See Note  
**FREQUENCY FOR MAXIMUM RATINGS** 500 MHz  
**COOLING** Conduction

#### CHARACTERISTICS

Cathode	Oxide-coated, unipotential	Base	Special
Heater	6.0 volts	9-pin, JEDEC B8 236	
Voltage	2.6 amperes	Socket	Eimac SK 600 Series
Current	16.5 pF	Max. Envelope Temp.	250 °C
Capacitances (Grounded Cathode):		Max. Anode Core Temp.	250 °C
Input	5.0 pF	Max. Height	2.445 inches
Output	0.04 pF	Max. Diameter	1.630 inches
Feed-Through		Net Weight	8.5 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio Frequency Power Amplifier or Oscillator	2000	250	250	12	2.0	900	200	0.195	5.0	112
AB <sub>1</sub>	Radio Frequency Linear Amplifier	2000	250	250	12	2.0	2000	250	0.250	2.9	390

This tube has a flat surface on the edge of the anode for contact to a suitable thermal conductor, usually a wafer of beryllium oxide. The dimension of the flat surface is 1 1/8" x 3/4". Thermal design should insure that for maximum expected anode dissipation, heat flow through the beryllium oxide wafer will be high enough to dissipate that power with no more than 225°C temperature at the interface between anode and beryllium oxide wafer.

# TETRODES

## EXTERNAL ANODE ■ CONDUCTION COOLED

### 4CS250H and 4CS250HA

The 4CS250H and 4CS250HA are conduction-cooled tetrodes having the basic electrical characteristics of the 4CX350A. These tubes are intended primarily for class AB<sub>1</sub> linear service. They have high transconductance and produce full output with extremely low drive power.



**PLATE DISSIPATION**  
**COOLING**

**250 watts**  
**Conduction**

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 6.0 volts  
Current: 3.6 amps (max)  
Capacitances (Grounded Cathode):  
Input: 26.2 pf(max)  
Output: 6.0 pf(max)  
Feed Through: 0.05 pf

Base: Special 9-pin  
Socket: SK-600  
Max Seal Temp: 250 °C  
Max Height: 2.4 inches  
Net Weight: 4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss (watts)	Screen Diss (watts)	Grid Diss (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	AF Power Amplifier and Modulator	2500	0.300	250	8.0	2.0	2200	400	0.580	—	770
AB <sub>1</sub>	RF Linear Amplifier	2500	0.300	250	8.0	2.0	1500	400	0.265	—	200

\*Two tube

## EXTERNAL ANODE ■ FORCED-AIR COOLED

### 4CX125C and 4CX125F

The 4CX125C is a horizontally-finned version of the 4CX300A and is intended for use where transverse air cooling is desired. It is also useful where anode power is dissipated by liquid immersion. Its electrical characteristics are identical to those of the 4CX300A with the exception of plate dissipation which is established at 125 watts with air cooling. It is ideally suited for applications where shock and/or vibration are experienced. The 4CX125F is an identical tube with a 26.5 volt heater.



**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

**125 watts**  
**500 MHz**  
**Forced Air**

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 4CX125C 4CX125F  
Voltage: 6.0 26.5 volts  
Current: 2.6 to 3.1 59 to 70 amps  
Capacitances (Grounded Cathode):  
Input: 25 to 33 pf  
Output: 3.5 to 4.5 pf  
Feed Through: 0.06 pf

Base: Special, breechblock  
Socket: Eimac SK-700 series  
Max Seal Temp: 250 °C  
Max Anode Core Temp: 250 °C  
Max Height: 2.50 inches  
Max Diameter: 1.25 inches  
Net Weight: 3.5 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss (watts)	Screen Diss (watts)	Grid Diss (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	125	12	2	2000	250	0.250	2.9	39
C	Plate Modulated RF Power Amplifier	1500	0.200	80	12	2	1500	250	0.200	1.7	23

### 6816

The 6816 is a small coaxial power tetrode designed for UHF power amplifier and oscillator service up to 1200 MHz. Coaxial construction makes this tube suitable for cavity circuits.



**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

**115 watts**  
**1200 MHz**  
**Forced Air**

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 6.3 volts  
Current: 2.26 amps (max)  
Capacitances (Grounded Cathode):  
Input: 36.2 pf(max)  
Output: 5.0 pf(max)  
Feed Through: 0.065 pf

Base: Coaxial  
Socket: Erie 2948-000  
Max Seal Temp: 250 °C  
Max Height: 1.95 inches  
Max Diameter: 1.31 inches  
Net Weight: 2.2 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss (watts)	Screen Diss (watts)	Grid Diss (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier and Oscillator	1000	0.180	115	4.5	—	900	300	0.170	5.0	40

### 6884

The 6884 is a small coaxial tetrode designed for UHF power amplifier and oscillator service up to 1200 MHz. The coaxial construction makes this tube suitable for cavity circuits. This tube is identical to the 6816 except for heater voltage.



**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

**115 watts**  
**1200 MHz**  
**Forced Air**

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 26.5 volts  
Current: 0.45 to 0.57 amperes  
Capacitances (Grounded Cathode):  
Input: 28.7 to 36.2 pf  
Output: 4.0 to 5.0 pf  
Feed Through: 0.065 pf

Base: Coaxial  
Socket: Erie 2948-000  
Max Seal Temp: 250 °C  
Max Height: 1.95 inches  
Max Diameter: 1.31 inches  
Net Weight: 2.2 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss (watts)	Screen Diss (watts)	Grid Diss (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	1000	0.180	115	4.5	—	900	300	0.170	5.0	40



# TETRODES

EXTERNAL ANODE ■ FORCED-AIR COOLED

## 7034/4X150A and 7035/4X150D

The veteran of external anode tetrodes, and an Eimac original, continues to enjoy its deserved popularity. Recent tube improvements have made possible increases in maximum plate voltage and plate dissipation ratings. In Class AB<sub>1</sub> or Class C service an input power of 500 watts is now allowed at frequencies up to 150 MHz. The 4X150D is a 26.5 volt heater version of the 4X150A.

PLATE DISSIPATION 250 watts  
FREQUENCY FOR MAXIMUM RATINGS 150 MHz  
COOLING Forced Air

### CHARACTERISTICS

Cathode: Oxide coated, unipotential  
Heater: 4X150A 4X150D  
Voltage 6.0 26.5 volts  
Current 2.3 to 2.9 0.50 to 0.62 amps  
Capacitances (Grounded Cathode):  
Input 14.5 to 17.0 pf  
Output 4.0 to 4.8 pf  
Feed-Through 0.05 pf

Base 9-pin, special  
Socket Eimac SK-600 series  
Max. Base-Seal Temp. 175 °C  
Max. Anode Core Temp. 250 °C  
Max. Height 2.404 inches  
Max. Diameter 1.640 inches  
Net Weight 4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated RF Power Amplifier	1600	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

## 8172/4X150G

One of the forerunners in external anode coaxial based tetrodes, the 4X150G continues to deliver long life and high reliability in VHF and UHF applications. It is intended for use in CW service at frequencies up to 1200 MHz and is useful in pulse service at frequencies up to 1500 MHz.

PLATE DISSIPATION 250 watts  
FREQUENCY FOR MAXIMUM RATINGS 500 MHz CW  
1500 MHz Pulsed  
COOLING Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 4X150G  
Voltage 2.5 volts  
Current 6.2 to 7.3 amperes  
Capacitances (Grounded Cathode):  
Input 25.0 to 29.0 pf  
Output 4.0 to 4.9 pf  
Feed-Through 0.05 pf

Base Coaxial  
Max. Seal & Anode Core Temp. 175 °C  
Max. Height 2.750 inches  
Max. Diameter 1.635 inches  
Net Weight 6 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B <sub>1</sub>	Radio-Frequency Linear Amplifier — TV Visual Service	1250	0.250	250	12	2	1250	300	0.305*	9	250*
C	Plate-Pulsed RF Power Amplifier and Oscillator	7000 pulse	**	250	12	2	7000 pulse	1000	6.0	1200	17,000 MHz Osc.

\*Peak synchronizing level.

\*\*Maximum pulse cathode current, 7 amperes; maximum pulse duration, 5 microseconds.

## 8296/4X150R and 8297/4X150S

This Eimac tetrode is a ruggedized version of the famous 4X150A. It incorporates construction features found in the 4CX300A and 4CX250R resulting in a tube capable of operating at full voltages in environments where moderate shock and vibration are present. The 4X150R will replace the 4X150A in nearly all applications since it is electrically identical except for a small (1.75 pf) increase in input capacitance limits in feed-through capacitance (0.01 pf) and in heater current (0.1 ampere). The 4X150S is identical but incorporates a 26.5 volt heater for mobile or airborne applications.

PLATE DISSIPATION 250 watts  
FREQUENCY FOR MAXIMUM RATINGS 150 MHz  
COOLING Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 4X150R 4X150S  
Voltage 6.0 26.5 volts  
Current 2.4 to 3.0 0.56 to 0.68 amps  
Capacitances (Grounded Cathode):  
Input 16.25 to 18.75 pf  
Output 4.0 to 4.8 pf  
Feed-Through 0.06 pf

Base 9-pin, special  
Socket Eimac SK-600 series  
Max. Base Seal Temp. 175 °C  
Max. Anode Core Temp. 250 °C  
Max. Height 2.404 inches  
Max. Diameter 1.640 inches  
Net Weight 4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated RF Power Amplifier	1600	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

## 7203/4CX250B and 7204/4CX250F

A 250-watt general purpose external anode tetrode featuring ceramic metal construction. This compact power tube can be used at maximum ratings at frequencies up to 500 MHz. It is recommended for use in equipments of new design. The 4CX250F is identical in all respects except for a heater rated at 26.5 volts.

PLATE DISSIPATION 250 watts  
FREQUENCY FOR MAXIMUM RATINGS 500 MHz  
COOLING Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 4CX250B 4CX250F  
Voltage 6.0 26.5 volts  
Current 2.3 to 2.9 0.5 to 0.62 amps  
Capacitances (Grounded Cathode):  
Input 14.2 to 17.2 pf  
Output 4.0 to 5.0 pf  
Feed-Through 0.06 pf

Base 9-pin, special  
Socket Eimac SK-600 series  
Max. Seal Temp. 250 °C  
Max. Anode Core Temp. 250 °C  
Max. Height 2.464 inches  
Max. Diameter 1.640 inches  
Net Weight 4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated RF Power Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

# TETRODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED

### 8621/4CX250FG

The 4CX250F/G is essentially a 4CX250F manufactured for extra stability in airborne linear amplifier service.

**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

250 watts  
500 MHz  
Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 26.5 volts  
Current: 0.62 amperes  
Capacitances (Grounded Cathode):  
Input: 17.2 pf  
Output: 5.0 pf  
Feed-Through: 0.06 pf

Base: 9-pin special  
Socket: Eimac SK-600 Series  
Max. Seal Temp: 250 °C  
Max. Anode-Core Temp: 250 °C  
Max. Height: 2.464 inches  
Max. Diameter: 1.640 inches  
Net Weight: 4 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier SSB	2000	0.250	250	12	—	2000	350	0.250	—	300

### 7580W / 4CX250R

4CX250R is a ruggedized version of the 7580. It is intended for use in environments where shock and vibration levels preclude the use of such a tube as the 4CX250B, and where the use of a higher-perveance tetrode is indicated. The 4CX250R is designed to operate with maximum rated plate and screen voltages applied in equipment where shock and/or vibration is experienced.

**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

250 watts  
500 MHz  
Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 6.0 volts  
Current: 2.3 to 2.9 amperes  
Capacitances (Grounded Cathode):  
Input: 16.0 to 18.5 pf  
Output: 4.2 to 5.2 pf  
Feed-Through: 0.06 pf

Base: 9-pin, special  
Socket: Eimac SK-600 series  
Max. Seal Temp: 250 °C  
Max. Anode-Core Temp: 250 °C  
Max. Height: 2.464 inches  
Max. Diameter: 1.640 inches  
Net Weight: 4 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	625*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	400	0.245	0	495
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated R-F Power Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes

### 7609

The 7609 is a power tetrode intended for use as an amplifier or oscillator at full ratings up to 150 MHz. Useful power can be obtained at reduced ratings up to 500 MHz.

**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

250 watts  
150 MHz  
Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 26.5 volts  
Current: 0.62 amps (max)  
Capacitances:  
Input: 17.0 pf (max)  
Output: 4.3 pf (max)  
Feed-Through: 0.05 pf

Base: 9-pin special  
Socket: SK 600 series  
Max. Seal Temp: 175 °C  
Max. Height: 2.40 inches  
Max. Diameter: 1.64 inches  
Net Weight: 4 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator	1600	0.250	250	12	2.0	1500	250	0.250	3.2	280
C	RF Power Amplifier or Oscillator 150 to 500 MHz	1250	0.250	250	12	2.0	1250	250	0.200	10	140

### 8245 / 4CX250K and 8246 / 4CX250M

These coaxial base tetrodes are particularly useful as a CW rf amplifier between 500 and 1200 MHz. In pulse applications, the useful frequency is above 1500 MHz. The 4CX250K employs a 6.0 volt heater while the 4CX250M uses a 26.5 volt heater.

**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

250 watts  
500 MHz  
Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 4CX250K 6.0 4CX250M 26.5 volts  
Current: 2.3 to 3.0 0.53 to 0.68 amps  
Capacitances (Grounded Cathode):  
Input: 25.0 to 29.0 pf  
Output: 4.0 to 4.9 pf  
Feed-Through: 0.05 pf

Base: Special, coaxial  
Socket: SK 600 series  
Max. Seal Temp: 250 °C  
Max. Anode-Core Temp: 250 °C  
Max. Height: 2.813 inches  
Max. Diameter: 1.640 inches  
Net Weight: 4 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated RF Power Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

# TETRODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED



### 4CPX250K

This tube is a pulse rated version of the coaxial 4CX250K. New cathode techniques permit pulse currents of over three amperes at pulse lengths up to 250 microseconds. Peak power output of 10kW is available at 0.005 duty.

#### PLATE DISSIPATION

FREQUENCY FOR MAXIMUM RATINGS

#### COOLING

250 watts

500 MHz

Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 6.0 volts  
Current: 2.3 to 3.0 amperes  
Capacitances (Grounded Grid):  
Input: 14.5 to 19.0 pf  
Output: 3.9 to 4.1 pf  
Feed-Through: 0.01 pf

Base: Special, coaxial  
Max. Seal Temp: 250 °C  
Max. Anode-Core Temp: 250 °C  
Max. Height: 2.813 inches  
Max. Diameter: 1.640 inches  
Net Weight: 4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Duty	Output Power (watts)
C	Grid-Pulsed Amplifier 450 MHz-250 $\mu$ sec pulses	5,500	0.250	250	12	2	5,500	1,000	0.250	0.005	10,000



### 8167 / 4CX300A

This rugged ceramic metal tetrode with unique breechblock basing has electrical characteristics similar to other tubes in the 4X150 and 4X250 families but is especially suited for service in severe environments. Its unusual internal construction assures reliable operation at acceleration levels up to 20 g's. Suitable for service from dc to 500 MHz, the 4CX300A is first choice for use in new equipment where shock and/or vibration are expected.

#### PLATE DISSIPATION

FREQUENCY FOR MAXIMUM RATINGS

#### COOLING

300 watts

500 MHz

Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 6.0 volts  
Current: 2.6 to 3.1 amperes  
Capacitances (Grounded Cathode):  
Input: 25 to 33 pf  
Output: 3.5 to 4.5 pf  
Feed-Through: 0.06 pf

Base: Special breechblock  
Socket: Eimac SK-700 series  
Max. Seal Temp: 225 °C  
Max. Anode Core Temp: 250 °C  
Max. Height: 2.5 inches  
Max. Diameter: 1.65 inches  
Net Weight: 4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2500	0.250	300	12	—	2500	350	0.500*	0	800*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB	2500	0.250	300	12	—	2500**	350	0.250	0	400
C	Radio-Frequency Power Amplifier and Oscillator	2500	0.250	300	12	2	2500**	250	0.250	2.8	500
C	Plate-Modulated R-F Power Amplifier	1500	0.200	200	12	2	1500	250	0.200	1.7	235

\*Two tubes.

\*\*Below 250 MHz only.



### 4CX300Y

This special version of the 4CX300A has a higher plate current rating which allows 60 per cent more input power. Physically identical to the 4CX300A, the Eimac 4CX300Y is attractive for general use wherever a compact high power tetrode is indicated.

#### PLATE DISSIPATION

FREQUENCY FOR MAXIMUM RATINGS

#### COOLING

400 watts

110 MHz

Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 6.0 volts  
Current: 3.00 to 3.85 amperes  
Capacitances (Grounded Cathode):  
Input: 30.0 to 38.0 pf  
Output: 3.9 to 5.0 pf  
Feed-Through: 0.07 pf

Base: Special breechblock  
Socket: Eimac SK-700 series  
Max. Seal Temp: 250 °C  
Max. Anode Core Temp: 250 °C  
Max. Height: 2.5 inches  
Max. Diameter: 1.65 inches  
Net Weight: 4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2,000	0.4	400	8	—	2,000	400	0.75*	0	850*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB	2,000	0.4	400	8	—	2,000	400	0.375	0	450
C	Radio-Frequency Power Amplifier and Oscillator	2,000	0.4	400	8	1	2,000	250	0.4	3.8	600
C	Plate-Modulated R-F Power Amplifier	1,500	0.3	250	8	1	1,500	250	0.3	1.7	300

\*Two tubes.



### 8072

The 8072 is a conduction cooled ceramic and metal power tetrode designed for use in radio frequency power amplifier, oscillator and linear RF power amplifier service.

#### PLATE DISSIPATION

FREQUENCY FOR MAXIMUM RATINGS

#### COOLING

See Note

500 MHz

Conduction

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 13.5 volts  
Current: 1.3 amperes  
Capacitances (Grounded Cathode):  
Input: 16.0 pf  
Output: 7.0 pf  
Feed-Through: 0.01 pf

Base: 11-pin  
Socket: Mycalex CP464-2  
Max. Seal Temp: 250 °C  
Max. Anode Core Temp: 250 °C  
Max. Height: 2.26 inches  
Max. Diameter: 1.436 inches  
Net Weight: 2 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier and Oscillator	2200	0.300	See Note	8.0	—	700	175	0.30	1.2	110
AB	Linear Radio-Frequency Amplifier	2200	0.300	See Note	8.0	—	700	250	0.205	0.3	80

#### NOTE:

Maximum plate dissipation is limited by maximum anode core temperature which is dependent on the type of conduction cooling employed. With a suitable thermal conductor, such as beryllium oxide, the thermal design should insure that for maximum expected anode dissipation, heat flow through the beryllium oxide thermal conductor will be sufficient to dissipate that power with no more than 225°C at the interface between anode and beryllium oxide.

# TETRODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED

### 8121 and 8122

The 8121 and 8122 are ceramic and metal air-cooled power tetrodes intended for use in radio-frequency power amplifier, oscillator and linear RF power amplifier service.

**PLATE DISSIPATION** 8121 — 150 watts, 8122 — 400 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 13.5 volts  
Voltage: 1.3 amperes  
Current: 16.0 pf  
Capacitances: 7.0 pf  
Input: 0.01 pf  
Output: 2.196 inches  
Feed-Through: 2.260 inches  
Base: 11-pin  
Socket: Mycalex CP464-2  
Max. Seal Temp: 250 °C  
Max. Anode Core Temp: 250 °C  
Max. Height: 8121  
8122  
Max. Diameter: 8121  
8122  
Net Weight: 3 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio Frequency Power Amplifier and Oscillator	2200	0.250	105	5.0	—	1000*	200	0.30	5.0	165
AB	Linear Radio-Frequency Amplifier	2200	0.300	150	8.0	—	1500**	250	0.210	0.3	170

\*In grid circuit at 470 MHz

\*\*30 MHz

### 8321 / 4CX350A and 8322 / 4CX350F

These tubes are externally identical to the 4CX250B but contain more rugged internal construction. These compact radial beam tetrodes have plate dissipation ratings of 350 watts.

These tubes are intended primarily for Class AB<sub>1</sub> linear service having high transconductance and allowing full output with extremely low drive requirements. The 4CX350A and 4CX350F differ only in heater voltages.

**PLATE DISSIPATION** 350 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 4CX350A 4CX350F  
Voltage: 6.0 26.5 volts  
Current: 2.9 to 3.6 0.66 to 0.81 amps  
Capacitances (Grounded Cathode):  
Input: 22.2 to 26.2 pf  
Output: 5.0 to 6.0 pf  
Feed-Through: 0.05 pf  
Base: Special, breechblock  
Socket: Eimac SK-600 Series  
Max. Seal Temp: 250 °C  
Max. Anode Core Temp: 250 °C  
Max. Height: 2.46 inches  
Max. Diameter: 1.64 inches  
Net Weight: 4 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.4	350	8	—	2000	400	0.54*	0	600*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.4	350	8	—	2000	400	0.27	0	300

\*Two tubes.

### 4CX600B/F

The 4CX600B/F is a ceramic and metal, air-cooled radial-beam tetrode designed for use in wideband amplifiers, particularly, distributed amplifiers. The mechanical and electrical features of this tube are compatible with wideband amplifier circuit requirements.

**PLATE DISSIPATION** 600 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 800 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 4CX600B 4CX600F  
Voltage: 6.0 26.5 volts  
Current: 4.3 0.93 amperes  
Capacitances (Grounded Filament):  
Input: 42 to 48 pf  
Output: 5.0 to 6.0 pf  
Feed-Through: 0.20 pf  
Base: Special  
Socket: Eimac SK-600 Series  
Max. Seal Temp: 250 °C  
Max. Height: 2.5 inches  
Max. Diameter: 3.0 inches  
Net Weight: 7 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB	Broadband Linear Amplifier	3000	0.600	600	15	3.0	2500	275	0.585	1.0	1000

### 4CX600J

A highly linear beam tetrode for amplifier service. Low input capacitance and high voltage gain provide an ideal amplifier for use with a solid state driver. 3rd and 5th order IMD products — 31 dB or better when operated as below.

**PLATE DISSIPATION** 600 watts (max.)  
**COOLING** Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: 6.0 volts  
Voltage: 5.4 amperes  
Current: 50.0 pf  
Capacitances: 5.3 pf  
Input: 0.2 pf(max)  
Output: 2.70 inches  
Feed-Through: 2.08 inches  
Base: Special 9-pin B8 236  
Socket: Special  
Max. Seal Temp: 250 °C  
Max. Anode Core Temp: 250 °C  
Max. Height: 2.70 inches  
Max. Diameter: 2.08 inches  
Net Weight: 7.7 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Radio-Frequency Linear Amplifier	3000	0.6	600	15	1.0	2000	350	487	—	550

\*In grid driven circuit at 470 MHz \*\*30 MHz

Note: Use a bypassed cathode resistor of approximately 11 ohms.



# TETRODES



## 8168/4CX1000A

This high-power ceramic-metal tetrode is an excellent choice for applications where class-AB<sub>1</sub> operation is desired. It is capable of delivering more than 1500 watts plate output power per tube in audio or r-f service without requiring grid driving power. It is recommended for use in new equipments.

**PLATE DISSIPATION** 1000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base: Special, breechblock
Heater: 6.0 volts	Socket: Eimac SK-800 series
Voltage: 8.1 to 9.9 amperes	Max. Seal Temp: 250 °C
Current: 8.1 to 9.9 amperes	Max. Anode-Core Temp: 250 °C
Capacitances (Grounded Cathode):	Max. Height: 4.8 inches
Input: 77 to 90 pf	Max. Diameter: 3.37 inches
Output: 11 to 13 pf	Net Weight: 27 ounces
Feed-Through: 0.02 pf	

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	1.0	1000	12	0	3000	325	1.75*	0	3260*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	1.0	1000	12	0	3000	325	.875	0	1630

\*Two tubes



## 8352/4CX1000K

This high-power ceramic-metal tetrode is electrically identical to the 4CX1000A, but gives improved performance at UHF due to its solid-ring screen terminal. This terminal surface improves isolation between input and output circuits to a marked degree and insures stable UHF operation as a class-AB<sub>1</sub> amplifier.

**PLATE DISSIPATION** 1000 watts  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base: Special, ring and breechblock
Voltage: 6.0 volts	Socket: SK 820
Current: 8.1 to 9.9 amperes	Max. Seal Temp: 250 °C
Capacitances (Grounded Cathode):	Max. Anode-Core Temp: 250 °C
Input: 84 pf	Max. Height: 4.75 inches
Output: 12 pf	Max. Diameter: 3.36 inches
Feed-Through: 0.02 pf	Net Weight: 28 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	1.0	1000	12	0	2500	325	0.885	0	1300



## 4CX1500A

The 4CX1500A is a compact, high-power ceramic and metal tetrode. It incorporates rugged internal construction features. A feature of this tube is the sturdy mesh cathode which allows it to meet demanding vibration and shock requirements. The 4CX1500A is useful up to 110 MHz and is recommended for use as a RF linear amplifier, a Class AB audio amplifier, a Class C power amplifier, plate modulated amplifier or a pulse modulator.

**PLATE DISSIPATION** 1500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Breechlock
Voltage: 5.0 volts	Socket: SK 831
Current: 38 to 43 amperes	Max. Seal Temp: 250 °C
Capacitances (Grounded Filament):	Max. Envelope Temp: 250 °C
Input: 68.0 to 78.0 pf	Max. Anode Temp: 250 °C
Output: 10.5 to 14.5 pf	Max. Anode Core Temp: 250 °C
Feed-Through: 0.4 pf(max)	Max. Height: 4.825 inches
	Max. Diameter: 3.370 inches

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Telegraphy	5000	1.0	1500	75	25	4500	500	0.9	9.0	3200
C	Telephony	3500	0.8	1000	75	25	3200	500	0.8	10	1900
B or AB	Linear Amplifier	4000	1.0	1500	75	25	3800	500	1.33*	—	3200*
—	Pulse Modulator, Pulse Length 100m sec. max	5000	6.0 pk	1500	75	25	5000	1500	6.0 pk	—	24,000 pk

\*Two tubes



## 8660/4CX1500B

The 4CX1500B is a ceramic-metal, forced-air-cooled, radial-beam tetrode with a rated plate dissipation of 1500 watts. It is a low-voltage, high-current tube specifically designed for exceptionally low intermodulation distortion and low grid interception. The low distortion characteristics make the tube especially suitable for RF and AF linear amplifier service.

**PLATE DISSIPATION** 1500 watts  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base: Special
Heater: 6.0 volts	Socket: SD-800 Series
Voltage: 11 amperes	Max. Seal Temp: 250 °C
Current: 11 amperes	Max. Anode Core Temp: 250 °C
Capacitances (Grounded Cathode):	Max. Height: 4.8 inches
Input: 88 pf(max)	Max. Diameter: 3.37 inches
Output: 12.8 pf(max)	Net Weight: 27 ounces
Feed-Through: 0.3 pf(max)	

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	RF Linear Amplifier	3000	0.900	1500	12	1.0	2500	225	0.720	1.5	900
AB <sub>1</sub>	AF Amplifier or Modulator	3000	0.900	1500	12	1.0	2500	325	1.69*	—	2258*

\*Two tubes

# TETRODES

EXTERNAL ANODE ■ FORCED-AIR COOLED



## 8169 / 4CX3000A

The 4CX3000A is a new ceramic-metal tetrode designed especially for class AB<sub>1</sub> linear amplifier service. In such service, the intermodulation distortion products produced by the 4CX3000A are of very low level, typically 32 to 44 db below PEP level, depending on operating conditions. The ample grid and screen dissipation ratings also make the 4CX3000A attractive for use as a class-C amplifier. The 4CX3000A is first choice for modern, new equipment design.

### PLATE DISSIPATION

FREQUENCY FOR MAXIMUM RATINGS

### COOLING

3000 watts

150 MHz

Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special, ring and breechblock
Voltage: 9.0 volts	Socket: Eimac SK-1400
Current: 43.5 amperes	Max. Seal Temp.: 250 °C
Capacitances (Grounded Filament):	Max. Anode Core Temp.: 250 °C
Input: 140 pF	Max. Height: 7.90 inches
Output: 14.5 pF	Max. Diameter: 4.63 inches
Feed-Through: 1.4 pF (max)	Net Weight: 5.5 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.0	3500	175	50	5000	850	3.6*	0	11,400*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB	6000	2.0	3500	175	50	5000	850	1.65	0	5300
C	Radio-Frequency Power Amplifier and Oscillator	7000	2.0	3000	175	50	7000	500	1.9	41	11,000
C	Plate-Modulated R-F Power Amplifier	5000	1.4	2000	175	50	5000	500	1.4	31	5750

\*Two tubes.



## 8170 / 4CX5000A

This high-power ceramic and metal tetrode features high class-AB<sub>1</sub> output power at audio and radio frequencies. It is also an excellent choice for AM or FM commercial service where high efficiency class-C operation is desired. Its modern and straight-forward design makes it preferred for use in new equipments.

### PLATE DISSIPATION

FREQUENCY FOR MAXIMUM RATINGS

### COOLING

5000 watts

30 MHz

Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special, concentric
Voltage: 7.5 volts	Socket: Eimac SK-300A
Current: 73 to 78 amperes	Max. Seal Temp.: 250 °C
Capacitances (Grounded Filament):	Max. Anode Core Temp.: 250 °C
Input: 108 to 122 pF	Max. Height: 9.125 inches
Output: 18.0 to 23.0 pF	Max. Diameter: 4.938 inches
Feed-Through: 1.0 pF	Net Weight: 9.5 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	7500	4.0	6000	250	75	7000	1250	3.65*	0	17,500*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB	7500	4.0	6000	250	75	7500	1250	1.9	0	10,000
C	Radio-Frequency Power Amplifier and Oscillator	7500	3.0	5000	250	75	7500	500	2.8	150	16,000
C	Plate-Modulated R-F Power Amplifier	5500	2.5	3500	250	75	5000	500	1.4	25	5800

\*Two tubes.



## 4CX5000J

The 4CX5000J is recommended for use in linear amplifier service where low levels of intermodulation distortion are required, and where the mechanical environment includes shock and vibration as in transportable equipment.

### PLATE DISSIPATION

### COOLING

5000 watts

Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten mesh	Base: Coaxial
Voltage: 7.5 volts	Socket: Eimac SK-300A or SK-300A
Current: 100 amperes	Max. Envelope Temp.: 250 °C
	Max. Anode Core Temp.: 250 °C
	Max. Height: 9.125 inches
	Max. Diameter: 4.938 inches
	Net Weight: 9.5 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Radio-Frequency Linear Amplifier	7500	4.0	5000	250	75	4050	800	1.61	—	3750



## 8170W / 4CX5000R

A ruggedized version of the 4CX5000A power tetrode, the 4CX5000R incorporates a sturdy mesh cathode construction. Electrically identical to the "A" version, it is an excellent choice for high power applications in severe environments.

### PLATE DISSIPATION

FREQUENCY FOR MAXIMUM RATINGS

### COOLING

5000 watts

30 MHz

Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special, concentric
Voltage: 7.5 volts	Socket: Eimac SK-300A
Current: 73 to 78 amperes	Max. Seal Temp.: 250 °C
Capacitances (Grounded Filament):	Max. Anode Core Temp.: 250 °C
Input: 108 to 122 pF	Max. Height: 9.125 inches
Output: 18.0 to 23.0 pF	Max. Diameter: 4.938 inches
Feed Through: 1.0 pF	Net Weight: 9.5 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	7500	4.0	6000	250	75	7000	1250	3.65*	0	17,500*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB	7500	4.0	6000	250	75	7500	1250	1.9	0	10,000
C	Radio-Frequency Power Amplifier and Oscillator	7500	3.0	5000	250	75	7500	500	2.8	150	16,000
C	Plate-Modulated RF Power Amplifier	5000	2.5	3500	250	75	5000	500	1.4	25	5800

\*Two tubes.

# TETRODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED

### 8171 / 4CX10,000



This Eimac tetrode is electrically identical to the 4CX5000A except for its plate dissipation rating and is intended for use where the extra plate dissipation is a necessity. It may be used at maximum ratings through 30 MHz and at slightly reduced ratings through the FM broadcast band.

**PLATE DISSIPATION** 10,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special, concentric
Voltage 7.5 volts	Socket Eimac SK-300A
Current 73 to 78 amperes	Max. Seal Temp. 250 °C
Capacitances (Grounded Filament):	Max. Anode-Core Temp. 250 °C
Input 115 pf	Max. Height 9.13 inches
Output 21 pf	Max. Diameter 7.05 inches
Feed-through 1.0 pf	Net Weight 12.2 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	7500	4.00	12,000	250	75	7500	1500	6.66*	0	31,900*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier	7500	4.00	12,000	250	75	7500	1500	3.33	0	15,950
C	Plate-Modulated r-f Power Amplifier	5000	2.5	6650	250	75	5000	500	1.4	25	5800
C	Radio-Frequency Power Amplifier and Oscillator	7500	3.0	10,000	250	75	7500	500	2.8	150	16,000

\*Two tubes

### 8281 / 4CX15,000A



A versatile addition to the Eimac line of ceramic-metal power tetrodes, the 4CX15,000A is similar to the 4CX10,000 but features higher plate voltage and current and greater plate dissipation. These increased capabilities allow it to operate at full ratings through the FM broadcast band. The 4CX15,000A is recommended for use in new equipment design.

**PLATE DISSIPATION** 15,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special, concentric
Voltage 6.3 volts	Socket Eimac SK-300A
Current 152 to 168 amperes	Max. Seal Temp. 250 °C
Capacitances (Grounded Filament):	Max. Anode-Core Temp. 250 °C
Input 148.5 to 161.5 pf	Max. Height 9.44 inches
Output 22.0 to 27.0 pf	Max. Diameter 7.58 inches
Feed-through 2.0 pf	Net Weight 12.8 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	10,000	5.0	15,000	450	200	10,000	750	4.55	220	36,500
C	Plate-Modulated rf Power Amplifier	8,000	4.0	10,000	450	200	8,000	750	3.65	150	23,500
AB <sub>1</sub>	Audio-Frequency Power Amplifier or Modulator	10,000	6.0	15,000	450	200	10,000	1500	8.5*	0	57,000*

\*Two tubes

### 4CX15,000J



The 4CX15,000J is recommended for use in linear amplifier service where low levels of intermodulation distortion are required, and where the mechanical environment includes shock and vibration as in transportable equipment.

**PLATE DISSIPATION** 15,000 watts  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten mesh	Base: Coaxial
Voltage 7.5 volts	Socket Eimac SK-300J or SK-300A
Current 153 amperes	Max. Envelope Temp. 250 °C
	Max. Anode Core Temp. 250 °C
	Max. Height 9.375 inches
	Max. Diameter 7.580 inches
	Net Weight 12.8 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Radio-Frequency Linear Amplifier	10,000	6.0	15,000	450	200	7500	1250	2.83	—	13,000

### 8349 / 4CX35,000C



Eimac's largest, forced air cooled power tetrode has a plate dissipation rating of 35 kilowatts and is usable to 20,000 plate volts in Class-C and Class-AB amplifier service. A single 4CX35,000C will deliver over 100 kilowatts of CW power as a Class-C power amplifier or oscillator.

**PLATE DISSIPATION** 35,000 watts  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special, concentric rings
Voltage 10.0 volts	Socket Eimac SK-1500
Current 300 amperes	Max. Seal Temp. 250 °C
Capacitances (Grounded Filament):	Max. Anode-Core Temp. 250 °C
Input 465 pf	Max. Height 17.0 inches
Output 55 pf	Max. Diameter 9.75 inches
Feed-through 2.45 pf	Net Weight 50 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	20,000	15.0	35,000	1750	500	12,000	1500	9.2*	0	70,000*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB	20,000	15.0	35,000	1750	500	15,000	1500	5.7	0	55,000
C	Radio-Frequency Power Amplifier and Oscillator	20,000	15.0	35,000	1750	500	19,000	750	6.97	258	110,000
C	Plate-Modulated rf Power Amplifier	14,000	15.0	23,000	1750	500	12,000	750	5.40	125	55,000

\*Two tubes.

# TETRODES

## EXTERNAL ANODE ■ FORCED-AIR COOLED



### 4X500A

This medium-power external anode tetrode finds wide acceptance in FM broadcast service. The instant-heating filament of thoriated tungsten and the overall compactness are but two of the 4X500A's bonus features. Maximum ratings apply to 120 MHz.

**PLATE DISSIPATION** 500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 120 MHz — class-C CW  
 220 MHz — class-B TV  
**COOLING** Forced Air

#### CHARACTERISTICS

Filament	Thoriated tungsten	Base	4-pin special
Voltage	5.0 volts	Socket	Eimac SK-900
Current	12.2 to 13.7 amperes	Max. Anode-Core Temp	175 °C
Capacitances (Grounded Cathode):		Max. Seal Temp.	175 °C
Input	10.6 to 14.4 pF	Max. Height	4.750 inches
Output	4.9 to 6.9 pF	Max. Diameter	2.625 inches
Feed-Through	0.1 pF	Net Weight	1.7 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
B <sub>1</sub>	Radio-Frequency Linear Amplifier — TV Visual Service	3000	0.350	500	30	10	2400	500	0.400*	25*	600*
C	Radio-Frequency Power Amplifier and Oscillator	4000	0.350	500	30	10	4000	500	0.315	5	835

\*Peak synchronizing level.

## EXTERNAL ANODE ■ WATER COOLED



### 4CW800B and 4CW800F

The 4CW800B/F is a ceramic metal, liquid-cooled radial beam tetrode. Its low lead-inductance, low input and output capacitance and small size make it ideal for use in distributed amplifiers for which it was especially designed. Rugged construction, unitized electrode structure and direct mounting to the chassis make the tube suitable for severe shock and vibration environments.

**PLATE DISSIPATION** 800 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 800 MHz  
**COOLING** Liquid

#### CHARACTERISTICS

Cathode	Oxide-coated, unipotential	Base	Special
Heater	4CW800B 4CW800F	Socket	Special
Voltage	6.0 26.5 volts	Max. Seal Temp	250 °C
Current	4.7 1.25 amperes	Max. Base Temp	150 °C
Capacitances (Grounded Filament):		Max. Height	3.0 inches
Input	48 pF (max)	Max. Diameter	3.0 inches
Output	6.0 pF (max)	Net Weight	7.0 ounces
Feed-Through	0.15 pF		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Broadband Linear Amplifier	3000	0.600	800	15	3.0	1500	275	0.580	0.12	590



### 8244 / 4CW2000A

This recent addition to the Eimac line is electrically identical to the popular 4CX1000A except for its plate dissipation rating which is 2000 watts. It is intended for use where water cooling is preferred or where higher anode dissipation capability is required.

**PLATE DISSIPATION** 2000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Water and Forced Air

#### CHARACTERISTICS

Cathode	Oxide-coated, unipotential	Base	Special, breechblock
Heater		Socket	Eimac SK-800 series
Voltage	6.0 volts	Max. Seal Temp	250 °C
Current	8.1 to 9.9 amperes	Max. Height	5.540 inches
Capacitances (Grounded Cathode):		Max. Diameter	2.550 inches
Input	77 to 90 pF	Net Weight	1.7 pounds
Output	11 to 13 pF		
Feed-Through	0.02 pF		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	1.0	2000	12	0	3000	325	1.75*	0	3360*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier — SSB	3000	1.0	2000	12	0	3000	325	0.875	0	1630

\*Two tubes.



### 4CW10,000A

Electrically identical to the 4CX5000A except for its plate dissipation rating, the 4CW10,000A is intended for use where water cooling is preferred or where the extra plate dissipation is a necessity. It may be used at maximum ratings through 30 MHz and at slightly reduced ratings through the FM broadcast band.

**PLATE DISSIPATION** 12,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Water and Forced Air

#### CHARACTERISTICS

Filament	Thoriated tungsten	Base	Special, concentric
Voltage	7.5 volts	Socket	Eimac SK-300A
Current	73 to 78 amperes	Max. Seal Temp	250 °C
Capacitances (Grounded Filament):		Max. Height	11.44 inches
Input	108 to 122 pF	Max. Diameter	4.66 inches
Output	18 to 23 pF	Net Weight	7.5 pounds
Feed-Through	1.0 pF		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	7500	4.00	12,000	250	75	7500	1500	6.66*	0	31,900*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier	7500	4.00	12,000	250	75	7500	1500	3.33	0	15,950
C	Plate-Modulated r-f Power Amplifier	5000	2.5	6650	250	75	5000	500	2.4	120	8500
C	Radio-Frequency Power Amplifier and Oscillator	7500	3.0	10,000	250	75	7500	500	2.8	150	16,000

\*Two tubes.



# TETRODES



## 4CW25,000A

The 4CW25,000A is a liquid-cooled, general purpose tetrode with the same basic characteristics as the air-cooled 4CX15,000A. It is recommended for regulator, and pulse modulator service.

**PLATE DISSIPATION** 25,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base	Coaxial
Voltage 6.3 volts	Socket	Eimac SK 300, or SK-300A
Current 160 amperes		
Capacitances (Grounded Filament):	Max. Envelope	
Input 155 pf	Temp	250 °C
Output 24 pf	Max Height	12.6 inches
Feed-Through	Max Diameter	4.6 inches
Less than 2.0 pf	Net Weight	13.5 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio Frequency Power Amplifier	10,000	5.0	25,000	450	200	9000	750	4.55	220	32,000
AB <sub>1</sub>	Audio Frequency Amplifier or Modulator	10,000	6.0	25,000	450	200	7500	1500	8.8	—	41,600*
—	Regulator, or Pulse Modulator	20,000	55.0	25,000	450	200	—	—	—	—	—
AB <sub>1</sub>	Radio Frequency Linear Amplifier	10,000	6.0	25,000	450	200	7500	1500	4.4	—	20,800

\*Two tubes



## 4CW50,000E\*

The 4CW50,000E is a ceramic metal, liquid-cooled power tetrode intended for use at the 50 to 100 kW output power level. It is recommended for use as a Class C RF amplifier or oscillator, a Class AB RF linear amplifier, or a Class AB push-pull AF amplifier or modulator. The tube is also useful as a plate and screen modulated Class C RF amplifier.

**PLATE DISSIPATION** 50,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Liquid

### CHARACTERISTICS

Filament: Thoriated tungsten mesh	Base	Special
Voltage 12 volts	Socket	SK-2050
Current 220 amperes	Coolant	
Capacitances (Grounded Filament):	Jacket	SK 2000 Series
Input 340 pf	Max. Seal Temp.	250 °C
Output 53 pf	Max Height	13.0 inches
Feed-Through 0.7 pf	Max Diameter	7.75 inches
	Net Weight	35 pounds

\*Shown with SK-2050 water jacket.

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator	17,500	12	50,000	1500	400	15,000	1500	12	250	140,000
C	Plate-Modulated RF Power Amplifier	15,000	12	33,300	1500	400	14,000	750	9.9	700	110,000
AB <sub>1</sub>	AF Amplifier or Modulator	17,500	12	50,000	1500	400	—	—	—	—	—
AB <sub>1</sub>	RF Linear Amplifier	17,500	12	50,000	1500	400	—	—	—	—	—



## 4CW100,000D

The 4CW100,000D is a ceramic metal, liquid-cooled power tetrode intended for use at the 100 to 200 kW output power level. It is recommended for use as a Class C RF amplifier or oscillator, a Class AB RF linear amplifier or a Class AB push-pull AF amplifier or modulator. The 4CW100,000D is also useful as a plate and screen modulated Class C RF amplifier and in pulse modulator-regulator service.

**PLATE DISSIPATION** 100,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Liquid

### CHARACTERISTICS

Filament: Thoriated tungsten	Base	Special
Voltage 10.0 volts	Socket	SK-1500 or 1510
Current 310 amps (max)	Max. Seal Temp.	250 °C
Capacitances (Grounded Filament):	Max Height	18.0 inches
Input 470 pf	Max Diameter	8.0 inches
Output 60 pf (max)	Net Weight	60 pounds
Feed-Through 3.2 pf		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (kW)
C	RF Power Amplifier or Oscillator	20,000	15.0	100,000	1750	500	17,000	750	9.8	1020	137.5
C	Plate-Modulated RF Power Amplifier Grid Driven	17,500	15.0	66,500	1750	500	16,000	750	10.0	870	138.5
AB	AF Amplifier or Modulator	20,000	15.0	100,000	1750	500	18,000	1500	20*	—	246.4*
AB	RF Linear Amplifier	20,000	15.0	100,000	1750	500	18,000	1500	10.0	—	123.2
—	Pulse Modulator	40,000	—	100,000	1750	500	38,000	1500	112	—	3600

\*Two tubes



## 4CW100,000E\*

The 4CW100,000E is a ceramic metal, liquid-cooled power tetrode intended for use at the 100 to 250 kW CW, and 300 to 500 kW pulse output power level. Its low grid-to-plate capacitance and high transconductance makes the tube ideal for broadband grid drive operation. The 4CW100,000E is also useful in pulse modulator-regulator service.

**PLATE DISSIPATION** 100,000 watts  
**COOLING** Liquid and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base	Special
Voltage 16 volts	Socket	SK 2000 Series
Current 230 amps (max)	Jacket	SK-2100
Capacitances:	Max. Seal Temp.	250 °C
Input 400 pf	Max Height	14.5 inches
Output 60 pf	Max Diameter	9.5 inches
Feed Through 0.9 pf	Net Weight	38 pounds

\*Shown with SK 2100 water jacket.

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
—	Radio Frequency Pulse Power Amplifier or Oscillator	30,000	—	100,000	1700	500	25,000*	2500	68	—	180,000

\*Typical operation in distributed amplifier service

\*\*RF power into load per tube

# TETRODES

## EXTERNAL ANODE ■ WATER COOLED

### 4CW250,000A and 4CW250,000V \*



The 4CW250,000A and 4CW250,000V are identical ceramic-metal, water-cooled power tetrodes except that the 4CW250,000V contains an integral ion vacuum pump which may be used to check the tube's vacuum condition during storage or to restore the vacuum of a tube which has been damaged by overheating in service. The tubes are intended for use in the 250 to 500 kW output power range.

**PLATE DISSIPATION** 250,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 50 MHz  
**COOLING** Liquid

#### CHARACTERISTICS

Filament	Thoriated tungsten	Base	Special
Voltage	12.0 volts	Socket	Special
Current	640 amperes	Max. Seal Temp.	200 °C
Capacitances (Grounded Filament)		Max. Height	29.5 inches
Input	775 pf	Max. Diameter	13 inches
Output	130 pf	Net Weight	100 pounds
Feed-Through	6.0 pf		

\* Shown with SK-1720 water jacket.

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator	20,000	40	250,000	3500	1500	19,000	800	32.5	3000	460.00
C	Plate-Modulated RF Power Amplifier	17,500	30	167,000	3500	1500	14,000	800	29.0	2320	285.00
AB	AF Amplifier or Modulator	20,000	40	250,000	3500	1500	20,000	1800	46	—	660.00
AB	RF Linear Amplifier	20,000	40	250,000	3500	1500	20,000	1800	23	—	330.00

\* Corresponds to 250,000 watts at 100 per cent sine wave modulation.



### 8249/4W300B

A general-purpose radial-beam tetrode with electrical characteristics similar to those of the Eimac 4X250B, this water-cooled version is intended for use where reserve anode dissipation is desired or where the use of water is a convenience. Maximum ratings apply to frequencies as high as 500 MHz.

**PLATE DISSIPATION** 300 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 MHz  
**COOLING** Water and Forced Air

#### CHARACTERISTICS

Cathode	Oxide coated, unipotential	Base	9-pin, special
Heater		Socket	Eimac SK-600 series
Voltage	6.0 volts	Max. Seal Temp.	175 °C
Current	2.3 to 2.9 amperes	Max. Height	3.407 inches
Capacitances (Grounded Cathode)		Max. Diameter	2.126 inches
Input	14.2 to 17.2 pf	Net Weight	6 ounces
Output	4.0 to 5.0 pf		
Feed-Through	0.06 pf		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio Frequency Power Amplifier and Modulator	2000	0.250	300	12	—	2000	350	0.500*	0	600
AB <sub>1</sub>	Radio Frequency Linear Power Amplifier—SSB	2000	0.250	300	12	—	2000	350	0.250	0	300
C	Radio Frequency Power Amplifier and Oscillator	2000	0.250	300	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated R F Power Amplifier	1500	0.200	200	12	2	1500	250	0.200	1.7	235

\*Two tubes.



### 8173/4W20,000A

The 8173/4W20,000A is a high power, water-cooled, power tetrode which will operate efficiently as a power amplifier at frequencies up to 250 MHz. A single 8173/4W20,000A operating as a television visual RF amplifier will deliver a synchronizing power output of 26 kW at 216 MHz with 5 MHz bandwidth. The coaxial construction of the tube is ideal for cavity circuits.

**PLATE DISSIPATION** 20,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 220 MHz  
**COOLING** Water and Forced Air

#### CHARACTERISTICS

Cathode	Unipotential thoriated tungsten heated by electron bombardment	Capacitances (Grounded Grid):	
DC Voltage	1500 volts	Input	87 pf (max)
DC Current	1.9 amperes	Output	25.5 pf (max)
Filament: Thoriated tungsten		Feed-Through	0.6 pf (max)
Voltage	10 volts	Base	Special, concentric
Current	25 amperes	Max. Seal Temp.	150 °C
		Max. Height	15 inches
		Max. Diameter	5.03 inches
		Net Weight	7.6 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier	8000	15	20,000	200	60	7000	1200	3.4	830	13,000
B	Linear Amplifier Television Visual	8000	15	20,000	200	60	7000	1200	6.0	500	26,000

\* Peak Synchronizing Level

## EXTERNAL ANODE ■ VAPOR COOLED

### 4CV1500B



The 4CV1500B is a ceramic-metal, vapor and forced air cooled radial beam tetrode with a rated maximum plate dissipation of 1500 watts. It is a low voltage, high current tube specifically designed for exceptionally low intermodulation distortion and low grid interception. The low distortion characteristics make the 4CV1500B especially suitable for RF and AF linear amplifier service.

**PLATE DISSIPATION** 1500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Vapor and Forced Air

#### CHARACTERISTICS

Cathode	Oxide coated, unipotential	Base	Special
Heater		Socket	SK 800 Series
Voltage	6.0 volts	Max. Seal Temp.	250 °C
Current	11.0 amps (max)	Max. Height	5.35 inches
Capacitances (Grounded Cathode)		Max. Diameter	3.35 inches
Input	88 pf	Net Weight	27 ounces
Output	12.8 pf		
Feed-Through	0.03 pf		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB	RF Linear Amplifier	3000	0.900	1500	12	1.0	2900	225	0.710	1.5	1100
AB <sub>1</sub>	AF Amplifier or Modulator	3000	0.900	1500	12	1.0	2900	325	1.69	—	2774

# TETRODES

## EXTERNAL ANODE ■ VAPOR COOLED

### 4CV8000A



This vapor-cooled version of Eimac's 4CX3000A offers a conservative plate dissipation rating of 8000 watts. It is recommended for Class AB audio and radio-frequency applications as well as Class-C rf amplifier service.

A pair of these tubes will deliver over 14 kilowatts of audio frequency output with low distortion in Class AB<sub>1</sub> service.

**PLATE DISSIPATION** 8000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 150 MHz  
**COOLING** Vapor and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special, ring and
Voltage: 10.0 volts	breechblock
Current: 43.5 to 48.5 amperes	Socket: Eimac SK-1490
Capacitances (Grounded Filament):	Max. Seal Temp: 250 °C
Input: 120 to 140 pf	Max. Height: 7.983 inches
Output: 10.5 to 14.5 pf	Max. Diameter: 7.016 inches
Feed-Through: 1.4 pf	Net Weight: 7.0 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio Frequency Power Amplifier and Modulator	6000	2.0	8000	175	50	5000	850	4.0*	0	14,500*
AB <sub>2</sub>	Radio Frequency Linear Power Amplifier—SSB	6000	2.0	8000	175	50	6000	850	2.0	0	7,250
C	Radio-Frequency Power Amplifier and Oscillator	7000	2.0	8000	175	50	7000	500	1.9	47	11,000
C	Plate-Modulated rf Power Amplifier	5000	1.4	5500	175	50	5000	400	1.35	42	5,500

\*Two tubes.

### 4CV20,000A



A vapor-cooled version of the popular 4CX5000A, the 4CV20,000A has a plate dissipation rating of 20 kilowatts. Two of these tubes in a push-pull Class-AB<sub>1</sub> amplifier will produce 35 kilowatts output.

A full complement of vapor cooling accessories is available for this and all other Eimac vapor-cooled tube types.

**PLATE DISSIPATION** 20,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Vapor and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special concentric
Voltage: 7.5 volts	Socket: Eimac SK-310
Current: 73 to 78 amperes	Max. Seal Temp: 250 °C
Capacitances (Grounded Filament):	Max. Height: 9.125 inches
Input: 108 to 122 pf	Max. Diameter: 7.75 inches
Output: 18.0 to 23.0 pf	Net Weight: 21 pounds
Feed-Through: 1.0 pf	

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	7500	4.0	20,000	250	—	7500	1500	8.0*	0	35,000*
AB <sub>2</sub>	Radio Frequency Linear Power Amplifier—SSB	7500	4.0	20,000	250	—	7500	1500	4.0	0	17,500
C	Radio-Frequency Power Amplifier and Oscillator	7500	3.0	20,000	250	75	7500	500	3.0	155	17,000
C	Plate-Modulated rf Power Amplifier	5000	2.5	13,500	250	75	5000	500	2.2	77	7,750

\*Two tubes.

### 4CV35,000A



Recommended for use as a modulator, oscillator or amplifier, the 4CV35,000A is usable to 110 megacycles. With a plate voltage of 10 kV in Class-C service, the tube is capable of over 35 kilowatts output power. The plate dissipation of 35 kilowatts allows use of the 4CV35,000A in low efficiency Class AB<sub>1</sub> circuits.

**PLATE DISSIPATION** 35,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 MHz  
**COOLING** Vapor and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special concentric
Voltage: 6.3 volts	Socket: Eimac SK-310
Current: 152 to 168 amperes	Max. Seal Temp: 250 °C
Capacitances (Grounded Filament):	Max. Height: 9.125 inches
Input: 158 to 172 pf	Max. Diameter: 7.88 inches
Output: 22.0 to 27.0 pf	Net Weight: 24 pounds
Feed-Through: 2.0 pf	

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	10,000	5.0	35,000	450	200	10,000	750	4.8	225	38,000
C	Plate-Modulated rf Power Amplifier	7500	4.0	23,000	450	200	7500	750	3.65	150	23,500
AB <sub>1</sub>	Audio Frequency Power Amplifier or Modulator	10,000	6.0	35,000	450	200	10,000	1500	10.7*	0	66,000*

\*Two tubes.

### 4CV50,000E\*



The 4CV50,000E is a ceramic metal, vapor cooled tetrode intended for use at the 50 to 100 kW output power level. It is recommended for use as a Class C RF amplifier or oscillator, a Class AB RF linear amplifier or a Class AB push pull AF amplifier or modulator. The 4CV50,000E can also be used as a plate and screen modulated Class C RF amplifier.

**PLATE DISSIPATION** 50,000 watts  
**COOLING** Vapor and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten mesh	Base: Special
Voltage: 12 volts	Socket: SK-2000 Series
Current: 220 amperes	Boiler: BR-700
Capacitances:	Max. Seal Temp: 250 °C
Input: 340 pf	Max. Anode Flange Temp: 200 °C
Output: 53 pf	Max. Height: 13.0 inches
Feed-Through: 0.7 pf	Max. Diameter: 7.75 inches
	Net Weight: 35 pounds

\*Shown with BR-700 boiler.

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator	17,500	12	50,000	1500	400	15,000	1500	12	250	140,000
C	Plate Modulated RF Power Amplifier	15,000	12	33,300	1500	400	14,000	750	9.9	700	110,000
AB <sub>1</sub>	AF Amplifier or Modulator	17,500	12	50,000	1500	400	—	—	—	—	—
AB <sub>2</sub>	RF Linear Amplifier	17,500	12	50,000	1500	400	—	—	—	—	—

# TETRODES

## EXTERNAL ANODE ■ VAPOR COOLED



### 4CV75,000A \*

The 4CV75,000A is a vapor phase cooled tetrode with basic characteristics the same as the 4CV100,000C. It is intended for use with the compact, upright, boiler, Eimac BR-320. This combination results in low capacitance of anode and boiler to ground.

**PLATE DISSIPATION** 75,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Vapor Phase and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base	Coaxial
Voltage 10.0 volts	Socket	Eimac SK 1500
Current 300 amperes		or SK 1510
Capacitances (Grounded Filament):	Max Envelope	
Input 440 pf	Temp.	250 °C
Output 55 pf	Max Height (In BR-320	
Feed Through 2.3 pf	Boiler)	19.3 inches
	Max Diameter (Of BR-320	
	Boiler)	9.4 inches
	Net Weight	60 pounds

\* Shown with BR-320 boiler.

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Power Amplifier (CW) Radio-Frequency	15,000	15.0	75,000	1750	500	15,000	1500	11.8	120	140,000
C	Radio Frequency Power Amplifier (Plate Modulated)	12,500	15.0	50,000	1750	500	11,000	750	9.1	1000	82,000
AB <sub>1</sub>	Audio Frequency Amplifier or Modulator	15,000	15.0	75,000	1750	500	11,000	1500	18.8	—	129,000



### 8351 / 4CV100,000C

The largest of Eimac's power grid tubes, the 4CV100,000C is finding wide acceptance in application where a very high power rugged tetrode is desired. Vapor cooling allows a conservative plate dissipation rating of 100 kilowatts.

**PLATE DISSIPATION** 100,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Vapor and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base	Special concentric rings
Voltage 10.0 volts	Socket	Eimac SK 1510
Current 300 amperes		Max Seal Temp. 250 °C
Capacitances (Grounded Filament):	Max Height	17.0 inches
Input 430 uufd	Max Diameter	10.0 inches
Output 45 uufd	Net Weight	95 pounds
Feed Through 2.3 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio Frequency Power Amplifier and Modulator	20,000	15.0	100,000	1750	500	18,000	1500	20.0	0	246,400
AB <sub>1</sub>	Radio Frequency Linear Power Amplifier—SSB	20,000	15.0	100,000	1750	500	18,000	1500	10.0	0	123,200
C	Radio Frequency Power Amplifier and Oscillator	20,000	15.0	100,000	1750	500	17,500	1500	11.8	125	168,000
C	Plate Modulated rf Power Amplifier	17,500	15.0	66,500	1750	500	16,000	750	12.0	1260	138,500

Two Tubes



### 4CV100,000E \*

The 4CV100,000E is a ceramic metal, vapor cooled power tetrode intended for use at the 100 to 250 kW CW, and 300 to 500 kW pulse output power level. Its low grid-to-plate capacitance and high transconductance make the tube ideal for broadband grid drive operation. The 4CV100,000E is also useful in pulse modulator and regulator service.

**PLATE DISSIPATION** 100,000 watts  
**COOLING** Vapor and Forced Air

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base	Special
Voltage 16 volts	Socket	SK 2000 Series
Current 230 amperes	Boiler	BR 800
Capacitances (Grounded Cathode):	Max Seal Temp.	250 °C
Input 400 pf	Max Height	14.5 inches
Output 60 pf	Max Diameter	9.5 inches
Feed Through 0.9 pf	Net Weight	38 pounds

\* Shown with BR 800 boiler.

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
—	Radio-Frequency Pulse Power Amplifier or Oscillator	30,000	—	100,000	1700	500	25,000*	2500	68	—	180,000

\* Typical operation in distributed amplifier service \*\* RF power into load per tube.



### 4CV250,000A and 4CV250,000V

The 4CV250,000A and V are ceramic metal, vapor cooled power tetrodes. The tubes are recommended for use as a Class C RF amplifier or oscillator, a Class AB RF linear amplifier or Class AB push-pull AF amplifier or modulator.

**PLATE DISSIPATION** 250,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Vapor and Water

#### CHARACTERISTICS

Filament: Thoriated tungsten	Base	Special
Voltage 12 volts	Socket	BR 605 Boiler
Current 660 amperes	Max Seal Temp.	200 °C
Capacitances (Grounded Cathode):	Max. Anode Flange	
Input 800 pf(max)	Temp.	130 °C
Output 136 pf(max)	Max Height	28.02 inches
Feed Through 8.0 pf	Max Dia	15.062 inches
	Net Weight	180 pounds

4CV250,000V is supplied with a Vaclon pump.

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator	20,000	40	250,000	3500	1500	19,000	800	32.5	3000	460,000
C	Plate-Modulated RF Power Amplifier	17,500	30	167,000	3500	1500	14,000	800	29.0	2320	285,000
AB	AF Amplifier or Modulator	20,000	40	250,000	3500	1500	20,000	1800	46**	—	660,000
AB	RF Linear Amplifier	20,000	40	250,000	3500	1500	20,000	1800	23	—	330,000
—	Pulse Modulator or Regulator	40,000	—	250,000	3500	1500	—	2500	—	—	—

\*\* Two tubes.

\* Corresponds to 250,000 watts at 100 per cent sine wave modulation.



# PENTODES

## 4E27A/5-125B

A general purpose compact pentode cooled by radiation and convection and with maximum ratings applicable to 75 MHz. No forced air cooling is required in most installations.

**PLATE DISSIPATION** 125 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 MHz  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: 7-pin, metal shell
Voltage: 5.0 volts	Socket: Johnson 122-237
Current: 7.0 to 8.0 amperes	Max. Seal Temp: 225 °C
Capacitances (Grounded Filament):	Max. Height: 6.188 inches
Input: 8.7 to 12.3 pf	Max. Diameter: 2.750 inches
Output: 3.5 to 5.9 pf	Net Weight: 6 ounces
Feed Through: 0.1 pf	

Class of Operation	Type of Service	Maximum Ratings						Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Supp. Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Freq. Power Amp. and Modulator	4000	0.200	125	20	20	—	2500	500	0.220*	0	300*
AB <sub>2</sub>	Audio-Freq. Power Amp. and Modulator	4000	0.200	125	20	20	5	2500	500	0.250*	0.2*	400*
C	Radio-Freq. Power Amp. and Oscillator	4000	0.200	125	20	20	5	3000	500	0.167	1.9	375
C	Plate-Mod. Radio-Freq. Amp.—Zero Suppressor Volts	2500	0.160	85	20	20	5	2500	500	0.152	2	295
C	Suppressor-Mod. Radio-Freq. Amp.	4000	0.200	125	20	20	5	3000	400	0.060	1.2	75

\*Two tubes.

## 175A

The 175A is a beam pentode which incorporates a unique vane type suppressor grid. The suppressor grid terminates in the tube shell and is designed to operate at zero voltage. The base shell must be grounded to the chassis by means of suitable spring clips.

**PLATE DISSIPATION** 400 watts  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: 5-pin metal shell
Voltage: 5.0 volts	Socket: Johnson 122-275
Current: 14.5 amperes	Max. Height: 6.63 inches
Capacitances:	Max. Diameter: 3.56 inches
Input: 15.1 pf	
Output: 9.8 pf	
Feed Through: 0.06 pf	

Class of Operation	Type of Service	Maximum Ratings						Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Supp. Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Amplifier or Oscillator	4000	0.350	400	—	25	—	3000	600	0.350	1.3	715
AB <sub>1</sub>	Linear RF Amplifier	4000	0.350	400	—	25	—	3000	750	0.350	—	680

## 177WA

The 177WA beam pentode is a ruggedized version of the 177A with which it is directly interchangeable. The 177WA may be mounted in any position and will withstand high levels of shock and vibration. The tube incorporates a unique vane-type suppressor grid which permits high power output at relatively low plate voltages and provides excellent characteristics for use as a linear RF or audio amplifier.

**PLATE DISSIPATION** 75 watts  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: 7-pin
Voltage: 6.0 volts	Socket: Johnson 122-101
Current: 3.2 amperes	Max. Height: 4.38 inches
Capacitances:	Max. Diameter: 2.38 inches
Input: 7.5 pf	
Output: 4.2 pf	
Feed-Through: 0.06 pf	

Class of Operation	Type of Service	Maximum Ratings						Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Supp. Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Amplifier or Oscillator	2000	0.150	75	—	—	—	1500	400	0.150	0.75	160
AB <sub>1</sub>	Linear RF Amplifier	2000	0.175	75	—	—	—	1500	600	0.175	—	140

## 5-500A

The 5-500A is a compact, ruggedly constructed radial-beam power pentode with a maximum plate dissipation rating of 500 watts. It is intended for use as an amplifier, oscillator or modulator. The high plate current rating, low grid-plate capacitance and low driving power requirements permit maximum power capability to be combined with circuit simplicity and economic driver requirements.

**PLATE DISSIPATION** 500 watts  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: 5 pin
Voltage: 10.0 volts	Socket: SK 410
Current: 10.2 amperes	Max. Seal Temp: 200 °C
Capacitances (Grounded Cathode):	Max. Height: 7.00 inches
Input: 19.0 pf (max)	Max. Diameter: 3.56 inches
Output: 12.0 pf (max)	Net Weight: 11 ounces
Feed-Through: 0.10 pf	

Class of Operation	Type of Service	Maximum Ratings						Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Supp. Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator	4000	0.450	500	—	35	12	3000	500	0.432	12	805
AB <sub>1</sub>	RF Linear Amplifier	4000	0.450	500	—	35	12	3000	750	0.320	—	612
C	Plate Modulated RF Amplifier	4000	0.340	330	—	35	12	3100	470	0.260	6.0	580
AB	AF Power Amplifier or Modulator	4000	0.450	500	—	35	12	3000	750	0.640*	—	1224*

\*Two tubes.

# PENTODES

## 8295 / 172



This tube is an air cooled, glass and metal beam pentode capable of high power gain and excellent efficiency at relatively low plate voltages. The tube is especially suited for low distortion Class AB<sub>1</sub> linear RF amplifier service.

**PLATE DISSIPATION**  
**COOLING**

**1000 watts**  
**Forced Air**

### CHARACTERISTICS

Cathode: Oxide coated, unipotential	Base	7 pin
Heater:	Socket	Eimac 184
Voltage 6.0 volts	Max. Seal Temp	175 °C
Current 8.2 amperes	Max. Height	5.125 inches
Capacitances:	Max. Diameter	4.032 inches
Input 42 pf	Net Weight	3.0 pounds
Output 21 pf		
Feed Through 0.09 pf		

Class of Operation	Type of Service	Maximum Ratings						Typical Operation					
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss (watts)	Supp. Diss (watts)	Screen Diss (watts)	Grid Diss (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)	
C	RF Amplifier or Oscillator	3000	1.0	1000	—	30	5	2500	500	0.840	2.1	1440	
AB <sub>1</sub>	Linear RF Amplifier	3000	0.800	1000	—	30	5	2500	500	0.800	—	1260	

## 8295A



The 8295A is an air-cooled, ceramic metal beam pentode capable of high power gain and excellent efficiency at relatively low plate voltages. The tube is especially suited for low distortion Class AB<sub>1</sub> linear RF amplifier service.

**PLATE DISSIPATION**  
**COOLING**

**1000 watts**  
**Forced Air**

### CHARACTERISTICS

Cathode: Oxide coated, unipotential	Base	7 pin
Heater:	Socket	Eimac 184
Voltage 6.0 volts	Max. Seal Temp	250 °C
Current 8.2 amperes	Max. Height	5.125 inches
Capacitances:	Max. Diameter	4.032 inches
Input 42 pf	Net Weight	3.0 pounds
Output 21 pf		
Feed Through 0.09 pf		

Class of Operation	Type of Service	Maximum Ratings						Typical Operation					
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss (watts)	Supp. Diss (watts)	Screen Diss (watts)	Grid Diss (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)	
C	RF Amplifier or Oscillator	3000	1.0	1000	—	30	5	2500	500	0.840	2.1	1440	
AB <sub>1</sub>	Linear RF Amplifier	3000	0.800	1000	—	30	5	2500	500	0.800	—	1260	

## 8432



The 8432 is a ceramic-metal beam pentode featuring compact construction. The tube is especially suited for low distortion Class AB<sub>1</sub> linear RF amplifier use where a single tube will deliver over 1500 watts of useful power output. The tube also provides outstanding performance in Class AB<sub>2</sub> and Class B service.

**PLATE DISSIPATION**  
**COOLING**

**1000 watts**  
**Forced Air**

### CHARACTERISTICS

Cathode: Oxide coated, unipotential	Base	7-pin
Heater:	Socket	Eimac 209A
Voltage 6.0 volts	Max. Seal Temp	250 °C
Current 8.2 amperes	Max. Height	4.75 inches
Capacitances:	Max. Diameter	3.53 inches
Input 42 pf	Net Weight	2.5 pounds
Output 20 pf		
Feed-Through 0.09 pf		

Class of Operation	Type of Service	Maximum Ratings						Typical Operation					
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss (watts)	Supp. Diss (watts)	Screen Diss (watts)	Grid Diss (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)	
AB <sub>1</sub>	Linear RF Amplifier	3000	0.800	1000	—	30	5	2500	500	0.780	—	1280	
C	RF Amplifier or Oscillator	3000	1.0	1000	—	30	5	—	—	—	—	—	

## 5CX1500A



The 5CX1500A is a ceramic metal power pentode designed to be used as a Class AB<sub>1</sub> linear amplifier in audio or radio-frequency applications. Its low intermodulation distortion characteristics make it especially suitable for single sideband service.

**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

**1500 watts**  
**110 MHz**  
**Forced Air**

### CHARACTERISTICS

Filament Thoriated tungsten mesh	Base	Special
Voltage 5.0 volts	Socket	SK 840
Current 43 amperes (max)	Max. Seal Temp	250 °C
Capacitances (Grounded Filament):	Max. Anode Core Temp.	250 °C
Input 78 pf (max)	Max. Height	5.0 inches
Output 18.5 pf (max)	Max. Diameter	3.4 inches
Feed-Through 0.25 pf	Net Weight	30 ounces

Class of Operation	Type of Service	Maximum Ratings						Typical Operation					
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss (watts)	Supp. Diss (watts)	Screen Diss (watts)	Grid Diss (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)	
C	RF Power Amplifier or Oscillator	5000	1.0	1500	25	75	25	4000	500	0.800	6.5	2350	
C	Plate Modulated RF Power Amplifier	3500	0.8	1000	25	75	25	3200	500	0.800	10	1958	
AB	AF Amplifier or Modulator	4000	1.0	1500	25	75	25	3800	500	1.33*	—	3220*	
AB	RF Linear Amplifier	4000	1.0	1500	25	75	25	3000	500	0.690	—	1785	

\*Two tubes.

# PENTODES



## 5CX3000A

The 5CX3000A is a ceramic-metal power pentode designed for Class AB linear amplifier AF and RF applications. Its low inter-modulation distortion characteristics make it especially suitable for single sideband service.

**PLATE DISSIPATION**  
**FREQUENCY FOR MAXIMUM RATINGS**  
**COOLING**

3000 watts  
150 MHz  
Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base: Special
Voltage: 9.0 volts	Socket: SK-1420 Series
Current: 43.5 amperes (max)	Max. Seal Temp: 250 °C
Capacitances (Grounded Filament):	Max. Height: 6.8 inches
Input: 145 pF	Max. Diameter: 4.6 inches
Output: 24 pF	Net Weight: 5.5 pounds
Feed-Through: 0.60 pF	

Class of Operation	Type of Service	Maximum Ratings						Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Supp. Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	RF Power Amplifier or Oscillator	7000	2.0	4000	100	175	50	6800	500	1.64	52	8500
AB	AF Amplifier or Modulator	7000	2.0	4000	100	175	50	6000	850	2.9*	—	11,000*
C	RF Linear Amplifier	7000	2.0	4000	100	175	50	6000	850	1.4	—	5500

\*Two tubes.



## 8576/264

The 8576/264 is a ceramic-metal beam pentode with exceptionally low input capacitance for its power-handling capability. The tube is especially suited for use in broadband linear amplifiers, but will also provide outstanding performance in other Class AB<sub>1</sub> amplifier applications.

**PLATE DISSIPATION**  
**COOLING**

3000 watts  
Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base: Special
Heater: 6.0 volts	Socket: Eimac 265A
Current: 17 amperes	Max. Seal Temp: 250 °C
Capacitances (Grounded Cathode):	Max. Height: 5.7 inches
Input: 57 pF	Max. Diameter: 4.4 inches
Output: 33 pF	Net Weight: 4.8 pounds
Feed-Through: 0.16 pF	

Class of Operation	Type of Service	Maximum Ratings						Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Supp. Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Linear RF Amplifier	5000	2.0	3000	—	50	—	5000	750	1.06	—	5300



## 290

The 290 is a ceramic-metal beam pentode with exceptionally low input capacitance for its power-handling capability. The tube is especially suited for use in broadband linear amplifiers, but will also provide outstanding performance in other Class AB<sub>1</sub> amplifier applications.

**PLATE DISSIPATION**  
**COOLING**

5000 watts  
Forced Air

### CHARACTERISTICS

Cathode: Oxide coated, unipotential	Base: Special
Heater: 6.0 volts	Socket: 291A
Current: 17 amperes	Max. Seal Temp: 250 °C
Capacitances (Grounded Cathode):	Max. Height: 7.2 inches
Input: 57 pF	Max. Diameter: 5.5 inches
Output: 33 pF	Net Weight: 4.8 pounds
Feed-Through: 0.16 pF	

Class of Operation	Type of Service	Maximum Ratings						Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Supp. Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Linear RF Amplifier	6000	2.0	5000	—	50	—	5000	750	1.06	—	5300



## POWER GRID TUBE HANDBOOK

A comprehensive book providing information on design, construction and operation of power grid tubes has been published by EIMAC, Division of Varian.

The 158-page book, "THE CARE AND FEEDING OF POWER GRID TUBES," discusses the types and uses of high power vacuum tubes from diodes to pentodes and includes special tubes such as zero-bias triodes and super power tetrodes.

In addition, cooling, emission, secondary emission, high frequency operation, limiting factors in tube design and operation

are discussed in the book. Electron tube materials used in cathodes, grids, filaments, anodes and envelopes as well as construction methods are also explained.

Primarily written as a guide to the tube specifier and circuit designer, it is also useful to amateur radio enthusiasts and teachers.

The \$3.95 book is being distributed by Stacey's Scientific Book Center, 2575 Hanover Avenue, Palo Alto, California, and is available through your nearest Eimac Distributor.

# PULSE MODULATORS



## 6C21

A high-vacuum triode designed for pulse-modulator service and incorporating a pyrovac plate and a non-emitting grid. It is recommended for use where long-pulse requirements rule out the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE** 30 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 15 amperes  
**COOLING** Radiation and Forced Air

## CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 8.2 volts  
 Current 15.9 to 17.7 amperes

Capacitances:  
 Grid-Plate 3.0 to 5.6 pf  
 Grid-Filament 7.0 to 12.0 pf  
 Plate-Filament 2.0 pf

Base 50-watt jumbo 4-pin  
 Socket E. F. Johnson Co. No. 123-211  
 or National Co. XM-50

Maximum Seal Temp. 225 °C  
 Maximum Length 12.625 inches  
 Maximum Diameter 5.125 inches  
 Net Weight 1.3 pounds

## MAXIMUM RATINGS

DC PLATE VOLTAGE 30 kilovolts  
 PEAK PLATE CURRENT 15 amperes  
 PLATE DISSIPATION 300 watts  
 GRID DISSIPATION 50 watts

## TYPICAL OPERATION

DC Plate Voltage 28 kilovolts  
 Pulse Plate Voltage 25 kilovolts  
 Pulse Plate Current 15 amperes  
 Peak Drive Power 7.5 kilowatts  
 Peak Output Power 375 kilowatts  
 Duty 0.2 percent



## 8252 / 4PR60B

The Eimac 4PR60B is a high-vacuum, radial-beam tetrode intended for pulse modulator service in circuits employing resistive loads. The 4PR60B supersedes the 4PR60A and unilaterally replaces the 715C and 5D21. It is recommended for use in equipment of new design.

**MAXIMUM PLATE VOLTAGE** 20 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 18 amperes  
**COOLING** Radiation and Convection

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential

Heater:  
 Voltage 26.0 volts  
 Current 1.95 to 2.35 amperes

Capacitances (Grounded Cathode):  
 Input 35.0 to 50.0 pf  
 Output 6.0 to 11.0 pf  
 Feed-through 2.0 pf

Socket E. F. Johnson Co. No. 122-234  
 Maximum Seal Temp. 200 °C  
 Maximum Envelope Temp. 200 °C  
 Maximum Length 6.0 inches  
 Maximum Diameter 3.063 inches  
 Net Weight 12 ounces

## MAXIMUM RATINGS

DC PLATE VOLTAGE 20 kilovolts  
 DC SCREEN VOLTAGE 1.5 kilovolts  
 PEAK PLATE CURRENT 18 amperes  
 PLATE DISSIPATION 60 watts  
 SCREEN DISSIPATION 8 watts  
 GRID DISSIPATION 1 watt

## TYPICAL OPERATION

DC Plate Voltage 20 kilovolts  
 DC Screen Voltage 1.25 kilovolts  
 Pulse Plate Voltage 18.75 kilovolts  
 Pulse Plate Current 18 amperes  
 Peak Drive Power 552 watts  
 Peak Output Power 337 kilowatts  
 Duty 0.1 percent  
 Pulse Duration 2 microseconds



## 8252W/4PR60C

The Eimac 4PR60C is a ruggedized version of the 4PR60B. It is a high-vacuum, radial-beam tetrode intended for pulse modulator service in circuits employing resistive loads. The 4PR60C supersedes the 4PR60A and unilaterally replaces the 715C and 5D21. It is recommended for use in equipment of new design.

**MAXIMUM PLATE VOLTAGE** 20 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 18 amperes  
**COOLING** Radiation and Convection

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential

Heater:  
 Voltage 26.0 volts  
 Current 1.95 to 2.35 amperes

Capacitances (Grounded Cathode):  
 Input 35.0 to 50.0 pf  
 Output 6.0 to 11.0 pf  
 Feed-through 2.0 pf

Socket E. F. Johnson Co. No. 122-234  
 Maximum Seal Temp. 200 °C  
 Maximum Envelope Temp. 200 °C  
 Maximum Length 6.0 inches  
 Maximum Diameter 3.063 inches  
 Net Weight 12 ounces

## MAXIMUM RATINGS

DC PLATE VOLTAGE 20 kilovolts  
 DC SCREEN VOLTAGE 1.5 kilovolts  
 PEAK PLATE CURRENT 18 amperes  
 PLATE DISSIPATION 60 watts  
 SCREEN DISSIPATION 8 watts  
 GRID DISSIPATION 1 watt

## TYPICAL OPERATION

DC Plate Voltage 20 kilovolts  
 DC Screen Voltage 1.25 kilovolts  
 Pulse Plate Voltage 18.75 kilovolts  
 Pulse Plate Current 18 amperes  
 Peak Drive Power 552 watts  
 Peak Output Power 337 kilowatts  
 Duty 0.1 percent  
 Pulse Duration 2 microseconds



## 8187 / 4PR65A

A compact, high-vacuum, radial-beam tetrode incorporating a pyrovac plate and non-emitting grids, intended for pulse-modulator service.

It is recommended for use in new equipments whenever long pulse durations, high duty factors, or high voltages preclude the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE** 15 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 1 ampere  
**COOLING** Radiation and Convection

## CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 6.0 volts  
 Current 3.2 to 3.8 amperes

Capacitances (Grounded Cathode):  
 Input 6.0 to 8.3 pf  
 Output 1.9 to 2.6 pf  
 Feed-through 0.12 pf

Base 5-pin metal shell  
 Socket National HX-29  
 or Johnson 122-101

Maximum Base-Seal Temp. 200 °C  
 Max. Plate-Seal Temp. 225 °C  
 Maximum Length 4.38 inches  
 Maximum Diameter 2.38 inches  
 Net Weight 3 ounces

## MAXIMUM RATINGS

DC PLATE VOLTAGE 15 kilovolts  
 DC SCREEN VOLTAGE 2 kilovolts  
 PEAK PLATE CURRENT 1 ampere  
 PLATE DISSIPATION 65 watts  
 SCREEN DISSIPATION 10 watts  
 GRID DISSIPATION 5 watts

## TYPICAL OPERATION

DC Plate Voltage 15 kilovolts  
 DC Screen Voltage 1 kilovolt  
 Pulse Plate Voltage 14 kilovolts  
 Pulse Plate Current 1 ampere  
 Peak Drive Power 11 watts  
 Peak Output Power 14 kilowatts  
 Duty 5.0 percent



## 8247 / 4PR125A

A compact, high-vacuum, radial-beam tetrode incorporating a pyrovac plate and non-emitting grids, intended for pulse-modulator service.

It is recommended for use in new equipments whenever long pulse durations, high duty factors, or high voltages preclude the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE** 18 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 1.8 amperes  
**COOLING** Radiation and Forced Air

## CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 5.0 volts  
 Current 6.0 to 7.0 amperes

Capacitances (Grounded Cathode):  
 Input 9.2 to 12.4 pf  
 Output 2.5 to 3.5 pf  
 Feed-through 0.07 pf

Base 5-pin metal shell  
 Socket National HX-100  
 or Johnson 122-275

Maximum Base-Seal Temp. 200 °C  
 Maximum Plate-Seal Temp. 170 °C

Maximum Length 5.69 inches  
 Maximum Diameter 2.81 inches  
 Net Weight 6.5 ounces

## MAXIMUM RATINGS

DC PLATE VOLTAGE 18 kilovolts  
 DC SCREEN VOLTAGE 2 kilovolts  
 PEAK PLATE CURRENT 1.8 amperes  
 PLATE DISSIPATION 125 watts  
 SCREEN DISSIPATION 20 watts  
 GRID DISSIPATION 5 watts

## TYPICAL OPERATION

DC Plate Voltage 18 kilovolts  
 DC Screen Voltage 1 kilovolt  
 Pulse Plate Voltage 17 kilovolts  
 Pulse Plate Current 1.8 amperes  
 Peak Drive Power 30 watts  
 Peak Output Power 30.6 kilowatts  
 Duty 4.0 percent



# PULSE MODULATORS



## 8248/4PR250C

A 50-kilovolt tetrode for use in pulse-modulator and switch-tube applications. The 4PR250C has a 250-watt plate dissipation rating and is capable of supplying pulses of four amperes and nearly 50 kilovolts to a resistive load. It is recommended for use in new equipments.

**MAXIMUM PLATE VOLTAGE** 50 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 4 amperes  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	5.0 volts
Current	13.5 to 14.7 amperes
Capacitances:	
Input	11 to 15 uufd
Output	2.7 to 3.7 uufd
Feed-Through	0.15 uufd
Socket	Eimac SK-400
Max. Plate-Seal Temp.	200 °C
Max. Envelope Temp.	200 °C
Max. Length	7.5 inches
Max. Diameter	3.5 inches
Net Weight	12.5 ounces

### MAXIMUM RATINGS

DC PLATE VOLTAGE	50 kilovolts
DC SCREEN VOLTAGE	2 kilovolts
PEAK PLATE CURRENT	4 amperes
PLATE DISSIPATION	250 watts
SCREEN DISSIPATION	25 watts
GRID DISSIPATION	5 watts

### TYPICAL OPERATION

DC Plate Voltage	49.7 kilovolts
DC Screen Voltage	1 kilovolt
Pulse Plate Voltage	48 kilovolts
Pulse Plate Current	4 amperes
Peak Drive Power	415 watts
Peak Output Power	192 kilowatts
Duty	1.7 percent



## 8188/4PR400A

A compact, high-vacuum, radial-beam tetrode incorporating a pyrovac plate and non-emitting grids, intended for pulse-modulator service.

It is recommended for use in new equipments whenever long pulse lengths, high duty factors, or high voltages preclude the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE** 20 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 4 amperes  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	5.0 volts
Current	13.5 to 14.7 amperes
Capacitances (Grounded Cathode):	
Input	10.7 to 14.5 uufd
Output	4.2 to 5.6 uufd
Feed-through	0.17 uufd
Base	5-pin metal shell
Socket	Eimac SK-400
Max. Base-Seal Temp.	200 °C
Max. Plate-Seal Temp.	225 °C
Maximum Length	8.0 inches
Maximum Diameter	5.5 inches
Net Weight	9 ounces

### MAXIMUM RATINGS

DC PLATE VOLTAGE	20 kilovolts
DC SCREEN VOLTAGE	2.5 kilovolts
PEAK PLATE CURRENT	4 amperes
PLATE DISSIPATION	400 watts
SCREEN DISSIPATION	35 watts
GRID DISSIPATION	10 watts

### TYPICAL OPERATION

DC Plate Voltage	20 kilovolts
DC Screen Voltage	1.5 kilovolts
Pulse Plate Voltage	19 kilovolts
Pulse Plate Current	4 amperes
Peak Drive Power	40 watts
Peak Output Power	76 kilowatts
Duty	1.5 percent



## 8189/4PR1000A

A compact, high-vacuum, radial-beam tetrode incorporating a pyrovac plate and non-emitting grids, intended for pulse-modulator service. This heavy-duty pulse modulator is recommended for use in new equipments where high voltage, high current, or high duty preclude the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE** 30 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 8 amperes  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	7.5 volts
Current	20.0 to 22.7 amperes
Capacitances (Grounded Cathode):	
Input	23.8 to 32.4 uufd
Output	6.8 to 9.4 uufd
Feed-through	0.35 uufd
Base	5-pin metal shell
Socket	Eimac SK-500
Max. Base-Seal Temp.	150 °C
Max. Plate-Seal Temp.	200 °C
Maximum Length	9.63 inches
Maximum Diameter	5.25 inches
Net Weight	1.5 pounds

### MAXIMUM RATINGS

DC PLATE VOLTAGE	30 kilovolts
DC SCREEN VOLTAGE	2.5 kilovolts
PEAK PLATE CURRENT	8 amperes
PLATE DISSIPATION	1000 watts
SCREEN DISSIPATION	75 watts
GRID DISSIPATION	25 watts

### TYPICAL OPERATION

DC Plate Voltage	30 kilovolts
DC Screen Voltage	1.5 kilovolts
Pulse Plate Voltage	29.4 kilovolts
Pulse Plate Current	8 amperes
Peak Drive Power	900 watts
Peak Output Power	235 kilowatts
Duty	1.0 percent



## 8189/4PR1000B

The Eimac 4PR1000B is a ruggedized version of the 4PR1000A. A compact, high-vacuum, radial-beam tetrode incorporating a pyrovac plate and non-emitting grids, intended for pulse-modulator service. This heavy-duty pulse modulator is recommended for use in new equipments where high voltage, high current, or high duty preclude the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE** 30 kilovolts  
**MAXIMUM PULSE PLATE CURRENT** 8 amperes  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	7.5 volts
Current	20.0 to 22.7 amperes
Capacitances (Grounded Cathode):	
Input	23.8 to 32.4 uufd
Output	6.8 to 9.4 uufd
Feed-through	0.35 uufd
Base	5-pin metal shell
Socket	Eimac SK-500
Max. Base-Seal Temp.	150 °C
Max. Plate-Seal Temp.	200 °C
Maximum Length	9.63 inches
Maximum Diameter	5.25 inches
Net Weight	1.5 pounds

### MAXIMUM RATINGS

DC PLATE VOLTAGE	30 kilovolts
DC SCREEN VOLTAGE	2.5 kilovolts
PEAK PLATE CURRENT	8 amperes
PLATE DISSIPATION	1000 watts
SCREEN DISSIPATION	75 watts
GRID DISSIPATION	25 watts

### TYPICAL OPERATION

DC Plate Voltage	30 kilovolts
DC Screen Voltage	1.5 kilovolts
Pulse Plate Voltage	29.4 kilovolts
Pulse Plate Current	8 amperes
Peak Drive Power	900 watts
Peak Output Power	235 kilowatts
Duty	1.0 percent



## 284

This tube is a premium quality pulse tetrode intended for use in pulse-modulator, pulsed-amplifier, and pulsed-oscillator service. This compact, high-vacuum, radial-beam tetrode is recommended for use in new equipments where high voltage, high current or high duty factor is encountered.

**PLATE DISSIPATION** 1000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 MHz  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	7.5 volts
Current	20 to 22.7 amperes
Capacitances (Grounded Cathode):	
Input	23.8 to 32.4 pf
Output	5.5 to 7.2 pf
Feed-through	0.35 pf max.
Base	5-pin special
Socket	SK-500
Maximum Operating Temperatures:	
Envelope Temperature	225 °C max.
Seal Temperature	200 °C max.
Maximum Height	9.625 inches
Maximum Diameter	5.250 inches
Net Weight	1.5 pounds
Class of Operation	Class "C"
Type of Service	Pulse Modulator

### MAXIMUM RATINGS

PLATE VOLTAGE	45 kilovolts
PEAK PLATE CURRENT	8 amperes
PLATE DISSIPATION	1000 watts
SCREEN DISSIPATION	75 watts
GRID DISSIPATION	25 watts

### TYPICAL OPERATIONS

<b>Capacitive Load</b>	
Plate Voltage	37 kilovolts
Peak Plate Current	5 amperes
Screen Voltage	1000 volts
Peak Drive Power	220 watts
Peak Output Power	4.2 kilowatts
<b>Resistive Load</b>	
Plate Voltage	17 kilovolts
Peak Plate Current	7 amperes
Screen Voltage	1500 volts
Peak Drive Power	320 watts
Peak Output Power	98 kilowatts

# SOCKETS AND ACCESSORIES

These sockets and accessories are specifically designed for use with Eimac tubes. Choice of the proper socket insures longer tube life and better performance. All sockets incorporate low loss insulating materials. All metal parts are plated for corrosion protection. Tube contact surfaces are non-ferrous spring alloy, silver plated for good rf conductivity and heat treated for positive contact and long life. Open construction permits adequate air flow for tube cooling.



SK-300A



SK-1306 SK-306



SK-400



SK-406



SK-410



SK-416



SK-500



SK-506



SK-510



SK-516



SK-600



SK-606

AIR-SYSTEM SOCKET	TUBE	BYPASS CAPACITOR			GROUNDED CONTACTS	CHIMNEY
		CAP. pF	VOLTAGE DCWV	ELEMENT BYPASSED		
SK-184	8295 8295A	2000 2500	1000 500	screen supp	none	C-184
SK-184A	8295 8295A	2000	1000	screen	supp.	C-184
SK-209B	8432	2000	1000	screen	none	C-209
SK-265A	264	2000	1000	screen	none	C-265
SK-291A	290	2000	1000	screen	none	C-290
SK-300 SK-300A*	4CX5000A 4CX5000J 4CX5000R	none †			none	SK-306
	4CW10,000A 4CW25,000A					none
	4CX10,000D					SK-1306
	4CX15,000A 4CX15,000J					SK-316
SK-310	4CV20,000A 4CV35,000A	none			none	none
SK-400	4-125A 4D21A 4PR125A	none			none	none
	4-250A 4-400A 4PR400A 175A 6775					SK-406
	4PR250C					none
	5-500A					SK-426
SK-410	6155	none			none	SK-406
	3-400Z					SK-416
	3-500Z 6156 7527					SK-406
	4-125A 4D21A 4PR125A					none
	4-250A 4-400A 4PR400A 175A 6775					SK-406
	4PR250C					none
	5-500A					SK-426
SK-500	4-1000A 4PR1000A 4PR1000B 279 284 294	none			none	SK-506
SK-510	3-1000Z 4-1000A 4PR1000A 4PR1000B 279 284 294	none			none	SK-506
SK-600 SK-602 SK-611*	4X150A 4X150D 4X150R 4X150S	2700	400	screen	none	SK-606
SK-610	4CX250B 4CX250F 4CX250FG				cath.	
SK-612†	4CX250R 4CX350A 4CX350F 7609				cath, gl. & 1 hr	
	4W300B					none

\* Body, contacts, & retainer supplied separately; no bypass capacitor.

† Low inductance version.

# SOCKETS AND ACCESSORIES

SK-604

This tube puller is designed for use in removing coaxial-base and 9-pin base tubes from their sockets without damage. The 4X150 series and 4CX250 series tubes may be removed with this puller. SK-604A has a bonderize finish, SK-604B is nickel-plated.



SK-605

These special pliers are designed for use in removing breechblock base tubes from their sockets without damage. The 4CX300 series and 4CX1000 series tubes may be removed with these pliers.



SK-620



SK-626

SK-636B



SK-640



SK-606



SK-650

SK-655



SK-626



SK-700



SK-606



SK-740



SK-760

AIR-SYSTEM SOCKET	TUBE	BYPASS CAPACITOR			GROUNDED CONTACTS	CHIMNEY
		CAP. pF	VOLTAGE DCWV	ELEMENT BYPASSED		
SK-600A* SK-602A*	4X150A 4X150D 4X150R 4X150S 4CX250B 4CX250F 4CX250FG 4CX250R 4CX350A 4CX350F 7609	2700	1000	screen	none	SK-606
SK-610A*	4W300B				cath.	
	* Bypass capacitor is encapsulated for moisture resistance.					
SK-620 SK-620A*	4X150A 4X150D 4X150R	1100	1000	screen	none	SK-626 SK-636B†
SK-621	4X150S 4CX250B 4CX250F 4CX250FG	525	500	cathode	none	
SK-630 SK-630A*	4CX250R 4CX350A 4CX350F 7609	1100	1000	screen	cath.	
	4W300B					
	none					
* Bypass capacitor is encapsulated for moisture resistance. † Chimney includes anode clamp.						
SK-640	4X150A 4X150D 4X150R 4X150S 4CX250B 4CX250F 4CX250FG 4CX250R 4CX350A 4CX350F 7609	none			none	SK-606
	4W300B					none
SK-650 SK-655*	4X150A 4X150D 4X150R 4X150S 4CX250B 4CX250F 4CX250FG 4CX250R 4CX350A 4CX350F 7609	1100	1000	screen	none	SK-626
	4W300B					none
* SK-650 is a simple, light-weight socket; SK-655 is matching bypass unit, can also be used with coaxial-based tubes in family (e.g. 4CX250K).						
SK-660*† SK-660A*‡ SK-661*+ SK-661A*Δ		none			none	none
* For conduction-cooled tube types. † Ceramic body with threaded mounting inserts. ‡ SK-660 with threaded mounting inserts deleted. + BeO body only, no mounting bracket. Δ SK-661 with clamp assembly; matches tube type 4CS250HA with SK-1910 BeO block attached to its anode.						
SK-700	4CN15A 4CX125C 4CX125F 4CX300A 4CX300Y	1100	400	screen	1 htr	SK-606
SK-710 SK-710A* SK-711† SK-711A*†					1 htr & cath.	
SK-712A*†					1 htr	
* Bypass capacitor has long external arc path. † Body insulation is teflon.						
SK-740	4CN15A 4CX125C 4CX125F 4CX300A 4CX300Y	none			none	none
SK-760 SK-761*	4CN15A 4CX125C 4CX125F 4CX300A 4CX300Y	none			none	integral
SK-770		none			screen	integral
* SK-761 is a low-capacitance version of the SK-760.						

# SOCKETS AND ACCESSORIES

AIR-SYSTEM SOCKET	TUBE	BYPASS CAPACITOR			GROUNDED CONTACTS	CHIMNEY				
		CAP. pF	VOLTAGE DCWV	ELEMENT BYPASSED						
SK-800B	4CX1000A	1500	400	screen	none	SK-806				
SK-810B SK-890B*	4CX1500B 4CW2000A†				1 htr & cath.					
SK-820	4CX1000K				500		400	cathode	screen	
SK-830A	4CX1000K	2500	1000	screen	cath.					
SK-831	4CX1000K 4CX1500A	2500	1000	screen	none	SK-816				
SK-840	5CX1500A	2500	1000	supp.	screen					
SK-860 SK-870	3CX1000A7	none none			none gl					
* Screen bypass capacitor isolated from screen contacts. † No chimney required.										
SK-900	4X500A	*650	700	screen	none	SK-906†				
* Screen bypass capacitor is detachable. † Chimney includes anode clamp.										
SK-1300	3CW10,000A3 3CW20,000A1 3CW20,000A3 3CW20,000A7	none			none	none req'd				
	3CX5000A3					Y-463				
	3CW25,000A3 3CX10,000A1 3CX10,000A3 3CX10,000A7 3CX15,000A3					SK-1306				
	3CX20,000A3					none available				
	SK-1310					3CV30,000A1 3CV30,000A3	none		none	none req'd
	SK-1400A					4CX3000A	1800	1000	screen	none
SK-1470		none			screen					
SK-1420*	5CX3000A	1800	1000	screen	supp.	SK-1426				
SK-1490†	4CV8000A	none			none	none req'd				
* low-inductance base arrangement. † No mounting flange included.										
SK-1500* SK-1510†	4CX35,000C 4CW100,000D 4CV100,000C	none			none	none				
SK-1511‡										
* Special assembly, to allow for stem cooling of tube. † SK-1510 is an SK-1500 with tube seating device added. ‡ Tube lifting & seating device for tubes shown.										
SK-1606A	6697A	Air distributor								
SK-1606B	6697A	Tube support for air distributor								
SK-1610	6696A 6697A 7480	Filament connector, small								
SK-1611	6696A 6697A 7480	Filament connector, large								
SK-1612	6696A	Grid connector								
SK-1620		Anode water jacket								
SK-1625		Mounting clamp for water jacket								
SK-1626		Mounting plate for water jacket								
SK-1710	4CV250,000A 4CV250,000V	Filament connector (two required)								
SK-1712	4CW250,000A 4CW250,000V	Control grid connector								
SK-1720	4CW250,000A/V	Water jacket								
SK-1900	Y-398 Y-401	BeO insulator disc, attaches to anode of tube for conduction cooling applications.								
SK-1910	4CS250HA	BeO block, attaches to anode of tube for conduction cooling applications.								
SK-2000 series	4CV50,000E 4CW50,000E 4CW100,000E									



SK-800B



SK-806



SK-900



SK-906



SK-1300



SK-1306



SK-1400A



SK-1406



SK-1500

## CUSTOM SOCKET DESIGN


For special applications which require features different from these standard sockets, custom designed sockets are offered. These may be modifications of the standard sockets or completely new designs, manufactured to customer drawings or Eimac design. Common modifications include: contact spacing, mounting features, encapsulation of components, grounded contacts, by-pass capacitors, insulating materials, contact materials, and plating.



# VAPOR-PHASE COOLING ACCESSORIES

In order to take the guess work out of using vapor cooling, Eimac has developed a complete line of accessories to complement its series of vapor-cooled tubes. All the components labeled in the system at right are available from Eimac. For more information on how this cooling technique can improve the performance of your equipment, write for a free copy of Application Bulletin Number 11, "The Care and Feeding of Vapor-Phase Cooling." Also available from Eimac is application engineering assistance in planning vapor-cooled systems. Eimac representatives can put you in touch with the same people who produced the first completely integrated vapor-phase cooling packages.

SCHEMATIC OF TYPICAL EIMAC VAPOR COOLING INSTALLATION

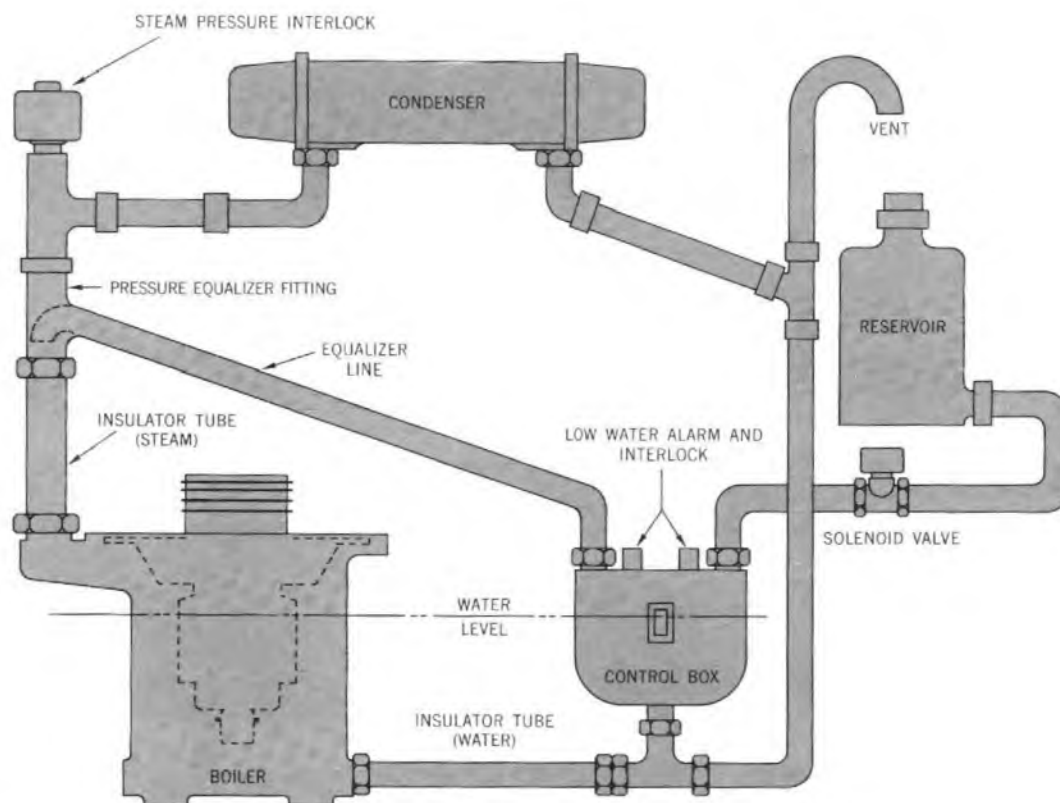

Tube Type Number	Tube Type	Maximum Plate Dissipation (kW)	Socket	Boiler <sup>1</sup>	Control Box <sup>2</sup>	Reservoir <sup>3</sup>	Steam Line <sup>4</sup>		Water Line <sup>4</sup>		Pressure Equalizer Fitting
							Pyrex Line	Pyrex-Cu Adapter	Pyrex Line	Pyrex-Cu Adapter	
4CV8,000A	Tetrode	8	SK-1490	BR-101	CB-102	RE-100	043028N	AF-100	043067N	AF-102	AD-100
4CV20,000A	Tetrode	20	SK-310	BR-200	CB-202	RE-200	043060N	AF-200	043068N	AF-202	AD-200
3CV30,000A3	Triode	30	SK-1310	BR-200	CB-202	RE-200	043060N	AF-200	043068N	AF-202	AD-200
4CV35,000A	Tetrode	35	SK-310	BR-200	CB-202	RE-200	043060N	AF-200	043068N	AF-202	AD-200
4CV50,000E	Tetrode	50	SK-2000	BR-700	—	—	—	—	—	—	—
4CV75,000	Tetrode	75	SK-1500	BR-320	CB-202	RE-200	—	—	—	—	AD-300
7480	Triode	80	SK-1600 Series <sup>5</sup>	BR-400	CB-202	RE-200	043033N	AF-300	043069N	AF-302	AD-300
4CV100,000C	Tetrode	100	SK-1510	BR-300 BR-310 BR-500	CB-202 — CB-202	RE-200 — RE-200	043033N 043033N 120mm OD	AF-300 AF-300 —	043069N 043068N 35mm OD	AF-302 AF-302 —	AD-300 — —
4CV100,000E	Tetrode	100	SK-2000	BR-800	—	—	—	—	—	—	—
4CV250,000V 4CV250,000A	Tetrode	250	SK-1700 Series <sup>5</sup>	BR-605	CB-202	—	5½" OD	—	1½" OD	—	—

- One boiler per tube except BR-500 which accommodates two tubes.
  - Solenoid Operated Valve #124281 and Pressure Interlock #124434 may be used in all system combinations.
  - Capacities of the reservoirs are: RE-100 = 1 qt., RE-200 = 2 qt., RE-300 = 1 gal.
  - For multiple tube systems, these components are multiplied by the number of tubes used.
  - Includes water-cooled filament and grid connections.
- Eimac will recommend condensers for specific system cooling requirements.

# OTHER PRODUCTS

## HEAT DISSIPATING CONNECTORS

Eimac HR Heat-Dissipating Connectors are used to make electrical connections to the plate and grid terminals of Eimac Tubes, and at the same time, provide efficient heat transfer from the tube element and glass seal to the air. These connectors are machined from solid dural rod and are supplied with the necessary set screws.




TYPE *	Length	Dia.	Hole Dia.
HR-1	11/16"	1/2"	.052"
HR-2	11/16"	1/2"	.062"
HR-3	11/16"	1/2"	.072"
HR-4	7/8"	3/4"	.102"
HR-5	7/8"	3/4"	.127"
HR-6	7/8"	3/4"	.367"
HR-7	1-11/32"	1-3/8"	.127"
HR-8	1-11/32"	1-3/8"	.575"
HR-9	4-11/32"	1-3/8"	.569"
HR-10	1-11/32"	1-3/8"	.510"

### RECOMMENDED CONNECTORS FOR USE WITH EACH EIMAC TUBE TYPE

TUBE	Plate Connector	Grid Connector	TUBE	Plate Connector	Grid Connector
2-25A	HR-1		25T	HR-1	
2-50A	HR-3		35T	HR-3	
2-150D	HR-6		35TG	HR-3	HR-3
2-240A	HR-6		75TH-TL	HR-3	HR-2
2-450A	HR-8		100TH-TL	HR-6	HR-2
2-2000A	HR-8		VT127A	HR-3	HR-3
3-1000Z	HR-8		250TH-TL	HR-6	HR-3
3C24	HR-1	HR-1	250R	HR-6	
4-65A	HR-6		304TH-TL	HR-7	HR-6
4D21/4-125A	HR-6		450TH-TL	HR-8	HR-8
5D22/4-250A	HR-6		592/3-200A3	HR-10	HR-5
4-400A	HR-6		750TL	HR-8	HR-8
4-1000A	HR-8		866A	HR-8	
4E27A/5-125B	HR-5		872A	HR-8	
4PR60A	HR-8		1000T	HR-9	HR-9
6C21	HR-8	HR-8	1500T	HR-8	HR-8
KY21A	HR-3		2000T	HR-8	HR-8
RX21A	HR-3		8020/100R1	HR-8	

\*For marking per MIL-STD-130B add prefix letter "M" to the part number for connectors HR-4 through HR-10. Note HR-1 through HR-3 are too small to permit marking.

## PREFORMED CONTACT FINGER STOCK



Eimac Preformed Finger Stock is a prepared strip of spring material slotted and formed into a series of fingers designed to make a sliding contact. It is especially suitable for making connections to tubes with coaxial terminals or to moving parts, such as long-line and cavity circuits or screen-room doors. Eimac finger stock is available in 9 different shapes and sizes, three of which incorporate "spooned" contact fingers. All sizes come in standard 36 inch lengths. Standard stock is heat treated and silver plated. Also available without heat treating or plating.

Type	Finger Radius (inches)	Finger Width (inches)	Slot Width (inches)	Slot Depth (inches)	Comments
CF-100	1/16	1/8	0.040	9/32	spooned
CF-200	1/16	1/8	0.040	9/32	double-edged
CF-300	13/64	1/8	0.040	19/32	finger tip has reverse radius
CF-400	13/64	1/8	0.040	35/64	double-edged
CF-500	15/32	1/8	0.040	7/8	finger tip has reverse radius
CF-600	15/32	1/8	0.040	29/32	double-edged with reverse tip radii
CF-700	1/16	1/8	0.040	9/32	spooned
CF-800	1/16	1/8	0.040	15/32	spooned and bent
CF-900	0.030	1/16	0.020	15/64	smallest fingers

Eimac Contact Finger Stock is available on special factory order in the following semi-finished states:

Slotted and formed (Not heat treated or plated)  
Slotted, formed, and heat treated (Not plated)  
Slotted, formed, and plated (Not heat treated)



## VACUUM SWITCHES

Eimac Vacuum Switches are offered for pulse service or rf switching. For details inquire of Eimac Power Grid Division.

Type	Intended Service	Insulation	Current	Peak Test Voltage	DC Coil
VS-2	RF	Glass	5a (30 MHz)	20 KV	12 V. 24 V.
VS-6	Pulse	Glass	150a (Pulse)	22 KV	12 V. 24 V.
VS-8	Medical Defibrillator	Glass	—	15 KV	30 V.
VS-9	RF General	Ceramic	4a (16 MHz)	4 KV	26.5 V.

Date\_\_\_\_\_

Please send me further information on the following Eimac products:

My application is\_\_\_\_\_

Special requirements\_\_\_\_\_

Name\_\_\_\_\_

Title or Position\_\_\_\_\_

Company\_\_\_\_\_

Address\_\_\_\_\_



EIMAC division of varian 301 INDUSTRIAL WAY • SAN CARLOS, CALIFORNIA

Date\_\_\_\_\_

Please send me further information on the following Eimac products:

My application is\_\_\_\_\_

Special requirements\_\_\_\_\_

Name\_\_\_\_\_

Title or Position\_\_\_\_\_

Company\_\_\_\_\_

Address\_\_\_\_\_



EIMAC division of varian 301 INDUSTRIAL WAY • SAN CARLOS, CALIFORNIA

Date\_\_\_\_\_

Please send me further information on the following Eimac products:

My application is\_\_\_\_\_

Special requirements\_\_\_\_\_

Name\_\_\_\_\_

Title or Position\_\_\_\_\_

Company\_\_\_\_\_

Address\_\_\_\_\_



EIMAC division of varian 301 INDUSTRIAL WAY • SAN CARLOS, CALIFORNIA

Eimac will be glad to furnish additional information on the products listed in this catalog. Simply note your product interest on a reply card and mail. Prompt response is assured.

**BUSINESS REPLY MAIL**

No postage stamp necessary if mailed in the United States

POSTAGE WILL BE PAID BY—

EIMAC division of varian  
301 INDUSTRIAL WAY  
SAN CARLOS, CALIFORNIA 94070

FIRST CLASS

PERMIT No. 103

San Carlos, Calif.

**BUSINESS REPLY MAIL**

No postage stamp necessary if mailed in the United States

POSTAGE WILL BE PAID BY—

EIMAC division of varian  
301 INDUSTRIAL WAY  
SAN CARLOS, CALIFORNIA 94070

FIRST CLASS

PERMIT No. 103

San Carlos, Calif.

**BUSINESS REPLY MAIL**

No postage stamp necessary if mailed in the United States

POSTAGE WILL BE PAID BY—

EIMAC division of varian  
301 INDUSTRIAL WAY  
SAN CARLOS, CALIFORNIA 94070

FIRST CLASS

PERMIT No. 103

San Carlos, Calif.





## FACTORY LOCATIONS

**EIMAC division of Varian**  
301 Industrial Way  
San Carlos, California 94070  
Telephone: (415) 592-1221  
TWX: 910-376-4893

**EIMAC division of Varian**  
1678 South Pioneer Road  
Salt Lake City, Utah 84104  
Telephone: (801) 487-7561

## FIELD SALES OFFICES

### ATLANTA

3110 Maple Drive N.E.  
Suite 203  
Atlanta, Georgia 30305  
Telephone: (404) 261-4574  
TWX: 810-751-8369

### ALBUQUERQUE

9000 Manual Boulevard NE  
Albuquerque, New Mexico 87112  
Telephone: (505) 296-1248

### BOSTON

400 Wyman Street  
Waltham, Massachusetts 02154  
Telephone: (617) 891-4560  
TWX: 710-324-0688

### CHICAGO

Executive Plaza Office Bldg.  
205 West Touhy Avenue  
Park Ridge, Illinois 60068  
Telephone: (312) 825-6686  
TWX: 910-253-1824

### DALLAS

First Bank & Trust Building  
P.O. Box 689  
811 South Central Expressway  
Richardson, Texas 75081  
Telephone: (214) 235-2385  
TWX: 910-867-4712

### DAYTON

Southmoor Building  
10 Southmoor Circle  
Dayton, Ohio 45429  
Telephone: (513) 298-7318  
TWX: 810-459-1924

### LONG ISLAND

Forte Suffolk Office Center  
900 Walt Whitman Road  
Melville, Long Island, New York 11746  
Telephone: (516) 549-5422  
TWX: 510-226-6987

### LOS ANGELES

2901 Wilshire Boulevard  
Santa Monica, California 90403  
Telephone: (213) 828-5588  
TWX: 910-343-6868

### NEW YORK

25 Route 22  
Springfield, New Jersey 07081  
Telephone: (201) 376-6600  
TWX: 710-983-4373

### PHILADELPHIA

P.O. Box 256  
1500 Kings Highway  
Cherry Hill, New Jersey 08034  
Telephone: (609) 428-6800  
TWX: 710-896-0640

### PHOENIX

77 West Third Avenue  
Scottsdale, Arizona 85251  
Telephone: (602) 947-5461  
TWX: 910-950-1298

### SAN FRANCISCO

4940 El Camino Real  
Los Altos, California 94022  
Telephone: (415) 968-7630  
TWX: 910-379-6446

### SYRACUSE

113 Twin Oaks Drive  
Syracuse, New York 13206  
Telephone: (315) 437-2568  
TWX: 710-541-1524

### TAMPA

314 South Missouri  
Suite 205  
Clearwater, Florida 33516  
Telephone: (813) 446-8513  
TWX: 810-866-0434

### WASHINGTON

714 Church Street  
Alexandria, Virginia 22314  
Telephone: (703) 549-8205  
TWX: 710-832-9823

## INTERNATIONAL SALES OFFICES

### AUSTRALIA

Varian Pty. Ltd.  
38 Oxley Street  
Crows Nest  
Sydney, Australia  
Telephone: 430-673  
Telex: 790-20096

Varian Pty. Ltd.  
541 St. Kilda Road  
Melbourne, Australia  
Telephone: 511-361

### BENELUX

Varian Associates Holland N.V.  
Maassluisstraat 100  
P.O. Box 9158  
Amsterdam, Holland  
Telephone: (020) 15 94 10  
Telex: 14 099

### BRAZIL

Varian Industria e Comercio Ltda.  
Av. Paulista, 2073-18° conj. 1824  
Sao Paulo - ZP 3, Brazil  
Telephone: 80 99 27  
Cable: Varian Sao Paulo

### CANADA

Varian Associates of Canada, Ltd.  
45 River Road  
Georgetown, Ontario, Canada  
Telephone: (416) 877-6901  
Telex: 022-95628

### FRANCE

MICROWAVE  
Thomson-Varian S.A.  
6 rue Mario Nikis  
75 Paris 15e  
France  
Telephone: 783.91.00  
Telex: 25 873

POWER GRID  
Varian S.A.  
Quartier de Courtaboeuf  
Boite Postale No. 12  
91 Orsay  
France  
Telephone: 920-8312  
Telex: 27 642

### GERMANY

Varian GmbH  
Breitwiesenstrasse 9  
7 Stuttgart-Vaihingen  
Germany  
Telephone: (0711) 73 20 28  
Telex: 7-255614

### ITALY

Varian SpA  
Via Varian  
10040 Leini (Torino)  
Italy  
Telephone: (02) 26 80 86  
Telex: 21 228

### JAPAN

Marubun Co., Ltd.  
1, 2-Chome, Odemmacho  
Nihombashi, Chuo-Ku  
Tokyo, Japan  
Telephone: 662-8151  
Telex: 22-957  
Cable: Marubun, Tokyo

### SCANDINAVIA

Varian AB  
Skytteholmsvagen 7D  
P.O. Box 1099  
Solna 1, Sweden  
Telephone: (08) 82 00 30  
Telex: 10 403

### SWITZERLAND

Varian AG  
Baarerstrasse 77  
6300 Zug, Switzerland  
Telephone: (042) 21 45 55  
Telex: 78 841

### UNITED KINGDOM AND IRELAND

Varian Associates Ltd.  
Russell House  
Molesey Road  
Walton-on-Thames  
Surrey, England  
Telephone: Walton-on-Thames 2 87 66  
Telex: 261 351



## **EIMAC division of varian**

**301 Industrial Way, San Carlos, California 94070**

**1678 South Pioneer Road, Salt Lake City, Utah 84104**