




THE HAMMARLUND

"40"

CATALOG


VAN SICKLE RADIO CO.
CHICAGO, ILL. PHONE 52-1602

HAMMARLUND MANUFACTURING COMPANY, INC.
Factory & Main Offices: 424-438 West 33rd Street, New York

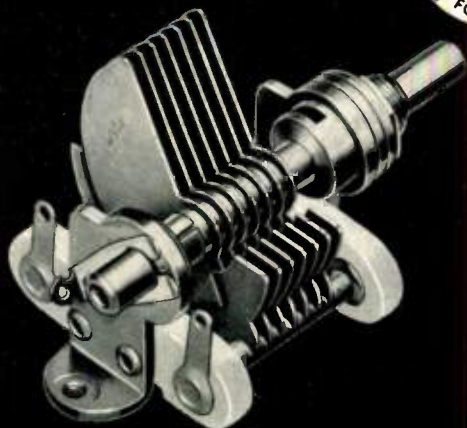

The graph plots Capacity in MMFD. (Y-axis, 0 to 100) against Dial Divisions (X-axis, 0 to 100). Two curves are shown: MC-100-S (straight line) and MC-100-M (curved line). The MC-100-M curve is below the MC-100-S curve for most of the range, indicating lower capacity for the same dial setting.

Dial Divisions	MC-100-S Capacity (MMFD.)	MC-100-M Capacity (MMFD.)
0	10	10
20	20	15
40	30	25
60	40	35
80	50	50
100	100	100

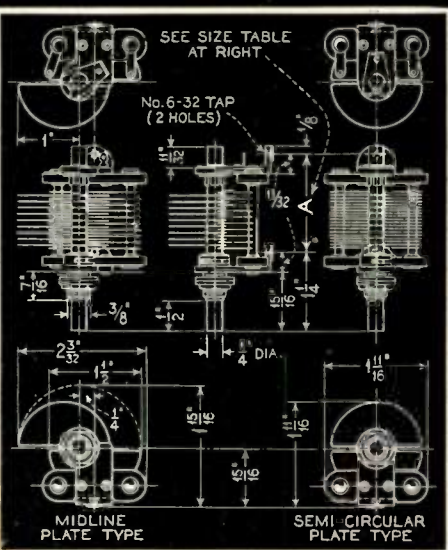

General Specifications—Plates are .0225" thick with .0245" air gap. Shafts are 1/4" diameter extending 5/16" beyond rear frame to facilitate ganging. Standard condensers include stops and are made to increase capacity by clockwise rotation. Individually tested for breakdown on 500 V., A. C. Quality fully guaranteed. See drawing and table below for dimensions, plates, etc. At left are typical capacity curves.

SPECIAL condensers can be supplied to order. These include condensers of special capacities, spacing, rotation, and shaft extensions; also locking type condensers for fixed frequency work, split stator, balancing condensers, extra compact condensers, etc.

<i>Code</i>	<i>Max. Cap.</i>	<i>Min. Cap.</i>	<i>Plates</i>	<i>Dimension "A"</i>	<i>List Price</i>
MC-325-M	320 mmf.	13.5 mmf.	43	2 23/32"	\$3.50
MC-250-M	260 mmf.	12 mmf.	34	2 5/16"	3.00
MC-200-M	200 mmf.	10.3 mmf.	27	2"	2.75
MC-140-M	140 mmf.	9 mmf.	19	1 19/32"	2.50
MC-140-S	140 mmf.	10 mmf.	19	1 19/32"	2.50
MC-100-M	100 mmf.	7.5 mmf.	14	1 13/32"	2.25
MC-100-S	100 mmf.	8.3 mmf.	14	1 13/32"	2.25
MC-75-M	80 mmf.	7.3 mmf.	11	1 7/32"	2.00
MC-75-S	80 mmf.	8 mmf.	11	1 7/32"	2.00
MC-50-M	50 mmf.	6.3 mmf.	7	1 7/32"	1.60
MC-50-S	50 mmf.	6.5 mmf.	7	1 7/32"	1.60
MC-35-S	35 mmf.	6 mmf.	5	1 7/32"	1.50
MC-20-S	20 mmf.	5.5 mmf.	3	1 7/32"	1.40

"S" = Semi-Circular Plates

"MCD" SPLIT-STATOR CONDENSERS

Like HAMMARLUND single midgets, these duals incorporate rigidity, low losses, and careful construction—every requirement imperative to highest mechanical and electrical efficiency. Entire condenser built on strong Isolantite base including shield plate between stators. Cadmium plated soldered brass plates. New split type rear bearing and noiseless wiping contact of silver plated Beryllium. Single hole panel mount. Other specifications same as for "MC" single midgets.

Code	Max. Cap. Per Sec.	Min. Cap. Per Sec.	Length Behind Panel	List Price
MCD-140-S	140 mmf.	8.5 mmf.	3 3/8"	\$4.00
MCD-140-M	140 mmf.	7.8 mmf.	3 3/8"	4.00
MCD-100-S	100 mmf.	7 mmf.	3 3/8"	3.50
MCD-100-M	100 mmf.	6.3 mmf.	3 3/8"	3.50
MCD-50-S	50 mmf.	5.5 mmf.	3 3/8"	3.00
MCD-50-M	50 mmf.	5 mmf.	3 3/8"	3.00

"M" = Midline Plates "S" = Semi-Circular Plates.

"MCD-X" DOUBLE-SPACED CONDENSERS

This condenser is specially designed for ultra-high frequency work and laboratory use, for either transmitting or receiving. Wide spacing between plates aids frequency stability. Isolantite insulation. New split type rear bearing and noiseless wiping contact. Cadmium plated non-corrosive soldered brass plates. Actual air gap between plates .0715".

Code	Max. Cap. Per Sec.	Min. Cap. Per Sec.	Length Behind Panel	List Price
MCD-35-MX	31 mmf.	6 mmf.	3 3/8"	\$3.50
MCD-35-SX	31 mmf.	6.8 mmf.	3 3/8"	3.50

"MX" = Midline Plates. "SX" = Semi-Circular Plates.

"MC-X" DOUBLE-SPACED CONDENSERS

An excellent variable condenser for ultra-high frequency receivers and transmitters, particularly compact transmitters. Plates are widely spaced—air gap between plates .0715". New split type rear bearing and noiseless wiping contact. Cadmium plated soldered brass plates. Isolantite insulation.

Code	Max. Cap	Min. Cap.	Length Behind Panel	List Price
MC-100-SX	100 mmf.	16.5 mmf.	4 3/8"	\$3.50
MC-50-SX	50 mmf.	11.5 mmf.	2 7/8"	2.75
MC-50-MX	50 mmf.	10.5 mmf.	2 7/8"	2.75
MC-35-SX	32 mmf.	8.5 mmf.	2 1/8"	2.25
MC-35-MX	32 mmf.	7.8 mmf.	2 1/8"	2.25
MC-20-MX	20 mmf.	6.5 mmf.	1 29/32"	2.00
MC-20-SX	20 mmf.	6.8 mmf.	1 29/32"	2.00

"MX" = Midline Plates. "SX" = Semi-Circular Plates.

"MC-B" BAND SPREAD CONDENSERS

These condensers are designed for use as "band spread" tuning condensers, for short wave receivers and for amateur band frequency meters. The "tank" section can be set and locked at any desired capacity permitting the tuning section to spread narrow frequency ranges over the entire dial regardless of the range of the band or the coils used. Cadmium plated non-corrosive soldered brass plates. Isolantite insulation.


Code	Tank Cap.	Tuning Cap.	Length Behind Panel	List Price
MC-120-B	100 mmf.	20 mmf.	2 5/16"	\$3.00
MC-150-B	100 mmf.	50 mmf.	3 1/8"	3.25



'MCD'
SPLIT-STATOR
CONDENSER




'MCD-X'
DOUBLE-SPACED
SPLIT-STATOR
CONDENSER

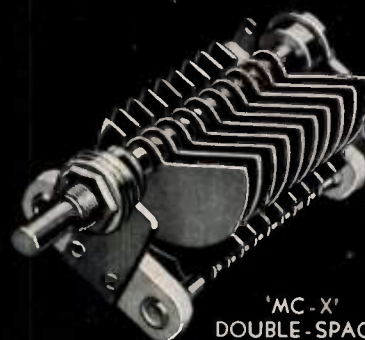



'MC-X'
DOUBLE-SPACED
CONDENSER



'MC-B'
BAND SPREAD
CONDENSER

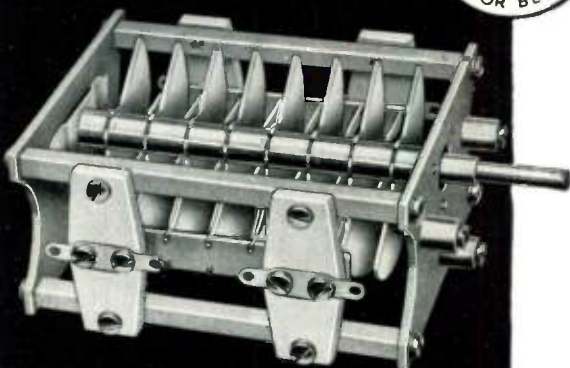

**'TC' TRANSMITTING
CONDENSER**

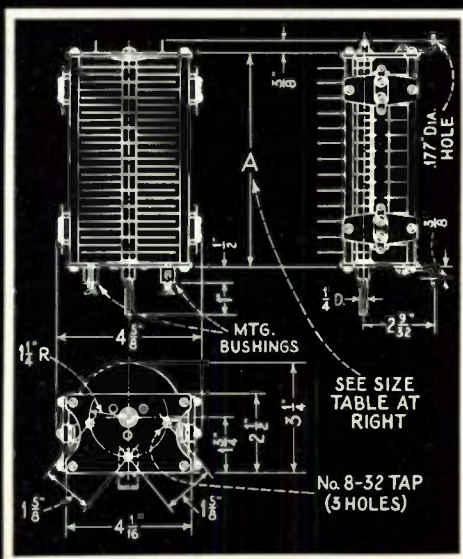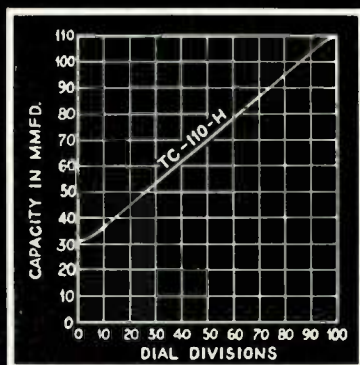

“TC” TRANSMITTING CONDENSERS

THIS new and complete line of "TC" transmitting condensers was recently developed in the HAMMARLUND laboratories. Many outstanding features incorporated in these new condensers are the result of years of careful research in both mechanical and electrical design of variable capacitors. Heavy aluminum end plates for maximum strength are tied together with four 5/16" duraluminum pillars. Both rotor and stator plates are carefully buffed and polished and have rounded edges in order to minimize danger of flash-over. The rotor assembly, which embodies the non-magnetic principle, is an exclusive HAMMARLUND feature. The rotor plates are carefully staked to a non-magnetic shaft. The stainless steel dial shaft does not pass through the rotor assembly. All magnetic material is kept out of the direct field of the condenser—something which is absolutely necessary for the maximum efficiency at high frequency. Special hand fitted full-floating bearings eliminate binding and twisting. The rotor contacts are heavy silver plated Beryllium wipers and of sufficient area to eliminate contact losses. This contact is direct to the rotor shaft and extends through the rear plate of the condenser for soldering. Thus, we do not depend upon metal to metal contacts through the framework. Neither do we depend upon the stainless steel rear ball bearing for electrical contact. This shortens the electrical path and greatly increases efficiency.

General Specifications: Peak voltage ratings for the various types are: 7500 V. for type "F"; 6750 V. type "G"; 6000 V. type "H"; 4250 V. type "J"; 3750 V. type "K"; 2000 V. type "L"; and 1000 V. type "M". The latter is only made in the split stator type as illustrated on page 6. Shaft is 1/4" diameter stainless steel. Isolantite insulation throughout, specially treated against moisture absorption. Three panel mounting bushings for 8/32" screws and also special mounting feet for base or stand-off insulator mounting are packed with each condenser. See drawings and table below for dimensions, plates, air gap etc.

CONDENSERS of special capacities or plate spacing can be supplied to order. Condensers can also be supplied to meet special mounting requirements or equipped with such accessories as rotor locking devices, Isolantite mounting bushings, etc.

LIST OF STOCK SIZES

<i>Code</i>	<i>Capacity</i>	<i>Plates</i>	<i>Plate Spacing</i>	<i>Dimension "A"</i>	<i>List Price</i>
†TC-55-F	60 mmf.	15	.230"	5"	\$8.00
†TC-40-G	46 mmf.	11	.200"	3 3/16"	7.00
†TC-65-G	75 mmf.	17	.200"	5"	8.80
†TC-100-G	110 mmf.	25	.200"	6 5/8"	11.20
†TG-150-G	165 mmf.	37	.200"	9 3/4"	14.80
†TC-25-H	23.5 mmf.	5	.171"	2 1/16"	3.50
†TC-50-H	53 mmf.	11	.171"	3 3/16"	6.00
†TC-110-H	115 mmf.	23	.171"	5 5/8"	9.00
†TC-240-J	250 mmf.	33	.100"	5 5/8"	10.20
†TC-90-K	95 mmf.	11	.084"	2 1/16"	4.50
†TC-165-K	167 mmf.	19	.084"	3 3/16"	6.50
†TC-220-K	222 mmf.	25	.084"	3 3/4"	8.00
†TC-330-K	335 mmf.	37	.084"	5 5/8"	10.00
†TC-220-L	220 mmf.	21	.070"	3 3/16"	4.50
†TC-440-L	465 mmf.	43	.070"	5"	7.70

†Polished round edged plates—.040" thick.

‡Standard type plates—.025" thick.

Plate spacing is actual air gap between adjacent rotor and stator plates.

"MTC" TRANSMITTING CONDENSERS

A NEW popular series of transmitting condensers for high frequency and ultra-high frequency medium and low powered units. The construction of these condensers is so rugged that even real rough handling will not damage them. Though low in price, these condensers include all constructional features necessary in quality transmitters of all kinds. High operating efficiency has been attained by extensive research in materials and design plus careful workmanship.

Construction is similar to the large "TC" type described on the opposite page; the end frames are of heavy aluminum sheet. Plates are of aluminum. Rotor plates are firmly anchored in place by wedging them into deep slots and then by further staking them. The same construction is employed in the stators. An accurately ground stainless steel shaft is carefully fitted to a long bronze front bearing mounted on a Beryllium cushion disc. The free-floating action thus afforded provides for consistently smooth operation and also provides a perfect bearing. The rear bearing is of the steel ball and cup type. Isolantite insulation and silver-plated Beryllium contact wiper assure lowest losses and lowest series resistance. Noiseless operation and complete stability are guaranteed under all conditions of use. All sizes may be either panel or base mounted.

Recommended generally for medium power applications. Small size and light weight specially recommend their use in apparatus where size and weight are of importance such as in airplane and other mobile or portable units. Both receiver and transmitter requirements are provided for by a wide range of capacities and plate spacings.

General Specifications—Voltage ratings are: 3000 V. for "B" types, and 1000 V. for "C" types. Lock washers are used under all screws. Base mounting brackets and three panel mounting bushings and No. 6-32 screws are packed with each condenser. For protection, condensers are individually packed in specially designed corrugated cartons. See drawing and table for all dimensions.

A SEPARATE department is maintained for the design, development and construction of condensers of special capacities, plate spacings, rotor locking devices, special types of mountings, etc.


LIST OF STOCK SIZES

Code	Capacity	Plate	Plate Spacing	Dimension "A"	List Price
‡MTC-20-B	22 mmf.	5	.070"	2 11/16"	\$3.25
‡MTC-35-B	33 mmf.	7	.070"	2 11/16"	3.50
‡MTC-50-B	50 mmf.	11	.070"	2 11/16"	3.90
‡MTC-100-B	100 mmf.	21	.070"	3 11/16"	5.00
‡MTC-150-B	150 mmf.	31	.070"	4 11/16"	6.10
§MTC-50-C	46 mmf.	5	.031"	2 11/16"	2.80
§MTC-100-C	105 mmf.	11	.031"	2 11/16"	3.05
§MTC-150-C	150 mmf.	15	.031"	2 11/16"	3.20
§MTC-250-C	255 mmf.	25	.031"	3 11/16"	3.60
§MTC-350-C	360 mmf.	35	.031"	3 11/16"	4.00



‡Polished round edged plates—.025" thick.

§Standard type plates—.025" thick.

Plate spacing is actual air gap between adjacent rotor and stator plates

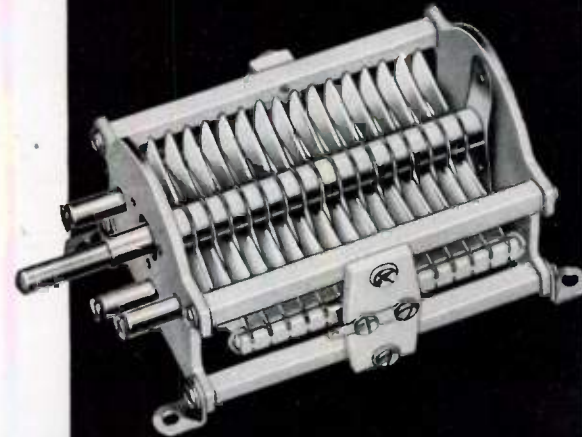


'MTC' TRANSMITTING CONDENSER

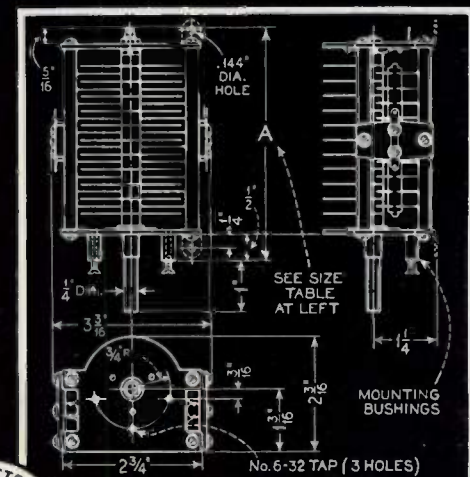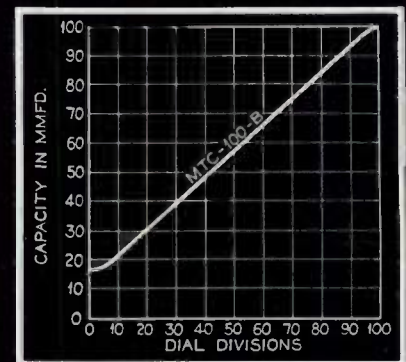

**"TCD" TRANSMITTING CONDENSERS**

HAMMARLUND "TCD" split stator transmitting condensers are identical in quality and have the same features found in the "TC" single transmitting condensers. These condensers, while available with wide plate spacing and high capacities, are still within bounds insofar as physical dimensions are concerned and lend themselves readily in the design of modern, compact apparatus. For complete details as to general construction and specifications, see page 4. The following split stator types have all four horizontal tie pillars drilled and tapped to accommodate brackets for mounting the neutralizing condensers and tank coil directly on the tuning condenser: "TCD-55-F", "TCD-40-G", "TCD-75-G", "TCD-50-H", and "TCD-100-H". This feature greatly facilitates construction of the amplifier in which the condenser is used, making a more compact and symmetrical layout.

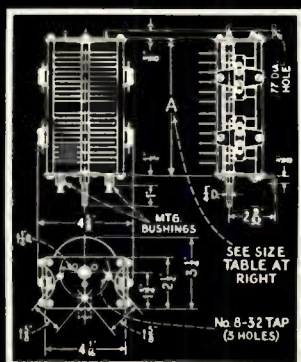
'TCD' SPLIT-STATOR TRANSMITTING CONDENSER

Code	Capacity	Plate Spacing	Plates per sec.	Dimension "A"	List Price
†TCD-55-F	60 mmf.	.230"	15	10 3/16"	\$13.50
†TCD-40-G	46 mmf.	.200"	11	6 5/8"	10.50
†TCD-75-G	85 mmf.	.200"	19	10 3/16"	14.50
†TCD-50-H	53 mmf.	.171"	11	5 5/8"	9.80
†TCD-110-H	115 mmf.	.171"	23	10 3/16"	16.00
†TCD-240-J	250 mmf.	.100"	33	10 3/16"	19.00
†TCD-90-K	95 mmf.	.084"	11	3 3/4"	7.50
†TCD-165-K	167 mmf.	.084"	19	5 5/8"	11.00
†TCD-325-K	335 mmf.	.084"	37	10 3/16"	20.50
‡TCD-80-L	90 mmf.	.070"	9	3 3/16"	5.50
‡TCD-210-L	215 mmf.	.070"	21	5"	8.25
‡TCD-500-M	490 mmf.	.030"	21	3 3/16"	6.50

†Polished round edged plates—.040" thick.
‡Standard type plates—.025" thick.

"MTC-D" TRANSMITTING CONDENSERS

These split-stator condensers have the same characteristics and the same constructional features as the "MTC" singles. Unusually compact and light in weight. Ideal for portable transmitters. Overspaced plates securely held in place. Isolantite insulation. Quality bearings. Noiseless wiping contacts. Provides the same operating advantages outlined in the above description of "TCD" type condensers. See drawing and table for dimensions, plates, air-gaps, etc.

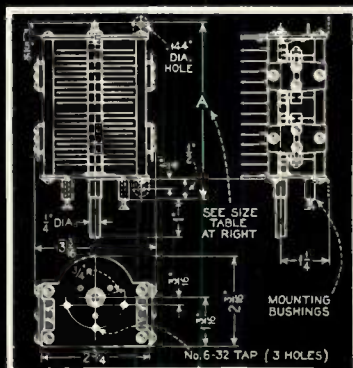'MTC-D' SPLIT-STATOR TRANSMITTING CONDENSER

Code	Cap. Per Sec.	Series Cap.	Plates per Sec.	Dimension "A"	List Price
†MTCD-20-B	22 mmf.	10 mmf.	5	3 11/16"	\$5.25
†MTCD-35-B	33 mmf.	18 mmf.	7	3 11/16"	5.75
†MTCD-50-B	50 mmf.	25.5 mmf.	11	3 11/16"	6.50
†MTCD-100-B	100 mmf.	51 mmf.	21	5 13/16"	8.75
‡MTCD-50-C	46 mmf.	25.5 mmf.	5	3 11/16"	4.50
‡MTCD-100-C	105 mmf.	51 mmf.	11	3 11/16"	5.00
‡MTCD-150-C	150 mmf.	77 mmf.	15	3 11/16"	5.25
‡MTCD-250-C	255 mmf.	135 mmf.	25	4 11/16"	6.00

†Polished round edged plates .025" thick—.070" plate spacing.
‡Standard type plates .025" thick—.031" plate spacing.
Plate spacing is actual air gap between adjacent rotor and stator plates.

"HFA" AND "HFB" CONDENSERS

THIS new line of transmitting and receiving condensers departs considerably from the usual condenser design. All parts are brass, cadmium plated, and soldered resulting in a compact, rugged unit. Isolantite end plates insulate the rotor assembly from the mounting brackets. All "HFB" models have insulated control shafts especially designed for circuits where the high voltage is connected directly to the rotor. This permits higher tube voltages for a given condenser plate spacing and results in a less expensive, more compact unit. It also provides greater personal safety to the operator. Model "G" can be used with 2,375 V. to the plates of the tubes, 100% modulated. Model "F", 2,000 V. modulated; Model "E" 1,500 V. modulated. The "HFAD" units are the same in construction as the "HFBD" except that smaller plates are used and the control shaft is not insulated. They are ideal for low power portable transmitters and receivers. "HFAD" like the "HFBD" has opposed rotors and stators for perfect counter-balancing. The "HFA" is a single unit having only one Isolantite end plate. The 100% soldered construction of both the "HFA" and "HFB" types eliminates the danger of losses due to high resistance contacts. Both "HFA" and "HFB" types are available to manufacturers with special shaft lengths and special mounting arrangements. Inquiries are invited.


General Specifications—All shafts are $\frac{1}{4}$ " in diameter. All plates are semi-circular and all rear bearings are single ball thrust. Types "HFB" and "HFBD" have $\frac{13}{16}$ " shaft extensions; .025" plates thickness; $1\frac{13}{16}$ " Isolantite end plates. Type "HFA" has $\frac{9}{16}$ " shaft extension, $1\frac{13}{16} \times 1\frac{1}{32}$ " Isolantite end panel, .020" plate thickness. "HFAD" has $\frac{13}{16}$ " square front and rear Isolantite panels, $\frac{9}{16}$ " shaft extension, .020" thickness. All types have base mounting brackets and panel mounting bushings. "HFA" and "HFAD" have additional single hole panel mounting feature.

Code	Per Section		Plate Edges	Air Gap	Length "A"	List Price
	Mmf.	No. Plates				
HFBD-35-C	35.	8	Plain	.050"	2 7/16"	\$3.90
HFBD-50-C	50.	11	Plain	.050"	2 7/8"	4.15
HFBD-100-C	100.	23	Plain	.050"	4 5/8"	5.15
HFBD-200-C	200.	43	Plain	.050"	7 11/16"	6.75
HFBD-35-E	35.	11	Rounded	.070"	3 1/4"	5.50
HFBD-65-E	65.	19	Rounded	.070"	4 13/16"	7.00
HFBD-100-E	100.	29	Rounded	.070"	6 11/16"	9.00
HFBD-35-F	35.	14	Rounded	.100"	4 5/8"	6.20
HFBD-65-F	65.	25	Rounded	.100"	7 3/8"	8.25
HFBD-35-G	35.	17	Rounded	.125"	6 3/16"	7.25
HFB-50-C	50.	11	Plain	.050"	1 7/8"	3.20
HFB-100-C	100.	23	Plain	.050"	2 7/8"	3.70
HFB-150-C	150.	33	Plain	.050"	3 9/16"	4.10
HFB-50-E	50.	15	Rounded	.070"	2 7/16"	4.40
HFB-100-E	100.	29	Rounded	.070"	3 13/16"	5.80
HFB-50-F	50.	19	Rounded	.100"	3 3/8"	4.90
HFB-100-F	100.	39	Rounded	.100"	5 7/8"	6.90
HFAD-75-A	75.	15	Plain	.020"	2 3/8"	3.15
HFAD-100-A	100.	19	Plain	.020"	2 23/32"	3.40
HFAD-140-A	140.	27	Plain	.020"	3 3/8"	3.90
HFAD-25-B	25.	7	Plain	.030"	1 29/32"	2.80
HFAD-35-B	35.	9	Plain	.030"	2 3/32"	2.95
HFAD-50-B	50.	13	Plain	.030"	2 1/2"	3.20
HFAD-100-B	100.	27	Plain	.030"	3 29/32"	4.00
HFAD-150-B	150.	39	Plain	.030"	5 3/32"	4.75
HFAD-15-E	15.	9	Plain	.070"	2 23/32"	3.00
HFAD-30-E	30.	17	Plain	.070"	4 3/16"	3.50
HFA-75-A	75.	15	Plain	.020"	1 1/4"	1.80
HFA-100-A	100.	19	Plain	.020"	1 13/32"	1.95
HFA-140-A	140.	27	Plain	.020"	1 3/4"	2.30
HFA-10-B	10.	3	Plain	.030"	25/32"	1.35
HFA-150-B	15.	5	Plain	.030"	7/8"	1.40
HFA-25-B	25.	7	Plain	.030"	31/32"	1.45
HFA-35-B	35.	10	Plain	.030"	1 3/16"	1.55
HFA-50-B	50.	14	Plain	.030"	1 3/8"	1.70
HFA-100-B	100.	27	Plain	.030"	2 11/32"	2.80
HFA-150-B	150.	39	Plain	.030"	2 31/32"	3.20
HFA-15-E	15.	9	Plain	.070"	1 3/8"	1.65
HFA-30-E	30.	17	Plain	.070"	2 1/2"	2.25


A = Overall including Isolantite Panels for types HFB, HFBD and HFAD.

A = Overall length behind mounting nut for HFA.


† Uses rear Isolantite panel.

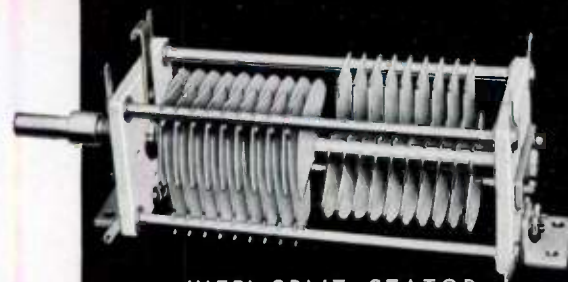


'HFB' SPLIT-STATOR TRANSMITTING CONDENSER

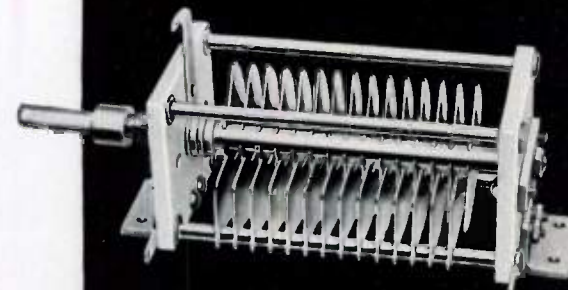

'HFB' TRANSMITTING CONDENSER

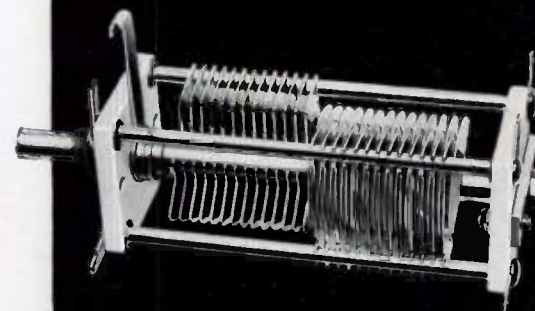

'HFA' SPLIT-STATOR CONDENSER

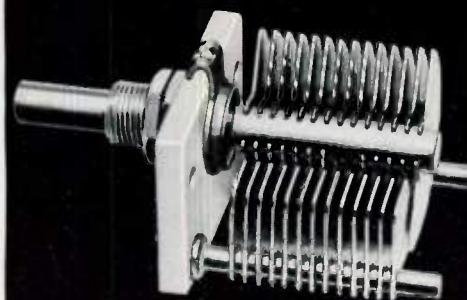

'HFA' MIDGET CONDENSER





'SM' STAR MIDGET
CONDENSER




'N-10'
NEUTRALIZING
CONDENSER



'CS' COIL
SHIELD



'TS' TUBE
SHIELD

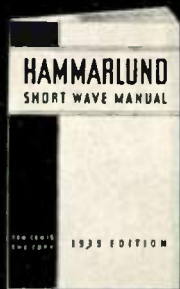

'SW' MANUAL



'FC' COUPLING

"SM" STAR MIDGETS

A very popular low-priced midget variable condenser for set-builders, experimenters, and laboratories. There are types for receiving and transmitting, for short wave tuning, regeneration, antenna coupling, verniers, etc., etc. Intelligent design, accurate manufacture and highest quality materials guarantee perfect operation and long life. Low-loss natural bakelite insulation. Straight line capacity type aluminum plates are accurately spaced on heavy brass tie-bars. A phosphor bronze spring plate affords proper tension for smooth control and also provides for perfect contact.

Single hole mounting. Shaft $\frac{1}{4}$ " diameter. Mounting bushing is $\frac{5}{16}$ " diameter. Size is $1\frac{1}{8}$ " wide by $1\frac{3}{4}$ " high. Depth behind panel from $\frac{1}{8}$ " to $1\frac{1}{8}$ " depending on capacity. Double spaced "X" types have .064" air gap.

Code	Max. Capacity	Min. Capacity	Plates	List Price
SM-15	15 mmf.	3 mmf.	3	\$.85
SM-25	25 mmf.	3.5 mmf.	4	.85
SM-50	50 mmf.	4 mmf.	7	.90
SM-100	100 mmf.	6 mmf.	14	1.00
SM-140	140 mmf.	7 mmf.	19	1.25
SM-35-X	35 mmf.	6.5 mmf.	11	1.00
SM-50-X	50 mmf.	7.5 mmf.	16	1.25

NEUTRALIZING CONDENSERS

A new type high voltage neutralizing condenser, offering the advantages of horizontal adjustment and generally improved both mechanically and electrically. Thick aluminum plates with rounded edges and polished on all surfaces. An oversized fine thread screw provides smooth micrometer adjustment. Lock nut permits permanent setting and a stop prevents shorting—plates can not touch. Special base construction prevents pivoting and insures permanent plate alignment. Isolantite insulation. Overall size: N-10, $2\frac{5}{8}$ " high x $1\frac{1}{8}$ " deep; N-15, $4\frac{1}{8}$ " high x $3\frac{1}{2}$ " deep; N-20, $5\frac{1}{8}$ " high x 4" deep.

Code	Capacity	List
N-10	2.1—10 mmf.	\$3.00
N-15	3.2—14 mmf.	6.00
N-20	3.8—14 mmf.	6.50

COIL AND TUBE SHIELDS

The "CS-3" coil shield is a very effective general purpose shield made of heavy aluminum and slotted to afford easy handling. Diameter—3", height— $3\frac{1}{2}$ ".

The "TS-50" tube shield affords complete isolation and is designed for maximum cooling. Made of heavy aluminum and measures $4\frac{5}{8}$ " high x $1\frac{1}{8}$ " diameter. Mounting centers— $1\frac{27}{32}$ ".

Code	Type	List Price
CS-3	Coil Shield	\$.50
TS-50	Tube Shield	.40

SHORT WAVE MANUAL

A 32-page book containing up-to-the-minute constructional data on short and ultra-short wave receivers, power supplies, transmitters, pre-selectors, converters, tuning hints, and short wave station list. All sets were built in the HAMMARLUND laboratories and thoroughly tested. Profusely illustrated.

Code SWM-39	List Price \$.10
-------------	------------------

"FC" FLEXIBLE COUPLINGS

This coupling permits tandem operation of any number of independent units without requiring exact shaft alignment. The sides are insulated from each other. Made of bakelized canvas. Brass bushings for $\frac{1}{4}$ " shafts. Four set screws provide against shafts slipping. Overall diameter— $1\frac{1}{2}$ ".

Code FC	List Price \$.60
---------	------------------

"APC" MICRO CONDENSERS

High quality, air dielectric condensers for use wherever space is at a premium. Will maintain constant capacity under any conditions of temperature, humidity, or vibration. Ideal as air dielectric trimmers for gang condensers, I. F. transformers and for padding r. f. circuits. Isolantite base. Cadmium plated soldered brass rotors and stators. Screw driver adjustment. See drawing and table for dimensions.

Code	Max. Cap.	Min. Cap.	Plates	Dimension "A"	Price List
APC-25	25 mmf.	3.0 mmf.	7	5/16"	\$1.30
APC-50	50 mmf.	3.9 mmf.	14	17/32"	1.50
APC-75	75 mmf.	4.5 mmf.	20	23/32"	1.70
APC-100	100 mmf.	5.5 mmf.	27	29/32"	1.90
APC-140	140 mmf.	6.5 mmf.	37	1 7/32"	2.25

"HF" MICRO CONDENSERS

A new series of ultra-high frequency variable condensers with many advanced features affording highest efficiency in tuning or trimming critical high frequency circuits. Cadmium plated soldered brass plates and Isolantite insulation insure rigidity, stability and lowest losses. Three different mounting methods are provided. Base mounting by means of a bracket. Single hole panel mounting. Panel mounting by means of two insulated spacer bushings. Equipped with special wide front bearing. Noiseless in operation. See drawing and table for dimensions.

Code	Max. Cap.	Min. Cap.	Plates	Dimension "A"	List Price
HF-15	17.5 mmf.	2.8 mmf.	5	1/4"	\$1.25
HF-35	35 mmf.	3.2 mmf.	10	13/32"	1.50
HF-50	50 mmf.	3.7 mmf.	14	17/32"	1.60
HF-100	100 mmf.	5.3 mmf.	27	29/32"	1.90
HF-140	140 mmf.	6.2 mmf.	37	1 7/32"	2.25
*HF-15-X	15 mmf.	3.6 mmf.	10	3/4"	1.60
*HF-30-X	30 mmf.	5.2 mmf.	20	1 5/16"	1.85

*Double Spaced.

"HFD" SPLIT-STATOR MICRO CONDENSERS


Like the "HF" single micro condensers, these duals also incorporate advanced features providing maximum efficiency at ultra-high frequencies. Soldered brass plates are cadmium plated. Aluminum front and rear end plates are mounted on a heavy Isolantite base. A wide front bearing and a special split rear bearing together with individual silver-plated Beryllium wipers for each section assure long life and noiseless efficient operation. Rotor contact can be shifted to three positions to permit shortest possible leads. Single hole panel mount or base mounting. Shield between sections for ground connection. See drawing and table for dimensions.

Code	Max. Cap. Per Sec.	Min. Cap. Per Sec.	Plates Per Sec.	Dimension "A"	List Price
HFD-50	50 mmf.	3.6 mmf.	14	2 5/16"	\$2.75
HFD-100	100 mmf.	5.0 mmf.	27	2 5/16"	3.25
HFD-140	140 mmf.	6.0 mmf.	37	2 15/16"	3.75
*HFD-15-X	16 mmf.	3.8 mmf.	11	2 5/16"	3.00
*HFD-30-X	28.5 mmf.	5.0 mmf.	19	2 15/16"	3.25



*Double Spaced.




'APC' MICRO CONDENSER



'HF' MICRO CONDENSER

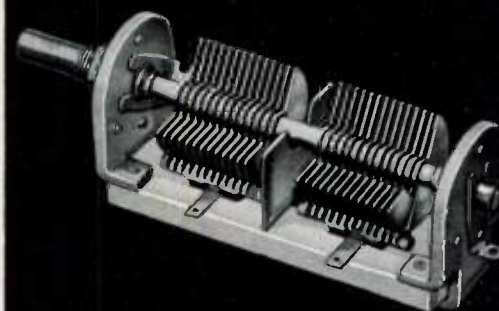

'HFD' SPLIT-STATOR MICRO CONDENSER








"VT" VARIABLE TRANSFORMERS

These transformers are designed to permit continuous variation of the mutual inductance between primary and secondary throughout a wide range of values without otherwise affecting circuit constants. The approximate range of variation is from 1/3 critical coupling to over 3 times critical coupling. Continuous variation between these limits may be controlled from the receiver panel by means of suitable mechanical arrangements. Where continuous variation is not desired coupling may be adjusted to the desired value and locked at that point via a thumb screw arrangement.


The effect of various coupling values on the transmission characteristics of a single transformer is shown in the graph at left. In a "one stage" I.F. amplifier two transformers are used; so in this case the overall selectivity curve is calculated by squaring the ordinates of the graph. Thus the voltage ratio marked "10" becomes "100", "5" would become "25" etc. Similarly in a "two stage" I.F. amplifier three transformers would be used and the "10" ratio would become "1000" and so on. For panel control of selectivity, several transformers can be mounted in line and their coupling varied simultaneously. For wide band or high fidelity reception, it is desirable to use three transformers; two variable and one fixed (such as the "VTF" which is the same as the "VT" variable type except that the coupling is fixed).

Primaries and secondaries are impregnated three pie Litz windings on Isolantite cores and have the exceptional "Q" of 130. Tuning condensers are the APC air dielectric micro condensers described on Page 7. May be used with any screen grid tubes normally used as I.F. amplifiers. Tuning adjustments are on one side of the 2" x 2" x 5" aluminum shield. All transformers tunable over a range of plus or minus 10 kc.

'VT' VARIABLE COUPLING I.F. TRANSFORMER

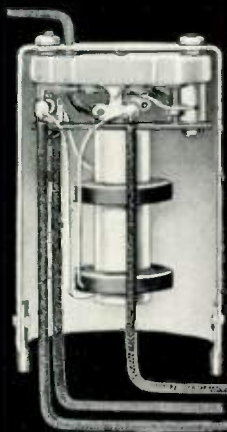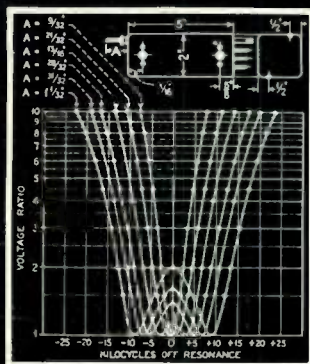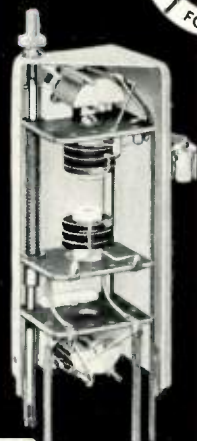

'T' I.F. TRANSFORMER

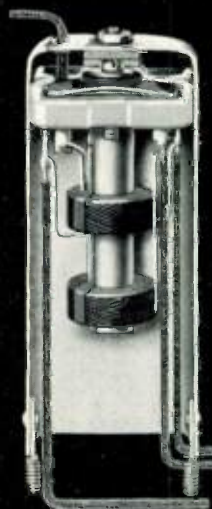

'ST' I.F. TRANSFORMER

Code	Frequency	Type	Price
VT-465	465 kc.	Variable I. F.	\$5.50
VT-175	175 kc.	Variable I. F.	5.50
VTF-465	465 kc.	Fixed I. F.	4.50
VTF-175	175 kc.	Fixed I. F.	4.50
VTF-465-CT	465 kc.	Fixed I. F. (center-tapped)	4.50
VTF-175-CT	175 kc.	Fixed I. F. (center-tapped)	4.50
VTO-465	465 kc.	Beat Oscillator	4.50
VTC	Variable coupling mechanism for panel control of up to four transformers		2.50

"ST" AND "T" TRANSFORMERS

Type "ST" and "T" I.F. transformers are high grade units designed for experimental work and replacement in standard receivers of all types. Sensitivity, selectivity, and other characteristics are such as to make them equally satisfactory in superheterodynes employing either one or two stages of I.F. in connection with any type of second detector. Made in 10 special types. The 262 kc. "ST" type is specially designed for automobile receivers. All transformers are the tuned grid, tuned plate type with lattice wound coils impregnated to prevent moisture effects. Litz windings are used in the 465 kc. units. Tuning condensers are the highest grade mica compression type mounted on Isolantite and adjustable from the top of the shield can. Leads are RMA color coded and tagged for easy installation. Secondaries are either plain for standard screen grid tubes or center-tapped for tubes requiring split input circuits. Aluminum shield can of type "T" measures 2 1/8" outside diameter and 3 1/8" high. Mounting is by means of threaded lugs on 2" centers. "ST" type is a midget type specially adapted for limited space installations. It measures 2 3/4" high x 1 7/16" square with threaded mounting studs on 1 5/16" centers. All units are individually packed with screen grid cap and mounting nuts. Tunable plus or minus 10 kc.

Code	Frequency	Type	List Price
ST-465 or T-465	465 kc.	Standard	\$1.65
ST-175 or T-175	175 kc.	Standard	1.65
ST-465-CT or T-465-CT	465 kc.	Center-Tapped	1.65
ST-175-CT or T-175-CT	175 kc.	Center-Tapped	1.65
ST-262	262 kc.	Standard	1.65
STBO-465 or TBO-465	465 kc.	Beat Oscillator	1.65

"CH-8" R. F. CHOKES

This R.F. choke is designed particularly for short waves but is equally effective over the broadcast band. Its compactness permits mounting in isolated positions well removed from stray R.F. fields. This, together with its load characteristics specially recommend it as a grid choke for multi-stage transmitters. Isolantite spool is sectionalized with four moisture-proofed windings protected by radio frequency lacquer and a covering of cellophane. Flexible leads and removable brackets permit any desired style of mounting. No metal screw passes through choke to increase losses or distribute capacity. Size is $1\frac{3}{8}$ " x $\frac{7}{8}$ " less brackets.

Code	Inductance	D.C. Res.	Dist. Cap.	Current Cap.	List Price
CH-8	8 mh.	70 ohms	3 mmf.	125 ma.	\$1.10

"CH-500" TRANSMITTING CHOKES

A specially designed choke for parallel feed in high-powered transmitters in the 10-20-40-80- and 160-meter amateur bands. In these bands it has the exceptional equivalent impedance of more than 500,000 ohms and consequently introduces negligible losses. Equally effective from 1500 to 30,000 kc. except between 5300 and 6400 kc. and between 8000 and 9000 kc. Its use within these frequencies is not recommended. Six thin Universal wound pies on an Isolantite core tapped at each end. Brackets removable and choke can be mounted with a single machine screw. Size (without brackets) $1\frac{1}{2}$ " dia. x $2\frac{1}{2}$ " long. Current 500 ma. continuous D.C.

Code	Inductance	D.C. Res.	Dist. Cap.	Current Cap.	List Price
CH-500	2.5 mh.	8 ohms	1.5 mmf.	500 ma.	\$1.75

"CH-X" MIDGET CHOKES

This choke is invaluable for use where space is at a premium. So small in size and light in weight that it can be supported by its own leads. So inexpensive that they may be used generously everywhere where R.F. filtering is desirable. Five universal wound impregnated pies are mounted on a $\frac{1}{4}$ " Isolantite core. Tinned copper wire leads secured to Isolantite core with metal end caps. Size is $\frac{1}{2}$ " diameter x $1\frac{1}{2}$ " long.

Code	Inductance	D.C. Res.	Dist. Cap.	Current Cap.	List Price
CH-X	2.1 mh.	35 ohms	1 mmf.	125 ma.	\$.50

"CH-250" MIDGET CHOKES


The "CH-250" is similar in design to the "CHX" and has a 250 ma. current rating. This higher rating permits us in medium power transmitters where chokes of larger dimensions would take up too much space. The characteristics of the "CH-250" make it suitable for operation on all amateur bands down to 10 meters. Size $\frac{5}{8}$ " diameter and $1\frac{1}{2}$ " long.

Code	Inductance	D.C. Res.	Dist. Cap.	Current Cap.	List Price
CH-250	1 mh.	10 ohms	1 mmf.	250 ma.	\$.50


"RFC" HIGH IMPEDANCE CHOKES

These chokes have been standard in the industry for years. A special process of winding and impregnating provides a very large inductance with a very low distributed capacity, making them very effective in both broadcast and SW receivers. Bakelite case is $1\frac{1}{8}$ " high x $1\frac{1}{8}$ " diameter.

Code	Inductance	D.C. Res.	Dist. Cap.	Current Cap.	List Price
RFC-85	85 mh.	215 ohms	3 mmf.	60 ma.	\$2.00
RFC-250	250 mh.	420 ohms	2 mmf.	60 ma.	2.25

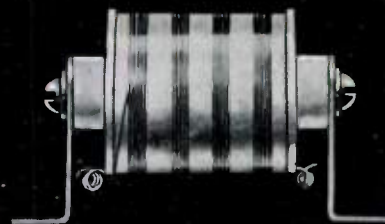

'CH-8' RF CHOKE

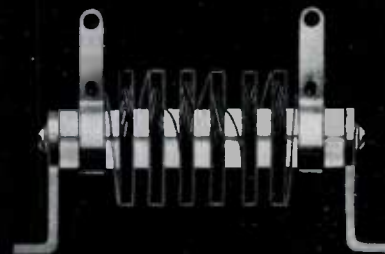

'CH-500' RF CHOKE



'CH-X' RF CHOKE



'CH-250' RF CHOKE



'RFC' RF CHOKE

**"XP-53" PLUG-IN COIL FORMS**

These attractively priced coil forms are made of XP-53 dielectric, the remarkable new low-loss insulating material. Rugged, durable, and most important, extremely effective, for XP-53's power factor is unusually low. Its amber color is natural—no artificial coloring to cause losses. The coil proportions provide a most practical form factor. The forms are groove ribbed for air spaced windings. Flange grips for easy handling. Meter indexes for wave length inscriptions. The form also has a special threaded shelf moulded inside to permit the mounting of "APC" air padding condensers for tuning the coil to a fixed frequency or for band spread arrangements. Winding diameter $1\frac{1}{2}$ ". Overall length is $2\frac{3}{8}$ ", exclusive of prongs.

Code	Prongs	List Price
SWF-4	4	\$0.35
SWF-5	5	.35
SWF-6	6	.40

"XP-53" PLUG-IN COILS

HAMMERLUND "XP-53" coils provide greater signal strength and greater selectivity on all bands. Extensive laboratory work has resulted in a practically perfect design of the primary, secondary, and tickler coupling and overlap with due regard to the suitability of type and size of wire, number of turns, spacing, form factor, co-efficient of coupling, etc. The frequency ranges covered by each coil were so selected as to provide the most favorable inductance to capacity (L/C) ratio on the important short wave bands. All of the amateur and broadcast short wave bands are thus tunable at the low capacity settings of the tank condensers, affording highest signal voltages. Four coils tuned by a 140 mmf. condenser cover entire range from 17 to 270 meters. A special coil is available for the 10 to 20 meter band, and another special coil is available for the broadcast band. Secondaries of high frequency coils are of heavy silver plated copper wire.

Code	No. of Coils	Prongs	No. of Windings	Wave-Length	List Price
SWK-4	4	4	2	17-270 meters	\$3.00
SWK-6	4	6	3	17-270 meters	3.75
No. 40	1	4	2	10-20 meters	1.00
No. 41	1	4	2	17-41 meters	1.00
No. 42	1	4	2	33-75 meters	1.00
No. 43	1	4	2	66-150 meters	.75
No. 44	1	4	2	135-270 meters	.75
BCC-4	1	4	2	250-560 meters	1.25
No. 60	1	6	3	10-20 meters	1.25
No. 61	1	6	3	17-41 meters	1.25
No. 62	1	6	3	33-75 meters	1.25
No. 63	1	6	3	66-150 meters	1.00
No. 64	1	6	3	135-270 meters	1.00
BCC-6	1	6	3	250-560 meters	1.50

"TCF" TRANSMITTING COIL FORMS

These new giant forms are made of low loss XP-53 dielectric, the same material that is used for the popular SWF type coil forms described above. Forms are groove ribbed to permit air spaced windings. Substantial flange grips for easy handling are another feature. The form may be base mounted by means of a special pair of brackets supplied with each form or mounted in the familiar plug-in coil fashion in the regulation socket. The winding diameter of the form is $2\frac{1}{4}$ ". Overall length is $3\frac{3}{8}$ " exclusive of prongs.

Code	Prongs	List Price
TCF-4	4	\$0.70
TCF-5	5	.70

'APC' IN
S W F
FORM'S W F'
COIL
FORM

'SWK' COIL KIT

'TCF' TRANSMITTING
COIL FORM

"CF" COIL FORMS

The low losses and stability of these forms of extruded Isolantite afford efficient high frequency reception under all conditions. Equipped with convenient recessed black enameled wooden handle in which is inserted a removable paper disc. A celluloid disc protects the paper, a spring ring holding the disc in place. Surface of form is "non-skid", eliminating troubles encountered in winding on slippery surfaces. Numerous holes provided make drilling unnecessary. Form is $1\frac{1}{2}$ " in diameter and $2\frac{1}{2}$ " long exclusive of knobs and prongs.

Code	Prongs	List Price
CF-4	4	\$1.25
CF-5	5	1.25
CF-6	6	1.25

"CF-M" COIL FORMS

These forms are designed for maximum efficiency at ultra-high frequencies or within the 28 or 56 megacycle band. Being made of Isolantite, and having the correct form factor, high frequency resistance is at a minimum and absolute stability is achieved. The number and location of holes facilitate securing the exact inductance desired and permits of almost any conceivable type of experimental winding. Form is $1\frac{1}{8}$ " in diameter and 2" long exclusive of prongs.

Code	Prongs	List Price
CF-5-M	5	\$1.00

"S" ISOLANTITE SOCKETS


An ideal low loss socket affording improved high frequency reception. Constant resistivity and perfect contact eliminate noise. Made of Isolantite, glazed on top and sides and "Ceresin" treated underneath guaranteeing highest surface resistivity. Long leakage paths between rust proofed positive side gripping contacts. Due to a square inset anchorage, HAMMARLUND contacts cannot twist, loosen, or shift position with age or changes in temperature or humidity. A circular "guide groove" makes insertion of tubes easier. Subpanel or base mounting. Size is $2\frac{1}{4}$ " long x $1\frac{5}{8}$ " wide. Standard 1 27/32" mounting centers.

Code	Prongs	List Price
S-4	4	\$.60
S-5	5	.60
S-6	6	.60
S-7	7 (large base)	.60
S-7-B	7 (small base)	.60
S-8	8	.75

"S-900" ACORN SOCKETS

HAMMARLUND acorn sockets for ultra-high frequency acorn type tubes, 954 and 955, are a real low loss achievement. Isolantite base with alignment stud. Top, sides, and stud are glazed for highest surface resistivity. Five Double grip, silver plated phosphor-bronze spring clips eyeletted and lipped to base guarantee perfect contact. The prongs cannot twist or shift. Size is $1\frac{1}{4}$ " diameter. Bottom of socket is recessed to insulate contacts and permit flush base mounting. Two mounting holes on $1\frac{3}{4}$ " centers.


Code	Prongs	List Price
S-900	5	\$1.50

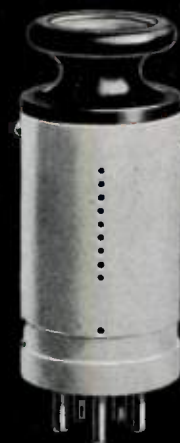


'CF' COIL FORM



'CF-M' COIL FORM

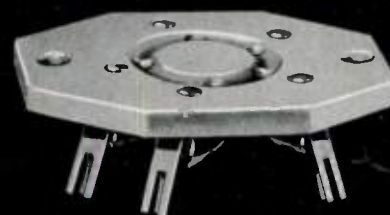

'S' ISOLANTITE SOCKET

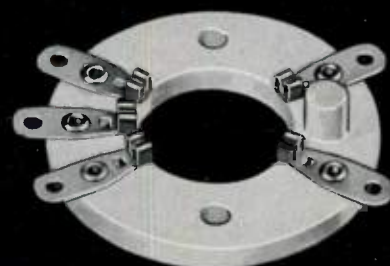

'S-900' ACORN SOCKET





TRIMMING AND PADDING CONDENSERS

HAMMARLUND adjustable mica condensers as now improved are the result of seventeen years of specialization. Quality has been constantly improved through research carried on with the larger electrical laboratories and radio manufacturers in the development of condensers to resist effects of moisture, temperature, vibration and age. Testifying to the accuracy of HAMMARLUND design, processes and material control is the fact that the great majority of radio receiver manufacturers use HAMMARLUND condensers exclusively.

Both the sensitivity and selectivity of superheterodynes are dependent upon the quality of these condensers. It is imperative that the capacity and power factor be maintained as uniform as possible under the constantly varying conditions of temperature, humidity, and vibration, encountered in actual service. Isolantite bases are conditioned to resist moisture and to maintain constant volume and surface resistance. Only the most expensive imported mica is used. The phosphor bronze spring plates are shaped to provide the best possible capacity curve. Easy soldering heat dissipating terminals are employed. Fixed plates are securely anchored. Actual minimums are lower and actual maximums are higher than indicated below. Condensers are tested for capacity, power factor, and for breakdown at 500 volts D.C.

Space does not permit complete description of all the types made. All types are designed with identical accuracy and excellence of materials to meet the exacting purposes for which they have been produced. For I.F. tuning R.F. trimming and for padding or trimming of oscillator and other circuits.

A SPECIAL laboratory is maintained for research and design of trimmers and padders. Our engineers will be glad to give their assistance to all special trimming and padding problems, including special condenser assemblies for automatic tuning devices.

LIST OF STOCK SIZES

Type	Code	Capacity	Size	Mtg. Centers	Base	List Price
"MEX"	MEX-30	3-30 mmf.	5/8"x3/4"	Isol.	\$0.30
"EC"	EC-35	3-35 mmf.	1 1/4"x11/16"	Single Hole	Bakelite	.30
.....	EC-80	25-80 mmf.	1 1/4"x11/16"	Single Hole	Bakelite	.40
"MICS"	MICS-70	10-70 mmf.	1"x1 5/8"	1 1/4"	Isol.	.50
.....	MICS-140	70-140 mmf.	1"x1 5/8"	1 1/4"	Isol.	.60
.....	MICS-220	140-220 mmf.	1"x1 5/8"	1 1/4"	Isol.	.70
.....	MICS-1000	600-1000 mmf.	1"x1 5/8"	1 1/4"	Isol.	1.00
"CTD"	CTD-85	25-100 mmf.	1 1/8"x2 1/8"	1 13/16"	Isol.	.80
.....	CTD-160	45-260 mmf.	1 1/8"x2 1/8"	1 13/16"	Isol.	.90
.....	CTD-230	65-350 mmf.	1 1/8"x2 1/8"	1 13/16"	Isol.	.90
"CTS"	CTS-85	25-100 mmf.	1 3/16"x1 1/16"	15/16"	Isol.	.50
.....	CTS-160	45-260 mmf.	1 3/16"x1 1/16"	15/16"	Isol.	.60
.....	CTS-230	65-350 mmf.	1 3/16"x1 1/16"	15/16"	Isol.	.60
.....	CTS-380	175-550 mmf.	1 3/16"x1 1/16"	15/16"	Isol.	.75
.....	CTS-525	230-800 mmf.	1 3/16"x1 1/16"	15/16"	Isol.	.80
"DTD"	DTD-50	8-90 mmf.	1 1/16"x1 3/16"	Single Hole	Isol.	.70
.....	DTD-115	30-175 mmf.	1 1/16"x1 3/16"	Single Hole	Isol.	.80
"DTS"	DTS-50	8-90 mmf.	1/2"x1 1/16"	Isol.	.30
.....	DTS-115	30-175 mmf.	1/2"x1 1/16"	Isol.	.40
"QTD"	QTD-100	20-100 mmf.	1 11/32"x1 11/32"	Single Hole	Isol.	.70
.....	QTD-250	55-250 mmf.	1 11/32"x1 11/32"	Single Hole	Isol.	.80
.....	QTD-450	100-450 mmf.	1 11/32"x1 11/32"	Single Hole	Isol.	.90
.....	QTD-600	170-600 mmf.	1 11/32"x1 11/32"	Single Hole	Isol.	1.00

Isol. = Isolantite

"ETU" EXCITER TUNING UNIT

These handy units are intended for use in multi-band transmitter excitors and lend themselves readily to band switching arrangements. They are used in our excitors shown on page 17. Available unwound or with windings for 10-20-40 and 80 meter bands. Designed to work with 6L6's. Consists of two 25 mmf. double spaced condensers and a 2" x $\frac{1}{8}$ " diameter winding form. "ETU-10" for 10 meters, "ETU-40" for 40 meters, etc.

Code	Size	List Price
ETU	2" x 4" x 1 $\frac{7}{16}$ "	\$4.00
ETU-10-20-40-80	2" x 4" x 1 $\frac{7}{16}$ "	5.50

"PTS" POWER TUBE SHIELD

Designed for use with power tubes of the screen grid type. Increases stability and reduces feedback. Made in two sizes, "PTS" for low powered tubes such as 807, RK-23, etc., and "PTS-H" for large pentodes and tetrodes such as RK-20, 814, etc. Mounting centers 2 $\frac{27}{32}$ ".

Code	Size	List Price
PTS	2 $\frac{1}{4}$ " x 3" high	\$0.40
PTS-H	2 $\frac{1}{4}$ " x 2 $\frac{1}{8}$ " high	.40

"XS-2" CRYSTAL SOCKET

A new crystal socket designed to follow the modern trend toward compact transmitter design. Pure Isolantite with heavy re-inforced contacts to insure perfect connection. Can be mounted above or below base or inside XP-53 coil form. Mounting centers 15/16".

Code	Size	Prongs	List Price
XS-2	1 $\frac{5}{16}$ " diameter	2	\$0.50

ISOLANTITE INSULATORS

Made of pure glazed Isolantite. These heavy duty insulators will not chip or crack as easily as ordinary porcelains. Superior material prevents threads from stripping. Hardware is heavy brass cadmium plated and the terminal lug is thick cadmium plated copper. Available with or without hardware and in either plain or jack tip types. Insulating beads and bushings also Isolantite.


LIST OF STOCK SIZES

Code	Size	List Price
SOS-75	1/2" x 3/4" long	\$0.15
SOS-100	1/2" x 1" long	.20
SOS-150	1/2" x 1 $\frac{1}{2}$ " long	.25
SOS-250	1/2" x 2 $\frac{1}{2}$ " long	.30
SOL-100	3/4" x 1" long	.30
SOL-150	3/4" x 1 $\frac{1}{2}$ " long	.40
SOL-200	3/4" x 2" long	.50
SOL-350	3/4" x 3 $\frac{1}{2}$ " long	.70
SOSP*	Plain tip for 1/2" Dia. Ins.	.10
SOSJ*	Jack tip for 1/2" Dia. Ins.	.15
SOLP*	Plain tip for 3/4" Dia. Ins.	.15
SOLJ*	Jack tip for 3/4" Dia. Ins.	.20
FTB**	Feed Through Bushings	.15 pr.
FCB***	Flexible Connector Beads	.25

* Complete hardware, including tip, screws, lockwashers, cork friction washer, mounting base, etc.

** Packed in pairs in individual envelopes.

*** Packed in envelopes of 25 beads (5 $\frac{1}{2}$ beads per inch).

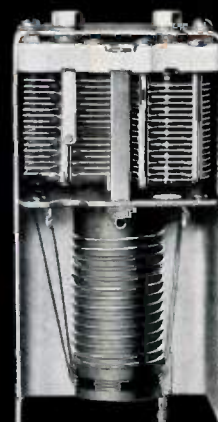

ETU



PTS




XS-2




INSULATORS




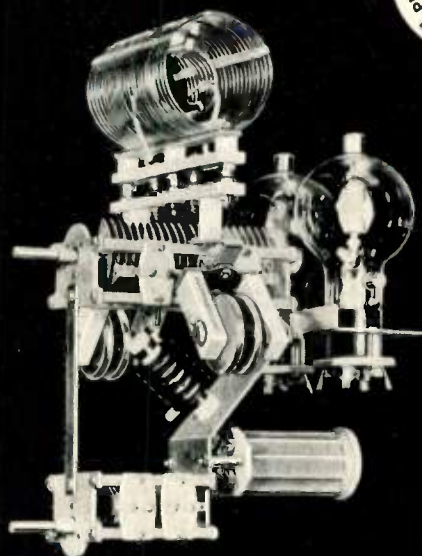

"PA-300" AMPLIFIER

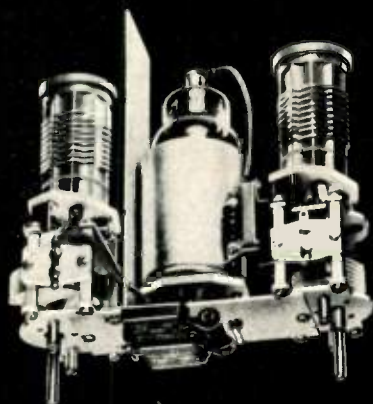

"BD-40" BUFFER-DRIVER

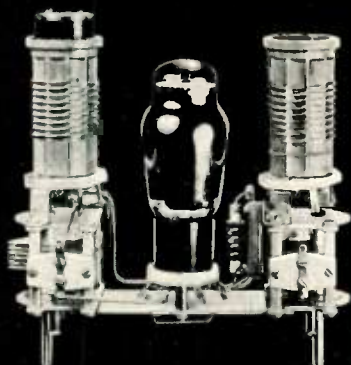

"OD-10" OSCILLATOR-DOUBLER

"PA-300" AMPLIFIER

AMATEURS the world over are expressing their enthusiasm over the new HAMMARLUND method of transmitter construction. It is no longer necessary to build complicated bulky apparatus. These new transmitter foundation units eliminate the usual chassis with its difficult drilling and machining. These units are so simple to assemble that even the most inexperienced person can build a neat, business-like transmitter. All brackets are completely drilled and shaped to fit standard HAMMARLUND parts and can be assembled in only a few minutes time. This unit is suitable for either a low or medium power transmitter. Such tubes as 809's, T-20's, 10's and many others can be used for low power output. For higher output either 808's, RK-37's, T-55's, HK-24 or HK-54 provide excellent results. The plate tuning condenser has .070" spacing. Voltages up to 2000 may be applied to the tubes. The brackets are designed to accommodate standard variable link inductors. Other HAMMARLUND parts used are—1 MTCD-100-B; 1 MTCD-100-C; 2 N-10; 1 CH-500; 2 S-4; 1 S-5; 4 SWF-4 coil forms. Dimensions 13"x8½"x8".

Code	Description	List Price
PA-300	Includes all brackets, screws, washers, and nuts	\$3.25

"BD-40" BUFFER DRIVER

THE "BD-40" is a buffer-driver-multiplier unit of compact design and can be used in multi-stage transmitters where several multiplier stages are necessary or can be used as the driving unit for the "PA-300". The "BD-40" employs an 807 or similar beam tube and has an output of nearly 40 watts on all bands from 80 to 10 meters. Ideal for beginners desiring to start out with a small inexpensive transmitter. The "BD-40", when used in conjunction with the "OD-10", provides a neat, compact low power transmitter. Other HAMMARLUND parts needed: 2 MTC-100-C; 2 S-4; 1 S-5; 1 CH-X; 8 SWF-4 coil forms. Dimensions 8¼" x 7½" x 3¼".

Code	Description	List Price
BD-40	Includes all brackets, tube shield, screws, washers and nuts	\$3.60

THE three foundation units listed on this page, when used together, form the complete R. F. section of an efficient and compact transmitter suitable for operation on all bands from 80 to 10 meters—phone or CW. Ideal for the beginner and old-timer alike.

"OD-10" OSCILLATOR DOUBLER

THE "OD-10" is a standard tri-tet oscillator-doubler and can be used as a low-power one-tube transmitter or in conjunction with the "BD-40" and "PA-300" in a multi-band transmitter. This unit employs a 6L6-G or similar tube and will operate on two amateur bands with a single crystal. The "XS-2" crystal socket is mounted inside of the cathode coil form so that the coil and crystal can be changed in one operation. Other HAMMARLUND parts needed—2 MTC-100-C; 2 S-4 sockets; 1 S-8 socket; 1 CHX choke; 1 XS-2 socket; 2 SWF-4 forms. Size: 8¼" x 7½" x 3¼".

Code	Description	List Price
OD-10	Includes all brackets, screws, nuts, etc.	\$2.80

"PA-500" AMPLIFIER

THE "PA-500" push-pull power amplifier can be operated with outputs up to 500 watts and over. This unit makes use of tubes such as RK-38, 100-T, 50-T, HK-54, HK-154, and others requiring up to 2,000 or more volts on the plates. "PA-500" uses standard HAMMARLUND "TC" condensers. Either the "TCD-55-F" with a .230" plate spacing, or the "TCD-75-G" with a .200" spacing can be used in the plate circuit and "TCD-50-H" or "TCD-165-K" in the grid circuit. In design, the "PA-500" is similar to the "PA-300." All parts are fastened together with brackets to form a neat and compact unit. All brackets are completely shaped and drilled. The entire unit can be assembled and wired in less than an hour. It is designed to mount directly on the panel—no chassis is required. "PA-500" can be used as a final amplifier in all amateur transmitters from 80 to 10 meters with maximum efficiency. Provisions have been made to accommodate standard, fixed, or variable link coils in both the plate and grid circuits. The "PA-500" and "ED-4" shown below, when used together, constitute the complete R.F. portion of a 500 watt transmitter capable of efficient operation on all bands from 80 to 10 meters — phone or C.W. Other HAMMARLUND parts needed: 2 "S-4" sockets; 2 "N-10" neutralizing condensers; 1 "CH-500"; 1 variable plate condenser; 1 variable grid condenser, (see page 6 for plate spacing and capacities). Dimensions: 15½" high x 10½" wide x 12" deep.

Code	Description	List Price
PA-500	Includes all brackets, nuts, screws, etc.	\$4.25

"ED-4" EXCITER-AMPLIFIER


The "ED-4" is the same as the "EU-4" except that a power amplifier (RK-47, 814, etc.) has been added so that it can be used as a driver for the "PA-500" or as a transmitter with an output of nearly 100 watts. This kit contains the same hardware as the "EU-4" with the addition of a tube shield, bracket for mounting the tube socket, special spring plate connector, and 2 pillars for mounting standard plate coil. When completely assembled and wired, this unit represents an extremely compact and efficient transmitter or driver. Other HAMMARLUND parts needed: Same as EU-4 plus 1 "S-4" socket; 1 "S-5" socket; 1 "MC-100-S" condenser; 1 "MTC-100-B" condenser; 1 "CHX"; 3 "SOS-100" stand-off insulators; 2 "SOSP" insulator hardware; 4 "SWF-4" coil forms. Dimensions: 17" long x 8" deep x 9¼" high. All parts aluminum.

Code	Description	List Price
ED-4	Includes all hardware, drilled and shaped, nuts, screws, 2-switches, etc.	\$13.50


"EU-4" EXCITER UNIT

THE NEW "EU-4" 4-band exciter unit is designed for amateurs who want a really flexible and compact unit covering the 80, 40, 20, and 10 meter amateur bands. There are four stages employing 6L6 tubes. The first is an 80 meter crystal oscillator and the remaining three stages are for frequency multiplication. Band changing is accomplished with a single 4-point rotary switch. This switch, as it is rotated, adds the proper number of multiplier stages to provide the output frequency desired and also connects the output link to the particular stage being used. Link coupling is used on all bands from 80 to 10 meters inclusive. Another switch is provided for metering the four stages. Power output is sufficient for driving small and medium power beam tubes or pentodes and low power triodes requiring only a few watts excitation. Foundation unit includes all hardware for building the "EU-4" and includes the two special rotary switches. Other HAMMARLUND parts needed: 1 "ETU-30"; 1 "ETU-40"; 1 "ETU-20"; 1 "ETU-10"; 1 "XS-2"; 4 "S-3" sockets; 5 "CHX" R.F. chokes. The "EU-4" is 17" long x 8" wide x 2¾" high. All parts are aluminum.


Code	Description	List Price
EU-4	All hardware, nuts, screws, switches, etc.	\$11.50

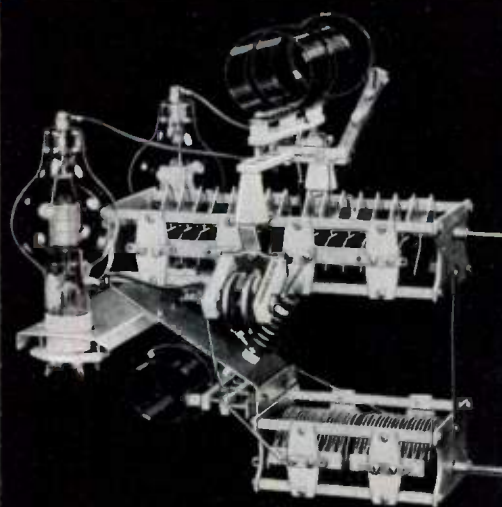

PA-500
PUSH-PULL
POWER AMPLIFIER

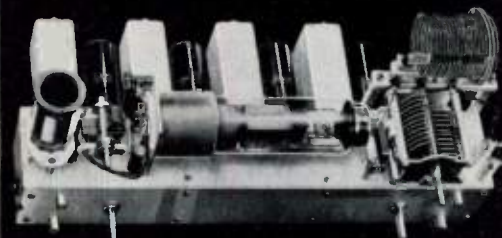

ED-4
COMBINED
BAND-SWITCHING
EXCITER AND AMPLIFIER

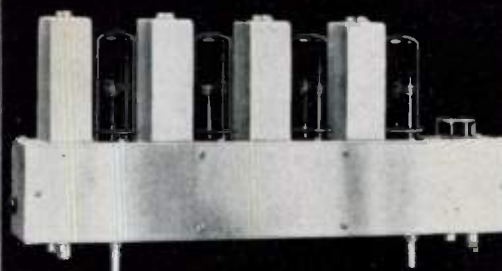

EU-4
BAND-SWITCHING
EXCITER UNIT



**"HQ-120-X" RECEIVER***(Licensed under RCA and Hazeltine Patents)*

NEVER BEFORE have so many outstanding features been incorporated in a single receiver. This ultra-modern 12-tube receiver covers a range of from 31 to 54 mc. (9.7—555 meters). It is designed to meet the most exacting demands of the amateur and short wave experimenter. This is no ordinary receiver, no redesigned broadcast set, it is especially engineered from start to finish. With the type construction employed in the "HQ-120-X," the inclusion of the broadcast band in no way jeopardizes the efficiency of the receiver at higher frequencies. Although this requires special tuning condenser design, it is the only satisfactory solution.

Many of the features in this remarkable receiver are original HAMMARLUND developments. The new "full range" crystal filter that opens up a new field in radiophone communication; the special high gain R.F. stage with its antenna compensator; uniform sensitivity; three I.F. stages with silvered mica condensers and permeability tuned transformers; exclusive tuning condenser design; calibrated dial; noise limiter, and many others all go to make up a receiver that is already taking the field by storm. The stability, sensitivity, and selectivity of the new "HQ-120-X" are exceptional. The voltage regulated power supply provides constant voltage to the high frequency oscillator. This, together with special oscillator circuit, provided a degree of stability high enough to warrant calibrating the band-spread dial in megacycles for each amateur band from 80 to 10 meters inclusive. This dial has an additional 0—200 scale for calibration at other frequencies. The general coverage dial is also calibrated in megacycles. The high gain R.F. stage, with its antenna compensator control, provides maximum image rejection and highest signal-to-noise ratio with all types of antennas. By special circuit arrangement, the gain of the entire receiver is held relatively constant in all amateur bands and provides accurate "S" meter readings. Another feature directly concerning the accuracy of the "S" meter is the uniform output of the crystal filter.

The specially designed 15-gang tuning condenser in the "HQ-120-X" provides constant band-spread throughout its entire range. There are six sections in the main tuning condenser, and nine sections in the band-spread condenser. The special design of the tuning condenser, combined with an unusual dial arrangement, provides 310 degrees band spread on each amateur band.

The noise limiter on the "HQ-120-X" is designed to effectively remove automobile ignition interference and similar disturbances. It works with or without the A.V.C. system and there are no delicate threshold controls on the panel—merely an "On and Off" switch.

The new crystal filter circuit employed in the "HQ-120-X" is an outstanding HAMMARLUND development. Because of its "full-range" selectivity, this filter is applicable to both phone and C.W. reception. There are six positions on the selectivity switch and these are controlled from the panel. There are three positions for phone reception and the first of these positions provides a band width wide enough to admit fairly good quality music. Two positions in the selectivity range are for single signal C.W. reception. The sixth position cuts the crystal out of the circuit. Equipped with black etched panel and crackle finished metal cabinet with handles. Measures 17 1/8" long x 10" high x 12 1/4" deep. Send for free 16-page booklet. Rack model \$10.00 extra list.

Code	Description	List Price
HQ-120-X	Receiver complete with tubes, crystal filter and 10" P.M. Dynamic speaker, less speaker cabinet	\$230.00
SC-10	Cabinet for 10" P.M. speaker finished to match receiver. Size is 12 1/2" x 12 1/2" x 7".	6.50
HQ-120-XG	With gray cabinet and panel.	235.00
SC-10-G	Gray Speaker cabinet.	7.50


"XU-455" VARIABLE CRYSTAL FILTER

This crystal filter is supplied with a 455 kc. crystal. It can be used with receivers having a 465 kc. I.F. by simply adjusting the transformers of the receiver to the new frequency. Dimensions 2 1/8" wide x 3" deep x 5" high.


Code	Description	List Price
XU-455	Complete with 455 kc. crystal	\$30.00



HQ-120- RECEIVER

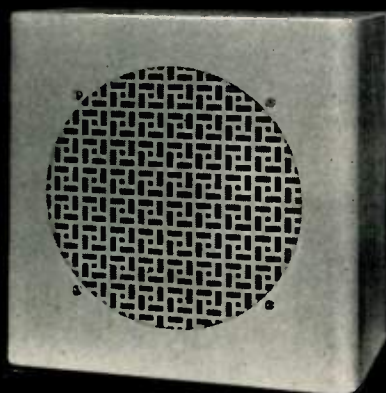

"PM" DYNAMIC SPEAKER

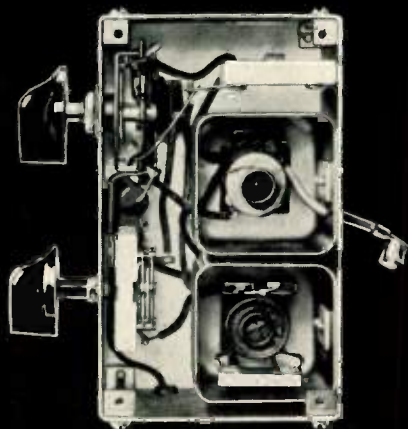

VARIABLE CRYSTAL UNIT

HAMMARLUND "SUPER-PRO" (Licensed under RCA and Hazeltine Patents)

The new HAMMARLUND 18-tube, Series 200, "Super-Pro" is the last word in communications receiver engineering. Every feature for improved performance has been built into the new "Super-Pro." This new receiver is designed for commercial services where peak performance and unlimited flexibility are paramount. Its full range selectivity from less than 100 cycles to approximately 16 kc. makes it respond to the operator's every wish whether it be for reception of CW telegraph signals in crowded bands or for high fidelity reception for re-broadcasting purposes. This wide range of selectivity permits maximum use of the extreme sensitivity for which the "Super-Pro" has long been famous. Amateur and commercial operators, alike, will find reception of weak, distant stations more reliable because selectivity can be adjusted to suit receiving conditions.

The crystal filter has five ranges of selectivity varying from "single-signal," to $2\frac{1}{2}$ kc. for phone reception. Three of these ranges are especially intended for receiving phone signals. In addition, the overall I. F. selectivity is variable from 3 to 16 kc. by mechanically changing the coupling in the I.F. transformers.

Interference by man-made disturbances has been reduced to a minimum with an efficient and improved noise limiter. Automobile ignition interference, which is most bothersome on 10 and 20 meters is practically eliminated.

The new "Super-Pro" also has an improved "S" meter which is adjustable to conform with the operator's custom of reporting signal strength. Another major feature is the band spread system with a 12-gang band spread condenser which spreads each amateur band over practically the entire dial scale. This band spreading is not restricted to the amateur bands. High frequency broadcast channels are also spread out considerably on the band spread dial. Band spread is available throughout the entire high frequency range of the receiver. The exclusive cam-operated band changing knife switch is noiseless in operation, jar-proof, and trouble-free. Especially designed silver-plated knives mounted on bakelite panels are used. Six silver-plated contact fingers insure dependable low resistance contact for each circuit. No moving part carries current to cause noise or to provide stray coupling. Silver-plated shortcircuiting springs automatically short out the unused coils at all times. The new Series 200 "Super-Pro" receiver is available in two special tuning ranges as listed below. All models, however, include identical features. In addition to the above, the "Super-Pro" has a beat oscillator, AVC, calibrated main tuning dial, two stages of tuned R. F. for image-free reception and high signal-to-noise ratio, 14 watt audio amplifier, separate power supply, relay terminals, ear-phone and phono-pick-up connections and a beautiful metal cabinet. Send for illustrated folder containing further details. Receiver measures $21\frac{1}{2}$ " long x $15\frac{1}{4}$ " deep x $12\frac{1}{4}$ " high. Power unit 13" x $7\frac{5}{8}$ " x $8\frac{1}{2}$ ". Rack model 19" long x $14\frac{3}{4}$ " deep x 10 $15\frac{32}$ " high.

Code	Type	Tuning Range	Speaker	List Price
SP-210-X	Crystal	15-560 meters	10" Dynamic	\$465.00
SP-210-SX	Crystal	$7\frac{1}{2}$ -240 meters	10" Dynamic	465.00
SP-220-X	Crystal	15-560 meters	12" Dynamic	490.00
SP-220-SX	Crystal	$7\frac{1}{2}$ -240 meters	12" Dynamic	490.00
PSC-10	10" speaker cabinet to match receiver			8.50

Above prices cover 110 volt 60 cycle model including tubes, crystal, speaker and separate power pack. Rack models are available at \$17.50 additional, list. Models covering other tuning ranges and for different line voltages are also available. Prices on request.


"All Prices in This Catalog Subject to Change Without Notice"



STANDARD 'SUPER-PRO'
IN METAL CABINET



STANDARD 'SUPER-PRO'
RECEIVER CHASSIS

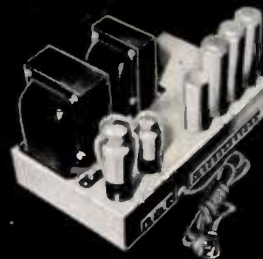

STANDARD 'SUPER-PRO'
POWER SUPPLY CHASSIS



'SUPER-PRO' HI-FIDELITY
12" SPEAKER CHASSIS



Twenty-Ninth YEAR

PAGE NINETEEN

Form No. 25-B-40

Printed in U. S. A.



HAMMARLUND PRODUCTS

PRECISION STANDARD, MIDGET AND MICRO VARIABLE CONDENSERS; TRIMMING AND PADDING CONDENSERS; PLUG-IN COILS; COIL FORMS; SOCKETS; I. F. TRANSFORMERS; R. F. CHOKES; COUPLINGS; SHIELDS; PROFESSIONAL RECEIVERS AND SPECIAL LABORATORY EQUIPMENT FOR ULTRA-HIGH FREQUENCY, HIGH FREQUENCY AND BROADCAST RECEIVING AND TRANSMITTING.

SALES OFFICES

BUFFALO, N. Y. . . 250 Delaware Ave.
PHILADELPHIA, PA. . . 2324 Ripley St.
CHICAGO, ILL. . . 540 N. Michigan Ave.
DETROIT, MICH. . . 153 E. Elizabeth St.
CLEVELAND, OHIO . . 1400 W. 25th St.
ATLANTA, GA. . . 289 Peachtree St., N.E.
DALLAS, TEXAS . . 137 South Montclair
DENVER, COLO. . 436 Continental Oil Bldg.
LOS ANGELES, CAL. . . 945 E. Pico St.
SAN FRANCISCO, CAL. . 1264 Folsom St.
PORTLAND, ORE. . . 917 S. W. Oak St.
HAMILTON, ONT., CAN. . 41 W. Ave., N.
EXPORT DEPT. . . . 100 Varick St., N. Y. C.