

electronics

Silicon diodes by the foot . . .




WESCON SPECIAL

- *Technical session highlights*
- *New instruments, components, systems*
- *West Coast business developments*

ROLAND KISSLER
BOX 916
MOORE LAKE WASH



One of the few
 "Solid-State" Counters
 that costs less
 than the **NEW** 1150-A
 Digital Frequency Meter

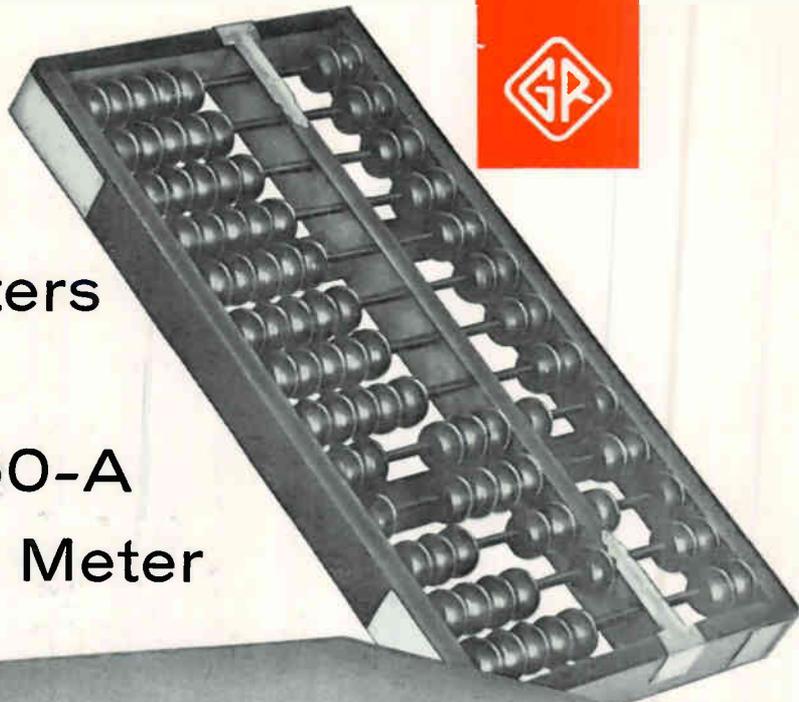

Type 1150-A
 Digital Frequency Meter... \$915

- Totalizes events or measures frequency to 220 kc.
- New, brilliant, always in focus, NUMERIK* in-line display. 120° viewing angle... 5000-hour lamp life in counting service.
- Fail-safe ring counting circuits eliminate fussy feedback codes and critical voltage levels.
- *Oven-controlled* 100-kc crystal oscillator with 1/2 ppm stability. Temperature stability better than 5 ppm over an ambient range of 0° to 50°C.

See this new instrument at

WESCON
 Booths 643—644

Along with other new General Radio Products

*TRADE MARK

GENERAL SPECIFICATIONS

Frequency Range: 10 cps to 220 kc
Accuracy: ±1 count ± time-base stability
Time Base: Internal 100-kc crystal oscillator with 1/2 ppm stability. Provision for external 100-kc time base
Sensitivity: Better than 1 volt, peak-to-peak. For pulses, duty ratio should be between 0.2 and 0.8. Input impedance is 0.5 MΩ shunted by less than 100 pf.
Gate Times: 0.1, 1, and 10 seconds. Also manual start/stop
Reset: Automatic or manual
Display Time: Adjustable from 0.1 to 5 seconds, or infinite
Self Check: Has provision for counting own 100-kc frequency
Small Size: Only 3 1/2" x 19" x 10"

GENERAL RADIO COMPANY

WEST CONCORD, MASSACHUSETTS

NEW YORK, WOrth 4-2722
 District Office in Ridgely, N. J.
 Whitney 3-3140

CHICAGO
 Oak Park
 Village 8-9400

PHILADELPHIA
 Abington
 HANcock 4-7419

WASHINGTON, D. C.
 Silver Spring
 JUniper 5-1088

SYRACUSE
 Syracuse
 GLEnview 4-9323

SAN FRANCISCO
 Los Altos
 WHitecliff 8-8233

LOS ANGELES
 Los Angeles
 HOLLYwood 9-6201

ORLANDO, FLA.
 Orlando
 GArden 5-4671

IN CANADA
 Toronto
 CHerry 6-2171

CIRCLE 900 READERS SERVICE CARD

electronics

A McGraw-Hill Publication 75 cents



W. W. MacDONALD, Editor

J. M. CARROLL, Managing Editor
 SENIOR EDITORS: Samuel Weber, George W. Sideris. SENIOR ASSOCIATE EDITOR: Michael F. Wolff. ASSOCIATE EDITORS: Michael F. Tomaino, Sylvester P. Carter, William P. O'Brien, John F. Mason, Thomas Emma, Sy Vogel, Leslie Solomon, George J. Flynn, Laurence D. Shergalis. ASSISTANT EDITORS: Nilo Lindgren, Stanley Froud, Stephen B. Gray, Roy J. Bruun, George V. Novotny, Leon H. Dulberger. REGIONAL EDITORS: Harold C. Hood (Pacific Coast, Los Angeles), Thomas Maguire (New England, Boston), Cletus M. Wiley (Midwest, Chicago). ART DIRECTOR: Harry Phillips; Howard R. Berry. PRODUCTION EDITOR: John C. Wright, Jr. EDITORIAL ASSISTANTS: Gloria J. Meurer, Bernice Duffy, Lorraine Rossi, Virginia T. Bastian, Lynn Emery, Bette H. Snyder, Rosemary Abbruzzese, Ann Mella, Lorraine Werner. FOREIGN NEWS BUREAU: Director, John Wilhelm, Alyne Elias. LONDON—John Shinn, Derek Barlow, Nicholas Landon. Bonn—Peter Forbath, Silke McQueen. Paris—Robert Farrell, Arthur Erikson. Milan—Marc A. Messina. Mexico City—Bruce Bendow. Rio de Janeiro—Leslie Warren. Moscow—Stewart Ramsey, Tokyo—Richard Halloran, Charles Cohen, John Yamaguchi.

JAMES GIRDWOOD, Publisher



LOS ANGELES AUG. 21-24

- ▶ **DIODE RIBBONS** produced by automated process developed by Delta Semiconductors consist of silicon diode junctions fused to continuous gold-plated strip. *Use of strips simplifies design of memory plane matrices and other computer circuits. See p 100* COVER
- ▶ **AEROSPACE R&D Paces West's Record-Breaking Sales.** Despite problems, among them shrinking profits, West continues growth. *California companies got 41 percent of nation's R&D prime contracts last year* 20
- ▶ **ENGINEERS ARE RECRUITED** Early in the West. Scholarships, science fairs, WESCON trips win future engineers. *Industry and education are cooperating to encourage youngsters into engineering* 24
- ▶ **WESCON SPOTLIGHTS FRONTIERS** in Electronics. Program, exhibits and special events carry out convention's theme. *This year's 1,250 booths set a record* 30
- ▶ **DESIGNS COMPETE** for WESCON Awards. Designers of new products stress clean, functional look. *The best 20 designs will be on display* 32
- SPACE COMMUNICATIONS BOOM: Will It Pass Tv By?** Satellite Transmission fees may be too steep for commercial tv. *System cost estimates are still too speculative to tell* 34
- ▶ **WESCON PREVIEW: 1962 Technical Highlights.** Culled from the high-quality program for this year's meeting in Los Angeles, a preview of eleven selected papers covering a wide range of developments in our industry is presented. *Advances in computer circuits, new solid state devices, communications methods, and space instrumentation are featured.* By H. C. Hood 59
- SINGLE-SIDEBAND Exciter Uses Planar Silicon Transistors.** Semiconductor components are well suited to single-sideband communication equipment, particularly since signal processing in ssb may be done at low power levels. *This all-solid-state ssb exciter uses silicon transistors, conforms to all the rigid requirements for stability, carrier suppression and distortion.* By D. L. Wilcox, Texas Instruments Inc. 65
- NOVEL CONVERTER Takes Current Analog of Digital Voltage Pulses.** Design of a digital-to-analog converter capable of converting an 11-bit digital number to an analog current within an accuracy of 0.049 percent sounds difficult and it is. Holding the accuracy over a temperature range of -50 C to +60 C compounds the difficulties. *Special attention to power supply regulation and a binary-weighted precision resistor network turn the trick.* By N. Aron, Radio Corporation of America 68

Contents continued

Published weekly, with Electronics Buyers' Guide and Reference issue as part of the subscription, by McGraw-Hill Publishing Company, Inc. Founder: James H. McGraw (1860-1948).

Title ® registered U.S. Patent Office; © copyright 1962 by McGraw-Hill Publishing Co., Inc. All rights reserved, including the right to reproduce the contents of this publication, in whole or in part.

Executive, editorial, circulation and advertising offices McGraw-Hill Building, 330 West 42nd Street, New York 36, N. Y. Telephone Longacre 4-3000. Teletype TWX N.Y. 1-1636. Cable McGrawhill, N. Y. PRINTED IN ALBANY, N. Y.; second class postage paid at Albany, N. Y.

OFFICERS OF THE PUBLICATIONS DIVISION: Nelson L. Bond, President; Shelton Fisher, Wallace F. Traendly, Senior Vice Presidents; John R. Callahan, Vice President and Editorial Director; Joseph H. Allen, Vice President and Director of Advertising Sales; A. R. Venezian, Vice President and Circulation Coordinator; Daniel F. Crowley, Vice President and Controller.

OFFICERS OF THE CORPORATION: Donald C. McGraw, President; Hugh J. Kelly, Harry L. Waddell, Executive Vice Presidents; L. Keith Goodrich, Executive Vice President and Treasurer; John J. Cooke, Vice President and Secretary.

Subscriptions are solicited only from those actively engaged in the field of the publication. Position and company connection must be indicated on orders. Subscription rates: United States and Possessions, \$6.00 one year, \$9.00 two years, \$12.00 three years. Canada, \$10.00 one year. All other countries \$20.00 one year. Single Copies, United States and Possessions and Canada 75¢. Single copies all other countries \$1.50.

THE PUBLISHER, UPON WRITTEN REQUEST FROM ANY SUBSCRIBER TO OUR NEW YORK OFFICE, AGREES TO REFUND THAT PART OF THE SUBSCRIPTION PRICE APPLYING TO COPIES NOT YET MAILED.

Subscribers: Please address change of address notices, subscription orders or complaints to Fulfillment Manager, Electronics, at above address. Change of address notices should provide old as well as new address, including postal zone number if any. If possible, attach address label from recent issue. Allow one month for change to become effective.

Postmaster: Please send Form 3579 to Fulfillment Manager, Electronics, 330 West 42nd Street, New York 36, New York.



Audited Paid Circulation

CONTENTS continued

- INTEGRATING AMMETER Measures Coulombs In Irregular Pulses. A common measurement problem is to integrate current pulses of irregular shape, duration or amplitude. *This new instrument allows such measurements to be made with precision.*
By J. F. Howell, General Electric Co. 72
- BI-LEVEL REGULATOR Reduces Storage Capacitance. Need a power supply regulator that combines fast response with small size? This kind of performance usually requires a series type or switching regulator. *Novel bi-level circuit permits 90 percent reduction in reservoir capacitor size.*
By F. L. Ward, Atlas Controls Inc. 74
- DERATING POTENTIOMETERS Realistically. Nominal power rating of pots can be deceptive, for the true dissipation capability depends on the circuit application. *Prevent expensive burn-out with proper design, aided by the formulas and table presented here.*
By H. H. Wormser, Markite Corp. 76

DEPARTMENTS

- Crosstalk. *Standards and Foreign Sales* 3
- Comment. *Sales Engineers. Numerical Prefixes* 4
- Electronics Newsletter. *Contracts for New Missile* 7
- Washington Outlook. *Equipment Sought for Guerrilla Warfare* 14
- Meetings Ahead. *Millimeter and Submillimeter Conference* 36
- Research and Development. *Mercury and Cadmium Dopes Improve Airborne IR Detectors* 84
- Components and Materials. *Diode Ribbons Form Logic Matrices* 100
- Production Techniques. *Process for Metalizing Ceramics is Automated* 116
- New Products Design and Application. *WESCON New Products* 130
- Literature of the Week 170
- Reprint Information and Order Form 175
- People and Plants. *Duncan: WESCON's Galloping Chairman* 176
- Exhibitors at the WESCON Show 181
- Index to Advertisers 200

Standards and Foreign Sales

AMERICAN manufacturers have spent a great deal of time and money in recent years to promote the sale of electronic equipment and components overseas. But every year we lose opportunities for sales because of our national apathy toward international standardization.

International standardization in electronics is based in large measure upon the recommendations of the International Electrotechnical Commission. The IEC is part of the International Standardization Organization, but keeps its identity inasmuch as it predates the parent body. Both organizations work closely with the United Nations.

The U.S. National Committee for the IEC is a member body of IEC and operates under the American Standards Association. The USNC holds several IEC technical secretariats.

ONE OBJECT of our participation in international standardization is to get IEC recommendations that are acceptable to U.S. manufacturers and compatible with American design practices and production techniques. To do this we must be represented by able delegates when recommendations are being hammered out.

Although the USNC accredits delegates to IEC meetings, the delegates' expenses are usually paid by the companies for whom they work. Trade associations such as EIA and NEMA have contributed, as have professional societies. The government has itself sent delegates.

Yet American participation in IEC activities has never been as effective as it might be. The reason is lack of regular attendance by U.S. delegates at all levels. Of course, when word gets out that IEC is proposing some standard that might hurt the pocketbook of U.S. manufacturers they quickly send delegates to the meeting in question. But these delegates often find, coming in late, that they have an uphill fight on their hands.

THE REASON is not lack of competence. It is, rather, that proposals being discussed at plenary or full committee sessions that our men usually attend have already been formulated long since in working groups or committees. The sponsoring groups are, therefore, understandably reluctant to make major changes.

Our delegates attend IEC sessions often after




only a very short briefing. They then find themselves across the table from engineers who have spent large portions of their professional careers attending international standardization meetings. These professionals know each other well and are thoroughly experienced in the workings of the IEC.

FOR MANUFACTURERS who expect to compete effectively in overseas markets, regular attendance at IEC meetings is a necessary part of engineering overhead. International standardization specialists with reasonable travel budgets are important to foreign trade.

Wise manufacturers do not wait until there is a fire before training a fire-fighting crew. They do not wait until they are sued before engaging legal counsel. And, if they want to sell products overseas they do not wait until a proposed IEC recommendation threatens to pinch the pocketbook before sending engineers to IEC meetings.

SALUTE TO WESCON. This week's Special WESCON Issue reflects, the influence of the West on the electronics industry. The reports previewing the convention and show do more than preview activities, technical developments and new products. They also tell what the West is doing to maintain its lusty growth rate, especially in the technically fruitful aerospace fields.

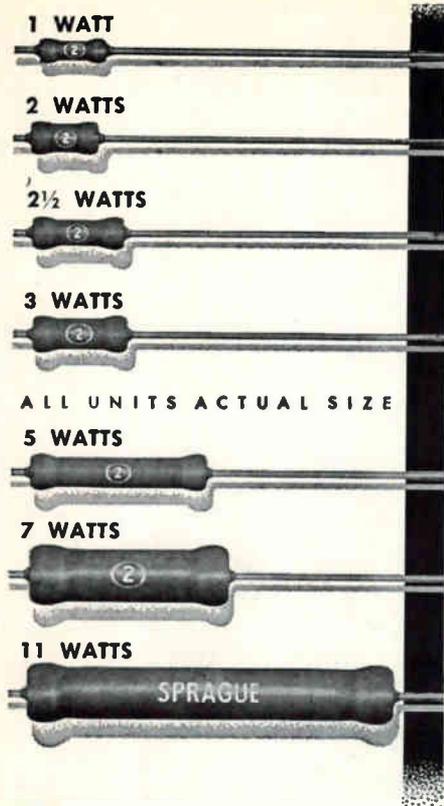

NEXT TIME ... USE TINY *Blue Jacket* WIREWOUND RESISTORS

Sprague builds reliability... efficiency... economy right into minified Blue Jackets with these important features:

- * All-welded end-cap construction with special vitreous-enamel coating for total protection against humidity, mechanical damage, heat, corrosion gives long-term dependability under severe environmental conditions
- * Available in resistance tolerances as close as $\pm 1\%$
- * Low in cost... quick and easy to install

Tiny axial-lead Blue Jackets are specially designed for use with conventional wiring or on printed boards in miniature electronic assemblies. Write for complete technical data in Sprague Engineering Bulletin 7410B.

SPRAGUE ELECTRIC COMPANY
35 Marshall Street, North Adams, Mass.



COMMENT

Sales Engineers

Your *Crosstalk* editorial, *What Shortage?* (p 3, June 8), is most appropriate.

The need for businessmen understanding technical electronics is greater than many of us realize. This is particularly true in the sales field.

As manufacturers representatives, we need "Sales Engineers." But we don't necessarily need graduate engineers provided we could find people with the right background technically and some training in marketing or sales. About the only way to get such people today is to start with graduate engineers, which is certainly a waste of good engineering talent, carefully trained for engineering work.

Let's have some courses with enough engineering to prepare graduates for the various business needs of the electronics industry, including the important function of selling.

KENNETH E. HUGHES

Kenneth E. Hughes Company, Inc.
Union City, New Jersey

Numerical Prefixes

Most engineers are conversant with milli-, micro-, centi-, kilo- and mega-, and are able to live with deci-, deca- and hecto-. With varying degrees of difficulty we have mastered (?) tera-, nano-, pico- and giga-. However, I agree with R. O. Whitaker in the June 15 *Comment* (p 4) that now is the time to question the continued use of numerical prefixes.

It is generally necessary, when solving problems, particularly those involving microwave frequencies and components, to convert the unit magnitudes to powers of ten. As I see it, the numerical prefix system has four significant difficulties: (1) the newer terms are relatively unfamiliar to many engineers and are not associated with commonly-used radices which would permit mnemonic correlation; (2) the larger terms are limited to powers of 1,000 rather than powers of ten, thus leading to inconsistency in handling; (3) the system is not readily extended to our ever-

increasing usable spectrum; and (4) the engineer must translate each unit to the appropriate power of ten in order to solve equations.

I suggest a numerical suffix system of nomenclature as an alternative to the numerical prefix. Positive powers of ten could be denoted by the suffix *pos* and negative powers of ten by *neg*. Thus, 1.23 Gc would be 1.23 pos-nine cycles (per second), and might be written as 1.23 (9) cps or 1.23p9 cps; 45.6 picofarads would be 4.56 neg-eleven farads, and might be written 4.56 (-11) f or 4.56n11 f. Such a system is readily extended to any conceivable frequencies or dimensions and is easily handled in numerical computations, with no time lost in translating to the equivalent powers of ten.

Incidentally, Whitaker chose an unfortunate symbol [a circle around the number] in his otherwise acceptable problem illustrating the difficulties of the prefix system. Your comment on relative ease of printing wouldn't hold water if any of literally dozens of appropriate printing designations (such as parentheses, for example) had been used.

RICHARD A. WALL

Sunnyvale, California

Transistor Frequency

Reference my article, *Pushing Transistors Above Their Frequency Limits With Parametric Conversion Operation* (p 46, June 22).

Since submitting the paper to you, even much better results have been obtained up to 8 Gc with the new Siemens AF 139 transistor in a coaxial housing. Some other excellent results for oscillation at 10 Gc have been demonstrated with a triple-diffused silicon epitaxial mesa transistor only recently fabricated at the Siemens semiconductor factory.

Some errors occur in the article: (1) the inductance in Fig. 2A is 20 nH, not 20 μ H; (2) the inductance in Fig. 4A is 25 nH, not 25 μ H; (3) in table II, it is not -32 db, but +32 db; (4) transistor Q_2 in Fig. 2A is a TF 65, and Q_3 in Fig. 4A is also a TF 65; (5) the expression following Eq. 9 should be $\omega_c C_c r_c'$, not $\omega_c C_c r_c'^2$.

ULRICH L. ROHDE

Munich, West Germany

WHERE SPACE-AGE RESEARCH IS IN ORBIT

Launching ships is an old story in Baltimore, which has built them by the thousands. The busy shipyards here are still building them, too. But another kind of launching preoccupies many Baltimore-area plants today . . . with electronics for guidance systems, chemicals for propulsion, hardware for the space vehicles themselves. Space-age research and


development, engineering and production are expedited by ideal sites, a profusion of specialized labor skills, major colleges and universities, proximity to NASA headquarters and Washington, D.C.

Added to these, in Baltimore and its neighboring counties, is fast, flexible transportation . . . by air, land and sea. Stable economy, too. When you want to think big, think BALTIMORE.

PUT YOUR PLANT IN

BALTIMORE

For confidential information, write Robert J. George, BALTIMORE GAS AND ELECTRIC COMPANY, Baltimore 3, Maryland. Or call him at 301-539-8000.

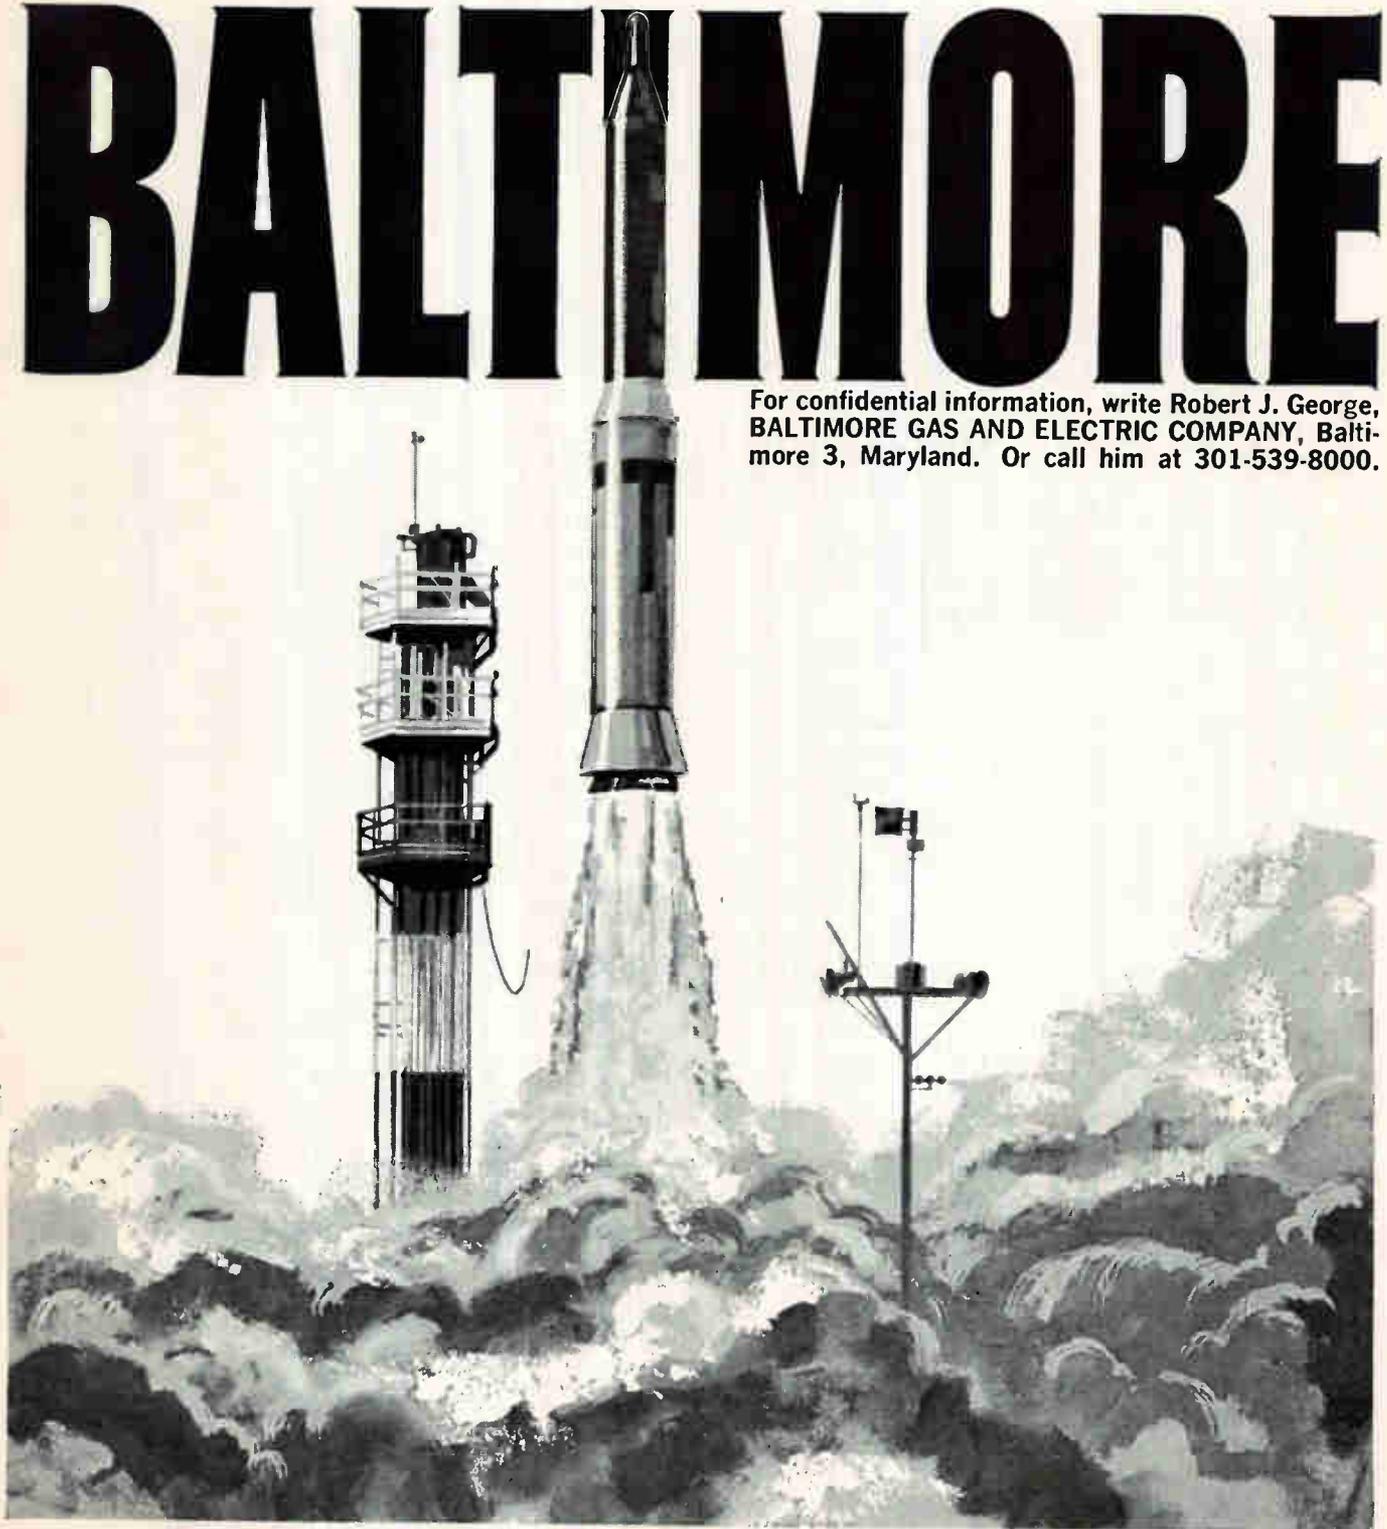

Yesterday tetrodes hit a new high of 75,000 watts.



Today it's 120,000 watts.

Yesterday we rated a pair of our new tetrodes at 100 kw output in class C plate-modulated service. Today: over 250 kw! The reason? Rugged, conservative tube design coupled with the advantages of vapor-phase cooling. Our new vapor-cooled 4CV120,000C offers you all this — and cuts cost, too. It eliminates the high-powered driver required by triodes. And the vapor-cooling equipment costs but one-fourth the price of comparable water-cooling equipment. Eimac offers the whole package — pre-engineered.

Eimac's new 4CV120,000C tetrode is an addition to

a family of high power tetrodes available in these plate dissipation levels: the 35 kw air-cooled 4CX35,000A and the 50 kw water-cooled 4CW50,000C.

This is another example of the way Eimac meets tomorrow's tube needs today. Another reason to keep your eye on Eimac — for advanced power grid tubes, high power klystrons, microwave tubes, accessories. Eitel-McCullough, Inc., San Carlos, California. Subsidiaries: Eitel-McCullough, S. A., Geneva, Switzerland; National Electronics, Geneva, Illinois. **KEEP YOUR EYE ON**



ELECTRONICS NEWSLETTER

Air Force Steps Up Mobile Missile Work

AIR FORCE last week awarded contracts for the Mobile Mid-Range Ballistic Missile (MMRBM). General Precision Equipment Corp. is to develop the stellar-inertial guidance and control system under a contract worth an estimated \$200 million. The other awards are for preliminary designs, cost estimates and program plans for other components of the system.

MMRBM will be a solid, two-stage missile capable of rapid launch from both land and sea. Air Force's Ballistic Systems Division is program manager. Navy will help insure sea-launch capability.

The guidance program will be carried out at General Precision Aerospace, Little Falls, N. J. GPA will also independently provide an all-inertial capability for the missile.

Hughes Aircraft and a team consisting of Martin Marietta and Sylvaria were awarded program definition contracts for the missile's command and control system.

Other firms selected to compete in preliminary study work are: Hughes and Northrop, integration, assembly, and checkout; Avco and a team consisting of Sperry Rand, Ford Motor's Aeronutronics division and Fairchild-Stratos Corp., reentry system; North American Aviation and Thiokol, propulsion; and AMF and Goodyear Aircraft, transporter-launcher.

The contracts do not mean a full-scale MMRBM project has been formally approved. The Defense Department said that decisions on more detailed study and full development contracts will be made after first phase proposals are evaluated.

July, 1964, Proposed for All-Channel Tv Startup

ELECTRONIC Industries Association told the FCC last week that a poll of all 21 tv set manufacturers revealed a preference for July, 1964 as the cutoff date for shifting from vhf to all-channel tv set production. Dates recommended by individual manufacturers ranged from August, 1963, to June, 1965. The asso-

ciation pointed out that July is when new models are announced. Models to be announced next summer have been frozen by many manufacturers. Some manufacturers asked that distributors and dealers be given until the end of 1964 to clear out vhf sets.

In addition to changeover time needed by set manufacturers, EIA said, tuner manufacturers will need time to increase all-channel tuner production 15 times. Only about seven percent of tuners made in recent years have been all-channel.

Trail of Semiconductor Diode Laser Gets Hot

BOSTON—Richard G. Seed, of Northeastern University, told the Boston Laser Conference last week that he thinks some researcher will achieve diode laser action in the next few months. Several labs are intensifying attempts to produce a semiconductor laser.

Seed reported on a proposed diode laser based on radiative recombination of injected carriers through impurity levels. He is experimenting at AF Cambridge Research Labs on liquid-gas-cooled indium-doped silicon. Pumping is done electrically, by a battery, putting forward bias on the diode to

get injected carriers in the base region. Seed said a high-power silicon rectifier probably comes closest to laser diode requirements.

MIT researchers are investigating laser possibilities in their infrared gallium-arsenide diode (p 24, July 27).

Europeans to Buy, Make Armament Control Systems

EUROPEAN ELECTRONICS firms have signed contracts totaling \$44 million for the purchase of North American Aviation F15A armament control systems and associated support equipment for Lockheed-NATO fighter aircraft. North American's Autonetics division, manufacturer of the systems, has also granted license agreements to the four firms.

Fabbrica Italiana Apparechi Radio, Italy; Manufacture Belge de Lampes et de Materiel Electronique, Belgium; N.V. Hollandse Signaalapparaten, The Netherlands, and Telefunken GMBH, West Germany are initially buying complete systems. Plans are that they will eventually produce both parts and completed systems under the licensing agreements.

D. G. Fink Appointed IEEE General Manager

APPOINTMENT of Donald G. Fink as General Manager of newly-formed IEEE was announced by W. H. Chase, head of AIEE, and P. E. Haggerty, president of IRE. Fink, unanimous choice of the 14-man AIEE-IRE Merger Committee, will take office when the society is formally created in January. A former

Two Lasers Make the Scene at WESCON

LOS ANGELES—Two lasers will dramatically open WESCON.

Act 1: a 1-joule beam flashes three miles across town, from the Statler Hotel to the Sports Arena. The signal trips a relay, activates a magnetic drum and a stored message of welcome is displayed to conventioners.

Act 2: a 10-joule beam vaporizes a wire, freeing a 12-foot balloon and the WESCON insignia rises over the arena

IRE president, Fink, who will be leaving his post as director of the Philco Scientific Laboratory to take this position, holds electrical engineering degrees from MIT and Columbia University. He is a former editor of **ELECTRONICS**.

Latins Won't Tax Each Other's Data Processors

RIO DE JANEIRO—First industrial complementary agreement under the Latin American Free Trade Area treaty (p 34, June 29) has been signed by Brazil, Argentina, Uruguay and Chile.

The four nations agreed to mutual scrapping of all import duties or fees on shipments of electronic data processing machines and special tabulating cards.

Among firms whose machines can move freely from one of the four countries to another are Remington-Rand and IBM. IBM is planning a new factory near Rio.

Optical Character Scanner Reads Four Type Styles

BINGHAMTON, N. Y.—A new optical character scanner that will read simultaneously four different intermixed type styles has been ordered by Beneficial Management Corp., Morristown, N. J., from Link division of General Precision.

A sensor in the scanner detects characters by sensing reflections from characters and their related background. Information obtained is converted and compared with stored information.

The scanner has a reading rate of 600 numbers a second, 500 alphanumeric characters a second, and a load, unload, and scan line-to-line time of 3.3 lines a second.

Rocketborne Transponder Would Aid in Searches

LOS ANGELES—Navy's Pacific Missile Range has awarded Space-General Corp. a \$47,000 feasibility and design contract for a system, called Searcher, that would enable vessels to locate downed nose cones, spacecraft and aircraft within an area

of about 150,000 square miles.

Plans are to put a direction finder and transponder in a small rocket projectile and loft them to an altitude of about 50,000 feet. This is expected to extend line-of-sight range of beacons in downed equipment from about 10 or 15 miles to about 200 miles. A nonpowered rotor would lower slowly.

The system is to include automatic acquisition and lock-on. A reference generator will indicate true north.

"Traveling Wave" Laser Amplifies Light Image

BELL TELEPHONE LABS reports construction of a pulsed ruby laser that can amplify light directly. Net gain reported was 13 db. It is expected that cascading stages will provide much higher gains. Amplification was demonstrated by the increase in intensity of an illuminated image transmitted through the laser.

The equipment consists of two laser sections separated by an isolator whose active material is lead-oxide glass. The isolator is similar in principle to a microwave Faraday rotation isolator, absorbing reflections of the beam (backward traveling waves) and passing the forward beam.

In the isolator, a disk polarizes the beam traveling forward. A longitudinal magnetic field then rotates the polarization plane 45 degrees at the output, where the beam is passed by a similarly rotated polarizing disk. Reflections find themselves at right angles to the input polarizer and are absorbed.

Japanese to Use Computer As Aid to Flood Control

TOKYO—Hybrid computer will be used for flood prevention control along the Kitikami River system in northern Japan. The Mitsubishi analog computer, with digital inputs, will eventually control five dams, determining how much water each should store or release, and when. Data from rain gages will be radioed to the computer. It will also be programmed to give flood warnings.

In Brief . . .

AUSTRALIAN Department of Civil Aviation will spend \$2.5 million in the next four years on 31 vor stations for domestic air routes, 4 dme stations for overseas routes and other airport equipment. These are expected to handle needs until 1970. Airlines will spend \$315,000 for airborne guidance aids.

FRANCE will flight test and evaluate Airborne Instruments Lab's Flaescan all-weather landing system for possible use in French and other European civil and military aircraft. The system is also being evaluated in the U. S. by FAA.

AIR FORCE Office of Scientific Research gave 37 grants and awards in June, bringing its 1962 fiscal year total to \$28.9 million. Most grants were for unsolicited proposals.

PRODUCTION monitoring and control system for Army's Watervliet Arsenal will be built by Hancock Telecontrol under \$114,000 contract.


MIT INSTRUMENTATION LAB will get a Honeywell 1800 computer next year to help design circuits and do other work on the Apollo guidance computer project.

MILITARY contracts include \$1.4 million from Army to Instruments for Industry for counter-measures equipment; \$1 million to Bart Manufacturing for light-weight waveguide for GE's AN/SPS-30 radar; \$914,000 to Motorola for AN/APN-132 transponders for Navy.


RADIATION-ORLANDO is to make an electrosensitive printer with an output of 600,000 words a minute, under a \$350,000 contract from Lawrence Radiation Lab.

MISSILE CONTRACTS include \$1.7 million from the Air Force to Avco-Everett Research Lab, mostly for missile reentry research and monitoring studies, and \$2.7 million to Vitro Corp. for engineering services on Navy's Terrier, Tartar and Talos.

TAKE THE HEAT OFF TRANSISTOR CIRCUIT PROBLEMS



KEEP GAIN LOSS TO 30% (OR LESS) PER STAGE AT HIGH TEMPERATURES WITH NEW HOFFMAN TEMPERATURE-COMPENSATING DIODES

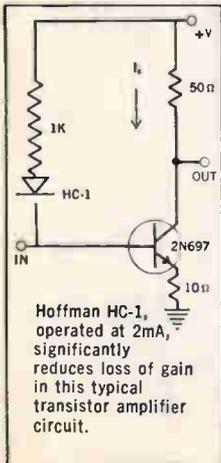

Diode Type	Operating Current Milliamperes									
	.5	1	2	5	10	15	20	30	50	70
HC-1 @ -40V - 25°C	V _F	1.375	2.00	3.25	6.75					
	T _C	4.25	6.75	11.75	26.25					
HC-2 @ -40V - 25°C	V _F		1.75	2.75	6.00					
	T _C		8.75	10.00	13.50					
HC-3	V _F			1.75	2.75	4.5				
	T _C			7.5	8.25	9.75				
HC-4 @ -36V - 25°C	V _F			1.375	2.25	3.75				
	T _C			2.75	7.0	14.0				
HC-5 @ -33V - 25°C	V _F				1.50	2.25	3.00			
	T _C				6.5	8.25	10.0			
HC-6 @ -33V - 25°C	V _F					1.5	1.7	1.9	2.25	
	T _C					2.25	3.5	4.75	7.25	
HC-7 @ -27V - 25°C	V _F							1.00	1.20	1.60
	T _C							.60	1.5	3.25

Max Leakage—1uA V_F Voltage Drop
 Max power rating @ 25°C all types 150mW derate 1mW/°C above 25°C
 T_C Typical Temperature Coefficient (+ MV/°C @ 25°-100°C)

The new Hoffman HC-1 through HC-7 diodes—developed from Hoffman's famous 1N200 Series of diodes—deliver higher biasing impedance and more gain per stage by automatically providing positive, linear temperature compensation for h_{FE} and V_{BE} . Used in the high voltage sections of transistor biasing circuits, they keep gain loss to 30% (or less) while holding power output variation to less than .5% within +25°C to +100°C. No need for padding stages, either, since these new devices are linear and automatically track the transistor.

For complete data, call your nearest Hoffman sales office.

Hoffman / **ELECTRONICS CORPORATION**
 Semiconductor Division

4501 Arden Dr., El Monte, Calif. · CUMberland 3-7191 · TWX El Monte 9735
 CIRCLE 9 ON READER SERVICE CARD

See the HC-1 Series at WESCON, Booth 514-516

**“Leave
the moving
to us!”**



Now... Nationwide!

Meet the fastest-growing member of America's first family in highway transportation: Greyhound Van Lines! Building on a multi-million mile reputation for swiftness, economy, dependability and care, Greyhound Van Lines now provides you with nationwide service.


The combination of fully equipped Greyhound offices and agents is uniquely designed to cope with today's moving needs. For example,


every move is supervised, controlled and coordinated by the best private communications network of its kind in the country. You know the exact status of your shipment...from loading time, leaving time, en route, to arrival time. And the Greyhound one-van, one-driver service assures the ultimate in worry-free moving.

For the big move, the long move, any move—remember Greyhound Van Lines...now NATIONWIDE. For

complete information call your local GREYHOUND VAN LINES representative or write Greyhound Van Lines, 57 W. Grand Avenue, Chicago 10, Ill.

Nationwide joint thru van service with CF Van Lines, Division of Consolidated Freightways, and Johnson Storage and Moving Company.

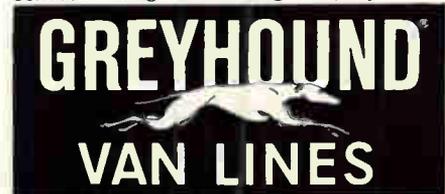

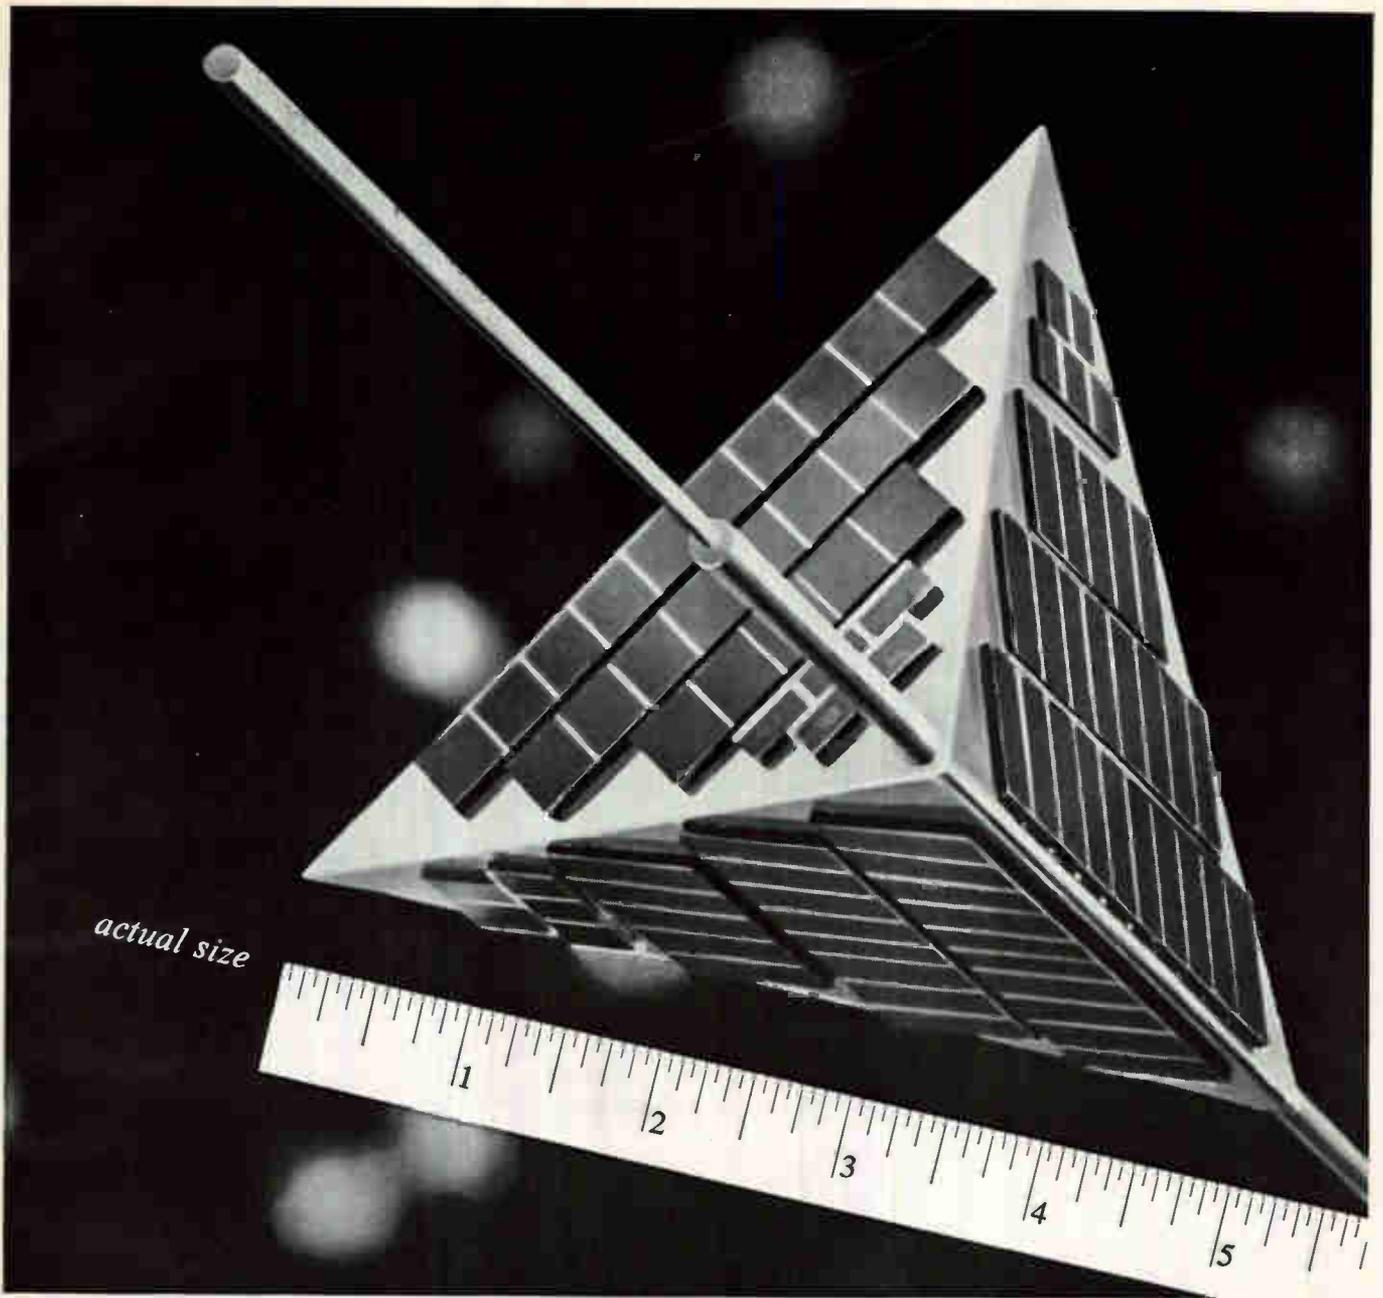

The world's smallest satellite has been developed by Space Technology Laboratories. Its shape will be different from all other satellites before it. STL engineers and scientists have used a tetrahedral configuration to bring about some remarkable characteristics in a space vehicle. There will be no need for batteries nor regulators in flight. The satellite will have no hot side, no cold side. It will require no attitude control devices. No matter how it tumbles in space it will always turn one side toward the sun to absorb energy, and three sides away from the sun to cool instrumentation and telemetry equipment inside. It can perform isolated experiments in conjunction with other projects. Or it can be put into orbit by a small rocket to make studies of its own, up to five or more separate experiments on each mission it makes.


STL is active on hardware projects such as this and as prime contractor for NASA's OGO and an entirely new series of classified spacecraft for Air Force - ARPA. We continue Systems Management for the Air Force's Atlas, Titan and Minuteman programs. These activities create immediate opportunities in: Space Physics, Radar Systems, Applied Mathematics, Space Communications, Antennas and Micro-waves, Analog Computers, Computer Design, Digital Computers, Guidance and Navigation, Electromechanical Devices, Engineering Mechanics, Propulsion Systems, Materials Research. For So. California or Cape Canaveral opportunities, please write Dr. R. C. Potter, Dept. G, One Space Park, Redondo Beach, California, or P. O. Box 4277, Patrick AFB, Florida. STL is an equal opportunity employer.



SPACE TECHNOLOGY LABORATORIES, INC.
a subsidiary of Thompson Ramo Wooldridge Inc.

Los Angeles • Vandenberg AFB • Norton AFB, San Bernardino • Cape Canaveral • Washington, D.C. • Boston • Huntsville • Dayton
WESCON DELEGATES: LOS ANGELES INTERVIEWS AUGUST 21-24. CALL F. C. NAGEL, DUNKIRK 7-5130. VISIT STL BOOTH 3607

Measure Switching Time of Fast Diodes, Transistors

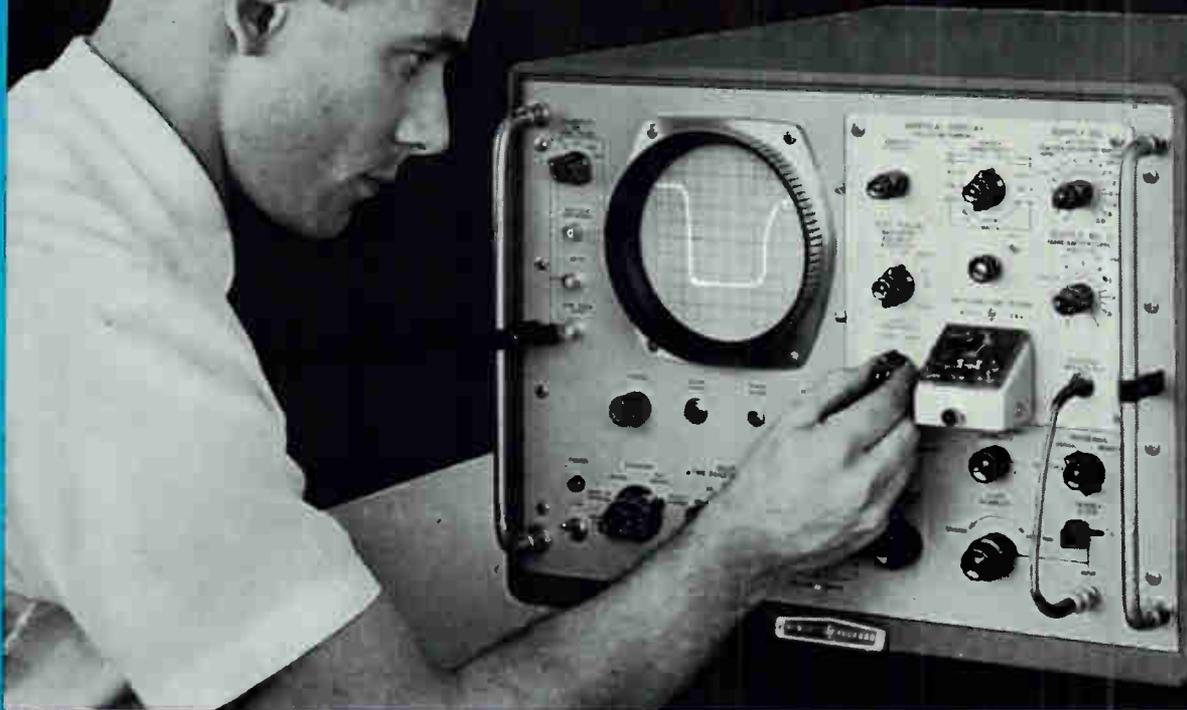

1 nsec resolution with new plug-in test set for 185 1,000 MC scope

A new "state-of-the-art" plug-in for your  185 Oscilloscope measures transistor and diode switching time with nanosecond resolution! Just plug in the  186A Switching Time Tester . . . and all the versatility of the 185 1,000 MC scope is yours for making switching time tests on transistors, diodes and tunnel diodes, or testing pulse response of active and passive networks. The 185 displays switching characteristics of test elements powered and pulsed by the 186A plug-in. And what's more . . . you can use the X-Y output of the scope for making permanent records with a Moseley AUTO-GRAF® or other standard X-Y recorder.

The 186A includes all instrumentation

needed for fast pulse testing. It provides a test pulse generator, vertical amplifier for the oscilloscope, and two bias supplies for the device under test. Pulses with less than 1 nsec rise time and up to 20 v output are available for many types of switching tests. Component and network testing is easy with a series of quick-change test adapters that plug into the front panel of the 186A.

Because the vertical amplifier in the 186A provides a rise time of less than 0.5 nanoseconds, you retain the remarkable versatility of the basic 185 scope. Test measurements are displayed on the 10 by 10 cm scope screen, and the high rep-rate pulse generator in the 186A insures clear, continuous, flicker-free display.

Specifications 186A

(when plugged into  185A or 185B Sampling Oscilloscope)

PULSE GENERATOR

Amplitude: 0.1, 0.2, 0.5, 1, 2, 5, 10 and 20 volts peak, either polarity
Rise Time: Less than 1 nsec
Width: 1 μ sec or 0.2 μ sec
Fall Time: Less than 3 nsec
Repetition Rate: Approximately 5 KC to 100 KC, continuously variable

VERTICAL CHANNEL

Sensitivity: 10 mv/cm to 10 v/cm
Bandwidth: Greater than 800 MC (0.45 nsec rise time)
Noise: Less than 3 mv
Input Impedance: 50 ohms

BIAS SUPPLIES

Supply #1 (Collector): 0 to \pm 30 volts 50 ma maximum (0.5 amp with 10% duty cycle)
Supply #2 (Base): 0 to \pm 10 volts, referable either to ground or supply #1 (20 ma maximum)

TRIGGER OUT

Triggers  185A or 185B Oscilloscopes

TEST BOARDS (supplied with 186A)

Transistor Test Board
Diode Test Board
Tunnel Diode Test Board
Universal Adapter for circuit tests (optional)

Price

 186A Switching Time Tester, \$1,500.00

And Look at the Scope Itself: Hundreds of Different Measurements, DC to 1,000 MC!

Look what you can do with the  185B Oscilloscope: Sync on any signal rep rate, look at rf sine waves to 1,000 MC. See clear, bright pictures, 10 cm full scale width, of a single event as long as 100 microseconds, as short as 0.5 nanoseconds. Sync on signals as small as 10 mv. Effectively see any portion of 600,000 sq. cm. display, with a sharp, steady trace!

Besides performing the measurement work of lower frequency scopes, the  185B is ideal for analyzing rf carrier signals by viewing rf directly; measuring phase angle on signals to 1,000 MC by dual channel viewing with the 187B Dual Trace Amplifier plug-in; analyzing

coaxial connectors, cables, attenuators and other devices by observing reflections of fast pulses. It's the first practical, commercially available answer to the need for measuring and viewing nanosecond pulses . . . and broad sweep speed capability and extreme sensitivity increase its usefulness for viewing all types of repetitive waveforms.

 experience, know-how, quality manufacturing techniques and careful testing procedures assure performance according to specs, long life and exceptional instrument value. Check the specifications on these pages, then call your  rep for a demonstration on your bench.

Specifications 185B with 187B Dual Trace Amplifier

VERTICAL (Dual Channel)

Bandwidth: Greater than 800 MC, usable to 1,000 MC; less than 0.5 nsec rise time for any input signal.
Sensitivity: Calibrated ranges, 10 to 200 mv/cm. Vernier increases sensitivity to 4 mv/cm. Attenuator accuracy, \pm 3%.
Voltage Calibrator: 20 to 1,000 mv, \pm 3% accuracy.
Input Impedance: 100 K ohms shunted by 2 pf.

HORIZONTAL

Sweep Speeds: 10 ranges, 10 nsec/cm to 10 μ sec/cm, calibrated within \pm 5%. Vernier increases fastest speed to 4 nsec/cm, provides continuous adjustment between ranges.
Time Scale Magnifier: 7 calibrated ranges x1, x2, x5, x10, x20, x50, x100. Increases maximum calibrated speed to 0.1 nsec/cm, vernier to 0.04 nsec/cm.
Jitter: Less than 0.03 nsec or 2 mm with x100 expansion, whichever is greater.
Variable Delay Range: Any portion of the trace may be viewed in detail using the Time Scale Magnifier and the time delay.
Trigger Functions: (Normal) External trigger 150 mv for 5 nsec or longer, 50 cps to 100 MC.
(Sensitive) External trigger 15 mv for 5 nsec or longer, 50 cps to 100 MC.
(High Frequency) External trigger 200 mv p-p, 50 MC to 1,000 MC.

Minimum Delay: Less than 120 nsec, 100 nsec/cm sweep and faster.
Sampling Rep Rate: 100 KC maximum.

SYNC OUTPUT

Amplitude: Positive, at least 1.5 volts into 50 ohms.
Rise Time: Less than 2 nsec.
Width: Approx. 7 μ sec.
Recurrence: One pulse per sample.

GENERAL

X-Y Recorder Output:

Available for making pen recordings of waveforms in MANUAL, RECORD and EXTERNAL scanning modes.
Facilitates location of beam that is off-scale vertically or horizontally.

Beam Finder:

Accessories Furnished:

187A-76A BNC Adapter (2); 187A-76F accessory adapter (2); 185B-21A Sync Probe.

Prices:

 185B Oscilloscope, \$2,300.00;
 187B Dual Trace Amplifier, \$1,000.00.

Data subject to change. Prices f.o.b. factory.

HEWLETT-PACKARD COMPANY

1501 Page Mill Road, Palo Alto, California, Area Code 415, DA 6-7000; Sales and service representatives in all principal areas; **Europe**, Hewlett-Packard S. A., 54-54bis Route des Acacias, Geneva; Canada, Hewlett-Packard (Canada) Ltd., 8270 Mayrand Street, Montreal.

7968

WASHINGTON OUTLOOK

EQUIPMENT SOUGHT FOR GUERRILLA WARFARE

DEFENSE DEPARTMENT'S new emphasis on counter-insurgency or antiguerrilla operations is opening up a big new market for military electronics contractors. Up high on the military's requirements for counter-insurgency equipment is communications.

The Air Force and Army are looking for simple, inexpensive transmitters, ground-to-air radios weighing 30 pounds or less, exceptionally reliable point-to-point communications gear that can be moved in a hurry, portable night-detection television, lightweight airborne loudspeakers, and similar electronics equipment.

The Army has been buying such equipment in increasing quantities in the past year. Now the Air Force, with its new Special Air Warfare Center at Eglin AFB, Fla., is coming into the market. Officials there say procurement of approved electronic hardware will be made through fast, redtape-cutting procedures.

AEROSPACE UNIONS DEMANDING CLOSED SHOP

AEROSPACE CONTRACT DISPUTES raise some of the toughest—and touchiest—union issues that the Kennedy administration has faced. No matter on what terms the aerospace manufacturers and the auto workers and machinists unions finally settle, the results are bound to raise a storm of controversy.

The administration is insisting on a settlement without a strike. To achieve this, President Kennedy has departed from usual disputes-handling procedures with the appointment of a special emergency board to recommend settlement terms.

The 60-day "cooling off" period now in force only delays the inevitable showdown. When it comes, another fight will erupt, depending on which way the board goes on the major issue—the union shop. Opponents of this provision, requiring union membership after 30 days employment, are already warning they'll blast the board if it proposes any form of union security. The unions insist that they must win on this issue if the employers want a restrained wage settlement.

With his own emergency board proposing the settlement terms, President Kennedy finds himself caught in the middle. Whether workers have to join a union to hold their jobs defies compromise. To make it even tougher, Douglas Aircraft signed up with the unions on a modified union security provision, the agency shop, where employees don't have to join the union but must pay dues. The other aerospace companies insist they won't buy even this watered down version.

NATO GOOD CUSTOMER FOR U. S. ELECTRONICS

DEFENSE DEPARTMENT has sold \$146.8-million worth of electronics and communications equipment to NATO countries in recent years, according to figures supplied to ELECTRONICS by the Pentagon.

This represents 82 percent of all sales of electronics and communications equipment to friendly foreign governments and 6 percent of total sales of all military equipment to NATO nations. The military sales program is administered by the Office of the Assistant Secretary of Defense for International Security Affairs.

Among the major items on the electronics list: 7,060 AN/SSQ-23 radio sets, 654 AN/SCR radio sets, 50 AN/UPN-12 loran stations, 517 AN/GRC radio sets, 124 AN/VRC radio sets, and 2 AN/BLR-1 ecm systems.

announcing

NEW

JERROLD[®]

rf LOGARITHMIC AMPLIFIER



Model LA-5100

500kc to 100mc



Accurate to within ± 1 db over 80-db dynamic range

Below is band-pass filter response curve without benefit of log amplifier. At right, same curve after amplification by LA-5100.

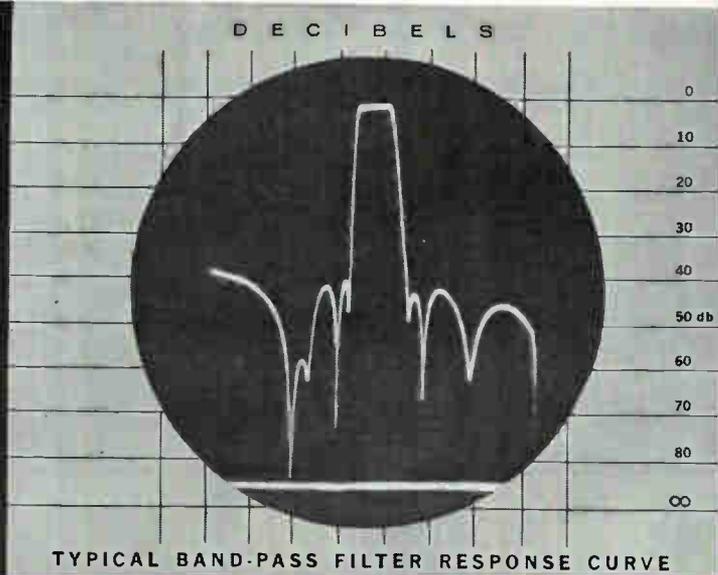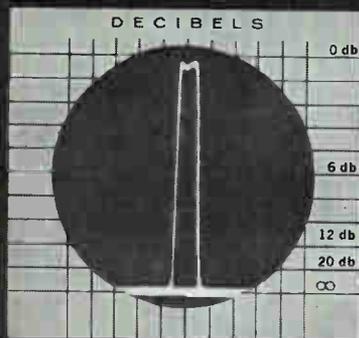

TYPICAL BAND-PASS FILTER RESPONSE CURVE

This extremely accurate log amplifier enables exact measurements of attenuation in networks, filters, amplifiers, and other devices exhibiting dynamic operating ranges down to 90 db. Total rf response of device under test can be displayed in a precise logarithmic ratio on a standard dc-coupled oscilloscope. Write for complete technical data.

- Gives true log presentation over frequency range 500kc-100mc, with flatness better than $\pm \frac{1}{2}$ db.
- Four calibrated ranges: Logarithmic 0-40, 0-60, 0-80 db (readable to 90 db) and one linear range 0-20 db (variable gain).
- Continuously variable log-expand control permits uncompressed presentation of first 5 db of each range.
- Direct-reading meter for point-by-point measurements.
- Oscilloscope output jack for sweep display measurements.
- Designed for rack mounting: 7" x 14 $\frac{1}{2}$ " x 19".

\$795.00

JERROLD ELECTRONICS CORPORATION

Industrial Products Division, Dept. ITE-152, Philadelphia 32, Pa.

Jerrold Electronics (Canada) Ltd., Toronto • Export Representative: Rocke International, New York 16, N.Y.

SEE US IN BOOTH 3814-15 AT WESCON



EASY STREET

1/10⁸/SEC-1/10⁶/WEEK

STABILITY

1-12.4 GC

Introducing a compact electronic instrument to
control microwave oscillator frequency

FOR

doppler systems
spectrum analyzers
radio astronomy
parametric amplifier pumps
microwave frequency standards
microwave spectroscopy

You name the application. The Dymec DY-2650A Oscillator Synchronizer will make it easier! Absolute control of frequency is yours when the DY-2650A phase locks your klystron oscillator to a crystal reference, to achieve short-term stability of 1 part in 10⁸ per second, 1 part in 10⁶ per week. Temperature stability is 1 part in 10⁶, 0-50° C. The DY-2650A requires only a small sample of klystron power—less than -10 dbm.



The DY-2650A will synchronize most reflex klystrons, 1 to 12.4 GC, with complete elimination of klystron drift and minimization of all incidental fm caused by klystron noise, power supply ripple and mechanical shock. You can use it for oscillator stabilization, frequency modulation and control, frequency stability monitoring and fm monitoring.

Frequency modulation and control: Use the DY-2650A to apply fm to a klystron oscillator with deviations up to 500 KC at rates to 50 KC.

Manual frequency control: Over 2 MC range of klystron frequency.

Frequency monitoring: Use an electronic counter or frequency meter to monitor the microwave signal for frequency stability.

FM monitoring: Demodulate fm on the test signal, providing an output for monitoring with a VTVM, oscilloscope or other monitoring devices.

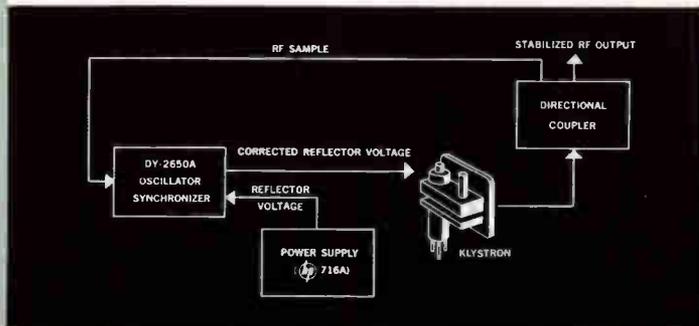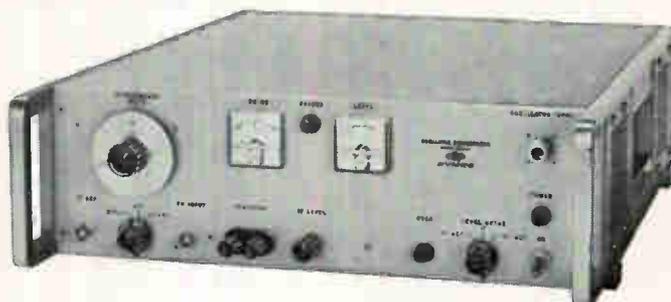

The DY-2650A is essentially a crystal-controlled superheterodyne receiver terminating in a phase comparator. An oscillator sample is mixed with harmonics of the rf reference to produce an intermediate frequency of 30 MC, which is compared in phase with the 30 MC reference. For stabilizing a klystron, the resultant phase error voltage is added in series with the klystron reflector power supply voltage.

SPECIFICATIONS

Frequency range: 1 to 12.4 GC

Stability: 1/10⁸ per second, 1/10⁶ per week (over ± 5°C), 1/10⁶ over range 0 to 50°C.

Output circuitry: Suitable for connection to klystron reflector; floating and insulated up to 2000 v dc. A phase lag network provides optimum characteristics for matching klystron sensitivities from 0.05 to 4 MC/volt nominal.

Input power: Less than -10 dbm.

Price: \$1,450.00, f.o.b. factory.

Data subject to change without notice.

Describe your requirement today to your Dymec/Hewlett-Packard representative, write Dymec for further information or call Dymec direct. Extension 223 or 224.

SEE US AT WESCON
ON EASY STREET
BOOTHS 554-555

D Y M E C

A Division of Hewlett-Packard Company



Dept. J-6, 395 Page Mill Road, Palo Alto, Calif. Phone DA 6-1755 (Area Code 415) TWX-117-U

7877



SCIENCE AND SCENERY. This is Jet Propulsion Laboratories, one of the research centers that has captured a dominant share of the nation's missile and space R&D for the West



Aerospace R&D Paces West's Record-Breaking Sales

Despite problems, among them shrinking profits, West continues growth

LOS ANGELES—This year, WESCON will be staged against a backdrop of record-breaking sales, but diminishing profit margins for the western electronics industry. Western Electronic Manufacturers Association estimates that its eleven states will capture an even one-quarter of the \$13.2 billion forecast for the nation's electronic industry in 1962, but, according to

WEMA president William J. Miller, the rising sales will not be accompanied by corresponding profits.

"Mounting costs and increased competition" he says "will limit earnings on the higher sales volume. The gravest problem as far as we in Southern California are concerned is the outspoken plans of Potomac politicians to channel defense work away from this area, which accounts for 62 percent of the West's electronics production, and into labor surplus areas."


OTHER PROBLEMS—Miller, in a recent talk before Los Angeles'

Mid-Year Business Outlook Forum, pointed out other problems.


A few are the continued drive for tighter controls on government outlays for new weapons systems to keep within cost estimates, profit probes, renegotiating processes, renegotiating tests, and new incentive-type contracts.

Another westerner, EIA's president Charles F. Horne, recently listed three developments that should figure significantly in the industry's future nationally as well as in the West. One is the Trade Expansion Bill, whose impact remains to be seen. The second is the

GROWTH PATTERNS compiled by Western Electronic Manufacturers Association: sales (A) employment (B) is also centered in Los Angeles (C). One out of every six employees is an engineer (D)

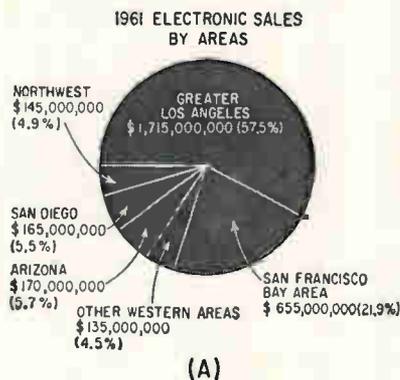

TOTAL ELECTRONICS EMPLOYMENT IN THE WEST



law requiring all-channel tv sets. By raising tv set prices, the latter could considerably delay consumer buying, he feels.

The third development, the ruling by Office of Emergency Planning denying the EIA claim that imports of semiconductor products, especially from Japan, threaten American security. EIA, reports Horne, was somewhat discouraged by the OEP statement that the trend of imports will be kept under surveillance and that "the domestic industry should continue to retain the bulk of the important military market without substantial direct competition from import sources." The fact remains that Japanese exports of electronic products to the United States rose from \$94 million in 1960 to \$120 million in 1961.

SPACE BOOST—More optimistically, WEMA points out that defense and space exploration expenditures continue to spiral, and that the West is in line to receive its share of these dollars.

The 1962 bill for R & D will be about \$16.5 billion. It is significant that, in 1961, 41 per cent of all R&D prime contracts were awarded to California companies. Production contracts tend to follow the geographic distribution of R&D awards.

WEMA cites the Apollo program as an example of projects potentially profitable to western electronics firms. The initial contract was awarded to North American Aviation's Space and Information division last fall. The program is expected to involve more than \$40 billion before completion. Twenty per cent of this will probably be earmarked for electronic gear.

NASA's Director of Western Op-

erations predicts that California alone will get from 30 to 40 per cent of NASA's multibillion-dollar procurement in the next fiscal year.

Early this year electronics pushed ahead of aircraft to become California's leading employer.

Electronics provides employment for 196,000 people, against aircraft's 193,000. Electronic manufacturing employment in the entire West is now approximately 230,000, representing a gain of 17,500 over 1961. Statistics projected for 1962 indicate that, in the eleven western states, 1,010 electronics firms will show a sales volume of \$3.29 billion, or 10.2 percent above last year's figure.


A breakdown by geographical areas shows that the Pacific Northwest now leads the major western electronics centers in growth rate. Centered around Portland and Seattle, the region is expected to chalk up \$175 million in sales this year, 20 percent above last year's volume.

Arizona's industry still ranks high on the growth chart and came through with a dollar volume increase from 1960 to 1961 of 17.2 percent. Projected 1962 figures place sales at \$185 million, or \$15 million better than 1961.


San Diego and vicinity ties with Arizona for third place in sales among western production areas, and is the fourth fastest growing section with a dollar increase of 12 percent anticipated for 1962.

More than half of total 1962 sales in the West will stem from the Los Angeles area's 595 companies, with an anticipated figure of \$1.868 billion. The San Francisco Bay area is expected to produce about \$730 million. Growth rates for the two areas are 13.4 and 11 percent, respectively.

1962 DISTRIBUTION OF EMPLOYMENT BY AREAS

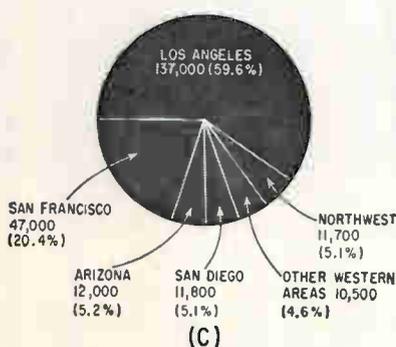

GRADUATE ENGINEERS IN ELECTRONICS IN THE WEST



"Nothing is impossible to diligence and skill"

Samuel Johnson

These are the trademarks of some of our customers—each an important contributor to a dramatically growing industry. We at Potter pledge our diligence and skills to this growth through a constantly expanding program of research and development.

POTTER

Model LP-1200
High Speed
Printer adds
new versatility



to modern computer systems. This high-performance, extremely reliable printer provides speeds of 1000 lines per minute with a maximum of 160 columns. An optional Format Control feature permits multi-page forms or books to be printed with completely flexible horizontal or vertical format and up to five carbons.

The Potter LP-1200 reflects the engineering-knowledge gained from extensive experience and research in high-speed printing. Solid-state modular electronics enhance reliability and sturdy, simple mechanical design readily adapts to meet customer requirements.

Three models are available: LP-1200-160 (160 columns), LP-1200-132 (132 columns) and LP-1200-80 (80 columns).

Write for specifications.




EUROPE BOUND?
 VISIT US AT Booth 28
 IFIP Interdata Exhibition
 in Munich, Germany
 August 26 to September 2

POTTER INSTRUMENT CO., INC.
 Sunnyside Boulevard • Plainview, New York



INDUSTRY-EDUCATION cooperation is discussed by J. S. Coleman, National Academy of Sciences; C. F. Horne, SCIEC chairman, and N. H. Topping, University of Southern California



Scholarships, science fairs, WESCON trips win future engineers

West Starts Recruiting Early

LOS ANGELES—Future Engineers Program at WESCON typifies the highly organized cooperation between western industry and education to encourage talented youngsters into scientific careers.

Numerous youth science programs are helping assure an adequate supply of scientists and engineers for the decades ahead by nurturing their interest in high school. Many of the WESCON student participants, for example, are winners of science fairs which reach more than 800,000 students in southern California alone.

ENROLLMENTS RISE—Importance of such programs is indicated by the expectation that California's population in the 18-to-21 age group will rise 70 percent in the 1960's.

Southern California is "the only place in the nation" with increasing college enrollment in scientific and technical fields, points out Charles F. Horne, chairman of the Southern California Industry-Education Council (SCIEC), and president of EIA.

During 1958 to 1961, the number of engineering undergraduates at UCLA jumped 17 percent, while nationally such enrollment dropped by 12,000 or 9.2 percent.

NATIONAL NEED—Horne says that industry-education cooperation must be intensified if the nation is to meet the expected national need of 81,000 new engineers a year—twice the present supply.

"The continuing cold war battles will be won by knowledge and know-how and both Russia and Communist China are demonstrating fanatical faith in education and indoctrination as a path to world supremacy," Horne warned.

Russia, reports the National Science Foundation, is producing twice as many engineers and scientists as the U. S.

SCIEC was formed in 1957 when it was realized that the concentration and rapid growth of scientific industry in the West would cause an overwhelming demand for scientific personnel. It was reportedly the first attempt to promote and coordinate individual youth science programs.

Programs sponsored include science centers where students may

work on projects under technically qualified guidance, science fairs, math-science weekends, career guidance center, teacher workshops, community study on technical education and the Future Engineers of America.

Another organization, specifically designed to help students in electronic engineering and related fields, is the 11-state Western Electronic Education Fund. It is managed by four trustees from WEMA and most of the donations are from WESCON. Starting with \$3,000 in 1952, the fund has risen to \$20,000 total in 1961, when more than 60 students were aided.

WESCON PROGRAM—The Future Engineers Program includes an exhibit of student experiments, a seminar, awards luncheon and field trips. Participants are guests of WESCON.

This year, 31 students will compete for \$2,800 in scholarships, including the \$1,000 Lee DeForest award for the best experiment and the \$300 Frederick E. Terman award for the best seminar presentation. Entrants are in most cases nominated by IRE sections.

Examples of the exhibits are an r-f mass spectrometer, entered by Keith Edwards, of Pasadena; demonstration of photovoltaic cell response to infrared, by John Nicholson, Alamogordo, and a differential thermal analyzer for detecting impurities in chemical compounds, by Deborah Fitzgerald, of Redlands.



STUDENT PROJECT. *Electromechanical optical scanner, entered at the Future Engineers Show by Ronald Sheets, is examined by J. L. Grigsby and H. C. Poulter, of the San Francisco IRE selection committee, Sheets' sponsor*

law requiring all-channel tv sets. By raising tv set prices, the latter could considerably delay consumer buying, he feels.

The third development, the ruling by Office of Emergency Planning denying the EIA claim that imports of semiconductor products, especially from Japan, threaten American security. EIA, reports Horne, was somewhat discouraged by the OEP statement that the trend of imports will be kept under surveillance and that "the domestic industry should continue to retain the bulk of the important military market without substantial direct competition from import sources." The fact remains that Japanese exports of electronic products to the United States rose from \$94 million in 1960 to \$120 million in 1961.

SPACE BOOST—More optimistically, WEMA points out that defense and space exploration expenditures continue to spiral, and that the West is in line to receive its share of these dollars.

The 1962 bill for R & D will be about \$16.5 billion. It is significant that, in 1961, 41 per cent of all R&D prime contracts were awarded to California companies. Production contracts tend to follow the geographic distribution of R&D awards.

WEMA cites the Apollo program as an example of projects potentially profitable to western electronics firms. The initial contract was awarded to North American Aviation's Space and Information division last fall. The program is expected to involve more than \$40 billion before completion. Twenty per cent of this will probably be earmarked for electronic gear.

NASA's Director of Western Op-

erations predicts that California alone will get from 30 to 40 percent of NASA's multibillion-dollar procurement in the next fiscal year.

Early this year electronics pushed ahead of aircraft to become California's leading employer.

Electronics provides employment for 196,000 people, against aircraft's 193,000. Electronic manufacturing employment in the entire West is now approximately 230,000, representing a gain of 17,500 over 1961. Statistics projected for 1962 indicate that, in the eleven western states, 1,010 electronics firms will show a sales volume of \$3.29 billion, or 10.2 percent above last year's figure.


A breakdown by geographical areas shows that the Pacific Northwest now leads the major western electronics centers in growth rate. Centered around Portland and Seattle, the region is expected to chalk up \$175 million in sales this year, 20 percent above last year's volume.

Arizona's industry still ranks high on the growth chart and came through with a dollar volume increase from 1960 to 1961 of 17.2 percent. Projected 1962 figures place sales at \$185 million, or \$15 million better than 1961.


San Diego and vicinity ties with Arizona for third place in sales among western production areas, and is the fourth fastest growing section with a dollar increase of 12 percent anticipated for 1962.

More than half of total 1962 sales in the West will stem from the Los Angeles area's 595 companies, with an anticipated figure of \$1.868 billion. The San Francisco Bay area is expected to produce about \$730 million. Growth rates for the two areas are 13.4 and 11 percent, respectively.

1962 DISTRIBUTION OF EMPLOYMENT BY AREAS

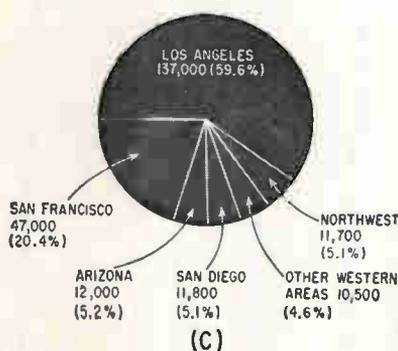

GRADUATE ENGINEERS IN ELECTRONICS IN THE WEST

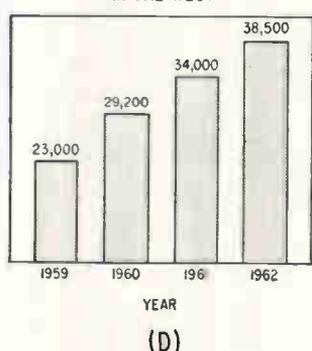


"Nothing is impossible to diligence and skill"
Samuel Johnson

These are the trademarks of some of our customers—each an important contributor to a dramatically growing industry. We at Potter pledge our diligence and skills to this growth through a constantly expanding program of research and development.

POTTER

Model LP-1200
High Speed
Printer adds
new versatility



to modern computer systems. This high-performance, extremely reliable printer provides speeds of 1000 lines per minute with a maximum of 160 columns. An optional Format Control feature permits multi-page forms or books to be printed with completely flexible horizontal or vertical format and up to five carbons.

The Potter LP-1200 reflects the engineering-knowledge gained from extensive experience and research in high-speed printing. Solid-state modular electronics enhance reliability and sturdy, simple mechanical design readily adapts to meet customer requirements.

Three models are available: LP-1200-160 (160 columns), LP-1200-132 (132 columns) and LP-1200-80 (80 columns).

Write for specifications.



EUROPE BOUND?
VISIT US AT Booth 28
IFIP Interdata Exhibition
in Munich, Germany
August 26 to September 2

POTTER INSTRUMENT CO., INC.
Sunnyside Boulevard • Plainview, New York

NEW FROM TUNG-SOL

FOUR SUPERIOR 15-AMP HIGH POWER GERMANIUM
TRANSISTORS IN THE TO-36 CASE. AVAILABLE
"OFF-THE-SHELF" AT COMPETITIVE PRICES

Types 2N2490-2N2493 generally provide lower leakage currents and higher breakdown voltages than the earlier types. Beta fall-off with temperature is relatively flat, making the new types ideal for low-temperature applications. All units

TEST	UNITS	MIN. MAX.	2N2490	2N2077	2N443	2N441	2N2491	2N2077
ICBO (VCB=2V)	mA	Max.	0.3	0.2	0.3	0.3	0.3	0.2
(1)ICBO	mA	Max.	3.0	4.0	8.0	8.0	3.0	4.0
(1)ICBO (70°C)	mA	Max.	6.0	15.0 ⁽²⁾	*	*	6.0	15.0 ⁽²⁾
(1)IEBO	mA	Max.	3.0	4.0	8.0	8.0	3.0	4.0
BVCES (IC=300mA)	V	Min.	60	50	50	40	50	50
BVCEO (IC=1A)	V	Min.	50	45	*	*	40	45
BVCBO	V	Min.	70	50	40	50	60	50
VBE (VCE=-2V) (IC=5A)	V	Max.	0.9	0.9	0.9	*	0.9	0.9
SVCE (IC=12A) (IB=2A)	V	Max.	0.7	0.9	1.0	*	0.7	0.9
hFE (1A)	—	Min.	45	25 ⁽³⁾	*	*	65	25 ⁽³⁾
hFE (5A)	—	Min.	20-40	20-40	20-40	20-40	35-70	20-40
hFE (5A) -65°C	—	Min.	15	15 ⁽⁴⁾	*	*	25	15 ⁽⁴⁾
hFE (12A)	—	Min.	8	8	*	*	12	8

(1) Measured at Max. VCB or VEB

(2) 71°C

(3) 1.2A

(4) -55°C

(5) IC=300mA

* Not Measured



2N2490

Replaces 2N441, 2N442,
2N443, 2N2077, and 2N2078



2N2491

Replaces 2N173, 2N277, 2N278,
2N1980, 2N1981, 2N2081 and 2N2082



2N2492

Replaces 2N174, 2N174A,
2N2075, 2N2076, 2N2079
and 2N2080



2N2493

Replaces 2N1100, 2N1358
and 2N1412

are guaranteed to four minimum beta (h_{FE}) conditions ■ All military TO-36 requirements are met. Cases are Cold-Weld sealed for added reliability over an ambient temperature range of -65°C to $+110^{\circ}\text{C}$.

2N2082	2N278	2N2492	2N174	2N174A	2N2075	2N2493	2N1100	JAN 2N1358	USN 2N1412
0.2	0.3	0.2	0.3	0.3	0.2	0.3	*	0.2	0.2
4.0	8.0	2.0	8.0	8.0	4.0	3.0	8.0	8.0	10.0
15.0 ⁽²⁾	*	6.0	15.0 ⁽²⁾	15.0 ⁽²⁾	15.0 ⁽²⁾	6.0	*	6.0 ⁽²⁾	6.0 ⁽²⁾
4.0	8.0	2.0	8.0	8.0	4.0	3.0	8.0	8.0	10.0
40	45	75	70	70	80	85	80	70	80
25	*	65	*	*	65	75	*	40 ⁽⁵⁾	60
40	50	80	80	80	80	100	100	80	100
0.9	*	0.8	0.9	0.9	0.9	0.8	0.9	0.9	0.9
0.9	1.0	0.5	0.9	0.7	0.7	0.5	0.7	0.7	0.7
40 ⁽³⁾	*	50	*	40 ⁽³⁾	25 ⁽³⁾	50	*	*	*
35-70	35-70	25-50	25-50	25-50	20-40	25-50	25-50	25-50	25-50
25 ⁽⁴⁾	*	20	*	**	15 ⁽⁴⁾	20	*	*	*
12	*	10	*	*	8	10	*	*	*

Detailed data sheets, beta-to-temperature curves and comparative data on earlier types are available on request. Tung-Sol Electric Inc., Newark 4, N. J. TWX: NK193

ts **TUNG-SOL**[®]
FULL POWER
POWER TRANSISTORS



INDUSTRY-EDUCATION cooperation is discussed by J. S. Coleman, National Academy of Sciences; C. F. Horne, SCIEC chairman, and N. H. Topping, University of Southern California



Scholarships, science fairs, WESCON trips win future engineers

West Starts Recruiting Early

LOS ANGELES—Future Engineers Program at WESCON typifies the highly organized cooperation between western industry and education to encourage talented youngsters into scientific careers.

Numerous youth science programs are helping assure an adequate supply of scientists and engineers for the decades ahead by nurturing their interest in high school. Many of the WESCON student participants, for example, are winners of science fairs which reach more than 800,000 students in southern California alone.

ENROLLMENTS RISE—Importance of such programs is indicated by the expectation that California's population in the 18-to-21 age group will rise 70 percent in the 1960's.

Southern California is "the only place in the nation" with increasing college enrollment in scientific and technical fields, points out Charles F. Horne, chairman of the Southern California Industry-Education Council (SCIEC), and president of EIA.

During 1958 to 1961, the number of engineering undergraduates at UCLA jumped 17 percent, while nationally such enrollment dropped by 12,000 or 9.2 percent.

NATIONAL NEED—Horne says that industry-education cooperation must be intensified if the nation is to meet the expected national need of 81,000 new engineers a year—twice the present supply.

"The continuing cold war battles will be won by knowledge and know-how and both Russia and Communist China are demonstrating fanatical faith in education and indoctrination as a path to world supremacy," Horne warned.

Russia, reports the National Science Foundation, is producing twice as many engineers and scientists as the U. S.

SCIEC was formed in 1957 when it was realized that the concentration and rapid growth of scientific industry in the West would cause an overwhelming demand for scientific personnel. It was reportedly the first attempt to promote and coordinate individual youth science programs.

Programs sponsored include science centers where students may

work on projects under technically qualified guidance, science fairs, math-science weekends, career guidance center, teacher workshops, community study on technical education and the Future Engineers of America.

Another organization, specifically designed to help students in electronic engineering and related fields, is the 11-state Western Electronic Education Fund. It is managed by four trustees from WEMA and most of the donations are from WESCON. Starting with \$3,000 in 1952, the fund has risen to \$20,000 total in 1961, when more than 60 students were aided.



WESCON PROGRAM—The Future Engineers Program includes an exhibit of student experiments, a seminar, awards luncheon and field trips. Participants are guests of WESCON.

This year, 31 students will compete for \$2,800 in scholarships, including the \$1,000 Lee DeForest award for the best experiment and the \$300 Frederick E. Terman award for the best seminar presentation. Entrants are in most cases nominated by IRE sections.

Examples of the exhibits are an r-f mass spectrometer, entered by Keith Edwards, of Pasadena; demonstration of photovoltaic cell response to infrared, by John Nicholson, Alamogordo, and a differential thermal analyzer for detecting impurities in chemical compounds, by Deborah Fitzgerald, of Redlands.



STUDENT PROJECT. *Electromechanical optical scanner, entered at the Future Engineers Show by Ronald Sheets, is examined by J. L. Grigsby and H. C. Poulter, of the San Francisco IRE selection committee, Sheets' sponsor*

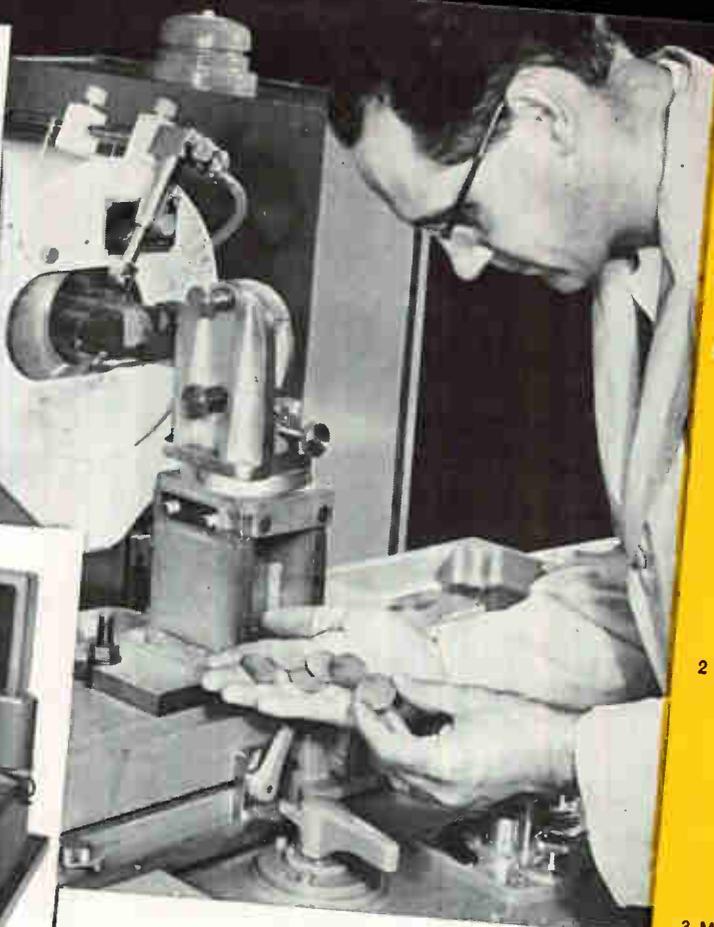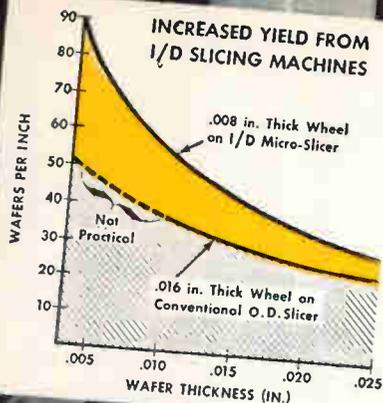

DoALL...first with new ideas in semiconductor slicing

I/D Micro-Slicer—the Productivity Champion introduced to the semiconductor industry by DoALL. Uses new super-thin DoALL I/D (annular) diamond wheels. Yields up to 40% more wafers per crystal than other types of machines... can save you up to \$50,000 per year in materials alone. Fully automatic, large capacity Micro-Slicer with hydro-mechanical indexing gives guaranteed repeatability to within $\pm .0002$ ". Other features include vibration-free spindle drive and recirculating coolant system.

CENSOR—a completely new sorting gage—another DoALL first. High-speed electronic machine automatically gages, sorts, and counts up to 3,600 silicon and germanium dice per hour... holds tolerances as close as $.000004$ ". Thickness range from $.0008$ to $.040$ ". At each of five settings, dice are sorted into 13 tolerance groups.

O.D. Microtom-atic Slicing and Dicing Machine and Wheels. Three DoALL models handle every type of hard, brittle, or friable materials.

Accessories—including carbon blocks, crystal mounting wax, and precision measuring equipment. See a sound color movie of the I/D Micro-Slicer in action, right in your own office. Or arrange for a demonstration of this equipment at the DoALL Hall of Progress in Des Plaines. Call your DoALL Sales-Service Store today.

THE DoALL COMPANY, Des Plaines, Ill., U.S.A.
Serving you locally through your DoALL Sales-Service Store



Here's Your Best Buy in I/D Diamond Wheels!

COMPARE VALUE with any other annular wheel on the market: 200% diamond concentration based on 72 carats per cu in. • Four layers of diamonds electrostatically oriented in matrix of controlled hardness • I/D concentricity within $.002$ " TIR • Precision-lapped cutting edges • Specially rolled and heat-treated backing.

CALL YOUR **DoALL** SALES-SERVICE STORE



MACHINES



2 MODELS I/D MICRO-SLICERS



3 MODELS O.D. MICROTOM-ATIC Slicers and Dicers

WHEELS



O.D. and I/D DIAMOND WHEELS

Sizes to fit all machines

SORTING GAGES

FULLY AUTOMATIC WAFER GAGING & SORTING



ACCESSORIES



CARBON BLOCKS



CRYSTAL MOUNTING WAX



DoALL ...the Productivity People

Visit DoALL Booths 3709 & 3710 at the WESCON Show, Los Angeles, August 21-24

MT-5

VACUUM COMPONENTS

PUMPS • VALVES • BAFFLES • GAUGES


The best performing and most reliable vacuum components come from NRC. All these components are shipped from stock. For additional information, write for product data sheets.



A Subsidiary of National Research Corporation

160 Charlemont St. Dept. 4 H
Newton 61, Massachusetts
Area Code 617, DEcatur 2-5800

DIFFUSION PUMPS

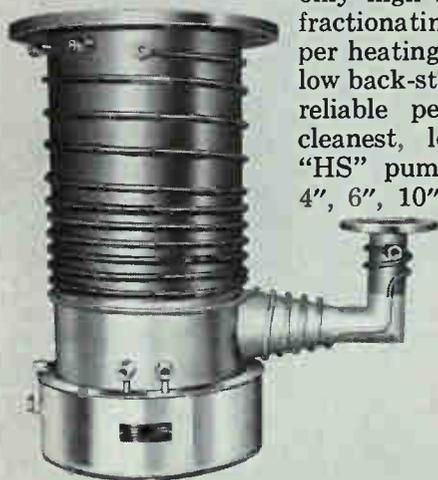

NRC's new "HS" Series Diffusion Pumps is the only high speed line with fractionating design, no super heating necessary, and low back-streaming for top, reliable performance and cleanest, lowest vacuum. "HS" pumps available in 4", 6", 10" and 32" sizes.

SLIDE VALVES



The new NRC Slide Valves are the best by comparative tests. The "HC" Series valves now provide valved systems with very high and ultrahigh vacuums (10^{-8} torr and lower) at conventional prices. Available in 4" and 6" sizes.

CRYO AND MOLECULAR BAFFLES



NRC's Circular Chevron Cryo Baffles provide exceptionally high conductance for maximum *useful* pumping speed.

NRC's new Molecular Sorbent Baffles provide truly *clean* vacuums by use of three full trays of sorbent material (Zeolite) and built-in heater for regenerating easily.

VACUUM GAUGES



From 1×10^{-3} to 10^{-10} torr range, the most accurate, reliable gauge in NRC's improved Bayard-Alpert type, the Model 751.

At pressures *below* 1×10^{-9} torr, "there is only one really satisfactory gauge commercially available, the Redhead Gauge, NRC's Model 752." The 752 is *not* "X-Ray limited", is magnitudes less "gassy" because there is *no* hot filament, is 50 times more sensitive than typical Bayard-Alpert gauges. The result is more accuracy below 10^{-9} torr than any other gauge. If you really want accurate, reproducible measurements in the ultrahigh vacuum range, use the Model 752.

MANUFACTURING PLANTS IN NEWTON, MASSACHUSETTS AND PALO ALTO, CALIFORNIA

SANGAMO
SANGAMO

MAGNETIC TAPE INSTRUMENTATION

You get


MORE ACCURATE DATA

with **SANGAMO SPEED CONTROL**



Sangamo's Unmatched Tape Speed Control System Assures Undistorted Data Reduction . . . Unsurpassed Recording/Reproducing Accuracy.

In every magnetic tape application, reproducibility of tape speed has a direct bearing on the validity of data. Sangamo Recorder/Reproducers with their unequalled tape synchronized servo, provide tape speed reproducibility previously believed unattainable. With a light mass capstan drive and Sangamo's exclusive eddy-current damping system, instantaneous time displacement error is less than ± 25 microseconds at 60 and 30 ips. The reproduce system can correct for record speed deviations of $\pm 15\%$ per second over a range of $\pm 10\%$ without loss of synchronism.

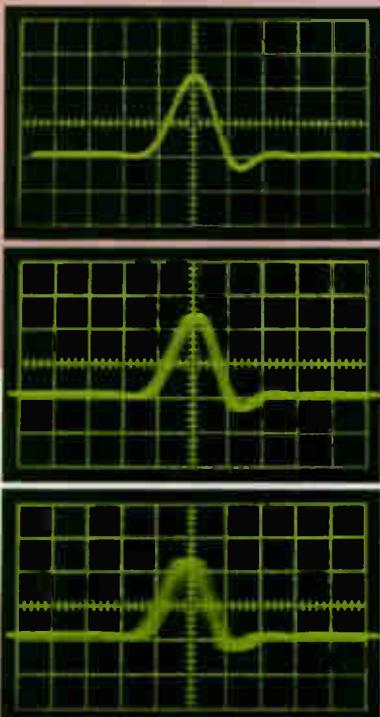


You get this accuracy in a *general purpose* Sangamo Recorder/Reproducer which also features:

- Automatic switching of 4 speeds of FM and Direct record and reproduce electronics.
- 7 to 28 channels of data.
- Solid state construction throughout.
- Reel-to-reel and loop capability in a single transport.

JITTER LESS THAN 1 PART PER 1000


Oscilloscope photographs display pulse-to-pulse jitter in a single channel for a complete record/reproduce cycle on a Sangamo Model 471 at 60 ips. Pulse width is 5 microseconds and jitter is shown for the time intervals of 0.5, 1.5 and 5.0 milliseconds.

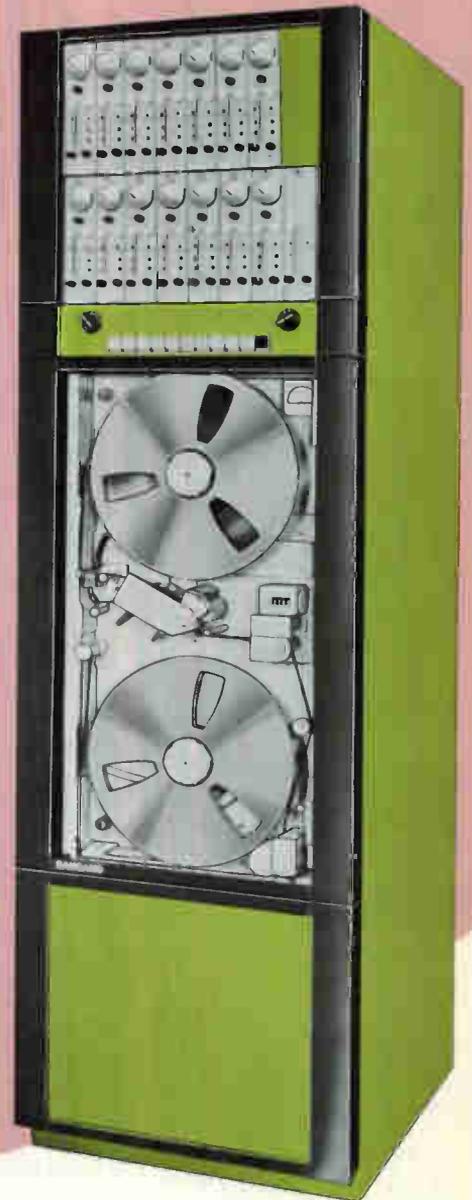

ELECTRONIC SYSTEMS

For more information about these and other benefits, write, wire or phone.

SANGAMO ELECTRIC COMPANY
SPRINGFIELD, ILLINOIS




MICROSONICS

... unexcelled source for **ultrasonic** delay lines

NEW VARIABLE DELAY LINE Microsonics' new ultrasonic variable delay lines are continuously adjustable from 5 to 200 μ sec with longer delays possible. Multiple variable outputs may be adjusted together or separately as well as through an adjacent output, over a limited range. Other characteristics: Frequency—20 to 60 mc; Band width—8 to 20 mc; Spurious—30 to 40 db.



NEW TEMPERATURE CONTROLLED ULTRASONIC DELAY LINES Microsonic temperature-controlled delay lines are for use as recirculating memories in systems where a phase coherent storage loop is a prerequisite. They may be used for IF Cancellors, Long Time Integrators, Delay Line Filters, Time Compression and Real Time Spectral Analysis. These controlled systems provide temperature excursions not greater than .01°C. Short term stability shall not exceed .003°C/minute over a twelve-hour period. Units have been furnished with .007°C stability over two weeks.





Microsonics has been selected time after time by major system manufacturers to develop and build ultrasonic delay line equipment. Systems using Microsonics delay lines include ASR-2, 3, 4, 5; UPS-1; FPS-30; SPS-38; SPS-6; ARSR; CPN-18; HAWK; APQ-72; MPS-23. Many of these applications have required advancements in the state of the art.

All of Microsonic's ultrasonic delay lines are hermetically sealed and meet the most rigid military environmental tests of shock, vibration, temperature and altitude.

Inquiries should be made directly to:


MICROSONICS INCORPORATED
Hingham Industrial Center, Hingham, Massachusetts



SANGAMO PRECISION MOTORS



NEW—SIZE 5 and SIZE 8 SERVO MOTORS. A size 5 (0.5" dia.) and size 8 (0.75" dia.) control motor, motor generator and synchronous motor have recently been added to Sangamo's extensive line of Precision Motors. Both units are designed for 400 cps excitation and are manufactured of corrosion resistant stainless steel. The size 8 can be provided with integral gear reducers.

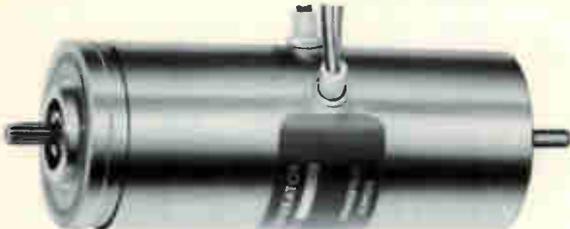

NEW FEATURE ADDED TO SIZE 10 and 11 MOTOR GENERATORS Sangamo's standard size 10 (.938" dia.) and size 11 (1.062" dia.) servo motor generators are now available with a rear shaft extension to permit mechanical coupling and/or speed checks after the unit is installed. Positive alignment is assured by the use of three ball bearings in each unit.



SYNCHRO

SYNCHRONOUS MOTOR

GEARED MOTOR GENERATOR

We at Sangamo have been designing and producing AC servo motors, Induction Generators, Motor Generators, Drag Cup motors, Synchronous motors, Synchros, and PM Generators for more than 20 years.

We can supply—on short notice—hundreds of designs for both 60 and 400 cycle input sources with frame sizes ranging from size 5 to size 25. The materials, finishes, and performance of these units are tailored to meet applicable military specs. Most of our motors and motor generators are available with integral reduction gear ratios, and selected current designs can be furnished to operate at total temperatures of up to 200°C.

This is sure: whether it's a "stock" motor or a special requirement motor, if it comes from Sangamo it is ultra-reliable, competitively priced, and delivered on time.


Write for complete information.



SANGAMO ELECTRIC COMPANY
SPRINGFIELD, ILLINOIS



Broadband 20-1000 mc switch



Single pole, 16 throw UHF switch



Single pole, double throw, broadband switch




Typical waveguide switch



Coaxial, single pole, single throw switch



3 KW beacon side lobe suppression switch



The AEL Modulator is a typical application of AEL solid state crystal switches for square wave or pulse modulation of signal sources to achieve greater power output with wide frequency bands



Self-operating AEL Microwave Power Limiters protect crystal diodes and prevent receiver overload in radar and crystal video receivers in the vicinity of high power microwave transmitters. Can be supplied in L, S, C and X band frequencies



brings you the largest and most varied line of

SOLID STATE CRYSTAL SWITCHES

available in the industry today

Through a continuing program of basic development in solid state crystal switches, AEL has made numerous contributions to the state-of-the-art in this field. We have the capability to achieve virtually any characteristic desired in a solid state switch. For example, we have developed and produced individual switches to meet each (also combinations of) the requirements listed at right.

AEL solid state crystal switches are characterized by their extremely low switching power requirements, very fast switching speeds, low forward insertion losses, high back isolation, high power, and capability to function over almost the entire RF spectrum from 10 mc upwards into millimeter bands.

Other features include light weight, wide temperature operating range, extremely compact physical configurations, and conformance to MIL specifications. They are superior in most respects to ferrite devices.

Numerous applications exist for these switches including . . . square wave or pulse modulation of signal sources to achieve greater power output with broad bandwidths; commutators for Wullenweber arrays; antenna lobe switching; and rapid selection of channels.

For complete catalog information on the extensive line of AEL solid state crystal switches, write to:

- **FREQUENCY RANGE**
from 10 mc to over 35 Gc
- **BROAD BANDWIDTH**
20-1000 mc in one switch . . .
200-8200 mc in one switch
- **HIGH POWER**
to 10 KW
- **HIGH SPEED**
as fast as 0.2 nanoseconds
- **LOW INSERTION LOSS**
down to 0.1 db
- **HIGH ISOLATION**
to 150 db
- **MULTIPLE THROWS**
switches built with as many as 32 throws
- **RELIABILITY**
to meet missile requirements
- **COAX, WAVEGUIDE & STRIPLINE**




American Electronic Laboratories, Inc.

RICHARDSON ROAD, COLMAR, PENNSYLVANIA • just north of Philadelphia • Engineers: Investigate the rewarding opportunities at AEL

VISIT US AT THE
WESCON SHOW
BOOTH #3044

WESCON Spotlights

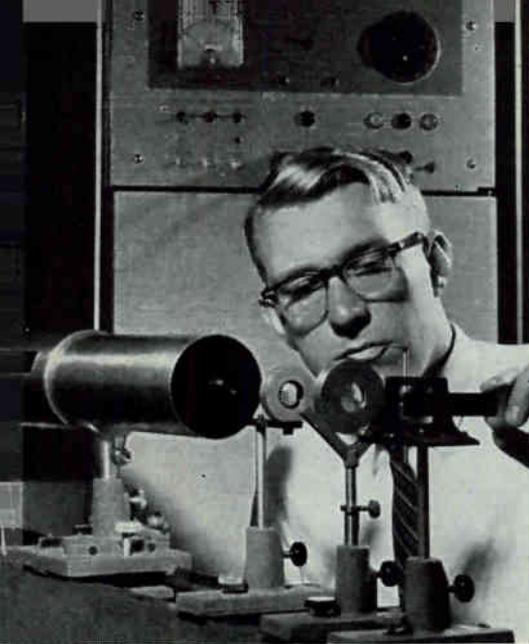

RUBY LASER, a high-power model developed at Hughes Research Labs, will be used in WESCON's opening ceremony to trigger the welcoming message

Program, exhibits and special events carry out convention's theme

By HAROLD C. HOOD
Pacific Coast Editor

LOS ANGELES—WESCON this month, for the first time in its 14-year history, sports a theme: "Frontiers in Electronics." Its technical program, exhibits, and the special events scheduled for August 21 through 24 have been carefully tailored to amplify this theme.

Number of contributed-paper sessions has been trimmed from last year's 40 to 21, and such timely topics as space electronics and telemetry, pattern recognition, antennas and propagation, and solid state devices will be explored in depth (for previews of technical papers, see page 59).

SPECIAL SESSIONS — Supplementing the regular sessions to be held mornings at the Statler Hotel will be five special afternoon sessions dealing with subjects of particularly high interest.

"Biological Aspects of Communications" will be held Tuesday afternoon and will present insight into

studies presently underway in the related fields of communications and biology. Two sessions on Wednesday, entitled "Weather Satellites and Data Processing" and "Research in Nuclear Test Detection" will run serially.

Special session on Thursday, delving into various types of electrically propelled spacecraft systems, will be "Advanced Propulsion Systems." Among electrostatic thrust devices to be discussed will be the cesium ion engine, the oscillating electron engine, the Penning discharge ion engine, and the duoplasmatron-type engine.

Wind-up special session to be held Friday will feature five NASA/JPL speakers and is headlined "Lunar Exploration."

A record 1,250 display booths will house exhibits from 850 companies in LA's mammoth Sports Arena and annex, both of which will be air-conditioned to beat the Southland's well-remembered August heat spells. Exhibit hours will be 9:30 a.m. to 6:30 p.m. each day except Wednesday when the area will be open at noon and close at 9:00 p.m.

WESCON's inquiry card system, instituted last year and proving very popular among literature-collecting conventioners, will be used again. Similar to regular credit cards, name-and-address plates are issued at registration and assure post-convention receipt of desired

literature and data hand-outs.

NEW PRODUCTS — Noteworthy new products to be introduced are far too numerous to list all here (see page 130), but some are:

Infrared Industries, Inc., will unveil a tunable microvoltmeter combining a tunable amplifier, a variable bandpass filter, an extremely low-noise amplifier and microvoltmeter. The device features plug-in preamplifiers for matching input impedances from a few ohms to many megohms, and a-c and d-c outputs proportional to meter deflection.


Exhibiting for the first time at WESCON, Wilk Instruments will preview five new precision measuring instruments. Among these are a Lindeck potentiometer and microvolt source having 20 ranges of voltage measurement from 0-1 mv to 2 v with accuracies to 0.1 percent of each range, and an a-c calibrator with a range from 0 to 1,511.0 v, accuracy of 0.1 percent, and a resolution of 0.01 v.

Eitel-McCullough will show a series of grid-type power tubes which heat to full operating condition from dead cold in one second. Some of the series feature unusually high transconductance and operate at higher frequencies than previously available units. Also to be introduced is a 20-watt twt, capable of withstanding 210-g shocks and giving 45-db gain over a 500-Mc

ELECTRON MIRROR microscope being introduced by General Mills can magnify up to 1,500 times and display dynamic electrical properties of specimens



Frontiers in Electronics

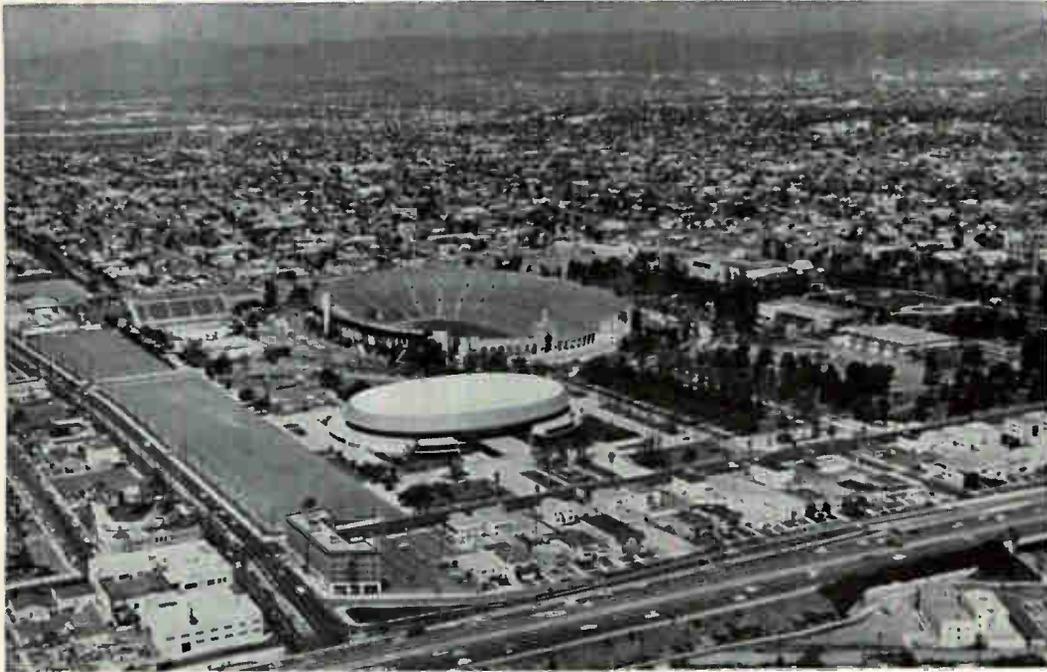

WESCON EXHIBITS will be housed in the pancake-shaped Sports Arena (center) and an annex. This year's 1,250 display booths sets a record

band around 8 Gc.

Among new items to be displayed by Beckman's Helipot Division is its Hallefex voltage generator. Two models of this tiny thin-film Hall-effect device to be shown measure $\frac{3}{8} \times \frac{1}{2}$ -inch and $\frac{1}{4}$ -inch square.

C-W LASER—Perkin-Elmer's continuous-wave, helium-neon laser will be shown for the first time. Developed jointly with Spectra-Physics, Inc., the device weighs 13 pounds, has a 1-mw output at 11,530 angstroms, a spread of less than one minute of arc, and will sell for around \$7,500. Interferometry and spectrum analysis are among potential applications.

Among six products to be introduced by Melabs are a laboratory receiver with frequency coverage from 500 Mc to 1,100 Mc, an all-solid-state, C-band microwave frequency source, and a triode oscillator solid-state tripler P-band parametric amplifier pump source.

Computer Control Co. will debut a "multiple slit" shaft encoder reportedly having four times the accuracy of any available single-slit unit of equal case size. Model to be demonstrated is packaged in a 3.5-

inch case and has a 2^{15} accuracy.

A new line of high power waveguide ferrite circulators for applications at frequencies from S-band through Ka-band will be shown by Microwave Associates. Also to be seen for the first time are two TWT's for both commercial and military applications, a new line of high power varactors, and a ruggedized miniature isolator less than $\frac{1}{2}$ -inch long and weighing less than 2 ounces.

DIGITAL INDICATOR—General Radio's booth will feature several new items, including an octave-band noise analyzer, a transistorized, low-cost counter, and a reportedly unique digital indicator. The latter has a bright white display of 10 digits, measures $\frac{1}{16}$ -inch from front to rear number, and features a 120-degree viewing angle.

For the do-it-yourself fans, thirteen new Knight-Kits will be on display in Allied Radio's booth. Included will be a 32-watt transistorized stereo amplifier, and a 1-watt transistorized portable 2-way radio.

General Mills will introduce a new electron mirror microscope characterized by an electron optical



NEW FLAT PACK (left center is being used by Minneapolis-Honeywell for 65-amp transistors. Eimac is showing vapor-cooled high-power tetrodes (right)

mirror which acts as both specimen and reflecting surface. The unit displays dynamic behavior, such as moving electric charge patterns and magnetic domains set in motion by mechanical strain. Magnification is from $20\times$ to $1500\times$.

A new line of 5-digit voltmeters, capable of making 5,000 measurements per second, will be introduced by Non-Linear Systems. Accuracy of ± 0.01 percent of reading +1 digit is maintained to top speed.

Montrose Division of Bendix Corp. will unveil size 10 and 11 ra-

diation-resistant synchros suitable for operation at 800 F.

Among new products to be introduced by five divisions of Minneapolis-Honeywell are a rack-mounted Visicorder oscillograph with heated paper, a series of 65-amp *pnp* germanium power transistors, a new magnesium-oxide ceramic which serves as both an electrical insulator and a thermal conductor, and a hermetically-sealed switch occupying less than 0.14 cubic inch.


FIELD TRIPS—This year's field trips will include visits to Consolidated Electrodynamics and Burroughs plants in Pasadena, Rocketdyne's engine test facility in the Santa Suzana Mountains, Litton's Guidance and Control Systems facilities in Woodland Hills, and Jet Propulsion Laboratory. NBC Color Studios in Burbank will open its doors to WESCON attendees for a glimpse of latest electronic equipment used for network color telecasts. For those desiring a breath of salt air, a trip has been scheduled to Hughes Semiconductor Division at Newport Beach, and the Navy is sponsoring a cruise out of Los Angeles Harbor on an LCG class missile cruiser.

SPEAKERS—Featured speaker at WEMA's annual luncheon will be Assistant Secretary of Defense John H. Rubel. Employed by Hughes Aircraft for 13 years, Rubel has extensive industrial experience encompassing fields of airborne systems, radar, digital and analog computers, guidance and control systems and communications sub-systems.


Thursday evening's All-Industry Banquet will be addressed by RCA's president Elmer W. Engstrom. His address is titled "The Challenge of Electronic Progress". National presidents of both the IRE and AIEE are expected to comment on the recent merger.

Theme of the all-industry cocktail party is "A Night in Hollywood" and will be held in Hollywood's colorful Paladium.


As in the past eight years, the annual Distributor-Representative-Manufacturer Conference will precede WESCON on Monday, August 20, and will be in the Ambassador Hotel's Convention Center.



BEAM PENTODE by Penta Laboratories melds metal and glass

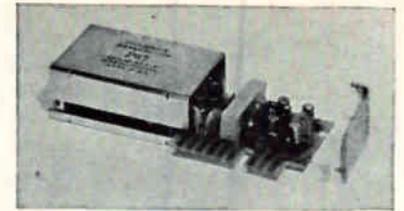


SLIDE-IN board is used in Philbrick amplifier



BECKMAN power supply has perforated case, recessed controls

SLIM LOOK is feature of GE phase position demodulator



INPUT STATION for Datex data collecting system

Designs Compete for WESCON

LOS ANGELES—The field of 150 entries submitted in WESCON's fourth Industrial Design Contest has been narrowed down to 20 new products, from 14 companies.

The 20 finalists will be displayed on the Sports Arena concourse. Four will be awarded certificates of excellence and the one judged best in design will receive the newly established Pacesetter Award.

Last year's winners of awards of excellence were submitted by Collins Radio, Hewlett-Packard, Kaar Engineer, Precision Instruments

and Tektronix. The finalists this year are:

Direct optical reader and random access file, National Cash Register; marine radiotelephone, Kaar Engineering; ultracentrifuge, power supply and ratio fluorometer, Beckman Instruments; two differential operational amplifiers, George A. Philbrick Researches.

Pulse position demodulator and radiometer, General Electric; beam pentode, Penta Laboratories; microwave absorber, B. F. Goodrich; electronic module weld head,



VISIBILITY is key to Kaar radio-telephone design



SELECTORS are grouped on Hewlett-Packard signal generator



CONSOLE for Minneapolis-Honeywell H800 doubles as desk



COMFORT is emphasized in Clevite headphone

RANDOM ACCESS card file by National Cash Register




AWARDS

Hughes Aircraft; portable announcer, Collins Radio Co.; two computer consoles, Minneapolis-Honeywell.


Data collection system, general purpose input station, Datax Corp; headphone, Clevite Corp; signal generator, Hewlett-Packard; Milli-K multicontact connector, Cannon Electric Co.

Judges are Jon W. Hauser, Robert J. Fujioka, Dean Meyers, all designers, and John Coleman and Joseph D. Thompson, of the Los Angeles Art Center.

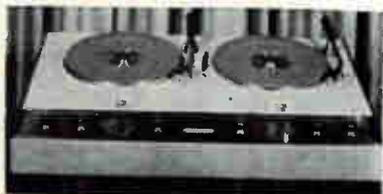

DISK JOCKEYS can tote Collins Radio announcer

Foil-type Tantalum Capacitors Now Available in Ratings to 300 Volts

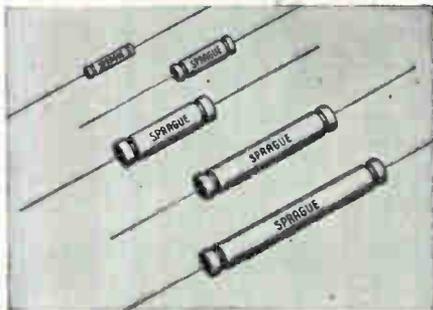

Sprague Electric Company has announced another major capacitor improvement. Higher voltage ratings, sorely-needed by circuit designers of military and industrial electronic equipment, are now available in Sprague's family of Tantalex® Foil-type Tantalum Capacitors.

Plain-foil 125 C types, previously limited to 200 volts, may now be obtained in 250 volt ratings. Plain-foil capacitors designed for 85 C operation, with a previous maximum of 250 volts, are now available in 300 volt ratings. Type numbers and pertinent characteristics are shown in the following table.

Capacitor Type	Polarity	Anode	D-C Voltage Range
85 C Max. Operating Temperature			
110D (MIL CL34, CL35)	polar	plain foil	3 to 300
111D	non-polar	plain foil	6 to 250
112D (MIL CL24, CL25)	polar	etched foil	15 to 250
113D	non-polar	etched foil	15 to 250
125 C Max. Operating Temperature			
120D	polar	plain foil	10 to 250
121D	non-polar	plain foil	10 to 200
122D	polar	etched foil	10 to 100
123D	non-polar	etched foil	10 to 100


Manufactured to meet or exceed the performance requirements of Specification MIL-C-3965B, this series of Tantalex Capacitors sets new standards of reliability for all types of military and industrial applications.

Tantalex Capacitors are available promptly in production quantities. For off-the-shelf delivery at factory prices on pilot quantities to 999 pieces, Sprague industrial distributors stock the more popular items in Types 110D, 111D, 112D, 113D, 120D, and 121D, as well as MIL Types CL24, CL25, CL34, and CL35.

For complete engineering data on the types in which you are interested, write Technical Literature Section, Sprague Electric Company, 35 Marshall Street, North Adams, Mass.

45-342P 2

CIRCLE 237 ON READER SERVICE CARD

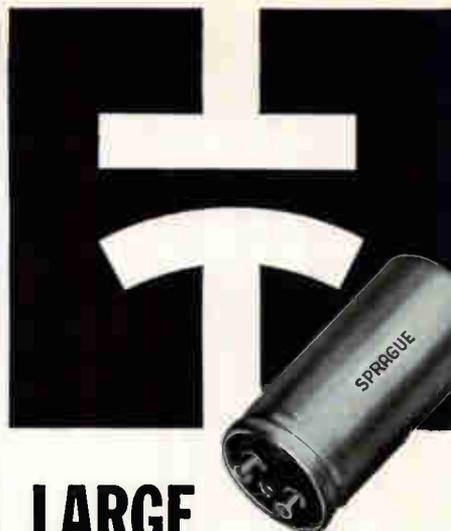

LARGE VALUES OF CAPACITANCE

IN SMALL PHYSICAL SIZE!

Sprague offers two series of "blockbuster" electrolytic capacitors for use in digital power supplies and allied applications requiring extremely large values of capacitance.

Type 36D Powerlytic® Capacitors pack the highest capacitance values available in their case sizes. Intended for operation at temperatures to 65 C, maximum capacitance values range from 150,000 µF at 3 volts to 1000 µF at 450 volts.

Where 85 C operation is a factor, Sprague offers the Type 32D Compulytic® Series, the ultimate in reliable long-life electrolytics for digital service. These remarkably trouble-free units have maximum capacitance values ranging from 130,000 µF at 2.5 volts to 630 µF at 450 volts.

Both 32D and 36D Capacitors have low equivalent series resistance and low leakage currents, as well as excellent shelf life and high ripple current capability.

If you'd like complete technical data on Type 36D units, write for Engineering Bulletin 3431. For the full story on the "blue ribbon" Type 32D Series, write for Engineering Bulletin 3441B to the Technical Literature Section, Sprague Electric Company, 35 Marshall Street, North Adams, Massachusetts.



45-362P 1

CIRCLE 33 ON READER SERVICE CARD

33

Will Satellite Tv Be Too Expensive?

WASHINGTON—Telstar is focusing attention anew on the economics of space communications. While the predictions for message traffic are relatively optimistic, government sources and the tv networks see no economic advantage in satellites tv transmission.

Edward R. Murrow, U. S. Information Agency chief, doubts his agency can afford satellite tv. Government economists say cost and use estimates are too speculative to guess at rates for services. If the first global system has capacity to spare, tv rates might be low to avoid wasting the capacity.

Cost estimates range from \$200 to \$500 million: AT&T figures \$200-million for a 50-Telstar system with 20 ground stations and 600 two-way voice channels, Lockheed sees \$259-million for 1,000 channels in two synchronous satellites with costs of \$420-million by 1975.


Telex, telephone and telegraph services between the U. S. and Europe will generate up to \$450 million annual revenue by 1970 and re-

quire 1,900 voice channels, thinks Booz, Allen and Hamilton. In its report to FCC, the ad hoc carrier committee forecast a need for 4,650 channels by 1970. AT&T expects 12,000 will be required by 1980. Government economists look for \$1 billion to \$2 billion revenue by 1980 and feel that would mean an economic system.


Air Force Buys Third Portable Traffic Control

COMPACT AIR TRAFFIC CONTROL and communications systems will be supplied to the Air Force by RCA under a \$7.5-million contract from USAF Electronic Systems Division. This is the third of 14 mobile control systems planned to make Air Force equipment compatible with FAA systems. Total contracts now awarded exceed \$13 million. Each control system, transportable by air, includes six radar vans, intercom and electronic landing assistance equipment.

Hydroacoustic Transducer for ASW Studies

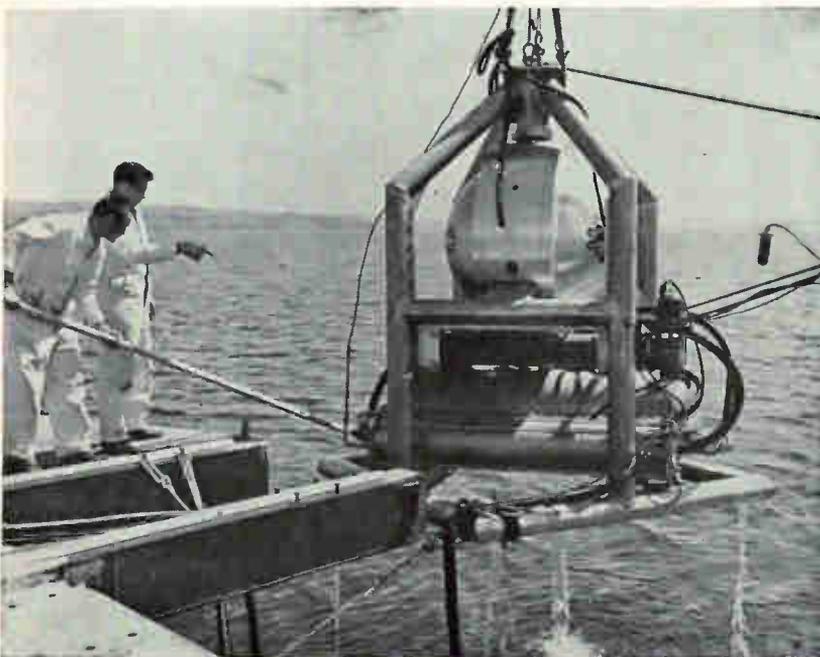

HIGH-POWER, LOW-FREQUENCY sound generator, shown under test at lake, was designed by General Dynamics/Electronics for Navy anti-submarine-warfare studies. A pump-driven valve amplifier converts a fluid flow to vibratory energy, driving two aluminum hemispherical pistons (seen below apex of frame). An electronic oscillator is used for control

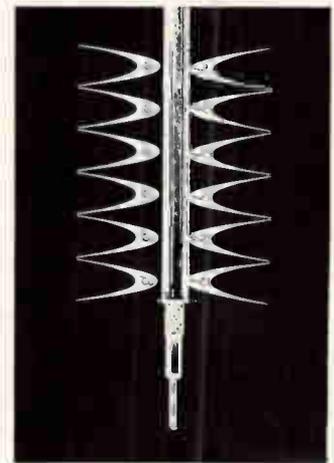

RADIATION RESISTANCE

Raychem wire and cable products, including hook-up wire, coaxial cables, and delay line cables, are highly resistant to the damaging effects of ionizing radiation present both in outer space and in and around nuclear power generating systems.


Raychem's extensive experience in the field of radiation chemistry has led to the development of wire and cable designed to be used in difficult radiation environments.

Raychem radiation resistant wire and cable products are being used by a wide cross-section of industry, including most NASA and military orbital and space probe vehicles, as well as the latest commercial communications satellite.



RAYCHEM
CORPORATION

DAKESIDE AT NORTHSIDE
REDWOOD CITY, CALIF.

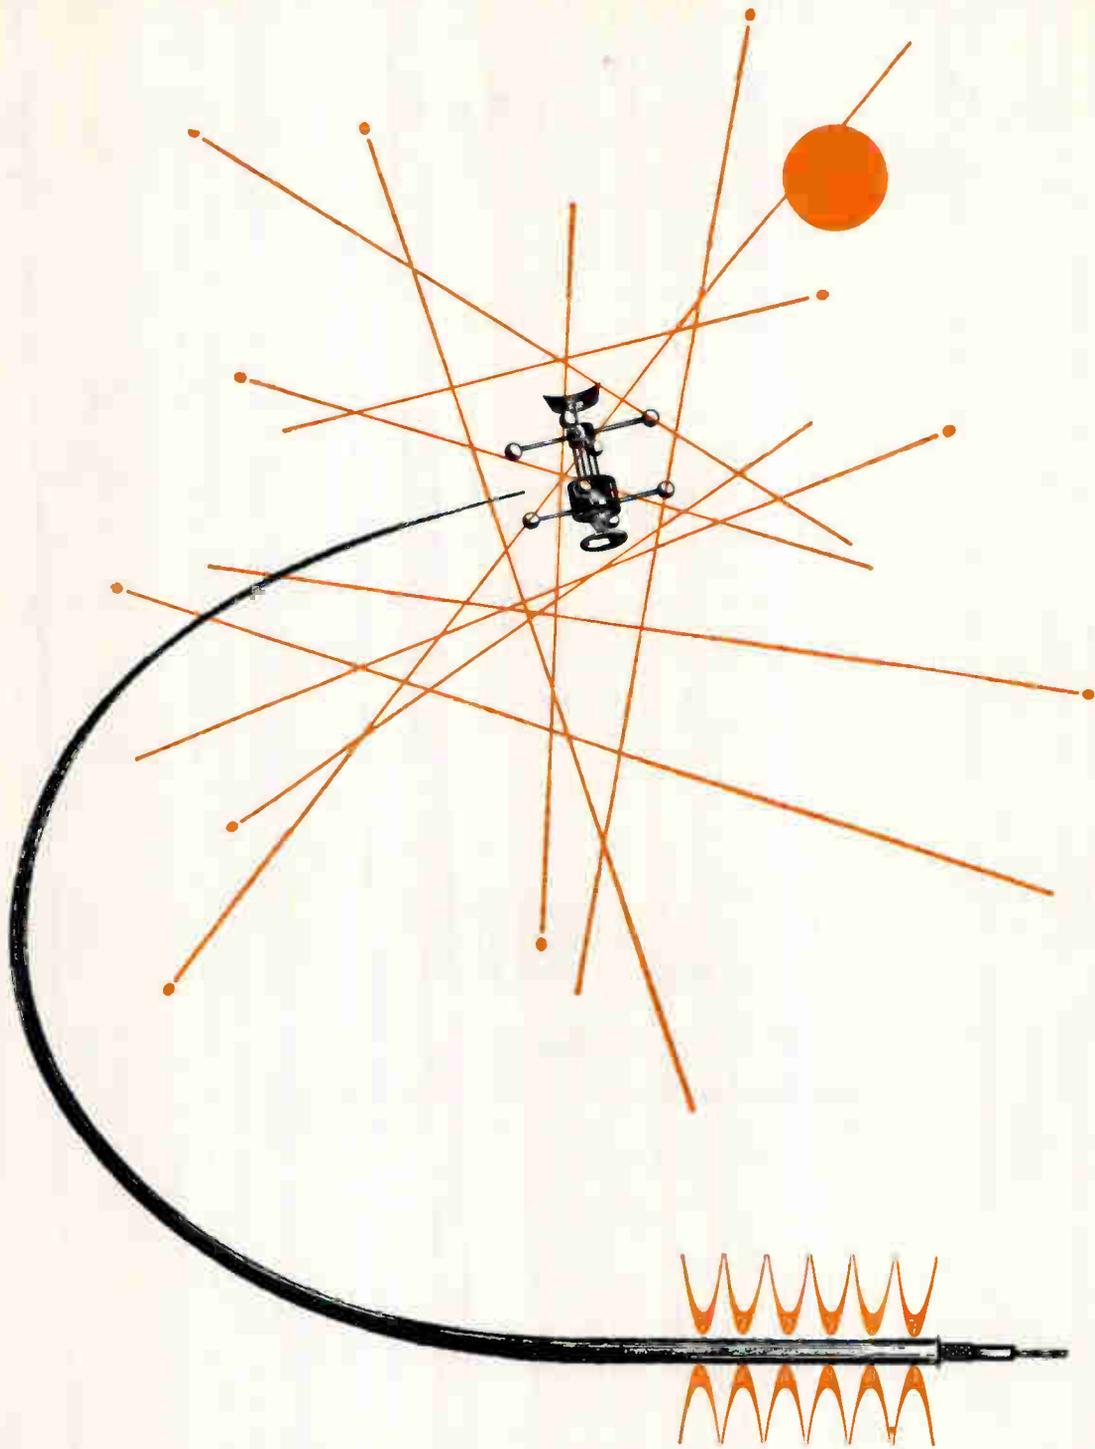

radiation resistance through irradiation

**LEADER IN RADIATION CHEMISTRY
FOR ELECTRONIC WIRE AND CABLE**




**RAYCHEM
CORPORATION**

draw your own conclusions...

ABOUT TRYGON'S MERCURY SYSTEM SERIES

Just follow the reasons from point to point and it's easy to see why Trygon's man in the white coat has developed a series of DC regulated power supplies which are uniquely qualified to power your electronic systems. He has combined the economy and small panel height of fixed voltage supplies with the flexibility of a wide range unit.

Here is truly unique design, with a voltage vernier on the front panel to allow narrow range adjustment and four toggle switches on the rear panel, which provide a wide voltage range by switching input transformer taps. The Mercury System design achieves significant savings in space and costs, yet retains the highest standards of quality in components, construction and overall performance.

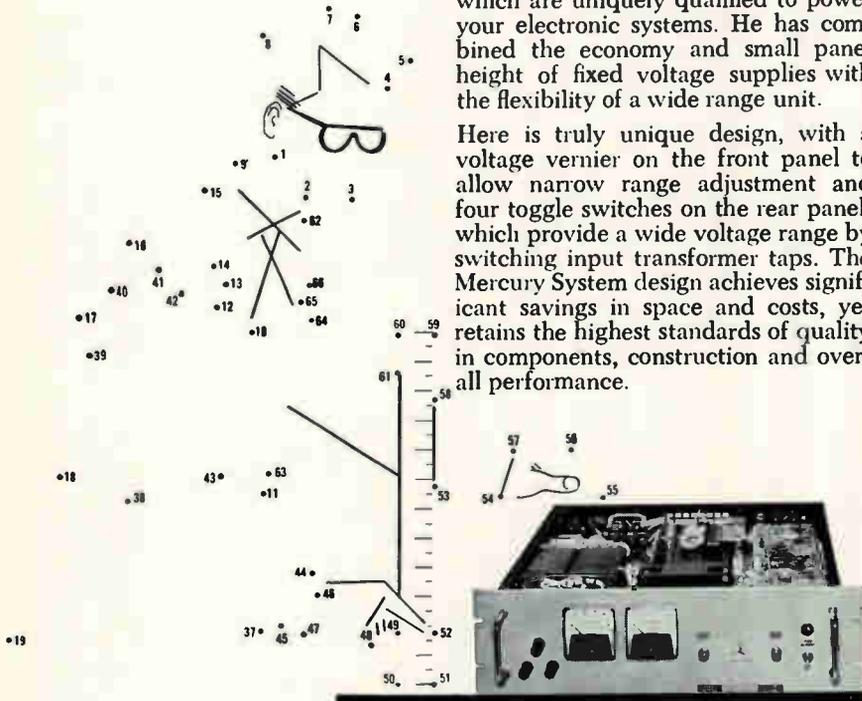

This new series more than measures up in models too, with 16 individual units to choose from, ranging up to 160 volts and 30 amperes... 2 different panel heights: 3½" and 5¼". Prove-out computations have shown MTBF figures of 15,000 to 20,000 hours, depending on the specific unit involved. Prove it to yourself... an inquiry will bring complete data—plus a box of crayons for the kids (you've drawn the conclusion, let them color the picture).

OUTPUT:

- 0-15 VDC, 10 and 20 Amp
- 0-36 VDC, 2.5, 5, 10, 15, 20 Amp
- 0-60 VDC, 5, 10 Amp
- 0-160 VDC, 1, 2, 3 Amp
- 6, 12, 18 VDC @ 30 Amp

REGULATION: 0.01% or 3 mv

RIPPLE: Less than 1 mv RMS

TRANSIENT RESPONSE: Better than 50 µsec

PANEL HEIGHT 3½" and 5¼"



TRYGON
ELECTRONICS, INC.
111 Pleasant Ave., Roosevelt, L.I., N.Y.
FReeport 8-2800

MEETINGS AHEAD

ENERGY CONVERSION PACIFIC CONFERENCE, AIEE; Fairmount Hotel, San Francisco, Calif., Aug. 13-16.

PRECISION ELECTRONIC MEASUREMENTS INTERNATIONAL CONFERENCE, IRE-PGI, NBS, AIEE; NBS Boulder, Labs., Boulder, Colo., Aug. 14-17.

WESTERN ELECTRONICS SHOW AND CONFERENCE, WEMA, IRE; Los Angeles, Calif., Aug. 21-24.

METALLURGY OF SEMICONDUCTORS CONFERENCE; American Institute of Mining, et al; Ben Franklin Hotel, Philadelphia, Pa., Aug. 27-29.

BALLISTIC MISSILE & SPACE TECHNOLOGY SYMPOSIUM, U.S. Air Force and Aerospace Corp.; Statler-Hilton Hotel, Los Angeles, August 27-29.

MAINTAINABILITY OF ELECTRONIC EQUIPMENT, EIA Engineering Dept. & Dept. of Defense; U. of Colorado, Boulder, Colo., Aug. 28-30.

INFORMATION PROCESSING, INTERNATIONAL CONFERENCE, IRE-PGEC, IFIPS, AIFPS; Munich, Germany, Aug. 29-Sept. 1.

INFORMATION ON THEORY INTERNATIONAL SYMPOSIUM, PGIT and Benelux Section of IRE; Free Univ. of Brussels, Belgium, Sept. 3-7.

ADVANCED TECHNOLOGY MANAGEMENT CONFERENCE, IRE-PGEM, AIEE, et al; Opera House on World's Fair Grounds, Seattle, Wash., Sept. 3-7.

DATA PROCESSING EXHIBIT, Assoc. for Computing Machinery; Onondaga County War Memorial, Syracuse, N. Y., Sept. 4-7.

PETROLEUM INDUSTRY CONFERENCE, AIEE and ISA; Carter Hotel, Cleveland, Ohio, Sept. 9-14.

ENGINEERING MANAGEMENT, IRE-PGEM, AIEE et al; Hotel Roosevelt, New Orleans, La., Sept. 13-14.

ENGINEERING WRITING AND SPEECH SYMPOSIUM, IRE-PGEWS; Mayflower Hotel, Wash., D. C., Sept. 13-14.

ELECTROCHEMICAL SOCIETY MEETING; Statler-Hilton Hotel, Boston, Mass., Sept. 16-20.


RECTIFIERS IN INDUSTRY MEETING, AIEE; Deshler-Hilton Hotel, Columbus, Ohio, Sept. 18-19.

ADVANCE REPORT

MILLIMETER & SUBMILLIMETER CONFERENCE, IRE-PGMTT; Jan. 8-10, 1963. Orlando, Fla. Sept. 15 is the deadline for submitting 3 copies of a 500-word abstract to: J. J. Gallagher, Technical Program, Millimeter & Submillimeter Conference, MP-172-Box 5837, Martin Company, Orlando, Fla. Topics may include the following: mm and sub-mm transmission lines, quasi-optical techniques, mm sources & stability considerations, mm & sub-mm resonant structures, mm components & power measurements, mm receivers, harmonic generation & detection, mm spectroscopy, mm masers.

THE BOURNS KNOBPOT®

- precision potentiometer, dial and knob, all in front of the panel.
- with new Mil Spec color accessories for increased versatility.



BOURNS

BOURNS, INC. TRIMPOT[®] DIVISION
1200 COLUMBIA AVE. RIVERSIDE CALIF.
92504-1700, TWX RZ9222. CABLE BOURNSINC

BOURNS KNOBPOT— NOTHING BEHIND THE PANEL BUT THE SOLDER HOOKS AND THE BUSHING!


With the new Bourns Knobpot, nothing is behind the panel but the solder hooks and the bushing. Everything else is out in front, integrated into a single, compact unit. (Just $\frac{3}{4}$ " in diameter by 1" long, the easy-to-mount 10-turn Model 3600 Knobpot is shorter by $\frac{1}{4}$ " than comparable potentiometers alone—to say nothing of the space it saves by incorporating its own turns-counting dial.)

Settings are easy to make and permanent. The clear-reading dial lets you adjust to 0.5% of the unit's total resistance value, and the knob's self-locking feature keeps your adjustment steady even under 10G vibration or 50G shock.

Resistances: 1000 Ω to 100K std. (to 250K spl.)
 Dial Accuracy (Including Linearity): $\pm 0.5\%$
 Power rating: 1.5W @ 25 C
 Max. operating temp.: +85 C
 Mech. life: 200,000 revolutions
 Humidity: MIL-STD-202, Method 103, Condition B (steady state)



ACTUAL SIZE

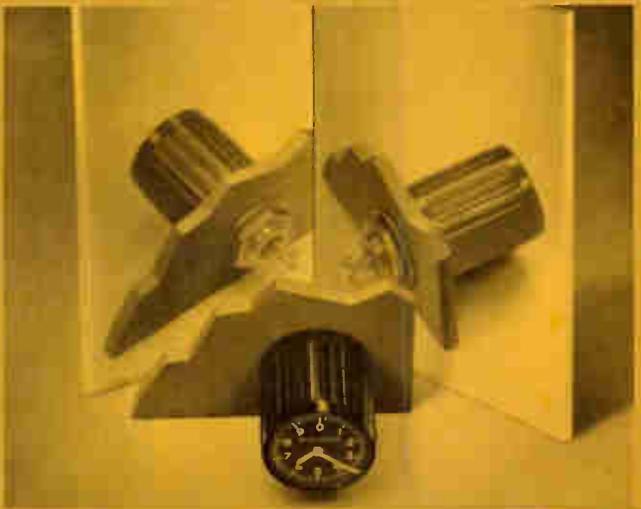

NOW YOU CAN MULTIPLY THE USEFULNESS OF KNOBPOT

TAKE YOUR CHOICE OF DIAL-FACE OR PLAIN-FACE STYLE



This is the standard model Knobpot—complete with dial for visual read-out of settings.



If you don't need the read-out dial, here's the same basic 10-turn precision potentiometer at a much reduced price.

WITH ANY OF THESE ACCESSORIES OR ANY COMBINATION OF THEM


Accessories meet color requirements of MS-91528B and MIL-STD-242 (ships)

COLORED SNAP-RINGS



To color-code control panels or impart higher style to equipment design.

COLORED MIL-SPEC SLIP-OVER KNOBS

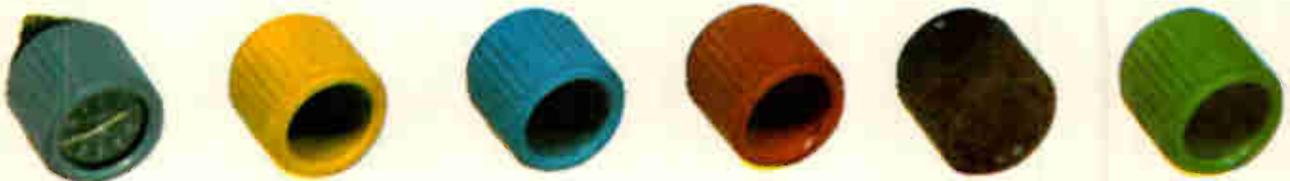

For function, for style. Standard 1" MIL-spec diameter.

STAINLESS STEEL SKIRTS



For a finishing touch of high-polish glamour.

LOCKING DEVICE (BRAKE)



To prevent accidental jarring of settings. Easy to install—simply snaps into place between the potentiometer and the panel.




BOURNS

BOURNS, INC., TRIMPOT® DIVISION
 1200 COLUMBIA AVE. RIVERSIDE, CALIF.
 684-1700. TWX RZ9222. CABLE BOURNSINC

WRITE FOR FULL INFORMATION ON KNOBPOT AND KNOBPOT ACCESSORIES

75TH
Anniversary
Year

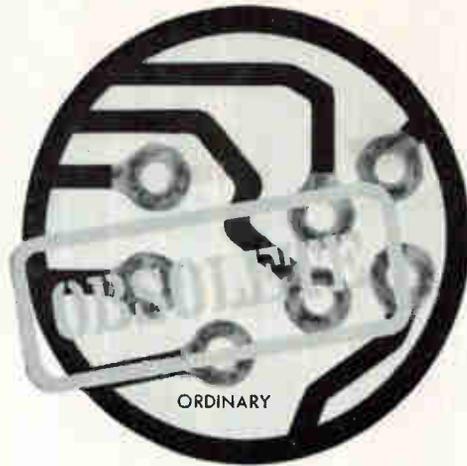


NO OXIDE . . . NO CONTAMINATION
in bright copper F.E.P. encapsulated



FREE-FLEX* CIRCUITRY

Now—break the oxidation habit! Apply Garlock FREE-FLEX Circuitry with pure, bright copper conductors. Through an exclusive Garlock technique, the need to oxide conductors has been eliminated. This reduces the possibility of contamination, results in a bright copper conductor.

In addition, FREE-FLEX Circuitry is not merely laminated. It is *completely encapsulated* between layers of F.E.P. Teflon† . . . selected by Garlock Material Value Analysis for its unmatched electrical, physical and thermal properties. This Garlock-developed encapsulating system is equivalent to a class A hermetic seal . . . provides line-to-line and line-to-ground protection . . . resists penetration of harmful moisture and gases . . . eliminates short circuits. And, the remarkable strength of F.E.P. Teflon prevents harmful crack-

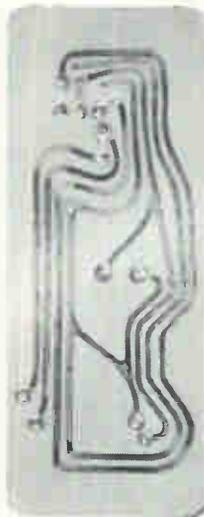


ing or deterioration through aging.

FREE-FLEX Circuitry is lighter, more flexible . . . can be folded, twisted, bent around corners . . . reduces package size and weight . . . can be soldered by conventional or infrared automatic methods . . . saves installation time and money.

For unmatched reliability specify Garlock FREE-FLEX Circuitry. It costs no more than ordinary flexible circuitry. For details call your nearest Garlock Electronic Products representative, or write for Engineering Manual AD-195, Garlock Electronic Products, Garlock Inc., Camden 1, N.J. In Canada: Garlock of Canada Ltd., Toronto, Ont. Order from the complete line of quality Garlock products . . . Packings, Gaskets, Seals, Molded and Extruded Rubber and Plastic Stock and Parts.

*Garlock Trademark †Du Pont Trademark

GARLOCK

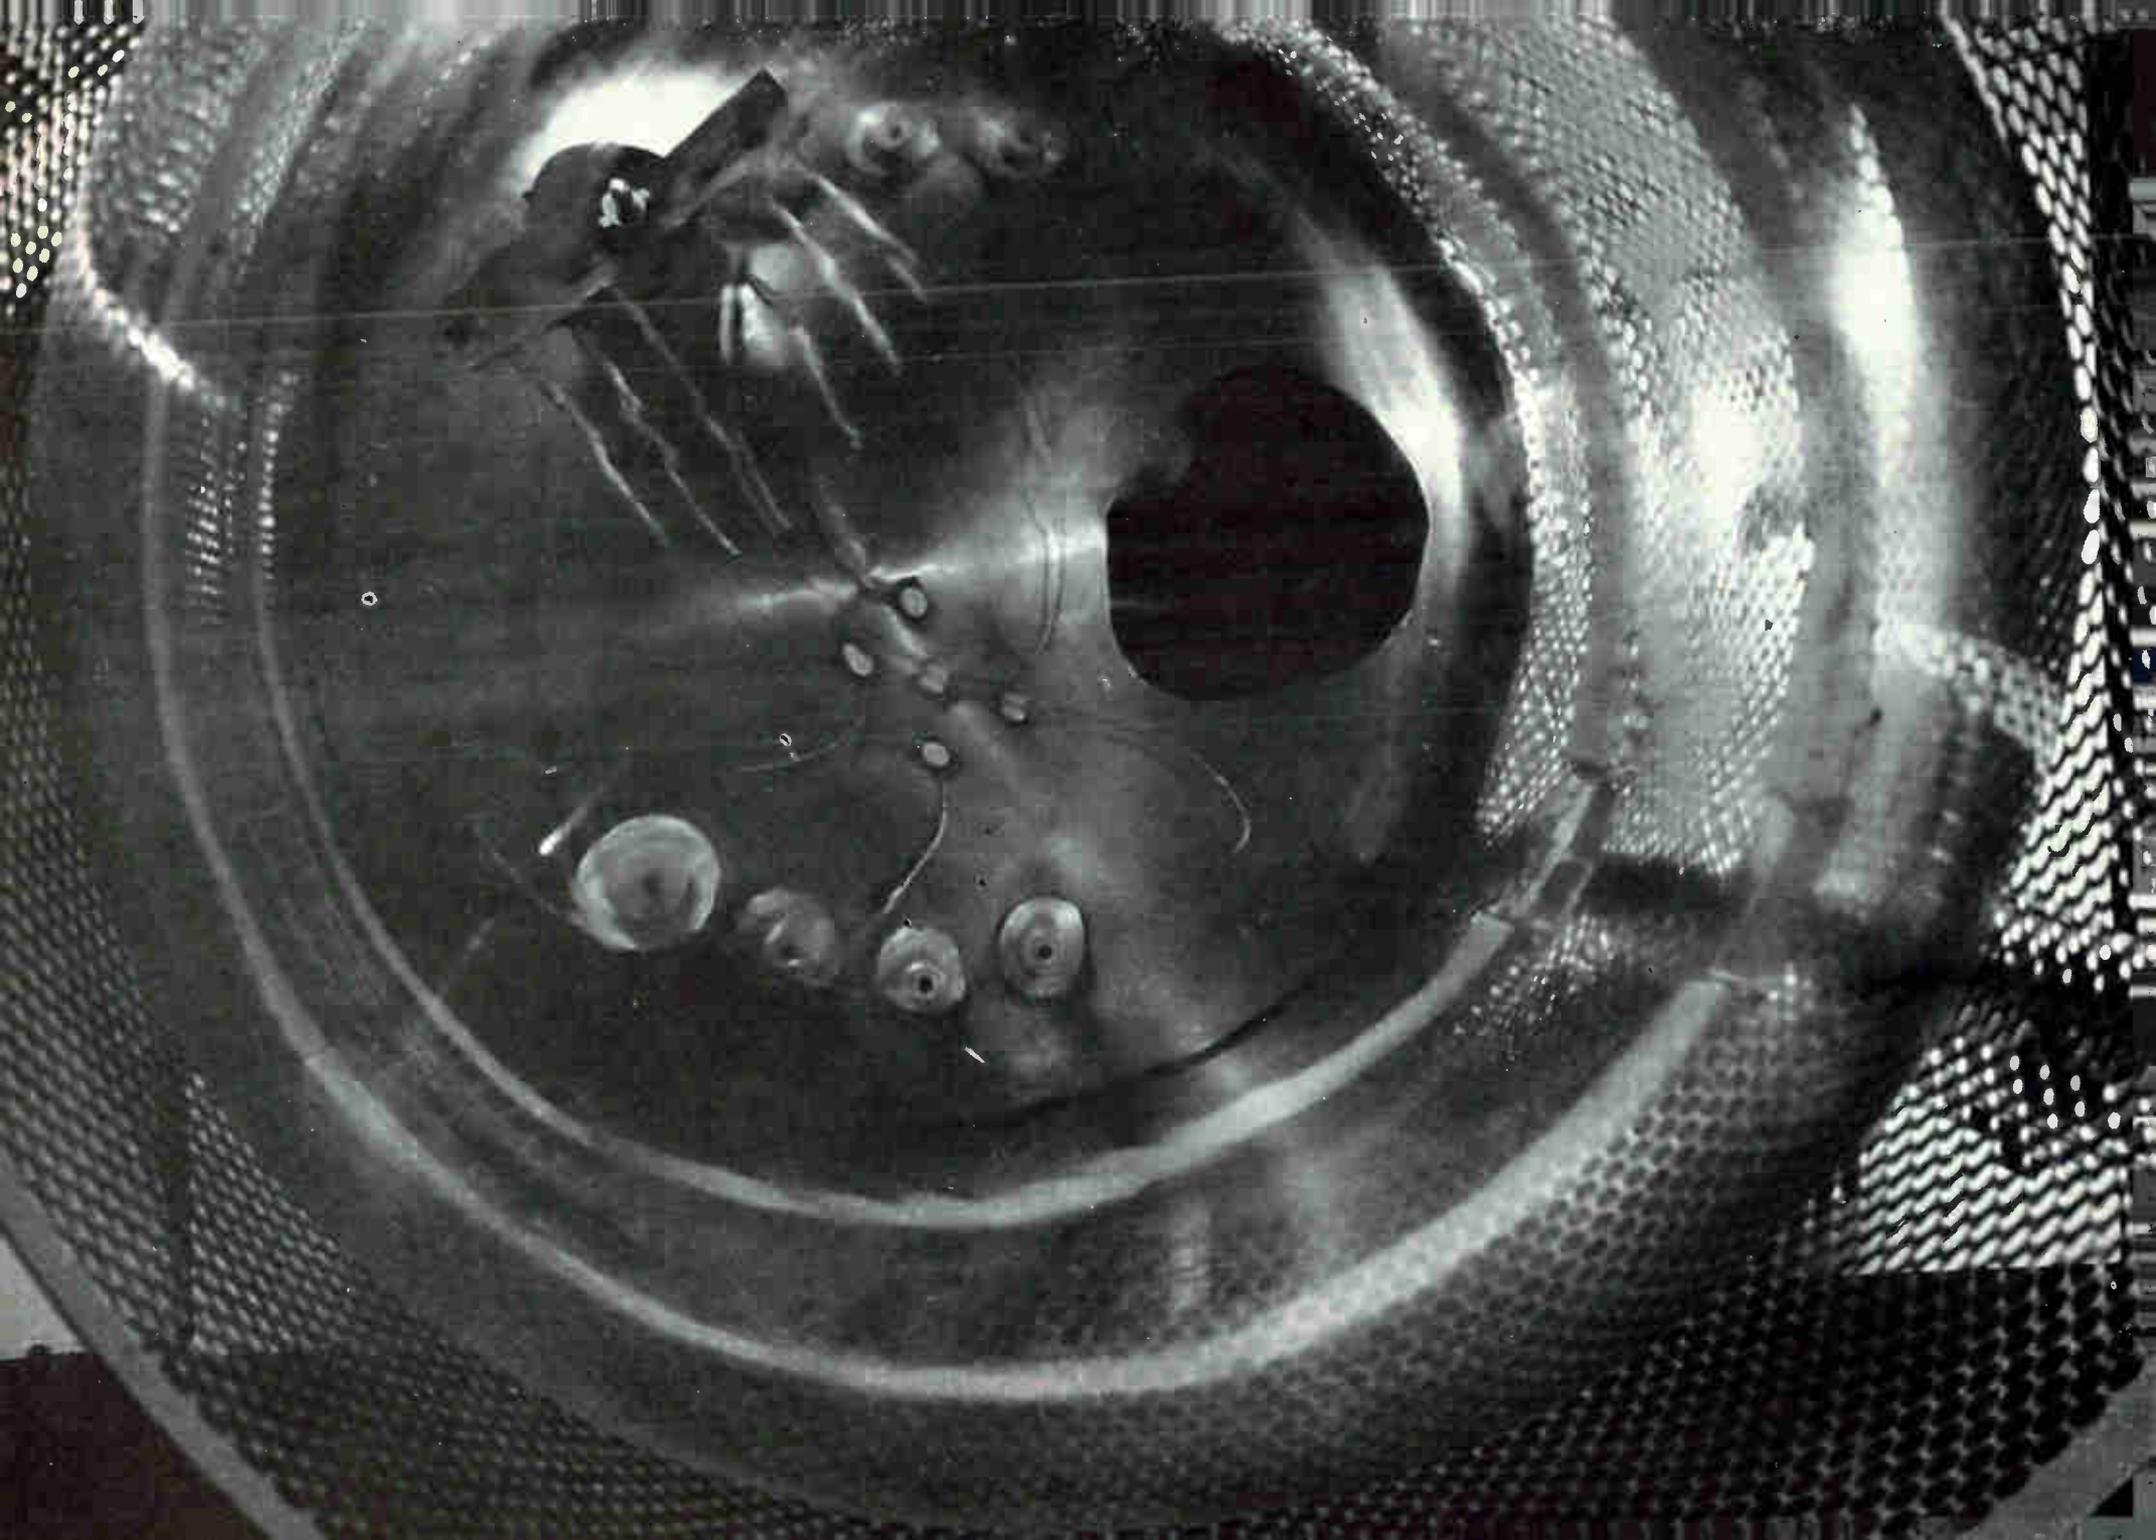

Vacuum-Impregnation Proof Humidity Proof

(MIL-STD-202B, METHOD 106A)

Immersion Proof

(MIL-R-27208A; PARAGRAPHS 3.23 AND 4.6.23)

Salt-Spray Proof

(MIL-R-27208A; PARAGRAPHS 3.20 AND 4.6.15)

... Daystrom Squaretrims®



Daystrom engineering and fabrication techniques not only assure full compliance to MIL-R-27208 but also offer processing protection not covered by this specification. The bonus advantages are resistance to immersion and resistance to vacuum encapsulation with potting resins.

Daystrom guarantees compliance to all operating parameters per the following table of environmental limits of MIL-R-27208.

ENVIRONMENT		LIMIT
Thermal Shock	Total Resistance	±1% + 0.05Ω
	Setting Stability	1% + 1 resolution
Resistance — Temperature Characteristic	Characteristic	±0.007%/°C
Moisture Resistance	Total Resistance	±1% + 0.05Ω
	Insulation Resistance	10 Megohms
Acceleration	Total Resistance	±1% + 0.05Ω
	Setting Stability	1% + 1 resolution
Shock	Total Resistance	±1% + 0.05Ω
	Setting Stability	1% + 1 resolution
Vibration	Setting Stability	1% + 1 resolution
	Total Resistance	±1% + 0.05Ω
	Operating Torque	150%
Salt Spray	No appreciable corrosion	
Effect of Soldering	Total Resistance	±1% + 0.05Ω
Life	Total Resistance	2% + 1 resolution
	Setting Stability	2% + 1 resolution
	Dielectric W.V.	1 Milliampere
	Operating Torque	150%
Low Temperature Operation	Setting Stability	1% + 1 resolution
	Operating Torque	150%
	Total Resistance	±1% + 0.05Ω
High Temperature Exposure	Setting Stability	1% + 1 resolution
	Total Resistance	±1% + 0.05Ω
	Operating Torque	150%
	Dielectric W.V.	1 Milliampere
	Insulation Resistance	1,000 Megohms
Rotational Life	Total Resistance	±2%

DAYSTROM, INCORPORATED


POTENTIOMETER DIVISION

ARCHBALD, PENNSYLVANIA • LOS ANGELES, CALIFORNIA

CIRCLE 41 ON READER SERVICE CARD

OZALID NEWSLETTER

NEW IDEAS TO HELP YOU WITH ENGINEERING REPRODUCTION AND DRAWING

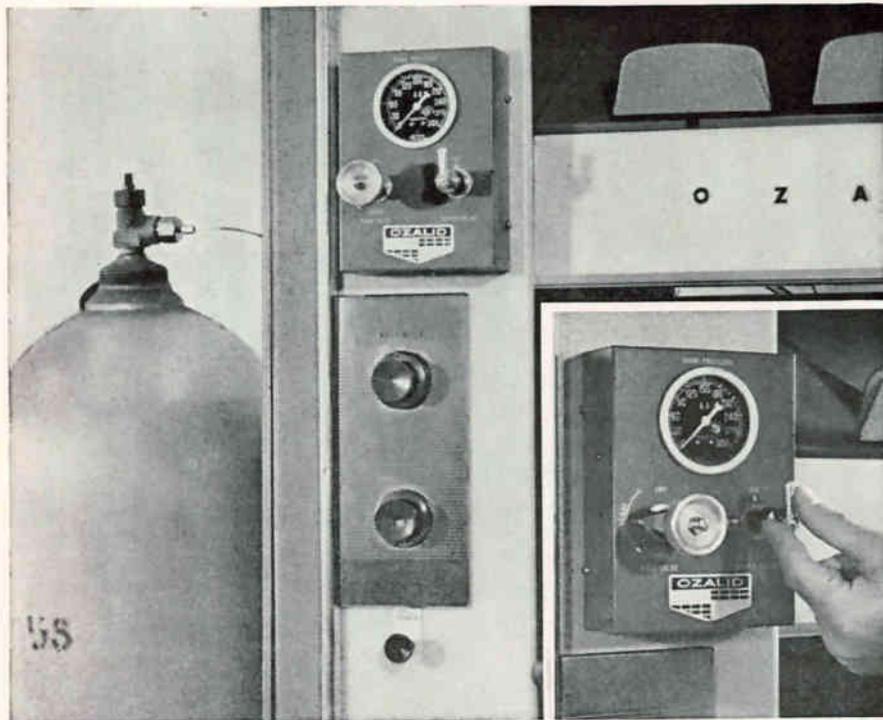

Ozalid® Anhydrous Ammonia System consists of control box mounted on machine and tubing to connect equipment with anhydrous ammonia cylinder, which may be remotely located. Developer handling becomes simply, "valve on, valve off."

New anhydrous ammonia gas system provides ultimate convenience, cuts developer costs up to 50%, gives from 2 to 6 months developing from a single cylinder!

A simplified, completely safe Ozalid Anhydrous Ammonia Kit brings the convenience of pressurized ammonia gas development to your dry-developing diazo whiteprinter. Depending on machine use intensity and model, the unit saves enough on ammonia costs to pay for its initial expense in as short a time as a year.

A low price tag is only the first of several reasons you should consider using Ozalid Anhydrous Ammonia in your diazo installation. Contents of a single cylinder give up to six months of developing, reducing developer handling to a minimum.

Heater rods, sealing sleeves, and other vital parts in the developer section have longer life because corrosive action is lessened. Machine

warm-up time is shorter. Improved employee morale results in increased production. What's more, chances are you'll see an improvement in print quality.

The Ozalid Anhydrous Ammonia Kit is specifically engineered to meter anhydrous ammonia in the simplest, most efficient method for use with diazo machines. Units have been proved in the field, and are already giving a high degree of customer satisfaction.

Conversion Kits fit all Ozalid dry diazo machines and can be easily installed on practically all others regardless of make. Price of the kit is \$235.00. For information ask your Ozalid man, or write Ozalid, Johnson City, N. Y., Dept. 186.

New fast reprinting, erasable sepia intermediate

Here's a highly transparent intermediate with a specially prepared paper base that makes reprints faster, yet is easily erasable. Ozalid 402 IZE is its name, has a dark sepia image (but you can rub it out with an ordinary abrasive eraser), has an ideal matte surface for pencil and ink additions, picks up fine line detail beautifully, has excellent covering power, yet is surprisingly low priced. Drafting room comments include, "like see-through"... "excited about erasable feature"... "excellent for overlay work." Ask your Ozalid man for samples and demonstration.

Crease and crumple this tracing paper. Then, make a print! Surprise!


New Ozaclear isn't called "clear" for nothing. This tracing paper permits only a hint of fracturing from creases and crumpling ever showing up on a print. Ozaclear is 100% rag, with an excellent surface for pencil and ink. But it's that "no bruising" quality that makes it stand out. Its exclusive Ozalid-perfected transparentizer holds its own against heavy pencil pressure, leaving no trace of ghosting when these lines are erased. Want more details about permanent, non-yellowing, high strength Ozaclear? Ask your Ozalid representative or write Ozalid, Johnson City, N. Y., Dept. 186.

Lennox gives branches up-to-the-minute changes on reproducible masters!


With eight scattered branches and factories, Lennox Industries (Marshalltown, Iowa) uses Ozalid diazo intermediates to get out new product drawings and drawing changes quickly and maintain perfect standardization among plants.

Single duplicate originals are sent to each plant, the plant, in turn, making as many clear, sharp prints as needed. Simple, fast, error-proof!

Ozalid, A Division of General Aniline & Film Corporation. In Canada: The Hughes-Owens Co. Ltd., Montreal

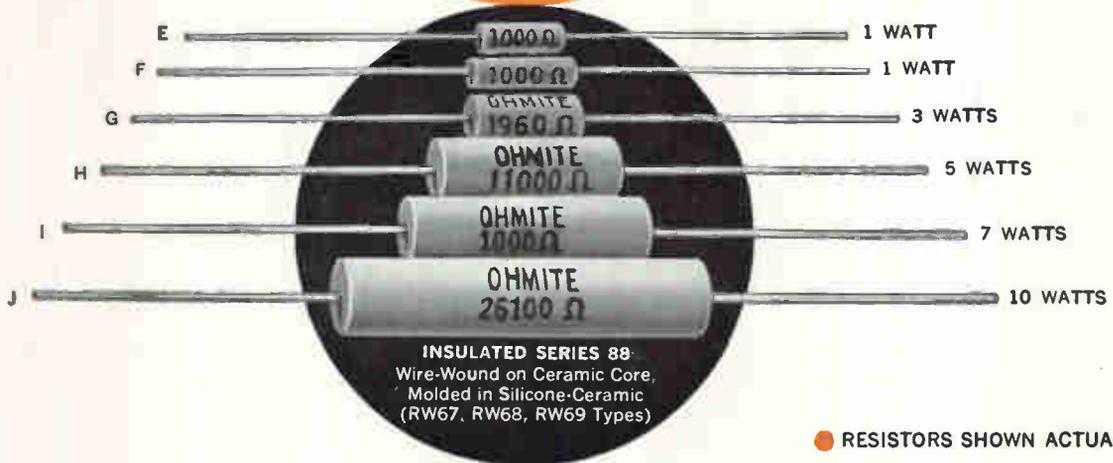

● RESISTORS SHOWN ACTUAL SIZE

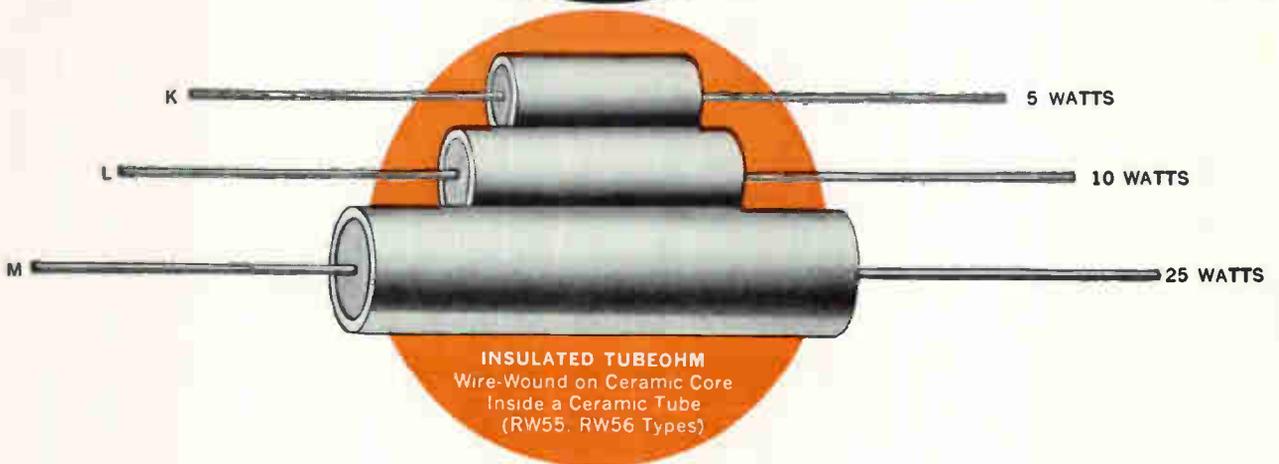

PROBLEM SOLVERS IN AXIAL LEAD RESISTORS

MINIATURE CIRCUITS: Resistors A, B, E, F pack 1 to 3 watts in sizes smaller than many nonpower units.

INSULATED RESISTORS: Choose from two types, E to J and K to M. Meet all MIL requirements for insulation.

PRECISION AND POWER COMBINED: Use E to J for tolerances down to 0.05%; A to D for tolerances to 1%.

MIL REQUIREMENTS: All pertinent MIL-R-26C types.

WELDABLE LEADS: Nickel—specify "weldable" (untinned).

HIGH TEMPERATURE OPERATION: A to D and K to M are rated up to 350°C; E to J, 275°C or 350°C depending on the application.

LOW TEMPERATURE COEFFICIENT: Use resistors E to J for 20 ppm/°C, standard.

IMMEDIATE DELIVERY: A, B, C, D, G, H, J stocked in popular MIL and commercial values. Call your electronic distributor or the factory.

Write for "Axial Lead" Literature

Rheostats • Power Resistors • Precision Resistors •
 Relays • R.F. Chokes • Germanium Diodes • Variable
 Transformers • Tantalum Capacitors • Tap Switches




OHMITE

OHMITE MANUFACTURING COMPANY
 3610 Howard Street, Skokie, Illinois

ANOTHER NEW PRODUCT OF FAIRCHILD RESEARCH

new
silicon semiconductor strain gage
load cell

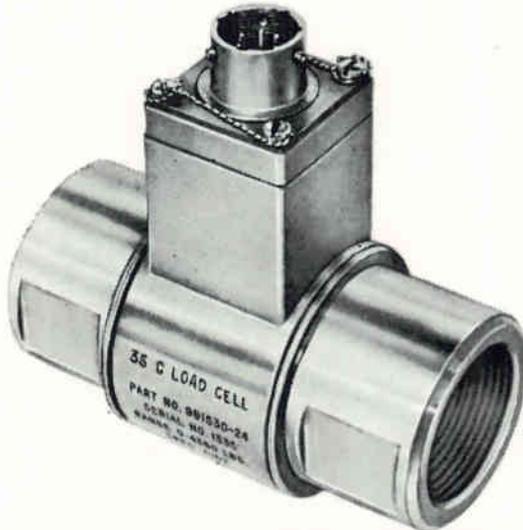

NOW MEASURE FORCE WITH SOLID STATE RELIABILITY

Latest addition to the Fairchild Semiconductor Transducer family offers exceptional accuracy, 0-100 to 0-25,000 lb range plus these outstanding characteristics

- .0007 maximum deflection
- 1/4v dc full scale on unamplified output
- infinite resolution
- maximum reliability
- tension and/or compression
- sealed stainless steel housing
- wide range temperature compensation

Fairchild's unique modular construction provides for optional

- internal amplification to 5v dc
- internal calibration
- internal supply regulation
- internal low impedance
- internal emitter follower

For more
information
write
Dept. 57 E



FAIRCHILD CONTROLS CORPORATION

A SUBSIDIARY OF FAIRCHILD CAMERA
& INSTRUMENT CORPORATION

225 Park Avenue, Hicksville, L. I., N. Y.
6111 E. Washington Blvd., Los Angeles, Calif.

Transducers/Rate Gyros/Potentiometers/Accelerometers

VISIT OUR Booths Nos. 2066-67 at WESCON—Los Angeles Sports Arena • Booth No. 212 at ISA—New York Coliseum,

another **Si** series from **MOTOROLA**



the most *completely specified* silicon epitaxial planar logic switch!

Whether you're designing switching circuits at 100 μ A or as high as 100 mA, you can design with confidence using the new Motorola 2N2501 NPN silicon epitaxial planar logic switch.

This new high-gain transistor is characterized over its optimum usable current range, with beta specified from 100 μ A to 100 mA, including measurements at 1, 10, and 50 mA.

And, with the specified active region time constant and total control charge parameters, you can more closely predict performance at various operating conditions (using a standard formula) than ever before.

In addition, saturation voltage is specified at 10, 50, and 100 mA, with extremely low values for these critical ratings.

The Motorola 2N2501 (TO-18 package) is specifically designed for low-level logic switching in the 100 μ A to 100 mA region, and is supported by fuller, more definitive specifications than available in any present device.

Units are immediately available to meet your production requirements, or if you have a present application in which you would like to evaluate this new type, contact your nearest Motorola District Office. An engineering representative will advise you how you may obtain free samples.

Boston / Chicago / Cleveland / Dallas / Dayton / Detroit / Garden City
Los Angeles / Minneapolis / New York / Orlando / Philadelphia / Phoenix / San Diego / San Francisco / Syracuse / Washington / Toronto

MOTOROLA 2N2501[®] PERFORMANCE SPECIFICATIONS

$V_{CE(sat)}$	40 volts (min)					
$V_{C(sat)}$	20 volts (min)					
$V_{ES(sat)}$	6 volts (min)					
h_{FE}	$I_C = 100 \mu A$	$I_C = 1 mA$	$I_C = 10 mA$	$I_C = 10 mA$ @ $-55^\circ C$	$I_C = 50 mA$	$I_C = 100 mA$
@ $V_{CE} = 1 V$	20 (min)	30 (min)	50 (min) 150 (max)	20 (min)	40 (min)	30 (min)
$V_{CE(sat)}$ @ $I_C = 10 mA$	$I_C = 10 mA$ 0.2 V (max)		$I_C = 50 mA$ 0.3 V (max)		$I_C = 100 mA$ 0.4 V (max)	
τ_A @ $I_C = I_{B1} = I_{B2} = 10 mA$	15 nsec (max)					
τ_A (Active Region Time Constant)	2.5 nsec (max)					

*TO-18 Package

The following Motorola silicon epitaxial logic transistor types are also available from your nearest Motorola Industrial Distributor or District Office:

2N834 2N835 2N744
2N914 2N706 2N753
 2N708

For your copy of the complete electrical specifications on the new Motorola 2N2501 transistor, call or write Motorola Semiconductor Products Inc., Technical Information Department, 5005 East McDowell Road, Phoenix, Arizona.



MOTOROLA
Semiconductor Products Inc.

A SUBSIDIARY OF MOTOROLA, INC.

2007

SEE THEM AT WESCON

Microwave tubes and ferrite devices for aerospace applications

1
25-WATT HIGH EFFICIENCY AMPLITRON*

For S-band space telemetry applications, only 14 oz. QKS 997.

*Raytheon Trademark

2
SMALLEST, MOST EFFICIENT M-BWO

Has 3/8 inch diameter, delivers 50 watts at 2.2-3.2 kMc. QKA 995.

3
MILLIMETER KLYSTRONS COVER 50-120 kMc

Nine tubes; all tune with single vernier adjustment. QKK 1080.

4
EXTREMELY RUGGED K-BAND KLYSTRON

Has excellent thermal stability, low microphonics. QKK 923.

5
COMPACT ISOLATOR FOR SPACE SYSTEMS

Matches QKS 997 Amplitron, 15-20 db min. isol., 1.20 max. VSWR. I_cSL5.

6
IR DETECTORS TO 30 MICRONS

Include variety of types, high sensitivity, fast response. QKN 1004.



Aerospace microwave systems designers:

Raytheon accelerates delivery of microwave tubes for aerospace applications


These completely different lightweight microwave tubes and ferrite devices are all built and tested for rated performance in aerospace environments. Each unit is the end result of extensive designing, redesigning and production testing.

For performance and applications data on these and other aerospace microwave tubes and devices, please write, outlining your particular area of interest, to Raytheon Company, Microwave and Power Tube Div., Waltham 54, Mass.



See these Raytheon microwave tube developments at WESCON—Booth 727-728

CIRCLE 47 ON READER SERVICE CARD

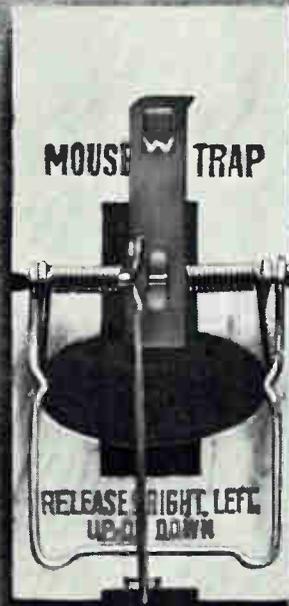

9 billion dollars to build a better one.

We're living in a needing, buying, growing America—a time for new and improved products and services—the creation of new jobs. More than ever, a businessman with an idea, with the urge for something better will move ahead with our expanding economy.

But after the idea, what follows can be a costly period of research and development. Not necessarily—if you use the immense 9-billion-dollar fund of research and patent information that's available at your U.S. Department of Commerce. Think of the saving—in time and money.

For example: there are reports on extensive research by your Government in new products and processes. A trans-

lation of data on inventions and discoveries abroad—information on over 3 million patents—a fortune in patents owned by your Government. All this is yours—for your use and your benefit.

Take advantage of the many ways in which your business can grow. In developing new products and services. In the lucrative foreign markets. In new U.S. markets. In attracting new industry to your local community. Just phone or write the U.S. Department of Commerce Office of Field Services in your city, or Washington 25, D.C. Your U.S. Department of Commerce is always ready to help you grow with America!



NOW'S THE TIME TO GET GROWING IN A GROWING AMERICA!

- 10-25,000 Total Q Range
- Self-Correcting UHF Resonating Capacitor
- Direct-Reading Inductance Scale
- 25 MV RF Measuring Level
- Measures "In-Circuit" Q of Self-Resonant Circuits

UHF Q METER

— measures
COMPONENTS,
CAVITIES
and SEMI-
CONDUCTORS

Q MEASUREMENT CHARACTERISTICS

Q RANGE:

Total Range: 10 to 25,000*
High Range: 200 to 25,000*
Low Range: 10 to 200

*10 to approx. 2,000 employing intern. resonating capacitor

Q ACCURACY: $\pm 20\%$ of indicated Q

Q CALIBRATION:

High Q Scale:
Increments of 1-5% up to 2,000
Low Q Scale: Increments of 3-5%

SPECIFICATIONS:

RADIO FREQUENCY CHARACTERISTICS

RF RANGE: 210 to 610 MC

RF ACCURACY: $\pm 3\%$

RF CALIBRATION:

Increments of approximately 1%

RF MONITOR OUTPUT:

10 mv. minimum into 50 ohms*

*At frequency monitoring jack

INDUCTANCE MEASUREMENT CHARACTERISTICS

L RANGE: 2.5 to 146 m μ h*

*Actual range depends upon measuring frequency

L ACCURACY: ± 11 to 15%*

*Accuracy depends upon resonating capacitance

L CALIBRATION:

Increments of approx. 5%

RESONATING CAPACITOR CHARACTERISTICS

CAPACITOR RANGE: 4 to 25 μ f

CAPACITOR ACCURACY:

$\pm (5\% + 0.2 \mu$ f)

CAPACITOR CALIBRATION:

0.05 μ f increments, 4-5 μ f

0.1 μ f increments, 5-15 μ f

0.2 μ f increments, 15-25 μ f

MEASUREMENT VOLTAGE LEVEL

RF LEVELS:

25, 40, 80, 140, 250 mv. nominal*

*Across measuring terminals

POWER REQUIREMENTS

280-A: 105-125/210-250 volts,
60 cps, 140 watts

280-AP: 105-125/210-250 volts,
50 cps, 140 watts

PRICE

280-A: \$2,610.00 280-AP: \$2,610.00
F.O.B. Rockaway, N. J.


Measure Q
Directly...

SEE US AT
BOOTHS
556-557
WESCON
SHOW

210-610 MC



TYPE 280-A

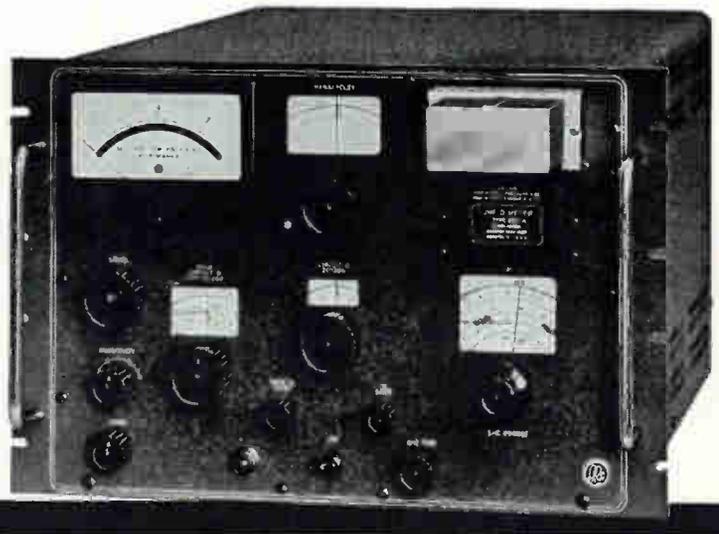

The new UHF Q Meter Type 280-A is a unique self-contained instrument for measuring the RF characteristics of components in the UHF range. The instrument consists of a specially designed oscillator, Q measuring circuit, and resonance indicator and, in application, is similar to its counterparts in the lower frequency ranges. In addition to performing conventional Q Meter measurements, in which the unknown component is resonated with the internal calibrated capacitor, the output of the oscillator and the input of the resonance indicator are available externally for directly measuring the Q of self-resonant devices.

The UHF Q Meter differs from conventional Q Meters in that it measures the actual percentage bandwidth of the resonance curve and, from this data, computes and reads out circuit Q. The test circuit is first tuned to resonance by adjusting oscillator frequency and/or resonating capacitance. The circuit is then detuned from the half-power point on one side of the resonance curve to the opposite half-power point by adjusting a calibrated dial, coupled to the oscillator frequency control, which directly reads out circuit Q.

BOONTON RADIO CORPORATION

A Subsidiary of Hewlett-Packard Company




P.O. Box 390, BOONTON, NEW JERSEY • Tel. OAKwood 7-6400
TWX: ROCKAWAY, NEW JERSEY 866 • CABLE ADDRESS: GOONRACO


HATHAWAY COMPONENTS RANK FIRST IN RELIABILITY




RSB COMMUTATOR provides the advantage of a high-performance commutator in an unusually compact package... Can be supplied with 1 to 24 contacts per deck; number of decks and poles per deck as required... Ideal for applications where low cost is a factor... Exceptional stability to environmental influences.

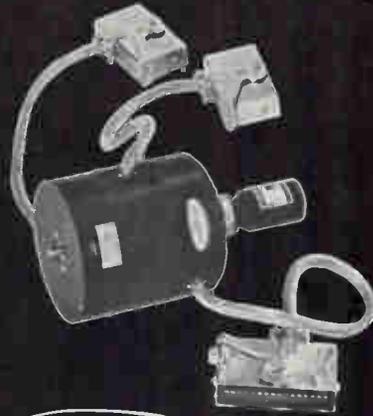

SHUTTER CONTROLLED RSC COMMUTATOR offers the benefit of precise phasing control to any specific timing sequence... Especially suited to systems requiring break before make operation, or controlled time periods between adjacent decks... Permanently lubricated prior to assembly.

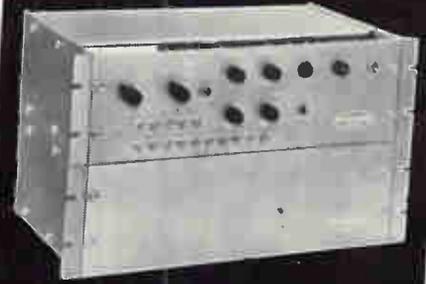

ELECTRONIC COMMUTATOR combines the advantages of both mechanical and electronic commutators... Scanning rate up to 1000 data points per second and 12 levels per cross point permits simultaneous scanning of differential inputs, shields of balance lines, calibration circuits and associated data.



Heart of Hathaway Commutators is the **DRIEED** — Industry's Most Nearly Perfect Switch.

HATHAWAY TUNING FORK FREQUENCY STANDARDS

Greatest possible resonator reliability is available in this advanced line of frequency standards. Use them in aircraft and missile guidance systems... as a constant speed control of aircraft generators... as a time reference for high-speed counting, ballistics measurement, geophysics... in instrument power supplies... as a fixed audio oscillator. They eliminate the count down circuits required with crystals, and meet all military and commercial specifications.



TYPE 40

FREQUENCY: 400 cycles per second (other frequencies available in same package). **ACCURACY:** $\pm 0.2\%$ (when used with recommended circuit). **STABILITY:** Less than .01% total deviation (-54°C to $+85^{\circ}\text{C}$) may be attained when used with the optional frequency trim circuit. Less than .004% total deviation ($+15^{\circ}\text{C}$ to $+35^{\circ}\text{C}$) may be attained when used with the optional frequency trim circuit.

TYPES 66 AND 76

FREQUENCY: Type 66—400 cps (240-2,000 cps available in same size package). Type 76—10,000 cps (2,000-10,000 cps available in same size package). **ACCURACY:** (when used with recommended circuit) $\pm 0.2\%$ (-54°C to $+85^{\circ}\text{C}$, no heater power). $\pm 0.02\%$ ($+15^{\circ}\text{C}$ to $+35^{\circ}\text{C}$, no heater power). $\pm 0.005\%$ (-54°C to $+85^{\circ}\text{C}$, with heater power).

TYPES 65 AND 75

FREQUENCY: Type 65—400 cycles per second (240 to 2,000 cps available in same size package). Type 75—10,000 cycles per second (2,000 to 10,000 cps available in same size package). **ACCURACY:** $\pm 0.2\%$ (-54°C to $+85^{\circ}\text{C}$, no heater power). $\pm 0.02\%$ ($+15^{\circ}\text{C}$ to $+35^{\circ}\text{C}$, no heater power). $\pm 0.005\%$ (-54°C to $+85^{\circ}\text{C}$, with heater, after 30 min. warm up).

Hathaway INSTRUMENTS, INC.

5800 EAST JEWELL AVE., DENVER 22, COLORADO

FOREIGN REPRESENTATION BY TERMINAL RADIO INTERNATIONAL, LTD., 3 W. 61ST ST., N. Y. 23, N. Y.


Skyline 6-8301
TWX DN 656

SEE THEM AT WESCON SHOW BOOTH 765-766


HATHAWAY DRIREED RELAYS

The highest available life ratings, and today's maximum in miniaturization and resistance to environmental effects are yours with the Hathaway Drireed Relay family. Reliability approaches that of solid state relays at a fraction of their cost and with drift-free operation. Relays are designed for printed circuit or on the chassis mounting and are miniaturized to save you up to 75% design space. Made-to-order relays are a Hathaway specialty... we will furnish a modular assembly of any number of contacts in a completed form.

NOW YOU CAN REPLACE LARGE,
CONVENTIONAL REEDS WITH
HATHAWAY DCB DRIREED CONTACTS...
TWICE THE LIFE OF COMPETITIVE REEDS!

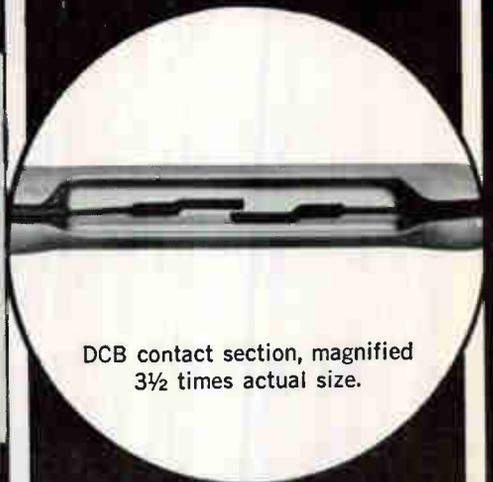

DCB contact section, magnified
3½ times actual size.



Heart of Hathaway Relays is the DRIREED
—Industry's Most Nearly Perfect Switch.



Hathaway

SERIES M (MINIATURE)

OPERATE TIME—TYPICAL: 600 micro-seconds, including bounce, for 28 vdc unit. OPERATING TEMPERATURE: -54°C to +85°C continuous. VOLUME: 0.110 cubic inches.



Hathaway

SERIES F (BUILDING BLOCK DESIGN)

NOMINAL VOLTAGE: 6 volts, 12 volts and 28 volts DC. OPERATING TEMPERATURE: -54°C to +85°C.



Hathaway

SERIES A, B AND C

VIBRATION: 20 g's to 2,000 cps, energized or non-energized. SHOCK: 50 g's. CONTACT RATING: 12 VA AC operation; 4 VA for DC operation; maximum current 125 ma and maximum voltage 200 volts. CONTACT LIFE: 5,000,000 operations at full load. 25,000,000 operations at half load. 1,000,000,000 operations at dry circuit (less than 2 ma).

See these NEW HATHAWAY PRODUCTS

for the first time
at WESCON

F SERIES—FORM C
DRIREED RELAY

RF COAXIAL
DRIREED RELAY

AUTOMATIC RESPONSE
PLOTTER—3

Hathaway INSTRUMENTS, INC.

5800 EAST JEWELL AVE., DENVER 22, COLORADO

SKYline 6-8301
TWX DN 656

FOREIGN REPRESENTATION BY TERMINAL RADIO INTERNATIONAL, LTD., 3 W. 61ST ST., N. Y. 23, N. Y.




Douglas Skybolt



North American A3J

DAYSTROM TRANSICOIL'S ROSTER OF MODERN MISSILES AND AIRCRAFT ...AND OUR SERVO ASSEMBLIES ABOARD THEM

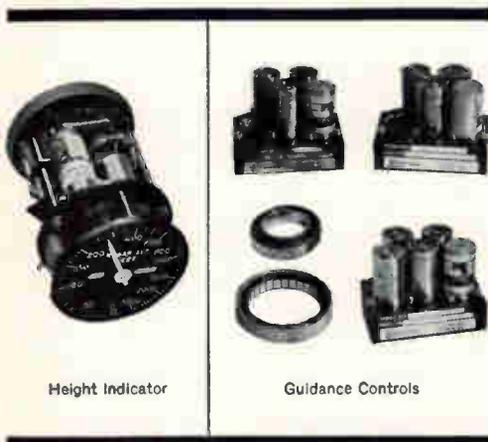

Height Indicator

Guidance Controls

As on a multitude of other weapons systems, Transicoil subsystems are aboard both Skybolt and the A3J. ■ For Skybolt, Transicoil supplies the guidance control packages shown at left. These consist of gimbal-mounted synchro resolver transmitters; azimuth, roll and pitch repeater assemblies; and synchro computing resolvers. ■ For the A3J, Transicoil supplies the radar height indicator shown at left. This precision airborne instrument, which utilizes synchro data from the altimeter, consists of control transformer, motor generator, transistorized servo amplifier, anti-backlash gear train, and the meter indicator itself. ■ All rotating components are size 8 in both applications, and are manufactured by Transicoil. This is design excellence and reliability. This is Daystrom Transicoil. Write for booklet, "Cases in Servo Control".

DAYSTROM, INCORPORATED
TRANSICOIL DIVISION
WORCESTER, PENNSYLVANIA
TELEPHONE 215-584-2421

only

ELECTRONIC MEASUREMENTS



NEW

CONSTANT-CURRENT POWER SUPPLIES

*offer all these exclusive features.**

- 1 Constant-current from less than 0.5 microampere up to 3 A.
- 2 Models to 1500 V DC compliance.
- 3 Voltage-limiting control to limit compliance.
- 4 Remotely programmable.
- 5 Modulation input . . . power supply can also be used as general purpose or operational amplifier.

***BRIEF SPECIFICATIONS**

MODEL	CURRENT RANGE		†VOLTAGE COMPLIANCE AT	
	MIN.	MAX.	MAX. I	MIN. I
C612A	1 μ a	100 ma.	260 V	100 V
C631A	1 μ a	100 ma.	420 V	300 V
°C638A	0.5 μ a	100 ma.	2100 V	1500 V
C624A	2.2 μ a	220 ma.	260 V	100 V
C632A	2.2 μ a	220 ma.	420 V	300 V
°C636A	2.2 μ a	220 ma.	735 V	600 V
C629A	2.2 μ a	300 ma.	205 V	150 V
C633A	2.2 μ a	300 ma.	420 V	300 V
C620A	5 μ a	500 ma.	110 V	50 V
C621A	5 μ a	500 ma.	160 V	100 V
C613A	10 μ a	1 AMP	115 V	50 V
C614A	10 μ a	1 AMP	170 V	100 V
°C628A	10 μ a	1 AMP	215 V	150 V
°C630A	10 μ a	1 AMP	280 V	200 V
°C625A	22 μ a	2 AMP	150 V	75 V
°C626A	22 μ a	2 AMP	190 V	100 V
°C615A	22 μ a	3 AMP	125 V	50 V
°C618A	22 μ a	3 AMP	170 V	100 V

° Voltage limiting control standard. Optional on all other models.

† For current vs. voltage compliance curves, request Specification Sheet 3072C.

Electronic Measurements Constant-Current Power Supplies were designed specifically for constant-current output. In this respect, they offer advantages in the field of semiconductor work that can't be matched by conversions of constant-voltage (voltage-regulated) power supplies . . .

Ask for Specification Sheet 3072C for all the facts.

SEE THEM
AT WESCON
BOOTHS
3419-3420



ELECTRONIC
MEASUREMENTS
COMPANY, INCORPORATED
EATONTOWN • NEW JERSEY



Time after time engineers specify Johnson components!

Whatever the choice . . . a tiny, color-coded nylon Collet Knob — or a flexible shaft coupling to handle both axial and angular shaft offset . . . time and time again design and development engineers specify Johnson components!

Manufacturers of more than 5,000 items for all segments of the electronic industry, Johnson offers a wide line of connectors; tube sockets; air variable capacitors; plus the hardware items described at the right. In addition, a complete line of heavy duty RF components is available for broadcast transmitting, RF heating, antenna phasing, and other commercial applications.

Equipment in this line includes: fixed and variable inductors; antenna phase sampling loops; isolation filter inductors; tower lighting filters; feed-thru bowl insulators; static drain chokes; RF contactors; and heavy duty make-before-break switches. For information on the Johnson RF component line, write for Catalog 560 — for detailed specifications on all other Johnson electronic components, write today for our newest components catalog!



E. F. JOHNSON COMPANY

1921 TENTH AVENUE S.W. • WASECA, MINNESOTA

INSULATORS—Low loss, high-voltage breakdown in either steatite or porcelain. High quality with heavy nickel-plated brass hardware — suitable for exposed applications. A complete line for immediate delivery from stock includes: Thru-panel Bushings and Insulators; Antenna Strain and Feeder Types; Cone and Stand-off Insulators; Lead-in Bushings; and Feed-Thru Bowl Assemblies.


PILOT LIGHTS — Over 47 separate assemblies immediately available from parts distributors throughout the country for original equipment or in-the-field replacement. Continuous indication neon types; models for high and low voltage incandescent bulbs; standard or wide angle glass; and lucite jewels. Specials, including types meeting military specifications, also available in production quantities. Detailed specifications listed in Pilot Light catalog 750 a — write today for your copy.

COLLET KNOBS AND DIALS — Rugged molded nylon body — fresh, modern styling — available in 13 colors. For $\frac{1}{8}$ " shafts — ideal for laboratory or test instruments. Four types: Basic Knob; Pointer Knob; Dial Knob, 10-0/180°; and Dial Knob, 10-0/270°. Other Knobs and Dials — Distinctive matching line of knobs and dials with brass inserts. Molded of tough, black phenolic to MIL-P-14 specifications. Metal dials and pointers are etched, satin aluminum, anodized finish.

SHAFT COUPLINGS — Flexible and rigid types for coupling $\frac{1}{4}$ " to $\frac{3}{4}$ "; $\frac{1}{4}$ " to $\frac{3}{8}$ "; and $\frac{3}{8}$ " to $\frac{3}{4}$ " shafts. **FLEXIBLE SHAFTS** — 3" to 6" lengths for out of line or up to 90° angular control.

PANEL BEARINGS — For use on $\frac{1}{4}$ " shafts and panels up to $\frac{3}{8}$ " thick. **CRYSTAL SOCKETS AND CERAMIC PLUG** — For low capacity, high voltage and high temperature operation. Glazed steatite, Grade L-4 or better. DC-200 impregnated. **RF CHOKES** — High quality construction. For 1.7 to 30 mc range and VHF.


INSULATORS, PILOT LIGHTS, KNOBS AND DIALS, HARDWARE

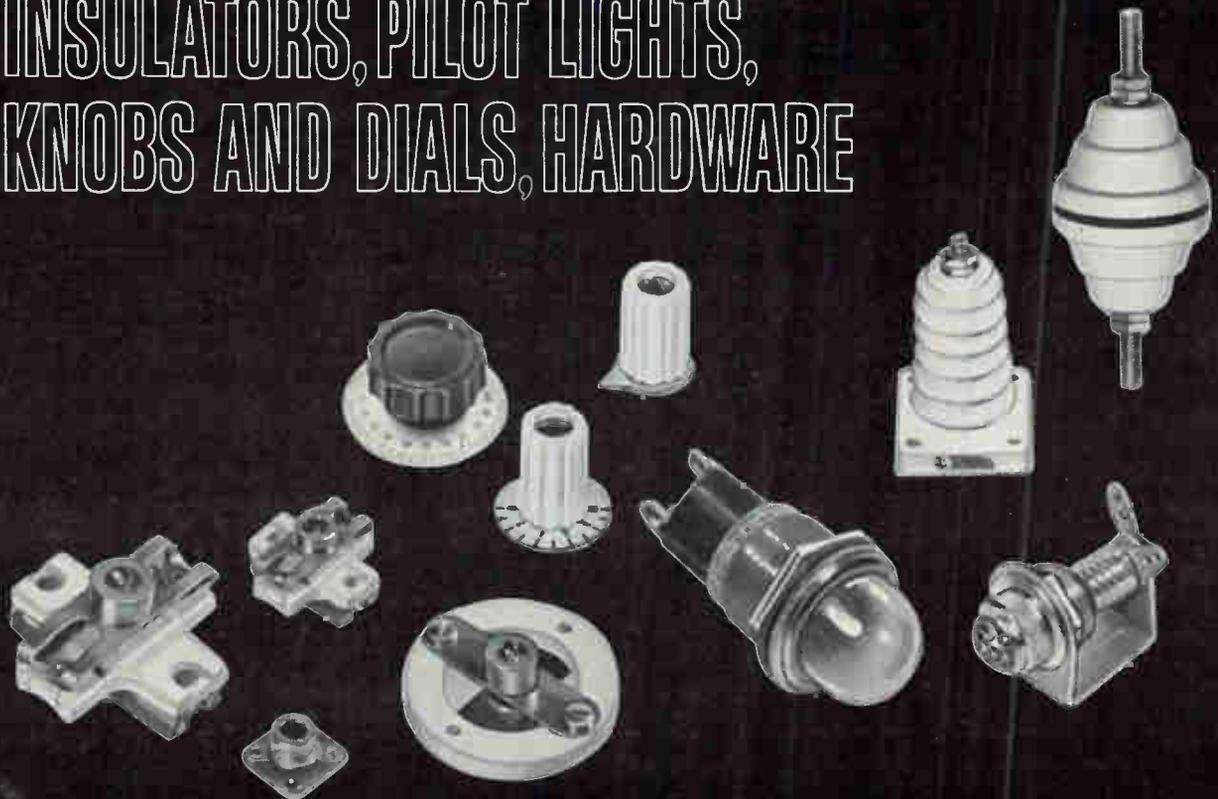

DETAILED COMPONENTS CATALOG AVAILABLE — Write today on company letterhead

• CAPACITORS • TUBE SOCKETS • CONNECTORS • PILOT LIGHTS • INSULATORS • KNOBS AND DIALS • INDUCTORS • HARDWARE

YOUR BEST VIEW AT WESCON '62 TEXAS INSTRUMENTS COMPONENTS



INTEGRATED CIRCUITS — See TI's full integrated circuit capability through catalogue, tailored and custom designs... circuitry of tomorrow in production today. **SEMICONDUCTOR NETWORKS** — See the new Series 51 **SOLID CIRCUIT**® semiconductor networks... low power (2-4 mw) digital silicon circuits in the smallest functional package available today. Semiconductor networks offer a greater potential for high reliability at low circuit cost than any other integrated circuit available. **TANTALUM FILM CIRCUITS** — See TI's new Tantalum Film Circuits for your miniaturized equipment programs. For analog and digital circuits requiring precise tolerances (1-2%)... or where low initial cost and quick reaction are required.



DIODES — See how the expanded MICRO/G® diode line gives you... low capacitance, fast switching... identical circuit performance as conventional diodes... 1/50th the volume. Be sure to see why MOLY/G® general purpose and switching diodes are your best selection for your circuits. See the silicon photo conductive diodes and the photovoltaic diodes used in high sensitivity and fast response applications.



RESISTORS — See today's most stable, most reliable precision carbon film resistors... pre-engineered to "Space Quality" specifications and hermetically sealed in hard glass to ensure long-term stability and reliability. See the *sensistor*® silicon resistor from TI... industry's first and broadest line of positive T.C. silicon thermistors for temperature compensation and sensing. See the CD 1/8 GR... smallest 1/8 watt carbon film resistor with welded cap and lead assembly... mechanically interchangeable with the RC-07 composition carbon resistor.



RECTIFIERS — See industry's broadest line of standard silicon rectifiers and voltage regulators... **PLUS**... thousands of special order devices. Make TI your first source supplier. See how EHR® manufacturing techniques can be applied to standard devices to increase your equipment reliability.



tan-TI-cap® **TANTALUM CAPACITORS** — See the famous Type SCM... now in voltage rating through **50V**... engineered, designed and manufactured for your circuit applications. Hermetically sealed for long-term stability, reliability and quality. For MIL-Type applications, specify CS12 and CS13 (MIL-C-26635A) from Texas Instruments.



MODULAR ELECTRONICS — See how TI's broad capability in design, manufacture and speedy delivery of encapsulated modules benefits you. Take advantage of this vast experience to meet your requirements for economical and reliable special assemblies.



SCR — See how TI's all-diffused silicon controlled rectifier line can meet or exceed your application requirements for DC or AC power control, triggering, motor control, or static switching. Learn what 200/ μ sec dV/dt capability can do for you.



MICROWAVE PRODUCTS — See TI's microwave product line available for high frequency applications. Complete display of GaAs tunnel, varactor and sampling diodes and silicon harmonic generator diodes.

*Trademark of Texas Instruments Incorporated

INTEGRATED CIRCUITS

Series 51 Semiconductor Networks

Complete line TI Integrated Circuits

Tantalum Film Circuits

DIODES

Micro/G® Diodes

Moly/G* Diodes

Complete line TI Diodes

RESISTORS

CD 1/8 GR Precision Miniature Resistor

Hard Glass Precision Resistors

sensistor® Resistors

Complete line TI Resistors

RECTIFIERS

Top Hat Rectifiers

Stud Rectifiers

Voltage Regulators

Full line TI Rectifiers

CAPACITORS

tan-TI-cap® Solid Tantalum Capacitors

SCR
 Complete line Economy SCR's

2N681A, 2N1842B Series

Complete line TI Controlled Rectifiers

MODULAR ELECTRONICS

High Voltage Rectifiers

High Voltage Bridges

Full Line TI Special Assemblies

MICROWAVE PRODUCTS

ALL PRODUCTS

CATALOG

NAME _____ TITLE _____

COMPANY _____


ADDRESS _____

CITY _____ STATE _____

Please send me additional information on: _____

FOR
COMPLETE
WESCON
INFORMATION

MAIL
THIS
CARD
TODAY

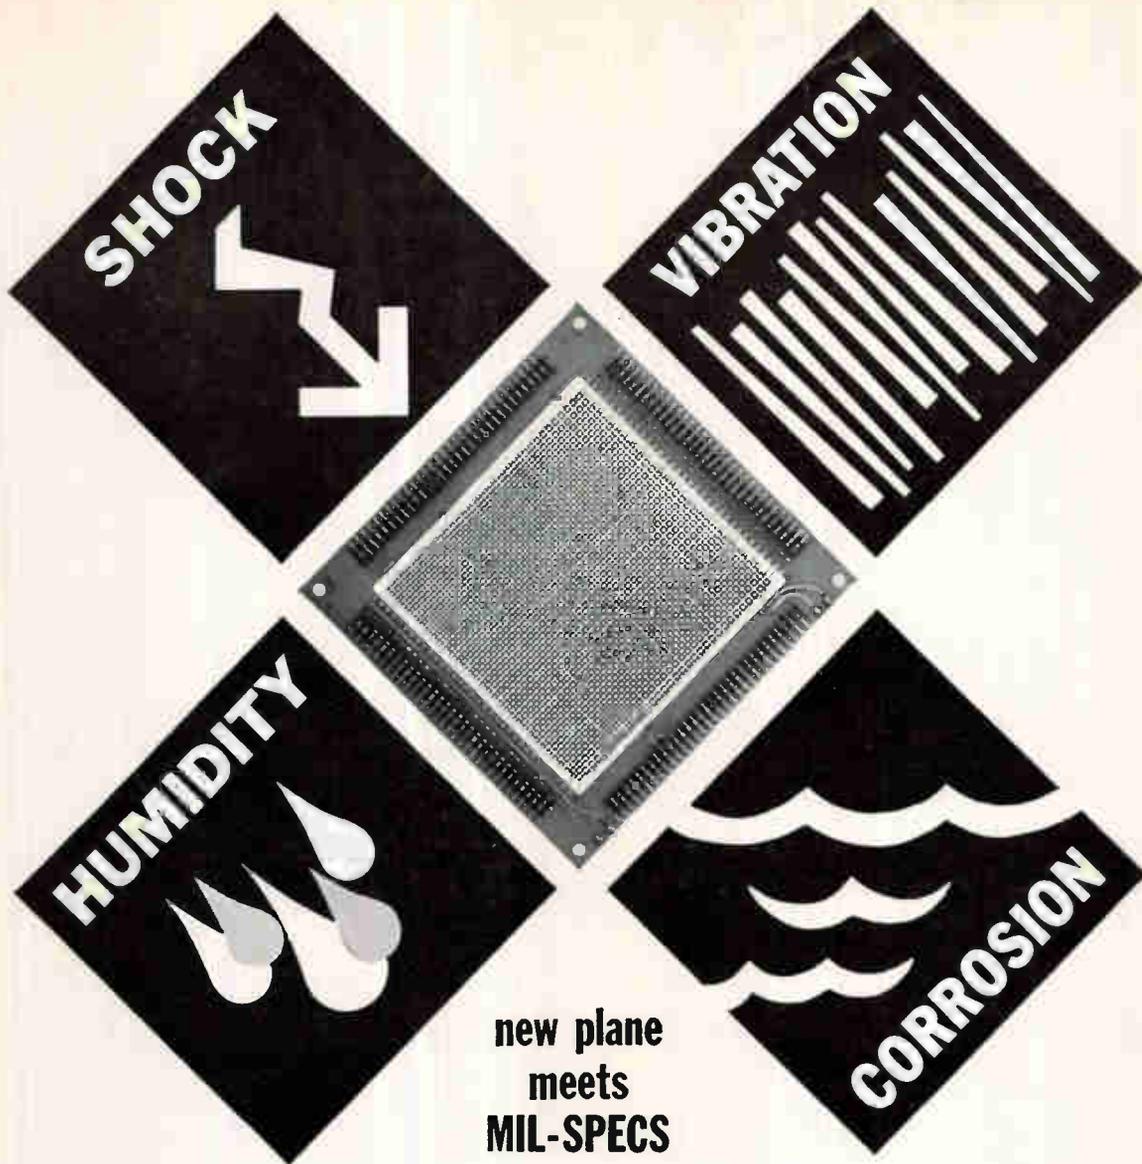

**new plane
meets
MIL-SPECS**

This typical 64 x 64 plane was subjected to rigid tests by the United States Testing Company, Inc., — punishing shock, high and low frequency vibration and corrosion from salt spray and humidity — in accordance with MIL-E-4970, MIL-T-4807 and MIL-STD-202B. Test results showed no degradation of windings or evidence of discontinuities or deterioration. Indiana General now offers this ruggedized plane for either coincident current or linear select applications for any matrix size at only a slight increase in cost over standard units. These planes can be organized into any capacity memory system for military or industrial equipment. Designing cores, planes, stacks, complete memory systems to withstand environmental conditions are typical of IGC's engineering abilities. Phone or write for copy of U. S. Testing Company Report to Indiana General Corporation, Electronics Division, Keasbey, New Jersey.

INDIANA GENERAL



To Contractors and Subcontractors
on U. S. Government Projects

Western Electric offers high reliability diodes, transistors and magnetrons

- Western Electric's Laureldale, Pennsylvania, plant is now in its tenth year of producing semiconductor devices of ultra-high quality and reliability for government applications.
- Devices designed by a resident Bell Telephone Laboratories group have performance standards exceeding specification requirements which are based on MIL-S-19500B.
- Mechanized production facilities and a comprehensive statistical quality control program assure uniformity and contribute to obtaining ultimate process capabilities.
- For further information on Western Electric-Laureldale electron devices and magnetrons . . .


Telephone — Area Code 215 — 929-5811

LAURELDALE PLANT
MAKER OF ELECTRON PRODUCTS



EASY STREET

Visit hp for the easiest-to-use, easiest reading, fastest, most accurate measuring instruments you've ever known... and for the softest, easiest-on-the-feet "pavement" you've ever walked!

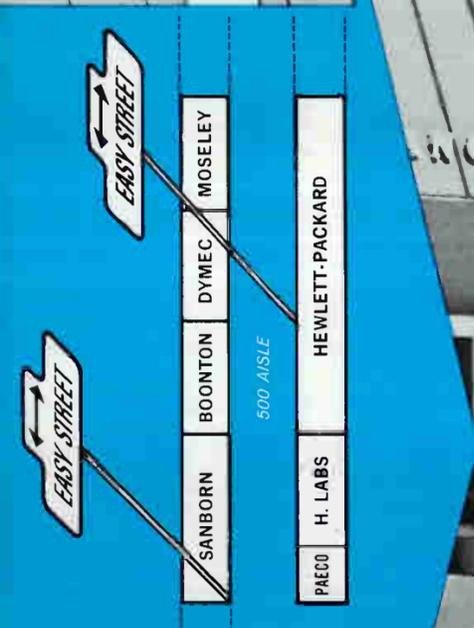

Don't miss hp Easy Street! Look for the carpet on the Main Floor, Los Angeles Sports Arena, the 500 Aisle, just off the center aisle.



New 130C 200 microvolt 500 KC Oscilloscope

Extremely high sensitivity, 200 $\mu\text{v}/\text{cm}$, helps make the new 130C Oscilloscope the ideal general-purpose instrument that lets you measure directly such low-level signals as the output of transducers, rf detectors, strain gauges without preamplification. Identical horizontal and vertical amplifiers provide balanced inputs on all ranges and may also be used single-ended and either ac or dc coupled. Similar amplifier phase characteristics permit easy measurement of relative phase between signals.

Bandwidth is 500 KC on all ranges. Sixteen calibrated ranges provide sensitivity from 200 $\mu\text{v}/\text{cm}$ to 20 v/cm, with an attenuator accuracy of $\pm 3\%$, a vernier extending the minimum sensitivity to 50 v/cm. Constant input impedance on all ranges permits the use of voltage divider probes. Twenty-one highly linear direct reading sweep times from 1 μsec to 5 sec/cm are available, accurate to within $\pm 3\%$. Vernier extends slowest sweep to 12.5 sec/cm, and sweep magnification (X2, X5, X10, X20, X50) is accurate within $\pm 5\%$ on sweep rates not exceeding a maximum of 0.2 $\mu\text{sec}/\text{cm}$.

Automatic triggering, which may be locked out if desired, provides a bright base line even in the absence of a synchronizing signal. Other features include the exclusive hp no-parallax, non-glare internal graticule CRT, human-engineered front panel for simple operation, push button beam finder and hp modular cabinet for bench and rack use in a single instrument. \$695.00.



New 3400A RMS Voltmeter

This new true rms voltmeter lets you read, with maximum accuracy, the root-mean-square value of all waveforms, 100 microvolts to 300 volts, 10 cps to 8 MC. Crest factor is an unequaled 8:1 minimum, the 3400A responding accurately to signals with that ratio between peak and rms amplitude. The ratio increases with decreasing input (16:1 at half scale).

With a linear scale, which makes the 3400A the true rms voltmeter with today's highest resolution, the instrument provides up to 1.0 volt dc linear output for recorders (maximum current 1 ma). The 3400A is fully protected from inadvertent overload, and its high stability eliminates the conventional zero-set calibration. Accuracy is an unprecedented $\pm 1\%$ of full scale, 50 cps to 3 MC, $\pm 5\%$ of full scale, 10 cps to 8 MC.

Input impedance is 10 megohms shunted by 20 picofarads. Output impedance is 1,000 ohms nominal. The modular cabinet is 5 1/4" wide, 6 1/2" high and 12" deep. \$525.00.



New 310A High Frequency Wave Analyzer

Extremely high frequency and voltage accuracy is yours with this new all solid state wave analyzer for analysis of multichannel communications systems, measurement of filter characteristics, noise analysis, and measurement of oscillator and amplifier distortion. Frequency range, depending on choice of selectivity is 1 KC to 1.5 MC, 5 KC to 1.5 MC, 10 KC to 1.5 MC. Selectivity is ± 100 cps, ± 500 cps, $\pm 1,500$ cps at 3 db points. Frequency accuracy is $\pm (1\% + 300$ cps). Continuous linear tuning with digital frequency readout.

Voltage range is 10 μv to 100 v FS, 15 ranges, with interlocked input attenuator and range controls. Voltage accuracy $\pm 5\%$ full scale, all ranges. Automatic frequency control (switchable) with wide dynamic range locks onto drifting or FM distorted signals.

Restored output of signal components in bandpass. BFO output of frequency to which analyzer is tuned. Will function as a receiver detecting single side-band and AM signals. \$2,000.00.



New 5245L 50 MC Solid State Counter



This new hp counter measures frequency directly to 50 MC.

Also measures period, period average of up to 10^6 periods; ratio between two frequencies, and, with the addition of versatile plug-ins, will count frequencies to 512 MC and measure time interval of 1 μsec to 10^9 sec.

And you can make all these measurements with unprecedented accuracy, with the new proportional oven-controlled crystal time base offering stability of ± 3 parts in 10^9 per day. The solid state counter, just 5 1/4" high with plug-ins, provides short-term stability of ± 5 parts in 10^{10} . Sensitivity is 0.1 v, and the counter operates from -20° to $+65^\circ\text{C}$.

New, close-spaced rectangular Nixies reduce the 8-digit readout to an easy-to-scan 6" while preserving full digit size. Display storage retains reading of most recent measured quantity, changing only if the measured count changes. Sample rate is adjustable and independent of gate time.

Features include remote programmability of time base and function controls, BCD outputs, 8 standard output frequencies switch controlled with time base stability, automatic decimal and units indication. hp 5245L, \$3,300.00. hp 5251A Frequency Converter, plug-in to extend counter frequency to 100 MC, \$350.00. hp 5253A Frequency Converter, to extend counter frequency to 512 MC, \$500.00. hp 5262A Time Interval Unit, plug-in to convert counter into an accurate time interval counter with 0.1 μsec resolution, \$300.00.

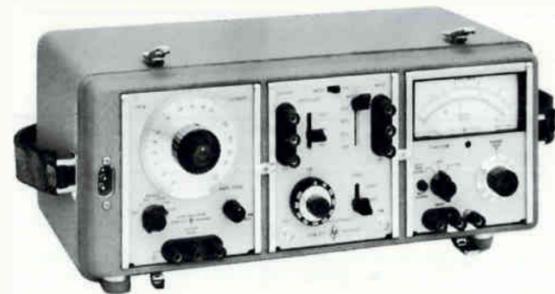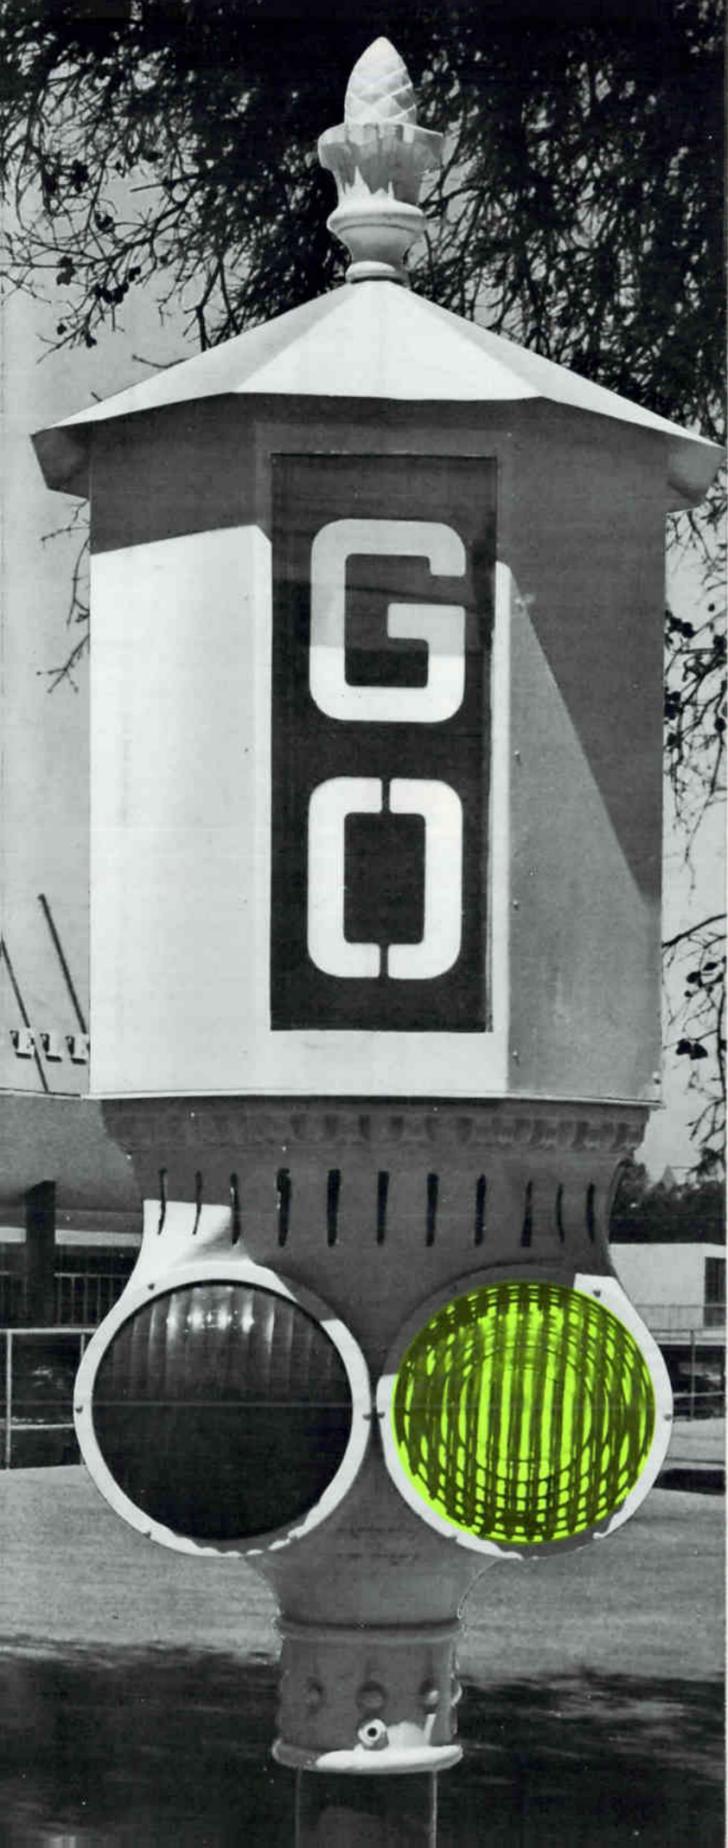

New 3550A Portable Test Set

☉ 3550A Portable Test Set is a versatile general-purpose frequency response test set for use in laboratories, in production and field. Completely solid state, the 3550A can be operated from either 115 volt/230 volt (50 cps to 1,000 cps) or from self-contained rechargeable batteries. The unit contains its own recharging circuit and can be operated from an ac line while being recharged.

The signal source of the 3550A is the reliable ☉ 204B Oscillator and the detector is the ☉ 403B AC Voltmeter. ☉ 353A Attenuator/Patch Panel provides balanced input and balanced output, as well as impedance matching into 135, 600 and 900 ohm systems to allow readings directly in dbm. It is also possible to measure the frequency response of transmission lines from 50 cps to 552 KC with convenience and ease.

Frequency range of the ☉ 204B Oscillator is 5 cps to 552 KC; ☉ 403B Voltmeter frequency range is 5 cps to 2 MC. ☉ 3550A, Price on request.



New 403B Solid State AC Voltmeter

The compact 403B is a completely portable instrument that measures from 0.001 to 300 v (in 12 ranges), 5 cps to 2 MC. Its portability, plus wide-range measuring capabilities make it one of the most versatile ac voltmeters available today. Rechargeable batteries are incorporated for convenient field use, and a self-contained charging circuit can function while the voltmeter is ac operated on your bench. Accuracy, within $\pm 2\%$ of full scale, 10 cps to 1 MC; 5%, 5 to 10 cps and 1 to 2 MC. Responds to average value of input waveform, is calibrated in the rms value of a sine wave. Reads directly in db, as well as voltage. Signal ground may be ± 500 v dc from external chassis. Weighs only 6½ lbs. \$310.00.



175A 50 MC Oscilloscope

You get a full 6 x 10 cm display on the exclusive ☉ internal graticule CRT, free from parallax, in the 175A Scope and you get a clear display, without distortion or defocusing. The front

panel astigmatism control common to other scopes is no longer necessary. The 175A is a universal oscilloscope with dual trace vertical bandwidth capacity greater than 40 MC. Eight separate vertical and horizontal plug-in units give the 175A the greatest versatility ever offered in a general purpose 50 MC scope. The 175A features simplified circuitry for more reliable performance and easy maintenance. It is housed in the new ☉ modular cabinet . . . a single instrument for both bench use and rack mount. Simple triode circuits are used in the vertical amplifier. Complicated distributed amplifiers are not employed. The 175A is as easy to service as it is to use! Internal sweep 0.1 μ sec/cm to 5 sec/cm (12.5 sec/cm with vernier), accuracy $\pm 3\%$, 10 nsec/cm with X10 magnifier. Horizontal amplifier passband, dc to 300 KC. Extreme versatility with plug-ins: 1750A 40 MC Dual Trace Vertical Plug-in, \$285.00; ☉ 1753A 40 MC Single Channel Vertical Plug-in, \$155.00; ☉ 1752A 5 mv Vertical Amplifier, \$225.00; ☉ 1780A Auxiliary Plug-in, \$25.00; ☉ 1783A Time Mark Generator, \$130.00; ☉ 1781A Sweep Delay Generator, \$375.00; ☉ 1782A Display Scanner, price on request; ☉ 175A, \$1,325.00.




8614A UHF Signal Generator

Provides UHF signal, 800 to 2,400 MC, automatically leveled within ± 0.5 db from 0 dbm to -125 dbm, or un-leveled 10 mw or

more across the band. Digital frequency setting and readout, push button mode and function selection. Sets to within 2 MC. Readout accuracy to $\pm 1\%$. Frequency stability 0.05%/°C; less than 1,000 cps peak incidental fm; \$1,650.00.

8714A Modulator

Absorption-type modulator for use with any signal source, 800 to 2,400 MC, to provide rf pulses and square waves with < 20 nsec rise, < 10 nsec decay time, and an on-off ratio up to 80 db. No incidental FM, jitter less than 1 nsec. Internal pulse, square-wave generator, variable rep rate 50 cps to 50 KC. External sync, modulation to 1 MC. \$850.00.

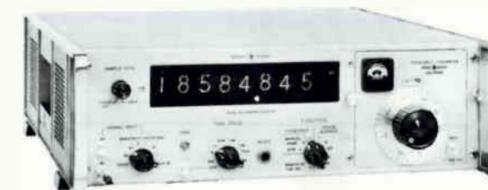

5243L 20 MC Counter

More measurements with greater accuracy are yours with this solid state counter. Measures frequency, time interval, period, multiple period average, ratio, multiple ratio, scales by decades. Stability 3 parts in 10^9 /day; 5 parts in 10^{10} /short term. Measures to 512 MC with plug-in, to 20 MC directly. Full storage display on easy-reading, close-spaced Nixies. BCD, std. freq. outputs. ☉ 5243L, \$2,950.00. ☉ 5251A Frequency Converter, to extend counter range to 100 MC, \$2,950.00; ☉ 5253A Frequency Converter, to extend counter range to 512 MC, \$500.00; ☉ 5262A Time Interval Unit, \$300.00. The 5243L is just 5¼" high including plug-ins.



5233L 2 MC Universal Counter

You can make frequency, period, time interval and ratio measurements with the 5233L, which provides a 6-digit display in the new rectangular Nixies. Only 3½" high, the rugged solid-state counter has a maximum counting rate of 2 MC. High input impedance of 1 megohm. Sensitivity 0.1 volt rms. Display storage for non-blinking readout. Manual scaling for long term averaging without exceeding readout capacity. Human-engineered front panel for easy operation. Modular construction for bench and rack use in a single instrument. BCD output. \$1,800.00.



241A Push Button 1 MC Oscillator

Here is a 1 MC oscillator which lets you punch in the exact frequency you want, starting with 10 cps, 1% basic accuracy, 0.02% resetability. Simple push button operation provides you with 3-digit resolution

— an ideal instrument for measurement situations where several preset frequencies are needed quickly and accurately. Frequency stability is better than $\pm 0.03\%$ /°C, from 0 to 55°C. The compact design increases the versatility of the 241A for bench, rack mount or portable use. \$425.00.

With hp on **Easy Street**

...measuring ease, accuracy, convenience in advanced equipment from...

DYMEC New DY-2010E Digital Data Acquisition System. Permits scanning, measuring and recording up to 400 low and normal level dc inputs in the presence of high common mode noise. System includes DY-2911A Crossbar Scanner, DY-2401A Integrating Digital Voltmeter, DY-2545A solid state High Speed Coupler and high speed paper tape punch.

F. L. MOSELEY New Moseley Model 680 solid state strip chart recorders for cool, reliable operation. One mv/inch to 20 v/inch in ten calibrated ranges. Eight instantly selected chart speeds. Instant load, tilt-front chart carriage and dual mode paper take-up or tear off. Drives output-potentiometers, limit switches and digitizers. Models: 680, \$750.00; Model 681 Single Range, Dual Speed, \$625.00; Model 682 Thermocouple Recorder, \$675.00; Model 683 Milliammeter Recorder, \$625.00.

HARRISON LABS New 6455 DC Power Supply: 0 to 36 v dc, 0 to 75 amps. Output is continuously variable with a continuously variable current overload control. Line stability $\pm 0.5\%$ for line variations from 105 to 125 volts. Ripple less than 0.5% rms. Completely solid state, \$1,450.00.

PAECO New 4011 Static Inverter for a reliable source of 400 cps power for laboratory or field use. Input, 24-32 v dc; output power, 180 va; output voltage, 115 v (adjustable $\pm 10\%$); output frequency, 400 cps ± 1 cps; output waveform: sine; output regulation, $\pm 2\%$. \$790.00. Also a wide array of other magnetic components, transformers, inductors, delay lines, magnetic amplifiers, and filters.

SANBORN Model 860-4000 FIFO Amplifier, 0 to 10 KC, fully transistorized, ideal for amplifying data from wide bandwidth transducers. Model 200 Magnetic Data Recorder, 7-channel FM-tape system. Model 360 Event Recorder, records up to 120 parallel ON-OFF events on a 16" wide electrically sensitive chart. Model 350-2500 True RMS Preamplifier (25 to 300 v, 0.05 to 500 cps) and Model 7 DCDT Differential Transducer former Displacement Transducer providing unlimited resolution, high accuracy and sensitivity no phase and balancing problems.


BOONTON RADIO New Type 202-H FM-AM Signal Generator covers the frequency range from 54 to 216 MC and is designed for the testing and calibration of FM receiving systems in the areas of broadcast, FM, VHF-TV, mobile, and general communications. The generator consists of a three-stage RF unit, together with a modulating oscillator and power supply, all housed in a single cabinet which may be adapted for rack mounting. Completely solid state power supply furnishes all necessary operating voltages and may be switched for inputs of either 105-125 or 210-250 volts, 50-60 cps. \$1,365.00.

PRICES AND DATA ARE TENTATIVE



HEWLETT-PACKARD COMPANY


1501 Page Mill Road, Palo Alto, California, Area Code 415, DA 6-7000 • Sales and service representatives in all principal areas; Europe, Hewlett-Packard S.A., 54-54bis Route des Acacias, Geneva, Canada, Hewlett-Packard (Canada) Ltd., 8270 Mayrand Street, Montreal.

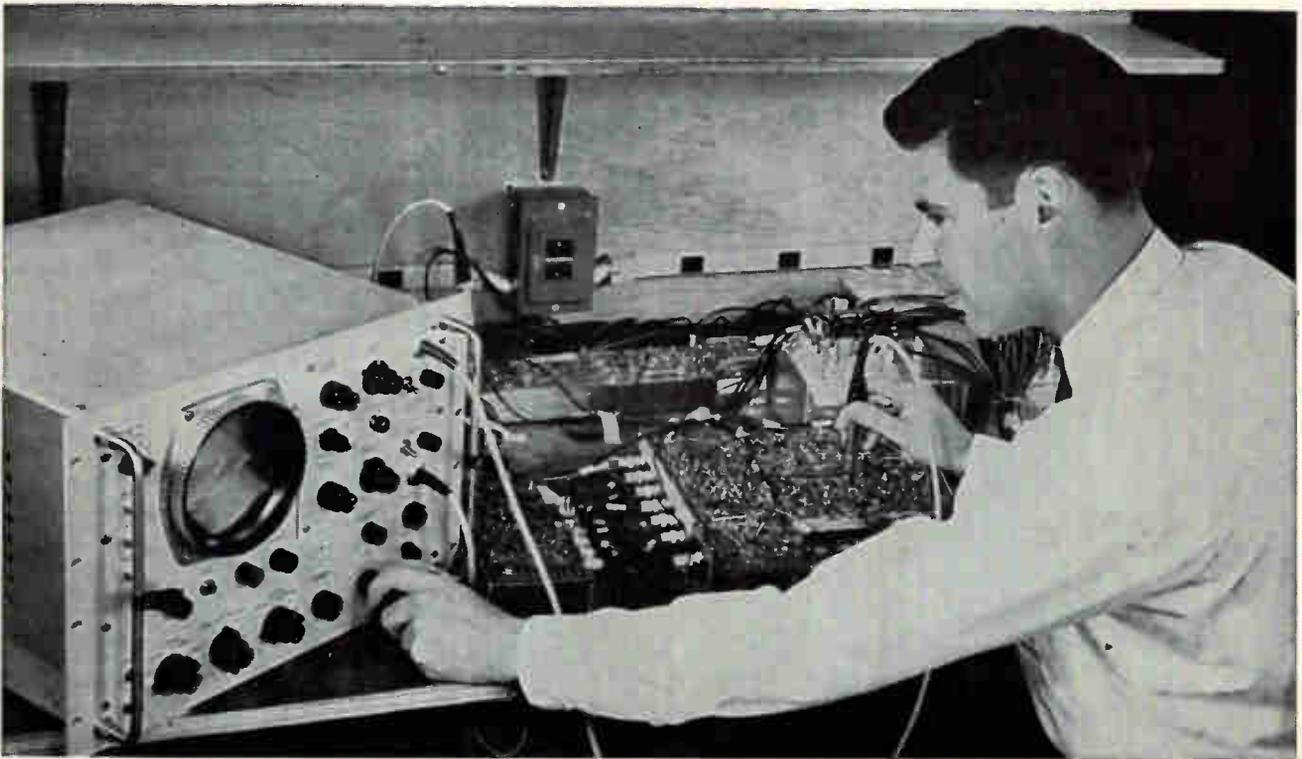

HIGH-SPEED digital differential analyzer using 82 tunnel diode circuits, built by Bendix Research Laboratories

1962 WESCON: A Technical Preview

Advances described include use of tunnel diodes in high-speed differential analyzer and low-power memory, chirp signals to transmit digital data, new strain transducer and an optical decision filter

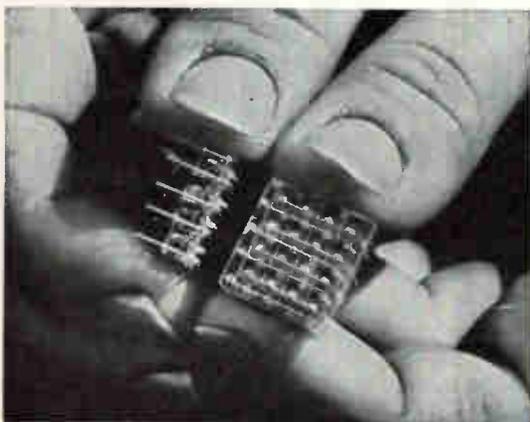


NON-DESTRUCTIVE random-access memory
by Litton Systems, Inc

By HAROLD C. HOOD Pacific Coast Editor

NEW APPLICATIONS for tunnel diodes, a novel jam-proof communication technique, space instrumentation systems and several new solid-state devices will be among the technical advances featured during the upcoming four-day 1962 WESCON technical program. Although the number of technical sessions has been cut almost in half this year, most of the papers are considered to be of exceptionally high quality by the technical program committee.

100-MC TUNNEL DIODE DDA—High-speed tunnel-diode circuits are reported to have been used in complex logic configurations at Bendix Research Laboratories, where a two-integrator serial DDA (digital

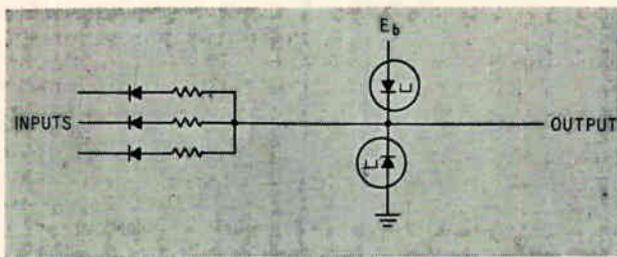

LOGIC CIRCUIT, heart of digital differential analyzer, uses two tunnel diodes with valley switching—Fig. 1

differential analyzer), using 82 such circuits operating at a clock rate of 100 mc, has been built.¹ All tunnel diodes used are standard germanium 1N3129 units with a nominal peak current of 20 ma.

To overcome limitations frequently imposed by inadequate tolerances and design inflexibility, a new basic circuit was developed. A variation of the Goto pair, it uses valley switching instead of peak switching and has one end of the pair grounded rather than employing the usual double-ended circuit. (See Fig. 1). Backward diodes are used in the coupling elements. Improved tolerances of the circuit are due to locking characteristics of tunnel-diode pair circuits; design flexibility is realized with valley-current switching.

AND, OR and MAJORITY operation may be achieved by the one basic circuit by shunting one tunnel diode with a resistor, thus adjusting the difference between valley currents of the two tunnel diodes. Valley currents typically range from 1.5 to 2.5 ma.

Power is supplied to the gates and directionality of information flow is provided by a three-phase clock. Undesired interaction between circuits is reduced by using two types of germanium backward diodes. Devices having a nominal peak current of 70 μ a, a nominal forward drop of 75 mv at 5 ma, and nominal capacitance of 3 pf are used where a fanout of 3 is used. Otherwise, diodes with a nominal peak current of 400 μ a, a nominal drop of 75 mv at 5 ma, and a nominal capacitance of 10 pf are used. Coupling resistors are 100 ohms, and clock source impedance for each gate is fixed by 10-ohm resistors.

P-N JUNCTION STRAIN TRANSDUCER—Elastic strain effects on the resistance of p-n junctions have recently been noted and the possibility of utilizing them in transducer applications has been investigated. Raytheon Research Division fabricated some experimental device structures, and found that when they are subjected to forces of a few thousand dynes, their resistance changes by more than three orders of magnitude.²

A conical stylus directed at right angles to the diode surface, parallel to the junction plane, applies the stress. The strain effect manifests itself as a current increase across the shallow p-n junction subjected to anisotropic stress; its reported magnitude exceeds those of any strain effects of conventional strain sensors.

Depending on electrical and mechanical stress bi-


ases applied, devices can be operated at various impedance and sensitivity levels. Sensitivity for a given electrical bias varies with the junction material, junction depth, and the diameter of the stressed region. Junction depth is the main determining factor, since sensitivity goes up exponentially as depth decreases.

Microphones are one possible application of the new device. One experimental model, under reverse bias from a high-impedance supply and subjected to a speech level of 60 db at five feet, was found to have 100 mv output. Frequency response of the device extends far beyond the audible range. The strain transducer described can be made considerably smaller and lighter than conventional transducers.


PLANAR EPITAXIAL PNP SWITC—A versatile planar epitaxial three-terminal pnp switch, exhibiting high turn-off gain, high switching speed, high breakover voltage, low holding current, and low on-state resistance has been developed by Sylvania Electric Products.³ Suggested applications include cross-point matrix switching, digital information switching, core driving, memory elements, flip-flops, and other uses where a bistable characteristic is required.

The device is fabricated with two planar diffused junctions and two epitaxial layer growths on a degenerate p-type substrate. A narrow p-type layer surrounds the gate terminal, and junctions between cathode and gate and the middle, or forward bias blocking junction, are oxide-protected planar junctions. Reverse bias blocking junction is bounded on both sides by epitaxially-grown, high-resistivity p- and n-type materials.

Turn-off gains in the unit have ranged from 6 to 12 at a load current of 50 ma, or 250 to 1,000 times holding current (current at which the sum of the pnp and npn alpha reaches unity.) Holding currents have been observed from 50 μ A to 200 μ A, and gate turn-on currents from 1 to 3 μ A are typical. Turn-on and turn-off times are 50 to 100 nsec, and switching

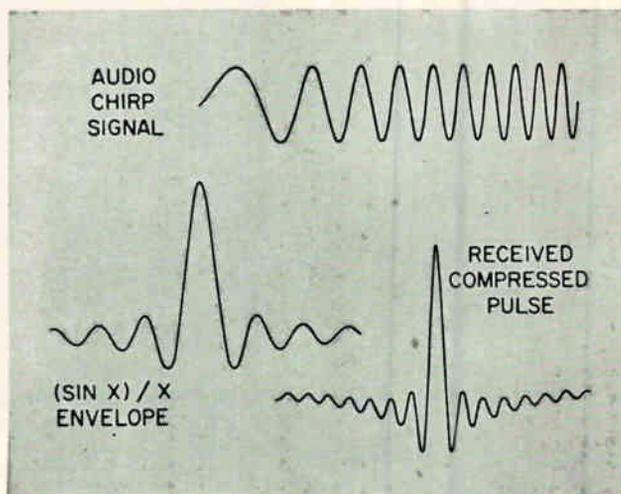

CHIRP SIGNAL is an interference-resistant and jam-proof medium of communication developed at RCA. Signal above contains only ten cycles—Fig. 2.

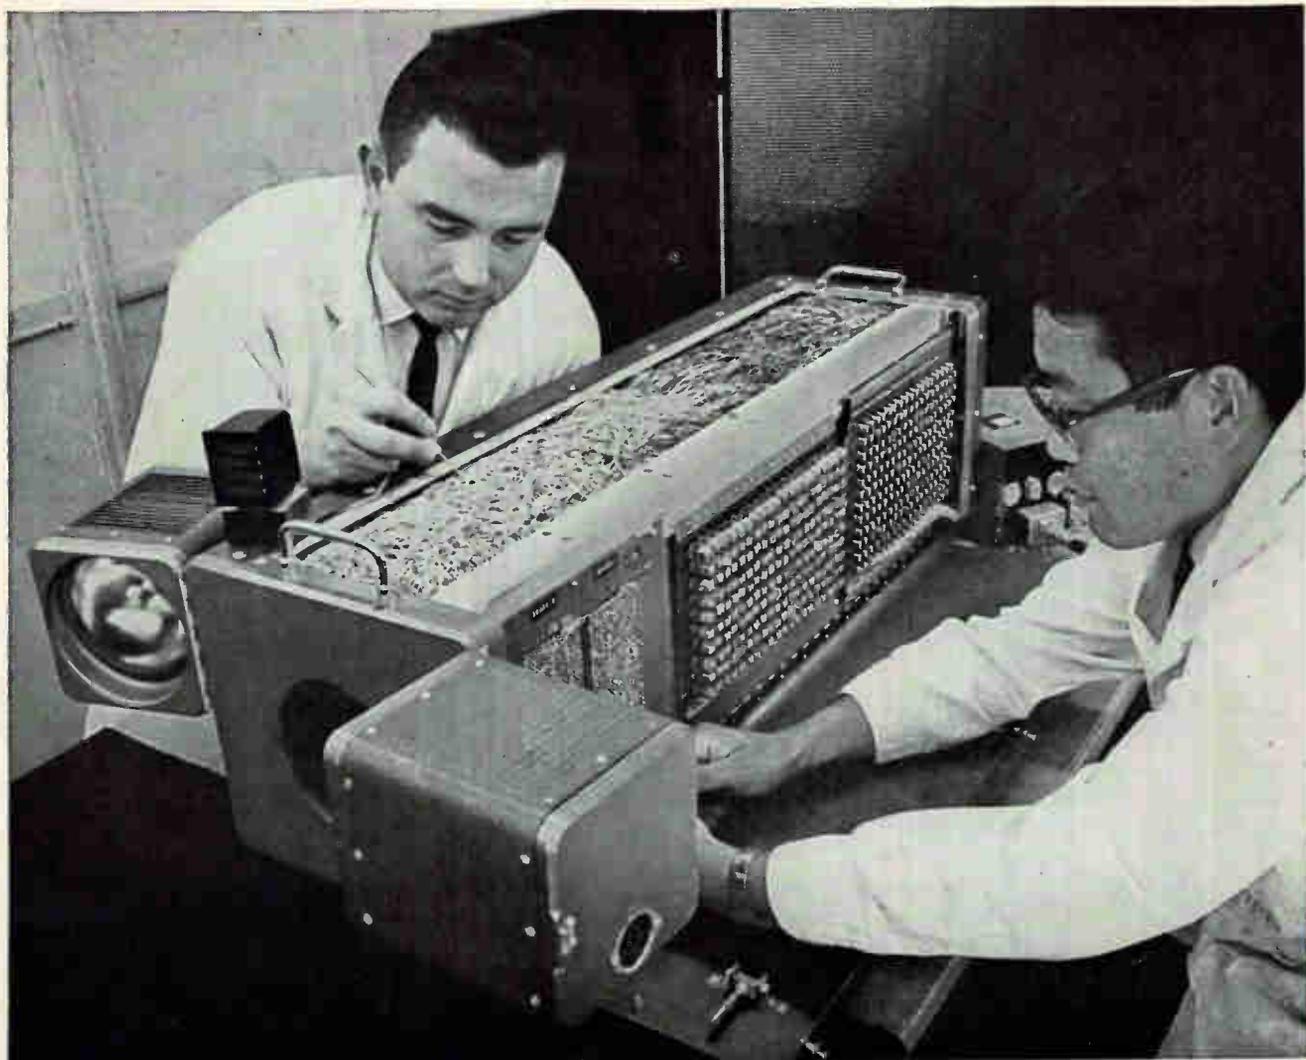

OPTICAL DECISION filter, developed by Astropower, using perceptron principles, recognizes three-dimensional geometric shapes. Wiring of associative networks is seen at top⁸

characteristics are currently being improved.

Forward breakover voltages are over 100 v, and with the addition of a gate cathode shunt, are found to be very uniform. At 50 v forward bias, leakage is less than 200 nA. The current-carrying capability is in the hundreds of milliamperes range. High reliability of the device reportedly is shown by its ability to withstand 300-deg C storage temperatures.


NON-DESTRUCTIVE MEMORY — Circuit techniques used by Litton in a new non-destructive random-access tunnel-diode memory minimize the limitation on switching rate imposed on most memories by the speed of addressing and readout circuits, and permit a significant reduction in power requirements. The device can operate at frequencies up to 10 Mc over the entire military environmental spectrum, and appears well suited for low to medium capacity scratch-pad applications in military and space equipment where weight, volume, and power considerations are paramount.⁴

A non-destructive read technique is used so that the writeback portion of a conventional destructive read cycle is not required. Clear-write cycle time

has been reduced by a circuit approach which allows a word to be cleared and written in simultaneously. A direct-coupled read amplifier, able to drive several logic gates, eliminates normal requirements for a buffer register and associated delays.

Also, thermal environment sensitivity has been minimized so that large variations in tunnel-diode parameters may be tolerated and voltage transients over 10 percent have no effect. Using the two voltage states of a tunnel diode to represent binary information, the memory requires only a single amplifier stage for discrimination. Conventional requirements for strobing the memory-cell output signal are eliminated by the direct-coupled readout. Each bit of the memory is represented by the interconnection of a tunnel diode, a resistor, and a conventional diode. Silicon tunnel diodes were selected for their higher voltage swing and broad operating temperature range, even though their switching speed is considerably lower than that of germanium units. One-ma devices are used, and write currents of 1.2 ma, and read and bias currents of less than 1 ma are required.

Average dissipation of 2 mw per bit can be obtained, or 1,000 words of 20 bits each with a total

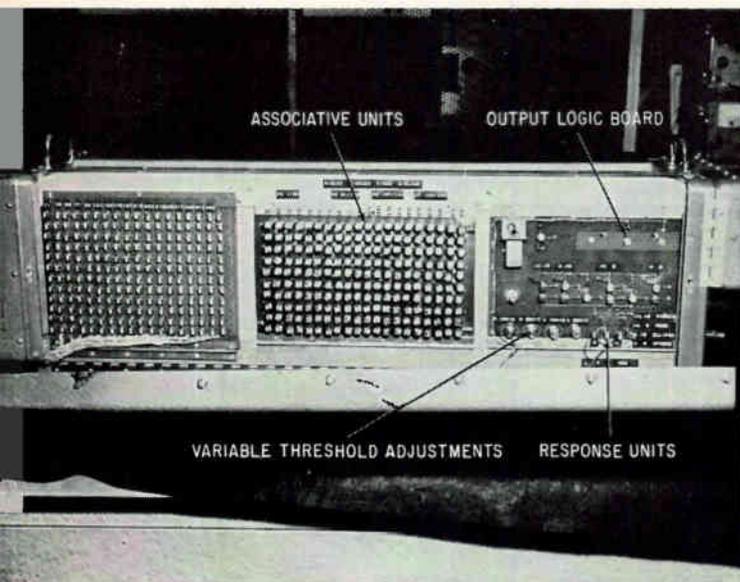

CIRCUITS of optical decision filter are clearly seen along side of unit

dissipation of less than 40 w. The photograph shows two welded modules each containing the basic memory element circuits for 16 bits of memory.

CHIRP SIGNALS FOR COMMUNICATIONS—

Work done at RCA's Defense Electronic Products division in Tucson confirms the theory that chirp pulses, used extensively to obtain increased radar range, are a useful new technique for transmitting digital information, with practical advantages over frequency shift keying and other commonly used methods. Areas of application include teletypewriter and data entry systems.⁵

These long frequency-modulated pulses, having continuous frequency changes in one direction without reversal for the duration of the pulse, can use existing voice channels effectively, have excellent noise discrimination characteristics for low bit rates, are less affected by Doppler shift and single-sideband frequency translation than other systems, and show relatively high immunity to certain periodic man-made interferences. Other advantages include adaptability to any bandwidth, resistance to jamming, and no requirement for synchronization.

Figure 2 shows a chirp signal covering the voice bandwidth, which could be transmitted over many existing voice channels. This pulse is linearly frequency modulated from 300 to 3,300 cps, has exactly 10 cycles, and is 0.00555 second long. Transmission could be at 180 bits a second.

Signal-to-noise ratio can be improved by pulse-compression techniques using matched filter correlation. The pulses may be generated by pulsing a matched filter, this being the reverse of the detection process. The impulse, applied through a resistor mesh, establishes a chirp wave on the transmission line, causing the wave emerging at one end to be ascending in frequency and that at the other end to be descending in frequency. A suitable resis-

tor mesh is shown in Fig. 3.

Considerable reciprocity is possible with most chirp-pulse configurations: input or output may be at either end of the transmission line, inputs and outputs may be reversed, modulators may be used as demodulators, pulses may be compressed or expanded, and pulse frequency may increase or decrease.


HALL-EFFECT ENCODER—A magnetic angle encoder using two microminiature Hall-effect probes and a single-track magnetic drum offers possibilities for reliable, compact high-resolution units for inertial guidance and space-platform use. Readout at zero angular rate can be accomplished by this AC Spark Plug Co. device since direct measurement is made of the magnetic drum's recorded field rather than the usual time derivative of flux.⁶

A semiconductor crystal mounted in a plane parallel to and within 0.0003 inch of the drum surface constitutes the probe. Both indium arsenide and indium antimonide crystals have been used to sense the vertical component of the drum's magnetic signal.


Probe excitation is 10 mw at 40 kc. The resulting signal, which is amplified, detected, and shaped into square waves for input to a digital computer or bi-directional counter, can be amplitude or carrier phase modulated by the balancing resistor between the crystal input and output. Maximum modulating frequency is about 1,000 cps; it is set by drum size, maximum rpm, and recorded bit packing density.

Bit densities of 180 bits an inch can be resolved, and angular resolution within 11 minutes of arc has been obtained using a 1.8-inch-diameter single-track magnetic drum and two probes placed 90 degrees apart. The two probes sense direction and double angular resolution. A probe is shown in Fig. 4.

Both plated CoNi and sprayed iron-oxide magnetic dispersion have been used for coating the aluminum drum with a 0.0005-inch magnetic layer. While a track width of only 0.03 inch is required, the drum used is 0.125 inch wide. Electronic synchronization of the master oscillator and a synchronous recording drive motor is used for initially writing the one-zero

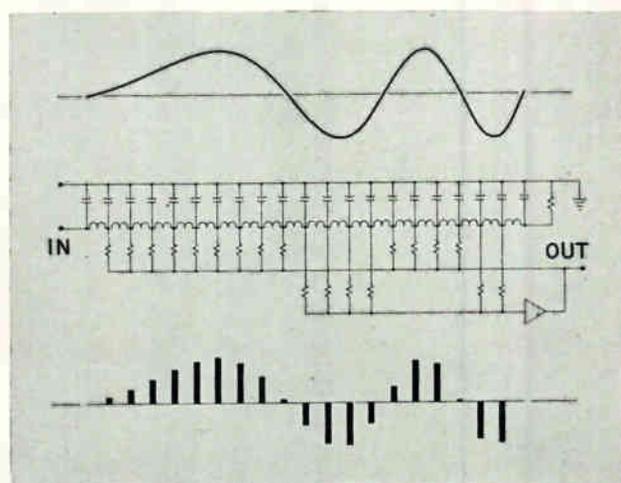

RESISTOR MESH used for generating a chirp signal—Fig. 3

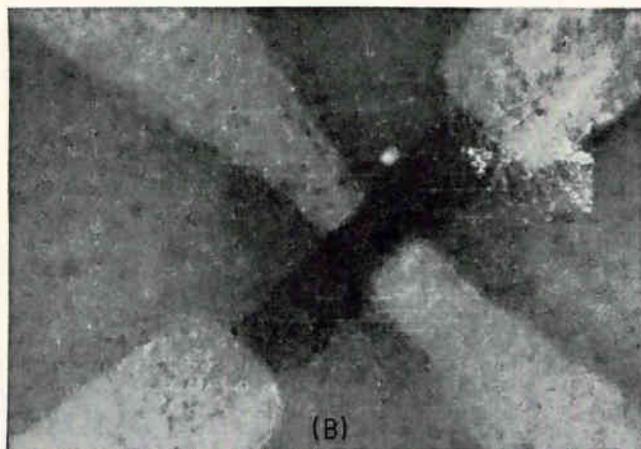

HALL EFFECT *microminiature* probe used in AC Spark Plug magnetic angle encoder, shown to indicate scale, (A); close-up of probe face, (B)—Fig. 4

NRZ pattern. A track closure with a given number of bits and only 3 percent jitter is thus assured.

SELF-FOCUSING ANTENNA—Sperry Gyroscope will describe a fundamentally unique self-adaptive antenna array which shows promise of providing added efficiency and economic advantages for communications systems and for very high gain antennas.⁷ Operating on a closed-loop basis, the antenna system automatically forms and directs its beam by using phase-locked receivers to lock on to the carrier of the signal. Coherent reception and transmission are provided by self-adjusting phase shifters.

The paper describing ATHESA (Automatic Three-dimensional Electronic Scanning Array) enumerates techniques for broadband modulation and for operation at separate frequencies for transmission and reception. Effective aperture of the array reportedly can be made larger than its physical area.

Signals received from the cooperating transmitting station are used for measuring the differences in path length, or phase, to the various elements of the array. Included are differences due to atmospheric inhomogeneities, antenna tolerances, and mutual coupling. These phase differences are then removed by means of phase-locked loops which self-adjust the system, and it receives or transmits with an effective aperture equal to the sum of all reflector apertures.

Prime applications are in the construction of large antennas having close tolerances, interferometer systems where high-gain communication simultaneous with electronic tracking is required, and for the transmission of power.

Main features of the system include automatic inertialess tracking on an instantaneous closed-loop basis, r-f power transmission, and practical methods for providing very high gain (70 db) and obtaining accurate orbital data on a beacon satellite while simultaneously communicating with it.

OPTICAL DECISION FILTER—A self-organizing image filter, developed by Astropower, Inc., automatically recognizes and classifies 3-dimensional objects

regardless of shape and orientation in relation to the viewing device.⁸ Its ability to differentiate between cubes, spheres, pyramids, and ellipsoids suggests many applications for reconnaissance, photo interpretation and star-field recognition for space probes. Techniques of analog neural networks are used.

Classification of objects is made from their 2-dimensional projection through a 15-inch focal length, f:5.2 lens on a 20 × 20 mosaic of silicon photovoltaic cells. Decision-making circuit resembles that used in Cornell Aeronautical Lab's Perceptron, and contains an associative memory logic system, response logic network, and digital logic network. The last of these selects indicator lights for the machine's readout.

Analysis of the 20,000 threshold majority logic units initially used in development resulted in a reduction to 400 in the final version. These follow photocell amplifiers and precede the conventional digital readout logic. Sometimes called a votetaker, this basic circuit has a binary readout depending on whether the algebraic sum of the input signals is greater than or less than the threshold. It tests each pattern for some majority-logic proposition, and if the proposition is true, switches to its high state.

To establish typical recognition patterns of the four different shapes, 200 images of each were selected to provide samples of various photocell retina configurations. Parameters specifying the samples were fed to an IBM 709 that determined which of the 400 sensory points were illuminated for each pattern.

The possibilities of using a multi-sensor unit with radar, infrared and optical inputs for follow-on models are being investigated.

IONOSPHERE PLASMA PROBE—An instrument has been developed at University of Utah's Upper Air Research Laboratory for measuring the plasma frequency of the ionosphere, so that electron densities can easily be computed. Designed for rocket or satellite payloads, the device obtains data directly by exciting the plasma with an r-f field from an antenna and varying the frequency.⁹ This method is

reported to have considerable advantages over previous techniques in which it was necessary to transform the induced changes of antenna impedance into the plasma characteristics, such as plasma frequency, electron density, and collision frequency.

When an r-f electromagnetic field is created, free electrons in an ionized medium add a lagging or inductive current to the free-space capacitive or displacement current. This added current is a function of the electron density, and being 180 deg out of phase with the free space capacitive or displacement current, tends to cancel it. As the exciting frequency is reduced, the inductive current increases and the two components become equal at some frequency known as the resonant frequency of the plasma. The plasma's equivalent circuit is a parallel L-C-R resonant circuit, and its resonant frequency is that of the plasma. Resistance of the circuit is a measure of the frequency of electron collisions. By measuring the resonant frequency of the ionosphere and its Q, it is possible to determine both electron density and collision frequency.

In one of two basic systems being used for plasma frequency measurement, the frequency of an oscillator is continuously swept through a band corresponding to the expected plasma frequencies. As the frequency is swept, phase measurements between antenna voltage and current are made. An f-m/f-m telemetry system transmits to earth the phase-frequency plot; the frequency at which the phase passes through zero corresponds to the parallel resonant point of the plasma. Results from an Astrobee 200 rocket test incorporating this equipment will be presented.

RANGER LUNAR CAPSULE ANTENNA—Several unique requirements were specified for a telemetry antenna built by Aeronutronic for JPL's Ranger lunar capsule. It must provide a circularly polarized 960-mc single-lobe beam directed along the local lunar vertical with maximum gain within a 90-degree cone centered on that vertical. Embedded in eight inches of balsa, it must operate within a minimum size spherical cap volume. Total weight of the antenna must be less than one pound, and it must survive a 3,000-g shock.¹⁰

To achieve lunar vertical orientation, the ball of the capsule is weighted and floated in a fluid at neutral buoyancy. Once this freely gimbaled pendulum attains proper orientation, the fluid is drained and the inner ball gaged.

The antenna is a turnstile made of two crossed dipole radiators curved to fit the spherical cap. Radiating poles are the outer conductors of strip transmission line sections. Circular polarization is obtained by reactive tuning of the transmission line sections, to produce conjugate impedances for the dipoles with essentially equal resistive and reactive magnitudes. The dipoles, when connected in parallel to a single coaxial line, have equal-magnitude impedances in quadrature, and the resultant purely resistive impedance may be designed to equal the characteristic impedance of common transmission lines.

Use of a single coaxial feed line minimizes thermal leakage since this cable has to penetrate the insulated equipment housing. The antenna design techniques permit using identically shaped dipoles, resulting in excellent beam rotational symmetry which is important in the lunar capsule system. Greater design versatility than is possible with certain related techniques dependent on the free-space impedance of differently shaped dipoles in parallel also resulted. Results of 3,000-g impact tests will be presented.

FIELD EMISSION DEVELOPMENTS—Follow-on developments to those reported last year in *ELECTRONICS* (Aug. 11, 1961, p. 141) issued last year will be detailed by W. P. Dyke of Field Emission Corp.¹¹ These include a field-emission cathode-ray tube with a measured resolution of 2,000 lines per inch, a multiple-tip field cathode switch tube having switched 1 Mw of power, and microwave devices that modulate emission at microwave frequencies.

In FEC's laboratories, stable emission at d-c current densities above 10⁷ amp per sq cm has been demonstrated, as well as at pulsed current densities in excess of 10⁸ amp per sq cm for various cathode materials. Pulsed beams with current densities of several hundred amps per sq cm and micropervances of the order of 10 have been emitted by compact multiple-tip cathodes. Life tests show that adequate cathode stability is maintained for over 15,000 hours at power dissipation levels above 100 w.

Commercially available models of flash x-ray tubes and systems have been pushed to a level where a 40-lb system provides 140 Mw peak power, and experimental tubes have achieved a peak power of 4 KMw with 10⁸ roentgen x-ray intensity. These accomplishments are due to the use of field-emission-related processes to generate extremely high-density electron beams from small, unheated multiple-tip cathodes.

By extracting the high-density electron beam through a thin metal window in another laboratory development, dose rates as high as 10¹³ rads/sec have been produced. Fields of application for these devices include radiology, quality control and nondestructive testing, hypervelocity and ballistic studies, and radiation chemistry.


REFERENCES

- (All papers prepared for the 1962 Western Electronic Show and Convention, Los Angeles.)
- (1) E. R. Beck and G. A. Brumm, Bendix Corp., Experimental 100-mc Tunnel-Diode DDA.
 - (2) W. Rindner and R. Nelson, Raytheon Co., A New p-n Junction Strain Transducer.
 - (3) T. A. Longo, M. Miller, A. E. Derek and J. D. Eknalan, Sylvania Electric Products, Planar Epitaxial PNP Switch with Gate Turn-off Gain.
 - (4) J. Y. Payton, Litton Systems, A Practical Non-Destructive Random Access Tunnel-Diode Memory.
 - (5) M. R. Winkler, Radio Corp of America, Chirp Signals for Communications.
 - (6) E. R. Strandt, General Motors Corp., A Hall Effect Incremental Angle Encoder.
 - (7) M. Breese and P. Sferrazza, Sperry Gyroscope Co., A Self-Focusing Antenna.
 - (8) R. D. Joseph, P. M. Kelly, and S. S. Viglione, Astropower, Inc., An Optical Decision Filter.
 - (9) O. C. Haycock and K. D. Baker, University of Utah, Ionosphere Plasma Frequency Probe.
 - (10) W. G. Scott, Ford Motor Co., Range Lunar Capsule Antenna.
 - (11) W. P. Dyke, F. M. Charbonnier, and F. J. Grundhauser, Field Emission Corp., Recent Developments in Field Emission.

SINGLE-SIDEBAND EXCITER

Uses Planar Silicon Transistors

Silicon transistors used in single-sideband circuits can increase reliability of ssb exciters; the transistors have low noise and high output impedance. Increased efficiency of ssb radio communications can result from use of solid-state exciters

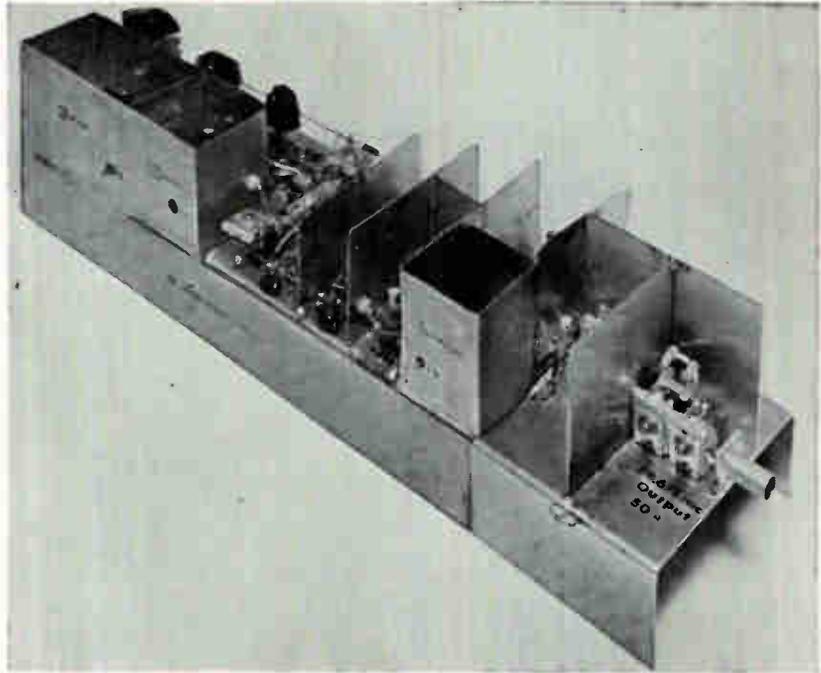

BRASS R-F SHIELDS were used in the construction of a prototype 10-meter ssb exciter

By DONALD L. WILCOX


Application Engineer
Transistor Products Division
Texas Instruments Inc., Dallas, Texas

AN ADVANTAGE of single-sideband (ssb) systems is that all signal processing may be done at relatively low power levels. Semiconductor components are well suited to such applications, particularly silicon transistors.

Only one sideband of a conven-


tional amplitude-modulated signal is necessary to convey intelligence. The carrier and one sideband may be omitted with no loss of information. When the modulating signal is a single-frequency tone, the ssb signal is a sinusoidal wave whose amplitude is a direct function of the modulation amplitude. Its frequency is a direct or an inverse function of the modulation frequency for upper and lower side-

band, respectively. A voice-modulated ssb signal may be considered the result of translating the voice frequencies intact to a position higher in the frequency spectrum. Thus the function of an ssb exciter is frequency translation. For reception, the ssb signal must be translated down to its original position in the frequency spectrum, an operation that is the reverse of the process used in the exciter.

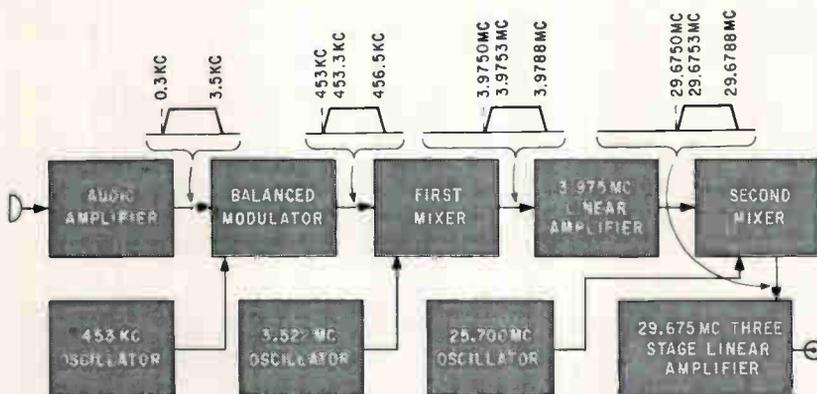

SSB EXCITER for upper sideband frequency synthesis—Fig. 1

SSB SYSTEMS — Requirements that must be met in an ssb system are control of frequency accuracy and stability, incidental amplitude and frequency modulation, injection oscillator distortion, and carrier and undesirable sideband suppression. Since all frequency translations are additive or subtractive operations, the total frequency shift of the demodulated ssb signal is the algebraic sum of all injection oscillator frequency errors, neglecting propagation and doppler shift. A frequency error of 100 cps will impair intelligibility, so it is necessary

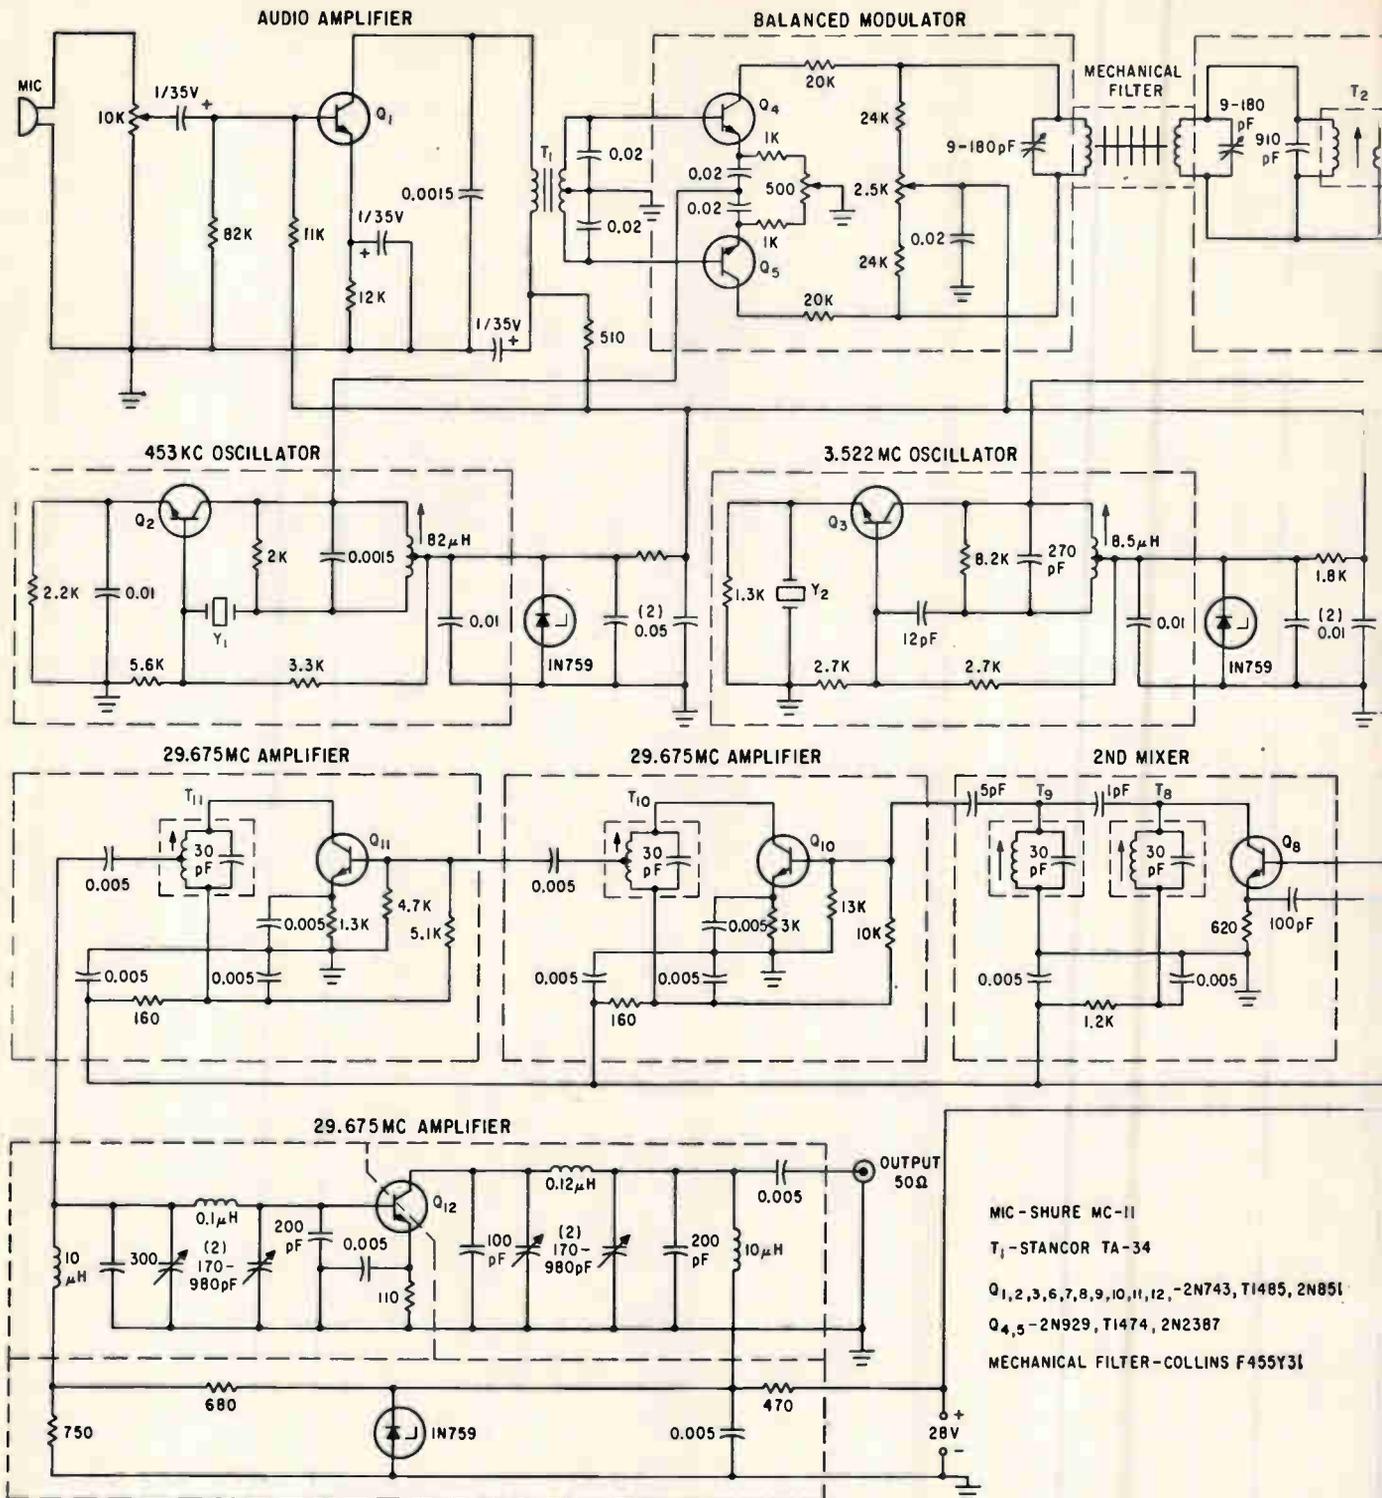

UPPER OR LOWER SSB frequency synthesis can be obtained with this 10-meter single-sideband exciter—Fig. 2


to maintain rigid frequency control. Overall frequency, accuracy and stability must be in the order of 0.2 to 2.0 parts in 10^6 to insure quality communications using the high-frequency spectrum.

Incidental amplitude and frequency modulation of any of the injection oscillators in the ssb system will cause the generation of new sidebands and resulting system distortion. The injection oscillators'

signals must be free of distortion to prevent unwanted mixing products. Overall distortion and intermodulation products should be at least 40 db below one tone of a standard two-tone test signal for satisfactory performance of ssb equipment. Ideally, suppression of the carrier and undesired sideband should be complete. Practically, it is desirable to have at least 40 db suppression.

In designing an exciter, efforts were concentrated on the balanced modulator, mixers and linear amplifiers. While the oscillator circuits employed are stable, no attempt was made to design ultrastable oscillators, since this problem is conventional and has been treated in several papers.

SSB SILICON EXCITER—Upper sideband frequency synthesis, uti-

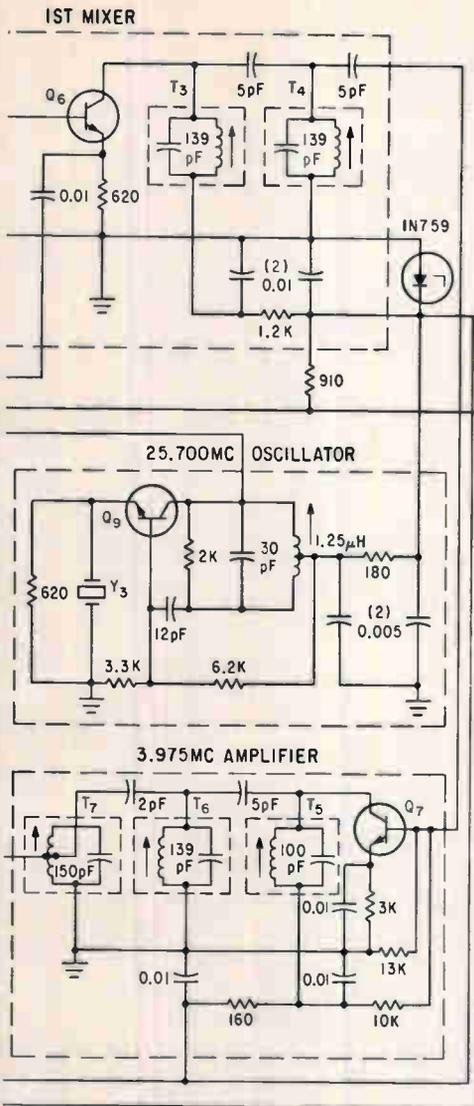

CRYSTAL COMPLEMENT			
SIDEBAND	Y ₁	Y ₂	Y ₃
UPPER	453KC	3.522MC	25.700MC
LOWER	457KC	3.518MC	25.700MC

K = X 1,000

lizing the circuit of Fig. 1 and 2, required a magnetic microphone, which had an output of -71 db. An audio amplifier was needed to raise this level and to provide a balanced input to the balanced modulator. The silicon planar 2N929 transistor was chosen for the balanced modulator because of its low noise and high-output impedance. Transistors Q_4 and Q_5 are selected units matched on h_{FE} and on 1 Kc h_{fe} ,

r_{opp} and c_{opp} . The narrow production spread of parameters makes this selection simple.

The balanced modulator has two inputs; audio feeding into the bases in push-pull and a 453-Kc carrier injection signal feeding into the emitters in parallel. With this configuration, the carrier signals appear at the collectors in phase with equal amplitude, and to a great extent balance each other. The degree of transistor matching helps determine the amount of balance, carrier suppression. Amplitude balance is achieved by the emitter potentiometer that adjusts emitter current, hence h_{fe} , and the collector potentiometer that adjusts the ratio of collector carrier voltages. A carrier suppression of 20 db is obtained without resorting to phase balancing.

When audio is present, mixing occurs in the nonlinear emitter-base diodes of Q_4 and Q_5 and produces a collector frequency spectrum that includes the audio, carrier, carrier plus audio, carrier minus audio, and other second and higher-order mixing products. This spectrum is applied to the Collins F455Y31 mechanical filter, which passes only the carrier-plus-audio component or primary upper sideband.

VARIABLE CAPACITORS — To preserve the 1-db maximum ripple in the 3.1-Kc bandpass of the mechanical filter, the driving generator impedance must be $\geq 50,000$ ohms. This is assured by using the high-output-impedance 2N929. Variable capacitors resonate the filter input and output transducers at 455 Kc. This filter provides an additional 30 db carrier suppression and 40 db to 60 db sideband suppression. Overall carrier suppression is 50 db.

The three injection oscillators have common emitter series-fed Hartley configurations. The frequency controlling crystals are calibrated at series resonance. Silicon zener diodes (1N759) supply a regulated 12 volts.

In the first mixer circuit, T_1 transforms the input impedance of Q_6 into 50,000 ohms to satisfy the mechanical filter's matching requirements. Transistor Q_6 is biased class-B, with the 3.522-Mc injection signal applied to the emitter and

the 453-Kc ssb signal applied to the base. The mixer is additive, with the sum, 3.975 Mc, selected by filters T_3 and T_4 . The injection signals are suppressed 17 db minimum below the 3.975-Mc ssb signal at the output of T_4 .

Transistor Q_7 is a small-signal class-A linear amplifier whose gain is just offset by the insertion loss of the high-Q filters T_5 , T_6 and T_7 . The 3.522-Mc injection signal is suppressed 40 db minimum below the 3.975-Mc ssb signal at the output of T_7 .

The second mixer is similar to the first except for frequencies. It also is additive with filters T_8 and T_9 selecting the sum, 29.675 Mc. Suppression of the 25.700-Mc injection signal is at least 24 db below the ssb signal.

LINEAR AMPLIFIERS — Transistors Q_{10} and Q_{11} are small-signal class-A linear amplifiers designed for maximum gain consistent with the suppression requirements. Peak-envelop-power (pep) output of Q_{11} is 3 mw. All unwanted radiation is suppressed 40 db below the 29.675-Mc ssb signal. Filter T_{11} is tapped for a 50-ohm load so the preceding circuits may be used as a low-power exciter. Transistor Q_{12} is a class-A linear amplifier. An L-C pi network at the input of Q_{12} matches the preceding stage output to the translator input impedance. A similar network provides output tuning and loading into a 50-ohm load for Q_{12} . The pep of the exciter is ≥ 90 mw.

Every stage except the audio amplifier must be r-f shielded. In constructing the prototype exciter, adequate shielding was obtained by building each stage in an enclosed brass compartment. Also for isolation, the power supply for each oscillator was decoupled by a low-pass R-C pi filter. The 29.675-Mc frequency was selected for convenient demonstration. Similar performance can be expected over the h-f range. The selection of transistors can be varied to match requirements. For severe requirements, an NPN planar 2N929 for the modulator and several epitaxial 2N743's could be used. Lower sideband frequency synthesis may be generated by changing crystal Y_1 from 453 Kc to 457 Kc and Y_2 from 3.522 Mc to 3.518 Mc (Fig. 2).

Precise Converter Takes Current Analog of Digital Voltage Pulses

Digital-to-analog conversions are carried out with high precision using a binary-weighted network of wire-wound resistors and a well-regulated transistor power supply. Eleven-bit digital voltage values are converted to current analog outputs to a resolution of one bit

By NATHAN ARON
Radio Corp. of America
Burlington, Mass.

WITH THIS DIGITAL-TO-ANALOG converter (decoder), an 11-bit digital value can be converted to a current analog. The conversion is accurate to a digital resolution which for 11 bits is one part in 2,048 or 0.049 percent. The decoder has maintained this accuracy over the temperature range of -50 deg C to $+60$ deg C.

The precise currents are obtained from a binary-weighted network of precision wire-wound resistors and a well-regulated transistor power supply.


Typically, a decoder circuit includes a resistive network, a reference power supply and a set of switches. The resistive network provides the binary weighting for conversion. The power supply provides either the voltage or current analog and the switches activate the resistor network to switch the binary references as required by the digital input. Each element affects the conversion accuracy. High-precision decoders must keep the errors introduced by each to a minimum.

This decoder includes a parallel network of binary-weighted precision resistors, high-conductance silicon junction diode switches, and a transistor high-voltage regulated power supply. The impedance of the


precision wire-wound resistor network is much greater than that of the load. Thus each resistor produces a constant current source to provide binary current values to the load. These currents are switched by diodes activated by the flip-flops of the digital input register. The decoder low impedance load for this application is a magnetic modulator or comparator.

DECODER CIRCUIT—Figure 1 shows the decoder weighted current network and the transistor switching circuit. The resistor branches are identified by the bit numbers zero through 10. The bit zero

branch takes care of the sign, the bit one branch the most significant digit, and the bit 10 branch the least significant digit. The network resistors are proportioned to produce an ampere-turns driving force in the magnetic modulator related by a factor of two for each succeeding resistive branch and increasing from the least significant digit to the most significant digit. The digital value to be converted appears in the flip-flop stages of the output register driving the transistor switches and the analog current output of the converter appears in the windings of the magnetic modulator. The current is

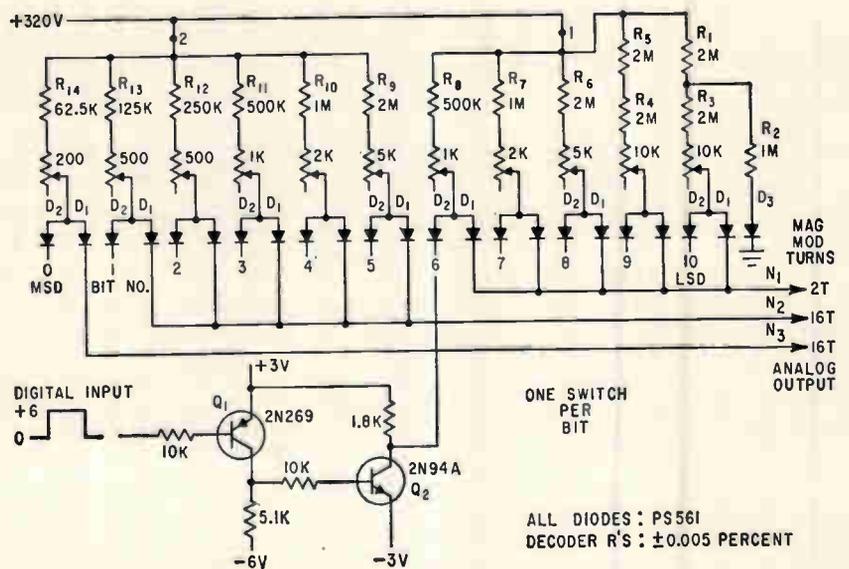

ELEVEN-BIT DECODER network and switch—Fig. 1

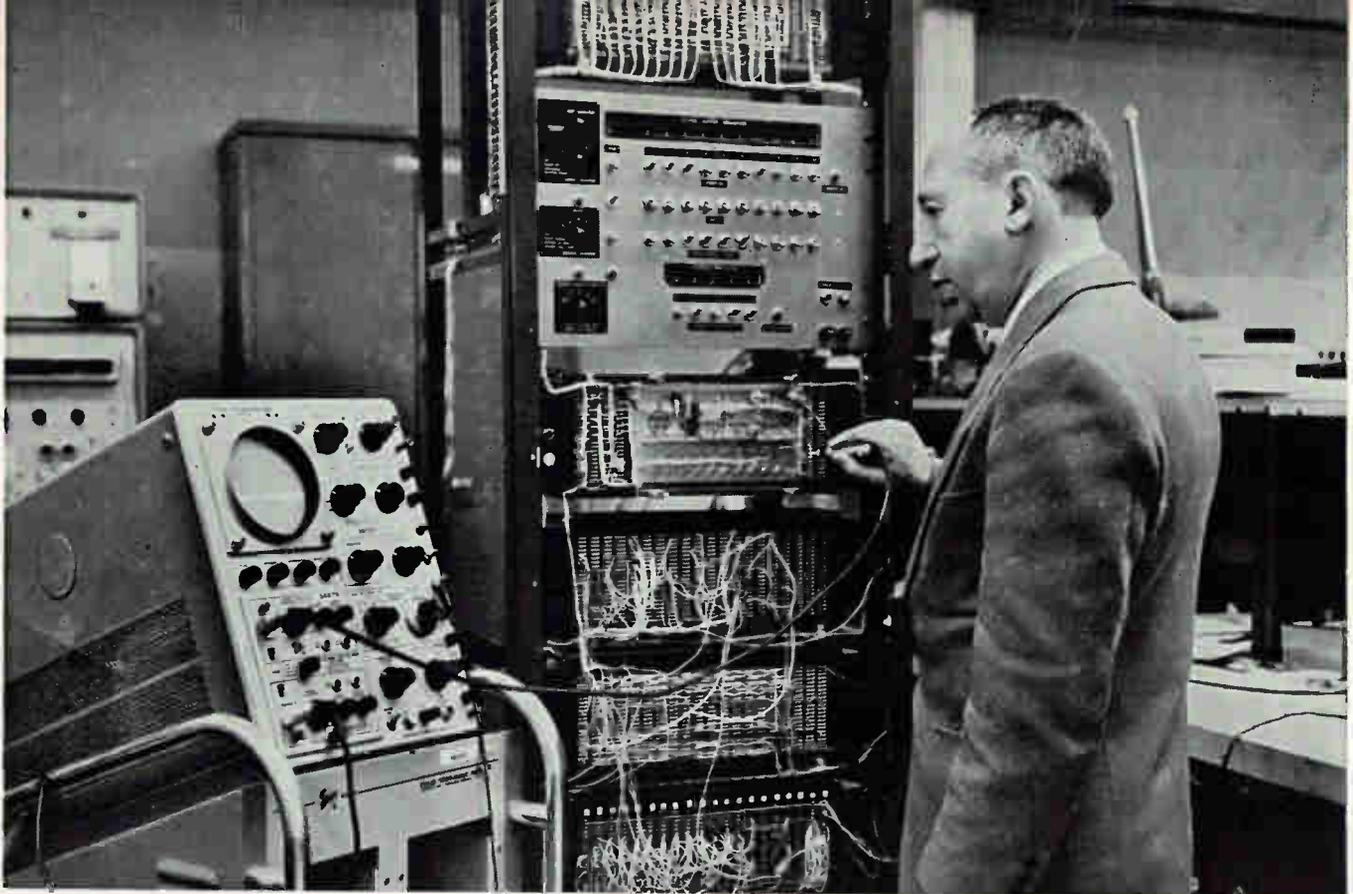

DIGITAL-ANALOG CONVERTER. Author measures a d-c level output from converter

maintained in the resistor network by the 320-volt transistor-regulated power supply. A digital value in the output register flip-flops sends the output level of the ZERO output of the flip-flops to ground when the register holds a ZERO and to +6 volts when the register contains a ONE. The ZERO output of each of the flip-flops is connected to a diode, D_2 (Fig. 1), of the resistor network through the two-transistor switch circuit. When the output level of a flip-flop goes to ground, the collector of the transistor switch, Q_3 , tied to diode D_2 of the associated resistor branch goes to -3 volts. Diode D_2 conducts and diode D_1 stops conducting. As a result, the resistor current for this branch passes through the transistor Q_2 and not through the magnetic modulator. When the flip-flop level is at +6 volts, diode D_2 stops conducting and diode D_1 conducts. Current from the associated resistor branch is now switched to the magnetic modulator winding. Thus, for all stages of the output register containing a ONE, current enters the magnetic modulator winding and is prevented from entering for those stages containing a ZERO. Current from each of

the resistive branches is additive in the magnetic modulator windings. Further, windings N_1 and N_2 are together additive but N_3 , the sign winding, is subtractive, producing a magnetic effect opposite to that produced by windings N_1 and N_2 .

DECODER POWER SUPPLY—


The power supply for the decoder provides the currents in the binary weighted precision resistors. It is a well-regulated power supply with semiconductor (silicon junction) diodes in the rectifier and transistors in the series regulator. The power supply is capable of delivering 60 milliamperes at 320 volts. The regulation is better than ± 0.01 percent for ± 10 percent line voltage variation and for load current change from no load to full load. Ripple voltage is less than 20 millivolts peak-to-peak and the supply has a long-term stability of -0.015 percent.

Figure 2 shows the power supply. The high voltage rectifier uses the full-wave bridge circuit consisting of silicon junction diodes, D_3 , D_4 , D_5 and D_6 . The rectified output is filtered and fed to the transistor regulator consisting of Q_2 through

Q_6 . A sample of the output d-c voltage is taken from the output bleeder resistor at the 100-ohm trimpot and compared to the 8.4-v reference of a 1N430A silicon diode in the difference amplifier consisting of transistors Q_7 and Q_8 . The error between these two voltages is fed to the transistor amplifier, Q_9 , through emitter follower Q_4 , and to the driver amplifier, Q_7 , through emitter follower Q_6 . The driver amplifier Q_7 provides the drive for the series regulator transistor Q_2 .

REGULATOR FEATURES—

Power for the regulator transistors is provided by the separate low-voltage full-wave center-tapped rectifier consisting of silicon junction diodes D_1 and D_2 . This supply is also regulated, using a series regulator transistor Q_1 , the output of which is referenced to silicon junction reference diodes, D_7 and D_8 . A notable feature of this supply is that it provides a high output voltage with a transistor regulator. This is accomplished by referring the reference diode to the high-voltage side of the output of the regulator and by taking advantage of the low reverse dynamic impedance of high-voltage reference di-

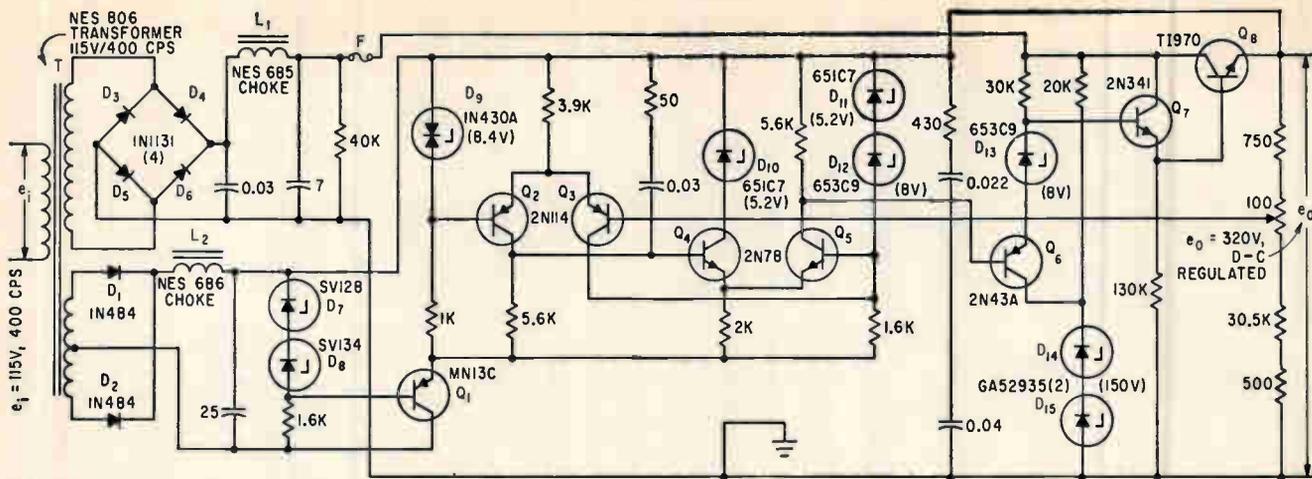

REFERENCE POWER SUPPLY relies on a temperature-compensated silicon junction zener diode as the basic reference element with precision wire-wound resistor network to obtain error signal—Fig. 2

odes, D_{11} , and D_{15} . These have a 150-volt reference voltage. Application of the diodes greatly improves regulation. In addition, the 1N430A diode improves stability of the supply with temperature. The 1N430A is a temperature-compensated reference diode. Ordinary reference diodes are susceptible to voltage change with temperature.


Design of a high-precision decoder for conversion accuracies of ± 0.025 percent places stringent requirements on its elements—the resistors, the power supply and the switches. This is especially true if operation is expected over a large temperature range as is desired in this unit. The precision resistors must be stable to better than ± 0.025 percent and must track each other closely with temperature. The switching diodes must have a uniform and stable forward voltage drop that varies little with temperature and the power supply must have good stability and also not

vary with temperature. The factors that contribute to the conversion errors are (1) change in resistance of the network resistors, (2) change in diode forward voltage drop, (3) diode back (reverse) currents, (4) change in power supply voltage and (5) variation of load impedance (magnetic modulator resistance).

MINIMIZING ERRORS—The resistor error is minimized by selection of highly stable precision wire-wound resistors. The diode error is minimized by using silicon junction diodes of high conductance (low forward voltage drop) and low reverse current. Although the silicon junction diode characteristically has low reverse current, this property can vary considerably between diodes and careful selection of type is required for minimum values of reverse current. Furthermore, the supply voltage is made sufficiently large (320 volts) so that

the possible variation of the diode forward voltage with temperature does not introduce sizable errors. The change in power supply voltage is controlled by a regulated supply using a temperature-compensated zener diode (1N430A) that can also be temperature controlled. Stability of conversion accuracy with time and temperature can be further enhanced by including a full-scale check circuit to compensate for supply and component variation with time and temperature. This was not found necessary in this design. The effect of the magnetic modulator load is accommodated by limiting the number of analog outputs fed by one decoder such that the error introduced by the drop across the modulator is less than one part in 2,048 of the supply voltage of 320 volts.


ERROR ANALYSIS—An error analysis of the decoder shows that the total output conversion error is the sum of the errors introduced by the resistors, the power supply and the diodes. Diode reverse current is small and can be neglected. Since the accuracy required is one part in 2,048 or 0.049 percent the sum of the errors introduced by the resistors, the power supply and the diodes cannot exceed this figure. If the error is split equally among the three elements, the contribution of each to the error is 0.016 percent. Thus the resistors must maintain an overall accuracy of ± 160 parts per million (ppm), the power supply cannot vary by more than ± 50 mv and the diode

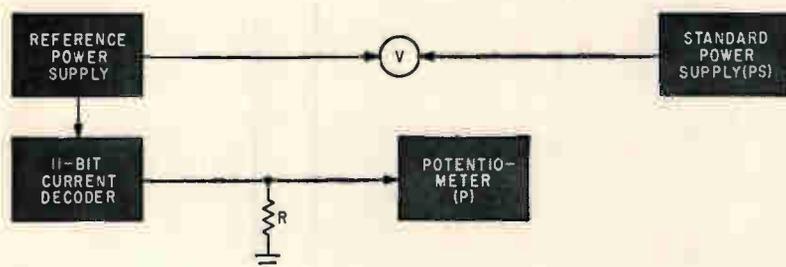

- PS - KIN TEL D-C POWER SUPPLY MODEL NO. 50-B-25, DRIFT = $\pm 0.01\%$
- P - RUBICON POTENTIOMETER, TYPE B, ERROR LIMIT $\pm 1\mu V$
- V - KIN TEL D-C MICROVOLT METER MOD 203, DRIFT = $10\mu V$
- R - STANDARD RESISTOR, GENERAL RADIO, 20 OHMS OR 10 OHMS $\pm 0.05\%$ TOLERANCE


MEASUREMENT CIRCUIT used in determining overall conversion accuracy—Fig. 3

DECODER FULL SCALE ERROR VS TIME
(FULL SCALE ERROR DETERMINED BY SUMMING
MAGNITUDE ONLY OF EACH BIT ERROR)

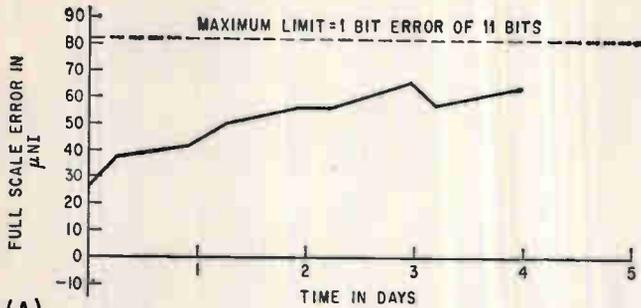

(A)

FULL SCALE CONVERSION ERROR VS TEMPERATURE
FOR 11-BIT CURRENT DECODER
ERROR CALCULATED BY SUMMING INDIVIDUAL BIT ERRORS
A - CONSIDERING MAGNITUDE SUM ONLY
B - CONSIDERING ALGEBRAIC SUM

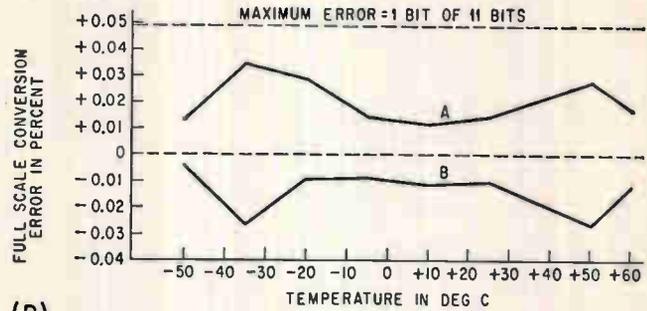

(B)

FULL-SCALE conversion error variation with time (A) and full-scale conversion error versus temperature for 11-bit current decoder (B)—Fig. 4

forward voltage should not change by more than ± 50 mv. The errors, however, are a function of the characteristics of the components and therefore do not necessarily divide equally. At room temperature the resistor and diode forward voltage errors can be adjusted to zero by trimpot. If this is done, the predominant remaining error is the reference power supply variation. The resistor stability and diode reverse currents also introduce errors. Their magnitudes, however, do not influence the required conversion accuracy materially.

The tighter requirements of temperature operation take advantage of compensation between the switching diode forward voltage and the resistor temperature coefficient. The forward voltage of the diode decreases with increasing temperature. The theoretical figure for this change is approximately -2 mv per degree C'. The resistor temperature coefficient can be either positive or negative. A positive coefficient, however, can be utilized to offset the negative diode coefficient. The resistors used have characteristically positive coefficients over the desired temperature range.

RESISTOR TOLERANCE — The effect of resistor tolerance on conversion accuracy is another factor of interest in considering the overall conversion accuracy of the decoder. A set of parallel, binary-weighted resistors of equal tolerance do not each contribute equally to the full scale conversion error.²

The least significant digit (LSD) weighted resistor contributes less to the full scale error than does the most significant digit (MSD). It is therefore possible for the LSD resistors to have poorer tolerance than the MSD resistors. The LSD resistors can change more than the MSD resistors without affecting the conversion accuracy as greatly. This fact is used to good advantage in the variation of decoder accuracy with temperature.

TEMPERATURE STABILITY— The overall conversion accuracy of the decoder was evaluated for stability at room temperature and for variation with temperature from -50 degrees C to $+70$ degrees C. A block diagram of the measurement circuit is shown in Fig. 3.

Before start of the test the current in each weighted branch was adjusted to its exact value with the trimpot. The adjustment and the subsequent measurements were made by noting the voltage across a standard 10-ohm resistor for the lower valued resistor branches (bit numbers zero through five) and across a 20-ohm standard resistor for the higher valued resistor branches (bit numbers six through 10).

The stability test at room temperature covered a period of approximately four and one-half days. The individual bit currents and the power supply voltage were measured twice a day during this interval. Figure 4A shows the change in computed full-scale conversion

error. The full-scale error is computed by adding the errors obtained for each bit current, ignoring the sign of the individual bit error. Thus, this represents the worst error. The non-zero initial error shown in the figure is the result of drift occurring in the interval of several days between adjustment of the unit and start of the measurement run. The overall drift observed during the test is less than 410 microampere-turns (0.025 percent). This is equivalent to one-half bit in 11-bits.

The variation with temperature is shown in Fig. 4B. The d-c reference supply went out of regulation at 60 degrees C. This was caused by the high voltage Zener diodes rising in voltage with temperature and causing saturation of the 2N43A transistor in the regulator. Use of a slightly lower voltage diode with a better temperature coefficient can correct this.


The full-scale conversion error with temperature in the figure is computed from measurements on the individual bit outputs in two ways. Curve A is the full-scale error computed by summing only the magnitude of the bit errors. Curve B is the full-scale error computed using the algebraic sum of the bit errors. Either method of error computation gives a maximum error less than one bit and almost equal to one-half bit of eleven-bits.

REFERENCES

- (1) Variation of Forward Characteristics of Junction Diodes With Temperature, IRE Proc, p 101, Jan. 1955.
- (2) N. Aron and R. Goundry, The Weighted Resistor Decoder: An Error Analysis, Electro-Technology, April 1961.

Instrument uses a close-coupled magnetic core for current sensing, has a sensitivity up to 2.5×10^{-7} coulomb per volt of response

By JOHN F. HOWELL
X-Ray Dept., General Electric Co.,
Milwaukee, Wisconsin

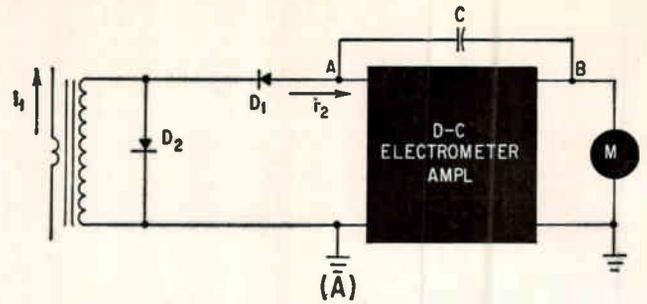

CURRENT INTEGRATION CIRCUITS: *unidirectional*

HOW TO MEASURE COULOMBS

IT IS OFTEN necessary to determine the quantity (coulombs) of electrical current in one or more pulses or cycles. The current integral, however, may be difficult to determine when the current pulse is irregular in duration, shape or amplitude, or where the current cannot be conveniently measured because of lack of a good ground connection or prevailing high potential levels. The circuits presented here overcome these obstacles and provide a convenient, precise means for measuring the integral of current pulses.

The current is allowed to flow through a transformer primary winding consisting of one or more turns linking a close-coupled magnetic core (Fig. 1A). A current will then flow in the secondary winding, proportional to the current in the primary and to the transformer turn ratio. This secondary current flows through diode D_1 , charging capacitor C to a potential proportional to the integral of the current. The operational amplifier, which is a d-c inverting electrometer, is an impedance transformer and provides an input impedance of about 10^{14} ohms and a low output impedance suitable for driving a meter or equivalent read-out device.

The operational amplifier causes point A to be driven continuously to near zero or ground potential, whereas point B varies as a charge is accumulated on capacitor C . Leakage of the charge on C through diode D_1 is held to a low rate by the high reverse resistance of the diode and the fact that only

a small potential, commonly known as the error signal, appears across diode D_1 .

Diode D_2 prevents a voltage from being generated across the transformer secondary because of current flow in the primary in a direction opposite to the current of interest, or to energy stored in the magnetic field.

If the integral of a bidirectional current is to be measured, the circuit of Fig. 1A can be modified to that of Fig. 1B.

GATING—Sometimes it is desirable to control the response of the instrument so that it is insensitive except during a period t corresponding to the duration of a gating pulse. This feature is easily provided in either the unidirectional or bidirectional circuit. For example, in Fig. 1C a gate has been added to the unidirectional circuit by adding switch S , diode D_s , resistor R and connector J . With the switch closed, diodes D_2 and D_s short out the transformer secondary, preventing any input from charging capacitor C . If, however, a gating current pulse is applied to J , resulting in a voltage drop of 40 to 50 volts across R , then diode D_s is biased off and the circuit responds as the original unidirectional circuit during the gating pulse.

For optimum gating, it is necessary to select the circuit parameters as follows: resistance of R , small compared to the transformer secondary impedance; ratio of gating current amplitude to transformer secondary current, large; and the slope of the current versus


voltage characteristics for diodes D_2 and D_s , much steeper than the diode D_1 slope. Usually a high-conductance germanium diode, such as type T-9, is used for D_2 and D_s , and a high inverse potential silicon diode such as type 1N302A for D_1 .

Calibration of the integrating ammeter is simple, since only the turn ratio of the current transformer and the value of capacitor C significantly influence calibration. The sensitivity in coulombs per volt of response can be calculated by sensitivity = CN_2/N_1 , where C is in farads, and N_1 and N_2 are the number of transformer primary and secondary turns.

The natural action of the transformer, being a true ratio device, causes the instrument to be relatively independent of the characteristics of diode D_1 , the frequency response of the amplifier, and other factors.

TRANSFORMER ADVANTAGES

—A current transformer in the input provides: isolation of the measuring equipment from the circuit being measured, allowing operation without a common-ground connection and at different potential levels; measurement of the sum or difference in current flowing in two or more wires; a step-up or step-down of the current being measured, through choice of transformer turn ratio; and separation of very low frequency or steady-state direct currents from fast pulsating currents by the normal transformer action. This latter feature can be used, for example, in measuring phototube current to separate

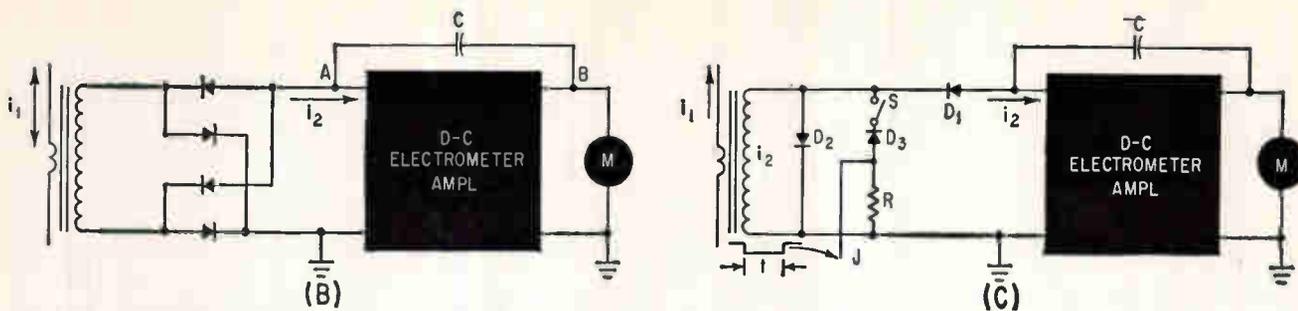

(A); bidirectional (B); gated unidirectional (C)—Fig. 1

IN IRREGULAR PULSES

dark current from pulse signal current.

The instrument (Fig. 2) provides six sensitivity ranges from 5×10^{-6} coulomb per volt to 2.5×10^{-7} coulomb per volt of response. The current-sensing and integrating components are in a small box and connected to the operational amplifier and readout device with Twinax cable, to provide the usual instrument remote pickup.


The amplifier has an electrometer tube input followed by a noninverting 12AX7 stage. Half of the 12AU7 is an output cathode fol-

lower. A one-megohm resistor connection from the output to the cathode of the second stage provides some positive feedback, increasing the open-loop gain. The second half of the 12AU7 is a shunt voltage regulator, providing regulated voltages that are used for the plate, screen and filament supply of the input stage.

The integral of one or more current pulses flowing in a conductor is measured simply by inserting the conductor through the hole in the transformer toroidal core. The integral measurement is indicated by

the meter and is continuously displayed until the instrument is reset. The single galvanometer readout (Fig. 2) has five full-scale sensitivities from 1 to 20 volts. This is useful when the integral of random signals, which cannot be repeated, is measured and the sensitivity switch at the remote pickup has been adjusted for an off-scale or very small meter indication.


The author is indebted to co-developer John C. Roubik. The work was performed for the U. S. Atomic Energy Commission.

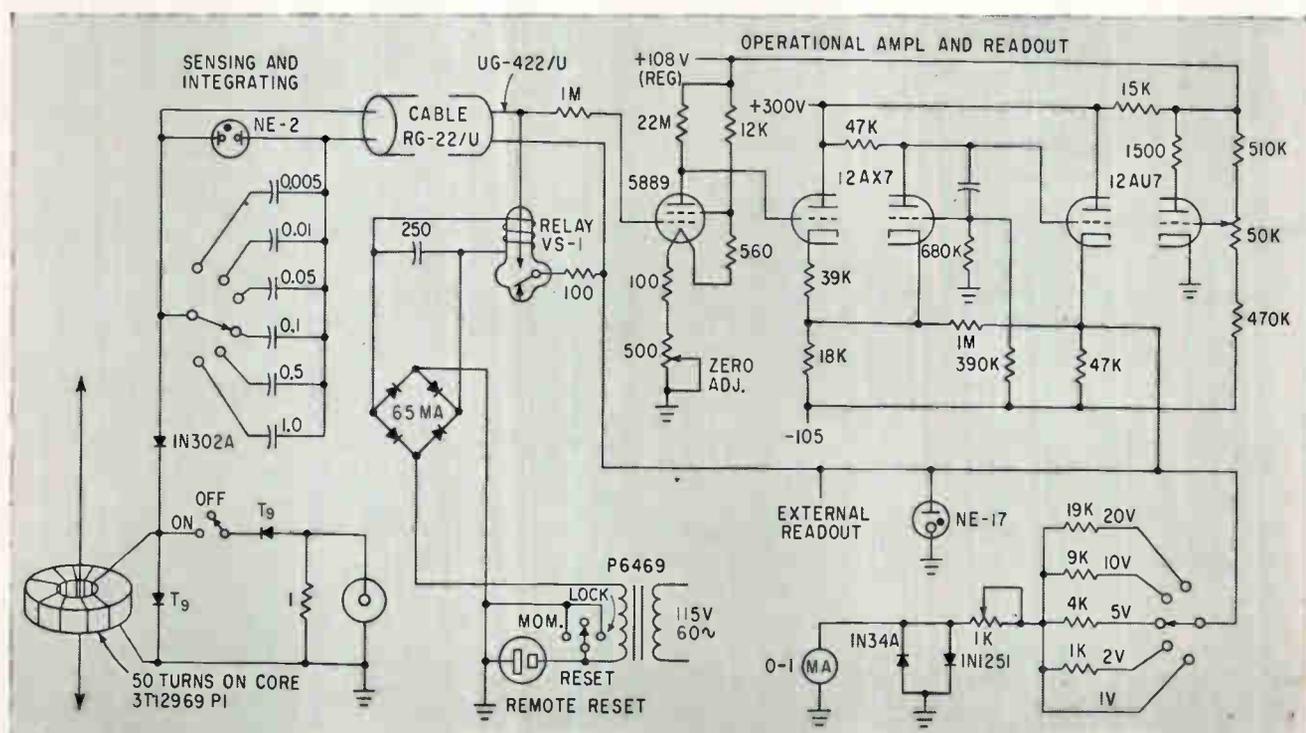


INTEGRATING AMMETER has the range switch at the pickup for maximum convenience. If a commercial electrometer is used, only the sensing and integrating portions of this circuit are needed—Fig. 2

Novel Bi-level Regulator

Solid-state unit uses bilevel voltage principle to improve on efficiency of series-regulator circuits. Gives faster response than comparable switching type regulators and is 20 percent more efficient than series regulators

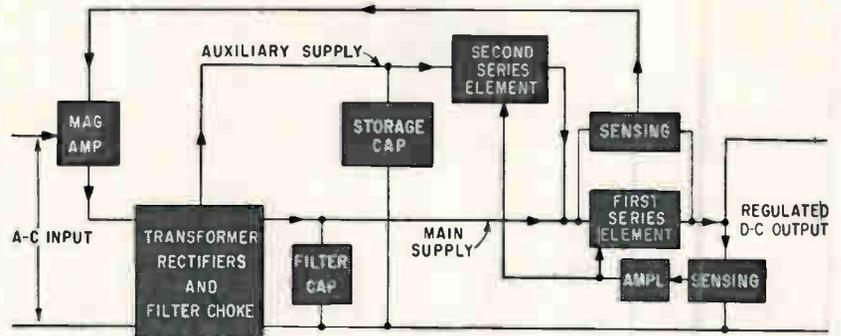

WHEN SUDDEN LOAD is sensed second series element is operated, delivering current from the auxiliary supply—Fig. 1

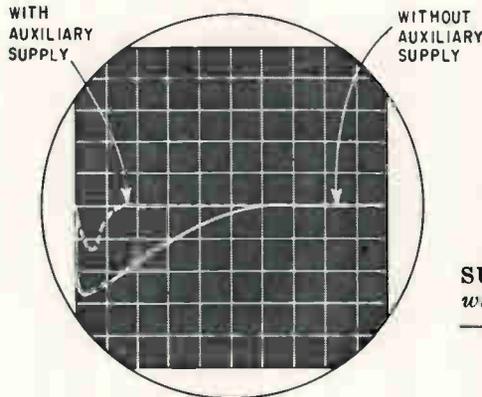

SUPERIMPOSED RESPONSES with and without auxiliary supply—Fig. 2

By F. L. WARD
President, Atlas Controls Inc.,
Natick, Mass.

THIS REGULATOR principle gives fast response (approaching that of the series regulator) and combines this advantage with the component and size economy of nondissipative circuits that use such components as switching transistors, magnetic control amplifiers and silicon controlled rectifiers. (Switching regulators use variable mark-space chopping to adjust the d-c output). Owing to the novel method, reservoir capacitors one-tenth the size used in switching regulators are able to handle full-load transients.

Figure 1 shows the principle of the bilevel regulator. One power transformer provides two separate output voltages, one delivering load to the output terminals in normal operation, the other, an auxiliary, higher voltage, delivering load-current during transients.

The auxiliary supply is connected to the main output terminals through the second series element. As long as the first series element is not saturated, the second series element is biased in the off state, with zero dissipation. Saturation

of the first series element occurs with a sudden load increase, causing the lower level output voltage to drop momentarily. During this period—the response time of the magnetic amplifier—the auxiliary level takes over and delivers power to prevent voltage undershoot.

Applying this reasoning to an actual circuit, voltage across the low level series element remains at 2 volts, the magnetic amplifier has response of 0.1 seconds, and the upper level voltage (not necessarily regulated) is set at about 20 volts above the output. The storage capacitance necessary to handle load during the magnetic-amplifier response interval is 5,000 μf —a reduction in magnitude of ten times from the 50,000- μf capacitance necessary in comparable preregulated units.

Figure 2 illustrates the advantage of the two-level regulating method in handling transients.


Figure 3 is a schematic of a typical unit employing the bilevel circuit. The low-level d-c output uses rectifiers D_1 and D_2 , one wind-

ing of choke L_1 , plus capacitor C_3 . The auxiliary level uses rectifier D_3 and D_4 , plus the second winding of choke L_1 and capacitor C_2 . It operates only during transients.

The magnetic amplifier controls the low level d-c by referencing the voltage drop across transistor Q_1 against the forward bias of diodes D_1 and D_2 , providing a long term low voltage drop across transistor Q_1 .

DRIVE CIRCUIT—Transistors Q_1 through Q_4 and their circuits provide a conventional drive circuit for transistor Q_2 . Transistor Q_1 is connected between the high and low voltage levels, biased off by the 1 to 2 volt drop across Q_2 . With the application of a sudden load to the power supply output, power is drawn from capacitor C_2 through transistor Q_2 . Owing to reactance of choke L_1 , voltage across C_2 drops rapidly. At the same time, the regulator circuit tends to maintain steady output voltage by reducing voltage across Q_2 . As the voltage across Q_2 approaches saturation,

Reduces Storage Capacitance

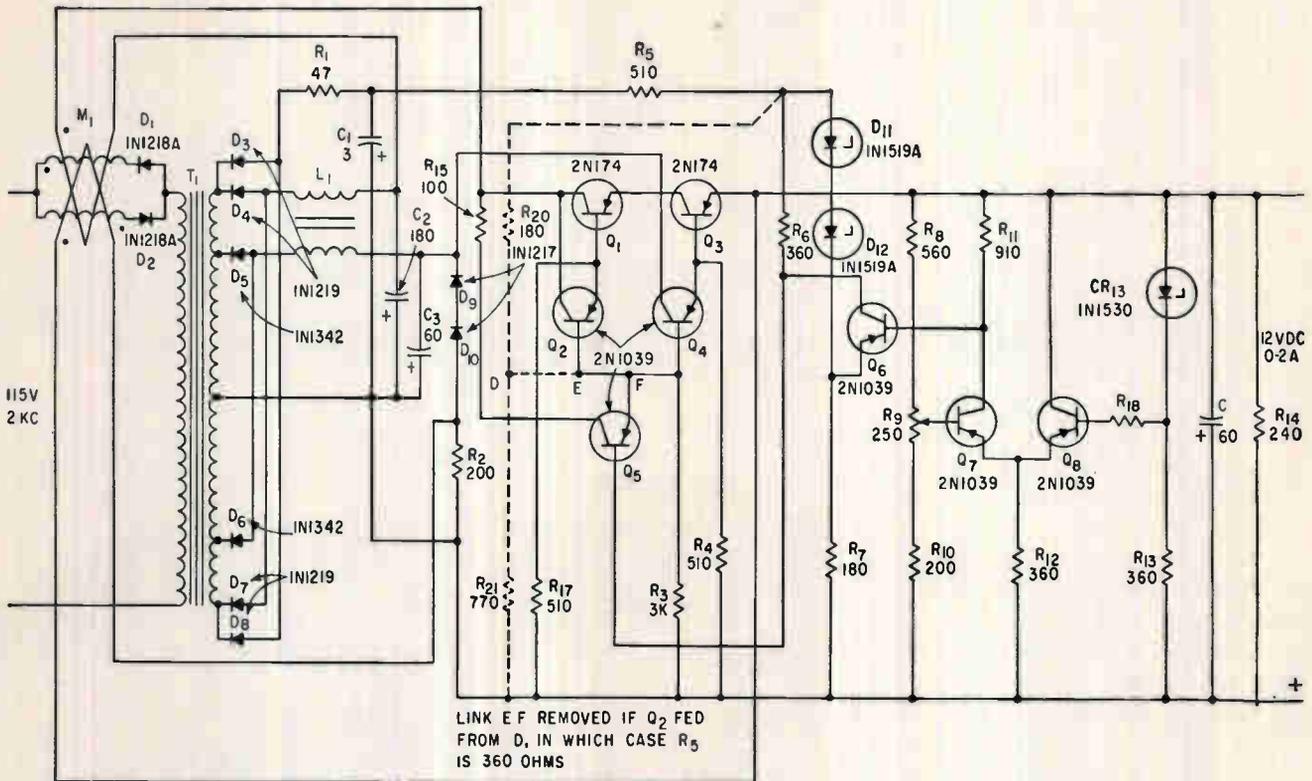

THIRD SUPPLY delivers bias to zener D_{11} and control transistors. Alternative method of controlling auxiliary output is shown by dotted connections—Fig. 3

the bias on Q_1 reduces, Q_1 conducts, and delivers output current.

Thus energy from the upper d-c level transfers to the lower level, which maintains the lower voltage at a point high enough to prevent complete saturation of Q_3 . The magnetic amplifier during its response interval of approximately 0.1 second restores voltage across Q_5 to its set value of 2 volts.

Another method of driving the high-level transistors, shown by dotted lines in Fig. 3, involves an additional resistance divider. It sets a reference voltage at the junction of resistors R_{20} and R_{21} , at a point slightly below the steady-state value of the low-level voltage. With a sudden dip in voltage, transistors Q_1 and Q_2 are driven by the reference source for the duration of the transient. Under steady state conditions, Q_1 and Q_2 are biased off by the difference between reference voltage and low-level voltage.

Rectifiers D_3 and D_4 with resistor R_1 and capacitor C_1 , provide bias voltage for zener diode D_{11} .

The reference for magnetic am-

plifier M_1 , consists of diodes D_5 and D_{10} . The forward drop against each of these diodes is approximately 0.7 volt, so that total reference voltage for M_1 is 1.4 volts.

Magnetic amplifier M_1 also has an extra control winding in series with the auxiliary high-voltage output. This winding cuts back the magnetic amplifier if current persists in the auxiliary voltage line.




COMPACT potted power unit gives increased efficiency

The reference amplifier is indifferent to its source of current, so without this extra control winding, the regulator could continue to use Q_1 after application of a sudden load. In this case, after current is drawn through the second control winding for more than 0.1 second, the magnetic amplifier starts to drop back, restoring the circuit to its steady state condition.


Of the application advantages of the regulation technique, probably the most significant is reduction in the amount of storage capacitance.

The storage capacitance is roughly inversely proportional to the voltage drop across the series transistors. If 10,000 μf is required with a series drop of one volt, then only 1,000 μf would be necessary if ten volts were dropped across the series element or elements.

Reduction in the value of capacitance not only saves space, it saves considerable expense in those low-temperature applications requiring tantalum capacitors.

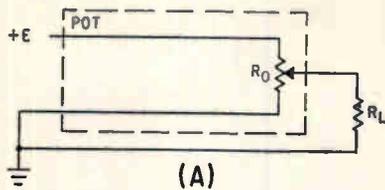

(A)

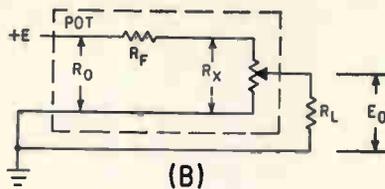

(B)

POTENTIOMETER without (A) and with (B) a fixed resistor at one of its terminals

POTENTIOMETER DERATING

L/N	P_L/P_0	L/N	P_L/P_0
100	0.98	2	0.44
50	0.96	1	0.25
20	0.91	0.5	0.11
10	0.82	0.2	0.03
5	0.69	0.1	0.008

Realistic Potentiometer Derating

By HANS H. WORMSER

Chief Product Engineer,
Markite Corp., New York, N. Y.

NOMINAL power rating of a potentiometer is not necessarily its true power-dissipation capability since this capability is often affected by the application.

With a finite load impedance between the wiper and the ground terminal (A), when the wiper is near the full-voltage terminal, the total current drawn by the potentiometer is determined by the applied voltage E and by the parallel resistance between the potentiometer and its load. All this current must be carried between the $+E$ terminal and the wiper. For a load impedance of zero, the voltage is directly applied to the wiper; this is a dangerous condition—commonly recognized as likely to cause a potentiometer element to burn out.

The basic power-dissipation capacity of a potentiometer, while expressed in watts, actually is determined by the maximum current that can be drawn continuously through its terminals or any part of its resistance element. When the current is not the same in all parts, as with a loaded unit, a potentiometer may burn out if the dissipation rate of one part is disproportionate.

A useful parameter for power-dissipation derating is L , the ratio between the load impedance and R_0 , the resistance of the potentiometer from the full-voltage-end terminal to ground. For potentiometers whose load is returned to a center tap, the denominator is half the potentiometer resistance. The analysis of (A) shows how to de-

crease the nominal power rating of a potentiometer without a wiper load for any given load ratio L :

$$L = R_L/R_0 \quad (1)$$

Current (I_0) in the track due to excitation voltage is

$$I_0 = E/R_0 \quad (2)$$

When the external load is applied and the wiper is near the upper ($E+$) terminal, additional current I_L flows through the wiper and positive terminal. For this analysis the limiting condition is

$$I_L = E/R_L \quad (3)$$

Total current in the power terminal and potentiometer element adjacent to the power terminal is

$$I_T = I_0 + I_L$$

$$I_T/I_0 = 1 + I_L/I_0 \quad (4)$$

From Eq. 2 and 3, $I_T/I_0 = 1 + R_0/R_L$. Also

$$I_T = I_0(1 + 1/L) \quad (5)$$

Let the nominal rated power (P_0) of the potentiometer when unconnected to the load be

$$P_0 = I_0^2 R_0 \quad (6)$$

Derated power (P_L) of the potentiometer when the load is connected is

$$P_L = I_0^2 R_0$$

$$P_L = I_T^2 R_0 / (1 + 1/L)^2$$

$$P_L = P_0 / (1 + 1/L)^2$$

$$P_L/P_0 = 1 / (1 + 1/L)^2 \quad (7)$$

$$P_L/P_0 = [L / (1 + L)]^2 \quad (8)$$

When R_L approaches ∞ , L approaches ∞ , and $P_L = P_0$; that is, with an infinite load impedance, a 2-w potentiometer can dissipate 2 w. When $R_L = R_0$, $L = 1$ and $P_L/P_0 = \frac{1}{4}$; this means that with a load ratio of 1, a 2-w potentiometer can dissipate only $\frac{1}{2}$ w. When R_L

approaches 0, L approaches 0 and P_L/P_0 approaches 0; therefore, with the wiper shorted to ground, the potentiometer should theoretically dissipate no power.

When the potentiometer has a fixed resistor at its upper end [R_F , (B)], the maximum position of the wiper results in an output voltage E_0 or a voltage ratio of N ; thus

$$I_L = E_0/R_L$$

From Eq. 4,

$$I_T/I_0 = 1 + (R_0/R_L) E_0/E \quad (9)$$

From Eq. 1, $L = R_L/R_0$. Also

$$E_0/E = N \quad (10)$$

From Eq. 1, 9 and 10,

$$I_T/I_0 = 1 + N/L \quad (11)$$

From Eq. 5, 7 and 11

$$P_L/P_0 = [1 / (1 + N/L)]^2 \quad (12)$$

The table plots the derating factor P_L/P_0 against values of L/N .

When only the maximum unloaded voltage ratio R_X/R_0 of (B) is known

$$N = SL / (L + S - S^2) \quad (13)$$

where $S = R_X/R_0$. From Eq. 12 and 13, the derated power relation becomes

$$P_L/P_0 = 1 / [1 + S / (L + S - S^2)]^2$$

$$P_L/P_0 = [(L + S - S^2) / (L + 2S - S^2)]^2 \quad (14)$$

Equation 14 shows that even when L approaches 0, the potentiometer can dissipate some power, that is,


$$P_L/P_0 = [(1 - S) / (2 - S)]^2$$

DISSIPATION EXAMPLE—For a potentiometer rated at 2 w, whose maximum output under load is $N = 0.50$, and whose L is 5, $L/N = 5/0.5 = 10$. From the table, $P_L/P_0 = 0.82$. This unit can dissipate $2 \text{ w} \times 0.82 = 1.64 \text{ w}$ under the given load.

(ADVERTISEMENT)

You are looking at an incredible achievement by Fairchild Semiconductor: the world's first successful integrated semiconductor circuit. It has nine transistors, five resistors—and it takes the place of a whole boardful of components in a computer.

Oh, and one more thing...

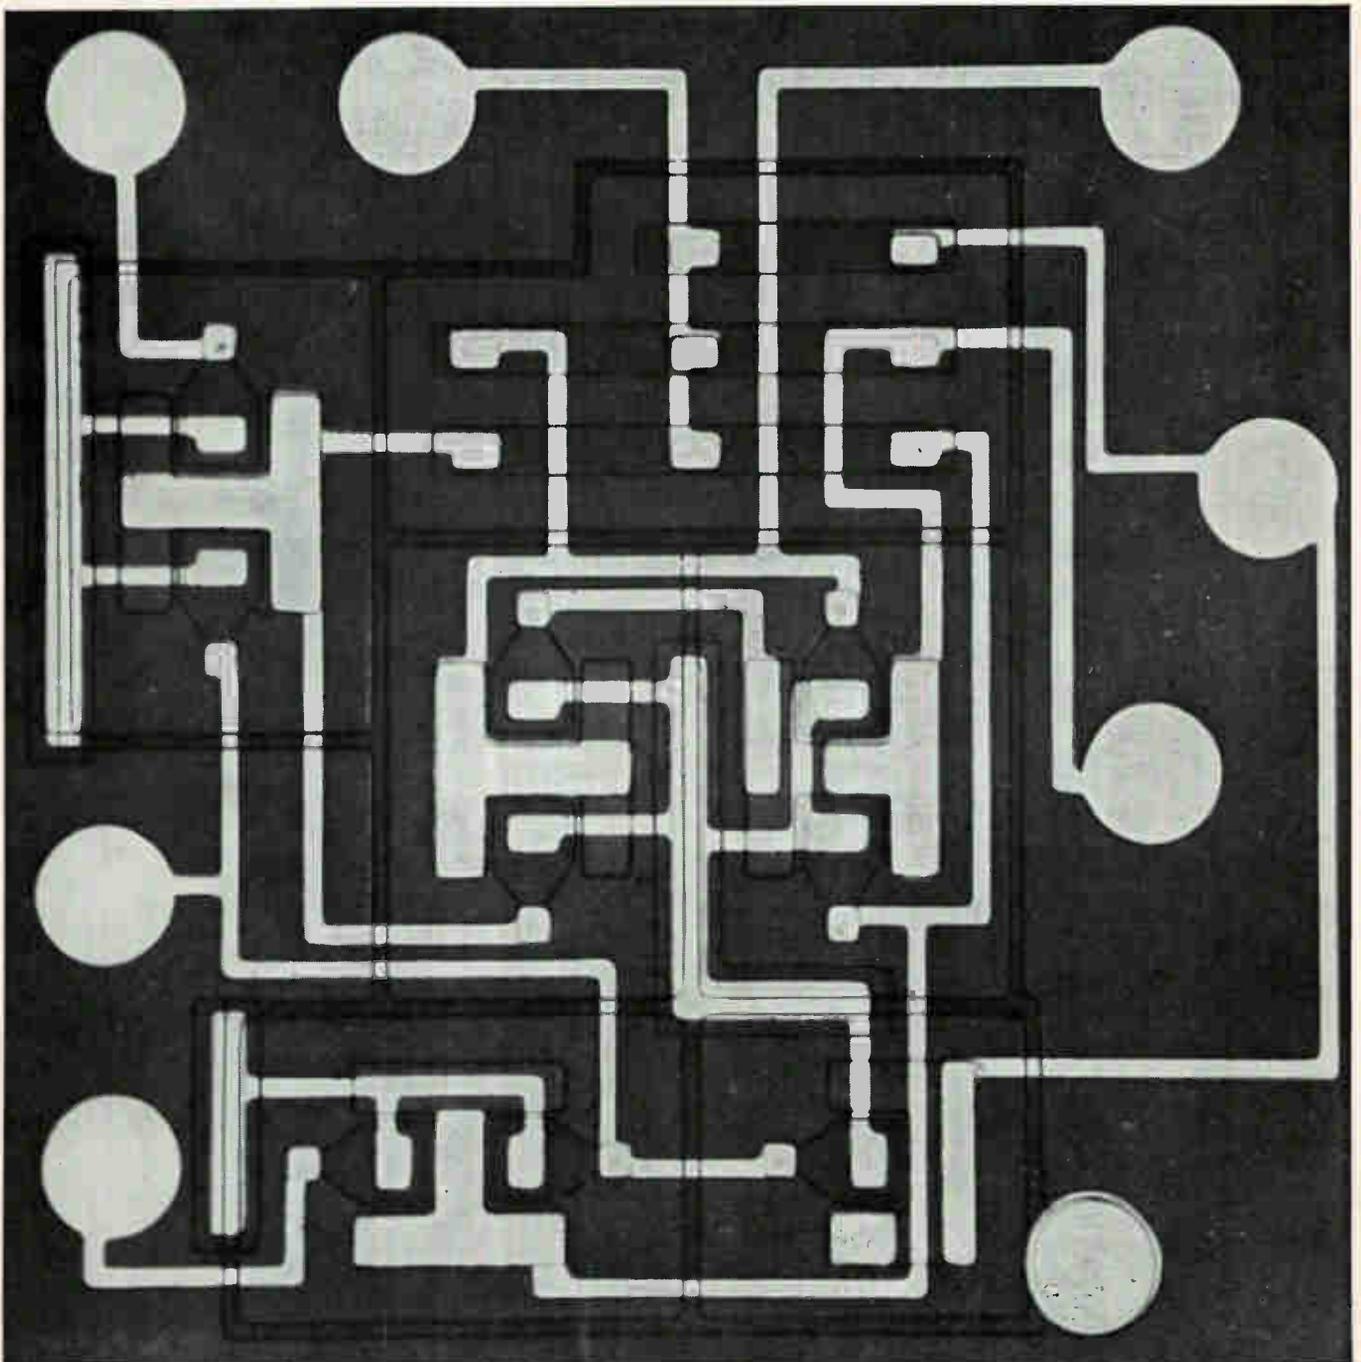

CIRCLE 77 ON READER SERVICE CARD

COPYRIGHT FAIRCHILD SEMICONDUCTOR 1962

Sigma Cyclonome[®], a new class of motor. Delivers 5 inch-ounce torque in precise 18° steps, up to 450 steps/sec., on simple drive circuits. No stand-by power to maintain holding torque. 5.5 cubic-inch package.


Here is a remarkable source of precisely-controllable driving torque supplied in handy 18° increments, which has so many unique advantages over conventional devices that it's a shame to call it just a "stepping motor." This high torque Cyclonome is now being used or evaluated for use in such things as punched paper and magnetic tape drives, process control instrumentation, digital to analog converters, business machines, automatic control systems, counters, computer peripheral equipment and a wide variety of rotary switching, positioning and indexing devices. Here are the main reasons it will pay you to consider a Cyclonome for your application.

The shaft starts and stops instantly on command from the input, within $\pm 1/2^\circ$ on each 18° step, delivering torque in exact proportion to and at the same rate as the input. Speeds up to 450 steps/second are achieved with maximum torque. Random pulses or noise of the same polarity cannot make the Cyclonome take "extra" steps or run backward; remote positioning can be done without feedback. Successive ampere-turn reversals in the stator winding are required for the motor to step. Stepping accuracy is non-cumulative and superior to that of any other motor we know of.

Drive circuitry for this unique "rotary actuator" is far less complicated and voracious than with other devices: with no catches, the same motor can be operated on either 60-cycle AC, DC drive with switches or relays, oscillators, transistor flip-flops or other means, without complex sequential switching. And because the high (7 inch-ounce) holding torque requires no power (*magnetic detent*), power requirements are lowered further.

Inherently long life, high reliability and noiseless operation come from the best source: very few parts and only one that moves. There are no catches, solenoids, escapements, ratchets, slip rings or brushes; principal parts are two large alnico magnets, a stator winding, and a small solid toothed rotor turning in miniature pre-loaded ball bearings. High shock and vibration immunity results from the rugged sandwich-type construction.

Present versions of this new class of motor include the High Torque Series described here, Standard Uni- and Bi-directional types and a Miniature, High Speed Series. Basic design, performance and application data on all Cyclonome motors are contained in a new and comprehensive Cyclonome Technical Bulletin. Write for your copy now.

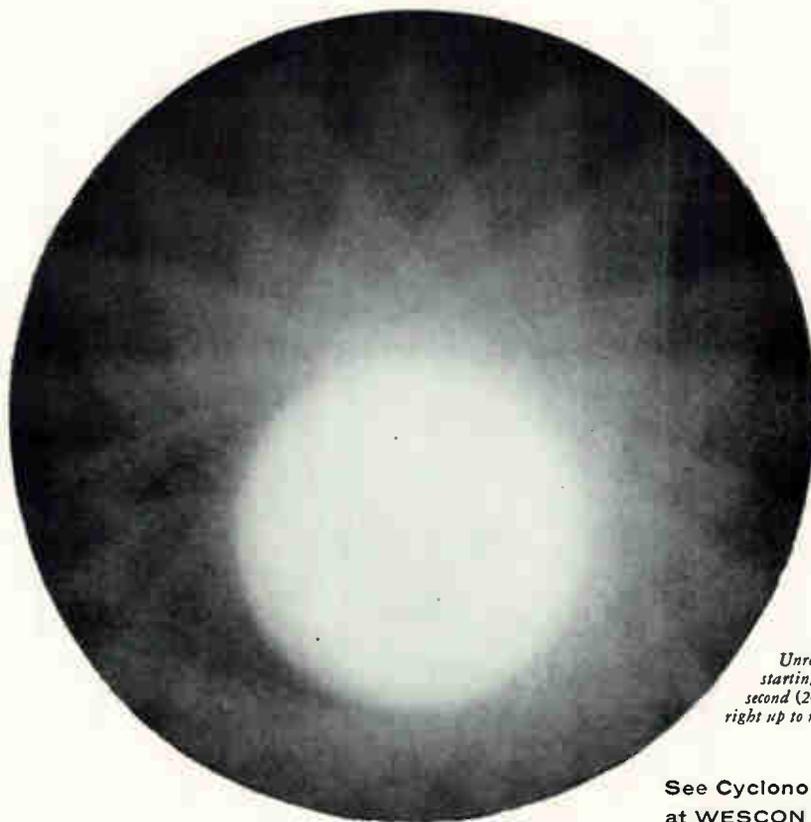

Unretouched photo of Cyclonome starting and stopping 450 times per second (20-18° steps per revolution right up to maximum speed).

See Cyclonomes "Live"
at WESCON Booths 223-224

SIGMA
DIVISION

SIGMA INSTRUMENTS, INC.
Department 62, Braintree 84, Massachusetts

this is its actual size:



FAIRCHILD
SEMICONDUCTOR

FAIRCHILD SEMICONDUCTOR/545 WHISMAN ROAD, MOUNTAIN VIEW, CALIFORNIA/YORKSHIRE 8-8161/TWX: MN VV CAL 853/A DIVISION OF FAIRCHILD CAMERA AND INSTRUMENT CORPORATION

August 10, 1962

CIRCLE 79 ON READER SERVICE CARD 79



ELECTRONIC INSTRUMENTATION FOR INDUSTRIAL, MILITARY AND PETROLEUM APPLICATIONS

SOLID STATE POWER SUPPLIES From milliwatts to kilowatts



Marine - Airborne - Mobile - Aircraft - Missiles - Communications - Automation - Laboratory - Test Control.

Regulated DC-DC converters for reliable performance in marine, airborne, mobile, and portable electronic equipment. Provides regulated or unregulated DC power for B+ or bias circuits from 6 to 48V input.

DC-AC inverters are superior to motor-generator sets, assure

reliability and afford excellent frequency stability. Available in regulated or unregulated models with free running oscillator, fork, or crystal-controlled frequency control. Supplies sine or square-wave output from DC input of 6 to 48V.

AC-DC for research and test laboratories, automatic control, and ground-support telemetry installations. Extremely low output impedance, low ripple and negligible servicing make a BER an ideal replacement for storage batteries.

TRANSFORMERS AND CHOKES




A representative number of the complete line. Many show how EIC custom design has been employed. Many constructed with inorganic materials to meet Class H specifications.

MAGNETIC RECORDING HEADS

Wide range of electrical and mechanical characteristics adapts these heads to many laboratory and industrial applications in recording, control, and data analysis.


Vacuum impregnated, potted in epoxy resin, available singly or in multihead blocks.

Used for drum, reel, or disk recording; sound or seismic recording; process instrumentation and control computers.

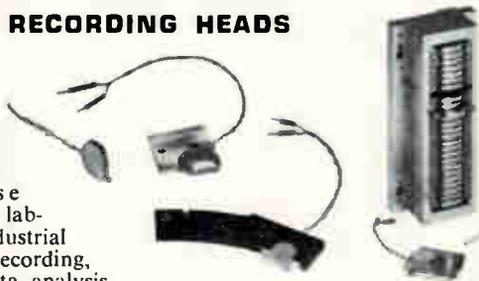

ANALOG INTERVAL TIMER AND PLOTTER

Used in any application requiring seismicological evaluation of subterranean structures for geophysics, civil engineering foundation tests, for buildings, roadways, dams and excavations, college laboratories and research.

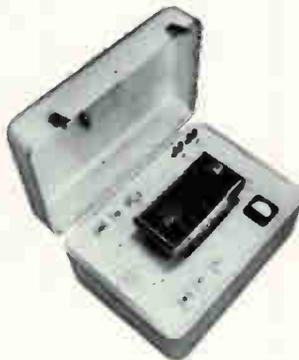

SEISMIC INSTRUMENTATION

Transcoders • Interval Timers • Data Logging Systems • Complete Field Equipment • Multichannel recording oscillographs • Modulators and demodulators • AM-FM • Direct-recording magnetic tape systems • Recording and data-reduction systems

OTHER AREAS OF EIC APPLICATION

Subassembly Electromechanical
• Electronic • Research and Development

OCEANOGRAPHIC

Broadband underwater acoustic transducers
Magnetic detectors • Research and Development

EIC REPRESENTATIVES

CLYDE M. SALISBURY CO.

San Francisco 22
1453 Seventh Ave.—MO 4-0586

REPCO SALES

Miami
401 N.W. 71st Street—PL 7-2911

EDWARD F. AYMOND CO.


Dallas—3915 Lemmon Ave.—LA 6-5233—TWX DL-206-U
Houston—5010 Carew Street—MO 6-1804
New Orleans—6305 Leslie—834-0196

ELECTRONIC SALES, INC.

Denver 22
2641 S. Ivy Street—SK 6-4148

WALLACE AND WALLACE

Los Angeles 15
1206 Maple Ave.—RI 7-0401




ELECTRODYNAMIC INSTRUMENT CORPORATION

Subsidiary of Reed Roller Bit Company

TWX HO-1147-U / RI 8-2760 • 1841 Old Spanish Trail • Houston 25, Texas

NEW! Metalized circuits that exceed current weldment standards

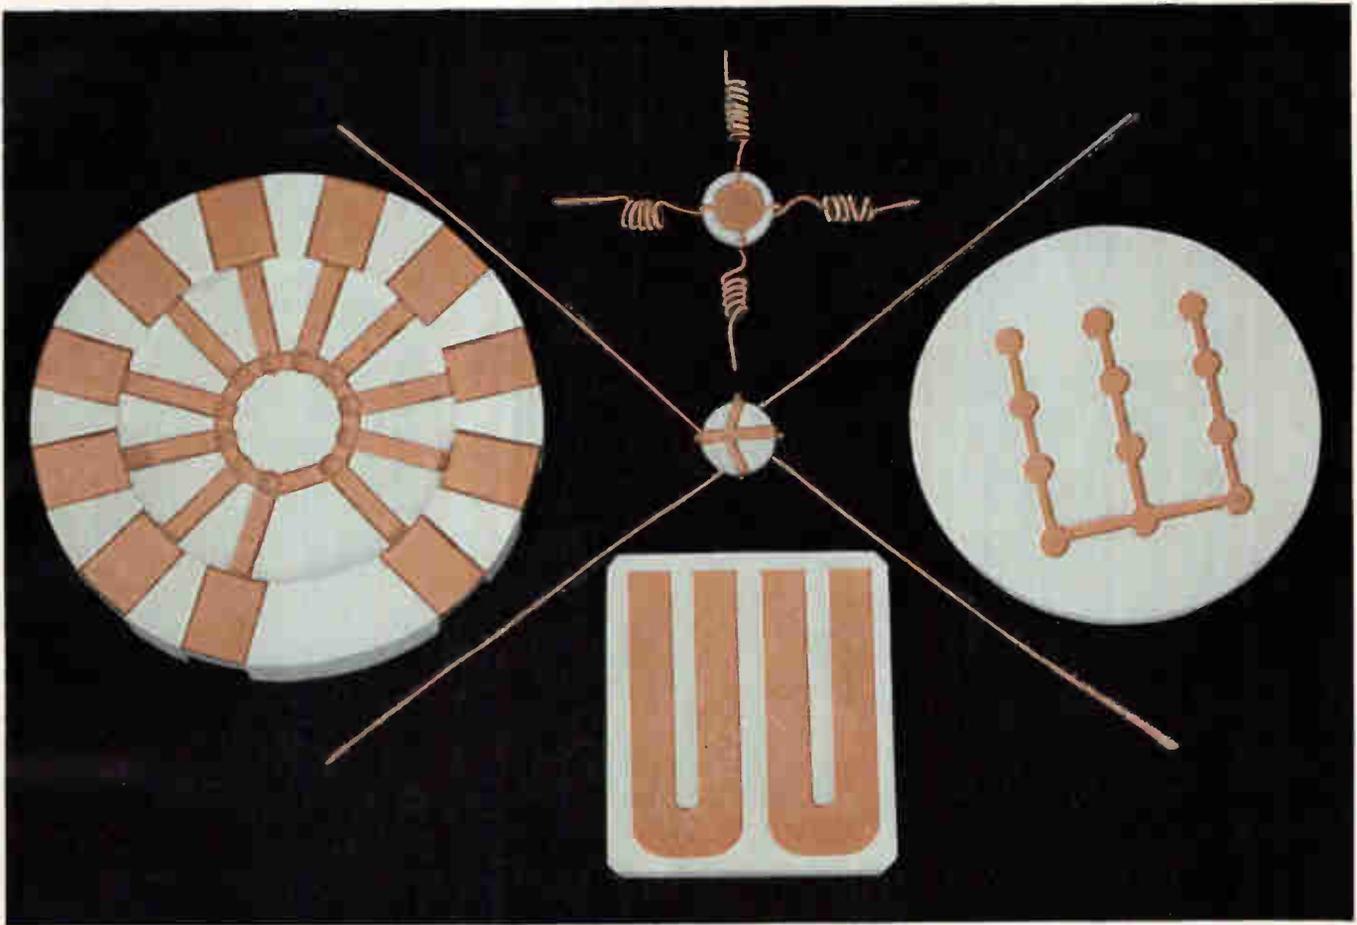

Precision-molded SUPRAMICA® 620 "BB" ceramoplastic offers exceptional pull strength in metalized circuits

Time was when *metalized* circuits meant *unreliable* circuits. Now metalized SUPRAMICA 620 "BB" changes all that. In 620 "BB", ceramoplastic and metal coating combine to deliver pull strength as high as 10 lbs. in a disc only $\frac{1}{8}$ " in diameter. Weldments are much stronger than ever before!

Maybe your strength requirements aren't quite so high. But you can benefit from SUPRAMICA's other advantages: for example, *total* dimensional stability, which simplifies the production of microminiature circuits and the molding of simple or complex inserts into place. You can position inserts at any conceivable angle . . . connect them with metalized circuits. The result? Practically unlimited three-dimensional-design possibilities. *And remember: These circuits are not electroplated circuits.*

In addition, SUPRAMICA 620 "BB" gives you a maximum temperature endurance of 1200°F (unstressed), dissipation factor (1 mc) of 0.0023, and compressive strength of 30,000 psi, to mention three other qualities.

Look into this new solution to all types of circuit-design problems. Specify precision-molded SUPRAMICA 620 "BB" or its companion product, machinable SUPRAMICA 620 ceramoplastic.

General Offices and Plant: 120 Clifton Boulevard, Clifton, N. J.
Executive Offices: 30 Rockefeller Plaza, New York 20, N. Y.

World's largest manufacturer of ceramoplastics, glass-bonded mica and synthetic mica products


See these new circuits at 1962 WESCON SHOW, August 21-24, Booth 326-327



NEW
DESIGN
INFORMATION

Filled with facts you can use, Mycalex' up-to-date 36-page, color catalog is yours for the asking. For your personal copy, write today.



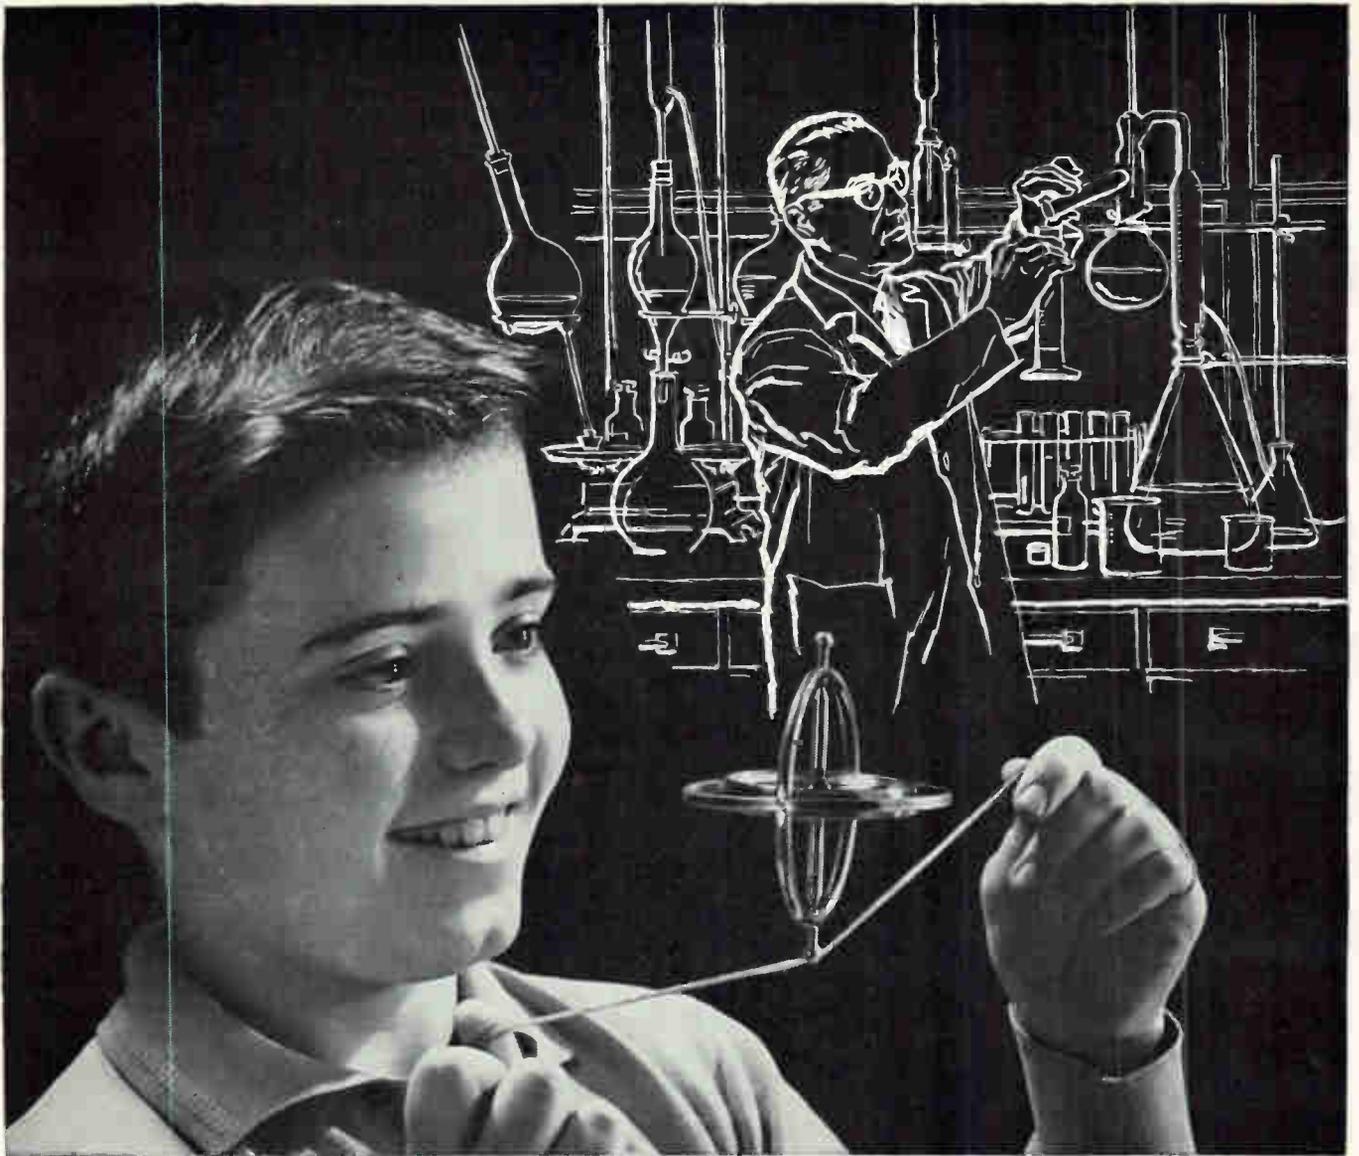

The Future of Your Business

MAY DEPEND UPON HIS EDUCATION

The young mind which today discovers an old principle may someday reveal a new one capable of revolutionizing your business and creating undreamed of growth. But this is possible only if he gets the finest education we can offer.

By the time today's youngsters are ready for college, business and industrial technology will be even more complicated and will require many more trained specialists. To fill this order we must provide our young people with the best possible college educations.

Unfortunately many colleges are already overcrowded. In ten years applications are expected to double. We will need more and better college classrooms and libraries, more efficient college laboratories, and additional top-quality professors. *You can help assure your own future by helping the college of your choice.*

If you want to know what the college crisis means to you, write for a free booklet, "OPEN WIDE THE COLLEGE DOOR," to Higher Education, Box 36, Times Square Station, New York 36, N.Y.



Published as a public service
in cooperation with The Advertising Council and
the Council for Financial Aid to Education



**YOU'LL REACH
FOR THIS CATALOG
OFTEN!**

It's the new Struthers-Dunn Catalog of Reed Relays—just off press.

Its graphs, tables, and performance data cover the widest variety of reed relays in the industry—all of them characterized by fast switching, long life, low operating power, and moderate cost.

It will simplify your relay selection.

It will help you get exactly the right relay type for your specific application.*

**THIS IS TRUE, whether the job is telemetering, data processing, computing systems, fire alarm systems, mobile communications, missile ground support, transistor drive, numerical control of machine tools, digital voltmeters, chromatography, or what have you?*

Your copy is waiting. Just tell us where to send it.

STRUTHERS-DUNN, Inc.

PITMAN, NEW JERSEY

Member, National Association of Relay Manufacturers



Sales Engineering Offices in: Atlanta • Boston • Buffalo • Charlotte • Chicago • Cincinnati • Cleveland
Dallas • Dayton • Denver • Detroit • High Point • Kansas City • Los Angeles • Memphis • New York
Orlando • Pittsburgh • St. Louis • San Diego • San Francisco • Seattle. Canadian Licensee: Renfrew
Electric Co., Toronto, Ontario, Canada. Export Department: 1505 Race St., Philadelphia 2, Pa., U.S.A.

See Us at Wescon Show, Booth 3204



Mercury and Cadmium Improve IR Detectors

Infrared detectors combine properties ideally suited to airborne reconnaissance

By F. G. WHELEN

I. E. DISTELHORST

Electronics Systems & Products Div.
Martin Company, Baltimore, Md.


AIRBORNE reconnaissance capabilities can be improved by newly developed infrared detectors, particularly where low noise equivalent temperature is required. Mercury-doped and cadmium-doped germanium detectors have been produced that provide an ideal combination of characteristics for these applications.

One objective of a development program underway for several years is improved detection in the middle and far infrared regions. For most airborne reconnaissance missions, peak detector sensitivity is required from 8 to 14 microns, corresponding to the atmospheric

transmission window. In these applications, sensitivity beyond 14 microns contributes little but requires additional cooling and adds complexity to the system. Ideally, therefore, peak response should be in the region of 8 to 14 microns with sharp cutoff above 14 microns to reduce cooling requirements.

Gold-doped germanium detectors, which have been produced for some time, have found acceptance for ground mapping and color discrimination applications. They are sensitive over 2 to 9 microns and operate at 77 degrees K, unlike copper- and zinc-doped germanium which require temperatures of 4 degrees K.

More recently, cadmium- and mercury-doped germanium detectors have been produced, providing characteristics even more suitable for airborne reconnaissance. Their advantages are particularly evident where low noise equivalent temperature is required to discriminate the target of interest from background objects having nearly the same am-

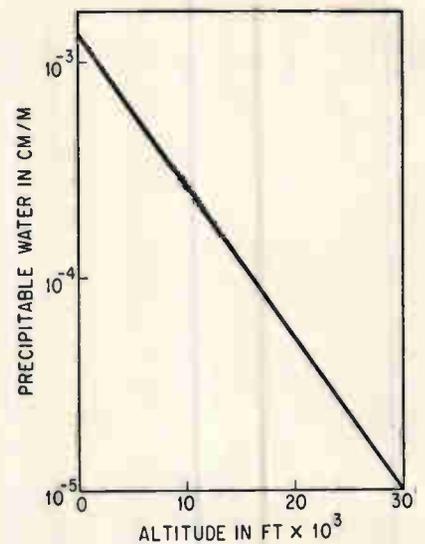

Precipitable water plotted on logarithmic scale and altitude on linear scale are linearly related—Fig. 1

bient temperature.

Mercury-doped germanium detectors have been produced with measured peak detectivity D^* of 3×10^{10} cm/watt and 500-degree K black-body D^* of 1.4×10^{10} for an aperture of 60 degrees and an operating temperature of 35 degrees K. The new detectors have nearly optimum response from 8 to 14 microns, corresponding to the atmospheric window. Peak sensitivity corresponds closely to the peak of ambient temperature objects. Also, mercury-doped germanium requires cooling only to 40 degrees K.

TEST RESULTS—The properties of mercury-doped germanium, particularly in relation to the low noise equivalent temperature (NET), are similar to cadmium-doped germanium, which has been tested extensively at Martin. Results of these tests were used to compare performance of cadmium- or mercury-doped germanium to gold-doped germanium for airborne reconnaissance.

Assumptions made in the calculations include mean ground temperature of 300 degrees K, minimum sensitive area of one detector

NR Diode Report Slated for WESCON

MAGNETIC properties of the bonded negative-resistance diode will be described at WESCON. Extensive studies of these devices were made at Raytheon Research Division. Results of these experiments will be reported in a paper by A. P. Schmid and W. Rindner, which also discusses a number of potential applications.

Sensitivity of the bonded negative-resistance diode, which considerably exceeds that of conventional magnetic transducers, was measured as a function of temperature, bias and frequency. Using the figure of merit usually applied to Hall-effect devices, sensitivities as high as 165 volts/amp kilogauss were obtained at room temperature. With proper biasing, output was also found to be independent of temperature over the temperature range

of 0 to 70 degrees Centigrade.


Other characteristics of the bonded NR diode include low bias requirements and magnetic sensitivity that is a linear function of field up to 4 kilogauss. Small size of the devices is also a desirable feature and has resulted in fabrication of packaged units of less than 10⁻³ cubic inches.

Bonded NR diodes also have a current-controlled negative-resistance characteristic, which combined with the magnetic properties make possible a number of unusual circuit applications. The devices are most attractive as an element for sensing a-c rather than d-c fields. Potential applications of the bonded NR diode include use as modulators, choppers, multipliers and field probes, several of which are discussed in the conference paper.

**LOW COST
WIDE
APPLICATION
FLEXIBILITY**



CHECK KEPCO

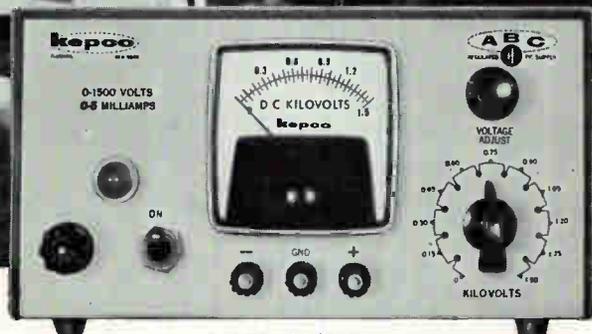

0-1500 V/0-5 ma



from 0-2V / 1A to 0-1500V / 5ma

**KEPCO QUALITY AT COMPETITIVE PRICES!
EQUIP YOUR FACILITY WITH ALL SEVEN
BASIC POWER SUPPLIES FOR ONLY \$1248**

AVAILABLE FROM STOCK

- 0.05% REGULATION and STABILITY
- 0.5 mv rms RIPPLE
- Adjustable Overload Protection
- No Voltage Overshoot
- Bench or Rack mounting
- Control Amplifier Terminals for:
 - Programming Voltage/Current by Resistance or Voltage
 - Remote Error Sensing


MODEL	ABC 2-1M	ABC 7.5-2M	ABC 15-1M	ABC 30-0.3M	ABC 40-0.5M	ABC 200M	ABC 1500M
DC OUTPUT VOLTS	0-2	0-7.5	0-15	0-30	0-40	0-200	0-1500
DC OUTPUT AMPS	0-1	0-2	0-1	0-0.3	0-0.5	0-0.1	0-5 ma
PRICE	\$179.00	\$159.00	\$159.00	\$119.00	\$159.00	\$199.00	\$274.00



Over 200 models to choose from... WRITE FOR NEW CATALOG B-621
131-48 SANFORD AVENUE • FLUSHING 52, N. Y. • Area Code 212 IN 1-7000 • TWX # NY 4-5196
SEE US AT WESCON SHOW - BOOTHS 114-115

PULSE POINTERS—

Serial Word Generator For Digital Circuitry And Logic Design




Model 5510 Serial Word Generator

Variable sync bit locations, NRZ and RZ, and complementary outputs —

Models in the SERVOPULSE™ 5500 series offer 1-99 bit word length selection. Fully transistorized for reliability and long life, these instruments are powerful tools for the design and test of shift registers, memory elements, and other logic circuitry. —Units offer flexible basic design features such as 0.5 to 10,000 μ sec (2 mc to 100 cps) clock rate; variable and delayed syncs; arbitrary coding; 0.2 μ sec wide, plus 4.5 v into 600 ohms clock output; plus complementary NRZ and RZ outputs.

10 mc Pulse Generator Accepts Variety of Standard Modification

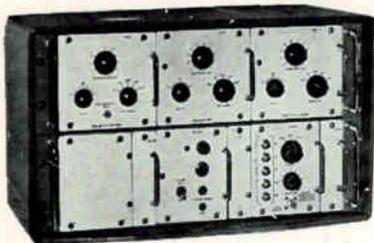

Model 4550A
10mc Pulse Generator


Computer makers like high rep rate and 10 nanosec rise time — Model 4550A Pulse Generator delivers variable parameter test pulses at very high rep rates. It is used to develop and test components, logic circuitry, and high clock rate digital systems. This compact, transistorized instrument can be modified by the simple addition of standard output amplifier modules.

For complete details, write:

**SERVOPULSE™ PRODUCTS
SERVO CORPORATION OF AMERICA**



111 New South Road
Hicksville, L. I., N. Y.
WElls 8-9700

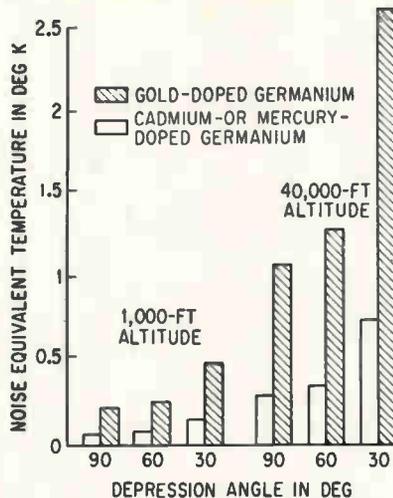

Noise equivalent temperature of cadmium- or mercury-doped germanium is several times that of gold-doped germanium—Fig. 2

COMPARATIVE DETECTOR PERFORMANCE

De-tector	Alti-tude in feet	De-pression angle in deg	E_o	T_a	NET in deg K
Cad-mium-doped ger-manium (8-13 microns)	1,000	90	0.3	0.87	0.069
		60	0.26	0.85	0.082
		30	0.15	0.79	0.152
	40,000	90	0.3	0.65	0.247
		60	0.26	0.62	0.348
		30	0.15	0.52	0.718
Gold-doped ger-manium (3-8 microns)	1,000	90	0.3	0.383	0.213
		60	0.26	0.37	0.255
		30	0.15	0.338	0.483
	40,000	90	0.3	0.218	1.04
		60	0.26	0.21	1.24
		30	0.15	0.204	2.53

of 10^{-4} cm^2 and angular width of the strip mapped of 2.36 radians. System overall optical efficiency ranges from 0.3 to 0.15 as scanner depression angle makes less of the parabolic mirror effective, scan efficiency is 0.667 and 25 detectors are used in an array. Effective D^* for the 300-degree K field is 5×10^6 for both gold-doped germanium over the region of 3 to 8 microns and cadmium- or mercury-doped germanium over the region of 8 to 13 microns.

Flights at 1,000 and 40,000 feet are considered. For the low-altitude flight, the ratio of altitude to air-

craft speed is 1.26 and system angular resolution is 10^{-3} radians. For the high-altitude flight, the altitude to speed ratio is 0.02 and resolution is 0.2×10^{-3} radians. Diameter of the primary parabolic mirror in the cases of both altitude levels is 15.25.



To determine spectral atmospheric transmission, an atmosphere is assumed in which sea-level temperature is 20 degrees C and relative humidity is 80 percent. Thus precipitable water per meter path length is 1.4×10^{-3} cm, and precipitable water at 30,000 feet altitude is 1×10^{-5} cm/meter. The straight-line relationship between precipitable water plotted on a logarithmic scale and altitude plotted on a linear scale is shown in Fig. 1.

Correcting for pressure, precipitable water in a vertical column from sea level to 1,000 feet altitude is 0.381 equivalent sea-level cm and to 40,000 feet is 2.27 equivalent sea-level cm.

CALCULATING NET — These values were substituted into the equation for noise equivalent temperature. For cadmium- or mercury-doped germanium at 1,000 and 40,000 feet, NET was calculated to be $1.8 \times 10^{-2}/E_o T_a$ and $5.6 \times 10^{-2}/E_o T_a$, respectively, where E_o is system overall optical efficiency and T_a is atmospheric transmission. For gold-doped germanium at 1,000 and 40,000 feet, NET was calculated to be $2.46 \times 10^{-2}/E_o T_a$ and $7.64 \times 10^{-2}/E_o T_a$, respectively.

Using the Kellogg and Greenfield curves¹ for transmissivity from 8 to 13 microns and the Larmore and Passman tables² for transmission from 3 to 7 microns, the results shown in the table were obtained. These results are also plotted in Fig. 2. Results with cadmium-doped and mercury-doped germanium are 3 or 4 times better than gold-doped germanium for the atmospheric conditions chosen and are less than the mean ground fluctuation of 1.5 degrees C by at least a factor of 2 in all cases.

It is noteworthy that under poorer atmospheric conditions, the comparative performance of cadmium- or mercury-doped germanium infrared detectors would pro-

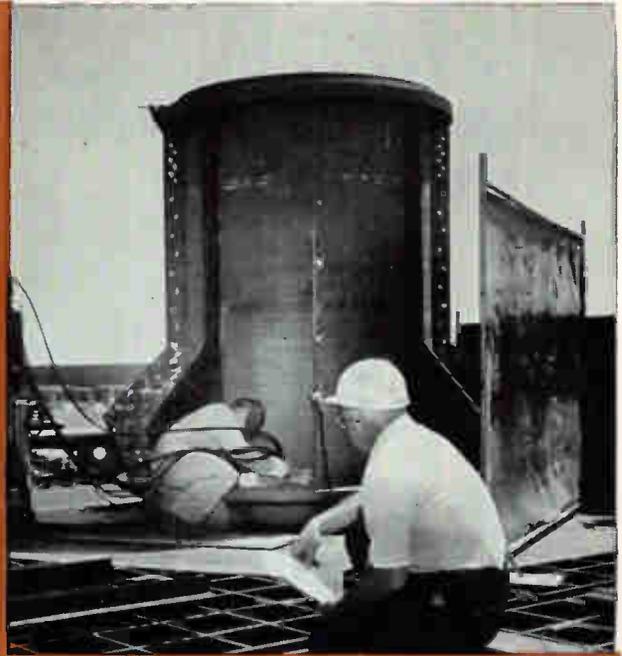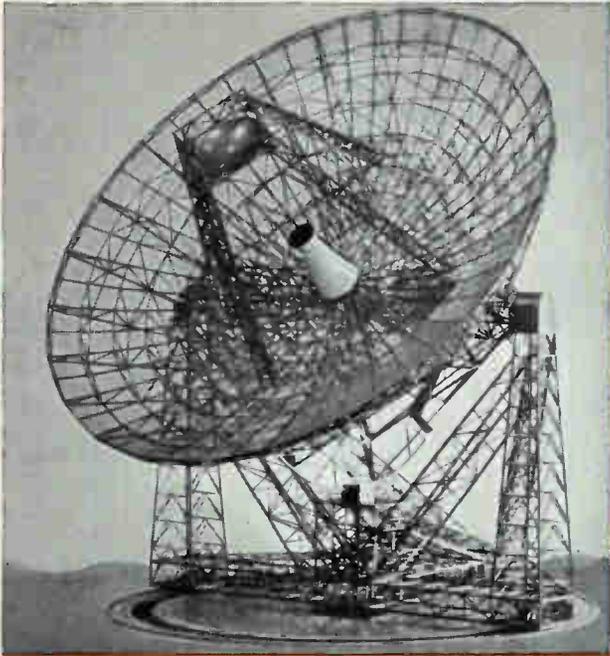

Rohr precision — a natural plus in large antenna hardware

Our successful performance in the manufacture of massive antenna structures results from a unique blending of engineering and manufacturing experience in the field of large and precise metal components. From the beginning, our antenna philosophy called for a new degree of precision to meet new levels of antenna performance. This led to a long and continuing Rohr antenna research program . . . research in design, fabrication and erection problems with consideration of environmental requirements. The result is that today Rohr is producing under contract some of the largest and most advanced antenna structures in the world. For more information, write for our brochure titled, "Large Antenna Structures." Address Marketing Manager, Dept. 129, Rohr Corporation, Chula Vista, California.

Main Plant and Headquarters: Chula Vista, Calif./Plant: Riverside, Calif./Assembly Plants: Winder, Ga.; Auburn, Wash.

Offices in Washington, D. C. and Huntsville, Ala.



ROHR
CORPORATION

PRECISION PRODUCTION PROBLEMS?



Here's help
from
Bausch & Lomb
in

TOOL DESIGN
INSPECTION
FABRICATION
MEASURING
TESTING




**DR-25B
OPTICAL GAGE**
Fastest, easiest way to measure depth, thickness, height, diameter, taper. Read direct to 0.0001" on bright, magnified scale.

**10" BENCH
PROJECTOR**
Magnifies silhouette of production part on high-contrast, wide-angle screen for measurement or comparison with template. Optional micrometer stage reads to 0.0001".



**TOOLMAKERS'
MICROSCOPE**
Wide field of view, bright shadow-free light and wide reticle lines for fast, easy linear measurements to 0.0001"; angular, to 1 minute of arc.

**SCRATCH
DEPTH GAGE**
With this simple hand-held instrument you can measure the depth of any scratch to 0.0001", with a range of 0" to 0.015".



**STEREOZOOM®
MICROSCOPES**
Big, bright 3-D views of tiny parts. Zoom to any magnifications you need for assembly, inspection. Dust-proof, shockproof—can be mounted right in machines.

**DIE-WEAR
MICROSCOPE**
See readily if die needs sharpening, and exactly how much metal must be removed. Direct, easy-to-read measurement of die wear up to 0.020" . . . accurate to 0.0001".



**ZOOM
MACROSCOPE**
Measure direct to 0.0001" — at any magnification from 10x to 30x — with constant focus throughout.

BAUSCH & LOMB INCORPORATED
61432 Bausch St., Rochester 2, N. Y.

Please send literature on optical production aids checked below:

DR-25B Optical Gage Toolmakers' Microscope StereoZoom Microscopes Zoom Macroscope 10" Bench Projector Scratch-Depth Gage Die-Wear Microscope

NAME

TITLE

COMPANY

ADDRESS

CITY ZONE STATE

BAUSCH & LOMB

vide an even greater improvement in noise equivalent temperature.

REFERENCES

- (1) Kellogg and Greenfield, Proc IRIS, 5, p 207.
- (2) Larmore and Passman, Proc IRIS, 1.

Explanation Offered for Angels on Radar Displays

ANGELS or false targets on radar displays have lent credence to many flying saucer reports, as well as causing considerable confusion. The cause of angels has never been fully understood, although they are partly explained by sharp discontinuities of temperature and moisture in the atmosphere.

False targets are produced by backscattering from inhomogeneities in the atmosphere only at short ranges, indicating the need for further explanation of angels. At Air Force Cambridge Research Laboratory, P. J. Harney analyzed results of many observations made at the laboratory and by the Weather Bureau and Wright Air Development Center. From this information, he suggests a model of the mechanism of false radar targets.

The conditions necessary for producing angels are found typically in the Kansas area. On hot summer days, radar displays may be cluttered with angels, although there is not a cloud in the sky. The pattern of the clutter is quite similar to that of certain types of cloud populations found in Florida. This pattern results from a condition called Benard cell circulation. Although no clouds were present, it is suggested that this type circulation was present in Kansas.

Benard cell circulations produce concave reflecting surfaces at altitudes up to about 6,000 feet. The radar beam reflected by these dish-like surfaces produces angels. A number of these reflecting surfaces in a huge undulating layer would present slowly changing aspects.

A low-angle radar beam under certain conditions could be reflected from one surface to another before returning to the radar. Because of the undulating nature of the reflecting surface, the target would appear to be moving rapidly. The model could also explain occasional transmissions of vhf and uhf signals over great distances.



AIL
DIVISION

TYPE 90

TYPE 120

ARE YOU USING THE LATEST AUTOMATION TECHNIQUES IN YOUR DESIGN ENGINEERING?

The AIL Type 90 Circuit Design Tolerance Tester can help you produce circuit designs of *proven* reliability under "tolerance limit" conditions of component values and environmental extremes . . . and in a fraction of the time it now takes for a superficial design.

The tolerance limits may be either "worst case" conditions or can represent the limits established by computation of expected tolerances to arrive at some predetermined reliability or confidence level.

"Tolerance limit" conditions of resistance, capacitance, inductance, and such other parameters as power factor and dielectric absorption can be evaluated in all possible combinations at a rate of 6000 tests per minute! The Type 90 Circuit Design Tolerance Tester provides for testing of up to 16 circuit

components in a two transistor circuit, and can perform over 65,000 tests in less than 15 minutes.

Also permits checks on circuit performance for input signal variations, B+ changes and transistor characteristic changes. Component switching performed by 16 high speed mercury wetted relays good for at least 2×10^9 operations; Includes output sensor which adapts to standard 5" oscilloscope for detecting failures; Automatic stop on failure, and/or end of test cycle.

The Type 90 also provides a means for arriving at the most economical production design. Only those circuit components, whose tolerance is proved

by the Type 90 to be critical, need be chosen for higher quality.

Price of the Type 90 is \$3,600. Circle Publication No.796.

TYPE 120— FUNCTION GENERATOR


Three Wave Forms are provided in one lightweight transistorized package. Sine waves, square waves or pulses with constant amplitude within ± 1 db over the 30 to 39,000 Cps range. Output amplitude and pulse width adjustable. Price \$299. Circle Publication No.797.

Prompt service from leading test instrument representatives.

Prices and specifications are subject to change without notice.

AIRBORNE INSTRUMENTS LABORATORY

DIVISION OF CUTLER-HAMMER, INC. DEER PARK, LONG ISLAND, NEW YORK

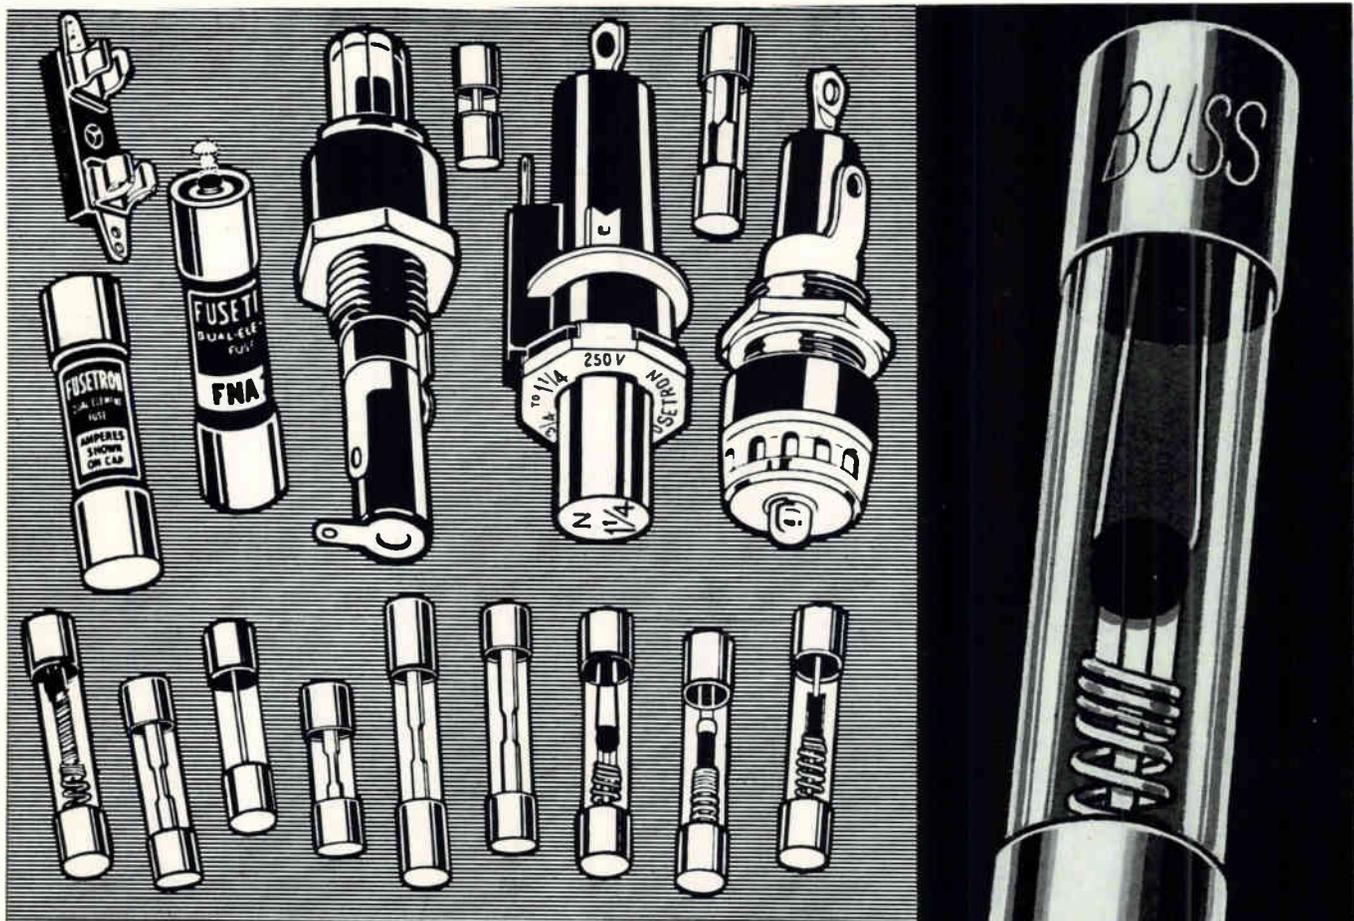

**You'll save time, trouble...
by turning *FIRST* to *BUSS*
for fuses of unquestioned high quality**

By relying on BUSS as your source for fuses, you can quickly and easily find the type and size fuse you need. The complete BUSS line of fuses includes: dual-element "slow-blowing", single-element "quick-acting" and signal or visual indicating types... in sizes from 1/500 amp. up—plus a companion line of fuse clips, blocks and holders.

**BUSS fuses are made to protect—
not to blow needlessly**


When you specify BUSS fuses—users of your equipment receive maximum protection against damage due to electrical faults. And just as important, users are safeguarded against irritating, useless shutdowns caused by faulty fuses blowing needlessly.

A component part that operates as intended helps to maintain the reputation of your equipment for quality and service. That's why it pays to rely on dependable BUSS fuses.


If you should have a special problem in electrical protection... the world's largest fuse research laboratory and its staff of engineers are at your service—backed by over half a century of experience. Whenever possible, the fuse selected will be available in local wholesalers' stocks, so that your device can be easily serviced.

For more information on BUSS and FUSETRON Small Dimension Fuses and Fuseholders... Write for bulletin SFB.


**BUSS: The complete line of fuses and
fuse mountings of unquestioned high quality.**

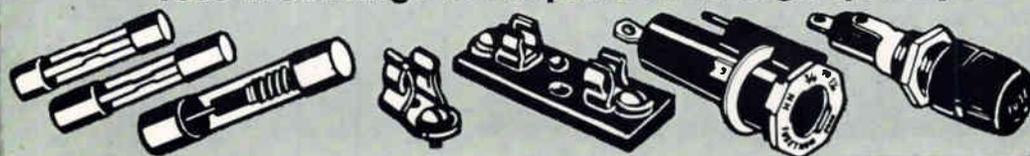

BUSSMANN MFG. DIVISION
McGraw-Edison Co.
St. Louis 7, Mo.

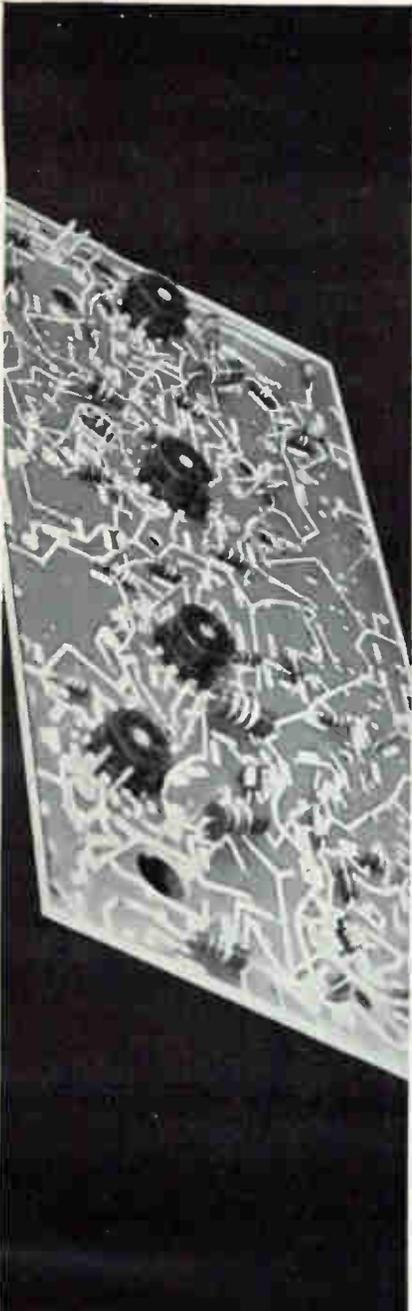

Baths of molten solder

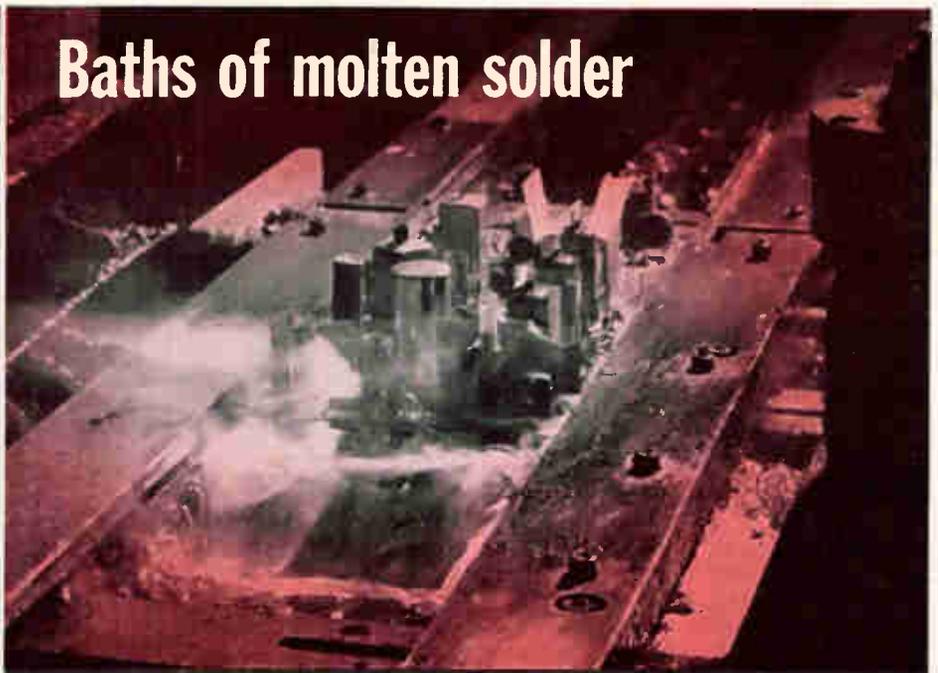

Bent a million times



Rugged PANELYTE printed circuit board comes through the rigors of manufacture and test of SYLVANIA TV

Sylvania TV components go through torture—to assure long and reliable set performance.

The "Lifetime Engraved Circuit"—made of Thiokol Panelyte copper-clad laminated sheet—is subject to the molten heat of automatic soldering. The temperature extreme has no negative effect on the sheet's dimensional stability or electrical strength. Exposure to this high heat underscores other Panelyte laminates characteristics highly significant in electronic equipment.

A unique torture test devised by Sylvania to check out durability and dependability of its printed circuit proves the flexural and mechanical strength of Panelyte laminates. Bent back and forth over three inches 15,000 times a day, an operating chassis kept a clear, sharp picture. The Panelyte sheet did not crack nor lose a connection through a million tortuous bends. For complete information about Panelyte laminated stock, write to Thiokol Panelyte for Production Values literature.

SEE US AT THE WESCON SHOW—BOOTH 3711

THIOKOL CHEMICAL CORPORATION, PANELYTE INDUSTRIAL DIVISION, N. ENTERPRISE AVE., TRENTON 4, N. J.



Panelyte produces laminated sheets, rods, tubes and copper-clad stock, as well as high temperature materials, and high pressure moldings for the missile and aerospace industry.

How do you talk to a man to sell him something when he can be working in any or all of the areas of research, design, production and management in the dynamic electronics industry? Obviously you can't follow him unless *he keeps in touch with you*. That's exactly what **electronics'** 52,721 subscribers do. They **PAY** to read **electronics** because they want and need it in their work. As they progress they voluntarily contact us week in and week out...more than 61,721 changes in titles, addresses, etc. during 1960...and that's where **electronics'** membership in the Audit Bureau of Circulation — where subscribers actually pay — reaps dividends for the advertiser.

Illustrated below are major steps in the career of Mr. Dorman D. Israel, a charter subscriber to **electronics**. Mr. Israel has paid approximately \$160.00 to receive **electronics** since it was established in April, 1930. Mr. Israel estimates that he spends between 60 and 100 hours a year studying the pages of the publication. (The average subscriber

he paid to read **electronics**



Mr. Dorman D. Israel
as radio design
engineer



As chief engineer

currently spends 5 hours 25 minutes every month.) Mr. Israel has obviously invested a considerable amount of time as well as his money in **electronics** over the past 31 years.

Only paid circulation has the drawing power to keep track of key people in America's most dynamic growth industry. Only **electronics** reaches so deep into the industry. And only **electronics** reaches all four major buying influences in the industry—engineers in research, design, production and management, working in any or all four areas. Place your advertising alongside editorial material for which the buyer has demonstrated a need...in ABC publications such as **electronics**.



A McGraw-Hill Publication, 330 West 42nd Street, New York 36, N. Y.

all the way to the top

As development engineer




As vice president in charge of engineering and production



As Executive Vice President
Emerson Radio & Phonograph Corporation



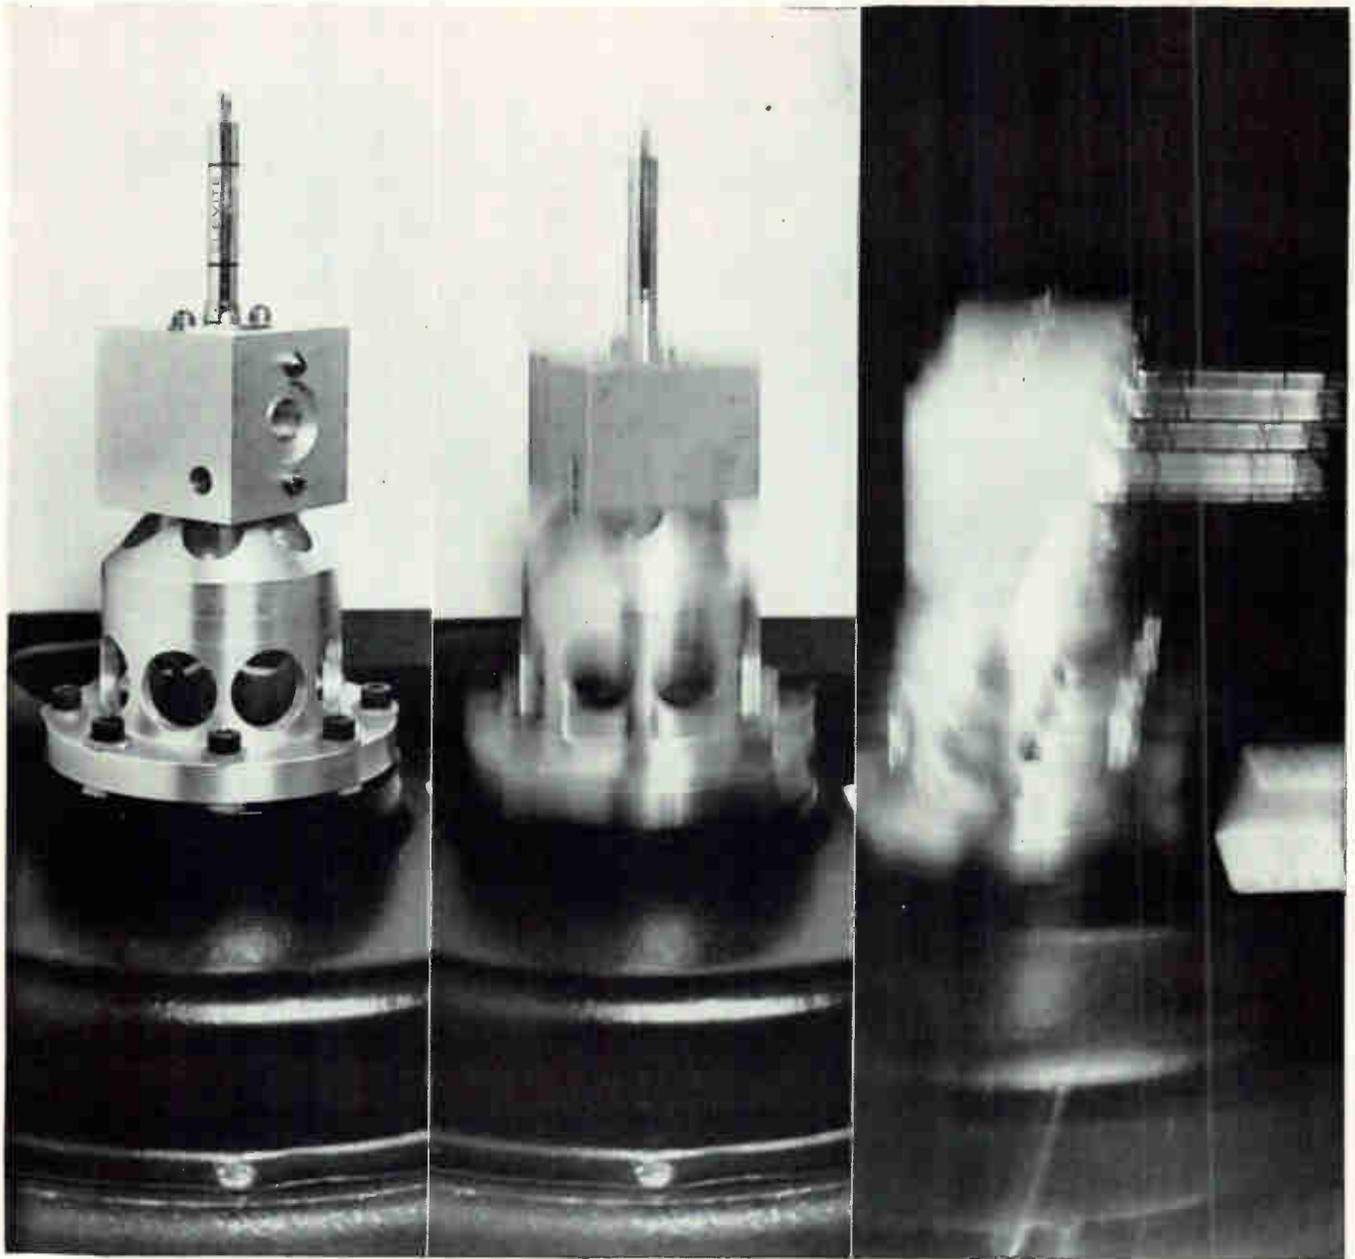

Specify proven stability



with CLEVITE Ceramic Filters


Does your i-f filter maintain center frequency under vibration and shock? It does if it's a Clevite ceramic ladder filter. Center frequency shift is negligible after MIL 202B shock and vibration tests*. ■ Stability like this is worth considering whether your next receiver is ground or airborne. Clevite now stocks 455 kc and 500 kc ladder filters in 12 bandwidths from 2 kc to 50 kc. Standard models pack 80 db stopband rejection into a 0.1 cu. in. package. ■ Write or phone the nearest Clevite office for immediate information, prices and delivery on Clevite ceramic ladder filters.

Booth 821-824 WESCON Aug. 21-24

*actual test plots on request.

Field Sales offices: New York, New York/Chicago, Illinois/Denver, Colorado/Inglewood, California.

CLEVITE
ELECTRONIC
COMPONENTS
 DIVISION OF CLEVITE CORPORATION
 232 FORBES ROAD, BEDFORD, OHIO

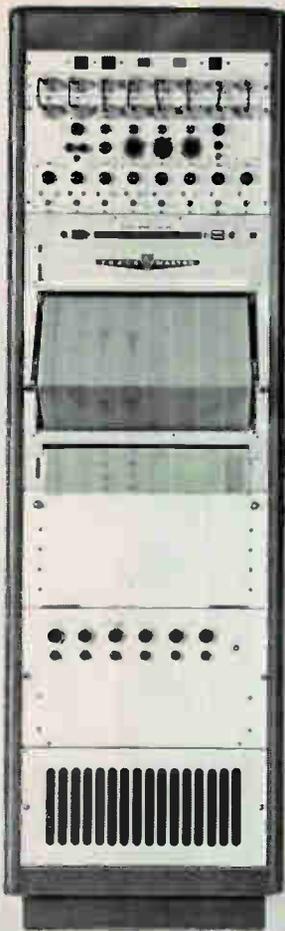

	SERIES 250 TRACEMASTER 8-channel, Rack Cabinet on casters	SERIES 260 TRACEMASTER 8-channel, Rack Cabinet on casters	SERIES 290 TRACEMASTER Model 291 Single-channel; Portable	Model 293 3-channel; Portable
FREQUENCY RESPONSE	DC to 110 cps. $\pm 1\%$ at 40 mm. peak to peak. Down 3 db at 140 cps.	DC to 100 cps. $\pm 1\%$ at 40 mm. peak to peak. Down 3 db. at 125 cps.	DC to 90 cps. $\pm 5\%$ at 30 mm. peak to peak. Down 3 db at 125 cps.	DC to 90 cps. $\pm 5\%$ at 30 mm. peak to peak. Down 3 db at 125 cps.
BAND AMPLITUDE PRODUCT	5600 (i.e. 40 mm. x 140 cps.)	5000 (i.e. 40 mm. x 125 cps.)	3750 (i.e. 30 mm. x 125 cps.)	3750 (i.e. 30 mm. x 125 cps.)
SENSITIVITY RANGE	10 Microvolts to 100 v/cm	100 mv/cm to 20 v/cm	50 mv/cm to 50 v/cm	50 mv/cm to 50 v/cm
CHART SPEEDS	0.2 to 500 mm/sec.	1 to 250 mm/sec.	1 to 100 mm/sec.	1 to 100 mm/sec.
CHART CAPACITY	1000 ft. roll	1000 ft. roll	200 ft. roll	200 ft. roll
WEIGHT			18 lbs.	40 lbs.

NOW... a Tracemaster System to meet your recording problem!

AO Tracemaster presents three outstanding direct-writing recorder systems to help you acquire more meaningful low-frequency data.

Series "250" — Ideal for test installations requiring a multi-channel record of diverse signal inputs on a common time base.

Series "260" — Economical recording of simpler, medium sensitivity inputs requiring many identical channels.

Series "290" — Single-, 2- or 3-channel portable Tracemasters; ruggedness and performance reliability in a compact package for those on-the-spot recordings in the lab, field or plant.

... And they all feature the advanced Tracemaster Pen Motor and the exclusive direct-carbon-transfer writing method . . . assuring a clean, uniform, high-contrast, fine-line trace that is two to three times finer than any other direct-writing technique.

The important specifications above give only some of the many reasons why each system has established new standards of performance for direct-writing recorders in its class and price range. The complete story is yours for the asking . . . just write for the catalog!


American  Optical
COMPANY

INSTRUMENT DIVISION, BUFFALO 15, NEW YORK

See a complete demonstration
at the WESCON . . . AO Booths 3026-27.

CIRCLE 95 ON READER SERVICE CARD

Of interest to engineers and scientists

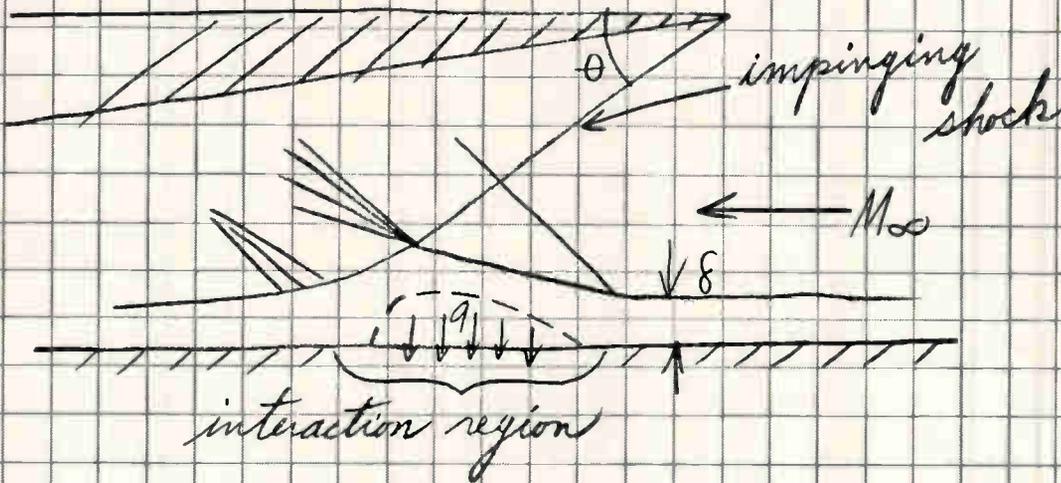

AERO-THERMODYNAMICS

...among the more than 500 R & D programs under way at Douglas

Extensive research in advanced aero-thermodynamics relating to missiles and space vehicles is now being performed in Douglas laboratories.

Among current areas are dissociation non-equilibrium in supersonic flows; separated supersonic boundary layer phenomena; experimental boundary layer studies; heat transfer; turbulent mass transfer; and base flow.

Support of this program is provided through a multi-million dollar laboratory complex. Included is the Douglas Aerophysics Laboratory, one of the finest fluid dynamic research facilities in the aerospace industry.

Of career interest to engineers and scientists

If you are seeking stimulating assignments and associates, full support of your activities, and an open door to advancement, investigate the

outstanding career opportunities at Douglas.

Here, the emphasis is on the research and development that solve today's problems and lead to involvement in the biggest defense and space projects of tomorrow. Also, scholarships and financial assistance are available to continue your studies in such nearby universities as U.C.L.A., Southern California and Cal Tech.

Send us your resume or fill out and mail the coupon. Within 15 days from the receipt of your letter, we will send you specific information on opportunities in your field at Douglas.



MISSILE & SPACE SYSTEMS DIVISION

An equal opportunity employer

Mr. F. V. Edmonds
Missile and Space Systems Division
Douglas Aircraft Company
3000 Ocean Park Boulevard
Santa Monica, California

F-6

Please send me full information on professional opportunities in my field at Douglas.

Name

Engineering or scientific field


Address

City

State



A major advance in low-cost, general purpose measuring instruments!

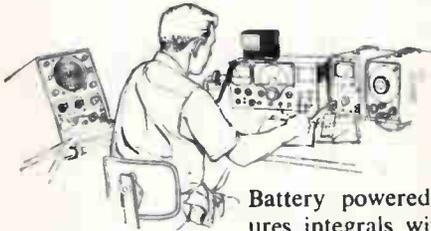

The SI-100 is a versatile measuring instrument for general laboratory use. It costs only \$99.50.

Battery powered, this instrument measures integrals with the convenience normally associated with voltage measurements. Six integral ranges are provided to permit a wide variety of input signals with the integral of the input signal displayed on a meter calibrated in volt-seconds. An auxiliary electrical output is provided for utility. Shunts are available for integration of current signals.

SPECIFICATIONS

- ACCURACY: $\pm 3\%$
- DRIFT: Less than 0.02 volt-sec./sec. during integration. Negligible on "Hold" position.
- RESET TIME: Less than 5 sec.
- VOLTAGE INTEGRATION: Six ranges: 10; 30; 100; 300; 1000 and 3000 volt-sec.
- CURRENT INTEGRATION: Optional shunts available.
- AUXILIARY VOLTAGE OUTPUT:

$$V_{out} = K_1 \int V_{in} dt + K_2$$

$$V_{out} \text{ Max. is approx. } 0.5v$$

$$K_2 \text{ is approx. } 30mv$$
- SIZE: LWH-6.75" X 5.25" X 2.40"
- WEIGHT: 1.75 lbs.

THE SI-100 SIMPLIFIES:


- TIME AVERAGING OF SIGNALS
- GENERATION OF RAMP FUNCTIONS
- MEASUREMENT OF CHARGE, IMPULSE, ENERGY, HEAT, VOLUME FLOW, REVOLUTIONS
- MEASUREMENT OF D-C COMPONENT OF SIGNALS
- MEASUREMENT OF DUTY FACTORS
- BATTERY CHARGE AND DISCHARGE STUDIES
- COULOMETRIC MEASUREMENTS
- SERVO TESTING
- PLATING AND ANODIZING
- RADIO PROPAGATION STUDIES
- POWER SPECTRUM ANALYSIS
- AMPLITUDE ANALYSIS
- TEMPERATURE PROGRAMMING
- LOW FREQUENCY NOISE MEASUREMENTS
- PULSE COUNTING
- OBTAINING AREAS UNDER CURVES



INTEGRATOR, MODEL SI-100
PRICE: \$99.50, FOB: DALLAS, TEXAS
DELIVERY: 30 DAYS

WRITE FOR ADDITIONAL INFORMATION
OR ORDER FROM:

TEXAS RESEARCH AND ELECTRONIC CORPORATION
6612 DENTON DRIVE DALLAS 35, TEXAS
MFG. SOLUTIONS, CAPCO CAPACITORS, HALLMARK INSTRUMENTS, EASTMAN & CENTRAL D METAL PRODUCTS

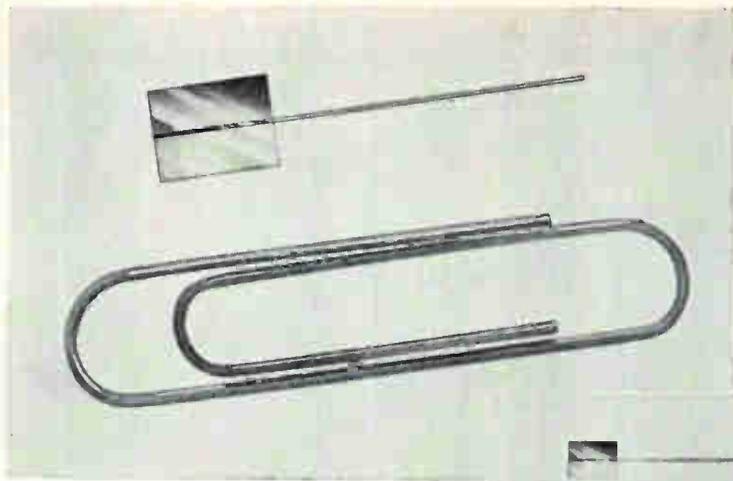

STRAIGHT SHANK MICRO-DRILLS


SPHINX straight shank precision micro-drills are now stocked in the U.S.A. for the first time. These Swiss drills are recognized as the standard of quality wherever fine instrument work is being done.




Ideally suited for drilling exceptionally long holes and for drilling through a bushing. For complete information write for Catalog 62.

LEVIN®

LOUIS LEVIN & SON, INC.
3573 Hayden Ave., Culver City, California



ACTUAL SIZE

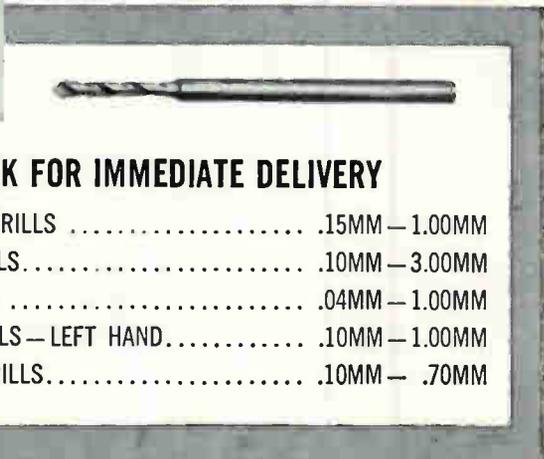

IN STOCK FOR IMMEDIATE DELIVERY

STRAIGHT SHANK DRILLS15MM — 1.00MM
 SPIREC PIVOT DRILLS..... .10MM — 3.00MM
 FLAT PIVOT DRILLS04MM — 1.00MM
 SPIREC PIVOT DRILLS — LEFT HAND..... .10MM — 1.00MM
 SPIREC CENTER DRILLS..... .10MM — .70MM

CIRCLE 203 ON READER SERVICE CARD

Simplify Wire Assembly

with a **Kingsley Wire-Marking Machine**


Now you can mark each wire or piece of plastic tubing with its own individual circuit number . . . quickly . . . economically, right in your own plant!

You reduce wire inventories because you need only one color of wire for as many circuits as necessary.

Simplify your assembly methods and speed production with the same machine that has proved so successful in the aircraft and missile industries.

For Complete Details, Write or Wire

KINGSLEY MACHINE CO.
850 Cahuenga Blvd., Hollywood 38, California

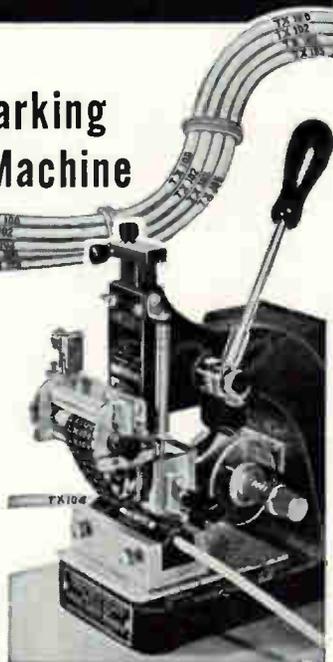

TKK INDUSTRIAL MOTORS

Lowest Drain, Minimum Noise,
Longest Life — at Low Cost



RM-170 T



FM-250 R



FM-250 N

APPLICATIONS

- * Tape-recorders
- * Record-players
- * Clocks
- * Shavers
- * Music Boxes
- * Cinemas
- * Turntables
- * Automations
- * Other Appliances

type	voltage (D.C.)
RM-170 T models	1.5 ~ 3.0 V
RM-170 S models	1.5 ~ 6.0 V
RM-170 SC models	3.0 ~ 12 V
FM-250 N models	1.5 ~ 4.5 V
FM-250 R models	1.5 ~ 6.0 V


Large orders executed reliably and on schedule by the world's largest factory specializing in D.C. magnetic low current motors (Output: up to 2½ million units per month!) Your detailed inquiry is invited — your satisfaction guaranteed.

MABUCHI SHOJI K.K.

37, Kobuto-cho 2-chome, Nihonbashi, Chuo-ku, Tokyo, Japon
 C.P.O. Box 1084, Tokyo Cables: "NIHONKAKOCO TOKYO"

CIRCLE 204 ON READER SERVICE CARD
electronics

NEW
FROM WESTON

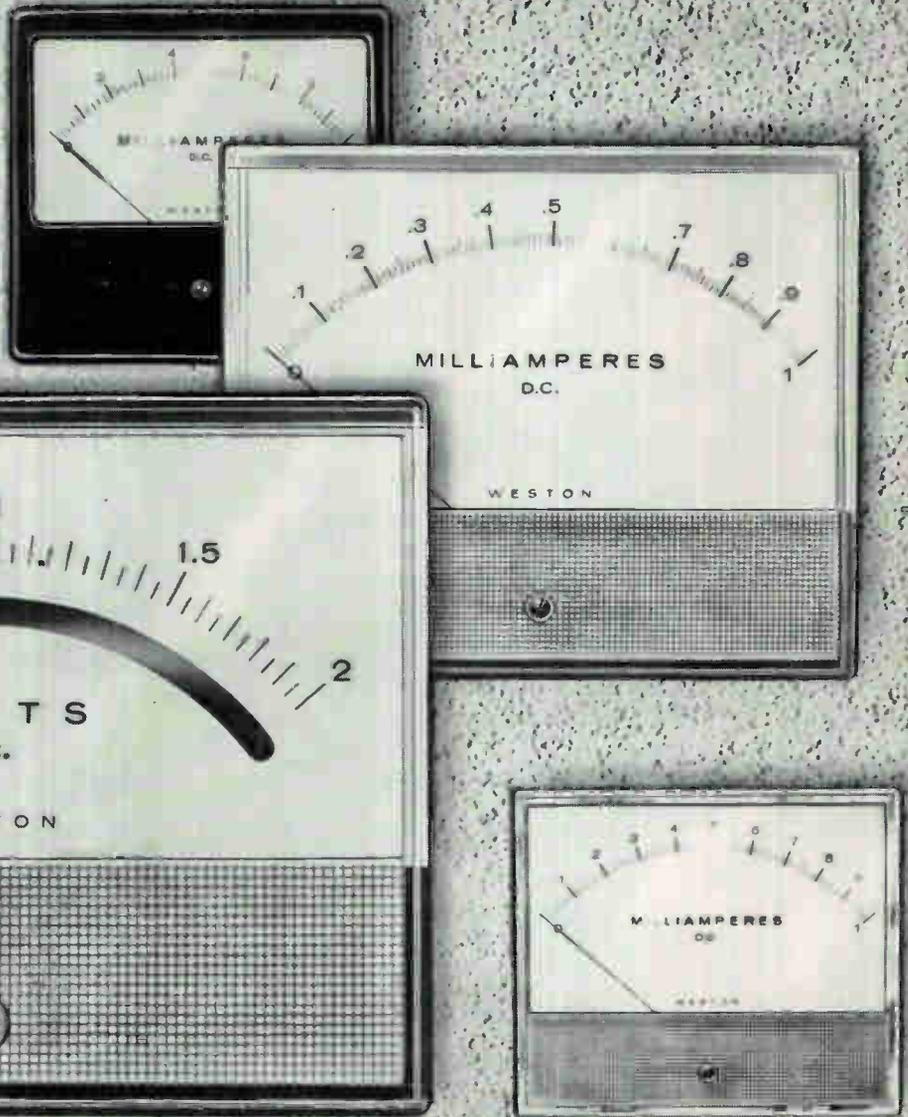

TAUT BAND


WESTON TAUT-BAND SUSPENSION SETS NEW STANDARD FOR PANEL METERS

Weston Series 1900 is the most versatile line of panel meters ever produced for general use. Instruments with taut-band mechanisms are free from friction and inertia, and offer outstanding sensitivity, reliability and uniformity from zero to full scale. 1% and 2% accuracies are standard . . . higher on special order.

Here are the facts: Weston exclusive taut band Co-planar™ suspension is the only method which assures complete control of ribbon length and tension, uniformity of torque, precise centering of moving coil, and positive

protection against excessive axial and lateral motion. The instruments require extremely low driving energy, are highly resistant to vibration and shock, and may be operated in any position.



Series 1900 also sets a new standard in flexibility. Instruments with taut-band and conventional movements are completely interchangeable. They are available with Bakelite or modern, static-free plastic cases in sizes 2½" to 7½", and offer the widest choice of functions and ranges available in a single matching line. Write today for details. Dept. 83.



ANOTHER EXCLUSIVE: Only Weston Series 1900 Instruments can be mounted in three ways — conventional, flush, and recess with provision for internal illumination.

WESTON INSTRUMENTS *Division of Daystrom, Incorporated, Newark 14, New Jersey*

Aerospace Instrumentation • Bimetal Thermometers • Calibration & Test Equipment • Panel & Switchboard Meters • Photosensitive Devices • Precision Metal Film Resistors • Relays & Tachometers • Systems Design & Development
CIRCLE 99 ON READER SERVICE CARD

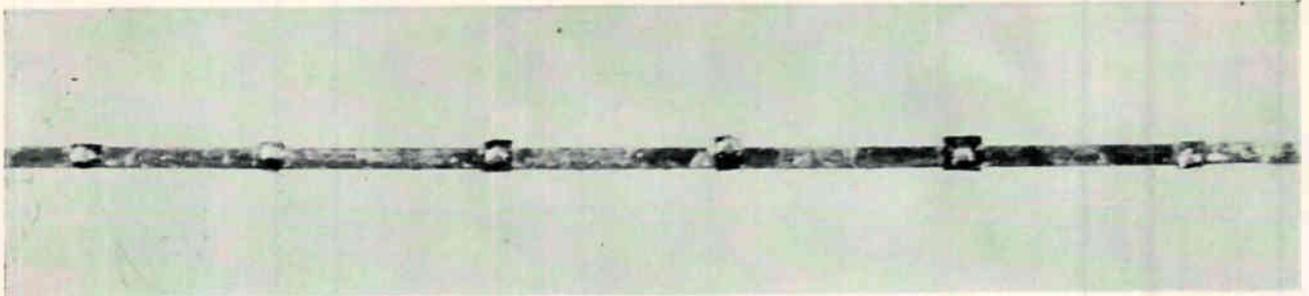

THIN GLASS chain links many silicon diodes. Use for designing memory plane does not require redesign of circuits

Form Logic Matrix with Diode Ribbons

Use diodes sealed in flexible strips, simplify gate hook up

By J. G. HAMMERSLAG
 President,
 Delta Semiconductors, Inc.,
 Newport Beach, Calif.

DIODES BY the tens of thousands are used in modern electronic systems, particularly in digital computers. This great demand for diodes may result in diode-selection problems for some circuit designers

concerned with computer logic. One approach is to arrive at circuit simplification without the necessity of discarding the entire integrated circuit if one component fails.

Over a year ago, Delta Semiconductors designed a compact diode component that combined several individual diodes in a compact glass envelope (see *ELECTRONICS*, Apr. 21, 1961, p 78). Delta now perfects a fully-automated process that permits rapid production of many low-cost, high-reliability silicon diode junctions fused to a continuous gold-plated ribbon. Diodes are avail-

able in ribbon strips, measuring 0.032 in. wide and approximately 0.008-in. thick. (See cover).



Diode junctions are formed individually, with a compatible hyper-pure glass seal fused directly to the silicon. This thin glass encapsulation provides an integral hermetic seal around the entire junction.

IMPURITIES ISOLATED — The glass seal completely isolates any impurities that might be present during the manufacturing process and keeps them in the glass, preventing future migration of the impurities to the junction. Solid-glass seal also eliminates air space around the junction and greatly increases heat dissipation.

The diodes themselves are either diffused or alloyed types, made by manufacturing techniques similar to those used for making diode junctions for standard glass packages. High parameter combinations can be obtained, with switching speeds as high as two nanoseconds, conductance up to 500 milliamps at one volt.


Since the glass which is fused to the junctions has a relatively high melting point, the limiting factor for the temperature operating range of the diodes is the silicon itself, and diodes can be operated between -65 deg C. and +200 deg C. The size of the diode pellets themselves varies somewhat with the parameter requirements, but the diameter of the pellet can generally be kept below 0.020 inch.

Once sealed, the entire diode

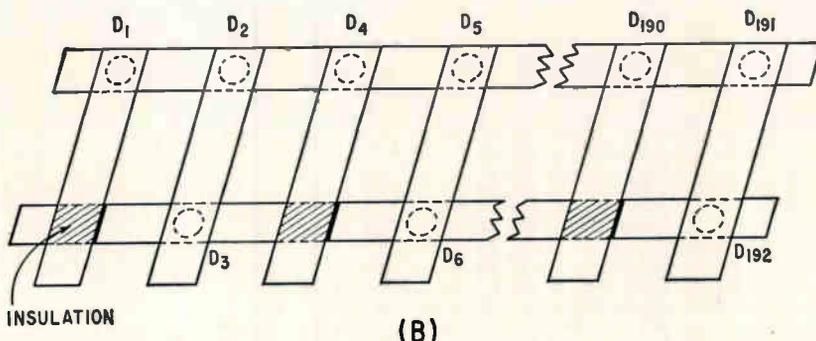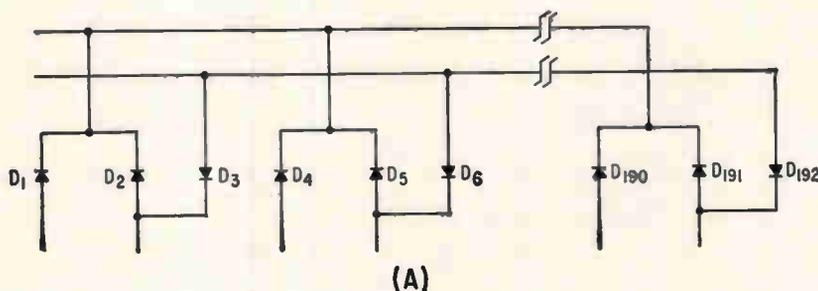

MEMORY PLANE schematic (A) of diode core. Construction (B) with diode ribbon strips shows how factory-welded matrix replaces 192 individual diodes

*we'll
see you at the
WESCON SHOW
booth **3901-2** *put
yourself
in this picture!**

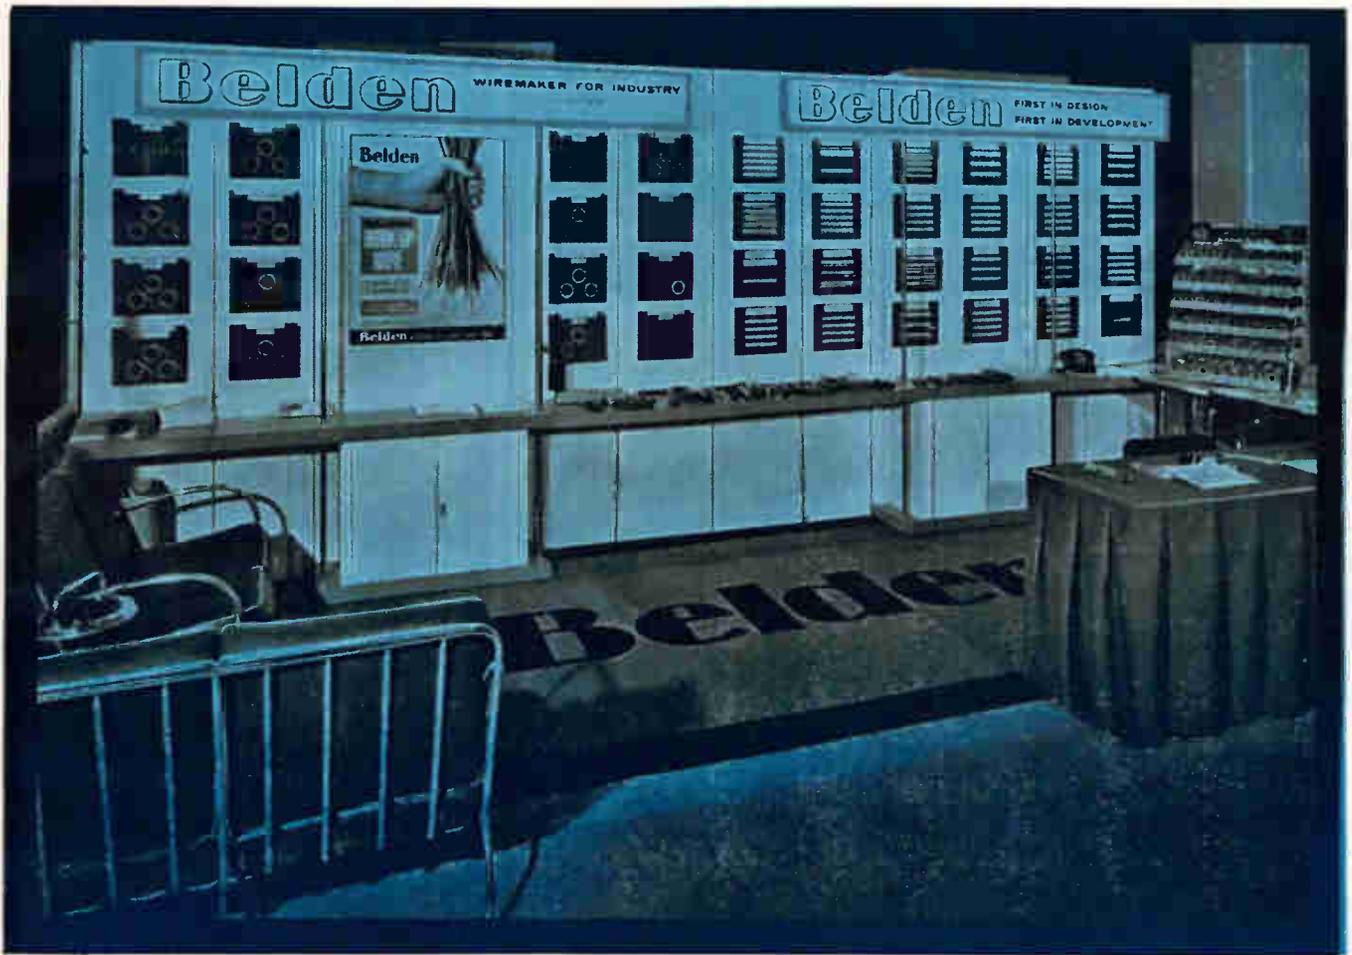

***BELDEN ENGINEERS WILL BE
ON HAND TO TALK TO YOU ABOUT***

- *new and dramatic uses of Beldfoil* shielding to reduce the diameter of shielded cables*
- *fine and ultra-fine magnet wire.. Celenamel,* Beldure* and Belden Blue Isonel*
- *lead wire.. all types, sizes, insulations, colors, and temperature ranges*
- *cord sets for any product*



remember 3901-2

magnet wire • lead wire • electronic wire • control cables • power supply cords

*Belden Trademarks—Reg. U.S. Pat. Off.

**Ford Instrument
builds
0.01% accuracy
in a
Size 23 Resolver**



This extremely accurate Size 23 Resolver is precision-engineered . . . exceeds MIL-E-5272A.

SPECIFICATIONS:

- Maximum Functional Error (over 360° of shaft rotation) . . . 0.01% of input voltage at maximum coupling
- Maximum Total Null Voltage . . . 1 mv/volt input maximum
- Maximum Interaxis Error (rotor) . . . 1.5 minutes
- Maximum Interaxis Error (stator) 1.5 minutes
- Maximum Variation of Transformation Ratio (with input voltage from 6-18 volts with 12 volts input as reference) . . . 0.03%
- Maximum Variation of Transformation Ratio (with input voltage from 0.3 to 6 volts) . . . 0.02% of 6 volts

Bulletin FR 62-1 gives full specifications. It's yours for the asking. Write: 2.19

 **FORD INSTRUMENT CO.**
DIVISION OF SPERRY RAND CORPORATION
31-10 Thomson Ave., Long Island City 1, N.Y.

pellet is fused to the gold-plated ribbon, through a completely automated process, which allows for variable spacing of the diode junctions from 0.020 in. to 2.5 in. apart. The completed ribbon with diodes attached, is known by the trade name Deltastrip Diodes. Because of the simplified manufacturing process and the elimination of relatively costly glass package diodes, the cost of the assemblies can be maintained at a level somewhat less than comparable individual glass

package diodes or integrated circuits.


GATING STRIP—Since the gold-plated ribbon is a common connection to either the anode or cathode of each diode, the entire diode strip assembly can form part of a gate circuit or core driver circuit. The strip can be cut into various lengths to provide groups of three or more diodes, as required. The diode pellets are pretested before they are attached to the strip and parameters are carefully matched to provide compatible junctions, as well as similar polarity on the strips.

A typical application of diode strips is a core driver assembly on a computer memory plane matrix. Because of increased data handling speeds, it is desirable to have the core driver diodes located as close to the memory cores as possible. Other important factors are price, size, simple installation and high reliability, as well as the specific parameters of various diode types.


MEMORY APPLICATION—In a specific core memory plane designed by Ampex Computer Products, the diode strips are sweat-soldered directly onto pretinned etched connections on the inner edge of the matrix. In this particular application, high reliability is achieved through the reduction in the number of soldered or welded connections. A reduction in size by a factor of ten to one or more over the use of individual diodes has also been accomplished.

Sizeable cost reduction has been effected through the reduction of assembly time, elimination of individual diodes and their connections. Serviceability has also been greatly simplified and replacement, if necessary, can easily be made in the field which greatly reduces computer down time.

In another application the diode ribbons are cut into equal lengths up to a foot. Several strips are interconnected with transverse gold-plated ribbons welded to the semiconductor junctions, forming a matrix. Through the use of a steel rule die, these strips can be cut up into groups of three or more diodes. These units would become part of a gate circuit with individual strip leads preattached. The result is a very low cost and highly

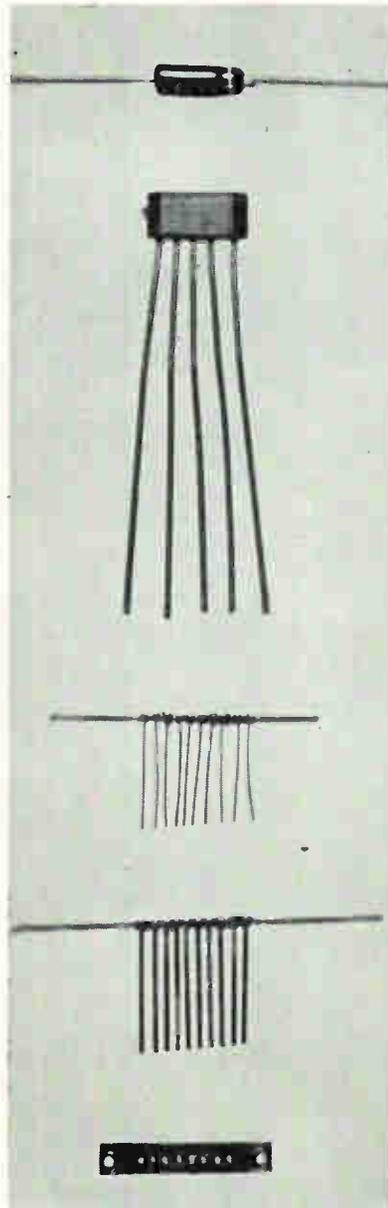

DIODE UNITS illustrate evolution from standard glass component, top, to direct-wired poly diode with four junctions plus common lead, next. Third unit from top is ribbon strip with leads welded, followed by ribbon strip with sweat-soldered connections. Bottom unit is ribbon strip in matrix for direct mounting on etched circuit board connectors.

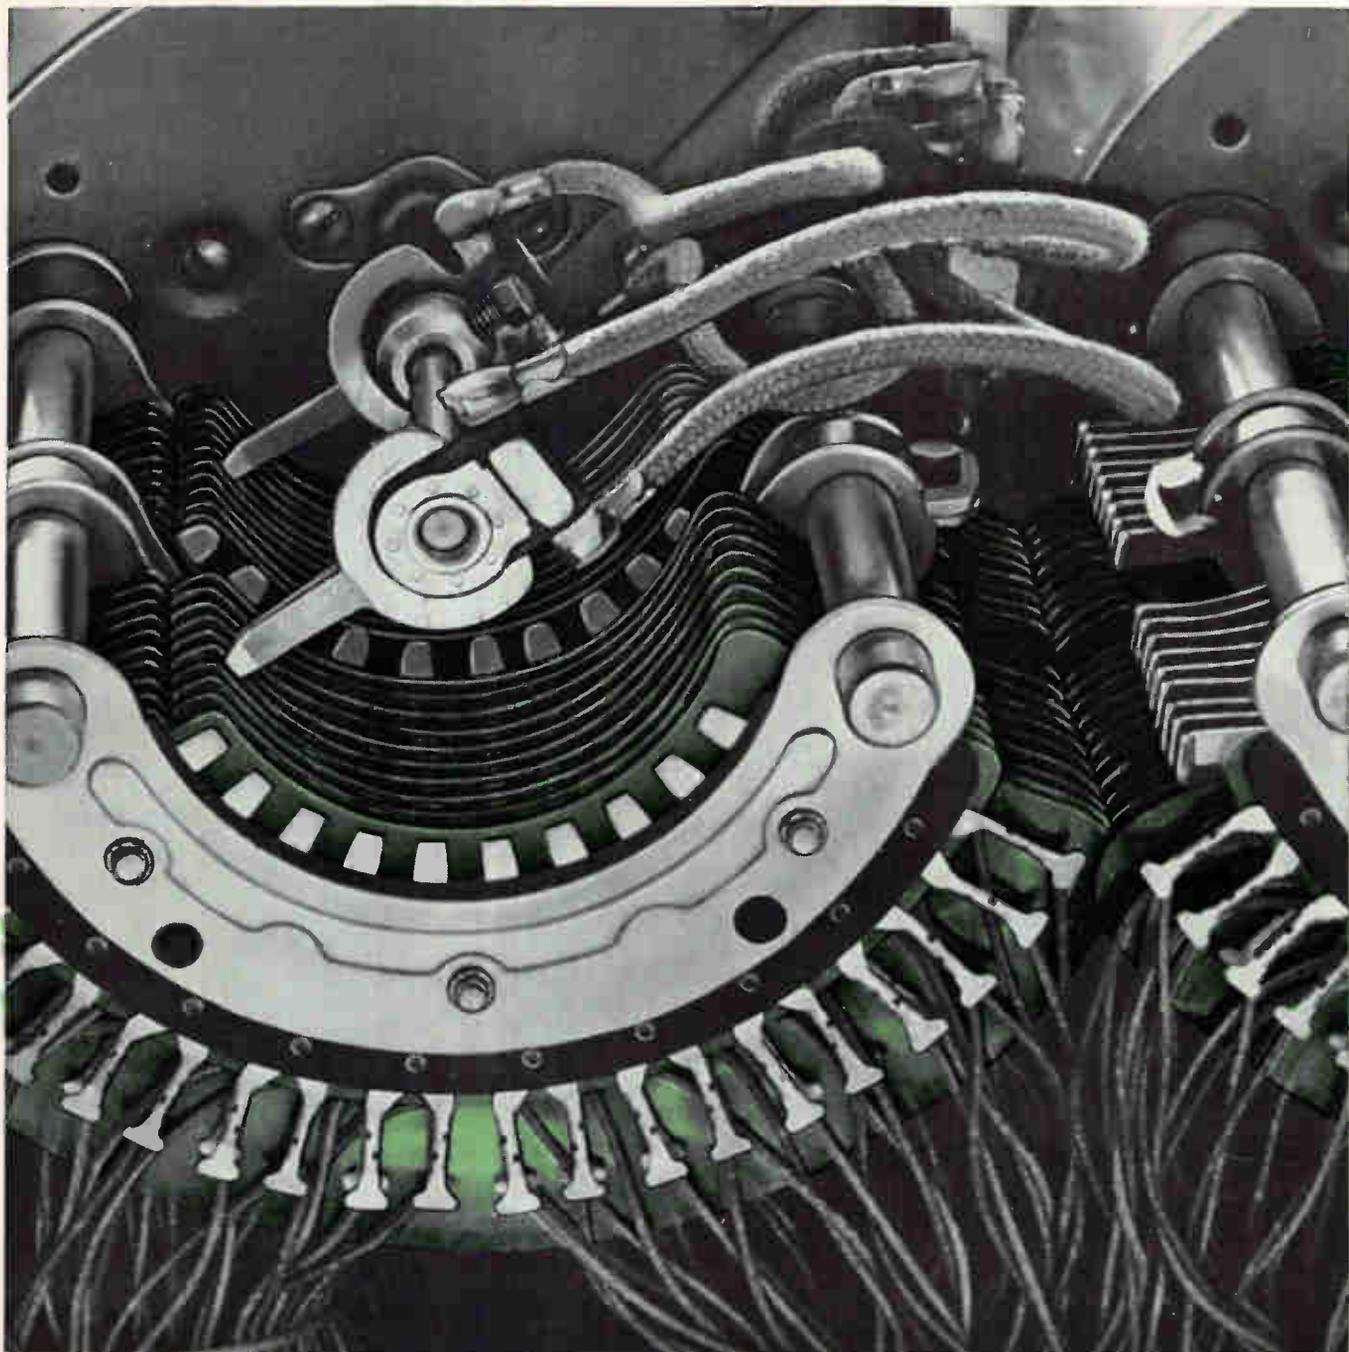

The insulation of "Mylar" is shown in green.

HOW MYLAR® CUT STEP-SWITCH COSTS FOR WESTERN ELECTRIC

This step-by-step switch handles 300 trunk calls a day. A hundred thousand times a year the central contact wiper flashes between the tough spacers of Du Pont "Mylar" polyester film.

Western Electric Co. picked "Mylar" to replace stiff phenolic fiber. It reduced manufacturing costs, since separate insulators could be punched out automatically at high speeds from rolls of "Mylar". Phenolic fiber was available only in sheets, not adaptable to full automation. "Mylar" was tougher and more durable: resisted cracking when flexed or bent. It had a higher dielectric rating, allowing valuable space reductions.

"Mylar" today is the standard insulation in a wide variety of electrical/electronic applications. In motors, capacitors, switches and wiring, its superb dielectric,

chemical and thermal properties guarantee years of trouble-free performance. The high performance of "Mylar" in thinner gauges frequently gives substantial savings—since you use less "Mylar" than conventional materials.

Additional cost reductions can come from design modifications and manufacturing economies. Why not investigate its unique properties in your application? Save time and money now by writing to: Du Pont Company, Film Dept., Wilmington 98, Delaware.


only DU PONT makes

MYLAR®
POLYESTER FILM



BETTER THINGS FOR BETTER LIVING
... THROUGH CHEMISTRY

VISIT OUR BOOTH AT WESCON—BOOTH #3734-35

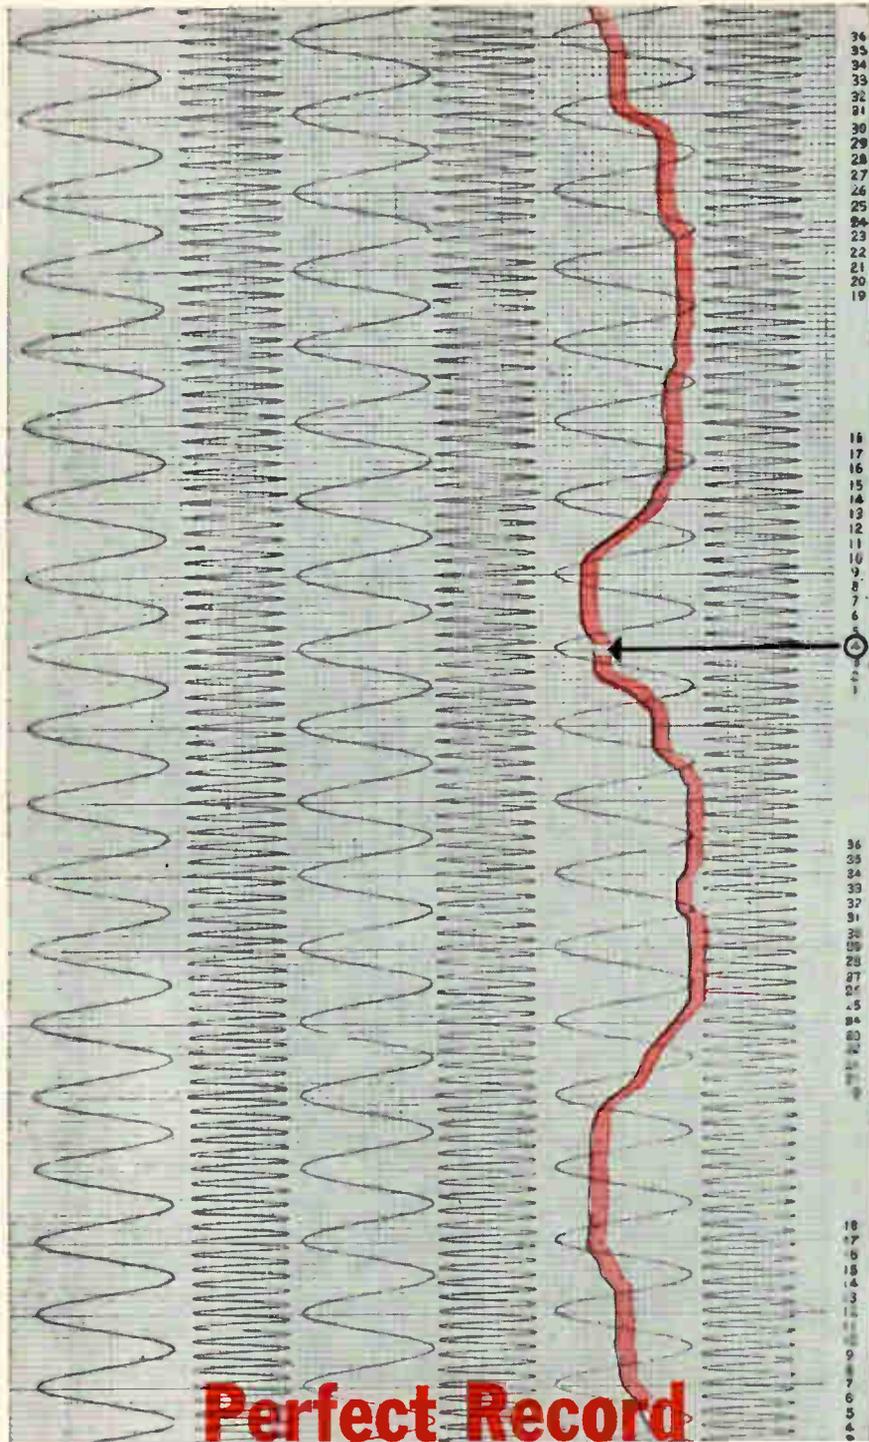


CEC's Type 5-123 Multi-channel, Direct-print Recording Oscillograph gives you: complete front access; twelve discrete speeds from 0.1 to 160 ips; easily interchangeable, self-contained major modules; direct rack mounting; 36 or 52 active channels; trace numbering; and optional DATAFLASH for record access time sixty times faster than any other printout process. All of which adds up to a perfect record every time. More data? Call your CEC office or write for Bulletin CEC 5123-X5.

CEC

Data Recorders Division

CONSOLIDATED ELECTRODYNAMICS

PASADENA, CALIFORNIA • A SUBSIDIARY OF BELL & HOWELL



RAPID PRODUCTION of silicon diode junctions lowers cost. Ribbon is shown as it comes off fully automated fabrication machine. Diodes can be spaced from 0.20 inch to two and one half inches along ribbon

reliable gate circuit, requiring diodes with common anode or cathode intertwined.

FLEXIBLE CIRCUITS — The structure of the ribbon allows use in flexible substrates, on curved surfaces or other difficult applications.

In still another application, a memory plane required 192 conventional glass package diodes which had to be mounted and soldered individually to the frame, see Fig. A. In this case, an especially high saving in assembly time and cost, as well as an increase in inherent reliability was achieved simply by replacing the 192 diodes with two strips superimposed upon each other, see Fig. B. One strip consisted of 128 diodes spaced 0.037 inches apart (common cathodes) and the other superimposed strip consisted of 64 diodes spaced 0.074 inches apart (common anodes). The entire 192 diode assembly was potted in epoxy and soldered in one operation to the memory plane, eliminating literally hundreds of individual soldering operations.

Diodes by the foot prove successful in a wide range of applications. Greater reliability, improved heat dissipation, simplified installation, easier serviceability, reduction of production time and reduced cost, and a large degree of miniaturization result from their use.

Since the processes involved in the manufacture and installation of the diode ribbons are in common use, little or no redesign of existing circuits or assembly techniques is required. The concept proves to be a practical step forward in the advance of miniaturization, added reliability and cost reduction of space-age electronics equipment.

PREMIUM PERFORMANCE AT PRODUCTION PRICES... ITT KELLOGG INDUSTRIAL SYSTEM COMPONENTS...

ITT Kellogg designs and manufactures a broad range of electronic and electro-mechanical components for hundreds of industrial and commercial applications . . . including:

- Data storage devices
- Switching matrices and other assemblies
- Relays of many kinds
- Transistorized circuit modules
- Communications equipment, components, hardware
- Monitoring, sensing, alarm devices


You'll find ITT Kellogg components are reliable, durable,

efficient . . . yet moderately priced. They are built to exacting high-performance standards developed by more than 60 years of design and manufacturing experience for the telephone industry.

got a problem?


ITT Kellogg will engineer relays for the special, exacting needs of the modern systems and control designer. Write or call for a specialist to discuss your needs. Whatever your problem, ITT Kellogg has the experts to help you. No obligation.

THESE ARE ONLY A FEW EXAMPLES OF ITT KELLOGG COMPONENTS



MAGNETIC DATA-STORAGE DRUM

Non-destructive store, 250 bit 5 track, selective pulse record and erasure contact closure for read-out. High reliability.




MINIATURIZED TRANSLATION MATRIX

For automation systems, plug-in selenium disc rectifiers, not soldered or wired . . . rearrange circuits by simply repositioning discs.



COMMUNICATIONS EQUIPMENT AND COMPONENTS

Telephones, handsets, hook switches, dials, cam keys and accessories, lamps, caps, jacks, plugs, mountings, plates . . . all types of telephone-type hardware for industrial application.

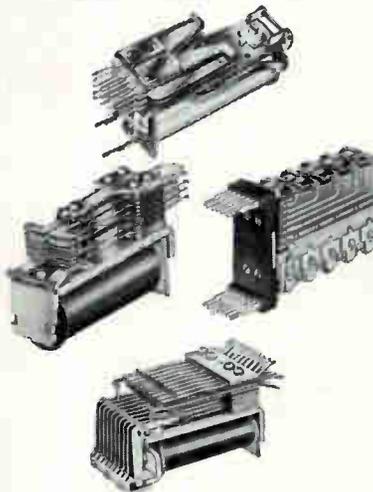

LOW-COST INDUSTRIAL RELAYS AND MAGNETIC IMPULSE COUNTER

For a multitude of uses . . . types for "memory" devices, binary data storage, multiple-circuit operation, special requirements.

FOR MORE INFORMATION, OR A DISCUSSION OF YOUR NEEDS, WRITE OR CALL YOUR NEAREST REPRESENTATIVE—OR, SEND THE COUPON AT RIGHT.


ITT KELLOGG

A Division of International Telephone & Telegraph Corporation
Industrial Sales Department • 6650 S. Cicero Ave. • Chicago 38, Ill.

REPRESENTATIVES:

ALABAMA, Birmingham Emery Design & Equipment Co. TRemont 1-1369 (Area Code 205)	FLORIDA, Indiatlantic Emery Design & Equipment Co. 723-7515	NEW YORK, Tuckahoe L-C-A Sales, Inc. WO 1-4700 (Area Code 914)
ARIZONA, Scottsdale E. V. Roberts & Associates, Inc. WHitney 7-1381 (Area Code 602)	ILLINOIS, Chicago Bernit & Klein Associates SPring 5-3488 (Area Code 312)	OHIO, Cleveland Midwest Sales Company WI 1-2700 (Area Code 216)
CALIFORNIA E. V. Roberts & Associates Los Angeles—WEbster 8-2541 (Area Code 213)	MARYLAND, Towson Barnhill & Associates VA 5-3900 (Area Code 301)	TEXAS, Dallas Fred Gross and Co. FL 1-1837 (Area Code 414)
San Carlos—LYtel 3-7878 San Diego—ATwater 3-2149 (Area Code 714)	MISSOURI, Kansas City T. H. Ellis Sales Co., Inc. HI 4-4650 (Area Code 816)	WISCONSIN, Milwaukee Albert A. Jacobs Co., Inc. UPlown 3-4821 (Area Code 414)

SEE OUR EXHIBIT
AT THE WESCON
SHOW — BOOTH
3227-28

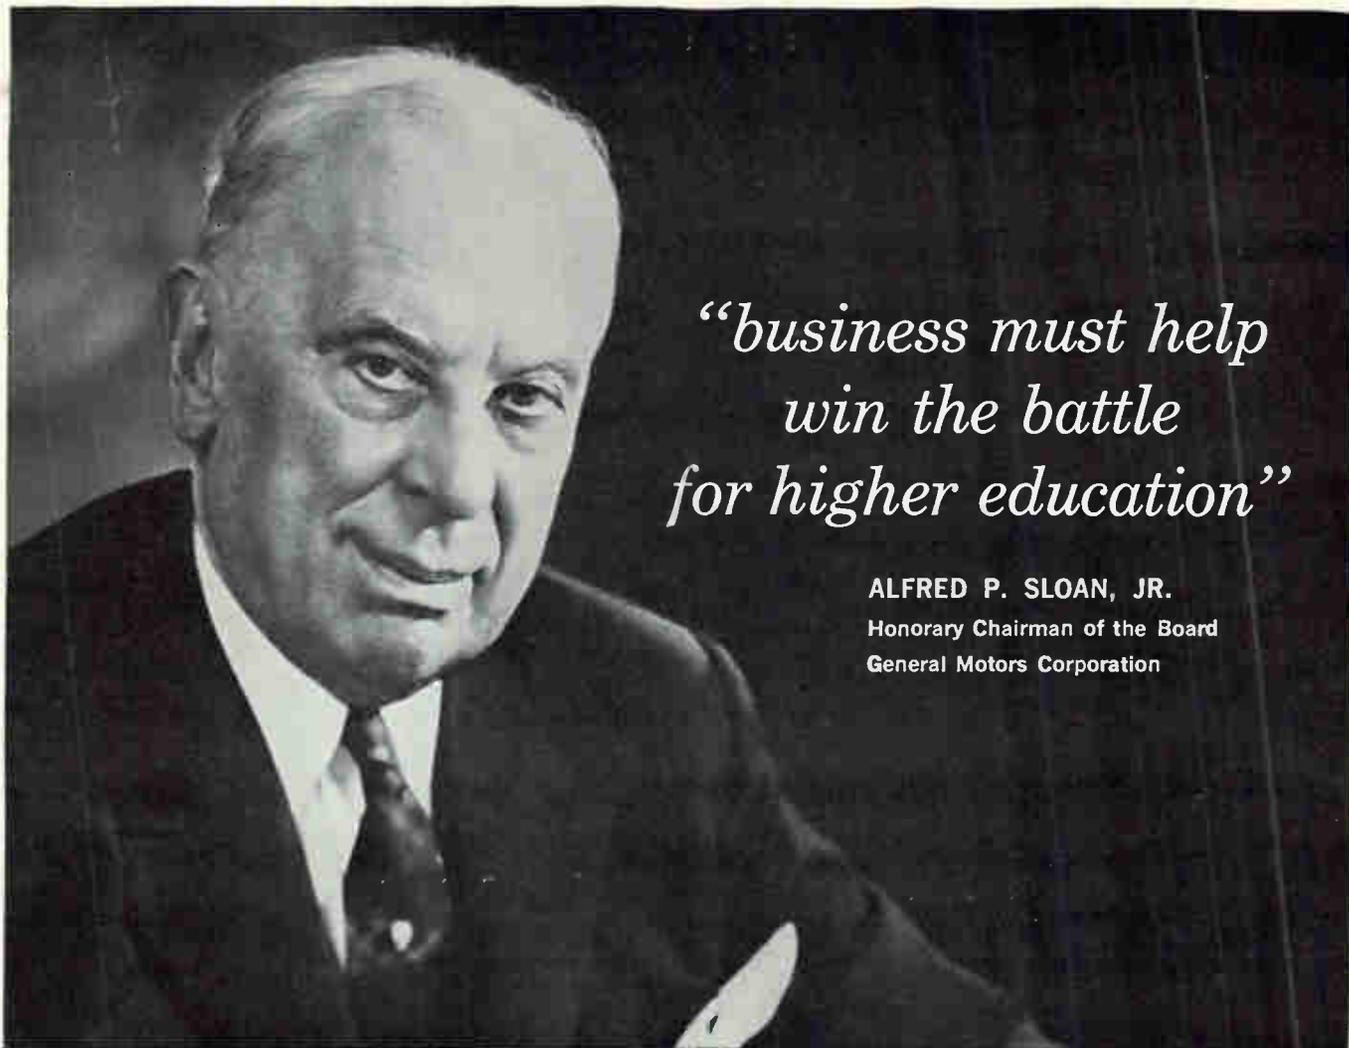

*“business must help
win the battle
for higher education”*

ALFRED P. SLOAN, JR.
Honorary Chairman of the Board
General Motors Corporation

“Regardless of the strengths and attributes our nation possesses, if we fall behind in the field of education, we will fall behind as a world power.

“Our scientific, cultural and economic growth—and our political strength—will depend largely upon the educational facilities we make available to our youth. We owe it to ourselves as a nation; we owe it to our young people who will inherit this nation to provide the financial aid that will make our institutions of higher learning second to none in the world. This is of vital importance to our business community.

“Business must put its support on the line to help win the battle for higher education.”

Today many of our colleges are overcrowded. In ten years, applications will have doubled and we will be faced with an even more serious crisis in our institutions of higher learning. We will need more and better college classrooms, many more well-equipped college laboratories and thousands more of the most dedicated and well-trained professors.

Only increased financial aid will provide our young people with the best college facilities. Only increased financial aid will keep our finest minds from leaving the teaching profession.

For additional information on the crisis faced by higher education write to: Higher Education, Box 36, Times Square Station, New York 36, N. Y.



Published as a public service
in cooperation with The Advertising Council and
the Council for Financial Aid to Education



CANNON IMAGINATIVE ENGINEERING FOR THE SPACE ERA

ENGINEERING CAPABILITIES IN:

- CRIMP & SOLDER TECHNIQUES ● MICROMINIATURIZATION
- MATCHED IMPEDANCE ● PRINTED CIRCUIT PLUGS
- UMBILICALS ● PLUGS FOR EXTREME ENVIRONMENTS
- RACK/PANEL APPLICATIONS ● HERMETICS ● MAGNETIC DEVICES

Whatever your requirements for these and other
Space Age applications, write to:

SEE CANNON AT WESCON BOOTH 2054-56



CANNON ELECTRIC COMPANY, 3208 Humboldt St., Los Angeles 31, Calif.

August 10, 1962

CIRCLE 107 ON READER SERVICE CARD 107

AAC

PRECISION FROM HOLT



AUDIO VOLTAGE STANDARD MODEL 323

Holt Laboratories has filled the need for a variable precision AC Voltage source over a broad frequency range. This new Audio Voltage Standard, Model 323, provides fully variable voltage from 10 millivolts to 1000 volts at frequencies from 35 cps to 20 KC. Any five internal frequencies switch selected and, in addition, any other frequency may be obtained using an external oscillator. The 323 will calibrate instruments at any load from 0 to 30 watts through its full frequency and voltage range. Stability .03%/month.

THERMAL TRANSFER VOLTMETER MODEL TVI

NBS Certifiable to .01% 20 KC.—300 volts
.02% to 50 KC

The TVI is a radical new design concept—the first on a transfer standard unit in a decade. This unit is designed so that one operator can do all A.C. calibration work.

The completely coaxial design permits this unit to operate at frequencies to 5 mc up to 200 volts.

The temperature compensation and zener regulation make the unit stable to .02% for a period of several hours without rebalancing.

Range: Three decade range multiplier .5 volt to 1200 volts. Full resolution in 1 volt steps from 1 to 999 volts.

Frequency Response: .5 to 299 volts
.02% to 50 KC 300 to 1200 volts
.02% to 20 KC

Thermocouple: DC reversal error \pm .01%.



See Holt
Instruments
Wescon Booth
226-227

Holt Instrument Laboratories, Oconto, Wisconsin.

HOLT

DEBAKER ADVERTISING, 734 E WALNUT STREET, GREEN BAY, WIS.

108 CIRCLE 108 ON READER SERVICE CARD

Heavy-duty

STEPPING SWITCH

The GENALEX

ONE-WAY

PRECISION UNISELECTOR



especially designed for service where long life is essential . . . for circuit selection, timing control, and special switching circuits.

featuring:

- 65 steps per second on self-interruption
- 30 steps per second external impulses
- 25-point banks up to 11 levels, or
- 50-point banks up to 6 levels
- Bridging or non-bridging wipers

Over 100,000,000 Steps Without Replacement


For complete data on this and other unique GENALEX switches write:



11 UNIVERSITY ROAD, CAMBRIDGE 38, MASS.
U. S. AGENTS FOR THE GENERAL ELECTRIC COMPANY, LTD. OF ENGLAND
CIRCLE 205 ON READER SERVICE CARD



old Japan was known for these . . .

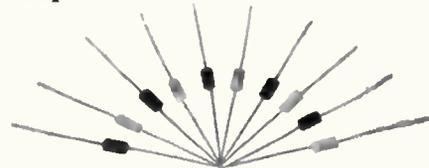

new Japan is known for these !

Ornate fans formed a part of every girl's wardrobe in old Japan. Today, Japan is known for tiny precision parts like these capacitors made by Nichicon. Nichicon has a complete line of capacitors designed to fit every need and backed by Nichicon quality and experience.

MAIN PRODUCTS: Oil Paper Capacitor, Electrolytic Capacitor, Tantalum Capacitor, Metallized Paper Capacitor, Ceramic Capacitor, Mica Capacitor and Mylar Capacitor, etc.



Nichicon Capacitor Ltd.


Head Office: Uehara Bldg., Oikedori, Karasumahigashi-iru, Nakagyo-ku, Kyoto, Japan

Cable Address: CAPACITOR KYOTO


Branch Offices: Tokyo, Osaka, Nagoya, Fukuoka.

CIRCLE 206 ON READER SERVICE CARD

electronics

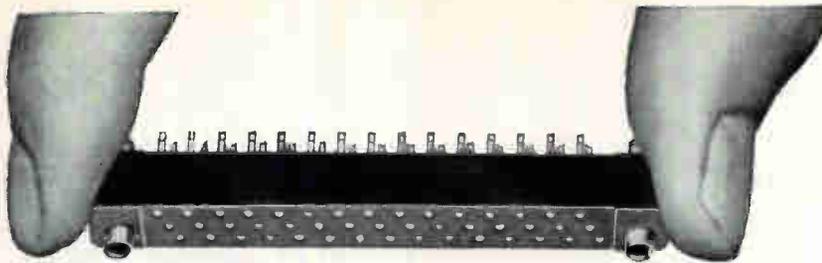

**This PC Connector gives you 45 Contacts in 2⁷/₈"
 .050" center-to-center printed circuit board**

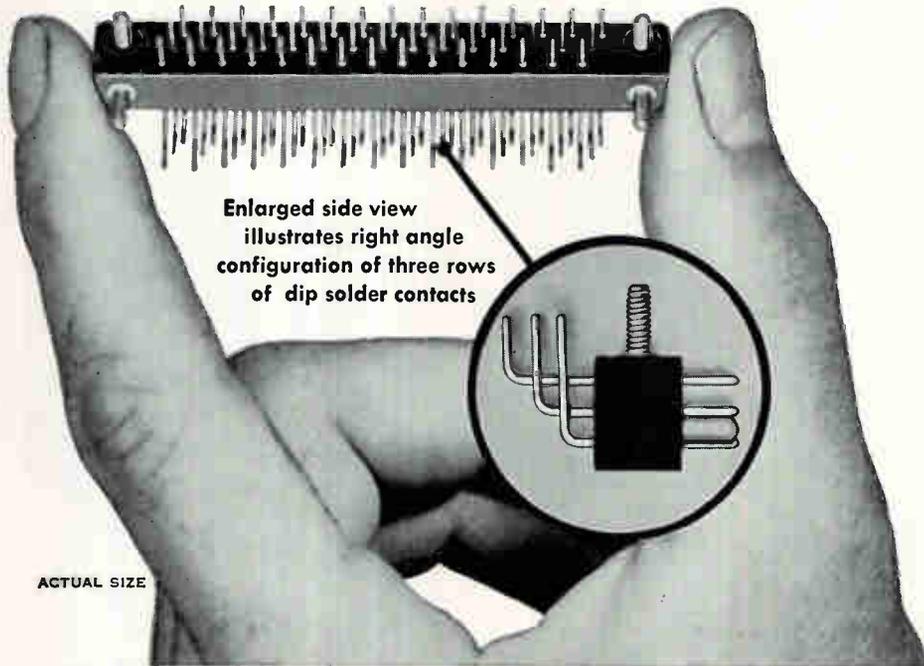

Enlarged side view
 illustrates right angle
 configuration of three rows
 of dip solder contacts

ACTUAL SIZE

Continental's Series 600-1-45 Sub-Miniature PC Connectors have been designed specifically for critical, high density printed circuitry in airborne and other severe environments where built-in design reliability is of utmost importance. Three-row, staggered contact arrangement provides 45 terminations for #22 wire in only 2⁷/₈" by 0.36" area. Right angle pins dip solder directly to PC board, with threaded studs assuring mechanical security. Other reliability features include polarized guide pins and guide sockets, phosphor bronze pins and sockets with gold plate over silver plate, and moldings of glass reinforced Diallyl Phthalate per MIL-M-19833, type GDI-30F for low moisture absorption,

high impact strength, flame resistance and high dielectric properties. At Continental, new PC connector designs are constantly under development. Our Engineering Department will be pleased to assist you in solving special connector problems. Simply tell us your requirements.

DESIGNER'S DATA FILE

If you're designing for right angle printed circuit applications you'll want to have Continental's Catalog RTA 362, compiled to help you select and specify the type best suited to your needs. For a free copy, write to: Continental Connector Corporation, 34-63 56th Street, Woodside 77, New York, or call TW 9-4422.



MICRO-MINIATURE • SUB-MINIATURE • MINIATURE • PRINTED CIRCUIT • RIGHT ANGLE PIN & SOCKET • CENTER SCREWLOCK

CONTINENTAL CC CONNECTORS

CONTINENTAL CONNECTOR CORPORATION • WOODSIDE 77, NEW YORK
 SEE US AT WESCON—BOOTH 3609



Said Max Planck:

"The energy of a quantum is directly proportional to the frequency of vibration of its electromagnetic wave."

A new window in space is being opened by scientists at Lockheed Missiles & Space Company. While the visible spectrum of stars is observable from the earth, photons of several hundred to several thousand electron volts are filtered out by the atmosphere: Hence undetectable on the earth's surface.

Very hot stars may have coronas—as does our sun. Scientists speculate that, if it were possible to study that portion of the frequency range known as "soft" X-rays (which may emanate from the coronas of very hot stars), we might gain new insights into the evolution and constitution of the universe.

To initiate a search for celestial sources of "soft" X-rays, Lockheed (under NASA sponsorship) has developed and built photon counters to be carried aboard sounding rockets. Thus a survey of the night sky will be made for sources which emit photons in the 100-to-10,000 electron volt energy range.

Of interest to most engineers and scientists is the fact that this investigation was originated by a young Lockheed physicist. He realized that no serious attempt was being made to investigate those wave lengths just below the ultraviolet. Many similar developments have been evolved by Lockheed people who find here the creative freedom they need to pursue their own original ideas.

Lockheed Missiles & Space Company is located on the beautiful San Francisco Peninsula, in Sunnyvale and Palo Alto, California. We invite you to investigate your own career-potential with Lockheed. Write: Research & Development Staff, Dept. M-38B, 599 North Mathilda Avenue, Sunnyvale, California. Lockheed is an equal opportunity employer.

LOCKHEED MISSILES & SPACE COMPANY



A GROUP DIVISION OF LOCKHEED AIRCRAFT CORPORATION

SYSTEMS MANAGER FOR THE NAVY POLARIS FBM AND THE AGENA VEHICLE IN VARIOUS AIR FORCE SATELLITE PROGRAMS. OTHER CURRENT PROJECTS INCLUDE SUCH NASA PROGRAMS AS THE OGO, ECHO, NIMBUS, RANGER AND RIFT.

SUNNYVALE, PALO ALTO, VAN NUYS, SANTA CRUZ, SANTA MARIA, CALIFORNIA • CAPE CANAVERAL, FLORIDA • HAWAII



BMEWS ... *eyes of the free world*

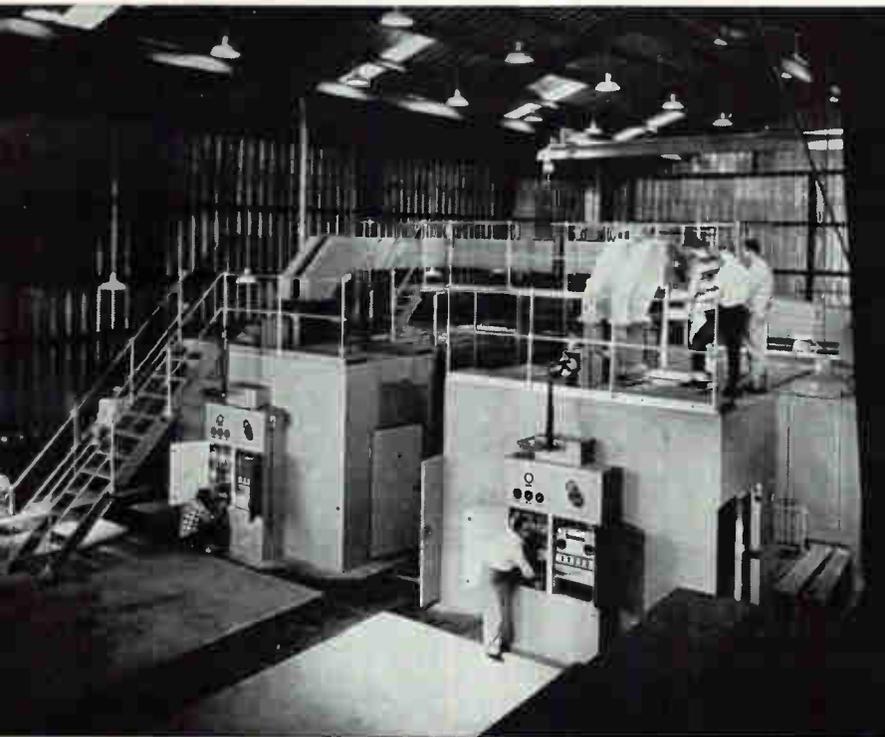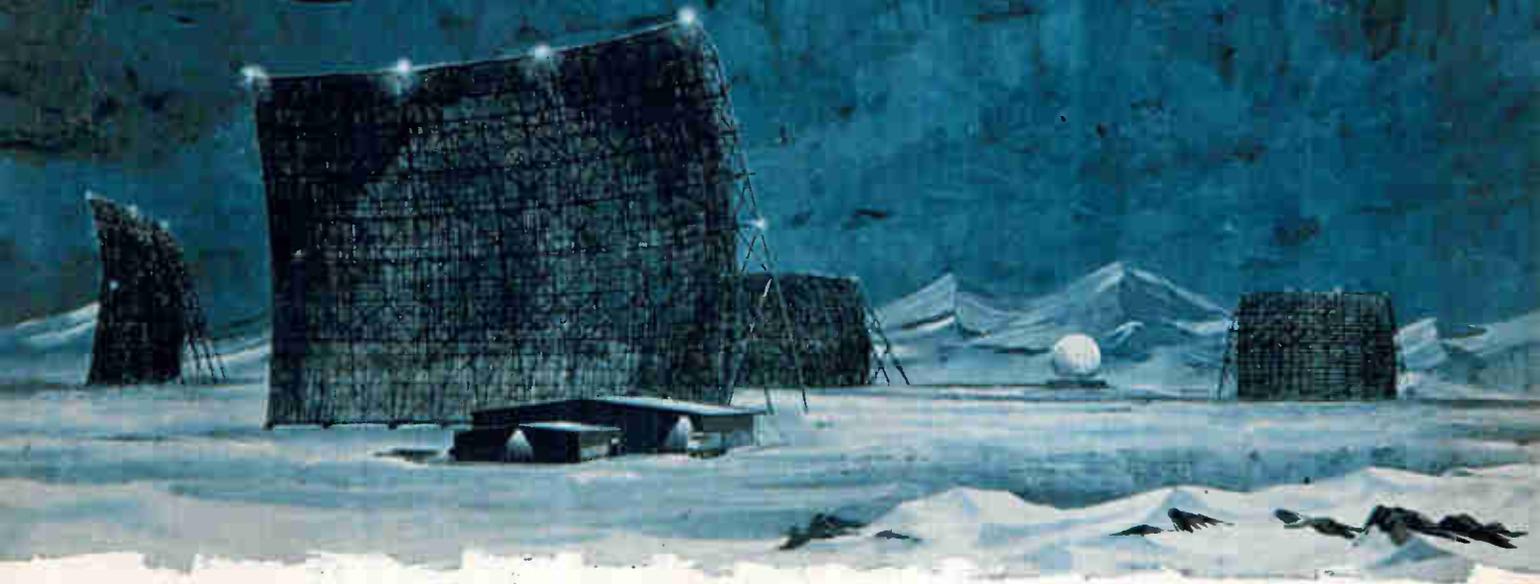

BMEWS ... the Ballistic Missile Early Warning System is the free world's first warning of enemy ICBM attack.

Powerful radars with an accurate range of thousands of miles can detect incoming ICBMs minutes after launching. The transmitters for this defense system are being built by Continental Electronics ... specialists in super power transmitting equipment.

Provided under sub-contract to General Electric and R.C.A., these transmitters from Continental Electronics are another contribution to our country's defense.

Continental Electronics


MANUFACTURING COMPANY • MAILING ADDRESS: BOX 17040 • DALLAS 17, TEXAS
4212 S. BUCKNER BLVD. • EV 1-7161 • LTV SUBSIDIARY OF LING-TEMCO-VOUGHT, INC.

Designers and Builders of the World's Most Powerful Radio Transmitters



ENGINEERS... FOR STIMULATING WORK ON THE ELECTRONICS FRONTIERS OF TOMORROW WITH A DYNAMIC, CREATIVE ORGANIZATION, SEND RESUME TO DIR. OF PERSONNEL

CIRCLE 111 ON READER SERVICE CARD

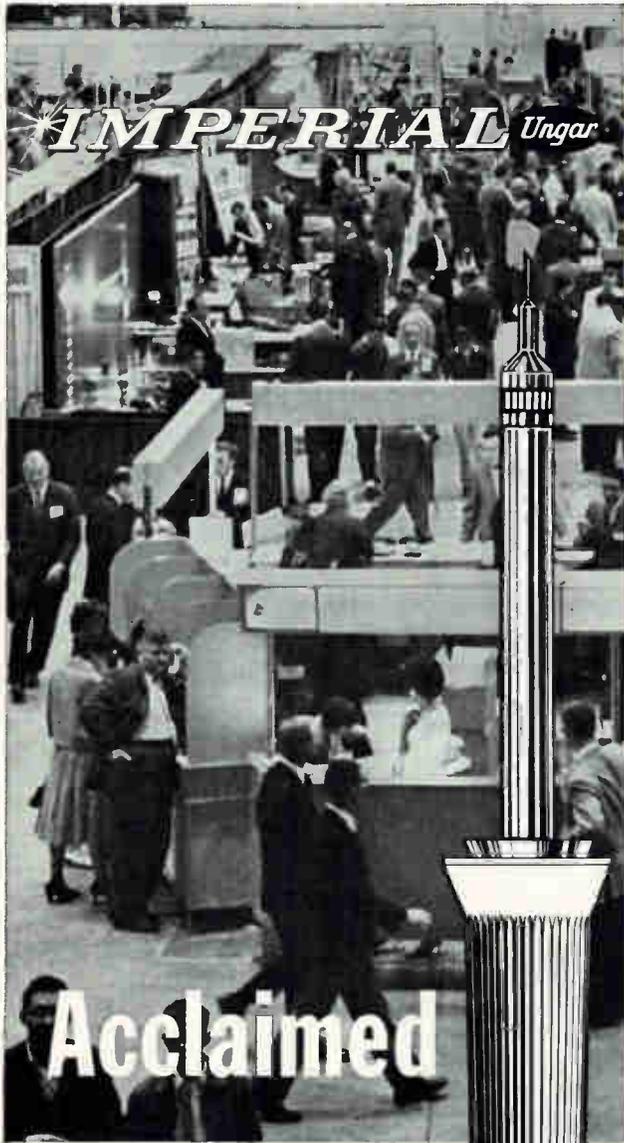

IMPERIAL Ungar

Acclaimed

**at Wescon
and on the Job!**

IMPERIAL... the award winning soldering iron at WESCON 1961. Now acclaimed by thousands of production line users in leading electronic firms throughout the world. Designed with all-new functional features and built with traditional Ungar dependability. Result! Top soldering efficiency, maximum operating economy. Why not see for yourself why the Imperial is the most widely used soldering iron in the electronics industry.

See it in action at booth #3507 or call your local IMPERIAL distributor.

IMPERIAL Ungar

UNGAR ELECTRIC TOOLS
Electronic Div. of Eldon Industries, Inc.
Hawthorne, California



**NOW . . .
YOU CAN TEST**

- RESISTORS
- CAPACITORS
- DIODES
- OTHER ELECTRONIC COMPONENTS

**FASTER and
EASIER !!**

the all-new
MODEL B-1003
**MONTE-
CLIP**



The "Monte-Clip" connects directly to a banana plug permitting fast "set-up" and connection to auxiliary equipment. Blades may be adjusted quickly for proper tension. Hardware is stainless steel or nickel plated brass and body is molded red phenolic resin. Priced at \$11.00 per pair. Delivery 7-10 days.

- FEATURING . . .**
- EFFORTLESS ONE-HAND INSERTION OF COMPONENT
 - WIDE TAPERED THROAT GUIDES LEADS DIRECTLY INTO CONTACT BLADES
 - SILVER ALLOY BLADES FOR LOWER CONTACT RESISTANCE (10 mΩ per pair)

Representatives wanted in certain key areas.

MONTEREY ENGINEERING

P.O. Box 3083 • Granada Hills, California

CIRCLE 207 ON READER SERVICE CARD

BEST MINIATURIZED INDICATOR

**VU
RADIOATOR** 



V-403



SB-305



R-201



R-101

R-101	Tuning indicator and Battery residual capacity indicator
F-102	FM tuning indicator
V-103	Audio level indicator
A-104	AM tuning indicator
SB-105	Stereo balancing indicator
B-106	Battery indicator
R-201	Smaller type tuning and battery indicator
V-203	Smaller type level indicator
B-206	Smaller type battery indicator
R-301	Larger type tuning and battery indicator
V-303	Larger type level indicator
SB-305	Larger type stereo balancing indicator
V-403	VU meter
V-403B	Audio level indicator
SB-405	Null indication stereo balancing indicator

ACCEPTABLE SPECIAL DIAL UPON YOUR REQUEST

DISTRIBUTOR
ATAKA NEW YORK, INC. **ATAKA & CO., LTD.**
633 THIRD AVENUE
16TH FLOOR
NEW YORK 17, N.Y., U.S.A.
PHONE: OXFORD 7-7480
OHEMACHI BLDG.
1-CHOME, OHEMACHI
CHIYODA-KU, TOKYO
PHONE: 201-6411
MAKER
TOYO MUSEN CO., LTD.
75, WAKABAYASHI-CHO, SETAGAYA-KU, TOKYO

CIRCLE 208 ON READER SERVICE CARD



Sanborn data amplifiers

(Three types available now — more on the way)



(Specifications and prices subject to change without notice; prices are FOB Waltham, Mass.)

Match amplifier characteristics much more closely to your over-all *system* requirements — and pay for only the performance you need — by choosing from these newly-developed, all solid-state DC data amplifiers now available from Sanborn. Ask your local Sanborn Sales-Engineering Representative for complete specifications, application help and a copy of the Industrial Division Catalog — or write the Main Office in Waltham.

.

Wide Band, Floating Input—Floating Output "FIFO"

Bandwidth DC to 3 db down at 10 KC • Input isolated from output • Max. gain 1000, smooth gain covers intermediate ranges or switch out for calibrated gains of 1000 to 50 • Input impedance 100 meg. min. at DC, output impedance 60 ohms • Output capability ± 10 V at 10 ma • Common mode rejection (1000 ohms in either input lead) 160 db at DC, 120 db at 60 cps • Linearity $\pm 0.1\%$ of 10 V full-scale at DC • Recovery from 500% overload is 300 μ sec to 1% of f.s. output • Recovery from 20 V overload is 1 millisecond to 1% of f.s. output • Model 860-4000 "FIFO", \$825. Model 860-4000P (grounded output ± 5 V at ± 100 ma, impedance less than 1 ohm), \$900.

DC—50 KC, 3-Terminal Floating Amplifier

Gain 1000 to 10 in 1, 2, 5 ratios; does not phase invert • Input impedance 100 meg. at DC • Output ± 10 V ± 100 ma, impedance less than 0.2 ohm • Linearity $\pm 0.01\%$ of 10 V output • Gain stability $\pm 0.01\%$ at DC at constant ambient for 40 hours • Model 860-4200, including internal power supply, \$650.

Narrow Band, Floating Input — Floating Output

Bandwidth DC to 3 db down at 100 cps • Optional plug-in output filters to limit bandwidth • Floating input isolated from floating output • Gain 1000 to 10; fixed step attenuator, gain trim and zero trim controls • Input impedance 300,000 ohms min., output impedance 75 ohms • Output ± 5 V, ± 2.5 ma • Linearity $\pm 0.05\%$ of 5 V output • Recovers from ± 10 V overload in 200 ms • Common mode rejection (1000 ohms in either input lead) 130 db at 60 cps • Model 860-4300, \$425.

INDUSTRIAL  DIVISION
SANBORN COMPANY
175 Wyman Street, Waltham 54, Massachusetts
A SUBSIDIARY OF HEWLETT-PACKARD COMPANY

CIRCLE 113 ON READER SERVICE CARD

AT WESCON — SEE THESE NEW DC DATA AMPLIFIERS AT BOOTHS 558-560.



HIGH *Precision*

RESOLVERS, SYNCHROS and PHASE SHIFTERS

For data transmission; coordinate transformation and conversion; computer chain; and sweep applications. Write for data file 108.



STANDARD RESOLVERS

Reeves produces a full line of both compensated and uncompensated resolvers in standard BuOrd size 23, 15 and 11 cases. The size 23 series has a functional accuracy of 0.05%; resolvers in the other two series have an accuracy of 0.1%.



HIGH PRECISION SIZE 23 RESOLVERS

A new series of extremely accurate resolvers, which include a 0.01% functional accuracy computing resolver with 100% compensation; and a data transmission resolver with 20 second accuracy. They represent the ultimate in precision for resolvers of this case size.



30-SECOND SIZE 23 SYNCHROS

These three wire synchros are the most accurate units available in a standard BuOrd size 23 case. Both transmitters and control transformers can be supplied, designed for either 400-cycle or 60-cycle input.



PRECISION PANCAKE RESOLVERS

0.005% functional accuracy computer resolvers with 100% compensation; and 10-second accuracy data transmission resolvers. Integral bearing design permits direct mounting to gimbal structure. Beryllium housings provide highly stable operation under conditions of extreme temperature variation.



BOOSTER AMPLIFIERS

A complete line of vacuum tube and transistorized booster amplifiers, for use in conjunction with compensated resolvers. Transistorized units contain two fully encapsulated amplifiers in a single case.

SEE OUR DISPLAY AT WESCON—BOOTHS 907 AND 908

REEVES INSTRUMENT CORPORATION


A Subsidiary of Dynamics Corporation of America
Roosevelt Field, Garden City, New York

3RV62

ALL NEW
from Ingersoll Products

Emcor II

MODULAR ENCLOSURE SYSTEM

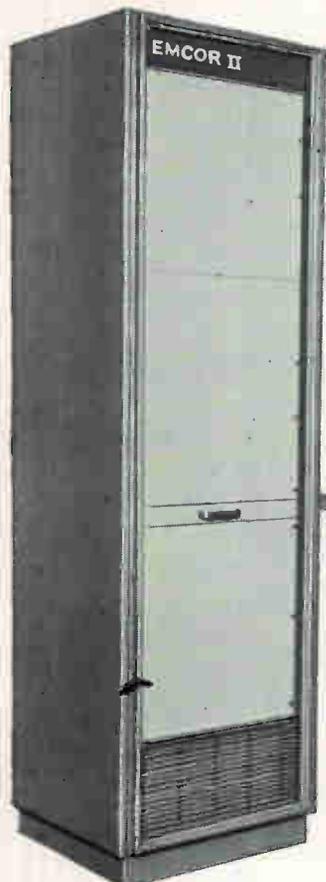

DESIGNED TO STIMULATE YOUR IMAGINEERING!

EMCOR II Modular Enclosure System provides an exclusive combination of appearance and structural features for distinct, individualized customer identity. Recessed, flush or extended panel mountings; choice of aluminum trim or grillwork extrusions, an assortment of customer nameplate styles, double width frames, pontoon bases and side panels, multi-function enclosures; superior structural strength second to none; externally removable side panels; 1 3/4" pull-out Work Writing Surfaces plus many more features designed to stimulate your imagineering. Your investigation of the EMCOR II Line will be rewarded by virtually unlimited application possibilities.



Request New
EMCOR II
Literature



EMCOR-The Original Modular Enclosure System By
INGERSOLL PRODUCTS
Division of Borg-Warner Corporation
1000 W. 120th ST. • DEPT. 1242 • CHICAGO 43, ILL.

Full details available
on the ALL NEW

Emcor II

MODULAR
ENCLOSURE
SYSTEM

from your local
EMCOR sales
engineering office

NORTHWESTERN
N. R. SCHULTZ COMPANY
Seattle

WESTERN
NEELY ENTERPRISES
North Hollywood • Sacramento
San Carlos • San Diego
Albuquerque • Las Cruces
Scottsdale • Tucson

TEXAS, OKLAHOMA
JOHN A. GREEN COMPANY
Dallas • Houston • Tulsa

SOUTHEASTERN
W. A. BROWN &
ASSOCIATES, INC.
Orlando • Alexandria • Winston-
Salem • Indian River City
Huntsville • Ft. Lauderdale

NEW ENGLAND STATES
TECHNICAL INSTRUMENTS,
INC.

Reading • Bridgeport

UPPER NEW YORK STATE
J. A. REAGAN CO., INC.
Albany • Buffalo • Binghamton
Marcellus (Syracuse)
New Hartford

**METROPOLITAN NEW
YORK CITY, NEW
JERSEY AND EASTERN
PENNSYLVANIA**
KENNETH E. HUGHES
COMPANY, INC.

Union City • Haddonfield
(New York City Telephone)


**MICHIGAN, OHIO,
WESTERN PENNSYLVANIA
AND WEST VIRGINIA**
S. STERLING COMPANY
Southfield (Detroit) • Dayton
Cleveland • Pittsburgh

NORTH CENTRAL
HUGH MARSLAND &
COMPANY, INC.
Chicago • Indianapolis
Minneapolis


KANSAS—MISSOURI
HARRIS-HANSON COMPANY
St. Louis • Kansas City

ROCKY MOUNTAIN AREA
LAHANA & CO.
Denver • Salt Lake City

CANADA
BRIAN ENGINEERING
LIMITED
Montreal • Toronto



METALIZED-CERAMIC parts are assembled with metal parts in brazing jig. Many metals can be plated on the metalized ceramics and many types of metal can be brazed to the metalized ceramic

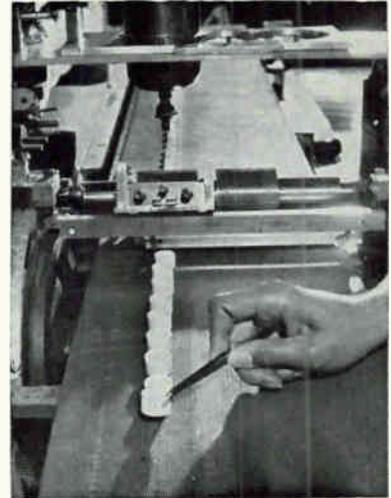

METALIZING COATING is applied automatically by rollers to ends of ceramic cylinders. The cylinders will be heated in a six-stage hydrogen furnace to fuse the coating to the ceramic

Process for Metalizing Ceramic is Automated

Vacuum tight seals are stronger than the ceramic sections

By S. R. JEPSON
Eitel-McCullough, Inc.
San Carlos, Calif.

CERAMIC TO METAL seals can be made in two ways. The first process produces a mechanical bond between the metal and ceramic, but a bond that will not hold a vacuum and is weaker than either the metal or the ceramic and thus will open under sufficient stress. The other process produces fusion between metal and ceramic; it gives seals that will hold a vacuum of 10^{-6} mm Hg at over 700 C, and the bond is stronger than the ceramic.

Vacuum-tight ceramic to metal seals have been used for a number of years for power and microwave tubes. Now the seals are being used for rocket igniter casings, connector inserts, semiconductor envelopes and caustic coolant shielding. Mass production of high qual-



METALIZING COMPOUND is applied to octal tube headers by silk screen process

ity seals is justified in many cases and a high degree of automation is possible.

Ceramic blanks are made from aluminum or beryllium oxide. Alumina provides both electrical and thermal insulation while beryllia is a good electrical insulator and has the thermal conductivity of white

brass. The blanks are checked for mechanical tolerances, purity, and hardness, then immersed in a dye which seeps into fine cracks and indicates them by a bright red mark. Acceptable blanks are then cleaned in a strong detergent.

METALIZING — The metalizing compound is a thick grey fluid made with four parts molybdenum and one part manganese suspended in a nitrocellulose lacquer base. It can be applied with rollers, hypodermic syringe or silkscreen. The automated roller press shown in one of the photographs is used to metalize the ends of small cylinders. A conveyor belt carries the blanks under a roller which deposits a thin film of the compound on the surface to be metalized. The conveyor then passes through an infra-red drying oven. The coating process takes about six minutes. Larger blanks are placed in mandrels and are spun at a few-hundred rpm. Metalizing compound is applied with hand-held rollers or hypodermic syringes. The compound dries in about fifteen minutes



...a TV set
operating under water?

That's not water... that's FREON® fluorocarbon solvent

And we'll bet this is the cleanest electronic system at the Wescon show! Because it will play, while completely immersed, for the duration of the show.

This demonstration is possible because "Freon" is an excellent dielectric and a selective cleaning agent. There is no arcing, even in the TV set's high-voltage circuitry. "Freon" thoroughly removes dust, grease, lint and chips from components or entire assemblies—without harm to delicate parts, finishes, elastomers or insulation. "Freon" has a uniquely low surface tension that lets it penetrate minute openings. There it wets and displaces soils other solvents cannot.

And "Freon" is *safe* for production people because it's nonexplosive and virtually nontoxic. It leaves no residue and can easily be recovered for use over and over again for maximum economy.

So don't miss this one at Wescon! If you're not going to the show, write for complete technical information, and, if you wish, the services of a Du Pont technical man. Du Pont Company, 2420E Nemours Building, Wilmington 98, Delaware.

Freon® solvents

Better Things for Better Living... through Chemistry



SEE THIS DEMONSTRATION IN BOOTH #3734 AT WESCON!



NEED METERS?

Whether you require Military or Commercial Panel Meters, chances are the meters you need are among the wide selection of "standard" and "custom" types produced by WacLine Meters. These include square, rectangular, round and edgewise shapes in sizes from 1" round to 6" rectangular . . . sealed, ruggedized Mil Spec types, basic and custom movements, special scale plates, and accessories.

WacLine Meters, instrumentation specialists since 1950, provide complete freedom of selection from one reliable source for all Military and Commercial Meters . . . with quick delivery on all models.

Send For New WacLine Catalog



35 S. ST. CLAIR STREET • DAYTON 2, OHIO
Tel 228-5161 TWX 944-0478 Area Code 513

in the open air.

Fusing the metalizing compound to the ceramic is accomplished in a six-stage hydrogen atmosphere furnace. Parts are carried into one end of the 50-foot long automated furnace on a conveyor, heated in six stages to 1,450 C, then emerge from the opposite end. In the furnace the molybdenum in the coating forms a 0.001 inch film on the surface of the ceramic and the manganese combines with other elements in the ceramic to form a bond at the interface of the molybdenum and ceramic.

Metalized areas of the ceramic can be plated with nickel, copper, silver, and gold, or they can be brazed to metal parts using pure copper, copper alloys, or silver. Ceramic-metal assemblies are

stacked in precision brazing jigs with brazing alloys sandwiched between the metal-ceramic surfaces. As many as 14 pieces have been brazed into one assembly. Metals to which the metalized ceramic can be brazed include nickel-iron alloy, copper, kovar, nickel, copper-nickel alloy, tungsten, molybdenum, and steel, including stainless. After brazing, the assemblies are cleaned, can then be plated if required.

Typical mass production ceramic-to-metal seal processes include 0.02 inch diameter beryllia diode envelopes 0.065 inches long, 1-inch diameter alumina rod brazed to a 0.125 inch thick, 3-inch diameter tungsten disk, brazing to the inner and outer edges of a 0.03 inch thick ceramic disk, and brazing sapphire to copper for microwave windows.

Printing Trick Speeds Panel Mockups



PRODUCTION MODEL scope at right had front panel design established in advance by realistic colored mockups of various configurations


A TRANSPARENT OVERLAY system, originally designed to provide printers with an inexpensive check of color work, is being used to produce models of electronic instruments quickly and with high accuracy.

Marketing samples and production mockups of precision instruments should duplicate the color, typography, hardware and other essentials of proposed designs. Close simulation of alternative designs for proposed instruments allows realistic decisions about the best approach.

Time is usually important in the mockup stage of electronic instrument production. Front panel in-

strument mockups can be made with silk screen panel, which tends to be time consuming, or a hand-painted comprehensive, which tends to be inaccurate. The overlay technique, called Color-Key, uses 0.002 inch thick polyester film coated with a light-sensitive material. It was developed for the printing industry by Minnesota Mining and Manufacturing Co. to check color break, value and register before costly lithographic plates are made. The photograph indicates how the process was used to produce a front panel mockup for a new Packard Bell oscilloscope.

The front panel is first fabri-

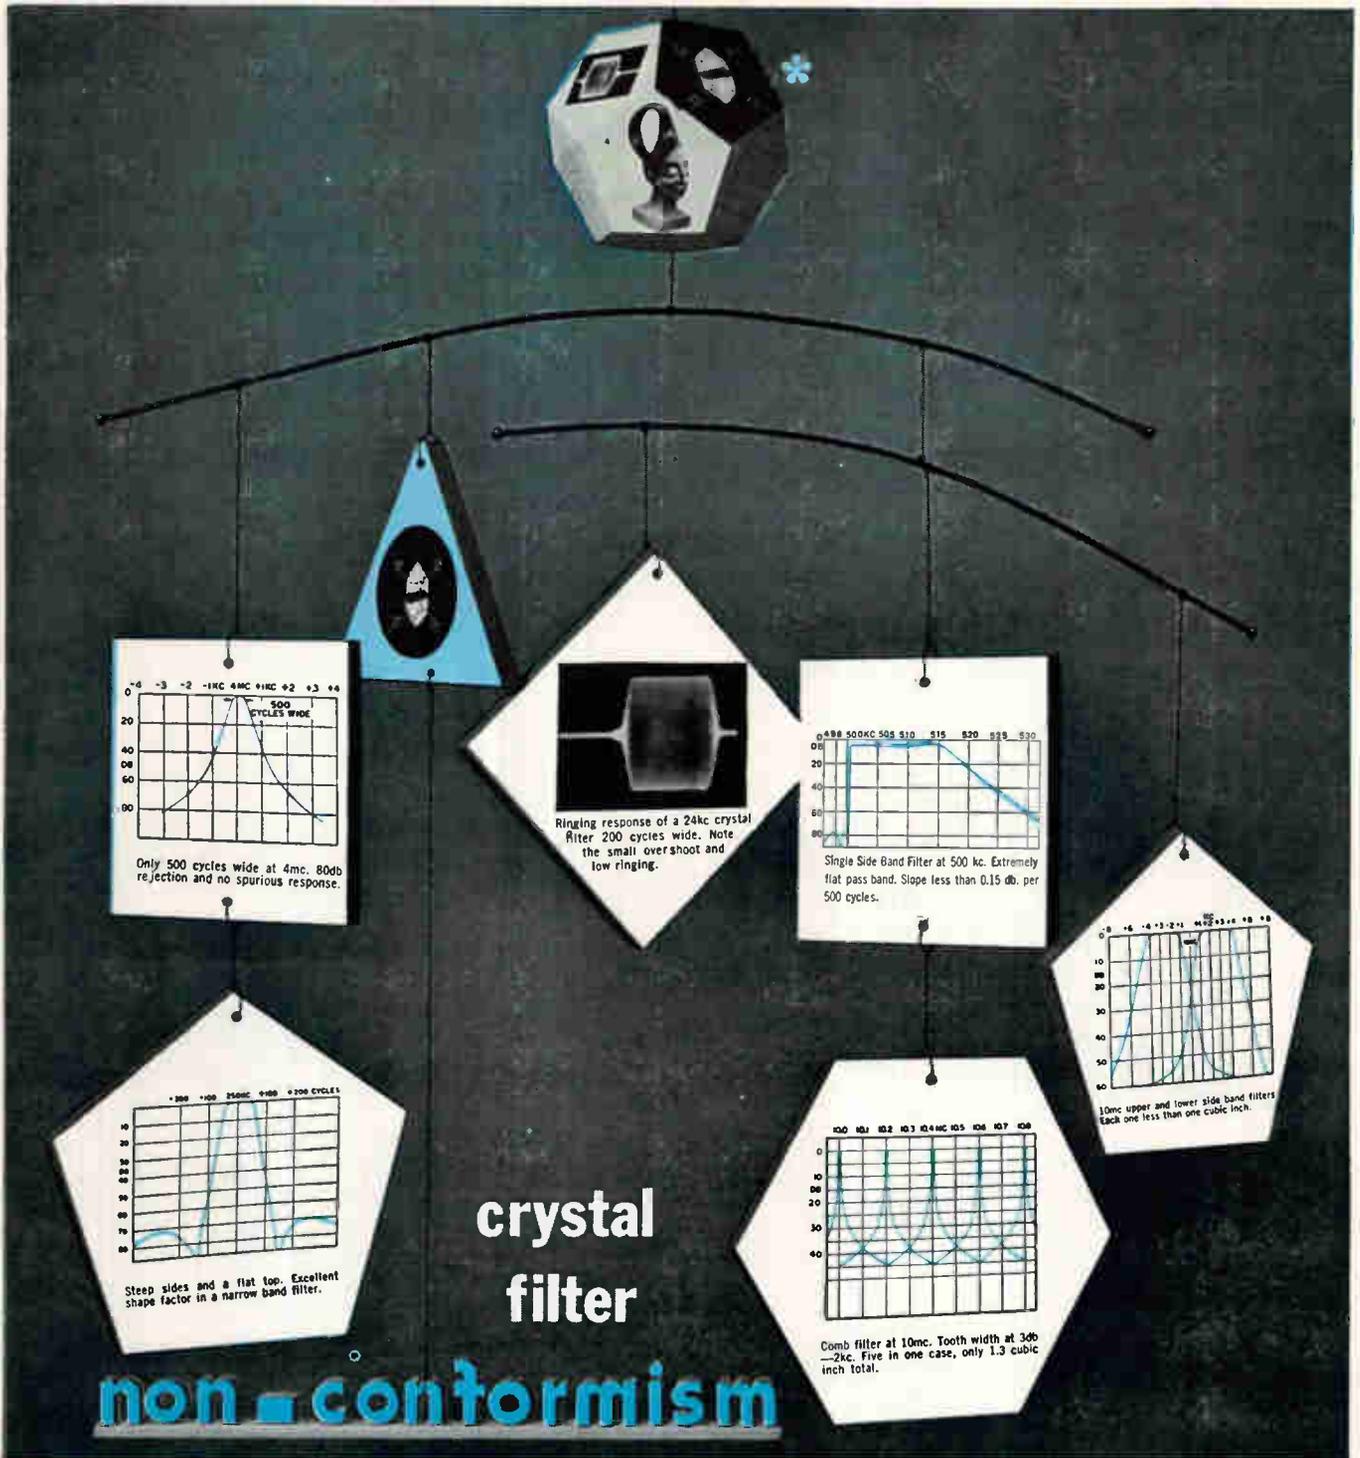

Those *non-conformists* at Burnell's engineering laboratory aren't satisfied with just producing the broadest range of crystal filters, toroids and communication networks: through their constant efforts to satisfy tomorrow's space age electronics problems, they have developed a whole new family of sophisticated crystal filters, with exceptional and unusual characteristics, contributing to increased circuit flexibility as graphically demonstrated above.

Those same *non-conformists* have also made considerable

progress solving other electronics/space age problems. A typical example of this has been their work with the application of Time Domain Synthesis; producing an unlimited inventory of wave forms for new applications, and resulting in substantial reductions of size and weight, eliminating the need for complex active circuitry for its support.

*Join the *non-conformists*—write today for your free *Non-Conformist* paper weight and Crystal Filter Catalog XT-455. Yes! Your circuits *can* profit today from tomorrow's research.

Burnell & Co., Inc.


PIONEERS IN microminiaturization OF TOROIDS, FILTERS AND RELATED NETWORKS

DIVISIONS: Gray & Kuhn, Inc., Pelham, New York • GLP Electronics, Inc., Bristol, Conn. • Guillemin Research Laboratory, Cambridge, Mass.

EXECUTIVE OFFICE
AND PLANT
DEPT. E-8
PELHAM, NEW YORK
PELHAM 8-5000
TELETYPE PELHAM 3633



PACIFIC DIVISION
SOUTH PASADENA, CAL.
MFD. IN CANADA
BY EDO (CANADA) LTD.
CORNWALL, ONT.
WELLINGTON 2-6774

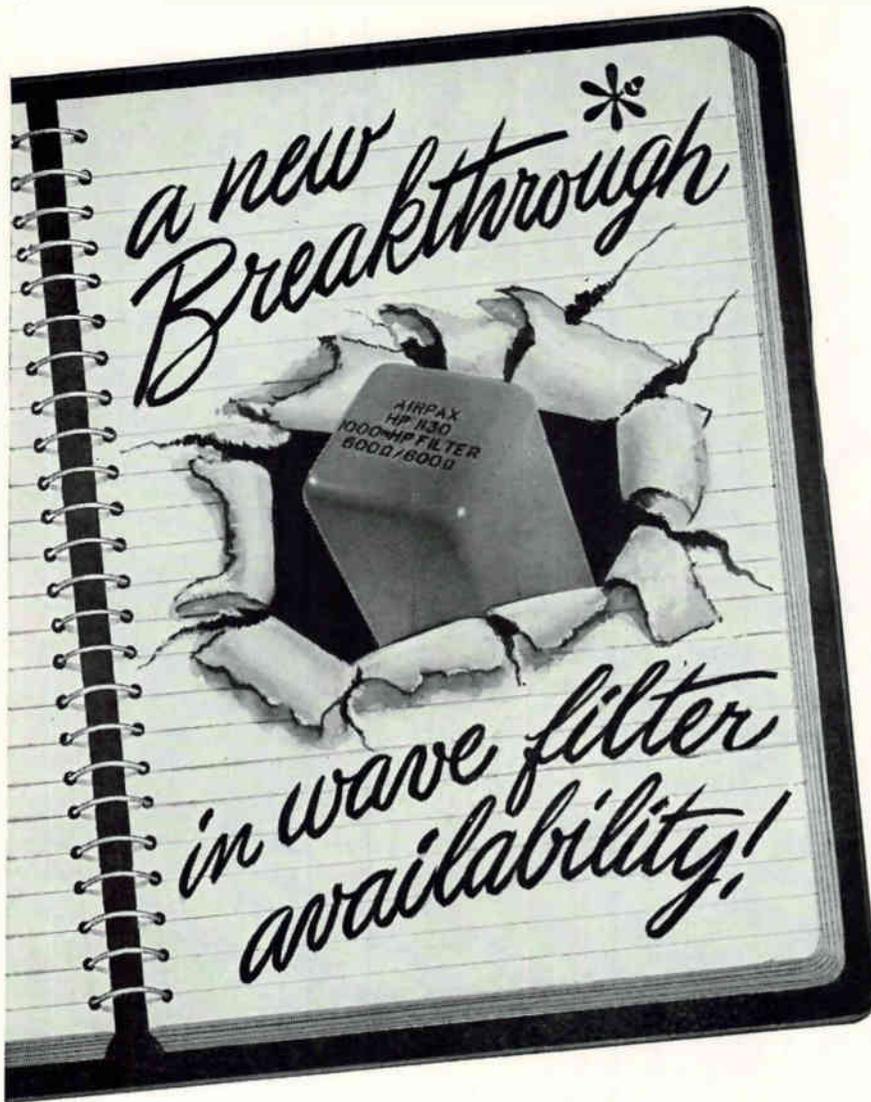

Design your circuit. Put a black box in the filter spot. Tell Airpax Engineering what the filter must do and the conditions under which it must perform. Your problem is solved that simply. Occasionally a standard off-the-shelf filter will just fill the bill. If not . . .

*** AIRPAX WILL DELIVER A "SPECIAL" TO YOUR SPECIFICATION AS QUICKLY AS YOU CAN PROCURE AN ALMOST-RIGHT "STANDARD."**

We produce all types — low pass, high pass, band pass, band reject, notch and comb types to 10 megacycles. Your specification will not be foreign to our experience.

Descriptive Literature on Request.



PACIFIC DIVISION


NORTHRIDGE, CALIF.

PHONE: DI 1-4320 • TWX CNPK 5426

cated to the desired shape and then painted with the base color the instrument is to have; or the base color is simulated with colored paper. Then the dial markings are printed in the desired color on a separate piece of paper and photographed. Since instrument lettering in this instance is to appear in three different colors, three different colored overlays are produced from the photograph; the basic process is similar to that used in reproducing colored pictures in books and magazines. The overlays are then fastened to the panel with tape or mechanical fasteners, and hardware such as switches and knobs are added.

The oscilloscope mockup was prepared by Consultants for Product Design in conjunction with Creative Type Co.

Welded Connections and Welded Sealing

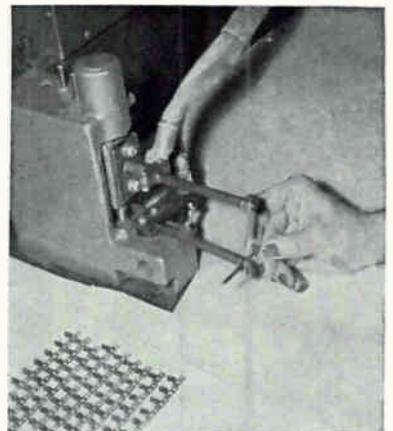

CONTACT CONTAMINATION is one of the major causes of trouble in relays and choppers, and a major source of contamination is the solder flux used for making internal connections and sealing the cans. Cambridge Scientific Industries, Cambridge, Md., has therefore turned to spot welding for internal connections in their choppers and to heliarc welding for sealing the can.

The sealing operation using heliarc welding is accomplished in a closed chamber filled with nitrogen. Thus the choppers are subject only to an inert gas during sealing and in operation.

DU MONT at WESCON...

SEE WHAT THE INDUSTRIAL TUBE LEADER IS DISPLAYING

HIGH RESOLUTION, HIGH BRIGHTNESS

MICRO-SPOT CATHODE-RAY TUBES*



Cathode-ray tubes with a .0007" spot size, or over 1400 lines/inch resolution, provide the ultimate in detailed displays for the most precise investigations. Types specified here are some of the high-resolution family of tubes designed and manufactured by Du Mont. Complete details on request.

CATHODE-RAY TUBES—.0007" SPOT SIZE

Type	Dia.	Length (nom.)	Type Defl.	Type Focus	Accel. Volts	Line Width
K1972	3"	14-9/16"	Mag.	Mag.	20 kv	.0007" @ 10 uA
K1871	5 1/4"	16-5/8"	Mag.	Mag.	20 kv	.0007" @ 10 uA

*Including Fiber Optic Faceplates

DIRECT-VIEW STORAGE TUBES

Tubes with lightning-fast indications and controllable retention...including Scan Converters and 5-inch diameter types. Du Mont Direct-View Storage Tubes offer brighter, flicker-free displays. Electrostatic deflection available. DVST's available in all sizes from 2-3/4" to 21"—for all applications from underwater to airborne.



TYPICAL DIRECT-VIEW STORAGE TUBES

Type	Dia. Max.	Writing Guns		Storage Time (min.) Sec.	Writing Rate (min.) in./sec.	Erasing Uniformity Ratio, Max.	Resolution (min.) lines/in.
		Defl.	Focus				
K1938	2-11/16"	Elec.	Elec.	30	2x10 ³	0.5	50
7448	5-5/16"	Elec.	Elec.	40	3x10 ⁵	0.5	50
K1826	10-3/8"	Mag.	Elec.	180	1x10 ⁴	0.5	50
K1810	20-5/16"	Mag.	Mag.	180	5x10 ⁴	0.5	30

INCREASED SENSITIVITY MULTIPLIER PHOTOTUBES




See two new types: Type 2276—a 1-1/4" flat end-window, 10-stage MPT with S-1 cathode luminous sensitivity of 30 ua/lumen—twice that ordinarily available in these photomultipliers; Type 2284—offering extra ruggedness and shortness for space economies.

Du Mont image converters, image dissectors and other photo-sensitive tubes will also be shown. MPT's for every application from space exploration to sub-strata.

QUALITY POWER TUBES

A complete new line of Power Tubes—on display for the first time by Du Mont. Typical of those to be seen are: Power Triodes, High-Voltage High-Current Diodes, Rectifier Tubes, Ionization Gauges, Switch Tubes and High-Voltage Pulse Modulator Triodes. See the complete line—already accepted and in use as high-quality items.



SEE THEM ALL AT WESCON BOOTHS 2129-31




ALLEN B. DU MONT LABORATORIES

ELECTRONIC TUBE DIVISION

DIVISIONS OF FAIRCHILD CAMERA AND INSTRUMENT CORPORATION

750 Bloomfield Avenue, Clifton, New Jersey



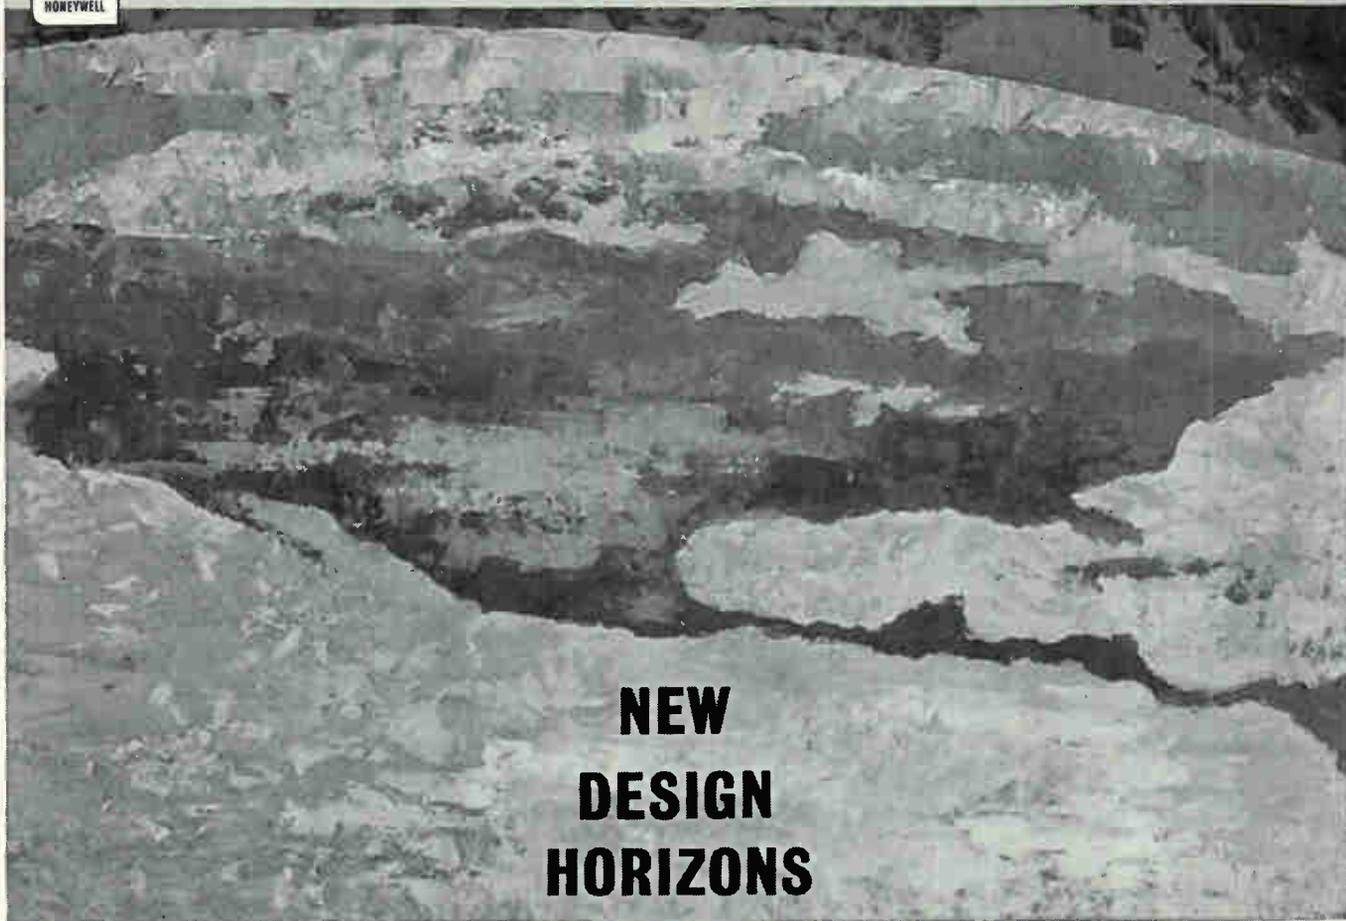


NEW DESIGN HORIZONS

WITH SMALL SEALED SWITCHES

MICRO SWITCH offers a complete selection of small, sealed switches for aircraft, missiles, ground support, marine and ordnance applications. The four switches described below are designed to operate with precision and reliability under the most severe environmental conditions including dust, moisture and corro-

sion. They meet the requirements of MIL-S-6743 and applicable requirements of MIL-E-5272. For further information on these and other sealed switches along with complete engineering service, contact your nearby MICRO SWITCH Branch Office (see the Yellow Pages). Or write for Catalog 78.



Hermetically Sealed Switches

Sealing is by metal-to-metal and glass-to-metal fusion. The new "HM", smallest of its type available, is interchangeable with unsealed subminiature switches (MS25085-1). The "HS" offers rugged construction and 25 ampere electrical capacity. Both are SPDT.

Environment-Proof Switches

Small size and completely sealed (Basic switching unit and lead wires are embedded in epoxy resin; an elastomer seal is bonded to the actuating plunger). The "XE" weighs only .14 oz., the "SE", .24 oz. Both are SPDT. Normally-open and normally-closed versions available.

See our exhibit in
Booths 2010-11 at the
WESCON Show, August 21-24.



MICRO SWITCH

FREEPORT, ILLINOIS

A DIVISION OF HONEYWELL

IN CANADA: HONEYWELL CONTROLS LIMITED, TORONTO 17, ONTARIO

HONEYWELL INTERNATIONAL SALES AND SERVICE OFFICES IN ALL PRINCIPAL CITIES OF THE WORLD. MANUFACTURING IN UNITED STATES, UNITED KINGDOM, CANADA, NETHERLANDS, GERMANY, FRANCE, JAPAN.



500:1

INCREASE IN AC RANGE IN THE COMPLETELY NEW **FLUKE MODEL** **803B** AC/DC PRECISION DIFFERENTIAL VOLTMETER

PARTIAL 803B SPECIFICATIONS

DC ACCURACY	$\pm 0.05\%$ from 0.1 to 500V DC $\pm 0.05\% + 50 \text{ uv}$ below 0.1V DC
AC ACCURACY	20 cps to 10 kcps $\pm 0.2\%$ from 0.5 to 500V AC $\pm 0.2\% + 25 \text{ uv}$ from 0.001 to 0.5V AC
VOLTAGE RANGE	0 to 500V
FREQUENCY RANGE	5 cps to 10 KC
MAX. FULL SCALE NULL SENSITIVITY	1mv AC; 10mv DC
REFERENCE ELEMENT	Standard Cell (zener diode optional at extra cost)
REGULATION and STABILITY of 500V REFERENCE	$\pm 0.0025\%$ for a $\pm 10\%$ line change $\pm 0.005\%$ per hour after 30 min. warmup
PRICE	Cabinet \$875.00 Rack \$895.00

Prices and data subject to change without notice.

John Fluke Mfg. **FLUKE** **INSTRUMENTS**
Company, Inc.
Seattle 33, Wash.
Box 7428 PR 6-1171 TWX—Halls Lake TLX—852

ONLY FLUKE OFFERS an AC/DC differential voltmeter with these outstanding features:

0.2% + 25uv AC measurement accuracy extended to 1mv from 500mv.

DC polarity reversal switch for negative or positive voltage measurements.

Independent built-in reference for true self calibration of 500V working reference.

Infinite input impedance at null from 0 to 500V DC to eliminate errors caused by circuit loading.


Taut band suspension meter to eliminate meter stickiness.

Extreme circuit stability eliminating need for front panel electrical or mechanical zero adjustments.



SEE THE ENTIRE LINE OF NEW FLUKE INSTRUMENTS / COMPONENTS AT WESCON BOOTH 562-563

Printed Circuit Designers! AVOID Wire Failures at Soldering Temperatures

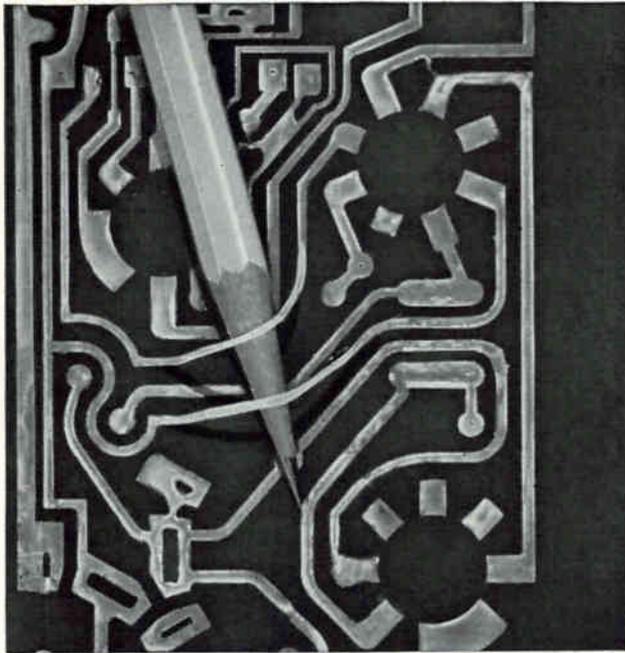

You've never had a printed circuit fail at room temperature. But you may often have experienced loose wire trouble in the soldering pot or during solder roller coating.

Synthane G-10R, a special glass epoxy base laminate, was developed especially to eliminate wire failures during the soldering operation—approximately 500°F.

G10-R meets or beats NEMA and MIL specs for peel strength at room temperature and has a hot peel strength of 2 to 4 lbs. per inch of width after immersion for 15 seconds at 500°F* instead of the customary 0.1 to 0.2 lbs. per inch of width.

G-10R is available in sheets 36" x 36" or 36" x 48" and in the usual foil thicknesses. Write for new folder on all Synthane metal-clad laminates.

*Tests made on 1/8 & 1/16" wires.

SYNTHANE

CORPORATION **S** OAKS, PENNA.
Glendale 2-2211 TWX Valley Forge 735U
Synthane-Pacific 518 W. Garfield Ave., Glendale 4, Calif. TWX GLDL 4417U

Synthane Corporation, 36 River Rd., Oaks, Pa.

Gentlemen:

Please send me your latest brochure on Synthane G-10R and other Synthane copper-clad laminates.

Name _____

Address _____

City _____ Zone _____ State _____

ONLY PERKIN GIVES YOU THIS CHOICE IN 30A DC POWER SUPPLIES



MODEL TVCR040-30

TRUE DYNAMIC REGULATION OF BOTH VOLTAGE AND CURRENT

DC OUTPUT: 0-40v, 30a. STATIC REGULATION: (Line) $E \pm 0.01\%$ or $\pm 2mv$, $I \pm 0.02\%$ or $\pm 3ma$; (Load) $E \pm 0.02\%$ or $\pm 4mv$, $I \pm 0.05\%$ or $\pm 7.5ma$; DYNAMIC REGULATION: Line $\pm 50mv$ for inst. $\pm 10V$ line change, Load $\pm 0.5v$ for FL change. RIPPLE RMS: $E 2mv$, $I 5ma$. RESPONSE: 50μ sec. \$1295.



MODEL TVR040-30

VOLTAGE REGULATION WITH ADJUSTABLE CURRENT LIMITING

DC OUTPUT: 0-40v, 0-30a. STATIC REG: Line $\pm 0.01\%$, Load $\pm 0.02\%$. DYNAMIC REG: Line $\pm 50mv$ for inst. $\pm 10v$ line changes, Load $\pm 0.5v$ for FL change. RIPPLE RMS: 2.0 mv. RESPONSE: 50μ sec. CURRENT LIMITING REGULATION ACCURACY: $\pm 0.1\%$ or $\pm 30ma$. \$1120.

Only Perkin gives you these two big choices in 30a DC power supplies:

1. A supply that has true voltage regulation *and* current limiting with automatic voltage programming.
2. A supply that has both voltage and current regulation with automatic voltage and current programming.

Both these all-solid state units are transient-free. Both feature current limiting adjustable from 0 amps upwards, series and parallel operation, remote sensing, and immunity to short circuits. Off-the-shelf delivery, prepaid in U.S.

Write for complete technical information.

PERKIN

electronics

345 Kansas St., El Segundo, Calif., Spring 2-2171

CIRCLE 209 ON READER SERVICE CARD

Around the world it's **KEW**

MODEL F-98

MODEL EW-16

MODEL P-22

MODEL VR-2P

MODEL VO-38

MODEL TK-20A

MODEL FL-202

MODEL PV-200


MODEL TR-A

SWR & RF WATTMETER

KYORITSU ELECTRICAL INST. WORKS, LTD.

No. 120, Nakane-cho, Meguro-ku, Tokyo, Japan
Cable Address: "KYORITSUKEIKI TOKYO"
Tel: (717) 0131 ~ 5 • 0151 ~ 3

CIRCLE 210 ON READER SERVICE CARD

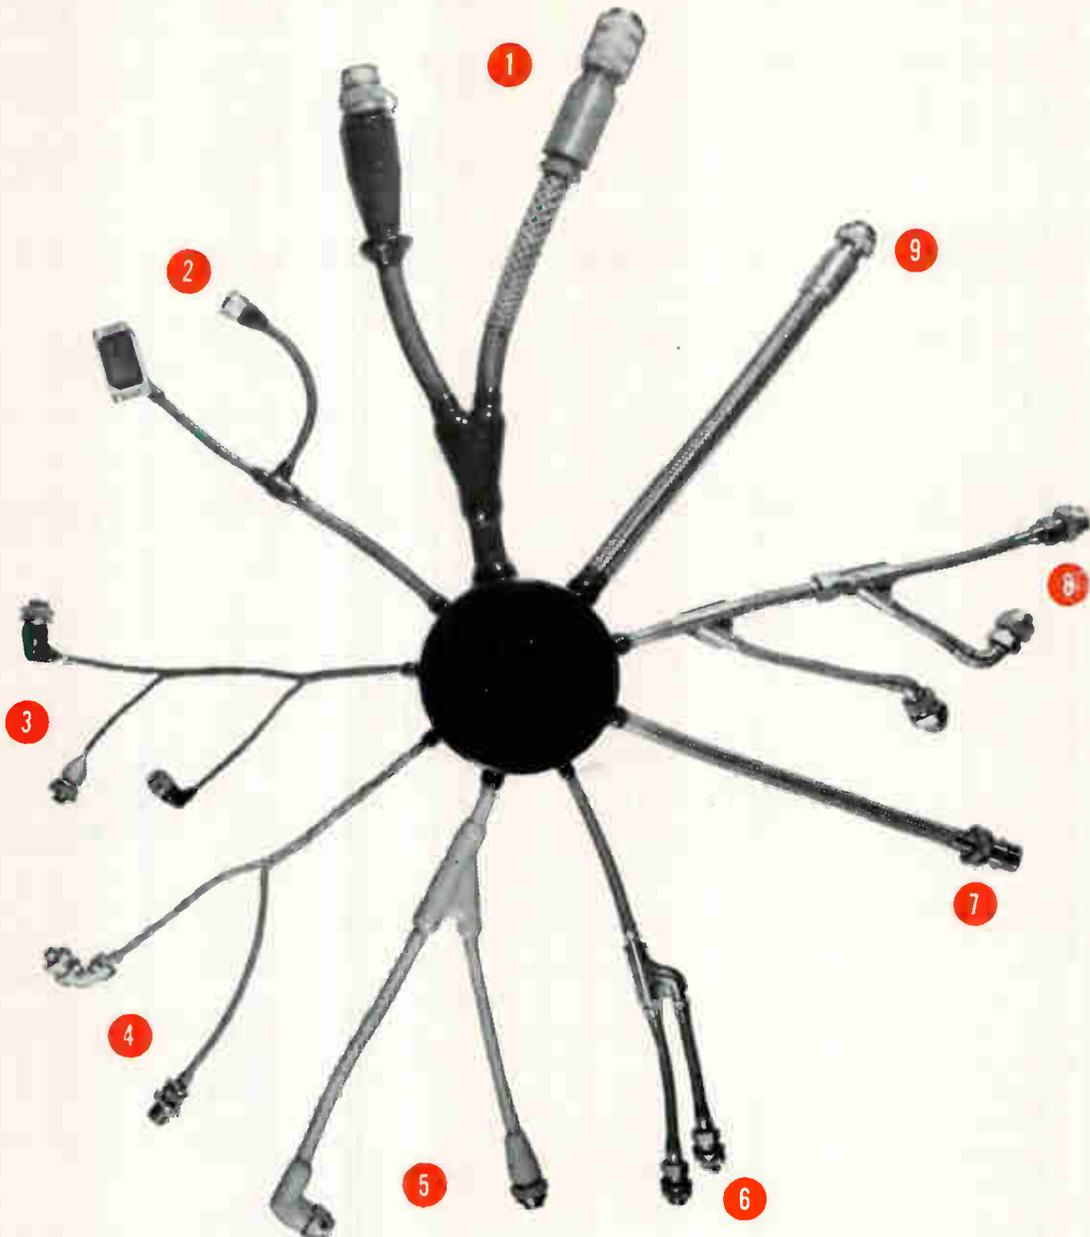

TYPICAL BENDIX® SPECIAL-PURPOSE CABLES THAT SOLVE CRITICAL ENVIRONMENTAL PROBLEMS

- 1 Heavy Duty—Ground Support Cable
- 2 Benseal® Missile Control Cable
- 3 Fabric Braided—Aircraft and Missile Control Cable
- 4 Metal Braid—Aircraft Nacelle Cable
- 5 High Temperature—Radiation Resistant Cable
- 6 High Temperature—Lightweight—Missile Cable
- 7 "Wet Wing" Aircraft Fuel Cell Cable
- 8 Rewirable—Jet Engine Control Cable
- 9 High Temperature—1500°F.—Thermocouple Cable

Bendix cables—products of over a quarter-century of design and manufacturing experience—are proving their complete reliability in a countless variety of applications involving critical environmental conditions. For complete information, write us at Sidney, New York.

BENDIX CABLES • BENDIX CONNECTORS

Designed together to work best together

Scintilla Division



TOSHIBA ELECTRON TUBES EXCEL IN...


LONG LIFE

ADVANCED DESIGN

HIGH RELIABILITY

EXCELLENT PERFORMANCE

Image Orthicons

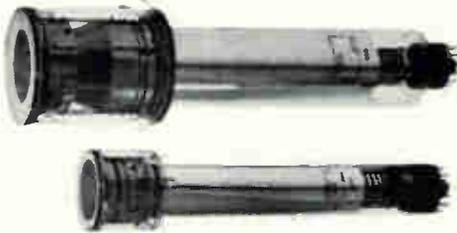

Tube Type	Feature	Application
5820	3" Standard, High Sensitivity (None Field Mesh)	Monochrome Broadcast Studio and Outdoor
75PC11	3" Low Spurious Signal High Sensitivity	Monochrome Broadcast Studio and Outdoor
75PC12	3" Low Spurious Signal High S/N Ratio	Monochrome Broadcast Studio and VTR
4415	3" High Quality High Sensitivity	Color (Red and Green)
4416	3" High Quality High Sensitivity	Color (Blue only)
7389A	4 1/2" Super High Quality High S/N Ratio	Studio and VTR
7295A	4 1/2" High Quality	Studio, Outdoor and VTR

Traveling Wave Tubes



TYPICAL PPM TYPE TUBES

TYPE	FREQUENCY RANGE (MC)	POWER OUTPUT (W)	BEAM VOLTAGE (V)	BEAM CURRENT (mA)	GAIN (db)
2W401	1700 - 2300	20	2200	65	37
3W402	2300 - 2900	17	2200	65	37
3W20	2400 - 3200	5	2600	35	35
6W401	5850 - 6450	14	3100	40	40
7W25	6400 - 7200	8	2700	25	38
7W402	6425 - 7125	13	3100	40	40
8W403	7100 - 7900	12	3100	40	40
8W23	7200 - 7800	5	2500	25	36
11W174	10500 - 11800	1	2300	8	27

Our products will be on display at the WESCON Show, Booth #3454 & #3455

For detailed information, write Toshiba, Foreign Trade Division, Hibiya Mitsui Bldg., Yurakucho, Tokyo, Japan.

Tokyo Shibaura Electric Co., Ltd. Tokyo, Japan

Toshiba Quality Since 1875

DELTA DESIGN

SOLID STATE TEMPERATURE CONTROLLER



Precise
Reliable
Convenient
Silent

Compensates for Variations in Line Voltage, Ambient Temperature, Heat Load

Thoroughly tested with stock model Delta Temperature Chambers. Can be designed into new systems or retrofitted to existing equipment. **PRECISE:** Advanced bridge circuitry gives better than $\pm 0.1^\circ\text{F}$ control. **SILENT AND RELIABLE:** Null gating SCRs proportion power without transients, without wear. There are no moving parts. **Overshoot eliminated** by novel anticipator circuit. **CONVENIENT:** Temperature set directly on numbered scale to better than $1/2\%$ of range. Easy to install in any temperature control operation. Retrofit kits available.

Call your
Delta Representative
or write direct



8000 FLETCHER PKWY. LA MESA, CALIFORNIA
PHONE: 465-4141 (SAN DIEGO) • TWX: LMSA 6538-U

CIRCLE 211 ON READER SERVICE CARD



ELECTRONIC COMPONENTS

The SMK components are exported in large quantities to foreign markets at the lowest possible prices with the highest quality available.

We are always making strenuous efforts to make a new design and improve every product in quality.

We are proud of our production capacity which is claimed to be the largest in the Orient. Catalogue available on request.



S-G1101 S-H1101
Miniature Plugs
and Jacks



S-I 5201
S-I 5202
U.S.
Connector



S-I 5701
S-I 5702
Plug Socket



S-I 7901
Connector
for microphone



S-J 2801
Rotary Switch



S-X2201
Battery Holders



TV Adapter



S-Q 2501
Pin Jack
Terminals
for amplifier

SHOWA MUSEN KOGYO CO., LTD.

24 Higoshitogoshi 5-chome, Shinagawa-ku, Tokyo, Japan

CIRCLE 212 ON READER SERVICE CARD

electronics

SG-5000

Transitron offers computer circuit designers a highly reliable, better performing, subminiature glass silicon planar epitaxial diode. Careful development, supported by stringent environmental and life tests, has solved all mechanical and electrical problems. The result is the SG-5000 — a premium unit that fully meets military specifications.

At the same time, Transitron has improved upon the selected performance of silicon planar epitaxial diodes now available. In addition to the recognized features of higher forward conductance, faster switching and lower capacitance, the uniformity of planar epitaxial construction lets Transitron offer tightly controlled forward voltages at specified current levels. The SG-5000 is available in quantity with digital marking for quick diode type identification.

Another step in Transitron's continuing efforts to offer the industry's widest variety of silicon diode types is the introduction of the 1N3604-6 and 1N3062-9 series of silicon planar epitaxial diodes. All Transitron silicon diodes, in-

TENTATIVE DATA — SPECIFICATIONS AT 25°C					
Type	Maximum Forward Voltage @ 200mA	Maximum Inverse Current @ -75V	Minimum Inverse Voltage @ 100μA	Maximum Capacitance @ 0V @ 1Mc	Maximum Reverse Recovery Time*
SG-5000	1.0V	0.1μA	100V	2 pf	2 nsec

*($I_F = 10\text{mA}$, $V_R = -6\text{V}$, recovery to 1 mA, $R_L = 100\text{ohms}$)

cluding the newest types, can be packaged as multiple-chip assemblies to your specification. All are now available through your Transitron distributor.

Transitron invites your inquiry regarding further details of its silicon planar epitaxial diodes. Write today.

Transitron
 electronic corporation
 wakefield, melrose, boston, mass.



SALES OFFICES IN PRINCIPAL CITIES THROUGHOUT THE U.S.A. AND EUROPE
 CABLE ADDRESS: TRELCO

Meet us at WESCON, Booths 2176-77

TRANSITRON'S NEW FULLY EVALUATED SILICON PLANAR EPITAXIAL DIODE

CIRCLE 127 ON READER SERVICE CARD

New reading checklist from McGraw-Hill

1 TRANSISTOR ENGINEERING an Introduction to Semiconductor Integrated Circuits

Just Published. Equips the reader with a basic understanding of the principles of transistor theory and design so that any of the DC or high-frequency parameters and characteristics can be directly related to the physical properties of transistor materials. By Alvin B. Phillips, Motorola, Inc. 370 pp., 203 illus., \$12.00

2 THE AGE OF ELECTRONICS

Just Published. Specialists discuss the present state of several fields of electronics and their possible future projections. Covers electromagnetic theory, communications, use of computers in scientific research, radio astronomy and radio telescopes, transistors, masers, and satellite relays. Ed. by Carl F. Overhage, Lincoln Lab., M. I. T. 256 pp., illus., \$7.95

3 INTRODUCTION TO RADAR SYSTEMS

Just Published. Covers modern developments and techniques in radar systems engineering. Ranges from prediction of radar range performance to applications in detecting extraterrestrial objects. Treats subsystems and major components, and how signals are detected in noise and information is extracted from signals. By Merrill I. Skolnik, Electronic Communications, Inc. 636 pp., 379 illus., \$14.50

4 DELAY TABLES for Finite- and Infinite-Source Systems

Just Published. Presents tabulated values to enable the operations researcher and engineer to deal quickly with important classes of delay systems. By A. Descloux, Bell Telephone Labs, Inc. 448 pp., \$15.00

5 HANDBOOK OF SEMICONDUCTOR ELECTRONICS

Thorough, comprehensive guide for all concerned with the design and application of semiconductor devices. Covers transistors, diodes, and photocells, giving principles of operation; technology; including fabrication; circuit applications; and reference to methods of mathematical analysis. Ed. by Lloyd F. Hunter, IBM. 2nd Ed., 916 pp., 678 illus., \$18.50

6 MATHEMATICS MANUAL

Just Published. Helps you solve all kinds of mathematical problems—business, engineering, or scientific—faster and easier. Gives important definitions, principles, theorems, corollaries relationships, and the methods most commonly used in mathematics. By F. S. Merritt, *Engg. News-Record*. 387 pp., 178 illus., \$9.50

VISIT MCGRAW-HILL
AT THE WESCON SHOW
BOOTHS 3837-38-39-40

7 ELECTRONICS DRAFTING

Simple, clear self-training guide to all types of electronic diagrams and drawings. Covers symbols and terms; use of drafting tools; mechanical diagrams; visualization; lettering; etc. By K. Karl Kuller, Hammarlund Mfg. Co. 286 pp., 139 illus., \$8.00

8 ELECTRON DEVICES AND CIRCUITS

Gives facts, descriptions, and explanations regarding the operating fundamentals of all types of electron devices and their application in common circuits. Covers and stresses the similarity between tubes, transistors, and magnetic amplifiers. Explains operation of devices in terms of energy balance, with frequent use of dimensional analysis. By John M. Carroll, *Electronics*. 334 pp., 226 illus., \$8.75

9 A SURVEY OF SWITCHING CIRCUIT THEORY

Short, direct introduction to modern switching theory for both combinational and sequential circuits. Requires only moderate knowledge of mathematics and provides many examples of solutions of problems. Ed. by E. J. McCluskey, Jr., Princeton Univ., & T. C. Bartee, MIT Lincoln Labs. 205 pp., 60 illus., \$7.75

10 RADIO-ELECTRONIC TRANSMISSION FUNDAMENTALS

Simplified, comprehensive guide for everyone interested in successful handling of high-power electrical energy of radio frequency. Covers techniques and underlying principles for everything from radio transmission to such diverse fields as induction and dielectric heating, plasma generation, and medical and chemical applications. By B. Whitfield Griffith, Jr., Gen. Electrodynamics Corp. 612 pp., 217 illus., \$10.75

11 MATHEMATICS FOR PLEASURE

Just Published. Gives wide variety of mathematical games, puzzles, brain-teasers, and magic squares. Includes easy puzzles, hard puzzles, puzzles to challenge your reasoning power and ingenuity. Puzzles range in knowledge required from simple arithmetic to elementary algebra and logic. By Oswald Jacoby with William H. Benson. 208 pp., \$4.95

12 COMPUTER HANDBOOK

A vast array of facts and data for ready use in every phase of designing and using analog and digital computers. Covers the full range of design practices, circuits, components, and systems. Includes programing and coding, producing flow diagrams, and organizing problems for computers. By 65 specialists. Ed. by Harry D. Huskey, Univ. of Calif., Berkeley, & Granino A. Korn, Univ. of Ariz. 1251 pp., 1099 diagrams, tables, & illus., \$25.00

13 ENGINEERING FUNDAMENTALS FOR PROFESSIONAL ENGINEERS' EXAMINATIONS

Helps you prepare for and pass the closed-book portion of state licensing examinations. Covers all phases—mathematics, mechanics, fluid mechanics, thermodynamics, mechanics of materials, electricity and electronics, chemistry, and economics and investment theory. By L. Polentz, Prof. Eng. 394 pp., \$9.50

14 DESIGN MANUAL FOR TRANSISTOR CIRCUITS

Gives a wealth of practical information to help meet everyday design problems involving the use of transistors and other semiconductor devices. Covers a wide range of applications, from simple one-transistor "push-pull" amplifiers to complex computer switching circuits equipped with high-power transistors. Ed. by John M. Carroll, *Electronics*. 390 pp., 600 illus., \$9.50

15 SUPERCONDUCTIVE DEVICES

Fully illustrated volume presents vital information on all major types of superconductive devices. Progresses in careful stages from principles of superconductivity through detailed explanations of cryotron circuit types. Particular emphasis is given to computer devices. Ed. by John W. Bremer, G.E. Computer Lab., 183 pp., 6x9, 42 illus., \$8.00

USE THESE BOOKS
10 DAYS
FREE

McGraw-Hill Book Co., Dept. L-8-10—327 W. 41st St., New York 36, N. Y.
Send me book(s) whose numbers I have circled below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep, plus few cents for delivery costs, and return unwanted book(s) postpaid. (We pay delivery costs if you remit with this coupon—same return privilege.)

1 2 3 4 5 6 7
8 9 10 11 12 13 14 15

Name Address

City Zone State

Position Company

For price and terms outside U. S., write McGraw-Hill Int'l., N. Y. C. L-8-10



NEW
FROM
ITT

LARGE SCREEN OSCILLOSCOPE HAS RESPONSE TO 5 MC



The new ITT Model LS 421 is a sampling oscilloscope with a low frequency display capability. It has the advantages of a large screen with exceptionally high resolution, plus a small, compact, modular control console. It has application as a general purpose lab scope for research and development activities, as a high speed readout for computers and display systems and wherever detailed observation of pulses and complex waveforms with high resolution and linearity is required.

LS 421 FEATURES:

VERSATILITY

X and Y plug-ins are completely symmetrical, thus allowing interchangeability of plug-ins normally associated with X and Y functions.

EASY MAINTENANCE

There is easy accessibility for servicing. Side panels are removable at the push of a button. There are no screws to remove. The deflection amplifiers are on swing-out chassis for easy access.

LARGE SCREEN

A 14" rectangular Cathode Ray Tube provides a full screen of 9" x 12"

For further information about the LS 421 Large Screen Oscilloscope, write for Data File No. E-1654-3, or call your local representative for a demonstration.

XY PLOTS

A unique random sampling method which allows the unit to be used as an XY plotter for phenomena varying at a DC rate or as high as 5 mc.

The system takes 50,000 samples per second, independent of the frequency of the waveform being displayed.

MODULAR CONTROLS


A modular Control Unit contains sampling circuitry, the control panel for indicator functions, and spaces for X and Y plug-ins.

CONVENIENCE


The Indicator and Control Unit are separate to allow the Indicator to be placed in the most convenient viewing position. The scope is packaged for rack, bench or mobile cart mounting.



Industrial Products Division
INTERNATIONAL TELEPHONE AND TELEGRAPH CORPORATION
15191 Bledsoe Street • San Fernando, Calif. • EMpire 7-6161



DESIGN AND APPLICATION

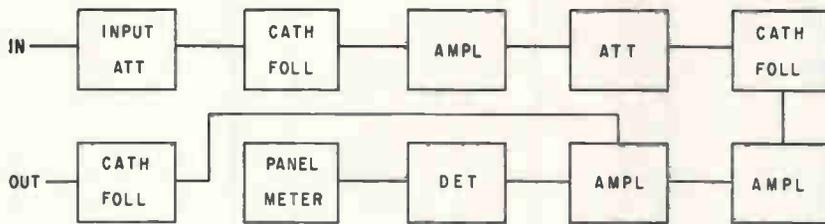

Measuring A-C Between 10 Cps and 100 Mc

Voltmeter measuring less than 100 μ v to 300 v is also preamplifier

ANNOUNCED by Keithley Instruments Inc., 12415 Euclid Ave., Cleveland 6, Ohio, the model 120 wideband voltmeter measures a-c voltage from less than 100 μ v to 300 v in 12 overlapping ranges. It can also be used as a wideband preamplifier. The amplifier can withstand up to 400 v. on the upper range scale therefore there is no danger of overvoltage changing calibration or burning out the probe. The signal source is not loaded by a nonlinear device having varactor properties. Using high-frequency transistors in conjunction with thermionic devices, amplifier response is 10 cps to 100 Mc \pm 2 percent between 20 cps and 50 Mc. Input impedance is 1 megohm shunted by 25 pF which can be increased to 10 megohms with a probe used for measurements below 300 mv. Noise level is less than 70 uv rms and d-c drift is eliminated. Oscilloscope output of 200 mv for full-scale output on any range is available for simul-



taneous viewing during measurements. When used as a wideband preamplifier, output impedance is 50 ohms with a rise time of less than 6 ns. Gain stability is assured by over 100 db of negative feedback. There is a complete absence of low-frequency jitter either due to amplifier noise or line transients. Change of range is by interstage attenuator.


CIRCLE 301, READER'S SERVICE CARD

Cold Cathode Trigger Tube Operates Within 250 ns


RECENTLY announced by E.G.G. Inc., 160 Brookline Ave., Boston 15, Mass., the krytron cold cathode tubes features short delay between triggering and firing of 250 ns, need no warmup time, less than 25 ns jitter, operation in high radia-

tion environment, instant firing keep-alive and high hold-off voltage. They were designed for applications where a high peak pulse current of several hundred amperes and a short anode delay time of a few tenths of a microsecond are required. Under design are krytrons with no keep-alive electrode and 2,500 ampere peak current and 1

μ sec duration capability at high voltages. They can be used to replace spark gaps, triggering flash tubes, timing mechanisms, deton-

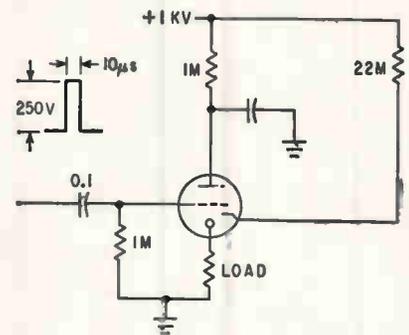

ators, and have been used as high energy film markers, photomultipliers and shunting devices. The sketch shows typical operation in a trigger circuit. (302)

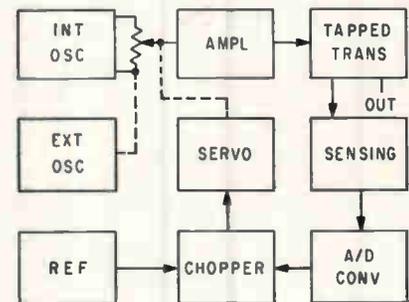

Audio Standard Variable Between 35 Cps and 20 Kc

ANNOUNCED by Holt Instrument Labs., Oconto, Wisconsin, the model 323 provides fully variable voltage between 10 mv and 1,000 v at frequencies between 35 cps and 20 Kc with output distortion less than 0.03 percent throughout most of the range. Absolute calibration of 0.03 percent and short term stability of 0.01 percent permit use as a working standard. The unit provides up to 30 watts output and can supply up to 10 amperes for use in wattmeter or ammeter calibration. An external oscillator can be used to provide any other desired fre-



**New from Sorensen...
custom-designed
DC supplies at
standard product cost,
off-the-shelf delivery!**

Need a custom-designed power supply at low cost and fast delivery? A Sorensen QM Voltage Selector may be your answer.

1. To match your special voltage/wattage requirements we combine standard, component-type transistorized QM DC supplies.

2. The QM's are mounted on a standard chassis (five sizes available). A panel is added . . . without panel controls, or with such optional features as pilot light, switch, fuse, voltmeter, and front panel pot adjust.

3. You receive a complete, multiple-output power supply that exactly meets your specifications. Up to eight different voltage outputs; up to six different voltage/wattage combinations—all on one rack. No external heat sink is required (heat sink area provided by mounting area and chassis).

QM Voltage Selectors give you all the advantages of the transistorized QM series: Regulation $\pm 0.05\%$ (line and load comb.); ripple less than 1MV RMS; instant starting, fast response.

For complete information on this versatile DC power supply, contact factory or circle reader service card **284**.



A UNIT OF RAYTHEON COMPANY
RICHARDS AVE. • SOUTH NORWALK • CONN.



*"They make our special†

HEXSEALS** & SEELSKREWS** on earth.™

We like people with ideas! If you have suggestions for cartoons, send them on to us... **A WORTHLESS PRIZE FOR EVERY ENTRANT!** You'll get a credit line too ... if you give permission.

Cartoon above suggested by H. Michaels, Riverdale, New York.

Incidentally... **HEXSEALS** are modular seals which fit onto switches.

SEELSKREWS are self-sealing screws.

We also manufacture

SEELBOLTS SEELRIVITS****

RUBRGLAS SILICORINGS****

OUR PRODUCTS MEET ALL APPLICABLE MIL SPECS

Our modular seals may be new to you; let us send you our Catalog 359B. **Trade Mark

Write or call: **MISS RIVA SOLINS**

APM-HEXSEAL CORPORATION

41 Honeck St., Englewood, N. J.

LOwell 9-5700


†Specials available to order

VISIT OUR BOOTH 602 AT WESCON

quency. Direct reading in-line dials permit adjustment of output volt-

ages to desired level.

CIRCLE 303, READER'S SERVICE CARD

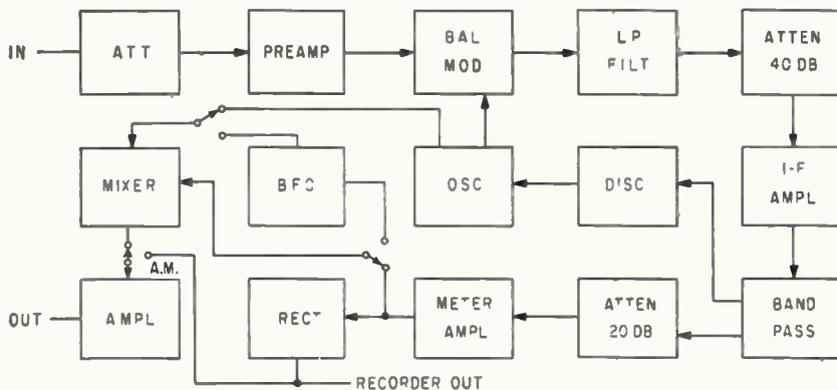

Wave Analyzer Has AFC and Digital Readout

Continuous wideband linear tuning covers range between 1 Kc to 1.5 Mc

NEW from Hewlett-Packard Co., 1501 Page Mill Rd., Palo Alto, California, the model 310A high-frequency wave analyzer covers the range between 1 Kc and 1.5 Mc with a tuning resolution within 200 cps throughout entire range. AFC hold-in range is ± 3 Kc at 100 Kc with tracking speed approximately 100 cps per sec. This can be used to track a harmonic component of a drifting signal while the amplitude is being measured. Voltage range is $10 \mu\text{v}$ to 100 v full scale with ± 5 percent accuracy. Meter sensitivity is indicated by an illuminated front panel range scale. Three switchable bandwidths are available: 3 Kc, 1 Kc and 200 cps. Active feedback filters having flat passband response but dropping 24 db per octave with respect to band cutoff frequency are used. Three outputs are available: one is proportional in amplitude to meter deflection and identical in frequency to harmonic component

being measured and can be used to drive an external digital counter; the second is a d-c signal corresponding to meter deflection and can supply 1 ma into a 1,500-ohm load for recorder driving; the third is a signal in the bfo mode corresponding to the signal indicated on the tuning indicator. This last output is useful as a signal source for bandpass



measurements where the 310A can be used as both signal source and measuring voltmeter. A carrier reinsertion oscillator demodulates either inverted or non-inverted signals. Conventional a-m signals can also be detected. (304)

Production Wheel


FLOTRON INDUSTRIES, INC., 1201 E. Grand Ave., El Segundo, Calif., announces a production wheel that combines a number of field tested assembly fixtures on two turntables 15 in. and 23 in. in diameter, completely integrated to provide easy

one hand transport from one station to another. (305)

Precise Thermistors

YELLOW SPRINGS INSTRUMENT COMPANY, Box 106, Yellow Springs, Ohio

revolutionary new **single point** resistance MICROWELDER

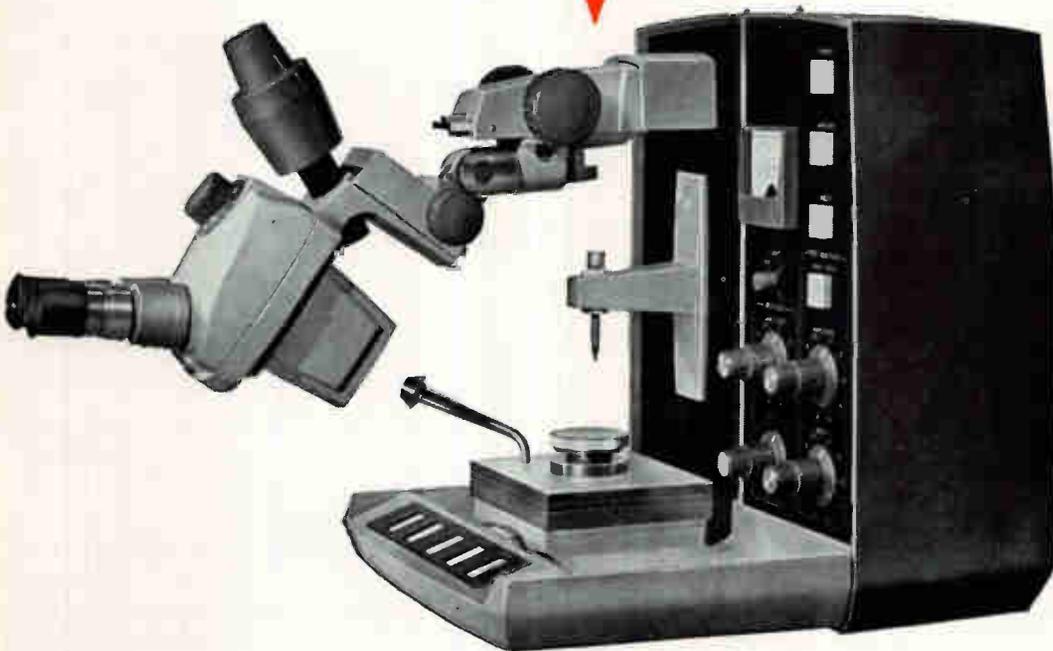


WELDS 1/2-MIL WIRE ON 3-MIL CENTERS

- Metal-to-glass bonds ■ Metal-to-ceramic bonds
- Metal-to-semiconductor substrates ■ Bonds to angstrom-thick thin-films ■ Portable—110-115 V, ac, 60-cycle operation

Provides reliable bonds...from printed circuitry to molecular electronic functional blocks.

*For further information write Aerojet-General® Corporation
Astrionics Division, Dept. 505, Azusa, California*




WELDED
WINDOW-FRAME
MICROELECTRONICS

See the
MICROWELDER
at Wescon Booth
No. 3817, 3818



ASTRIONICS DIVISION / AZUSA, CALIFORNIA

Taylor works magic

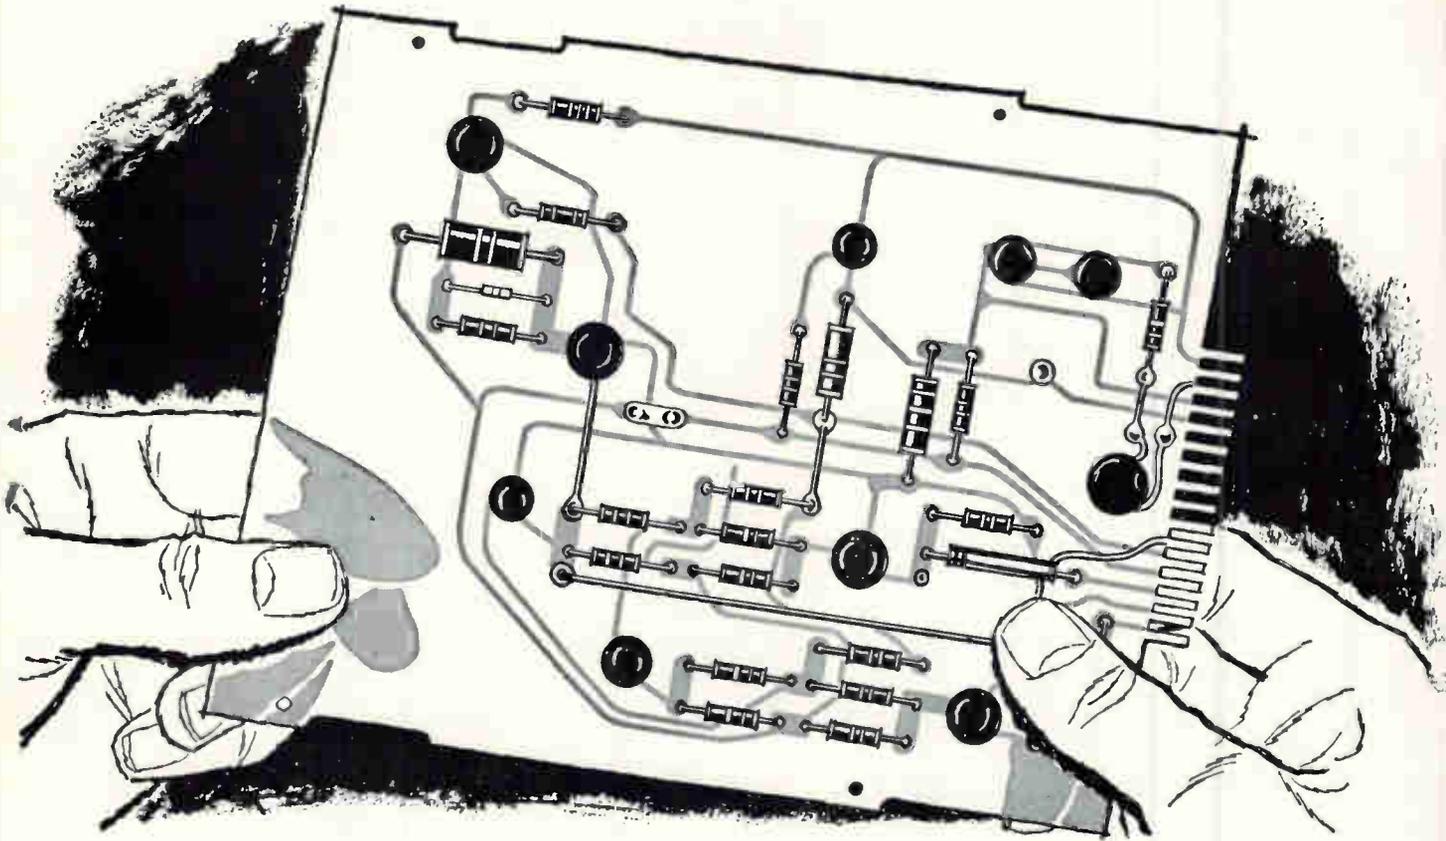


offers precise thermistors mounted in 2-in. Teflon probes. A stiffening wire in the heat sealed Teflon tube may be bent with finger pressure to

any required shape and the entire probe then assumes that shape.

CIRCLE 306, READER'S SERVICE CARD

under test and observing the phase shift of the demodulated f-m component. Time delay distortion is equal to phase shift in radians divided by angular modulation frequency. The new device achieves simplicity by making measurements at r-f frequency rather than heterodyning to i-f frequency as is customary. Instrumentation for carrying out these measurements is based on this company's 301 phase detector in conjunction with the delay distortion test set. Digital readout is provided for better resolution and ease of reading. The f-m is by a built-in modulator. (307)

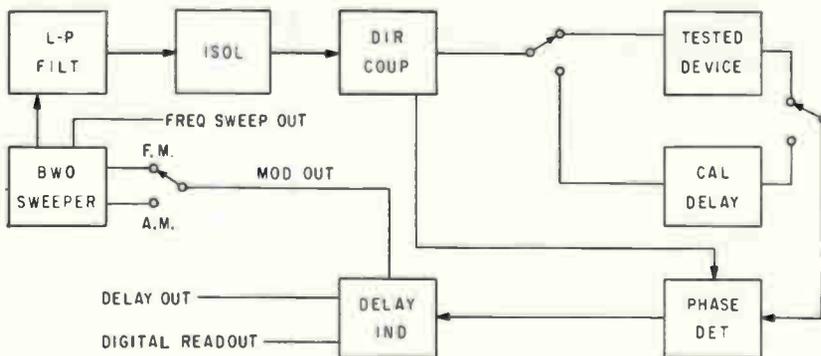

Delay Distortion Test Set Has Resolution of 0.25 ns

INTRODUCED by Wiltron Co., 717 Loma Verde Ave., Palo Alto, Calif., the model 310 test set measures time delay of various frequency components through a microwave system with a time resolution of $\frac{1}{4}$

nanosecond and in conjunction with a detector can perform time delay measurements from 300 Mc to 12.4 Gc. Calibration is by standardized time delay through a length of transmission line. Delay distortion is typically measured by applying an f-m modulated, swept-frequency signal to the input of the equipment

Expanded Scale Meters

QUALITY ELECTRIC CO., 3700 S. Broadway, Los Angeles 7, Calif. Line of expanded scale meters includes: voltmeters—both d-c and a-c to 10 Kc, accuracies to ± 0.5 percent of center scale value; frequency meters— ± 0.25 percent of

with glass-base laminates

Which grade has the unusual combination of properties you need?



Almost magical combinations of resin formulations and glass reinforcements have enabled Taylor to develop a number of glass-base laminates that have outstanding characteristics for electrical and mechanical applications. For example, the glass silicone grades offer very high heat

resistance combined with excellent mechanical and electrical properties plus the highest arc resistance. If you require extremely high strength, excellent chemical resistance, low moisture absorption and high strength retention at elevated temperatures select one of the glass epoxy grades. These grades are ideally suited for high reliability printed circuitry. Other grades have equally important characteristics.

For complete technical data on any of Taylor's glass base laminates in sheet, rod, tube or copper clad form, write Taylor Fibre Co., Norristown 40, Pa.

Taylor
REINFORCED PLASTICS VULCANIZED FIBRE


TAYLOR GLASS-BASE LAMINATES

Taylor Grade	NEMA Grade	Military Specification	Resin Used	Principal Characteristics
GSC	G-7	MIL-P-997 Type GSG	Silicone	High heat resistance. Excellent electrical properties, highest arc resistance. Will not support combustion.
FIREBAN 1011	G-10 G-11 FR-4 FR-5	MIL-P-18177 Types GEE and GEB	Epoxy	Combines all desirable properties of G-10 (GEE) and G-11 (GEB), plus flame retardance in one grade.
GEC-500	G-10	MIL-P-18177 Type GEE	Epoxy	Extremely high flexural, impact and bond strength. Low moisture absorption. High insulation resistance.
FIREBAN 600	FR-4	MIL-P-18177 Type GEE	Epoxy	Self extinguishing. Excellent electrical properties under high humidity conditions. Extremely high flexural, impact and bond strength.
GEC-111	G-11	MIL-P-18177 Type GEB	Epoxy	High mechanical strength retention at elevated temperatures. Will not support combustion.
G-6	G-5	MIL-P-15037 Type GMG	Melamine	High mechanical strength. Excellent arc resistance and electrical properties. Will not support combustion.
G-3	G-3	None	Phenolic	Good mechanical strength. Good heat resistance.

NOTE: Taylor Glass-Epoxy, Copper-Clad Grades are available to meet MIL-P-13949B, Types GE, GB and GF.

CIRCLE 135 ON READER SERVICE CARD


center scale accuracy, frequencies 3200 cps; true rms voltmeters—to 20 Kc bandwidth, ± 2 percent of full scale accuracy; r-f ammeters—to 30 Mc at ± 2 percent of full scale accuracy. (308)

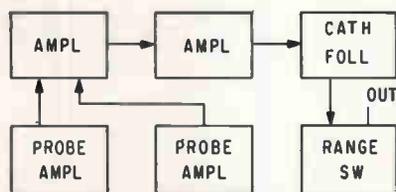

Dual Probe Electrometer Measures 2×10^{-15} Amp

MANUFACTURED by Vacuum-Electronics Corp., Terminal Drive, L. I., N. Y., the model EL-1 electrometer is a very high impedance microammeter providing meter indications over the range between 10^{-4} and 2×10^{-15} ampere with minimum noise. Two probes are supplied, one provides preamplification for currents between 10^{-10} and 2×10^{-15}

amperes and the other from 10^{-4} to 2×10^{-15} ampere. Drift on the most sensitive scale is 0.002 percent per hour. Output is displayed on a temperature-compensated, mirror-separated two-scale meter with knife edge pointer. Two ten turn potentiometers are provided for fine and coarse zero set adjustment. (309)

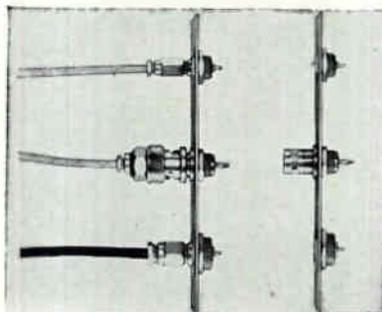

R-F Connectors Insulated with Teflon

SEAELECTRO CORP., 139 Hoyt St., Mamaroneck, N. Y., offers a new design in r-f bulkhead receptacle


which features virtually no protrusion beyond the mounting surface. The ConheX recessed r-f bulkhead receptacle is bushing mounted from the rear, providing complete protection for the critical female receptacle within the equipment enclosure. It is available in 90-, 75-, and 50-ohm sizes. Design features very low vswr through optimum impedance matching. (310)

Glass Preforms

FERROXCUBE CORP. OF AMERICA, Saugerties, N. Y., announces glass preforms featuring the lead-free 195 glass. This is said to provide a 50 percent stronger sealing bond between metal and glass. (311)

Deviation Bridge

INDUSTRIAL INSTRUMENTS INC., 89 Commerce Road, Cedar Grove, N. J., announces the model DB-1 deviation bridge, which in some instances is

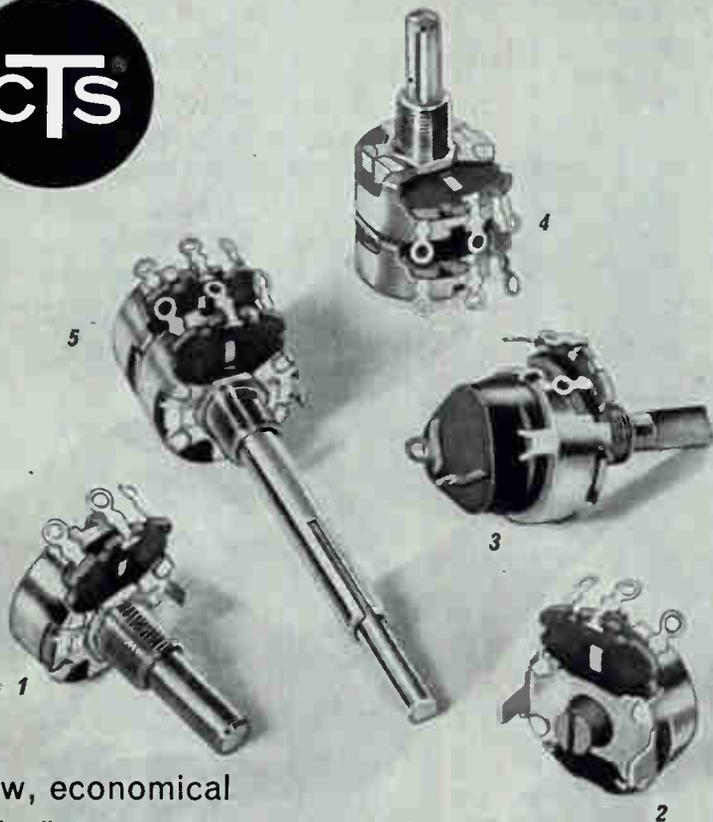

New, economical
15/16" dia. 5-watt wirewound
variable resistors

Versatile Series AW

Available with: 1 Bushing Mounting 2 Twist Tab Mounting 3 Pull-on, Push-off Switch 4 Straight Tandems 5 Concentric Tandems. (The new Series AW wirewound controls can also be used with CTS Series 45 1 $\frac{1}{16}$ " dia. 1/2-watt carbon control to make any combination of straight or concentric tandems desired.) Series AW can be supplied in L and T pads. Element wire can be soldered to end terminals if required.

Priced less than larger diameter lower wattage commercial wirewound variable resistors. Unique high temperature heat resistant winding core and liner permit a 5-watt rating at 25°C, or a 4-watt rating at 55°C derated to no load at 105°C. Resistance range is one ohm through 25,000 ohms, linear taper. The unit is completely enclosed for full protection.

Write for Catalog 2100. (West Coast Inquiries to Chicago Telephone of California, Inc., 1010 Sycamore Ave., So. Pasadena, Calif.)

CTS OF ASHEVILLE, INC.
SKYLAND, NORTH CAROLINA



SUBSIDIARY OF **CTS CORPORATION** • ELKHART, INDIANA


utilized for laboratory measurements of small quantities of resistors, and in other cases for high production testing.

CIRCLE 312, READER'S SERVICE CARD



Storage Oscilloscope Employs Ceramic CRT

TEKTRONIX, INC., P. O. Box 500, Beaverton, Ore. Model 564 provides both conventional and storage modes of oscilloscope operation. It accommodates more than 10 types of plug-in preamplifiers and sweep generators, including 0.35 nsec-risetime sampling plug-ins, a 4-trace vertical amplifier plug-in and a delaying sweep plug-in with extreme triggering flexibility. It has a storage time of over 1 hr with no appreciable depreciation of the display, an erase time less than 0.5 sec, a writing rate of better than 25,000 cm/sec, and a contrast ratio of better than 4:1. (313)

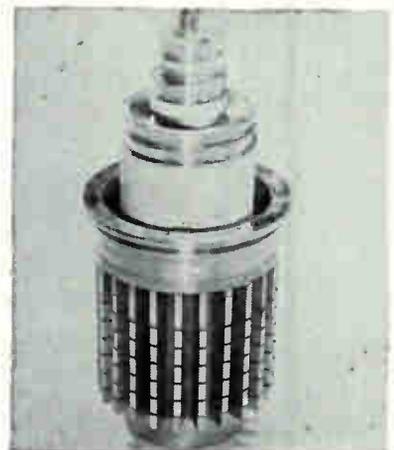


Vapor-Cooled Triode Has High Power Level

THE MACHLETT LABORATORIES, INC., 1063 Hope St., Springdale, Stamford, Conn. The ML-7482 vapor-cooled general purpose triode is ca-

pable of 400-Kw c-w output. The anode is designed to dissipate 200 Kw in c-w operation and substantially more during momentary overloads or intermittent operation. Sturdy coaxial grid and cathode mounting structures provide low-inductance and high-dissipation r-f terminals and cathode is sturdy, self-supporting, stress-free, thoriated-tungsten filament. (314)

Semiconductor Tools

THE DOALL CO., Des Plaines, Ill., announces machines and tools for slicing, inspecting and handling semiconductor materials. Included are the I/D Micro-Slicer and the Censor automatic electronic grading machine. (315)

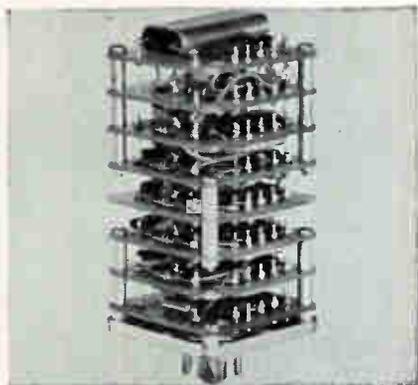

Crystal Oscillators Have Plug-In Design

BLILEY ELECTRIC CO., Union Station Building, Erie, Pa., offers a line of crystal oscillators in plug-in modules for range 60 cps to 15 Mc. Designed for use in counters, signal generators or as a time base in measurement and frequency control systems, they feature glass-sealed crystal units, transistorized circuitry and oven control. (316)



Pot Type Transducer Senses Pressure

SERVONIC INSTRUMENTS, INC., 1644 Whittier Ave., Costa Mesa, Calif.,

MOUNT IT IN ANY POSITION—SHOCK IT, SHAKE IT! THE PL-177WA CAN TAKE IT!

Here is a unique instant-heating power tube that can be operated in *any* position and will withstand levels of shock and vibration which would cause most instant-heating tubes to fail. If you've ever had to make equipment design compromises because of tube operating position or environmental restrictions, you'll appreciate Penta's new, rugged and reliable PL-177WA. This 75-watt beam pentode is ideal for mobile, airborne, portable, and similar applications, where its instant-heating filament allows minimum stand-by power.

Like the Penta PL-177A, with which the PL-177WA is directly interchangeable, this new beam pentode is an outstanding performer in low- to medium-power linear amplifier applications, at frequencies up to 175 Mc. The PL-177WA incorporates the exclusive Penta vane-type suppressor grid, which results in excellent linearity, low distortion, and high efficiency at relatively low plate voltages.


This small tube—slightly over two inches in diameter and less than four inches from the base to the top of the plate cap—will deliver up to 210 watts of useful power output as a Class-AB₁ linear amplifier, and 220 watts in Class-C service.

Use the Penta PL-177WA beam pentode in critical applications where mounting position, shock, and vibration would damage other instant-heating power tubes. And write today for your free, factual PL-177WA data sheet.



PENTA LABORATORIES, INC.


312 North Nopal Street, Santa Barbara, Calif.
Trade Mark Reg. U. S. Pat. Off.
Export Representative: Frazar & Hansen, Ltd.
San Francisco 11, California

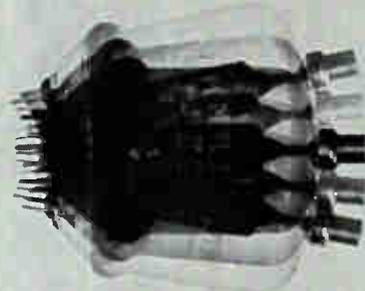

VISIT BOOTH 2116 DURING WESCON SHOW

U T I C A[®]

UTICA

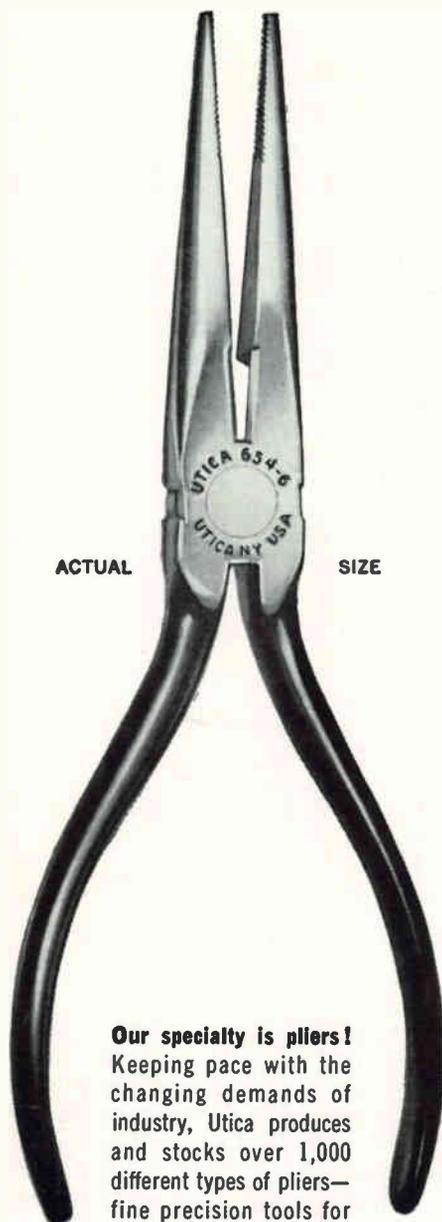

ACTUAL

SIZE

Our specialty is pliers! Keeping pace with the changing demands of industry, Utica produces and stocks over 1,000 different types of pliers—fine precision tools for every conceivable use. Because of the job we have been able to do in many of the country's largest and most specialized plants, we believe that Utica tools can help you, too—either reduce your costs or improve your products. Contact your Utica distributor, today.

**Utica Tool Division
Kelsey-Hayes Company
Utica 4, New York**


tools the experts use!

offers a high-pressure potentiometer type transducer for missile, ground support and oceanography applications. Model 2081 has an operating range of 0-350 through 0-20,000 psi, and measures $\frac{1}{2}$ in. diameter by $1\frac{1}{2}$ in. length. Instrument is capable of withstanding 50 g vibration at 2,000 cps, with a static error band of ± 1.0 percent including linearity, hysteresis, and repeatability.

CIRCLE 317, READER'S SERVICE CARD

Microwave NME

LFE ELECTRONICS, 1079 Commonwealth Ave., Boston 15, Mass. The Allscott 123 microwave noise measuring equipment separately measures both f-m and a-m noise modulation from 2.7 Gc to 18.0 Gc and can resolve a-m s-b power to a limit of 133 db below carrier. (318)

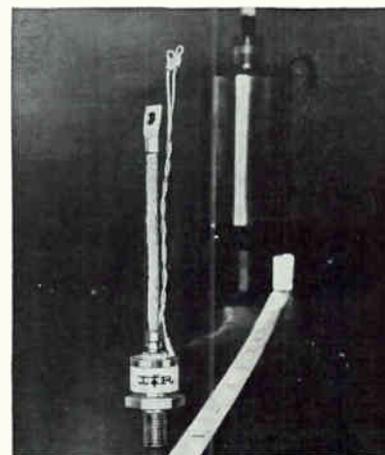

Controlled Rectifiers Are Ruggedly Packaged

INTERNATIONAL RECTIFIER CORP., 233 Kansas St., El Segundo, Calif. JEDEC types 2N1909-1916 and the 71RC series of 70 ampere rated silicon controlled rectifiers replace ignitrons and thyatrons in inverting, frequency changing, motor control and space vehicles. They are 25 to 500 prv rated. (319)


Diffusion Furnace

HEVI-DUTY HEATING EQUIPMENT DIV., Basic Products Corp., 304 Hart St., Watertown, Wisc. Diffusion furnace enables semiconductor manufacturers to obtain temperature uniformity of $\pm \frac{1}{2}$ C in the processing zone. The temperature uniformities are

repeatable for each production profile and at each setting up to the max operating temperature of 1,300 C. (320)

Strip Chart Recorder

NEFF INSTRUMENT CORP., 1088 E. Hamilton Road, Duarte, Calif. Type 401 is a strip chart, self-balancing, potentiometric recorder. Writing is accomplished by heated ink drawn by capillary action to the paper surface. (321)

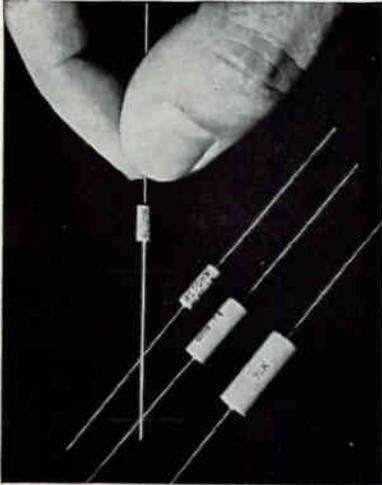

Metal Film Resistor Has High Stability

WARD LEONARD ELECTRIC CO., Mount Vernon, N. Y., announces a $\frac{1}{8}$ w metal film precision resistor for military and industrial electronic use where high reliability, high stability, close accuracy, low TC and compactness are vital. Type WL55 Metohm has resistance values to 100,000 ohms max and resistance tolerances ± 1 percent down to ± 0.05 percent available. (322)


A-C Calibrator

WILK INSTRUMENTS, 3700 South Broadway, Los Angeles 7, Calif., offers an a-c calibrator with a range of 0 to 1,511.0 v, accuracy of 0.1 %, resolution of 0.01 v. (323)

Glass Delay Medium

CORNING ELECTRONIC COMPONENTS, Bradford, Pa., has developed a glass delay medium with a low tempera-

New from Weldmatic PRODUCTION LINE WELD STATION

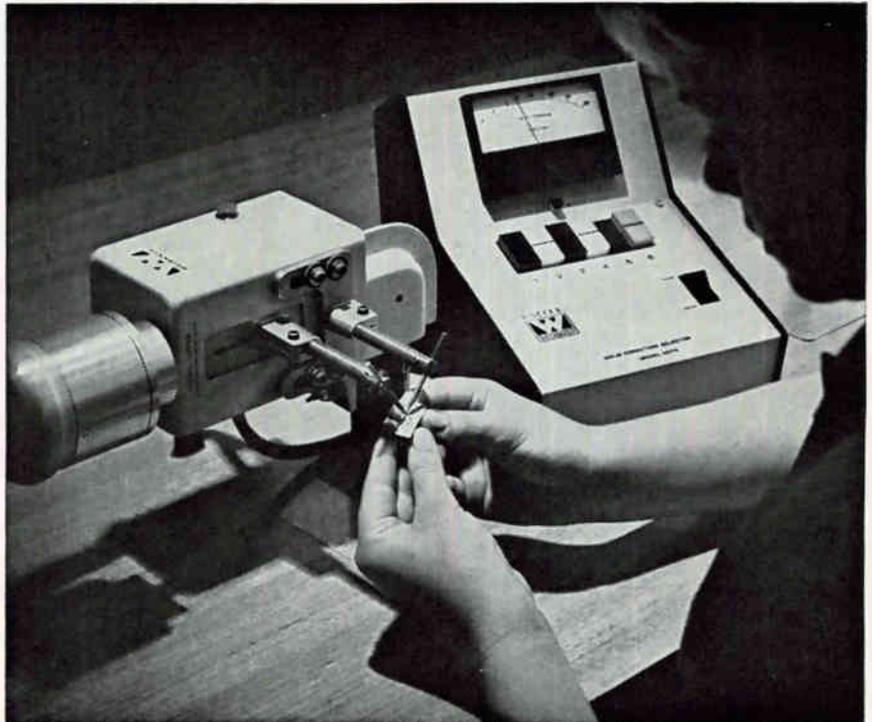

SIMPLIFIED PUSHBUTTON CONTROL

Both heat and force values are preset. No jumble of knobs and dials. Operator pushes one button, makes the weld.

CLEAN, UNCLUTTERED WORK AREA

Space consuming power supply is mounted under work bench. Selector panel is placed within easy reach of operator.

COMPACT, HI-RELIABILITY COMPONENTS

Voltage regulated 100 W/S power supply Model 1072; 6 position Remote Weld Selector Model 1073; and Model 1032 CMK Welding Head comprise this practical new approach to your production-line requirements.

GEARED FOR MAXIMUM WORK OUTPUT

Preset heat and force adjustments rule out setting errors; speed operator training and production output.

SEND FOR MORE INFORMATION NOW

Write Weldmatic Division/Unitek, 950 Royal Oaks Drive, Monrovia, California.

WELDMATIC DIVISION / UNITEK

NOW!

PULSE

CIRCUIT

FIDELITY



**UP TO
100 Mc.**

**with MECHATROL'S
new 1/2" square
metal film
trimmer potentiometer.**

This non-inductive unit designed with minimum shunt capacitance is superior to conventional units for high frequency use. The effective resistance of a 500!! T500 trimmer potentiometer changes less than 10% of its D.C. value from D.C. to 100 Mc. The effective shunt capacitance is less than 1 picofarad for the same range of frequencies.

CALL OR WRITE FOR DETAILS



SERVOMECHANISMS/INC.

MECHATROL DIVISION

NEW YORK — Home Office
1200 Prospect Avenue
Westbury, New York
Area Code 516 — EDgewood 3-6000
TWX WBRY 359

CALIF. — Branch Office — Mechatrol of Calif.
200 North Aviation Boulevard
El Segundo, California
Area Code 213 — ORegon 8-7841
TWX HAWCAL 4262


See them at WESCON
Booth 2006

ture coefficient. Code 8877 provides storage capacity between 3,500 and 4,000 bits. Chief applications will be in delay lines used as buffers and memories in digital computers and processing equipment.

CIRCLE 324, READER'S SERVICE CARD

Ceramic Capacitors

ASTRON CORP., 255 Grant Ave., East Newark, N. J., offers microminiature, square plate low voltage ceramic capacitors for high temperature and high reliability application. (325)

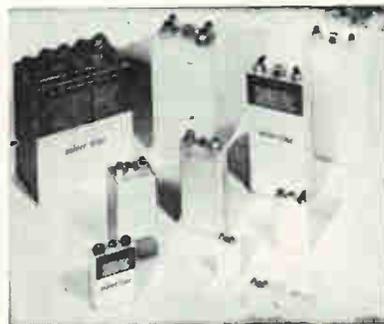

Silver-Zinc Batteries Suited to Missile Use

GOULD-NATIONAL BATTERIES, INC., E-1200 1st National Bank Building, St. Paul 1, Minn., offers a line of silver-zinc batteries in 14 standard sizes. Their size, weight and ability to withstand shock and vibration make them particularly suitable to application in torpedoes and missiles. Cells can be designed to meet varying requirements. (326)

D-C Power Supplies

DRESSEN-BARNES ELECTRONICS CORP., 250 No. Vinedo Ave., Pasadena, Calif. The 60 series all solid state modular supplies are available in a variety of voltage ratings from 2 to 200 v at output current ratings of from 1 amp to 20 amp. (327)

Reed-Switch Relays Designed for Computers

GENERAL ELECTRIC CO., Schenectady 5, N. Y. Line of reed-switch relays is designed for computer and data processing applications. Internal magnetic bias design assures fast,


AUGAT CRYSTAL SOCKET ASSEMBLIES



Horizontal
Mounting
for printed
circuits



Horizontal
Mounting
for sub-
miniature
crystal



Vertical
Mounting
for sub-
miniature
crystal

Augat Crystal Socket Assemblies are especially designed to reduce overall package size and weight. They combine modern packaging techniques with top quality materials to assure dependable mechanical and electrical life.

Once the crystal is installed, it will never shake loose... even under the most severe conditions.

Available for horizontal or vertical mounting, for use with hook up wire or printed circuits.

SOCKET SPECIFICATIONS

**FOR USE WITH THE FOLLOWING
CRYSTAL CASE SIZES:**

HC-6/U & HC-13/U.

HC-18/U with .040 diameter pins or .018 wire leads.

McCoy M-25 or equivalent.

CONTACT MATERIALS:

Phosphor bronze and beryllium copper.

FINISHES: silver plate with gold flash; cadmium or tin plated.

INSULATION:

DuPont's Teflon or Blue Nylon

HOLDING CLIP:

Beryllium copper or steel, cadmium plated.

For detailed specifications, write for Data Sheets.


AUGAT BROS., INC.:

30 Perry Avenue, Attleboro, Mass.

SEE US AT WESCON, BOOTH NO. 2060

CIRCLE 213 ON READER SERVICE CARD

positive contact closing. Operational characteristics show true spdt or Form C contacts. With this design, the possibility of overlap of contacts (the NO closing before the NC opens) is eliminated. (328)

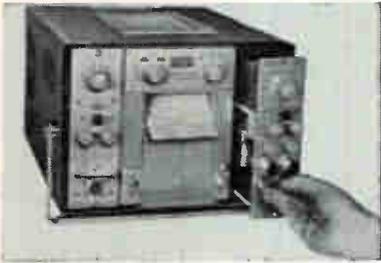

Strip-Chart Recorder Features Versatility

MASSA DIV. of Cohu Electronics, Inc., 280 Lincoln St., Hingham, Mass., announces the Meterite portable two channel rectilinear writing strip-chart recorder. It can be used directly with systems and transducers measuring power, current voltage, resistance, impedance, transconductance, reactance, audio frequency, r-f amplitude, events waveforms and other phenomena or variables that may be presented as electrical signals. (329)


Data Amplifier

SANBORN CO., 175 Wyman St., Waltham 54, Mass., offers a d-c to 100 cps data amplifier with floating, isolated input and output; plug-in output filters for limiting bandwidth; high common mode rejection, gain stability and linearity. (330)



S-Band TWT Uses PPM Focusing


EMI/US, 1750 N. Vine St., Los Angeles, Calif., introduces a 2-Kw pulsed S-band twt for applications where broadband response is required. The E-114 intended for countermeasures systems and frequency scanning radar, is rated at a minimum power output of 2,000 w, with high gain and excellent small

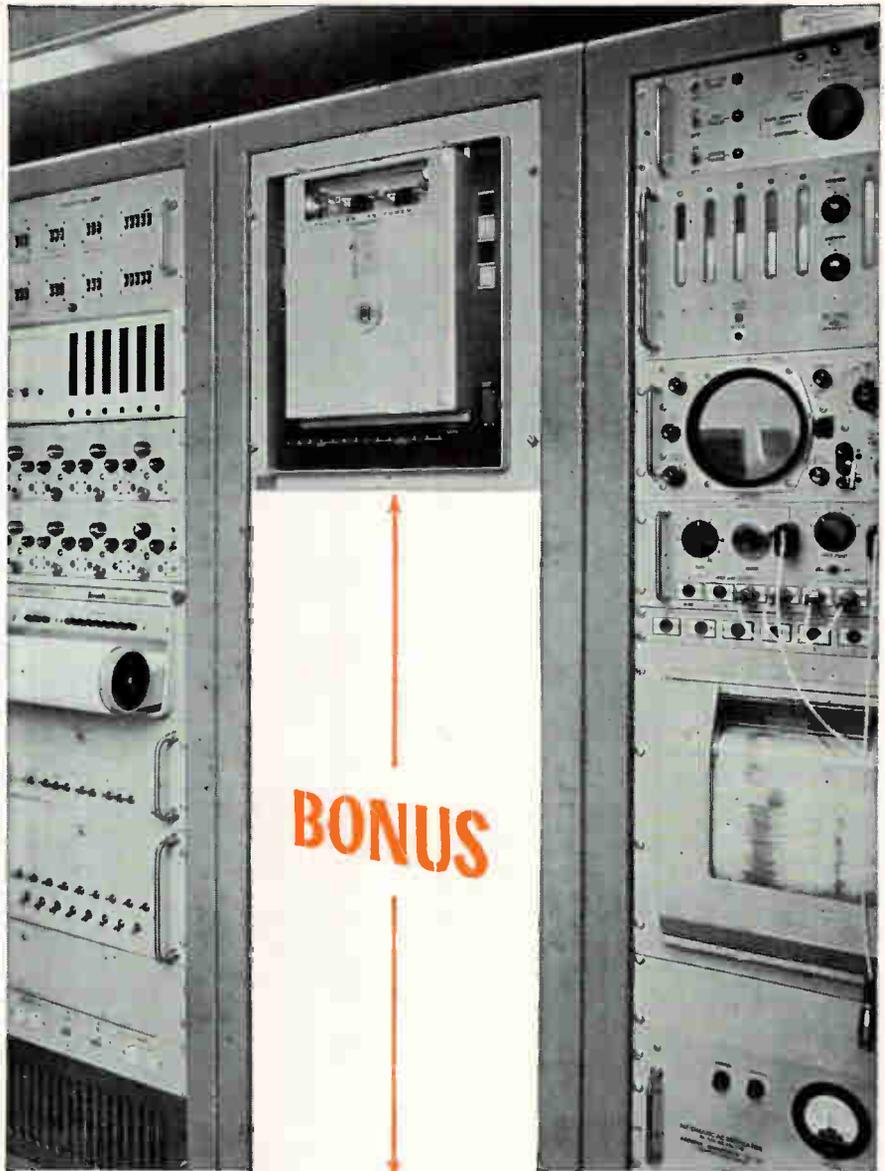

WITH A P.I. TAPE RECORDER: UP TO 4' OF EXTRA RACK SPACE

When you want full-size performance but can't afford the space, you'll find PI recorders measure up in many ways better than ordinary instrumentation magnetic tape equipment.

Flick open the magazine of a PI recorder, and you'll find a unique space-saving stacked-reel design. Turn the recorder around and you'll see how neatly the precision tape drive mechanism shares space with the plug-in, all-solid-state electronics. Finally, press the start button—you'll find performance on a par with recorders several times the size.



You'll find PI recorders wherever space is at a premium—in aircraft, ships, submarines, blockhouses, and instrumentation trailers such as that above. And for these and many other applications, whether your yardstick is calibrated in inches, decibels, or dollars, you'll find their value all out of proportion to their size. Write today for our new 12-page brochure.



PRECISION INSTRUMENT

SAN CARLOS, CALIFORNIA / LY 1-4441

P.I. Invites inquiries from senior engineers seeking a challenging future.

32

what's your problem* in microwave energy generation?

SOLUTION:
TRAK STOCK DEVICES
SUCH AS:





Size: 5/8" diam. by 2 1/8"



Size: 1" diam. by 4"

These are new and smaller C-Band plate pulsed oscillators for rodar beacon transmission. Both operate at the same frequency, 5.4 to 5.9 Gc. Type 9186C (left) has a power output of 50 watts minimum (100 watts minimum on special order) and Type 2979C (right) 400 watts minimum. Stock microwave energy sources cover all bands from 400 to 12,000 Mc, CW, grid or plate pulsed service. Send for catalog 62B for complete information.

SOLUTION:
TRAK SPECIAL PROJECTS
SUCH AS:

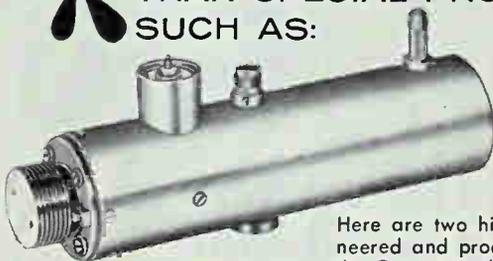

Here are two high reliability oscillators engineered and produced by Trak Microwave for the Gemini rendezvous radar system. We can provide you with developmental devices to be applied to previously difficult or impossible projects, or develop energy sources while your engineers work on other phases of their new projects. Write for more information or better yet PHONE COLLECT . . . Tampa 877-6735.

To Be Announced at WESCON

If everything goes well (and it doesn't always in engineering) we'll have a new 1 watt oscillator, tuneable 2.0 to 4.1 Gc with a low torque tuning shaft; also new energy sources in X-Band. Stop by BOOTH 648-9 and see if everything went well. All present stock devices will be on display.

TRAK[®]
Microwave

TRAK MICROWAVE
CORPORATION


5006 North Coolidge Avenue, Tampa 3, Florida
Phone 877-6735

Specialists In Miniature Microwave Energy Sources

signal gain. It utilizes periodic permanent magnet focusing, and is designed to operate over a temperature range from -65 to 100 C.
CIRCLE 331, READER'S SERVICE CARD

Telemetry Antennas

TECHNICAL APPLIANCE CORP., Sherburne, N. Y., offers several versions of the D-1365 multi-mode telemetry and command antenna. They provide instantaneous selection of several polarization modes and a wide choice of controls, including constant speed, remote, variable speed remote, slaved and automatic tracking. (332)

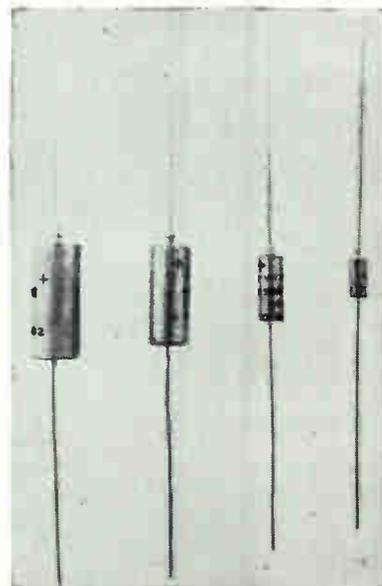


Tantalum Capacitor Operates to 85 V

CORNELL-DUBILIER ELECTRONICS, 50 Paris St., Newark 1, N. J. Type TY solid-tantalum capacitor operates up to 85 v and 85 C with no voltage derating. It can be supplied with no derating at 125 C. Capacitance values range from 0.1 to 6.8 μ f. It is available in sizes of from 1/4 in. length, 1/8 in. diameter to 1 in. length, 3/8 in. diameter. (333)

Cable Test Set Has High Accuracy

ROHDE & SCHWARZ SALES CO. (USA) Inc., 111 Lexington Ave., Passaic, N. J. Portable cable test set is used for carrying out fault location and maintenance measurements on tele-

communication and power cables. It operates on test voltages of 4.5 or 125 v d-c, and is accurate in fault location to ± 0.1 percent or ± 0.5 divisions of slide-wire scale. Functions include measurement of insulation, resistance, resistance difference, capacitance, and resistance to earth. (334)

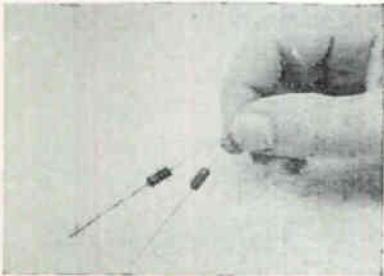

R-F Chokes Feature High Reliability

NATIONAL RADIO CO., 37 Washington St., Melrose, Mass. Encapsulated r-f chokes, called N-Caps, are virtually impervious to extremes of heat, cold, moisture and shock. The R-1550 series have inductance values from 0.1 to 330.0 μ h. Size is 0.157 in. dia. 0.375 in. length. (335)

Flexible Cable

SANDERS ASSOCIATES, INC., 95 Canal St., Nashua, N. H., announces a low-cost Flexprint flexible printed cable for interconnection of computer module systems. It conducts low power signals with the highest possible s/n ratio. (336)



Crossbar Scanner Is Modularized

NORTH ELECTRIC CO., Galion, O. The Scan-A-Cross featuring a 600 point wired crossbar switch is complete with power supply, relay circuitry and connectors in a standard 19 in. rack module. Its 14 $\frac{1}{8}$ in. by 8 $\frac{1}{2}$ in. by 5 $\frac{1}{2}$ in. size crossbar has a 5 by

SPECIFY ARNOLD IRON POWDER CORES... COMPLETE RANGE OF SIZES AND SHAPES FOR YOUR DESIGNS



Arnold offers you the widest range of shapes and sizes of iron powder cores on the market.

In addition to toroids, bobbin cores and cup cores—typical groups of which are illustrated above—Arnold also produces plain, sleeve and hollow cores, threaded cores and insert cores, etc., to suit your designs. Many standard sizes are carried in warehouse stock for prompt shipment, from prototype lots to production quantities. Facilities for special cores are available to order.

The net result is extra advantage and

assurance for you. No matter what shapes or sizes of iron powder cores your designs require, you can get them from a single source of supply—with undivided responsibility and a single standard of known high quality.

Arnold's superior facilities for manufacture and test also assure you of dependably uniform cores, not only in magnetic properties but also in high mechanical strength and dimensional accuracy.

● For technical data and other information on Arnold iron powder cores, write for a copy of Bulletin PC-109A.

ADDRESS DEPT. E-8



ARNOLD

SPECIALISTS in MAGNETIC MATERIALS

THE ARNOLD ENGINEERING COMPANY, Main Office: MARENGO, ILL.
BRANCH OFFICES and REPRESENTATIVES in PRINCIPAL CITIES

284191A

SHOCK IT, DROP IT SHAKE IT...EVEN! DRILL IT!


NETIC AND CO-NETIC MAGNETIC SHIELDINGS PERMANENTLY PROTECT YOUR COMPONENTS

Never require rejuvenation...
have negligible residual magnetism

Netic and Co-Netic magnetic shields make your sensitive components impervious to outside magnetic disturbances. Because of their proven reliability, both are widely used in satellites and missiles as well as on the ground to protect recording tapes, components and systems. The proprietary characteristics of these alloys enable you to design compactly, and improve overall performance.

Down time or replacement costs are eliminated because no time-wasting periodic annealing is required.

The magnetic shields have numerous military, scientific and laboratory applications as well as commercial uses where permanent component protection is demanded.

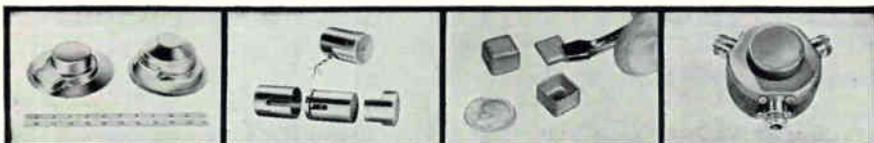

MAGNETIC SHIELDS CAN BE CUSTOM-FABRICATED TO ANY SIZE OR SHAPE. From micromodules to mobile shielded rooms, pick your shielding problem and let us help solve it! The Magnetic Shield Division offers you the widest range of production facilities.

PHONE YOUR NEAREST SALES OFFICE TODAY:

MERIDEN, CONNECTICUT, BEverly 7-9232
UNION CITY, NEW JERSEY, UNion 4-9577
BALTIMORE, MARYLAND, HOpkins 7-3766
GREENSBORO, NORTH CAROLINA, 272-6149
DECATUR, GEORGIA, 378-7516
CORAL GABLES, FLORIDA, HIGHLand 3-7439
MAITLAND, FLORIDA, MIDway 7-7830
ST. PETERSBURG, FLORIDA, WAverly 1-9735
DALLAS, TEXAS, FLEetwood 1-1615

HOUSTON, TEXAS, HOmestead 5-7780

ALBUQUÉRQUE, NEW MEXICO, AMherst 8-6797
PHOENIX, ARIZONA, AMhurst 4-4934
SAN DIEGO, CALIFORNIA, BRowning 8-6230
LOS ANGELES, CALIFORNIA, WEbster 1-1041
PALO ALTO, CALIFORNIA, DAVenport 1-5064
SALT LAKE CITY, UTAH, CR 8-9023
SEATTLE, WASHINGTON, EA 3-8545
MONTREAL, QUEBEC, WEllington 7-1167
WINNIPEG, MANITOBA, SPruce 4-1991

MAGNETIC SHIELD DIVISION

Perfection Mica Company / EVerglade 4-2122

1322 N. ELSTON AVENUE, CHICAGO 22, ILLINOIS

ORIGINATORS OF PERMANENTLY EFFECTIVE NETIC CO-NETIC MAGNETIC SHIELDS

12 crosspoint configuration with 10 Form A silver or gold contacts per crosspoint. Scanning capability is 200 three-wire channels, 300 two-wire channels, and 600 one-wire channels at speeds from 0-30 closures per sec per pole.

CIRCLE 337, READER'S SERVICE CARD

Shielding Material Offers 100 DB Insertion Loss

METEX ELECTRONICS CORP., Clark, N. J., has developed Polastrip, an oriented-wire shielding material having a 100 db insertion loss. It can be used to shield the doors on high-power radar units. (338)




H-F Relay Achieves Fast Operate Time

JENNINGS RADIO MFG. CORP., P.O. Box 1278, San Jose 8, Calif., presents the type RS8 vacuum transfer relay for high frequency, high current applications. It has heavy copper contacts to achieve continuous current ratings of 18 rms amp at 25 Mc. This rating can be doubled with forced air cooling. Peak test voltage rating is 30 Kv, yet the unit occupies only 3½ in. by 2½ in. Rated operating voltage is 10 Kv at 25 Mc, 28 Kv at 2.5 Mc. Operate time is fast because contacts need not move very far to recover dielectric strength. (339)

Strip-Chart Recorders Have Fast Response

F. L. MOSELEY CO., 409 No. Fair Oaks Ave., Pasadena, Calif. Model 680 Autograf recorders are servo potentiometer type instruments with fast response and broad versatility. They have an accuracy of 0.2 percent full scale and a pen

speed of $\frac{1}{2}$ sec full scale. Recording is made on 100-ft roll charts, 6 in. wide with a 5-in. writing span. Eight chart speeds and 10 calibrated voltage ranges are controlled from the front panel. (340)

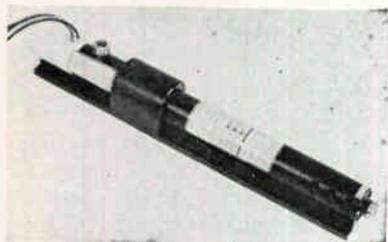


T-W Tube Features Ruggedness

EITEL-MCCULLOUGH, INC., 301 Industrial Way, San Carlos, Calif. Proved capable of withstanding repeated 120 g shocks, the X1020 twt gives 4 db gain and 20 watts output over a 500 Mc band around 6 Gc. Same tube will give a minimum of 10 w over the full octave of frequencies from 4 to 8 Gc. (341)

Ovens Provide Proportional Control

CONTROL INDICATING CORP., a division of Hi-G, Inc., Windsor Locks, Conn., has available proportional control ovens for components or circuits. They completely eliminate moving parts and contacts, and provide stability of temperature within 0.01 C or better, and less than 0.05 C for long term service. Temperature settings can be prescribed from 10 C above ambient, up to 125 C. (342)

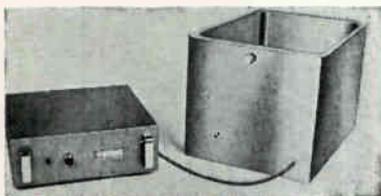


Ultrasonic System Cleans Large Parts

DELTA SONICS, INC., 12918 Cerise Ave., Hawthorne, Calif., has introduced a fully solid state ultrasonic system for heavy volume-large parts cleaning applications. It features a 2,000 w, 25 Kc transistorized generator, model DS-2000A

Itek


Crystal Filters do Wonderful Things

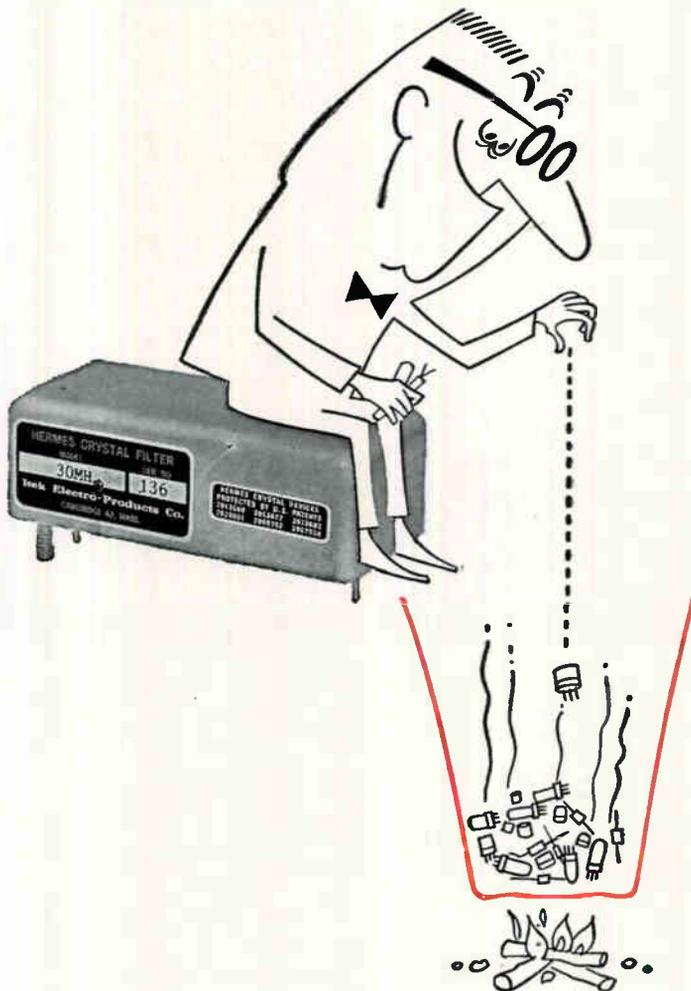

Dropping excessive components is a wonderful thing! At a receiver's antenna or first IF, Itek Crystal Filter 30 MH means no multiple conversions, no desensitization, near straight-up attenuation — enough components saved to fill a trash burner.

Perhaps you don't need a 30 megacycle, highly selective, 125 KC bandpass filter. But could you use the ingenuity that built one? Could Itek technical leadership help you?

Of course, the world's largest and most complete selection of stock crystal filters is available, too. Choose from more than 3,000 Itek-Hermes designs.




Write for free Brochure "WEESKACFAACP" or, *What Every Engineer Should Know About Crystal Filters At A Cocktail Party. You'll enjoy it.*

Itek Electro-Products Company

75 CAMBRIDGE PARKWAY, CAMBRIDGE 42, MASS. A DIVISION OF

Itek

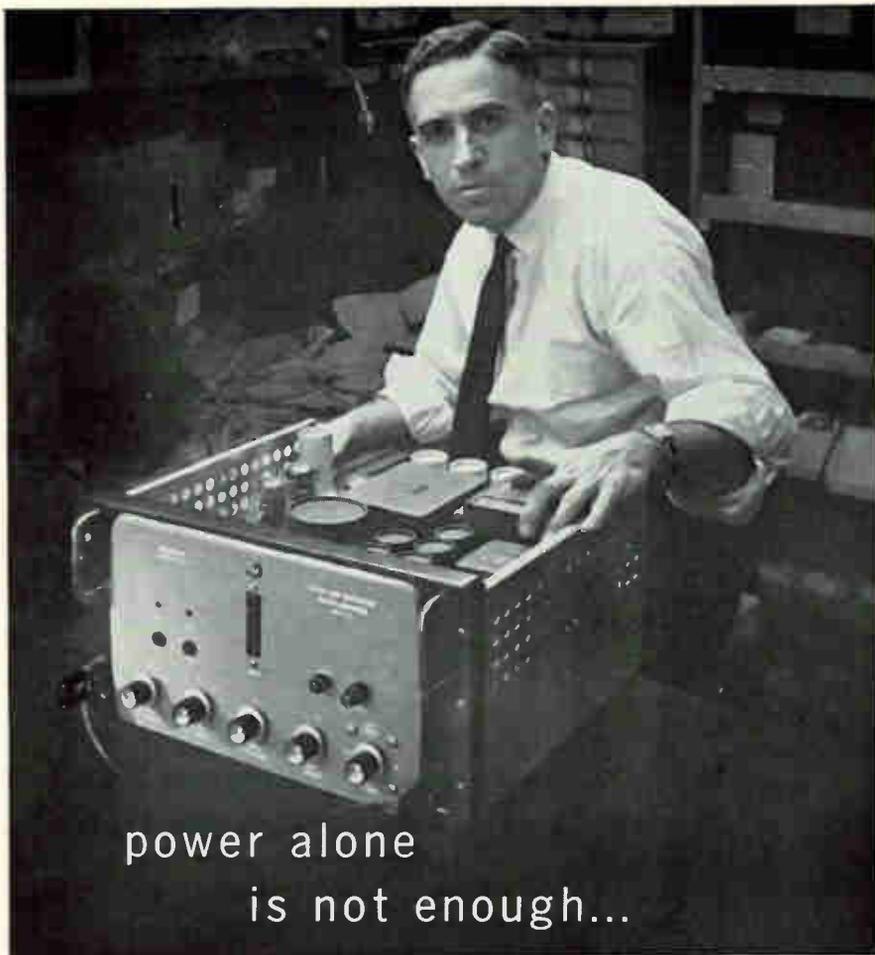

power alone
is not enough...

it's the ultra low distortion — .005%
in this audio amplifier
that makes the big difference!

Here's a fifty-watt power amplifier with harmonic and intermodulation distortion of less than .005%. Distortion so low — you'd need special equipment to measure it!

That's why the UF-101A is a natural as a reference source, with a suitable oscillator, for low distortion measurement of power components, as well as a highly linear amplifier within the audio band.

The other characteristics of the UF-101A are equally outstanding. Phase distortion is negligible — $\pm 2^\circ$ maximum deviation from linear phase shift. Total hum and noise level less than 10 microvolts input equivalent. Frequency range is from 20 cps to 20 kc. For convenience, the UF-101A has taps for matched load impedances from 1 to 225 ohms.

Some of the applications of this ultra-low distortion amplifier are: checking the residual distortion of distortion-measuring equipment, reproducing non-sinusoidal wave forms faithfully, and as an ultra-low distortion, high power source to supply test benches. Write for full information on the UF-101A.

Other Krohn-Hite amplifiers include the direct-coupled, wide band DCA-10 (10 watts), and DCA-50 (50 watts). Also, *Krohn-Hite Oscillators, Filters and Power Supplies.*

SEE US AT WESCON—
BOOTH 2048



KROHN-HITE CORPORATION


580 Massachusetts Avenue • Cambridge 39, Mass.
Pioneering in Quality Electronic Instruments

(priced at \$1,300) with a 17 gallon capacity transducerized stainless steel tank, model UT-17 (priced at \$1,200).

CIRCLE 343, READER'S SERVICE CARD


Digital Voltmeters

NON-LINEAR SYSTEMS, INC., Del Mar, Calif., announces model 10 digital voltmeters. Accuracy of ± 0.01 percent of reading +1 digit is maintained up to top speed of 5,000 completely independent d-c voltage readings per sec. (344)

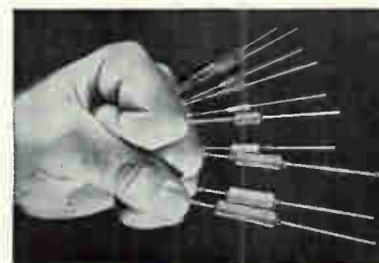

Miniature Resistor Offers High Power

DALE ELECTRONICS, INC., P. O. Box 488, Columbus, Neb., announces the G series wire wound, silicone coated resistor. Presently available in five sizes: 1, 1.5, 2.25, 4 and 7 w in values ranging from 10 ohms to 60,000 ohms, depending on size and tolerance. Available tolerances are 0.05, 0.1, 0.25, 0.5, 1 and 3 percent. The resistors are shown in comparison with RS resistors of comparable wattage. All G types have gold flash copper terminations. (345)

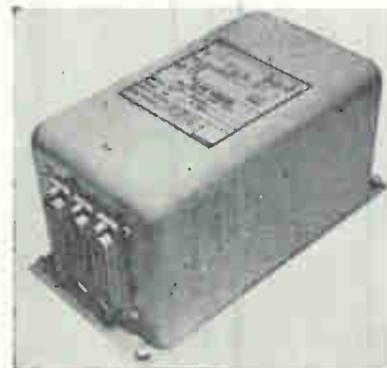

Stepping Switch Controls 468 Circuits

THE A. W. HAYDON CO., 230 N. Elm St., Waterbury 20, Conn., announces a motorized stepping switch, capable of controlling 468 circuits, in a

hermetically sealed housing only 4 in. square and 7 in. long. Unit has equivalent packaging in excess of 4 circuits per cu in., weight density of 8 circuits per oz. (346)


Cabinets Provide Climate Control



DEXON INC., 3517 Raleigh, Minneapolis 16, Minn., is producing a fully government-approved line of modularly connected Primaire climate control cabinets capable of providing dust, temperature and humidity control in a start-to-finish assembly line setup. This includes instrumentation such as ultrasonic cleaning, flushing, filtering, baking, balancing, sealing, curing and inspection. (347)



Switchlight

PENDAR, INC., 14744 Arminta St., Van Nuys, Calif. Multicircuit momentary switchlight series combines tease-proof snap action with low bounce wiping-action contacts. Rated at 2 amp resistive, 0.5 amp inductive, 30 v d-c or 125 v a-c for 100,000 operations. (348)

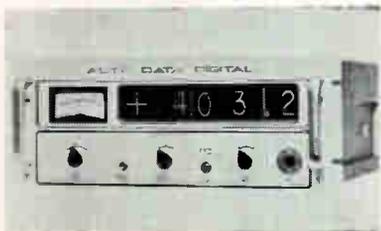

Digital Voltmeters Are Fully Automatic


AUTO DATA, 943 Turquoise, San Diego, Calif. The 2640 series transistorized digital voltmeters are designed for production measurement applications and general purpose laboratory use. Automatic ranging

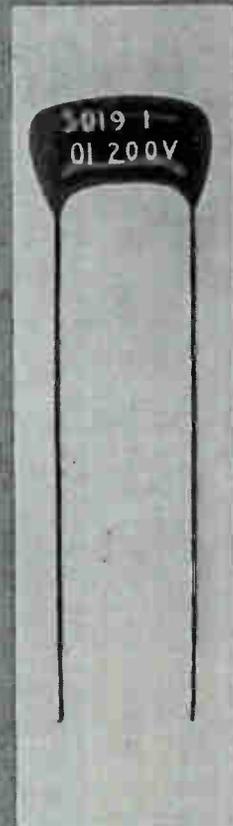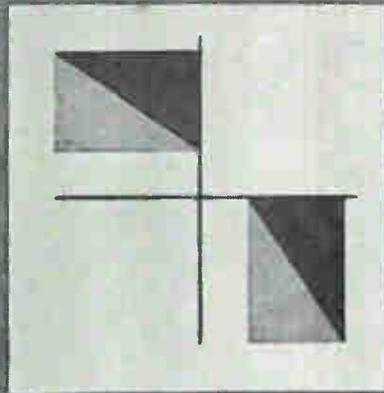

E.I.A. 900 PAKTRON miniature mylar* capacitors

E.I.A. Code 900 is recognized as a symbol for high quality and low cost. These Paktron Miniature Mylar* Capacitors feature small size, high insulation resistance, good temperature stability: in short—top performance characteristics at maximum economy.

Write for specifics to:




PAKTRON

DIVISION ILLINOIS TOOL WORKS INC.

1321 LESLIE AVENUE • ALEXANDRIA, VIRGINIA
AREA CODE 703 KING 8-4400

*Du Pont

**Jack
Penwell
can
show
you...**

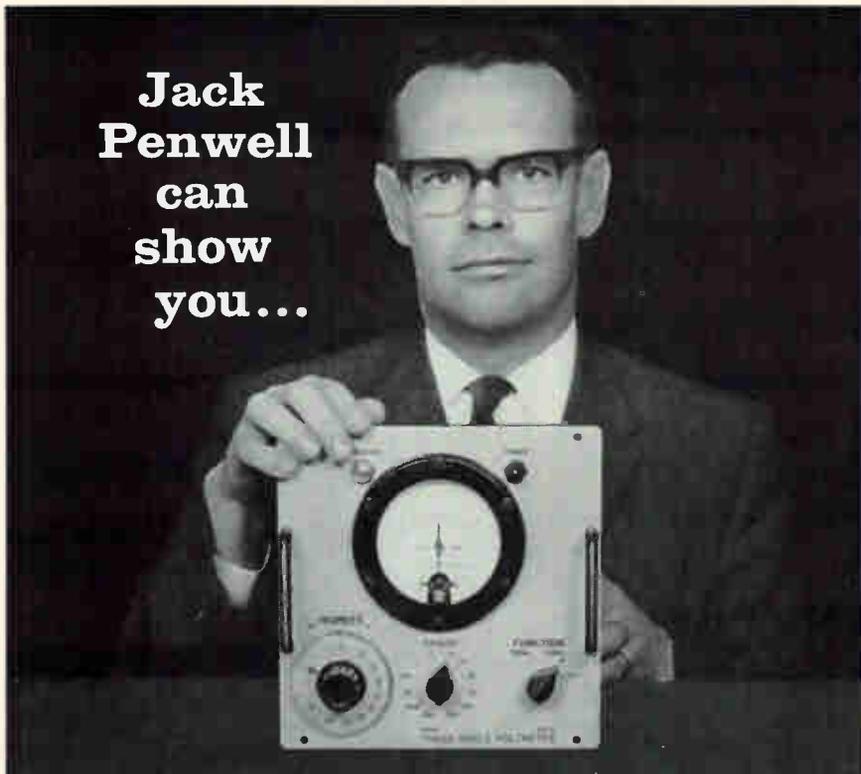

Sales Engineer, Tech-Ser, Inc., E. Palo Alto, Calif.

how to match a PAV to tough GSE specs

From its all solid state circuitry to its MIL-type hermetically sealed meter and plug-in amplifiers, every design feature of the Model VM-235 Phase Angle Voltmeter has been selected for rigorous service in Aerospace Ground Equipment.

Your North Atlantic man can quickly demonstrate how this rugged, miniaturized version of North Atlantic's famous PAV provides direct, accurate reading of phase angle, nulls, total, fundamental, quadrature and in-phase voltages—even under the roughest of military field conditions.

The VM-235's ability to meet tough system specs is demonstrated daily in operational and support equipment for USAF and Navy aircraft and missile programs. Its capabilities for complex measurements are shown in the abridged specifications below:

Voltage Range.....	1 mv to 300 v f.s., 12 ranges
Voltage Accuracy.....	±2% f.s.
Phase Accuracy.....	dial: ±1°; meter: ±3% of F.S. degrees
Signal Frequency.....	400 cps
Input Impedance.....	1 megohm
Reference Input.....	26 v or 115 v
Meter scale.....	3-0-3, 10-0-10 linear
Phase Angle Dial.....	2 scales, 90° (elec.) apart
Nulling Sensitivity.....	2 microvolts (phase sensitive)
Harmonic Rejection.....	55db (with filters)
Dimensions.....	8 ¹ / ₁₆ " h. x 8 ¹ / ₂ " w. x 6 ³ / ₁₆ " d.

North Atlantic's field engineering representative in your area has full data on the VM-235, as well as modified versions for specific systems requirements. For his name, call or write today, or request Bulletin VM-235.




NORTH ATLANTIC industries, inc.
TERMINAL DRIVE, PLAINVIEW, L. I., NEW YORK • OVerbrook 1-8600
SEE US AT WESCON—BOOTHS 1022-1023

and polarity change are standard features. Readout presentation is four digit edge-lighted numerals complemented by a front panel meter which extends the resolution to essentially five digits and verifies the null balance condition.

CIRCLE 349, READER'S SERVICE CARD


Power Transistors

SILICON TRANSISTOR CORP., Carle Place, L. I., N. Y. A line of *pn*p silicon power transistors in 75 and 85 w ranges will enable design engineers to employ complementary circuit push-pull output stages, eliminating an input and output transformer and several resistors and diodes. (350)

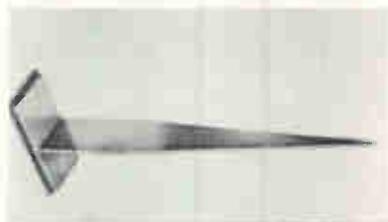

Terminations Withstand Shock


FILMOHM CORP., 48 W. 25th St., New York 10, N. Y. Employing Filmcard glass fibre resistance card as the base, a series of low vswr waveguide terminations are said to be extremely rugged, durable and virtually unbreakable even under the most severe shock and vibration. The low cost terminations are available in power ratings of from 1 to 3 w. (351)

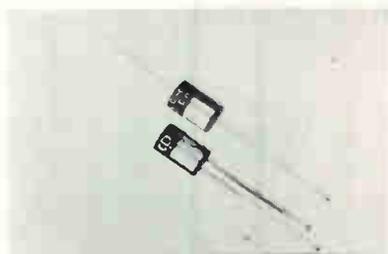

Current Regulators Simplify Circuitry

CIRCUIT DYNE CORP., 480 Mermaid St., Laguna Beach, Calif. New series of Corrector current regulating devices measure only 0.385 in. in diameter by 0.60 in. long. They are readily usable on etched

Do you share his probing curiosity?

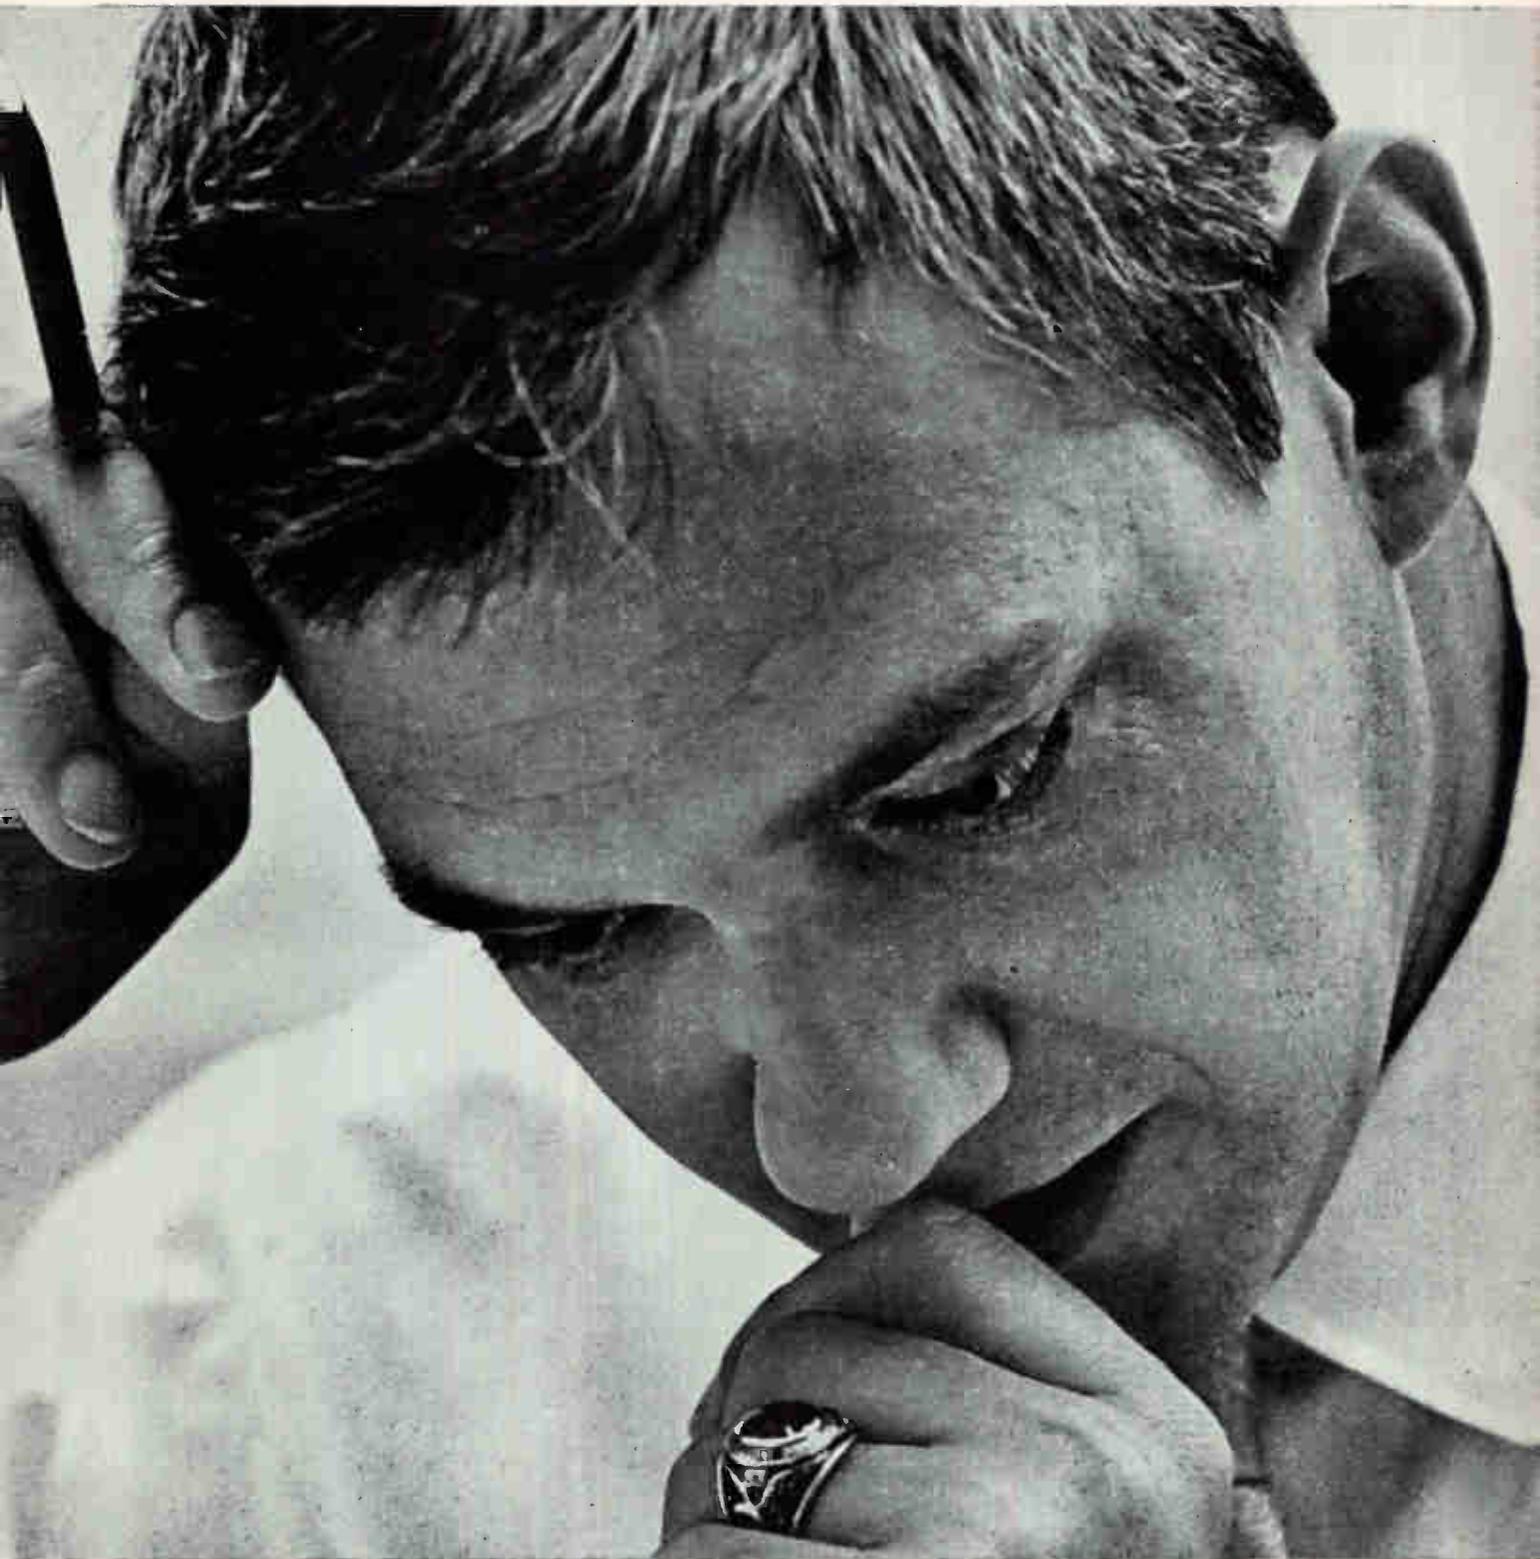

"Why" and "How" are more than words to him; they're a way of life. The need to know is an urgent drive that won't let him rest.

Are you a questioner by nature? Then come to Northrop. Pick your own area of investigation from more than 70 active projects. They range through space guidance, life support and deceleration systems to undersea technology, automatic checkout and failure prediction systems.

On the following pages you'll find some specific positions available now at Norair Division. Look them over. One may be just what you're looking for.

But if you don't happen to find your specialty listed, don't give up. Get in touch with us anyway. We simply don't have room to mention all the opportunities to be found throughout Northrop's several divisions. If yours is an active, seeking mind, there's bound to be a spot for you. Write to Dr. Alexander Weir, Northrop Corporation, P.O. Box 1525, Beverly Hills, California, and tell us about yourself. You will receive a prompt reply.

NORTHROP
AN EQUAL-OPPORTUNITY EMPLOYER

**FEW make MORE
precision resistors
than  . . . (now, there's a
little-known fact!)**

**FEW make MORE
PRECISE resistors
than  . . . (that will surely
evoke an argument!)**

**FEW can match the
 QUANTITY of
types (more than 450
available!)**

**NOBODY can offer
prompter DELIVERY
in any quantity-at lower
prices - or higher quality
than  !!**

Write for free catalog.

WIRE WOUND	METAL FILM	CARBON FILM	RESISTANCE NETWORKS
Precision	Precision	High Voltage High Frequency High Megohm	Precision units— conned or encapsulated

*Conformance to MIL-R-93: MIL-R-9444: MIL-R-14293A:
MIL-R-10683A: MIL-R-10509C

 Resistance Products Co.
914 S. 13th Street, Harrisburg, Pa.

Canadian Representative: Janok R. Aurora, Conodion Curtiss-Wright, Ltd., 518 Evans Ave.,
Toronto 14, Ont. Phone: CL 52391

circuit boards, where spacing between boards is critical, and for welded module configuration. The CP7 series are available with standard current values from 1.00 to 10.00 ma at approximately 5 percent increments, and in polar or non-polar types. Operating range is 5 to 20 v with current regulation of ± 1.5 percent of full scale.
CIRCLE 352, READER'S SERVICE CARD



Welding Heads Have Forces to 60 Lb

RAYTHEON CO., 225 Crescent St., Waltham 54, Mass., announces two new press-type resistance welding heads with a range of welding forces up to 60 lb. Model Q and its twin pneumatically-operated model QB, are designed for precision welding of relay contacts, modules, larger electrical and industrial components, and hermetic sealing of transistor packages. (353)

Magnetic Shields

MAGNETIC SHIELD DIVISION Perfection Mica Co., 1322 N. Elston Ave., Chicago 22, Ill., announces magnetic shields of a retrofit design which provide adequate magnetic isolation and also are held to very close dimensional tolerances particularly as to o-d considerations. (354)



TWT Pulse Amplifier Covers 870-1,000 Mc

VARIAN ASSOCIATES, 611 Hansen Way, Palo Alto, Calif. The VA-137C is a twt for use as a final amplifier in multi-output-tube radar equipment. It produces a peak output of

5 Kw with pulses as long as 600 μ sec. The VA-137C, which is liquid cooled, uses a periodic permanent magnet for focusing (355)

Delay Lines

DELTIME INC., 608 Fayette Ave., Mamaroneck, N. Y., has available 10- and 5-millisecond magnetostrictive delay lines suitable for data storage in computer systems. (356)




High-Speed Relay Offers Compact Design

HURLETRON INC., 528 W. Lambert Rd., Whittier, Calif. Miniature 10 amp dpdt relay conforms with MIL-R-6106-C Amendment No. 1. It weighs 1.3 oz and measures 1.015 in. by 0.515 in. by 1.4 in. high. Specifications include minimum current per Mil spec, vibration of 20 g to 2,000 cps and shock of 50 g 11 ± 1 ms. It is rated 10 amp with grounded case and terminal layout is 0.200 in. grid spaced. (357)

Tiny Choppers

COLLINS ELECTRONICS, INC., Stevensville, Md. Hermetically sealed Mini-Chops, with a case $\frac{1}{4}$ in. thick, $\frac{3}{8}$ in. wide and $\frac{3}{4}$ in. high, are available at any specific frequency range from 1,000 cps down. (358)

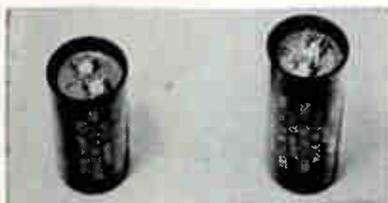

A-C Electrolytics Feature Ruggedness

AEROVOX CORP., New Bedford, Mass., offers a-c electrolytic capacitors with a new type of cover seal. Construction eliminates possibility of shorts between the formerly used

We're looking for men who can't let well enough alone



Northrop-Norair needs men who ask questions; men who aren't afraid to rock the boat. In the advanced areas we're exploring at Norair, you don't dare take anything for granted. If this kind of challenge appeals to you, put down the magazine now, while it's on your mind, and write us a letter. Positions are immediately available for:

Engineers in electronic checkout systems who have worked with advanced design and program development.

Engineers whose background is in supersonic aerodynamics, stability and control, inlet design, ducting, and performance analysis.

Engineers familiar with airframe structural analysis.

Scientists specializing in infrared, optics, and electronic research.

Engineers to work in data reduction.

Scientists who know structures research and dynamics.

Scientists who have done supersonic aerodynamic research.

Scientists experienced in working with information and sensing systems, platforms, infrared, sensors, flight controls, airborne computing and data handling systems.

Engineers familiar with programming, operations, and instrumentation for ballistic missile flight test.

Reliability Engineers to assess the reliability and to optimize the configurations and mission profiles of space systems.



Chemical Engineers to work on the development and applications of structural adhesives for aerospace vehicles.

Metallurgical Engineers for research and development on materials and joining.


If you'd like more information about these opportunities and others that may be available by the time you read this, write and tell us about yourself. Contact Roy L. Pool, Engineering Center Personnel Office, 1001 East Broadway, Hawthorne, California.

NORTHROP

AN EQUAL OPPORTUNITY EMPLOYER

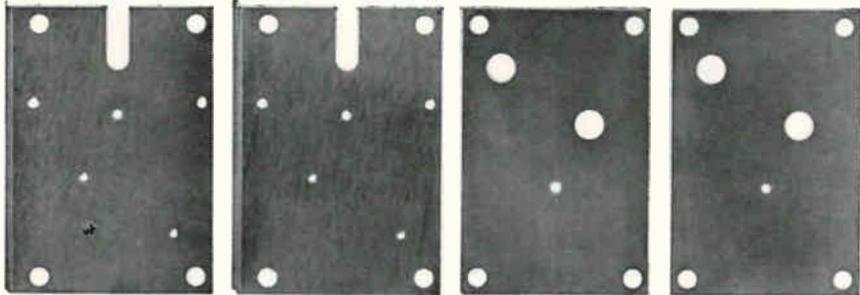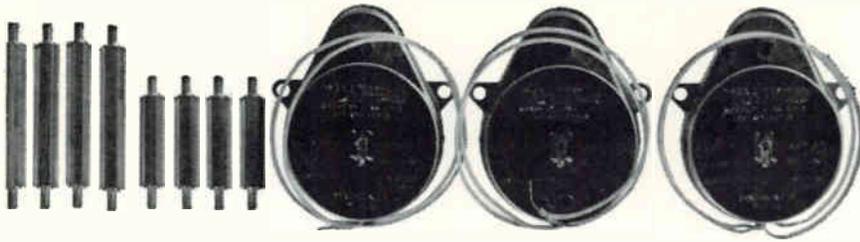

**59.95
BUYS A
LOT OF
TIMING...**

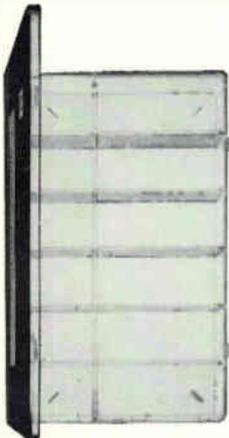

...that you build yourself! The A.W. Haydon Company's Program Timer Kit gives you all you need to build any of 60 different motor-driven, multi-switch timers with 20-second to 180-minute cycles! You get: 3 synchronous motors...6 SPDT switches...12 cams...10 change gears...other hardware—120 pieces in all, complete with full instructions—in a handy, compartmented plastic case. It's yours for only \$59.95! Don't spend time and money on prototypes—make your own timers with The A.W. Haydon Company's Program Timer Kit. Send check or money order to-day for delivery by return mail.


AWHAYDON
THE COMPANY
235 NORTH ELM ST., WATERBURY 20, CONN.

metal ring and the terminals. Product exceeds all U.L. specifications for an air gap (electrical creepage) clearance from live parts to ground. Cover cannot be jarred loose even under severe conditions of vibration and shock.

CIRCLE 359, READER'S SERVICE CARD

Capacitance Bridge

GENERAL RADIO CO., West Concord, Mass. Type 1615-A, a ± 0.01 percent precision capacitance bridge for use in the standardization laboratory, has a range from 10^{-17} to 10^0 farad, direct-reading. (360)

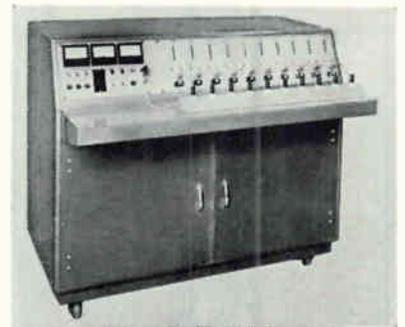


Dry Circuit Tester Operates Automatically

HI-G, INC., Bradley Field, Windsor Locks, Conn. The Miss Tester, a completely packaged automatic contact resistance tester, is offered to component manufacturers and users for dry circuit testing of make-break contact devices. (361)

Memory Stacks

FERROXCUBE CORP. OF AMERICA, Saugerties, N. Y., offers memory stacks constructed with planes capable of storing up to 1,984 information bits per plane. (362)

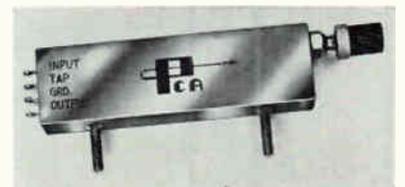


Delay Lines Offer High Reliability

PCA ELECTRONICS, INC., 16799 Schoenborn St., Sepulveda, Calif. Unit illustrated may be used as a

self-contained variable delay line, or as a vernier or trimmer adjustment section in conjunction with a fixed delay line. Range: 0.05-1.0 μ sec total delay. Rise time: approximately 0.14 μ sec. Attenuation: less than 15 percent. Impedance: 500 to 1,000 ohms. Cost: \$95 each in small quantities. (363)

Wide Range Oscillator

HULL INSTRUMENTS, 726 Mission St., So. Pasadena, Calif. The 700 series Decalock oscillator generates ultrastable frequencies up to 1 Mc with 5 digit setability. It is useful in calibration of measurement channels in f-m/f-m telemetry systems. (364)

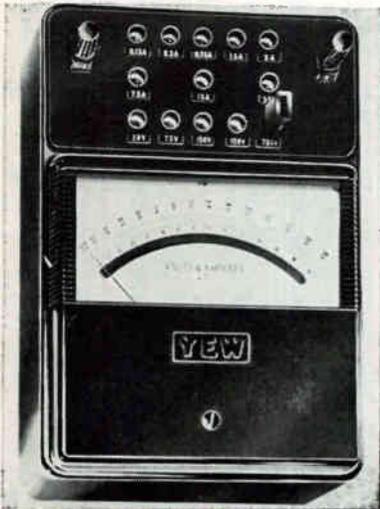

Volt-Ammeter Standard Is Versatile, Portable


YOKOGAWA ELECTRIC WORKS, INC., 40 Worth St., New York 13, N. Y. Model SPF-13R measures up to 30 amp a-c and 750 v a-c in 13 ranges without accessories to an accuracy of ± 0.5 percent of full scale value. Scale length is approximately 5 $\frac{1}{2}$ in. Ambient temperature influence (max) is 0.1 percent with ± 10 C variation from ± 25 C. Size of unit: 7 $\frac{1}{2}$ in. by 10 $\frac{1}{2}$ in. by 4 $\frac{1}{2}$ in. Weight: 10 $\frac{1}{2}$ lb. Price: \$195. (365)

Cable Ties Comply With MIL-T-713A

GUDEBROD BROS. SILK CO., INC., 225 W. 34th St., New York 1, N. Y. Gude-Ties eliminate the use of clamps and plastic tie straps. They

August 10, 1962

New From T/I MODEL 654 transistor and diode tester

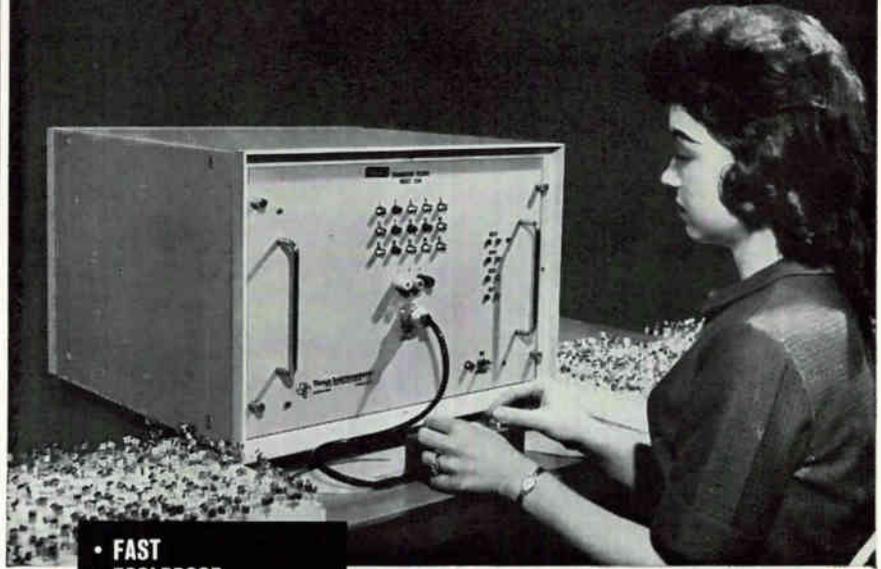

- FAST
- FOOLPROOF
- AUTOMATIC SORTING
- EASILY PROGRAMMED
- FLEXIBLE

15 Tests in Less Than a Second!

Texas Instruments Model 654 Transistor and Diode Tester combines speed and accuracy with complete flexibility of application. Fast reprogramming through use of printed circuit boards makes the Model 654 equally useful for high-volume, single-device testing or batch testing of a variety of devices.

High Speed. Fifteen parameter testing of 1800 devices per hour. Each test position can be set to provide a testing time of 50 milliseconds to 3 seconds.

High Accuracy. Null detector senses variations of less than 2 millivolts and/or 10 nanoamps. Power supply regulation is better than 1 per cent.

Minimum Operator Training. Only two controls are accessible to the operator, the ON-OFF switch on the front panel and the START push button on the test fixture. The testing cycle starts when the push button is released. Lights indicating failed tests remain on until the operator starts the next test cycle.

Fast Reprogramming. Electrical conditions for each test are preprogrammed on printed circuit boards. By merely changing circuit boards a completely new program may be obtained.

Flexible System. Circuit boards built to customer specifications. Modular power supplies permit direct substitution for special requirements. Automatic sorters in six- and eight-bin sizes are available as standard accessories.

Write for complete information.

APPARATUS DIVISION
PLANTS IN HOUSTON
AND DALLAS, TEXAS




TEXAS INSTRUMENTS
INCORPORATED
3609 BUFFALO SPEEDWAY
P. O. BOX 66027 HOUSTON 6, TEXAS

498

CIRCLE 153 ON READER SERVICE CARD

153

TELEMETRY BY TELE-DYNAMICS

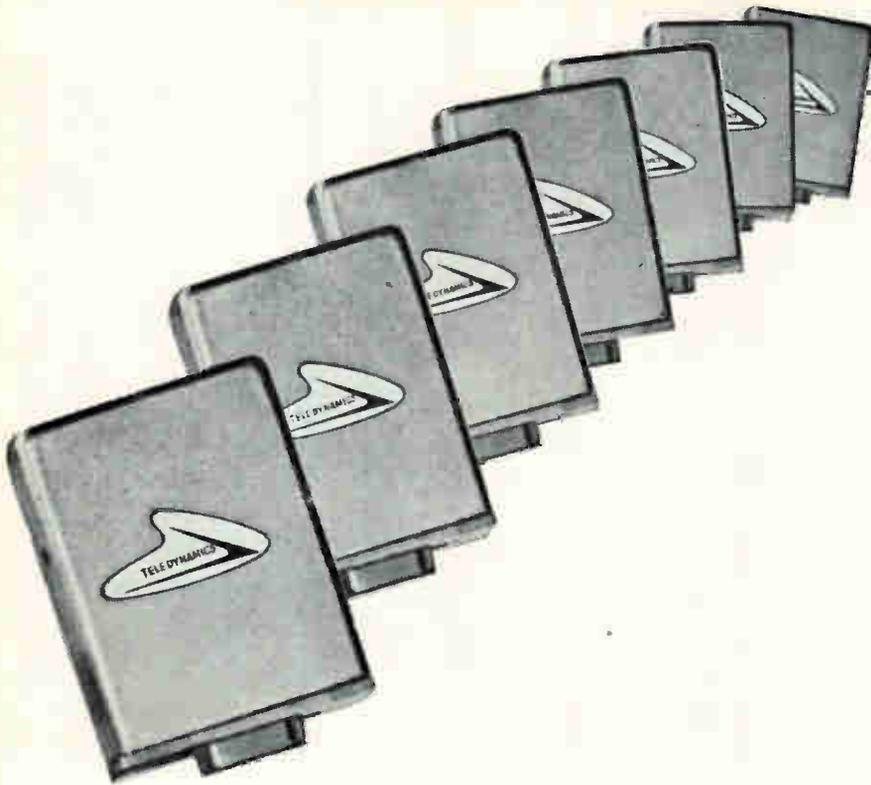

You can tell an oscillator by its cover!

With a Tele-Dynamics seal on the cover, you know you've got the ultimate in performance and dependability. Tele-Dynamics' SCO line is characterized by exceptional electrical and environmental qualities and proved by high customer acceptance.

1270—service proven 0-5 volt, outstanding performance in all characteristics, on the bench and in the air—

1262—includes all 1270 features plus high input impedance (1 megohm) and compact form factor—

1275—differential high level input plus switchable input signal range ± 2.5 or 0-5 volts at turn of switch—

1284—the LOW LEVEL subcarrier!

Write for complete specifications

8790

TELE-DYNAMICS


DIVISION

AMERICAN BOSCH ARMA CORPORATION

5000 Parkside Avenue, Philadelphia 31, Pa.

are made of soft Nylon braid and microcrystalline wax and comply with the requirements of MIL-T-713A including fungus proofing. Advantages include as much as 95 percent saving in material cost and substantial installation cost savings. Gude-Ties are available in a variety of lengths.

CIRCLE 366, READER'S SERVICE CARD

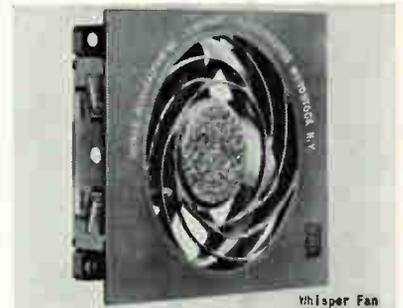


Super-Silent Fan Moves Air at 60 CFM

ROTRON MFG. CO., INC., Woodstock, N. Y. The Whisper Fan, designed to move 60 cu ft of air per minute, measures $1\frac{1}{2}$ in. deep by $4\frac{11}{16}$ in. sq. It has a built-in venturi block which serves as a frame for the complete unit. It is designed for continuous duty, requiring no maintenance, and operates at a quiet 18 db. It improves equipment performance by minimizing drift due to temperature changes within an enclosure, and extends life of components and tubes. (367)


Potentiometers

VOGUE INSTRUMENT CORP., 2350 Linden Blvd., Brooklyn 8, N. Y., has precision potentiometers in sizes from 1 in. to 3.31 in. with linearities up to 0.005 percent. (368)

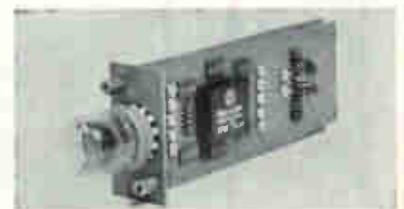

Solid State Counter Provides In-Line Readout

BURROUGHS CORP., P. O. Box 1226, Plainfield, N. J. Type BIP-8001 has a 100 Kc frequency capability and provides visual in-line readout

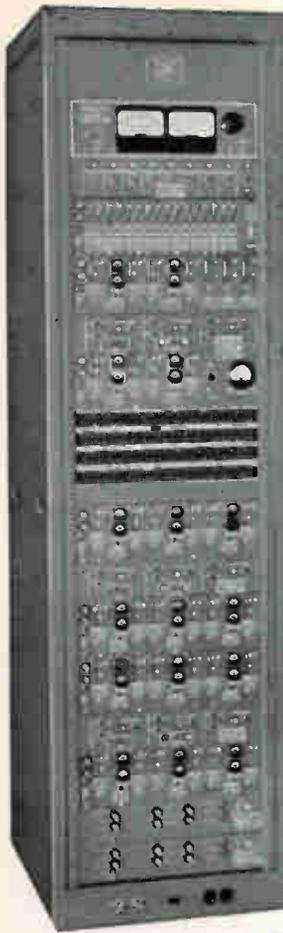

NEW BETTER-THAN-EVER RELIABILITY

for long-distance point-to-point communications



**NEW 16-CHANNEL TRANSISTORIZED
VOICE FREQUENCY DIVERSITY CARRIER
TELEGRAPH TERMINAL TYPE 235 MODEL 3
MIL DESIGNATION AN/FGC-61A**

ADVANTAGE

- ... All units militarized: components and design approved by U.S. Military.
- ... Converters have equalized gain and adjustable time delay in each channel for better diversity performance and interchangeability.
- ... Switching Panels provide "local" or "remote" selection of 2-channel or 4-channel diversity modes.
- ... Combiners have adjustable gains in each channel, for complete switching flexibility, and the combining follows an ideally modified square law function for both 2-channel space or frequency and 4-channel space plus frequency diversity.
- ... Keyers have adjustable "threshold" sensitivity control and simplified input circuit selection.
- ... Dotter and Delay Indicator provides test keying signal source for keyers and delay equalizers in all channels.

Write for complete literature.

Pace-Setters in Quality Communication Equipment.

NORTHERN RADIO COMPANY, inc.
147 WEST 22ND ST., NEW YORK 11, NEW YORK

In Canada: Northern Radio Mfg. Co., Ltd., 1950 Bank St., Billings Bridge, Ottawa, Ontario.

CIRCLE 214 ON READER SERVICE CARD



ANTENNA CAPABILITIES

The advanced design and precision construction of Ainslie antenna systems and associated equipment bear testimony to nearly two decades of microwave communication, detection and identification experience. By virtue of complete design-to-delivery capabilities and facilities, Ainslie Corporation offers its customers not only comprehensive standard lines of mesh, spun and horn antennas, but also the flexibility required to develop custom designed prototypes for on-schedule delivery.

We invite your inquiry.



Ainslie
CORPORATION

531 Pond Street
Braintree 85, Massachusetts

CIRCLE 155 ON READER SERVICE CARD 155

FINE WIRE

Custom Melting, Complete Redrawing, Strand and Vacuum Annealing Services for fine wire processing to customers' specifications.



WRITE for valuable brochure containing fine wire compositions, pertinent properties and applications.

for

- Semiconductors
- Resistors
- Potentiometers
- Thermocouples
- Electronic Tubes
- Other Electronic Applications

in

precious, base, exotic
and special metals
— bare or
insulated




CONSOLIDATED REACTIVE METALS, inc.
115 Hoyt Avenue — Mamaroneck, N. Y. — OWens 8-2300

CIRCLE 215 ON READER SERVICE CARD

Time-tested Standard of the Resistor Industry!

SEE US
AT THE
WESCON SHOW
BOOTH 3550

EVANOHM[®]

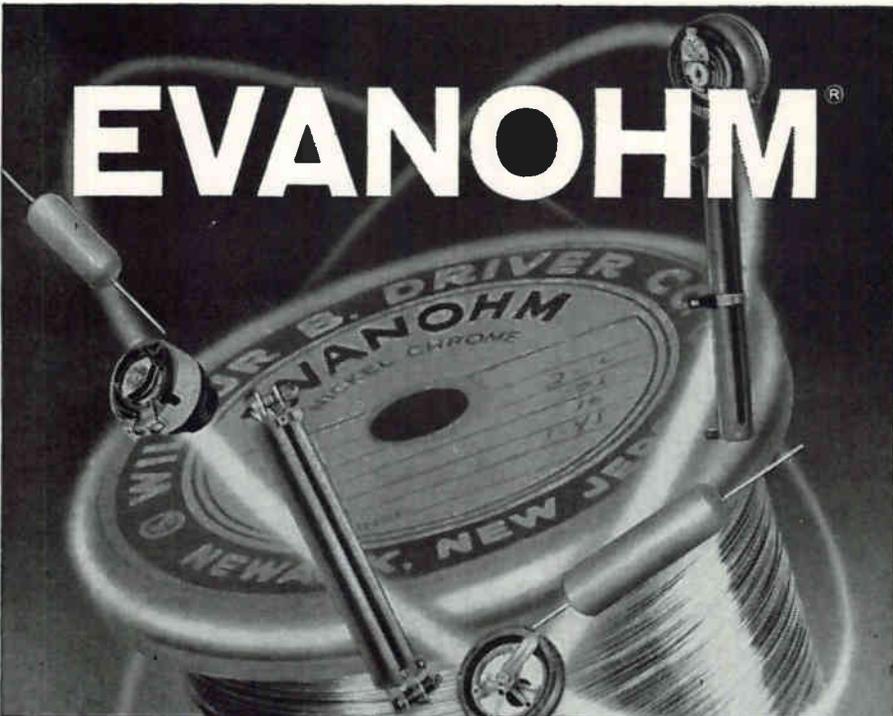

SPECIFICATIONS

Nominal composition
75% Nickel
20% Chromium
2.5% Aluminum
2.5% Copper

Specific resistance 20°C
800 ohms/cm²
134 microhm cm

Coefficient of
linear expansion
20° to 100°C
.000014/°C

Specific gravity
8.10 gm/cc


Pounds per cubic inch
.293

Magnetic attraction
None

Average tensile strength
180,000 psi

Thermal conductivity
0.152 W/cm²/°C

Mean thermal EMF
vs copper 0°C to 100°C
1 μV/°C

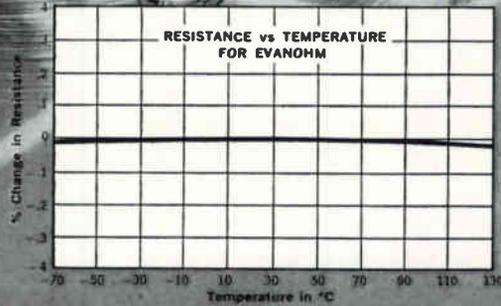

Specify EVANOHM for exceptional stability over wide temperature ranges. This WBD precision resistance alloy provides high specific resistance, low temperature coefficient and low thermal EMF to copper. It is especially recommended for high reliability applications... resistors, precision instruments, missiles and critical equipment. Available in bare wire, enameled or insulated.

FINE WIRE ALLOYS IN A FULL RANGE OF RESISTIVITIES

ALLOY	Nominal Composition	Resistivity (ohms/cm ²)	T.C. of Resistance (ohms/ohm/°C, 20-100°C)	Specific Gravity gms/cc
Evanohm [®]	75 Ni-20 Cr-2.5 Al-2.5 Cu	800	±.000005† (-65° to 125° C.)	8.10
Tophet A [®]	80 Ni-20 Cr	650	.000085	8.412
Tophet C [®]	61 Ni-15 Cr-bal. Fe	675	.00013	8.247
Cupron [®] (Constantan)	55-Cu-45 Ni	294	±.000020	8.90
Balco [®]	70 Ni-30 Fe	120	.0045	8.46
Ballast [®] (Pure Nickel)	99.7 Ni	48	.0060	8.90
30,60,90,180 Alloys	Cu-Ni	30-180	.00130 -.00018	8.90

†.002" and finer



Call or write for EVANOHM brochure to—

WILBUR B. DRIVER COMPANY
NEWARK 4, NEW JERSEY — Telephone: HUmboldt 2-5550

In Canada: Canadian Wilbur B. Driver Co., Ltd., 50 Ronson Drive, Rexdale (Toronto)


PRECISION RESISTANCE, ELECTRONIC AND MECHANICAL ALLOYS FOR ALL REQUIREMENTS

of the data by use of a Nixie indicator tube. Unit utilizes plug-in p-c construction and has an overall size of 1½ by 2½ by 7½ in. Counter features the use of a 90 silicon diode Bipco matrix package. The entire diode matrix is fabricated simultaneously from a single piece of silicon with diodes positioned to perform the counting function. The diodes are then joined to two circuit plates which provide input and output connections to the matrix.
CIRCLE 369, READER'S SERVICE CARD



Miniature Meters Present Clear Scale

HOYT ELECTRICAL INSTRUMENT WORKS, INC., 42 Carleton St., Cambridge 42, Mass. The long scale (close to 1½ in.) of the No. 668 meters presents high clarity due to the shadow-free clear plastic case and precise scale rendering. Meters feature jeweled bearings, high torque movement and accuracy within 2 percent. They are available for d-c applications in ammeters, milliammeters, and microammeters covering ranges from 5 amp to 100 μa. Also offered as d-c voltmeters up to 300 v. self-contained. (370)

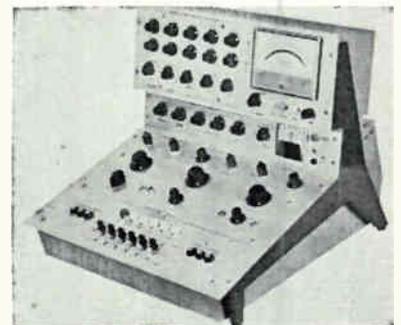

Semiconductor Tester Operates Automatically

TEST EQUIPMENT CORP., P. O. Box 13185, Houston 19, Texas. Wide range semiconductor d-c tester with 1 percent meter accuracy measures breakdown voltages up to 1,000 v

and leakages down to 1 na full scale. Current gains from 5 to 50,000, base voltage, and saturation voltage can be measured with test currents up to 10 amp at 15 v. Test conditions for the five d-c tests are selected to within 0.5 percent by control panel switches. All tests can be sequenced at 0.5 sec each. (371)



Angular Divider Tests Automatically

NORTH ATLANTIC INDUSTRIES, INC., 200 Terminal Drive, Plainview, N. Y. Model AAD-7100 is an angular divider for the automatic testing of precision rotary components. A synchro or resolver is mounted on the unit and automatically positioned to an angle indicated by the standard source driving the AAD-7100. The angular error can then be read directly from the digital counter readout. Price is approximately \$3,000. (372)

Electrometer

WAYNE KERR CORP., 1633 Race St., Philadelphia 3, Pa. The M141 precision electrometer provides an accuracy of 0.1 percent from 1 mv to 10 v, in 44 effective ranges, and current from 10^{-7} to 10^{-15} amp, with an input impedance greater than 10^{10} ohms. (373)



Miniature Trimmer Features Knob Adjust

INTERNATIONAL RESISTANCE CO., 401 N. Broad St., Philadelphia 8, Pa. A $\frac{1}{2}$ -in. round trimming pot enables finger-tip adjustments to be easily made from either the top or the side



140 Channels of 2 kc data on 100 kc magnetic tape recorder!

—One example of UNIDAP Data System capability!

- Permits magnetic recording and playback of multichannel, constant-bandwidth, time-correlated research data.
- Unique frequency translation and multiplexing techniques permit optimum use of recorder bandwidth capabilities.
- Physically and electrically interchangeable modules make custom system assembly easy.
- Compatible with existing DCS analog and digital equipments.

UNIDAP—a new concept... complete systems-engineered modular capability for acquisition, storage and playback of multichannel static and dynamic research data! Completely transistorized! Operator can modify system characteristics to adapt to the recorded data. Entire system automatically compensated to eliminate effects of wow and flutter. Modules can be interconnected at will using program boards. System can be expanded to meet future requirements and adapt to improved recorder capabilities.

Three systems are available immediately; others will follow:

- MARK 1.... All standard IRIG channels are available. Also, center frequencies to 1 mc with deviations to 40%.
- MARK 500... Simultaneous continuous FM magnetic recording of 1 to 10 channels of 500 cps intelligence data plus reference frequency on single tape track of 50 kc bandwidth recording capability.
- MARK 2000... Similar to Mark 500. Records 1 to 10 channels of 2000 cps on 200 kc bandwidth track.

- All above are nominal 1% accuracy systems, subject to terminal equipment employed.
- Full range of accessory calibration and test equipment available.

If you're concerned with magnetically recorded data for any purpose, you'll want to know more about UNIDAP's unique capabilities. For more information, address: Dept. E-1-7.

DATA-CONTROL SYSTEMS, INC.
Instrumentation for Research

Los Angeles • Santa Clara • Wash., O. C. • Cape Canaveral
Home Office: E. Liberty St., Danbury, Conn. • Pioneer 3-9241

DCS

MASSA METERITE

THE ONLY TRULY PORTABLE

2 CHANNEL

RECTILINEAR INK/ELECTRIC

RECORDER

WITH

INTERCHANGEABLE

PLUG-IN

PREAMPLIFIERS



NEW MASSA METERITE Model BSA-250A with Preamplifiers

Measures and records virtually everything. . . anywhere. . . strain, temperature, displacement, force, flow, proximity, depth, pressure, electrical, chemical, radiation, etc.

Write for BSA-250 Series Bulletins

MASSA

A DIVISION OF

COHU

ELECTRONICS, INC.

275 LINCOLN STREET


HINGHAM, MASSACHUSETTS,

SALES REPRESENTATIVES IN ALL PRINCIPAL AREAS
WILL GLADLY DEMONSTRATE
THE NEW MASSA METERITE

See it at Booth 621-622 at WESCON

of the unit. Type CT-110 is designed for both military and industrial applications. Standard resistance range is from 10 ohms to 50,000 ohms. Standard tolerance is ± 5 percent. Power rating is 1.0 w at 50 C, and operating temperature range is -55 C to 150 C.

CIRCLE 374, READER'S SERVICE CARD

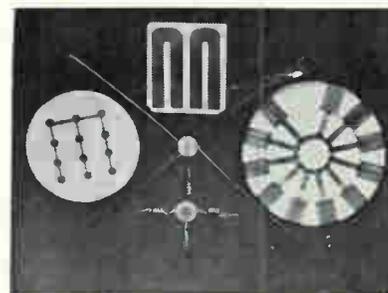


Metalized Ceramoplastic Exhibits Ruggedness

MYCALEX CORP. OF AMERICA, Clifton Blvd., Clifton, N. J. Metalized Supramica 620 BB has proved unusually rugged in the production of metalized circuits. In recent tests the material exhibited a pull strength as high as 10 lb in a disk of only $\frac{1}{8}$ in. in diameter. It features total dimensional stability; a dissipation factor, dielectric constant and loss factor at 1 Mc of 0.0023, respectively; 1,100 F heat distortion temperature; max temperature endurance of 1,200 F (unstressed); 5,000 psi tensile strength; 30,000 psi compressive strength. (375)



Variable Counter Has Digital Servo Uses

AUTOMATION DEVELOPMENT CORP., 11824 W. Jefferson Blvd., Culver City, Calif. Model 508A variable

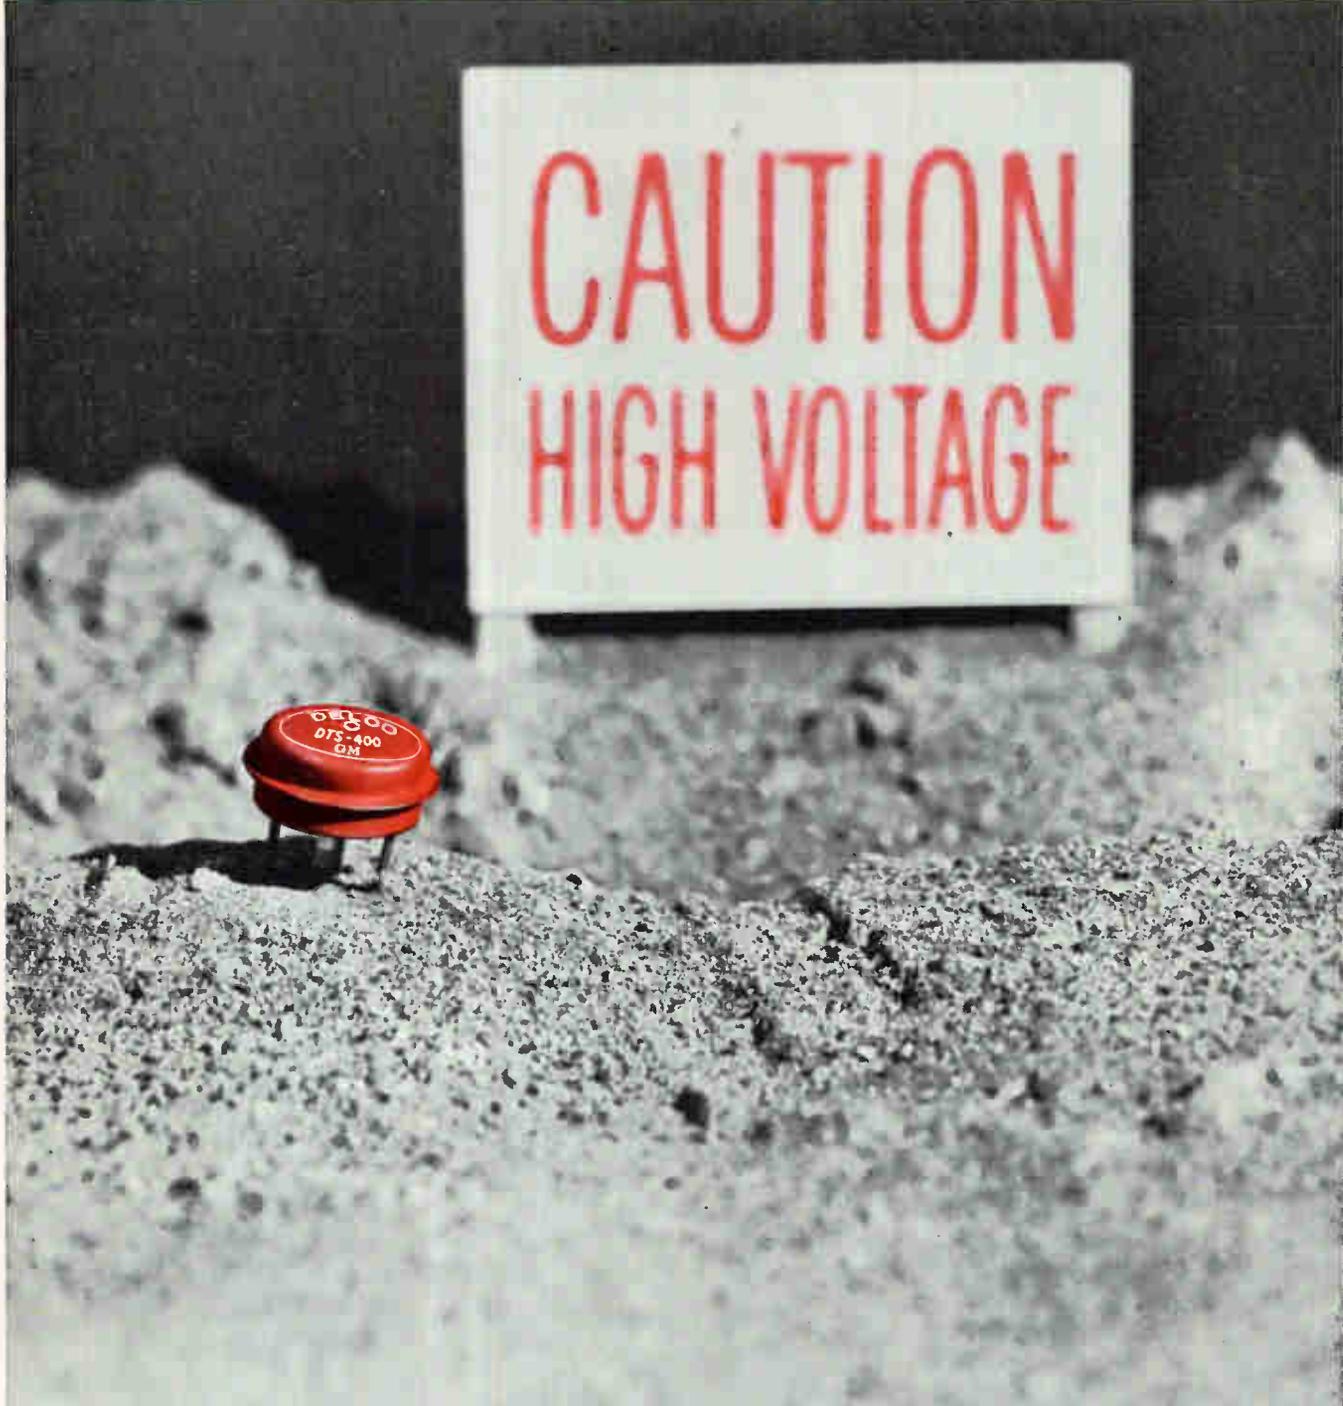

CAUTION
HIGH VOLTAGE



This is the new DTS-400 from Delco Radio . . . one of the highest voltage silicon power transistors available. The DTS-400 offers V_{ce0} , V_{cb0} and V_{cs} of 400 volts. Because of its high voltage capabilities and its ability to withstand high temperatures, this transistor offers a significant advancement in the art of power conversion.

The Delco DTS-400's capabilities make possible "direct to line" voltage hook-ups eliminating the need for transformers or other devices in between . . . and their related space and weight requirements. Production samples of the new DTS-400 silicon power transistor are available now to help you reduce the size, weight and cost of your power package. For complete engineering data, write or call our nearest sales office.

Union, New Jersey
324 Chestnut Street
MURdock 7-3770
AREA CODE 201

Detroit, Michigan
57 Harper Avenue
TRinity 3-6560
AREA CODE 313

Santa Monica, California
726 Santa Monica Blvd.
UPton 0-8807
AREA CODE 213


Syracuse, New York
1054 James Street
GRanite 2-2668
AREA CODE 315

Chicago, Illinois
5150 N. Harlem Ave.
775-5411
AREA CODE 312

DELCO
DEPENDABILITY
RADIO
RELIABILITY

General Sales Office: 700 E. Firmin, Kokomo, Ind., Gladstone 2-8211—Ext. 500 • Area Code 317 • Division of General Motors, Kokomo, Ind.

No. 3 of a Series—What's behind the superior reliability of Atohm Trimmer Potentiometers

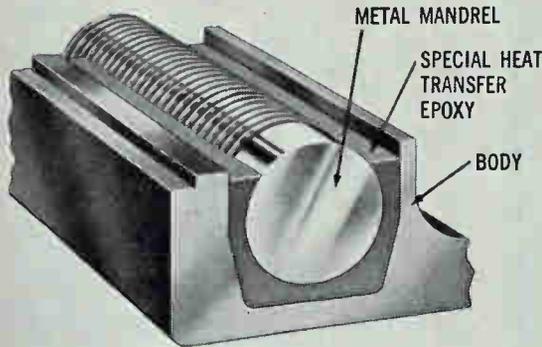

Atohm's metal mandrel eliminates hot pots


All Atohm trimmer potentiometers use *metal* mandrels imbedded in a special heat-transfer epoxy. This combination provides far better heat dissipation than techniques and materials used in competitive instruments. Atohm pots operate cooler, and are, therefore, more reliable. Write for catalog.

Don't rely on "Pot Luck"—ask for
ATOHM ELECTRONICS INC.
7648 San Fernando Road, Sun Valley, California



CIRCLE 216 ON READER SERVICE CARD

counter is designed for digital servo applications so as to achieve optimum performance with variable pulse rate (or count) input. Units can be manufactured for almost any binary number and supplied in MIL-T-27A cases or plug-in cards. Single unit price is \$245 (with quantity discounts).
CIRCLE 376, READER'S SERVICE CARD

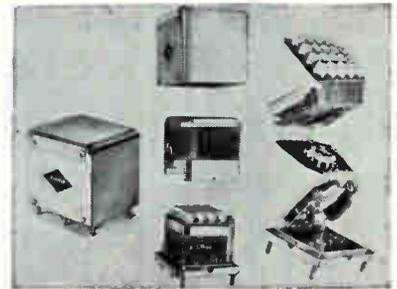


Crystal Oscillator Provides 20 Channels

MONITOR PRODUCTS CO., INC., 815 Fremont, S. Pasadena, Calif. A 20-channel temperature-controlled crystal oscillator utilizes flexible circuitry with all components including capacitors, crystals, switch wafers, and oscillator mounted directly on the circuitry. Circuitry folds up into an area of less than 15 cu in. Unit provides 20 separate externally adjustable channels each with a frequency stability of 1 part in 10⁶ from -55 to + 95 C. (377)

PERMACOR

Electronic Powdered

IRON CORES for Every Application

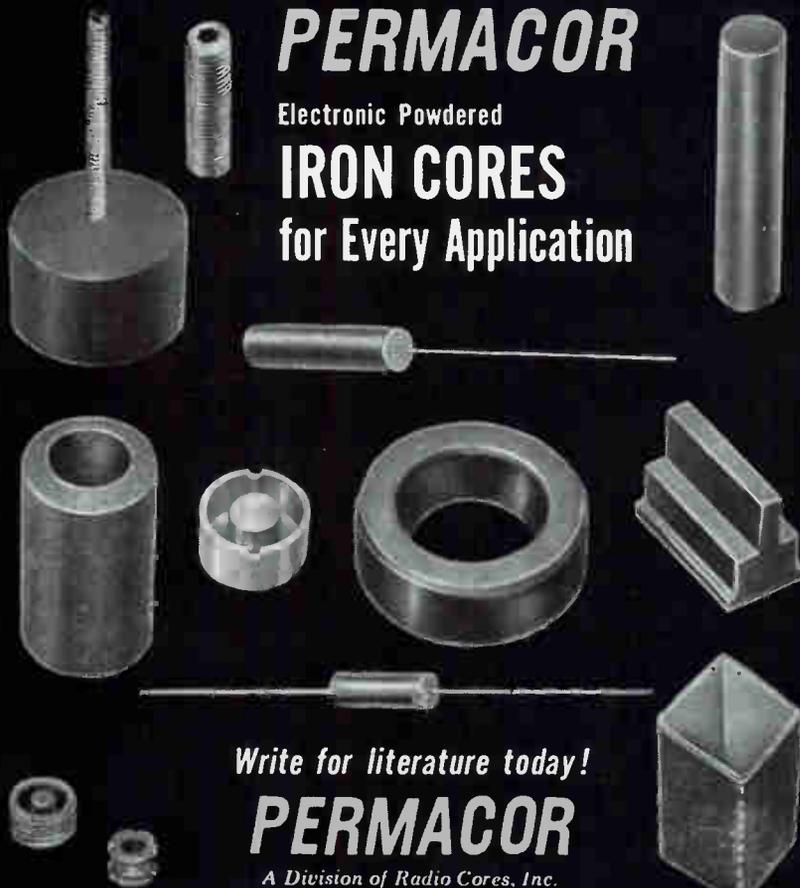


Write for literature today!

PERMACOR

A Division of Radio Cores, Inc.


9540 Tully Ave., Oak Lawn, Ill. • Phone: GArden 2-3353

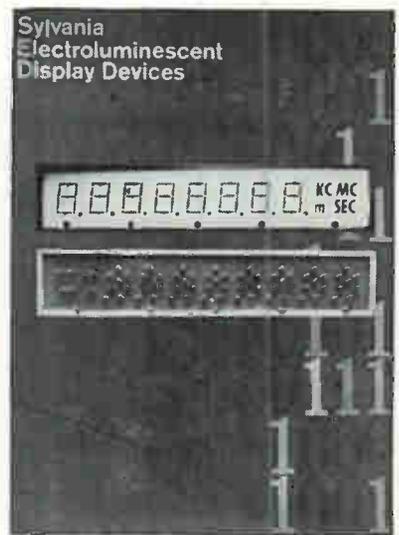

Electroluminescent Readout Device


SYLVANIA ELECTRIC PRODUCTS INC., 730 Third Ave., New York 17, N. Y. The NU78A, a solid state unit, does not require a filament and is

therefore highly reliable when operated under rated conditions. The devices may be viewed over almost 180 deg. The $\frac{3}{4}$ -in. size numeric requires only 8 Mw of power with all segments energized. Decay time of a typical EL phosphor is 2-5 μ sec. Electroluminescent lamps decrease gradually in light output with operation. When operated as a display device, many thousands of hours of operation are obtained. (378)

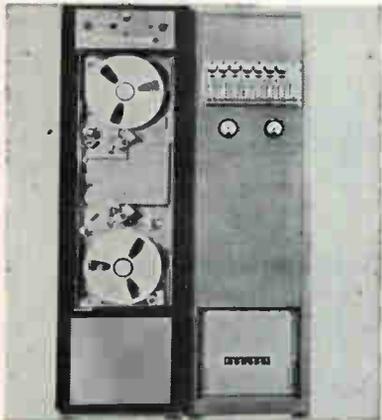

Recorder/Reproducer Offers Time Delay

SANGAMO ELECTRIC CO., Springfield, Ill. The 480 series magnetic tape recorder/reproducer provides a fixed or continuously variable time delay between record and reproduce or between two reproduce operations on a pre-recorded tape. The desired delay (up to 30 sec at 60 ips) can be set by timers located on the second cabinet or by the data itself. The delay is accomplished by storing the tape in a bin located between the two capstans. (379)

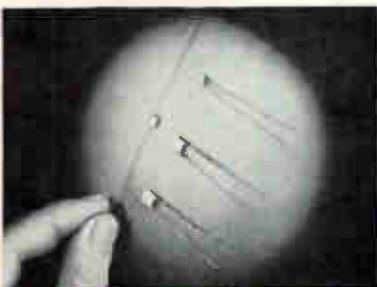

Thin Plate Capacitors Show High Stability

HI-Q DIVISION, Aerovox Corp., Olean, N. Y. Subminiature thin plate capacitors available in a variety of temperature coefficients permit maximum circuit component density

PRECISE FREQUENCY CONTROL



1 to 2 Parts in 10^{10} /Day Stability

The RD-180A Transistorized Frequency Standard. Available for immediate delivery.

Priced at **\$2400.**

1 to 2 parts in 10^{10} /day frequency stability — just one indication of the performance that makes the RD-180A the most advanced crystal frequency standard available today.

Built to MIL-E-16400D, the RD-180A is ideally suited to systems applications. It has been specified as the timing base of the Pacific Missile Range and proven in satellite tracking, doppler navigation, and numerous other communications, navigation, and lab applications.

Features include self-contained power supply and integral standby battery pack, incorporating an instantaneous, automatic switchover system with no loss of stability in the event of line failure. It is reliable, rugged and compact, being fully transistorized and equipped for rack mounting. Shock mounts are available for bench or airborne applications.

The RD-180A is ready to solve your frequency standard problem now — available for immediate delivery — \$2400, complete with power supply. Manson welcomes the opportunity to quote this unit for systems applications.

Write or phone for detailed engineering data sheet.

SPECIFICATIONS

- Output Frequencies 100 Kc, and 1 Mc (5 Mc optional)
- Output Levels 0.75 v rms (+50/-10%)
- Output Impedance 50 ohms
- Ambient Temperature Range 0°C to +50°C
- Ambient Humidity Range 0 to 95% RH
- Frequency Stability:
 1. Aging 1 to 2 parts in 10^{10} per day after 6 months continuous operation
 2. 25°C Ambient $\pm 25^\circ\text{C}$ Less than 5 parts in 10^{10}
 3. $\pm 20\%$ Change in 50-ohm load .. within one part in 10^{10}
- Input Voltage Requirement 115 vac $\pm 10\%$, 50-400 cps
- Battery Operating Time:
 1. Under full operation 35 hours
 2. Oven operation only 250 hours
- Over-all Dimensions 17 1/2" wide x 16" deep x 3 1/2" high
- Weight 38 lbs. (including batteries)

MANSON
LABORATORIES,
INCORPORATED



BOX 1214/375 FAIRFIELD AVENUE
STAMFORD, CONN. / DAVIS 5-1391



A SUBSIDIARY OF **hallicrafters**



HOW TO FORM a rectangular shape with the DI-ACRO ROLLER

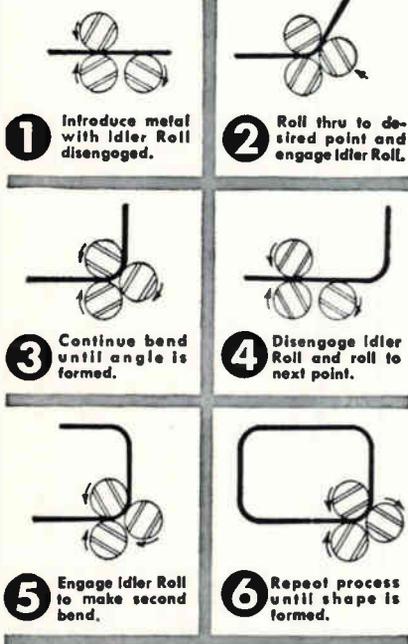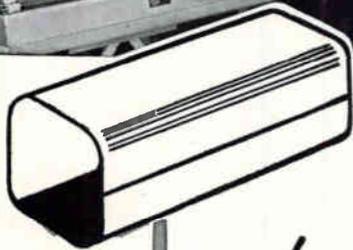

Forming small and large circles without flat spots and a variety of other sheet metal shapes is easily accomplished on the Di-Acro Roller with its exclusive cam actuated Idler Roll. Rear roll indicators allow operator to quickly return to a previous setting. Eight models from 6" to 42" forming width.

NEW DI-ACRO POWER ROLLERS



Increase speed and efficiency. Forward, stop and reverse are governed by foot control leaving both hands free for feeding materials. Six sizes from 12" to 42" wide all with 2" ground and polished forming rollers.

For six page roller folder call your nearest Di-Acro dealer listed in the yellow pages under Machinery—Machine Tools or write to us.


See complete Di-Acro line in Sweet's Machine Tool Catalog Sec. 2/DI



DI-ACRO CORPORATION
438 Eighth Avenue
Lake City, Minnesota

as a result of their slim rectangular design. All units are rated at 50 vdcw at 85 C and derated 50 percent at 125 C. Made with axial or radial leads, the ceramic capacitors are suited for transistorized circuits.

CIRCLE 380, READER'S SERVICE CARD

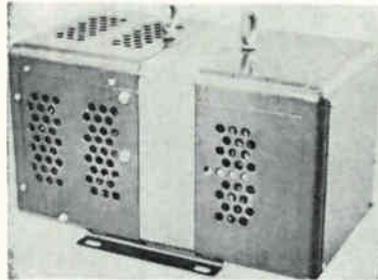

Line Regulator Uses No Moving Parts

SOLA ELECTRIC CO., 1717 Busse Road, Elk Grove Village, Ill. Designed for 3-100 Kva use, the Solatron line voltage regulator is an electronic magnetic device offering fast response to line voltage changes or load conditions. Also, since it does not utilize moving parts, a high degree of reliability plus no maintenance is benefited. It features a ± 1 percent output voltage envelope for variations of ± 10 percent from selected nominal, zero to full load, and 57-63 cps. (381)



Thin Capacitor Has Polystyrene Dielectric

ARCO ELECTRONICS, INC., Great Neck, N. Y. Type PE capacitor, 0.1 in. thick, is designed for filter and p-c applications. It is available in the capacitance range of 0.001 to 0.01 μf . Higher values are being designed and lower values may be obtained on special order. Tolerance

New! High Precision VOLTAGE CURRENT REFERENCE

Resolution: 1 MV
 $1 \mu\text{A}$

Stability: $\pm .001\%$

Regulation: $.0001\%$




- 5 decade digital voltage & current selector
- electronic chopper-stabilized amplifier
- temperature controlled and stabilized zener reference
- output: 0 - 100 v at 200 m.a. max., or 0-100 m.a.
- complete short circuit protection
- completely solid state, ultra conservative design
- for calibration, production testing, potentiometric measurements, computer reference, and precision laboratory experimental work.

Write for Bulletin No. 102

PRINCETON
APPLIED RESEARCH CORP.
Box 565 • Princeton, New Jersey

range is from ± 5 percent to ± 1 percent. Voltage rating is 100 vdcw; insulation resistance, 10^{12} ohms minimum at 25 C. Price: 35 cents to \$3 per unit depending on quantity and tolerance. (382)

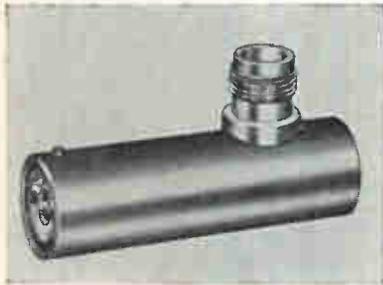


Pulsed Oscillators Designed for C-Band

TRAK MICROWAVE CORP., Tampa, Fla. Engineered for smallness and reliability are a pair of C-band plate-pulsed oscillators for radar beacon transmitters. Both operate at 5.4 to 5.9 Gc. The 9186C (illustrated) has a power output of 50 w minimum. It is $\frac{5}{8}$ in. in diameter and $2\frac{1}{2}$ in. long excluding projections. Type 2979C has a power output of 400 w minimum. It is 1 in. in diameter by 4 in. overall length, less output connector. (383)

Power Computer

OHIO SEMICONDUCTORS, 1205 Chesapeake Ave., Columbus 12, O. The Halltron model PC-523 3-phase power computer is an accurate wide band unit with rugged industrial construction and equipped with built-in output meter mounting flanges to add versatility. (384)

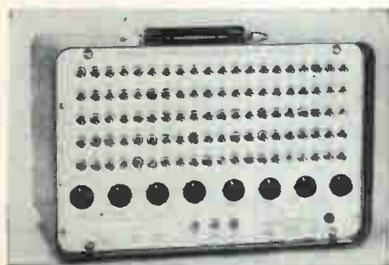

Pulse Pattern Generator Has Solid-State Design

FREDERICK ELECTRONICS CORP., 414 Pine Ave., Frederick, Md. Model 201 pulse pattern generator will generate pulses of any length from

**BOURNS
BRINGS YOU
WESCON '62**

**SAVE THIS SCHEDULE —
WATCH "WESCON '62"**

LOS ANGELES	KCOP Channel 13, 10:30-10:45 pm, Aug. 21, 22, 23
SAN FRANCISCO	KRON Channel 4, 7:00-7:15 am, Aug. 22, 23, 24
NEW YORK	WPIX Channel 11, 1:00-1:30 pm, Aug. 25

"WESCON '62, Frontiers In Electronics" is presented on TV as a service to industry by

BOURNS

CIRCLE 218 ON READER SERVICE CARD

ITECO

Powertron

**AC
POWER
SUPPLIES**

A complete line of single phase, two phase and three phase electronic power supplies with output power ranging from 3 watts to 9 KVA.

Featuring:

- Precision 400 C.P.S. output (other fixed or variable frequency ranges available).
- Regulated output voltage.
- Low distortion.
- Many standard optional features to suit your requirements.

WRITE FOR OUR NEW POWERTRON SPECIFICATION CATALOG


INDUSTRIAL TEST EQUIPMENT CO.
55 EAST 11th STREET • NEW YORK 3, N. Y.

SEE US AT BOOTH 348—WESCON—AUG. 21-24

Sumitomo

FROM SUMITOMO--

Two More Revolutionary New Products

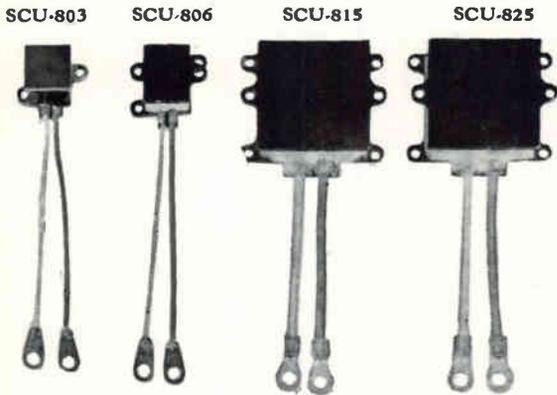

The World's First LOW CURRENT Electronic Cooling Units! Sumitomo Electric's amazing new Electronic Cooling Units — SCU-806 & SCU-803 — offer cooling functions of outstanding efficiency.


- Require such surprisingly low current, can be operated even by Dry Batteries
- Wiring much easier & simpler when installed in electronic appliances

PROPERTIES OF SUMITOMO'S ELECTRONIC COOLING UNITS

	No. of Couples	I _{opt} for ΔT _{max} (amp)	ΔT _{max} at Q=0, T _h =50°C (°C)	Q _{max} at ΔT=0, T _h =50°C (watt)	Input D.C. Voltage (v)
SCU-825	8	25	60	12	0.8
SCU-815	8	15	60	7	1.2
SCU-806	8	6	55	2.8	1.2
SCU-803	8	3	55	1.3	1.2
SCU-125	1	25	65	1.5	0.08

SUMITOMO'S Ultra-Modern DEW-POINT HYGROMETER

Through the use of a new thermoelectric element, Sumitomo's ultra-modern Dew-Point Hygrometer easily and accurately measures humidity within a wider temperature range.

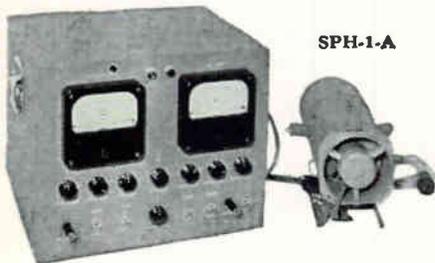

SPH-1-A

Measurement Range	Dew-Point -20°C~+50°C (Hygrometers with measurement range of up to +100°C may be specially manufactured)
Accuracy	Dew-Point ±0.2°C
Power Source	AC 100~110V 50~60 c/s Capacity: Hygrometer ab. 300W (with recorder ab. 400W)



Leaders of Today.....Pioneers of Tomorrow
SUMITOMO ELECTRIC INDUSTRIES, LTD.

Head Office: No. 15, 5-chome, Kitahama, Higashi-ku, Osaka, Japan

CIRCLE 164 ON READER SERVICE CARD

**HELP YOUR POST OFFICE
TO SERVE YOU BETTER**


by

Mailing Early In The Day!

**Nationwide Improved Mail Service
Program**

1 to 100 pulses with any combination of pulses from on and off—over 2¹⁰⁰ possible patterns. It provides three different forms of pattern outputs: NRZ, RZ, and audio tone transmission gates for generation of keyed tone and two tone patterns. It operates with a pulse spacing continuously variable from 100 millisecc to 10 μsec or from an external drive.

CIRCLE 385, READER SERVICE CARD

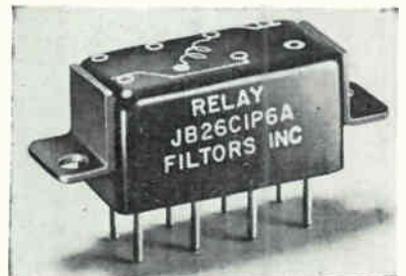

**Crystal-Can Relay
Measures 0.400 in. High**

FILTERS, INC., 30 Sagamore Hill, Port Washington, N. Y. The Demi-J half-size crystal-can relay has a standard 0.2 in. grid header, yet it measures only 0.400 in. in height. Special automated welding equipment used to seal the unit assures a consistently reliable seal, and reduces the hazards of contact contamination. Specifications: 250 mw pull-in power, 30 g vibration from 5 to 2,000 cps, 2 amp or dry circuits contacts, 150 g shock, and an ambient temperature range from -65 to 125 C. (386)



**RMS Voltmeter
Covers Broad Range**

HEWLETT-PACKARD CO., 1501 Page Mill Road, Palo Alto, Calif. Model 3400A makes possible accurate measurements of a broad range of sinusoidal or non-sinusoidal waveforms. It responds accurately to all



**Are you a
COMPLETELY INFORMED
electronics engineer?**

Today you may be working in microwaves. But on what project will you be working tomorrow? You *could* have read **electronics** this past year and kept abreast of, say, microwave technology. *There were 96 individual microwave articles between July, 1961 and June, 1962!*

But suppose tomorrow you work in some area of standard electronic components, in semiconductors, in systems? Would you be up-to-date in these technologies? Did you read the more than 3,000 editorial pages that **electronics'** 28-man editorial staff prepared last year?

electronics is edited to keep you current *wherever* you work in the industry, *whatever* your job function(s). If you do not have your own copy of **electronics**, subscribe today via the Reader Service Card in this issue. Only 7½ cents a copy at the 3 year rate.

electronics

PRODUCT
NEWS from EPL

**...nothing cheap
but the price!**

Compare performance, filtering, quality, output



EC-2
\$39⁹⁵

EC-1
\$29⁹⁵

New DC Power Supplies


Guaranteed 1 Year

They'll sell you on sight. Never before has so much value and performance been packed into a completely assembled power supply.

Auto radio... Use EC-2 for all servicing needs. Use EC-1 for "warm-up" and "check-out" or as low cost power source for FM and AM demonstrations.

Transistor portable servicing... Ideal as a hum-free DC voltage source.

Research and development work... Reliable performance for wide application in industry and laboratory.



Save bench space. Only 10¾" x 4¾" x 6½" ... use vertically or horizontally.

	EC-2	EC-1
DC VOLTAGE OUTPUT	0-16 VDC (cont. adj.)	12 VDC (adjustable)
AMPERAGE OUTPUT	0-5 ADC	0-5 ADC
RIPPLE	0.5% at 5A	0.5% at 5A
REGULATION	1.8 V/A	1.4 V/A
METER	0-20 V/O · 10A
DC IMPEDANCE	1.8 ohms	1.4 ohms
PANEL FEATURES	On-off, meter function switches. Pilot light, variable DC control, insulated binding posts, fuse, 6' cord.	4-position voltage adjustment switch, pilot light, wing nut output terminals, 6' cord.

16 OTHERS FROM 6 TO 125 VDC UP TO \$575
Write for Complete Line Catalog PS-562

Available Now at
Your Electronic
Distributor.



**ELECTRO PRODUCTS
LABORATORIES**


6125-F W. Howard, Chicago 48 (Niles), Ill.

Phone: 647-6125

Canada: Atlas Radio Ltd., Toronto

Since 1936... Pioneers in Low Voltage DC Power Supplies

2213

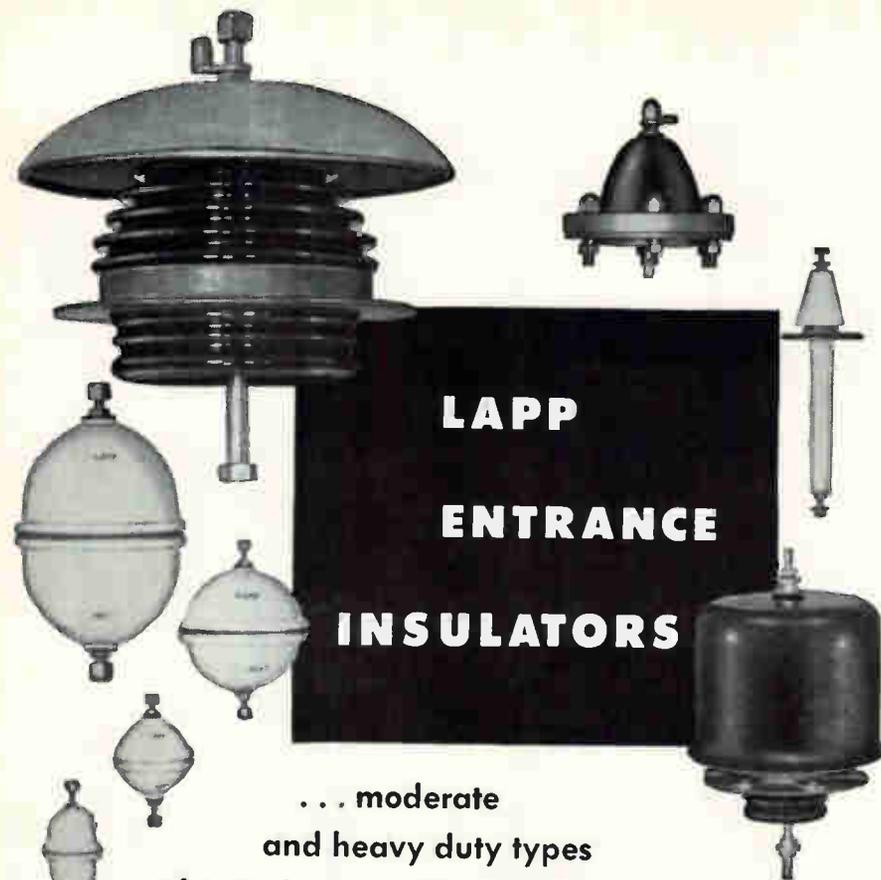

**LAPP
ENTRANCE
INSULATORS**

... moderate
and heavy duty types


... low voltage and apparatus types

A design which uses air as major insulation, with leakage path lengthened by forming porcelain into a bowl, eliminates losses which occur in ordinary types of bushings at radio frequency.


Lapp moderate duty insulators, suitable for a variety of low or medium voltage applications, are the standard type bowls for carrying leads through shields, equipment cases, walls, etc., and practically any indoor use where duty is not too severe.

Outdoor units are designed with corrugated surfaces which provide extra leakage distance for use in contaminated atmosphere. Corrosion-resistant hardware.

A wide variety of types of these insulators is now available as catalog items . . . or where requirements necessitate, on special design—for which Lapp engineering and production facilities are excellently qualified. Write for complete descriptive data and specifications. Lapp Insulator Co., Inc., Radio Specialties Division, 195 Sumner Street, Le Roy, N. Y.

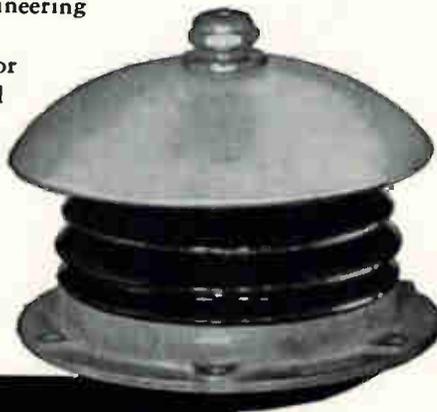


signals with a peak amplitude/rms amplitude ratio of 8:1. Accuracy is within ± 1 percent of full scale from 50 cps to 3 Mc or within ± 5 percent of full scale over its entire frequency range (10 cps to 8 Mc). Voltage range of 100 μ v to 300 v is covered in 12 ranges, with a lowest full scale reading of 1.0 mv.
CIRCLE 387, READER'S SERVICE CARD

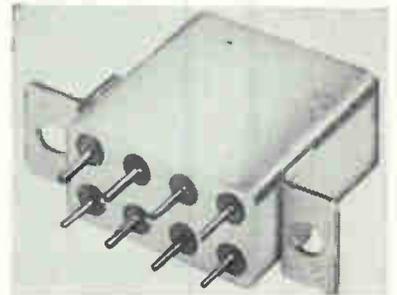

**Microminiature Relay
Failure Rate Tested**

BABCOCK RELAYS, 1645 Babcock Ave., Costa Mesa, Calif. The BR-12-S87 is backed by a demonstrated failure rate of less than 0.18 percent in 10,000 operations with a 90 percent confidence factor. Through use of gold-plated headers, the new unit is claimed capable of substantially reduced socket contact resistance in plug-in applications, and better solderability with p-c lead terminals. (388)

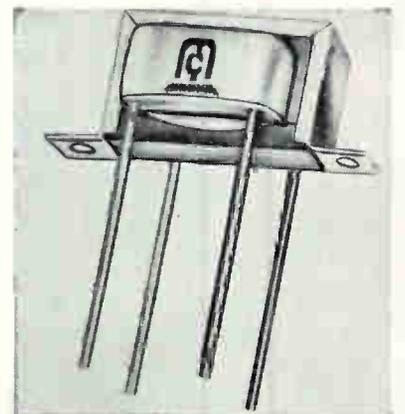


**Converter Transformers
Offer High Reliability**

MICROTRAN CO., INC., 145 E. Mineola Ave., Valley Stream, N. Y. Line of d-c/d-c converter transformers permit conversion of low voltage d-c to high voltage for operating mobile and military electronic equipment. They have d-c input voltage varying from 2.7 v to 4 v and output volt-

NOW

A
SINGLE
Q
METER

COVERS 1 kc to 300 mc . . .

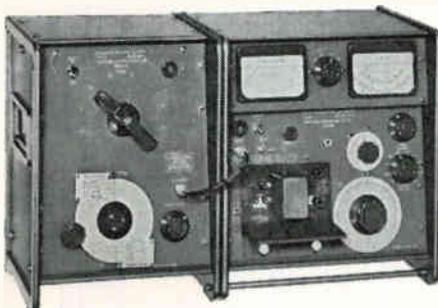

. . . with dual measuring circuits and plug-in oscillators for flexibility and reduced cost. Marconi Model 1245 has stability, high accuracy and silky smooth controls without backlash which make it a pleasure to use. Demonstration in your plant is easily arranged and can be convincing.

Q Range5 to 1000
Delta-Q25-0-25
Tuning C7.5 to 500pF
Price\$600
(Oscillators extra)

WESCON Booth #2043-44


MARCONI

INSTRUMENTS

DIVISION OF ENGLISH ELECTRIC CORPORATION
111 CEDAR LANE, ENGLEWOOD, NEW JERSEY
MAIN PLANT: ST. ALBANS, ENGLAND

CIRCLE 219 ON READER SERVICE CARD

ages of 500 v d-c. Constructions are available in either hermetic, open frame or epoxy, printed circuitry type. (389)

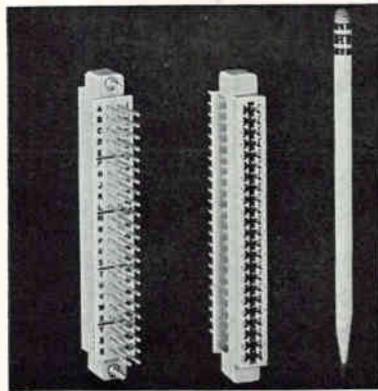

Card-Edge Connector Has Removable Contacts

ELCO CORP., Philadelphia, Pa. Series 6016 is a card-edge connector with cantilevered, bifurcated contacts. Photograph shows 46-contact model, a 23-position, double-contact connector, for use on double-sided card. Connector may also be used on a single-sided card as a 2 3-position, single-contact model. Series is designed for automatic wire wrap technique; but may also be hand-wrapped. (390)



Precision Timer Provides Two Ranges

THE A. W. HAYDON CO., 230 N. Elm St., Waterbury, Conn., has available a line of precision timers providing two adjustable timing ranges in a single 2½ in. diameter housing less than 6½ in. long. Driven by a miniature d-c motor with a high accuracy chronometric governor, the timer uses two precision clutches to obtain the required timing. Accuracy of each of the timing functions is better than 100 millisecc over the voltage range of 24-30 v d-c and temperature range of -54 C to 71 C. (391)

Precision to:
+ .0002
- .0000



Stainless Steel

PINS

in STOCK

DOWEL & TAPER
IMMEDIATE SHIPMENT

DOWEL PINS

(precision tolerance)

- Stainless steel 18-8, type 303
- Diams: .0312 through .500
- Lengths: 3/32" through 2½"
- Chamfered ends
- "Specials" manufactured promptly
- Full range raw material on hand

TAPER PINS

(commercial, precision, AN)

- Stainless 18-8, type 303. Also many in type 316 (Commercial tolerance)
- Size: 9/0 through 10 in stock
- Lengths: 3/16" through 8"
(not all lengths in all sizes.)
- "Specials" manufactured promptly, any material

PLUS all types and sizes of screws (slotted, Phillips—both magnetic and non-magnetic—hex, socket), bolts, nuts, washers, rivets, nails, keys, etc.

PHONE OR WRITE for prompt quotation or shipment. Ask for catalog.



ALLMETAL®

SCREW PRODUCTS COMPANY, INC.

Manufacturers of Stainless Fasteners Since 1929

821 Stewart Avenue, Garden City, L.I., N.Y.

Phone: 516 Pioneer 1-1200 TWX GCY 603

Midwest Division

6424 W. Belmont Avenue, Chicago 34, Illinois

Phone: 312 Avenue 2-3232 TWX CG 3185

West Coast Division—Office and Warehouse

5822 West Washington Blvd., Culver City, Calif.

Phone: 213 WEBster 3-9595 TWX LA 1472

Bay Area Sales Office

488 Lytton Ave., Palo Alto, Calif.

Phone: 327-0310 TWX PAL-AL 21

CIRCLE 167 ON READER SERVICE CARD 167




BOOTH 3706 WESCON SHOW

TWO AFFILIATED COMPANIES PROVIDE A SINGLE SOURCE FOR
SEMICONDUCTOR CLAD METALS & PARTS




Clad Metal Combinations

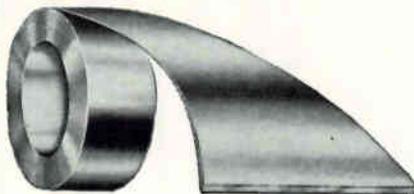

- Tin Clad Nickel
- Lead-Tin-Antimony Clad Nickel Iron
- Tin-Lead Clad Nickel
- Gold-Antimony Clad Molybdenum
- Gold-Antimony Clad Nickel Iron

Single or Double clad in continuous coils
NEW COMBINATIONS BEING DEVELOPED DAILY

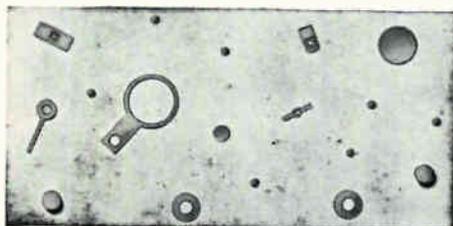

Precision Parts Fabrication

Long experience with the electronics and allied industries plus exceptional tooling facilities qualify to meet semiconductor parts requirements at low cost with complete conformity.

SPECIFY BOTH L & G AND G F

For Alloys and Clad Metals


For Precision Parts

LEACH & GARNER COMPANY / GENERAL FINDINGS INC.

For complete information on materials and parts write 52 Pearl Street, Attleboro, Massachusetts

SALES OFFICES: NEW YORK • CHICAGO • LOS ANGELES

CIRCLE 220 ON READER SERVICE CARD

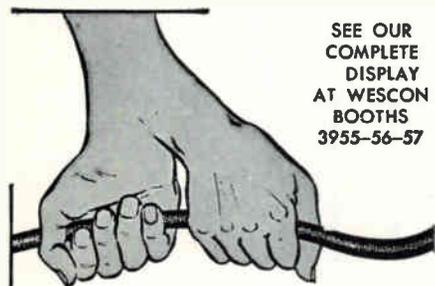

SEE OUR
COMPLETE
DISPLAY
AT WESCON
BOOTHS
3955-56-57

BETTER THAN AN EXTRA HAND

Protects your tubes and components from damage by sagging cable.

—eliminates the old bugaboo of cable entanglement which damages tubes and components in lower chassis each time the one above is withdrawn for service and returned to position.

Our new Cable Retractor's double action maintains constant tension and correct suspension of cable at all times—permits ample cable length for full extension and tilting of chassis without hazard of snagging.

For use with all types of chassis or drawer slides, adjustable to fit varying chassis lengths, simple to install, inexpensive, proven thoroughly reliable in operation.

Mounts on rear support rails on standard 1 3/4" hole increments. Cadmium plated CRS.

Write for Bulletin CR-100D Victoria 9-6821

CHASSIS-TRAK CORP.

555 FRONT STREET,

BURBANK, CALIFORNIA

TOYO CONES



**MANUFACTURERS
OF VARIOUS TYPES
OF SPEAKER CONES
ESPECIALLY
OF SPIDER TYPE**



No. 2-37, Nakano-cho, Miyakojima-ku
Osaka, Japan

phone: Osaka (351) 7791

Tokyo Office:

No. 1-589, Totsuka-machi, Shinjuku-ku
Tokyo, Japan

phone: Tokyo (341) 3522

TOYO CONEPAPER CO., LTD.

CIRCLE 221 ON READER SERVICE CARD

PRODUCT BRIEFS

TELEMETRY PREDETECTION RECORDING/PLAYBACK SYSTEM handles any type modulation. Price is \$75,000. Defense Electronics, Inc., Washington-Rockville Industrial Park, Randolph Rd., Rockville, Md. (392)

PRESSURE SWITCH for missile use. Device carries 3 amp under 35 g vibration. Servonic Instruments, Inc., 1644 Whittier Ave., Costa Mesa, Calif. (393)

TINY ELASTOMERIC MOUNTINGS for control of shock and vibration. None larger than 1 in. in largest dimension and some smaller than an aspirin tablet. Lord Manufacturing Co., Erie, Pa. (394)

SWITCH LIGHT is front relamping, front mounting. It features 4 independent MS flange base lamps with silicon rubber color filters. Controls Co. of America, 1420 Delmar Drive, Folcroft, Pa. (395)

HIGH TEMPERATURE SOLDER, new 525 alloy. It is designed to eliminate cracked glass to metal seals. Alpha Metals, Inc., 46 Water St., Jersey City 4, N. J. (396)

WIRE INSULATION saves weight, size and cost. Turbogard (patent pending) is flame-retardant. Brand-Rex Div., American Enka Corp., 31 Sudbury Road, Concord, Mass. (397)

BI-PIN CARTRIDGE LAMPS with legends and lampholders. They are designed chiefly for computers and data processing equipment. Drake Mfg. Co., 4626 North Olcott Ave., Chicago 31, Ill. (398)

D-C DIGITAL VOLTMETER is low-cost, transistorized. It has ranges of 1, 10, 100 and 1,000 v, with an accuracy of ± 0.1 percent. Dynascan Corp., 1801 W. Belle Plaine, Chicago 13, Ill. (399)

INDICATOR LIGHTS have modular construction. This facilitates servicing, replacement and rearrangement in the field. Marco Industries Co., 207 S. Helena St., Anaheim, Cal. (400)

NONLINEAR POTENTIOMETERS meet any required output function. Winding is fabricated to the exact function configuration. Duncan Electronics, Inc., 2865 Fairview Road, Costa Mesa, Calif. (401)

REDUCTION MECHANISMS, 5:1 and 10:1 units. Devices are offered in a wide variety of shaft and body configurations. National Radio Co., 37 Washington St., Melrose, Mass. (402)

STATIC FREQUENCY CONVERTERS with ultra low harmonic content. Basler Electric Co., Highland, Ill. (403)

SILICON CONTROLLED RECTIFIERS for use in power control and switching. Available with ratings of 4.7, 10 and 16 amp. Fansteel Metallurgical Corp., North Chicago, Ill. (404)

MERCURY-WETTED-CONTACT RELAYS with multiple capsules. They provide

double-, three-, and four-pole contact assemblies. Automatic Electric Co., 400 N. Wolf Road, Northlake, Ill. (405)

OCEANOGRAPHIC INSTRUMENT in a 5 in. by 6 in. carrying case. Unit measures salinity, temperature and conductivity in situ. Industrial Instruments, Inc., 89 Commerce Road, Cedar Grove, N. J. (406)

SEAWATER BATTERY SYSTEMS are miniaturized modules. The high-energy silver chloride-magnesium units are available in cylindrical and rectangular shapes. Yardney Electric Corp., 40-50 Leonard St., New York, N.Y. (407)

C-C TV CAMERA is environment-proof. Full resolution is provided up to 2,000 ft from camera to control unit. Cohu Electronics, Inc., Kin Tel Division, 5725 Kearny Villa Road, San Diego 12, Calif. (408)

FRACTIONAL H-P MOTORS guaranteed for 20,000 hr continuous duty; 25 models available. McLean Syntorque Corp., West Hurley, N. Y. (409)

PNP GERMANIUM POWER TRANSISTORS operate at a collector current of 65 amp. Several voltage ranges are offered. Minneapolis-Honeywell Regulator Co., 1015 S. Sixth St., Minneapolis 4, Minn. (410)

2 KVA A-C REGULATOR has solid state design. Two types available: rack and panel or bench. Dresser Electronics/HST Division, 555 N. Fifth St., Garland, Texas. (411)

MICROWAVE TRANSMISSION-COEFFICIENT BRIDGE for continuous oscilloscope display. It measures characteristics of passive and active networks. Dielectric Products Engineering Co., Inc., Raymond, Maine. (412)

LOCKING MECHANISMS for ball-bearing slides. They fit any packaging need. Jonathan Mfg. Co., 720 E. Walnut Ave., Fullerton, Calif. (413)

BLOWERS and filter grille assemblies. The rfi equipment meets or exceeds all requirements of MIL-I-6181D. McLean Engineering Laboratories, Princeton, N.J. (414)

MICROWAVE TEST EQUIPMENT and sophisticated system components. A variety of antenna feeds are offered. Budd-Stanley Co., Inc., 175 Eileen Way, Syosset, N. Y. (415)


R-F SHIELDED ENCLOSURES and accessories. The latter include power line filters and waveguide air vents. Shielding Division of Shieldtron, Inc., Riverton, N.J. (416)

SINGLE-POINT RESISTANCE MICROWELDER welds $\frac{1}{2}$ mil wire on 3 mil centers. Versatile device provides millisecond operation. Aerojet-General Corp., Azusa, Calif. (417)

FIVE-GALLON ULTRASONIC CLEANER with solid state transducers. The Polysonic System 320 is priced at \$499.95. Ultrasonic Industries Inc., Ames Court, Engineers Hill, Plainview, L.I., N.Y. (418)

Taber TELE-NEWS

about TELEDYNE® and TELEFLIGHT® pressure systems

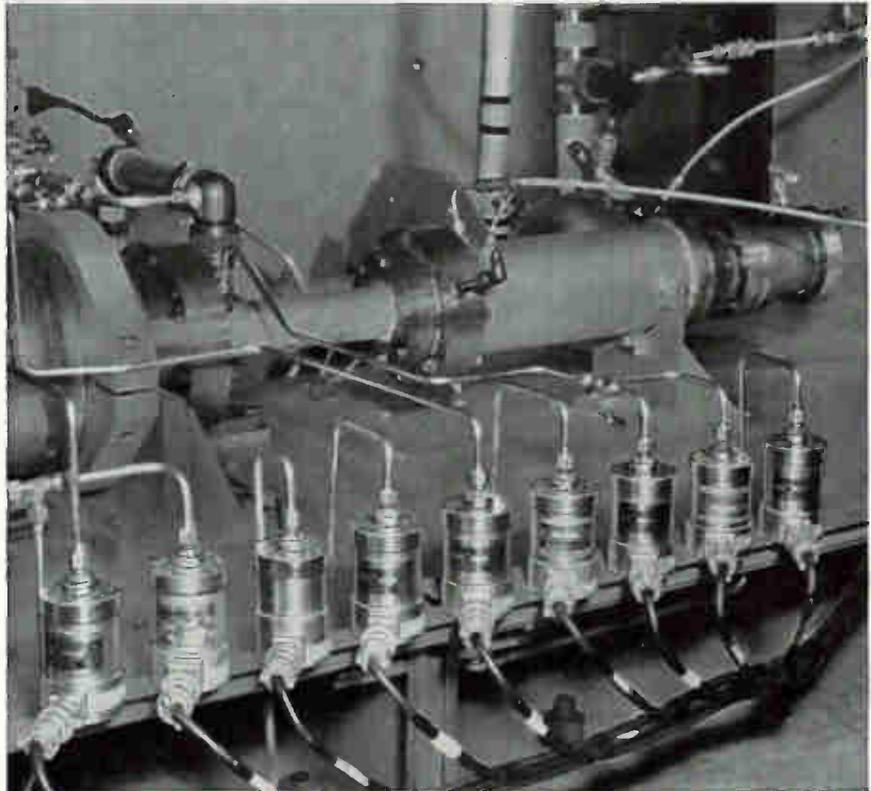

Taber Transducers play vital role in rocket research at Thiokol

Credited with the first man-safe rocket powerplant, Reaction Motors Division of Thiokol Chemical Corporation relies on Taber TELEDYNE® Pressure Transducers for research projects like the one above.

In the words of Test Instrumentation Engineers of Reaction Motors, "Taber Teledyne Transducers provide accurate, dependable data under severe environmental conditions during static testing. Their excellent reliability and compatibility with exotic propellants have enabled us to measure rocket engine parameters with a high degree of confidence."

Ideally suited to a wide variety of test, ground support, and airborne applications, Taber Bonded Strain Gage Pressure Transducers provide many performance pluses: high frequency response, infinite resolution, hysteresis of less than 0.25% full scale, and low sensitivity to temperature effects, shock or vibration.


For detailed information on Taber Transducers (in pressure ranges from 0-50 thru 0-10,000 psi), mail this coupon attached to your letterhead.

TO: TABER INSTRUMENT CORPORATION
AEROSPACE ELECTRONICS DIVISION SECTION 158
107 Goundry Street, North Tonawanda, N. Y.


Send detailed information on Taber Teledyne and Teleflight bonded strain gage pressure transducers.

name _____ title _____
company _____ dept. _____
address _____
city _____ zone _____ state _____



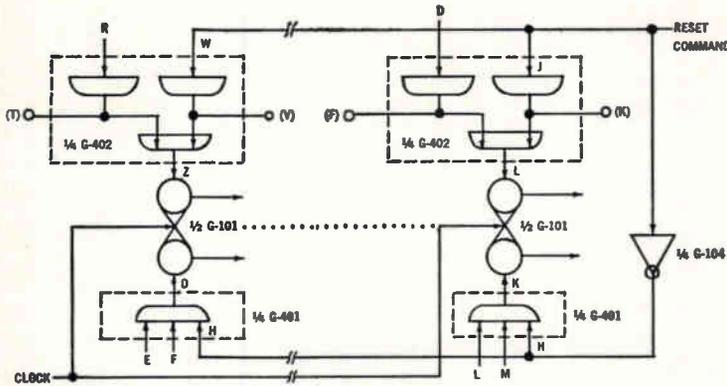

CLOCKED RESET OF A FLIP-FLOP REGISTER



Here's an economical way to provide for clocked reset in a flip-flop register operating reliably at speeds up to 10 mpps. Any number of flip-flops can be used, and all can be reset simultaneously by the single reset command.

The G-Series circuit modules required are:

- G-101, Dual JK Flip-Flop (1/2 card per flip-flop)
- G-104, Quadruple Logic Inverter B (1/4 card only)
- G-401, Universal Logic A (1/4 card per flip-flop)
- G-402, Universal Logic B (1/4 card per flip-flop)


In the circuit illustrated, the two 1/4-card sections of G-401 yield the equations $D = EFH$ and $K = LMH$, respectively; the two 1/4-card sections of G-402 yield the equations $Z = (T)R + (V)W$ and $L = (F)D + (K)J$, respectively. R, D, E, F, L, and M are normal logic inputs (viz., count, shift, etc.). (T), (V), (F), and (K) are direct connections to the gate centers of the G-402 and may be used to connect additional "And" diodes for extending an "And" portion of the logic expression.

The reset command signal feeds through one of the two "And" gates of each 1/4-card section of G-402 (W and J, as shown) and, at the same time, through the 1/4-card section of G-104 to form the H inputs to G-401. Thus, a reset signal forces the flip-flops into a reset state.

G-SERIES ECONOMY

This circuit is economical because it employs low-cost EECo G-Series extended service modules. The full economy of the G-Series family is realized when the three frequency sub-groups (10 Mpps, 500 Kpps, 25 Kpps) are used...it is not necessary to pay for higher frequency capability than is required for each system or portion of a system.

This is just one of the many practical applications of EECo G-Series extended-service digital circuit modules. We stand ready to furnish circuit modules and application data to meet your specific needs. Write, wire, or phone today.



ENGINEERED ELECTRONICS Company

1441 East Chestnut Avenue • Santa Ana, California
Kilmerly 7-5651 • Cable Address: ENGELEX

See us at WESCON, Booth 714-15.

Literature of the Week

PUSHBUTTON SWITCHES Licon Div., Illinois Tool Works Inc., 6615 W. Irving Park Rd., Chicago 34, Ill., offers a brochure on the 01 series of miniature lighted pushbutton switches. (419)

THERMOCOUPLES Hoskins Mfg. Co., 4445 Lawton Ave., Detroit 8, Mich., has available a technical report on tungsten/tungsten-rhenium thermocouples. (420)

MAGNETIC SHIELDS Magnetic Shield Div. Perfection Mica Co., 1322 No. Elston Ave., Chicago 22, Ill., offers data sheet on magnetic shields for close fit and retrofit tubes. (421)

HALL EFFECT BIBLIOGRAPHY Helipot Div. of Beckman Instruments, Inc., 2500 Harbor Blvd., Fullerton, Calif. A 10-page bibliography conveniently lists reference material on Hall effect devices. (422)

ENVIRONMENTAL TEST CHAMBERS Conrad, Inc., 141 Jefferson St., Holland, Mich., has published a 56-page catalog in looseleaf form on environmental test chambers. (423)

STATIC INVERTERS Electronic Research Associates, Inc., 67 Factory Place, Cedar Grove, N. J. Six-page bulletin provides technical details on solid-state d-c/a-c inverters. (424)

AMPLIFIER TEST CONSOLE Cohu Electronics, Inc., KinTel Div., Box 623, San Diego 12, Calif., has issued two-page data sheet on the model 111/112 amplifier test console. (425)

TRIMMING POTENTIOMETER Daystrom, Inc., Archbald, Pa., offers a data sheet on the 201 series Squaretrim subminiature trimming potentiometer. (426)

MICROWAVE CATALOG Turbo Machine Co., Lansdale, Pa., issues a catalog on fixed delay package waveguide systems and components. (427)

STRAIN GAGE RECORDING Datex Corp., 1307 S. Myrtle Ave., Monrovia, Calif. Bulletin describes a simple, reliable and economical method for recording in digital form the output of strain gages. (428)

FOIL TANTALUM CAPACITORS General Electric Co., Schenectady 5, N. Y. Bulletin covers a line of 85C, foil Tantalum capacitors. (429)

PULSE GENERATOR Servo Corp. of America, 111 New South Road, Hicksville, L. I., N. Y., offers a folder on the Servopulse model 4500 10-Mc pulse generator. (430)

FILTERS Polyphase Instrument Co., E. Fourth St., Bridgeport, Pa. Bulletin 78 is a 12-page, 2-color selection guide for LC filters. (431)

SWITCHING TRANSISTORS Radio Corp. of America, Harrison, N. J. Six-page bulletin 62S3 describes high-

reliability, double-diffused, *npn* silicon planar, very-high-speed switching transistors. (432)

SOLID-STATE TRANSDUCERS Semtran Instruments, Inc., Route 73, Industrial Center, Maple Shade, N. J. Brochure describes transducers featuring high output, stability, and low cost. (433)

CERAMIC CAPACITORS Gulton Industries, Inc., 212 Durham Ave., Metuchen, N. J. Bulletin H6 deals with the Dot series of microminiature ceramic capacitors for insertion into p-c boards. (434)

NIXIE TUBES Burroughs Corp., P. O. Box 1226, Plainfield, N. J. has published a 28-page Nixie indicator tube catalog with complete information on all Nixie tube types. (435)

POTENTIOMETERS Carter Mfg. Corp., 23 Washington St., Hudson, Mass. Series of technical data sheets describe semiprecision, precision, and custom-designed pots and potentiometric transducers. (436)

BONDING & IMPREGNATION ADHESIVE Isochem Resins Co., 221 Oak St., Providence 9, R. I. Technical data bulletin covers Isochemfil 219 system for bonding and impregnation of motor laminates, iron cores and transformers, as well as glass cloth and paper laminations. (437)

PRESSURE TRANSDUCER Columbia Research Laboratories, Mac Dade Blvd. & Bullens Lane, Woodlyn, Pa. Technical bulletin describes model 100-P pressure transducer which measures 0.005 to 4,000 psi. (438)

DIODES National Transistor Mfg., Inc., 500 Broadway, Lawrence, Mass., Bulletin E-504 is entitled "Measuring Forward Conductance and Reverse Leakage of Silicon and Germanium Diodes". (439)

MICRODENSITOMETER Hogan FAX-imile Corp., 635 Greenwich St., New York 14, N. Y. Product data bulletin No. 19 describes a rapid scanning microdensitometer. (440)


ULTRAMINIATURE CAPACITORS Aerovox Corp., 740 Belleville Ave., New Bedford, Mass. Bulletin lists design and capacity specifications of new ultraminiature capacitors. (441)

STEPPING SWITCHES Chicago Dynamic Industries, Inc., 1725 Diversey Blvd., Chicago 14, Ill., has released a catalog sheet on a 36-pole, 24 or 32-position removable wafer stepping switch. (442)

SCR POWER UNITS Electrologic Corp., 4165 W. 11th Terrace, Fort Lauderdale, Fla. Four-page brochure illustrates and describes industrial packaged scr power units. (443)

PARTICLE-MONITOR RECORDER Royco Instrument Inc., 440 Olive St., Palo Alto, Calif., has issued a leaflet on a digital-printing auxiliary for airborne- or liquidborne-particle monitor application. (444)

GLASS-TO-METAL SEALS Seal-A-Metic Co., 1 John St., Haledon, N. J., has available a data sheet on basic glass-to-metal technology. (445)

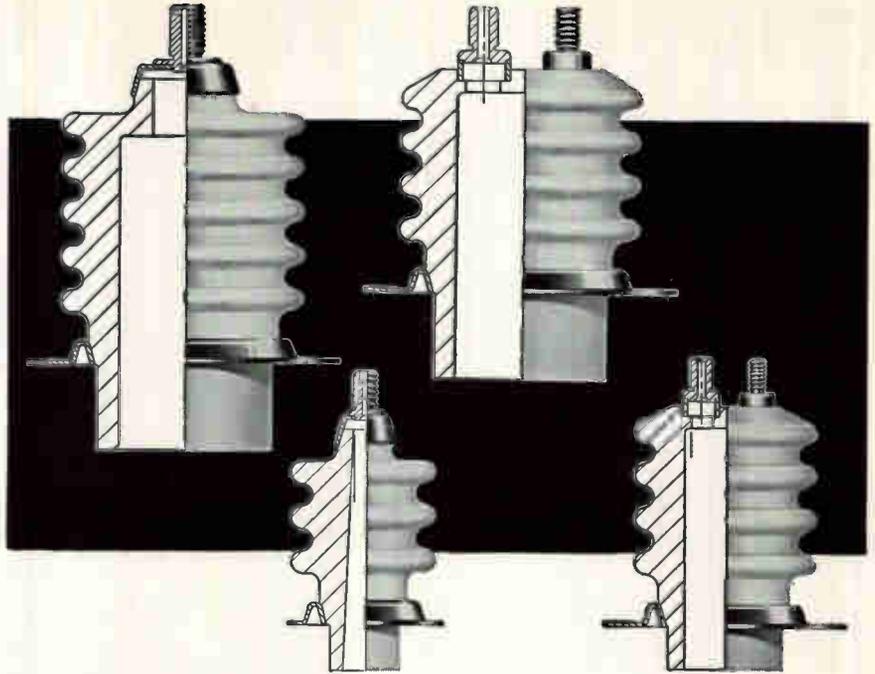

NOW a new source of technical ceramics

Here is the first completely integrated manufacturer in the East offering high alumina ceramic components for the most critical military and industrial applications.

Alberox has over 100 standard terminal bushings for use in transformers, capacitors, filters and power supplies. Alberox can often supply special bushings with tooling designed primarily for the standard line. This can pay off for you in time and cost savings.

Unique processing techniques permit standardization of high-fired 93.5% alumina composition for standard line of terminal bushings at no extra cost.


Improved design features help minimize corona and increase dielectric strength . . . assure superior quality and strength compared with the industry standard of 85% alumina content.

With the capabilities to produce the finest ceramics and ceramic-to-metal seals, Alberox can custom-engineer, develop and manufacture bushings for the ultimate in precision applications.

Learn the advantages to be gained by working with Alberox Corporation, the newest, most advanced source of high alumina ceramic components. Phone us at New Bedford: Area Code 617 995-1725.

alberox
corporation

INDUSTRIAL PARK, NEW BEDFORD, MASSACHUSETTS



I would like a copy of your FREE Catalog 362 describing your standard line of terminal bushings.

NAME _____

TITLE _____

COMPANY _____


ADDRESS _____

CITY _____ ZONE _____ STATE _____

(Meet you at the Wescon Show - Booth 3806)

BOOTH 3731

WESCON

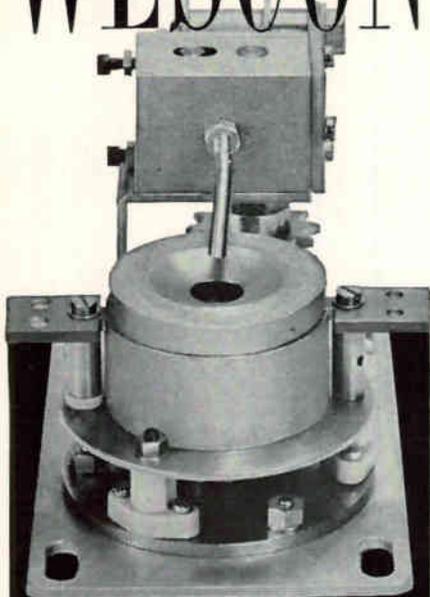

don't miss the **SPEEDIVAC** continuous feed **ELECTRON BOMBARDED SOURCE**

Now makes possible the inexpensive deposition of large quantities of alloys containing Ni, Fe, or Co. These difficult to evaporate alloys can now be deposited with controlled rate of feed.

SPEEDIVAC vacuum coating

unit To demonstrate the fast reliable evacuation of Edwards vacuum evaporators, a Speedivac coating unit will be operating at the booth.

components


Edwards, the largest manufacturer of vacuum systems and components will have representative units on display at the booth.

EDWARDS
HIGH VACUUM INC.

3279 GRAND ISLAND BLVD.
GRAND ISLAND, N. Y.

Manufacturers of the most complete line of high vacuum components and systems.

WHICH DEFLECTION YOKE FOR YOUR DISPLAY ?

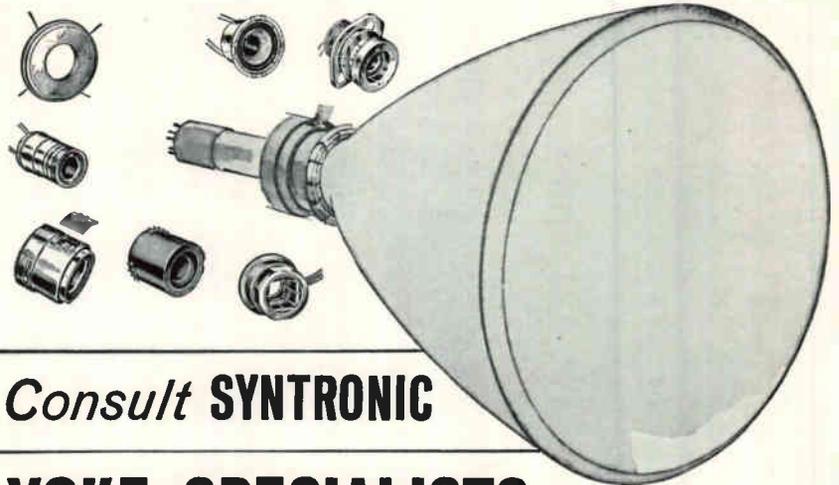

Consult **SYNTRONIC**


YOKE SPECIALISTS

Syntronic's team of experts knows more about yoke design, engineering and quality control than anyone else. A solid 10-year record of leadership—acknowledged throughout the industry. Benefit from it.

syntronic **INSTRUMENTS, INC.**
100 Industrial Road, Addison, Illinois
Phone: Kingswood 3-6444

CIRCLE 222 ON READER SERVICE CARD

VARIABLE CONDENSER



3 types, AM, AM-FM, FM.
2 gang, 3 gang, 4 gang.

PLASTIC INSULATED
VARIABLE CONDENSER

Square Sizes:
15mm., 17mm.,
20mm., 21mm.,
24mm.,

Single band,
2 band, 3 band
and for FM only.



SANKAISHA CO., LTD.

Cable address; SANESVARICON TOKYO
1425, 4-chome, Higashinakanobu,
Shinagawa-Ku, Tokyo, Japan.

CIRCLE 223 ON READER SERVICE CARD



BRESSLER ASSOCIATES
SALES ENGINEERING REPRESENTATIVES

New York State and
Northern New Jersey
GEORGE HARRIS
ENGINEERING ASSOCIATE

4808 Bergenline Avenue
Union City, New Jersey
UNion 4-9577

NY: OXford 5-3727
TWX-UN CY NJ-1367

Syracuse, N. Y.
1433 Court St.
GRanite 1-8650

CIRCLE 224 ON READER SERVICE CARD

Special Pliers for the Highly Specialized Electronics Field

When the early transmission lines were strung in this country a century ago, it was Klein Pliers in the hands of linemen that helped do the job.


Klein has kept pace with the development of the electrical field, meeting each new challenge with tools specially designed to do the wiring job better . . . more economically.

Shown here are a few of the many highly specialized Klein Pliers carried in stock to meet the needs of electrical and electronics manufacturers.

You will find your assemblies go together more smoothly and wiring is done more rapidly when the right Klein Plier is used.

SEE US AT THE WESCON SHOW
BOOTH 3519

SEE YOUR DISTRIBUTOR

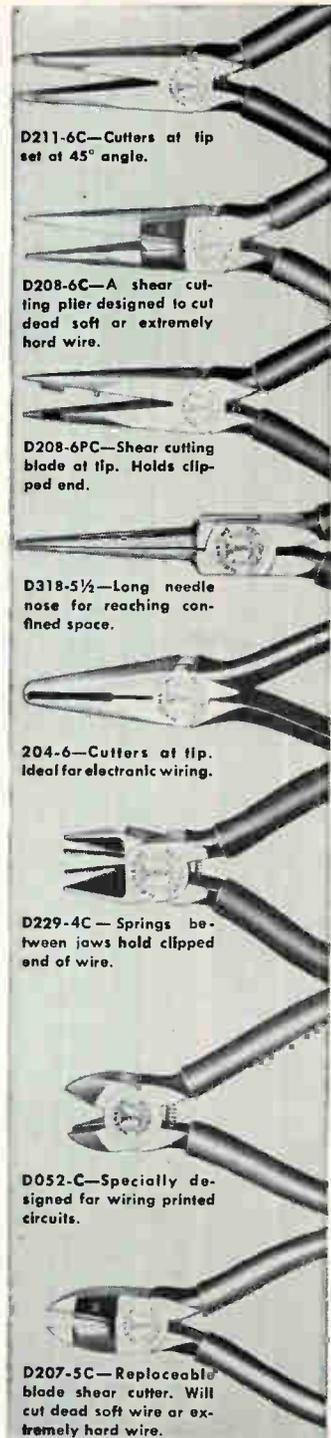

D211-6C—Cutters at tip set at 45° angle.

D208-6C—A shear cutting plier designed to cut dead soft or extremely hard wire.

D208-6PC—Shear cutting plier. Holds clipped end.

D318-5½—Long needle nose for reaching confined space.

D04-6—Cutters at tip. Ideal for electronic wiring.

D229-4C—Springs between jaws hold clipped end of wire.

D052-C—Specially designed for wiring printed circuits.

D207-5C—Replaceable blade shear cutter. Will cut dead soft wire or extremely hard wire.



Mathias KLEIN & Sons
Established 1857 Chicago, Ill., U.S.A.

INCORPORATED

7200 McCORMICK ROAD, CHICAGO 45, ILL.



Mathias Klein & Sons, Inc. 7200 McCormick Road, Chicago 45, Ill.
Please send me the Klein Plier Catalog and information.

Name _____

Title _____

Company _____


Address _____

City _____ State _____

Acme Electric


CONSTANT VOLTAGE STABILIZERS

PROTECT THEMSELVES AGAINST OVERLOAD!

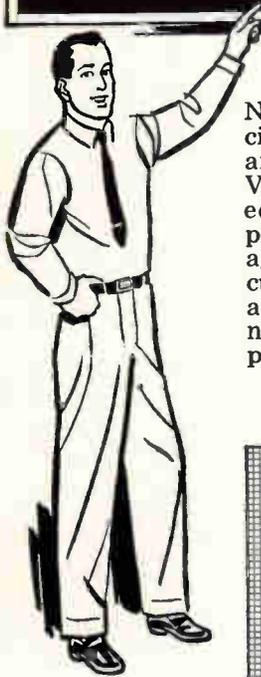

No need to "fuse" the output circuit against overload when an Acme Electric Constant Voltage Stabilizer is part of the equipment. These stabilizers provide automatic protection against overload or short circuit. When load current reaches a critical point in excess of normal operating load, the output voltage is reduced to zero.

Chart shows performance curves under various voltage inputs and current overload conditions. This current limiting is accomplished automatically.

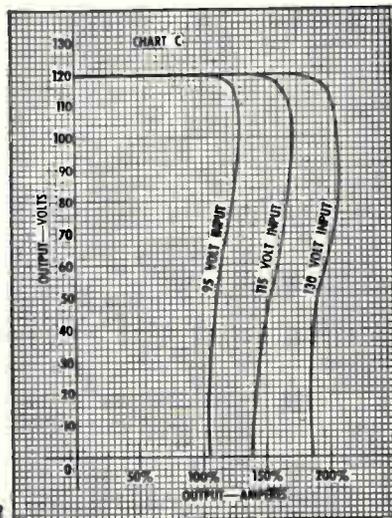

If you have ever observed the "quickness" of two cycles, 1/30 second, then you'll appreciate the speed with which these stabilizers respond to a fluctuation in line voltage.

Available in sizes from 15 to 2000 VA. Input voltage ranges 95/130, 190/260. Output voltages stabilized at 6.3, 120, 240 volts. Write for catalog 09-B01.


ACME ELECTRIC CORPORATION

318 Water St.

Cuba, N. Y.

In Canada: Acme Electric Corp. Ltd., 50 Northline Rd., Toronto, Ont.

SAA3519/1897

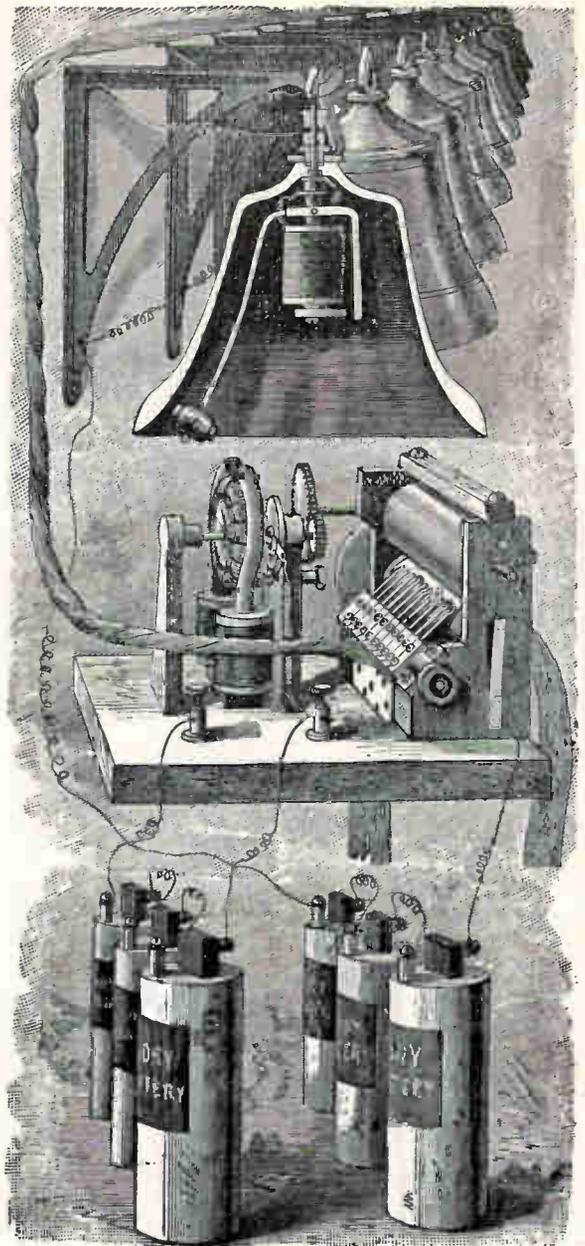

Is it ancient history

by the time you see

electronics?

Get the facts while they're new. Don't wait for **electronics** on a route slip. Look in this issue for the Reader Service Card. Fill out and mail the "for subscriptions" section. Only 7½ cents a week.

electronics

A McGraw-Hill Publication, 330 West 42nd St., N. Y. 36

electronics REPRINT SERVICE

The electronics Reprint Service Department offers these types of reprints for sale:

1. Reprints of the latest and previously published Special Reports and Feature Articles with definite costs for varying quantities. See the list below for Special Reports and Feature Articles available.

2. Bulk reprints of editorial articles in the current or past issues. (Minimum bulk order is 100 copies. Prices are not quoted because of the unknown number of editorial pages that may be requested.)

Reprints Available on Past Special Reports and Feature Articles

(Order by Key Number. Use the REPRINT ORDER FORM below.)

KEY NO.	TITLE OF REPRINT	NO. OF PAGES	ISSUE DATE	PRICE
	Medical Electronics—			
R-19a	Part I: Diagnostic Measurements	8	Jan. 20, 1961	25¢ ea.
R-19b	Part II: Diagnostic Systems and Visualization	6	Feb. 3, 1961	25¢ ea.
R-19c	Part III: Therapeutic Devices	4	Feb. 24, 1961	25¢ ea.
R-19d	Part IV: Prosthetics—Hearing Aids and Blind Guidance Devices	7	June 23, 1961	25¢ ea.
R-19e	Part V: Prosthetics—Substitute Organs and Limbs	7	July 21, 1961	25¢ ea.
R-19f	Part VI: Observing Life Processes	7	Dec. 15, 1961	25¢ ea.
R-19g	Part VII: Studying Life Processes	3	Jan. 19, 1962	25¢ ea.
	Plasma Engineering—			
R-22a	Part I: Generating and Heating Plasma	7	July 14, 1961	25¢ ea.
R-22b	Part II: Measuring Parameters	7	Aug. 4, 1961	25¢ ea.
R-22c	Part III: Practical Applications of Plasma	7	Sept. 1, 1961	25¢ ea.
R-23	What's New in Semiconductors	32	Sept. 29, 1961	*
R-24	Reference Section 1961-62 electronics Buyers' Guide	64	July 20, 1961	50¢ ea.
R-25	1961-62 electronics Buyers' Guide Product Listings/Manufacturers Index	432	July 20, 1961	\$2.50 ea.
	Lasers: Devices & Systems—			
R-26a	Part I: Principles of Functioning and Laser Materials	9	Oct. 27, 1961	25¢ ea.
R-26b	Part II: Communications, Navigation, Ranging and Undersea Applications	5	Nov. 3, 1961	25¢ ea.
R-26c	Part III: Military and Computer Applications	5	Nov. 10, 1961	25¢ ea.
	Frequency Tuning, Modulation, Demodulation and Mixing Techniques			
R-26d	Part IV: Scientific and Medical Applications; Laser Optics; Commercial Equipment	4	Nov. 24, 1961	25¢ ea.
R-27	Missile and Space Electronics	32	Nov. 17, 1961	*
R-28	Our Growing Markets	38	Jan. 5, 1962	*
	Bionics—			
R-29a	Part I: Electronics and the Life Sciences	6	Feb. 9, 1962	25¢ ea.
R-29b	Part II: Animal Sensors and Electronic Analogs	4	Feb. 16, 1962	25¢ ea.
R-29c	Part III: Brain Models and Neural Nets	5	March 2, 1962	25¢ ea.
R-29d	Part IV: Applications and New Directions	4	March 16, 1962	25¢ ea.
†R-30	Graphical Symbols for Electronics Diagrams	4	March 23, 1962	\$1.00 ea.
†R-31	1962 Electromagnetic Spectrum Chart	8	April 13, 1962	\$1.00 ea.
R-32	Modern Electronics Components	24	May 11, 1962	*
R-33	Information Storage and Retrieval	24	June 29, 1962	*

*Price: Reprints on items above are 1-10 copies, 75¢ each; 11-24 copies, 60¢ each, 25 copies or more, 50¢ each unless otherwise noted.

†One copy each of the Symbols Chart and Spectrum Chart is available at a combination rate of \$1.75. For prices of bulk orders call or write to electronics reprint department.

REPRINT ORDER FORM

For Reprints of the latest Special Report:

Information Storage and Retrieval (June 29, 1962)

Send me.....Reprints of Key No. R-33 (1-10 copies @ 75¢ ea.,
11-24 @ 60¢ ea., 25 or more @ 50¢ ea.).

For Reprints of previous Special Reports or Feature Articles fill in below:

Send me Reprints of Key No(s.) @ ¢ each. (For prices, see chart above.)

Check box Mail immediately and bill me later.

* For orders of Bulk Reprints of other editorial articles in this issue or past issues:

Send me Reprints of page no(s.) of issue date
of article entitled

* Minimum bulk order 100 copies. You will be advised of costs by return mail.

Name.....

Number and Street.....

City, Zone No., State.....



*Fill in,
Clip Out
coupon,
insert into
envelope and
mail to*

electronics

READER SERVICE
330 W. 42nd Street
New York 36, N. Y.

Duncan: WESCON's Galloping Chairman

LOS ANGELES—Chairman of the 1962 WESCON Board is Donald C. Duncan, energetic and affable president of Duncan Electronics and long acknowledged as one of the nation's top authorities on potentiometers.

Duncan has exhibited an intense interest in West Coast industry affairs resulting in his holding in rapid succession such posts as secretary, treasurer, vice chairman, and a director of WEMA. In 1958 he was elected president of the association, and a year later became director of WESCON. His appointment as board chairman this year was the natural culmination of his four-year tenure on the board.

EARLY YEARS—Born at State College, Pa., in 1918. Don grew up near the Penn State campus—where his father was a professor of physics—and matriculated there in 1936. He had completed several engineering courses while still in high-school, and left the campus as a double-degree graduate (EE and ME).

He worked as a test engineer for GE until the outbreak of World War II, when he was "loaned" to the Navy Bureau of Ships, Electrical Section, in Washington, D. C. Five years later he had achieved the rank of senior engineer.

Moving to California he teamed up with Arnold Beckman, a Cal Tech professor whose pH meters were finding an increasing number of applications throughout agriculture and industry. Working his way up from sales manager of the Helipot division of Beckman Instruments, he became vice president and general manager in 1951. Under Duncan's management, Helipot grew from a 100-man organization to one with well over 1,000 employees and branch offices in New Jersey and Canada.

His new company, formed two years ago, still manufactures potentiometers under some of the Helipot patents, and has pushed for-



ward the technology of several new areas.

Commenting on the rapid increase in formation of new companies within the industry, Don states that many capable engineers are being forced into administrative positions when they should be working at what they can do best—engineering. "On the other hand," he points out, "the manager of any electronics company must stay close to engineering to be effective".

WESCON'S ROLE — Now that WESCON has attained the status of one of the country's largest trade shows, Don visualizes it as an increasingly important medium for disseminating information among all facets of industry as well as to the public, and financial and governmental groups.

"WESCON provides a meeting place where exhibitors can display their wares," he observes, "but more importantly, it provides the

opportunity to familiarize ourselves with the needs of our customers and to observe what others are doing in similar areas. In a fast-moving industry where we have to keep informed or fall by the wayside, WESCON's job is to provide the best possible atmosphere for exchanging information on all levels."

With the separation of trade exposition and technical program, he believes that the proper emphasis can be placed on both activities.

Don's energy and diversity of interests extend to his two-acre, Santa Ana ranch situated on a hill overlooking Newport Beach where he leads an active family life with his wife Janet and their three daughters. His hobbies include wood-working, gardening, and animal husbandry. His efforts in the third category focus primarily on four horses and a mule, a variety of dogs, cats, chickens, geese, mallard ducks, parakeets, fish, and a spirited young steer named Martini.

Duncan Electronics is one of the

McCoy

CRYSTALS & CRYSTAL FILTERS

Regardless of its size, type, or frequency any crystal bearing the name



can be relied upon to deliver the ultimate in frequency control despite wide temperature variations and extreme conditions of shock and vibration.



MICRO MODULE CRYSTALS (GLASS)

SHOWN ACTUAL SIZE

This vacuum sealed, hard glass crystal unit was developed and designed for use with the RCA micromodule wafer shown above. Available in frequencies ranging from 10 mc to 200 mc, the type MM crystal provides electronic miniaturization programs with a reliable evacuated crystal enclosure of excellent stability.




M-1 (HC-6/U)

The crystals that made the name of McCoy a synonym for quality. Metal encased, HC-6/U size is available in frequencies from 500.0 kc to 200.00 mc.


METAL ENCASED STANDARD SIZE AND MINIATURE CRYSTAL UNITS

SHOWN ACTUAL SIZE



M-21 (HC-25/U)
M-20 (HC-18/U)


Fills the need for miniature crystals in frequencies from 2.5 mc to 200.0 mc. Meets specs MIL-C-3098C and ARINC No. 401.



G-1 (Military HC-27/U)

ALL GLASS STANDARD SIZE AND MINIATURE CRYSTAL UNITS

SHOWN ACTUAL SIZE



G-21 (Military HC-29/U)
G-20 (Military HC-26/U)

This vacuum sealed, hard glass crystal unit possesses all of the quality features for which the McCoy M-1 is so famous. It has long term frequency stability five times better than the conventional metal types. Available in frequencies from 1000 kc to 200 mc.

This vacuum sealed, hard glass crystal unit meets the new CR-73/U and CR-74/U specifications. It has long term frequency stability five times better than the conventional metal type. Available in frequencies from 5000 kc to 200 mc.



CRYSTAL FILTERS

McCoy crystal filter engineering and production capabilities are among the finest in the world and constantly in demand by industry, the military, and everyone searching for quality. A complete technical staff stands ready at all times to discuss your filter requirements. Many standard models are available without costly design and prototype charges.

The following chart shows bandwidths available in specific frequency ranges (expressed as % of center frequency).

Frequency	B.W.
1 mc to 30 mc	.01% to 4.0%
30 mc to 75 mc	.001% to .04%
up to 125 mc	up to .01%

SELECTIVITY CURVES

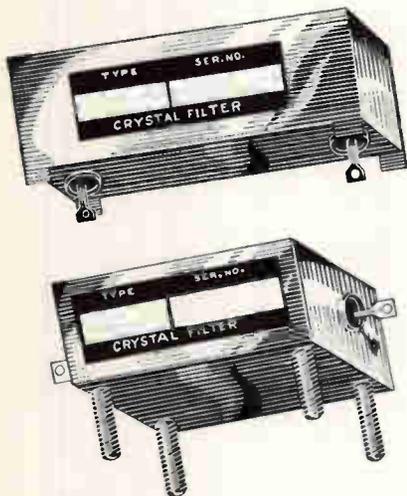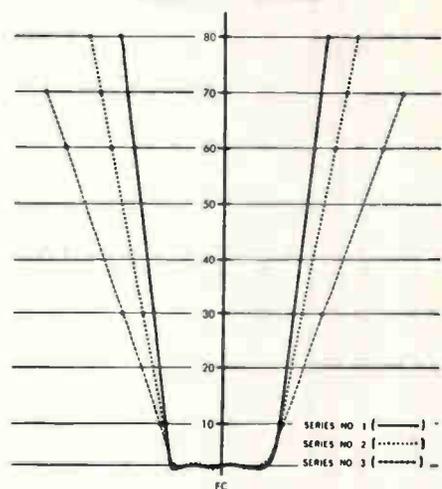

SEE THE NEW **McCoy**

HIGH-FREQUENCY CRYSTALS AND CRYSTAL FILTERS

at BOOTH No. 2087
WESCON SHOW
LOS ANGELES SPORTS ARENA
AUGUST 21-24

McCoy


ELECTRONICS CO.
Dept. 1862
MT. HOLLY SPRINGS, PA.
Phone: HUNter 6-3411
Area Code: 717

SUBSIDIARY OF OAK MANUFACTURING CO.



Write today for our free illustrated catalogs which include complete listing of MIL-C-3098C military specifications. For specific needs, write, wire or phone. Our research section is anxious to assist you.

SWEENEY MODEL SWE-1125
STATIC METER

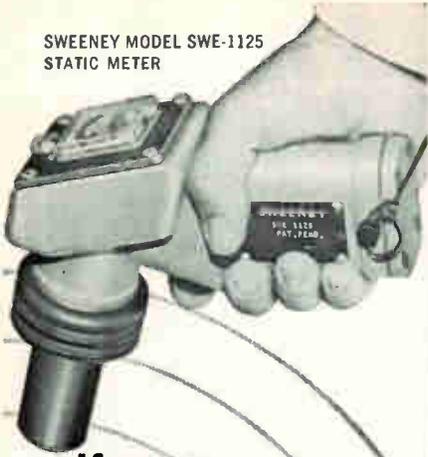

If your target is the detection of **STATIC ELECTRICITY** that exists between improperly grounded or bonded objects, your answer is the

SWEENEY

MODEL SWE-1125

STATIC METER

WRITE FOR AMMUNITION!

**B. K. SWEENEY MFG. CO.
DENVER 16, COLO.**

very few companies in the industry to sport a hitching post near the executive parking area. When the mood strikes, Don saddles up and gallops off to work.



**Tellerman Assumes
New Tempo Position**

JACOB TELLERMAN has been named chief engineer and director of development for the newly-established Systems division of Tempo Instrument Inc., Plainview, L. I., N. Y. He was formerly responsible for advanced digital techniques on the engineering staff.

Before joining Tempo, Tellerman was supervisor of computer development for American Bosch Arma.



**General Electric
Promotes Dickerson**

ARTHUR F. DICKERSON has been named manager of advanced engineering for the Advanced Product Planning Operation (APPO) of General Electric's Electronic Components division in Schenectady, N. Y.

Formerly advance project planning manager for the operation, Dickerson replaces James D. Keister who transferred to the com-

**"Diamond H" Series W
Gives You**

**More Relay
... 25 amps!**



More Circuits!

TYPE	DIAGRAM	CODE
SPDT/Z		Z
DPDT/Z		2Z
SPDT/C		C
DPDT/C		2C
SPST/NO		X
DPST/NO		2X
SPST/NC		Y
DPST/NC		2Y

a-c or d-c units available

**More Plug-In Relays
... in less space!**



For more complete information on Series W general-purpose Relays, write for Bulletin WU-09 which gives complete data, specifications, applications and illustrations.

The **HART**

Manufacturing Company
202 Bartholomew Avenue
Hartford 2, Connecticut
Phone: JACKSON 5-3491




CIRCLE 225 ON READER SERVICE CARD

pany's Defense Systems department.

IFI Names Zolides Plant Manager

WILLIAM H. ZOLIDES has been appointed plant manager of Instruments For Industry, Inc., Hicksville, N. Y. He will be responsible for production, quality control, procurement, and plant engineering.

Before joining IFI, Zolides was associated with Potter Instrument Co., The Liquidometer Corp., Norden-Ketay Corp., and Chance-Vought Aircraft Corp.



Micro-Radionics Hires Chief Engineer

OLIVER R. PRICE has been named chief engineer of Micro-Radionics, Inc., Van Nuys, Calif., manufacturer of precision microwave components and test equipment.

Before taking this post, Price was project engineer, heading the advanced studies section, of Hughes Aircraft Research and Development Laboratories.



Elect Schwartz to Burmec Board

MISCHA SCHWARTZ, acting head of electrical engineering department

August 10, 1962

Waugh MAGNETIC FREQUENCY DIVIDER

For


**COUNTING
DIVIDING
TIMING
PROGRAMMING
CONTROLLING**

NEKAY counter elements, comprised of pulse standardizers, counters and amplifiers, operate on the principle of incremental saturation of a square loop magnetic core. The units perform frequency division functions in a smaller space and at lower cost than conventional transistor circuitry.

FEATURES:

- Field adjustable in whole number increments from 3 to 11
- Low idle power
- High count to volume ratio
- Small size — 0.6 cu. in. per counter element
- Minimum number of components
- Rugged design for severe environmental conditions

APPLICATIONS

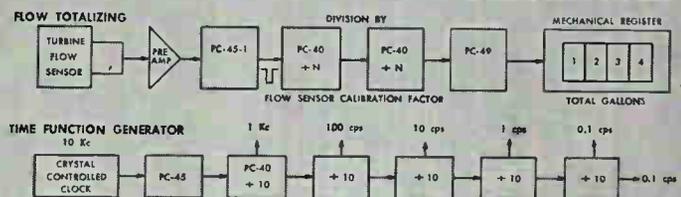

SPECIFICATIONS

PC-40 COUNTER

Input: dc to 7 kc*
Output: positive or negative floating pulse with 25 volt min. amplitude, 50 μ s pulse width and 100 ohm internal impedance
Size: 1.0" x 1.0" x 0.6"

*100 KC Available as Special Option

PC-45 STANDARDIZER

Input: approx. 5 v peak with rise time of 3 μ s or less and min. of 15 μ s duration.
Output: Same as PC-40
Size: 1.2" x 1.4" x 0.6"

PC-49 AMPLIFIER

Input: Furnished by output of PC-40
Output: Solid state switch closure of 30 ms width and 1 amp. max. capacity
Size: 1.5" x 1.8" x 0.8"

Waugh

ENGINEERING DIVISION

THE FOXBORO COMPANY

7740 LEMONA AVENUE, VAN NUYS, CALIFORNIA • STATE 2-1710

For complete information request Bulletin 119

SEE US AT WESCON BOOTH 3614

CIRCLE 179 ON READER SERVICE CARD

179


with Ford Instrument Co., named operations mgr. of the Defense Products div. of Fairchild Camera and Instrument Co. Wayne A. Burnett elevated to director of technical planning and Robert L. Riddle succeeds him as head, Electronic Systems dept. at HRB-Singer, Inc. William R. Sweeney, formerly with SoundScriber Engineering Corp., elected v-p, government operations, of Daystrom, Inc. John F. Emhardt, president of Ken Metal Industries, Inc., elected a member of the board of Volkert Stampings, Inc. Babcock Electronics Corp. advances Alden C. Packard to g-m of the Military Products div. Arthur Goldsmith, formerly with Wilcox Electric Co., appointed senior staff engineer at the Chicago Center, Motorola Military Electronics div. Robert E. Swift, until recently with Sprague Electric Co., named v-p and g-m of Genistron of Illinois. Harold E. Felix leaves Midwestern Instruments to join the Martin Co. Space Systems div. as a principal staff engineer. Leonard D. Seader, from Granger Associates to Applied Technology, Inc., as a project engineer.



Wescon Exhibitors And Booth Numbers

A

ADC Products	3405
AMP INC.	537, 539, 635, 628
APM-HEXSEAL Corp.	602
Abbott Instrument & Engineering Co.	3625
Ablestik Adhesive Co.	3743
Abseco Industries	3532
Accurate Instrument Co.	3601
Ace Electronics Associates, Inc.	324, 325
Ace Engineering & Machine Co., Inc.	222
Advanced Technology Laboratories	3610
Ad-Yu Electronics Lab., Inc.	3550
Aerojet-General Corp.	3817-3818
Aero Service Corp.	431-A
Aerovox Corp.	2032
Airborne Instruments Laboratory	650-651
Airpax Electronics Inc.	601
Alddin Electronics	321
Alberox Corp.	3896
Alford Manufacturing Co.	3631-3632
Alfred Electronics	609
Allen-Bradley Co.	405-408
Allied Chemical Corp.	3750-3752
Allison Laboratories, Inc.	3424
Alloys Unlimited, Inc.	3310
Alpha Metals, Inc.	3510
Alpha Wire Corp.	3821-3822
Amco Engineering Co.	3713
American Electrical Heater Co.	3518
American Electronics Labs., Inc. (AEL)	3044
American Sealants Co.	3314
American Optical Co.	3025-3028
American-Standard	3150
Amperex Electronic Corp.	3442 and 3443
Ampex Corp.	1028-1034

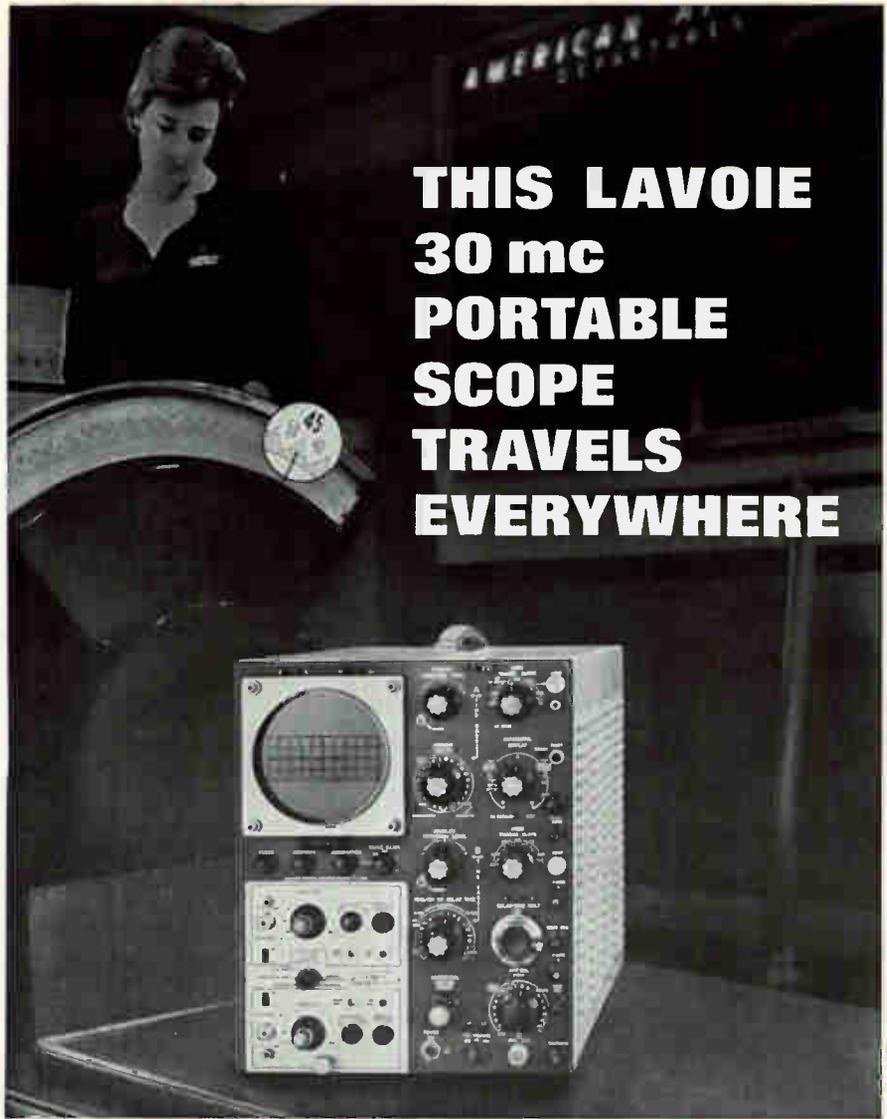

THIS LAVOIE 30 mc PORTABLE SCOPE TRAVELS EVERYWHERE

Model LA-285 \$1485.
Weight 45 lbs. as shown.

Wherever it goes, the new Lavoie LA-285 portable oscilloscope provides a full range of test capabilities. A frequency response of DC to 30 mc and a rise time of only 12 nanoseconds, it has two versatile time bases for a choice of sweeps from 0.02 microseconds per centimeter to 12 seconds per centimeter with a wide range of sweep delay periods. For calibration, portions of the sweep may be magnified and intensified.

This remarkable instrument will operate over a range of line voltages from 95 to 135 volts and is available for 60 to 400 cps use.*

It will accept plug-in heads from other Lavoie oscilloscopes, as well as heads from scopes of other manufacturers.

Ideally suited for rapid transport in plant, on flight line or shipboard, it can be easily handled by one man. The only portable oscilloscope (12" x 15" x 20") with all of these features plus 10 KV CRT accelerating voltage, it is a truly universal laboratory or field tool.

*Special

Write today for complete technical details and specifications.

Lavoie Laboratories, Inc.

MORGANVILLE, NEW JERSEY • LOWELL 6-2600 • TWX MW-1250

Since 1939, one of America's leading manufacturers and designers of: Oscilloscopes, Spectrum Analyzers, Frequency Standards, Frequency Comparators, Pulse Generators, Digital Counters, Automatic Test Equipment.

See Lavoie at Wescon Booth 451.

ADJUSTABLE PRECISION POLYSTYRENE CAPACITORS



**.01% ACCURACY
HERMETICALLY
SEALED**

**1st choice for
Critical Applications**

SOUTHERN ELECTRONICS hermetically sealed precision adjustable capacitors are being used for many applications in analog computers, network tuning circuits, differential analyzers, and similar circuitry requiring the utmost in accuracy and reliability.

SEC has pioneered in the design and manufacture of hermetically sealed adjustable capacitors, and this experience has resulted in a .01% accuracy standard, and a degree of in-circuit reliability not previously available. SEC adjustable capacitors incorporate features proven to be years ahead of any comparable product now available.

GENERAL SPECIFICATIONS

- Adjustment Range: $\pm 1\frac{1}{2}\%$
- Dielectric Absorption: 0.02%
- Available from .01 mfd. to 10 mfd.
- Accuracy: .001%
- Long Term Stability: 0.03%
- Temperature Coefficient: -100 PPM per °C
- Temperature Range: -40°F to +140°F



Write today for complete specifications and general catalog.

**SOUTHERN
ELECTRONICS
Corporation**

150 West Cypress Ave., Burbank, California

Amphenol-Borg Electronics Corp.	919-925
Anadex Instruments, Inc.	3049
Analab Instrument Corp.	3447
Anchor Plating & Tinning Co., Inc.	3533
Andrew Corp.	412-413
Anetsberger Brothers, Inc.	3531
Antenna & Radome Research Associates (ARRA)	3409
Antlab, Inc.	3643
Applied Development Corp.	3211
Applied Physics Corp.	3215
Arco Electronics, Inc.	103
Arnold Engineering Co.	2121-2123
Arnold Magnetics Corp.	3209
Artos Engineering Co.	3919-3920
Assembly Products, Inc.	452-453
Associated American Winding Machinery, Inc.	3511-3512
Astro-Science Corp.	3644
Astrodata, Inc.	2041-2042
Astron Corp.	220
Atlas Precision Products Co.	3502-3503
Atohm Electronics	216-217
Augat Inc.	2060
Auto Data	3247
Automatic Electric Sales Corp.	2004-2005
Automatic Metal Products Corp.	703
Automation Development Corp.	221
Avco Corp.	3221-3224
Aviel Electronics, Inc.	3633
Avnet Corp.	1013, 1014, 1015

B


B & K Manufacturing Co.	3408
Babcock Electronics Corp.	3249-3250 3450
Baird-Atomic, Inc.	3618-3619
Ballantine Laboratories, Inc.	3433
Barber-Colman Co.	228-229
Barnes Engineering Co.	2051-2052
Baron Industries	3346
Bausch & Lomb Inc.	3704
Beattie-Coleman, Inc.	409-410
Beckman Instruments, Inc.	2108-2113
Behlman-Invar Electronics Corp.	755-756
Belden Manufacturing Co.	3901-7602
Arvin Bell Co.	3129
F. W. Bell, Inc.	3822
Bender Publications, Inc.	3833
The Bendix Corp.	832-838
Bird Electronic Corp.	815-816
The Birther Corp.	345
Bliley Electric Co.	2026
Blue M Engineering Co.	3547-3548
Boesch Manufacturing Div.	3918
Boonton Electronics Corp.	540-541
Boonton Radio Corp.	556-557
Borden Chemical Co.	3555
Borg-Warner Controls	3819-3820
Bourns, Inc.	455-457
Bowmar Instrument Corp.	845-848
Bradley Semiconductor Corp.	3043
W. H. Brady Co.	3728-3729
Brand-Rex Division, American Enka Corp.	3528
Branson Corp.	3235
Branson Instruments, Inc.	3509
The Bristol Co.	854-855
Brown Engineering Co., Inc.	3112
Buchanan Electrical Products Corp.	205
Buckbee Mears Co.	3732
Burgess Battery Co.	710
Burdv Corp.	942-944
Burr-Brown Research Corp.	225
Burroughs Corp.	1017-1018
Burton Silverplating Co.	3703
Bussmann Mfg. Division, McGraw-Edison Co.	611

C

CBS Laboratories	112
CI Industries	3912
C & K Components, Inc.	2020
Calibration Standards Corp.	3023
California Instruments Corp.	3238
California Technical Industries	721-722
Calvert Electronics Inc.	3841
Camblock Corp.	3219
Cambridge Scientific Industries, Inc.	3337
Cambridge Thermionic Corp.	411
Camloc Fastener Corp.	3726-3727
Cannon Electric Co.	2054-2056
Capitol Radio Engineering Institute	3843
Carstedt Sales Corp.	812
CELCO, Constantine Engineering Laboratories Co.	3008
Central Vacuum Corp.	3545
Centre Circuits, Inc.	3343
Ceramaseal, Inc.	3243
Chaleo Engineering Corp.	3332
Chicago Dynamic Industries, Inc.	454
Chicago Telephone of California, Inc.	3029
Christie Electric Corp.	219
Cimron Corp.	3046
Cinch Manufacturing Co.	2169-2172
C. P. Clare & Company	2037, 2038
Clark Semiconductor Corp.	3145
Clauser Technology Corp.	3214
Clevite Corp.	821, 822, 823, 824
Sigmund Cohn Corp.	3739
Coil Winding Equipment Co.	3701-3702
Coleman Electronics, Inc.	3432-3433
Collins Electronics, Inc.	3130
Collins Radio Co.	3119-3120
Columbus Electric Manufacturing Co.	3111
Comar Electric Co.	820
Comineo Products, Inc.	3528

WOG

manufacture
over
100
thousand
different
COAXIAL
CONNECTORS

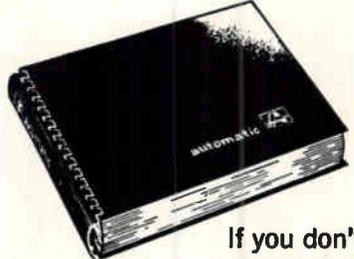

If you don't believe us, count them yourself!



automatic
METAL PRODUCTS CORPORATION

Leaders in the design and manufacture of coaxial connectors and components

323 Berry Street, B'klyn 11, N. Y.
Telephone: EVergreen 8-6057

AT THE WESCON SHOW-BOOTH 703

EICO®

**PUTS THE BEST IN
CREATIVE ELECTRONICS
INTO YOUR HANDS**

Send for
FREE
Catalog



28 pages of professional electronic equipment in kit and wired form—for Lab...Line...Home

EICO, 3300 N. Blvd., L.I.C. 1, N. Y. E-8A
 Send free 32-page catalog & dealer's name.
 Send new 36-page Guidebook to HI-FI for which I enclose 25¢ for postage & handling.


Name _____
 Address _____
 City _____ Zone _____ State _____

EICO 3300 N. Blvd., L.I.C. 1, N. Y.
 Export Dept., Roburn Agencies
 431 Greenwich St., N. Y. 13, N. Y.

See EICO at WESCON BOOTH 3035
CIRCLE 236 ON READER SERVICE CARD

MICO

DESK AND DOOR PLATE ENGRAVER

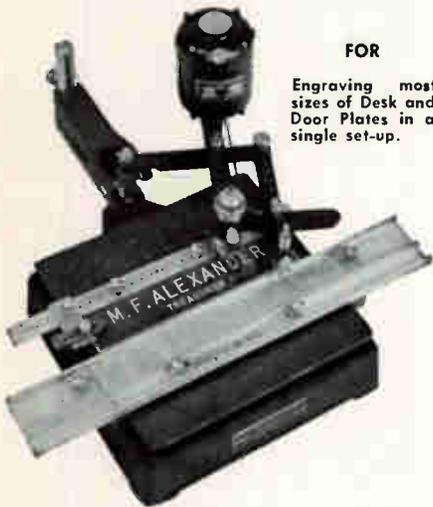

FOR
 Engraving most sizes of Desk and Door Plates in a single set-up.

FEATURES

1. Six pantograph ratios—from 1.5:1 to 4:1.
2. Spindle has integral micrometer depth control of .250".
3. Uses standard tapered-shank engraving cutters.
4. New 19" Copy carriers hold 17" of master copy: Permits engraving about 11" line of characters in one set-up at the 1.5:1 ratio.
5. Three sizes of copy carriers available. Each positioned separately.
6. Work-holding fence speeds set-up and engraving time.

Send for illustrated Catalog

MICO INSTRUMENT CO.

77 Trowbridge St. Cambridge 38, Mass.

CIRCLE 227 ON READER SERVICE CARD

August 10, 1962

Compo Shoe Machinery Corp.	3344
Computer Control Co., Inc.	2085-2086
Computer-Measurements Co.	607, 608
Conrad, Inc.	912
Consolidated Avionics Corp.	3649
Consolidated Electro-dynamics Corp.	1006-1010
Continental Connector Corp.	3609
Control Dynamics Corp.	3011
Controls Co. of America.	856-858
Cool-Fin Electronics Corp.	3446
Coors Porcelain Co.	2165-2166
Cornell-Dubilier Electronics	809-811
Corning Glass Works	312, 313
Costello & Co.	2053
Craig Corp.	349
Crucible Steel Co. of America.	206-207
Crystalonics, Inc.	3220
Cubic Corp.	716-717
Curtiss-Wright Corp.	3622-3623
Custom Materials, Inc.	3922

D


Dage Electric Co., Inc.	2057, 2058
Dale Electronics, Inc.	901, 902
Datapulse, Inc.	3418
Daven Division, General Mills, Inc.	940, 941
Daystrom, Inc.	735-739, 827-831
Dearborn Electronic Laboratories, Inc.	2144
The Decker Corp.	110-111
Defense Electronics, Inc.	3137
Deleo Radio Div., General Motors Corp.	916, 917
Delevan Electronics Corp.	3216
Delta Design, Inc.	309
Delta Semiconductors, Inc.	3201
Delta Sonics, Inc.	3014
DeMornay-Bonardi.	2045, 2046
Dempa Shimbun, Inc.	3451-3455
Despatch Oven Co.	3544
Device Seals, Inc.	3448
Dewco Sales, Inc.	2034
Dexon, Inc.	3533
Dialight Corp.	948, 949
Philip Diamond Enterprises.	3803
DI/AN Controls, Inc.	3033
A. B. Dick Co.	3634, 3635
Dielectric Products Engineering Co., Inc.	3415, 3416
Diginamics Corp.	3417
Digital Equipment Corp.	3240, 3241
Digital Systems, Inc.	3116
DIT-MCO, Inc.	3639, 3640
The Doall Co.	3709-3710
Douglas Microwave Co., Inc.	932
The Dow Chemical Co.	3522
Dow Corning Corp.	3905-3907
Drake Manufacturing Co.	3327
Dressen-Barnes Corp.	415-416
Wilbur B. Driver Co.	3550
Driver-Harris Co.	3008
Duncan Electronics, Inc.	3403
E. I. duPont de Nemours & Co. (Inc.)	3538, 3539
	3734, 3735
DYMEC, A Division of Hewlett-Packard Co.	554-555
DYMO Industries, Inc.	3913
Dynamic Gear Co., Inc.	619
Dynamics Corp. of America.	906-908
Dynasales Co.	3047
Dytronics Co., Inc.	3919

E

E-H Research Laboratories, Inc.	3811, 3812
El-Tek, Division of El-Tronics, Inc.	3205
EML/US Ltd.	3123-3124
ESC Electronics Corp.	808
Eagle Signal Co.	3048
Eastern Industries, Div. of Laboratory for Electronics, Inc.	436, 437
Edgerton, Germeshausen & Grier, Inc.	310, 311
Jackson Edwards Co.	322, 323
Eitel-McCullough, Inc.	748-750
Elastic Stop Nut Corp. of America	3534, 3535
Elec Corp.	910-911
Electra Manufacturing Co.	352, 353
The Electrada Corp.	3807
Electralab Printed Electronics Corp.	3637
Electrical Industries	612
Electro Devices, Inc.	3712
Electro Engineering Works	701
Electro Instruments, Inc.	2021-2023
Electro Scientific Industries, Inc.	2001-2003
Electro Switch Corp.	3229
Electronic Associates, Inc.	441, 442, 1005
Electronic Enclosures, Inc.	3953, 3954
Electronic Engineering Co. of Calif.	712-715
Electronic Equipment Engineering	3836
Electronic Instrument Co., Inc. (EICO)	3035
Electronic Measurements Co., Inc.	3419, 3420
Electronic News	3830
Electronic Plating Service, Inc.	3004
Electronic Processes Corp.	122
Electronic Reserch Associates, Inc.	1019
Electronic Seals Co., Inc.	3638
Electronic/Sources	3831
ELECTRONICS	3837
Electroplex, Inc.	3207
Elgin National Watch Co.	338-340
Emerson & Cuming, Inc.	350, 351
Empire Devices Inc.	3351, 3352
Engelhard Industries, Inc.	201, 202
Epsee, Inc.	214, 215
Equipto Electronics Corp.	3308, 3309
ETC, Inc.	3122
Eubanks Engineering Co.	3917

INSIDE STORY... of the **SDL** reson-ator

(Frequency Sensitive Relay)

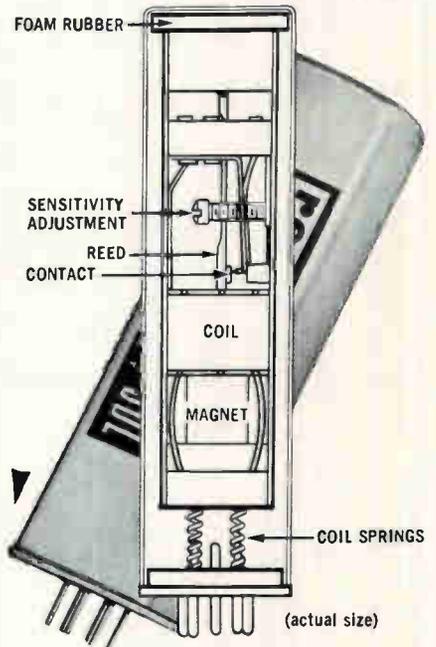

Looking for a frequency-sensitive switch whose major advantages are high selectivity and narrow bandwidth? You've found it!

Note the unique suspension... foam rubber at top, coil springs at bottom. This makes our RESON-ATOR virtually insensible to shock, vibration and acceleration. Gold and silver contact points assure minimum arcing and long life.

All critical "inside" components temperature stabilized. This permits RESON-ATOR operation under temperature extremes heretofore impossible. Even the copper can that wraps up the package has a "job." It has a magnetic shunting effect that allows these relays to work in areas where magnetic coupling would impair operation of other, similar units.

New SDL high and low frequency RESON-ATOR relays have hundreds of uses, with new applications being devised every day. Write for complete specifications. We welcome your relay problems.



**SECURITY
DEVICES
LABORATORY**

ELECTRONIC DIVISION OF
SARGENT & GREENLEAF, INC.

16 Seneca Ave.

ROCHESTER 21, N. Y.

CIRCLE 183 ON READER SERVICE CARD 183

In the province of the precise timing of major missile and aircraft programs, WHEATON capabilities are manifold. Separation timers, guidance system timers, G.S.E. timers, airborne computers, programmers, ignition timers and circuit check-out systems are among those applications with which WHEATON physicists and engineers are thoroughly familiar. Write for latest brochure illustrating WHEATON timing and programming capabilities.

PIONEERS of PRECISION TIMING


**WHEATON ENGINEERING DIVISION
HURLETRON INCORPORATED**
920 Manchester Road, Wheaton, Illinois

CIRCLE 228 ON READER SERVICE CARD

MORE THAN

1,000,000,000,000,000,000,000,000,000,000,000,000,000,000.

PATTERNS

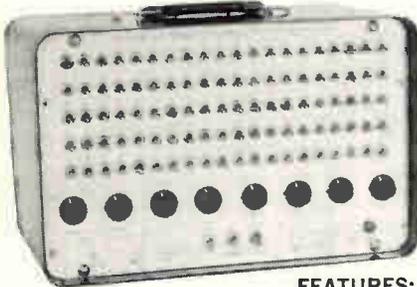

FEATURES:

- generates pulse patterns of any length from one to one hundred pulses with any combination of pulses on and off — over 2¹⁰⁰ possible patterns;
- provides three different forms of pattern outputs; non-return-to-zero (NRZ), return-to-zero (RZ), and audio tone transmission gates for generation of keyed tone and two tone patterns;

PULSE PATTERN GENERATOR

MODEL 201

- operates with a pulse spacing continuously variable from 100 milliseconds to 10 microseconds or from an external drive;
- recycles continuously or triggers in bursts of single patterns on external command;
- provides bit and frame synchronizing pulses;
- constructed of entirely solid-state construction and designed for a long trouble-free life.

Simulates Virtually ANY Digital Data Signal

F E C

FREDERICK ELECTRONICS CORP.

414 Pine Avenue, Frederick, Maryland PHONE: 301-662-4156 TWX: FRED 419

F

Fairchild Semiconductor	2124-2131
Fansteel Metallurgical Corp.	2074-2076
Federal Mfg. & Engineering Corp.	3012
Fenwal Electronics, Inc.	113
Ferroxube Corp. of America	3440, 3441
Filmohn Corp.	3401
Filters, Inc.	330-332
Filtron Co., Inc.	850, 860
Elite Electronic Wire & Components, Inc.	3537
Flotron Industries, Inc.	3944, 3945
Fork Standards, Inc.	3136
John Fluke Mfg. Co., Inc.	562-563
Franklin Electronics Inc.	2154
Claude C. Frantz Co.	3134

G

GB Components, Inc.	101
G-L Electronics Co., Inc.	630
The Gamewell Co.	3251
Garlock Electronic Products	3109
W. K. Geist Co.	226, 227
General Communication Co.	3244
General Dynamics Corp.	3340, 3341
General Electric Co.	104-109, 116-121, 2088-2089
General Findings Inc.	3706
General Magnetic Corp.	3354
General Mills, Inc.	3050-3051
General Motors Corp.	3937
General Precision, Inc.	983-939
General RF Fittings, Inc.	3148
General Radio Co.	643-644
General Resistance Inc.	2133
General Time Corp.	3230, 3231
Genisco, Inc.	813, 814
Gertsch Products, Inc.	950-954
Globe Industries, Inc.	806, 807
Goe Engineering Co.	905
The B. F. Goodrich Co.	3212
B. F. Goodrich Co.	3520
W. L. Gore & Associates, Inc.	3707
Gorman Machines Corp.	3530
Gould-National Batteries, Inc.	3611, 3612
Granger Associates	2106, 2107
Grant Pulley & Hardware Corp.	3318
Granville-Phillips Co.	3342
Graphic Controls Corp.	3745
Gravhill, Inc.	711
Greman Manufacturing Co., Inc.	2061
Guardian Electric Manufacturing Co.	1011, 1012
Gudebrod Bros. Silk Co. Inc.	3506
W. & L. E. Gurlev	918

H

Halliburton Enterprises, Inc.	3551, 3552
Hardwick, Hindle, Inc.	3017
Harove Servo Controls, Inc.	3202
Harrel, Inc.	3335
Harrison Laboratories, Inc.	507-508
The Hartwell Corp.	3748
Hastings-Raydist, Inc.	744
Hathaway Instruments, Inc.	765-766
Hayden Publishing Co., Inc.	3854-3856
The A. W. Haydon Co.	849, 850
Heinemann Electric Co.	449-450
Heller Industries, Inc.	3521
Henes Manufacturing Co.	3113
Hermetie Pacific Corp.	2114, 2115
Carl Herrmann Associates	301
Hevi-Duty Electric Co.	2066
Hewlett-Packard Co.	509, 513
Hexacon Electric Co.	3942
The Hickok Electrical Instrument Co.	439-440
Hi-G. Inc.	802-808
J. T. Hill Co.	764
Hill Magnetic Products	3042
Hillburn Electronics Corp.	3823
Hi-Rel Micro-Circuit Co., Inc.	3705
Hoffman Electronics Corp.	514-516
The Hoover Co.	3438
Hopkins Engineering Co.	903
Hudson Tool & Die Co., Inc.	3348
Huggins Laboratories, Inc.	842-844
Hughes Components Group	928-999
Hughes Aircraft Co.	930-931
Hull Instruments, Inc.	3620
R. N. Hunter Sales Co., Inc.	3542
Hurletron, Inc.	3248
Hysol of California	3719

I

Ideal Industries, Inc.	3347
Ideal Precision Meter Co., Inc.	2033
Illumitronic Engineering Corp.	3036
Indiana General Corp.	546-548
Industrial Electronic Engineers, Inc.	3449
Industrial Instruments Inc.	3648
Industrial Test Equipment Co.	348
Infrared Industries, Inc.	3550
Ingersoll Products Div. of Borg-Warner Corp.	3736-3738
Inland Motor Corp. of Virginia	2050
Insaco, Inc.	3311
The Institute of Radio Engineers	3853
Instrument Development Laboratories, Inc.	2049
Instruments Publishing Co., Inc.	3844
International Eastern Co.	3349
International Electronic Research Corp.	2178-2179
International Rectifier Corp.	2071-2073
International Resistance Co.	615-617
International Telephone & Telegraph Corp.	3228-3228, 839
Interstate Electronics Corp.	3225

Iron Fireman Mfg. Co.....2119, 2120
Irvan Ferrromagnetics Corp.....3316

J

J-B-T Instruments, Inc.....655
JFD Electronics Corp.....708, 709
JVM, Div. of Fidelitone Microwaves Inc.....448
J-Omega Co.....3132
Jamieson Industries, Inc.....3805
Jennings Radio Manufacturing Corp.....549-551
Jerrold Electronics Corp.....3813-3816
Jewett Co.....743
Jonathan Manufacturing Co.....3704

K

Kay Electric Co.....3411-3412
Kayner Mfg. Co., Inc.....3915
Keithley Instruments, Inc.....759-760
J. S. Keimf Co.....3037, 3038
Kepeco, Inc.....114-115
Kester Solder Co.....3951
Key Resistor Corp.....628
King Engineering Co.....3428
Kingsley Machine Co.....3903
Kin Tel Div. Cohn Electronics, Inc.....621
Kittleson Co.....341, 342
Mathias Klein & Sons, Inc.....3519
Kleinschmidt Div. of Smith-Corona Mar-
chant, Inc.....3054, 3055
W. Bert Knight Co.....336
Knight Electronics Corp.....945, 946
The James Knights Co.....620
Krohn-Hite Corp.....2048
Kurman Electric Co.....3804

L

LEL, Inc.....3406
Laboratory for Electronics, Inc.....521, 522
Lambda Electronics Corp.....3421, 3422
Land-Air, Inc.....915
Landis Associates.....3823
Landis & Gyr, Inc.....3053
Larson Instrument Co.....3139
Lavoie Laboratories, Inc.....451
Leach Corp.....652-654
Leach and Garner.....3706
Geo. W. Ledbetter.....3204
Lenkurt Electric Co., Inc.....230-231
Leon Div. Illinois Tool Works Inc.....705
Lincoln Instrument Co., Inc.....3141
Lindberg Engineering Co.....3934
Littelfuse, Inc.....914
Liton Industries, Inc.....428-431, 528-532
Lockheed Aircraft Corp.....3808-3810
Lord Manufacturing Co.....825, 896
Lumatron Electronics, Inc.....102

M

MB Electronics.....317 and 318
MM Electronic Enclosures, Inc.....3925
Macdonald & Co.....3050
Mac Panel Co.....3030
Mace Corp.....3016
Magnasync Corp.....3613
Magnecraft Electric Co.....723
Magnetic Metals Co.....3131
Magnetic Shield Div. Perfection Mica Co.....3716
P. R. Mallory & Co., Inc.....718-720
Marco Industries Co.....3404
Marconi Instruments Div. English Electric
Corp.....2043, 2044
J. W. Marsh Co.....343
Marshall Industries.....817-819
Marubeni-Iida (America), Inc.....3549
Massa Div. Cohn Electronics, Inc.....622
Master Specialties Co.....3242
Measurements, McGraw-Edison Co.....337
Mektron Div. of California General, Inc.....3210
Melabs.....2136
Adolf Meller Co.....3748
Melpar, Inc.....3107
Mevco, Inc.....702
Mesa Plastics Co.....3317
Metalphoto Corp.....3742
Metcom, Inc.....3802
Metex Electronics Corp.....3714
Methode Electronics, Inc.....3103
Metronix.....3647
Micon Electronics, Inc.....3218
Micro Electronics Corp.....3203
Micro Gee Products, Inc.....2007, 2008
Micro-Radionics, Inc.....3009
Microdot, Inc.....525-527
Microlab.....333
Micrometals.....3825
Microtran Co., Inc.....2019
Microwave Associates, Inc.....757-758
Microwave Development Laboratories, Inc.....1021
Microwave Electronics Corp.....3236
James Millen Mfg. Co., Inc.....704
J. W. Miller Co.....517
Miller-Stephenson Chemical Co., Inc.....3543
Millivac Instruments, Inc.....2151
Mincom Div. Minnesota Mining and Mfg.
Co.....445, 446
Miniquip, Inc.....3007
Minneapolis-Honeywell.....2009-2015
C. H. Mitchell Co.....627
Mitronics, Inc.....3036
Molecu Wire Corp.....3947
Molecular Dielectrics, Inc.....3313

TAPING TOROIDS?

NEW BOESCH T-600 TAPE WINDER

can apply most varieties of non-
adhesive tapes — paper, mylar,
varnished silk, cloth, etc. — on
all types of toroidal cores and
coils.

Interchangeable shuttle heads
and shuttles handle tapes from
1/8" to 1" wide on toroids from
3/8" I.D. to 6" O.D.

See us at WESCON
Booth #3918



FLEXIBLE, AUTOMATIC, PRECISE, HIGH PRODUCTION TAPING

For Complete Data Write For Bulletin T-600

BOESCH MANUFACTURING DIVISION

WALTHAM PRECISION INSTRUMENT COMPANY, INC.

DANBURY, CONNECTICUT / Telephone: Pioneer 3-3885 / Teletype: DANB 468

CIRCLE 229 ON READER SERVICE CARD


SAVE TIME and EXPENSE on PURCHASING RELAYS

IMMEDIATE DELIVERY

Off Shelf Items

DELIVERY WITHIN 1 WEEK

Items requiring assembly and/or adjustment

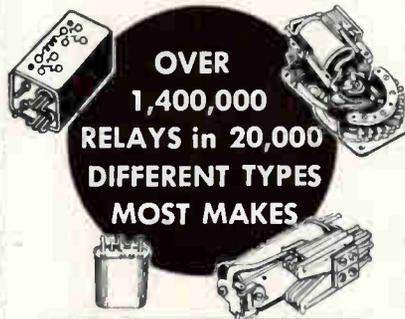

**WE DELIVER RELAYS
NOT PROMISES**

PRODUCTION QUANTITIES IN STOCK
SEND FOR CATALOG E

Universal RELAY CORP.

42 White St., New York 13, N. Y. WAlker 5-6900

CIRCLE 230 ON READER SERVICE CARD

INCREASE

PW BOARD RELIABILITY



**... WITH DYNASERT
COMPONENT INSERTING
MACHINE**

Depend on Dynasert to insert all types
of axial-lead components accurately time
after time after time. Automatically
feeds, trims, bends leads, inserts, and
clinches. Leads automatically clinched
to follow circuit, are easier to solder
tightly. Inserts both small (to .032" di-
ameter) and large components. Opera-
tors are trained quickly, components in-
serted up to ten times faster. See how
Dynasert can increase reliability, cut
costs for you. Write today. Dynasert
Dept., United Shoe Machinery Corp.,
Boston, Mass.

United

DYNASERT

US 1-75

CIRCLE 185 ON READER SERVICE CARD

185




LOOKING FOR THE IDEAL AUTOMATIC TERMINAL SETTER?

STOP. You've found it. Name is Electroset. Sets up to 4200 terminals per hour. Very reliable. Performance tested and proven by leading electronics firms.




LONG RUNS: Model FST-1 — raceway-fed, for split-lug, feedthrough, and other terminals. Up to 4200 per hour. All electric. (Model FST Automatic Terminal Setter, not shown, a tube-fed model, achieves even faster production rates.)



SHORT RUNS: Electropunch — sets hand-fed terminals twice as fast as conventional methods, solves terminal setting problems for as little as \$163. All electric. Foot-switch operation.

What's your problem? Black & Webster can help. Send sample terminal and requirements. Write today for 14-page catalog describing our complete line of production tools.



BLACK & WEBSTER, INC.
Dept. BG, 570 Pleasant St., Waterfown 72, Mass.

Monitor Products Co., Inc.	618
F. L. Moseley Co.	552-553
Motorola Communications and Electronics, Inc.	306-307
Motorola Semiconductor Products, Inc.	302-303
Moxon Electronics	605-606
Robert G. Moye Company	344
Mucon Corp.	3133
Mycalex Corp. of America	326-327
Mystik Adhesive Products, Inc.	3508
McCoy Electronics Co.	2087
McGraw-Hill Publishing Co., Inc.	3837-3840
McKee Automation Co.	3534
McLean Engineering Laboratories	3423
McMillan Industrial Corp.	3152

N

Narda Microwave Corp.	523-524
Natel Engineering Co., Inc.	3624
National Beryllia Corp.	3515
The National Cash Register Co.	3426-3427
National Connector Corp.	3024
National Radio Co., Inc.	840-841
National Semiconductor Corp.	3021-3022
National Vulcanized Fibre Co.	3525-3526
Nationwide Engineering Service, Inc.	3733
Navan Products, Inc.	3315
Navigation Computer Corp.	3034
Neff Instrument Corp.	3621
New Hermes Engraving Machine Corp.	3557
The J. M. Ney Co.	707
Nippon Electric Co., Ltd.	3246
NJE Corp.	3339
Non-Linear Systems, Inc.	2029-2031
North American Electronics, Inc.	3650
North Atlantic Industries, Inc.	1022-1023
North Electric Co.	533-535
Northeastern Engineering, Inc.	3245
NRC Equipment Corp.	3645-3646
Paul Nurches Co.	3320
Nylok Western	3931

O

Ohmite Mfg. Co.	2101-2102
Omega Dynamics Corp.	3834
Omni Spectra, Inc.	3121
Omtronics Manufacturing Inc.	3031
Optimization, Inc.	3040
Optimized Devices, Inc.	3437
Opto-Electronics Devices, Inc.	315
Ormond, Inc.	3052
John Oster Manufacturing Co.	637-638

P


PCA Electronics, Inc.	536
PIC Design Corp.	561
PRD Electronics, Inc.	2103-2104
Pacific Resistor Co.	3106
Pacific Scientific Co.	316-2168
Packaging Services of Calif.	3514
Packard Bell Electronics Corp.	432-435
Palo Alto Engineering Co.	505-506
Panduit Corp.	3540
Panoramic Electronics, Inc.	3354-3355
Parker Seal Co.	3541
Loren Patrick Associates, Inc.	3731
PEK Laboratories, Inc.	624
Pendar, Inc.	3326
Penta Laboratories, Inc.	2116
Perfect Gear & Instrument Corp.	3127
Perkin Electronics Corp.	746-747
The Perkin-Elmer Corp.	3142-3144
Perlmuth Electronic Associates, Inc.	2139-2140
Phaostroon Instrument & Electronic Co.	2173-2175
George A. Philbrick Researches, Inc.	1025
Phileo Corp.	3401-3402
Phillips Control Co.	623
Photo Chemical Products of California, Inc.	3556
Photocircuits Corp.	123-124
Piddington & Associates Ltd.	3948
Plastic Capacitors, Inc.	2018
Plastic Products Div. (IRC)	3828
Polarad Electronics Corp.	761-762
Pomona Electronics Co., Inc.	3321
Potter & Brumfield	314-315
Potter Instrument Co., Inc.	3429-3431
Power Designs, Inc.	3319
Powertron Ultrasonics Corp.	3744
Precision Instrument Co.	346-347
Premier Metal Products	3740
Prentice-Hall, Inc.	3848
Presin Co., Inc.	646
Price Electric Corp.	851
Probescope Co. Inc.	3905
Prodelin, Inc.	3641-3642
The Pyle-National Co.	3239
Pyrofilm Resistor Co., Inc.	1024

Q

Quality Electric Co.	3832
Quantatron, Inc.	3753
Quan Tech Laboratories, Inc.	304-305

R

RCA Electron Tube Div.	1043-1050
RS Electronics Corp.	628
Radiation Inc.	3413
Radiation Materials, Inc.	3536
Radiation at Stanford	3414

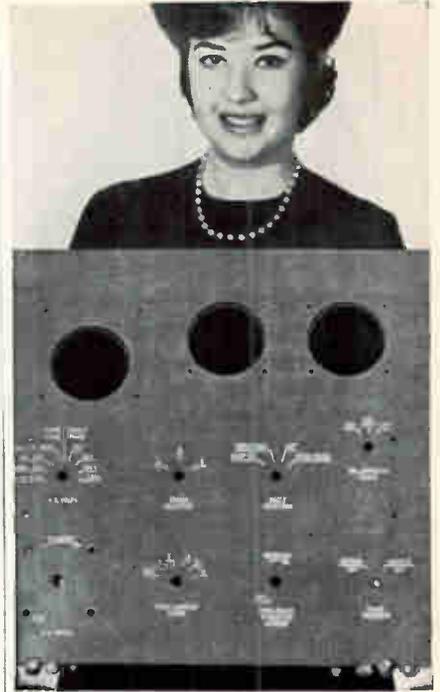

ANY SIZE panels or nameplates ANY TIME you need them with tracer-guided ENGRAVOGRAPH



VISIT BOOTH 3557
WESCON SHOW

Write for catalogue ZR-5
new hermes
ENGRAVING MACHINE CORP.
154 W. 14TH ST., NEW YORK 11, N.Y.
Chicago • Los Angeles • Montreal

Radio Frequency Lab., Inc.	3101, 3102
Ramy Manufacturing Co.	3345
Rantec Corp.	2027, 2028
Ray Products, Inc.	3513
Raybestos-Manhattan, Inc.	3312
Raychem Corp.	2067, 2068
Raymond Engineering Laboratory, Inc.	3110
Raytheon Co.	724-734, 3928-3929
Reeves Soundcraft Corp.	913
Renbrandt, Inc.	3002
Resdel Engineering Corp.	3208
Rose Engineering Inc.	3006
Rheem Mfg. Co.	544-545
M. W. Riedel & Co.	3826-3827
Rimak Electronics, Inc.	3952
Robertshaw-Fulton Controls Co.	804-805
Robinson & Middy Associates	3331
Robinson Technical Products, Inc.	3147
Rockbestos Wire & Cable Co.	3938
Rohde & Schwarz	203-204
Malcolm Ross & Co.	3325
The Milton Ross Co.	3045
Rotron Manufacturing Co., Inc.	2035-2036
The Rowan Controller Co.	3627, 3104
C. B. Rush and Associates	2142-2143
Rutherford Electronics Co.	603-604
Ryan Publishing Co. Inc.	3842

S

STL Products	3607, 3608
Les Sachs Associates	3516
Sage Laboratories, Inc.	3233
Howard W. Sams & Co., Inc.	2059
Sanborn Co.	558-560
Sanders Associates, Inc.	503-504
San Fernando Electric Mfg. Co.	564, 585
Sanzamo Electric Co.	2132-2134
Santa Anita Engineering Co. of California	3730
Sarkas-Arzian, Inc.	426-427
Scientific-Atlanta, Inc.	2040
Sealectro Corp.	2016, 2017
Security Devices Laboratory	3010
Seg Electronics Co., Inc.	3820
Selectrons, Ltd.	3939
Semi-Elements, Inc.	3019
Sensitive Research Instrument Corp.	518-520
Servomechanisms, Inc.	2206
Servonic Instruments	3333
Shallross Mfg. Co.	3128
Shepard-Winters Co.	213
Sherold Crystals, Inc.	745
Shielding Div. of Shieldtron, Inc.	3504, 3505
H. M. Shoemaker & Associates	763
The Sibley Co.	3330
Sierra Electronic Corp.	613, 614
Sigma Instruments, Inc.	223-224
Signetics Corp.	3039
Silicon Transistor Corp.	909
Simpson Electric Co.	443, 444
The Sippican Corp.	3546
Skylyne, Inc.	3754, 3755
Herrnan H. Smith, Inc.	209
Sola Electric Co.	2063-2065
Solid State Products, Inc.	3444, 3445
Southco Div., South Chester Corp.	3517
Southern Electronics Corp.	656
Space Age News	3847
Spaulding Fibre Co., Inc.	3741
Specific Plating Co., Inc.	3930
Spectra-Strip Wire & Cable Corp.	3927
Spectrol Electronics Corp.	2083, 2084
Spectrolab, Div. of Textron Electronics, Inc.	319
Spectrum Instruments, Inc.	3206
Sperry Rand Corp.	417-422
Sprague Electric Co.	639-642, 3328
Stancor Electronics, Inc.	414
Standard Electrical Products Co.	3617
Standard Wire and Cable Co.	3524
Sterling Instrument Div. of Designatronics, Inc.	3114
Stevens-Arnold, Inc.	402-403
Stevens-Evans, Inc.	3835
George Stevens Manufacturing Co., Inc.	3916
Stewart Engineering Co.	3626
Stewart Stamping Co.	3756
Stoddart Aircraft Radio Co., Inc.	3824
Stone & Smith, Inc.	3940, 3941
The Superior Electric Co.	1001-1004
Switchcraft, Inc.	2062
Sylvania Electric Products, Inc.	3154-3159
	3301-3306
Synthane Corp.	3529
Systron-Donner Corp.	2146-2148

T


TRG Inc.	3135
TRW Electronics, Inc.	2077-2078
Tally Register Corp.	2047
Tamar Electronics, Inc.	501-502
Tech-Ohm Electronics, Inc.	3439
Tech-Ser, Inc.	1026, 1027
Technibilt Corp.	3911
Technical Devices Co.	3718
Technical Wire Products, Inc.	3949
Technitron, Inc.	3323
Tektronix, Inc.	751-754
Teletype Corp.	3651-3652
Telex, Inc.	211, 212
Telonic Engineering Corp.	3606
Telonic Industries, Inc.	3604, 3605
Tenney Engineering, Inc.	3234
Test Equipment Corp.	3149
Texas Instruments Inc.	631-636
Thermodor Electrical Mfg. Co.	447

NOW! SLIDES, BLOWERS and FANS for a COMPLETE PACKAGE by PREMIER



PREM-O-RAK line of READY-TO-MOUNT Standard CHASSIS SLIDES


SB-75 and 175 Series Tilt and non-tilt models
75 lb. and 175 lb.
SOLID BEARING
SLIDES

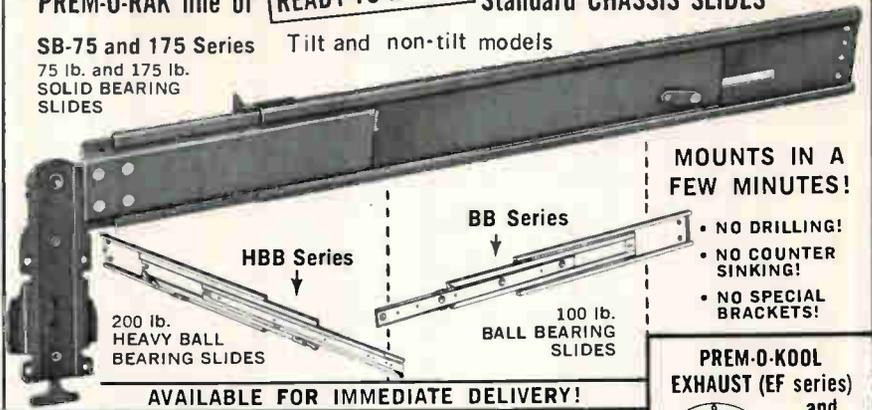

MOUNTS IN A FEW MINUTES!

- NO DRILLING!
- NO COUNTER SINKING!
- NO SPECIAL BRACKETS!

AVAILABLE FOR IMMEDIATE DELIVERY!



PREM-O-KOOL line of Standard PANEL MOUNTED BLOWERS

TO FIT STANDARD 19" WIDE PANEL SPACE

PMB Series *Available in 4 models — 150, 285, 410 and 750 CFM



PREM-O-KOOL EXHAUST (EF series) and INTAKE (IF series) FANS

• Available in 13 models

CONTACT YOUR PREMIER DISTRIBUTOR or SEND FOR COMPLETE CATALOG

PREMIER METAL PRODUCTS CO., INC.

Subsidiary of Renwell Electronics Corp. of Delaware

337 Manida St., New York 59, N. Y. WY 1-6600 (area code 212)

IN CANADA: PREMIER METAL HOUSINGS, LTD., 5810 Smart Avenue, Montreal • Hunter 6-8126

PACKAGE WITH PREMIER • RACKS • CABINETS • CONSOLES • CHASSIS • SLIDES • BLOWERS

VISIT BOOTH 3740
WESCON SHOW
LOS ANGELES, CAL.

CIRCLE 232 ON READER SERVICE CARD



Good parts work best!

Intermediate Frequency Transformer IFT



The high standards of MITSUMI electronic components are insured by a fully-automated assembly system, and double-checked by rigid quality controls. Mitsumi Electric Company is Japan's largest manufacturer of components for radio, television and communications equipment.

POLYVARICON Variable Capacitor



MITSUMI PARTS

MITSUMI ELECTRIC CO., LTD.

Komae, Kitatama, Tokyo



HIGH PURITY METALS AND ELECTRONIC MATERIALS

METALS AND ALLOYS

ALUMINUM	ANTIMONY
ARSENIC	BISMUTH
CADMIUM	GOLD
INDIUM	LEAD
SILVER	TIN
	ZINC

High purity alloys are made from these metals to customer specifications.

STANDARD FORMS

INGOTS	SHEET
BARS	SHOT
RODS	POWDER
RIBBON	WIRE

PREFORMS

Preforms are available in a range of sizes and shapes such as discs, dots, washers, squares and spheres. Enquiries are invited on our alloy preforms.

COMPOUND SEMICONDUCTORS

INDIUM ANTIMONIDE

Available as crystals, wafers, circles, rings and other shapes made to precise tolerances.

CHEMICALS

SALTS	SOLUTIONS
-------	-----------

COMINCO PRODUCTS INC.

Electronic Materials Department
933 West Third Avenue
Spokane, Washington
Ph. RI 7-7103 TWX: SP 311

Thiokol Chemical Corp.	3711
The Thomas & Betts Co., Inc.	3909, 3910
Thomas Electronics, Inc.	3338
Thomas & Skinner, Inc.	401
Thompson Ramo Wooldridge Inc.	2079-2082, 1020
F. D. Thompson Publications, Inc.	3845
The Torson Co.	3232
Times Wire and Cable Div. The International Silver Co.	3722
Tinsley Laboratories, Inc.	3001
Topatron, Inc.	852, 853
The Torrington Manufacturing Co.	3213
Transistor Specialties, Inc.	3105
Transitron Electronic Corp.	2176, 2177
Trans-Sonics, Inc.	3329
Trio Laboratories, Inc.	3434, 3435
Triplett Electrical Instrument Co.	2167
Trompeter Electronics, Inc.	3138
Tru-Connector Corp.	3407
Tru-Ohm Products Div. Model Eng. & Mfg. Inc.	947
Trygon Electronics Inc.	3237
Tung-Sol Electric Inc.	328, 329
Tur-Bo Jet Products Co., Inc.	706

U

H. W. Ulmer Co.	3146
Ultek Corp.	335
Ultrasonic Industries, Inc.	3720, 3721
Ultrasonic Systems, Inc.	3921
Ultronix, Inc.	1016
Ungar Electric Tools	3507
Union Carbide Consumer Products Co.	3623
Union Switch & Signal Div. Westinghouse	
Air Brake Co.	2163, 2164
United Aircraft Corp.	3013, 3014, 3015
United Catalog Publishers, Inc. (EEM)	3829
United Shoe Machinery Corp.	3932, 3933
U. S. Components, Inc.	3041
U. S. Semiconductor Products, Inc.	3117, 3118
U. S. Stowware	3015, 3616
United Transformer Corp.	208
Unitek Corp.	3923, 3924
Unitrode Transistor Products, Inc.	3126
Universal Electronics Co.	645
Universal Instruments Corp.	3723, 3724
Universal Manufacturing Co., Inc.	3939
Universal Microtron Corp.	3629, 3630
Utica Div. Kelsey-Hayes Co.	3943

V

Vaco Products Co.	3527
Vacuum-Electronics Corp.	3802-3803
Valpey Crystal Corp.	3125
Van Groos Co.	2149, 2150
Varian Associates	2155-2162
Vari-L Company, Inc.	3217
Varo Inc.	2137, 2138
Vector Electronic Co., Inc.	801
Veeder-Root Inc.	1051
Victor Business Machines Co.	438
Viking Industries, Inc.	741-742
Vitramon, Inc.	2069, 2070
Vitro Electronics	542-543
Vogue Instrument Corp.	3032


W

Wabash Magnetics, Inc.	3324
L. Wagner	3946
Wakefield Engineering, Inc.	3715
The Walkirt Co.	334
Wallace & Wallace	308
Ward Leonard Electric Co.	904
Warner Electric Brake & Clutch Co.	3113
Waterman Products Co., Inc.	2145
Waters Manufacturing, Inc.	320
Watkins-Johnson Co.	2141
Waugh Engineering Div.	3614
Waveforms, Inc.	3018
Weckesser Co., Inc.	3717
Weightman & Associates	404
The Welch Scientific Co.	3140
Weller Electric Corp.	3747
Western Gear Corp.	2024, 2025
Westrep Corp.	210
Western Gold and Platinum Co.	3549
Western Semiconductors, Inc.	3056
Western States Electronics Directory & Buyers' Guide	3851
Westinghouse Electric Corp.	428-425
Westline E-Z Code Div. of Western Lithograph Co.	3749
Westron Sales and Engineering	218
S. S. White, Industrial Div.	3925, 3926
John Wiley & Sons, Inc.	3846
Wiltron Co.	3433
Winchester Electronics, Inc.	2105
Wire Co. of America	3708
Wright Engineering Co., Inc.	647-649
Wyco Metal Products	2117, 2118
Wyle Laboratories	3109

XYZ

Xcelite Inc.	3501
Yardney Electric Corp.	610
Yellow Springs Instrument Co., Inc.	3003
Yokogawa Electric Works, Inc.	3410
Zero Manufacturing Co.	3955-3959
The Zero-Max Co.	3020
Ziff-Davis Publishing Co., Inc.	3852
The Zippertubing Co.	3725

You Get Things Done With Boardmaster Visual Control

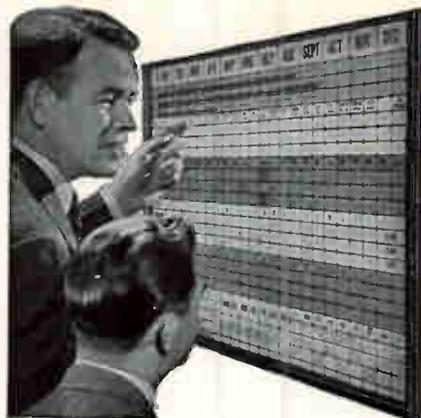

- ☆ Gives Graphic Picture of Your Operations—Spotlighted by Color
- ☆ Facts at a glance — Saves Time, Saves Money, Prevents Errors
- ☆ Simple to operate — Type or Write on Cards, Snap in Grooves
- ☆ Ideal for Production, Traffic, Inventory, Scheduling, Sales, Etc.
- ☆ Made of Metal. Compact and Attractive. Over 750,000 in Use

Full price \$49⁵⁰ with cards

FREE 24-PAGE BOOKLET NO. C-30
Without Obligation

Write for Your Copy Today

GRAPHIC SYSTEMS

YANCEYVILLE, NORTH CAROLINA

CIRCLE 233 ON READER SERVICE CARD

DIGITAL CLOCKS

Up to 86,400 contact combinations per day in Decimal or Binary Coded Decimal form for Programming . . . Process Control . . . Test Data Logging . . . Computer Systems.

Time in increments of minutes, tenth minutes, or seconds. Time of day (12 hour or 24 hour) — Count Down or Elapsed Time configurations.

Easy to read, single or multiple displays. Output compatible with printers, typewriters, card punches, etc. Special models. For details write:



PARABAM

DIVISION OF **H** HOUSTON FEARLESS CORPORATION

12822 Yukon Avenue, Hawthorne, Calif./OSborne 9-3393

CIRCLE 234 ON READER SERVICE CARD

electronics

electronics

WEEKLY QUALIFICATION FORM FOR POSITIONS AVAILABLE

ATTENTION: ENGINEERS, SCIENTISTS, PHYSICISTS

This Qualification Form is designed to help you advance in the electronics industry. It is unique and compact. Designed with the assistance of professional personnel management, it isolates specific experience in electronics and deals only in essential background information.

The advertisers listed here are seeking professional experience. Fill in the Qualification Form below.

STRICTLY CONFIDENTIAL

Your Qualification form will be handled as "Strictly Confidential" by ELECTRONICS. Our processing system is such that your form will be forwarded within 24 hours to the proper executives in the companies you select. You will be contacted at your home by the interested companies.

WHAT TO DO

1. Review the positions in the advertisements.
2. Select those for which you qualify.
3. Notice the key numbers.
4. Circle the corresponding key number below the Qualification Form.
5. Fill out the form completely. Please print clearly.
6. Mail to: D. Hawksby, Classified Advertising Div., ELECTRONICS, Box 12, New York 36, N. Y. (No charge, of course).

COMPANY	SEE PAGE	KEY #
AF SC-AFLC Joint Professional Professional Placement Office New York, New York	193	1
ANTENNA SYSTEMS INC. Hingham, Massachusetts	192	2
ATOMIC PERSONNEL INC. Philadelphia, Pennsylvania	190	3
AVCO RESEARCH AND ADVANCED DEVELOPMENT a division of Avco Corporation Wilmington, Massachusetts	194	4
THE BENDIX CORPORATION Kansas City Division Kansas City, Missouri	196	5
BRISTOL COMPANY Waterbury, Connecticut	70*	6
DOUGLAS AIRCRAFT CO. Missile and Space Systems Div. Santa Monica, California	96	7
ESQUIRE PERSONNEL SERVICE INC. Chicago, Illinois		
GENERAL DYNAMICS ASTRONAUTICS San Diego, California	17-20*	9
HOUSTON INSTRUMENT CORP. Bellaire, Texas	190	10
JET PROPULSION LABORATORY Pasadena, California	190	11
LOCKHEED MISSILES & SPACE CO. Div. of Lockheed Aircraft Corp. Sunnyvale, California	110	12
LOS ALAMOS SCIENTIFIC LABORATORY Los Alamos, New Mexico	190	13
McDONNELL St. Louis, Mo.	192	14

CONTINUED ON PAGE 192

(cut here)

electronics WEEKLY QUALIFICATION FORM FOR POSITIONS AVAILABLE

(cut here)

(Please type or print clearly. Necessary for reproduction.)

Personal Background

NAME

HOME ADDRESS

CITYZONE.....STATE.....

HOME TELEPHONE

Education

PROFESSIONAL DEGREE(S)

MAJOR(S)

UNIVERSITY

DATE(S)

FIELDS OF EXPERIENCE (Please Check)

81062

- | | | |
|--|--|---------------------------------------|
| <input type="checkbox"/> Aerospace | <input type="checkbox"/> Fire Control | <input type="checkbox"/> Radar |
| <input type="checkbox"/> Antennas | <input type="checkbox"/> Human Factors | <input type="checkbox"/> Radio-TV |
| <input type="checkbox"/> ASW | <input type="checkbox"/> Infrared | <input type="checkbox"/> Simulators |
| <input type="checkbox"/> Circuits | <input type="checkbox"/> Instrumentation | <input type="checkbox"/> Solid State |
| <input type="checkbox"/> Communications | <input type="checkbox"/> Medicine | <input type="checkbox"/> Telemetry |
| <input type="checkbox"/> Components | <input type="checkbox"/> Microwave | <input type="checkbox"/> Transformers |
| <input type="checkbox"/> Computers | <input type="checkbox"/> Navigation | <input type="checkbox"/> Other |
| <input type="checkbox"/> ECM | <input type="checkbox"/> Operations Research | <input type="checkbox"/> |
| <input type="checkbox"/> Electron Tubes | <input type="checkbox"/> Optics | <input type="checkbox"/> |
| <input type="checkbox"/> Engineering Writing | <input type="checkbox"/> Packaging | <input type="checkbox"/> |

CATEGORY OF SPECIALIZATION

Please indicate number of months experience on proper lines.

	Technical Experience (Months)	Supervisory Experience (Months)
RESEARCH (pure, fundamental, basic)
RESEARCH (Applied)
SYSTEMS (New Concepts)
DEVELOPMENT (Model)
DESIGN (Product)
MANUFACTURING (Product)
FIELD (Service)
SALES (Proposals & Products)

CIRCLE KEY NUMBERS OF ABOVE COMPANIES' POSITIONS THAT INTEREST YOU

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25

CONTROLS ENGINEERS

*

INSTRUMENTATION SPECIALISTS

are invited to investigate the advantages of affiliation with

LOS ALAMOS SCIENTIFIC LABORATORY

the Laboratory with a reputation for leadership in

NUCLEAR ROCKETRY

a program with a future

LASL is expanding its ROVER test facilities and establishing a permanent organization at the National Nuclear Rocket Development Center near Las Vegas, Nevada. Career opportunities exist for capable electronics engineers involving the design and analysis of controls and instrumentation systems in connection with very high power, fast start-up, nuclear reactors.

CONTROLS SYSTEMS ENGINEERS:

Work involves design and analysis of closed-loop feedback control systems and programmers controlling reactor and flow systems. Included are such areas as reactor power control, turbo pump control, mass flow rate or thrust control systems, profile programmers, and automatic start-up and sequencing equipment. Work requires a B.S., M.S., or Ph.D. degree in Electrical Engineering plus substantial experience with design, operation and analysis of feedback control systems. A good background in mathematics and theory of servomechanisms is important.

INSTRUMENTATION ANALYSTS:

This work involves the determination of instrumentation requirements for each test, reduction of test data, and data analysis. A B.S., M.S., or Ph.D. degree in Electrical Engineering or Nuclear Engineering plus substantial experience in instrumentation utilizing transducers, multiplex systems, and magnetic tape recording and decoding is required.

Los Alamos Scientific Laboratory offers many attractive employment benefits, including liberal compensation for extended work week at the test site.

Laboratory representatives will attend the Wescon meetings in Los Angeles August 21st through 24th. For further information or interview appointment, telephone Mr. Robert Meier at MADISON 9-1933 during the convention, or write

Recruiting Department

LOS ALAMOS SCIENTIFIC LABORATORY

P. O. Box 1663

Los Alamos, New Mexico

An equal opportunity employer.

U. S. citizenship required.

EMPLOYMENT OPPORTUNITIES



The advertisements in this section include all employment opportunities — executive, management, technical, selling, office, skilled, manual, etc.

Look in the forward section of the magazine for additional Employment Opportunities advertising.

— RATES —

DISPLAYED: The advertising rate is \$40.17 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

An advertising inch is measured 7/8" vertically on a column—3 columns—30 inches to a page.

Subject to Agency Commission.

UNDISPLAYED: \$2.70 per line, minimum 3 lines. To figure advance payment count 5 average words as a line.

Box numbers—count as 1 line.

Discount of 10% if full payment is made in advance for 3 consecutive insertions.

Not subject to Agency Commission.

CHIEF ENGINEER

To \$22,500 Per Year

BSEE, however a MS or PHD is preferred. Experience at the department or program level, where groups of engineering and support personnel were supervised. Knowledge of Digital Systems and Solid State Devices required. Company client assumes all expenses.

ESQUIRE PERSONNEL SERVICE INC.
202 S. State St. Chicago 4, Ill.

ELECTRONIC CIRCUIT DESIGNERS

Excellent opportunity in New Products Department of rapidly growing company making recorders and laboratory test instruments. Requirements are a degree in electrical engineering from a leading college or university and three or more years experience in instrument circuit design employing both vacuum tubes and transistors. All development work would be on proprietary instruments.

Write in confidence to:

Technical Director
HOUSTON INSTRUMENT CORPORATION
4950-4951 Terminal Avenue
Bellaire 101, Texas.

POSITION VACANT

Department of Scientific & Industrial Research, New Zealand. Vacancy No. 9/62/2096: Scientific Officer, (Electronics Engineer) Institute of Nuclear Sciences, Lower Hutt. The Institute of Nuclear Sciences has a vacancy for an Electronics Engineer to supervise the maintenance and modifications to electronic equipment now in operation at the Institute, including four mass spectrometers and three low background shielded counter assemblies with associated electronics used for tritium and carbon-14 age determination measurements and to plan and design electronic equipment for experiments planned using the 3 Mec Van de Graaff accelerator to be installed at the Institute. The electronic group is expected to expand considerably within the next few years as plans are being formulated for the purchase and installation of a Research Reactor. The qualifications desired are an honours degree in Physics, an Engineering degree in Electricity or a similar qualification from a chartered professional institute with experience in the designing of transistorized pulse and digital circuits. The salary offered is up to 2,300 pounds a year according to age and experience. Fares payable—minimum first class rail and/or steamer fares by shortest and most direct route to New Zealand plus fares from port of arrival to destination in New Zealand. In addition certain other actual expenses are payable and details of these can be obtained, together with application forms, from the New Zealand Consulate-General, Suite 530, 630 Fifth Avenue, New York 20, N. Y. Applications close August 31, 1962.

jpl needs

SENIOR ELECTRONIC ENGINEERS

DIGITAL COMMUNICATIONS TECHNIQUES

To lead communication demodulation development employing programmable or general purpose digital machines. Study and development is long term, aimed at developing practical demodulation hardware for ground station use. Applicant should have MSEE or better and be interested in making a practical contribution to spacecraft reception implementation.

Send complete resume to
PERSONNEL DEPT. 334

JET PROPULSION LABORATORY

CALIFORNIA INSTITUTE OF TECHNOLOGY
4814 OAK GROVE DR. • PASADENA, CALIF.

"An equal opportunity employer"



E.E.'s

For professional, individualized fee-paid service write for confidential application.

A national employment agency for the Nuclear & Scientific Fields.

ATOMIC PERSONNEL, INC.
Suite 1207L, 1518 Walnut St., Phila. 2, Pa.

COMMUNICATIONS APPLICATION ENGINEER
Analysis of advanced electronic communication systems including radio, carrier, telephone, microwave:

Must have design and marketing experience with commercial and military users.

EE degree, 5 yrs. exp. min.

Send Resume to:

Microwave Services International Inc.
Consulting Engineers
Route 46 Denville, N. J.

Electronic Instrument Technicians The Oak Ridge National Laboratory Operated by UNION CARBIDE NUCLEAR COMPANY

at
Oak Ridge, Tennessee
Has openings for

Highly skilled electronic instrument technicians to work with electronic engineers in the development, installation and maintenance of electronic systems. Digital data handling, transistorized pulse height analyzers, analog and digital computer systems are only a few examples.

Minimum high school education, with additional training in electronics and at least three years' experience in installation and maintenance of complex electronic systems. Entrance rate \$3.10 per hour; \$3.16 per hour after six months. Reasonable interview and relocation expenses paid by Company.

Excellent Working Conditions


and

Employee Benefit Plans

An Equal Opportunity Employer

Send detailed resume to:

Central Employment Office
UNION CARBIDE NUCLEAR COMPANY
Post Office Box M Oak Ridge, Tennessee

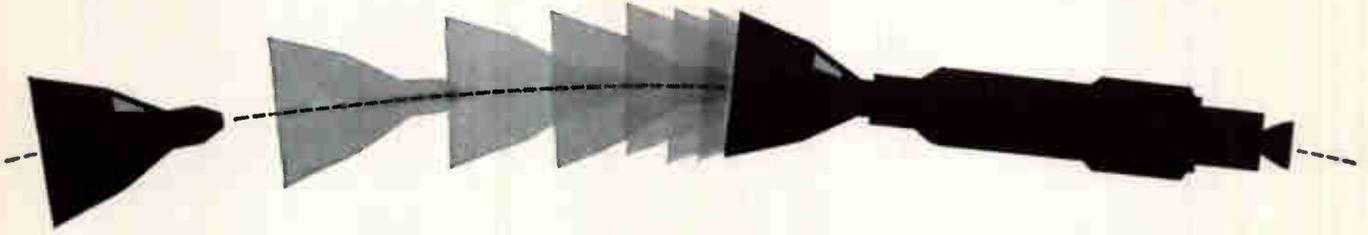

GEMINI

first manned rendezvous in space

How do you dock a two-man spacecraft with another vehicle in earth orbit? What happens when astronauts are weightless for a week or more? Project Gemini is calculated to answer these vital questions. The test of rendezvous techniques alone is a crucial experience in man's drive for the moon—and the results will be invaluable.

Unusual capabilities are needed to solve the intricate and demanding problems of Gemini (and, after Gemini, Apollo).

NASA needs senior aerospace engineers with 6 to 10 years experience in . . . Systems analysis and studies • Systems engineering • Spacecraft and flight missions • Reliability assessment • Launch

vehicles and propulsion • Systems integration and checkout.

NASA offers you unequalled resources and unlimited opportunities for professional growth and recognition. Send just one resume to NASA, Director of Professional Staffing, Dept. 502, NASA Headquarters, Washington 25, D.C. Positions in various locations and in other disciplines—many requiring less experience—are also available.

All qualified applicants will receive consideration for employment without regard to race, creed or color, or national origin. Positions are filled in accordance with Aero-Space Technology Announcement 252-B.



ENGINEERS

MECHANICAL ELECTRICAL MICROWAVE STRUCTURAL

Large and continuing programs in satellite tracking systems, tropospheric scatter communications, radio astronomy, and other large and interesting projects create immediate openings.

New engineering, laboratory and production facilities are now under construction in Manchester, New Hampshire. Salaries commensurate with abilities and experience.

Please send resume in confidence to:

MR. R. W. LEISHMAN


ANTENNA SYSTEMS



349 Lincoln Street

Hingham, Massachusetts

"An equal opportunity employer"

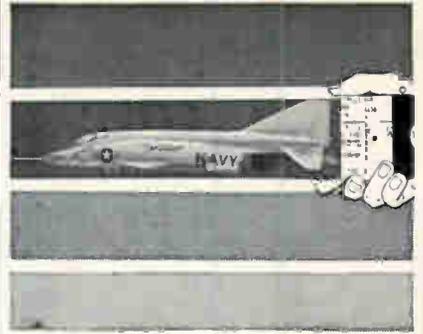

ENGINEERS

Why you should
know more about

MCDONNELL

In the 22 years since its founding, the McDonnell name has become associated with an increasing number of outstanding engineering achievements in aeronautics and astronautics.

Among these are America's Manned Spacecraft built for NASA . . . the record-setting F4H Phantom II, all weather fighter and attack airplane; the world's fastest jet.

Programs initiated include:

FOR NASA: GEMINI . . . an extended mission, two-man spacecraft capable of orbital rendezvous.

FOR THE AIR FORCE: F-110A and RF-110 Tactical Fighter and Photo-Reconnaissance Aircraft.

FOR THE NAVY & MARINE CORPS: Continuing F4H Phantom II and Fighter Attack Aircraft.

Other projects now under way include Typhon and Tolos Airframes, Asset and Aeroballistic Space Research Vehicles.

The extensive McDonnell facilities—encompassing modern aerospace engineering research laboratories and production facilities are located in suburban St. Louis, Missouri. Diversified industry and commerce, well-established cultural and entertainment centers and a progressive minded population exceeding two million make this important metropolitan city an excellent one in which to work and reside.

Present and planned phases of our activities have created these career opportunities:

ELECTRONIC ENGINEERS

Responsible for concept, design, analysis and development of electronic equipment in the areas of: R.F. SYSTEMS, OPTICAL SYSTEMS, SPECIAL DEVICES, MICROWAVE AND ANTENNAS, THIN FILM TECHNIQUES, ADVANCED WELDED PACKAGING TECHNIQUES AND NUCLEAR STUDY PROGRAMS.

Please submit resume in confidence to:

Mr. D. F. Waters,
Supervisor of Engineering Employment,
Dept. 62W

MCDONNELL

P. O. Box 516, St. Louis 66, Missouri .

An equal Opportunity Employer

Engineering Analyst

Continuous growth and increased emphasis on application of analog and digital computation offers an unusual opportunity having widely varying analytical sophistication.

Multi product activities assure man possessing BS and MSE or MS in Math or equivalent plus 3-5 years experience in analytical phases of engineering, a greater engineering diversity and faster career advancement. Must have high mathematical orientation and ability to discuss work at length.

Will obtain background material and synthesize solution on such problems as: heat transfer, mechanical dynamics, transient voltages, behavior of materials; analysis of structures, electrical and fluid dynamics.

Contact D. C. Trew



® VAPOR CORPORATION
6420 W. HOWARD
CHICAGO 48, ILLINOIS

electronics

WEEKLY QUALIFICATIONS FORM FOR POSITIONS AVAILABLE

(Continued from page 189)

MICROWAVE SERVICES INTERNATIONAL, INC. Denville, New Jersey	190	15
MOTOROLA, INC. Chicago, Illinois	71*	16
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION Washington, D. C.	191	17
NATIONAL CASH REGISTER CO. Dayton, Ohio	70*	18
NORTHROP CORP. Norair Beverly Hills, California	149	19
NORTHROP CORP. Norair Hawthorne, California	151	20
PHILCO WESTERN DEVELOPMENT LABS. Palo Alto, California	195	21
REMINGTON RAND UNIVAC Div. of Sperry Rand Corp. St. Paul, Minnesota	67*	22
REPUBLIC AVIATION CORPORATION Farmingdale, Long Island New York	194	23
SPACE AND INFORMATION SYSTEMS a division of North American Aviation Inc., Downey, California	196	24
SPACE TECHNOLOGY LABORATORIES, Inc. Sub. of Thompson Ramo Wooldridge Inc. Redondo Beach, California	11	25
UNION CARBIDE NUCLEAR CO. Oak Ridge, Tennessee	190	26
VAPOR CORPORATION Chicago 48, Illinois	192	27

*These advertisements appeared in the 8/3/62 issue.

ELECTRONIC ENGINEERS



AEROSPACE SYSTEMS ORIENTED SCIENTISTS ENGINEERS

Investigate Career Opportunities With The

UNITED STATES AIR FORCE



The United States Air Force has designated the AIR FORCE SYSTEMS COMMAND as the single overall manager for the many steps involved in the acquisition of aerospace systems—including applied research, advanced technology, development, test, procurement, contract management and missile site activation.

To provide essential direction and support to this broad spectrum of challenging programs, AFSC maintains its own in-house capability through a number of divisions, centers and contract management regions located throughout the nation. The responsibilities and missions assigned to these highly specialized organizations embrace most of the basic scientific and engineering disciplines and their inter-relations.

The staff of AFSC makes direct contributions to some of this nation's most challenging and vital aerospace programs. This provides an opportunity for the scientists and engineers of AFSC to work across a broad spectrum of technical areas. Many

of the basic ideas, techniques, and concepts on which future Air Force systems are based come from AFSC's own staff.

The United States Air Force has assigned the AIR FORCE LOGISTICS COMMAND the mission of insuring that Air Force combat units throughout the world are equipped for instant action to meet any emergency. To accomplish this, AFLC is responsible for supply and maintenance of aerospace systems, equipment and supplies for the entire Air Force. The Command also has sizeable and complex service engineering responsibilities.

Staffing of AFLC's installations provides engineer career opportunities in the logistics areas of maintenance, procurement and supply and in areas concerned with planning and preparing for support of future space vehicles.

Current positions are open for engineers with B.S., M.S., and Ph.D. degrees.

For more information and the career opportunities available, send resume to:

AFSC - AFLC

JOINT PROFESSIONAL PLACEMENT OFFICE

527 Madison Avenue, New York 22, New York

An Equal Opportunity Employer

ELECTRONICS ENGINEERS
& PHYSICISTS

JOIN US IN
GIVING A
NEW
DIRECTION
TO
AEROSPACE
TECHNOLOGY thru
RESEARCH & DEVELOPMENT in

aerospace electronics

Republic's Paul Moore Research & Development Center is the most sophisticated and integrated research complex in the East. Advances made here in many critical aerospace problem areas have brought Republic a diversity of new and follow-on R & D contracts leading to next-generation space and re-entry vehicles, satellites, space power and communication systems.

Electronics Engineers and Physicists are invited to consider the challenging opportunities to make important contributions on these programs in the areas of:

SPACE CRAFT COMMUNICATION — B.S., M.S.
Design and develop space vehicle communications systems including telemetry, command and on-board data handling.

DATA HANDLING (ASGSE) — B.S., M.S.
Design and develop ground station and on-board data handling systems for re-entry and space vehicle applications.

COMMUNICATION TECHNIQUES — B.S., M.S.
Develop advanced communications techniques for aerospace and space craft, includes communications theory and network synthesis.

ADVANCED SPACE RADARS — B.S., M.S.
Develop concepts and components for advanced space radar including rendezvous, mapping, acquisition and tracking applications.

RADAR INTEGRATION — B.S.
Develop specifications, install and integrate advanced radar in hypersonic and space vehicles, including antennas, transmitters, receivers, displays, power supplies, controls.

ANTENNA DESIGN — M.S.
Design and development of antennas for re-entry vehicles. Knowledge of wind effects and general re-entry radiation blackout problems.

RADAR TEST (GSE) — B.S.
Test, checkout and maintain ground radar systems. Make required circuit modifications including range gating circuits, modulators. No travel.

RE-ENTRY INSTRUMENTATION — B.S., M.S.
Design instrumentation for specific re-entry and space vehicles including telemetry systems.

MATHEMATICAL ANALYSIS CONTROLS — PH.D.
Theoretical analysis of noise effects and nonlinear mechanisms on automatic controls. Includes optimal control theory and generalized stability criteria.

ELECTRONIC INSTRUMENTATION — B.S., M.S.
Develop instrumentation for space vehicles. Knowledge of system integration and telemetry desirable.

SPACE GUIDANCE SYSTEMS — M.S., Ph.D.
Develop and analyze navigation and guidance systems using inertial and Doppler techniques and advanced nuclear gyros.

ECM REQUIREMENTS — B.S., M.S.
Mathematical analysis of ECM requirements for advanced aerospace and space craft, and specification of equipment.

FLIGHT CONTROL DESIGN — M.S.
Automatic flight controls, servo systems, nonlinear dynamic systems for space craft.

PYROTECHNIC CIRCUIT DESIGN — B.S., M.S.
Develop pyrotechnic missile circuits including safe arm, squib ignition and RFI elimination devices.

EXPERIMENTAL PHYSICIST — PH.D.
Conduct experimental studies of the application of nuclear or electron resonance to gyroscopes.

ENVIRONMENTAL TESTING — B.S., M.S.
Undertake test programs to estimate component and system reliability using AGREE type methods; monitor offsite testing.

DESIGN REVIEW — B.S., M.S.
Perform mechanical or electronic design reviews, failure analyses, quantitative analyses and reports. Includes circuit analysis, component selection.

STATISTICAL ANALYSIS — B.S., M.S.
Apply statistical theory and method to prediction and analysis of aerospace component performance.

IDEP PRISM PROCEDURES — B.S., M.S.
Participate in "Interservice Data Exchange Programming" and "Program Reliability Information Systems for Management."

Interested applicants are invited to write in confidence to: Mr. George R. Hickman, Technical Employment Manager, Dept. 11H-2

REPUBLIC
AVIATION CORPORATION

FARMINGDALE, LONG ISLAND, NEW YORK

An Equal Opportunity Employer



★
New
Avenues
in Space
Technology ★

at AVCO/RAD

Electromechanics

Putting "man among the stars" through the design and development of a new generation of space vehicles plus a multitude of advanced space-oriented programs at Avco/RAD have created broad vistas of professional advancement for qualified engineers and scientists.

Openings exist for ME's & EE's in the following areas:

ARMING & FUZING SYSTEM DESIGN AND DEVELOPMENT
Systems synthesis, circuit design, electrical and mechanical design and project engineering.

ELECTROMECHANICAL COMPONENT DEVELOPMENT
Precision inertial devices, barometric sensors, safing and arming devices, switching mechanisms, timers and power sources.

RADAR FUZING SYSTEMS DEVELOPMENT

ADVANCED FUZING CONCEPTS STUDIES

MISSILE & SPACE VEHICLE PROGRAMMING SYSTEMS
To perform separation, ejection and similar functions.

The Division is located in a superbly equipped \$23,000,000 laboratory facility in the Boston suburbs. At Avco/RAD you will find a liberal benefits program including educational assistance.

Send resume to
Mr. J. Bergin, Dept. EE

Avco/RAD is presently associated with Apollo, Titan, Atlas, Minuteman, Nike-Zeus and other classified space projects.


Avco

Research & Advanced Development

A Division of Avco Corporation

201 Lowell St., Wilmington, Mass.

An equal opportunity employer

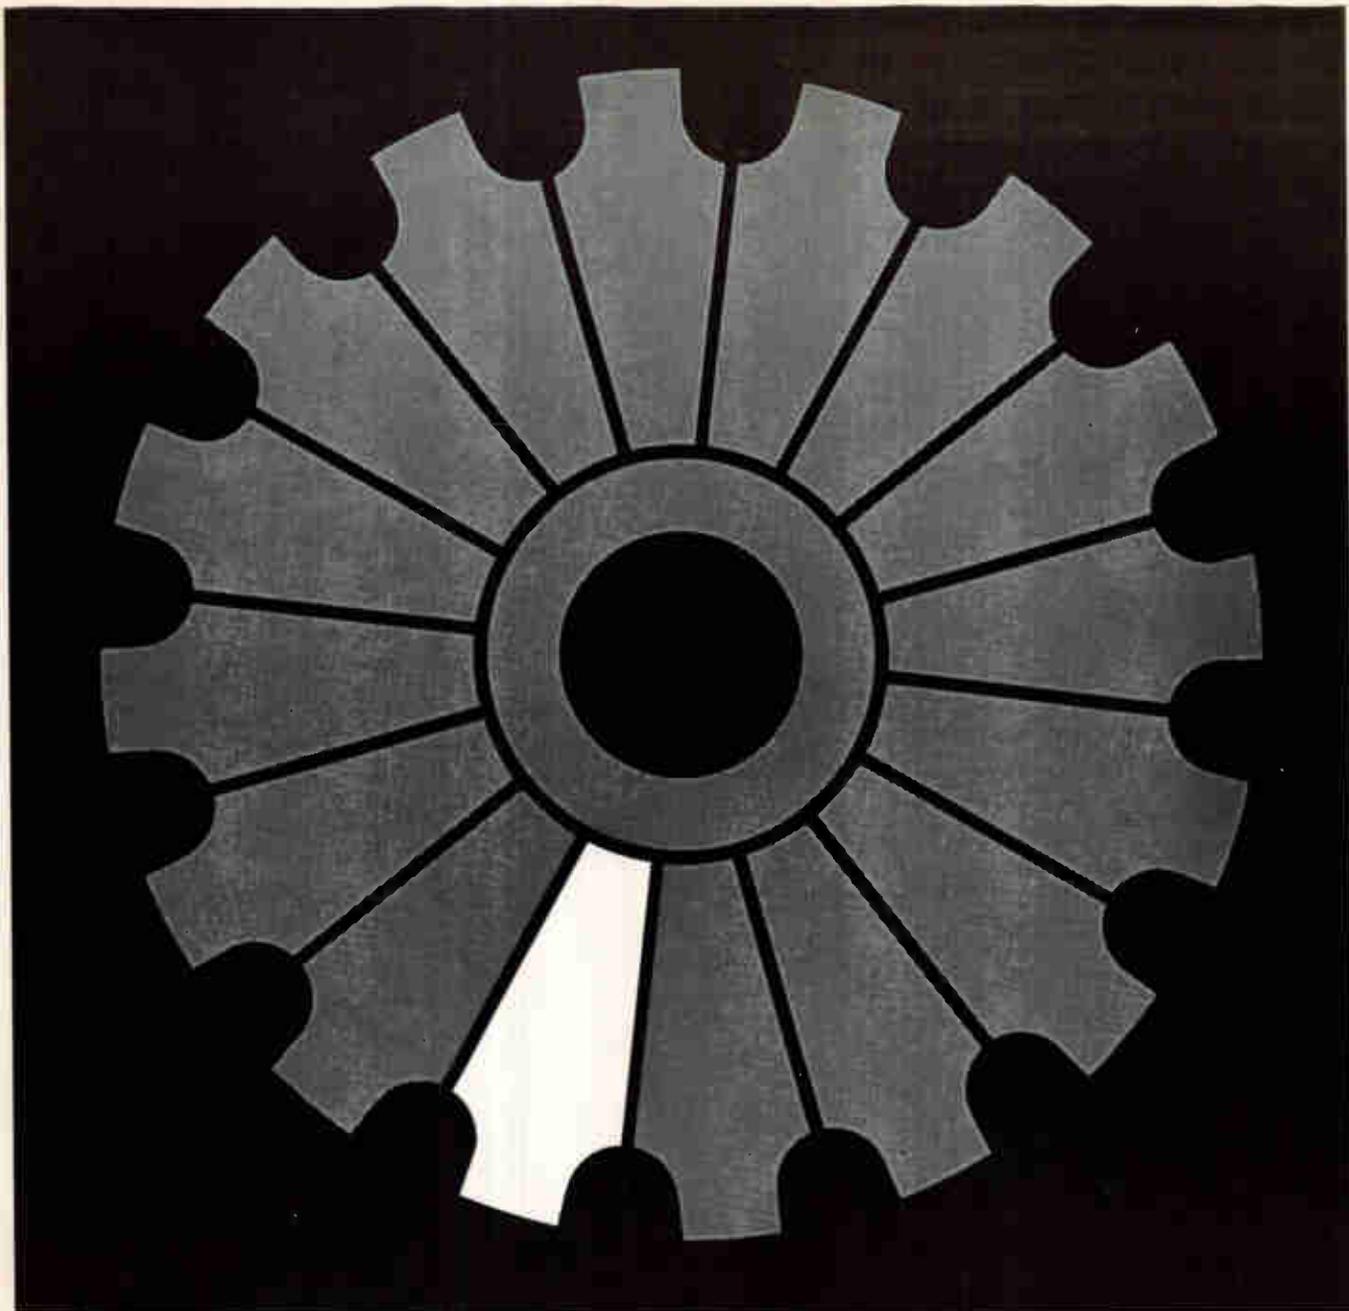

FOR OUTER SPACE . . . THE COG AND THE WHEEL. Program-oriented approach to space age problems lets engineers and scientists at Philco Western Development Laboratories play an important . . . and totally satisfying role in communications and control projects associated with major U. S. satellite programs. The typical Philco WDL program starts with careful analysis of the mission requirements and ends with field activation of equipment, plus test and . . . in many cases . . . continued operation. Thus, the engineer and scientist who begin the project are "on the spot" when theory and advanced techniques become operational equipment. Every cog in the Philco WDL space achievement is an integral part of the wheel.

Write in confidence for information on how you can find your career at Philco WDL, with the additional rewards of ideal living on the San Francisco Peninsula and professional and monetary advancement commensurate with your own ability. Requirements include B.S. or advanced degree (electronics, mathematics, physics), and U. S. Citizenship or currently transferable D.O.D. clearance. Address Mr. Patrick Manning, Department E-8..

PHILCO
A SUBSIDIARY OF
Ford Motor Company

WESTERN DEVELOPMENT LABORATORIES

3875 Fabian Way, Palo Alto, California

an equal opportunity employer

7760

Outstanding Opportunities
in an
ADVANCED COMPUTER CENTER

Challenging, unique, and immediate positions are available at all levels for personnel interested in these areas:

- PROGRAMMING**
- MECHANIZATION**
- OPERATION AND MAINTENANCE**
- DEVELOPMENT OF ADVANCE CAPACITY TECHNIQUES**

COMPUTERS YOU'LL USE

- DIGITAL IBM 7090's**
- ANALOG EAI PACE**
- HYBRID COMPUTERS**

COMPUTER APPLICATIONS IN

- ORBITAL MECHANICS**
- SPACE PHYSICS**
- NUCLEONICS**
- AERO-THERMO HYDRODYNAMICS**
- ENGINEERING**
- ADAPTIVE SYSTEMS**
- PATTERN RECOGNITION**
- SYSTEM DEVELOPMENT**
- REAL TIME SYSTEMS**


We invite you to inquire further by sending your resume to:

Mr. G. Starr
Employment Services
12214 Lakewood Blvd.
Downey, California

All qualified applicants will receive consideration for employment without regard to race, creed, color or national origin.

SPACE AND INFORMATION SYSTEMS DIVISION

North American Aviation

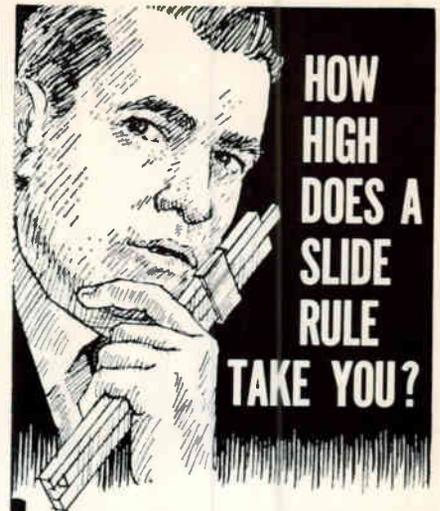

Well, look at the management echelon of your company... are they engineers? Or are you blocked by an executive barrier which only salesmen or financial men may aspire to pass? Most decision-makers at Bendix are engineers because Bendix is essentially an engineering corporation. Thus we offer you a barrier-free opportunity plus many other professional inducements. Investigate them!

ELECTRONIC TEST EQUIPMENT DESIGN ENGINEERS

To develop, design and supervise construction of special electronic test instruments, and to direct the technical activities of others in the organization. These positions require familiarity with test equipment problems and inspection techniques. Past association with military electronic equipment or experience in precision measurement of production items would assist you in qualifying for these positions. EE degree required.

SYSTEMS COORDINATING ENGINEERS

Responsible for technical management and coordination of mechanical and electrical systems in development and production. Program includes directing the activities of other engineering support groups and manufacturing organizations as well as maintaining liaison with outside design agencies. Requires a basic knowledge of production techniques and processes employed in sheet metal, light or heavy tooling, and gaging. Minimum of 4 years experience in the engineering phases of a manufacturing organization. ME or EE with mechanical experience necessary.

COMPONENTS SPECIALISTS

EE or physics degree with 4 to 6 years experience in gaseous tube design and/or production. Requires the application of gas tubes to triggering and control circuitry.

KANSAS CITY is a delightful place to live; visitors frequently call it America's most beautiful city. Living costs are moderate; recreational, cultural and educational facilities are plentiful. Choice suburban living only minutes away; no traffic problems.

We cordially invite you to submit your resume in strict confidence to Mr. D. M. BOWEN, Technical Personnel Representative.

THE Bendix CORPORATION
KANSAS CITY DIVISION
Box 303-DR, Kansas City 41, Missouri

All qualified applicants will receive consideration for employment without regard to race, creed, color or national origin.

LONG TERM PRIME CONTRACTOR FOR USAEC

DISPLAYED RATE

The advertising rate is \$27.25 per inch for advertising appearing on other than a contract basic. Contract rates quoted on request. AN ADVERTISING INCH is measured 7/8 inch vertically on one column, 3 columns—30 inches—to a page. EQUIPMENT WANTED or FOR SALE ADVERTISEMENTS acceptable only in Displayed Style.

The publisher cannot accept advertising in the Searchlight Section, which lists the names of the manufacturers of resistors, capacitors, rheostats, and potentiometers, or other names designed to describe such products. Send NEW ADS or inquiries to Classified Adv Div. of Electronics P. O. Box 12, N. Y. 36, N. Y.

UNDISPLAYED RATE

\$2.70 a line, minimum 3 lines. To figure advance payment count 5 average words as a line. BOX NUMBERS count as one line additional in undisplayed ads. DISCOUNT of 10% if full payment is made in advance for four consecutive insertions of undisplayed ads (not including proposals.)

LIFSCHULTZ

FASTEST TO BOTH COASTS

Over 62 years of dependable ON-TIME Freight Forwarding Service.

We welcome your inquiry.



PROMPT DAILY PICKUP and DELIVERY

LIFSCHULTZ

FAST FREIGHT

CIRCLE 955 ON READER SERVICE CARD

SMALL AD but BIG STOCK

of choice test equipment and surplus electronics

Higher Quality—Lower Costs
Get our advice on your problem

ENGINEERING ASSOCIATES

434 Patterson Road — Dayton 19, Ohio

CIRCLE 956 ON READER SERVICE CARD

OSCILLOGRAPH—RECORDER

Six-Channel, High-Speed, light spot recorder, uses process free paper. In like new condition. Used for demonstrator only. Will sacrifice.

C. H. STOLTING CO.

424 N. Homan Chicago 24, Illinois
Tel: Sacramento 2-3833

CIRCLE 957 ON READER SERVICE CARD

TUBE SPECIALS

3CX100A5 (replaces 2C39B, 2C39A & 2C39WA)
Tested and fully guaranteed \$9.95 ea.
6146 Brand new \$3.25 ea.
5654 6AK5W/6096 Brand new highly reliable 6AK5 \$5.95 ea.

ELECTRO SALES CO.

1608 Milwaukee Ave., Chicago 47, Ill. BR 8-8080

CIRCLE 958 ON READER SERVICE CARD FOR RESEARCH — DEVELOPMENT & EXPERIMENTAL WORK

Over 10,000 different electronic parts: waveguide, radar components and parts, test sets, pulsed, antennas, pulse xmtrs, magnetrons, IF and pulse amplifiers, dynamotors, 400 cycle xmtrs, 584 ant, pedestals, etc.

PRICES AT A FRACTION OF ORIGINAL COST!

COMMUNICATIONS EQUIP CO.
343 CANAL ST., N. Y. 13, W0 6-4045
CHAS. ROSEN (Formerly at 131 Liberty St.)

CIRCLE 959 ON READER SERVICE CARD

"Opportunity" Advertising
Think
"SEARCHLIGHT"
First

EXCELLENT USED LABORATORY EQUIPMENT

- Moseley, Model 2S X-Y Recorder. 11" x 14" . \$735
- Electro-Instruments, DVA-400 Digital Voltmeter. .0001—999.9 VDC. .01% Precision. . . . \$1000
- Measurements Corp. 84R Signal Generator, 300—1000 MC. Internal pulse and sine modulation. . . \$795
- Link Aviation 250400 Phase Comparator System with Pwr. Supply. \$785
- Endevco 2223 Tri-axial Accelerometer with 3 channel amplifier and low-noise cables. . . . \$1225
- PRD 579A Frequency Meter, High Precision, 1.6—2.6 GC. \$490
- FXR N410A Frequency Meter, 1.8—4.0 GC. . . \$185
- Kay Megamatch, 10—1000 MC. up to 30 MC sweep width. \$415
- Hewlett Packard H 382A, Precision attenuators, each. \$165
- Hewlett Packard 130A Scope. \$278
- Tektronix Scopemobiles, almost new. . \$50 and \$55
- Sierra Electronics 500 Watt Coaxial Dummy Load. \$98
- Precise Measurements 20 KV., 5 ma. Regulated Supply. \$72

Everything Sold with money-back guarantee.

SPECIALTIES RESEARCH LABORATORY

2116 Essex Street, Berkeley 5, Calif.
Telephone 843-3046 or 223-4943.
In Calif. add 4% Sales Tax.

CIRCLE 952 ON READER SERVICE CARD

can deliver **Amphenol**
Bendix
Cannon
CONNECTORS
FITTINGS & CLAMPS

We stock more than 5,000,000 MS/AN CONNECTORS . . . of 50,000 variations! In PRODUCTION QUANTITIES . . . we sell BELOW "O.E.M." PRICE . . . and offer IMMEDIATE "OFF-THE-SHELF" DELIVERY!

FREE . . . Send for latest brochure "LIST-PRICE SHEET"

WILGREEN INDUSTRIES, Inc.
102 Warren Street, New York 7, N. Y.
Worth 4-2490-1-2 Wire: FXK

CIRCLE 954 ON READER SERVICE CARD

TUBE & COMPONENT

FREE...CATALOG BARRY ELECTRONICS

512 BROADWAY WALKER 5-7000
NEW YORK 12, N.Y. TWX- NY 1-3731

CIRCLE 953 ON READER SERVICE CARD

It's UNIVERSAL . . .



This is our idea of a little fun and at the same time . . . let you test your knowledge of the most spectacular achievements of man and nature.

Do you know . . .
the name of the golfer and the distance of the longest hole-in-one?

The longest hole ever holed in one is the par four (425 yard) ninth hole at Hillcrest Golf Club, Winston-Salem, North Carolina, by Mr. Cardwell, in 1939.

This is quite an achievement—and when it comes to RELAYS . . . there's no "par" to UNIVERSAL RELAY CORP. . . . and no need to get "teed off" with delivery problems . . . because . . .

WE STOCK 2,000,000 RELAYS

SEND FOR NEW CATALOG EE



Universal RELAY CORP.

42A White St., N. Y. 13, N. Y. WALKER 5-6900
MIDWEST OFFICE: Industrial Rd., Crystal Lake, Ill.
Phone 459-2313 (Code 815)

CIRCLE 950 ON READER SERVICE CARD

GROMA wants
METAL CORP. for shipment to plant Houston, Pa.

SILVER PLATED

Molybdenum — Tungsten — Nickel etc. We pay for the Silver at competitive prices. We return or take over the base metal which we reclaim in undamaged condition.

GROMA METAL CORP.

50 Broad St., N.Y.C. • BO 9-0420

CIRCLE 951 ON READER SERVICE CARD

SPECIAL PURPOSE TUBES

OA2.....	.80	4-65A.....	10.00	25Z6WGT.....	1.50	725A.....	10.00	5751WA.....	2.00
OA2WA.....	2.00	4-125A.....	20.00	26Z5W.....	1.50	726A.....	5.00	5763.....	1.75
OA3.....	.85	4-250A.....	35.00	FG-27A.....	20.00	726B.....	5.00	5777.....	150.00
OB2.....	.60	4-400A.....	30.00	28D7W.....	3.50	726C.....	7.50	5778.....	150.00
OB2WA.....	2.00	4-1000A.....	80.00	FG-32.....	10.00	7507L.....	112.50	5783.....	2.25
OB3.....	.70	4AP10.....	10.00	35T.....	10.00	NL-760.....	20.00	5784.....	2.50
OC3.....	.50	4B31.....	12.50	35TG.....	2.50	802.....	7.50	5787.....	2.50
OD3.....	.30	4C35.....	15.00	FP-54.....	100.00	803.....	3.50	5796.....	10.00
CTA.....	8.50	4CX250B.....	30.00	FG-57.....	10.00	804.....	15.00	5800 VX-41.....	7.50
1AD4.....	1.50	4CX1000A.....	125.00	RK-60/1641.....	1.50	805.....	7.50	5803 VX-55.....	5.00
1B24.....	7.50	4D32.....	15.00	HY-69.....	3.00	807.....	1.50	5814A.....	1.35
1B24A.....	12.50	4E27A.....	27.50	BL-75.....	3.00	807W.....	2.25	5829.....	1.00
1B35A.....	3.00	4J32.....	100.00	75TL.....	17.50	808.....	2.50	5836.....	50.00
1B63A.....	10.00	4J34.....	100.00	TG-77.....	7.50	809.....	5.00	5837.....	50.00
1C/3B22.....	5.00	4J35.....	100.00	HF-100.....	10.00	810.....	15.00	5840.....	2.50
CIK.....	7.50	4J52.....	35.00	100TH.....	12.00	811.....	2.50	5845.....	6.00
1P21.....	32.50	4PR60A.....	50.00	100TL.....	12.00	811A.....	4.00	5852.....	5.00
1P22.....	8.00	4X150A.....	13.50	FG-105.....	25.00	812A.....	4.75	5876.....	7.50
1P25.....	10.00	4X150D.....	15.00	F-123A.....	5.00	813.....	12.50	5879.....	1.15
1P28.....	15.00	4X150G.....	25.00	FG-172.....	25.00	814.....	3.50	5881/6L6WGB.....	2.00
1Z2.....	1.50	4X250B.....	20.00	211.....	2.50	815.....	5.00	5886.....	4.00
2-01C.....	10.00	4X250F.....	30.00	212E.....	50.00	816.....	2.25	5893.....	10.00
2AP1A.....	8.50	5BP1A.....	9.50	FG-235.....	50.00	826.....	3.50	5894.....	18.85
2B23.....	20.00	5C22.....	17.50	242C.....	10.00	828.....	12.50	5915.....	1.00
2B24.....	10.00	5CP1A.....	9.50	244A.....	3.50	829B.....	10.00	5931/5U4WG.....	3.50
2C36.....	22.50	5CP7A.....	9.50	245A.....	3.50	832.....	2.50	5933 807W.....	3.00
2C39A.....	9.75	5D21.....	7.50	249B.....	10.00	832A.....	7.50	5948/1754.....	100.00
2C39B.....	15.00	5J26.....	50.00	249C.....	5.00	833A.....	37.50	5949/1907.....	50.00
2C40.....	7.50	5J27.....	7.50	250R.....	10.00	836.....	2.50	5963.....	1.00
2C42.....	3.00	5LP1.....	7.50	250TH.....	25.00	837.....	1.00	5964.....	.85
2C43.....	7.50	5R4GY.....	1.25	251A.....	50.00	842.....	7.50	5965.....	.85
2C46.....	5.00	5R4WGA.....	4.00	254A.....	3.50	845.....	7.50	5976.....	50.00
2C50.....	4.00	5R4WGB.....	6.00	FG-258A.....	100.00	849.....	75.00	5993.....	5.00
2C51.....	1.50	5R4WGY.....	2.00	259A.....	3.50	851.....	50.00	6005/6AQSW.....	1.50
2C52.....	1.50	5RP1A.....	9.50	262B.....	3.50	866A.....	1.90	6012.....	4.00
2C53.....	7.50	5Y3WGT.....	1.25	267B.....	5.00	869B.....	50.00	6021A.....	2.00
2D21.....	.50	5Y3WGTB.....	2.50	271A.....	12.50	872A.....	5.00	6032.....	10.00
2D21W.....	1.00	6AC7W.....	.50	274A.....	3.50	884.....	1.25	6045.....	1.15
2E22.....	3.00	6AC7WA.....	2.00	283A.....	3.50	885.....	.85	6072.....	1.50
2E24.....	2.25	6AG5WA.....	1.50	287A.....	3.50	889A.....	150.00	6073.....	1.50
2E26.....	2.50	6AG7Y.....	1.00	QK-288.....	250.00	891R.....	200.00	6074.....	1.75
2J42.....	75.00	6AK5W.....	1.25	HF-300.....	25.00	913.....	9.50	6080.....	3.35
2J51.....	50.00	6AK5 (WE).....	.75	300B.....	5.00	920.....	2.50	6080WA.....	5.00
2J55.....	90.00	6AL5W.....	.60	304TH.....	35.00	927.....	1.50	6080WB.....	10.00
2K22.....	25.00	6AN5.....	1.75	304TL.....	35.00	931A.....	3.50	6082.....	3.35
2K25.....	8.50	6AN5WA.....	3.50	307A.....	.50	1000T.....	80.00	6087/5Y3WGTB.....	2.50
2K26.....	35.00	6AQ5W.....	1.00	310A.....	3.50	R1130B.....	10.00	6101/6J6WA.....	1.50
2K28.....	25.00	6AR6.....	.75	311A.....	3.50	1500T.....	150.00	6106.....	1.50
2K29.....	25.00	6A56W.....	1.00	313C.....	1.50	1614.....	2.75	6115/QK351.....	50.00
2K30.....	50.00	6A57C.....	2.50	323A.....	3.50	1620.....	4.00	6130/3C45.....	6.50
2K33A.....	200.00	6AU6WA.....	1.25	328A.....	6.00	1624.....	1.00	6136/6AU6WA.....	1.25
2K34.....	75.00	6B4G.....	3.35	329A.....	4.50	1625.....	.50	6146.....	3.00
2K35.....	200.00	6BA6W.....	.75	336A.....	2.50	1635.....	2.00	6159.....	3.50
2K39.....	150.00	6BE6W.....	1.50	337A.....	3.50	1846.....	50.00	6161.....	35.00
2K41.....	50.00	6BF7W.....	2.00	347A.....	1.00	1855.....	250.00	6186/6AG5WA.....	1.50
2K42.....	125.00	6BH6W.....	2.75	348A.....	4.50	2050.....	1.25	6189/12AU7WA.....	1.50
2K43.....	200.00	6BL6.....	20.00	349A.....	3.50	ZB-3200.....	100.00	6197.....	1.75
2K44.....	125.00	6BM6.....	25.00	350A.....	3.50	5516.....	7.50	6201/12AT7WA.....	1.85
2K45.....	20.00	6BM6A.....	30.00	350B.....	2.50	5528 C6L.....	3.50	6202/6X4WA.....	1.50
2K47.....	150.00	6C4W.....	2.50	352A.....	8.50	5545.....	20.00	6211.....	.75
2K48.....	50.00	6C4WA.....	1.00	354A.....	12.50	5550.....	30.00	6213.....	2.50
2K50.....	175.00	6C21.....	17.50	355A.....	12.50	5552 FG235.....	50.00	6216.....	3.00
2K54.....	10.00	6D4.....	1.50	371B.....	2.50	5553 FG258.....	100.00	6236.....	125.00
2K55.....	15.00	6F4.....	3.50	388A.....	2.00	5557 FG17.....	5.00	6248.....	250.00
2K56.....	50.00	6GJ.....	10.00	393A.....	5.00	5558 FG32.....	10.00	6263.....	9.00
2P21.....	40.00	6GJ/A.....	15.00	394A.....	3.00	5559 FG57.....	10.00	6265/6BH6W.....	2.75
2X2A.....	1.25	6GJ/K.....	20.00	395A.....	2.25	5560 FG95.....	25.00	6291.....	35.00
3A5.....	.75	6J4.....	1.75	396A/2C51.....	1.50	5561 FG104.....	50.00	6293.....	4.50
3AP1.....	3.50	6J4WA.....	2.50	398A/5603.....	3.00	5586.....	125.00	6299.....	37.50
3B4.....	2.50	6J6W.....	.60	401A/5590.....	1.00	5608A.....	6.00	6316/BL800A.....	100.00
3B24W.....	3.00	6J6WA.....	1.00	403B/5591.....	3.00	5636.....	2.25	6322/BL25.....	12.50
3B24WA.....	5.00	6K4.....	2.00	404A/5847.....	7.50	5642.....	2.25	6336.....	8.75
3B25.....	2.50	6L6GAY.....	.75	407A.....	3.75	5643.....	3.00	6336A.....	12.75
3B26.....	2.25	6L6WGA.....	1.50	408A/6028.....	2.75	5647.....	3.50	6344/QK235.....	500.00
3B28.....	3.00	6L6WGB.....	2.00	409A/6A56.....	1.00	5651.....	1.00	6350.....	1.25
3B29.....	5.00	6Q5G.....	2.50	410R.....	75.00	5654/6AK5W.....	1.50	6352.....	7.50
3BP1A.....	7.50	6SJ7WGT.....	1.25	GL-414.....	80.00	5656.....	5.00	6385.....	10.00
3C22.....	15.00	65K7W.....	.75	416B/6280.....	20.00	5663.....	1.00	6390.....	125.00
3C23.....	4.00	65K7WA.....	2.00	417A/5842.....	9.50	5665/CT6J.....	35.00	6394.....	12.75
3C24/24G.....	7.50	65L7WGT.....	1.25	418A.....	9.50	5667.....	125.00	6438.....	5.00
3C33.....	7.50	65N7W.....	.50	420A/5755.....	5.00	5670.....	1.00	6442.....	25.00
3C45.....	3.50	65N7WGT.....	1.00	421A/5998.....	7.50	5672.....	1.35	6463.....	1.00
3CX100A5.....	12.50	65N7WGTA.....	2.50	429A.....	6.50	5675.....	10.00	6485.....	1.50
3D21A.....	5.00	65U7GTY.....	.85	GL-434A.....	10.00	5678.....	1.25	6533.....	7.50
3D22.....	8.00	6V6GTY.....	1.00	450TH.....	40.00	5686.....	2.25	6542.....	5.75
3DP1A.....	5.00	6X4W.....	.75	450TL.....	40.00	5687.....	1.50	6550.....	3.00
3E29.....	7.50	6X4WA.....	1.50	578.....	5.00	5691.....	5.00	6807.....	20.00
3GP1.....	2.50	6X5WGT.....	1.00	KU-610.....	5.00	5692.....	3.50	6883.....	3.50
C3J.....	7.50	SRL7H.....	100.00	NL-623.....	10.00	5693.....	3.50	7044.....	1.50
C3J/A.....	9.50	7AK7.....	2.50	631-P1.....	5.00	5696.....	1.00	7521.....	100.00
3J21.....	35.00	7MP7.....	22.50	673.....	15.00	5718.....	1.50	7580.....	35.00
3J31.....	100.00	10KP7.....	15.00	676.....	30.00	5720 FG33.....	17.50	8002R.....	25.00
3JP1.....	5.00	12A77WA.....	1.50	677.....	40.00	5721.....	100.00	8005.....	10.00
3K21.....	125.00	12AU7WA.....	1.50	701A.....	5.00	5725/6A56W.....	1.50	8008.....	7.75
3K22.....	125.00	12AX7W.....	1.35	703A.....	1.50	5726/6AL5W.....	.75	8013A.....	5.00
3K27.....	150.00	12AY7.....	1.00	707B.....	2.50	5727/2D21W.....	1.25	8014A.....	30.00
3K30.....	100.00	C16J.....	25.00	715C.....	15.00	5728 FG67.....	10.00	8020.....	4.50
3KP1.....	9.75	FG-17.....	5.00	719A.....	12.50	5749/6BA6W.....	1.00	8025A.....	7.50
3RP1.....	7.50	HK-24.....	5.00	721B.....	5.00	5750/6BE6W.....	1.50	9003.....	2.00
3WP1.....	12.50	25T.....	10.00	723A/B.....	3.50	5751/12AX7W.....	1.35	9005.....	3.50

ALL TUBES ARE NEW, INDIVIDUALLY CARTONED, FULLY GUARANTEED

western engineers

TELEX or TWX:
Elk Gr Cal 123
Telephone:
916-685-9582

ELK GROVE, CALIFORNIA
SUPPLIERS OF ELECTRON TUBES SINCE 1932

Prices FOB
Min order \$10

CIRCLE 960 ON READER SERVICE CARD

SEARCHLIGHT Equipment Locating Service

NO COST OR OBLIGATION

This service is aimed at helping you, the reader of "SEARCHLIGHT", to locate Surplus new and used electronic equipment and components *not currently advertised*. (This service is for USER-BUYERS only).

How to use: Check the dealer ads to see if what you want is not currently advertised. If not, send us the specifications of the equipment wanted on the coupon below, or on your own company letterhead to:

Searchlight Equipment
Locating Service
c/o ELECTRONICS

P. O. Box 12, N. Y. 36, N. Y.

Your requirements will be brought promptly to the attention of the equipment dealers advertising in this section. You will receive replies directly from them.

Searchlight Equipment Locating Service
c/o ELECTRONICS
P. O. Box 12, N. Y. 36, N. Y.

Please help us locate the following equipment components.

NAME
TITLE
COMPANY
STREET
CITY 8/10/62

ELECTRONIC


WAR TERMINATION INVENTORIES

WRITE OR WIRE FOR INFORMATION ON OUR COMPLETE LINE OF SURPLUS ELECTRONIC COMPONENTS. ALL PRICES NET F.O.B. PASADENA, CALIFORNIA

C&H

SALES CO.

2176-E East Colorado St.
Pasadena 8, California
MUrray 1-7393




SIMPLE DIFFERENTIAL WITH BALL-BEARING SUN GEARS

The 1:1 reverse ratio spur gears are 48-tooth, 32 pitch brass with 3/16" available face. On one side, the shaft is 23.64" dia. for 11/16" and has a pin hole, then increases in dia. to .377" for the remaining 3/16" of length. On the other side, the shaft is .377 dia. 1/4" lg. 2-13/16" dia. is required to clear the body.
Stock no. A6-115 each \$15.00

RCA 6032 IMAGE-CONVERTER TUBE
Combined with suitable optical systems, this 3-electrode tube permits viewing of scene with infrared radiation. Scene to be viewed is imaged by optical objective upon semi-transparent photocathode. Spectral resp., S-1; good response up to about 1200A. Max. ratings, absolute, grid #2, 20,000VDC or peak AC, grid #1, 2700.
\$9.95 ppd.

MINOR SWITCH 10-position, 3-pole, with stopper & reset coil 6-12 V. D.C. off-normal non-bridging wiper. wt.: 1 lb. \$9.95

400-CYCLE MOTOR GENERATOR, PU-20



The generator assembly consists of a 1400-watt, 120-volt, 400-cycle inductor-alternator and a 400-watt, 27-volt D.C. generator. The alternator rotor and the D.C. generator armature are mounted on a common shaft, which is dual-belt-driven by a 3-H.P., 1750-R.P.M., 115/230-volt, single-phase 60-cycle electric motor. Weatherproof output box is mounted on top of the stator shell. It contains a rheostat, adjustable resistor, two pin jacks for plugging in an A.C. voltmeter. Size: 28" W., 33" L., 18" H. Weight, approx. 250 lbs.
Price \$175.00

8-DAY ELAPSED-TIME SURPLUS AIRCRAFT CLOCK



Here's an accurate time-control center that'll help you win your next rallye. It not only tells you the date and time of day right to the second, it's a stop watch that gives you elapsed time in seconds, minutes, and hours! The 24-hour clock simplifies adding and subtracting elapsed time for your navigator. Manufactured by Elgin Watch Co. to exacting military specifications, it will remain accurate in spite of road bumps and vibrations. Uses no electrical connections. Does the job of high-cost equipment. Jeweled/Sweep Second Hand/Luminous Hands and Numerals/25-Hour Dial/Black Face and Plastic Case/3 1/4" Mounting.
Cost the Government \$185.00
Only \$39.95 Postpaid

SPERRY VERTICAL GYRO



Part #673073, Motor 115 volts, 3 phase, 400 cycle, 8 watts, 20,000 RPM. 3-minute runup, synchro pickoffs, roll 360°, pitch 85°. Synchro excitation 26 volts, 400 cycle, 150 m.a. Vertical accuracy ± 1/2". Weight 3 1/2 lbs. Approx. dim. 5 1/4" L., 4 1/2" W., 4 1/2" H.
Price \$35.00

VARIABLE SPEED BALL DISC INTEGRATORS

(All Shafts Ball Bearing Supported)
No. 145 Forward & Reverse 2 1/4"-0-2 1/4". Input shaft spline gear 12 teeth 9/32" dia. 3/8" long. Output shaft 15/64" dia. x 15/32" long. Control shaft 11/32" x 3/8" long. Cast aluminum construction. Approx. size 3" x 3" x 2 1/4" \$17.50
No. 146 Forward & Reverse 4-0-4. Input shaft 5/16" dia. x 3/8" long. Output shaft 15/64" dia. x 9/16" long. Control shaft 11/64" dia. x 11/16" long. Cast aluminum construction. Approx. size 4 1/2" x 4 1/2" x 4".
\$18.50 ea.


SMALL DC MOTORS



(approx. size over 3/4" x 1 1/4" dia.)
5067043 Delco 12 VDC PM 1" x 1" x 2", 10,000 rpm. \$7.50
5067126 Delco PM, 27 VDC, 125 RPM, Governor Controlled 15.00 ea.
5069600 Delco PM 27.5 VDC 250 rpm 12.50
#5069625 120 rpm, mfr. Delco, 27 VDC governor controlled \$15.00
5069230 Delco PM 27.5 VDC 145 rpm 15.00
5068750 Delco 27.5 VDC 160 rpm w. brake 6.50
5068571 Delco PM 27.5 VDC 10,000 rpm (1x1x2") 5.00
5069790 Delco PM, 27 VDC, 100 RPM, Governor Controlled 15.00 ea.
#5069800 575 rpm, mfr. Delco, 27 VDC, PM reversible governor controlled, equipped with 27 VDC clutch \$17.50
5072735 Delco 27 VDC 200 rpm governor controlled 15.00
5BA10A118 GE 24 VDC 110 rpm 10.00
5BA10AJ37 GE 27 VDC 250 rpm reversible 10.00
5BA10AJ52 27 VDC 145 rpm reversible 12.50
5BA10AJ50, G.E., 12 VDC, 140 rpm 15.00
5BA10FJ401B, G.E. 28 VDC, 215 rpm, 10 oz. in., 7 amp. contains brake 15.00
5BA10FJ421, G.E. 26 VDC, 4 rpm, reversible, 6 oz. in., .65 amp 15.00

400 CYCLE PM GENERATOR

115/200 volts A.C. 1- or 3-phase, 200 watts, 4,000 r.p.m. Approx. dimensions: 4 1/4" dia.; 3" long; 1/2" shaft, AN connector. \$75.00



DIRECTIONAL INDICATOR, TYPE C5C



Mfr. Summers Gyro-scope Company. 115 volt A.C., 400 cycle, 3 phase. Contains direct reading gyro with caging mechanism and power failure indicator. Hermetically sealed case. 5" dia., 0 to 360°
PRICE \$22.50

MINNEAPOLIS-HONEYWELL RATE GYRO (Control Flight)



Part no. JG7005A. 115 volts A.C., 400 cycle, single phase potentiometer take off resistance 530 ohms. Speed 21,000 r.p.m. Angular momentum 2 1/2 million, CM²/sec. Weight 2 lbs. Dimensions 4-7/32 x 3-29/32 x 3-31/64.
Price \$22.50

SELSYNS- SYNCHROS



1CT cont. Trans 90/55V 60 cy.....	\$27.50
1DG Diff. Gen. 90/90V 60 cy.....	34.50
1F Syn. Mtr. 115/90V 60 cy.....	34.50
1G Gen. 115V 60 cy.....	34.50
1HDG	37.50
1HCT	37.50
1SF Syn. Mtr. 115/90V 400 cy.....	12.50
23TR4 torque receiver.....	34.50
23TR6 torque receiver.....	37.50
23CT6 control transformer.....	37.50
23CX6 control transmitter.....	37.50
23TX6 torque transmitter.....	37.50
7DG differential generator.....	37.50
211F1 Gen. 115/57.5V 400 cy.....	7.50
211F3 Gen. 115/57.5V 400 cy.....	10.00
211FA1 Gen. 115/57.5V 400 cy.....	7.50
211G1 57.5/57.5V 400 cy.....	5.00
211H1 Diff. Gen. 57.5V 400 cy.....	7.50
215D1 Cont. Trans. 105/55V 60 cy.....	17.50
215F1 Cont. Trans. 105/55V 60 cy.....	17.50
215H1 Gen. 115/105V 60 cy.....	17.50
215M1 Gen. 115/57.5V 400 cy.....	17.50
5CT Cont. Trans. 90/55V 60 cy.....	34.50
5D Diff. Mtr. 90/90V 60 cy.....	34.50
5DG Diff. Gen. 90/90V 60 cy.....	34.50
5F Syn. Mtr. 115/90 VAC 60 cy.....	34.50
5G Syn. Gen. 115/90VAC 60 cy.....	34.50
5HCT Cont. Trans. 90/55V 60 cy.....	12.50
5SDG Diff. Gen. 90/90V 400 cy.....	25.00
6DG Diff. Gen. 90/90V 60 cy.....	34.50
6G Syn. Gen. 115/90VAC 60 cy.....	42.50
7G Syn. Gen. 115/90VAC 60 cy.....	20.00
C56701 Type 11-4 Rep. 115V 60 cy.....	20.00
C69405-2 Type 1-1 Transm. 115V 60 cy.....	20.00
C69406 Syn. Transm. 115V 60 cy.....	20.00
C69406-1 Type 11-2 Rep. 115V 60 cy.....	20.00
C78248 Syn. Transm. 115V 60 cy.....	12.50
C78410 Repeater 115V 60 cy.....	20.00
FPE 49-7 Diehl servo motor, 115 volts, 60 cycle, 10 watts.....	30.00

400 CYCLE, 3 PHASE GENERATOR BY MASTER ELECTRIC



Type AG, frame 364Y, 7.5 kw, 3428 rpm, pi .95 Star connected 120/208 3 phase, 22 amps. Delta connected 120 volt single phase 6 amps. Self excited. Complete with control box, voltage regulator, AC voltmeter and frequency meter. Shaft 1" dia., 2" long; overall dim. of unit: 21" x 6 1/2" x 20".
Price \$395.00 each

SENSITIVE INTEGRATING GYROS




This is the famous HIG Gyro which is being used in missile guidance systems, radar stabilization and fine control systems. Government cost approximately \$1500.
PRICE \$50.00

400 CYCLE PM GENERATOR

Mfgd. by T K M Electric Corp. Model #A-12 120/208 volts, 400 cycle, 1 or 3 phase, 1 kw, pf 0.8, rpm 8,000. Approx. dim. 6" x 5 1/2". Internal spline drive. Price \$100.00

HONEYWELL VERTICAL GYRO MODEL AG7044A17



115 volts, 400 cycles, single phase, 35 watts. Pitch and roll potentiometer pickoffs 890 ohms, 40 volts max. AC or DC. Speed 20,000 rpm, ang. momentum 12,500,000 gm-cm²/sec. Erection system 27 VAC.
400 cycles, time 5 min. to 1/2"; caging mechanism operates on 24 VDC.
\$49.50

400-CYCLE FREQUENCY METER IN PORTABLE METAL CASE

Range, 380-400 cps. 100-130 VAC. Nine vibrating reeds. Frequency increments of 5 cps. Frequency accuracy is ± 0.3% at 77° F. with sine wave input. With test leads. 3 1/4" x 3 1/4" x 6". Winslow Model 360. \$12.50



INDEX TO ADVERTISERS



Audited Paid Circulation

• APM Hexseal Corp. 132	duPont de Nemours & Co., Inc. E.I. 103 , 117	• Kepeco, Inc. 83
• Aeme Electric Corp. 174	Dymec, A Division of Hewlett Packard Co. 19	• Kingsley Machine Co. 98
• Ad-Yu Electronics Lab. Inc. 202		• Klein & Sons, Mathias 173
Aerojet General Corp., Astrionics Div. 133		Krohn-Hite Corp. 146
• Ainslie Corporation 155	Edwards High Vacuum Inc. 172	• Kyoritsu Electrical Instruments Works, Ltd. 124
Airborne Instruments Laboratory..... 89	Eitel-McCullough, Inc. 6	
Airpax Electronics, Inc. 120	• Electrodynamic Instrument Corporation 80	• Lapp Insulator Co., Inc. 166
Alberox Corp. 171	Electro Products Laboratories 165	• Lavoie Laboratories Inc. 181
• Allmetal Screw Products Co., Inc. 167	• Electronic Instrument Co., Inc. (EICO) 183	• Leach and Garner Co. 168
• American Bosch Arma Corp. Teledynamics Div. 154	Electronic Measurements Co., Inc. 53	Levin and Son, Inc., Louis..... 98
• American Electronic Laboratories, Inc. 29	• Engineered Electronics Co. 170	Lockheed Missiles & Space Co..... 110
• American Optical Co. 95		
Arnold Engineering Co., The..... 143	• Fairechild Controls Corp. 44	• Mabuchi Shoji K.K. 98
Athom Electronics Inc..... 160	• Fairechild Semiconductor Corp. 77, 79	• Magnetic Shield Division of Perfection Mica Co. 144
• Augut Inc. 140	Fluke Mfg. Co., Inc. John..... 123	Manson Laboratories, Inc..... 161
• Automatic Metal Products Corp. 182	Ford Instrument Co. Div. of Sperry Rand Corp..... 102	Marconi Instruments 167
	Frederick Electronics Corp..... 184	• Massa, A Div. of Cohu Electronics, Inc. 158
Baltimore Gas & Electric Co..... 5		• McCoy Electronics Co. 177
Bausch & Lomb, Inc..... 83	• Garlock Electronics Products Inc. 39	McGraw-Hill Book Co..... 128
Belden Manufacturing Co..... 101	• General Findings Inc. 168	• Mico Instrument Co. 183
Bendix Corporation Scintilla Division 125	General Radio Co. 2nd cover	• Microswitch, Division of Honeywell .. 122
• Black & Webster, Inc. 186	Graphic Systems, Inc. 188	Mitsumi Electric Co., Ltd. 187
Boesch Mfg. 185	Greyhound Van Lines..... 10	Monterey Engineering 112
• Boonton Radio Corp. 49	Gries Reproducer Corp..... 202	Motorola Semiconductor Products Inc. 46
Bourns Inc. 37, 38, 163		• Mycalex Corp. of America 81
Bressler Associates 172	• Hart Manufacturing Co. 178	
Burnell & Co., Inc..... 119	Hathaway Instruments Inc..... 50, 51	NRC Equipment Co. 26
• Bussmann Mfg. Co., Div. of McGraw Edison Co. 90	• Haydon Co., A. W. 152	• New Hermes Engraving Machine Corp. 186
	• Hewlett-Packard Company 12, 13, 16, 17, 18	• Nichicon Capacitor Ltd. 108
• CTS Corp. 136	Hoffman Electronics Corp. 9	• North Atlantic Industries, Inc. 148
• Cannon Electric Co. 107	Holt Instrument Laboratories..... 108	• Northern Radio Co., Inc. 155
• Chassis-Trak Corp. 168	Hughes Aircraft Co..... 180	Northrop Corp. 149, 151
• Clevite Electronic Components A Div. of Clevite Corp. 94		
Cominco Products, Inc..... 188	• Imtra Corp. 108	• Ohmite Mfg. Co. 43
Consolidated Electrodynamics Corp... 104	• Indiana General Corp. 57	Ozalid, A Div. of General Aniline & Film Corp. 42
Consolidated Reactive Metals, Inc.... 155	• Industrial Test Equipment Co. 163	
• Continental Connector Corp. 109	Inertia Switch Inc. 201	Paktron, Div. of Illinois Tool Works, Inc. 147
Continental Electronics Mfg. Co..... 111	Ingersoll Products Division of Borg-Warner Corp..... 115	Parabam, Div. of Houston Fearless Corp. 188
	International Telephone and Telegraph Corp. 129	Penta Laboratories, Inc. 137
Data-Control Systems, Inc..... 157	Industrial Products Div. 105	
• Daystrom Incorporated Potentiometer Div. 40, 41	• Itek Electro-Products Co. 145	
Daystrom Incorporated Transicoll Div. 52		
Delco Radio 159	Jerrold Electronics Corp. 15	• See advertisement in the July 25, 1962 issue of Electronics Buyers' Guide for complete line of products or services.
Delta Design, Inc..... 126	Johnson Company, E. F..... 54	
DoAll Co., The..... 25		
Di Acro Corp..... 162		
Douglas Aircraft Co..... 96		
• Driver Co., Wilbur B. 156		
• Dumont Laboratories Inc., Allen B. 121		

- **Perfection Mica Co.**
Magnetic Shield Div. 144
- Perkin Electronics 124
- **Potter Instrument Co., Inc.**..... 21
- Precision Instrument Co. 141
- **Premier Metal Products Co., Inc.**... 187
- Princeton Applied Research Corp.... 162

- **Radio Cores, Inc., Permacor Div.**.... 160
- **Radio Corporation of America**... 4th cover
- Raychem Corp. 34, 35
- **Raytheon Company** 46, 47
- **Reeves Instrument Corp.**
Sub. of Dynamics Corp. of America 114
- **Resistance Products Co.** 150
- Rohr Corp. 87

- **Sanborn Company**..... 113
- Sangamo Electric Co. 27, 28
- Sankalsha Co., Ltd. 172
- Security Devices Laboratory 183
- **Servo Corporation of America**..... 86
- Servomechanisms, Inc. 140
- **Showa Musen Kogyo Co., Ltd.**..... 126
- **Sigma Instruments, Inc.**..... 78
- **Sorensen** 131
- **Southern Electronics Corp.**..... 162
- Space Technology Laboratories, Inc. 11
- Sperry Electronic Tube Div. Sperry
Rand Corp. 3rd cover
- Sprague Electric Co. 4, 33
- Struthers-Dunn Inc. 83
- Sumitomo Electric Industries, Ltd. 164
- Sweeney Mfg. Co., B. K. 178
- Synthane Corp. 124
- **Syntronic Instruments Inc.**..... 172

- Taber Instrument Corp. 169
- Taylor Fibre Co. 134, 135
- Texas Instruments Incorporated
Apparatus Division 153
- Texas Instruments Incorporated
Components Division 55, 56
- Texas Research & Electronic Corp. 97
- Thiokol Chemical Corp. 91
- **Tokyo Shibaura Electric Co., Ltd.**... 126
- **Toyo Cone Paper Co., Ltd.**..... 168
- Toyo Musen Co., Ltd. 112
- Trak Microwave Corp. 142
- **Transitron Electronic Corp.**..... 127
- Trygon Electronics Inc. 36
- **Tung-Sol Electric, Inc.** 22, 23

- Unger Electric Tools 112
- **United Shoe Machinery Corp.**..... 185
- Unitek/Weldmatic Division 139
- **Universal Relay Corp.**..... 185
- **Utica Tool Division,**
Kelsey-Hayes Co. 138

- Wacline Meters, Inc. 118
- Wagh Engineering, Div. of Foxboro
Co. 179

- **Western Electric**
Laureldale Plant 58
- Weston Instruments
A Division of Daystrom Inc. 99
- **Wheaton Engineering, Hurlertron**
Inc. 184
- **Yellow Springs Instrument Co.,**
Inc. 180

CLASSIFIED ADVERTISING
F. J. Eberle, Business Mgr.

EMPLOYMENT OPPORTUNITIES 190-196


EQUIPMENT
(Used or Surplus New)
For Sale 197-199

INDEX TO CLASSIFIED ADVERTISERS

- AFSC-AFLC 193
- Antenna Systems Inc. 192
- Atomic Personnel Inc. 190
- Avoc Research & Development 194
- **Barry Electronics** 197
- Bendix Corp. 196
- **C & H Sales** 199
- **Communications Equipment Co.**..... 197
- **Electro Sales Co.** 197
- Engineering Associates 197
- Esquire Personnel Service Inc. 190
- Groma Metal Corp. 197
- Houston Instrument Corp. 190
- Jet Propulsion Laboratory 190
- Lifschultz 197
- Los Alamos Scientific Laboratory 190
- McDonnell 192
- Microwave Service International Inc. 190
- National Aeronautics and Space
Administration 191
- Philco Western Development Labs... 195
- Republic Aviation Corp. 194
- Space and Information Systems
a division of North American Avia-
tion Inc. 196
- Specialties Research Laboratory 197
- Stoelting Co., C. H. 197
- Union Carbide Nuclear Co. 190
- **Universal Relay Corp.**..... 197
- Vapor Corp. 192
- **Western Engineers** 198
- **Wilgreen Industries** 197

• See advertisement in the July 25, 1962 issue of Electronics Buyers' Guide for complete line of products or services.

This Index and our Reader Service Numbers are published as a service. Every precaution is taken to make them accurate, but ELECTRONICS assumes no responsibilities for errors or omissions.

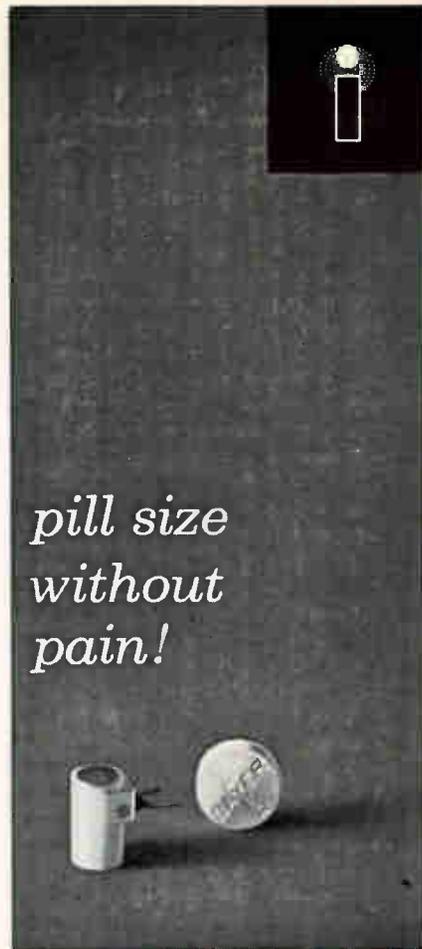

*pill size
without
pain!*

*new
MICRO-MITE
inertia
switch*

Standard and custom

- Switches
- Integrators
- Recorders
- Indicators

for all forms of motion

Write, wire, or phone for
descriptive brochure E-8-11-62



311 West 43rd St. • New York 36 • JUDSON 6-5880

PRECISION

- Direct Reading in Degrees.
- Accuracy 0.05° or 1%.



PHASE SETTERS

Type 405 Series: 1 cps to 500 kc. Accuracy 0.25° relative, 1° absolute. No amplitude adjustment from 0.1v to 70v. Suitable for plotting phase curve.

Type 202: 20 cps to 500 mc. Accuracy 0.02° or 2%. 1° full scale sensitivity. Phase range 0-1, 0-2, 0-4, 0-12, 0-120, and 0-180 degrees.

Type 205A1-A2: 100 kc to 15 mc. Accuracy 0.05° or 1%. Sensitivity 0.04v.

Type 205B1-B2-B3: 15 mc to 1500 mc. Accuracy 0.05° or 1%. Sensitivity 10 millivolts or better with receiver.

AD-YU
ELECTRONICS LAB., INC.

249 TERHUNE AVE., PASSAIC, N. J.

VISIT OUR BOOTH 3350 AT THE WESCON SHOW
CIRCLE 235 ON READER SERVICE CARD

GRC tiny parts



die cast
ZINC ALLOY



molded
PLASTICS



Coil Bobbins
Gears & Pinions



MOLDED NYLON, DELRIN & OTHER THERMOPLASTICS

Design Guide . . . Shows how GRC's special methods for producing tiny, precision parts in all engineering thermoplastics can help you. GRC's exclusive automatic single cavity techniques offer quality and accuracy in small parts of diecast zinc alloy, Nylon, Delrin, and other engineering thermoplastics. Write, wire, phone NOW for samples and detailed bulletins. **NO MINIMUM SIZE!** Maximum sizes: Zinc Alloy—2" long, 1/2 oz. Plastic—1 3/4" long—0.05 oz.



GRIES REPRODUCER CORP.

World's Foremost Producer of Small Die Castings
151 Beechwood Ave., New Rochelle, N. Y.
Phone: (914) NEw Rochelle 3-8600

electronics



Audit Bureau
of Circulations



Associated Business
Publications

Audited Paid Circulation

JAMES T. HAUPTLI

Advertising Sales Manager

R. S. QUINT:
Assistant Publisher Buyers'
Guide and Business Manager
FRED STEWART:
Promotion Manager
B. ANELLO:
Market Services Manager

RICHARD J. TOMLINSON:
Production Manager
GEORGE E. POMEROY:
Classified Manager
HUGH J. QUINN:
Circulation Manager

ADVERTISING REPRESENTATIVES

ATLANTA (9):

Michael H. Miller, Robert C. Johnson
1375 Peachtree St. N.E., Trinity 5-0523
(area code 404)

BOSTON (16):

William S. Hodgkinson, Donald R. Furth
McGraw-Hill Building, Copley Square,
Congress 2-1160 (area code 617)

CHICAGO (11):

Harvey W. Wernecke, Robert M. Denmead
645 North Michigan Avenue, Mohawk 4-5800
(area code 312)

CLEVELAND (13):

Paul T. Fegley
55 Public Square, Superior 1-7000
(area code 216)

DALLAS (1):

Frank Le Beou
The Vaughn Bldg., 1712 Commerce St.
Riverside 7-9721 (area code 214)

DENVER (2):

J. W. Potten
Tower Bldg., 1700 Broadway,
Alpine 5-2981 (area code 303)

HOUSTON (25):

Joseph C. Page, Jr.
Prudential Bldg., Halcombe Blvd.,
Riverside 8-1280 (area code 713)

LOS ANGELES (17):

Peter S. Carberry, Ashley P. Hartman
1125 W. 6th St., Huntley 2-5450
(area code 213)

NEW YORK (36):

Donald H. Miller, Henry M. Shaw,
George F. Werner
500 Fifth Avenue, LO-4-3000
(area code 212)

PHILADELPHIA (3):

Warren H. Gardner, William J. Boyle
6 Penn Center Plaza, LOcust 8-4330
(area code 215)

SAN FRANCISCO (11):

R. C. Alcorn
255 California Street, Douglas 2-4600
(area code 415)

LONDON W1:

Edwin S. Murphy Jr.
34 Dover St.

FRANKFURT/Main:

Matthée Herfurth
85 Westendstrasse

GENEVA:

Michael R. Zeynel
2 Place du Port

"Headquarters for Business Information"

McGraw-Hill Technical and Business Publications

American Machinist/Metal-
working Manufacturing
Aviation Week and Space
Technology
Business Week
Chemical Engineering
Chemical Week
Coal Age
Construction Methods and
Equipment
Construction Daily
Control Engineering
Electrical Construction
and Maintenance
Electrical Merchandising Week
Electrical Newsletter
Electrical West

Electrical Wholesaling
Electrical World
Electronics
Engineering Digest
Engineering and Mining Journal
E & MJ Metal and Mineral
Markets
Engineering News-Record
Factory
Fleet Owner
Industrial Distribution
National Petroleum News
Nucleonics
Nucleonics Week
Platt's Oilgram News
Platt's Oilgram Price Service
Power

Product Engineering
Purchasing Week
Science Week
Textile World

Overseas only:
Automobile International
(English, Spanish)
Ingenieria Internacional
Construccion (Spanish)
International Management
(English, Spanish)
Portuguese editions
Metalworking Production
(Great Britain)

Available by subscription only—to qualified persons actively engaged in the field of the publication. For subscription rates and information describing the editorial coverage of any of the above publications, write to: Subscription Manager, Circulation Department, McGraw-Hill Publishing Company, 330 West 42nd Street, New York 36, N. Y.

SPERRY microwave memo



Sperry offers 60-day delivery on a low-cost K band reflex klystron

The SRK-291, a new low-cost K band reflex klystron oscillator offering dramatic cost savings in microwave systems, is now available from Sperry Electronic Tube Division within 60 days from receipt of your order! Sperry's new tube operates at frequencies ranging from 21 to 24.5 Gc. Within these frequency limits, it offers a $1\frac{1}{2}$ Gc mechanical tuning range and a low temperature coefficient. The SRK-291 is priced at only \$1495.


PARAMETRIC PUMPING APPLICATIONS

The SRK-291 is specially suited to the requirements of parametric amplifier pumping, since its power output — 80 mW minimum — is more than adequate for parametric amplifier pumping demands. Its low price, wide bandwidth, and inherent stability remove the technical and economic limitations that for-

merly hindered the use of parametric amplifiers in many systems.

OTHER APPLICATIONS

Sperry's versatile new tube also shows great desirability for application in short range communications systems, beacons, and microwave links. Extreme mechanical ruggedness, light weight (only $3\frac{1}{2}$ oz.), and small size, make the tube ideal for airborne as well as ground-based installations.

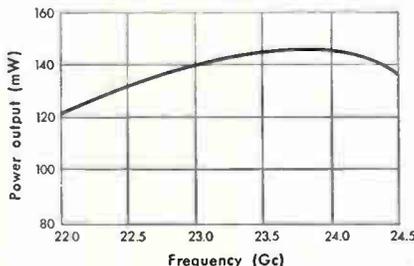

SRK-291, typical P out vs. Freq.

NEW, FREE BROCHURE

A new, free brochure describes the capabilities of the SRK-291 in greater detail. For your copy, write to Sperry Electronic Tube Division, Sec. 147, Gainesville, Florida.

Since the SRK-291 is available within 60 days, it represents an *immediate* solution to your present problems, whether you are designing a new system or concentrating on improved performance for an operational one. Cain & Co., which represents Sperry nationally, has a sales engineer near you. He'll be happy to help you work out specification details. Call him today.



GAINESVILLE, FLA. / GREAT NECK, N. Y.
SPERRY RAND CORPORATION

CIRCLE 901 READERS SERVICE CARD

Why Wurlitzer chose
the RCA-7868 NOVAR Power Pentode
for its Electronic Pianos



**“High Power Sensitivity, High Power Output Capabilities
and Low Cost”...**

THE WURLITZER COMPANY



This is the power amplifier stage of the new Wurlitzer Console Electronic Piano, *first mass-produced instrument of its kind on the market.* The two power pentodes are RCA-7868 novar types. Why did Wurlitzer engineers choose novar tubes?

Because:

- “The RCA-7868 offers high power sensitivity, high power output capabilities and low cost.”
- “Comparative tests were run on other tubes with equal results from the standpoint of distortion at power outputs of 20 and 30 watts, but the novar tube performed at reduced cost.”
- “In addition to supplying power at lower cost than other types, the novar 7868 also permitted us to ship the instruments with the tubes in their respective novar sockets without special mounting clamps or packing materials.”
- “The compactness of the tube permitted us to install it in amplifiers where vertical clearance is quite limited.”
- “Novar construction permits more efficient heat conduc-

tion through the base pins to the sockets and the chassis, thus transferring heat from the tube bulb to a greater cooling area.”

The RCA-7868 supplies 25 and 35 watts of audio power in Wurlitzer Model 4100 and 4430 electronic organs respectively, and 15 watts of audio power in the Wurlitzer console electronic piano.

The unique design features that made these novar types a wise choice for Wurlitzer may also be the answer to *your* circuit design problem. For more information on novar tube types see your RCA Field Representative or write Commercial Engineering, Section 11-19-DE-2, RCA Electron Tube Division, Harrison, N. J.

RCA ELECTRON TUBE DIVISION—FIELD OFFICES... EAST: 744 Broad Street, Newark 2, New Jersey, HUmboldt 5-3900 • MIDWEST: Suite 1154, Merchandise Mart Plaza, Chicago 54, Illinois, WHitehall 4-2900 • WEST: 6801 E. Washington Boulevard, Los Angeles 22, California, RAYmond 3-8361



THE MOST TRUSTED NAME IN ELECTRONICS.