

**RADIO INDUSTRY  
RED BOOK  
REPLACEMENT PARTS  
BUYERS GUIDE**

A *Howard W. Sams* PHOTOFACt PUBLICATION  
FIRST EDITION

DISTRIBUTED BY

AEROVOX  
ASTATIC  
BURGESS  
CLAROSTAT  
CORNELL-DUBILIER  
EVEREADY  
IRC  
JENSEN  
MEISSNER  
MERIT  
QUAM-NICHOLS  
RADIART  
SOLAR  
SPRAGUE  
STANCOR  
SYLVANIA  
THORDARSON

★  
AEROVOX  
ASTATIC  
BURGESS  
CLAROSTAT  
CORNELL-DUBILIER  
EVEREADY  
IRC  
JENSEN  
MEISSNER  
MERIT  
QUAM-NICHOLS  
RADIART  
SOLAR  
SPRAGUE  
STANCOR  
SYLVANIA  
THORDARSON

FIRST EDITION • COVERS 1938 TO 1948 RADIO RECEIVERS

# RADIO INDUSTRY

# RED BOOK

REPLACEMENT PARTS BUYER'S GUIDE

FIRST EDITION—FIRST PRINTING—SEPTEMBER, 1948

Reproduction or use, of editorial or pictorial content, in any manner,  
without express permission, is prohibited. No responsibility is assumed with respect  
to application or patent liability of the included material.

Entire Contents Copyrighted 1948 by Howard W. Sams & Co., Inc. Indianapolis 7, Indiana. U.S.A.

Copyright Under International Copyright Union

All Rights Reserved Under Inter-American Copyright Union (1910) by Howard W. Sams & Co., Inc.

PRINTED IN U.S. OF AMERICA

★ COMPILED AND PUBLISHED BY HOWARD W. SAMS & CO., INC. • INDIANAPOLIS 7, INDIANA

# The First Cooperative Industry Effort in Behalf of the Radio Service Technician

THE STORY about the RED Book is important, particularly to you—the Radio Service Technician. You will want to know the facts of that story. It begins with the purpose behind the formation of Howard W. Sams & Co., Inc. That purpose is, and always will be, to work for your interests, and for your advancement in the profession of Radio Servicing.

We owe our success to you—the thousands of Radio Service Technicians who give us wholehearted support—and to the Industry as a whole, generous in the cooperation it constantly provides.

When we first announced PHOTOFACt RADIO SERVICE DATA there were those who said it could not be done. But we did what we said we would do. We got the actual equipment into our laboratories. We analyzed it. We photographed it. We published the first original service data, designed for your particular use, wholly accurate, more complete than anything ever before attempted, and presented it in a uniform, easy-to-use style, with exclusive advantages—the way thousands of you wanted it.

We did not stop there. We provided what you requested when we published the AUTOMATIC RECORD CHANGER MANUAL, the DIAL CORD STRINGING GUIDE, and the RADIO RECEIVER TUBE PLACEMENT GUIDE. And to

help you insure your future in the Industry, we supplied the timely PHOTOFACt TELEVISION COURSE, which has been of the greatest assistance to thousands of established service technicians. We had another plan that looked like a dream at first, because it seemed impossible of achievement. We knew your problems. For years we have watched you hunting and digging for reliable data on major replacement parts. We know you have used dozens of separate parts guides, wasting valuable time. Our plan to remedy this was foremost in our minds. We asked ourselves:

"Suppose it were possible to compile a single accurate volume that would give Radio Service Technicians instant reliable data on major replacement parts used during the past ten years, covering thousands of popular radio receivers . . . And suppose that single volume listed the proper replacement products of most of the leading parts manufacturers in the industry?"

Well, that was the dream we set out to make into a reality. We know the RED Book should be a cooperative industry effort. We approached the set manufacturers. We laid our plans before the parts manufacturers. With but few exceptions, the response was gratifying. We got the "green light." We were pledged cooperation.

We worked two years to turn the dream into solid reality. The result is this volume—"THE RADIO INDUSTRY RED Book"—the first publication that gives you reliable data on major receiver replacement parts used during the past ten years and covering thousands of popular radio receivers—like all other PHOTOFACt publications, a volume dedicated to make your work easier, faster and more profitable.

## Your RED BOOK is Reliable

The RED Book is no ordinary hit-or-miss collection of data. Our staff of service technicians and compilation experts, guided by 15 years of my personal experience in research and in service data compilation, invested thousands of man hours to produce the book. Our field organization literally

lived with the receiver and participating parts manufacturers. We purchased, studied, and measured samples by the hundreds.

We obtained, copied and analyzed blue prints, accurate specifications, and data on thousands of original equipment parts. In many instances, pre-war records of original parts specifications were destroyed, making necessary the line at the bottom of each listing page—"Information not available." As the data accumulated, we started the exacting task of final analysis, checking, proving, and the actual recording, or compilation of the book. We checked and double checked by every possible means, the accuracy of final replacement parts recommendations. As the file folder for each receiver was completed, actual compilation and setting of type for publication began.

Two years of intensive work, the cooperation of most of the Radio Industry, and an expenditure of over \$90,000 have gone into the RED Book. The effort and expense has been justified. We are satisfied that we have brought you the most complete, accurate and useful replacement parts data that you have ever had, to help you in your daily work. That is the purpose of the RED Book. The achievement of a task that at first appeared impossible, too, is satisfying.

## Let's Look at the RED BOOK

There are over 440 pages in this first edition—and 20% more type per page than in any book this size. The saving in the number of pages used effects a real economy for you. Thousands of receiver models are covered, representing ten years' production (1938 to 1948). The most important fact about the RED Book is this: Now—for the first time—you have vital replacement parts data that you need—**ALL IN ONE VOLUME**. It is the first and only single volume that gives you information on the replacement parts of 17 leading manufacturers. It is the first and only single volume that gives you vital data on all nine major replacement components.

Here is information on Tubes and Dial Lights, Capacitors, Transformers, Controls, IF Coils, Vibrators, Speakers, Batteries and Phonograph Car-

tridges—PLUS IF peaks and valuable installation and servicing notes. All data is arranged in clear, concise, easy-to-use form. You will find what you want in seconds. The expensive special Smythe sewed binding permits the book to open flat for your convenience, and insures long useful life. It, too, permits us to set more type per page.

The RED Book is completely practical from cover to cover—free from non-essentials—packed with important information. Where the reference "Information Not Available" appears, you'll be glad to know that we are continuing our efforts to obtain all the information we can on original parts specifications for prewar receivers. If you should encounter a prewar receiver in your shop which has a particular component listed in the RED Book as "Information Not Available," send a complete electrical and mechanical description of the part, or the part itself, to "RED Book Section," in care of Howard W. Sams & Co., Inc., Indianapolis 7, Indiana. We will be glad to give you the replacement part number, if possible. We will enter your information in our files and incorporate it in future editions of the RED Book, so that other Radio Service Technicians all over the country will benefit mutually through your cooperation.

## Suggestions Invited

We are indebted to you, the Radio Service Technician, for your support and help, and to the Radio Industry for its cooperation. Compilation for future RED Book editions is a constant activity. We have done and are doing everything humanly possible to assure complete accuracy and to improve the data we publish. We invite you to send in any suggestion that will contribute toward the betterment and greater usefulness of the RED Book.

A handwritten signature in black ink, appearing to read "Howard W. Sams".

# It's Easy to Use the RED BOOK — Here's What You Want to Know About Each

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"
AIRLINE—Continued	4	1A7G, 1N5G, 1H5G, 1C5G	119-35	PRS25-25		BR252A		M-25-25		TA-25		Out	On Spkr.	A-3878		T22S48		A-293I		742 2482		4F 2B30	
93BR-1455A	4	1A7G, 1P5G, 1H5G, 1C5G	119-75	PRS25-10		BR102A	A3	M-10-25		TA-10		Out	105-91	A-3878		T22S48	B3	A-293I		742 2482		4F 2B30	
93BR-1461	4	1A7G, 1N5G, 1H5G, 1A5G	119-75	PRS25-10		BR102A	A3	M-10-25		TA-10		Out	On Spkr.	A-3857		T22S48		A-2937		2482	C4	4FL 2B30	
93WG-382	8	6SK7, 6SA7, 6SQ7, 6V6, 5Y3G, 6AD6G, (51)	40	GL450-40		KR540	A3	D-40-450		PLS-40		Pwr	+	P-6012		T22R04		P-2952					
93WG-510	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (51)	20-20-20	GL450-20		KR520		D-20-450		PLS-20		Out	+	A-3877		T22S58		A-2930					
				PRSA150-20-20 & PRS150-20		EZ42215		DSB-3X20-150		LM-220		Out	+	A-3876		T22S45		A-2928					
										& UT-201													

Reproduced above is a typical double-page listing, showing the method by which the RED Book gives you information. Let's take a look at the RED Book listing method.

MFR. & MODEL
AIRLINE—Continued
74WG-2711A.....
93BR-335A.....
93BR-391.....

First you will see how easy it is to locate the receiver manufacturer and model number you want. To help you read quickly and accurately across the double page, we show the manufacturer's name twice—once at the outer margin of the left hand page, and once at the outer margin of the right hand page. Manufacturers are listed alphabetically. Where the receiver is popularly known by its trade-name, a cross index in the listings helps you to locate it.

After the manufacturer and model number, is a complete listing of Tube Complement and Dial Light data. Here you see at a glance not only

TUBE COMPLEMENT AND DIAL LIGHT
Sylvania or Equivalent Dial Light Type Listed in Parentheses

0 6BA6, 6J6, 6BE6, 6AL5, 6AT6, 6U5GT, 6V6GT, 5Y3GT, (47).....  
5 6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G, (44).....  
7 6SK7, 6K8, 6K7, 6SQ7, 6V6G, 5Y3G, 6U5, (44).....

Now we come to the sections listing the major replacement part components. These are divided as follows:

## Section A — Capacitors

## Section B — Transformers

## Section C — Batteries

## Section D — IF Coils

## Section E — Phono Cartridges

## Section F — Speakers

## Section G — Controls

## Section H — Vibrators

Let's examine each of the major replacement parts sections so that you will understand exactly what information is given in each.

NOTE: Replacement parts numbers and not the original equipment parts numbers are listed for General Electric and R.C.A. receivers.

# Receiver Model.... ALL ON ONE LINE.... Easy to Find, Easy to Read....

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL  Photostat Set No.						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quan. Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	108-142.	16-6658.		465				114-158.	ST-105.		5A1		Vol	101-163.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42					Continued—	AIRLINE 93BR 1455A
2nd.	108-145.	16-6660.						114-166.	ST-105.		5A1		Vol	101-175.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42						93BR 1460A
1st.	108-151B.	16-5712.		465					ST-105.		5A1		Vol	101-173.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42						93BR 1461
2nd.	108-153.	16-5714.								F2			Vol													93WG 382	
1st.		16-6658.	D6	465						F2			Vol													93WG 510	
2nd.		16-6660.								F2			Tone	36X268.	AM-60-Z.	KSS-3.	A.		D13-133.	E	41						
1st.		16-6658.		456						F2			Tone	40X245.													
2nd.		16-6660.																									

## Section A—Capacitors

Section A CAPACITORS								
Mfr. Part No.	Aerovox Part No.	Note	Cornell- Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note
45X351.	AF4J		UP2045.		DY-20-450.		EL-2.	
45X302.	AF8J		UP4045.		DY-40-450.		EL-4.	
45X352.	PRS250-5.		BR425.		M-4-450.		UT-42.	
119-103.								
119-100.	AF8834A.		UP4445C.		DY-313.		EL-330.	
119-81.	PRS450-16.		BR1645.		M-16-450.		UT-16.	
119-91.	PRS25-50.		BR502.		M-50-25.		TA-50.	

Under the heading of "MFR. PART NO." are the parts numbers of the capacitors used in the receiver, or the values of the capacitors used. Proper replacement capacitors appear under the five headings. Helpful servicing and installation notes appear where required. These are explained in the "A" Notes Section in the back of the book.

## Section B—Transformers

Section B TRANSFORMERS						
Use	Mfr. Part No.	Stancor- Part No.	Note	Thordarson Part No.	Note	Merit Part No.
Pwr Out	53X286.	P-6013.		T22R06.		A-2930.
	Or Spkr.	A-3843.		T22S46.		
Pwr Out	104-193.					A-2930.
	105-175.					
Pwr Out	104-181.	A-3878.		T22S47.		A-2932.
	105-98.					
Chk	105-97.	A-3877.		T22S58.		A-2930.
		C-1709.		T20C53.		

Under the heading "USE," the applications of the various transformers used are shown. Under the heading "Mfr. Part No." are the parts numbers of the transformers used in the receiver. Proper replacement transformers appear under the four headings. Servicing and installation notes appear where required. These are explained in the "B" Notes Section in the back of the book.

## Section C—Batteries

Eveready Part No.	Note	Burgess Part No.	Note
		"A"	"B"
†..738.		4FL	..A30.
742 487.		20F	..2308.
741 482.		8F	..B30.
741 482.		8F	..B30.
			17GD60.

This section covers proper replacement batteries required for battery-operated farm and portable receiver models.

To make use of the available space, there are only two columns for each Battery manufacturer's listings—"A" Batteries and "B" Batteries without a separating line. The "A" Battery listing falls directly under the "A" heading and the "B" Battery listing falls directly under the "B" heading.

In cases where the receiver employs an "A-B" pack, the recommended replacement pack will be located in the center of each column. Helpful notes included will be found under the "C" Notes Section in the back of the book.

## Section D—IF Coils

Section D IF COILS				
Use	Mfr. Part No.	Meissner Part No.	N o t e	Peak Freq.
1st.	9A-1876.....	16-6672.....		455
2nd.	9A-1877.....	16-6672.....		
1st.	9A-1878.....	16-6672.....		10.7mc
2nd.	9A-1877.....	16-6672.....	D5	
1st.	1081698.....	16-5712.....		465
2nd.	108170.....	16-5714.....		
1st.	108165.....	16-5712.....		465
2nd.	108119.....	16-5714.....		

Under the heading "USE" is the application of the IF coils used in the circuit (whether 1st, 2nd, 3rd, etc.). Under the "Mfr. Part No." you will find the parts numbers of the IF coils used in the receiver. The correct IF coil replacement is shown under the two headings. Helpful "D" notes are located in the "D" Notes Section in the back of the book. IF Peaks are given under the last heading.

## Section G—Controls

Section G CONTROLS									
Use	Mfr. Part No.	Claretat Part No.	Shaft	Switch	N o t e	IRC Part No.	Shaft	Switch	N o t e
Vol Tone	36X363 40X259B.....	T-78..... AM-69-Z.....	KSS-3..... KSS-3.....	A.....		D13-133X.....	E	41.....	
Vol	101208.....	AM-63-Z.....	KSS-3.....	A.....		D13-137.....	E	41.....	
Vol Tone	101184..... 101206.....	AM-63-Z..... AM-51-Z.....	KSS-3..... KSS-3.....	A.....		D13-137..... D13-128.....	E		

Under the heading "USE" the designation of the control as used in the circuit (Volume Control, Tone Control, etc.) is shown. Under "Mfr. Part No." appear the parts numbers of the controls used in the receivers. Proper replacement controls are shown. In addition, the correct replacement shafts and switches are shown if required. Servicing and installation notes appear where necessary. You'll find these under the "G" Notes Section in the back of the book.

## Section E—Phono Cartridges

Section E PHONO CARTRIDGES				
Mfr. Part No.	Astatic Part No.	N o t e		
↑.....	L-70-A.....			
↑.....				
PC-301M.....	L-40-A.....			
↑.....	L-70-A.....			

Under the "Mfr. Parts No." are shown the parts numbers of the phonograph cartridges used. The two headings show the correct replacement phono cartridges. Service and installation notes are included where required; these are explained in the "E" Notes Section in the back of the book.

## Section F—Speakers

Section F SPEAKERS				
Mfr. Part No.	Jensen Part No.	N o t e	Quam Part No.	N o t e
12A470.....	ST-175.....		10E10.....	
114176.....	ST-168.....		6E10.....	
114179.....	ST-115.....		8A21.....	

Under the heading "Mfr. Part No." are the part numbers or size of the speaker used in the receiver. Correct replacements appear under the three headings. Servicing and installation notes appear where required, and are in the "F" Notes Section in the back of the book.

## PHOTOFAC T REFERENCE TO POSTWAR RECEIVERS

In the last column of listings, you will find the correct reference to the PHOTOFAC Folder Set which contains a complete service data folder on receivers carrying this reference, PHOTOFAC Folders are only available on postwar receivers. PHOTOFAC Folders contain completely accurate circuit information, Standard Notation Schematics, Alignment Data, Photos of all chassis views, keyed to all parts, Disassembly Instructions, Dial Cord Diagrams, and other vital data, uniformly presented.

## INDEX TO NOTES

The helpful servicing and installation notes in the RED Book listings are fully explained in a separate section at the end of this volume.

- As we go to press, the Cornell-Dubilier Electric Corporation, one of our charter participants, announces their new line of Cornell-Dubilier Replacement Vibrators. As evidence of our policy of complete impartiality and out of courtesy to them, and with a further desire to be helpful to you, we have allotted the last page in the RED Book for their catalog listing and explanation of their line.

## Section H—Vibrators

Section H VIBRATORS		
Mfr. Part No.	Radiant Part No.	N o t e
17-14747.....	5300.....	H1
↑.....	5300.....	H1

Under the heading "Mfr. Part No." appear the parts numbers of the vibrators used in each receiver. The two headings show the correct replacement. Helpful servicing and installation notes are included where required—these appear in the "H" Notes Section at the back of the book.

# These Howard W. Sams PHOTOFACt Publications are Indispensable Companions to the RED BOOK . . . You'll Use Them Every Single Working Day . . .

The speed with which you can complete radio repairs usually depends on the quality of your technical information. That's why you owe it to yourself to choose the best. Don't guess. Don't take anyone's word for it. Be your own judge and jury.

Ask yourself: "Does the technical information I use provide these features:

1. Is it complete—does it give me all the data I need to do the job?
2. Is the information concise, or is it padded with useless sales talk that makes needed data harder to find?
3. Is the data uniform—the same for all makes and models—or do I have to "dope out" a different layout for each model?"

Don't guess about these important points. Be critical. Analyze carefully. Judge for yourself. Then you will know that PHOTOFACt Publications will meet your actual needs.

**YOUR JOBBER HAS THEM ALL**



## AUTOMATIC RECORD CHANGER SERVICE MANUAL

Covers more than 40 different postwar models. Absolutely accurate, complete, authoritative—based on actual study of equipment. Shows exclusive "exploded" views, photos from all angles. Gives full change cycle data, information on adjustments, service hints and kinks, complete parts lists. Shows you how to overcome any kind of changer trouble. PLUS—for the first time—complete, accurate data on leading Wire, Ribbon, Tape and Paper Disc Recorders. 400 pages; hard cover; opens flat.

Vol. 1 (1947).....\$4.95  
Vol. 2 (1948) (Ready in December)



## DIAL CORD STRINGING GUIDE


There's only one right way to string a dial cord, and only Howard W. Sams' Dial Cord Stringing Guide shows you how. Here, in one handy-sized pocket volume, are all available dial cord diagrams and data covering 1938 to 1948 receivers. Licks the knottiest dial cord stringing problems in seconds. You know from your own experience that if you get started the wrong way, you can waste hours of valuable time.....\$1.00

## PHOTOFACt MANUALS

### THE WORLD'S MOST PRACTICAL RADIO SERVICE DATA!

BRING YOUR DATA FILES UP TO DATE WITH THESE 5 GREAT VOLUMES—COVER POSTWAR MODELS UP TO JANUARY 1, 1949

You can't afford to be without this complete Service Data Library covering postwar models up to January 1, 1949. There's nothing like them for easy reference and completeness. Each Volume is in rugged, easy-to-use DeLuxe Binder perfect for shop reference. These PHOTOFACt Volumes give you the finest service data library in existence; they increase your earning power; they're the smartest investment you can make. Place your order for PHOTOFACt Volumes today!

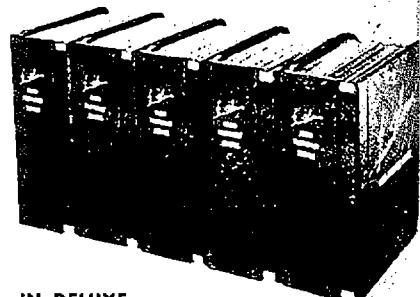

IN DELUXE BINDER

**\$18.39 per Volume**

### "The Service That Pays for Itself Over and Over Again"

VOLUME 1—Covers postwar models up to January 1, 1947  
VOLUME 2—Covers models from Jan. 1, 1947 to July 1, 1947  
VOLUME 3—Covers models from July 1, 1947 to Jan. 1, 1948  
VOLUME 4—Covers models from Jan. 1, 1948 to July 1, 1948  
VOLUME 5—Covers models from July 1, 1948 to Jan. 1, 1949

Over 1600 pages in each Volume • Published Regularly Every 6 Months



## RADIO RECEIVER TUBE PLACEMENT GUIDE

The book that shows you exactly where to replace each tube in over 5,500 models! Covers receivers from 1938 to 1948. Each tube layout is illustrated by a clear, accurate diagram, with tubes identified by easy-to-read type numbers. Saves valuable time—especially where tubes have been removed from the set.

192 Pages ..... \$1.25



## PHOTOFACt FOLDERS IN REGULARLY ISSUED FOLDER SETS

The most accurate and complete Radio Data ever compiled . . .

- Accurate, Complete, Uniform, Original—based on study of the actual equipment.
  - Exclusive Large Size Standard Notation Schematics.
  - Exclusive Oscilloscope Wave Forms.
  - Complete Alignment, Stage Gain, Circuit Voltage and Resistance Analysis for each model.
  - Complete Parts Listings and Proper Replacements for each model.
  - Dial Cord Stringing; Disassembly Instructions.
  - Record Changer Analysis and Repair Instructions.
  - Exclusive Pictorial "Keyed" Data for instant reference.
  - Thousands of Exclusive Photos.
- Subscribe at your Jobbers, today, for regular monthly issues of PHOTOFACt Folder Sets. PER SET.....Only \$1.50

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	N o t e	Cornell-Dubilier Part No.	N o t e	Solar Part No.	N o t e	Sprague Part No.	N o t e	Use	Mfr. Part No.	Stancor Part No.	N o t e	Thordarson Part No.	N o t e	Merit Part No.	N o t e	Eveready Part No.	N o t e	Burgess Part No.	N o t e	
ADMIRAL																								
A2	5	6A8, 6K7, 6Q7, 6F6, 5W4	8-4 Mfd.	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	t	P-6119		T22R02		P-2951						
A4	4	1A7, 1N5, 1H5, 3Q5	P2602	PRS25-25		BR202A		M-25-25		TA-25		Out	t	A-3878		T22S47		A-2931		758	C1	17GD60	C1	
A5	5	1A7GT, 1P5GT, 1N5GT, 1H5GT, 105GT	P3024	PRS150-8		BR815		M-8-150		UT-81		Out	t	A-3878		T22S47		A-2931		758	C1	17GD60	C1	
A6	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	P3935	AF66D		UP3315		DY-2X30-450		EL-230		Chk Pwr Out	On Spkr.	P-3926	C-1706	T20C52	C-2990	A-3876						
A7	7	6SK7, 6SA7, 6SQ7, 6K6G, 5Y3G	P4130 P1992	AF44J4A GL450-30		UP2245C KR530		DY-315 D-30-450		EL-250 PLS-30		Chk Pwr Out	On Spkr.	P-3926	C-1355	T20C52	C-2990	P-6120						
A10	10	6SK7, 6SA7, 6SQ7, 26K6, 5Y3, (44)	P4372	PRS450-20-20		EZ5116		DH-2X16-450SS		TU-1616		Out	t	P-5119	T22R04	T22S47	A-2931	P-6013						
A11, A11-PH.	12	6AB7, 6SA7, 6SK7, 6SQ7, 36J5GT, 26F6G, 6AF6, 5U4G	P4372 P1992	PRS450-20-20 GL450-30		EZ5116 KR530		DH-2X16-450SS D-30-450		TU-1616 PLS-30		Pwr Out	t	P-6013	T22R06	P-2953	A-2904							
A77	7	6SK7, 6SA7, 6SQ7, 6K6G, 5Y3G	P4264	AF88J4A		UP4445C		DY-313		EL-330		Chk Pwr Out	On Spkr.	P-3926	C-1706	T20C52	C-2990	P-6120						
84	4	1A7, 1N5, 1H5, 3Q5	P2602	PRS25-25		BR202A		M-25-25		TA-25		Out	t	A-3878	T22S47		A-2931		758	C1	17GD60	C1		
B5	5	12A8, 12SK7, 12SQ7, 50L6, 35Z5, (47)	P3792	PRS150-30-20 & PRS150-20		EZ42215		DSB-403020-150		TA-230 & UT-201		Out	On Spkr.	A-3876	T22S45		A-2928							
B6	6	12SJ7, 12SA7, 12SK7, 12SQ7, 35L6, 35Z5, (47)	P5022	PRS150-30-20		EDL5315		M-5030-150		TA-530		Out	On Spkr.	A-3876	T22S45		A-2928							
B7	7	6SK7, 6SA7, 6SQ7, 6K6G, 5Y3G	P4264	AF88J4A		UP4445C		DY-313		EL-330		Chk Pwr Out	On Spkr.	P-3926	C-1706	T20C52	C-2990	P-6011						
B11	12	6AB7, 6SA7, 6SK7, 6SQ7, 5J5GT, 26F6GT, 6SR7, 6U5, 5U4	P4372 P4371	PRS450-20-20 GL450-30		EZ5116 KR530		DH-2X16-450SS D-30-450		TU-1616 PLS-25		Pwr Out	t	P-6013	T22R06	P-2953	A-2904							
C4	4	1A7, 1N5, 1H5, 3Q5	P3024	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3878	T22S47		A-2931		758	C1	17GD60	C1		
C5	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47)	P3355	PRS150-20-30		EDL4215		M-2X30-150		TA-230		Out	On Spkr.	A-3876	T22S45		A-2928							
C6	6	6SA7, 26SK7, 6SQ7, 6K6GT, 5J5GT	P4130	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	t	P-6119	B1	T22R01	B1	P-2951						
CW13	2	12A8GT, 70L7GT	P3585	PRS440302		UP4215C		DSB-303		TA-240		A1	Out	A-3878	T22S47		A-2931							
D4	4	1A7, 1N5, 1H5, 1A5	P3024	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3876	T22S45		A-2928							
D4 (Late)	4	1A7, 1N5, 1H5, 3Q5	P2602	PRS25-25		BR202A		M-25-25		TA-25		Out	t	A-3878	T22S47		A-2931		758	C1	17GD60	C1		
D5	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47)	P3355	PRS150-20-30		EDL4215		M-2X30-150		TA-230		Out	On Spkr.	A-3876	T22S45		A-2928							
E4	4	1A7, 1N5, 1H5, 3Q5	P2602	PRS25-25		BR202A		M-25-25		TA-25		Out	On Spkr.	A-3878	T22S47		A-2931		758	C1	17GD60	C1		
E5	5	1A7, 1N5, 1H5, 1Q5, 117Z6	P4860 P4831	AF106D20A PRS25-100		DY-304 M-100-12		EL-351 UHD-112		TA-240		Out	On Spkr.	A-3878	T22S47		A-2931		758	C1	17GD60	C1		
E6	6	6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6X5GT	P4224	AF43F4A		UP2235C		DY-309		EL-333		Chk Pwr Out	On Spkr.	P-4228	C-1706	T20C52								
F4	4	1A7, 1N5, 1H5, 3Q5	P2602	PRS25-25		BR202A		M-25-25		TA-25		Out	t	A-3879	T22S47		A-2932							
F5	5	1A7, 1N5, 1H5, 3Q5, 117Z6	P3971	AF886D4A		UP44315C		DY-419		EL-434		Chk Pwr Out	On Spkr.	C-1723	T22S47		C-2975		742 & 2482	C2	.6FA60	C3		
G4	4	1R5, 1T4, 1S5, 1S4	P4667	PRS150-12		BR1215		M-10-150		UT-121		Out	On Spkr.	A-3878	T22S47		A-2931		2950 & 467		.2R & XX45			
G5	5	1R5, 1T4, 1S5, 1S4, 35Z5	P4589	UP4C162		DY-304		EL-351		Out	P4698							2950 & 467		.2R & XX45				
G6	6	1N5, 1A7, 1H5, 3Q5, 117Z6	P3971	AF44315C		DY-419		EL-434		Chk Pwr Out	On Spkr.	C-1723	A-3878	T22S47		C-2975		742 & 2482	C2	.6FA60	C3			
H5	5	1A7, 1N5, 1H5, 3Q5, 117Z6	P3971	AF44315C		DY-419		EL-434		Chk Pwr Out	On Spkr.	C-1723	A-3878	T22S47		C-2975		742 & 2482	C2	.6FA60	C3			
J5	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47)	P4212	PRS150-20-30		EZ3315		M-2X30-150		TA-230		Out	On Spkr.	A-3876	T22S45		A-2928							
J6	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, BT-1000 Ballast, (47)	P3581	PRS-A40302		EZ2215C		DSB-302		TA-230 & TA-25		Out	On Spkr.	A-3876	T22S45		A-2928							
J55	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47)	P4212	PRS150-20-30		EZ3315		M-2X30-150		TA-230		Out	On Spkr.	A-3876	T22S45		A-2928							
K5	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G	P4130	AF44J4A		UP2245C		DY-315		EL-350		Chk Pwr Out	On Spkr.	P-3926	C-1706	T20C52	C-2990	P-6119						
K6	6	6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G	P4130	AF44J4A		UP2245C		DY-315		EL-350		Chk Pwr Out	On Spkr.	P-3926	C-1706	T20C52	C-2990	P-6297						
K7	6	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G	P4130	AF44J4A		UP2245C		DY-315		EL-350		Chk Pwr Out	On Spkr.	P-3926	C-1706	T20C52	C-2990	P-6119						
K63	6	6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G	P4130	AF44J4A		UP2245C		DY-315		EL-350		Chk Pwr Out	On Spkr.	P-3926	C-1706	T20C52	C-2990	P-6297						
L5 (Phone)	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47)	P5022	PRS150-30-50		EDL5315		M-5030-150		TA-530		Out	On Spkr.	A-3876	T22S45		A-2928							
M5, M5-PH	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47)	P4683	PRS150-30-50		BRD3515		M-5030-150		TA-530		Out	P4684	A-3876		B2	A-2928							

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL									
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quar. Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Photofact Set No.					
1st.		16-5712		456																						ADMIRAL A2					
2nd.		16-5714						P4033	ST-108		F1		F1	Vol	P934	M-60-Z		A.	D13-133	S13-128		41	G1				A4				
1st.	P3048	16-6658		455				P4045	ST-108		6A1			Vol	P943	M-51-Z		A2	D13-133		E	42						A5			
2nd.	P2606	16-6660													P3720	AM-60-Z		KSS-3		D13-137			41	G1						A6	
1st.	P3048	16-6658		455				P3936	ST-105		5A1			Vol	P930	AM-60-Z		KSS-3		A.	D13-133		E	41						A7	
2nd.	P3736	16-6660						P4206	ST-110		6A21			Vol	P4089	AT-90		KSS-3		A.	D13-133X		E	41							
1st.	P3923	16-6658		455											P4193					D13-133		J									
2nd.	P3324	16-6660																													
1st.	P4108	16-5712		455																											
2nd.	P4109	16-5714																													
1st.	P5114	16-5712		455				P5180			F2		F2	Vol	P5152	AT-95		KSS-3		A.	D18-133XX		E	41						A10	
2nd.	G6532																														
3rd.	P5114	16-5714		455	†	†	†	P4382			12E60			Vol	P4349							D18-133XX		E	41					A11, A11-PH	
1st.	P4360	16-5712						P4283	ST-119		F3	10A31		Vol	P4089	AT-90		KSS-3		A.	D13-133X		E	41						A77	
2nd.	P4361	16-5714													P4193					D13-133		J									
1st.	P4108	16-5712		455																											
2nd.	P4109	16-5714																													
1st.	P3048	16-6658						P4040	ST-108		6A1			Vol	P2600	AM-60-Z		KSS-3		A2	D13-133		E	42						B4	
2nd.	P2606	16-6660													P3746	AM-60-Z		KSS-3		A.	D13-133		E	41						B5	
1st.	P3794	16-6658						P3949	ST-105		5A1			Vol	P3797	AM-60-Z		KSS-3		A.	D18-133XX		E	41						B6	
2nd.	P3793	16-6660						P4987	ST-194		SE45			Vol	P5167	AT-92		KSS-3		A.	D18-133XX		E	41						B7	
1st.	P5155	16-6658		455				P4283	ST-119		F3	10A31		Vol	P4089	AT-90		KSS-3		A.	D13-133X		E	41						B11	
2nd.	P5016	16-6660													P4531	AM-60-Z		KSS-3		D13-133		J								C4	
1st.	P4108	16-5712		455	†	†	†	P4382			12E60			Vol	P4349	AM-51-Z		KSS-3		A1	D18-133XX		E	41						C5	
2nd.	P5172	16-5714						P4925	ST-105		5A1			Vol	P4350	AM-63-Z		KSS-3		A2	D13-137		E	42						C6	
1st.	P4360	16-5712		455	†	†	†	P3553	ST-105		5A1			Vol	P3746	AM-60-Z		KSS-3		A.	D13-133		E	41						CW13	
2nd.	P4351	16-5714						P5078	ST-175		10E10			Vol	P5049	AT-90		KSS-3		A.	D19-133X		E	41						D4	
1st.	P4323	16-6658		455				P4311	ST-105		5A1			Vol	P5058	AM-60-Z		KSS-3		A.	D13-133		E	41						D4 (Late)	
2nd.	P3980	16-6660						P4040	ST-108		6A1			Vol	P2600	AM-60-Z		KSS-3		A2	D13-133		E	42						D5	
1st.	P3923	16-6658		455				P3553	ST-105		5A1			Vol	P3746	AM-60-Z		KSS-3		A.	D13-133		E	41						E4	
2nd.	P3924	16-6660						P4918	ST-108		6A1			Vol	P4916	AM-60-Z		KSS-3		A2	D13-133		E	42						E5	
1st.	P3048	16-6658		455				P4925	ST-105		5A1			Vol	P4309	AM-63-Z		KSS-3		A.	D13-137		E	42						E6	
2nd.	P2606	16-6660						P4243	ST-108		6A1			Vol	P4231	AM-60-Z		KSS-3		A2	D13-133		E	42						F4	
1st.	P4323	16-6658		455				P4572	ST-108		6A1			Vol	P4916	AM-60-Z		KSS-3		A2	D13-133		E	42						F5	
2nd.	P3980	16-6660						P3972	ST-105		5A1			Vol	P3961	AM-63-Z		KSS-3		A2	D13-137		E	42						G4	
1st.	P3048	16-6658		455				P4620						Vol	P4612	AM-63-Z		KSS-3		A.	D13-137		E	41	G1						G5
2nd.	P3980	16-6660						P4620						Vol	P4612	AM-63-Z		KSS-3		A.	D13-137		E	41						G6	
1st.	P4245	16-5712		455				P4620						Vol	P4231	AM-60-Z		KSS-3		A2	D13-133		E	42						H5	
2nd.	P4244	16-5714						P4620						Vol	P4916	AM-60-Z		KSS-3		A2	D13-133		E	42						J55	
1st.	P3048	16-6658		455				P4004	ST-105		5A1			Vol	P3661	AM-63-Z		KSS-3		A2	D13-137		E	42						K5	
2nd.	P2606	16-6660						P4004	ST-105		5A1			Vol	P3961	AM-63-Z		KSS-3		A2	D13-137		E	42						K6	
1st.	P3048	16-6658		455				P4169	ST-194		SE45			Vol	P4612	AM-63-Z		KSS-3		A.	D13-137		E	41						K7	
2nd.	P3980	16-6660						P4169	ST-194		SE45			Vol	P4060	AM-60-Z		KSS-3		A.	D13-133		E	41						K63	
1st.	P4610	16-5712		455	†	†	†	P4515	ST-109		6A15			Vol	P4089	AT-90		KSS-3		A.	D13-133X		E	41						L5 (Phono)	
2nd.	P4610	16-5714						P4515	ST-109		6A15			Vol	P4089	AT-90		KSS-3		A.	D13-133X		E	41						M5, M5-PH	
1st.	P4108	16-5712		455	†	†	†	P4490	ST-109		6A15			Vol	P4089	AT-90		KSS-3		A.	D13-133X		E	41						ADMIRAL — 9	
2nd.	P4109	16-5714						P4464	ST-115		SA21			Vol	P4089	AT-90		KSS-3		A.	D13-133X		E	41							
1st.	P5155	16-6658		455	†	†	†	P5235			F2		F2	Vol	P5167	AT-92		KSS-3		A.	D18-133XX		E	41							
2nd.	P3924	16-6660						P4792	ST-105		5A1			Vol	P4060	AM-60-Z		KSS-3		A.	D13-133		E	41							
1st.	P3924	16-6658		455	RC-6001	L-40																									
2nd.	P3924	16-6660																													

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Model	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
				Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"
ADMIRAL—Continued	6	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G.	P4130.	AF44J4A.			UP2245C.		DY-315.		EL-350.		Chk P3926..	C-1706.	T20C52..		C-2990.							
N6.	6	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G.	P4130.	AF44J4A.			UP2245C.		DY-315.		EL-350.		Chk P4512..	P-6119.	T22R02..		P-2951.							
P5.	5	1A7, 1N5, 1H5, 3Q5, 117Z6.	P4860.	AF106D20A..			UP6CJ64..		DY-304..		EL-351..		Chk P3926..	C-1706.	T20C52..		C-2990.							
P6.	6	1N5, 1A7, 1H5, 3Q5, 117Z6.	P4860.	PRS25-100..			BRH121..		M-100-12..		UHC-112..		Out On Spkr.	A-3878.	T22S47..		A-2931.							
XA3.	3	12S07, 50L6GT, 35Z5GT..	P4932.	PRSA150-30-50..			BRD3515..		M-5030-150..		EL-351..		Chk P4824..	C-1723.	T20C52..		C-2975.							
XA6.	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47).	P4935.	AF660..			UP3315..		DY-2X30-450..		TA-330..		Out On Spkr.	A-3878.	T22S47..		A-2931.							
XB5.	5	12A8, 12SK7, 12SQ7, 50L6, 35Z5, (47).	P3792.	PRSA150-30-20..			EZ42215..		DSB-403020-150..		TA-230..		Chk P3926..	C-1706.	T20C52..		C-2990.							
XB6.	6	12S7, 12SA7, 12SK7, 12SQ7, 35L6, 35Z5, (47).	P5022.	PRS150-30-50..			EDL5315..		M-5030-150..		TA-530..		Out On Spkr.	A-3876.	T22S45..		A-2928..							
XCS, XDS.	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47).	P3355.	PRSA150-20-30..			EDL4215..		M-2X30-150..		TA-230..		Out On Spkr.	A-3876..	T22S45..		A-2928..							
XFS.	5	1A7, 1N5, 1H5, 3Q5, 117Z6..	P3971.	AF886D4A..			UP44315C..		DY-419..		EL-434..		Chk P3958..	C-1723.	T22S47..		C-2975.							
XG6.	6	1N5, 1A7, 1H5, 3Q5, 117Z6..	P3971.	AF88604A..			UP44315C..		DY-419..		EL-434..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
XJ5..	5	12S7, 12SK7, 12SQ7, 50L6, 35Z5, (47).	P4212.	PRSA150-20-30..			EZ3315..		M-2X30-150..		TA-230..		Chk P3958..	C-1723.	T22S45..		C-2975.							
XJ6..	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47), BT-1000 Ballast.	P3531.	PRS-A40302..			EZ2215C..		DSB-302..		TA-230..		Out On Spkr.	A-3876..	T22S45..		A-2928..							
XJ55, XJ55-PH.	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47).	P4212.	PRSA150-20-30..			EZ3315..		M-2X30-150..		TA-230..		Out On Spkr.	A-3876..	T22S45..		A-2928..							
XLS..	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47).	P5022.	PRSA150-30-20..			EDL5315..		M-5030-150..		TA-530..		Out On Spkr.	A-3876..	T22S45..		A-2928..							
XPS..	5	1A7, 1N5, 1H5, 3Q5, 117Z6..	P4860.	AF106D20A..			UP6CJ64..		DY-304..		EL-351..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
XP6..	6	1N5, 1A7, 1H5, 3Q5, 117Z6..	P4860.	PRS25-100..			BRH121..		M-100-12..		UHC-112..		Chk P4824..	C-1723.	T22S47..		C-2975.							
3A1.	3	14B6, 50A5, 35Y4..	67A8..	PRSA150-30-30..			BRD3515..		M-5030-150..		TA-530..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
4A1.	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT..	67A4-2..	PRS150-4..			BR415..		M-4-150..		UT-41..		Out On Spkr.	A-3878..	B3	T22S47..	B3	A-2931..	B3	758..	C1	17GD60..	C1	
4B..	4	1A7G, 1N5G, 1H5G, 1C5G..	P2602.	PRS25-25..			BR202A..		M-25-25..		TA-25..		Out On Spkr.	A-3878..	T22S47..		A-2932..							
4B1..	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT..	67A4-2..	PRS150-4..			BR415..		M-4-150..		UT-41..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
4C..	4	1A7G, 1N5G, 1H5G, 1C5G..	P2602.	PRS25-25..			BR202A..		M-25-25..		TA-25..		Out On Spkr.	A-3878..	T22S47..		A-2932..							
4D, 4D-PH..	4	1A7G, 1N5G, 1H5G, 1Q5G..	P3024..	PRS150-8..			BR815..		M-8-150..		UT-81..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
4F..	4	1A7G, 1N5G, 1H5G, 1Q5G..	P3024..	PRS150-8..			BR815..		M-8-150..		UT-81..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
4H..	4	6K7, 6J7, 25L6, 25Z6..	P2434..	PRS150-30..			BR3015..		M-30-150..		UT-301..		Out On Spkr.	A-3876..	T22S45..		A-2928..							
4J..	4	1A7G, 1N5G, 1H5G, 1Q5G..	P3024..	PRS150-12..			BR1215..		M-10-150..		UT-121..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
4Z..	4	1A7G, 1N5G, 1H5G, 1Q5G..	P3024..	PRS150-8..			BR815..		M-8-150..		UT-81..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
5B1..	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	67A8..	PRSA150-30-30..			EZ42215..		DSB-403020-150..		TA-303..		Out On Spkr.	A-3876..	B3	T22S45..	B3	A-2928..	B3	758..	C1	17GD60..	C1	
5B1 (Phono)..	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	76A8..	See 5B1.			EZ42215..		DSB-403020-150..		TA-303..		Chk 74A1..	C-1711..	B4	T20C52..	B4	C-2975..	B4					
5B1A..	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	67A8..	PRSA150-30-30..	A2		BRD3515..		M-5030-150..	A2	TA-530..	A2	Out On Spkr.	A-3876..	T22S45..		A-2928..							
SH1..	5	1U4, 1R5, 1S5, 3V4..	67A3..	PRSA150-30-30..	A2		BRD3515..		M-5030-150..	A2	TA-530..	A2	Out On Spkr.	A-3876..	T22S45..		A-2928..							
SJ..	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25-10 Mfd..	P3562..	PRS150-4..			BR415..		M-8-150..		UT-41..		Out On Spkr.	A-3876..	T22S45..		A-2928..							
5KI, UL5KI..	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47).	67A10..	PRSA150-50-30..			EZ2215..		M-2X20-150..		TA-230..		Out On Spkr.	A-3876..	T22S45..		A-2928..							
5M..	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT..	P3563..	PRS150-20-30..			EZ3315..		M-2X30-150..		TA-230..		Chk P3556..	C-1706..	T20C52..		C-2975..							
5NL..	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT..	P3563..	PRS150-20-30..			EZ3315..		*M-50-25..		*TA-50..		Out On Spkr.	A-3878..	T22S47..		A-2931..							
5Q, SR, SS..	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	P3562..	*PRS25-50..			EZ3315..		*M-50-25..		*TA-50..		Chk P3601..	C-1706..	T20C52..		C-2975..							
5QL, SRL, SSL..	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	P3355..	PRS150-20-30..			EDL4215..		M-2X30-150..		TA-230..		Out P3357..	A-3865..	B5	T22S45..	B5	A-2928..	B5					
6A..	6	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	P2140..	PRS150-20-8..			EZ2215..		M-2X30-150..		TA-230..		Out P3397..	A-3865..	B5	T22S45..	B5	A-2928..	B5					
6AI..	6	12S7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47).	67A8..	PRSA150-30-30..			EDL4215..		DSB-403020-150..		LM-2B..		Chk P2128..	C-1711..	T20C52..		C-2975..							
6C..	6	6L5G, 6D6G, 6S7G, 6T7G, 6G6G, 6ZYSG..	8-8-5 Mid..	PRSA150-20-8..			EZ8825S..		DH-2X8-450..		& TA-S..		Out P2131..	A-3876..	T22S45..		A-2928..							
				& PRS25-10..					M-10-25..		LM-2B..		Chk P2128..	C-1711..	T20C52..		C-2975..							
												Out P2131..	A-3876..	T22S45..		A-2928..								
												Out On Spkr.	A-3876..	T22S45..		A-2928..								
												Out P3397..	A-3879..	T22S47..		A-2933..								

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photo ref. Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiar Part No.	Note			
1st.	P4108	16-5712.		455	RC-6001.	L-40.		P5078	ST-175.	F5	10E10.		F5	P4089	AT-90.	KSS-3.	A.		D13-133X.	E	41			Continued	ADMIRAL	M6		
2nd.	P4858	16-5714.						P4805	ST-119.	F5	10A31.		F5	P4729	AM-60-Z.	KSS-3.			D13-133.								N6	
1st.	P4108	16-5712.		455	RC-6001.	L-40.		P4515	ST-109.		6A15.			P4089	AT-90.	KSS-3.	A.		D13-133X.	E	41							P5
2nd.	P4109	16-5714.												P4531	AM-60-Z.	KSS-3.			D13-133.	E	41							P6
1st.	P4859	16-6658.		455				P4829	ST-105.		5A1.			P4820	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							XA3
2nd.	P4874	16-6660.						P4795	ST-105.		5A1.			P4820	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							XA6
1st.	P4818	16-6658.						P5164	ST-105.		5A1.			P5141	AM-66-Z.	KSS-3.	A.		D13-139.	E	41							XB5
2nd.	P4819	16-6660.	D1	455				P3949U	ST-105.		5A1.			P3746	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							XB6
1st.	P3923	16-6658.		455				P3096	ST-194.		5E45.			P5167	AT-92.	KSS-3.	A.		D18-133XX.	E	41							XCS, XD5
2nd.	P3924	16-6660.						P3991	ST-105.		5A1.			P3746	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							XF5
1st.	P3794	16-6658.		455				P3998	ST-105.		5A1.			P3961	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							XG6
2nd.	P5155	16-6658.						P4007	ST-105.		5A1.			P3961	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							XJ5
1st.	P5016	16-6660.						P4170	ST-194.		5E45.			P4050	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							XJ6
2nd.	P3923	16-6658.		455				P4170	ST-194.		5E45.			P4050	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							XJ55, XJ55-PH
1st.	P3924	16-6660.						P4170	ST-194.		5E45.			P4060	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							XL5
2nd.	P3924	16-6660.						P5254		F2			F2	P5167	AT-92.	KSS-3.	A.		D18-133XX.	E	41							XP5
1st.	P5155	16-6658.		455				P4830	ST-105.		5A1.			P4820	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							XP6
2nd.	P3924	16-6660.						P4796	ST-105.		5A1.			P4820	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							
1st.	P2598	16-5712.		455				P2598	ST-105.		5A1.			P2600	75B1-9.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41							Z, 3A1
2nd.	P2617	16-5712.						P2603	ST-108.		6A1.			P2600	AM-60-Z.	KSS-3.	A2.		D13-133.	E	42							4A
1st.	7285	16-6658.		455				70B9	ST-108.		6A1.			75B-1	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							3, 4A1
2nd.	7286	16-6660.						P2612	ST-105.		5A1.			P2610	M-60-Z.		A2.		D13-133.		42	G1						4B
1st.	P2611	16-5712.		456				70B3	ST-108.		6A1.			75B1-1	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							4B1
2nd.	P2617	16-6658.						P2603	ST-108.		6A1.			P3161														4C
1st.	P2785	16-6658.		455				P3029	ST-105.		5A1.			P3015	AM-60-Z.	KSS-3.	A2.		D13-133.	E	42							4D, 4D-PH
2nd.	P2617	16-5712.		456				P3320	ST-105.		5A1.			P3317	AM-60-Z.	KSS-3.	A2.		D13-133.	E	42							4F
1st.	P3048	16-6658.		455				P2435		F1			F1	P2498	M-51-Z.		A.	D14-125.		41	G1							4H
2nd.	P2606	16-6660.						P3465	ST-105.		5A1.			P3317	AM-60-Z.	KSS-3.	A2.		D13-133.	E	42							4J
1st.	P3048	16-6658.		455				P3465	ST-105.		5A1.			P3317	AM-60-Z.	KSS-3.	A2.		D13-133.	E	42							42
2nd.	P2606	16-6660.						78B4-1	ST-105.		5A1.			75B1-6	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							5B1
1st.	7283	16-6658.		455				78B4-1	ST-105.		5A1.			75B3-2	AT-92.	KSS-3.	A.		D18-133XX.	E	41							4, 5B1 (Phono)
2nd.	7283	16-6658.						78B4	ST-105.		5A1.			75B3-2	AT-92.	KSS-3.	A.		D-18133XX.	E	41							18, 5B1A
1st.	7283	16-6658.		455				78B13-1	ST-107.		6A15.			75B3-2	AT-92.	KSS-3.	A.		D-18133XX.	E	41							5B1A
2nd.	7284	16-6658.						78B17-3						46A1														26, 5H1
1st.	7284	16-6658.		455				P3564	ST-105.		5A1.			75B1-18	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							5J
2nd.	7284	16-6658.						P3603	ST-105.		5A1.			P2432A	M-50-Z.		A.		D13-133.		41	G1						30, 5K1, UL5K1
1st.	72B31	16-6658.		455				P3553	ST-105.		5A1.			75B1-16	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							5N
2nd.	72B32	16-6658.						P3553	ST-105.		5A1.			P3560	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							5NL
1st.	P3559	16-6658.		455				P3603	ST-105.		5A1.			P3560	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							5Q, 5R, 5S
2nd.	P2606	16-6660.						P3345	ST-105.		5A1.			P3346	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							5QL, 5RL, 5SL
1st.	P3559	16-6658.		455				P3553	ST-105.		5A1.			P3346	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							6A
2nd.	P2606	16-6660.						P2143	6" Spkr.	F4	6" Spkr.	F4		P2144	8" Spkr.	F4			P2136					P1414	5300	H1		
1st.	P3345	16-6658.		455				P2143	6" Spkr.	F4	6" Spkr.	F4		P2144	8" Spkr.	F4			P2137	M-51-Z.								6C
2nd.	P3346	16-6660.						78B4-2	ST-105.		5A1.			75B3-2	AT-92.	KSS-3.	A.		D13-128.		42	G1						
1st.	P3345	16-6658.		455				78B4-2	ST-105.		5A1.			75B3-2	AT-92.	KSS-3.	A.		D18-133XX.	E	41							
2nd.	P3346	16-6660.						78B4						P2848					P2849	AM-51-Z.	KSS-3.	A2.		D13-128.	E	42		
1st.	72B3	16-6659.		455				78B4-2	ST-105.		5A1.			75B3-2	AT-92.	KSS-3.	A.		D18-133XX.	E	41							
2nd.	72B4	16-6660.						78B4						P2848					P2849	AM-51-Z.	KSS-3.	A2.		D13-128.	E	42		
1st.	72B3	16-5712.		456															D14-128.		42	G1						
2nd.	72B4	16-5712.																	P1414	5300	H1							
1st.	72B3	16-5712.																	P1414	5300	H1							
2nd.	72B4	16-5712.																	P1414	5300	H1							

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
	No.	Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell- Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
																				"A"	"B"	"A"	"B"			
ADMIRAL—Continued	10	6SK7, 6SA7, 6SQ7, 6F6, 5Y3G, (47).	6TC6-25.	AF88J4A.			UP4445C.		DY-313.		EL-330.		Pwr Out	80B2, 79A1.	P-6313, A-2312.		T22R33, T22S88.		P-2953, A-2901.							
6D	6	6A8G, 6L5G, 6U7G, 6Q7G, 6G6G, 6ZYSG.	P225I.	PRSA200-8-.			EZ8825.		DH-2X8-450.		UT-88.		Pwr Out	74A1.	A-3879.		T22S47.		A-2933.							
6E1, 6E1N	6	6IN5GT, 1A5GT, 1H5GT, 3Q5GT, 11Z26GT.	6TC7-42.	AF106D20A.			UP6CJ64.		DY-304.		EL-351.		Chk Out	74A5.	A-3822, A-3876.	B3	T22S47, T22S45.	B3	A-2900, A-2928.	B3	754.	C3	GSM60.	C3		
6L1	6	12SA7GT, 12SK7, 12SQ7, 12SJ7, 35L6GT, 35Z5GT, (47).	PRSA-A40302- & PRS150-20.	EZ42215C.			DSB-302. & M-30-150.		TA-303. & TA-25.		DSB-302.		Out	74A1.	A-3876.		T22S47.		A-2928.							
6M, 6ML	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT.	20-20-20 Mfd.	PRSA-A40302.			EZ2215C.		TA-220. & TA-25.		TA-220.		Out	74A1.	A-3876.		T22S47.		A-2928.							
6M1	6	12SA7, 12SK7, 12SQ7, 12SJ7, 35L6GT, 35Z5GT, (47).	6TC7-46.	AF886D4A.			UP44315C.		DY-401.		EL-443.		Out	98A18.	A-3349.		T22S87.		A-2928.							
6P32	6	12SA7, 12SK7, 12SQ7, 12SJ7, 35L6GT, 35Z5GT, (47).	6TC7-42.	AF106D20A.			UP6CJ64.		DY-304.		EL-351.		Chk Out	74A5.	A-3822, A-3876.	B3	T22S47, T22S45.	B3	A-2900, A-2928.	B3	754.	C3	GSM60.	C3		
6RP48, 6RP49,	3	14B6, 50A5, 35Y4.	6TA8.	PRSA150-50-30.			BRD3515.		M-5030-150.		TA-530.		Chk Out	74A1.	A-3856, A-3876.	B3	T22S45.	B3	A-2900.	B3						
6RT41, 42, 43.	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	6TA8.	PRSA150-50-30- & PRS150-20.			EZ42215.		DSB-403020- 150.		TA-303.		Chk Out	74A1.	C-171.	B4	T20C52.	B4	C-2975.	B4						
6RT42A	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	6TA8.	PRSA150-50-30- & PRS150-20.			EZ42215.		DSB-403020- 150.		TA-303.		Chk Out	74A1.	A-3876.	B3	T22S45.	B3	A-2928.	B3						
6RT44	7	6SK7, 6SA7, 6SQ7GT, 6V6GT, 5Y3GT, (47).	6TC6-25.	AF88J4A.			UP4445C.		DY-313.		EL-330.		Chk Out	74A3.	A-3822, A-3876.	B3	P-6312.		P-2952.							
6T01	6	12SJ7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47).	6TA8.	PRSA150-30-30- & PRS150-20.			EZ42215.		DSB-403020- 150.		TA-303.		Out	On Spkr.	A-3876.	B3	T22S45.	B3	A-2928.	B3						
6T02, 6T04	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	6TA8.	PRSA150-30-30- & PRS150-20.			EZ42215.		DSB-403020- 150.		TA-303.		Out	On Spkr.	A-3876.	B3	T22S45.	B3	A-2928.	B3						
6T05	6	12SJ7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47).	6TA8.	PRSA150-30-30- & PRS150-20.			EZ42215.		DSB-403020- 150.		TA-303.		Out	On Spkr.	A-3876.	B3	T22S45.	B3	A-2928.	B3						
6T06	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT.	6TA4-2.	PRS150-4.			BR415.		M-4-150.		UT-41.		Out	On Spkr.	A-3878.	B3	T22S47.	B3	A-2931.	B3	758.	C1	17GD60.	C1		
6T11	5	12A7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).	6TA8.	PRSA150-30-30- & PRS150-20.			EZ42215.		DSB-403020- 150.		TA-303.		Out	On Spkr.	A-3876.	B3	T22S45.	B3	A-2928.	B3						
6T12	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT.	6TA4-2.	PRS150-4.			BR415.		M-4-150.		UT-41.		Out	On Spkr.	A-3878.	B3	T22S47.	B3	A-2931.	B3	758.	C1	17GD60.	C1		
7A	7	6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6AB5, 6ZY5G, & PRS25-10.	P2140.	PRSA200-8-8.			EZ8825S.		DH-2X8-450. & M-10-25.		LM-28. & TA-5.		Pwr Out	74A1.	A-3879.		T22S47.		A-2933.							
7B1	7	6SK7, 6SA7, 6SQ7GT, 6V6GT, 5Y3GT, (47).	6TC6-25.	AF88J4A.			UP4445C.		DY-313.		EL-330.		Pwr Out	74A3.	C-2303.		T22S45.		P-2952.							
7C1, UL7C1	7	6SK7, 6SA7, 6SQ7, 6SJ7, 6V6GT, 5Y3G, (47).	6TC6-25.	AF88J4A.			UP4445C.		DY-313.		EL-330.		Chk Out	98A18.	A-3849.		T22S45.		C-2975.							
7C61, 7C62, 7C62UL	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47).	6TC7-46.	AF886D4A.			UP44315C.		DY-401.		EL-443.		Out	98A20.	A-3849.		T22S45.		A-2930.							
7C63, 7C63UL	7	6SK7, 6SA7, 6SQ7, 6SJ7, 35L6GT, 5Y3GT, (47).	6TC6-25.	AF88J4A.			UP4445C.		DY-313.		EL-330.		Chk Out	74A3.	C-2303.		T22S45.		P-2952.							
7K	7	6A8G, 6P5G, 6K7G, 6Q7G, 25L6, 25Z6G.	P2531.	PRS-A40302.			EZ2215C.		DSB-302.		TA-230. & TA-25.		Out	74A1.	A-3876.		T22S45.		A-2928.							
7KS	7	6A8G, 6P5G, 6K7G, 6Q7G, 25L6, 25Z6G.	P2531.	PRS-A40302.			EZ2215C.		DSB-302.		TA-230. & TA-25.		Out	74A1.	A-3876.		T22S45.		A-2928.							
7P32, 33, 34, 35,	5	1U4, 1R5, 1S5, 3V4.	6TC7-5.	PRSA150-4.			UP7D63.		DY-401.		TA-230.		Out	98A21.	A-3878.		T22S47.		A-2931.		754.	C3	G6M60.	C3		
7RT41, 42, 43.	6	12SA7, 12SK7, 12SQ7, 12SJ7, 35L6GT, 35Z5GT, (47).	6TA4-2.	PRSA-A40302- & PRS150-20.			EZ42215C.		DSB-302. & M-30-150.		TA-303. & TA-25.		Out	98A17.	A-3876.	B3	T22S45.	B3	A-2928.	B3						
7T06, 7T12	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT.	6TA4-2.	PRS150-4.			BR415.		M-8-150.		UT-41.		Out	On Spkr.	A-3878.	B3	T22S47.	B3	A-2931.	B3	758.	C1	17GD60.	C1		
7T10, 7T14, 7T15	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47).	6TA10.	PRSA150-50-30.			BRD3515.		DSB-5030-150.		TA530.		Out	98A4.	A-3876.	B3	T22S47.	B3	A-2928.	B3						
10AI	10	6SK7, 6SA7, 6SQ7, 6F6, 5Y3G, (47).	6TC6-25.	AF88J4A.			UP4445C.		DY-313.		EL-330.		Pwr Out	80B2, 79A1.	P-6313, A-2312.		T22R33, T22S88.		P-2953, A-2901.							
11A	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3.	P1939. P1937.	GLS450-8-8. GL450-30.			KRC588.		D-2X8-450. D-30-450.		PLS-88. PLS-25.		Pwr Out	P-2710. P-3470.	A-3830.		T22S47.		A-2905.							
11B, 11B-PH	11	6A8G, 6K7G, 6J5G, 6F6G, 5Y3.	P1993. P3478.	GL450-30.			KR530.		DY-2X30-450.		PLS-25. P-3476.		In Pwr Out	P-3479. P-3476.	P-6013, A-3830.		T22R08, T22S47.		P-2953, A-2905.							
16R	16	6K7G, 6L7G, 6H6G, 6J7G, 6J5G, 26L6G, 25Z3.	P1997. P1992.	PRSA450-8-8. GL450-30.			EZ8835.		DH-2X8-450. D-30-450.		UT-88. PLS-25.		In Pwr Out	P-2005. P-2006.	C-2304, C-1034.		T20C54.									
16S	16	6K7G, 6L7G, 6H6G, 6J7G, 6F8G, 6J5G, 6L6G, 25Z3.	P1997. P1992.	PRSA450-8-8. GL450-30.			WR10.		D-12-450. EZR835.		LS-12. PLS-25.		Out	P-2007. P-2006.	A-3830, C-2304.		T22S70.		A-2935.							
28-G5, 29-G5	5	1R5, 1T4, 1S5, 3S4, 35Z5GT.	P4589.				P1993. P1992.		WR-10. UP46J62.		LS-12. EL-351.		Out	P-2007. P-4638.	A-3830.		T22S70.		A-2935.							
55	5	6A8, 6K7, 6Q7G, 6K6G, 6X5G.	P2329.	PRSB-8-8.			EZ588.		DH-2X8-450SS.		LM-88.		Pwr Out	74A1.	A-3878.		T22S47.		A-2931.							
62-B7	7	6SK7, 6SA7, 6SQ7, 6K6G, 5Y3G.	P4264.	AF88J4A.			UP4445C.		DY-313.		EL-330.		Chk Out	98A18.	P-3926, P-4198.		T20C52, T22R02.		C-2990.							

†Information not available.

Section D IF COILS				Section E PHONO CARTRIODES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL								
Use	Mfr.	Meissner	Note	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clarostat	Shaft	Switch	Note	IRC	Shaft	Switch	Note	Mfr.	Radiant	Note	Photofact Set No.				
1st.	72B7	16-6658		455	409A3		L-70A		78B12			10E60		Vol	75B3-3				D18-137XX	E	41			Continued—	ADMIRAL				
2nd.	72B12																							3	6C71				
3rd.	72B8	16-6660		456																					6D				
1st.	72B9	16-5712		456																					6E1, 6E1N				
2nd.	72B9	16-5714																							6L1				
1st.	72B9-2	16-6658		4					78B3		ST-105	A1		Vol	75B1-100				75B2-6	KSS-3	A2	D1-17	E	42					
2nd.	72B10-2	16-6660							78B19-1		ST-107	A		Tone	75B1-12	AM-33-S	A	D13-139	KSS-3	A	D13-139	E	41						
1st.	72B3	16-6658														P3527	AM-60-Z	KSS-3	P3527	A	D13-133	E	41						
2nd.	72B4	16-6660														P3528	AM-60-Z	KSS-3	P3528	A	D13-133	E	41						
1st.	72B3	16-6658		455					78C20		ST-111	8A21		Tone	75B2-2	AT-112	KSS-3	D18-137X	AT-112	A	D18-137X	E	41						
2nd.	72B4	16-6660		455					78B3		ST-105	5A1		Tone	75B1-3	AM-83-S	KSS-3	D13-139	AM-83-S	A	D13-139	E	42						
1st.	72B9	16-6658		455												75B1-100	AM-53-Z	KSS-3	D13-137	A2	D13-137	E	42						
2nd.	72B10-2	16-6660																						6	6P32				
1st.	72B3	16-6658							78B9		ST-105	1		Vol	75B1-9	AM-1	KSS-3	D13-137	AM-1	A	D13-137	E	41						
2nd.	72B4	16-6660							78B4-3		ST-105	51		Vol	75B3-2	AT-2	KSS-3	D18-133X	AT-2	A	D18-133X	E	41						
1st.	72B3	16-6658			409A3		L-7 A		78B13		ST-107	1		Vol	75B3-2	AT-	KSS-3	D18-133XX	AT-	-	D18-133XX	E	41						
2nd.	72B4	16-6660																						4	6RT42A				
1st.	72B7	16-6658		455	409A3		L-7 A		78B7		ST-108	5A1		Vol	75B2-1	AT-112	KSS-3	D18-137XX	AT-112	A	D18-137XX	E	41						
2nd.	72B8	16-6660														75B1-5	AM-1	KSS-3	D13-139	A	D13-139	E	42						
1st.	72B3	16-6658		455					78B4-2		ST-105	5A		Vol	75B3-2	AT-92	KSS-3	D18-133XX	AT-92	A	D18-133XX	E	41						
2nd.	72B4	16-6660							78B4-1		ST-105	51		Vol	7	AT-6-Z	K,S-3	D13-137	AT-6-Z	A	D13-137	E	41						
1st.	72B3	16-6658							78B4		ST-105	51		Vol	7	3-2	AT	KSS-3	AT	A	D18-133XX	E	41						
2nd.	72B4	16-6660							78B3		ST-108	A		Vol	7	B1-1	AM-6	KSS-3	A	A2	D13-137	E	42						
1st.	72B5	16-6658		45					78B3		ST-108	5A1		Vol	75B1-6	AM-63-Z	KSS-3	D13-137	AM-63-Z	A	D13-137	E	41						
2nd.	72B6	16-6660							78B4		ST-105	5A1		Vol	75B1-6	AM-63-Z	KSS-3	D13-137	AM-63-Z	A	D13-137	E	41						
1st.	72B5	16-6658		455					78B3		ST-108	5A1		Vol	75B1-1	AM-63-Z	KSS-3	D13-137	AM-63-Z	A2	D13-137	E	42						
2nd.	72B6	16-6660																						3	6T12				
1st.	72B7	16-5712		456																					7A				
2nd.	72B7	16-5714																											
1st.	72B7	16-6658		55	409A3		—		78B7		ST-108	61		Vol	P2136	M-1-Z	A2	D1-12	AT-112	A	D1-12	E	42	G1	P2147	5300..	H1	7A	
2nd.	72B8	16-6660														Tone	75B1-2	AT-112	KSS-3	D18-1	A	D18-1	E	41	G			1	7B1
1st.	72B7	16-6658		455	A1372				78B6		ST-119	F3	1 A1	Vol	75B2-2	AT-1	KSS-3	D18-137X	AT-1	A	D18-137X	E	41				7C1, UL7C1		
2nd.	72B8	16-6660							78C20		ST-115	8A21		Vol	75B1-8	AM-83-S	KSS-3	D13-139	AM-83-S	A	D13-139	E	41				25	7C61, 7C62, 7C62UL	
1st.	72B3	16-6658		455					78B6		ST-119	F3	10A31	Vol	75B2-2	AT-112	KSS-3	D18-137X	AT-112	A	D18-137X	E	41				25	7C63, 7C63UL	
2nd.	72B4	16-6660							78B6		ST-119	F3	10A31	Tone	75B1-8	AM-83-S	KSS-3	D13-139	AM-83-S	A	D13-139	E	41						
1st.	P3282	6-5712		55					P3284		ST-194	5E4		Vol	P	M-6-Z	A	D13-133	M-6-Z	A	D13-133	E	41				7K		
2nd.	P3283	6-5714							P3638		T-19	“		Vol	P	M-6-Z	A	D13-133	M-6-Z	A	D13-133	E	41				7KS		
1st.	P3283	6-5714							78B17			46A		Vol	P	M-6-Z	A	D13-1	M-6-Z	A	D13-1	E	41				7P32, 33, 34, 35		
2nd.	72B28-1	16-6658		4													75B1-18	AM-3-Z	D13-1	75B1-18	AM-3-Z	D13-1	E	42					
1st.	72B28-1	16-6669							78B19		T-07	51		Vol	75B2-6	AT-1	KSS-3	D13-1	AT-1	A	D13-1	E	42						
2nd.	72B3	16-6658		455					78B19		T-07	51		Tone	75B1-12	AT-83-S	KSS-3	D13-1	AT-83-S	A	D13-1	E	41				7RT41, 42, 43		
1st.	72B4	16-6660							78B3		ST-108	6A1		Vol	75B1-1	AM-63-Z	KSS-3	D13-1	AM-63-Z	A2	D13-1	E	42				24	7T06, 7T12	
2nd.	P7285	16-6658		455					78B26		“	5A1		Vol	75B1-1	AT-1	KSS-3	D13-1	AT-1	A	D13-1	E	41				30	7T10, 7T14, 7T15	
1st.	72B31	16-6658		455	4091		L-6A		78B12			“		Vol	7	“	“	D18-137XX	“	“	D18-137XX	E	4				10A1		
2nd.	72B32	16-6660																											
1st.	72B7	16-6658		455																									
2nd.	72B12	16-6660																											
3rd.	72B8	16-6660																											
1st.	P1930	16-5712		455					P2716		T-1	“		Vol	P	T-11		D18-1	9X		D18-1	E	41				11A		
2nd.	P2704	16-6133							P2716		ST-173	F6	12E10	Tone	P3471	AM-60-Z	KSS-	D13-137	P3472	A	D13-133	E	41					11B, 11B-PH	
3rd.	P2711	16-5714							P2017		ST-1	3	“	12E15	Vol	P1989	M-1	P1990	V-0-Z		D13-137	E	41					16R	
1st.	P1506	16-5712		455	†		t																			16S			
2nd.	P2704	16-6133																											
3rd.	P2711	16-5714		45																									
1st.	P2001	16-5712		45					P2017		ST-1	3	“	12E15	Vol	P1989	M-1	P1990	V-0-Z		D13-137	E	41					28-65, 29-65	
2nd.	P2002	16-6133		45																									
3rd.	P2003	16-5714		45																									
1st.	P2001	16-5712		45																									
2nd.	P2002	16-6133		45																									
3rd.	P2003	16-5714		45																									
1st.	P4610	16-5712		455					P4 2 A			“		Vol	P7 6	AM-63 Z	“	D13-137	P7 6	AM-63 Z	“	D13-137	E	41				55	
2nd.	P4612	16-5712		456																									
1st.	P4108	16-5714		5			t		“		“	“		Vol	P2321														

AIRCASTLE

CROSS REFERENCE	
Model	See Chassis
A2000, AP2000, A9P2000, A14P2000.	821
A2002, AP2002.	TSA
AP2004, AP2005.	402
A2006, AP2006.	B5
A2008, AP2008, A2010, AP2010.	711
A2012, AP2012.	1944
A9P2014.	561-1
A2015, A3P2016, A2022, A6P2022	711
A2026, A9P2026.	10-70
AP2028.	10-72
A14P2036.	711
AP2050.	721
A2052, AP2052, A10P2052, A14P2052.	1061
A2056, A6P2056.	204
A2060, A2P2060, A2062.	1061
A6P2062.	1271-SP
APB2064.	1061
A2100, AP2100, A14P2100.	611-1
A2104.	0-44
A2108, AP2108, A2112, A3P2112.	561-1
A2116, AP2116.	561-1
A2120, AP2120.	130, 130U
A2122, AP2122.	KD
A2123, AP2123.	1BS0, 1BS0P
A2130, A3P2130.	KB
A2132, A6P2132.	F5
A2134, A7P2134, A9P2134.	BP12
A2136.	BP11S
A9P2138.	130U
A10P2144.	561-1
A14P2148.	0-557
A2154, A6P2154.	175B
A2200, AP2200, A14P2200.	631
A2204, A6P2204.	119B
A2250, AP2250.	631
A2454, AP2454, A9P2455.	510
A2460 (Late).	10-72
A2462, A6P2462, A10P2464.	710
BP5500.	751
BP5502.	831
B3P6506.	821
B3P6508.	711
B5P6518, B5P6530.	751
B5P6540.	6540
B5P6542.	6542
BP6550.	751
BP6552.	831
B3P6554.	1061
B3P6556.	650
B5P6570.	831
B5P6580.	1271-SP
B5P6582.	831
BP6600, BP6604.	571-1M
Model	
B3P6608.	821
B5P6612.	6540
B5P6612.	6542
BP6622.	751
BP6700.	1061
BP6850, B1P6850.	711
B3P6854.	831
B5P6856.	6540
BP6860.	1061
CP5006, CP5007.	751
CP5008, CP5009.	832
C5P5012.	711
C5P5014.	650
CP5025.	831
C5P5030.	K202
CP5052, CP5053.	TK-510
C5P5054, C5P5055.	832
C5P5056.	1271-SP
CP5060.	560
CP5100, CP5101, CPS102, CP5103.	571-1M
CP5104, CPS105, CP5106, CP5107.	572-1M
C5P5110.	811-1
CP5120, CP5121.	5120
CP5125.	05
C7P5128.	1-53
CP5150, CPS151.	572-1M
CP5200, CP5201, CP5202, CP5203.	560
CP5450, CPS451.	520
CP5452, CPS453.	621
C7P5454.	AR-10
CP5460, CPS461.	10-72
DP7000, DP7001.	T-502
DP7001, DP7002.	T-503
DP7010, DP7011.	LB, LBU
DP7012.	722
DP7014.	822
DP7021.	LCU
DP7022.	K205
DP7025.	K202
DP7031.	300
DP7044, DPS7046.	832
DP7050.	722
DP7052.	822
DP7060.	722
DP7062.	7052
DP7064.	7054
DSP7070.	419
DP7104, DP7108.	562-1
DP7120.	TB001, TB002
DSP7154.	408
DP7450.	621
DP7452, DP7454.	AR-40
DSP7456.	520

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.
1st.		16-5712.			175							Vol	P1371..				D13-133..	B	41		P1414..	5300..	Continued	ADMIRAL 69	
2nd.		16-5714.										Vol	P1371..				D13-128..	G1							319-4Z
1st.	P3048.	16-6658.			455			P3465.	ST-105.		5A1.					D13-133..	E	42							AERMOTIVE 181AD
2nd.	P2606.	16-6660.														D13-133..		41	G1						
1st.		16-6658.			460				ST-738..		8E25.		Vol		M-58-S..		A..								AIRCASLE
2nd.		16-6660.																							

CROSS REFERENCE See Chassis		Model	See Chassis
EP2000, EP2001.	T-502	Z7002	0-51
EP2004.	T-2625	Z7006, ZP7006, ZSP7006	TPSA
EP2010.	722	Z7008, ZP7009 (Late)	TP
EP2014, E10P2014, E11P2014..	419	Z7014, ZP7014, ZSP7014, Z7016,	
EP2050..	922	ZP7016, ZSP7016	650
EP2060.	932	Z7018..	0-61
EP2100, E10P2100	397	ZP7024..	1549
EP2104.	582-1	Z7026, ZSP7026	0-77
EP2121, E11P2121	2-54	Z7030, ZP7030, ZP7030	711
EP2122.	378	Z7050, ZP7050, Z7064, ZP7064	650
EP2124.	408	Z7100..	176B
E10P2128.	7122	Z7104, ZP7104, ZP7106..	560-1
EP2452.	AR-40	Z7108..	175B
EP2454.	AR-50	ZSP7112..	0-52
F5P608.	822	ZP7112, ZP7114..	560-1
FP510..	TR-640	Z7116, ZP7116, ZP7116, ZP7118..	176B
FP512..	417UL	ZP7120..	286
FP514..	TK-510	ZP7122..	295
FP515..	K202	Z7124, ZP7124..	TF
F5P520..	419	ZSP7125..	591-1
F5P562..	722	Z7126, ZP7126, ZP7126..	5N
F5P608..	582-1	Z7150, ZP7150..	175B
KG6628..	KG	Z7154..	178BL
LB6517, LB6518..	LB	ZP7154..	Q1
T2054..	175E	ZP7200, ZP7202..	119B
TP2215, TP2218..	6A	Z7208..	
TP2226, TP2228..	73-B	ZP7212, ZSP7212, ZP7214, ZP7216..	
V12P1132..	211 (AC-DC)	ZP7216, ZP7216, ZP7254, ZP7254..	630-6
V1216, VP1216, V4P1216, V6P1216, V8P1216..	405	Z7254, ZP7254..	297
VP1222..	128B	Z7456, Z7458..	
VI224..	902	Z7460, ZP7460..	510
VI2250..	4D	134..	46A
W102, WP102..	TC	204..	SM
W122, WP122..	KR-20	1002, 1003..	219
W130, WP130, W4P130, W4P131..	P	1008, 1009..	8A5
W134, W6P134..	TF	1010, 1011..	216
W200, WP200, WP202, WP203..	QT	1026..	8A5
W216, WP216, WP218..	TM	1108-1111..	211 (6V)
W240, WP240, W6P240, W244..	QT	2006, 2007..	6A
WP254, WP254, WP256..		2060, 2061..	8A5
W264, WP264, W4P264, W270..		2070, 2071..	16R
WP270, WP270..	QT	2122..	KD
W300, WP300..	SL	2208-2211..	184
W302, WP302..	TL	2212-2215..	145E
W310 (Late)	178BL	2218..	6A
W312, WP312, W2P312..	SL	2460 (Late)..	10-72
W314, WP314, W4P314, W6P314..	178BL	4040..	5A
W316, WP316, W5P316..		4056..	16R
W320, WP320, W5P320, W330..		4068..	885
WP330, WP330..	553	4074..	16R
W400, WP400, WP402..	9-627	4076..	1105
W408..	AU-10	5101, 5102, 5103, 6604, 6650..	
Z7000, ZP7000..	720	7152..	571-1M

1st.	65-0191..	16-5712..	455		73-0027..				Vol	67-0020..					D13-132..	N	41		83-0025..	5326P..	H1		AR-10
2nd.	65-0192..				73-0059..				Vol	67-0043..								83-0025..	5326P..	H1		AR-40, AR-50	
1st.	65-0319..	16-6658..	455																				AU-10
2nd.	65-C320..				N-1235..	ST-113..	F8	4A07..	F8	Vol	N-1238..												B5
1st.	N-1248..	16-5712..	456		P3943..	ST-105..		5A1..		Vol	P3745..	AM-60-Z..	KSS-3..	A..		D13-133..	E	41					BP11S
2nd.	N-1596..									Vol	8.153..	M-63-Z..		A2..		D13-137..		42	G1				BP12
1st.	P3794..	16-6658..	455							Vol	8.150..	M-63-Z..		A2..		D13-137..		42	C1				F5
2nd.	P3793..	16-6660..	455							Vol	P3961..	AM-63-Z..	KSS-3..	A2..		D13-137..	E	42					G5
1st.			455							Vol	P4612..	AM-63-Z..	KSS-3..	A..		D13-137..	E	41					K-202, K-205
2nd.			455							Vol	5-301..	AM-63-Z..	KSS-3..	A..		D13-137..	E	41					
1st.	P3048..	16-6658..	455		P3972..	ST-105..		5A1..															
2nd.	P3380..	16-6650..	455		P4620..																		
1st.	P4510..				51-300..	t..		43-302..															
2nd.	P4712..																						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No	Tubes Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note		
AIRCAS TLE - Cont	in	ued																							
KB	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT, (47)	N2748	AF44D40A		UP4CJ61							Cut	On Spkr.	A-3857		T22S48		A-2937		747 & 2482		2F4 & 2B30		
KD	6	1A7GT, 1N5GT, 1H5GT, 1A5GT, 50LGT, 35Z5GT, (47)	N2627										Cut	On Spkr.								747 & 2482		2F4 & 2B30	
KG	4	1R5, 1T4, 1S5, 1S4	N3161	PRS50-10		BR-105		M-10-50		TA-510		Cut	N3100									950 & 738		2R & 230	
KR20	5	6K8, 6K7, 6R7, 25L6, 25Z6, 16S Balast	A-481	PRSA150-30-30		BRD3315		M-2X30-150		TA-230		Cut	A-3876		T22S45		A-2928								
LB, LBU	5	12A8GT, 12K7GT, 12Q7GT, 35L5GT, 35Z5GT	N3554	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Cut	On Spkr.	A-3876	T22S45	A-2928									
LC, LCU	6	6A8GT, 6K7GT, 6Q7GT, 6K6GT, 6X5GT, (47)	N3440			EZ5116				TU-1616		Pwr	N3438, N3437	P-6119	T22R02	P-2951									
P	4	6K7, 6J7, 25L6, 25Z6, (40)	C233			EZ32115		DSB-3X20-150		TA-300		Cut	On Spkr.	A-3876	T22S45	A-2928									
PX	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	A18-273	PRS150-4		BR415		M-4-150		UT-41		Cut	A-3831	T22S47	A-2901										
QT	7	6D8G, 6S7G, 21H4G, 6T7G, 6L5G, 116G	C-242			UP15D35		DY-2X15-350		EL-254		In	T-26	A-4401	T20D75	A-2920									
SL	5	1A7G, 1N5G, 1H5G, 21A5G	N-1367	PRS150-8		BR-815		M-8-150		UT-81		Cut	On Spkr.	A-3879	T22S47	A-2938									
SM	5	6A8G, 6K7, 6Q7G, 6G6G, 6ZY5G	N-1468			UP22135				EL-355		Pwr	N-1476, On Spkr.	A-3879	T22S48	A-2928									
T-502	5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	7-301	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	On Spkr.	A-3876	T22S45	A-2928									
T-530	5	14Q7, 14A7, 14B6, 50LGT, 35Y4, (47)	7-301	PRSA150-40-20		BR04215		M-2X40-150		TA-240		Cut	On Spkr.	A-3876	T22S45	A-2928									
T-2625	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	A7-302	PRSA150-50-30 & PRS25-10		BRD5315 & BR102A EZ42215		M-5030-150, & M-10-25		TA-530 & TA-10		Cut	On Spkr.	A-3876	T22S45	A-2928									
TB-503	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 50Y6GT, (47)	7-304	PRS150-20		BR2015 BRH121		DSB403020-150		UT-201 M-100-12		Cut	On Spkr.	A-3878	T22S47	A-2932									
TB601, TB602, TB603	6	1NSGT, 1A7GT, 1H5GT, 3Q5GT, 50Y6GT, (47)	7-303			UP2225		DY-2X20-350		EL-120		Pwr	N-1315, On Spkr.	P-6119	T22R02	P-2951									
TC	5	6A8G, 6K7, 6Q7G, 25L6G, 25Z6G, (47)	N-1312	AF44F		BR-815		M-8-150		UT-81		Cut	On Spkr.	A-3878	T22S45	A-2928									
TF	4	1A7G, 1N5G, 1H5G, 1C5G	N-1367	PRS150-8		UP22135				EL-355		Pwr	N-1476, On Spkr.	A-3879	T22S48	A-2932									
TK-510	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	7-301	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	On Spkr.	A-3876	T22S45	A-2928									
TL	4	1A7G, 1N5G, 1H5G, 1C5G	N-1367	PRS150-8		BR-815		M-8-150		UT-81		Cut	On Spkr.	A-3878	T22S47	A-2932									
TM	4	6A8G, 6K7, 6Q7G, 6G6G, (47)	N-1468			UP22135		DSB-3X20-150		TA-220 & TA-25		Pwr	N-1476, On Spkr.	A-3879	T22S48	A-2932									
TP	4	12K7GT, 12J7GT, 50L5GT, 35Z5GT	N-1850	PRSA150-20-20 & PRS25-20		EZ2215C		DSB-3X20-150		TA-220 & TA-25		Cut	12-300	A-3876	T22S45	A-2928									
TR640	6	6SA7, 6SK7, 6SQ7GT, 35L6GT, 35Z5GT, (47)	7-304	PRS50-10		BR105		M-10-50		TA-510		Cut	On Spkr.	A-3876	T22S45	A-2928									
TSA	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT, (47)	N-1366	PRSA150-30-20		BRD3315		M-2X30-150		TA-230		Cut	On Spkr.	A-3876	T22S45	A-2928									
O-44	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Cut	On Spkr.	A-3878	T22S47	A-2932									
O-5I	5	6SA7GT, 6SK7GT, 6SQ7GT, 6K6GT, 5W4GT, (51)	18-254	AF44J		UP2235		DY-2X20-350		EL-32		Pwr	60-179, On Spkr.	P-6119	T22R02	P-2951									
O-52	5	1A7GT, 1N5GT, 1H5GT, 21A5G	18-250	PRS150-8		BR815		M-8-150		UT-81		Cut	80-194	A-3878	T22S47	A-2932									
O-61	5	6SA7GT, 6SK7GT, 6SQ7GT, 25L6, 25Z6GT, BM198 Balast, (51)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-122		Cut	On Spkr.	A-3876	T22S45	A-2928									
O-77	6	6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, BM42B Ballast, (51)	18-255	PRSA150-20-40		BRD4215		M-2X30-150		TA-240		Cut	On Spkr.	A-3876	T22S45	A-2928									
O-557	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT, (47)	18-262	AF44D		UP2215		DY-2X20-150		EL-221		Cut	80-204	A-3881	T22S48	A-2934									
1-40	4	12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	18-263	PRS150-20-20		EOL2215SS		DH-2X20-150SS		TU-220		Cut	80-205	A-3876	T22S45	A-2928									
1-42	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-265	PRS-A40302		EZ4215C		DSB-303		TA-330 & TA-10		Cut	On Spkr.	A-3876	T22S47	A-2932									
1-53	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT	18-262	AF44D		UP2215		DY-2X20-150		EL-221		Cut	On Spkr.	A-3881	T22S48	A-2934									
1BR50, 1B50-P	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 25Z6GT	18-263	PRSA150-20-20		EDL2215SS		DH-2X20-150SS		TU-220		Pwr	Y-TP-55	A-3881	T22S48	A-2934									
1S49	5	12SA7GT, 12K7GT, 12Q7GT, 20-20 Mid	18-264	PRSA150-20-20		BRD2215		M-20X2-150		TA-220		Cut	On Spkr.	A-3876	T22S45	A-2928									
2-54	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 17Z4GT	18-265	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Cut	On Spkr.	A-3881	T22S48	A-2934									
2-56	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 17Z6GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Cut	On Spkr.	A-3878	T22S47	A-2932									
2-61	6	12SA7, 12SK7, 12SQ7, 12Q5GT, 35L6GT, 35Z5GT, (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Cut	On Spkr.	A-3876	T22S45	A-2928									
4D	4	1A7G, 1N5G, 1H5G, 1Q5G	P3024			BR815		M-8-150		UT-81		Cut	On Spkr.	A-3878	T22S47	A-2931									
5X	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 70L7GT	P3563	PRS150-20-30		EZ3315		M-2X30-150		TA-220		Chk	P3556	C-1706	T20C52	C-2975									
6A	6	6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6ZY5G	P3562	PRS25-50		PRSA200-8-8,		M-50-25		TA-50		Out	On Spkr.	A-3878	T22S47	A-2931									
			P3562	PRS25-50		EZ8825S		DH-2X8-450		LM-28		Chk	P2128	C-1711	T20C52	C-2975									
			P3562	PRS25-50				M-10-25		& TA-5		Pwr	P2131	A-2932	T22S48	A-2932									

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Product Set No.	MFR. & MODEL					
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clorostat	Shaft	Switch	Note	IRC	Shift	Switch	Note	Mfr.	Radiart	Note			
1st.	N2647.	16-6658.		456				N2747.	ST-105		5A1.		Vol	N2623.	AM-53-Z.	KSS-3.			D13-137.	E						Continued—	AIRCASTLE KB	
2nd.	N2648.							M2624.	ST-105		5A1.		Vol	N2623.	AM-53-Z.	KSS-3.			D13-137.	E							KD	
1st.	N2647.	16-6658.		456				N3101.	ST-113		4A07.		Vol	N3092.	AM-53-Z.	KSS-3.	A2		D13-137.	E	42						KG	
2nd.	N2648.							D-69.	F2		F2		Vol	R-198.	M-60-Z.				D13-133.								KR-20	
1st.	N3098.							N3538.	ST-113		4A07.		Vol	N3248.	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							LB, LBU
2nd.	N3099.							N3539.	ST-113		4A07.		Vol	N3065.	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							LC, LCU
1st.	T-335.	16-5712.		448				N3436.	ST-165		5E10.		Vol	V23.	M-40-S.	KSS-3.	A.		D14-120.								P	
2nd.	T-351A.							S300.	F2		F2		Vol	A24-165.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42	G1					PX	
1st.	N3043.	16-6658.		456				B79-745.	ST-108		6A1		Vol	V-20.	M-63-Z.		A.		D13-137.		41	G1	F-4.	5436.	H1	13.	QT	
2nd.	N3091.							B79-335.	ST-108		6A1		Vol	V-112.	M-51-Z.				D13-125.									
1st.	N1598.							N-1271.	ST-108		6A1		Vol															
2nd.	N3463.							S-27.	ST-115		8A4		Tone															
1st.	B10-416.	16-5740.	D2	455				N-1450.	ST-105		5A1		Vol	N-1373.	M-60-Z.		A2.		D13-133.		42	G1					SL	
2nd.	B10-417.	16-5742.						N-1472.	ST-105		5A1		Vol	N-1454.	M-51-Z.				D13-128.								SM	
1st.	I-38.	16-5712.						43-301.	ST-105		5A1		Vol	N-1320.	M-63-Z.		A.		D13-137.		41	G1	N-1431.	5300.	H1		T-502	
2nd.	I-28.	16-5714.						43-301.	ST-105		5A1		Vol	N-1454.	M-51-Z.				D13-128.								T-530	
1st.	N-1391.	16-5712.		456				43-301.	ST-105		5A1		Vol	5-301.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							T-2625
2nd.	N-1392.	16-6661.						43-301.	ST-105		5A1		Vol	5-310.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							TB-503
1st.	N-1318.	16-6660.		456				43-301.	ST-105		5A1		Vol	5-311.	AM-46-Z.	KSS-3.	A.		D11-120.									
2nd.	N-1319.	16-6660.						43-306.	F1		F1		Vol	5-305.	M-63-Z.		A4.		D13-137.	E	45							
1st.	N-1391.	16-5712.						43-303.					Vol	5-304.	AM-66-Z.	KSS-3.	A4.		D13-139.	E	45							TB601, TB602, TB603
2nd.	N-1303.	16-6660.						N-1314.	F2		F2		Vol	N-1320.	M-63-Z.		A.		D13-137.		41	G1						TC
1st.	N-1319.	16-6661.						N-1507.	ST-105		6A1		Vol	N-1321.	M-63-Z.				D13-133.									TF
2nd.	N-1391.	16-5712.						43-301.	ST-105		5A1		Vol	N-1733.	AM-60-Z.	KSS-3.	A2.		D13-133.	E	42							TK-510
1st.	N-1548.							43-301.	ST-105		5A1		Vol	5-301.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							TL
2nd.	N-1302.	16-6658.	51-301.	L-26-A.				43-301.	ST-105		5A1		Vol	5-301.	AM-63-Z.	KSS-3.	A.		D13-133.		42	G1	N-1475.	5436.	H1		TM	
1st.	N-1303.	16-6660.						N-1372.	ST-105		5A1		Vol	N-1373.	M-60-Z.		A2.		D13-133.		42	G1						TP
2nd.	N-1392.	16-5712.		456				N-1472.	ST-105		5A1		Vol	N-1320.	M-63-Z.		A.		D13-137.		41							TR640
1st.	N-1318.	16-6661.						N-2047.	F1		F1		Vol	N-1537.	AM-40-S.	KSS-3.	A.	G5	D16-120.	E	41	G4						TSA
2nd.	N-1319.	16-5712.						43-305.	ST-108		6A1		Vol	5-310.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							O-44
1st.	N-1598.	16-5712.						N-1585.	ST-113		4A07.		Vol	N-1595.	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							O-51
2nd.	N-1596.							79-297.	ST-105		5A1		Vol	24-149.	M-63-Z.		A2.		D13-137.		42	G1						O-52
1st.	10-342.	16-5712.		455				79-275.	ST-165		5E10.		Vol	24-140.	M-60-Z.		A.		D13-133.		41	G1						O-61
2nd.	10-343.	16-5714.						79-296.	ST-108		6A1		Vol	24-148.	AM-63-Z.		A2.	G2	D13-137.		42	G2						O-77
1st.	10-309.	16-6650.		455				79-283.	ST-194		5E45.		Vol	24-142.	M-60-Z.		A.		D13-133.		41	G1						D-557
2nd.	10-281.	16-6661.						79-283.	ST-194		5E45.		Vol	24-146.	M-60-Z.		A.		D13-133.		41	G1						1-40
1st.	10-342.	16-5712.		455				79-303 or	ST-105		5A1		Vol	24-150.	AM-63-Z.	KSS-3.			D13-137.	E								I-42
2nd.	10-343.	16-5714.						79-304.	ST-105		5A1		Vol	24-152.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							I-53
1st.	10-368.	16-6660.		455				79-305.	ST-105		5A1		Vol	24-154.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							I-549
2nd.	10-342.	16-5712.						79-297.	ST-105		5A1		Vol	24-150.	AM-63-Z.	KSS-3.	A.		D13-137.	E	42	G1						I-549P
1st.	10-343.	16-5714.						79-314.	ST-105		5A1		Vol	24-150.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42	G1						1-54
2nd.	10-379.	16-5712.						F1			F1		Vol	Y-VC-41.					D13-133.		42	G1						2-56
1st.	10-379.	16-5714.						F1			F1		Vol	Y-VC-37.	M-60-Z.		A.		D13-133.		41	G1						2-61
2nd.	10-343.	16-5714.						P3029.	ST-105		5A1		Vol	P3015.	AM-60-Z.	KSS-3.	A2.		D13-133.	E	42							4D
1st.	10-343.	16-5714.						P3564.	ST-105		5A1		Vol	P3550.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							5N
2nd.	10-343.	16-6658.		455				P2143.			F4		Vol	P2136.					D13-133.		42	G1						6A
1st.	10-369.	16-5712.		455				P2144.			F4		Vol	P2137.	M-51-Z.		A2.		D13-128.									
2nd.	10-370.	16-5714.																										
1st.	P3048.	16-5712.		456																								
2nd.	P2517.																											
1st.	P3559.	16-6658.		455																								
2nd.	P2606.	16-6660.																										
1st.	P1735.	16-5712.		456																								
2nd.	P1690.	16-5714.																										

†Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note			
																			"A"	"B"	"A"	"B"				
AIRCRAFT—Continued																										
8A5 (1939)	5	6A8, 6K7, 6Q7, 6F6, 5Z4	18-2008	PRSA-450-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	.....†	P-6119		T22R02		P-2951								
9-627	6	6A7, 6D6, 6R7, 76, 41, 6Z4	18-240	PRV450-10-10-10	A4	BRD1845		M-20-450 & M-8-450		UT20 & UT-8		Chk Pwr Out	33-219	A-3878		T22S47		A-2931								
10-70	6	6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (51)	18-255	PRSA150-20-40		BRD4215		M-2X30-150		TA-240		Pwr Out	60-169			T22S47		A-2931								
10-72	7	6SK7, 6SA7, 6SQ7, 6J5GT, 6K5GT, 6X5GT	18-264	AF44J & PRS25-50		UP2245 & BR602		DY-2X20-450 & M-20-25		EL-220 & TA-50		Pwr Out	80-202	A-3878		T22S47		A-2931								
16R	16	6K7G, 6L7G, 6HG, 6J7G, 6F5G, 6LG, 5Z23	P1897	PRSA450-8-8		EZ8835		EZ8835		DH-2X8-450		Chk Pwr Out	80-201	P2005		C2304										
	P1892					KR530		D-30-450		PLS-25		Pwr Out	80-201	P2006		C-1034										
	P1893					KR530		D-30-450		PLS-25		Chk Pwr Out	80-201	P2007		A-3830										
	P1894					WR10		D-12-450		LS-12		Chk Pwr Out	80-201	P-6012												
46A	7	6A7, 6K7, 75, 6C5, 6F6, 80, or 8	1477	GL450-12		KR512A		D-12-450		PLS-12		Chk Pwr Out	80-201	A-3870		T22S70		A-2935								
	1476					GL450-16		D-16-450		PLS-16		Chk Pwr Out	80-201													
73B	5	6D8G, 6S7G, 6L5G, 41	3060	PRSA450-8-8		EZ8835		M-2X8-450		UT-88		Chk Pwr Out	2271	A-3878		T22S47		A-2931								
												Chk Pwr Out	3685													
106B	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT, (47)	18-266	PRSA150-40-40		EZ3315		DSB-2X30-150		TA-330		Chk Pwr Out	80-224	A-3878		T22S47		A-2931								
												Chk Pwr Out	80-224	B3		T22S45		A-2928								
119B	4	6D8G, 6S7, 6T7G, 6G6G, (40)	4841	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	4848			T22548		A-2932								
	1693					BR102A		M-10-25		TA-10		Chk Pwr Out	4848	A-3879		T22S47		A-2931								
128B	5	1C7G, 1D5G-P, 1H4G, 1E5G-P, 1G5	1693	PRS25-10		BR102A		M-10-25		TA-10		Chk Pwr Out	4848	A-3878												
130	3	1A7GT, 1N8GT, 1D8GT	CE58	PRS150-4		BR415		M-8-150		UT-41		Out	.....†	A-3881		T22S48		A-2934								
130U	3	1A7GT, 1N5GT, 1D8GT	CE58	PRS150-4		BR415		M-8-150		UT-41		Out	.....†	A-3881		T22S48		A-2934								
145E	7	6D8G, 6S7G, 6T7G, 6L5G, 233, 1H4G	3575	PRS450-8		BR845		M-8-450		UT-8		Chk Pwr Out	3416			T22S48		A-2900								
	3574					BR1625		M-16-250		UT-816		Chk Pwr Out	3573			T22S48		A-2937								
175B	4	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10		BR102A		M-10-25		TA-10		Out	.....†	A-3857												
175E	8	6A7, 6D6, 75, 76, 42, 6G5, 80	3375	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	4387			T22S64		A-2904								
176B	6	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10		BR102A		D-8-250		SC-8		Pwr Out	4387	A-3857		T22S48		A-2937								
178BL	4	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10		BR102A		M-10-25		TA-10		Out	On Spkr	A-3857		T22S48		A-2937								
184	4	6D8G, 6S7G, 6T7G, 1C5G	4459	PRSA150-20-30		BR3315		M-2X30-150		TA-230		Pwr Out	.....†	A-3822		T22S47		A-2900								
187B	5	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10		BR102A		M-10-25		TA-10		Pwr Out	On Spkr	A-3822		T22S47		A-2900								
194U	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	11493	AF88D		UP4415		DY-2X40-150		EL-245		Out	On Spkr	A-3876		T22S45		A-2928								
204	5	6SA7, 6SK7, 6SQ7, 6F6G, 5Y4G, Some Models Use 6U5, (44)	10625	PRS350-8		BR835		M-10-350		UT-88		Pwr Out	11272	P-6297		T22R00		P-2949								
	6											Pwr Out	11272	A-3878		T22S47		A-2931								
211 (AC-DC)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	11493	AF88D		UP4415		DY-2X40-150		EL-245		Out	On Spkr	A-3876		T22S45		A-2928								
211 (6V)	5	6A8, 6S7, 6T7, 41, 6ZY5	1732	AF33F4A		UP15025C		DY-310		EL-331		Pwr Out	534			T22S47		A-2931								
216	5	6A8, 6K7, 6Q7, 25L6, 25Z6	20-12-12 Mfd.	PRSA150-20-20 & PRS150-12		EZ32115		DBS-3X20-150		TA-220 & UT-121		Pwr Out	524	A-3878		T22S45		A-2928								
219	5	6A7, 6D6, 6Q7, 41, 80	1732	AF33F4A		UP15025C		DY-310		EL-331		Pwr Out	533	P-6297		T22R00		P-2949								
286	5	1N5, 1A7, 1H5, 1C5	5779	PRS150-8		BR815		M-8-150		UT-81		Pwr Out	533	A-3878		T22S47		A-2931								
295-1	5	1A7, 1N5, 1H5, 1Q5, 25Z6GT	6640	PRS150-40		BR4015		M-40-150		UT-401		Chk Pwr Out	6639			T22S47		A-2931								
	5779					BR815		M-8-150		UT-81		Chk Pwr Out	6639	A-3878												
	6660					BR202A		M-25-25		TA-25		Chk Pwr Out	6731			T22S47		A-2931								
297	4	6K8GT, 6K7GT, 6SQ7GT, 6K6GT	6714	PRS450-8-8		EZ8835		DH-2X8-450		UT-88		Pwr Out	6731	A-3878		T22S47		A-2931								
378	5	1R5, 1T4, 1S5, 3S4, 3Z5GT	8952	AF84D20A		UP4CJ65		DY-304		EL-351		Pwr Out	8975	A-3877		T22S47		A-2930								
390	8	12SA7GT, 12K7GT, 12SQ7GT, 35L6GT, 6U5, 35Z6GT	8425								Pwr Out	8918			T22S60		A-2900									
397	4	1A7GT, 1N5GT, 1H5GT, 1A5GT	10 Mfd.	PRS150-12		BRD1215		M-10-150		UT-121		Pwr Out	8919	A-3878		T22S47		A-2931								
402	3	25B8GT, 50L6GT, 35Z5GT	17-14319	AF44D4A		UP2215C		DY-303		EL-222		Pwr Out	00-16510	A-3876		T22S45		A-2928								
405	4	1A7, 1N5G, 1H5G, 1A5G	18-235	PRS25-10		BR102A		M-10-25		TA-10		Pwr Out	80-167	A-3857		T22S48		A-2937								
406	4	6D8G, 6S7G, 6T7G, 6G6G, (40)	18-236	PRSA150-20-40		BRD4215		M-2X30-150		TA-240		Pwr Out	80-160	A-3879		T22S48		A-2932								
408	5	1A7GT, 1N5GT, 1H5GT, 1Q5GT	10 Mfd.	PRS150-12		BRD1215		M-10-150		UT-121		Pwr Out	.....†	A-3877		T22S46		A-2930								
417UL	5	12SA7, 12SK7, 12SQ7, 50L5GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-20-40		BRD4215		M-2X30-150		TA-240		Out	.....†	A-3876		T22S45		A-2928								
419	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	40-20 Mfd.	PRSA150-20-40		BRD4215		M-2X30-150		TA-240		Out	.....†	A-3876		T22S45		A-2928								
433	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	8525	PRSA150-20-40		BRD4215		M-2X30-150		TA-240		Out	On Spkr	A-3876		T22S45		A-2928								

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Product Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quar Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radlart Part No.	Note		
1st.		16-6658.		456									Vol	19-2007.	M-60-Z.		A..	D13-133..		41	G1				Continued	AIRCASTLE SA5 (1939)	
2nd.		16-6660.											Vol	24-119.	M-60-Z.		A..	D13-133..		41	G1	34-102.	5300..	H1		9-627	
1st.	10-221	16-6658.		456				79-240.	ST-105.	F8	SEVG.		Vol	24-146.	M-60-Z.		A..	D13-133..		41	G1	34-104.	5307..	H1		10-70	
2nd.	10-222	16-6660.											F2	Vol	24-146.	M-60-Z.											10-72
1st.	10-317	16-6660.		455				79-283.		F2			Vol	24-103.	M-60-Z.		A..	D13-133..		41	G1						16R
2nd.	10-312	16-6660.						79-302.					Tone	26-103.	M-60-Z.			D13-133..	B	41	G1	34-104.	5307..	H1			
1st.	10-360	16-6652.		262				P2017.	ST-173.	F6	I2E15.		Tone	P1989.	M-64-Z.			D13-133..									
2nd.	10-212	16-6654.											Vol	P1990.	M-64-Z.			D13-133..									
1st.	P2001.	16-5712.		455									Tone	P1991.	M-60-Z.			D13-133..									
2nd.	P2002.	16-6133.											Bass														
3rd.	P2003.	16-5714.																									
1st.	A-2527	16-5712.		465				2208.	ST-166.	6E10.			Vol	2198.	M-46-Z.			D13-133..	444								46A
2nd.	A-2195							1858.	ST-738.	8E10.			Tone	2199.	M-46-Z.		A..	D13-123..		41	G1						
1st.	3283	16-5712.		465				1859.		10E10.																73B	
2nd.	3284	16-5714.						2440.		12E10.			Vol	3671.	M-60-Z.			D13-133..									
1st.	3283	16-5712.		465				3676.	ST-108.	6A1.			Tone	3545.	M-46-Z.			D13-123..									
2nd.	3284	16-5714.						3677.	ST-115.	8A4.																	
1st.	10-369	16-6658.		455				72-339.	ST-107.	F7			Vol	24-153.	AM-60-Z.	KSS-3.	A..	D13-133..	E	41						13.	106B
2nd.	10-370	16-6660.																									
1st.	3283	16-5712.		455				4837.	ST-105.	6A1.			Vol	4839.	AM-60-Z.	KSS-3.	A..	D13-133..	E	41			3698.	5413..	H1		119B
2nd.	3284	16-5714.						10073.	ST-115.	8A4.																128B	
1st.	4791	16-5712.		455				2999.	ST-108.	6A1.			Vol	4803.	AM-60-Z.	KSS-3.	A4.	D13-133..	E	45							130
2nd.	4792	16-5714.						3721.	ST-115.	8A4.			Tone	4862.	M-46-Z.			D13-123..									
1st.				455									Vol														
2nd.																										130U	
1st.				455																							
2nd.																										145E	
1st.	3412	16-5712.		456				3586.	ST-115.	8A4.			Vol	3418.	M-60-Z.	A2.		D13-133..		42	G1	3421.	5409..	H1			
2nd.	3465-1	16-5714.						3660.	ST-108.	6A1.			Tone	3571.	M-66-Z.			D13-139..									
1st.	10967	16-5712.		455				11128.	ST-105.	6A1.			Vol	11132.	AM-60-Z.	KSS-3.	A2.									175B	
2nd.	10969	16-5714.						4983.	ST-108.	6A1.																	
1st.	3462-1	16-5712.		456				11235.	ST-119.	10A31.			Vol	2726.	M-60-Z.	A..		D13-133..		41	G1						175E
2nd.	3464-1	16-5712.						3346.	ST-736.	8E10.			Tone	2337.	M-66-Z.			D13-139..									
1st.	10967	16-5712.		455				3710.		10E10.			Vol	10441.	AM-60-Z.	KSS-3.	A2.	D13-133..	E	42						176B	
2nd.	10967	16-5712.						4983.	ST-108.	6A1.			Tone	11098.	AM-60-Z.			D13-133..								178BL	
1st.	10669	16-5712.		455				11235.	ST-119.	10A31.			Vol	10441.	AM-60-Z.	KSS-3.	E										
2nd.	10670	16-5714.						10685.	ST-105.	5A1.																	
1st.				456									Vol	3418.	M-60-Z.	A2.		D13-133..		42	G1	3421.	5409..	H1		184	
2nd.																											
1st.	4791	16-5712.		455				4983.	ST-108.	6A1.			Vol	4871.	AM-60-Z.	KSS-3.		D13-133..	E							187B	
2nd.	4792	16-5714.						10123.	ST-115.	8A4.																	
1st.	11347	16-5714.		455				11390.	ST-113.	4A1.			Vol	11389.	AM-60-Z.	KSS-3.	A.	D13-133..	E	41						194U	
2nd.	11376	16-5714.																									
1st.	11347	16-5714.		455				11278.	ST-165.	5E10.			Vol	4839.	AM-60-Z.	KSS-3.	A.	D13-133..	E	41						204	
2nd.	4404	16-5714.						11537.	ST-736.	8E10.																	
1st.	11347	16-5714.		455				11390.	ST-113.	4A1.			Vol	11389.	AM-60-Z.	KSS-3.	A.	D13-133..	E	41						211 (AC-DC)	
2nd.	11376	16-5712.		465				722.	ST-108.	6A1.			Vol	221.	M-60-Z.	A..		D13-133..		41	G1	1505.	5300..	H1		211 (6V)	
1st.	10176	16-5712.											Tone	305.				S13-128..									
2nd.	10178	16-5714.						744.		F2			Vol	221.	M-60-Z.	A..		D13-133..		41	G1					216	
1st.	308	16-6658.		456																							
2nd.	310	16-6660.						719.		F2			Vol	221.	M-60-Z.	A..		D13-133..		41	G1					219	
1st.	302.	16-5712.		465																							
2nd.	303.																										
1st.	6438	16-5740.		455				6657.	ST-105.	5A1.			Vol	6257.	M-60-Z.	A2.		D13-133..		42	G1					286	
2nd.	6439							6797.	ST-105.	5A1.			Vol	6257.	M-60-Z.	A2.		D13-133..		42	G1						
1st.	6273	16-6662.		455																						295-1	
2nd.	6274																										
1st.	6689	16-6662.		455				6729.		F1.			Vol	6687.	M-60-Z.	A..		D13-133..		41	G1	6735.	5438..	H1		297	
2nd.	6730							8808.					Vol	8858.	AM-63-Z.	KSS-3.		D13-137..	E							378	
1st.	8836			455																							
2nd.	8836																										
1st.	8434	16-6658.		455	9424.	L-26.		8919.		F2.			Vol	8910.	M-60-Z.	A..		D13-137..		41	G1					390	
2nd.	8435	16-6660.		456									Vol	9333.	M-63-Z.	A2.		D13-137..		42	G1					397	
1st.				456									F2.	Vol	17-14320.	M-27-S..											
2nd.								17-16439.		5A1.			Vol	24-129.	M-63-Z..	A2.		G5	D14-116..		41	G1					402
1st.	10-251	16-6662.		455				79-257.	ST-105.</td																		

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Type Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
																			"A"	"B"	"A"	"B"		
AIRCASTLE—Cont'd	510.	5 6A8GT, 6K7GT, 6Q7GT, 6K6GT, 6X5GT, (44).	17-14297	AF22J4A		UPI135C		DY-310		EL-102		Pwr Out	00-16446	A-3878		T22S47		A-2931						
	520.	5 6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT, (47).	17-14297	AF22J4A		UPI135C		DY-310		EL-102		Pwr Out	00-16446	A-3878		T22S47		A-2931						
	553, 554.	4 1A7G, 1N5G, 1H5G, 1C5G, 7-57.	PR25-10			BR102A		M-10-25		TA-10		Out	00-16445	A-3878		T22S47		A-2931						
	560.	5 6DS8, 6ST7, 6T7G, 6G6G, 6ZY5G, 7-57.	PR25-10-10			BRD2235		M-2X10-450		UT-88		Chk Pwr	13-10 11-43											
	560-1.	5 1A7G, 1N5G, 1H5G, 1A5G, A-14958.	PR150-8			BR102A		M-10-25		TA-10		Out	00-16445	A-3878		T22S47		A-2931						
	561.	5 1A7G, 1N5G, 1H5G, 1A5G, A-14958.	PR150-8			BR102A		M-B-150		UT-81		Cut	On Speaker	A-3881		T22S48		A-2934						
	561-1.	5 1A7G, 1N5G, 1H5G, 1A5G, A-14958.	PR150-8			BR102A		M-8-150		UT-81		Out	On Speaker	A-3881		T22S48		A-2934						
	568.	5 12SA7, 12SK7GT, 12SQ7, 50L6GT, 35Z5GT, (47).	A8948.	AF84D4A	A3	UP4215		DY-40+20-150		EL-24		Out		A-3875	B3	T22S45	B3	A-2928						
	571-1.	5 1A7G, 1N5G, 1H5G, 1A5G, A-14958.	PR150-8			BR102A		M-8-150		UT-81		Cut	On Spkr	A-3881		T22S48		A-2934						
	571-1M.	5 1A7G, 1N5G, 1H5G, 1A5G, A-14958.	PR150-8			BR102A		M-8-150		UT-81		Cut	On Spkr	A-3881		T22S48		A-2934						
	572-1M.	5 1A7G, 1N5G, 1H5G, 1A5G, A-14958.	PR150-8			BR102A		M-8-150		UT-81		Out	On Spkr	A-3881		T22S48		A-2934						
	582-1.	5 1A7, 1N5G, 1H5G, 3Q5GT, A-14958.	PR150-8			BR102A		M-8-150		UT-81		Out	On Spkr	A-3878		T22S47		A-2931						
	591-1.	5 1A7G, 1N5G, 1H5G, 1A5G, 35Z5GT A-14684-5.	AF44D			UP22215		DY-3X20-150		EL-320		Cut	On Spkr	A-3857		T22S48		A-2937						
	610.	5 6A8GT, 6K7GT, 6Q7GT, 6K6GT, 6X5GT, (44).	17-14297	AF22J4A		UPI135C		DY-310		EL-102		Pwr Out	00-16446	A-3878		T22S47		A-2931						
	611-1.	6 1A7G, 1E4G, 1N5G, 1H5G, 1A5G, A-14958.	PR150-8			BR102A		M-8-150		UT-81		Out	On Spkr	A-3857		T22S48		A-2937						
	621.	2 50A5 35Y4 (47).	A-25-020	PRSA150-40-40		BRD4415		DSB305		TA-440		Out	B11-037	A-3875		T22S45		A-2928						
	625.	3 12AT6, 50B5, 35W4 (or Octal— Lock-in Equivalents).	B-9564-1	PRSA150-40-40		BRL4215		M-40+20-150		TA-240		Out	B-51578-2	A-3875		T22S45		A-2928						
	630-6.	6 7A8, 7B7, 7C7, 7C8, 6G6G, A-14684-6.	AF44D			UP22215		DY-3X20-150		EL-320		Pwr Out	A-15302		T22S47		A-2932							
	631.	6 7A8, 7B7, 7C7, 7C8, 6G6G, A-14684-6.	AF44D			UP22215		DY-3X20-150		EL-320		Pwr Out	A15302		T22S47		A-2932							
	641.	4 1A86, 25A5, 35Y4, (47).	A25-019	PRSA150-40-40		EZ3815		DSB-2X30-150		TA-330		Out	On Spkr	A-3879		T22S47	B6	A-2900	B6					
	650.	6 6A7, 78, 75, 76, 6AC5G, 80,	A-14799.	PRSA450-16-16		EZ5116		DH-2X16-450SS		TU-1615		Pwr Out	B-7185-2	P-6012		T22R04		P-2952						
	651.	5 1A07, 1A47, 1B46, 50A5, 35Y4 (47).	A-25-019	PRSA150-40-40		BRD4415		DSB2X40-150				Out	On Spkr	A-3878		T22S47		A-2931						
	661.	7 6SA7GT, 6SK7GT, 6SQ7GT, 6F6G, 6U5, 5V3G.	A-14780-2.	PRSA450-16-16	A1	EZ12D45S		DH-2X16-450	A1	TU-1616	A1	Pwr	B-8054-2	P-6011		T22R02		P-2951						
	710.	5 6A8, 6K7, 6Q7G, 6K6G, 6X5G, (51).	17-14297	AF22J4A		BR825		M-3-250		UT-82		Pwr Out	00-16265		T22S47		A-2931							
	711.	7 12SK7GT, 12A8GT, 6H4GT, 12SF5GT, 35L6GT, 35Z5GT, 7A7, 78, 75, 76, 6AC5G, 80, 6U5.	A-15571	PRSA150-30-30		BRD3315		DY-310		EL-102		Out	B-16266	A-3878		T22S47		A-2931						
	720.	7 6A7, 78, 75, 76, 6AC5G, 80, 6U5.	A-14799.	PRSA450-16-16		EZ5116		DH-2X16-450		TA-330		Pwr Out	B-7185-2	P-6012		T22R04		P-2952						
	721.	7 6SA7GT, 6SK7GT, 6SQ7GT, 6K6GT, GPSGT, 6AF6G, 5V3G.	A-14780-1.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	B-7185-2	P-6012		T22R04		P-2952						
	722.	7 6SD7GT, 6SA7GT, 6SK7GT, 6J5G, 6SQ7GT, 6F6G, 5V3G.	A-14780-2.	PRSA450-16-16		EZ12D45S		& PRS2015		TA-20-130		Out	On Spkr	A-3878		T22S47		A-2931						
	751.	7 6SK7GT, 6SA7GT, 6J5GT, 6S07GT, 6F6G, 5V3G.	A-15786.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	C-2280-59-3	A-3878		T22S47		A-2931						
	752.	7 6SD7GT, 6SA7GT, 6SK7GT, 6J5G, 6SQ7GT, 6F6G, 5V3G.	A-14780-2.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	C-2280-59-3	A-3878		T22S47		A-2931						
	821.	8 6SK7GT, 6SA7GT, 6J5GT, 6P5GT, 6K6GT, 5V3G, 5AF6G.	A-14780-1.	See Model 721		EZ5116		M-25-25		TA-25		Out	B-8252	P-6012		T22R04		P-2952						
	822.	8 6SK7GT, 6SA7GT, 6J5GT, 6S07GT, 6AC5G, 7Z4.	A-20188.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	B-8252	P-6012		T22R04		P-2952						
	831.	8 6SK7GT, 6SA7GT, 6J5GT, 6S07GT, 6AC5G, 7V4.	A-15741.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	B-8298	P-6012		T22R04		P-2952						
	832.	8 6SD7GT, 6SA7GT, 6SK7GT, 6J5G, 6SQ7GT, 6AC5G, 7Z4.	A-20188.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	B-8298	P-6012		T22R04		P-2952						
	885.	8 6A7, 6D8, 6H6, 6Y7G, 6V6, 80, 6G5, (46).	16-202.	GL475-12		KR512A		ZD-12-500		LS-12		Out	B-8298	P-6012		T22R04		P-2952						
	902.	5 1A7G, 1N5G, 1H5G, 1A5G, A-14958.	16-201.	GL475-12		KR512A		ZD-12-500		LS-12		Out	B-8298	P-6012		T22S47		A-2905						
	922.	9 6SK7GT, 6SA7GT, 6J5GT, 6S07GT, 6AC5G, 7Z4, 6U5.	A-20188.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	V-8296	P-6012		T22R04		P-2952						
	932.	9 6SD7GT, 6SA7GT, 6SK7GT, 6U5, 6J5G, 6SQ7GT, 6AC5G, 7Z4.	A-20188.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	B-8296	P-6012		T22R04		P-2952						
	1061.	10 6SA7GT, 6PS6GT, 6SK7GT, 6SF5GT, 6K6GT, 5Y3G, 5U5.	A-14799-2.	PRSA450-16-16		EZ5116		DH-2X16-450		TU-1616		Out	B-8296	P-6012		T22R04		P-2952						
	1105.	11 6C5, 6A8, 6K7, 6H6, 6J7, 6V6, 80, 6G5, (46).	18-214.	GL475-12		KR516A		ZD-16-500		LS-16		Out	B-8296	P-6012		T22R05		P-2953						
			18-215.	GL475-12		KR512A		ZD-12-500		LS-12		Out	B-8298	P-6012		T22S47		A-2901						
			18-216.	PRS250-8.		BR825		M-8-250		UT-82		Out	S38	A-3881		T22S48		A-2934						

Section D - IF COILS				Section E - PHONO CARTRIDGES			Section F - SPEAKERS				Section G - CONTROLS							Section H - VIBRATORS			MFR. & MODEL						
Use	Mfr.	Meissner	Note	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clarostat	Shaft	Switch	Note	IRC	Shaft	Switch	Note	Mfr.	Radiant	Note	Photofact Set No.		
1st.	00-16443						17-16458	ST-105	F4	SEV6		Vol	17-16422	M-63-Z		A.	D13-137		41	G1	17-14747	5300..	H1	Continued	AIRCASTLE 510		
2nd.	00-16444	16-5714		455			17-16458	ST-105	F4	SEV6		Vol	17-17006	M-63-Z		A.	D13-137		41	G1	17-14747	5300..	H1		520		
1st.	00-17003	16-6658		455			43-III		F1		F1	Vol	5-62	M-60-Z		A.	D13-133		41	G1					553.554		
2nd.	00-17004	16-6650					43-102					Vol	5-55	M-60-Z		A.	D13-133		41	G1	89-6	5300..	H1		560		
1st.	16-39	16-6658		456			C-2280-71	ST-105	SA1			Vol	A-15132-2	AM-60-Z	KSS-3	A2	D13-133	E	42							560-1	
2nd.	16-50	16-6650					C-2280-72	ST-115	SA21			Vol	A-15132-1	AM-60-Z	KSS-3	A2	D13-133	E	42							561	
1st.	16-25	16-6658		456			C-2280-71	ST-105	SA1			Vol	A-15132-2	AM-60-Z	KSS-3	A2	D13-133	E	42							561-1	
2nd.	16-26	16-6660					C-2280-73	ST-115	SA21			Vol	B50101-5	AM-60-Z	KSS-3	A.	D13-133	E	41							568	
1st.	A-12064-35	16-5712		456			C-2280-71A	ST-105	SA1			Vol	A-15132-2	AM-60-Z	KSS-3	A2	D13-133	E	42							571-1	
2nd.	A-12064-35	16-5714					C-2280-68A	ST-109	6A1			Vol	A-15132-5	AM-60-Z	KSS-3	A2	D13-133	E	42							571-1M	
1st.	A-12064-35	16-5712		456			C-2280-73A	ST-115	SA21			Vol	A-15132-5	AM-60-Z	KSS-3	A2	D13-133	E	42							572-1M	
2nd.	A-12064-35	16-5714		456			C-2280-88A	ST-108	6A1			Vol	A-15132-2	AM-60-Z	KSS-3	A2	D13-133	E	42							582-1	
1st.	A-12064-35	16-5714					C-2280-73A	ST-115	SA21			Vol	A-15132-2	AM-60-Z	KSS-3	A2	D13-133	E	42							591-1	
2nd.	A-12064-40	16-6658		456			C-2280-75		F1			Vol	A-15132-1	AM-60-Z	KSS-3	A2	D13-133	E	42								
1st.	A-12064-35	16-5712		456			C-2280-75		F1			Vol	A-15132-1	AM-60-Z	KSS-3	A2	D13-133	E	42								
2nd.	A-12064-35	16-5714					17-16458	ST-105	F8	SEV6		Vol	17-16422	M-63-Z		A.	D13-137		41	G1	17-14747	5300..	H1		610		
1st.	00-16443	16-5714					C-2280-84	ST-108	6A1			Vol	A-15130-3	AM-60-Z	KSS-3	A2	D13-133	E	42							611-1	
2nd.	A-12064-40	16-6658		456			C-2280-85	ST-115	SA21			Tone	A-15138	AM-66-Z		A.	D13-139		41	G1							621
1st.	A-12064-40	16-6650					B-11-037	ST-105	5A1			Vol	B501-1	AM-60-Z	KSS-3	A.	D13-133	E	41							626	
2nd.	A-12064-35	16-5714					C-2280-84	ST-115	SA21			Vol	A-15130-3	AM-60-Z	KSS-3	A2	D13-133	E	41							630-6	
1st.	A-12064-36	16-5712		456			C-2280-71	ST-105	SA1			Vol	A-15128	AM-64-Z	KSS-3	A.	D13-130	E	41								
2nd.	A-12064-17	16-5714					C-2280-74	ST-108	6A1			Vol	A-15130-3	AM-60-Z	KSS-3	A2	D13-133	E	41								
1st.	A-12064-39	16-5712		456			C-2280-73	ST-115	SA21			Vol	A-15130-3	AM-60-Z	KSS-3	A2	D13-133	E	41							631	
2nd.	A-12064-17	16-5714					C-2280-82	ST-108	6A1			Vol	A-15128-2	AM-64-Z	KSS-3	A.	D13-130	E	41							641	
1st.	A-12064-39	16-5712					C-2280-73	ST-115	SA21			Vol	A-9-067	M-60-Z		A.	D13-137		41								
2nd.	A-12064-17	16-5714					C-11-037	ST-105	5A1			Vol	B501-1	AM-60-Z	KSS-3	A.	D13-133	E	41								
1st.	A-12064-36	16-5712		456			C-2280-80	ST-177	SE18			Vol	A-15130-1	AM-60-Z	KSS-3	A.	D13-133	E	41							650	
2nd.	A-12064-17	16-5714					B-11-037	ST-105	SA1			Vol	A-9-066	M-60-Z		A.	D13-133	E	41							651	
1st.	C2-191-1	16-6656		455			C-2280-60	ST-177	SE18			Vol	A-15130-1	AM-60-Z	KSS-3	A2	D13-133	E	41							661	
2nd.	C2-191-2	16-6657					C-2280-93	ST-168	6E18			Vol	A-15130-5	AM-60-Z	KSS-3	A2	D13-133	E	41							710	
1st.	A-12064-41	16-5712		456			C-2280-60	ST-177	SE18			Tone	A-15128	AM-64-Z	KSS-3	A.	D13-130	E	41							711	
2nd.	A-12064-17	16-5714					17-16517		F2			Vol	17-14536	SC-60-Z	DFS-12	A.	D13-137		41								
1st.	00-16263	16-5712		455			C-2280-81		F2			Vol	A-15129-1	AM-60-Z	KSS-3	A.	D13-133	E	41								
2nd.	A-12064-32	16-5712					C-2280-60	ST-177	SE18			Vol	A-15128-1	AM-64-Z	KSS-3	A.	D13-130	E	41								
1st.	A-12064-17	16-5714					C-2280-60	ST-177	SE18			Vol	A-15128-1	AM-64-Z	KSS-3	A.	D13-130	E	41								
1st.	A-14794-3	16-6858		456			C-2280-60	ST-177	SE18			Vol	A-15128-1	AM-64-Z	KSS-3	A.	D13-130	E	41							720	
2nd.	A-12064-17	16-5714					C-2280-68	ST-177	SE18			Vol	A-15128-3	AM-60-Z	KSS-3	A.	D13-133	E	41							721	
1st.	A-12064-39	16-5712		456			C-2280-68	ST-168	6E18			Vol	A-15128-2	AM-64-Z	KSS-3	A.	D13-130	E	41							722	
2nd.	A-12064-17	16-5714					C-2280-59	ST-168	6E18			Vol	A-15130-6	AM-60-Z	KSS-3	A.	D13-133	E	41								
1st.	A-14794-3	16-6858		456			C-2280-59	ST-175	10E10			Vol	A-15129-9	AM-60-Z	KSS-3	A.	D13-133	E	41								
2nd.	A-12064-42	16-6670					C-2280-59	ST-175	10E10			Vol	A-15128-7	AM-64-Z	KSS-3	A.	D13-130	E	41								
1st.	A-12064-39	16-5712		456			C-2280-59	ST-176	6E10			Vol	A-15128-7	AM-64-Z	KSS-3	A.	D13-133	E	41							751	
2nd.	A-12064-17	16-5714					C-2280-59	ST-176	6E10			Vol	A-15129-2	AM-60-Z	KSS-3	A.	D13-133	E	41							752	
1st.	A-14794-3	16-6858		456			C-2280-59	ST-176	6E10			Vol	A-15129-5	AM-60-Z	KSS-3	A.	D13-133	E	41								
2nd.	A-12064-42	16-6670					C-2280-59	ST-176	6E10			Vol	A-15129-2	AM-60-Z	KSS-3	A.	D13-133	E	41								
1st.	A-12064-39	16-5712		456			C-2280-99	ST-736	SE10			Vol	A-15128-2	AM-64-Z	KSS-3	A.	D13-133	E	41							821	
2nd.	A-12064-17	16-5714					C-2280-99	ST-736	SE10			Vol	A-15128-2	AM-64-Z	KSS-3	A.	D13-133	E	41							822	
1st.	A-14794-3	16-6858		456			C-2280-99	ST-736	SE10			Vol	A-15130-2	AM-60-Z	KSS-3	A.	D13-133	E	41								
2nd.	A-12064-42	16-6670					C-2280-99	ST-736	SE10			Vol	A-15128-7	AM-64-Z	KSS-3	A.	D13-130	E	41								
1st.	A-12064-39	16-5712		456			C-2280-99	ST-736	SE10			Vol	A-15130-3	AM-60-Z	KSS-3	A.	D13-133	E	41							831	
2nd.	A-12064-17	16-5714					C-2280-99	ST-736	SE10			Vol	A-15128-2	AM-64-Z	KSS-3	A.	D13-130	E	41							832	
1st.	A-14794-3	16-6858		456			C-2280-99	ST-175	10E10			Vol	A-15130-3	AM-60-Z	KSS-3	A.	D13-133	E	41								
2nd.	A-12064-42	16-6670					C-2280-99	ST-175	10E10			Vol	A-15128-2	AM-64-Z	KSS-3	A.	D13-130	E	41								
1st.	10-201	16-5712		456			1		F2			Vol	24-113	M-60-Z		A.	D13-133	E	41							885	
2nd.	10-202	16-5714					749		ST-108	6A1		Vol	26-110	M-51-Z		A.	D13-128	E	41							902	
1st.	310	16-5714		455								Vol	221	M-60-Z		A.	D13-133	E	41</td								

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
						Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
AIRCASTLE—Cont'd	12	6SK7GT, 6SA7GT, 6SQ7GT, 6P5GT, 6AF6G, 6AC5G, 573G, 1A7G, 1N5G, 1H5G, 1Q5G	A-15625.	PRSA450-16-16		EZ5116.		DH-2X16-450		TU-1616.		Pwr Out	B-8177, C-2280-87-3	P-6013.	T22R05		P-2953						
1271SP	5	1A7G, 1N5G, 1H5G, 1Q5G									Out		A-2312.	T22S74		A-2901							
1555	8	6SK7GT, 6SA7GT, 6J5GT, 6S07GT, 6AC5G, 574G	A-15741.	PRSA450-16-16		EZ5116.		DH-2X16-450		TU-1616.		Pwr Out	On Spkr.	P-6120.	T22R04		P-2952						
1831	5	12SA7G, 12SK7G, 12SQ7G, 50L6GT, 35Z5GT, (47) or Miniature Type Equivalent	EC-3.	PRSA150-20-40		BR04215.		M-2X40-150		TA-240.		Out	On Spkr.	A-3878.	T22S47		A-2931						
5000, 5001	6	12SK7 or 12BA6, 12SA7, 12SQ7 or 12AT6, 35L6GT, 35Z5GT or 35W4, (47)	†.	PRSA150-50-30		BRD3515.		DSB-5030-150		TA-530.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
5002	5	12SK7GT, 12SA7GT, 12SQ7GT, 50L6GT, (47)	†.	PRSA150-40-40		BRD4415.		M-2X40-150		TA-440.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
5003, 5004, 5005, 5006	5	12SK7GT, 12SA7GT, 12SQ7GT, 50L6GT, (47)	EC-10.	PRSA150-40-40		BRD4415.		M-2X40-150		TA-440.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
5010, 5011, 5012	6	12SK7GT, 12SA7GT, 12AT6, 35L6GT, 35W4, (47)	EC-4.	AF888D.		UP44415.		DY-3X40-150		EL-340.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
5020 (Batt.)	4	1A7GT, 1N5GT, 1LH4, 3Q5GT	EC-6.	PRS25-100		UP64215.		DY-604020-150		UHC-112.		Out	On Spkr.	A-3878.	T22S47		A-2931						
5020 (AC)	8	6SA7GT, 6SK7GT, 26SQ7GT, 20.125.	PRSA450-16.	BRH121.		BRH1645.		M-100-50.		UT-16.		Pwr Out	40.84.	P-6011.	T22R02		P-2951						
5025	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	EC-4.	AF888D.		UP44415.		DY-3X40-150		EL-340.		Out	On Spkr.	A-3876.	T22S47		A-2931						
5060	8	6SA7GT, 6SK7GT, 26SQ7GT, 20.125.	PRSA450-16.	BR1645.		M-16-450.		UT-16.		Pwr Out	40.84.	P-6011.	T22R02		P-2951								
5120, 5121	6	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 50V6GT, (47)	349.	PRS150-20-20.		EDL2115.		M-2X20-150		TA-122.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
6514	5	1407, 1A47, 14B6, 50A5, 35Y4, (47)	†.	PRSA150-30-30		BRD3315.		M-2X30-150		TA-330.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
6540	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT,	†.	PRSA150-20-30		BRD3315.		M-2X30-150		TA-230.		Out	†.	A-3876.	T22S45.		A-2928						
6541, 6547	5	1407, 14A7, 14B6, 50A5, 35Y4, (47)	A25.019.	PRSA150-40-40		EDL4415.		M-2X40-150		TA-440.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
6542.	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT,	†.	PRSA150-20-30		BRD3315.		M-2X30-150		TA-230.		Out	†.	A-3876.	T22S45.		A-2928						
6611, 6612, 6613, 6630 thru 6635.	6	1407, 1A47, 14B6, 33A5, 35Y4, (47)	A25.020.	PRSA50502.		EDL5315C.		DSB-305.		TA-440.		Aud Out	TA-15.018.	A-53-C.	T20A16		A-2900						
7000, 7001	2	50L6GT, 35Z5GT	EC-5.	AF440D & PRS150-50		EZ53215C.	A4	DY-804020-150		TA-25.		Out	On Spkr.	A-3856.	T22S47		A-2900						
7004	2	50L6GT or 50B5, 35Z5GT or 35W4	EC-5.	AF440D, PRS150-50		UP2215.		DY-804020-150		EL-35.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
7016	7	6SK7, 6SA7, 7E7, 7F7, 35L6, 25Z6, (47)	M126.	PRS150-20.		BR2015.		M-20-150.		UT-201.		Out	†.	A-3856.	T22S47		A-2900						
7062, 7064	7	6SK7GT, 6SA7GT, 26SQ7GT, 20.132.	M127.	PRS150-40.		BR4015.		M-40-150.		UT-401.		Chk Pwr Out	35.150.	C-1709.	T20C53		C-2993						
7121	7	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 50L6GT, 35Z5GT,	20.118.	PRSA150-30-30		BRD3315.		M-2X30-150.		TA-330.		Chk Pwr Out	40.75A.	P-6011.	T22R02		P-2951						
7122	5	1R5, 17A, 1S8, 3S4, 35Z5GT	20.129.	PRSA150-20-30		BRD3315.		M-2X30-150.		TA-230.		Out	On Spkr.	A-3329.	T22S47		A-2998						
AIR CHIEF—(See Firestone)																							
AIR KING																							
A-400	4	12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT	2073.	AF1010D.		UP5315.		DY-5030-150.		EL-35.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
A-403	4	12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT	2073.	AF1010D.		UP5315.		DY-5030-150.		EL-35.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
A-510	4	1R5, 104, 1S5, 3Q4.	†.			UP84215.		DY-804020-150		EL-26.		Out	1337.	A-3878.	T22S47		753.	C3	F6A60.				
A-511, A-512.	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT or 35W4, (47)	†.	PRSA150-40-40		BR252A.		M-25-25.		TA-25.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
A-600	6	12SA7GT, 12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35W4, (47)	2073.	AF1010D.		UP5315.		DY-5030-150.		EL-35.		Out	On Spkr.	A-3876.	T22S45.		A-2928						
4, 23X	4	12SK7GT, 12SA7GT, 35L6GT, 35Z5GT, (47)	30-20 Mfd.	PRSA150-20-30		BRD3315.		M-2X30-150.		TA-230.		Out	†.	A-3876.	T22S45.		A-2928						
3905	4	1A7G, 1N5G, 1H5G, 1C5G.	8 Mfd.	PRS150-8.		BR815.		M-8-150.		UT-81.		Out	†.	A-3822.	T22S47		A-2900						
3906 LW	4	1A7G, 1N5G, 1H5G, 1Q5G.	8 Mfd.	PRS150-8.		BR815.		M-8-150.		UT-81.		Out	†.	A-3822.	T22S47		A-2900						
3907	5	12K7GT, 12J5GT, 12F5GT, 35L6GT, 35Z5GT, (51).	30-40 Mfd.	PRSA150-30-40		BRD4415.		M-2X40-150.		TA-430.		Out	†.	A-3876.	T22S45.		A-2928						
3910	4	1A7G, 1N5G, 1H5G, 1C5G.	8 Mfd.	PRS150-8.		BR815.		M-8-150.		UT-81.		Out	†.	A-3822.	T22S47		A-2900						
3912	5	1A7G, 1N5G, 1H5G, 1A5G, 35Z5GT, (51).	100-70 Mfd.	PRS150-30.		BR3015.		M-30-150.		UT-301.		Out	†.	A-3857.	T22S48.		A-2937						
3916	5	1A7G, 1N5G, 1H5G, 1A5G, 35Z5GT.	100-70 Mfd.	PRS150-30.		BR3015.		M-30-150.		UT-301.		Out	†.	A-3857.	T22S48.		A-2937						
3950	5	1A7G, 1N5G, 1H5G, 1A5G, 50Z7G.	24 Mfd.	PRS150-30.		BR3015.		M-30-150.		UT-301.		Out	†.	A-3857.	T22S48.		A-2937						
			20, 20 Mfd.	2PRSA450-20.		BR2045.		M-20-450.		UT-20.		Out	†.	A-3857.	T22S48.		A-2937						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. TUBES	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar Part No.	Sprague Part No.	Note	Use	Mfr.	Stancor	Note	Thordarson Part No.	Note	Morit Part No.	Note	Eversdry Part No.	Note	Burgess Part No.	Note	
		Dial Light Type Listed in Parentheses				Part No.						Part No.	Part No.						"A"	"B"	"A"	"B"	
AIR KING--Continued	6	6A8G, 6K7G, 6H6G, 6F5G, 6V6G, 6X5G	16 Mfd.	PRSA450-16		BR1645		M-16-450		UT-16	Out	†	A-3877		T22S46		A-2930						
4000, 4000A	5	12A8GT, 12K7GT, 1207GT, 35L6GT, 35Z5GT, (47)	20 Mfd.	PRSA450-20		BR2045		M-20-450		UT-20	Out	†	A-3876		T22S45		A-2928						
4001	6	12A8GT, 12K7GT, 6H4GT, 12F5GT, 35L6GT, 35Z5GT, (47)	40-30 Mfd.	PRSA150-30-40		BRD4415		M-2X40-150		TA-430	Out	†	A-3876		T22S45		A-2928						
4002	6	12A8GT, 12K7GT, 6H4GT, 12F5GT, 35L6GT, 35Z5GT, (47)	40-30 Mfd.	PRSA150-30-40		BRD4415		M-2X40-150		TA-430	Out	†	A-3876		T22S45		A-2928						
4007	6	12A8GT, 12K7GT, 6H4GT, 12F5GT, 35L6GT, 35Z5GT, (47)	40-30 Mfd.	PRSA150-30-40		BRD4415		M-2X40-150		TA-430	Out	†	A-3876		T22S45		A-2928						
4012	5	1A7G, 1N5G, 1H5G, 1A5G, 50Y6GT, (51)	25-150 Mfd.	^PRSA150-25		^BR3015		M-24-150		^UT-301	Out	†	A-3857		T22S48		A-2937		747-482		D-4A-60		
4034	8	12K8, 12K7GT, 1250GT, 12J7GT, 35L6GT, 50Y6GT, 6E5, (51)	30-30 Mfd.	PRSA150-30-30		BRD3315		M-2X30-150		TA-330	Out	†	A-3852				A-2904						
4100	5	12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT, (47)	30-30	PRSA150-30-30		BRD3315		M-2X30-150		TA-330	Out	†	A-3876		T22S45		A-2928						
4136	6	6SA7GT, 6SK7GT, 6S07GT, 6J7GT, 6F6GT, 6X5GT, (51)	1102063	PRSA450-16-16		BRD1145		M-2X10-450		TU-1616	Pwr	1101019	P-6011	T22R02		P-2951							
4200	5	12A8GT, 12K7GT, 12S07GT, 50L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TU-220	Out	†	A-3878		T22S47		A-2931						
4232, 4233	5	12SA7GT, 12K7GT, 12S07GT, 35L6GT, 35Z5GT, (47)	2066	^PRSA150-40		^BR4015		M-40-150		^UT-401	Out	†	A-3876		T22S45		A-2928						
4234	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT	2066	^PRSA150-40		^BR4015		M-40-150		^UT-401	Out	†	A-3876		T22S45		A-2928						
4245, 4247, 4265,	6	6SA7GT, 6SK7GT, 6S07GT, 6J7GT, 6V6GT, 6X5GT, & PRSA450-20	2067	PRSA450-16-16		BRD1845		DH-2X16-450 & M-20-350		TU-1616 & UT-203	Pwr	†	P-6011	T22R02		P-2951							
4267				PRSA150-40-40		BRD4415		M-2X40-150		TA-440	Out	On Spkr.	A-3876	T22S46	B3	A-2930	B3						
4601	5	12SA7GT, 12K7GT, 12S07GT, 50L6GT, 35Z5GT, (47)	2068	PRSA150-40-40		BRD4415		DH-2X50-150		TA-440	Out	On Spkr.	A-3876	T22S45	B3	A-2928	B3						
4603	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	2068	PRSA150-40-40		BRD4415		DH-2X50-150		TA-440	Out	On Spkr.	A-3876	T22S45	B3	A-2928	B3						
4604, 4604D	6	7H7, 7A4, 6SK7GT, 7B6, 6V6GT, 6X5GT, (47)	20102	PRSA450-20		BR2054		M-20-450		UT-20	Pwr	1089	P-6119	T22R02		P-2951							
4607, 4608, 4609,	5	14Q7, 7B7, 14B6, 50L6GT, 35Y4, 410	20105	PRSA25-25		PRSA25-25		M-25-25		TU-1616	Out	On Spkr.	A-3856	T22S46	B3	A-2930	B3						
4609, 4610	5	12SA7GT, 12SK7GT, 12S07GT, 50L6GT, 35Z5GT, (47)	2068	PRSA150-40-40		BRD252A		M-25-25		TA-440	Out	On Spkr.	A-3876	T22S45	B3	A-2928	B3						
4625	3	12S07GT, 14B6, 50L6GT or 50A5, 35Z5GT or 35Y4	2065	PRSA150-40-40		BRD4415		DSB-2X40-150		TA-440	Out	On Spkr.	A-3876	T22S45	B3	A-2928	B3						
4704	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	2072	PRSA150-40-40		BRD4415		DSB-305		TA-440 & TA-25	Out	TA-200-447	A-3856	T22S45		A-2928							
4705, 4705	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	2072	PRSA150-40-40		BRD4415		M-2X40-150		TA-440	Out	TA-131-447	A-3876	T22S45	B3	A-2928	B3						
5000	6	6K8GT, 6K7GT, 6H4GT, 12S7GT, 6V6GT, 6X5GT, (47)	16	PRSA450-16		BR1645		M-16-450		UT-16	Pwr	†	P-6011	T22R02		P-2951							
9722, 9822, 9822A,	4	12K7GT, 12J7GT, 35L6GT, 35Z5GT, (47)	25	PRSA450-30		BR3045		M-30-450		UT-30	Out	†	A-3877	T22S46		A-2930							
9823, 9922			30-20 Mfd.	PRSA150-30-20		BRD3315		M-2X30-150		TA-230	Out	†	A-3876	T22S45		A-2928							
AIR KNIGHT																							
NS-ND291	5	12BE6, 12BA6, 12AT6, 50B5, 35W4	†	PRSA150-50-30		BRD3515		M-5030-150		TA-530	Out	TO-10000	A-3876	T22S45	B3	A-2928	B3						
CB-500-P	5	1R5, 2T4, 1S5, 3S4	†	PRSA150-20		BR2015		M-20-150		UT-201	Out	TO-10002	A-3879	T22S47		A-2932		758	C1	17GD60			
CA-500	5	12BE6, 12BA6, 12AT6, 50B5, 35W4	†	PRSA150-50-30		BRD3515		M-5030-150		TA-530	Out	TO-10000	A-3876	T22S45	B3	A-2928	B3						
AIRLINE																							
62-266	8	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G, 6G5, (46)	103-14	GL450-16		KR516A		D-16-450		PLS-16	Pwr	104-96	P-6012	T22R04		P-2952							
62-269	7	6L7, 6C5, 6K7, 6Q7, 6F6, 5Y3	103-6	GL450-8		KR508		D-8-450		PLS-8	Out	On Spkr.	A-3852	T22S74		A-2904							
62-270, 62-270E	9	6K7, 6L7, 6C5, 6M6, 6F5, 6F6, 5Y3G, 6G5	103-7	GL450-8		KR508		D-8-450		PLS-8	Pwr	104-55	P-6011	T22R02		P-2951							
62-271	11	6K7, 6C5, 6F6, 524, 6G5	103-7	GL450-16		KR516A		D-16-450		PLS-16	Out	A-3878	53X159	T22R04		A-2931							
62-274A, 62-274B	6	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G, 6U5	103-7	BE119-47B		EZ588		DH-2X8-450SS		LM-88	Pwr	†	A-3878	T22S47		A-2931							
62-276	6	6A8, 6K7, 6Q7, 6K6, 5Y3, 6G5	119-38	PRV450-8-8		EZ288		DH-2X8-450SS		LM-28	Pwr	†	A-3878	T22S87		A-2931							
62-278	7	6S7G, 6L5G, 6K6, 6N5	45X229	PRSA150-20-20 & PRS25-10		EZ2215C		DSB-302		TA-220 & TA-5	Out	Chk	A-3824	T22S87		A-2931							
62-280	5	6D8G, 6S7G, 6T7G, 6K6G, 6AB5	BE119-46	PRSA250-10-10		EDL8125		DH-2X8-450		LM-28	Pwr	†	A-3824	T22S87		A-2931							
62-281	8	6L7, 6C5, 6K7, 6Q7, 25A6, 25Z6, 6G5, (51)	119-30	PRSB150-20-40		^BR3015		M-30-150		TU-420	Pwr	105-32	C-1709	T22C53		C-2993							
62-280B, 62-282B	5	6D8G, 6S7G, 6T7G, 6K6G, 6U5	119-59B	PRSA150-20-40		BR102A		M-10-25		TA-10	Pwr	†	A-3870	T22S58		A-2901							
62-284B			119-76	PRS25-10		EZ588		DH-2X8-450SS		LM-88	Pwr	†	104-1378	T22S47		A-2900							
62-288A, B	6	6ABG, 6K7, 6Q7G, 6K6G, 5Y3G, 6U5	BE119-47B	PBS450-8-8							Pwr	105-55	P-6011	T22R02		P-2951							
62-290A, B											Pwr	†	A-3879	T22S47		A-2900							

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photostat Set No.	MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Chiarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note					
1st.	†	16-5712		455	†	†		†	ST-736		8E10		Vol	†	M-60-Z		A	D13-133		41	G1					Continued	AIR KING 3980			
2nd.	†	16-5714						†	ST-105		5A1		Tone	†	M-60-Z		A	D13-133		41	G1						4000, 4000A			
1st.	†	16-5712	455					†	ST-105		5A1		Vol	2444	M-60-Z		A	D13-133		41	G1						4001			
2nd.	†	16-5714						†	ST-105		5A1		Vol	2444	M-60-Z		A	D13-133		41	G1						4002			
1st.	†	16-6658	455					†	ST-105		5A1		Volt	†	M-60-Z		A	D13-133		41	G1						4007			
2nd.	†	16-6660						†	ST-105		5A1		Tone	†	M-60-Z		A	D13-133		41	G1						4012			
1st.	†	16-6658	455					†	ST-105		5A1		Vol	†	M-60-Z		A	D13-133	45	G1						4012				
2nd.	†	16-6680						†	ST-105		5A1		Vol	†	M-60-Z		A	D13-133		41	G1						4034			
1st.	†	16-5712	455	†		†		†	ST-105		5A1		Volt	†	M-60-Z		A	D13-133		41	G1						4100			
2nd.	†	16-5714						†	ST-105		5A1		Tone	†	M-60-Z		A	D13-133		41	G1						4136			
1st.	†	16-6662	455					†	ST-105		5A1		Vol	†	M-60-Z		A	D13-133		41	G1						4200			
2nd.	†	16-6663						†	ST-105		5A1		Vol	†	M-60-Z		A	D13-133		41	G1						4232, 4233			
1st.	†	16-5712	455					†	ST-105		5A1		F1		F1		Vol	2436	M-60-Z		A	D13-133		41	G1					4234
2nd.	†	16-5714						†	ST-105		5A1		Tone	†	M-60-Z		A	D13-133		41	G1						4245, 4247, 4265,			
1st.	†	16-5712	455					†	ST-105		5A1		Vol	†	M-60-Z		A	D13-133		41	G1						4267			
2nd.	†	16-5714						†	ST-105		5A1		F1		F1		Vol	2456	M-60-Z		A	D13-133		41	G1					4601
1st.	†	1103320	†	1106331	L-26			†	1105854	ST-108	6A1		Volt	1102454	T-78		A	D13-133X		41	G1						4603			
2nd.	†	1103519						†	ST-105		5A1		Tone	1102515	M-60-Z		A	D13-133		41	G1						4604, 4604D			
1st.	†	16-5712	455					†	ST-105		5A1		F1		F1		Vol	2456	M-60-Z		A	D13-133		41	G1					4610
2nd.	†	16-5714						†	ST-105		5A1		Volt	2462	T-78		A	D13-133X		41	G1						4611			
1st.	†	16-5712	455	†	L-40			†	ST-105		5A1		F1		F1		Volt	2519	M-60-Z		A	D13-133		41	G1					4625
2nd.	†	16-5714			L-40			†	ST-105		5A1		Volt	2463	M-60-Z		A	D13-133		41	G1						4626			
1st.	†	3364-A						†	ST-113		4A1		Volt	2470	M-60-Z		A	D13-133		41	G1						4630			
2nd.	†	3365-A						†	ST-105		5A1		Tone	2521	M-55-S		A	D13-133		41	G1						4631			
1st.	†	3364-A	455					†	ST-105		5A1		Vol	2467	M-60-Z		A	D13-133		41	G1						4632, 4633			
2nd.	†	3365-A						†	ST-113		4A1		Volt	2472	M-60-Z		A	D13-133		41	G1						4634			
1st.	†	3364-A	455					†	ST-113		4A1		Tone	2473	M-55-S		A	D13-133		41	G1						4635			
2nd.	†	3365-A						†	ST-113		4A1		Vol	†	M-60-Z		A	D13-133		41	G1						4636			
1st.	†	3364-A	455					†	ST-105		5A1		Volt	2477	M-55-S		A	D11-130		41	G1						4637			
2nd.	†	3365-A						†	ST-105		5A1		Tone	2478	M-60-Z		A	D11-130		41	G1						4638			
1st.	†	3364-A	455					†	ST-113		4A1		Vol	2482	M-55-S		A	D11-130		41	G1						4639			
2nd.	†	3365-A						†	ST-113		4A1		Volt	2483	M-60-Z		A	D11-130		41	G1						4640			
1st.	†	3329	455					†	ST-105		5A1		Volt	2484	M-60-Z		A	D11-130		41	G1						4641			
2nd.	†	3529						†	ST-105		5A1		Tone	2485	M-55-S		A	D11-130		41	G1						4642			
1st.	†	3363	455					†	ST-113		4A1		Vol	2486	M-60-Z		A	D11-130		41	G1						4643			
2nd.	†	3533						†	ST-113		4A1		Volt	2487	M-55-S		A	D11-130		41	G1						4644			
1st.	†	3329	455					†	ST-105		5A1		Volt	2488	M-60-Z		A	D11-130		41	G1						4645			
2nd.	†	3529						†	ST-105		5A1		Tone	2489	M-55-S		A	D11-130		41	G1						4646			
1st.	†	3363	455					†	ST-113		4A1		Vol	2490	M-60-Z		A	D11-130		41	G1						4647			
2nd.	†	3533						†	ST-113		4A1		Volt	2491	M-55-S		A	D11-130		41	G1						4648			
1st.	†	16-5712	455					†	ST-105		5A1		Volt	2492	M-60-Z		A	D11-130		41	G1						4649			
2nd.	†	16-5714						†	ST-105		5A1		Tone	2493	M-55-S		A	D11-130		41	G1						4650			
1st.	†	16-6658	455					†	ST-113		4A1		Vol	2494	M-60-Z		A	D13-133		41	G1						4651			
2nd.	†	16-6660						†	ST-113		4A1		Tone	2495	M-60-Z		A	D13-133		41	G1						4652			
1st.	†	16-6658	455					†	ST-113		4A1		Vol	2496	M-60-Z		A	D13-133		41	G1						4653			
2nd.	†	16-6662						†	ST-113		4A1		Volt	2497	M-60-Z		A	D13-133		41	G1						4654			
1st.	†	16-5712	455					†	ST-105		5A1		Volt	2498	M-60-Z		A	D13-133		41	G1						4655			
2nd.	†	16-5714						†	ST-105		5A1		Tone	2499	M-60-Z		A	D13-133		41	G1						4656			
1st.	†	16-5712	455					†	ST-105		5A1		Vol	2500	M-60-Z		A	D13-133		41	G1						4657			
2nd.	†	16-5714						†	ST-105		5A1		Tone	2501	M-60-Z		A	D13-133		41	G1						4658			
1st.	†	16-5712	455					†	ST-105		5A1		Vol	2502	M-60-Z		A	D13-133		41	G1						4659			
2nd.	†	16-5714						†	ST-105		5A1		Tone	2503	M-60-Z		A	D13-133		41	G1						4660			
1st.	†	16-5712	455					†	ST-105		5A1		Vol	2504	M-60-Z		A	D13-133		41	G1						4661			
2nd.	†	16-5714						†	ST-105		5A1		Tone	2505	M-60-Z		A	D13-133		41	G1						4662			
1st.	†	16-5712	455					†	ST-105		5A1		Vol	2506	M-60-Z		A	D13-133		41	G1						4663			
2nd.	†	16-5714						†	ST-105		5A1		Tone	2507	M-60-Z		A	D13-133		41	G1						4664			
1st.	†	16-5712	455					†	ST-105		5A1		Vol	2508	M-60-Z		A	D13-133		41	G1						4665			
2nd.	†	16-5714						†	ST-105		5A1		Tone	2509	M-60-Z		A	D13-133		41	G1						4666			
1st.	†	16-5712	455					†	ST-105		5A1		Vol	2510	M-60-Z		A	D13-133		41	G1						4667			
2nd.	†	16-5714																												

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	N o t e	Cornell-Dubilier Part No.	N o t e	Solar Part No.	N o t e	Sprague Part No.	N o t e	Use	Mfr. Part No.	Stancor Part No.	N o t e	Thordarson Part No.	N o t e	Merit	N o t e	Eveready Part No.	N o t e	Burgess Part No.	M o t e	
AIRLINE—Continued	8	6L7, 6C5, 6K7, 6Q7, 25L6, 25Z6, 665	119-30	PRSB150-20-40		EZ83015		M-30-150		TU-240		Chk Out	105-47	A-3856		A-2900								
62-291	7	1C7G, 1D5G, 4H4G, 1E5G	45X225	PRSA150-8-8		EZ8825		M-2X8-250		LM-28		Aud Pwr	1	A-4713		T20D75		A-2920						
62-292			45X234	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	1											
62-293	13	6K7, 6C5, 6H6, 6G5, 6L6, 5Z4	44X21	GL450-30		KR530		M-1000-6		UHC-1000		Aud Pwr	1	A-3831		T22S56		A-2901						
62-294	7	1C7G, 1D5G, 4H4G, 1E5G	45X225	PRSA150-8-8		BR425		Z-30-500		PLS-30		SC-16	1	P-6165		T22R07		P-2955						
62-294			45X234	PRSA150-40-40		EZ8825		M-2X8-250		LM-28		UT-42	1	A-3830		T22S74		A-2935						
62-294			45X233			BRD4415		M-2X40-150		TA-440		Aud Pwr	1	A-4713		T20D75		A-2920						
62-296	6	6L7, 6C5, 6K7, 6Q7, 6F6, 5Y3	119-45	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Out	1	A-3831		T22S56		A-2901						
62-297	7	6J7, 6C5, 6K7, 6Q7, 6F6, 5Y3G, 665	45X35	GL450-30		WR-30		Z-30-500		LS-30		On Spkr.	1	P-6011		T22R02		P-2951						
62-300	7	6A8, 6K7, 6Q7, 6C5, 6F6, 5Y3	103-6	GL450-12		WR-10		ZD-12-500		LS-12		On Spkr.	1	A-3878		T22S47		A-2931						
62-301, 62-301X	11	26K7, 6J7, 6C5, 6H6, 6F5, 5C6, 5Z3, 6G5	103-14	GL450-16		KR508		D-8-450		PLS-B		Out	1	P-6012		T22R04		P-2952						
62-301			103-10	GL450-30		WR-30		Z-30-500		PLS-16		On Spkr.	1	A-3830		T22S74		A-2935						
62-301			103-8	GL450-16		KR516A		D-16-450		PLS-16		Out	1	P-6014		T22R06		P-2954						
62-302	7	6A8G, 6C5G, 6U7G, 6V7G, 25A6G, 6N7G	45X227	PRPS50-50 & PRS25-10		BR505		M-50-50		TA-550		Chk	1	A-3852		T22S74		A-2904						
62-303	13	6K7, 6J7, 6C5, 6H6, 6L6, 5Y3G, 665	44X21	GL450-30		KR530		Z-30-500		PLS-30		Out	1	A-4713		T20D75		A-2920						
62-303			44X36	GL450-40		WR-40		Z-40-500		LS-40		Chk	1	A-3856		T22S74		A-2900						
62-303			45X224	PRPS25-25		BR252A		M-25-25		TA-25		Pwr	1	P-6165		T20C54		C-2903						
62-304	4	ID7G, 1D5G, 1H6G, 1F5G	45X212	PRS150-4		BR415		M-8-150		UT-41		Out	1	A-3830		T22S74		A-2935						
62-305	5	ID7G, 2D5G, 1F7G, 1G5G	119-22	PRS25-10		BR102A		M-10-25		TA-10		Out	1	A-3329		T22S47		A-2900						
62-306	6	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 665	119-38	PRSB450-8-8		EZ288		DH-2X8-450SS		TU-88		Pwr Out	1	P-6289		T22R00		P-2949						
62-307	7	6L7, 6C5, 6K7, 6Q7, 6F6, 5W4, 665, (51)	103-6	GL450-8		KR508		D-8-450		PLS-8		Pwr Out	1	P-6012		T22R04		P-2952						
62-309	9	6K7, 6J7, 6C5, 6H6, 6F5, 6F6, 5Y3G, 6G5	103-7	GL450-8		KR508		D-8-450		PLS-8		On Spkr.	1	A-3822		T22S47		A-2900						
62-312	7	6A8G, 6C5G, 6U7G, 6V7G, 25A6G, 6N7G	45X227	PRPS50-50 & PRS25-10		BR505		M-50-50		PLS-16		Pwr Out	1	P-6012		T22R04		P-2952						
62-316	6	6L7, 6C5, 6K7G, 6Q7G, 6F6G, 5Y3G, (51)	103-6	GL450-8		KR508		D-8-450		PLS-8		Chk	1	A-4713		T20D75		A-2920						
62-319	9	6K7, 6C5, 6J7, 6H6, 6F5, 6F6, 5Y3G, 6G5	103-7	GL450-8		EZ845		D-8-450		PLS-8		Pwr Out	1	P-6012		T22S74		A-2900						
62-320	4	6J7, 25L6, 25Z6G, (44), L55B	45X237		EZ2215C		DSB-302		LM-2016		Out	1	A-3876		T22S45		A-2928							
62-321	11	26K7, 6J7, 6C5, 6H6, 6X6, 5Y3, 665	103-8	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	1	P-6014		T22R08		P-2954						
62-321			44X11	GL450-16		KR516A		D-16-450		PLS-16		Out	1	A-3830		T22S74		A-2935						
62-322	7	6A8G, 6U7G, 6V7G, 6J5G, 25A6G, 6N7G	45X222	PRSB450-40-20		BR825		M-8-250		UT-82		Chk	1	A-4713		T22R04		P-2952						
62-322			45X222	PRSB450-25		BRD4215		M-25-25		TA-25		Pwr Out	1	A-3878		T22R04		P-2952						
62-323	7	6K8G, 6K7, 6Q7G, 6P5G, 6A5G, 5Y3G, 6U5, (44)	119-63B	PRSB450-16-16		EZ5112		DH-2X16-450SS		TU-1616		Pwr Out	1	P-6011		T22R04		P-2952						
62-324	7	6A8G, 6K7, 6Q7, 6J5, 6F6, 5Y3	103-6	GL450-8		KR508		D-8-450		PLS-8		Pwr Out	1	P-6120		T22S47		P-2951						
62-325	4	6J7, 25L6, 25Z6G, (44), L55B	45X237		EZ2215C		DSB-302		LM-2016		Out	1	A-3852		T22S47		A-2904							
62-329	9	26K7, 6C5, 6J7, 6H6, 6F5, 6F6, 5Y3G, 6G5	103-13	PRV450-8		EZ845		D-8-450		LM-8		Pwr Out	1	P-6012		T22R04		P-2952						
62-334	5	6A8G, 6U7G, 6H6, 6F5G, 6K6G, (51)	103-8	PRSB250-16-16	A1	EZ16D35S		M-10-25		TA-10		On Spkr.	1	A-3878		T22S47		A-2931						
62-341	11	26K7, 6J7, 6C5, 6H6, 6F5, 6F6, 5Z3, 6G5	103-10	GL450-30		WR-30		Z-30-500		PLS-16		In	1	A-4722		T20D75		A-2921						
62-345	5	6D8G, 6S7G, 6T7G, 1F5G, 6N5	119-40	PRSA450-8-8		EZ8825		M-2X8-250		LM-28		Pwr Out	1	P-6014		T22R08		P-2954						
62-346	6	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 665	119-38	PRSB450-8-8		EZ288		DH-2X8-450SS		TU-88		Pwr Out	1	P-6289		T22R00		P-2949						
62-347	7	6J7, 6K7, 6C5, 6Q7, 6F6, 5Y3G, 665	44X31	GL450-12		WR-10		ZD-12-500		LS-12		Pwr Out	1	A-3823		T22S47		A-2901						
62-349	9	26K7, 6J7, 6C5, 6H6, 6F5, 6F6, 5Y3G, 6G5	44X10	GL450-30		KR516A		D-16-450		PLS-16		Pwr Out	1	P-6120		T22R04		P-2952						
62-350	5	6A8G, 6K7, 6Q7G, 6K6G, 5W4 or 5Y3G	119-47C	PRSB250-8		EZ288		M-8-250		UT-82		Pwr Out	1	P-6011		T22R02		P-2951						
62-351	5	6A8G, 6K7, 6Q7G, 6K6G, 5W4 or 5Y3G	119-47C	PRSB250-8		EZ288		M-8-250		UT-82		Pwr Out	1	P-6011		T22R02		P-2951						

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photofact S/N.	MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiat Part No.	Note			
1st.	108-88	16-5712		465				114-82	ST-115		8A4		Vol	101-46	M-63-Z		A	D13-137		41	G1				Continued—	AIRLINE		
2nd.	108-73	16-5714		456				6 inch	ST-108		6A1		Tone	101-51	M-64-Z			D13-130			G1					62-291		
1st.	108-73	16-5712		456				8 inch	ST-115		8A4		Vol	36X239	M-63-Z			D13-137		45	G1					62-292		
2nd.	108-73	16-5714		456									Tone	40X226	M-51-Z			D13-128			G1					62-293		
1st.	9A729			456							F2		F2		Vol	36X221	T-114		A	D17-139X		41	G1					62-293
2nd.	9A730			456									Tone	40X221														
3rd.	9A731			456																								
1st.	108-105	16-5712		456				6 inch	ST-108		6A1		Vol	36X239	M-63-Z			D13-137		45	G1					62-294		
2nd.	108-106	16-5712		456				8 inch	ST-115		8A4		Tone	40X226	M-51-Z			D13-128			G1							
1st.	108-648	16-5712		465				114-85B	ST-166		6E10		Vol	101-93	M-63-Z			D13-137		41	G1					62-296		
2nd.	108-648	16-5714		465				12A277					Tone	101-92	M-46-Z			E13-123			G1					62-297		
1st.	108-648	16-5714		456				12A288					Vol	36-235	M-60-Z			E13-133			G1					62-300		
2nd.	108-648	16-5712		465				114-66	ST-186		6E10		Tone	40-223	M-51-Z			A	D13-137		41	G1					62-301, 62-301X	
1st.	108-648	16-5712		465				114-47			F2		Tone	101-74	M-63-Z			D13-130			G1							
2nd.	108-648	16-5714		465									Vol	101-75	M-64-Z			D18-137X		41	G1							
1st.	108-778	16-5712		456									Vol	101-36														
2nd.	108-778	16-5714		456									Tone	101-40														
1st.	108-778	16-5712		456									Vol	46X213	M-60-Z			A	D13-133		41	G1					62-302	
2nd.	108-778	16-5714		456									Tone	40X209	M-51-Z			D13-125			G1					62-303		
3rd.	108-778	16-5712		456									Vol	36X238	T-114			A	D17-139X		41	G1						
1st.	108-778	16-5714		456									Tone	40X225	M-66-Z			D13-139			G1							
1st.	108-778	16-5712		456									Vol	36X237	M-63-Z			A2	D13-137		47	G1					62-304	
2nd.	108-778	16-5714		456									Tone	43X70	58-6												62-305	
1st.	108-778	16-5712		456				114-76	ST-108		6A1		Vol	101-78	M-64-Z			A	D13-130		41	G1					62-306	
2nd.	108-778	16-5714		456									Tone	101-79	W-5													
1st.	108-778	16-5712		465							F2		F2	Vol	101-83	M-63-Z			A	D13-137		41	G1					62-316
2nd.	108-778	16-5714		465									Vol	BE101-46	M-63-Z			A	D13-137		41	G1					62-307	
1st.	BE108-73	16-5712		456				114-45	ST-737		8E18		Tone	BE101-53	M-46-Z			D13-123									62-309	
2nd.	BE108-73	16-5714		456				8 inch	ST-736		8E10		Vol	36X236	T-81			A	D17-133X		41	G1					62-312	
1st.	BE108-73	16-5712		456				10 inch			10E10		Tone	40X223	M-51-Z			S13-128										
2nd.	BE108-73	16-5714		456									Vol	46X213	M-60-Z			A	D13-133		41	G1						
3rd.	BE108-73	16-5712		465				114-15	ST-168		6E18		Tone	40X209	M-51-Z			D13-125										
1st.	BE108-73	16-5714		465									Vol	101-46	M-63-Z			A	D13-137		41	G1					62-316	
2nd.	BE108-73	16-5712		465				114-87			10E10		Vol	101-60	T-103			A	D18-137X		41	G1					62-319	
1st.	108-107	16-5712		465				114-79	ST-736		8E10		Tone	101-61													62-320	
2nd.	108-108	16-5714		465				114-80	ST-166		6E10		Vol	36X236	T-81			A	D17-133X		41	G1					62-321	
1st.	108-107	16-5712		456							F2		F2	Vol	36X224	M-63-Z			D13-128								62-322	
2nd.	108-107	16-5714		456									Tone	40X224													62-323	
1st.	108-107	16-5712		456									Vol	36X252	AM-67-Z	KSS-3	A	D13-140		41	G1						62-324	
2nd.	108-107	16-5714		456									Tone	40X229	AM-64-Z	KSS-3	A	S13-128									62-325	
1st.	108-107	16-5712		465									Vol	101-126	AM-63-Z	KSS-3	A6	D13-137		47							62-329	
2nd.	108-107	16-5714		465									Tone	101-104	M-63-Z			D13-137									62-334	
1st.	108-107	16-5712		465									Vol	101-105	M-64-Z			D13-130		41	G1						62-341	
2nd.	108-107	16-5714		465									Tone	36X244	AM-27-S	KSS-3	A	D16-116		41	G1						62-345	
1st.	108-108	16-5712		465									Vol	101-60	T-103			A	D18-137X		41	G1					62-346	
2nd.	108-108	16-5714		465									Tone	101-61													62-347	
1st.	SA942	16-5712		456				114-79	ST-735		8E10		Vol	36X247	AM-63-Z	KSS-3	A	D13-139		41	G1						62-348	
2nd.	SA943	16-5714		456				114-80	ST-168		F8		Tone	40E6V6														62-349
1st.	108-648	16-5712		465				114-47			F2		F2	Vol	101-36													
2nd.	108-648	16-5714		465									Tone	101-40														
1st.	108-82B	16-5712		465				114-74	ST-105		5A1		Vol	101-80	N-63-Z			A2	D13-137		42	G1					62-345	
2nd.	108-82B	16-5714		465				114-72	ST-167		5E18		Vol	101-77	M-63-Z			A	D13-137		41	G1					62-346	
1st.	108-82B	16-5712		465							F4		F4	Vol	36X235	M-60-Z			A	D13-133		41	G1					62-347
2nd.	108-82B	16-5714		465									Tone	40X223	S13-128			A	D17-133X		41	G1					62-349	
1st.	108-82C	16-5712		456							F2		F2	Vol	36X236	T-81			A	D17-133X		41	G1					62-350
2nd.	108-82C	16-5714		456									Tone	40X223	M-51-Z			D13-128									62-351	
1st.	108-82E	16-5712		465				114-108	ST-167		5E18		Vol	101-106	AM-63-Z	KSS-3	A	D13-137		41								
2nd.	108-82E	16-5714		465				114-108	ST-167		5E18		Vol	101-106	AM-63-Z	KSS-3	A	D13-137		41								

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
AIRLINE—Continued																							
62-352	5	6A8G, 6K7, 6Q7G, 6K6G, 5W4 or 5Y3G	119-47C	PRSB450-8-8		EZ288		DH-2X8-450SS		LM-28		Pwr Out	104-100E	P-6011	T22R02		P-2951						
62-353	7	6K8G, 6K7, 6Q7G, 6F5G, 6AC5G, 5Y3G, 6U5	119-63B	PRSB450-8-16		EZ5816		DH-816-450SS		LM-816		Pwr Out	104-124B	P-6011	T22R02		P-2951						
62-354	5	107G, 1D5G, 1F7G, 1G5G	119-52	PRS25-25		BR252A		M-25-25		TA-25		Pwr Out	105-75	A-3852	T22S47		A-2904						
62-355	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G	9557CE	PRSB450-8-8		EZ288		DH-2X8-450SS		TU-88		Pwr Out	95113TR	P-6011	T22R02		P-2951						
62-356	6	6A8G, 6S7G, 6T7G, 6L5G, 1J6G, 6N5, (47)	119-41	PRSA250-10-10		EZ8825		DH-2X8-450		UT-88		Pwr Chk In	B105-30D	C-1279	T20C52		C-2980						
62-357	7	6J7, 6C5, 6K7, 6Q7, 6F6, 5Y3G, 665	45X35	GL450-40		KR540		D-40-450		PLS-40		Pwr Out	53X144	P-6012	T22R04		A-2920						
62-358	8	6J7, 6J5, 6K7, 6H6, 6F5, 6F6, 5Y3G, 6G5, (51)	44X31	GL450-12		KR512A		D-12-450		PLS-12		Pwr Out	53X170	A-3878	T22S47		A-2931						
62-359	7	6S7G, 6L5G, 6K6G, 6N5	44X38	GL450-40		KR520		ZD-20-500		PLS-20		Pwr On Spkr.	A-3878	T22S47		A-2931							
			45X223	PRSA150-20-20 & PRS25-10		EZ2215C		D-40-450		PLS-40		Pwr On Spkr.	C-1706	T20C52		C-2973							
62-361A, B	6	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G, 6U5, (44)	BE119-48	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	104-124B	A-3824	T22S47		A-2900						
62-362	6	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G, 6U5, (44)	119-48	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	105-57	A-3824	T22S47		A-2900						
62-363	6	6D8G, 6SJ7G, 6T7G, 6G5G, 6AB5	45X243	PRV250-16-16 & PRS25-10		EZ16D35S				LM-2016		Pwr Out	104-124B	P-6011	T22R02		P-2951						
62-364	6	6U7G, 6J7G, 6B8G, 6K6G, 6N7G	45X239	PR25-10		BR102A		M-10-25		TA-10		Pwr Out	105-57	A-3824	T22S47		A-2900						
			45X235	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	104-124B	P-6011	T22R02		P-2951						
			45X240	PR530-4		BR435		M-4-450		UT-43		Pwr Out	105-74	A-3824	T22S47		A-2900						
			45X239	PR25-10		BR102A		M-10-25		TA-10		Pwr In	105-57	A-3824	T22S47		A-2900						
62-365	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G	9567CE	PRSB450-8-8		EZ288		DH-2X8-450SS		TU-88		Pwr Out	95113TR	P-6011	T22R02		P-2951						
62-367	7	6J7, 6C5, 6K7, 6Q7, 6F6, 5Y3G, 665	45X35	GL450-40		KR540		D-40-450		PLS-40		Pwr Out	53X144	P-6012	T22R04		P-2952						
62-368	8	6J7, 6J5, 6K7, 6H6, 6F5, 6F6, 5Y3G, 6G5, (51)	44X31	GL450-12		KR512A		D-12-450		PLS-12		Pwr Out	53X170	A-3878	T22S47		A-2931						
62-369	6	6K7, 6J7, 6B8G, 6K6G, 6N7G	44X38	GL450-40		KR520		ZD-20-500		PLS-20		Pwr On Spkr.	A-3878	T22S47		A-2931							
62-370	7	6A8G, 6J5G, 6U7G, 6Q7G, 6K6G, 5Y3G, 5Y3G, 6U5	44X37	GL450-20		KR520		ZD-20-500		PLS-20		Pwr Out	104-124B	A-3824	T22S47		A-2931						
62-371	8	6L7, 6C5, 6K7, 6Q7, 25L6, 25Z5, 665	119-30	PRSB150-20-40		BR3015		M-24-150		PLS-20		Pwr Out	105-47	A-3856	T22S47		A-2931						
62-372	7	6J7, 6C5, 6K7, 6Q7, 6F6, 5Y3G, 665, (51)	44X31	GL450-12		KR512A		D-12-450		PLS-12		Pwr Out	53X144	P-6012	T22R04		P-2952						
62-373, 62-374	7	1C7G, 105G, 1H4G, 1E5G	45X225	PRSB150-20-20		EDL2215SS		M-20-150		PLS-40		Pwr Out	53X170	A-3878	T22S47		A-2931						
			45X225	PRSA150-20-40		EDL4215		M-2X40-150		PLS-40		Pwr Out	104-124B	A-3824	T22S47		A-2900						
62-375	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G	9567CE	PRSB450-8-8		BRH610		M-1000-6		DHC-1000		Pwr Out	95113TR	P-6011	T22R02		P-2951						
62-376	6	6D8G or 6A8G, 6S7G, 6T7G, 6L5G, 1J6G, 6N5	BE119-41	PRSA250-10-10		EZ8825		DH-2X8-450		UT-88		Pwr Chk In	B105-30D	C-1279	T20C52		A-2931						
62-377	7	107G, 1D5G, 1H4G, 1E5G	45X225	PRSB150-20-20		EDL2215SS		*M-20-150		TU-220		Pwr Out	105-47	A-3856	T22S47		A-2931						
62-380 (Issue "A")	5	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G	119-38	PRSB450-8-8		EZ288		DH-2X8-450SS		LM-28		Pwr Out	104-60B	P-6289	T22R00		P-2949						
62-380, 62-383	5	6A8, 6K7, 6Q7, 6K6, 5Y3	119-38	PRSB450-8-8		EZ288		DH-2X8-450SS		LM-28		Pwr Out	104-60B	P-6289	T22R00		A-2900						
62-385	5	107G, 1D5G, 1F7G, 1G5G	119-22	PRS25-10		BR102A		M-10-25		TA-10		Pwr Out	105-47	A-3856	T22S47		A-2932						
62-386	6	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 665	†	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	105-47	A-3856	T22S47		A-2931						
62-387	7	1C7G, 1D5G, 1H4G, 1E5G	45X225	PRSB150-20-20		EDL2215SS		*M-20-150		TU-220		Pwr In	105-47	A-3856	T22S47		A-2931						
62-390	9	6K7, 6K8, *6J5, 6Q7G, 6K6G, 5Y3G, 6U5, (44)	119-60	PRSA450-8-16	A1	EDL8145		LM-816	A1	UT-123		Pwr Out	104-139	P-6120	T22R04		P-2952						
62-401	11	6U7, *6J7, *6J5, 6H6, *6F5G, 5Y3G, 6U5, (51)	44X30	GL450-16		KR515A		ZC-16-500		LS-16		Pwr Out	105-73	P-6103	T22R04		P-2952						
62-403	13	6U7G, 6J7G, 6J5G, 6H6, 6F8G, 6F6G, 5U4G, 6U4	44X36	GL450-40		KR540		Z-40-500		LS-40		Pwr Out	51X61	A-3852	T22S47		A-2904						
			44X38	PRSA50-50		KR550		M-50-25		TA-50		Pwr Out	105-47	A-3870	T22S47		P-2955						
			44X21	GL450-30		BR502		Z-30-500		LS-30		Pwr Out	105-47	A-3870	T22S47		A-2905						
			44X35	GL450-40		BR505		Z-40-500		LS-40		Pwr Out	105-47	A-3870	T22S47		A-2905						
			44X244	PR505-50		BR102A		M-50-50		TA-550		Pwr Out	105-47	A-3870	T22S47		A-2905						
62-404	4	1D7G, 1D5G, 1H6G, 1F5G	4 Mfd.	PRS150-4		BR415		M-8-150		UT-41		Pwr Out	105-47	A-3870	T22S47		A-2905						
62-405	5	1D7G, 1D5G, 1F7G, 1G5G	119-22	PRS25-10		BR102A		M-10-25		TA-10		Pwr Out	On Spkr.	A-3831	T22S47		A-2932						

<sup>†</sup>Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
AIRLINE—Continued																							
62-406	6	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 6G5.	119-38.	PRSB450-8-8		EZ288		DH-2X8-450SS		LM-28.		Pwr Out	104-100.	P-6289.	T22R00.		P-2949.						
																			A-3856.	T22S47.	A-2931.		
62-407	7	6L7, 6C5, 6K7, 6Q7, 6F6, 5W4, 6G5, (51).	103-6.	GL450-8.		KR508		DM-8-450.		PLS-8.		Pwr Out	BE104-52.	P-6012.	T22R04.		P-2952.						
						GL450-8.		KR508		PLS-8.		On Spkr.	A-3878.	T22S47.	A-2931.								
62-408	9	6K7, 6C5, 6J7, 6H6, 6F5, 6F6, 5Y3G, 6G5.	103-13.	GL450-8.		KR508		DM-8-450.		PLS-8.		Pwr Out	104-80.	P-6012.	T22R04.		P-2952.						
						GL450-8.		KR508		PLS-8.		On Spkr.	A-3878.	T22S47.	A-2931.								
62-414	5	1D7G, *1D5G, IF7G, 1G5G.	119-22.	PRS25-10.		BR102A		M-10-25.		TA-10.		Out	On Spkr.	A-3329.	T22S47.	A-2900.							
62-416	6	6L7, 6C5, 6K7G, 6Q7G, 6F6G, 5Y3G, (51).	103-6.	GL450-8.		KR508		DM-8-450.		PLS-8.		Pwr Out	BE104-52.	P-6012.	T22R04.		P-2952.						
						GL450-8.		KR508		PLS-8.		On Spkr.	A-3878.	T22S47.	A-2931.								
62-417	7	6J7, 6K7, 6C5, 6U7G, 6V7G, 6F6G, 5Y3G, 6G5.	44X31.	GL450-12.		KR512A		D-12-450.		PLS-12.		Pwr Out	†	P-6120.	T22R04.		P-2952.						
						GL450-12.		KR512A		PLS-12.		On Spkr.	A-3823.	T22S47.	A-2901.								
62-419	9	6K7, 6C5, 6J7, 6H6, 6F5, 6F6, 5Y3G, 6G5.	103-13.	GL450-8.		KR508		D-40-450.		PLS-40.		Pwr Out	104-80.	P-6012.	T22R04.		P-2952.						
						GL450-8.		KR508		PLS-8.		On Spkr.	A-3878.	T22S47.	A-2931.								
62-422	7	6A8G, *6U7G, 6V7G, 6J5G, 25A6G, 6N7G.	45X241.	PRSA150-20-40		BRD4215.		M-2X40-150.		TA-240.		In Out	†	A-4713.	T20D75.		A-2920.						
																			A-3856.	T22S74.	A-2900.		
62-425 (Late)	6	6D8G or 6A8G, 6S7G, 6T7G, 6L5G, 1J6G, 6M5.	BE-119-41.	PRSA250-10-10		EZ8825.		DH-2X8-450.		UT-88.		Cbk	B-105-30D.	C-1279.	T20C52.		C-2980.						
												In Out	B-104-62C.										
62-433	13	*6K7, 6J7, *6C5, 6H6, *6L6, *5Y3G, 6G5.	44X21.	GL450-30.		KR530		Z-30-500.		LS-30.		Cbk	B-105-36B.	A-4713.	T20D75.		A-2920.						
						GL450-40.		KR540		LS-40.		In Out	On Spkr.	A-3831.	T22S47.		A-2938.						
						45X224.		BR252A.		M-25-25.		Cbk	†	C-2303.	T20C54.		C-2993.						
												In Out	B-105-36B.	P-6165.	T22R07.		P-2955.						
62-434	5	1C7G, *1D5G, 1F7G, 1G5G.	119-52.	PRS25-25.		BR252A		M-25-25.		TA-25.		In Out	†	A-3830.	T22S74.		A-2935.						
																			A-3856.	T22S47.	A-2900.		
62-435	5	1C7G, *1D5G, 1F7G, 1G5G.	119-52.	PRS25-25.		BR252A		M-25-25.		TA-25.		Out	105-69.	A-3856.	T22S47.		A-2900.						
62-442	7	6A8G, 6C5G, *6U7G, 6V7G, 25A6G, 6N7G.	45X227.	PRSS0-50 & PRS25-10		BR505 & BR102A.		M-50-50 & M-10-25.		TA-550 & TA-10.		Chk	†	A-4713.	T20D75.		A-2920.						
												In Out	A-3856.	T22S74.	A-2900.								
62-445	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G.	119-38.	PRSB450-8-8		EZ288		DH-2X8-450SS		LM-28.		Pwr Out	104-100.	P-6011.	T22R02.		P-2951.						
												On Spkr.	A-3878.	T22S47.	A-2931.								
62-446	6	6A8G, 6S7G, 6T7G, 6L5G, 1J6G, 5N5, (47).	119-41.	PRSA250-10-10		EZ8825.		DH-2X8-450.		UT-88.		Chk	B-105-30D.	C-1279.	T20C52.		C-2980.						
												In Out	B-104-62C.	P-6165.	T22R04.		P-2952.						
62-447	7	6J7, 6K7, 6C5, 6Q7, 6F6, 5Y3G, 6G5.	44X31.	GL450-12.		KR512A		D-12-450.		PLS-12.		Pwr Out	†	A-3831.	T22S47.		A-2938.						
						GL450-40.		KR540		PLS-40.		On Spkr.	A-3823.	T22S47.	A-2901.								
62-448	8	6J7, 6L5, 6K7, 6H6, 6F5, 6F6, 5Y3G, 6G5, (51).	44X37.	GL450-20.		KR520		ZD-20-500.		PLS-20.		Pwr Out	53X170.	A-3878.	T22S47.		A-2931.						
						GL450-40.		KR540		PLS-40.		On Spkr.	†	P-6013.	T22R05.		P-2953.						
62-449	9	*6K7, 6J7, 6C5, 6H6, 6F5, 6F6, 5Y3G.	44X38.	GL450-16.		KR516A		ZD-16-500.		PLS-16.		Pwr Out	53X170.	A-3878.	T22S47.		A-2931.						
						GL450-16.		KR516A		PLS-16.		On Spkr.	†	A-3878.	T22S47.		A-2931.						
62-451	11	*6K7, *6J7, *6C5, 6H6, *6V6, 5Y3G, 6G5.	44X30.	GL450-16.		KR516A		ZD-16-500.		LS-16.		Pwr Out	†	P-6014.	T22R06.		P-2954.						
						GL450-16.		KR516A		PLS-16.		On Spkr.	A-3830.	T22S74.		A-2935.							
						45X223.		BR825.		M-8-250.		Out	†	A-3856.	T22S74.		A-2900.						
						45X222.		BR252A.		M-25-25.		Out	†	A-3856.	T22S47.		A-2900.						
62-452	7	6A8G, 6C5G, *6U7G, 6V7G, 25A6G, 6N7G.	45X227.	PRSS0-50 & PRS25-10		BR505 & BR102A.		M-50-50 & M-10-25.		TA-550 & TA-10.		Chk	†	A-4713.	T20D75.		A-2920.						
												In Out	A-3856.	T22S74.		A-2900.							
62-453A	4	1D7G, *1D5G, 1F7G, 1G5G.	119-52.	PRS25-25.		BR252A		M-25-25.		TA-25.		Out	On Spkr.	A-3878.	T22S47.		A-2931.						
62-454	4	1A7G, 1N5G, 1H5G, 1C5G.	119-35.	PRS25-25.		BR252A		M-25-25.		TA-25.		Out	On Spkr.	A-3878.	T22S47.		A-2931.						
62-455	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G.	119-38.	PRSB450-8-8		EZ288		DH-2X8-450SS		LM-28.		Pwr Out	104-100.	P-6011.	T22R02.		P-2951.						
												On Spkr.	A-3878.	T22S47.		A-2931.							
62-457	7	6J7, 6C5, 6K7, 6Q7, 6F6, 5Y3G, 6G5.	45X35.	GL450-40.		KR540		O-40-450.		PLS-40.		Pwr Out	53X144.	P-6012.	T22R04.		P-2952.						
						GL450-40.		KR516A		PLS-16.		Out	53X144.	A-3878.	T22S47.		A-2931.						
62-458	8	6J7, 6L5, 6K7, 6H6, 6F5, 6F6, 5Y3G, 6G5, (51).	44X37.	GL450-20.		KR520		ZD-20-500.		PLS-20.		Pwr Out	53X170.	A-3878.	T22S47.		A-2931.						
						GL450-40.		KR540		D-40-450.		Out	53X170.	A-3878.	T22S47.		A-2931.						
62-459	4	6D8, 6S7, 6T7, 6K6.	119-57.	PRSA150-20-20		BRD2215.		M-2X20-150.		TA-116.		Pwr Out	On Spkr.	A-3878.	T22S47.		A-2931.						
						119-58.		BRD2215.		M-30-150.		Out	UT-301.	A-3856.	T22S47.		A-2900.						
62-459 (Series "A")	4	6D8, 6S7, 6T7, 6K6.	119-57.	PRSA150-20-20		BRD2215.		M-2X20-150.		TA-116.		Pwr Out	104-137.	A-3856.	T22S47.		A-2900.						
						119-58.		BRD2215.		M-2X20-150.		Out	105-70.	A-3855.	T22S47.		A-2900.						
62-463	6	6D8G, *6S7G, 6T7G, 6G6G, 6AB5.	119-58.	PRV250-16-16 & PRS25-10		BRV250-16-16		M-30-150.		UT-301.		Out	LM-2016.	A-3856.	T22S47.		A-2900.						
						45X239.		EZ16D3SS.		M-10-25.		Out											
62-465	5	6D8G, 6S7G, 6T7G, 1F5G, 6N5, (51).	119-40.	PRSA15																			

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL				
Use	Mfr. Part No.	Melsner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quans Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiat Part No.	Note	Project Set No.		
1st.	†	16-5712		465				†			F2		F2	Vol	101-83	M-63-Z		A		D13-137		41	G1			Continued—	AIRLINE 62-406	
2nd.	†	16-5714												Vol	BE 101-46	M-63-Z		A		D13-137		41	G1				62-407	
1st.	BE 108-74	16-5712		465				114-45	ST-737		8E18			Tone	BE 101-53	M-46-Z		A		D13-123		41	G1				62-409	
2nd.	BE 108-73	16-5714		465				114-87			10E10			Vol	101-60	T-103		A		D18-137X		41	G1					
1st.	108-107	16-5712		465				114-79	ST-736		8E10			Tone	101-61													
2nd.	108-108	16-5714						114-80	ST-108		6E10			Vol	101-78	M-54-Z		A		D13-130		41	G1				62-414	
1st.	108-77B	16-5712		465				114-76			6A1			Fil	101-79	58-6		A		W-5							62-416	
2nd.	108-78B	16-5712		465										Vol	101-46	M-63-Z		A		D13-137		41	G1				62-417	
3rd.	108-79B	16-5714		465										Tone	36X235	M-50-Z		A		D13-133		41	G1				62-419	
1st.	BE 108-74	16-5712		465				114-15	ST-168		6E18			Vol	30X223	M-51-Z		A		S13-128		41	G1					
2nd.	BE 108-73	16-5714		465				8" Inch	ST-736		F4			Tone	101-60	T-103		A		D18-137X		41	G1					
1st.	†			456				114-87			10E10			Vol	101-61													
2nd.	108-107	16-5712		465				114-79	ST-736		8E10			Tone	101-61													
2nd.	108-108	16-5714												Vol	101-78	M-54-Z		A		D13-130		41	G1					
1st.	†	16-5712		456				114-80	ST-108		6A1			Fil	101-79	58-6		A		W-5							62-422	
2nd.	†	16-5712		456										Vol	36X222	AM-66-Z	KSS-3	A		D13-140		E	41					
3rd.	†	16-5714		456										Tone	40X229	AM-64-Z	KSS-3	A		S13-128		E	41				62-425 (Late)	
1st.	B-108-93B	16-5712		465				BE 114-58	ST-108		6A1			Vol	BE 101-81	M-60-Z		A2		D13-133		42	G1	126-4	5411	H1		
2nd.	B-108-92B	16-5714		465										Tone	BE 101-82	M-51-Z				S13-128								
1st.	†	16-5712		456										Vol	36X238	T-114		A		D17-139X		41	G1				62-433	
2nd.	†	16-5712		456										Tone	40X225	M-66-Z		A		D13-139		41	G1					
3rd.	†	16-5714		456										Vol	101-81	M-60-Z	KSS-3	A2		D13-130		E	42				62-434	
1st.	108-116	16-5712		465				114-115	ST-109		6A21			Fil	101-111	AM-64-Z		A		W-3							62-435	
2nd.	108-78C	16-5712		465										Vol	101-112	58-4		A		D13-130		E	42					
3rd.	108-90C	16-5714		465										Tone	101-111	AM-64-Z	KSS-3	A2		W-3								
1st.	108-116	16-5712		465				114-115	ST-109		6A21			Fil	101-112	58-4		A		D13-130		E	42				62-442	
2nd.	108-78C	16-5712		465										Vol	46X213	M-60-Z		A		D13-133		41	G1				62-443	
3rd.	108-79C	16-5714		465										Tone	40X209	M-51-Z		A		D13-128		41	G1				62-444	
1st.	†	16-5712		456										Vol	101-77	M-63-Z		A		D13-137		41	G1				62-445	
2nd.	108-82B	16-5712		485				114-72	ST-167		5E18			Tone	101-81	M-60-Z		A2		D13-133		42	G1	126-4	5411	H1		
2nd.	108-83B	16-5714		465				114-64	ST-115		8A4			Vol	101-82	M-51-Z		A2		D13-128							62-446	
1st.	†	16-5712		456										Vol	101-81	M-60-Z	KSS-3	A2		D13-133		42	G1	126-4	5411	H1		
1st.	9A902	16-5714		456				12A303	ST-168		8E10			Vol	30X223	M-51-Z		A		D13-133		41	G1				62-447	
2nd.	9A903	16-5714		456				12A302	ST-736		8E10			Vol	36X235	M-60-Z		A		D13-133		41	G1				62-448	
1st.	†	16-5714		456				8" Dyn.	ST-736		8E10			Vol	40X223	M-51-Z		A		D13-128		41	G1				62-449	
2nd.	†	16-5714		456				10" Dyn.	ST-175		10E10			Vol	36X236	M-51-Z		A		D17-133X		41	G1				62-451	
1st.	†	16-5712		456										Tone	40X224	M-63-Z		A		D13-137		41	G1					
2nd.	†	16-5712		456										Vol	46X213	M-60-Z		A		D13-133		41	G1				62-452	
3rd.	†	16-5714		456										Tone	40X209	M-51-Z		A		D13-125		41	G1					
1st.	108-111E	16-5712		465				114-145	ST-105		5A1			Vol	101-155	AM-63-Z	KSS-3	A2		D13-137		E	42				62-453A	
2nd.	108-112D	16-5714		465				114-158	ST-105		5A1			Fil	101-156	58-4		A		W-3							62-454	
1st.	108-142	16-5712		465										Vol	101-163	AM-63-Z	KSS-3	A2		D13-137		E	42					
2nd.	108-143	16-5714		465										Tone	101-162	AM-63-Z		A		D13-133		41	G1					
1st.	108-82B	16-5712		465				114-72	ST-167		5E18			Vol	101-77	M-63-Z		A		D13-137		41	G1				62-455	
2nd.	108-83B	16-5714		465										Tone	101-76	AM-63-Z		A		D13-133		41	G1					
1st.	9A915			456				12A277			8E10			Vol	36X235	M-60-Z		A		D13-133		41	G1				62-457	
2nd.	9A916	16-5714		456				12A288			8E10			Tone	40X223	M-51-Z		A		S13-128		41	G1				62-458	
1st.	9A902	16-5714		456				12A303	ST-166		6E10			Vol	36X235	M-60-Z		A		D13-133		41	G1				62-459	
2nd.	9A903	16-5714		456				12A302	ST-736		8E10			Tone	40X223	M-51-Z		A		D13-128		41	G1				62-460	
1st.	108-95E	16-5712		465							5A1			Vol	101-107	AM-60-Z	KSS-3	A		D13-133		E	41		126-8	5436	H1	
2nd.	108-95D	16-5714		465				114-118	ST-105		5A1			Vol	101-107	AM-60-Z	KSS-3	A		D13-133		E	41		126-8	5436	H1	
1st.	108-95E	16-5712		465										Vol	36X249	AM-67-Z	KSS-3	A		D13-140		E	41		19A28	5411	H1	
2nd.	108-95D	16-5714		465										Tone	40X231	M-51-Z		A		D13-137		42	G1		126-8	5436	H1	
1st.	†	16-5712		456										Vol	101-80	M-63-Z		A2		D13-137		42	G1		126-4	5411	H1	
2nd.	†	16-5714		456				114-74	ST-105		5A1			Tone	101-80	M-63-Z		A2		D13-137		42	G1		126-4	5411	H1	

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES			
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Tbordarson	Note	Merit	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		"A"	"B"	"A"	"B"	
AIRLINE—Continued																						
62-466	6	6A8G, 6S7G, 6T7G, 6L5G, 1J6G, 6N5, (47)	119-41	PRSA250-10-10		EZ8825		DH-2X8-450		UT-88		Chk Pwr In Out	B-105-30D... B-104-62C... B-105-36B... On Spkr.	C-1279		T20C52		C-2980				
62-467	7	6J7, 6C5, 6K7, 6Q7, 6F6, 5Y3GT, 6G5	45X35	GL450-40		KR540		D-40-450		PLS-40		Pwr Out	A-4713		T20D75		A-2920					
62-470	7	6A8G, 6J5G, 6U7G, 6Q7G, 6K6G, 5Y3G, 6U5	44X37	GL450-20		KR520		ZD-20-500		PLS-20		Pwr Out	A-3831		T22S47		A-2938					
62-471, 62-472	7	6A8G, 6J5G, 6U7G, 6Q7G, 6K6G, 5Y3G, 6U5	44X37	GL450-20		KR520		ZD-20-500		PLS-20		Pwr Out	P-6012		T22R04		P-2951					
62-473 (Early)	7	6A8G, 6K7, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5, (44)	119-63	PRS8450-8-16		KR540		D-40-450		PLS-40		Pwr Out	A-3856		T22R00		P-2949					
62-473 (Late)	7	6K5G, 6K7, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5, (44)	119-63	PRS450-16		EZ5816		DH-816-450SS		LM-816		Pwr Out	A-3877		T22S47		A-2931					
62-475	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G...	119-38	PRS8450-8-8		EZ288		DH-2X8-450SS		LM-28		Pwr Out	P-6297		T22R00		P-2949					
62-476	6	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 6G5	119-38	PRS8450-8-8		EZ288		DH-2X8-450SS		LM-28		Pwr Out	A-3856		T22S47		A-2900					
62-477	7	1C7G, 1D5G, 1H4G, 1E5G...	45X225	PRS8150-20-20		EDL2215SS		*M-20-150		TU-220		In Out	A-4713		T20D75		A-2931					
62-479	7	6A8G, 6U7G, 6Q7G, 6J5G, 6K6G, 5Y3G, 6U5	20 Mfd. 40 Mfd.	GL450-20		KR520		D-20-450		PLS-20		Pwr Out	53X179		T22S56		A-2901					
62-486	6	6D8G or 6A8G, 6S7G, 6T7G, 6L5G, 1J6G, 6N5	BE-119-41	PRSA250-10-10		KR540		D-40-450		PLS-40		Pwr Out	A-3824		T22R04		P-2952					
62-487	7	1C7G, 1D5G, 1H4G, 1E5G...	45X225	PRS8150-20-20		EOL2215SS		*M-20-150		TU-220		Pwr In	B-105-30D...		T20C52		C-2980					
62-488	7	1C7G, 1D5G, 1H4G, 1E5G...	45X225	PRS8150-20-20		EOL2215SS		*M-20-150		TU-220		Pwr In	B-104-62C...		T22R02		P-2951					
62-490	9	6K7, 6K8, 6J5, 6Q7G, 6K6G, 5Y3G, 6U5, (44)	119-60	PRS8450-8-16	A1	EDL8145		M-12-450		LM-816	A1	Pwr Out	A-4713		T20D75		A-2920					
62-495	5	1D7G, 1D5G, 1F7G, 1H5G...	119-22	PRS25-10		BR102A		M-10-25		TA-10		Pwr Out	104-139...		T22R04		P-2952					
62-497	7	6J7, 6C5, 6K7, 6Q7, 6F6, 5Y3G, 6G5	45X35	GL450-40		KR540		D-40-450		PLS-40		Pwr Out	53X144...		T22R04		P-2952					
62-500	7	6L7G, 6J5G, 6K7, 6Q7G, 6K6G, 5Y3G, 6G5, (44)	119-38C	PRS8450-8-8		EZ288		ZD-16-500		PLS-16		Pwr Out	104-300C		T22S47		A-2931					
62-501, 62-502	4	6A8, 6J7, 25L6G, 25Z6G, 62A Ballast	119-70	PRS840302		EDL5315C		DSB-305		TA-330	A1	Pwr Out	104-124...		T22R04		P-2952					
62-503	5	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G, (44)	119-71	PRS825-10		BR102A		M-10-25		TA-5	A1	Pwr Out	105-73...		T22S47		A-2901					
62-504, 62-505 (Series "A")	5	12S7A, 12SK7, 12SQ7GT, 35L6GT, 35Z5GT, (47)	119-82	PRS8150-20-30		EZ32115		DSB-403020-		TA-230		Pwr Out	105-87...		T22S45		A-2928					
62-506, 62-516	6	1C7G, 1D5G, 1H5G, 1H4G...	119-44	PRS8250-12		BR1225		M-16-250		UT-122		In Out	105-51...		T20D75		A-2920					
62-524	5	1C7G, 1D5G, 1F7G, 1G5G...	119-52	PRS25-25		BR252A		M-25-25		TA-25		In Out	105-69...		T22S47		A-2900					
62-536, 62-546	5	6A8, 6K7, 6R7, 25L6, 25Z6...	II9-42	PRS8150-8... & PRS8150-20		BR815		M-8-150 & & BR2015		UT-81		Out On Spkr.	A-3876		T22S45		A-2928					
62-550	5	1D7G, 1D5G, 1H4G, 1G5G...	119-35	PRS25-25		BR252A		M-25-25		UT-201		Out On Spkr.	A-3831		T22S47		A-2932	X-125-437	20F2	2308		
62-551	5	1A7G, 1N5G, 1H5G, 1A5G...	119-35	PRS25-25		BR252A		M-25-25		TA-25		Out	105-78...									
62-552A	5	6D8G, 6S7G, 6L5G, 6T7G, 6G6G, (40)	119-59C	PRS8150-20-30		BRD3315		M-2X30-150		TA230		Pwr Out	104-137D									
62-553	5	6D8G, 6K7, 6T7G, 6G6G, 6Y5G, (40)	119-79	PRS8200-16-16 & PRS25-25		EZ16035S				TU-216		Pwr Out	105-69B...		T22S47		A-2932					
62-554	5	6SK7, 6SA7, 6SQ7, 41	30-20-20		A5		A5	A5	A5	A5	Pwr Out	104-114B		T20C52		C-2980						
62-555	5	1A7G, 1N5G, 1H5G, 1C5G...	45X250	PRS250-8		BR825		M-8-250		UT-82		Pwr Out	104-137D		T22S47		A-2932					
62-556	5	6A8, 6K7, 6R7, 25L6, 25Z6...	119-42	PRS8150-8... & PRS8150-20		BR815		M-8-150		UT-81		Pwr Out	105-69B...		T22S47		A-2932					
62-557	5	1A7G, 1N5G, 1H5G, 1C5G...	45X250	PRS250-8		BR825		M-8-250		UT-82		Pwr Out	105-55...		T22S47		A-2932					
62-558	5	1A7G, 1N5G, 1H5G, 1C5G...	119-52	PRS25-25		BR252A		M-25-25		TA-25		Pwr Out	105-69...		T22S47		A-2932					
62-587	5	6A8, 6K7, 6Q7, 6F6, 5Y3...	103-6	GL450-8...		KR508		DM-8-450		PLS-8		Pwr Out	104-56...		T22R02		P-2951					
62-601A	6	6A8G, 6K7, 6Q7G, 6K6G, 5W4, 6U5, (44)	119-478C	PRS8450-8-8		EZ288		DM-8-450		PLS-8		Pwr Out	104-100B		T22R02		A-2931					
62-606	6	6A8G, 6K7, 6Q7G, 6F6G, 5Y3G, 6G5	119-38	PRS8450-8-8		EZ288		DH-2X8-450SS		LM-28		Pwr Out	104-55...		T22S47		A-2931					
62-607	7	1C7G, 1D5G, 1H5G, 1E5G...	45X225	PRS8150-20-20		EDL2215SS		*M-20-150		TU-220		Pwr Out	104-100...		T22R02		P-2951					
62-616	6	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 6G5	119-38	PRS8450-8-8		EZ288		DH-2X8-450SS		LM-28		Pwr Out	104-100...		T22S47		A-2931					
62-617	7	1C7G, 1D5G, 1H4G, 1E5G...	45X225	PRS8150-20-20		EDL2215SS		*M-20-150		TU-220		Pwr Out	104-100...		T20D75		A-2920					

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	No. Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	No. Note	Mfr. Part No.	Jensen Part No.	No. Note	Quam Part No.	No. Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	No. Note	IRC Part No.	Shaft	Switch	No. Note	Mfr. Part No.	Radiart Part No.	No. Note	Photact Set No.		
1st.	B-108-93B	16-5712		465				114-64	ST-115		8A4		Vol Tone	101-81 1 1-2	M-60-Z M-1-Z	A2		D13-133 D13-128		42	G1	126-4	5411	H1	Continued	AIRLINE 62-466		
2nd.	B-108-92B	16-714						12A27					Vol Tone	4-3	M-0-Z M-51-Z			-133		41	G1							
1st.	9A815			4-6				12A288					Vol Tone	40X223	M-51-Z			S1-128										62-467
2nd.	9A816	1-5714		45				6 Inch	ST-168		6E10	F4	Vol	36X249	AM-57-Z	KSS-3	A.	D13-140	E	41	G1							62-470
1st.	+t	16-5714						8 Inch	ST-177		8E10	F4	Tone	40X229	AM-54-Z	KSS-3		S13-128									62-471, 62-472	
2nd.	+t	16-5714		456				6 Inch	ST-168		6E10	F4	Vol	36X243	M-60-Z		A.	D13-133		41	G1						62-473 (Early)	
1st.	+t	16-5714						8 Inch	ST-177		8E10	F4	Tone	40X227	M-51-Z			S13-128									62-473 (Late)	
2nd.	108-105	16-5712		455				114-45					Vol	101-124	AM-63-Z	KSS-3	A.	D13-137	E	41	G1						62-475	
1st.	108-106B	16-5714		465				114-4	ST-737				Vol	101-125	AM-63-Z	KSS-3		D13-137	E	41	G1						62-476	
2nd.	108-122	16-5712		465				114-7	ST-167				Vol	101-137	AM-63-Z	KSS-3		D13-137	E	41	G1						62-477	
1st.	108-106J	16-5714						114-7	ST-167				Vol	101-136	AM-64-Z	KSS-3		D13-137	E	41	G1						62-479	
2nd.	108-82B	16-5712		46									Vol	101-77	M-63-Z		A.	D13-137									62-486	
1st.	108-83B	16-5714						114-72	ST-167		SE18		Vol	101-77	M-63		A.	D13-137		41	G1						62-487	
2nd.	108-82B	16-5714						6 Inch	ST-108		6A1		Vol	36X239	M-3-		A4	D13-137		45	G1						62-490	
1st.	+t	16-5714		456				8 Inch	ST-115		8A21		Tone	40X226	M-51-Z			S13-128									62-495	
2nd.	+t	16-5714						6 Inch	ST-168		6E10	F4	Vol	36X249	AM-67-Z	KSS-3	A.	D13-140	E	41	G1						62-500	
1st.	+t	16-5714		456				8 Inch	ST-177		8E10	F4	Tone	40X229	AM-64-Z			S13-128								62-501, 62-502		
2nd.	B-108-93B	16-5712		465				BE-114-58	ST-108		6A1		Vol	BE-101-81	M-60-Z		A.	D13-133		42	G1	1-1	1-1	-1			62-503	
1st.	B-108-92B	16-714											Vol	BE-101-82	M-51-Z			D13-128		G1								62-504, 62-505 (Series 'A')
1st.	+t	-5712		5				6 Inch	ST-108		A1		Vol	36X239	M-63-Z		A.	D13-137		45	G1						62-506, 62-516	
2nd.	+t	16-5714						8 Inch	ST-115		8A21		Tone	40X226	M-51-Z			S13-128									62-524	
1st.	108-118							114-121	ST-168		6E10		Vol	101-122	AM-60-Z	K	A.	D13-133	E	41	G1						62-536, 62-546	
2nd.	108-119	16-5714		46				114-122	ST-736		8E10		Tone	101-123				D13-130	A-								62-550	
1st.	108-77B	16-5712		46				114-76	ST-108		6A1		Vol	101-78	M-64-Z		A.	D13-130		41	G1						62-551	
2nd.	108-78B	1-5712											Vol	101-79	M-58			D1-1-1		41	G1						62-555	
3rd.	108-79B	16-5714						12A277					Vol	36X235	M-6-	A.	D1-1-12										62-556	
1st.	9A815			456				12A28					Tone	40X223	M-1-			D13-137									62-557	
2nd.	9A816	16-5714						114-6 A	ST-168		6E10	F4	Vol	101-95	M-63-Z		A.	D13-137									62-558	
1st.	108-105F	16-5712		46				114-130	ST-194		SE45		Tone	101-95	M-63-Z			D14-120	E	1	G1						62-559	
2nd.	108-106D	16-5714											Vol	101-138	AM-40-S			D1-1-3	A.									62-560
1st.	108-123	16-5712		6				114-110	ST-168		6E10	F4	Vol	101-100	M-3-			D1-1-7		41	G1						62-561	
1st.	108-111B	1-5712		4				114-157	ST-113		4A1		Vol	101-164	AM-6-			D1-1-3									62-562	
2nd.	108-112B	1-5714						114-92	ST-108		6A1		Vol	101-88	M-3-Z			D13-137		45	G1						62-563	
1st.	108-140B	16-6660		465				114-9	ST-115		A21		Vol	101-89	M-3-Z			W-3									62-564	
2nd.	108-141	16-6660						114-115	ST-109		6A21		Vol	101-111	AM-64-			D13-130		4	G1						62-565	
1st.	108-111	16-5712		465									Vol	101-112	M-4-			W-										62-566
2nd.	108-112	16-5714						114-88					Vol	101-77	M-63-			D1-1										62-567
1st.	108-116	16-5712		465				114-7	ST-108		6A1		Vol	101-140	AM-63-Z			SS-3	A2									62-568
2nd.	108-117	16-5712						114-117	ST-108		6A1		Tilt	101-79	S8-6			D13-137		42	G1						62-569	
1st.	108-128B	16-5712		465				114-14	ST-108		A1		Vol	101-140	AM-63-Z			D13-137		42	G1						62-570	
2nd.	108-130B	16-3736	D4					114-1	ST-18				Vol	101-126	A*-63-Z			KSS-3	A.									62-571
1st.	108-129	16-5712		465									Vol	101-150	A*-63-Z			KSS-3	*									62-572
2nd.	108-129	16-3736	D4										Vol	101-150	A*-63-Z			D1-13	E	42								62-573
1st.	108-112	16-5714		4									Vol	101-77	M-63-			D13-137		42								62-574
2nd.	108-113C	16-5712											Vol	101-140	AM-60-Z			KSS-3	A2									62-575
1st.	108-112	16-5714		455									Vol	101-79	S8-6			D13-137		42								62-576
2nd.	108-113B	16-5712											Vol	101-140	AM-63-Z			KSS-3	A.									62-577
1st.	108-129B	16-5712		465									Vcl	101-77	M-63-Z			D13-137		41	G1						62-578	
2nd.	108-130B	16-3736	D4										Vcl	101-77	M-63-Z			D13-137		41	G1						62-579	
1st.	108-129	16-5712		465									Vcl	101-160	AM-64-Z			KSS-3	A.									62-580
2nd.	108-133	16-5714		46									Vcl	101-160	AM-64-Z			D13-130	E	42								62-581
1st.	108-135	1-5712											Vcl	101-49	M-63-Z			A.	D13-137		41	G1						62-582
3rd.	108-134	1-5714											Vcl	101-49	M-63-Z			A.	D13-137		41	G1						62-583
1st.	108-75A	1-5712		465									Vcl	101-49	M-63-Z			D13-137		41	G1						62-584	
2nd.	108-76A	1-5714		46									Vcl	101-168	AM-63-Z			KSS-3	A.									62-585
1st.	108-82D	16-5712		46									Vcl	101-168	AM-63-Z			D13-137		41	G1						62-586	
2nd.	108-83D	16-5714		4									Vcl	101-77	M-63-Z			A.	D13-137		41	G1						62-587
1st.	108-82B	16-5714		456																								

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	No. 1	Cornell-Dubilier	No.	Solar	No.	Sprague	No.	Use	Mfr.	Stancor	No.	Thordarson	No.	Merit	No.	Eveready Part No.	No.	Burgess Part No.	
			Part No.	Part No.	6	Part No.	note	Part No.	note	Part No.	note	Part No.	Part No.	Part No.	note	Part No.	note	Part No.	note	"A"	"B"	"A"	"B"
AIRLINE—Continued	7	6A8, 6K7, 6Q7, 6C5, 6F6, 5Y3...	103-6	GL450-8		KR508		DM-8-450		PLS-8		Pwr Out	104-87	P-6012		T22R04		P-2952					
62-627			103-14	GL450-16		KR516A		D-16-450		PLS-16		On Spkr.	A-3852		T22S56		A-2904						
62-638	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G...	5-5 Mfd	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	A-3878	P-6011		T22R02		P-2951					
62-648	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G...	5-5 Mfd	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	A-3878	P-6011		T22S47		A-2931					
62-650	6	6D8G, 6S7G, 6T7G, 6G6G, 6AB5...	45X243	PRV250-16-16	A1	EZ16D355		BR102A		M-10-25		LM-2016		T20C52		C-1706		T22S47		A-2931		C-2975	
62-651, 62-652	6	6K8G, 6K7, 6T7G, 6G6G, 6AE6G, 6AF6G, (40)	119-59C	PRSA150-20-30		BRD3315		M-2X30-150		TA230		Pwr Out	A-3878		T22S47		A-2932						
62-653	6	6SK7, 6SA7, 6H6, 6V6G...	40-20-20		A5			A5		A5		Pwr Out	104-137E		T22S47		A-2932						
62-654, 62-655	6	1C7G, *1D5G, 1H4G, 1G5G...	119-52	PRS25-25		BR252A		M-25-25		TA-25		Out	105-69	A-3831		T22S47		A-2932		X-125 *487		20F2	*2308
62-656	6	1A7G, *1N5G, 1G4G, 1H5G, 1Q5G...										Out	105-69	A-3831		T22S47		A-2932		740 *487		20F	*2308
62-700	7	6A8G, 6J5G, 6U7G, 6Q7G, 6K6G, 5Y3G, 6U5...	44X37	GL450-20		KR520		ZD-20-500		PLS-20		Pwr Out	A-3856	P-6289		T22R00		P-2949					
62-701 (Early)	7	6A8G, 6K7, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5, (44)	119-63	PRSB450-8-16		KR540		D-40-450		PLS-40		Pwr Out	104-124C	P-6012		T22S47		A-2904					
62-701 (Late)	7	6K8G, 6A7, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5, (44)	119-69	PRS450-16		EZ588		BR1645		LM-816		Pwr Out	A-3852	T22R04		T22S47		A-2904					
62-702, 62-703	7	6K8G, 6K7, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5, (44)	119-69	PRS450-16		BR1645		M-16-450		UT-16		Pwr Cut	A-3852	T22R04		T22S47		A-2904					
62-704 to 62-712	7	6A7, 76, 6D6, 75, 41, 80, 6U5, (51)	44X41	GL450-20		KR520		ZD-20-500		UT-16		Pwr Cut	A-3852	P-6119		T22R02		P-2951					
62-750, 62-751	7	6K8G, 6K7, 6T7G, 6G6G, 6ZY5G, 6AE6G, 6AF6G, (40)	119-79B	PRSA200-16-16 & PRS25-25		EZ16D355		BRD4215		M-2X40-150		PLS-20	A-3856	Z-40-500		PLS-40		53X195		P-6120		T22R04	
62-752, 62-753	7	6A8G, 6J5G, 6U7G, 6V7G, 25AG6, 6N7G, (51)	45X241	PRSA150-20-40								Out	105-69C	A-3831		T22S47		A-2932					
62-900	9	6K7, 6K8, *6J5, 6Q7G, 6K6G, 5Y3G, 6U5, (44)	119-60	PRSA450-8-16	A1	EDL8145		A1		LM-816		Pwr Out	104-114C	A-3831		T22S47		A-2932					
62-901A, B, 62-902, 62-905, 62-910	9	6A7, 76, 6D6, 75, 41, 80, 6U5, (51)	119-61	PRS350-12		BR1235		M-12-450		UT-123		On Spkr.	105-69C	A-4713		T20D75		A-2920					
62-905	9	6A7, 76, 6D6, 75, 41, 80, 6U5, (51)	44X41	GL450-20		KR520		ZD-20-500		PLS-20		Pwr Out	53X193	P-6120		T22R04		A-2904					
62-929	9	6K7, 6A8, *6Q7, 6J5, 6F6, 5Y3, 6U5...	119-55	PRSA450-16-16		BR4245		Z-40-500		PLS-40		Pwr Out	104-124C	A-3852		T22S47		A-2904					
62-1100	11	*6U7, *6J7, *6J5, 6H6, *6F6G, 5Y3G, 6U5, (51)	44X42	PRS250-4		BR4245		M-4-450		UT-42		Pwr Cut	A-3852	T22R04		T22S47		A-2904					
62-1150	5	1D7G, *1D5G, 1H4G, 1G5G...	119-35	PRS25-25		BR102A		M-10-25		TA-10		Pwr Cut	A-3852	T22R04		T22S47		A-2904					
62-1551	5	1A7G, 1N5G, 1H5G, 1A5G...	119-35	PRS25-25		EZ5116		2M-16-450		UT-1616		Pwr Out	104-136	A-3852		T22S56		A-2904					
62-1558	5	1A7G, *1N5G, 1H5G, 1C5G...	119-52	PRS25-25		EZ5116		ZD-16-500		UT-1616		Pwr Out	105-54	P-6013		T22R04		P-2952					
62-1654, 62-1655	6	1C7G, *1D5G, 1H4G, 1G5G...	119-52	PRS25-25		KR516A		Z-40-500		LS-16		Pwr Out	53X174	A-3852		T22S56		A-2904					
62-1656	6	1A7G, *1N5G, 1G4G, 1H5G, 1Q5G...	119-52	PRS25-25		KR540		M-40-500		LS-40		Pwr Out	51X61	A-3852		T22S56		A-2904					
62-2550	5	1D7G, *1D5G, 1H4G, 1G5G...	119-35	PRS25-25		BR502		M-50-25		TA-50		Out	On Spkr.	A-3831		T22S47		A-2932					
62-2551	5	1A7G, 1N5G, 1H5G, 1A5G...	119-35	PRS25-25		BR252A		M-25-25		TA-25		Out	105-78										
62-2555	5	1A7G, *1N5G, 1H5G, 1C5G...	45X250	PRS250-8		BR825		M-8-250		UT-82		Out	105-78	A-3831		T22S47		A-2932		741 *482		8F ...*B30	
62-2557	5	1A7G, *1N5G, 1H5G, 1C5G...	45X250	PRS250-8		BR825		M-8-250		UT-82		Out	105-78	A-3831		T22S47		A-2932		741 *482		8F ...*B30	
62-2558	5	1A7G, *1N5G, 1H5G, 1C5G...	119-52	PRS25-25		BR252A		M-25-25		TA-25		Out	105-69	A-3831		T22S47		A-2932		740 *487		20F ...*2308	
62-2654, 62-2655	6	1C7G, *1D5G, 1H4G, 1G5G...	119-52	PRS25-25		BR252A		M-25-25		TA-25		Out	105-69	A-3831		T22S47		A-2932		X-125 *487		20F2 ...*2308	
62-2656	6	1A7G, *1N5G, 1G4G, 1H5G, 1Q5G...	119-52	PRS25-25		BR252A		M-25-25		TA-25		Out	105-69	A-3831		T22S47		A-2932		740 *487		20F ...*2308	
62-2663, 62-2668	6	1A7GT, *1N5GT, 1H5GT, 3Q5GT, 3S5GT	40-20-10	AF844D		UP42215		DY-402010-150		EL224		Out	...†...	A-3856		T22S47		A-2900		746 *482		*63 ...*B30	
04BR-389T	5	6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G, (44)	BE119-103									Pwr Out	BE104-193	P-6119		T22R02		P-2951					
												Pwr Out	BE105-75	A-3850		T22S47		A-2900					

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photocard Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	108-105	16-5712		465				114-66	ST-736		6E10		Vol Tone Vol	101-74 101-75 101-76	M-63-Z M-64-Z M-63-Z	A		D13-137		41	G1				Continued—	AIRLINE 62-627	
2nd.	108-106	16-5714						†		F2		F2		Vol Tone Vol	†		A	D13-130		41	G1					62-636	
1st.	†	16-5712	465					†		F2		F2		Vol Tone Vol	†	M-63-Z	A	D13-137		41	G1					62-646	
2nd.	†	16-5714						†		F1		F1		Vol Tone Vol	†		A	D13-137		41	G1					62-650	
1st.	†	16-5712	465					†						36X249 40X231	AM-67-Z	KSS-3	A	D13-140	E	41	19A28	5411	H1				62-650
2nd.	†	16-5714	456					†																			
1st.	108-111F	16-5712		455				114-143	ST-108		6A1		Vol Tone Vol	101-153 101-154 101-155	AM-63-Z	KSS-3	A2	D13-137	C3	42	G9	126-8	5436	H1			62-651, 62-652
2nd.	108-1060	16-5714		456				114-139	ST-115		8A21															62-653	
1st.	†	16-5712						†		F8		6EV6															
2nd.	†	16-5714																									
3rd.	†	16-5712	456																								
1st.	108-128	16-5712	465					114-115	ST-109		6A21		Vol Tone Vol	101-152 101-151	AM-64-Z	KSS-3	A2	D13-130	E	42							62-654, 62-655
2nd.	108-127	16-5712						114-146	ST-115		8A21																
3rd.	108-79E	16-5714						114-115	ST-109		6A21		Vol Tone Vol	101-152	AM-64-Z	KSS-3	A2	D13-130	E	42							62-656
1st.	108-123	16-5712	465					114-148	ST-115		8A21		Vol Tone Vol	101-151	AM-64-Z	KSS-3	A2	D13-137	E	42							
2nd.	108-127	16-5712																									
3rd.	108-134B	16-5714																									
1st.	†	16-5714	456																								
2nd.	†	16-5714																									
3rd.	†	16-5712	456																								
1st.	108-105	16-5712	465					6 Inch.	ST-168		6E10	F4	Vol Tone Vol	36X249	AM-67-Z	KSS-3	A	D13-140	E	41							62-700
2nd.	108-105B	16-5714						8 Inch.	ST-177		8E10	F4	Vol Tone Vol	40X225	AM-64-Z	KSS-3	A	S13-128	E	41							62-701 (Early)
1st.	108-122	16-5712	465					114-45					Vol Tone Vol	101-124	AM-63-Z	KSS-3	A	D13-137	E	41							62-701 (Late)
2nd.	108-106J	16-5714						114-45	ST-737		8E18		Vol Tone Vol	101-125	AM-64-Z	KSS-3	A	D13-137	E	41							62-702, 62-703
1st.	108-122	16-5712	465					114-15	ST-168		6E18		Vol Tone Vol	101-137	AM-63-Z	KSS-3	A	D13-137	E	41							62-704 to 62-712
2nd.	108-106J	16-5714						12A305	ST-168		6E10	F4	Vol Tone Vol	36X255	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	9A1046	16-5712	456					12A304	ST-177		8E10	F4	Vol Tone Vol	40X238	AM-67-Z	KSS-3	A	D13-140	E	41							
2nd.	9A1047	16-5714						12A320	ST-175		10E15																
1st.	108-111F	16-5712	465					114-143	ST-108		6A1		Vol Tone Vol	101-153	AM-63-Z	KSS-3	A2	D13-137	C3	42	G9	126-6	5307	H1		62-750, 62-751	
2nd.	108-1060	16-5714						114-139	ST-115		8A21		Vol Tone Vol	101-154	AM-64-Z	KSS-3	A	D13-140	E	41							62-752, 62-753
1st.	†	16-5712	456					5 Inch.	ST-108		F7	F7	Vol Tone Vol	36X252	AM-67-Z	KSS-3	A	S13-128									
2nd.	†	16-5714						8 Inch.	ST-115		8A21	F7	Vol Tone Vol	40X229	AM-64-Z	KSS-3	A									62-900	
3rd.	108-118		465					114-121	ST-168		6E10		Vol Tone Vol	101-122	AM-60-Z	KSS-3	A	D13-133	E	41							62-901A, B, 62-902, 62-905, 62-910
1st.	108-119	16-5714		456	B-1		B-1	12A31		10E10		Vol Tone Vol	101-123	AM-64-Z	KSS-3	A	D19-139X	E	41								
2nd.	9A1026	16-5712																									
1st.	9A1027	16-5714																									
1st.	108-118		465	†				114-102	ST-736		8E10		Vol Tone Vol	114-114	AM-63-Z	KSS-3	A	D18-137X	E	41							62-929
2nd.	108-119	16-5714		456	†			114-99	12A307		10E10	12E15	Vol Tone Vol	35X245	AT-114	KSS-3	A	D13-130	E	41							62-1100
1st.	9A933	9A934	16-5714																								
2nd.	9A934	16-5714																									
1st.	108-111C	16-5712	465					114-76	ST-108		6A1		Vol Fil Vol	101-140	AM-63-Z	KSS-3	A2	D13-137	E	42							62-1550
2nd.	108-112	16-5714						114-137	ST-108		6A1		Vol Fil Vol	101-140	58-6	KSS-3	A2	D13-137	E	42							62-1551
1st.	108-111C	16-5712	465					114-115	ST-109		6A21		Vol Tone Vol	101-160	AM-64-Z	KSS-3	A2	D13-130	E	42							62-1558
2nd.	108-112	16-5714						114-135																			
1st.	108-133	16-5712	465					114-134	16-5714		6A21		Vol Tone Vol	101-152	AM-64-Z	KSS-3	A2	D13-130	E	42							62-1654, 62-1655
2nd.	108-128	16-5712						108-128	16-5712		6A21		Vol Tone Vol	101-151	AM-64-Z	KSS-3	A2	D13-130	E	42							62-1656
3rd.	108-127	16-5712	465					108-127	16-5712		6A21		Vol Tone Vol	101-151	AM-64-Z	KSS-3	A2	D13-130	E	42							62-2550
1st.	108-134B	16-5714						108-134B	16-5714		6A1		Vol Fil Vol	101-140	AM-63-Z	KSS-3	A2	D13-137	E	42							62-2551
2nd.	108-111C	16-5712	465					108-111C	16-5712		6A1		Vol Fil Vol	101-140	58-6	KSS-3	A2	D13-137	E	42							62-2555
1st.	108-111C	16-5712	465					108-111C	16-5712		6A1		Vol Tone Vol	101-151	AM-64-Z	KSS-3	A2	D13-133	E	42							62-2557
2nd.	108-112	16-5714						108-135	16-5712		6A21		Vol Tone Vol	101-151	AM-63-Z	KSS-3	A2	D13-130	E	42							62-2558
3rd.	108-135	16-5712	465					108-135	16-5712		6A21		Vol Tone Vol	101-151	AM-64-Z	KSS-3	A2	D13-130	E	42							62-2654, 62-2655
1st.	108-134	16-5714						108-134	16-5714		6A21		Vol Tone Vol	101-152	AM-64-Z	KSS-3	A2	D13-130	E	42							62-2656
2nd.	108-128	16-5712	465					108-128	16-5712		6A21		Vol Tone Vol	101-151	AM-64-Z	KSS-3	A2	D13-130	E	42							62-2656
3rd.	108-127	16-5712						108-127	16-5712		6A21		Vol Tone Vol	101-151	AM-64-Z	KSS-3	A2	D13-130	E	42							62-2656
1st.	108-127	16-5714	456					108-127	16-5714		6A1		Vol Tone Vol	101-151	AM-64-Z	KSS-3	A2	D13-137	E	42							62-2663, 62-2668
2nd.	108-127	16-5714						108-127	16-5714		6A1		Vol Tone 														

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
		No.	Tubes	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
				Dial Light Type Listed in Parentheses	Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.	Part No.		"A"	"B"				
AIRLINE—Continued																										
04BR-397A.	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47).	119-011	AF844D		UP42215			DY-403020-150		EL-224				Out	105104B	A-3876	T22S45		A-2928							
04BR-511A, 04BR-512A.	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT.	BE11992	AF444D	A4	UP4215			DY-4020-150		EL-24				Out	BE105110	A-3876	T22S45		A-2928							
04BR-513A, 04BR-514A.	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47).	BE11992	AF444D	A4	UP4215			DY-4020-150		EL-24				Out	BE105104	A-3876	T22S45		A-2928							
04BR-515A, B.	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47).	BE11994	AF844D		UP42215			DY-403020-150		EL-224				Out	BE105108	A-3876	T22S45		A-2928							
04BR-566A.	5 1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT, (47).	BE119104			UP4CJ61									Out	On Spkr.	A-3857	T22S48		A-2937	744-482		F4P1	“A30”			
04BR-567A.	5 6SA7, 6SK7, 6SQ7, 6K6G, 6X5G, (51).	BE119105			UP2235C			DY-310		EL-326				Pwr	BE104131											
04BR-570A.	5 6DBG, 6STG, 6T7G, 6G6G, 6ZY5G,	BE119111								EL-422				Out	BE10567											
04BR-609A.	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47).	BE11994	AF844D		UP42215			DY-403020-150		EL-224				Out	BE104216											
04BR-615A.	6 6SA7, 6SK7, 6SJ7, 6SQ7, 6V6GT, 5Y3G, (44).	BE119114	AF444J4A		UP222245			DY-404		EL-442				Pwr	BE104225	P-6119	T22R02		P-2951							
04BR-620A.	6 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G, (44).	BE119115	PRS450-8	BR845		EZ5116			M-8-450		UT-8			Pwr	BE104228	P-6119	T22R02		P-2951							
04BR-675A, 04BR-676A.	6 6SA7, 6STG, 6T7G, 6G6G, 6ZY5G, (47).	BE119111	PRS450-16-16											Pwr	BE105113	A-3878	T22S47		A-2931							
04BR-678C.	6 6K7, 6A8GT, 6SK7, 6SQ7, 6J5GT, 6N7G, (51).	11998												Out	10589B											
04BR-679A.	6 6K7, 6A8GT, 6SQ7, 6V6GT, 6X5GT, (51).	119650	PRS450-16-16		EZ5116			DH-2X16-450SS		LM-1616				Pwr	104159B											
04BR-729.	7 6SA7, 6SK7, 6SQ7, 6J5GT, 6K6GT, 5Y3G, (44).	119108	PRS450-16-16		EZ5116			DH-2X16-450SS		LM-1616				Out	10561B	A-3878	T22S47		A-2931							
04BR-729A, 04BR-730A (Late)	7 6SA7, 6SK7, 6SQ7, 6J5GT, 6K6GT, 5Y3G, (44).	119108	PRS450-16-16		EZ5116			DH-2X16-450SS		LM-1616				Out	104-212	P-6119	T22R02		P-2951							
04BR-904A, 04BR-905A.	9 6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, 6U5, (44).	119109	PRS450-16-16		EZ5116			DH-2X16-450SS		LM-1616				Out	105-12	A-3830	T22S74		A-2905							
04BR-905A.	9 6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, 6U5, (44).	119109	PRS450-16-16		EZ5116			DH-2X16-450SS		LM-1616				Pwr	104212	P-6119	T22R02		P-2951							
04BR-1105A.	11 6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, 6U5, (44).	119112	AF862J4A	A3	UP43145C	A3	DY-403	M-16-450	A3	EL-424	A3	UT-16	A3	Out	105115	A-3830	T22S74		A-2905							
04BR-1106A.	11 6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, 6U5, (44).	11969	PRS450-16		BR1645									Pwr	104217	P-6013	T22R05		P-2953							
04JP-399D.	2 6S17.	45X287	PRS350-12	A1	BR1235	A1	M-10-350	DSB-403020	A1	UT-123	A1	Out	A-3879	T22S47		A-2932	746-482	2G3	“B30”							
04WG-2672.	6 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT.	45X283			EZ42215									Pwr	105115	A-3830	T22S74		A-2905							
04WG-464.	4 1A7GT, 1N5GT, 1H5GT, 1A5GT.	4 Mfd.	PRS150-4		BR415		M-8-150		UT-41					Out	†	A-3857	T22S48		A-2937							
04WG-468.	4 1A7GT, 1N5GT, 1H5GT, 1A5GT.	4 Mfd.	PRS150-4		BR415		M-8-150		UT-41					Out	†	A-3857	T22S48		A-2937	742-482		4F	“A30”			
04WG-568.	5 1A7GT, 1N5GT, 1H5GT, 3Q5GT.	20-30 @ 100 V	PRS150-20-40		BRD3315		M-2X30-150		TA-230					Out	†	A-3879	T22S47		A-2932							
04WG-569.	5 1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT.	40-40-200												Out	†	A-3857	T22S48		A-2937	744-482		F4P1	“A30”			
04WG-610, 04WG- 611.	5 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT.	20-20-20	PRS150-20		EZ2215C		DSB-3X20-150	TA-220	A1	Out	†	A-3876	T22S45		A-2928											
04WG-612.	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT.	20-20-20-20	PRS150-20-20		EZ42215C		DSB-2X20-150	UT-201		Out	†	A-3876	T22S45		A-2928											
04WG-614.	6 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G.	20-40 Mfd.												Pwr	†	A-6120	T22R04		P-2952							
04WG-619, 04WG- 621, 04WG-621NI.	6 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G.	20-40 Mfd.												Out	†	A-3850	T22S47		A-2900							
04WG-622A, 04WG- 623A.	6 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G, (44).	45X277	PRS250-8		BR825		M-8-250	DSB-403020	UT-82					Pwr	†	A-6120	T22R04		P-2952							
04WG-668.	6 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT, (51).	20-40-20			EZ42215		DSB-403020							Out	†	A-3850	T22S47		A-2900							
04WG-672.	6 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT.	10-40-20												Out	†	A-3879	T22S47		A-2932	746-482		2G3	“B30”			
04WG-672A.	6 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT, (51).	45X284			EZ42215		DSB-403020							Out	On Spkr.	A-3879	T22S47		A-2932	746-482		2G3	“B30”			
04WG-673, 04WG- 674.	6 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT.	10-40-20			EZ42215		DSB-403020							Out	†	A-3879	T22S47		A-2932	746-482		2G3	“B30”			
04WG-725.	7 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G, (51).	40-20-20	AF88J4A		UP4445C		DY-315		EL-330					Pwr	†	P-6119	T22R02		P-2951							
04WG-727.	7 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G.	40-20-20	AF88J4A		UP4445C		DY-315		EL-330					Out	†	A-3852	T22S56		A-2904							
04WG-728.	7 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G.	40-20-20	AF88J4A		UP4445C		DY-315		EL-330					Out	†	A-3852	T22S56		A-2904							
04WG-731.	7 12SA7, 12SK7, 12SQ7, 12SQ7, 35L6GT, 35Z5GT.	80-40-20-20 @ 150-150-150- 25V												Pwr	†	P-6119	T22R02		P-2951							
04WG-732.	7 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G.	40-20-20	AF88J4A		UP4445C		DY-315		EL-330					Pwr	†	P-6119	T22R02		P-2951							
04WG-803, 04WG- 803B.	8 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G, 6AD5G.	40-20-20	AF88J4A		UP4445C		DY-315		EL-330					Out	†	P-6120	T22R04		P-2952							
														Pwr	†	A-3830	T22S74		A-2905							

Section D IF COILS					Section E PHONO CARTRIGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photofac Set No.	MFR. & MOEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	108-169-H	16-5712		41				114-215	ST-108		6A1		Vol	101-208	AM-63-Z	KSS-3	A	D13-137	E	41					Continued	AIRLINE 04BR-397A	
2nd.	108-170-B	16-5714		41				BE-114-199	ST-113		"		Tone	101-194	AM-64-Z	KSS-3		D13-130	E								04BR-511A 04BR-512A
1st.	BE-108-157-H	16-6658		41				BE-114-201	ST-105		"		Vol	BE-101-198	AM-63-Z	KSS-3	A	D13-137	E	41							04BR-513A 04BR-514A
2nd.	BE-108-157-I	16-6660		4				BE-114-198	ST-105		5A1		Vol	BE-101-217	AM-60-Z	KSS-3	A	D13-133	E	41							04BR-515A, B
2nd.	BE-108-140-D	16-6660		4				BE-114-198	ST-105		5A1		Vol	BE-101-210	AM-63-Z	KSS-3	A2	D13-131	E	42							04BR-566A
1st.	BE-108-140-F	16-6658		465	BE-114-194	L-26-A		BE-114-198	ST-105		5A1		Vol	BE-101-210	AM-63-Z	KSS-3	A2	D13-133	E	41							04BR-567A
2nd.	BE-108-140-D	16-6660		465				BE-114-198	ST-105		5A1		Vol	BE-101-210	AM-63-Z	KSS-3	A2	D13-131	E	42							04BR-570A
1st.	BE-108-171-B	16-6658		465				BE-114-198	ST-105		5A1		Vol	BE-101-210	AM-63-Z	KSS-3	A2	D13-131	E	42							04BR-566A
2nd.	BE108172....	16-6660		465				BE114114	ST-105	F8	5EV6		Vol	BE101110	AM-63-Z	KSS-3	A	D1-17	E	41	12	0	-1				04BR-567A
1st.	BE108121 B			465				BE114205	ST-105		5A1		Vol	BE101225	AM-63-Z	KSS-3	A	D1-17	E	42	1	-	-00	H1			04BR-570A
2nd.	BE108120 D	16-71		455				114177	ST-105		5A1		Vol	BE101195	AM-63-Z	KSS-3	A	D1-17	E	41							04BR-609A
1st.	BE108140 G	16-6658		465				114177	ST-105		5A1		Tone	BE101194	AM-64-Z	KSS-3		D13-130									04BR-615A
2nd.	BE108145	16-6660		465				BE1141	ST-166		6E10		Vol	BE101142	AM-63-Z	KSS-3	A	D13-137									04BR-620A
1st.	BE108169 D	16-5712		455	G-12114	L-26-(or) B-		BE114216	ST-736		8E10		Vol	BE101143	AM-64-Z	KSS-3		D13-137									04BR-620A
2nd.	BE108169 T	16-5714		455	J-22125	L-26-A		114210	ST-108		6A1		Vol	BE101231	AM-63-Z	KSS-3	A	D13-137									04BR-620A
1st.	BE108169 E	16-5712		455	J-22125	L-26-A		114211	ST-115	8A21			Vol	101228	AM-66-Z	KSS-3	A	D1-17	E	42							04BR-620A
2nd.	BE108169 U	16-5714		455	J-22125	L-26-A		114155	ST-115	5EV6			Vol	101161	AM-66-Z	KSS-3		D13-133	C3	41	126-7						04BR-620A
1st.	108183	16-5712		455				114459	ST-10	F8	5EV6		Vol	101141	AM-63-Z	KSS-3		D1-17									04BR-620A
2nd.	108180	16-5714		455				114226					Vol	101224	AT--	KSS-3		D18-133X	E								04BR-729
1st.	108179	16-5714		455				114203					Tone	101223	AM--	KSS-3		D18-133X	E								04BR-729A
2nd.	108179	16-5714		455				114204					Vol	101224	AT-88	KSS-3		D18-133X	E								04BR-730A (Late)
1st.	108177	16-5712	*	5				114205					Tone	101223	AM-63-Z	KSS-3		D18-133X	E								04BR-903A
2nd.	108176	16-5714		55				114206					Vol	101221	10E50	AM-63-Z		D18-133X	E								04BR-907A
1st.	108177	16-5712	*	55	1 4' 1			114208					Tone	101226	10E50	AM-63-Z		D18-133X	E								04BR-904A
2nd.	108177	16-5714	*	55	1 4' 1			114207					Vol	101221	10E50	AM-63-Z		D18-133X	E								04BR-906A
1st.	108181			455				114207					Vol	101229	AM-60-Z	KSS-3		D1-13	E								04BR-1105A
2nd.	108182			455				114209					Vol	101229	AM-60-Z	KSS-3		D1-13	E								04BR-1105B
1st.	108181			455				114209					Vol	101229	AM-60-Z	KSS-3		D1-13	E								04BR-1106A
2nd.	108181			455				114209					Vol	101229	AM-60-Z	KSS-3		D1-13	E								04BR-1106B
3rd.	108182			455				114209					Vol	101229	AM-60-Z	KSS-3		D1-13	E								04BR-1106C
1st.		16-6658		456				Inch.	ST-1 8		A1		Vol	36X292	AM-62-Z	KSS-3	*	D13-33	E	42							04JP-399D
2nd.		16-6660		456									Vol	36X286	AM-60-Z	KSS-3	A2	D13-33	E	42							04WG-2672
1st.		16-6658		456									Vol	36X287	AM-60-Z	KSS-3	A	D13-133	E	42							04WG-464
2nd.		16-6660		456									Vol	36X281	AM-60-Z	KSS-3	A2	D13-133	E	42							04WG-468
1st.		16-6658		456									Vol	36X282	AM-60-Z	KSS-3	A2	D13-133	E	42							04WG-568
2nd.		16-6660		456									Tone	40X249	AM-67-Z	KSS-3	A2	D13-140	E	42							04WG-569
1st.		16-6658		456									Vol	36X284	AM-60-Z	KSS-3	A2	D13-133	E	42							04WG-569B
2nd.		16-6660		456									Vol	36X24	AM-60-Z	KSS-3	A	D13-133	E	42							04WG-569B
1st.	9A1279	16-6658		456				12A35	ST-105		5A1		Vol	36X24	AM-60-Z	KSS-3	A	D13-133	E	42							04WG-569B
2nd.	9A1280	16-6660		456				114209	ST-1		*		Vol	36X247	AM-60-Z	KSS-3	*	D13-133	E	41							04WG-510
1st.	16-6658			456				114209	ST-1		*		Vol	36X248	AM-60-Z	KSS-3	*	D13-133	E	41							04WG-611
2nd.	16-6660			456				114209	ST-1		*		Vol	36X248	AM-60-Z	KSS-3	*	D13-132	E	41							04WG-612
1st.	16-6658			456				114209	ST-1		*		Vol	36X248	AM-60-Z	KSS-3	*	D13-133	E	41							04WG-614
2nd.	16-6660			456				114209	ST-1		*		Vol	36X248	AM-60-Z	KSS-3	*	D13-133	E	41							04WG-618
1st.	16-6658			456				114209	ST-1		*		Vol	36X248	AM-60-Z	KSS-3	*	D13-133	E	41							04WG-619, 04WG-621-04WG-621N
2nd.	16-6660			456				114209	ST-1		*		Vol	36X248	AM-60-Z	KSS-3	*	D13-133	E	41							04WG-622A
1st.	16-6658			456				12A354	ST-168		SE10		Tone	40X248	AM-67-Z	KSS-3	*	D13-133	E	41							04WG-623A
2nd.	16-6660			456				12A354	ST-168		SE10		Vol	36X280	AM-60-Z	KSS-3	*	D13-133	E	41							04WG-663, 04WG-568
1st.	16-6658			456				12A354	ST-168		SE10		Tone	40X248	AM-67-Z	KSS-3	*	D13-133	E	41							04WG-572
2nd.	16-6660			456				12A358	ST-108		-1		Vol	36X286	AM-60-Z	KSS-3	*	D13-133	E	42							04WG-622A
1st.	16-6658			456				12A358	ST-108		-1		Vol	36X286	AM-60-Z	KSS-3	*	D13-133	E	42							04WG-622A
2nd.	16-6660			456				12A358	ST-108		-1		Vol	36X286	AM-60-Z	KSS-3	*	D13-133	E	42							04WG-622A
1st.	16-6658			456				12A358	ST-108		6A1		Vol	36X282	AM-60-Z	KSS-3	A2	D13-133	E	42							04WG-573
2nd.	16-6660			456				12A358	ST-108		8A21		Tone	40X252	AM-67-Z	KSS-3	*	D13-140	E	41							04WG-574
1st.	16-6658			456				12A358	ST-108		10A31		Vol	35X277	AM-60-Z	KSS-3	*	D13-1									

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES										
			No.	Type	Mfr. Part No.	Aerovox Part No.	No. t	Cornell- Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note				
																						"A"	"B"	"A"	"B"				
AIRLINE—Continued			8	6SK7, 6SA7, 6SQ7, 6V6G, 5Y3G, 6U5, (51)	40 Mfd.	GL450-40		KR540	D-40-450	PLS-40	Pwr Out	†	P-6012	T22R04	P-2952														
04WG-804			11	6DS, 6C6, 6J5GT, 76, 841, 80, 6U5	20 Mfd.	GL450-20		KR520	D-20-450	PLS-20	Pwr Out	†	A-3830	T22S58	A-2930														
04WG-1108A			44X39	44X40	44X40	GL450-20		KR520	ZD-20-500	PLS-20	Pwr Out	†	P-6012	T22R04	P-2952														
14BR440A			5	6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G, 35Z5GT	45X239	PRS25-10		BR102A	Z-40-500	PLS-40	Pwr Out	†	A-2312	T22S88	A-2901														
14BR474			4	1A7GT, 1NSGT, 1H5GT, 3Q5GT	119-103				M-10-25	TA-10			104-193B 105-75C 105-91B	P-6119	T22R02	P-2951													
14BR474			4	1A7GT, 1NSGT, 1H5GT, 3Q5GT	119-117B	PRS150-12		BR1215	M-10-150	UT-121			105-128	A-3876	T22S45	A-2928													
14BR521A, 14BR522A			5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	119-92	AF444D	A4	UP4215	DY-4020-150	EL-24	Out	105-128	A-3876	T22S45	A-2928														
14BR523A			5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	119-94	AF844D		UP42215	DY-403020-150	EL-224	Out	†	A-3876	T22S45	A-2928														
14BR525A, 14BR526A			5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	119-95	AF444D	A4	UP4215	DY-4020-150	EL-24	Out	†	A-3876	T22S45	A-2928														
14BR530A, 14BR531A			5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	119-93	AF1010D		UP515	DY-2X50-150	EL-25	Out	105-108B	A-3876	T22S45	A-2928														
14BR573A			5	1A7GT, 1NSGT, 1H5GT, 1A5GT, 35Z5GT	119-126	AF444D	A4	UP4215	DY-4020-150	EL-24	Out	†	A-3857	T22S48	A-2937	A & B Pack	5V & 90V												
14BR574A			5	1A7GT, 1NSGT, 1H5GT, 3Q5GT	119-130	PRS150-12		BR1215	M-10-150	UT-121	Out	105-119B	A-3329	T22S47	A-2938	62-5033													
14BR613A			7	6SA7, 6SK7, 6B8, 25L6GT, 25Z6GT	119-121	AF1010D		UP515	DY-2X50-150	EL-25	Out	105-126	A-5528	T22S87	A-2901														
14BR629A			5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	119-94	AF844D		UP42215	DY-403020-150	EL-224	Out	105-136	A-3876	T22S45	A-2928														
14BR681A			6	6SK7, 6SA7, 6K6GT, 6X5GT, (51), (51)	119-120	PRS25-10		BR102A	M-10-25	TA-10	Pwr	104-159C	A-3878	T22S47	A-2931														
14BR682A			6	6SK7, 6SA7, 6SQ7, 6J5GT, 6N7, (51)	119-118			UP2245C	DY-312	EL-322	Pwr	105-125	A-3878	T22S47	A-2931														
14BR684A			6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	119-126						Out	†	A-3879	T22S47	A-2932	A & B Pack	9V & 90V												
14BR685A, 14BR- 687A			6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT, (49)	119-131	PRS25-25		BR202A	M-25-25	TA-25	Out	105-119B	A-3329	T22S47	A-2938	A & B Pack	9V & 90V												
14BR688A, 14BR- 689A			6	6SA7, 6S7G, 6T7G, 6G6G, 6ZV5G, (247)	119-111					EL-422	Pwr	104215	105114	A-3879	T22S47	A-2932													
14BR695			6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	119-94	AF844D		UP42215	DY-403020-150	EL-224	Out	105-104C	A-3876	T22S45	A-2928														
14BR734A, 14BR- 735A			7	12SA7, 12J5GT, 12SK7, 6T7G, 12SQ7, 35L6GT, 35Z5GT (47)	119-128	EZ42215		DSB-403020		Out	105-134	A-3876	T22S46	A-2928															
14BR734B, 14BR- 735B			7	12SA7, 12J5GT, 12SK7, 12SQ7, 6T7G, 35L6GT, 35Z5GT (47)	119-128	PRSA150-20-40		EZ42215	DSB-403020	TA-240	Out	105-134	A-3876	T22S46	A-2928														
14BR736A			7	12SA7, 12J5GT, 12SK7, 6T7G, 12SQ7, 35L6GT, 35Z5GT (47)	119-128	PRSA150-20-40		EZ42215	DSB-403020	TA-240	Out	†	A-3876	T22S46	A-2928														
14BR736B			7	12SA7, 12J5GT, 12SK7, 12SQ7, 6T7G, 35L6GT, 35Z5GT (47)	119-128	PRSA150-20-40		EZ42215	DSB-403020	TA-240	Out	105-134	A-3876	T22S46	A-2928														
14BR742A			7	6S7G, 6SA7, 6T7G, 6L5G, 5S5C, 024	119-127	PRSA150-20-40		BRD4215	M-2X30-150	TA-240	Pwr	104-265	105-101B	A-4723	T20D75	A-2920													
14BR911, 14BR- 912, 14BR-913			9	6SK7, 6SA7, 6SQ7, 6J5GT, 6Y3G, 6U5, (242)	119-109			UP15D145	DY-3X15-450	EL-360	Pwr	105-133	A-3857	T22S48	A-2937														
14BR1105A			11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, 6U5, (244)	119-124	AF444A			UP15D145	DY-3X15-450	EL-360	Dot	104-202B	P-6120	T22R04	P-2952													
14BR1112A			11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, 6U5, (244)	119-124	AF444A			UP15D145	DY-3X20-450	EL-360	Pwr	105-111C	A-3830	T22S74	A-2905													
14BR1113			11	6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, 6U5, (244)	119-112	AF86214A	A3	UP43145C	DY-403	A3	Pwr	105-54F	A-3852	T22S56	A-2904														
14BR1400A			14	6AB7, 6SA7, 6SK7, 26S07, 6J5GT, 6V6GT, 6SK7, 6S7J, 6H6, 5U4, 6U5, (244)	119-69	PRS450-16		BR1645	M-16-450	UT-16	Pwr	104-262	105-115	A-3830	T22S74	A-2905													
14BR1474			4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119-117B	PRS150-12		BR1215	M-10-150	UT-121	Out	105-91B	A-3872	T22S47	A-2932	Batt. Pack.	1.5V & 90.												
14JP-3990, 24BR-521B, 24BR- 522B			2	6SJ7	119-92	PRS350-12	A1	BR1235	M-10-350	A1	UT-123	A1	105-128	A-3876	T22S45	A-2928													
14WG-438			4	1R5, 1T4, 1S5, 3S4, 35Z5GT	119-93	AF444D	A4	UP4215	DY-4020-150	EL-24	Out	†	A-3329																
14WG-469			4	1A7GT, 1N5GT, 1H5GT, 1A5GT	119-93	PRS150-8		UP5515	M-2X30-150	TA-25	Out	†	A-3857	T22S48	A-2937	Batt. Pack.	1.5V, B-90V												
14WG-499			2	6SJ7	119-93	PRS350-12	A1	BR1235	M-10-350	A1	UT-123	A1	105-125	A-3876	T22S45	A-2928													
14WG-518, 14WG- 519			5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (51)	119-93	PRS150-20-40		BRD4215	M-2X30-150	TA-25	Out	51X92	A-3876	T22S46	A-2928														
14WG-538			5	1R5, 1T4, 1S5, 3S4, 35Z5GT	119-93	PRS25-25		BR202A	M-25-25	TA-25	Out	51X92	A-3876	T22S46	A-2928														
14WG-572			5	1A7GT, 1N5GT, 1H5GT, 1A5GT	119-93	PRS150-20		BR2015	M-20-150	UT-201	Out	51X94	A-3829																
14WG-572			5	1A7GT, 1N5GT, 1H5GT, 1A5GT	119-93	PRS250-8		BR25	M-8-150	UT-82	Out	†	A-3857	T22S48	A-2937	Batt. Pack.	62-5032 A-1½V B-58V												

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MOEL							
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clarostat	Shaft	Switch	Note	IRC	Shaft	Switch	Note	Mfr.	Radiant	Note	Photoact	Set No.	
1st.																												
2nd.																												
1st.		16-5712		456																								
2nd.																												
1st.		16-5712		456																								
2nd.																												
1st.		108-169 H		16-5712																								
2nd.		108-170 C		16-5712																								
1st.		108-202		16-5712																								
2nd.		108-153 B		16-5712																								
1st.		108-157-H		16-6558																								
2nd.		108-157-I		16-6660																								
1st.		†		16-6658																								
2nd.		16-6660		16-6658																								
1st.		16-6658		16-6658																								
2nd.		16-6660		16-6660																								
1st.		108-140 K		16-6660																								
2nd.		108-141 F		16-6660																								
1st.		†		16-6658																								
2nd.		†		16-6660																								
1st.		108-204		16-6558																								
2nd.		108-204B		16-6558																								
3rd.		108-188B		1-																								
1st.		108-189		4.3MC																								
2nd.		108-190		108-140 O	1--58																							
1st.		108-140 O	1--58	455	†	L 26			114-198		T-105		SA1		V I	101-247	AM-44-S	KSS-3	A	D11-123	E	41						
2nd.		108-145F	16-6660	455					114-234		ST-108		F8	6EV6	Vol	101-246	AM-63-Z	KSS-3	A	D13-137	E	41						
1st.		108-194	16-6558	455					114-232		T-108		F8		Vol	101-242				D13-133	C3	41	G9	1267	5307	H1		
2nd.		108-194	16-6660	5-																								
1st.		108-195	16-58																									
1st.		†	16-6658	455																								
2nd.		†	16-6658	455																								
1st.		108-204	16-6558	455					114-245		ST-108		6A1		Vol	101-242	AM-64-Z	KSS-3	A2	1-130	E	42						
2nd.		108-204B	16-6558	114-254					114-254		T-115		-A2		Vol	101-242												
3rd.		108-188B	16-6660																									
1st.		108-183	16-5712	455					114-210		T-108		A1		Vol	101-268	AM-63-Z	KSS-3	A2	D13-137	E	42						
2nd.		108-180	16-5714						114-211		ST-115		8421		Tone	101-269	AM-66-Z	KSS-3	A	D11-137								
1st.		108-169 F	16-5712	4.5					114-224		T-105		5A1		Tone	101-215	AM-53-Z	KSS-3	A	D13-137								
2nd.		108-130 F	16-5714																									
1st.		108-206	16-6558	1-					114-247		T-108		6A1		Vol	101-262	AM-63-Z	KSS-3	A	D13-137								
2nd.		108-206	16-6558	114-264					114-264		ST- -		6E		Tone	101-263	AM-60-Z	KSS-3	A	D13-137								
1st.		108-206	16-6558	455					114-271																			
2nd.		108-205	16-6658																									
1st.		†	16-6658	455																								
2nd.		†	16-6658	455																								
1st.		108-206	16-6558	455					114-262																			
2nd.		108205																										
1st.		108-207	16-6558	455																								
2nd.		108-208	16-6660																									
1st.		108-177	16-5712	455	†	LP-6			1142																			
2nd.		108-176	16-5714	455					114-261			1 : 0																
1st.		108-169J	16-5712	455					114-261																			
2nd.		108-130C	16-5714	455	BE 4426	L 40			114-261			10E 0																
1st.		108-169J	16-5712	455																								
2nd.		108-130C	16-5714	455																								
1st.		108-181	16-5714	45					114-20																			
2nd.		108-155B																										
3rd.		108-182																										
1st.		108-177D		4	4				114237			F2		F2		Vol	101249	M-63-Z	KSS-3									
2nd.		108176B	15-5714	4																								
1st.		108-197																										
2nd.		108-198																										
1st.		108-202	16-5712	455																								
2nd.		108-153 B	16-5714	455																								
1st.		108157 H	16-6558	455																								
2nd.		108171	16-6660	455					114-199			4A1				Vol	36X295	AM-63-Z	KSS-3									
1st.		108171	16-6668	455																								
2nd.		108-1669							4 Inch.			4A1				Vol	101255	AM-63-Z	KSS-3									
1st.		108-1669	16-6558	455					5 Inch.			ST-0		A1		Vol	36X305	AM-60-Z	KSS-3	A2	D13-137	E	42					
2nd.		108-1669	16-6660	455					L 40							Vol	36X302	AM-60-Z	KSS-3									
1st.	9A1384	16-6558	456						12A38			ST-113		4A1		V	X	AM-63-Z	KSS-3		D13-137	E						
2nd.	9A1385	16-6560	456						12A40					F2		F2												
1st.	9A1413	16-6558	456	6					12A38																			

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Type Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
AIRLINE—Continued	14WG-610B, 14WG-611B	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT	45X282, 45X275	PRS150-20		BR2015, EZ2215C		M-20-150, DSB-302		UT-20I		Out	51X78	A-3876		T22S45	A-2928							
14WG-624A, 14WG-625A, 14WG-628A	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (51)	45X282, 45X301	PRS150-20		EZ2215C, BR2015		DSB-302, M-20-150		UT-20I		Out	51X91	A-3876		T22S45	A-2928								
14WG-672	6 1A7GT, 2IN5GT, 1H5GT, 3Q5GT, 35Z5GT	45X283			EZ42215, E242215, E242215		DSB-403020, DSB-403020, DSB-403020				Out	51X91	A-3856		T22S47	A-2900	746 4482	7G3	7B30					
14WG-680	6 1A7GT, 2IN5GT, 1H5GT, 3Q5GT, 35Z5GT	45X283, 45X293	PRS250-8		BR825		M-8-250		UT-32		Out	On Spkr.	A-3856		T22S47	A-2900	746 4482	7G3	7B30					
14WG-683A, 14WG-683B	6 1A7GT, 2IN5GT, 1H5GT, 3Q5GT, 35Z5GT, (47)	45X307	PRS50-50		BR505		M-50-50		TA-550		Out	On Spkr.	A-3856		T22S47	A-2900	746 4482	7G3	7B30					
14WG-690A	6 1A7GT, 2IN5GT, 1H5GT, 3Q5GT, 35Z5GT, (51)	45X306	PRS50-50, PRS250-8		BR505, BR825		M-50-50, M-8-250		TA-550, UT-32		Out	On Spkr.	A-3856		T22S47	A-2900	746 4482	7G3	7B30					
14WG-737	7 6SJ7, 26SK7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, (51)	45X277	PRS40-40, & PRS40-20		BR4048, BR4048, & PRS40-20		M-40-450, & M-20-450		UT-30		Pwr Out	P-6011		T22R02	P-2951									
14WG-739	7 6SJ7, 26SK7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, (44)	45X277	PRS40-40, & PRS40-20		BR4048, BR4048, & PRS40-20		M-40-450, & M-20-450		UT-30		Pwr Out	53X240	A-3877	T22S53	A-2930									
14WG-740, 14WG-741	7 6SJ7, 26SK7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, (51)	45X277	PRS40-40, & PRS40-20		BR4048, BR4048, & M-20-450		M-40-450, & M-20-450		UT-30		Pwr Out	P-6011		T22R02	P-2951									
14WG-756, 14WG-757	7 6SA7, 6J5G, 26SK7, 6V7G, 25A6G, 6N7G, (51)	45X262	PRSA150-20-30		EDL2215		M-2X30-150		TA-230		Chk In	52X33		C-1706	T20C52									
14WG-806	8 6SA7, 6SK7, 26SQ7, 26KGGT, 5Y3G, 6U5, (51)									Out	On Spkr.	A-2201		T22S74	A-2901									
14WG-807	8 6SA7, 6SK7, 26SQ7, 26KGGT, 5Y3G, 6U5, (51)									Out	P-6012		T22R04	P-2952										
14WG-808M, 14WG-808W	8 6SA7, 6SK7, 26SQ7, 26KGGT, 5Y3G, 6U5, (51)	45X305	PRS40-40, & PRS40-20		BR4045, BR4045, & PRS40-20		M-40-450, & M-20-450		UT-30		Pwr Out	A-2312		T22S74	A-2901									
14WG-809MA, 14WG-808WA	8 6SA7, 6SK7, 26SQ7, 26KGGT, 5Y3G, 6U5, (51)	45X305	PRS40-40, & PRS40-20		BR4045, BR4045, & PRS40-20		M-40-450, & M-20-450		UT-30		Pwr Out	P-6012		T22R04	P-2952									
14WG-1202B, 14WG-1203B	12 6SK7, 6SA7, 26SQ7, 26VGGT, 5Y3G, 6U5, (51)	45X313	PRS40-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	53X245	A-2312	T22S74	A-2901									
14WG-1203W, W	6 1A7GT, 2IN5GT, 1H5GT, 3Q5GT, 35Z5GT	40-20-10 @ 150V, 40-200 @ 12V			EZ42215		DSB-403020				Out	A-3856		T22S47	A-2900	746 4482	7G3	7B30						
14WG-2672C	6 1A7GT, 2IN5GT, 1H5GT, 3Q5GT, 35Z5GT	119-109																						
24BR-914A	9 26SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, 6U5, (54)		UP15D145		DY-3X15-450		EL-344				Pwr Out	104-202B	P-6312	T22R04	P-2952									
24BR-1401B	14 6AB7, 6SA7, 26SK7, 6SQ7, 6S07, 615GT, 26VGGT, 6S17, 6H6, 5U4, 6U5, (44)	119-69, 119-112	PRS40-16, PRS40-15, AF862J4A	A3	BR1645, BR1645, UP43145	M-16-450, M-16-450	UT-16, UT-16	A3	EL-424	A3	Pwr Out	105-111C	A-3311	T22S74	A-2936									
54BR-1501A, 54BR-1502A	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	119-92, 119-93	AF880, AF1010D		UP4215, UP5513	DY-4020-150, DY-2X50-150	EL-24, EL-25				Out	105-128	A-3876	T22S45	A-2928									
54BR-1503A, B, C, 54BR-1504A, B, C	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	119-92	A-8C-10077, AF844D		UP4215, UP4215	DY-4030-200-150	EL-224				Out	12-10074	A-3876	T22S45	A-2928									
54BR-1505A, B, 54BR-1506A, B	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	119-92	AF880D, AF880D		UP4215	DY-4020-150	EL-24	A8	EL-24	A8	Out	105-108D	A-3876	T22S45	A-2928									
54KP-1209A, 54KP-1209B	5 1N5GT, 1A7GT, 1H5GT, 3Q5GT	25-600	PRS150-18		BR1615	M-16-150	UT-161				Out	25-594	A-3879	B3	T22S47	B3	A-2900	B3	758		17GD60			
54WG-1801A	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	45X341	PRS150-40-40		EZ5515	DHN2X50-150	TA-530				Out	51X123	A-3876	T22S45	A-2928									
54WG-1801B	5 6SJ7, 6J5G, 26SK7, 6S07, 6V6GT, 5Y3G, (51)	45X277	PRS40-40		BR4049, BR2045	M-40-450, M-20-450	UT-30				Pwr Out	53X235	P-6011	T22R02	P-2951									
54WG-2500A	7 6SJ7, 6J5G, 26SK7, 6S07, 6V6GT, 5Y3G, (51)	45X277	PRS40-20		UP4415, UP4415	DY-2X40-150, DY-2X40-150	EL-25, EL-25				Out	105-128	A-3856	T22S46	A-2928									
64BR-915A	3 12SQ7, 50L6GT, 35Z5GT	A-8C-1119, AF880D			UP4415, UP4415	DY-2X40-150, DY-2X40-150	EL-25, EL-25				Out	105-132	A-3876	T22S45	A-2928									
64BR-917A, B	3 12SQ7GT, 50L6GT, 35Z5GT	A-8C-11375, AF880D			UP4415, UP4415	DY-4030-200-150	EL-443				Out	105-132	A-3881	T22S48	A-2934									
64BR-1051A, B	5 1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT, (47)	119-126	PRS25-100		BRH1225	DGM-250-12	UHC-212																	
64BR-1205A, 64BR-1206A	4 1R5, 1T4, 1S5, 3S4	A-8C-10258, AF22F			UP-1145	DY-2X10-150	EL-101				Out	B-12C-10328	A-3878	T22S47	A-2931									
64BR-1208A	5 1A7GT, 2IN5GT, 1H5GT, 3Q5GT	119-130	PRS150-12		BR1215	M-10-150	UT-121				Out	105-119B	A-3878	T22S47	A-2931		758		17GD60					
64BR-1513A, B, 64BR-1514A, B	6 12SG7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	A-8C-10077, AF844D			UP4415	DY-4030-20-150	EL-224				Out	B-12C-10826	A-3876	T22S45	A-2930									
64BR-1808A	8 26SK7GT, 6SA7, 6S07GT, 6J56GT, 26SK6GT, 5Y3GT, (44)	A-8C-10272, AF222J			UP150145	DY-3X20-450	EL-344				Pwr Out	104-202D	P-6312	T22R04	P-2952									
64BR-2200A	5 1A7GT, 2IN5GT, 1H5GT, 3Q5GT	119-130	PRS150-12		BR1215	M-10-150	UT-121				Out	105-119B	A-3878	T22S47	A-2931		758		17GD60					
64WG-1050A, B, C, D	4 1R5, 1T4, 1S5, 3S4	45X350									Out	51X94	A-3877	T22S46	A-2930								2TX40	
64WG-1052A, B	5 1R5, 1T4, 1S5, 3Q4	45X347, 45X348	PRS150-40-40		BRL-3515, BR415	M-5030-150, M-4-150	TA-530, UT-41				Out	On Spkr.	A-3823	T22S47	A-2901		754		66M60					
64WG-1207B	5 1R5, 1T4, 1S5, 3Q4	45X250	PRS150-4		E25515	DHN-2-50-150 & M-25-25	TA530, & TA-25				Out	51X128	A-3881	T22S48	A-2934		758		17GD60					
64WG-1511A, B, 64WG-1512A, B	6 12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X344	PRS150-40-40 & PRS25-25		E25515, & BR202A	DHN-2-50-150 & M-25-25	TA530, & TA-25				Out	51X116	A-3876	T22S45	A-2928									

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Phonofet Set No.		
1st.	9A1241	16-6658		456				12A347	ST-194		5E45		Vol Tone	36X279	AM-60-Z	KSS-3	A.	D13-133	E	41					Continued	AIRLINE		
2nd.	9A1242	16-6660											40X247	AM-66-Z	KSS-3		D13-139									14WG 610B, 14WG 611B		
1st.	9A1377	16-6658		456				12A379	ST-194		5E45		Vol	36X279	AM-60-Z	KSS-3	A.	D13-133	E	41							14WG 624A, 14WG, 625A, 14WG 628	
2nd.	9A1378	16-6660						6 Inch	ST-108		6A1		Vol	36X299	AM-60-Z	KSS-3		D13-133	E								14WG 672	
1st.	†	16-6658		456																							14WG 630	
2nd.	†	16-6660						6 Inch	ST-108		6A1		Vol	36X299	AM-60-Z	KSS-3		D13-133	E								14WG 633B	
1st.	†	16-6658		456				12A395	ST-105		5A1		Vol	36X308	AM-60-Z	KSS-3		D13-133	E								14WG 690A	
2nd.	9A1432	16-6658		456				12A394	ST-105		5A1		Vol	36X307	AM-60-Z	KSS-3		D13-133	E									
1st.	9A1433	16-6660																										
1st.	†	16-5712		456				8 Inch	ST-177		8E10	F4	Vol	36X311	AM-60-Z	KSS-3	A.	D13-133	E	41								14WG 737
2nd.	16-5714							12A400	ST-168		6E10	F4	Vol	40X259	AM-67-Z	KSS-3		D13-140	E								14WG 739	
1st.	9A1250	16-5712		456	SB27099																							
2nd.	9A1251	16-5714						8 Inch	ST-177		8E10	F4	Tone	36X280	AM-60-Z	KSS-3	A.	D13-133	E	41								14WG 740
1st.	†	16-5712		456	0-4426-9, J-22202																						14WG 741	
2nd.	†	16-5714						12A286	ST-108		F7	6A1	Tone	40X259	AM-67-Z	KSS-3	A.	D13-140	E								14WG 756	
1st.	9A1469			456				12A287	ST-115		F7	8A21	Tone	36X314	AM-67-Z	KSS-3	A.	D13-140	E								14WG 757	
2nd.	9A1470																											
3rd.	9A1471							6 Inch	ST-168		6E10	F4	Vol	36X306	AM-60-Z	KSS-3	A.	D13-133	E	41								14WG 806
1st.	†	16-5712		456																							14WG 807	
2nd.	16-5714							10 Inch	ST-175		10E15		Vol	36X313	AT-78	KSS-3		D13-133X	E									14WG 808M, 14WG 808W
1st.	†	16-5712		456																							14WG 808MA	
2nd.	†	16-5714																									14WG 808WA	
1st.	9A1428	16-5712		456	S28A65	LP6		12A399	ST-175		10E15		Vol	40X261	AM-67-Z	KSS-3		D13-133X	E								14WG 1202B, 14WG	
2nd.	9A1429	16-5714																									1203B, 14WG	
1st.	9A1480			456	S28A65	LP6		12A403			12E50	F4	Tone	40X261	AM-67-Z	KSS-3		D13-133X	E								1203M, W	
2nd.	9A1481																											
3rd.	9A1482																											
1st.	†	16-6658		456																							14WG 2672 C	
2nd.	†	16-6660																										
1st.	108-176	16-5712		455	4426-10	LP6		114-208			10E60		Vol	101-267				D13-139XX	E								24BR 914A	
2nd.	108-177	16-5714						114-237			F2		Vol	101-249	AM-63-Z	KSS-3		D13-137	E								24BR 1401B	
1st.	108-177D	16-5712		455	J-22404	LP6					F2	Tung Lt	101-248	AM-40-S	KSS-3		D11-120	E										
2nd.	108-176B	16-5714																										
1st.	108-197			4.3																								
2nd.	108-198																											
1st.	108157H	16-6658		455				18A10251	ST-113		4A07		Vol	101-255	AM-60-Z	KSS-3	A.	D13-133	E	41							2 54BR 1501A, 54BR 1502A	
2nd.	108157I	16-6660						18A10094			46A1		Vol	A-10A-10075	AM-60-Z	KSS-3	A.	D13-133	E	41							3 54BR 1903A, B, C, 54BR 1504A, B, C	
1st.	B-13810091	16-6658		455																								
2nd.	B-13810092	16-6660																										
1st.	108140K	16-6658		455				114-248C	ST-105		5A1		Vol	101-255	AM-63-Z	KSS-3	A.	D13-137	E	41							2 54BR 1505A, B, 54BR 1506A, B	
2nd.	108141F	16-6660						25593	ST-107		5A15		Vol	125367B	M-60-Z		A2	D13-133		42	G1						8 54KP 1205A, 54KP 1205B	
1st.	25521	16-6658		455																							4 54WG 1801A, 54WG 1801B	
2nd.	25522	16-6670						12A429	ST-107		5A15		Vol	36X340	AM-60-Z	KSS-3	A.	D13-133	E	41							4 54WG 250A, 54WG 2700A	
1st.	9A1782	16-6658		455																							3 64BR 916A, 10 64BR 917A, B	
2nd.	9A1783	16-6660						12A398	ST-177		8E10	F4	Tone	40X259	AM-67-Z	KSS-3	A.	D13-140								2 64BR 1051A, B, 64BR 1514A, B		
1st.	9A1810	16-6658		455				12A401	ST-177		6A15		Vol	101-230	AM-60-Z	KSS-3	A.	D13-133	E	41							16 64BR 1808A	
2nd.	9A1811	16-6650						18A10952	ST-109		46A1		Vol	BEA-10A-11332	AM-60-Z	KSS-3	A.	D13-133	E	41								
1st.	108-201B	16-6658		455				114-245B	ST-105		5A1		Vol	101-258	AM-63-Z	KSS-3	A2	D13-137	E	42							16 64BR 2200A	
2nd.	108-203B	16-6665																										
1st.	BEB-13A-10333	16-6558		455				B-18A-10284	ST-105		5A1		Vol	BEA-1013-10368	AM-63-Z	KSS-3	A2	D13-137	E	42							10 64BR 1205A, 64BR 1206A	
2nd.	BEB-13B-10334	16-6558	D3	455				114245	ST-108		6A1		Vol	101-257	AM-64-Z	KSS-3	A2	D13-130	E	42							16 64BR 1208A	
1st.	108204	16-6658		455																								
2nd.	108204B	16-6659						B-18A-10260			4A1		Vol	101-264	AM-60-Z	KSS-3												
3rd.	108188B	16-6660																										
1st.	B-13B-10091-2	16-6658		455																								
2nd.	B-13B-10794-1	16-6660						BEC-18A-11129			4A1		Vol	A-10A-10683				D13-137X	G1, S								24 64BR 1513A, B, 64BR 1514A, B	
1st.	BEB-203-1813-2			455				BEC-18B-11003			4A1		Vol	101-230	AM-60-Z	KSS-3	A.	D13-133	E	41							16 64BR 1808A	
2nd.	BEB-203-1813-3																											
1st.	108204	16-6658		455				114245	BEC-18A-11471		6A1		Vol	101-257	AM-64-Z	KSS-3	A2	D13-130	E	42								
2nd.	108204B	16-6659																										
1st.	108188B	16-6660																										

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubes	Sylvania or Equivalent	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note		
		Dial Light Type Listed in Parentheses																							
AIRLINE—Continued																									
64WG-1801C	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	45X34I	PRS150-40-40		EZ5515		DHN-2X50-150		TA-530		Cut	51X123	A-3876		T22S45		A-2928							
64WG-1804A, B	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X344	PRS150-40-40 & PRS25-25		EZ5515		DHN-2X50-150 & M-25-25		TA-530 & TA-25		Out	51X116	A-3876		T22S45		A-2928							
64WG-1807 A, B	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT, (47)	45X346			UP43145C		DY-2X40-450/20-25		EL-330		Pwr	53X232												
64WG-1809A, B	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X344	PRS150-40-40 & PRS25-25		EZ5515		DHN-2X50-150 & BR202A		TA-530 & TA-25		Out	51X97	A-3876		T22S45		A-2928							
64WG-2007A, B	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	45X341	PRS150-40-40		EZ5515		DHN-2X50-150		TA-530		Out	51X119	A-3876		T22S45		A-2928							
64GW-2009A, B	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X345	PRS150-40-40 & PRS25-25		EZ5515		DHN-2X50-150 & M-10-25		EL-330		Pwr	53X232			T22S46		A-2928							
64WG-2010B	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT, (47)	45X346			UP43145C		DY-314				Out	51X116	A-3876											
64WG-2500A, 64WG-2700A, B	7	65J7, 65L7, 65K7, 65Q7, 6V6GT, 5Y3GT, (51)	45X277	PRS150-40, PRS450-20		BR4045		M-40-450		UT-30		Pwr	53X232	A-3873		T22S47		A-2901							
74BR-916B	3	12SQ7GT, 50L6GT, 35Z5GT, (47)	A-8C-114151	AF88D		BR2045		M-20-450		UT-30		Pwr	53X235	A-3873		T22R02		P-2951							
74BR-1513B, 74BR-1514B	6	12SG7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	A-8C-10077	AF844D		UP4415		DY-2X40-150		EL-25		Out	51X97	A-3876		T22S88		A-2901							
74BR-1812A, B	9	6BA6, 6C4, 6AL5, 6AT6, 6V6GT, 5Y3GT, (44)	A-8C-10272	AF22J		UP150145		DY-3X15-450		EL-210 & UT-20		Pwr	53X235	A-3873		T22S45		A-2928							
74BR-2001A, B	5	12BE6, 12BD6, 12AT6, 50B5, 35W4, (47)	A-8C-11496	PRS25-25		BR252A		M-25-25		TA-25		Cut	51X123	A-3876		T22S45		A-2928							
74BR-2701A	8	65K7GT, 6SA7, 6507GT, 6J5GT, 36K6GT, 5Y3GT, (44)	119-019	AF44J		UP150145		DY-3X15-450		EL-344		Pwr	53X235	A-3873		T22R04		P-2925							
74BR-2702A, B	9	6BA6, 6C4, 6AL5, 6AT6, 6V6GT, 5Y3GT, (44)	A-8C-10272	AF22J		UP150145		DY-3Y15-450		EL-210 & UT-20		Cut	51X123	A-3876		T22S48		A-2938							
74WG-925A	3	12AT6, 50B5, 35W4	45X341	PRS150-12		BR252A		M-25-25		TA-25		Pwr	53X235	A-3873		T22R04		P-2952							
74WG-1050C, D	4	1R5, 1T4, 1S5, 3S4	45X350	PRS150-50-50		BR1215		M-10-50		UT-121		Cut	51X94	A-3877		T22S46		A-2930							
74WG-1052B	5	1R5, 2U4, 1S5, 3Q4	45X347	PRS150-40-40		BR415		M-5030-150		TA-530		Out	On Spkr.	A-3873		T22S47		A-2936							
74WG-1054A, B	5	1R5, 2U4, 1S5, 3V4	45X353	PRS25-100		BR4415		DY-3X40-150		EL-340		Out	51X130	A-3879		T22S47		A-2932							
74WG-1056A	5	1R5, 2U4, 1S5, 3V4	45X356	PRS25-50		BR502		M-25-25		JHC-202		Out	On Spkr.	A-3823		T22S47		A-2936							
74WG-1207B, B	5	1R5, 2U4, 1S5, 3Q4	45X250	PRS150-4		UP7D153		M-4-150		TA-41		Out	51X128	A-3881		T22S48		A-2936							
74WG-1509A, 74WG-1510A	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X344	PRS150-40-40 & PRS25-25		EZ5515		DSB-2X50-150		TA-505		Out	51X116	A-3876		T22S45		A-2928							
74WG-1511B, 74WG-1512B	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X344	PRS150-40-40 & PRS25-25		EZ5515		DHN-2X50-150 & M-25-25		TA-530 & TA-25		Out	51X116	A-3876		T22S45		A-2928							
74WG-1802A	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	45X341			EZ5515		DH-2X50-150		TA-505		Out	51X132	A-3876		T22S45		A-2928							
74WG-1803A	6	12SK7, 12SA7, 12SF7, 12SJ7, 35Z5GT, (47)	45X344	PRS150-40-40 & PRS25-25		EZ5515		DHN-2X50-150 & M-25-25		TA-530 & TA-25		Out	51X116	A-3876		T22S45		A-2928							
74WG-1804C	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X344	PRS150-40-40 & PRS25-25		EZ5515		DY-2X40-450/20-25		EL-330		Pwr	53X232	A-3823		T22S47		A-2901							
74WG-1807A, B	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT, (47)	45X346			UP43145C		DY-2X40-450/20-25		TA-530		Out	51X97	A-3876		T22S45		A-2928							
74WG-2002A	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	53X345	PRS150-40-40 & PRS25-25		EZ5515		DSB-2X50-150 & M-10-25		TA-530 & TA-25		Out	51X116	A-3876		T22S45		A-2928							
74WG-2004A	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	45X341			EZ5515		DSB-2X50-150 & M-4-150		TA-505		Out	51X119	A-3876		T22S45		A-2928							
74WG-2007B, C	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	45X341	PRS150-40-40		EZ5515		DSB-2X50-150		TA-530		Out	51X116	A-3876		T22S45		A-2928							
74WG-2009B	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X345	PRS150-40-40 & PRS25-25		EZ5515		M-10-25		TA-25		Out	51X116	A-3876		T22S45		A-2928							
74WG-2010B	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT, (47)	45X346			UP43145C		DY-312		EL-330		Pwr	53X232	A-3823		T22S47		A-2930							
74WG-2500A	7	6SJ7, 6J5, 26SK7, 6SQ7, 6V6GT, 5Y3GT, (51)	45X277	PRS450-40, PRS450-20		BR4045		M-40-450		UT-30		Out	51X97	A-3823		T22R02		P-2951							
74WG-2504A, B, C	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT, (47 or 51)	45X346			BR2045		M-20-450		UT-30		Out	53X232	A-3823		T22S47		A-2901							
74WG-2505A	10	6BA6, 6J6, 6BE6, 6AL5, 6AT6, 6U5GT, 6V6GT, 5Y3GT, (47)	45X351	AF4J		UP2045		DY-20-450		EL-2		Out	51X134	A-3849		T22S85		A-2902							
74WG-2505A	10	6BA6, 6J6, 6BE6, 6AL5, 6AT6, 6U5GT, 6V6GT, 5Y3GT, (47)	45X352	AF4J		UP4045		DY-40-450		EL-4		Out	53X286	P-6013		T22R06		A-2930							
74WG-2700A, B	7	6SJ7, 6J5, 26SK7, 6SQ7, 6V6GT, 5Y3GT, (51)	45X277	PRS450-40, PRS450-20		BR425		M-4-450		UT-42		Out	On Spkr.	A-3849		T22S46		A-2930							
74WG-2705A, B	10	6BA6, 6J6, 6BE6, 6AL5, 6AT6, 6U5GT, 6V6GT, 5Y3GT, (47)	45X351	AF4J		BR4045		M-20-450		UT-30		Pwr	53X235	A-3823		T22S47		A-2901							
74WG-2705A, B	10	6BA6, 6J6, 6BE6, 6AL5, 6AT6, 6U5GT, 6V6GT, 5Y3GT, (47)	45X352	AF4J		UP2045		DY-20-450		EL-2		Pwr	53X286	P-6013		T22R06		A-2930							
74WG-2705A, B	10	6BA6, 6J6, 6BE6, 6AL5, 6AT6, 6U5GT, 6V6GT, 5Y3GT, (47)	45X352	AF4J		UP4045		DY-40-450		EL-4		Pwr	53X286	P-6013		T22R06		A-2930							
74WG-2709A	7	6SJ7, 6J5, 26SK7, 6SQ7, 6V6GT, 5Y3GT, (51)	45X277	PRS450-20, PRS450-40		BR2045		M-20-450		UT-20		Pwr	53X235	P-6011		T22R02		P-2951							
74WG-2709A	7	6SJ7, 6J5, 26SK7, 6SQ7, 6V6GT, 5Y3GT, (51)	45X277	PRS450-20, PRS450-40		BR4045		M-40-450		UT-40		Pwr	51X97A	A-3823		T22S46		A-2901							

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL								
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Phono Set No.				
1st.	9A1782	16-6658		455				12A429	ST-107		5A15		Vol	36X340	AM-60-Z	KSS-3	A		D13-133	E	41				Continued—	AIRLINE 64WG 1801C				
2nd.	9A1783	16-6660		455				12A431			46A1		Vol	36X347	AT-92	KSS-3	A	G10	D13-133X	E	41				5.	64WG 1804A, B				
1st.	9A1775	16-6658		455				12A435	ST-109		6A15		Vol	36X354	AT-92	KSS-3	A		D13-133X	E	41				5.	64WG 1807A, B				
2nd.	9A1776	16-6660		455				12A461	ST-109		6A15		Tone	40X280	AM-67-Z	KSS-3	A	G11	D13-140	E	41				5.	64WG 1809A, B				
1st.	9A1814	16-6658		455				12A431			46A1		Vol	36X347	AT-92	KSS-3	A	G10	D13-133X	E	41				5.	64WG 2007A, B				
2nd.	9A1815	16-6660		455				12A429	ST-107		5A15		Vol	36X340	AM-60-Z	KSS-3	A		D13-133	E	41				6.	64WG 2009A, B				
1st.	9A1775	16-6658		455				12A437			46A1		Vol	36X347	AT-92	KSS-3	A	G10	D13-133X	E	41				6.	64WG 2009B				
2nd.	9A1782	16-6658		455		L-75		12A442	ST-110		6A21		Vol	36X358	T-78	KSS-3	A		D13-133X	E	41				18.	64WG 2010B				
1st.	9A1776	16-6660		455		L-70-A		12A459	ST-110		6A21		Tone	40X280	AM-67-Z	KSS-3	A		D13-140	E	41				4.	64WG 2500A, B				
2nd.	9A1815	16-6658		455		L-70		12A398	ST-177	F4	8E10		Vol	36X311	AM-60-Z	KSS-3	A	G11	D13-133	E	41				17.	64WG 2700A, B				
1st.	9A1810	16-6658		455		L-70		12A401	ST-177	F4	8E10		Tone	40X259	A-10A-11377	KSS-3	A		D13-133	E	41				24.	74BR 916B				
2nd.	9A1811	16-6660		455		L-70		12A401	ST-105	F4	5A1		Vol	36X341	A-10A-10688	KSS-3	A		D13-137X	E	47	G1, 9			22.	74BR 1514B				
1st.	B-13B-10091-2	16-6658		455				12A41																						
2nd.	B-13B-10794-1	16-6660		455				C-18B-12404			59A3		Vol	A-10B-11263	AT-103	KSS-3	A		D19-137X	E	41									
1st.	C-203-11743																													
2nd.	C-203-11746																													
1st.	C-203-11743			10.7mc																										
2nd.	C-203-11744																													
1st.	B-13A-10728-1	16-6666		455	8K-11885				B-18A-11219			46A1		Vol	A-10A-11332	AM-60-Z	KSS-3	A	G10	D13-133	E	41						23.	74BR 2001A, B	
2nd.	B-13B-10729	16-6667		455	L-70-S				B-18E-10616			12E50		Vol	A-10A-10832	AT-88	KSS-3	A		D13-137	E	41	G6						24.	74BR 2701A
1st.	108177	16-6658		455	L-75				B-18B-10617			10E60		Vol	A-10B-11263	AT-103	KSS-3	A		D19-137X	E	41						25.	74BR 2702A, B	
2nd.	108176	16-6658		455	L-75																									
1st.	C-203-11743			10.7mc																										
2nd.	C-203-11746																													
1st.	9A1823								12A463	ST-105		5A1		Vol	36X367	AM-60-Z	KSS-3	A		D13-133	E	41						24.	74WG 925A	
2nd.	9A1824								12A477	ST-113		4A1		Vol	36X305	AM-60-Z	KSS-3	A		D13-133	E	41	G6						10.	74WG 1050C, D
1st.	9A1840	16-6658		455					12A443	ST-107		5A15		Vol	36X307	AM-60-Z	KSS-3	A		D13-133	E	41						9.	74WG 1052B	
2nd.	9A1841	16-6660		455					12A429	ST-107		5A15		Vol	36X310	AM-60-Z	KSS-3	A2		D13-133	E	42						22.	74WG 1054A, B	
1st.	9A1889	16-6658		455					12A446	ST-107		5A15		Vol	36X370	AM-60-Z	KSS-3			D13-133	E						29.	74WG 1056A		
2nd.	9A1890	16-6650		455					12A443	ST-107		5A15		Vol	36X370	AM-60-Z	KSS-3			D13-133	E						18.	74WG 1207B		
1st.	9A1840	16-6658		455					12A443	ST-107		5A15		Vol	36X355	AM-60-Z	KSS-3	A2		D13-133	E	42						27.	74WG 1509A, B	
2nd.	9A1841	16-6660		455					12A431			46A1		Vol	36X347	AT-92	KSS-3	A	G10	D13-133X	E	41						5.	74WG 1511B, 74WG 1512B	
1st.	9A1801	16-6658		455					12A431			46A1		Vol	36X347	AT-92	KSS-3	A	G10	D13-133X	E	41						25.	74WG 1802A, 74WG 1803A	
2nd.	9A1802	16-6660		455					12A429	ST-107		5A15		Vol	36X347	AT-92	KSS-3	A	G10	D13-133X	E	41						4.	74WG 1804C	
1st.	9A1775	16-6658		455					12A431			46A1		Vol	36X368	AM-60-Z	KSS-3	A		D13-133	E	41						5.	74WG 1807A, B	
2nd.	9A1776	16-6660		455					12A431			46A1		Vol	36X368	AM-60-Z	KSS-3	A		D13-133	E	41						27.	74WG 2004A	
1st.	9A1773	16-6658		455					12A429	ST-109		5A15		Vol	36X347	AT-92	KSS-3	A	G11	D13-140	E	41	GII						26.	74WG 2002A
2nd.	9A1776	16-6660		455					12A431			46A1		Vol	36X347	AT-92	KSS-3	A		D13-133X	E	41						5.	74WG 2007B, C	
1st.	9A1775	16-6658		455					12A431			46A1		Vol	36X368	AM-60-Z	KSS-3	A		D13-133	E	41						6.	74WG 2009B	
2nd.	9A1775	16-6660		455		L-75-S		12A429	ST-107		5A15		Vol	36X340	AM-60-Z	KSS-3	A		D13-133	E	41						6.	74WG 2010B		
1st.	9A1782	16-6658		455	L-75				12A437			46A1		Vol	35X347	AT-92	KSS-3	A	G10	D13-133X	E	41						6.	74WG 2505A	
2nd.	9A1783	16-6660		455	L-75				12A437			46A1		Vol	35X347	AT-92	KSS-3	A	G10	D13-133X	E	41						18.	74WG 2505A	
1st.	9A1775	16-6658		455	L-70-A				12A442	ST-110		6A21		Vol	36X358	T-78	KSS-3	A	G6	D13-133X	E	41						4.	74WG 2500A	
2nd.	9A1776	16-6660		455	L-70-A				12A459	ST-110		6A21		Tone	40X276	AM-67-Z	KSS-3	A		D13-137	E						28.	74WG 2504A, B, C		
1st.	9A1814	16-6658		455	L-70				12A476	ST-119	F4	10A31		Vol	36X291	AM-60-Z	KSS-3	A		D13-133	E	41						18.	74WG 2505A	
2nd.	9A1815	16-6660		455	L-70				12A470	ST-175	10E10			Tone	40X276	AM-67-Z	KSS-3	A		D13-140	E	41								
1st.	9A1876	16-6658		455	L-75-S				12A470	ST-175	10E10			Tone	40X259	AM-67-Z	KSS-3	A		D13-133X	E	41								
2nd.	9A1877	16-6672	D5	10.7mc	L-75-S				12A455	ST-175	10E15	F4		Vol	36X311	AM-60-Z	KSS-3	A		D13-133	E	41						4.	74WG 2700A, B	
1st.	9A1876	16-6658	455	L-75	L-75-S				12A401	ST-177	8E10	F4		Vol	36X311	AM-67-Z	KSS-3	A		D13-140	E	41						18.	74WG 2705A, B	
2nd.	9A1875	16-6672	455	L-75	L-75-S				12A455	ST-175	10E15	F4		Vol	36X358	T-78	KSS-3	A		D13-133X	E	41						18.	74WG 2705A	
1st.	9A1877	16-6672	455	L-75	L-75-S				12A455	ST-175	10E10	F4		Vol	36X363	T-78	KSS-3	A		D13-133X	E	41						26.	74WG 2709A	
2nd.	9A1876	16-6672	455	L-75	L-75-S				12A455	ST-175	10E15	F4		Vol	36X311	AM-69-Z	KSS-3	A		D13-133	E	41						26.	74WG 2709A	
1st.	9A1876	16-6658	455	L-75	L-75-S				12A455	ST-175	10E10	F4		Vol	36X															

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"		
AIRLINE—Continued 74WG-2711A.....	10	6BA6, 6J6, 6BE6, 6A15, 6AT6, 6U5GT, 6V6GT, 5Y3GT, (447)	45X351 45X302 45X352	AF4J AF8J PRS250-5		UP2045 UP4045 BR425		DY-20-450 DY-40-450 M-4-450		EL-2 EL-4 UT-42		Pwr Out	53X286 On Spkr	P-6013 A-3849		T22R06 T22S46		A-2930						
93BR-335A.....	5	6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G, (44)	119-103									Pwr Cut	104-193 105-175		A-3878		T22S47		A-2932					
93BR-391.....	7	6SK7, 6K8, 6K7, 6SQ7, 6V6G, 5Y3G, 6U5, (44)	119-100 119-81 119-91	AF88J4A PRS60-16 PR525-50		UP4445C BR1645 BR502		DY-313 M-16-450 M-50-25		EL-330 UT-15 TA-50		Pwr Out	104-181 105-98 105-97		A-3877 C-1709 C-1355		T22S58 T20C53		A-2930					
93BR-392A.....	7	6SK7, 6K8, 6K7, 6SQ7, 25N6G, 25Z6G, 6U5, (44)	119-98	AF88J4A PRS450-8-16		UP4445C EZ5816		DY-313 DH-816-450SS		EL-330 LM-816		Pwr Out	105-98 105-97		A-3876 C-1355		T22S45 T20C53		C-2930		A-2928			
398R-393A (Batt.)	7	6S7G, 6K8, 6T7G, 6L5G, 6SC7, 6AB5, (44)	119-98	AF88J4A		UP4445C		DY-313		EL-330		Pwr Out	104-180									C-2930		
93BR-393A (AC).....	8	6S7G, 6K8, 6T7G, 6L5G, 6SC7, 5Y3G, 6AB5, (44)	119-98	AF88J4A		UP4445C		DY-313		EL-330		In	105-101		A-3857 C-1355		T22S48 T20C53		A-2937 C-2930					
93BR-420A, B, 93BR-421A, B, 93BR-423B, 93BR-424B	4	12SA7, 12SK7, 12SQ7, 70L7GT	119-92	AF88D		UP4215		DY-4020-150		EL-24		Out	105-99		A-3876		T22S48 T22S45		A-2937 A-2928					
93BR-431B.....	4	12SA7, 12SK7, 12SQ7, 70L7GT	119-92	AF88D		UP4215		DY-4020-150		EL-24		Out	On Spkr	A-3876		T22S45		A-2928						
93BR-454A.....	4	1A7G, 1N5G, 1H5G, 1C5G	119-35		PRS25-25		BR252A		M-25-25		Out	On Spkr	A-3878		T22S47		A-2931		742 4482		4F	2B30		
93BR-459.....	4	6D8, 6S7, 6T7, 6K6	119-57		PRS150-20-20		EZ2215		M-2X20-150		Out	On Spkr	A-3878		T22S47		A-2931							
93BR-460A.....	4	1A7G, 1P5G, 1H5G, 1C5G	119-75		PRS25-10		BR102A		M-30-150		Out	105-91		A-3878		T22S47		A-2931		742 4482		4F	2B30	
93BR-461A.....	4	1A7G, 1N5G, 1H5G, 1A5G	119-75		PRS25-10		BR102A		M-10-25		Out	On Spkr	A-3857		T22S48		A-2937		4482		C4	4FL		
93BR-462A.....	4	1A7G, 1N5G, 1H4G, 1A5G	119-75		PRS25-10		BR102A		M-10-25		Out	105-100		A-3857		T22S48		A-2937		742 4482		4F	2B30	
93BR-508A, 93BR-509A.....	5	12SA7, 12SK7, 12SQ7, 70L7GT, 35L6GT, 35Z5GT, (44)	119-87		PRS150-20-30 & PRS150-12		EZ32115		DSB-3X20-150		Out	105-89		A-3876		T22S45		A-2928						
93BR-508A, 93BR-560B.....	5	1A7G, 1N5G, 1H5G, 1C5G	119-86		PRS25-8		BR825		M-8-250		Out	105-69		A-3878		T22S47		A-2931		742 4482		4F	2B30	
93BR-561A, 93BR-563A.....	5	1A7G, 21N5G, 1H5G, 1Q5G	119-86		PRS250-8		BR825		M-8-250		Out	105-69		A-3878		T22S47		A-2931		742 4482		4F	2B30	
93BR-564A.....	5	6D8G, 6K7, 6T7G, 6G6G, 6ZY5G, (44)	119-79		PRS150-16-16 & PRS25-25		EZ16D355		LM-2016		Pwr Out	104-114B												
93BR-571A.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (44)	119-92		AF88D		UP4215		DY-4020-150		EL-24		Pwr Out	105-69D		A-3879		T22S48 T22S45		A-2932				
93BR-657A.....	7	6D8G, 6SK7, 6T7G, 6G6G, 5Y3G, 6AE6G, 6AD6G, (40)	119-85			UP3325C		DY-309		EL-334		Pwr Vib	104-165											
93BR-658A.....	7	6D8G, 6SK7, 6T7G, 6G6G, 5Y3G, 6AE6G, 6AD6G, (40)	119-85			UP3325C		DY-309		EL-334		Pwr Vib	104-164											
93BR-659A, 93BR-660A.....	6	1P5, 1A7, 21N5, 1H5, 1Q5	119-86		PRS250-8		BR825		M-8-250		Out	105-92		A-3879		T22S48 T22S47		A-2932		742 4482		4F	2B30	
93BR-666A.....	7	6D8G, 6SK7, 6T7G, 6G6G, 5Y3G, 6AE6G, 6AD6G, (40)	119-85			UP3325C		DY-309		EL-334		Pwr Vib	104-165											
93BR-677.....	6	6K7, 6A8, 6Q7, 6V6, 0Z4/6X5	119-51		PRS450-8-16		EZ3112		DH-816-450SS		TU-1616		Out	105-62										
93BR-713A.....	7	6SA7, 6SK7, 6SQ7, 6P5G, 6AC5G, 5Y3G, 6AD6G, (44)	119-84		AF222J		UP15D145		DY-3X10-450		EL-344		Out	105-61		A-3877		T22S58		A-2930				
93BR-714A, 93BR-715A.....	7	6SA7, 6SK7, 6SQ7, 6P5G, 6AC5G, 5Y3G, 6AD6G, (44)	119-84		AF222J		UP15D145		DY-3X10-450		EL-344		Out	104-139D		A-3878		T22R04		A-2931				
93BR-714B.....	7	6SA7, 6SK7, 6SQ7, 6P5G, 6AC5G, 5Y3G, 6AD6G, (44)	119-84		AF222J		UP15D145		DY-3X10-450		EL-344		Out	105-90		A-3878		T22S47		A-2931				
93BR-715A (Ser. 786400 & Up.)	7	6SA7, 6SK7, 6SQ7, 6P5G, 6AC5G, 5Y3G, 6AD6G, (44)	119-84		AF222J		UP15D145		DY-3X10-450		EL-344		Pwr Out	104-139E		P-6120		T22R04		A-2931				
93BR-715B (Ser. A)	7	6SA7, 6SK7, 6SQ7, 6P5G, 6AC5G, 5Y3G, 6AD6G, (44)	119-84		AF222J		UP15D145		DY-3X10-450		EL-344		Pwr Out	105-90		P-6120		T22S47		A-2931				
93BR-717A (Ser. A)	7	6SA7, 6SK7, 6SQ7, 6P5G, 6AC5G, 6AD6G, 5Y3G, (44)	119-84		AF222J		UP15D145		DY-3X10-450		EL-344		Pwr Out	105-90		P-6120		T22S47		A-2931				
93BR-719A.....	7	12A6G, 12SK7, 12SQ7, 12Q7GT, 35L6GT, 35Z5GT, (44)	119-101		AF844D		UP42215		DY-403020		EL-224		Out	104-175		A-3878		T22S48		A-2932				
93BR-720A.....	7	6A8G, 6SK7, 6SQ7, 35L6GT, 35Z5GT, (44)	119-101		AF844D		UP42215		DY-403020		EL-224		Out	105-96		A-3856		T22S47		A-2900				
93BR-908A, 93BR-909A.....	5	12SA7, 12SK7, 12SQ7GT, 35L6GT, 35Z5GT, (47)	119-87		PRS150-20-30 & PRS150-12		EZ32115		DSB-3X20-150		TA-230 & UT-121		Out	105-96		A-3856		T22S47		A-2900				
93BR-1075A, 93BR-1075A.....	10	6K7, 6K8, 6Q7G, 6J5G, 6K6G, 5Y3G, 6U5	119-64		PRS450-8-16		EZ5816		DH-816-450SS		LM-816		Pwr Out	104-143		P-6012		T22R04		P-2952				
93BR-1201A.....	12	6SK7, 6K8, 6SQ7, 6J5G, 6F6G, 5U4G, 6AD6G, (44)	103-10 119-91		PRS25-50		BR1235		M-12-450		PLS-30		Pwr Out	104-155B		A-2312		T22S74		A-2901				
			119-89		PRS350-12 & PRS25-25		KR530		D-30-450		P-6314		Pwr Out	104-156		A-3885		T22S74		P-2952				
							BR502		M-10-350		TA-50		Pwr Out	105-93		A-3885								
							BR1235		& TA-25															

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS			Section G CONTROLS						Section H VIBRATORS			Photofact Set No.	MFR. & MODEL										
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	ClaroStat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radial Part No.	Note					
1st. 9A-1876	16-6672.	16-6672.		455				12A470.	ST-175.	10E10.			Vol Tone	36X363 40X259B.	T-78 AM-69-Z.	KSS-3. KSS-3.	A		D13-133X.	E	41					Continued—	18	AIRLINE 74WG 2711A		
2nd. 9A-1877	16-6672.	16-6672.	10.7					i 4	S -168.	E1			Vol	101208.	AM-63-Z.	KSS-3.	A											93BR 335A		
1st. 9A-1876	1-6672.	1-6672.	DS					114179.	ST-115.	8A21			Vol Tone	101184 101206.	AM-63-Z. AM-51-Z.	KSS-3. KSS-3.			13-137.	E	41							93BR 391		
2nd. 9A-1877	1-6672.	1-6672.		46				114179.	ST-115.	8A21			Vol Tone	101184 101207.	A**-63-Z. AM-63-Z.	KSS-3. KSS-3.			D13-137.	E								93BR 392A		
1st. 108169B	1-5712.	1-5712.						1141	ST-115.	-A21			Vol Tone	101184 101207.	AM-63-Z. AM-63-Z.	KSS-3. KSS-3.			13-137.	E								93BR 393A (Balt.)		
2nd. 108170.	1-5712.	1-5712.		4				1141	ST-115.	-A21			Vol Tone	101184 101207.	AM-63-Z. AM-63-Z.	KSS-3. KSS-3.			D13-137.	E								93BR 393A (AC)		
1st. 108165.	1-5712.	1-5712.		465				1141	ST-115.	8A21			Vol Tone	101184 101207.	*-63-Z. AM-63-Z.	KSS-3. KSS-3.			13-137.	E								93BR 420A, B, 93BR 421A, B, 93BR 423B, 93BR 424B 93BR 431B		
2nd. 108119.	1-5712.	1-5712.		4 5				114186.	ST-101.	12A4			Vol	101188	A**-63-Z.	-			13-137.	E	47								93BR 454A	
1st. 108157.	16-6658.	16-6658.		465				1141	ST-113.	4A07			Vol	101188	A**-63-Z.	-			13-137.	E	47								93BR 459	
2nd. 108157B	16-6660.	16-6660.											Vol	101188	A**-63-Z.	-			13-137.	E	47								93BR 460A	
1st. 108157.	16-6658.	16-6658.		465									Vol	101188	A**-63-Z.	-			13-137.	E	47								93BR 461A	
1st. 108-142.	16-6658.	16-6658.	4 5										Vol	101163	AM-63-Z.	-			13-137.	E	42								93BR 462A	
2nd. 108-143.	16-6660.	16-6660.											Vol	101107	AM-60-Z.	KSS-3.	A		D13-133.	E	41								93BR 508A, 93BR 509A	
1st. 108-96E.	16-712.	16-712.		46									Vol	101175	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42								93BR 560A, 93BR 560B 93BR 561A 93BR 561A 93BR 563A 93BR 564A	
2nd. 108-95D.	16-5714.	16-5712.		465									Vol	101204	AM-63-Z.	-			D13-137.	L									93BR 571A	
1st. 108-151B.	16-5712.	16-5712.											Vol	101170	AM-63-Z.	*S.	A		D13-137.	E	4								93BR 575A	
2nd. 108-153.	16-5714.	16-5714.											Vol	101166	AM-63-Z.	KSS-3.			D13-137.	E									93BR 576A	
1st. 108151.	16-5712.	16-5712.	4										Vol	101166	AM-63-Z.	KSS-3.	A		D13-137.	E	4								93BR 577A	
2nd. 108152.	16-5712.	16-5712.											Vol	101173	**-63-Z.	-			D13-137.	E	4								93BR 578A	
1st. 108157.	16-6658.	16-6658.		465									Vol	101204	AM-63-Z.	-			D13-137.	L									93BR 579A	
2nd. 108168.	16-6660.	16-6660.		4									Vol	101209	A**-60-Z.	KSS-3.	A		13-133.	E	4								93BR 580A, 93BR 581A 93BR 582A 93BR 583A 93BR 584A	
1st. 108140E.	16-6660.	16-6660.											Vol	101166	A**-63-Z.	KSS-3.			D13-137.	E									93BR 585A	
2nd. 108111.	16-5712.	16-5712.	4 5										Vol	101171	AM-60-Z.	KSS-3.	A6.		D13-137.	E	42								93BR 586A	
1st. 108112.	16-5712.	16-5712.											Vol	101166	A**-63-Z.	KSS-3.	A6.		13-137.	E	42								93BR 587A	
2nd. 108112E.	16-5712.	16-5712.											Vol	101171	AM-60-Z.	KSS-3.	A6.		D13-137.	E	42								93BR 588A	
1st. 108111J.	16-5712.	16-5712.	4										Vol	101184	AM-63-Z.	*SS-3.			13-137.	E									93BR 589A	
2nd. 108132.	16-5712.	16-5712.		465									Vol	101177	AM-60-Z.	KSS-3.	A6.		D13-137.	E	47								93BR 590A	
1st. 108111L.	16-5712.	16-5712.	65										Vol	101184	AM-63-Z.	*SS-3.			13-137.	E									93BR 591A	
2nd. 108112E.	16-5712.	16-5712.											Vol	101177	AM-60-Z.	KSS-3.	A6.		D13-137.	E	47								93BR 592A	
1st. 108111J.	16-5712.	16-5712.											Vol	101180	**-63-Z.	KSS-3.			D13-137X.	E	4								93BR 593A	
2nd. 108132.	16-5712.	16-5712.											Vol	101179	**-64-Z.	KSS-3.	A		D13-137.	E	4								93BR 594A	
1st. 108111L.	16-5712.	16-5712.	465										Vol	101184	A**-63-Z.	KSS-3.	A6.		D13-137.	E	4								93BR 595A	
2nd. 108112E.	16-5712.	16-5712.											Vol	101177	A**-63-Z.	KSS-3.	A6.		D13-137.	E	4								93BR 596A	
1st. 108-96C.	16-6658.	16-6658.		46									Vol	101109	-	1 9.	KSS-3.	A	13-137X.	E	41								93BR 597A	
2nd. 8 11.													Vol	101113	ST-11.	-	..													93BR 598A
1st. 108-111H.	16-5712.	16-5712.											Vol	101166	ST-166.	6.1			D13-137.	E									93BR 599A	
2nd. 108-132B.	16-5712.	16-5712.											Vol	101167	ST-736.	8' 10			D13-137.	E									93BR 600A & Up	
1st. 108-166.	16-5712.	16-5712.											Vol	101185	ST-736.	8' 10			D13-137.	E									93BR 601A	
2nd. 108-132B.	16-714.	16-714.											Vol	101183	ST-736.	8' 10			D13-137.	E									93BR 602A	
1st. 108-111H.	16-5712.	16-5712.											Vol	101183	ST-166.	6E10			D13-137.	E									93BR 603A	
2nd. 108-132B.	16-714.	16-714.											Vol	101184	ST-166.	6E10			D13-137.	E									93BR 604A	
1st. 108-111L.	16-5712.	16-5712.	46										Vol	101184	ST-166.	6E10			D13-137.	E									93BR 605A	
2nd. 108-132B.	16-5712.	16-5712.											Vol	101176	ST-166.	6E10			D13-137.	E									93BR 606A	
1st. 108-111H.	16-5712.	16-5712.	46										Vol	101184	ST-166.	6E10			D13-137.	E									93BR 607A	
2nd. 108-132B.	16-5712.	16-5712.											Vol	101176	ST-166.	6E10			D13-137.	E									93BR 608A	
1st. 108-163.	16-5712.	16-5712.											Vol	101202	ST-119.	10A31			D13-137.	E									93BR 609A	
2nd. 108-173.	16-5712.	16-5712.											Vol	101195	ST-108.	6A1.			D13-137.	E	41								93BR 610A	
1st. 108-163C.	16-5712.	16-5712.											Vol	101195	ST-108.	6A1.			D13-137.	E									93BR 611A	
2nd. 108-163D.	16-5712.	16-5712.											Vol	101170.	ST-1.	5A1.			D13-137.	E	1								93BR 612A	
1st. 108-140E.	16-6660.	16-6660.											Vol	101170.	ST-1.	5A1.			D13-137.	E									93BR 613A	
2nd. 108-141B.	16-6660.	16-6660.											Vol	101128.	A -103.	KSS-3.			D18-137X.	E									93BR 614A	
1st. 108-10.	16-5712.	16-5712.	65										Vol	101129.	A -103.	KSS-3.			D18-137X.	E									93BR 615A</td	

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	N o 1 e	Cornell-Dubilier Part No.	N ote	Solar Part No.	N ote	Sprague Part No.	N ote	Use	Mfr. Part No.	Stancor Part No.	N ote	Thordarson Part No.	N ote	Merit	N ote	Eveready Part No.	N ote	Burgess Part No.	N ote	
																				"A"	"B"	"A"	"B"	
AIRLINE—Continued																								
93BR-1455A	4	1A7G, 1N5G, 1H5G, 1C5G	119-35	PRS25-25		BR252A		M-25-25		TA-25		Out	On Spkr.	A-3878		T22S48		A-2931		742 2482		4F	2B30	
93BR-1460A	4	1A7G, 1P5G, 1H5G, 1C5G	119-75	PRS25-10		BR102A		M-10-25		TA-10		Out	105-91	A-3878		T22S48		A-2931		742 2482		4F	2B30	
93BR-1461	4	1A7G, 1N5G, 1H5G, 1A5G	119-75	PRS25-10		BR102A		M-10-25		TA-10		Out	On Spkr.	A-3857		T22S48		A-2937		2482		C4	4FL	
93WG-382	8	6SK7, 6SA7, 6SQ7, 6V6, 5Y3G, 6AD6G, (51)	40	GL450-40		KR540		D-40-450		PLS-40		Pwr	†	P-6012		T22R04		P-2952						
93WG-510	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (51)	20-20-20	PRSA150-20-20 & PRS150-20		KR520, EZ42215		D-20-450		PLS-20		Out	†	A-3877		T22S58		A-2930						
93WG-562	5	6D8G, 6S7G, 6T7G, 6G6G, 6AB3	45X254					DSB-3X20-150 & UT-201		LM-220		Out	†	A-3876		T22S45		A-2928						
93WG-565A	5	1A7GT, *1N5GT, 1H5GT, 1Q5GT	45X250	PRS250-8		BR825		M-8-250		UT-82		Out	On Spkr.	A-3879		T22S48		A-2932		741 2482		8F	2B30	
93WG-602, 93WG-603	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, 6AB5	20-20-20	PRSA150-20-20 & PRS150-20		EZ42215		DSB-3X20-150		LM-220 & UT-201		Out	†	A-3876		T22S45		A-2928						
93WG-604, 93WG-605	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, 6AB5, (51)	20-20-20 Mfd	PRSA150-20-20 & PRS150-20		EZ42215		DSB-3X20-150		LM-220 & UT-201		Out	†	A-3876		T22S45		A-2928						
93WG-663, 93WG-668	6	1A7GT, *1N5GT, 1H5GT, 1Q5GT, 35Z5GT, (51)	45X268	AF8440	A7	EZ42215		DSB-403020		EL-224		Out	On Spkr.	A-3856		T22S47		A-2900		746 2482		*G3	2B30	
93WG-754, 93WG-755	7	6SA7, 6J5G, 6SK7, 6V7G, 25A6G, 6N7G, (-51)	30-20 Mid	PRSA150-20-30		EZ3315		DSB-2X30-150		TA-230		Out	CHK	†										
93WG-800, 93WG-801, 93WG-802	8	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6AD6G, (51)	40	GL450-40		KR540		D-40-450		PLS-40		Out	Pwr	A-3856		T22S74		A-2900						
93WG-805	8	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6AD6G	40	GL450-40		KR540		D-20-450		PLS-40		Out	Pwr	A-3879		T22R04		P-2952						
93WG-1000, 93WG-1001	10	6SK7, 6SA7, 6SQ7, 6P5G, 6V6G, 6V3G, 6AD6G	14	GL450-40		KR540		D-40-450		PLS-40		Out	Pwr	A-3878		T22S47		A-2931						
93WG-1102, 93WG-1110	11	6U7G, -6J7G, 6J5G, 6H6, -6F6G, 5Y3G, 6U5	44X36	GL450-40		KR540		D-16-450		PLS-40		Out	Pwr	P-6012		T22R04		A-3311						
93WG-1103, 93WG-1104	11	6D6, 6C6, -6E, 241, 80, 6U5	44X36	PRSA25-50		BR502		M-20-25		TA-50		Out	PLS-16	A-3876		T22S64		P-2952						
93WG-2208	5	1A7GT, *1N5GT, 1H5GT, 1Q5GT	4 Mfd.	PRS150-4		KR520		D-20-450		PLS-40		Out	Pwr	P-6012		T22R04		A-2312						
93WG-2663, 93WG-2668	6	1A7GT, *1N5GT, 1H5GT, 1Q5GT, 35Z5GT	40-20-10 Mfd., 40-200 Mfd.	AF8440	A7	EZ42215		DSB403020		EL-224		Out	†	A-3856		T22S47		A-2900		746 2482		*G3	2B30	
ALGENE																								
AR-5U	5	14Q7, 14A7, 14B6, 50A5, 35Y4, (47)	20-20 Mfd.	PRS150-20-20		BRD2215		M-2X20-150		TA-220		Out	†	A-3876	B3	T22S45	B3							
AR-6U	6	1R5, *1T4, 1S5, 3Q4, 11723, (47)	50-50 Mfd.	PRS150-50-50		EZ5515		M-40-150		UT-401		Out	†	A-3878	B3	T22S45	B3					754	66M60	
ALLIED RADIO	(See Knight)																							
AMC																								
125-P	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	5.400-8	AF88BD		UP44415		DY-3X40-150		EL-340		Out	9.200	A-3876		T14S82								
126	6	6SS7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	20 Mfd.	PRSA150-20		BR2015		M-20-150		UT-201		Out	9.200	A-3875		T22S45								
AMERICAN COMMUNICATIONS—(See Liberty)																								
AMPLIPHONE																								
10	3	6S17, 6V6GT, 5Z4	†	AF2222J		UP111145		DY-402		EL-431		Out	†	P-6119		T22R01								
20	1	117N7GT	20 Mfd.	PRS25-50		BR502		M-50-25		TA-50		Out	†	A-3877	B3	T22S46	B3							
ANDREA																								
CO-U15	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	HC-198	AF1010D & PRS25-25		UP64215		DY-60402D-150		EL-352		Out	CHK	A-3876		ST-3003	On Spkr.	C-1707		T20C52		C-2975		
C42	2	50L6GT, 35Z5GT	HC-139					M-20-150		UT-201		Out	Out	On Spkr.	A-3876	T22S45	On Spkr.	A-2928						
P-163	6	1R5, *1N5GT, 1H5GT, 3Q5GT, 35Z5GT, (47)	40-40-100-100	AF88BD & PRS25-100	A4	AF1010D & PRS25-100		DY-60402D-150		EL-351 & UHC-102		Out	On Spkr.	A-3878		T22S47								
T-U15	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	HC-198	AF1010D & PRS25-25		UP64215		DY-60402D-150		EL-352		Out	On Spkr.	A-3876										
T-U16	6	6K8, 6SK7, 6H6, 6SF5, 25L6G, 25Z6G, (44)	HC-191	AF84D4A		UP4215C		DY-305		EL-343		Out	On Spkr.	A-3849		T22S87								
T-16	6	6K8, 6SK7, 6H6, 6SF5, 6V6GT, 5Y3GT, (44)	HC-198	AF44U4A		UP2245C		DY-312		EL-350		Out	Pwr	FM-274		T22S62								
1E6, 2E6	6	6K8, 6K7, 6H6, 6F5, 6V6G, 5Y4G, HC-131	HC-129	GL450-30		KR530		D-30-450		PLS-30		Out	Out	OH Spkr.	A-3849									
1E8, 2E8, 3E8, 4E8, 5E8, 6E8, 7E8, 8E8, 9E8, 10E8	8	6K7, 6K8, 6H6, 6F5, 6V6G, 5Y4G, 6U5	HC-145	GL450-16		KR515A		D-16-450		PLS-16		Out	Pwr	FM-431										
			HC-148	GL450-30		KR530		D-10-25		TA-10		Out	Pwr	FM-505										
			HC-131	PRS25-10		EZ5816		DH-816-450SS		UT-816		Out	On Spkr.	A-3849										

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.
1st.	108-142.	16-6658.		465			114-158.	ST-105.	5A1.			Vol	101-163.	KSS-3.	A2.		D13-137.	E	42					Continued—	AIRLINE
2nd.	108-143.	16-6660.					114-166.	ST-105.	5A1.			Vol	101-175.	AM-63-Z.	KSS-3.	A2.	D13-137.	E	42						93BR 1455A
1st.	108-151B	16-5712.		465								Vol	101-173.	AM-63-Z.	KSS-3.	A2.	D13-137.	E	42						93BR 1460A
2nd.	108-153.	16-5714.										Vol	+	+	+	+	+	+	+						93BR 1461
1st.		16-6658.		465								Tone	36X268.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						93WG 382
2nd.		16-6660.										Tone	40X245.				D13-133.	L	41						93WG 510
1st.		16-6658.		456								Tone	36X252.												93WG 562
2nd.		16-6660.										Vol	36X274.	AM-60-Z.	KSS-3.	A2.	D13-133.	E	42						93WG 565A
1st.	9A1192	16-6658.		456			12A340.	ST-108.	6A1.			Vol	36X262.				D13-133.	L	41						93WG 602
2nd.	9A1193	16-6660.					5 Inch.	ST-105.	5A1.			Vol	+												93WG 603
1st.		16-6658.		456								Vol	36X274.	AM-60-Z.	KSS-3.	A2.	D13-133.	E	42						93WG 605
2nd.		16-6660.										Vol	36X269.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						93WG 663
1st.	9A1192	16-6658.		456			12A339.	ST-108.	6A1.			Vol	36X274.	AM-63-Z.	KSS-3.	A2.	D13-133.	E	42						93WG 668
2nd.	9A1193	16-6660.					6 Inch.	ST-108.	F7	6A1.	F7	Vol	36X269.	AM-64-Z.	KSS-3.		D13-140.	M							93WG 734.
1st.		16-6658.		456			8 Inch.	ST-115.	F7	8A21.	F7	Tone	40X242.	AM-64-Z.	KSS-3.		D13-130.	E							93WG 755
2nd.		16-6660.										Vol	36X267.	AM-67-Z.	KSS-3.		D17-139X.	M							93WG 800, 93WG-801, 93WG 802
1st.		16-5712.		456			8 Inch.					Tone	40X241.	AM-67-Z.	KSS-3.		D13-140.	M							93WG 805
2nd.		16-5712.					8 Inch.					Tone	36X255.	AM-67-Z.	KSS-3.		D13-139X.	M							93WG 1000,
1st.		16-5712.		456			10 Inch.					Tone	40X241.	AM-67-Z.	KSS-3.		D13-140.	M							93WG 1001
2nd.		16-5712.										Tone	36X266.	AM-67-Z.	KSS-3.		D13-139X.	M							93WG 1102,
1st.		16-5714.		456								Tone	35X245.	AM-67-Z.	KSS-3.		D19-139X.	E							93WG 1110
2nd.		16-5714.										Tone	40X228.	AM-67-Z.	KSS-3.	G6	D13-140.	E							93WG 1103,
1st.		16-5712.		456			10 Inch.					Tone	36X251.	AM-66-Z.	KSS-3.	A.	D13-140.	E	41	G6					93WG 1104
2nd.		16-5712.										Tone	40X230.	AM-63-Z.	KSS-3.	A2.	D13-139.	E	41						93WG 2208
1st.		16-6658.		456			28A10.	1-22-A.				Tone	36X274.	AM-60-Z.	KSS-3.	A2.	D13-137.	E	42						93WG 2663,
2nd.		16-6660.					6 Inch.	ST-108.	6A1.			Vol	36X274.	AM-60-Z.	KSS-3.	A2.	D13-137.	E	42						93WG 2668
1st.		16-6658.		455								Vol	+	M-60-Z.		A.	D13-133.		41	G1					22.
2nd.		16-6660.		455			5 Inch.	ST-107.				Vol	+	M-61-S.			D11-137.			G1					22.
1st.		16-6658.																						(See Knight) ALLIED RADIO	
1st.	1.259.	16-6658.		455																				AMC 125-P	
2nd.	1.409.	16-6660.					30.300.	ST-105.				Vol	+	AM-63-Z.	KSS-3.	A.	G7	D13-137.	E	41	G7				3.
1st.	1.259.	16-6658.		455			30.300.	ST-105.				Vol	8.200	AM-63-Z.	KSS-3.	A.	G7	D13-137.	E	41	G7				16.
2nd.	1.409.	16-6660.																						(See Liberty) AMERICAN COMMUNICATIONS	
																								AMPLIPHONE 10	
																								21.	
																								21.	
1st.	SA-204A.	16-6658.		455		L-70.	SL-4002.	ST-107.				Vol	GRV-804.	AM-61-S.	KSS-3.	A.	D11-137.		E	41					27.
2nd.	SA-205D.	16-6660.				FM-749.	FM-745.					Tone	GRV-805.	AM-58-S.	KSS-3.		D11-133.	E							G 42
1st.	SA-214A.	16-6660.		455			FM-773.	ST-107.				Tone	FM-804.	AM-63-Z.	KSS-3.	A2.	D13-137.	E	42						18.
2nd.	SA-203D.	16-6660.										Vcl	FM-805.	AM-63-Z.	KSS-3.										P-163
1st.	SA-204A.	16-6658.		455			FM-918.	ST-194.				Vol	GRV-804.	AM-68-S.	KSS-3.	A.	D11-132.		E	41					24.
2nd.	SA-205D.	16-6660.					FM-706.	ST-189.				Tone	GRV-805.	AM-60-Z.	KSS-3.	A.	B13-133.		E	41					21.
1st.	SA-194.	16-6658.		470			FM-727.	ST-166.				Tone	FM-5015.	AM-55-S.	KSS-3.	A.	D11-130.		E	41					T-16
2nd.	SA-195.	16-6660.					FM-441.	F2.				Tone	FM-5015.	AM-60-Z.	KSS-3.	A.	D13-133.		E	41					1E6, 2E6
1st.	SA-200.	16-6658.		470								Tone	FM-5016.	AM-55-S.	KSS-3.	A.	D11-130.		E	41					
2nd.	SA-195.	16-6660.										Tone	FM-5016.	AM-60-Z.	KSS-3.	A.	D13-130.		E	41					
1st.	SA-119.	16-5712.		470			FM-441.	F2.				Tone	FM-427.	M-60-Z.	M-64-Z.	A.	D13-133.		E	41	G1				
2nd.	SA-120.	16-5714.					FM-565.	F2.				Tone	FM-428.	M-64-Z.	M-64-Z.		D13-130.		E	41	G1				
1st.	SA-143.	16-6658.		470			FM-565.	F2.				Vol	FM-506.	M-63-Z.			D13-137.		E	41	G1				1E8, 2E8, 3E8, 4E8,
2nd.	SA-144.	16-6660.										Tone	FM-507.	M-64-Z.			D13-130.		E	41	G1				5E8, 6E8, 7E8, 8E8, 9E8, 10E8

† Information not available.



Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL								
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat. Part No.	Note	Photog. Set No.		
1st.	SA-148			470				FM-564			10E10		Vol	FM-506	M-63-Z				D13-137							Continued		
2nd.	SA-149							FM-572			12E10		Tone	FM-554	M-60-Z				D13-133							ANDREA		
3rd.	SA-150																								3E11, 4E11, 5E11, 6E11, 7E11, 8E11, 9E11, 10E11			
1st.	SA-208A	16-6658		455				FM-773	ST-105		5A1		Vol	FM-762	AM-63-Z	KSS-3	A2		D13-137		E	42				6G61, 6G61A		
2nd.	SA-209D	16-6660						FM-709					Voltone	FM-842	AM-60-Z	KSS-3	A	D13-133	E	41						6H43		
1st.	SA-194	16-5712		470				FM-727	ST-166		6E10		Voltone	FM-842	AM-60-Z	KSS-3	A	D13-133	E	41						6H44		
2nd.	SA-195	16-5714						FM-497			F2		Voltone	FM-486	M-60-Z				D13-133								11E6, 12E6, 14E6	
1st.	SA-135	16-5712		470				FM-714	ST-194		5E48		Voltone	FM-487	M-64-Z				D13-130								12F5	
2nd.	SA-136	16-5714						FM-687	ST-105		5A1		Vol	FM-678	M-63-Z				D13-137								21AF5, 21F5	
1st.	SA-196	16-6658		455				FM-742			F2		Voltone	FM-734	M-63-Z				A	D13-137								25G5
2nd.	SA-197	16-6660						FM-709	ST-189		F2		Voltone	FM-735	M-60-Z				D13-133								33F6	
1st.	SA-186	16-6658		455				FM-773	ST-166		6E10		Vol	FM-699	M-60-Z				A	D13-133								43F6
2nd.	SA-204A	16-6658						FM-388			F1		Vol	FM-762	AM-63-Z	KSS-3	A2		D13-137		E	42					6G63, 6G63A	
1st.	SA-205D	16-6660						FM-440			F2		Voltone	FM-303	M-63-Z				A	D13-137								626, 627, 628
1st.	SA-194	16-5712		470				FM-542			F11		Voltone	FM-302	M-64-Z				A	D13-130								630, 631, 634, 635
2nd.	SA-195	16-5714						FM-569					Voltone	FM-506	M-63-Z				D13-137									
1st.	SA-149	16-5712		470	FM-537	†		FM-573					Voltone	FM-554	M-60-Z				D13-133								1530, 1531, 1533, 1534, 1535, 1536, 1537, 1538	
2nd.	SA-151	16-5714																										
1st.	†	16-5712		456							†		F2		F2	Vol	M-60-Z		A	D13-133								ANSLEY
2nd.	†	16-5714									†					Voltone	M-60-Z		A	D13-133								D9A, D10A
1st.	†	16-5712		456							†		F2		F2	Vol	M-63-Z		A	D13-137								D21, D22.
2nd.	†	16-5714									†					Voltone	M-60-Z		A	D13-133								D24A, D25A
1st.	†	16-6658		456							8 Inch.					Voltone	12.20			D13-133								5, 32
2nd.	†	16-6660														Voltone	12.21			D13-133								
1st.	†	16-6658		455												Bass	12.22			D13-123								4, 41
2nd.	†	16-6660														GC-45	12.22			D13-133								
1st.	LO-3	14-1040		455				QS-3	ST-439					Voltone	RP-4	M-60-Z		A	G6	D13-137								51 (TUNER)
2nd.	T1-1	16-6658														Voltone	12.24A		A	T-109								51 (AMP-PWR.PK)
3rd.	T1-1	16-6660														Voltone	12.25			D13-137X								52 (TUNER)
1st.	T1-1	16-5712		456												Voltone	12.26			D13-139								52 (AMP-PWR.PK)
2nd.	T1-1	16-5714																										
1st.	†	16-5712		456							†		F2		F2	Vol	12.24A		A	T-109								61 (TUNER)
2nd.	†	16-5714									†					Voltone	12.25			D13-137								61 (AMP-PWR.PK)
1st.	T1-1	16-6658		455							12 Inch.		12E60			Vol	12.26		A	D13-137								62 (TUNER)
2nd.	T1-1	16-6660														Bass	RP-2			M-63-Z								
1st.	T1-2			10.7mc												Treble	RP-1			M-60-Z								
2nd.	T1-2																RP-3			M-63-Z								
1st.	T1-5																		12.24A									
2nd.	T1-6																		T-109									
1st.	†	16-5712		456															12.25									
2nd.	†	16-5714																	12.26									
1st.	†	16-5714		456															12.24A									
2nd.	†	16-5714																	T-109									
1st.	†	16-5714																	12.25									
2nd.	†	16-5714																	12.26									
1st.	†	16-5714																	12.24A									
2nd.	†	16-5714																	T-109									
1st.	†	16-5714																	12.25									
2nd.	†	16-5714																	12.26									
1st.	†	16-5714																	12.24A									
2nd.	†	16-5714																	T-109									
1st.	†	16-5714																	12.25									
2nd.	†	16-5714																	12.26									
1st.	†	16-5714																	12.24A									
2nd.	†	16-5714																	T-109									
1st.	†	16-5714																	12.25									
2nd.	†	16-5714																	12.26									
1st.	†	16-5714																	12.24A									
2nd.	†	16-5714																	T-109									
1st.	†	16-5714																	12.25									
2nd.	†	16-5714																	12.26									
1st.	†	16-5714																	12.24A									
2nd.	†	16-5714																	T-109									
1st.	†	16-5714																	12.25									
2nd.	†	16-5714																	12.26									
1st.	†	16-5714																	12.24A									
2nd.	†	16-5714																	T-109									
1st.	†	16-5714																	12.25									

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tube	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
ANSLEY—Continued 62 (AMP-PWR PK.)	10	6J5, 425L6, 425Z6.....	105 MFD 120 MFD 10 MFD.....	AF20D AF88D PRS25-10.....		UP5515. UP8415. BR102A.....		DY-2X50-150. DY-8040-150. M-10-25.....		EL-25. EL-28. TA-10.....		Chk Cut Cut		C-1706.....		T20C52.....		C-2977.....						
APEX 192A.....	3	6SN7GT, 6V6GT/G, 6X5GT. (46)	.....†.....	AF2222J.....		UPI11145.....		DY-402.....		EL-322.....		Chk Pwr Cut		C-1706..... P-6297..... A-3877.....	B11	T20C53..... T22R00..... T22S46.....		C-2975..... P-2949..... A-2930.....						
ARC 601.....	4	1R5, 1T4, 1S5, 3S4.....	601-10.....	PRS150-8.....		BR815.....		M-8-150.....		UT-81.....		Out	On Spkr.	A-3877.....	B3	T22S46.....	B3	A-2930.....	B3	950 467.....		*2R.....XX45.....		
ARCADIA 37D14-600.....	7	12SA7, 12SK7, 6SS7, 12SQ7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X342.....	PRSA-50502.....		EDL5315C.....		DSB-304.....		*UT-50I..... & TA-25.....		Out	51X120A.....	A-3876.....		T22S46.....		A-2928.....						
ARIA 554-1-61A.....	6	6SK7, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3G, (44)	.....†.....	AF44J.....		UP2245C.....		DY-316.....		EL-312.....		Pwr Out	C-51502..... On Spkr.	P-6120..... A-3856.....	B3	T22R04..... T22S47.....	B3	P-2952..... A-2900.....						
ARVIN 5.....	5	6A8, 6K7, 6Q7G, 6V6G, 6X5G, (51)	17-13419.....	PRSB450-8-8.....		EZ588.....		DH-2X8-450SS.....		TU-88.....		Chk Pwr Out	00-14917..... 00-14659.....											
6.....	5	6A8, 6K7, 5Q7G, 6K6G, 6X5G, (51)	17-14235.....	AF2214A.....		UPI1145C.....		DY-316.....		EL-102.....		Chk Pwr Out	00-14658..... 00-13511..... 00-13460.....	A-3878.....		T22S47.....		A-2931.....						
7A.....	5	6A8, 6K7, 6Q7G, 6K6G, 6X5G, (51)	17-14297.....	AF2214A.....		UPI1145C.....		DY-310.....		EL-102.....		Chk Pwr Out	00-16285..... 00-16286..... 00-16223.....	A-3878.....		T22S47.....		A-2931.....						
8A.....	6	6A8, 6K7, 6Q7G, 6P5G, 6AC9G, 6X5G.....	17-15266.....	PRSA450-10-10		EZ3112.....		DH-816-450SS.....		UT-816.....		Chk Pwr Out	00-16224..... 00-14917..... 00-14659.....	A-3878.....		T22S58.....		A-2931.....						
22A.....	6	6K7, 6A8, 6Q7G, 6K6G, 6X5G, (51)	17-14132.....	PRSB250-8-15.....		KR2888.....		D-2X8-450.....		TU-816.....		Chk Pwr Out	00-14658..... 00-14754..... & M-2X10-25.....	A-3878.....		T22S47.....		A-2931.....						
32.....	6	6K7, 6A8, 6Q7G, 6C6G, 6X5G, (51)	17-14221.....	PRSA450-8-16 & PRS25-10-10		EZ8845SS.....		D-2X8-450 & M-2X10-25.....		UT-816..... & TA-110.....		Chk Pwr Out	00-14755..... 00-14756.....	A-3878.....		T22S47.....		A-2931.....						
40, 40A.....	2	25B88GT, 70L7GT.....	17-14319.....	AF444D.....		UP2215C.....		DY-3X20-150.....		EL-222.....		Chk Pwr Out	00-16137.....	A-3865.....		T22S45.....		A-2928.....						
42.....	7	6K7, 6A8, 6Q7G, 6C5G, 6N7G, 024 or 6X5G, (51)	17-14222.....	PRSB450-16-16 & PRS25-10-10		EZ5112..... & EDL2101.....		DH-2X16-450SS & M-2X10-25.....		TU-1616..... & TA-110.....		Chk Pwr Out	00-14786..... 00-14785.....	A-3865..... A-4713.....		T20D76.....		A-2922.....						
44C.....	6	6SK7, 6A8, 6Q7G, 6V6G, 6X5G, (51)	10-ID-20 MFD	AF2214A.....		UPI1145C.....		DY-316.....		EL-202.....		Chk Pwr Out	00-14776..... 00-14776.....	A-2201.....		T22S66.....		A-2901.....						
58, 58A.....	5	6A8, 6K7, 6Q7G, 2516G, 25Z6G, N493, (51)	17-14239.....	AF44D.....		UP2215.....		DY-2X20-150.....		EL-221.....		Chk Pwr Out	00-15980.....	A-3877..... A-3875.....		T22S58..... T22S45.....		A-2930..... A-2928.....						
68.....	5	6A8, 6K7, 6Q7G, 6K6G, 5Y3G, (51)	17-14233.....	AF2214A.....		UPI1145C.....		DY-316.....		EL-202.....		Chk Pwr Out	00-15919..... 00-15920.....	A-3878.....		T22S47.....		A-2931.....						
71.....	5	6A8, 6K7, 6Q7G, 6K6G, 5Y3G, (44)	17-14271.....	PRSB450-8-8.....		EZ3112.....		DH-2X8-450SS.....		LM-88.....		Chk Pwr Out	00-16140..... 00-16160.....	A-3878.....		T22S47.....		A-2931.....						
78.....	5	6K8, 6K7, 6Q7G, 6K6G, 5Y3G, (44)	17-14233.....	AF2214A.....		UPI1145C.....		DY-316.....		EL-202.....		Chk Pwr Out	00-16099..... 00-16093.....	A-3878..... A-3855.....		T22S47..... T22S45.....		A-2931..... A-2928.....						
88.....	5	6A8, 6K7, 6Q7G, 25L6G, 25Z6G, M49B, (51)	17-14239.....	AF44D.....		UP2215.....		DY-2X20-150.....		EL-221.....		Chk Pwr Out	00-15980.....	A-3878..... A-3855.....		T22S47..... T22S45.....		A-2931..... A-2928.....						
89, 91.....	6	6A8, 6K7, 6Q7G, 6V6G, 5Y3G, 6U5, (51)	17-14249.....	PRSA450-8-8 & PRS25-25		EZ8845S.....		DH-2X8-450 & M-25-25.....		UT-88..... & TA-25.....		Chk Pwr Out	00-15995..... 00-15996.....	P-6011..... A-3877.....		T22R02..... T22S58.....		P-2951..... A-2930.....						
92.....	8	6K8, 6K7, 6Q7G, 6V6G, 5Y3G, 6U5.....	17-14124..... 17-14126..... 17-13260.....	GLS450-8- GLS450-16- GLS450-16.....		KR508..... KR516A..... D-16-450.....		D-8-450..... PLS-8..... PLS-16.....		In Cut	00-15972..... 00-15966..... 17-16050.....	B7	T22R04..... T20A00..... A-52-C..... A-3311..... AC21057-1..... AC21106..... AC21099-1.....	B7	T22S47..... T20C52..... T22S45.....		A-2915..... A-2931..... A-2936..... A-2928.....							
140-P.....	5	1R5, 1U4, 1S5, 3V4, 0Y4, (49)	A21163.....	AF844D.....		UP42215.....		DY-402010-150.....		EL-224.....		Chk Pwr Out	00-15995..... 00-15996.....	P-6011..... A-3877.....		T22R02..... T22S58.....		P-2951..... A-2930.....						
150-TC, 151-TC.....	6	12BD6, 12BE6, 12AT6, 35B5, 35W4, (47)	A21164..... A21349.....	PRS25-100 PRS150-20-40		BRH121..... BRD4215.....		M-100-12..... DSB-5030-150.....		UHC-112..... TA-240.....		Chk Pwr Out	00-15972..... 00-15966..... 17-16050..... AC21057-1..... AC21106..... AC21099-1.....	B7	T20A00..... A-52-C..... A-3311..... AC21057-1..... AC21106..... AC21099-1.....	B7	T22S47..... T20C52..... T22S45.....		A-2915..... A-2931..... A-2936..... A-2928.....					F6A60.....
302, 302A.....	4	12SK7, 12SQ7, 50L66T, 35Z5GT.....	17-16637.....	PRSA40302.....		EZ42150.....		DSB-303.....		TA-240..... & TA-25.....		Chk Pwr Out	00-16636.....	A-3865.....		T22S45.....		A-2928.....						
402, 402A.....	3	25B88GT, 50L6GT, 35Z5GT.....	17-14319.....	AF444D.....		UP2215C.....		DY-3X20-150.....		EL-222.....		Chk Pwr Out	00-16510.....	A-3865.....		T22S45.....		A-2928.....						
422, 422A.....	4	12SA7, 12SQ7, 50L6GT, 35Z4 or 35Z5GT, (47)	17-14398.....	PRSA40302.....		EZ4215C.....		DSB-303.....		TA-240..... & TA-25.....		Chk Pwr Out	00-17131.....	A-3865.....		T22S45.....		A-2928.....						
444, 444A, 444M 444AM.....	4	12SA7, 12SQ7, 50L6GT, 35Z5GT, or Equivalents	A19176.....	PRS40302.....		EZ4215C.....		DSB-303.....		TA-240..... & TA-25.....		Chk Pwr Out	AC18258-I.....	A-3876.....		T22S62.....		A-2928.....						
502, 502A.....	5	12A8GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (51)	17-14326.....	PRSA150-20-20 & PRS25-25		EZ2215C.....		DSB-302.....		TA-220..... & TA-25.....		Chk Pwr Out	00-16324.....	A-3865.....		T22S45.....		A-2928.....						
510.....	5	6A8GT, 6K7GT, 6SQ7GT, 6K6GT, 6X5GT, (44)	17-14297.....	AF2214A.....		UPI1145C.....		DY-310.....		EL-102.....		Chk Pwr Out	00-16446..... 00-16445.....	A-3878.....		T22S47.....		A-2931.....						
520.....	5	6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT	17-14297.....	AF2214A.....		UPI1145C.....		DY-310.....		EL-102.....		Chk Pwr Out	00-16446..... 00-16445.....	A-3878.....		T22S47.....		A-2931.....						
522, 522A.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	17-14375.....	PRSA150-20-20		EZ2215.....		DSB-2X20-150.....		TA-122.....		Chk Pwr Out	00-16869.....	A-3865.....		T22S45.....		A-2928.....						
524, 524A.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	17-14415.....	PRSA40302.....		EZ4215C.....		DSB-303.....		TA-240..... & TA-25.....		Chk Pwr Out	00-16869.....	A-3865.....		T22S45.....		A-2928.....						

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"
ARVIN—Continued	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	17-17140	PRSA150-20-20 & PRS25-25		EZ2215C		DSB-3X20-150		TA-122 & TA-25		Out	.....†										
544, 544A, 544AR, 544R	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	A19136	PRSA40302		EZ4215C		DSB-303		TA-240 & TA-25		Out	AC19193	A-3876		T22S45		A-2928					
552AN, 552N, 555, 555A	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	C19840	PRSA150-20-40		EDL4215		M-2X40-150		TA-240		Out	AC19357-1	C-1707		T20C52		C-2975					
558	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	A19780	PRSA150-12		EZ42215		DSB-403020-150		UT-121		Out	AC19358-1	A-3876		T22S45		A-2928					
602, 602A	6	12K7GT, 12A8GT, 12SQ7, 35L6GT, 35Z5GT, (47)	17-14319	AF444D		UP2215C		DY-3X20-150		EL-222		Chk	00-16424	C-1277		T20C52		C-2975					
610	5	6A8GT, 6K7GT, 6Q7GT, 6K6GT, 6X5GT, (44)	17-14297	AF22J4A		UP1145C		DY-310		EL-102		Out	00-16446	A-3876		T22S47		A-2931					
616, 616A	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (C-7)	17-14417	PRSA40302		EZ4215C		DSB-303		TA-240 & TA-25		Out	00-17302	A-3876		T22S45		A-2928					
620	5	6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT	17-14297	AF22J4A		UP1145C		DY-310		EL-102		Pwr	.....†	A-3878		T22S47		A-2931					
622, 622A	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	17-14376	PRSA150-20-20		EDL2115		M-2X20-150		TA-122		Out	00-16883	A-3865		T22S45		A-2928					
632	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	17-14376	PRSA150-20-20		EDL2115		M-2X20-150		TA-122		Out	00-16883	A-3865		T22S45		A-2928					
664, 664A, 6640	6	12SK7GT, 12SA7GT, 14R7, 35L6GT, 35Z5GT, (C-7)	A19239	AF88D		UP4215		DY-4020-150		EL-24		Chk	AC18583-1	C-1723		T-20C52		C-2975					
665	6	6SS7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	A19780	PRSA150-40-20 & PRS150-12		EZ42215		DSB-403020-150		TA-240		Out	AC19357-1	A-3876		T20C52		C-2975					
702	6	12K7GT, 12A8GT, 12SQ7, 35L6GT, 35Z5GT, (47)	17-14344	AF84D4A		UP4215C		DY-304		EL-343		Chk	AC19591-1	A-3876		T22S45		A-2928					
710	5	6A8, 6K7, 6Q7, 6K6G, 6X5G, (51)	17-14297	AF22J4A		UP1145C		DY-310		EL-102		Out	00-16534	C-1277		T20C52		C-2975					
720	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT, (51)	17-14297	AF22J4A		UP1145C		DY-310		EL-102		Out	00-16265	A-3878		T22S47		A-2931					
722, 722A, 732	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	17-6918	PRSA150-20-40 & PRS150-12		EZ42215		DSB-403020-150		TA-240 & UT-121		Chk	AC21073-1	C-1706		T22S47		A-2931					
802	5	1A7GT, 1NSGT, 1H5GT, 3Q5GT, 35Z5GT, (47)	17-14353	AF84D20A		UP4CJ65		DY-304		EL-351		Out	AC19591-1	A-3876		T20C52		C-2975					
803	5	1A7GT, 1NSGT, 1H5GT, 3Q5GT, 35Z5GT, (47)	17-14353	AF84D20A		UP4CJ65		DY-304		EL-351		Pwr	00-16608	A-3878		T22S47		A-2931					
810	6	6SK7, 6A8, 6Q7G, 6V6G, 6X5G, (51)	17-14299	AF22J4A		UP1145C		DY-316		EL-202		Pwr	00-16615	A-3876		T22S47		A-2931					
820, 821	6	6SK7, 6SA7, 6SQ7, 6UGGT, 6X5GT, (51)	17-14396	UP2235C		DY-310		EL-333		EL-333		Pwr	00-16305	A-3877		T22S58		A-2930					
822	5	1A7GT, 1NSGT, 1H5GT, 3Q5GT, 35Z5GT, (47)	17-14353	AF84D20A		UP4CJ65		DY-304		EL-351		Pwr	00-16566	A-3849		T22S45		A-2902					
828AT, 838AT	8	6A8G, 6K7G, 6H6G, 6F5G, 6V6G, 513G, 6E5, (51)	17-14001	GLS450-8		KR508A		D-8-450		PLS-8		Pwr	00-13703	P-6012		T22R04		P-2952					
			17-14126	GLS450-16		KR516A		D-16-450		PLS-16		Out	17-13721	A-3877		T22S58		A-2930					
			17-14124	GLS450-8		KR508		D-8-450		PLS-8		Out	17-15735	A-3877		T22S58		A-2930					
1237, 1247	12	6K7G, 6A8G, 6Q7G, 6J7G, 6H6G, 6V6G, 5U4G, 6AB5	17-14002	GLS450-16		KR516A		D-16-450		PLS-16		In	00-13088	A-62-C	B7	T20A00		A-2915					
			17-14138	GLS450-16		KR530		Z-30-50		PLS-30		Out	00-13773	C-1706		T20C52		C-2975					
			17-14005B	PRS25-25		BR202A		M-25-25		PLS-16		Out	00-13774	P-6013		T22R05		P-2953					
1427, 1427D	14	6K7G, 6A8G, 6J7G, 6H6G, 6C5G, 6L6G, 5U4G, 6AB5	17-14002	GLS450-16		KR516A		D-16-450		PLS-16		Out	17-13723	A-3311		T22S64		A-2936					
			17-14192	GL450-30		KR530		Z-30-50		PLS-30		Out	17-13790										
			17-14124	GLS450-8		KR508		D-8-450		PLS-8		Chk	00-13881										
ATLAS AB-45	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT/G, (51)	.....†	PRSA150-30-50		BRD3515		DSB-5030-150		TA-530		Out	.....†	A-3876	B3	T22S45		B3	A-2928		B3		
AUDAR MAS-4	3	6SL7GT, 6Y6G, 5Y3GT	50-20-20 Mfd	PRSA150-50-30 & PRS150-20		EZ42215		DSB-403020-150		TA-530 & UT-201		Pwr	.....†	P-6289	B12	T22R00		B12	P-2949	A-2928	B12		
P-1A	3	12SQ7GT, 50L6GT, 35Z5GT	25 Mfd.	PRS25-25		BR252A		DSB-403020-150		TA-530 & UT-201		Out	.....†	A-3876		T22S45		A-2928					
P-4A	3	6SF5, 6Y6G, 5Y3GT	8 Mfd.	PRSA150-50-30		BR815		M-8-150		UT-81		Out											
P-5	3	6SF5, 6Y6G, 6X5GT	10 Mfd.	PRSA150-50-30		BR102A		M-10-25		TA-10		Out	TPSA-13-D										
PR-6, PR-6A	4	12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT or Lock-in Type Equivalents	CE-LHH-4	PRSA150-20-40		BR102A		M-10-25		TA-220		Out	TOS-20-3	A-3876		T22S45		A-2928					
			CE-E-1	PRSA150-20		EZ42215		M-10-25		TA-10		Out	TOS-20-4	A-3865		T22S45		A-2928					
			CE-E-1	PRS25-10		BR102A		M-10-25		TA-10		Out	TOS-20-4	A-3865		T22S45		A-2928					

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photostat Set No.	MFR. & MODEL								
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note Quar.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note							
1st.....+		16-6658										17-17193	M-63-Z		A		D13-137	E	41					Continued	ARVIN					
2nd.....+		16-6660	455									B-17291	AM-63-Z	KSS-3	A		D13-137	E	41					532						
1st..AC18908-1		16-6658	455				AC19193	ST-105		5A1														I.	544A, 544AR,					
2nd..AC18909-1		16-6660																						544R						
1st..AC19355-1		16-6666	455				C19393	ST-113		4A07			C19389	AM-63-Z	KSS-3	A		D13-137	E	41					13.	552AN, 552N, 555,				
2nd..AC19356-1		16-6667					C19620	ST-105		5A1			C19753	AM-63-Z	KSS-3	A		D13-137	E	41					555A					
1st..AC19587-1		16-6666	455	C19594								C19947	AM-66-Z	KSS-3	A		D13-123	E	41					3.	558					
2nd..AC19588-1		16-6667										C17-14333	M-63-Z		A		D13-137	E	41	G1										
1st..00-16405.		16-6658	455				17-16408.	ST-105		5A1			17-14334	M-51-Z		A		D13-128	E	41	G1				602, 602A					
2nd..00-16406.		16-6660										17-16422	M-63-Z		A		D13-137	E	41	G1				610						
1st..00-16443.			455																					616, 616A						
2nd..00-16444.		16-5714																												
1st..00-17200.		16-6658	455				17-17251			F2			17-17291	AM-63-Z	KSS-3	A		D13-137	E	41										
2nd..00-17301.		16-6660										17-16488	M-63-Z		A		D13-137	E	41	G1				620						
1st..00-16883.		16-6658										17-16867	F2		17-17376.	M-63-Z		A		D13-137	E	41	G1			622, 622A				
2nd..00-16886.		16-6660										17-16867.	F2		17-16899	M-63-Z		A		D13-137	E	41	G1			632				
1st..00-16886.		16-6660																												
1st..AC18581-1.		16-6666	D6	455			C-18550	ST-107		5A15			019224	AM-60-Z	KSS-3	A		D13-133	E	41					3, 29	664, 664A, 664D				
2nd..AC21009-1.		16-6666										C19279	AM-40-S	KSS-3	A	G6	D11-120	E	41	G1										
1st..AC18587-1.		16-6658					D-19882	ST-117		8A4			C19965	AM-60-Z	KSS-3			D13-133	E	41					18.	665				
2nd..AC19588-1.		16-6660										17-16516	F1	F1			C19582	AM-63-Z	KSS-3	A		D11-137	E	41				702		
1st..00-16531.		16-6658										17-16521	F1	F1			17-16521	M-63-Z		A		D13-137	E	41	G1					
2nd..00-16532.		16-6660										17-16530	F2	F2			17-16530	M-51-Z		A		D13-128	E	41	G1					
1st..00-16263.		16-5712	455									17-14536	SD-60-Z	DFS-½			DC13-133		G14	17-14747	5300	H1		710						
2nd..00-16264.		16-5714										17-14536	F2	F2			17-14536	SD-60-Z	DFS-½			DC13-133		G14	17-14747	5300	H1	720		
1st..00-17007.		16-6658										17-16517	F2	F2			17-14536	SD-60-Z	DFS-½			DC13-133		G14	17-14747	5300	H1			
2nd..C0-17008.		16-6660										17-16517	F2	F2			17-14536	SD-60-Z	DFS-½			DC13-133		G14	17-14747	5300	H1			
1st..00-16913.		16-6658										17-16892.	ST-108	6A1			17-16950	M-64-Z		A		D13-130	E	41	G1				722, 722A, 732	
2nd..00-17005.		16-6658										17-16892.	ST-108	6A1			17-16951	M-51-Z		A		D13-128	E	42	G1				802	
1st..00-16578.		16-6658										17-16502.	ST-105	5A1			17-14350	M-63-Z		A		D13-137	E	42	G1				803	
2nd..00-16578.		16-6660										17-16613.	ST-105	5A1			17-14350	M-63-Z		A		D13-137	E	42	G1				810	
1st..00-16303.		16-6658										17-16310.	F2	F2			17-14536	SD-60-Z	DFS-½			DC13-133		G14	17-14747	5300	H1			
2nd..00-16304.		16-6662										17-17114.	F2	F2			17-14536	SD-60-Z	DFS-½			DC13-133		G14	17-14747	5300	H1			
1st..C0-17074.		16-6662	455									17-17114.	F1	F1			17-14536	SD-60-Z	DFS-½			DC13-133		G14	17-14747	5300	H1	820, 821		
2nd..C0-17075.		16-6653										17-17168.	ST-105	5A1			17-14536	SD-60-Z	DFS-½			DC13-137		42	G1				822	
1st..C0-16579.		16-6660										17-13720.	10E10.				17-13720.	T-78		A		D13-133X		41	G1				828AT, 838AT	
2nd..C0-15737.			455									17-15734.	12E10.				17-13713.	M-51-Z		A		D13-128		41	G1					
3rd..C0-15738.																														
C0-15739.																														
1st..00-13779.			455									17-13722.	F2	F2			17-13795	T-78		A		D13-133X					1237, 1247			
2nd..00-13780.			100									17-13789.	F2	F2			17-13796	M-51-Z		A		D13-128								
2nd..00-13781.			455									17-13791.	F1	F1			17-14157.	S13-5000		A		W-5000		51						
1st..00-13779.																														
1st..00-13780.																														
2nd..00-13781.																														
1st..TIF-1.		16-5742.	455	PC-301M	L-40-A, L-70-A							5 Inch.	ST-105.	6A1			Vol	1.	M-60-Z		A		D13-133		41	G1			14.	ATLAS AB-45
2nd..20110.		16-6658		16-6660								6 Inch.	ST-108.	6A1			Vol	†.	M-63-Z		A		D13-137		41	G1			26.	AUDAR MAS-4
												6 Inch.	ST-109.	6A15			Vol	Tone	24171-1, VC10105.	M-66-Z M-63-Z	A		D13-139 D13-137		41	G1			5.	P-IA
												6 Inch.	ST-108.	6A1			Vol	Tone	RVC-5040 RVC-105-5.	M-58-S M-63-Z	A		D11-133 D13-137		41	G1			19.	P-4A
												6 Inch.	ST-108.	6A1			Vol	Tone	†.	M-66-Z M-63-Z	A		D13-139 D13-137		41	G1			5.	P-5
1st..TIF-1.		16-5742.	455	PC-301M	L-40-A, L-70-A							6 Inch.	ST-108.	6A1			Vol	RVC-16-3.	M-63-Z		A		D13-137		41	G1			13.	PR-6, PR-6A

† Information not available.



Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS			Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL Photocat Set No.							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Charostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	
					†	L-70, X-26		61B5MS					Vol		M-63-Z		A		D13-137		41	G1		Continued— 19.	AUDAR RE-8A	
1st.	A575A	16-6668		455				PM-703	ST-113		4A07		Vol	RV-44B												27.
2nd.	A575A	16-6669		455				PM-703	ST-113		4A07		Vol	RV-44B											26.	
1st.	A575A	16-6668		455				PM-504			3A07		Vol	RV47	M-63-Z										23.	
2nd.	A575A	16-6669		455	D7						F1		Vol	RV44	M-63-Z											
1st.	†	16-6668		456							F1		Vol	RV-44A	M-64-Z		A		D13-137		42	G12	G1			
2nd.	†	16-6668		456							F1		Vol	RV-44A	M-64-Z		A		D13-137		41	G12	G1			
1st.	†	15-6669		456							F1		Vol	RV-44B	M-63-Z		A		D13-137		42	G1			5.	
2nd.	†	16-6658		455				5 Inch	ST-107		5A15		Vol	RV44B	M-63-Z		A2		D13-137		42	G1				
1st.	†	16-6658		455				PM-502	ST-105		5A1		Vol	RV44B	M-63-Z		A2		D13-137		42	G1				
2nd.	†	16-6658		455				PM-800	ST-119		10A31		Vol	RV-46	M-64-Z		A		D13-130		41	G1				
1st.	†	16-6660		456						F1		Vol	RV-46	M-64-Z		A		D13-130		41	G1					
2nd.	†	16-5712		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-5714		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G1					
1st.	†	16-6650		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6660		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6660		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6660		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6650		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6660		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6650		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6660		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6650		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
2nd.	†	16-6658		456						F1		Vol	RV-44	M-63-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-14A	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6650		456						F1		Vol	RV-46	M-64-Z		A2		D13-137		42	G12	G1				
1st.	†	16-6658		456						F2		Vol	RV46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6650		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
2nd.	†	16-6658		456						F2		Vol	RV-46	M-64-Z		A		D13-130		41	G12	G1				
1st.	†	16-6660		456																						

**†** Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"		
AUTOMATIC—Cont'd																									
265.....	3 12SQ7, 50L6, 50Y6.....	20-20-20 Mfd.	PRSA150-20-20 & PRS150-20	EZ2215 & BR2015	DSB-2X20-150 & M-20-150	TA-220 & UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
347, 351.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (51)	50-30 Mfd.	PRSA150-30-50	EDL5315	DSB-5030-150	TA-530	Out	R-1040-1	A-3865	T22S45	A-2928														
362.....	3 12SQ7, 50L6, 50Y6.....	20-20-20 Mfd.	PRSA150-20-20 & PRS150-20	EZ2215 & BR2015	DSB-2X20-150 & M-20-150	TA-220 & UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
400, 401.....	4 6K7GT, 6J7GT, 25L6GT, 25Z6, (BM55B Ballast)	10-20-20 Mfd.	AF444D	UP2215	DY-3X20-150	EL-320	Out	R-1040-1	A-3865	T22S45	A-2928														
402, 403, 404, 405, 406, 408.....	5 12A8GT, 12K7GT, 12SQ7GT, 50L6GT, 35Z5GT, (51)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
420.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5, (51)	20-20 Mfd.	PRSA150-20-20	BRD2215	M-2X20-150	TA-220	Out	R-1040-1	A-3865	T22S45	A-2928														
430.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (51)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
432, 434A.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (51)	20-20 Mfd.	PRSA150-20-20	BRD2215	M-2X20-150	TA-220	Out	R-1040-1	A-3865	T22S45	A-2928														
436.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (51)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
440, 441.....	5 12A8GT, 12K7GT, 12SQ7GT, 50L6GT, 35Z5GT, (51)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
442, 443.....	5 12A8GT, 12K7GT, 12SQ7GT, 50L6GT, 35Z5GT, (51)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
444.....	5 12A8GT, 12K7GT, 12SQ7GT, 50L6GT, 35Z5GT, (51)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
446.....	5 12A8GT, 12K7GT, 12SQ7GT, 50L6GT, 35Z5GT, (51)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
448, 450, 452, 454.....	5 6K8GT, 6K7GT, 6S07GT, 25L6GT, 25Z6GT, (BM49B Ballast)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
480.....	5 6A8GT, 6K7GT, 6S07GT, 25L6GT, 25Z6GT, (BM49B Ballast)	20, 20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201	Out	R-1040-1	A-3865	T22S45	A-2928														
601, 602 (Ser. A).....	5 12SA7GT, 12B7, 12SQ7GT, 50L6GT, 35Z5GT, (47)	50 Mfd.	PRS150-50	BR5015	M-50-150	UT-501	Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3											
601, 602 (Ser. B).....	5 12BE6, 12BA6, 12AT6, 50L6GT, 35W4, (47)	30 Mfd.	PRS150-50	BR3015	M-20-150	UT-301	Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3											
612X, 613X.....	6 12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	50 Mfd.	PRS150-50	BR5015	M-40-150	UT-501	Out	A-3876	T22S45	A-2928															
614X, 616X.....	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	50 Mfd.	PRS150-50	BR5015	M-50-150	UT-501	Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3											
620.....	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	50 Mfd.	PRS150-50	BR5015	M-50-150	UT-501	Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3											
640 (Ser. B).....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47) or Lock-in Type Equivalents	50 Mfd.	PRS150-50	BR5015	M-50-150	UT-501	Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3											
660, 662, 666.....	6 14A7, 14Q7, 14B6, 35L6GT, 35Y4, (47)	50 Mfd.	PRS150-50	BR5015	M-50-150	UT-501	Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3											
667.....	7 14A7, 14Q7, 14B6, 50L6GT, 35Y4, (47)	50 Mfd.	PRS150-50	BR5015	M-50-150	UT-501	Out	On Spkr.	A-3876	T22S45	A-2928														
720.....	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	50 Mfd.	PRS150-50	BR5015	M-50-150	UT-501	Out	A-3876	B3	T22S45	B3	A-2928	B3												
AVIOLA																									
509.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	12104	PRSA150-20-20	EZ42215	DSB-3X20-150	TA-220	Out	R-1040-1	A-3876	T22S45	A-2928														
601.....	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5, (47)	10 Mfd.	PRSA150-20	BR105	M-10-50	UT-201	Out	R-1040-1	A-3876	T22S45	A-2928														
608.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12101-40	PRSA150-20-40	BRD4215	M-2X40-150	TA-240	Out	R-1040-1	A-3876	T22S45	A-2928														
612.....	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5, (47)	12105-10	PRSA150-40-20	BR25-25	M-10-25	TA-25	Out	R-1267	A-3876	T22S45	A-2928														
618.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12101-40	PRSA150-40-20	BRD4215	M-2X40-150	TA-240	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5, (47)	12105-10	PRSA150-40	BR4215	M-10-25	TA-25	Out	R-1267	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-25	PRSA150-40	BR202A	M-25-25	TA-25	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-40	PRSA150-40	BR4215	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-50	PRSA150-40	BR4015	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-60	PRSA150-40	BR202A	M-40-150	TA-40	Out	R-1267	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-70	PRSA150-40	BR4215	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-80	PRSA150-40	BR4015	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-90	PRSA150-40	BR202A	M-40-150	TA-40	Out	R-1267	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-10	PRSA150-40	BR4215	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-15	PRSA150-40	BR4015	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-20	PRSA150-40	BR202A	M-40-150	TA-40	Out	R-1267	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-25	PRSA150-40	BR4215	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-30	PRSA150-40	BR4015	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-35	PRSA150-40	BR202A	M-40-150	TA-40	Out	R-1267	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-40	PRSA150-40	BR4215	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-45	PRSA150-40	BR4015	M-40-150	TA-40	Out	R-1040-1	A-3876	T22S45	A-2928														
620.....	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4, (47)	12105-50	PRSA150-40	BR202A	M-40-150	TA-40	Out	R-1267	A-3876	T22S45	A-2928														

---

t Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. of Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"		
BELL SOUND—Continued	7	7B7, 6SL7GT or 6SF5, 6N7, 6L6G, 5U4G, (44)	20 Mfd.	PRS450-20		BR2045		M-20-450	DY-2X10-450	UT-20	EL-210	Chk	B-20055	C-2309		C-2993							
3725	10-10 Mid.	AF22J		UP1145		DY-30-450		EL-3		Chk	B-20058	C-1707	P-5165	T20C52		C-2975							
	30 Mid.	AF61		UP3045		DY-10-450		EL-1		Pwr Out	B-20057		T22R07		P-2955								
	10 Mid.	AF2J		UP1045		M-50-25		TA-50					T22S66										
	50 Mid.	PRS25-50		BR502				EL-423		Chk	B-20059	C-2309		T20C52		C-2993							
	20-10-50 Mfd.	AF44J & PRS25-50		UP1145				EL-50		Chk	B-20058	C-1707		T22R24		C-2975							
	150 Mfd.	BR502								Pwr Out	B-20051	A-3801		T22S68		A-3130							
BELLTONE 500	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	50-30 Mfd.	PRSA150-30-50		EDL3515		M-5030-150		TA-530		Out		A-3876	B3	T22S45	B3	A-2928	B3				
BELMONT A-5D110	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35ZGT, (47)	11994	AF844D		UP42215		DY-403020-150	EL-224		Out	10595		A-3876		T22S45		A-2928					
3AW7.	3	12SQ7GT, 50L6GT, 35Z5GT	A8C1145-1	AF88D		UP5515		DY-2X40-150	EL-25		Out	B-12C-10074-3		A-3876		T22S45		A-2928					
4B16	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119117B	PRS150-12		BR1215		M-10-150	UT-121		Out	10591B		A-3881		T22S48		A-2934		758		17GD60	
4B17	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119117	PRS150-12		BR1215		M-10-150	UT-121		Out	10591B		A-3881		T22S48		A-2934		758		17GD60	
4B112, 4B113	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119117	PRS150-12		BR1215		M-10-150	UT-121		Out	10591B		A-3881		T22S48		A-2934		758		17GD60	
4BA1	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119117B	PRS150-12		BR1215		M-10-150	UT-121		Out	10591B		A-3881		T22S48		A-2934		758		17GD60	
4BA2	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119117B	PRS150-12		BR1215		M-10-150	UT-121		Out	10591B		A-3881		T22S48		A-2934		758		17GD60	
5DA1	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	11992	AF88D		UP4215		DY-4020-150	EL-24		Out	10595B		A-3876		T22S45		A-2928					
5D16	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	11994	AF844D		UP42215		DY-403020-150	EL-224		Dut	105108C		A-3876		T22S45		A-2928					
5D110	5	12BE5, 12BD6, 12AT6, 50B5	119117	PRS150-12		BR1215		M-10-150	UT-121		Out	10591B		A-3881		T22S48		A-2934					
5D128 (Ser. A)	5	12SA7GT, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	11992	AF88D		UP4215		DY-4020-150	EL-24		Out	B-12C-10735		A-3876		T22S45		A-2928					
5P19 (Ser. A)	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT, (47)	119123								Out	105127		A-3496		T22S48		A-2900		744 2482		F4P1, 2M30	
5P113	5	2E32, 2E22, 2E42, 2E36									Out									1016 412		2ZE, U15E	
6A27	6	6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G, (44)	119115	PRSA450-16-16		EZ5116		DH-2X16-450SS	TU-1616		Pwr Out	104225B		P-6011		T22R02		P-2951					
6D14	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	11994	AF844D		UP42215		DY-403020-150	EL-224		Out	105118		A-3856		T22S47		A-2902					
6D15	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	11994	AF844D		UP42215		DY-403020-150	EL-224		Out	105104		A-3876		T22S45		A-2928					
6D18, 6D19	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	11994	AF844D		UP42215		DY-403020-150	EL-224		Out	10595B		A-3876		T22S45		A-2928					
6D111 (Ser. B)	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	11994	AF844D		UP42215		DY-403020-150	EL-224		Out	105104		A-3876		T22S45		A-2928					
6D120	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	11994	AF844D		UP42215		DY-403020-150	EL-224		Dut	10595		A-3876		T22S45		A-2928					
6P11	6	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 35Z5GT, (47)	119128								Out	105131		A-3822		T22S47		A-2932		746 2482		G3, 2M30	
7D22	7	12SJ7, 12J5GT, 12SK7, 6T7G, 12SQ7, 35L6GT, 35Z5GT, (47)	119128	PRSA150-20-40 & PRS150-20		EZ42215		DSB-4C3020-150	TA-240 & UT-201		Out	105134		A-3856		T22S46		A-2930					
7D22	7	12SJ7, 12J5GT, 12SK7, 6T7G, 12SQ7, 35L6GT, 35Z5GT, (47)	119128	PRSA150-20-40 & PRS150-20		EZ42215		DSB-4C3020-150	TA-240 & UT-201		Out	105134		A-3856		T22S46		A-2930					
7H31	7	6S7G, 6SA7, 6T7G, 6L5G, 6SC7, 024, (44)	119127								Pwr In	104265											
8A59	8	6SK7, 6SA7, 6SQ7, 6J5GT, 6K6GT, 5Y3GT, (44)	119109	AF22J		UPI50145		DY-3X15-450	EL-344		Pwr Out	105131		A-4723		T20D75		A-2920					
8AE1	8	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, (44)	119109	AF22J		UPI50145		DY-3X15-450	EL-344		Pwr Out	105133		A-3857		T22S48		A-2937					
11A24	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, (44)	119124	AF44J				DY-3X20-450		Pwr Out	104202B		P-6120		T22R02		P-2952						
11A25	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 6U5, 5Y3G, (44)	119124	AF44J				DY-3X20-450		Pwr Out	10554F		A-3852		T22S56		A-2900						
11A55	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 6U5, 5Y3G, (44)	119112	AF86214A	A3	UP43145C	A3	DY-406	EL-424	A3	Pwr Out	10554B		A-3852		T22S55		A-2904					
11AE2	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 6U5, 5Y3G, (44)	119112	AF86214A	A3	UP43145C	A3	DY-406	EL-424	A3	Pwr Out	104217		P-6013		T22R05		P-2953					
11AE2	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 6U5, 5Y3G, (44)	11969	AF86214A	A3	PR350-16	A3	M-16-450	UT-163	A3	Pwr Out	105115		A-3830		T22S74		A-2905					
12A51, 12A52	12	6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 6U5, 5Y3G, (44)	119112	AF86214A	A3	UP43145C	A3	DY-406	EL-424	A3	Pwr Out	104217		P-6013		T22R05		P-2953					
151	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	11992	AF88D		UP4215		DY-4020-150	EL-24		Dut	10595C		A-3876		T22S62		A-2928					
403	4	1A7G, 1N5G, 1H5G, 1C5G	11935	PRS25-25		BR252A		M-25-25	TA-25		Out			A-3878		T22S47		A-2931		741 2482		8F, 2B30	

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiat Part No.	Note	Photofact Set No.			
														Mike Phono Bass Treble	† † †	M-63-Z M-60-Z M-60-Z M-60-Z			D13-137 D13-133 D13-133 D13-133		G1 G1 G1 G1					Continued—	BELL SOUND 3725		
														Mike Phono Bass Treble	B-20066-P-39 B-20066-P-39 B-20066-P-39 †	M-63-Z M-63-Z M-63-Z M-60-Z			D13-137 D13-137 D13-137 D13-133		G1 G1 G1 G1						24	3728M	
1st..	†	16-6658		455				ST-105		5A1			Vol	CM1264	M-60-Z		A		D13-133		41	G1				BELLTONE 500			
2nd..	†	16-6660																							BELMONT A-6D110				
1st..	108140G	16-6658		455				114191	ST-113	4A1			Vol	101211	AM-63-Z	KSS-3	A		D13-137	E	41					17			
2nd..	108145C	16-6660						B-18A-10592	ST-107	5A15			Vol	A-10A-1137	AM-60-Z	KSS-3	A		D13-133	E	41					10			
1st..	108202	16-6658		455				114238					Vol	101250	AM-63-Z	KSS-3	A2		D13-137	E	42					4B16			
2nd..	108153B	16-6660						18A-10164	ST-105	5A1			Vol	A-10155	AM-63-Z	KSS-3	A2		D13-137	E	42					2			
1st..	108202	16-6658		455				114238	ST-107	5A15			Vol	101250	AM-63-Z	KSS-3	A2		D13-137	E	42					10			
2nd..	108153B	16-6660						114238	ST-107	5A15			Vol	101250	AM-63-Z	KSS-3	A2		D13-137	E	42					4BA1			
1st..	108202	16-6658		455				114238	ST-107	5A15			Vol	101250	AM-63-Z	KSS-3	A2		D13-137	E	42					4BA2			
2nd..	108153B	16-6660						114215R	ST-108	6A1			Vol	101250	AM-63-Z	KSS-3	A2		D13-137	E	42					5DA1			
1st..	108202	16-6658		455				114239	ST-105	5A1			Vol	101251	AM-63-Z	KSS-3	A		D13-137	E	41					5C16			
2nd..	108140G	16-6658						114239	ST-105	5A1			Vol	101265	AM-60-Z	KSS-3	A		D13-133	E	41					22			
1st..	108141E	16-6660		455				114257	ST-194	5E45			Vol	A-10A-10720	AM-60-Z	KSS-3	A		D13-133	E	41					5D1F0			
2nd..	108140L	16-6658		455	4426	L-40		114198	ST-105	5A1			Vol	101198	AM-63-Z	KSS-3	A		D13-137	E	41					9			
1st..	108145E	16-6658		455	t.	L-70-S		114201	ST-105	5A1			Vol	101252	AM-63-Z	KSS-3	A2		D13-137	E	42					5D128 (Ser. A)			
2nd..	108202	16-6658		455				114240	ST-107	5A15			Vol													9			
1st..	108201	16-6658		455									Vol												28				
2nd..	108200	16-6660											Vol												5P113				
1st..	†			455																					6A27				
2nd..	108169E	16-5712		455	t.	L-40		114222					Vol	101232	AM-63-Z	KSS-3	A		D13-137	E	41					6D14			
1st..	108106U	16-5714						114197	ST-105	5A1			Vol	101231	AM-63-Z	KSS-3			D13-137	E	41					6D15			
2nd..	108140H	16-6658		455				114257	F2	F2			Vol	101211	AM-63-Z	KSS-3	A		D13-137	E	41					6D18, 6D19			
1st..	108145C	16-6660		455				114255	F2	F2			Vol	101211	AM-63-Z	KSS-3	A		D13-137	E	41					2			
2nd..	108140G	16-6658		455				114191	F2	F2			Vol	101251	AM-63-Z	KSS-3	A		D13-137	E	41					6D11 (Ser. B)			
1st..	108140R	16-6660		455				114255	F2	F2			Vol	101218	AM-63-Z	KSS-3	A		D13-137	E	41					24			
2nd..	108140G	16-6658						114191	ST-113	4A1			Vol	101193	AM-63-Z	KSS-3	A		D13-137	E	41					6P11			
1st..	108220C	16-6658		455				114246	ST-105	5A1			Vol	101258	AM-63-Z	KSS-3	A2		D13-137	E	42					7D22			
2nd..	108203	16-6658						114262	ST-108	6A1			Vol	101262	AM-63-Z	KSS-3	A		D13-137	E	41					7D22 (Ser. B)			
1st..	108206	16-6658		455				114262	ST-108	6A1			Vol	101262	AM-63-Z	KSS-3	A		D13-137	E	41					6A59			
2nd..	108205												Vol	101263	AM-60-Z	KSS-3			D13-137	E	42					8AEI			
1st..	108207	16-6658		455				114250	ST-115	8A21			Vol	101259	AM-63-Z	KSS-3	A2		D13-137	E	42					11A24			
2nd..	108208	16-6660											Vol	101260	AM-63-Z	KSS-3			D13-137	E	42					11A25			
1st..	108177	16-5712		455	t.	L-26		B-188-10617	+				Vol	A-10A-10586	AT-88	KSS-3	A		D18-133X	E	41					11A55			
2nd..	108176	16-5714		455	t.	L-26		114221					Vol	101253	AM-63-Z	KSS-3			D18-133X	E						11AE2			
1st..	108175C	16-5714		455	4426	L-40		114261B					Vol	101254	AM-63-Z	KSS-3			D18-133X	E						12A51, 12A52			
2nd..	108169J	16-5712		455	4426	L-40		10E60					Vol	101270	AM-60-Z	KSS-3	A		D13-137	E	41					403			
1st..	108130C	16-3736	D4	455	4426	L-40		114275					Vol	101271	AM-63-Z	KSS-3	A		D13-137	E	41					151			
2nd..	108169K	16-5712		455	4426	L-40		114270					Vol	101273	AM-60-Z	KSS-3	A		D13-137	E	41								
1st..	108130G	16-3736	D4	455	4426	L-40		114270					Vol	101273	AM-63-Z	KSS-3	A		D13-137	E	41								
2nd..	108177B	16-5712		455	4426	L-40		12E60					Vol	101275	AT-113	KSS-3			D13-139X	E									
1st..	108181			455	t.	L-22		114209					Vol	101229	AM-60-Z	KSS-3			D13-133	E									
2nd..	108155B												Vol	101238	AM-60-Z	KSS-3	A		D13-133	E	41								
3rd..	108182							114225	ST-105	5A1			Vol	101229	AM-60-Z	KSS-3			D13-133	E	41								
1st..	108210							114158	ST-105	5A1			Vol	101163	AM-63-Z	KSS-3	A2		D13-137	E	42								
2nd..	108155C																												
3rd..	108209																												
1st..	108157L	16-6658		455																									
2nd..	108157N	16-6660		465																									
1st..	108142	16-5712		465																									
2nd..	108143	16-5714																											

\*Information not available.



Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.	
1st.	108151.	16-5712.	465				114155.	ST-105.	5A1.		Vol	101173.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42					Continued —	BELMONT 407, 411	
2nd.	108152.	16-5714.					114147.	ST-105.	5A1.		Vol	101155.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42						418	
1st.	108111E	16-5712.	465				114166.	ST-105.	5A1.		Vol	101175.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42						460 (Ser. A)	
2nd.	108112D	16-5714.					114210.	ST-108.	6A1.		Vol Tone Vcl	101119.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42						460 (Ser. C)	
1st.	108151B	16-5712.	465				114-96.	ST-108.	6A1.			101-91.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42						489 (Ser. A)	
2nd.	108153.	16-5714.																								
1st.	108151B	16-5712.	465																							
2nd.	108153.	16-5714.																								
1st.	108153.	16-5712.	465																							
2nd.	108153.	16-5714.																								
1st.	108153.	16-5712.	465																							
2nd.	108153.	16-5714.																								
1st.	108105B	16-5712.	465																							
2nd.	108106B.	16-5714.																								
1st.	108-84.	16-5712.	465																							
2nd.	108-85.	16-5714.																								
1st.	108-105 B	16-5712.	465																							
2nd.	108-106 B	16-5714.																								
1st.	108171.	16-5712.	465																							
2nd.	108172.	16-5714.																								
1st.	108177 C	16-5712.	455																							
2nd.	108188 B	16-5714.																								
1st.	108157 C	16-6658.	465																							
2nd.	108157 C.	16-6660.																								
1st.	108133.	16-6658.	465																							
2nd.	108135.	16-6659.																								
3rd.	108134.	16-6660.																								
1st.	108171.	16-5712.	465																							
2nd.	108172.	16-5714.																								
1st.	108157 C.	16-6658.	465																							
2nd.	108140.	16-6658.																								
1st.	108141.	16-6660.	465																							
2nd.	108141.	16-6658.																								
1st.	108140 F	16-6558.	465	114194.	L-26.		114193.	ST-105.	5A1.		Vol	101217.	AM-60-Z.	KSS-3.	A.		D13-133.	E	47							518
2nd.	108145 D	16-6660.					114201.	ST-105.	5A1.		Vol	101198.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							519
1st.	108140 I	16-6558.	455				114201.	ST-105.	5A1.		Vol	101238.	AM-60-Z.	KSS-3.	A.		D13-133.	E	41							524
2nd.	108141 D	16-6660.					114225.	ST-105.	5A1.		Vol	101208.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							527 (Ser. A)
1st.	108157 L	16-6658.	455				114176.	ST-168.	6E18.		Vol	101208.	AM-63-Z.	KSS-3.	A.		D13-133.	E	41							529
2nd.	108157 N	16-6660.					114176.	ST-168.	6E18.		Vol	101237.	AM-51-Z.	KSS-3.	A.		D13-128.	E	41							531
1st.	108169 B	16-5712.	465				114176.	ST-168.	6E18.		Vol	101210.	AM-63-Z.	KSS-3.	A.		D13-137.	E	42							533
2nd.	108170.	16-5714.					114176.	ST-168.	6E18.		Vol	101140.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							534
1st.	108169 H	16-5712.	455				114176.	ST-168.	6E18.		Vol	101208.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							536
2nd.	108170 C	16-5714.					114176.	ST-168.	6E18.		Vol	101208.	AM-63-Z.	KSS-3.	A.		D13-133.	E	41							539
1st.	108171 B	16-5712.	455				114189.	ST-105.	5A1.		Vol	101208.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							542
2nd.	108172.	16-5714.					114189.	ST-105.	5A1.		Vol	101210.	AM-63-Z.	KSS-3.	A.		D13-137.	E	42							546
1st.	108111 C	16-5712.	465				114137.	ST-108.	6A1.		Vcl	101140.	AM-63-Z.	KSS-3.	A.		D13-137.	E	42							551
2nd.	108112.	16-5714.					114137.	ST-108.	6A1.		Vcl	101150.	AM-63-Z.	KSS-3.	A.		D13-137.	E	42							553
1st.	—	16-5712.	465				—.	—.	F1		F1	101-41.					D13-137.	E	42							553
2nd.	16-3736.	D4					114-59.	—.	F2		F2	Vol	101-41.				D13-133.	C3	41	G9	126-1.	5307.	H1		557A	
1st.	108-96.	16-5712.	465				114-59.	—.	F2		F2	Vol	101-41.				D13-133.	C3	41	G9	126-1.	5307.	H1			
2nd.	108-95.	16-5714.					114-59.	—.	F2		F2	Vol	101-41.				D13-133.	C3	41	G9	126-1.	5307.	H1			
1st.	108157 D	16-6658.	465				114187.	ST-113.	4A1.		Vol	101209.	AM-60-Z.	KSS-3.	A6.		D13-133.	E	47							571
2nd.	108157 E	16-6660.					114114.	ST-105.	F8	SEV6.	Vol	101110.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							577A
1st.	10896 D	16-5712.	465				114114.	ST-105.	F8	SEV6.	Vol	101110.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							577 C
2nd.	10893 C	16-5714.					114105.	ST-168.	6E18.		Vol	101100.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							577D, 579
1st.	108139.	16-5712.	465				114105.	ST-168.	6E18.		Vol	101100.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							582
2nd.	108121 B	16-5714.					114210.	ST-168.	6E18.		Vol	101100.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							583
1st.	108105 E	16-5712.	465				114240.	ST-105.	5A1.		Vol	101252.	AM-63-Z.	KSS-3.	A2.		D13-137.	E	42							590
2nd.	108106 F	16-5714.					114191.	ST-105.	5A1.		Vol	101211.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							612
1st.	108111 B	16-5712.	465				114218.	ST-736.	SE10.		Vol	101142.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							616
2nd.	108112 B	16-5714.					114188.	ST-168.	6E18.		Vol	101143.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							629
1st.	108201.	16-6658.	455				114218.	ST-736.	SE10.		Vol	101143.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							
2nd.	108200.	16-6660.					114191.	ST-105.	5A1.		Vol	101208.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							
1st.	108140 G	16-6658.	465				114191.	ST-105.	5A1.		Vol	101142.	AM-63-Z.	KSS-3.	A.		D13-137.	E	41							
2nd.	108145 C	16-6660.					114218.	ST-736.	SE10.		Vol	101143.</														

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No.	Tubes Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
BELMONT—Continued	5	6A8G, 6K7G, 607G, 25L6G, 25Z6, L49B Ballast, (44).	11962B									Out	10560	A-3876		T22S45	A-2928						
632.	5	6A8G, 6K7G, 607G, 25L6G, 25Z6, L49B Ballast, (44).	11953C	PRSA150-30-30 & PRS25-50	EZ4215C	DSB-305		TA-330 & TA-50		Out	10560	A-3876		T22S45	A-2928								
633.	5	6A8G, 6K7G, 607G, 25L6G, 25Z6, L49B Ballast, (44).	11953C	PRSA150-30-30 & PRS25-50	EZ4215C	DSB-305		TA-330 & TA-50		Out	10560	A-3876		T22S45	A-2928								
634.	5	6A8G, 6K7G, 607G, 25L6G, 25Z6, L49B Ballast, (44).	11953C	PRSA150-30-30 & PRS25-50	EZ4215C	DSB-305		TA-330 & TA-50		Out	10560	A-3876		T22S45	A-2928								
635.	5	12SA7, 12SK7, 125G7, 12SQ7, 35L6GT, 35Z5GT, (47).	11953E	PRSA150-30-30 & PRS25-50	EZ4215C	DSB-305		TA-330 & TA-50		Out	10568B	A-3825		T22S45	A-2902								
636.	6	12SA7, 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47).	11953E	PRSA150-30-30 & PRS25-50	EZ4215C	DSB-305		TA-330 & TA-50		Out	10568B	A-3825		T22S45	A-2902								
637 (Ser. A)	5	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47).	11954	AF844D	UP42215	DY-403020-150		EL-224		Out	10589B	A-3825		T22S45	A-2902								
637.	5	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47).	11994	AF844D	UP42215	DY-403020-150		EL-224		Out	105104	A-3876		T22S45	A-2928								
642.	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47).	11994	AF844D	UP42215	DY-403020-150		EL-224		Out	10595B	A-3876		T22S45	A-2928								
665.	6	6K8G, 6K7, 607G, 6P5G, 6AC5G, 5Y3G, (44).	11963B	PRS450-8-16	EZ5816	DH-816-450SS		LM-816		Pwr	104124B	P-6011		T22R02	P-2951								
667.	6	6SK7, 6A8, 6Q7, 6K6, 6X5, (50).	119-34	GL450-8-8	KR548A	D-2X8-450		LM-88		Pwr	10575	A-3852		T22S47	A-2904								
671A, 671B	6	6SA7, 6SK7, 6S07, 6V6GT, 5Y3GT, (44).	119115	PRSA450-16-16	EZ5116	DH-2X16-450SS		TU-1616		Pwr	104225B	P-6119		T22R02	P-2951								
671C.	6	6SA7, 6SK7, 6S07, 6V6GT, 5Y3GT, (44).	119115	PRSA450-16-16	EZ5116	DH-2X16-450SS		TU-1616		Pwr	105118	A-3856		T22S47	A-2902								
676.	6	6K7, 6A8, 6Q7, 6K6, 6X5, (44).	11981	PRS450-16	BR1645	M-16-450		UT-16		Pwr	104225B	P-6119		T22R02	P-2951								
677.	6	6K7, 6A8, 6Q7, 6V6, 6X5 or 0Z4, (51).	11951	PRS450-16-16	EZ3112	DH-2X16-450SS		LM-1616		Chk	10562			T22S47	A-2902								
678.	6	6K7, 6A8, 6SK7, 6Q7, 6J5, 6N7, (44).	11978	AF444J4A	UP2245CC	DY-405		EL-423		Pwr	10561	A-3878		T22S47	A-2931								
679.	6	6SK7, 6A7, 6SK7, 6S07, 6K6GT, 6X5GT, (44).	119120	UP22135	DY-3X15-450	EL-360			Pwr	104158			T22S47	A-2931									
681.	6	6SA7, 6SK7, 6S07, 6K6GT, 5Y3GT, (44).	119115	PRSA450-16-16	EZ5116	DH-2X16-450SS		TU-1616		Pwr	104225C	P-6119		T22R02	P-2951								
695.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47).	11994	AF844D	UP42215	DY-403020-150		EL-224		Pwr	10590B	A-3878		T22S47	A-2931								
705.	7	6J5GT, 6SK7, 6S07, 6K6GT, 5Y3G, (44).	11997	UP2245C	DY-312	EL-205			Pwr	104246	P-6120		T22R04	P-2952									
708C.	6	6SK7, 6K8, 6K7, 6S07, 6V6G, 5Y3G, (44).	119100	UP4445C	DY-313	EL-330			Chk	10597B	C-1355		T20C53	C-2990									
716.	7	6SA7, 6SK7, 6B8, 25L6GT, 25Z6GT.	119121	PRSA450-16-16 PRS150-12	BR1545 BR502 BR1215	M-16-450 M-50-25 M-10-150		TA-50 EL-25 UT-121		Pwr	104181			T22S58	A-2930								
729.	7	6SA7, 6SK7, 6S07, 6J5GT, 6K6GT, 5Y3G, (44).	119108	PRSA450-16-16	EZ5116	DH-2X16-450SS		TU-1616		Pwr	104212	P-6119		T22R02	P-2951								
751.	7	6SA7, 6SK7, 6S07, 6J5GT, 6K6GT, 5Y3G, (44).	11979B	PRSA250-16-16 & PRS25-25	EZ16D35S			TA-216 & TA-25		Chk	105112	A-3830		T22S74	A-2905								
761.	7	6A8, 6K7, 6Q7, 6J5, 6F6, 5Y3, (44).	103-6	GL450-8	KR508	ZD-8-500		PLS-8		Pwr	10569	A-3877		T22S58	A-2930								
765.	7	6K8G, 6K7, 6Q7G, 6P5G, 6AC5G, 6U5, 5Y3G, (44).	11963B	PRS450-8-16	KR516A	ZD-16-500		PLS-16		Pwr	10558	A-3877		T22S58	A-2930								
767.	7	6K8G, 6K7, 6Q7G, 6J5G, 6K6G, 5Y3G, (44).	11973	PRS450-20	BR2045	M-20-450		UT-20		Pwr	10487C	P-6012		T22R04	P-2952								
791.	7	12A8GT, 12SK7, 12SQ7GT, 35L6GT, 35Z4GT, (44).	11974	PRS450-10	BR1045	M-10-450		UT-12		Pwr	10558	A-3852		T22S74	A-2932								
792.	7	12A8GT, 12SK7, 12SQ7GT, 35L6GT, 35Z4GT, (44).	119101	AF844D	UP42215	DY-403020-150		EL-224		Pwr	104124B	P-6011		T22R02	P-2951								
793.	7	12A8GT, 12SK7, 12SQ7GT, 35L6GT, 35Z4GT, (44).	119101	AF844D	UP42215	DY-403020-150		EL-224		Pwr	10575	A-3852		T22S74	A-2932								
794.	7	12A8GT, 12SK7, 12SQ7GT, 35L6GT, 35Z4GT, (44).	119101	AF844D	UP42215	DY-403020-150		EL-224		Pwr	104175B	P-6012		T22R04	P-2952								
796.	7	6SA7, 6SK7, 6S07, 6J5GT, 5Y3G, (44).	119108	PRSA450-16-16	EZ5115	DH-2X16-450SS		TU-1616		Pwr	104175B	P-6012		T22R04	P-2952								
797.	7	6SA7, 6SK7, 6S07, 6V6GT, 5Y3G, (44).	119108	AF444J4A	UP2245C	DY-315		EL-350		Pwr	104209	P-6012		T22R04	P-2952								
800.	8	6KS7, 6SA7, 6S07, 6J5GT, 6F6G, 5Y3G, (44).	119109	AF222J	UPI5D145	DY-3X15-450		EL-344		Pwr	104202B	P-6120		T22R04	P-2952								
801.	8	6SK7, 6SA7, 6S07, 6J5GT, 6F6G, 5Y3G, (44).	119109	AF222J	UPI5D145	DY-3X15-450		EL-344		Pwr	105111	A-3830		T22S74	A-2905								
860.	8	6A8, 6K7, 6Q7, 6C5, 6F6, 5Y3, 6U5, (44).	103-14	GLS250-16	KR516A	ZD-16-500		PLS-16		Pwr	104202B	P-6120		T22R04	P-2952								
867.	8	6K8G, 6K7, 6Q7G, 6J5G, 6K6G, 5Y3G, 6U5, (44).	11974	PRS450-10	KR508	ZD-8-500		PLS-8		Pwr	105111	A-3830		T22S74	A-2905								
881.	8	6K7, 6A8, 6R7, 6CS, 6V6, 0Z4	11973	PRS450-20	BR2045	M-20-450		UT-20		Pwr	10487B	P-6012		T22R04	P-2952								
			11943	PRS450-8-16	KR5816A	DH-816-450SS		LM-816		Out	10554B	A-3852		T22S58	A-2904								
										Out	105109	A-3849		T22S58	A-2902								
										Out	10549	A-3822		T22S47	A-2932								

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Ciarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photost Sat No.
1st.	108117	16-5712		470	†			114116 C	ST-194		5E45		Vol	101113	AM-63-Z	KSS-3	A.	D13-137	E	41					Continued—	BELMONT
2nd.	10895 D	16-5714						114116 E	ST-194		6E45		Vol	101127	AM-63-Z	KSS-3	A.	D13-137	E	41						632
1st.	10882 F	16-5712		470				114116 D	ST-194		5E45		Vol	101139	AM-63-Z	KSS-3	A.	D13-137	E	41						633
2nd.	10883 F	16-5714						114116 G	ST-194		6E45		Vol	101127	AM-63-Z	KSS-3	A.	D13-137	E	41						634
1st.	10882 F	16-5712		470	†			114116 G	ST-194		5E45		Vol	101127	AM-63-Z	KSS-3	A.	D13-137	E	41						635
2nd.	10883 F	16-5714						114177	ST-105		SA1		Vol	101195	AM-63-Z	KSS-3	A.	D13-137	E	41						636
1st.	108140 G	16-6658		465				114187	ST-105		SA1		Tone	101194	AM-54-Z	KSS-3	A.	D13-130	E	41						637 (Ser. A)
2nd.	108140 G	16-6658		465				114174	ST-105		SA1		Vol	101218	AM-63-Z	KSS-3	A.	D13-137	E	41						637
1st.	108140 D	16-6660						114125	ST-168		6E18		Vol	101126	AM-63-Z	KSS-3	A.	D13-137	E	41						642
2nd.	108145 C	16-6660						114-52	ST-108	F8	6EV6		Vcl	10173	AM-63-Z	KSS-3	A.	D13-130	C3	41	G9	126-1	5307	H1	645	
1st.	108145 C	16-6660						114154	ST-108	F8	6EV6		Vcl	10145	M-63-Z			D13-137								646
2nd.	108105 G	16-5712		455				114113	ST-115	F8	6EV6		Tone	101161												647
1st.	108105 D	16-5714		455				114155	ST-115	F8	6EV6		Vol	101161												648
2nd.	108106 U	16-5714		455	†	L-26		114216	ST-736		8E10		Vol	101232	AM-63-Z	KSS-3	A.	D13-137	E	41						649
1st.	108105 E	16-5712		455	†	L-26		114216	ST-736		8E10		Vol	101232	AM-63-Z	KSS-3	A.	D13-137	E	41						650
2nd.	108137 †	16-5714		465				114154	ST-108	F8	6EV6		Vol	101161												651
2nd.	108138 †	16-5712		465				114113	ST-115	F8	6EV6		Vol	101109	AT-112	KSS-3	A.	D13-137X	E	41		126-1	5307	H1	652	
1st.	108120 B	16-5712		465				114113	ST-115	F8	6EV6		Vol	101109	AT-112	KSS-3	A.	D13-137X	E	41		126-1	5307	H1	653	
2nd.	108115 B	16-5712		465				114155	ST-115	F8	6EV6		Vol	101161												654
1st.		16-6658		455				6 inch	ST-108	F8	6EV6		Vol	101246												655
2nd.		16-6660		455				114229	ST-736		8E10		Vol	101240	AM-63-Z	KSS-3	A.	D13-137	E	41						656
1st.	10869 G	16-5712		455				114224	ST-105		5A1		Tone	101241	AM-63-Z	KSS-3	A.	D13-137	E	41						657
2nd.	108106 L	16-5714		455				114224	ST-105		5A1		Vol	101215	AM-63-Z	KSS-3	A.	D13-137	E	41						658
1st.	108169 F	16-5712		455				114186	ST-105		10E10		Tone	101216	AM-63-Z	KSS-3	A.	D13-137	E	41						659
2nd.	108130 F	16-3736	D4	455				114179	ST-115		8A21		Vol	101239	AM-60-Z	KSS-3	A.	D13-133	E	41						660
1st.	108188	16-6658		455				114186	ST-105		12A4		Tone	125140												661
2nd.	108165	16-5712		465				114179	ST-115		8A21		Vol	101205	AM-63-Z	KSS-3	A.	D13-137	E	41						662
2nd.	108119	16-5714		465				114186	ST-105		12A4		Vol	101206	AM-51-Z	KSS-3	A.	D13-128	E	41						663
1st.	108189		4.3 MC					114235	ST-105		5A1		Vol	101247	AM-44-Z	KSS-3	A.	D11-123	E	41						664
2nd.	108190							114235	ST-105		5A1		Vol	101247	AM-44-Z	KSS-3	A.	D11-123	E	41						665
3rd.	108191							114187	ST-105		F1		Vol	101224	AM-63-Z	KSS-3	A.	D18-133X	E	41						666
1st.	108178	16-5712		455				114187	ST-105		F1		Tone	101223	AM-63-Z	KSS-3	A.	D13-137	E	41						667
2nd.	108179	16-5714		465				114187	ST-105		F1		Tone	101153	AM-63-Z	KSS-3	A.	D13-137	E	41						668
1st.	108179	16-5712		465				114187	ST-105		F1		Tone	101154	AM-51-Z	KSS-3	A.	D13-128	E	41						669
2nd.	108179	16-5714		465				114109	ST-166		6E10		Vol	101104	M-63-Z	KSS-3	A.	D13-137	E	41						670
1st.	108-105	16-5712		465				114125	ST-158		6E18		Tone	101105	M-64-Z	KSS-3	A.	D13-130	E	41						671
2nd.	108-106 E	16-5714		465				114134	ST-108		6A1		Vol	101126	AM-63-Z	KSS-3	A.	D13-137	E	41						672
1st.	108-105 G	16-5712		465				114134	ST-108		6A1		Tone	101144	AM-63-Z	KSS-3	A.	D13-137	E	41						673
2nd.	108-106 D	16-5714		465				114135	ST-108		6A1		Vol	101145	AM-63-Z	KSS-3	A.	D13-137	E	41						674
1st.	108105 M	16-5714		465				114182	ST-108		6A1		Tone	101195	AM-63-Z	KSS-3	A.	D13-137	E	41						675
2nd.	108163 C	16-5712		465				114178	ST-119		10A31		Vol	101159	AM-63-Z	KSS-3	A.	D13-137	E	41						676
1st.	108163 D	16-5714		465				114178	ST-119		10A31		Vol	101202	AM-63-Z	KSS-3	A.	D13-137	E	41						677
2nd.	108163 B	16-5712		465				114178	ST-119		10A31		Vol	101195	AM-63-Z	KSS-3	A.	D13-137	E	41						678
1st.	108163 B	16-5714		465				114178	ST-119		10A31		Vol	101215	AM-63-Z	KSS-3	A.	D13-137	E	41						679
2nd.	108173	16-5712		465				114192			10E60		Vol	101216	AM-63-Z	KSS-3	A.	D13-137	E	41						680
1st.	108162 B	16-5712		465				114192			10E60		Tone	101215	AM-63-Z	KSS-3	A.	D13-137	E	41						681
2nd.	108132 D	16-5714		465				114195			10E10		Vol	101215	AM-63-Z	KSS-3	A.	D13-137	E	41						682
1st.	108162 B	16-5712		465				114195			10E10		Tone	101215	AM-63-Z	KSS-3	A.	D13-137	E	41						683
2nd.	108132 D	16-5714		465				114221			12E60		Vol	101233												684
1st.	108177	16-5712		455				114217			12E60		Vol	101233												685
2nd.	108176	16-5714		455	†			114217			12E60		Vol	101233												686
1st.	108176	16-5712		455	†			114217			12E60		Vol	10197	M-63-Z	KSS-3	A.	D13-137	E	41						687
2nd.	108176	16-5714		455	†			114217			12E60		Tone	10198	M-64-Z	KSS-3	A.	D13-130	E	41						688
1st.	108176	16-5712		455	†			114217			12E60		Vol	10144	AM-63-Z	KSS-3	A.	D13-137	E	41						689
2nd.	108176	16-5714		455	†			114217			12E60		Tone	10144	AM-63-Z	KSS-3	A.	D13-137	E	41						690
1st.	108-105 D	16-5712		465				114-99			10E10		Vol	10144	AM-63-Z	KSS-3	A.	D13-137	E	41						691
2nd.	108-106 E	16-5714		465				114135			10E10		Tone	10												

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tungs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	No. Note	Burgess Part No.	No. Note		
BELMONT—Continued	9	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 6U5, 5Y3G, (44)	119109	AF222J		UP15D145		DY-3X15-450		EL-344		Pwr Out	104202B	P-6120		T22R02		P-2952							
1075A, 1075B	10	6K7, 6K8, 6J5G, 6Q7G, 6U5, 5Y3G, (44)	11954 11961	PRSA450-8-16 PRS350-12		KR5816A BR-1235		DH-816-450SS M-12-450		LM-818 UT-123		Pwr Out	105111	A-3830		T22S74		A-2905							
1100	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 6U5, 5Y3G, (44)	119112 11969	AF862JAA PRS350-16	A3	UP43145C BR1635		DY-403 M-16-450		EL-424 UT-163	A3	Pwr Out	104217	P-6013		T22R05		P-2953							
1131	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 6U5, 5Y3G, (44)	119124	AF44J				DY-3X20-450				Pwr Out	104202	P-6120		T22R02		P-2952							
1401A	14	6AB7, 6SA7, 6SK7, 6SQ7, 6J5GT, 6J5G, 6SJ7, 6H6, 6V6GT, 6U5, 5U4, (44)	119102 11973B 11969	AF64K4A PRS450-20 PRS350-16	A3	UP15D145 BR2045 BR1635		DY-3X15-450 M-20-450 M-16-450		EL-360 UT-20 UT-163	A4	Pwr Out	10564B 104262 105115	P-6013 A-3830		T22R06		P-2953							
BENDIX	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZG1, (47)	CE2A00	AF88D		UP5515		DY-2X50-150		EL-25		Out	TA0000	A-3876	B3	T22S45	B-3	A-2928	B-3						
526MA, 526MB, 526MC	5	12BE6, 12BA6, 12AT6, 50B5, 35W4, (47 or 44)	CE3E01	PRSA150-40-40		BRD4415		DSB-2X40-150 & M-12-150		TA-440 UT-121		Out	TA0000	A-3876	B3	T22S45	B3	A-2928							
626-A	5	14A7, 14Q7, 14B6, 35A5, 35Y4, (47)	CE3A00	AF888D		UP64215		DY-604020-150		EL-340 & UT-201	A4	Out	TA0001	A-3876	B3	T22S45	B3	A-2928	B3						
636A, 635B, 636C	6	14A7, 14Q7, 14B6, 35A5, 35Y4, (47)	CE3A00	AF888D		UP64215		DY-604020-150		EL-340 & UT-201	A4	Out	TA0003	A-3876		T22S62		A-2902							
646A	6	14A7, 14Q7, 14B6, 35A5, 35Y4, (47)	CE3A00	AF888D		UP64215		DY-604020-150		EL-340 & UT-201	A4	Out	TA0003	A-3876		T22S62		A-2902							
656A	6	6SK7, 6SA7, 6SQ7, 6V6GT, 35Y4, (47)	CE3A00	AF888D		UP64215		DY-604020-150		EL-340 & UT-201	A4	Out	TA0003	A-3876		T22S62		A-2902							
676B, 676C, 676D	6	6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT, (47)	CE3A01	AF44J		UP222245	A9	DY-3X20-450		EL-420	A9	Pwr Out	TP0F00	P-6120		T22R02		P-2951							
697X	6	12BE6, 12BA6, 12AT6, 35B5, (47)	CE3FOO	PRSA150-40-40 & PRS150-40		EZ55515C	A3	DSB-2X40-150 & M-10-150		TA-440 & UT-401		Out	TA0028			T22S88		A-2904							
736-B	7	6SK7, 6SA7, 6SF7, 6SC7, 6V6GT, 5Y3GT, (44)	CE2A01	AF44J		UP2245		DY-312		EL-220		Pwr Out	TP0F01	P-6312		T22R31		P-2952							
847-B	8	6AG5, 7F8, 7AH7, 7AG7, 6H6, 6SQ7, 6V6GT, 5Y3GT, (47)	CE3A01 CE1T00 CE1T02	AF44J PRS25-25 PRS150-4		UP222245 BR252A BR550	A9	DY-3X20-450		EL-420	A9	Pwr Out	TP0J00	P-6011	B12	T22R02	B12	P-2951	B12						
847S	8	6AG5, 7F8, 7AH7, 7AG7, 6H6, 6SQ7, 6V6GT, 5Y3GT, (47)	CE3A01 CE1T00 CE1T01	AF44J PRS25-25 PRS150-4		UP222245 BR252A BR550	A9	DY-3X20-450		EL-420	A9	Pwr Out	TP0J00 TA0007	P-6011 A-3877	B12	T22S86	B12	A-2930	B12						
1217, 1217B, 1217D	12	6AG5, 7F8, 6BE6, 7AH7, 6H6, 6SN7GT, 6J5, 6SN7GT, 6V6GT, 5U4G	CE2A02 CED00 CE1T02 CE1D00	AF4414A PRS450-8-16 PRS25-25 PRS150-4	A3	UP2245CC EZ5816 BR202A BR550	A3	DY-2X50-150		EL-330	A3	Pwr Out	TP0R00 TAC000	A-3824		T22S58		A-2935							
DAVID BOGEN	9	6SC7, 6SL7GT, 607, 5Y3GT, 5R4GY, (44)	8-8 Mfd. 4 Mid. 10-10 Mfd. 5, 5, 5, 5 Mfd.	GLS-450-8-8 GL600-4 AF222J AF222I		KR588A KR604 UP111145 UP111143		D-2X8-450 D-4-600 DH-2X8-450 DY-4X10-450		CL-88 AP-46 EL-210 EL-410		Chk	T501B T510B	C-2303											
G-50	6	6SL7GT, 607, 5Y3GT, 5R4GY, (44)	8-8 Mfd. 4 Mid. 50 Mfd. 50 Mfd. 100 Mfd.	GL600-4 PRS450-10 PRS50-50 PRS25-50 PRS25-100		BR505 BR502 BRH251 KR558A		M-50-50 M-50-25 M-100-25 D-2X8-450		TA-550 TA-50 TA-50 CL-88		Chk	T510B T361B Driv Out	T20C55		C-2304									
G-125	8	6SL7, 6SN7, 607, 5Y3GT, 5R4GY, (44)	8-8 Mfd. 2 Mid. 50 Mfd. 50 Mfd. 50 Mfd.	GL600-4-8-8 TJH10020 KR558A XCLU20-2		BR505 BR502 KR558A TJH10020		M-10-450 M-50-50 M-50-25 D-2X8-450		TA-550 TA-50 TA-50 PLS-88		Chk	T510B T256B T256B T256B	T20D78 T22S72 T20C54		B13									
GX50	11	6SC7, 6S17, 6SL7, 6SN7, 607, 5Y3GT, 5R4GY, (44)	4 Mfd. 8-8 Mfd. 5-5-10 Mfd. 60 Mfd. 50 Mfd. 100 Mfd.	GL600-4 GL450-8-8 AF222I PRS50-50 PRS25-50 PRS25-100		KR604 KR588A UP111145 BR505 BR502 BRH251		D-4-600 D-2X8-450 DY-4X10-450 M-50-50 M-50-25 M-100-25		AD-46 CL-88 DY-4X10-450 M-50-50 TA-550 TA-50		Chk	T501B T501B Pwr Driv Out	T20C55											
2AR, 2RS	2	12SL7GT, 50L6GT	8 Mfd. 10 Mfd.	AF6D PRS150-8 PRS25-10		UP3015 BR815 BR102A		DY-4C-150 M-8-150 M-10-25		EL-31 UT-81 TA-10		In Out	T110B T252B	A-3849		T22S48 T22S45	B14	A-4744 A-2934							
BREWSTER	9-1084, 9-1085, 9-1086	612SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	27145	AF888D	A4	UP4415	A4	DY-3X40-150	A4	EL-340	A4	Out	On Spkr	A-3876	B3	T22S45	B3	A-2928	B3						

† Information not available

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
BRUNSWICK C-3300	9	6SK7, 6SA7, 6SF7, 6J5GT, 6U5, 6SN7GT, 6V6GT, 5Y3GT, (47)	20 Mfd. 8 Mfd.	PRS450-20 PRS450-8		BR2045 BR845		M-20-450 M-8-450		UT-20 UT-8		Pwr Out	+	P-6013 A-3823		T22R06 T22S56		P-2953 A-2901						
T-4000, T-4000½, T-6000, T-6000½, T-6000S, T-6000SS, T-6000SX, D-6875	10	6AG5, 6SB7Y, 6SG7, 6SA7, 6SF7, 6H6, 6SL7GT, 5V6GT, 5Y3GT, (44)	25214 25136	AF44J4A PRS150-4		UP43145C BR550		DY-403 M-4-150		EL-424 & UT-8 TA-55		Pwr Out	+	94204 94195		P-6120 A-3852		T22R04 T22S87		P-2952 A-2901				
BUICK 980620	6	6SK7, 6A8, 6R7G, 6V6G	7238552 7238553	AF22I AF44D		JP1145 UP222-25		DY-2X10-450 DY-3X20-25		EL-210 EL-325		Chk Pwr In & Out	7235985 7238548											
980650	6	6K7, 6SA7, 6SK7, 6SR7, 6V6GT	7240612 7238553	AF44J AF44D		UP2245 UP222-25		DY-2X20-450 DY-3X20-25		EL-220 EL-325		Chk Pwr In & Out	7238551											
980660	8	6K7, 6SA7, 6SK7, 6SR7, 6H6, 6V6GT	20-20-20 Mfd. 20 Mid.	AF44J4A PRS25-25		UP2245C BR202A		DY-315 M-25-25		EL-350 TA-25		Chk Pwr In & Out	+											
980690, 980691, 980733	6	6K7, 6SA7, 6SK7, 6SR7, 6V6GT, (51)	7240612 7238553	AF44J AF44D		UP2245 UP222-25		DY-2X20-450 DY-3X20-25		EL-220 EL-325		Chk Pwr In & Out	7240519		T22R22									
980744, 980745	6	6SK7, 6SA7, 6SR7, 6V6GT, (55)	7240612 7238553	AF44J AF44D		UP2245 UP222-25		DY-2X20-450 DY-3X20-25		EL-220 EL-325		Chk Pwr In & Out	7240519		T22R22									
1308221	6	6K7G, 6A8G, 6R7G, 6V6G, (55)	7232952 7235996	PRSA450-8-8		EZ8845 T		M-2X8-450 T		UT-88		Chk Pwr In	7235985 7235978											
1314523	6	6SK7, 6A8, 6R7G, 6V6GT	7238552 7238553	AF22I AF44D		UP1145 UP222-25		DY-2X10-450 DY-3X20-25		EL-210 EL-325		Chk Pwr In & Out	7235976 7235985											
1323457	7	7A7, 7B8, 7E6, 7C5, 0Z4	20-20-20 Mfd.	AF44J4A		UP2245C		DY-315		EL-350		Pwr In & Out	7238551											
BUTLER BROS. (See AIR KNIGHT or SKY ROVER)																								
CADILLAC 77	7	7A7, 7B8, 7E7, 7F7, 27C5, 0Z4	10-15-20 Mfd.	AF44J		UP2245C		DY-316		EL-353		Pwr Out	+											
1425470, 1425471	6	6U6G, 6J7G, 6B8G, 6K6G, 6N7G	45X230 4 Mfd.	PRS4450-8-16 & PRS25-25 PRS450-4		EZ5816 & BR202A BR445		OH-815-450SS & M-25-25 M-4-450		UT-816 & TA-25 UT-4		Chk Pwr In	+											
1433970	8	6SK7, 6K8, 6H6, 6J5, 6V6G 6N7G	30-20 Mfd. 20-20 Mfd.	AF44J AF44J	A4	UP3345 UP2245		DY-2X30-450 DY-2X20-450		EL-32 EL-220		Out or Pwr In	1427920 1427921											
7232502	5	6K7, 6A8G, 6B8G, 6F8G, 6N7G	8-8 Mfd. 12 Mfd.	PRSA450-8-8 PRS25-10		EZ8845 BR102A		M-2X8-450 M-10-25		UT-88 TA-10		Chk Pwr In	+											
7238399	7	7A7, 7B8, 7E6, 7C5, 0Z4	10 Mfd. 8-8 Mfd.	PRS450-10 PRS4450-8-8		BR1045 EZ8845		M-10-450 M-2X8-450		UT-12 UT-88		Pwr In	+											
7240371	7	7A7, 7B8, 7E7, 7F7, 27C5, 0Z4	7240724	AF44J4A		UP2245C		DY-315		EL-350		Pwr Cut	+											
7240427	7	7A7, 7B8, 7E6, 27C5, 0Z4	7240724	AF44J4A		UP2245C		DY-315		EL-350		Pwr In	+											
7241938	7	7A7, 7B8, 7E6, 27C5, 0Z4	20-20-20 Mfd.	AF44J4A		UP2245C		DY-315		EL-350		Pwr In	+											
7241951	7	6SK7, 6SA7, 6SR7, 6V6GT, 0Z4	7240724	AF44J4A		UP2245C		DY-315		EL-350		Pwr In	+											
CAPITOL B-17	7	6SK7, 6H6, 6SN7GT, 6V6GT, 5U4G, (44)	20 Mfd. 20 Mfd. 10 Mfd. 25 Mfd. 40 Mfd.	PRS450-20 PRS450-20 PRS450-10 PRS25-25 PRS450-40 PRS450-20 PRS25-25		BR2045 BR2045 BR1045 BR252A BR4045 BR2045 BR252A		M-20-450 M-20-450 M-10-450 M-25-25 M-40-350 M-20-350 M-25-25		UT-20 UT-20 UT-12 TA-25 UT-40 UT-203 TA-25		Chk Pwr Cut	+	C-1003 P-4080 A-3303	B12	T20C53 T22R32 T22S48		C-2987 P-3153 A-2904	B12					
T-13	3	6SQ7, 6V6GT, 0Z4	20 Mfd. 25 Mfd.	PRS450-40 PRS450-20 PRS25-25		BR4045 BR2045 BR252A		M-40-350 M-20-350 M-25-25		UT-40 UT-203 TA-25		Pwr Out	+	89008 89405		P-6119 A-3877		T22R01 T22S58		P-2950	B12			
U-24	4	1S5, 3Q4, 50B5, 35W4	40-20-100 Mfd	AF88D & PRS25-100		UP4C165		DY-304		EL-24 & UHC-112		Out	+									745-482	8FL	EM30

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photo of act Set No.	MFR. & MODEL								
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note				
1st. 2nd.	14075. 14076.	16-5740. 16-6670.		455	†	QT-M.			†				Vol Bass Treble Tone	† † †	M-64-Z. M-55-S. 43-1500	A.		D13-130. D11-130.		41	G1					28.	BRUNSWICK BJ-6836, C-3300		
1st. 2nd.	38681. 38682.	16-5740. 16-5742.		455	†	L-71-S.		81126.	ST-101.	F3	12A4..	F3	78120. 78072.	AM-67-Z.	KSS-3			D13-140.	E						29.	T-4000, T-4000½, T-6000, T-6000½, T-6000S, T-6000SS, T-6000SX, D-6876			
1st. 2nd.	38683. 38684.	10.7 MC																								BUICK 980620			
1st. 2nd.	7238546. 7235982.	16-5704..		260				7238575..	ST-115..	F8	8EV6..		Vol	7238538..									8630..	5426..	H1				
1st. 2nd.	†			260				†		F2		F2	Vol & Tone	7240366..										8630..	5426..	H1		980650	
1st. 2nd.	†			455				†		F2		F2	Vol & Tone	7239916..										9630..	5426..	H1		980660	
1st. 2nd. 3rd.	7238546. 7240467.	16-5704..		262				7240469..			8EV6..		Vol & Tone	7241928..										7235951..	5426..	H1	18.	980690, 980691, 980733	
1st. 2nd.	7238546. 7240467.	16-5704..		262				7240469..			8EV6..		Vol & Tone	7241967..										7235951..	5426..	H1	19.	980744, 980745	
1st. 2nd.	7235981. 7235982.			260				7235995..	ST-II5..	F8	8EV6..		Vol & Tone	7241928..										5050498..	5426..	H1		1308221	
1st. 2nd.	7238546. 7235982.	16-5704..		260				7238575..	ST-115..	F8	8EV6..		Vol	7238538..										8630..	5426..	H1		1314523	
1st. 2nd.	†			455				†		F2		F2	Vol	7239816..										†.	5335..	H1		1323457	
																									(See Air Knight or Sky Rover)	BUTLER BROS.			
1st. 2nd.	†	16-6652. 16-6654. 16-5700.		260				8 Inch..	ST-115..	8A21..		Vol	7238497..					D13-137X..	F			G15	7238829..	5335..	H1		CADILLAC 77		
1st. 2nd.	†	16-6654. 16-5700.		175				6 Inch. 8 Inch.	ST-108.. ST-115..	F8 F8	6EV6. BEV6..	Vol Tone	† †	M-67-Z..				D13-140..				G1	1427129..	5400..	H1		1425470, 1425471		
1st. 2nd. 3rd.	†	16-6658. 16-6659.		456				6 Inch..	ST-108..	F8	6EV6..	Vol	1434977..											1434660..	5404..	H1		1433970	
1st. 2nd.	†	16-5704. 16-5706.		262				6 Inch..	ST-108..	6A1..		Vof Tone	† †	SD-109.. M-60-Z..		A.	D13-133..						7232741..	5426..	H1		7232502		
1st. 2nd.	†			455				8 Inch..	ST-115..	F8	8EV6..	Vol	†											7238829..	5335..	H1		7238399	
1st. 2nd.	†	16-6652..		260				8 Inch..	ST-115..	8A21..		Vol	7240851..											7238829..	5335..	H1		7240371	
1st. 2nd.	†			455				†		F1		F1	Vol & Tone	7239816..										7238829..	5335..	H1		7240427	
1st. 2nd.	†			455				7241514..			69A3..		Vol & Tone	7239816..										7238829..	5335..	H1		7241938	
1st. 2nd.	†	16-6652..		262				†		ST-115..	F8	8EV6..	Vol	7242296..										7238829..	5335..	H1		7241951	
																										CAPITOL D-17			
					†	L-40..		ST-104..	BA6..		Vol Bass Treble	† †	M-67-Z..				D13-140..				G1					30..			
								83300..	ST-112..	6A21..		Vol Tone	† †	AM-60-Z.. AM-67-Z..	FS-3.. FS-3..	A.	D13-133.. D13-140..				41	G1					28..	T-13	
								†		ST-107..	5A15..		Vol Tone	† †	M-60-Z.. M-67-Z..		A.	D13-133.. D13-140..				41	G1					29..	U-24

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
CARDWELL, ALLEN D. CE-25.....	6	6S7JGT, 26SL7GT, 26V6GT, 5Y3GT, (44).....	35-1201..... 35-1203.....	AF44J4A..... AF22J.....		UP2245C..... UP1145.....		DY-312..... DY-2X10-450.....		EL-350..... EL-210.....		Chk Pwr Out	92-0003..... 92-1002..... 92-1006.....	C-1420..... P-6013..... A-3823.....		T20C53..... T22R05..... T22S58.....		C-2980..... P-2953..... A-2901.....					
20TH CENTURY 100X, 10I, 104.....	6	12SA7, 212SK7GT, 12SQ7, 35L6GT, 35Z5GT, (47); or Lock-in Type Equivalents.....	40-40 Mfd.....	PRSA150-40-40.....		BRD4415.....		M-2X40-150.....		TA-440.....		Chk Out	.....†	C-1709..... A-3876.....		T20C53..... T22S45.....		A-2928.....					
200.....	3	12SQ7GT, 50L6GT, 35Z5GT.....	50-30 Mfd.....	PRSA150-50-30.....		BRD3515.....		M-5030-150.....		TA-530.....		Out	.....†	A-3876.....		T22S45.....		A-2928.....					
300.....	3	12SQ7GT, 50L6GT, 35Z5GT.....	50-30 Mfd.....	PRSA150-50-30.....		BRD3515.....		M-5030-150.....		TA-530.....		Cut	.....†	A-3876.....		T22S45.....		A-2928.....					
CHANCELLOR—(See Radionic) 35P.....	4	1R5, 1T4, 1S5, 3Q4.....	60-60-25 Mfd..... 25 Mfd.....	PRS25-25.....		UP5515 & BR255, BR252A.....		DY-804020-150..... M-25-25.....		EL-26 & TA-525..... TA-25.....		Cut	1337.....	A-3878.....		T22S47.....		A-2932.....		753.....		F6A60.....	
CHEVROLET 985283.....	7	6U7G, 6A8G, 6R7G, 26V6G, 0Z4.....	1212314..... 1212313.....	PRSA450-8-8..... PRS25-10.....	A1	EZ8845..... BR102A.....	A1	DH-2X8-450..... M-10-25.....	A1	UT-88..... TA-10.....		Chk Pwr Out	.....†										
985284.....	7	6K7G, 6J7G, 6R7G, 6J5G, 6N7G, 0Z4G.....	7233092..... 7231831.....	PRSA450-8-8..... PRS25-10.....		ED1-8845..... BR-102A.....		DH-2X8-450..... M-10-25.....		UT-88..... TA-10.....		Chk Pwr In Out	.....†										
985285.....	6	26U7G, 6A8G, 6Q7G, 6F6G, 0Z4G.....	1212441.....	PRSB450-8-8 & PRS450-8.....		EZ-88845.....		DH-3X8-450SS.....		UT-88..... & UT-8.....		Chk Pwr In Out	.....†										
985424.....	7	26K7, 6A8, 6R7, 26V6G, 0Z4.....	1212902..... 1212813.....	AF22J4A..... PRS25-10.....		UP1145C..... BR102A.....		DY-316..... M-10-25.....		EL-202..... TA-10.....		Chk Pwr In Out	.....†										
985425.....	5	6A8G, 6K7G, 6Q7G, 6K6G, 6X5G.....	5-5-20 Mfd.....	AF22J4A.....		UP1145C.....		DY-316.....		EL-202.....		Pwr Out	.....†	A-3878.....		T22S47.....		A-2931.....					
985426.....	6	26K7, 6A8, 6Q7, 6K6G, 0Z4G.....	8-8 Mfd.....	PRSB450-8-8.....		EZ-8845.....		DH-2X8-450SS.....		TU-88.....		Pwr Out	.....†	A-3878.....		T22S47.....		A-2931.....					
985536.....	8	26K7GT, 6A8GT, 6R7GT, 26V6GT, 0Z4.....	1213652..... 1213653.....	AF22J.....		UP1145..... EZ32115.....		DY-8X10-450..... DSB-3X20-150.....		EL-310..... TA-303.....		Pwr Out	1213640..... 1213641..... 1213642.....	A-3878.....		T22S47.....		A-2931.....					
985537.....	6	26K7GT, 6A8GT, 6Q7GT, 6V6GT, 0Z4.....	7239053.....	AF22J4A.....		UP1145C.....		DY-316.....		EL-202.....		Pwr Out	7238894.....	A-3877.....		T22S58.....		A-2930.....					
985538.....	5	6SA7GT, 6SK7GT, 6S07GT, 6V6GT, 0Z4.....	1213868.....	AF32K4A.....		UP2235C.....		DY-310.....		EL-153.....		Pwr Out	1213670.....	A-3877.....		T22S58.....		A-2930.....					
985651.....	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT, Ballast 5459.....	40-20-200 Mfd.....	AF44D40A & PRS150-20.....		UP4CJ61.....		DY-304.....		EL-351.....		Pwr Out	On Spkr. A-3877..... A-3857.....		T22S58..... T22S48.....		A-2930..... A-2937.....						
985694.....	5	26K7GT, 6A8GT, 6R7GT, 26V6GT, 0Z4.....	20-10-5 Mfd..... 20-4 Mfd.....	PRSA150-20-20..... BRD2215.....		DY-3X15-450..... M-2X20-150.....		EL-344..... TA-220.....		Pwr In Out	.....†												
985695.....	6	26SK7GT, 6A8GT, 6SQ7GT, 6V6GT, 0Z4.....	20-20-20 Mfd.....	AF44J4A.....		UP2245C.....		DY-315.....		EL-350.....		Pwr Out	.....†										
985696.....	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 0Z4G.....	10-15-20 Mfd.....	AF32K4A.....		UP2235C.....		DY-310.....		EL-153.....		Pwr Out	.....†										
985697.....	9	6K7, 6SA7, 26SK7, 6SR7, 6H6, 26V6GT, 0Z4.....	20-8-20 Mfd..... 20-20 Mfd.....	AF32K4A..... AF22J4A.....	A4	UP2235C..... UP2045C.....		DY-310..... DY-316.....		EL-153..... EL-202.....	A4	Pwr Out	.....†										
985775.....	4	1R5, 1T4, 1S5, 1S4.....	10 Mfd.....	PRS150-12.....		BR1215.....		M-16-150.....		UT-161.....		Pwr Out	.....†								950 467.....	XX49.....	2R.....
985792.....	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 0Z4G, (51).....	41473.....	AF32K4A.....		UP1135C.....		DY-310.....		EL-153.....		Pwr Out	1216011..... 1216010.....	A-3877.....		T22R20..... T22S46.....		A-2930..... A-2931.....					
985793.....	6	26SK7, 6SA7, 6SQ7, 6V6GT, 0Z4, (55).....	7240724.....	AF44J4A.....		UP2245C.....		DY-312.....		EL-322.....		Pwr Out	7255881..... 7242258.....	A-4061..... A-3877.....		T22R20..... T22S58.....		P-2971..... A-2930.....					
985794.....	9	26SK7, 6SA7, 6SR7, 6H6, 26V6GT, 0Z4, (55).....	1214489..... 1215184.....	AF22J4A..... AF44J4A.....		UP1145C..... UP2245C.....		DY-316..... DY-315.....		EL-202..... EL-350.....		Pwr Out	1215611..... 1215091.....										
985866.....	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT.....	30-20-100 Mfd..... 10 Mfd.....	AF106D20A..... PRS150-12.....		UPAC165..... BR1215.....		DY-304..... M-10-150.....		EL-351..... UT-121.....		Pwr Out	1216011..... 1216010.....	A-3857..... A-3877.....		T22S48..... T22S46.....		A-2937..... A-2930.....		718 2482.....	2P4.....	2B30.....	
986146.....	5	7Q, 7A7, 7B6, 7C5, 0Z4, (51).....	41473.....	AF32K4A.....		UP2235C.....		DY-310.....		EL-153.....		Pwr Out	1216011..... 1216010.....	A-3877.....		T22R20..... T22S46.....		A-2930..... A-2931.....					
CHRYSLER—(See Chrysler)																							
CISCO 9A5.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).....	3-1.....	AF88D.....		UP4215.....		DY-4020-150.....		EL-24.....		Cut	On Spkr. A-3876.....	B3	T22S45.....	B3	A-2928.....	B3					
CLARION C100.....	5	(Also See Warwick) 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47).....	18-266.....	PRSA150-40-40.....		EZ3315.....		M-2X30-150.....		TA-330.....		Cut	80-224.....	A-3876.....		T22S45.....		A-2928.....					
C101.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).....	18-266.....	PRSA150-40-40.....		BRL3315.....		M-2X30-150.....		TA-330.....		Cut	80-224.....	A-3876.....	B3	T22S45.....	B3	A-2928.....	B3				
C102.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47).....	A18-272..... A18-280.....	PRSA150-20..... PRSA150-40.....		BR2015..... BR4015.....		M-20-150..... M-40-150.....		UT-201..... UT-401.....		Cut	A30-225.....	A-3876.....	B3	T22S45.....	B3	A-2928.....	B3				

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photofact Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	iRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
							100-0001	ST-120		10A4		Phono Mike Tone	40-0015 40-0017 40-0020	T-112 M-60-Z M-60-Z			D18-137XX D13-133 D13-133	G1 G1 G1							14	CARDWELL ALLEN D. CE-26	
1st. 2nd.	2010 C. 2011 C.	16-6653 16-6660	456				t..	ST-109		6A15		Vol.	t..	M-60-Z	A..		D13-133		41	G1					12	20TH CENTURY 300X, 101, 104	
												Vol Tone	t..	M-60-Z M-66-Z	A..		D13-133 D13-133		41	G1	t..				21	200	
												Vol Tone	t..	M-60-Z M-66-Z	A..		D13-133 D13-139		41	G1	t..				21	300	
1st. 2nd.	3371 3535	16-6653 16-6660	456				5868	ST-113		4A1		Vol	2481	M-63-Z	A2..		D13-137		42	G1				30	CHANCELLOR 35P		
1st.																										CHEVROLET 985283	
1st. 2nd.	t..	16-6654	262½				t..			F1		F1	Vol Tone	1212427 1212810	SD-115	FS-3..		DC13-139X								985284	
1st. 2nd.	t..		262				t..			F2		F2	Vol Tone	7232981 1563950			DC13-130X								985285		
1st. 2nd.	t..	16-6652	262				t..			F2		F2	Vol Tone	1212542 1210719			DC13-133X								985424		
1st. 2nd.	t..	16-6654	262½				t..			F1 F2		F1 F2	Vol Tone & Tone	1212903												985425	
1st. 2nd.	t..		455				t..			F2		F2	Vol	1212967			D13-137	C3	41	G9	1212966				985426		
1st. 2nd.	t..	16-6652	260				t..			F2		F2	Vol & Tone Vol	7236369 1213639												985536	
1st. 2nd.	t..	16-6654	260				t..			F2		F2	Vol	7239120			D13-139X	N	41	7239439					985537		
1st. 2nd.	1213646 1213849	16-6654	262½							F2		F2	Vol	1213863											985538		
1st. 2nd.	7239165 7239164	16-6652 16-6654	260				7239162			F2		F2	Vol	7239120												985551	
1st. 2nd.	1213851 1213852	16-6654	455				1213864			F2		F2	Vol	1213863												985694	
1st. 2nd.	t..	16-6653	465				t..			F1		F1	Vol	1213745	AM-63-Z	KSS-3		D13-137	E	42						7239124	985695
1st. 2nd.	t..		262				t..			F2		F2	Vol	1214928												985696	
1st. 2nd.	t..	16-6654								F2		F2	Vol	7241165												985697	
1st. 2nd.	t..	16-6652	260				t..			F2		F2	Vol	1214864												985775	
1st. 2nd.	t..	16-6658	455				t..			F2		F2	Vol Sen	1215180	t..											985792	
1st. 2nd.	t..		455				t..			F2		F2	Vol	1215180												985793	
1st. 2nd.	t..	16-6654								F2		F2	Vol	t..											985794		
1st. 2nd.	t..	16-6652	260				t..			F2		F2	Vol	1216012												985866	
1st. 2nd.	t..	16-6658	455				t..			F2		F2	Vol & Tone Vol	7242259				7239124	5300	19..	986145				986145		
1st. 2nd.	7242079 7242417	16-6652	262				7241312			F2		F2	Vol Sen	1215610 1215179				7239439								CLARION C100	
1st. 2nd.	1215608 1215608	455					1214923			F2		F2	Dimmer Vol	1215642												CLARION C101	
1st. 2nd.	1215609	16-6658	455				t..			F2		F2	Vol	t..												CLARION C102	
1st. 2nd.	1216014 1216015	16-6660	260				1216013	ST-105		F8	5EV6	F2	Vol	1216012												CLARION C95	
																									(See Mo par)		
1st. 2nd.	15-3 15.3	16-6668 16-6669	455				8-1	ST-105		5A1		Vol	t..	M-60-Z	A..		D13-133		41	G1					20	CISCO	
1st.	10-369	16-6658	455				79-339 or 79-307A	ST-105		5A1		Vol	24-153	AM-60-Z	KSS-3	A..	D13-133	E	41						I..	CLARION C100	
2nd.	10-370	16-6660					79-339	ST-105		5A1		Vol	24-153	AM-60-Z	KSS-3	A..	D13-133	E	41						5..	CLARION C101	
1st.	10-369	16-6658	455	t..	L-70		B79-340 (or) B79-343 (or) B79-344	ST-105		5A1		Vol	A24-164	AM-60-Z	KSS-3	A..	D13-133	E	41						9..	CLARION C102	

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT			Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
		"A"	"B"																							
CLARION—Continued																										
C103.....	6	6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3GT	A18-274.....	PRS450-16.....	BR1645.....		DH-16-450.....		UT-16.....		Pwr Out	C80-223.....	P-6119.....	T13R20.....		P-2951.....										
C104, C105.....	6	6SK7, 6SA7, 6SQ7GT, 6K6GT, (47)	A18-274.....	PRS450-16.....	BR1645.....		M-16-450.....		UT-16.....		Pwr Out	C80-223.....	P-6119.....	T13R20.....		P-2951.....										
C105A.....	6	6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3GT, (44)	A18-274.....	PRS450-16.....	BR1645.....		PR25-25.....		TA-25.....		Pwr Out	C80223.....	P-6119.....	T-22R02.....		P-2951.....										
C108.....	4	6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3GT, (44)	A18-274.....	PRS450-16.....	BR1645.....		PR25-25.....		UT-16.....		Pwr Out	C80223.....	P-6119.....	T-22R02.....		P-2951.....										
C108.....	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	A18-274.....	PRS150-40.....	BR415.....		M-16-450.....		UT-41.....		Pwr Out	C80223.....	P-6119.....	T-22R02.....		P-2951.....										
11011.....	4	1R5, 1U4, 1S5, 3Q4.....	A18-281.....	AF866D4A & BRH251	A3	DSB-403020-150 & M-100-25	UP4431C5.....	EL-224 & UHC-102	Out	A80-228.....	A-3878.....	T22S47.....	A-2931.....	753.....	F6A60.....											
11305.....	4	12SA7, 12SK7, 12SQ7, 50L6GT, (47)	A18-280.....	PRS150-40.....	BR4015.....		M-40-150.....	UT-401.....	Out	B80-230.....	A-3876.....	T22S45.....	A-2928.....													
11411-N.....	4	1R5, 1U4, 1S5, 3Q4.....	A18-282.....		UP7DJ63.....				Out	A80-231.....	A-3856.....	T22S48.....	A-2900.....	4950 467.....	42R.....	XX45.....										
11801.....	5	12SA7, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	B18-283.....	PRS150-40-40	BRD3315.....		M-2X30-150.....	TA-330.....	Out	A-80223.....	A-3877.....	B3	T22S46.....	B3	A-2930.....	B3										
CLARK																										
PA-10.....	5	7F7, *6V6GT, 5Y3GT, (47)	20-10-20 Mfd.	AF32K4A.....	UP4CJ5.....		DY-312.....		EL-212.....		Pwr Out	P-6013.....	T22R05.....	P-2953.....												
PA-10.....	6	6SJ7, 6J5GT, *6V6GT, 5Y3GT, (47)	10-10-20 Mfd.	AF32K4A.....	UP4CJ5.....		DY-310.....		EL-102.....		Pwr Out	A-3504.....	T22S55.....	A-2938.....												
PA-10A.....	6	20-20-20 Mfd.	AF4414A.....	UP2245C.....		DY-312.....		EL-530.....		Pwr Out	P-6013.....	T22R06.....	P-2953.....													
PA-20.....	6	7F7, *6L6GA, 5U4G, (47)	16 Mfd.	PRS150-16.....	BR1615.....	M-16-150.....	UT-161.....	Pwr Out	A-3304.....	T22S64.....	A-2938.....															
PA-20.....	6	7F7, *6L6GA, 5U4G, (47)	20 Mfd.	AF4J.....	UP2045.....	DY-20-450.....	EL-212.....	Pwr Out	A-3304.....	T22S64.....	A-2938.....															
PA-20A.....	7	6SJ7, 6J5GT, *6L6GA, 5U4G, (47)	20-10-20 Mfd.	AF32K4A.....	UP1135C.....	DY-312.....	EL-102.....	Pwr Out	T22R07.....	T22S68.....	P-2955.....															
PA-20A.....	7	6SJ7, 6J5GT, *6L6GA, 5U4G, (47)	40 Mfd.	AF4J & PRS25-20	UP2245C.....	DY-312.....	EL-530.....	Pwr Out	A-3801.....	T22S68.....	A-3130.....															
PA-30.....	8	7C7, 7F7, *6L6, 5U4G, (*47)	12 Mfd.	BR105.....	M-10-50.....	TA-510.....	A4	Pwr Out	P-6314.....	T22R33.....	P-2953.....															
PA-30.....	8	7C7, 7F7, *6L6, 5U4G, (*47)	30 Mfd.	UP4045.....	DY-312.....	EL-530.....	A4	Pwr Out	T22R33.....	P-2953.....																
PA-30.....	8	7C7, 7F7, *6L6, 5U4G, (*47)	20-10-20 Mfd.	AF4414A.....	UP6CJ17.....	DY-312.....	EL-312.....	Pwr Out	A-3865.....	B3	T22S45.....	B3	A-2928.....	B3												
PA-30.....	8	7C7, 7F7, *6L6, 5U4G, (*47)	20-20 Mfd.	AF44D.....	UP2215.....	DY-2X20-150.....	EL-221.....	Pwr Out	A-3865.....	B3	T22S45.....	B3	A-2928.....	B3												
CLEARSONIC (See U. S. Television)																										
COMMANDER																										
3 Tube Record Player.....	3	12AT6, 50B5, 35W4.....	40 Mfd.	PRS150-40.....	BR4015.....	M-40-150.....	UT-401.....	Out	A-2865.....	B3	T22S45.....	B3	A-2928.....	B3												
CONCORD																										
6C51B, 6C51W.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	...+.....	PRS150-40-40	BRD4415.....	M-2X40-150.....	TA-440.....	Out	On Spkr.	A-3876.....	B3	T22S45.....	B3	A-2928.....	B3											
6D51B, 6D51I, 6D51W.....	5	14Q7, 14A7/12B7, 14B6, 50A5, 35Y4, (47)	A-8948.....	AF84D4A.....	UP4215C.....	DY-4020-150.....	EL-24.....	Out	C-51014.....	A-3856.....	B3	T22S48.....	B3	A-2900.....	B3											
6D61B, 6D61X.....	6	12SK7, 12SA7GT, 12SQ7, 35L6GT, 35Z5GT, (47)	A-8948.....	AF84D4A.....	UP4215C.....	DY-40-20-150.....	EL-24.....	Out	A-3876.....	B3	T22S45.....	B3	A-2928.....	B3												
6D61P.....	6	6SK7, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3GT, (44)	15-10-20 Mfd.	AF4J4A.....	UP6CJ17.....	DY-312.....	EL-205.....	Pwr Out	C-51502.....	P-6120.....	T22R04.....	P-2952.....														
6D62W.....	6	6SK7GT, 6SA7, 6SQ7GT, 6K6GT, 5Y3GT, (44)	A-51356.....	AF4414A.....	UP6CJ17.....	DY-312.....	EL-205.....	Pwr Out	C-51421.....	P-6120.....	T22R04.....	P-2952.....														
6E51B.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	A-51419.....	PRS250-12.....	BR1225.....	M-16-250.....	UT-122.....	Pwr Out	C-51421.....	P-6120.....	T22R04.....	P-2952.....														
6F26W.....	6	12SK7GT, 12SA7GT, 12AT6, 35L6GT, 35W4, (47)	EC-4.....	AF888D.....	UP44415.....	DY-3X40-150.....	EL-340.....	Out	On Spkr.	A-3876.....	B3	T22S45.....	B3	A-2928.....	B3											
6R3ARC, 7R3APW.....	3	12AT6, 50B5, 35W4.....	...+.....	PRS150-30-30	BRD3315.....	M-2X30-150.....	TA-330.....	Out	A-3876.....	B3	T22S45.....	B3	A-2928.....	B3												
6T61-W.....	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	...+.....	PRS150-50-30	BRD3515.....	M-5030-150.....	TA-530.....	Out	A-3876.....	B3	T22S45.....	B3	A-2928.....	B3												
7G26C.....	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 5X5GT, (47)	45X346.....	AF88J4A.....	UP4445C.....	DY-314.....	EL-424.....	Pwr Out	53X282 On Spkr.	P-6120.....	B12	T22R02.....	P-2951.....													
CONTINENTAL R																										
CONTINENTAL E																										
CONVERSA-FONE																										
MS-5, SS-5.....	4	12SJ7, 50L6GT, 35Z5GT.....	...+.....	PRS150-40-40	BRD3515.....	DSB-5030-150.....	TA-530.....	Mic Out	A-3876.....	B14	T22S45.....	B14	A-2928.....	B14												

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photolab Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note				
1st.	B10-412	16-6658						S84-49	ST-109		6A15		Vol	A24-169	AM-60-Z	KSS-3		D13-133	E							Continued—	CLARION		
2nd.	B10-444	16-6660	D2	455				B79-338					Tone	A26-123	AM-67-Z	KSS-3		D13-140	E							6.	C103		
1st.	B10-412	16-5712											Vol	A24-169	AM-60-Z	KSS-3		D13-133								1.	C104, C105		
2nd.	B10-444	16-5714	D2	455									Tone	A26-123	AM-66-Z	KSS-3		D13-139								6.	C105A		
1st.	B10-412	16-6658						B79-341	ST-112		6A21		Vol	A24-169	AM-60-Z	KSS-3		D13-133								5.	C108		
2nd.	B10-444	16-6660	D2	455	†	L-70		B79-342	ST-108		6A1		Tone	A26-123	AM-67-Z	KSS-3	A2	D13-140	E	42						17.	11011		
1st.	B10-416	16-5740						B79-345	ST-107		5A15		Vol	A24-165	AM-63-Z	KSS-3		D13-137	E	42						18.	11305		
2nd.	B10-417	16-5742	D2	455				B79-350	ST-107		5A15		Vol	A24-170	AM-63-Z	KSS-3	A2	D13-137								30.	11411-N		
1st.	C10-462	16-6658						B79-352	ST-107		5A15		Vol	A24-164	AM-60-Z	KSS-3	A	D13-133	E	41						23.	11801		
2nd.	C10-463	16-6660		455	†	L-70		B79-353			3A07		Vol	A24-172	M-63-Z			D13-137								12.	CLARK PA-10		
1st.	A10-468	16-6658						79-316	ST-113		4A1		Vol	A24-161	M-60-Z	KSS-3	A	D13-133	E	41						18.	PA-10A		
2nd.	A10-454	16-6660		455																					13.	PA-20			
1st.	C10-475	16-6658		455																					18.	PA-20A			
2nd.	A-10-478			455																					19.	PA-30			
																											CLEARSONIC		
																											COMMANDER		
																											3 Tube Record Player		
																											17.		
1st.	12Y4	16-6658		455				45B6	ST-105		5A1		Vol	26Y3	AM-63-Z	KSS-3	A	D13-137		41	G1						19.	CONCORD 6C51B, 6C51W	
2nd.	12Y8	16-6660																									6D51B, 6D51I, 6D51W		
1st.	B51010-1	16-6658		455				C-51014	ST-194		5E45		Vol	B-9051-1	AM-60-Z	KSS-3	A	D13-133	E	41								6D61B-6D61X	
2nd.	B51011-1	16-6670						C-51058	ST-194		5E45		Vol	A-9051-2	AM-60-Z	KSS-3	A	D13-133	E	41								6D61P	
1st.	B51011-1	16-6658		455				L-70	C-51512	ST-194	5E45		Vol	B55575-1	AT-88	KSS-3	A	D18-133X	E	41							6D62W		
2nd.	B51416-2	16-6658		455	†			C-51413	ST-194		5E45		Vol	B55550-1	AM-60-Z	KSS-3	A	D13-133	E	41									
1st.	B51416-1	16-6658		455									Tone	B51445-1	AT-88	KSS-3	A	D18-133X	E	41									
2nd.	B51417-1	16-6670																											
1st.	S-LR-127	16-6658		455				S-QL104	ST-107		5A15		Vol	S-RV171-1	M-60-Z		A	66	D19-133		41	GI	6				20.	6E51B	
2nd.	S-LR-129	16-6660						SPK-4	ST-105		5A1		Vol	VC-4	M-63-Z		A	D13-137		41	GI						19.	6F26W	
1st.	LI-1	16-6658		455									Vol	VC-4	AM-63-Z	KSS-3	A	D13-137	E	41								21.	6R3ARC, 7R3APW
2nd.	LI-2	16-6660			†								Tone	VC-4	AM-40-S	KSS-3	A	D11-120	E	41									
1st.													Vol	VC-4	M-63-Z		A	D13-137											
2nd.																													
1st.	9A1814	16-6658		455	†	L-70		I2A442	ST-110		6A21		Vol	36X357	AT-78	KSS-3	A	D13-133X	E	41	GI						20.	7G26C	
2nd.	9A1815	16-6660											Tone	40X277	AM-67-Z	KSS-3		D13-140	E										
																											(See Admin)		
																											CO N T I N U E D		
																											CO N T I N U E D		
																											CONVERSA-FONE		
																											MS-5, SS-5		

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	No. Note	Burgess Part No.	Note	
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	
CORONADO																								
C4B15 Ser. A.	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119117B	PRS-150-I2		BR1215		M-10-150		UT-121		Out	105918	A-3879		T22S47		A-2932		†	†	†	†	
C4B16 Ser. A.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	11992, 11993	AF66D, AF1020D		UP4215, UP5515		DY-4020-150, DY-2X50-150, DSB-35		EL-24, EL-25		Out	105139	A-3865		T22S45		A-2928						
C5D14 Ser. A.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	119134	PRS150-20-40		E23315 & PRS150-4		TA-430 & TA150, BP-502		LM-4020, EL-224		Out	105108D	A-3876		T22S45		A-2928						
C5D15	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	11994	AF-844-D		UP42215		DY-403020-150, UP4215		EL-224, EL-452		Out	105108C	A-3876		T22S45		A-2928						
C5D16	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	119135			E242215		DSB-403020-150		UT-401 & TA-220		Out	105106B	A-3825		T22S45		A-2902						
C6D11 Ser. A.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	119135			UP42215		DSB-403020-150		UT-401 & TA-220		Out	105106C	A-3825		T22S46		A-2902						
C6D13 Ser. A.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	11994	AF-844D		UP42215		DY-403020-150		EL-224		Out	10595B	A-3876		T22S45		A-2928						
C6D18 Ser. A.	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	11995			UP42215		DY-804020-150		EL-452		Out	10595B	A-3876		T22S45		A-2928						
C11A54 Ser. A.	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, 6U5, (44)	11999	PRS350-16		BR1635		M-16-450		UT-15		Pwr	104217	P-6014		T22R07		P-2954						
C11A55 Ser. A.	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, 6U5, (44)	119112			UP43145C	A3	DY-403	A3	EL424		Out	105115B	A-3824		T22S74		A-2905						
C12A51	12	12SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, 6U5, (44)	119112 or 119112B			UP43145C	A3	DY-403	A3	EL424		Out	105115B	A-3824		T22S74		A-2905						
GD60	5	6A8G, 6K7, 6Q7G, 25L6G, 25Z, 49A Ballast	RC599	PRS150-20-20		BRD2215		M-2X20-150		TA-220		Out	105918	A-3879		T22S45		A-2928						
S200	4	12SK7GT, 12J7GT, 50L6GT, 35Z5GT	N-2174	PRSA-40302		EZ2215C		DSB-302		TA-330 & TA-25		Out	On Spkr.	A-3865		T22S45		A-2928						
TNF70	5	12A6GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT, (47)	N-2015	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
4BA1	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119117B			BR1215		M-10-150		UT-121		Out	105918	A-3879		T22S47		A-2932		†				
6C9	6	6SK7, 6SA7, 6H6, 6V6G	20-20 Mid	PRSA250-20-20		BRD2235		M-2X20-450		AT-261		Pwr	†											
6D11 Ser. B.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	119135	PRSA150-20-40		EZ2215		PR50-50		AT-401		Out	†	A-3877		T22S58		A-2930						
6P11	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	119125			UP42215		DSB403020-150		TA-220 & UT-401		Out	†	A-3876		T22S45		A-2928						
11A24	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, 6U5, (44)	119124	AF444AJ		UP222245		DY-4X20-450		EL-420		Pwr	†	104202C	B16	T22S86	B16	A-2902	B16					
15C6	5	6A8G, 6U7G, 6H6, 6PSG, 6K6G	4-21-14 Mid	PR525-10		EZ3116		DHS-2X16-450		TU-1616		Out	10554F	A-3870	B16	T22S86	B16	A-2902	B16					
43-2027	2	50L6GT, 35Z5GT	10 Mid	PR525-10		BR102A		M-10-25		TA-10		Pwr	†			T22S47		A-2931						
43-5005	5	6SA7, 6SK7, 6SQ7, 6KGGT, 6X5GT, (51)	119-105	A-8C-11119, A-8C-11678		UP4415		DY-2X40-150		EL-25		Out	B-12C-100743	A-3876		T22S45		A-2928						
43-6301	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	118-273	PR5150-4		AF32K4A		BR252A		M-25-23		Out	104295	P-4060		T22R20		P-2969						
43-6451	5	1N5GT, 1A7GT, 1H5GT, 3Q5GT	25600	PR5150-16		BR415		DY-310		EL-326		Pwr	B-12C-10235	A-3878		T22S47		A-2931						
43-7601B	6	6SA7, 6SK7GT, 6SF7, 6SJ7, 6V6GT, 6X5GT, (47)	45X346	AF444J & PR525-25	A4	UP4445C		DY-314		EL-424		Out	25594	A-3879	B3	T22S47	B3	A-2932		758		17GD60		
43-7651, 43-7652	8	6SK7, 6SA7, 6SQ7, 6J5GT, 6KGGT, 5Y3GT, (44)	119109	AF222J		UP15D145		DY-3X15-450		EL-344		Pwr	†	P-6119	B12	T22R01		P-2951						
43-8160	5	12SA7, 12SK7GT, 12SQ7GT, 60L6GT, 35Z5GT	40-20 Mid	AF84D4A	A3	UP404J59		DY-4020-150		EL-24		Out	104202B	B-12C-10234	A-3876	T22S45		A-2931						
43-8177, 43-8178	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	40-40 Mid	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	†	A-3876		T22S45		A-2928						
43-8180	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	18-272	PR5150-20		BR2015		M-20-150		UT-201		Out	A80-224	A-3876	B3	T22S45	B3	A-2928						
43-8190	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	18-280	PR5150-40		BR4015		M-40-150		UT-401		Out	†	A-3876		T22S45		A-2928						
43-8213	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	30-30 Mid	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	†	A-3876		T22S45		A-2928						
43-8240, 43-8241	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-40 Mid	PRSA150-40-40		BRD4415		DSB-2X50-150		TA-530		Out	51X122	A-3876		T22S45		A-2928						
43-8305	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X344	PRSA150-50-50 & PRS25-25		EZ5515		DSB-304		EL-352 & TA-25		Out	51X119	A-3876		T22S45		A-2928						
43-8312A	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT, (47)	45X344	PRSA150-50-50 & PRS25-25		EZ5515		DSB-304		EL-352 & TA-25		Out	51X116	A-3876	B9	T22S45	B9	A-2928						
43-8330	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (51)	30-30 Mid	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	†	A-3876		T22S45		A-2928						
43-8351, 43-8352	6	12SA7, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	119-135	PRSA150-40-40 & PRS150-20		BRD4215		DSB-403020-150		TA-220 & UT-401		Out	105-106	A-3856		T22S45		A-2937						
43-8353, 43-8354	6	12SK7GT, 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	A-8C-10077	AF844D		UP42215		DY-403020-150		EL-224		Out	B-12C-11203	A-3876		T22S45		A-2928						
43-8420	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (51)	30-30 Mid	PRSA150-30-30		BRD3315		DSB-2X30-150		TA-330		Out	†	A-3876		T22S45		A-2928						
43-8470	6	12SK7, 12SA7, 12SF7, 12SJ7, 45X344	PRSA150-50-50 & PRS25-25			EZ5515		DSB-304		EL-352 & TA-25		Out	51X119	A-3876		T22S45		A-2928						
43-8471	6	12SK7, 12SA7, 12SF7, 12SJ7, 45X344	PRSA150-40-40 & PRS25-25			EZ5515		DSB-304		EL-352 & TA-25		Out	51X116	A-3876	B9	T22S45	B9	A-2928						
43-8576B	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT, (47)	45X346	AF444AJ	A4	UP4445C		DSB-403020-150		EL-224		Out	53X282	P-6120	B12	T22R02		P-2952						
43-8685	6	6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT, (47)	25688	AF44J & PRS25-25		UP2245C		DY-312		EL-353		Pwr	51X97	A-3823	B12	T22S45	B12	A-2901						

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS			Section G CONTROLS						Section H VIBRATORS			Photofact Ser. No.	MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	108202	16-5712		455			114215B	ST-108		6A1		Vol	101250	AM-63-Z	KSS-3	A2	-	D13-137	E	42					CORONADO		
2nd.	108153 B	16-5714		455			114268 (or)	ST-113		4A1		Vol	101272	AM-60-Z	KSS-3	A	-	D13-133	E	41					C4B15 Ser. A,		
1st.	108157 H	16-6658		455			114250	ST-196		4E45		Vol	101265	AM-63-Z	KSS-3	A	-	D13-137	E	41					C4B16 Ser. A		
2nd.	108157 O	16-6650		455			114258 (or)	ST-194		5E45		Vol	101266	AM-60-Z	KSS-3	A	-	D13-133	E	41					C5D14 Ser. A		
1st.	108140 N	16-6658		455			114251	ST-105		5A1		Vol	101274	AM-63-Z	KSS-3	A	-	D13-137	E	41					C5D15		
2nd.	108141 G	16-6660		455	104274	L-26	114198 B (or)	ST-194		5E45		Vol	101267	AM-63-Z	KSS-3	A	-	D13-137	E	41					C5D16		
1st.	108140 L	16-6658		455			114257	ST-105		5A1		Vol	101274	AM-63-Z	KSS-3	A	-	D13-137	E	41					C6D11 Ser. A		
2nd.	108145 E	16-6660		455			114263			4E45		Vol	101274	AM-63-Z	KSS-3	A	-	D13-137	E	41					C6D13 Ser. A		
1st.	108140 P	16-6658		455			114263			4E45		Vol	101274	AM-63-Z	KSS-3	A	-	D13-137	E	41					C6D14 Ser. A		
2nd.	108145 G	16-6660		455			114191	ST-105		5A1		Vol	101211	AM-63-Z	KSS-3	A	-	D13-137	E	41					C6D18 Ser. A		
1st.	108140 G	16-6658		455			114265	ST-194		5E45		F2	101275	AM-67-Z	KSS-3	A	-	D13-139X	E	G16					C11A54 Ser. A,		
2nd.	108145 C	16-6660		455	4426	L-40	114270			F2		Vol	101275	125180		A	-	D13-133	E						C11A55 Ser. A		
1st.	108177 B	16-5712		455			114269			F2		Vol	101229	AM-60-Z	KSS-3	A	-	D13-133	E						C12A51		
1st.	108210			455																					GD 60		
2nd.	108155 C																								S 200		
1st.	108209																								TNF 70		
2nd.	†	16-5712	455																						4BA1		
1st.	†	16-5714																							6C9		
2nd.	†						N-2503			F1		Vol	N-3152	AM-40-S	KSS-3	A	-	D16-120	E	41	G4				6D11 Ser. B		
1st.	N-1598	16-5712	456	N-2402	L-24		N-2168			F1		Vol	N-3111	AM-40-S	KSS-3	A	-	D16-120	E	41	G4				6P11		
2nd.	N-1596						N-2389	ST-105		F1		Vol	N-2070	AM-60-Z	KSS-3	A	-	D13-133	E	41					11A24		
1st.	108202	16-5712	455				114238	ST-105		5A1		Vol	101250	AM-63-Z	KSS-3	A2	-	D13-137	E	42					15C6		
2nd.	108153 B	16-5714	456							F2		Vol	36X261												19A33	5438	H2
1st.	†									F2		Vol	101274	AM-63-Z	KSS-3	A	-	D13-137	E	41					43-2027		
2nd.	108140 P	16-6658	455							F2		Vol	101288	AM-60-Z	KSS-3	A2	-	D13-133	E	42					11-43-2027		
1st.	108145 G	16-6660	455							F1		Vol	101288	AM-60-Z	KSS-3	A	-	D13-137	E	41					43-5005		
2nd.	†									F1		Vol	101271	AM-63-Z	KSS-3	A	-	D13-137	E	41					43-6301		
1st.	108169 J	16-5712	455	4426	L-40		114261 B			F2		Vol	101270	AM-60-Z	KSS-3	A	-	D13-133	E	41					10-43-6301		
2nd.	108130 C	16-5714	456				6 inch			F2		Vol	101271	125180		A	-	D13-137	E	41					15C6		
1st.	†						B-18A-11546			3A07		Vol	A-10A-11555	AM-63-Z	KSS-3	A	-	D13-137	E	41					19A32	5437	H1
2nd.	†						B-18B-10236	ST-105		F8	5EV6	Vol	101276				-								11-43-2027		
1st.	108139 B	16-6658	455				B-18B-10236	ST-105		F8	5EV6	Vol	101276				-								43-7651, 43-7652		
2nd.	108211	16-6660					B79-348	ST-109		6A15		Vol	A24-165	AM-63-Z	KSS-3	A2	-	D13-137	E	42					7	43-6451	
1st.	B10-416	16-5740	455				B79-345			5A15		Vol	125367B	M-60-Z		A2	-	D13-133	E	42	GI				10	43-7601B	
2nd.	B10-417				D2		25593	ST-107		5A15		Vol	36X357	AT-92	KSS-3	A	-	D13-133X	E	41					10	43-8160	
1st.	25621	16-6658	455				12A436	ST-115		8A21		Vol	A-10A-10586	AT-88	KSS-3	A	-	D19-133X	E	41					9	43-8177, 43-8178	
2nd.	25622	16-6670					114268	ST-113		4A1		Vol	101272	125180	AM-63-Z	KSS-3	-	D13-137	E	41					12	43-8177	
1st.	9A1814	16-6658	455							4A1		Vol	101272	AM-60-Z	KSS-3	A	-	D13-133	E	41					21	43-8177, 43-8178	
2nd.	9A1815	16-6660								4A1		Vol	24-153	AM-60-Z	KSS-3	A	-	D13-133	E	41					10	43-8180	
1st.	108177 T	16-6658	455							4A1		Vol	101272	AM-60-Z	KSS-3	A	-	D13-133	E	41					19	43-8190	
2nd.	108176 T	16-6658	455							4A1		Vol	101272	AM-60-Z	KSS-3	A	-	D13-133	E	41					7	43-8213	
1st.	108157 H	16-6666	455							4A1		Vol	36X352	AM-60-Z	KSS-3	A	-	D13-133	E	41					12	43-8240, 43-8241	
2nd.	1081570 R	16-6658								4A1		Vol	101265	AM-63-Z	KSS-3	A	-	D13-133	E	41					8	43-8305	
1st.	†	16-6658	455							4A1		Vol	101265	AM-63-Z	KSS-3	A	-	D13-133	E	41					8	43-8312A	
2nd.	10-369	16-6660	455							4A1		Vol	101265	AT-92	KSS-3	A	-	D13-133X	E	41					19	43-8213	
1st.	10-370	16-6660								4A1		Vol	101265	AM-60-Z	KSS-3	A	-	D13-133	E	41					7	43-8213	
2nd.	†	16-6658	455							4A1		Vol	101265	AM-60-Z	KSS-3	A	-	D13-133	E	41					19	43-8213	
1st.	9A1808	16-6658	455							5A15		Vol	36X347A	AT-92	KSS-3	A	-	G10	D13-133X	E	41				19	43-8330	
2nd.	9A1809	16-6660								5A15		Vol	36X347A	AT-92	KSS-3	A	-	G10	D13-133X	E	41				12	43-8351, 43-8352	
1st.	108140 NR	16-6658	455							5A15		Vol	101265	AM-63-Z	KSS-3	A	-	D13-137	E	41					28	43-8353, 43-8354	
2nd.	108141 GR	16-6660								5A15		Vol	36X347A	AT-92	KSS-3	A	-	G10	D13-133X	E	41				8	43-8420	
1st.	9A1775 A	16-6658	455							5A15		Vol	36X347A	AT-92	KSS-3	A	-	G10	D13-133X	E	41				8	43-8420	
2nd.	9A1776 B	16-6658	455							5A15		Vol	36X347A	AT-92	KSS-3	A	-	G10	D13-133X	E	41				8	43-8420	
1st.	9A1775	16-6660								5A15		Vol	36X347A	AT-92	KSS-3	A	-	G10	D13-133X	E	41				8	43-8420	
2nd.	9A1776	16-6660								5A15		Vol	36X347A	AT-92	KSS-3	A	-	G10	D13-133X	E	41				8	43-8420	
1st.	108-140 P	16-6658	455							46A1		Vol	A-10A-11146				-							24	43-8420		
2nd.	108-145 G	16-6660								46A1		Vol	A-10A-11146				-							8	43-8470		
1st.	B13A-11133	16-6660	455							6A1		Vol	...1	AM-60-Z	RS-3	A	-	D13-133	F	41					8	43-8470	
2nd.	B13B-11132	16-6660								6A1		Vol	...1	AM-60-Z	RS-3	A	-	G10	D13-133X	E	41				8	43-8470	
1st.	†	16-6658	455							6A1		Vol	12A439	ST-107	5A15		-	9A1775A	16-6658	455					8	43-8471	
2nd.	9A1775A	16-6658	455							6A1		Vol	12A439	ST-107	5A15		-	9A1776B	16-6658	455					8	43-8471	
1st.	9A1775	16-6658	455							6A1		Vol	12A439	ST-107	5A15		-	9A1776C	16-6660	455					9	43-8576 B	
2nd.	9A1776 C																										

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
CORONADO—Cont																								
43-9196.....	5	12BE6, 12BA6, 12AT6, 50B5, 35W4, (47)	B-9564-1	PRSA150-20-40		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876..	B3	T22S45..	B3	A-2928..						
43-9201.....	5	12BE6, 12BD6, 12AT6, 50B5, 35W4, (47)	A-8C-10377	AF844D		UP44415		DY-3X40-150		EL-224		Out	B-12C-10074-1	A-3876..		T22S45..		A-2928..						
151.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT, (47)	11992	AF66D		UP4215		DY-4020-150..		EL-24		Out	10595C..	A-3876..		T22S62..		A-2928..						
259.....	5	6SA7GT, 6 SK7GT, 6SQ7GT, 6V6GT, 6Z40	10-15-20 Mfd.	AF44J4A		UP5515		DY-2X50-150..		EL-25		Pwr	†											
401.....	4	6K7, 6F5, 25L6, 25Z6	18-219	PRSA150-20-20		EDL4215		DSB-2X30-150		TA-330		Out	80-148..	A-3877..		T22S59..		A-2930..						
415.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT, (47)	18-266	PRSA150-20-20								Out	80-203..	A-3865..		T22S45..		A-2928..						
426.....	5	1A7GT, 1A6GT, 1S86GT, 3V6-566, 3V6-560	9VC-566	PRSA150-8..		BR815..		M-8-150..		UT-81		Out	On Spkr.	A-3866..		T22S47..		A-2900..					G5A42	
442.....	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT..	18-250	PRSA150-12		BR505..		BR505..		TA-550..		Out	On Spkr.	A-3822..		T22S47..		A-2932..		†	†	†		
489.....	4	6D8G, 6S7G, 6T7G, 6K6G..	119-22..	PRSA25-10..		BR102A..		M-10-25..		TA-10..		Chk	105-30E..	C1707..		T20C52..		C2981..						
504.....	5	6D8G, 6S7G, 6T7G, 1F5G, 6N5..	119-28..	PRSA250-8-8..		EZ8825..		M-2X8-250..		LM-28..		Out	105-30..	C-1707..		T20C52..		C-2981..						
509, C509.....	5	1A7GT, 1N5GT, 1H5GT, 1Q5GT..	119116..	PRSA25-25..		BR252A..		M-25-25..		TA-25..		Out	105119..	A-3329..		T22S48..		A-2934..						
518.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT, (47)	11992..	AF66D		UP4215..		DY-4020-150..		EL-24		Out	On Spkr.	A-3876..		T22S45..		A-2928..						
520.....	4	6A8, 6J7, 25L6G, 25Z6G..	11971..	PRSA25-10..		UP5515..		DY-2X50-150..		EL-25		Out	On Spkr.	A-3865..		T22S45..		A-2928..						
521.....	5	6A7, 6D6, 75, 41, 80, (46)	18-102..	PRSA40302..		BR102A..		M-10-25..		TA-10..		Out	On Spkr.	A-3865..		T22R00..		P-2951..						
527A.....	5	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G..	5 Mfd.	PRSA450-8..		EZ8825S..		DY-2X8-450..		TA-303..		Pwr	80-104..	P-6119..		T22S88..		A-2931..						
527C.....	5	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G..	11947E..	PRSA450-8-8..		BR845..		M-10-25..		& TA-5..		Out	104149..	P-6289..		T22R00..		P-2949..						
533, C533.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT, (47)	11994..	AF-844-D..		UP42215..		DY-403020-150..		EL-224..		Out	105108..	A-3876..		T22S45..		A-2928..						
534.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT, (47)	11992..	AF66D		UP4215..		DY-4020-150..		EL-24		Out	105104..	A-3876..		T22S45..		A-2928..						
541A.....	4	1C7G, 1D5G, 1H6G, 1G5G..	17080..	PRSA25-10..		UP5515..		DY-2X50-150..		EL-25		Out	105104..	A-3876..		T22S45..		A-2928..						
546.....	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z6GT..	119104..	AF44D40A..		UP4CJ61..		DY-304..		EL-351..		Out	On Spkr.	A-3857..		T22S48..		A-2937..		†	†	†		
552.....	5	1C7G, 1D5G, 1H4G, 1G5G..	17080..	PRSA25-10..		BR102A..		M-10-25..		TA-10..		Out	104322..	A-3822..		T22S47..		A-2932..		†	†	†		
553.....	5	6D8G, 6K7, 6T7G, 6GGG, 6ZY5G..	11921..	PRSA450-8-8..		EZ588..		DH-2X8-450SS..		TU-88..		Pwr	†			A-3879..		T22S48..		A-2992..				
0-556.....	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z6GT, (47)	18-263..	PRSA150-20-20..		BRD2215..		M-2X20-150..		TA-220..		Out	80-204..	A-3881..		T22S48..		A-2934..						
566.....	5	6A8, 6K7, 75, 41, 624..	119-20..	PRSA450-8-8..		EZ588..		DY-2X8-450SS..		TU-38..		Chk	105-23..	†										
571.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z4GT..	11992..	AF66D		UP4215..		DY-4020-150..		EL-24		Out	105106..	A-3878..		T22S47..		A-2931..						
577C.....	5	6SA7, 6SK7, 6Q7, 6K6, 6X5 or 024, (51)	11950..	PRSA250-12..		BR1225..		M-16-250..		UT-122..		Pwr	104131..	P-6125..		T22S74..		A-2900..						
577D, 579.....	5	6SA7, 6SK7, 6SQ7, 6K6G, 6X5G, (51)	119105..	AF44J4A..		UP2245C..		DY-315..		EL-350..		Pwr	10567..	A-3823..		T22S74..		A-2900..						
589.....	5	6A8, 6K7, 6Q7, 6K6, 5Y3..	119-38..	PRSA450-8-8..		EZ588..		DH-2X8-450SS..		TU-88..		Pwr	10460..	P-6119..		T22R00..		P-2951..						
C590.....	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z6GT, (47)	II19123..	AF886D4A..	A1	UP7DJ63..	A1	DY-419..	A1	EL-443..	A1	Out	105127..	A-3857..		T22S48..		A-2937..						
600.....	6	6A7, 6D6, 75, 41, 80, 6G5, (46)	18-102..	PRSA250-8-16 & PRSA25-10..		EZ8825S..		DH-2X8-450 & M-10-25..		UT-88..		Pwr	80-104..	P-6119..		T22R00..		P-2951..						
602.....	5	6A8, 6K7, 6R7, 25L6, 25Z6..	119-39..	PRSA150-20-20..		BRD2215..		M-2X20-150..		EL-230..		Out	104323..	A-3823..		T22S45..		A-2931..						
602B, 602C.....	5	6A8, 6K7, 6R7, 25L6, 25Z6..	119-42..	PRSB150-20-20..		EDL2215SS..		DSB-2X20-150 SS..		TU-816..		Out	On Spkr.	A-3865..		T22S45..		A-2928..						
636.....	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z6GT, (47)	11953E..	PRSA40302..		EZ2215C..		DSB-302..		TA-330 & TA-25..		Out	10588B..	A-3825..		T22S45..		A-2902..						
C640.....	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z6GT, (47)	11994..	AF844D		UP42215..		DY-403020-150..		EL-224..		Out	105104..	A-3876..		T22S46..		A-2928..						
C642.....	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z6GT, (47)	11994..	AF844D		UP42215..		DY-403020-150..		EL-224..		Out	105958..	A-3876..		T22S46..		A-2928..						
648.....	6	6A76D, 75, 76, 6AC5G, 60, 5Y3G, 6U5, (44)	18-226..	PRSA450-8-16..		EZ5112..		M-2X10-450..		UT-816..		Pwr	80-159..	P-6119..		T22R02..		P-2951..						
665.....	7	6K8G, 6K7, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5, (44)	11953B..	PRSA450-8-16..		EZ5816..		DH-816-450SS..		TU-1616..		Pwr	104124B..	P-6119..		T22S52..		A-2904..						
666.....	6	6K7, 6A8, 6Q7, 6N6, 6X5..	119-21..	PRSA450-8-8..		EZ588..		DH-2X8-450SS..		TU-88..		Chk	10575..	A-3852..		T22R00..		P-2951..						
667.....	6	6K7, 6A8, 6Q7, 6F6, 6X5..	119-34..	PRSA450-8-8..		EZ588..		DH-2X8-450SS..		TU-88..		Pwr	10483..	A-3852..		T22S88..		A-2904..						
												Out	10540..	A-3852..										

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL					
User	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.		
1st.	B-56722-1	16-6666		455	t.	L-70	C-57843					Vol	B 54466-2	AM-60-Z	KSS-3	D13-133							Continued—	CORONADO 43-9196			
2nd.	B-56718-1	16-6670										Tone	t.	AM-60-Z	KSS-3	D13-133								24.	43-9201		
1st.	B-13A-10728	16-6666		455	t.	L-70-S	B-18A-11089					Vol	A-104-10720	AM-60-Z	KSS-3	A	A							151			
2nd.	B-13B-10729	16-6667																						259			
1st.	108157 L	16-5712		455								F2		AM-60-Z	KSS-3	D13-133	E	41							401		
2nd.	108157 N	16-5714										F2		Vol	t.										415		
1st.		16-6658		455								F1		Vol	24-117	M-51-Z	A	D14-125									
2nd.															24-153	AM-60-Z	A	D13-133	E	41	G1						
1st.	10-369	16-6658		455								F1	5A1														
2nd.	10-370	16-6660																							426		
1st.	9VT-668	16-6658		455								F1	5A1	Vol	9VR-453	AM-66-Z	KSS-3	A2	D13-139	E	42						
2nd.	9VT-632																										
1st.	10-342	16-6658		455								F1		Vol	24-154	AM-63-Z	KSS-3	A2	D13-137	E	42					442	
2nd.	10-343	16-6660																									
1st.	108-105 B	16-5712		465								F1	5A1	Vol	101-91	M-63-Z	A	D13-137								489	
2nd.	108-106 B	16-5712																									
1st.	108-84	16-5712		465								F1		Vol	101-56	M-63-Z	A2	D13-137								504	
2nd.	108-85	16-5714													101-72	M-64-Z	A	D13-130									
1st.	108177 C	16-5712		455								F1	5A1	Vol	101236	AM-60-Z	KSS-3	A2	D13-137	E	42					509 C509	
2nd.	108185 B																									518	
1st.	108157 C	16-6658		465								F1	5A1	Vol	101196	AM-60-Z	KSS-3	A	D13-133	E	47					520	
2nd.	108157 C	16-6660		465																							
1st.	108123																										
1st.	10-162	16-5712		456								F1		Vol	24-104	M-60-Z	A	D13-133								521	
2nd.	10-163																									527A	
1st.	108-96	16-5712		465								F2		Vol	101141	AM-60-Z	KSS-3	A6	D13-133	E	47					527C	
2nd.	108-95 B	16-5714																								533, C533	
1st.	10896 F	16-5712		465								F1	5A1	Vol	101141	AM-60-Z	KSS-3	A6	D13-133	E	47						
2nd.	10895 E	16-5714																									
1st.	108140 F	16-6658		465								F1	5A1	Vol	101217	AM-60-Z	KSS-3	A	D13-133	E	41						
2nd.	108140 D	16-6660																								534	
1st.	108140 I	16-6658		455								F1	5A1	Vol	101198	AM-63-Z	KSS-3	A	D13-137	E	41						
2nd.	108141-D	16-6660																								541A	
1st.		16-6658		456								F1		Vol	17589	M-60-Z	A	D13-133									
2nd.		16-6660																								546	
1st.	108171 B	16-6658		465								F1	5A1	Vol	101210	AM-63-Z	KSS-3	A2	D13-137	E	42						
2nd.	108172																									552	
1st.		16-6658		456								F1	5A1	Vol	17451	M-60-Z	A	D13-133								553	
2nd.		16-6660																									
1st.		16-6658		465								F1		Vol	101150	AM-63-Z	KSS-3	A	D13-137	E	41	I26-6	5307	H1		0-556	
2nd.		16-6660																									
1st.	10-355	16-6658		455								F1	5A1	Vol	24-150	AM-63-Z	KSS-3	A	D13-137	E	42						
2nd.	10-343	16-6660																								566	
1st.	108-69	16-5712		465								F1	5A1	Vol	101-41				D13-133	C3	41	G9	126-1	5300	H1		
2nd.	108-70	16-5714																									
1st.	108157 D	16-5712		465								F1	5A1	Vol	101209	AM-60-Z	KSS-3	A	D13-133	E	41					571	
2nd.	108157 E	16-5714																								577 C	
1st.	108139	16-6658		465								F1	5A1	Vol	101110	AM-63-Z	KSS-3	A	D13-137	E	41					577D, 579	
2nd.	108121	16-6660																									
1st.	108139	16-6658		465								F1	5A1	Vol	101110	AM-63-Z	KSS-3	A	D13-137	E	41	I26-7	5307	H1			
2nd.	108121 B	16-6660																									
1st.	IC8-105 B	16-5712		465								F1	5A1	Vol	101-71	M-63-Z	A	D13-137	E	41	G1					569	
2nd.	IC8-106 B	16-5714																									
1st.	108201			455								F1	5A1	Vol	101252	AM-63-Z	KSS-3	A2	D13-137	E	42						C590
2nd.	108200	16-5712		456																							
1st.	10-152	16-5712		456								F1		Vol	24-104	M-60-Z	A	D13-133								600	
2nd.	10-153																									602	
1st.	108-82 B	16-5712		465								F2		Vol	101-77	M-63-Z	A	D13-137								602B, 602C	
2nd.	108-83 B	16-5714																									
1st.	108-82 B	16-5712		470								F1		Vol	101-77	M-63-Z	A	D13-137									
2nd.	108-83 B	16-5714																									
1st.	108140 F	16-6658		465								F1	5A1	Vol	101127	AM-63-Z	KSS-3	A	D13-137	E	41					636	
2nd.	108140 B	16-6660																									
1st.	108140 H	16-6658		455								F1	5A1	Vol	101218	AM-63-Z	KSS-3	A	D13-137	E	41					C 640	
2nd.	108145	16-6660																								C 642	
1st.	108140 G	16-6658		455								F1	5A1	Vol	101193	AM-63-Z	KSS-3	A	D13-137	E	41					648	
2nd.	108145	16-6660																								665	
1st.	10-227	16-6658		455								F2		Vol	24-121	M-63-Z	A	D13-137	E	41	G1						
2nd.	10-228	16-6660													26-117	M-60-Z	A	D13-133									
1st.	108105 G	16-5712		465								F1		Vol	101126	AM-63-Z	KSS-3	A	D13-137	E	41					666	
2nd.	108106 D	16-5714																									
1st.	108-72			465								F1		Vol	101-42	M-46-Z	A	D13-123									
2nd.	108105 G	16-5712													101-45	M-63-Z	A	D13-137									
1st.	108-101	16-5704	262.5									F2		Vol	101-73	M-63-Z	A	D13-130			</						

<sup>†</sup> Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
																			"A"	"B"	"A"	"B"			
CORONADO—Continued																									
671.....	6 6SA7, 26SK7, 6SQ7, 6V6GT, 5Y3G, (44).	119115.....	PRV450-16-16.....	EZ5116.....	DH-2X16-450SS.....	TU-1616.....	Pwr Out	104225B.....	P-6119.....	T22R02.....	P-2951.....														
675A.....	5 2ID5G, 1C7G, 1H5G, 1G5G, (233).	E17080.....	PRS25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	105118.....	A-3856.....	T22S47.....	A-2902.....														
677A. B.....	6 26K7, 6A8, 6Q7, 6V6, 024 or 6X5, (51).	119-51.....	PRSB450-8-8.....	EZ588.....	DHS-2X8-450.....	TU-88.....	Pwr Out	104-132.....	A-3877.....	T22S58.....	A-2930.....														
678A.....	6 6K7, 6A8, 6SK7, 6Q7, 6J5, 6N7, (44).	11978.....	AF44J4A.....	UP2245CC.....	DY-405.....	EL-423.....	Pwr Out	1054.....	A-3854.....	T22S47.....	A-2900.....														
678C.....	6 6K7, 6A8, 6SK7, 6Q7, 6J5, 6N7, (51).	11988.....					Pwr Out	10533.....	A-3823.....	T22S47.....	A-2900.....														
685B.....	5 2ID5G, 1C7G, 1H6G, 1G5G.....	E17080.....	PRS25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	10584.....	A-3823.....	T22S47.....	A-2900.....														
690B.....	6 6A8G, 6K7G, 6Q7G, 6K6G, 5Y3G, (51).	16-16 Mfd 20 Mfd.....	PRS25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	E-17960.....	P-6120.....	T22R02.....	P-2952.....														
695.....	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47).	11994.....	AF844D.....	UP42215.....	DY-403020-150.....	EL-224.....	Pwr Out	105104C.....	A-3876.....	T22S45.....	A-2928.....														
715, 715B.....	7 6A8G, 6K7G, 6Q7G, 6CSG, 6F6G, 5Y3G, (51).	17645.....	GL450-16.....	KR516A.....	D-16-450.....	PLS-16.....	Pwr Out	14066.....	P-6012.....	T22R04.....	P-2952.....														
729.....	7 6SA7, 8SK7, 6SQ7, 6J5GT, 6V6G, 6K6GT, 5Y3G, (44).	14062.....	PRV450-16-16.....	KR516A.....	D-16-450.....	PLS-16.....	Pwr Out	104212.....	A-3852.....	T22R04.....	A-2904.....														
735.....	7 76, 6A7, 6D6, 6Q7G, 6V6G, 80, 65, (46).	18-202.....	GL450-12.....	KR512A.....	D-12-450.....	PLS-12.....	Pwr Out	105112.....	A-2312.....	T22R04.....	P-2952.....														
761A.....	7 6A8, 6K7, 6Q7, 6J5, 6F6, 5Y3,	18-201.....	GL450-12.....	KR516A.....	D-12-450.....	PLS-12.....	Pwr Out	80-105.....	A-3849.....	T22S62.....	A-2930.....														
765.....	7 6K8G, 6K7, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5, (44).	103-6.....	GL450-16.....	KR508.....	D-16-450.....	PLS-16.....	Pwr Out	104209.....	P-6120.....	T22R04.....	P-2952.....														
767.....	7 6K8G, 6K7, 6Q7G, 6K6G, 6J5G, 5Y3G, (44).	11974.....	PRS350-12.....	BR1235.....	M-10-350.....	UT123.....	Pwr Out	104143B.....	P-6010.....	T22R04.....	P-2952.....														
775.....	13 6K7 or 6U7G, 6J7, 6C5, 6H6, 6LS, 25Y3G, 6G5, (51).	44X21.....	GL450-30.....	KR530.....	D-30-450.....	PLS-30.....	Pwr Out	10554B.....	A-3330.....	T22S86.....	A-2902.....														
796.....	7 6SA7, 6SK7, 6SQ7, 6J5GT, 6K6G, 5Y3G, (44).	119108.....	PRV450-16-16.....	44X36.....	GL450-40.....	D-40-450.....	Pwr Out	105112.....	A-3852.....	T22S86.....	A-2904.....														
797.....	7 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G, (44).	119110.....	PRS450-8.....	44X24.....	PRV450-16-16.....	M-25-25.....	Pwr Out	104170B.....	P-6120.....	T22R04.....	P-2952.....														
C800.....	8 6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, (44).	119109.....	UP15D145.....	DY-3X15-450.....	EL-344.....	Pwr Out	104202B.....	P-6120.....	T22R04.....	P-2952.....															
802, 804.....	4 6J7, 25L6, 25Z6, (44).	30-20-20 Mfd.....	PRS25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	105111.....	A-3830.....	T22S86.....	A-2902.....														
802A.....	4 1A7G, 1N5G, 1H5G, 1A5G.....	10 Mfd.....	PRS25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	104245.....	A-3865.....	T22S45.....	A-2928.....														
803A, 803B.....	5 6D8G, 6S7G, 6T7G, 6G6G, 6ZY5G.....	14403.....	PRSA250-10-10.....	EZ8825.....	M-2X8-450.....	UT-88.....	Pwr Out	14400.....	A-3879.....	T22S48.....	A-2932.....														
806A.....	4 1C7G, 1D5G, 1H5G, 1G5G.....	17080.....	PRS25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	14404.....	A-3822.....	T22S47.....	A-2932.....														
810 (1938).....	7 6A8G, 6J5G, 6U7G, 6V7G, 25A6G, 6N7G.....	30-20 Mfd.....	PRS50-50.....	BR605.....	M-50-50.....	In	A-4401.....	T20D77.....	A-2922.....																
813A, 813B.....	5 1A7G, 1N5G, 1H5G, 1A5G.....	10 Mfd.....	PRS25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	104202B.....	A-2201.....	T22S66.....	A-2901.....														
864.....	11 6U7G, 6J7G, 6S15G, 6H6, 6F6G, 5Y3G, 6U5, (51).	44X30.....	GL450-16.....	KR516A.....	D-16-450.....	PLS-16.....	Pwr Out	53X174.....	T22R04.....	P-2954.....															
867A.....	8 6K8G, 6K7, 6Q7G, 6K6G, 6J5G, 5Y3G, 6U5, (51).	44X28.....	PRS25-50.....	BR502.....	M-50-25.....	TA-50.....	Pwr Out	51X61.....	A-3830.....	T22S88.....	A-2905.....														
C901.....	9 6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, 6U5, (51).	11974.....	PRV450-12.....	44X36.....	GL450-40.....	D-40-450.....	Pwr Out	104143B.....	P-6120.....	T22R04.....	B16	P-2952.....													
902.....	5 1A7G, 1N5G, 1H5G, 1C5G.....	119109.....	PRS450-16.....	BR1235.....	M-10-25.....	UT-123.....	Pwr Out	10554B.....	A-3852.....	T22S88.....	B16	P-2952.....													
906.....	6 26SK7G, 6SA7GT, 6SQ7GT, 6K6GT, 5W4GT.....	18-243.....	PRS-25-25.....	BR202A.....	M-25-25.....	TA-25.....	Pwr Out	104143B.....	P-6120.....	T22R04.....	P-2952.....														
907.....	7 6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 6AC5GT, 5W4GT.....	18-256.....	AF44J.....	UP2235.....	DY-2X20-450.....	EL-32.....	Pwr Out	104245.....	A-3878.....	T22S47.....	B16	P-2952.....													
908.....	8 6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 6AC5GT, 5W4GT.....	18-256.....	AF44J.....	UP2245.....	DY-2X20-450.....	EL-220.....	Pwr Out	104202B.....	A-3878.....	T22S47.....	B16	P-2952.....													
910.....	6 26SK7, 6SA7, 6SQ7, 6K6GT, 5W4GT.....	18-267.....	AF44J4A.....	UP2245C.....	DY-315.....	EL-350.....	Pwr Out	104202B.....	A-3878.....	T22S47.....	B16	P-2952.....													
940, 940A.....	4 1B7G, 1P5G, 1H5G, 1Q5G.....	10 Mfd.....	PRS-25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	104202B.....	A-3822.....	T22S47.....	A-2932.....														
951, 951A.....	5 1B7G, 1P5G, 1H5G, 1Q5G.....	10 Mfd.....	PRS-25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	104202B.....	A-3822.....	T22S47.....	A-2932.....														
953A, 953B.....	5 1B7G, 1P5G, 1H5G, 1Q5G.....	10 Mfd.....	PRS-25-10.....	BR102A.....	M-10-25.....	TA-10.....	Pwr Out	104202B.....	A-3822.....	T22S47.....	A-2932.....														
962, 962B.....	6 2P5G, 1B7G, 1H5G, 1Q5G.....	16 Mfd.....	PRS150-20.....	BR2015.....	M-20-150.....	UT-201.....	Pwr Out	104202B.....	A-3822.....	T22S46.....	A-2930.....														
970B, 970BX.....	7 6A8GT, 6K7GT, 6P5GT, 6Q7GT, 6K6G, 5Y3G, 6U5, (51).	14844.....	AF22J4A.....	UP1145C.....	DY-316.....	EL-202.....	Pwr Out	14385.....	P-6119.....	T22R00.....	B12	P-2951.....													
980B, 980BX.....	8 6A8G, 6K7G, 6Q7G, 6P5G, 6K6G, 5Y3G, 6U5, (51).	15-15 Mfd.....	AF44J.....	UP15D45.....	DY-2X20-450.....	EL-220.....	Pwr Out	14385.....	P-6119.....	T22R01.....	B12	P-2951.....													

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL Part No.						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	108106 U	16-5712		455	†			114216		F2		F2	Vol Tone Vol	101232 101231 E17916	AM-63-Z AM-63-Z M-60-Z	KSS-3 KSS-3	A	D13-137 D13-137 D13-133	E	41						Continued —	CORONADO C671
2nd.	108169 E	16-5714						E17941	ST-108	6A1			Vol	101-109	T-109	KSS-3	A	D13-137X	E	41							675A
1st.	14522	16-5712		456				114-113	ST-115	F8	8EV6		Vol Tone	101161 101162													677A, B
2nd.	14523	16-5714		456				114155	ST-115	F8	8EV6		Vol Tone	101161 101162													678A
1st.	108-96 C	16-5712		456									Vol Tone	101161 101162													678 C
2nd.	108-115			456									Vol Tone	101161 101162													
1st.	108120 B			456									Vol Tone	101161 101162													
2nd.	108115 B			456									Vol	E17916	M-60-Z		A2	D13-133		42	G1						685 B
1st.	14522	16-5712		456				E17941	ST-108	6A1			Vol	E17934 E14047	M-60-Z M-51-Z		A	D13-133		41	G1						690 B
2nd.	14523	16-5714		456				E14064	ST-736	8E10			Vol Tone	101215	AM-63-Z	KSS-3	A	D13-137	E	41	G1						695
1st.	E17963	16-5712		456				114224	ST-105	5A1			Vol Tone	101216	AM-63-Z	KSS-3	A	D13-137	E	41	G1						715, 715B
2nd.	E17463 A	16-5714		456				14065	ST-736	8E10			Vol Tone	E14048	M-60-Z		A	D13-133		41	G1						729
1st.	108169 F	16-5712		456									Vol	101224	AT-88	KSS-3	A	D13-133		41	G1						735
2nd.	108150 F	16-5714		456									Vol	101223	AM-63-Z	KSS-3	A	D13-137	E	41	G1						761A
1st.	17963	16-5712		456									Vol	24-105	M-60-Z		A	D13-133		41	G1						765
2nd.	17463	16-5714		456									Vol	24-106	M-60-Z		A	D13-137		41	G1						
1st.	108178	16-5712		456									Vol	101-104	M-63-Z		A	D13-130		41	G1						
2nd.	108179	16-5714		456									Vol	101-105	M-64-Z		A	D13-137		41	G1						
1st.	10-201	16-5712		456									Vol	101126	AM-63-Z	KSS-3	A										
2nd.	10-202	16-5714		456									Vol	101144	AM-63-Z	KSS-3	A	D13-137	C3	41	G9						767
1st.	†	16-5712		456									Vol	101145	T-114		A	D13-137	E	41	G1						776
2nd.	†	16-5714		456									Vol	36X238 40X225	M-65-Z			D13-139X		41	G1						
1st.	108162 B	16-5712		456				114192		10E60			Vol	101215	AM-63-Z	KSS-3	A	D13-137	E	41	G1						796
2nd.	108132 D	16-5714		456				114195		10E10			Vol	101216	AM-63-Z	KSS-3	A	D13-137	E	41	G1						797
1st.	108162 B	16-5712		456									Vol	101215	AM-63-Z	KSS-3	A	D13-137	E	41	G1						C800
2nd.	108132 D	16-5714		456									Vol	101216	AM-63-Z	KSS-3	A	D13-137	E	41	G1						
1st.	108177	16-6658		456				114206		F2		F2	Vol	36X244 17451	AM-30-V	KSS-3	A	D16-116	E	41	G4						802, 804
2nd.	108176	16-6660		456									Vol	101213	M-60-Z		A2	D13-133		42	G1						802A
1st.	†	16-5712		456									Vol	101224	AM-30-V	KSS-3	A2										
2nd.	14401	16-5714		456				14555	ST-105	5A1			Vol	14571	M-60-Z		A2	D13-133		42	G1						803A, 803B
1st.	14402	16-5714		456				14296	ST-105	5E10			Vol	14399	M-60-Z		A2	D13-133		42	G1						806 A
2nd.	14401	16-5712		456				E14363	ST-105	5A1			Vol	14358		KSS-3	A2	D13-133	E	42							810 (1938)
1st.	14360	16-5714		456									Vol	36X252 40X229	AM-67-Z	KSS-3	A	D13-140	E	41	G17						813A, 813B
2nd.	14361	16-5712		456									Vol	101233	AT-88	KSS-3	A	D13-130	E	41	G16						
1st.	†	16-5133											Vol	14475	M-60-Z		A2	D13-139		42	G1						
2nd.	14401	16-5712		456				14485	ST-105	5A1			Vol	36X245 40X228	AT-114	KSS-3	A2	D19-139X	E								864
1st.	14402	16-5714		456				12A307					Vol	101-104													
2nd.	9A933	16-5714		456									Vol	101144	AM-63-Z	KSS-3	A	D13-137	C3	41	G9						867A
1st.	9A934	16-5712		456									Vol	101145	AT-88	KSS-3	A	D18-133X	E	41	G16						C901
2nd.	108105 B	16-5712		456				114135		10E60			Vol	101144	AM-63-Z	KSS-3	A	D13-137	C3	41	G9						902
1st.	108106 M	16-5714		456	114219.			114208		F2		F2	Vol	101233	AT-88		A2	D13-133	E	41	G16						906
2nd.	108177	16-6658		456									Vol	36X258	AM-60-Z	KSS-3	A2	D13-133	E	42							907
1st.	108176	16-6660		456									Vol	24-146	M-60-Z		A	D13-133		41	G1						908
2nd.	10-358	16-6658		456									Vol	24-147	T-78		A	D13-133X		41	G1						910
1st.	10-315	16-6658		456									Vol	24-131	T-78		G18	†									940, 940A
2nd.	10-312	16-6660		456									Vol	14727	M-60-Z		A2	D13-133		42	G1						951, 951A
1st.	10-315	16-6658		456									Vol	14727	M-60-Z		A2	D13-133		42	G1						953A, 953B
2nd.	10-312	16-6660		456									Vol	14875			A	D13-133		42	G1						962A, 962B
1st.	10-358	16-6658		456									Vol	14875			A	D13-133		41	G1						970-B, 970-BX
2nd.	14722	16-6658		456				E14719					Vol	14727	M-60-Z		A2	D13-133		42	G1						980B, 980BX
1st.	14722	16-6660		456				E14767					Vol	14727	M-60-Z		A2	D13-133		42	G1						
2nd.	14723	16-6659		456				14870					Vol	E14869	M-60-Z		A2	D13-133		42	G1						
1st.	14722	16-6658		456				14873					Vol	14875			A	D13-133		41	G1						
2nd.	14723	16-6660		456				14881	ST-108	6A1			Vol	14875			A	D13-133		41	G1						
1st.	14722	16-6658		456				14885	ST-119	10A31			Vol	14845	M-60-Z		A	D13-133		41	G1						
2nd.	14723	16-6660		456				14840		F2		F2	Vol	14849	T-120		A	D13-139X		41	G1						
1st.	14520	16-6658		456				14665					Vol	14288	M-51-Z		A	D13-128		41	G1						
2nd.	14832	16-6660		456				10E10					Vol	14288			A	D13-139X		41	G1						
1st.	14520	16-6658		456				14665					Vol	14288													

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT			Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note		
		"A"	"B"																							
CORONADO—Cont'd	990, 990B	9-6K7GT, 6A8GT, 6Q7GT, 6P5GT, 6K6G, 5Y3G, 6U5, (51)	14670	AF44J			UP15D45		DY-2X20-450		EL-220		Pwr Out	14815	P-6012	T22R04		P-2952								
1010B	10-6SK7, 6SA7, 6J5J5GT, 6S07, 6K6GT, 5Y3G, (51)	14670	AF44J				UP15D45		DY-2X20-450		EL-220		Pwr Out	14815	P-6012	T22R04		P-2952								
C1041 Ser. A	10-6SK7, 6SA7, 6S07, 6P5G, 6F6G, 5Y3G, 6U5, (44)	119106					UP15D145		DY-3X15-450		EL-344		Pwr Out	104202	P-6120	T22R04		P-2952								
1070A	7-6SK7, 6S07, 6SA7, 6S07, 6K6GT, 5K6GT, 5Y3G, (51)	25069	AF44JA				UP2245C		DY-315		EL-350		Pwr Out	105548	A-3870	T22S86		A-2902								
C1100	11-6SK7, 6SA7, 6S07, 6J5GT, 6V6GT, 5Y3G, 6U5, (44)	11969	PRS450-16	BR1645			M-16-450		UT-16		EL-420		Pwr Out	104217	P-6013	T22R07		P-2954								
C1128	8-12SK7, 12SA7, 12SQ7, 35L6GT, 6X5GT, (47)	25407					UP22245		DY-311		EL-323		Pwr Out	25419	P-6012	T22R04		P-2952								
C1131	11-6SK7, 6SA7, 6S07, 6J5GT, 6F6G, 5Y3G, 6U5, (44)	119124	AF4444J				UP22245		DY-4X20-450		EL-420		Pwr Out	104202	P-6120	T22R04		P-2952								
1682A	8-12SK7, 12SA7, 12SQ7, 35L6GT, 6X5GT, (47)	25407							DY-311		EL-323		Pwr Out	105548	A-3870	T22S86		A-2902								
2402, 2408	4-1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-4	BR415					M-4-150		UT-41		Cut	On Spkr.	25419	P-6012	T22R04		P-2952							
2543, 2554	4-1A7GT, 1N5GT, 1H5GT, 1T5GT, 11724GT	18-266	PRS150-30-30	EZ3315			M-2X30-150		TA-330				Out	On Spkr.	A-3881	T22S48		A-2934						F4B60.		
3005	6-1A7GT, 2N5GT, 1H5GT, 3Q5GT, 35Z5GT, (51)	45X284					DSB-403020-150						Out	On Spkr.	A-3856	T22S47		A-2900	746	482	2G3	2B30				
3058	6-6SA7, 2SK7, 6S07, 6V6GT, 5Y3G, (44)	45X283					EZ42215						Pwr Out	53X227	P-6011	T22R02		P-2951								
3102, 3118	6-1A7GT, 2N5GT, 1H5GT, 3Q5GT, 35Z5GT	45X303					DSB-403020-450						Pwr Out	On Spkr.	A-3878	T22S47		A-2931								
3128 (Late)	7-12SJ7, 6L5G, 12SK7, 12SQ7, 35L6GT, 35Z5GT	45X320	PRSA150-30-30	BR03315			M-2X30-150		TA-330				Out		A-3876	T22S45		A-2928								
3158	6-6SA7, 2SK7, 6S07, 6V6GT, 5Y3G	45X277	PRSA150-20-20	BRD2215			M-2X20-150		TA-220				Pwr Out		P-6011	T22R02		P-2951								
4002	6-1A7GT, 2N5GT, 1H5GT, 3Q5GT, 35Z5GT, (51)	45X269	PRSA150-40-40	EDL4215			M-2X40-450		TA-440				Out	On Spkr.	A-3856	T22S47		A-2930								
4132	7-6SA7, 6J5G, 2SK7, 6V7G, 2SA6G, 6N7G	45X262	PRSA150-30-30	BRD3315			M-2X30-150		TA-330				In Out		A-4401	T20D77		A-2922								
4163	11-6SK7, 6SJ7, 6J5GT, 6S07, 6K6GT, 5Y3G, 6U5, (51)	45X322	PRS450-20	BR2045			M-20-450		UT-20				Pwr Out		A-2312	T22S74		A-2901								
4164	11-6SK7, 6SJ7, 6J5GT, 6S07, 6K6GT, 5Y3G, 6U5	20-40 Mfd.	GL450-20	KRS20			D-20-450		PLS-20				Pwr Out		A-2312	T22S74		A-2901								
4912, 4914	5-12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	20-20 Mfd.	GL450-40	KRS40			D-40-450		PLS-40				Pwr Out		A-3876	T22S45		A-2930								
4946	6-1A7GT, 2N5GT, 1H5GT, 3Q5GT, 35Z5GT, (51)	45X269											Out	On Spkr.	A-3856	T22S47		A-2930								
4954	11-6SK7, 6SA7, 6P5G, 6C8G, 6V6G, 6S07, 5Y3G, 6U5, (51)	14 Mfd.	GL450-16	KRS16A			D-18-450		PLS-16				Pwr Out		P-6165	T22R07		P-2955								
4956	8-6SK7, 6SA7, 6S07, 6V6G, 5Y3G, 6U5, (51)	40 Mfd.	GL450-40	KRS40			D-40-450		LM-28				Pwr Out		A-3830	B16	T22S74	B16	A-2905							
CORONET	2-1407, 14A7/12B7, 14B6, 50A5, 35Y4, (47)		AF844D	UP6CJ44			DY-40+30+20-150		EL-324				Out		A-3876	T22S45		A-2928								
CROSLEY	5-6A8GT, 6SK7, 6S07, 6K6GT, 0Z4	W-51139	AF22J4A	UP1145C			DY-316		EL-202				Pwr Out	B-51756												
A-170	5-6A8G, 6U7G, 6Q7G, 6K6G, 6X5G	W-50528	PRSB450-8-8	EZ588			DH-2X8-450SS		TU-88				Pwr Out	B-50844												
A-160	6-6SK7, 6A8GT, 6S07, 6V6GT, 0Z4	W-51782											Pwr Out	45889	A-3878	T22S47		A-2931								
A-168	6-6A8G, 6U7G, 6Q7G, 6P5G, 6AC5G, 6X5G	W-50674	AF22J	UP1145			DY-2X10-450		EL-210				Pwr Out	B-51729	A-3878	T22S47		A-2931								
A-169	6-6SK7, 6A8T, 6S07, 6K6GT, 6X5GT	W-51139	AF22J4A	UP1145C			DY-316		EL-202				Pwr Out	B-51730	A-3877	T22S58		A-2930								
A-250	5-6A8GT, 6SK7, 6S07, 6K6GT, 0Z4	W-51139	AF22J4A	UP1145C			DY-316		EL-202				Pwr Out	B-50844	45889	A-3878	T22S47	A-2931								
A258	5-6A8G, 6U7G, 6Q7G, 6K6G, 6X5G	W-50528	PRSB450-8-8	EZ588			DH-2X8-450SS		TU-88				Pwr Out	B-51644	45721	A-3878	T22S47	A-2931								
A-259	5-6SA7, 6SK7, 6S07, 6K6GT, 6X5GT	W-51139	AF22J4A	UP1145C			DY-316		EL-202				Pwr Out	B-51155A	45721	A-3878	T22S47	A-2931								
A267	6-6K7, 6A8, 6Q7, 6K6, 0Z4	W-50194	PRSB450-8-8	EZ588			DH-2X8-450SS		TU-88				Pwr Out	B-51756	47612	A-3878	T22S47	A-2931								
A268	6-6A8G, 6U7G, 6Q7G, 6P5G, 6AC5G, 6X5G	W-50674	AF22J	UP1145			DY-2X10-450		EL-210				Pwr Out	B-50644	45889	A-3878	T22S47	A-2931								
A350	5-6A8GT, 6SK7, 6S07, 6K6GT, 0Z4	W-51139	AF22J4A	UP1145C			DY316		EL-202				Pwr Out	G79-24628	45721	A-3878	T22S47	A-2931								

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quant Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radart Part No.	Note	Photost Set No.	
1st.	14520	16-6658		456				14665			10E10		Vol	14809	T-115		A	D13-139X		41	G1				Continued	CORONADO 990, 990B	
2nd.	14832	16-5660		456				25131			10E10		Vol	25004	T-120		A	D13-139X		41	G1					1010B	
1st.	25028	16-5712		456				114136			10E60		Vol	101214	AM-60-Z	KSS-3	A	D13-133		E	41					C1041 Ser. A	
2nd.	25029	16-5714		465				25088		F2		F2	Vol	101213	AM-63-Z	KSS-3	A	D13-137		E	41					1070 A	
1st.	108169 C	16-5712		456				114207		F2		F2	Vol	101234	AM-60-Z	KSS-3	A	D13-139X		41	G1					C1100	
2nd.	108130 C	16-5714		456				25416	ST-165		52E10		Vol	25409	T-115		A	D13-125X		41	G1					C1128	
1st.	25029	16-5712		456				114192 B			10E60		Vol	101214	AM-60-Z	KSS-3	A	D13-133		E	41					C1131	
2nd.	25029	16-5714		455				25416	ST-165		52E10		Vol	101213	AM-63-Z	KSS-3	A	D13-137		E	41					1582A	
1st.	108169	16-5712		455				79-322		F1		F1	Vol	24-154	AM-63-Z	KSS-3	A2	D13-137		E	42					2402, 2408	
2nd.	10-342	16-5712		455				79-314	ST-105		5A1		Vol	24-150	AM-63-Z	KSS-3		D13-137		E	42					2543, 2554	
1st.	10-343	16-5714		456				79-314-A	ST-105		5A1		Vol	36X289	AM-60-Z	KSS-3	A2	D13-133		E	42					3006	
2nd.	10-379	16-6658		455				12A358		F2		F2	Vol	36X280	AM-60-Z	KSS-3	A	D13-133		E	41					3058	
1st.	10-343	16-6658		456				12A355	ST-177				Vol	36X280	AM-60-Z	KSS-3	A	D13-133		E	41					3102, 3118	
2nd.	9A1192	16-6658		456				12A358	ST-108		6A1		Vol	40X248	AM-67-Z	KSS-3	A	D13-140		E	41						
1st.	9A1193	16-6660		456				12A339					Vol	36X299	AM-60-Z	KSS-3	A	D13-133		E	42						
2nd.	9A1193	16-6660		456				5 Inch	ST-194		5E45		Vol	36X209	AT-79	KSS-3	A	D13-133X		E	41					3128 (Late)	
1st.	†	16-6658		456				†	ST-177				Vol	40X267	AM-67-Z	KSS-3	A	D13-140		E	41					3158	
2nd.	†	16-6660		456				†					Vol	36X280	AM-60-Z	KSS-3	A	D13-133		E	41					4002	
1st.	†	16-6658		456				12A339					Vol	40X248	AM-67-Z	KSS-3	A2	D13-140		E	42					4132	
2nd.	†	16-6660		456				5 Inch	ST-108	F7	6A1	F7	Vol	36X319	AM-67-Z	KSS-3	A	D13-140		E	41						
1st.	†	16-6658		456				8 Inch	ST-175	F7	8421	F7	Vol	40X263	AM-51-Z	KSS-3	A	D13-128		E	41					4163	
2nd.	†	16-6660		456				8 Inch					Vol	36X320	AM-60-Z	KSS-3	A	D13-133		E	41						
1st.	†	16-5712		456				10 Inch					Vol	40X270	AM-60-Z	KSS-3	A	D13-133		E	41						
2nd.	†	16-5714		456				10 Inch					Vol	36X320	AM-60-Z	KSS-3	A	D13-133		E	41						
1st.	†	16-5712		456				8 Inch	10 or 12 Inch		5E45		Vol	36X320	AM-60-Z	KSS-3	A	D13-133		E	41					4164	
2nd.	†	16-5714		456				5 Inch	ST-194				Vol	40X270	AM-60-Z	KSS-3	A	D13-133		E	41					4912, 4914	
1st.	†	16-6658		456				12A339					Vol	36X271	AM-60-Z	KSS-3	A	D13-133		E	42					4946	
2nd.	†	9A1192		456				12 Inch			12E60	F4	Vol	37X272	AT-115	M-27-S		D13-139X		E	41					4954	
1st.	†	9A1193		456				10 Inch			10E60	F4	Vol	37X272	AT-115	M-27-S		D13-139X		E	41					4956	
2nd.	†	16-5712		456				10 Inch					Vol	37X272	AT-115	M-67-Z		D13-140		E	41						
1st.	†	16-6658		455				5 Inch	ST-105		5A1		Vol	1, 40625	AM-60-Z	KSS-3	A	D13-133		E	41					6.	
2nd.	†	16-6660		455				5 Inch	ST-105		5A1		Vol	1, 40625	AM-60-Z	KSS-3	A	D13-133		E	41						
1st.	G239-32004	16-5712		455				278-BL-5 "R"	ST-105	F8	5EV6		Vol	51660	M-63-Z		A	D13-137		41	G1	G15-38000	5307	H1		CROSLEY A150	
2nd.	G223-32004	16-6660		455				278-BL-7 "U"	ST-105	F8	5EV6		Vol	50526	M-63-Z		A	D13-137		41	G1	G10-38000	5300	H1		A158	
1st.	G185-32004	16-5712		455				386-BJ-4		F2		F2	Vol	51712													A-160
2nd.	G186-32004	16-6660		455				G1-51722	ST-105	F8	5EV6		Vol	50526	M-63-Z		A	D13-137		41	G1	G10-38000	5300	H1		A-168	
1st.	G239-32004	16-5712		455				278-BL-7 "V"	ST-105	F8	5EV6		Vol	51117												A-169	
2nd.	G236-32004	16-6660		455				278-BL-7 "B"	ST-105	F8	5EV6		Vol	51711												A-250	
1st.	G191-32004	16-5712		455				278-BL-5 "B"	ST-105	F8	5EV6		Vol	50526	M-63-Z		A	D13-137		41	G1	G10-38000	5300	H1		A-258	
2nd.	G226-32004	16-6660		455				278-BL-5	ST-105	F8	5EV6		Vol	51198	M-63-Z		A	D13-137		41	G1	G10-38000	5300	H1		A-259	
1st.	G216-32004	16-5712		455				278-BL-5 "B"	ST-105	F8	5EV6		Vol	50056	SD-115	DFS-12		DC13-139X		G19	G10-38000	5300	H1		A-267		
2nd.	G223-32004	16-6660		252				456 BP 9 "M"					Vol	50056	SD-115	DFS-12		DC13-139X		G19	G10-38000	5300	H1		A-268		
1st.	G40-32005	16-5704		252				278-BL-7 "U"	ST-105	F8	5EV6		Vol	50526	M-63-Z		A	D13-137		41	G1	G10-38000	5300	H1		A-269	
2nd.	G41-32005	16-5706		252				278-BL-7 "B"	ST-105	F8	5EV6		Vol	51198	M-63-Z		A	D13-137		41	G1	G10-38000	5300	H1		A-270	
1st.	G191-32004	16-5712		455				278-BL-7 "U"	ST-105	F8	5EV6		Vol	50526	M-63-Z		A	D13-137		41	G1	G10-38000	5300	H1		A-271	
2nd.	G196-32004	16-6660		455				278-BL-5 "R"	ST-105	F8	5EV6		Vol	51198	M-63-Z		A	D13-137		41	G1	G15-38000	5307	H1		A-272	

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
																				"A"	"B"	"A"	"B"	
CROSLEY — Cont'd	5	6A8G, 6U7G, 6Q7G, 6K6G, 6X5G, 6AC5G, 5Y3G.	W-50673	AF22J4A			UP1145C		DY-316		EL-202		Pwr Out	B-50644, 45889, 45721.	A-3878, A-3878.		T22S47, T22S47.		A-2931, A-2931.					
A450	5	6A8GT, 6SK7, 6SQ7, 6K6GT, 6X5GT, 6AC5GT, 5Y3GT.	W-51139	AF22J4A			UP1145C		DY-316		EL-202		Pwr Out	B-51756.	A-3878.		T22S47.		A-2931.					
A-459	5	6A8, 6SK7, 6SQ7, 6K6GT, 6X5GT, 6AC5GT, 5Y3GT.	W-51139	AF22J4A			UP1145C		DY-316		EL-202		Pwr Out	51331.	A-3878.		T22S47.		A-2931.					
A-559,	5	6A8GT, 6SK7, 6SQ7, 6Y6G, 6X5, 6AC5GT, 5Y3G.	51278	AF22J4A			UP1145C		DY-316		EL-202		Pwr Out	51267, 48173.	A-3876, A-3878.		T22S45.		A-2928.					
C33CA	6	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G, 20-20-20 Mid 16 Mfd.	PRS450-16	AF44J4A, PRS450-16			UP2245C, SR1645		DY315, M-16-45D.		EL-350, UT-16.		Pwr Out	49838, F-6119.	A-3878, A-3878.		T22R02, T22S47.		P-2951, A-2931.					
CA12	II	6SK7, 6SA7, 6J5GT, 6SQ7, 6AC5GT, 5Y3G.	W-131847										Pwr Out	I31958.	A-3804.				A-2905.					
CR26	2	12A8, 35Z4	W-131607	PRS150-20-20			BRD2215		M-2X20-150		TA-220													
J11	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
J12	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
J13, J14	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
J15, J18	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773 Ballast.	W-49654	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
J16	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773 Ballast.	W-49654	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
J30BC	7	6A8GT, 6SK7, 6SQ7, 6J5, 6K6G, 5Y3G.	W-49773	PRSA150-20-20			UP150D145		DY-3X15-450.		EL-344		Pwr Out	49789, On Spkr.	P-6120.		T22R04.		P-2952.					
J35	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773 Ballast.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
J539	5	12A8, 12SK7, 12SQ7, 50L6 35Z5.	W-47783	PRS150-16			BR1615		M-16-150.		UT-161.		Chk Pwr Out	47704, 48159.	C-1706.		T20C52.		C-2975.					
J539	5	12A8, 12SK7, 12SQ7, 50L6 35Z5.	W-47702	PRS150-30			BR3015		M-30-150.		UT-301.		Chk Pwr Out	48864.	A-3865.		T22S45.		A-2928.					
J-739	7	6A8GT, 6SK7, 6P5, 6SF5, 25L6, 25Z6, W-48669 Ballast.	W-47702	PRS150-30			BR3015		M-30-150.		UT-301.		Chk Pwr Out	48864.	A-3865.		T22S45.		A-2928.					
J819	8	6K8, 6SK7, 6SQ7, 25L6, 5Y3G.	W-46128, W-47809	PRS250-20, UP4415C			BR2025		M-20-350.		UT-202, EL-343		In Pwr Out	G12-29535, 48995V.	A-3804.				A-2905.					
J5519, J5529	5	12A8GT, 12SK7, 12SQ7, 50L6, 35Z5.	W-46398	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	489893.	A-3801.		T22S60.		A-2905.					
J5539	5	12A8GT, 12SK7, 12SQ7, 50L6, 35Z5.	W-45783	PRSA150-16			BR1615		M-16-150.		UT-161.		Pwr Out	48623.	A-3801.		T22S60.		A-2905.					
O2CA, O2CB, O2CP, O2CQ	10	6SK7, 6SA7, 6SQ7, 6J5GT, 6AC5G, 5Y3G.	W-132301-2	PRS450-20			BR2045		M-20-450.		UT-20.		Pwr Out	48617, 49438.	A-3865.		T22S45.		A-2928.					
O3CA, O3CB, O3CC, O3CP, O3CQ, O3CR	10	6SK7, 6SA7, 6SQ7, 6J5GT, 6AC5G, 5Y3G.	W-134060-1	AF44J4A			BR3045		M-30-450.		UT-30.		Pwr Out	48617, 49438.	A-3865.		T22S45.		A-2928.					
TA62, TA62W	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773 Ballast.	W-49664B	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
TH52, TH52J, TH52W, TK52, TK52W	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
10 (1940)	4	6SK7, 6J7, 25L6, 25Z6, 46416	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
11	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
12	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
13, 14	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
15	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773 Ballast.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
16	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773 Ballast.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
18	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773 Ballast.	W-49664	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out	On Spkr.	A-3865.		T22S45.		A-2928.					
20-21	5	6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G.	W-49794	AF44J4A			UP2245C		DY-315		EL-350		Pwr Out	49838.	P-6119, A-3850.		T22R02, T22S47.		P-2951, A-2909.					
22AS	5	6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G.	W-130577	AF44J4A			UP2245C		DY-315		EL-350		Pwr Out	130592.	P-6010, A-3830.		T22R01, T22S58.		P-2950, A-2930.					
22CA, 22CB, 22CP	12	6SA7, 6AC7, 6SK7, 6SJ7, 6H6, 6SQ7, 6AH7GT, 6V6, 5U4, W-132673-2, W-132571-1, W-132570-1.	PRS25-25.	BR252A			SM-25-25.		DY-311		EL-323		Pwr Out	132601-3.	A-3830.									
23	5	6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G.	W-49794	AF44J4A			UP150D145		DY-315		EL-350		Pwr Out	49838.	A-3830.		T22S64.		A-2936.					
24	35	6A8GT, 6SK7, 6SQ7, 6J5, 6K6G, 5Y3G.	W-49773				UP150D145		DY-3X15-450.		EL-344		Pwr Out	49789.	P-6120, A-3830.		T22R02, T22S47.		P-2951, A-2909.					
25	7	6A8GT, 6SK7, 6SQ7, 6J5, 6K6G, 5Y3G.	W-49773B				UP150D145		DY-3X15-450.		EL-344		Pwr Out	49789.	P-6120, A-3830.		T22R04, T22S74.		P-2952, A-2905.					

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
																			"A"	"B"	"A"	"B"	
CROSLEY — Cont'd																							
26.....	8	6K7GT, 6A8GT, 6SK7, 6SQ7, 6J5GT, *6F6G, 5Y3G,	W-130246..	AF444J		UP150145		DY-3X15-450..		EL-344		Pwr Out	130191 On Spkr.	P-6012	T22R04		P-2952						
27BD, 27BE.....	5	1A7, 1N5, 1H5, 1T5, 3525..	W-49995..	PRSA150-50-50		EZ5515		M-2X50-150		TA-505		Pwr Out	A-3830 †	A-3830	T22S74		A-2905						
28.....	8	*6SK7, 6A8GT, 6SK7, 6SQ7, 6J5, *6K6G, 5Y3G,	W-130404..	AF444J		UP150145		DY-3X15-450..		EL-344		Pwr Out	130740 †	P-6012	T22R04		P-2952						
29.....	8	6K7GT, 6A8GT, 6SK7, 6SQ7, 6J5, *6F6G, 5Y3G,	W-130246..	AF444J		UP150145		DY-3X15-450..		EL-344		Pwr Out	130740 †	P-6012	T22S74		A-2900						
31-31BF.....	10	6K7GT, 6A8GT, 6SK7, 6SQ7, 6J5, *6V6G, 6E5, 5U4G..	W-130358..	UP43145C		DY-406..		EL-424		TA-25		Pwr Out	130738 G1-130432	A-3830	T22S74		A-2905						
33BG.....	6	6SA7, *6SK7, 6SQ7, 6K6GT, 5Y3G..	W-48122..	PRS250-16..		BR1625		M-16-250..		UT-162		Pwr Out	130592 On Spkr.	P-6119	T22R02		P-2951						
34BH.....	10	6K7GT, 6A8GT, *6SK7, 6SQ7, 6J5GT, *6K6GT, 5Y3G, 6E5..	W-48122..	PRS250-16..		BR1625		M-16-250..		UT-162		Pwr Out	130784 On Spkr.	P-6012	T22R04		P-2952						
35.....	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773 Ballast..	W-49774..	AF444JA		UP2245C		DY-315..		EL-350		Out	On Spkr.	A-3865	T22S45		A-2928						
36AM.....	4	1A7GT, 1N5GT, 1H5GT, 1A5GT..	W-45783..	PRS150-20..		BRD2015		M-20-150..		UT-201		Out	48801	A-3857	T22S48		A-2937		758		17GD60		
38BM.....	5	6SA7, 6SK7, 6SQ7, 25L6, 25Z6, W-46773..	W-49664..	PRSA150-20-20		BRD2215		M-2X20-150..		TA-220		Dut	On Spkr.	A-3865	T22S45		A-2928						
43BT.....	5	1A7GT, 1N5GT, 1H5GT, 1T5GT..	W-49995..	PRSA150-50-50		EZ5515		M-2X50-150		TA505		Out	131395	A-3881	T22S48		A-2934					5F4D60	
43FA.....	4	1A7GT, 1N5GT, 1H5GT, 1T5GT..	W-132501-1..																		758	17GD60	
45BV.....	4	1R5, 1T4, 1S5, 1S4..	W-131338..	PRS150-12..		BR2125		M-10-150..		UT-121		Out	131369	A-3329	T22S47		A-2998		950. 467..	2R	XX45		
46FA, 46FB.....	5	1A7GT, 1N5GT, 1H5GT, 1A5GT..	49684..	PRSA150-20-20		BRD2215		M-2X20-150..		TA-116		Out	On Spkr.	A-3881	T22S47		A-2934		758		17GD60		
48BF, 48CB.....	10	6K7GT, 6A8GT, *6SK7, 6SQ7, 6J5GT, *6F6G, 5Y3G, 6E5..	W-48122..	PRS250-16..		BR1625		M-16-250..		UT-162		Pwr Out	130784 On Spkr.	P-6012	T22R04		P-2952						
49BZ.....	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G..	W-49794..	AF444JA		UP2245C		DY-315..		EL-350		Pwr	49838	P-6119	T22R02		P-2951						
52FA, 52FB.....	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117ZGT..	W-132501-1..																		718. 482..	C6	5F4D60
52FC.....	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117ZGT..	W-132501-1..																		718. 482..	C6	5F4D60
52PA.....	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6..	B132144-1..																		718. 482..	C6	2F4A60
52PB.....	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6..	B132144-1..																		718. 482..	C6	2F4A60
52TD, 52TD-U..	5	12SA7, 1ZSK7, 1ZSQ7, 50L6GT, 52TE, 52TE-U..	49664-B..	PRSA150-20-20		BRD2215		M-2X20-150..		TA-220		Out	On Spkr.	A-3865	T22S45		A-2928						
52TG, 52TF-U..	5	12SA7, 1ZSK7, 1ZSQ7, 50L6GT, 52TG, 52TG-U..	49664-B..	PRSA150-20-20		BRD2215		M-2X20-150..		TA-220		Out	On Spkr.	A-3865	T22S45		A-2928						
52TK, 52TL.....	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G..	132669-1..	PRSA450-20-20		BRD2235		M-2X20-450..				Pwr	49838	P-6119	T22R02		P-2951						
52TP.....	5	12SA7, 1ZSK7, 1ZSQ7, 50L6GT, 35Z5GT..	49664-B..	PRS25-25..		BR252A		M-25-25..				Out	†	A-3878	T22S47		A-2931						
52TQ.....	5	12SA7, 1ZSK7, 1ZSQ7, 50L6GT, 35Z5GT..	49664-B..	PRSA150-20-20		BRD2215		M-2X20-150..		TA-220		Pwr	133528-2	A-3865	T22S45		A-2928						
53FB.....	5	*1N5GT, 1A7GT, 1H5GT, 1T5GT..	132501-1..									Out	On Spkr.	A-3881	T22S48		A-2934						
53TF.....	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G..	132669-1..	PRSA450-20-20		BRD2235		M-2X20-450..				Pwr	49838	P-6119	T22R02		P-2951						
53TP.....	5	12SA7, 1ZSK7, 1ZSQ7, 50L6GT, 35Z5GT..	134177-1..	PRSA150-20-20		BRD2215		M-2X20-150..		TA-220		Out	On Spkr.	A-3865	T22S45		A-2928						
56PA, 56PB.....	5	1R5, 1L4, 1S5, 3S4, 117Z6GT, 35Y4, (47)..	1006 Mfd	PRSA150-40-40		BRD4415		M-2X40-150..		TA-440		Out	B-135878-B	A-3879	T22S47		A-2932						
56TA-L, 56TC-L.....	5	1407, 1A7/12B7, 14B6, 50A5, 35Y4, (47)..	131477..	HCLV12-1000		BRD1125		2-BR1125		UHC1012		Out		A-3876	B3	T22S45		B3					
56TD.....	5	12SA7, 1ZSK7, 1ZSQ7, 50L6GT, 35Z5GT (47)..	B-136771..			BRL2215		M-2X16-150..		TA-116		Out		B-135388	A-3876	T22S45		A-2928					
56TG.....	5	1407, 1A7/12B7, 14B6, 50A5, 35Y4, (47)..	KIB-136769..			BRL5315C		DSB-304..		TA-530 & TA-10..		Out		A-3876	T22S45		A-2928						
56TJ.....	5	12SA7, 1ZSK7, 1ZSQ7GT, 50B5, 35W4, (47)..	134177..			PRD3515..		M-50-30-150 & M-10-25..		TA-530 & TA-10..		Out		A-3876	T22S45		A-2928						
56TN-L, 56TW-L.....	5	1407, 1A7/12B7, 14B6, 50A5, 35Y4, (47)..	134177..			PRD3515..		DSB2X50-150/25-25..		TA-530 & TA-25..		Out		A-3876	B3	T22S45		B3					
56TO.....	5	12SA7GT, 1ZSK7GT, 1ZSQ7GT, 50L6GT, 35Z5GT, (47)..	W-134988..			PRD3515..		M-5030-150..		TA-116..		Out		B-134940	A-3876	T22S45		A-2928					
56TR, 56TS.....	5	12SA7, 1ZSK7, 1ZSQ7, 50L6GT, 35Z5GT (47)..	B-135732..			EZ53215C	A3	DSB-804020-150..		EL-26..		Out		B-137723	A-3876	T22S45		A-2928					
56TU.....	5	12SA7, 1ZSK7, 1ZSQ7GT, 50L6GT, 35Z5GT, (47)..	B-136770..	PRSA150-50-30		BRD3515..		M-5030-150..		TA-530..		Out		B-135077..	A-3876	T22S45		A-2928					
62FA, 62-FB.....	6	*1N5GT, 1A7GT, 1H5GT, 1T5GT, 117Z6GT..	B-135073..	PRSA150-20-20		BRD2215..		M-2X20-150..		TA-II6..		Out		B-135077..	A-3876	T22S45		A-2928					

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Phonijet Set No.	
1st.	G246-32004.	16-5712.		455				G1-130328.			12E10.		Vol Tone Vol	130I92. 130741A. 49974.	M-67-Z. M-63-Z.				D13-140. D13-137.			G1.			Continued	CROSLEY 26	
2nd.	G240-32004.	16-5714.		455				G1-130446.	ST-105.		52A1.					A.				41							27BD, 27BE
1st.	G244-32004.	16-6658.		455																						28	
2nd.	G248-32004.																										
1st.	G246-32004.	16-5712.		455	130818.	L-26.		G2-130146.			10E10.		Vol Tone Vol	47783. 130741. 130602.	T-112. M-67-Z. M-67-Z.				D13-137X. D13-140.			G1.				29	
2nd.	G240-32004.	16-5714.																								31, 31BF	
1st.	G246-32004.	16-5712.		455	130818.	L-26.		G3-130328.			12E10.																
2nd.	G240-32004.	16-5714.		455	130818.	L-26.		G4-130328.			12E10.																
1st.	G240-32004.	16-5712.		455	130818.	L-26.		G4-130145.	ST-736.		8E10.															33BG	
2nd.	G249-32004.	16-5714.																									
1st.	G246-32004.	16-5712.		455	130818.	L-26.		G2-130328.			12E10.		Vol Tone Mike Vol	47783. 130741. 130602.	T-112. M-67-Z. M-67-Z.				D13-137X. D13-140.			G1.				34BR	
2nd.	G240-32004.	16-5714.																									
1st.	G240-32004.	16-5714.		455	†	L-25A.		G4-49698.			F2.		F2													35	
2nd.	G242-32004.							392 PL-6 "W"	ST-105.		52A1.		Vol	48709.	M-63-Z.	A2.			D13-137.			42				36AM	
1st.	G154-32004.	16-5712.		455	†	L-25A.		G1-49698.			F2.		F2	Vol	49774.	M-63-Z.	A.		D13-137.			41				38BM	
2nd.	G242-32004.	16-5714.		455	†			G2-130446.	ST-105.		52A1.		Vol	49974.	M-63-Z.	A2.			D13-137.			42				43BT	
1st.	G244-32004.	16-6658.		455				132670-3.	ST-105.		52A1.		Vol	130520-2.	M-63-Z.	A2.			D13-137.			42				43FA	
2nd.	G248-32004.	16-6658.		455																						45BV	
1st.	G255-32004.	16-6668.		455				131342.			F1.		F1	Vol	131345.												
2nd.	G256-32004.	16-6659.						C-133786.	ST-107.		5A15.		Vol	B-130520-3.	M-63-Z.	A2.			D13-137.			42				46FA, 46FB	
1st.	AW-134348.	16-6658.						G2-130728.			F2.		F2	Vol Tone	47783A. 130741-A.	T-112. M-67-Z.	A.		D13-137X. D13-140.			41				48BF, 48CB	
2nd.	G240-32004.	16-5712.		455	130857.																						
1st.	G240-32004.	16-5712.		455				G3-49729.	ST-166.		6E10.		Vol Vol Tone	130044 or. 130252. 130253.	T-112.	A.		D13-137X. D13-137X.			41				49-BZ		
2nd.	G249-32004.	16-5714.						G2-130145.	ST-736.		8E10.		Vol	130252. 130253.	T-112.	A.		D13-137X. D13-137X.			41				52FA, 52FB		
1st.	G268-32004.	16-6658.		455				132670-2.	ST-105.		52A1.															52FC	
2nd.	G276-32004.	16-6658.		455				132832.			Vol															52PA	
1st.	G268-32004.	16-6658.		455				130446-3.	ST-105.		52A1.		Vol	B130520-1.	M-63-Z.	A2.			D13-137.			42				52PB	
2nd.	G269-32004.	16-6658.		455				132825.			F1.		F1	Vol	B130520-1.	M-63-Z.	A2.			D13-137.			42				52TD, 52TD-U, 52TE, 52TE-U, 52TF, 52TF-U, 52TG, 52TG-U
1st.	G269-32004.	16-6658.		455				G2-49675.	ST-196.		4E45.		Vol	49774.	M-63-Z.	A.			D13-137.			41				52TK, 52TL	
2nd.	G267-32004.	16-6658.		455				G3-49675.	ST-196.		4E45.																
1st.	G282-32004.	16-6658.		455				132683-5.	ST-165.		5E10.		Vol	49793-1.	T-112.	A.			D13-137X.			41					52TP
2nd.	G283-32004.	16-6658.		455	131095.	L-25.		G3-49675.	ST-196.		4E45.		Vol	49774.	M-63-Z.	A.			D13-137.			41					52TQ
1st.	G266-32004.	16-6658.		455	133843.	L-40.		132683-2.	ST-165.		5E10.		Vol	49774.	M-63-Z.	A.			D13-137.			42					53FB
2nd.	G267-32004.	16-6658.		455				C-133786-1.	ST-107.		5A15.		Vol	130520-3.	M-63-Z.	A2.			D13-137.			42					53TF
1st.	G286-32004.	16-6658.		455				132683-5.	ST-165.		5E10.		Vol	49793-1.	T-112.	A.			D13-137X.			41					53TP
2nd.	G282-32004.	16-6658.		455				132683-5.	ST-165.		5E10.		Vol	49793-1.	M-63-Z.	A.			D13-137.			41					56PA, 56PB
1st.	G289-32004.	16-6658.		455	132738.	L-40.		49675-9.	ST-196.		4E45.		Vol	49774-1.	M-63-Z.	A.			D13-137.			41					56TA-L, 56TC-L
2nd.	G291-32004.	16-6670.						136156.	ST-113.		4A1.		Vol	B135353.	AM-63-Z.	KSS-3.	A2.		D13-137.	E		42					56TD
1st.	AW 134065.	16-6666.		455				GC-49675-9.	ST-196.		4E45.		Vol	C46846-6.	M-63-Z.	A.			D13-137.			41					56TG
2nd.	AW 134158.	16-6670.		455				B-136767.	ST-113.		4A1.		Vol	B-135383.	AT-109.	KSS-3.	A.		D13-137X.	E		41					56TJ
1st.	AW 137656.	16-6666.		455				4 Inch.	ST-113.		4A1.		Vol	B-135892.	AM-66-Z.	KSS-3.	A.		D13-139.	E		41					56TN-L, 56TW-L
2nd.	AW 137657.	16-6666.		455				4 Inch.	ST-113.		4A1.		Vol	B-135127.	AM-63-Z.	KSS-3.	A.		D13-137.	E		41					56TP
1st.	AW 134065.	16-6658.		455				GC-49675-9.	ST-196.		4E45.		Vol	C-46846-6.	M-63-Z.	A.			D13-137.			41					56TR, 56TS
2nd.	AW 134158.	16-6670.		455	B-134245.	L-75.		R-136023.	ST-113.		4A1.		Vol	B-135692.	AM-63-Z.	KSS-3.	A.		D13-137.	E		41					56TU
1st.	AW 134065.	16-6658.		455				C-135633.	ST-196.		4E45.		Vol	I30520-3.	M-63-Z.	A2.			D13-137.			42					62FA, 62FB
2nd.	AW 134158.	16-6670.		455				L-132131.					Vol														

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No.	Notes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			"A"	"B"																"A"	"B"				
GROSLEY—Continued	62PA—62PB	6 <sup>d</sup> 1N5GT, 1A7GT, 1H5GT, 1T5GT, 117Z6GT	132144-1										Out	132152	A-3876		T22S45			753		.F6A60			
62TA, 62TC, 62TD	6 <sup>d</sup> 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT	132226-1	PRSA150-50-30	BRD3515			M-5030-150		TA-530				Pwr Out	49838	P-6119		T22R02		A-2928						
63CA	6 <sup>d</sup> 6SA7, 6SK7, 6J5, 6SQ7, 6K6GT, 5Y3G	W132669-1		BRD2235			BR252A						Pwr Out	A-3878			T22S47		P-2951						
63FB	6 <sup>d</sup> 1N5GT, 1A7GT, 1H5GT, 1T5GT, 117Z6GT	132501-1											Pwr Out	49838	P-6119		T22R02		A-2931			746	4492	6G3	2M30
63TA	6 <sup>d</sup> 6SA7, 6SK7, 6J5, 6SQ7, 6K6GT, 5Y3G	W132669-1		BRD2235			BR252A						Pwr Out	49838	P-6119		T22R02		P-2951						
66CA, 66CP, 66CQ, 66CS, 66CSM	6 <sup>d</sup> 6SK7, 6SA7, 6SQ7GT, 6V6GT, 5Y3GT, (51)	B-132807	UP22245	DY-404			UT-203						Pwr Out	B-134625	P-6120		T22S47		P-2951						
66TA, 66TC, 66TW	6 <sup>d</sup> 6SK7, 6SA7, 6SQ7GT, 6V6GT, 5Y3GT, (51)	B-132807	AF4441A	UP22245			DY-4X20-450		EL-442				Pwr Out	B-134625	P-6120		T22R02		P-2951						
72CA	7 <sup>d</sup> 6SK7, 6SA7, 6SQ7, 6AD7, 6F6, 5Y3G	132807-1											Pwr Out	B-137237	A-3877		T22S47		A-2930						
72CP	7 <sup>d</sup> 6SK7, 6SA7, 6SQ7, 6AD7, 6F6, 5Y3G	132807-1											Pwr Out	132313-4	A-6312		T22R04		P-2952						
72TA	7 <sup>d</sup> 6SK7, 6SA7, 6SQ7, 6AD7, 6F6, 5Y3G	132807-1											Pwr Out	132313-4	A-6312		T22R04		A-2936						
82CP, 82CQ	8 <sup>d</sup> 6SK7, 6SA7, 6SQ7, 6J5GT, 6K6GT, 5Y3G	132484-1	PRS25-10	BR102A			M-10-25		TA-10				Pwr Out	132313-2	A-6312		T22R04		P-2952						
83CA, 83CB, 83CC, 83CP, 83CQ, 83TA	8 <sup>d</sup> 6SK7GT, 6SA7GT, 6SQ7, 6J5, 6K6GT, 5Y3GT	B-132807-1											Pwr Out	132313-10	P-6312		T22R04		A-2901						
86CR, 86CS	8 <sup>d</sup> F8, 6AC7, 6GS7, 6H6, 6SQ7, 6V6GT, 5Y3GT, (47)	B-137028		UP9DJ55			DY-404		EL-323 & EL-20				Pwr Out	B-135336	P-6012		T22R04		P-2952						
106CP, 106CS	10 <sup>d</sup> 6SK7, 6SA7, 6SQ7, 6J5, 6K6GT/G, 5Y3GT/T, (51)	U-134999	AF44J	UP6BJ38			DY-2X20-400/20-25		EL-322				Pwr Out	B-135018	P-6013		T22R04		P-2952						
146CS	14 <sup>d</sup> 6SG7, 6AC7, 6SA7, 7F8, 6SH7, 6H6, 6E5, 6SQ7, 6V6GT, 5Y4G, (51)	B-137003	PRS25-25	BR4054			M-40-450		UT-40				Pwr Out	B-135600	A-3870		T22S88		A-2905						
				B-137002			PRS40-40 & PRS30-12		BRL4045 & BR1235				Pwr Out	B-137001	P-6014		T22R06		P-2954						
429	4 1A7G, 1N5G, 1H5G, 1C5G	W46128	PRS250-20	BR2025			M-20-350		UT-202				Out	48336	A-3878		T22S47		A-2931		741	4482	4F	2B30	
439	4 1A7GT, 1N5GT, 1H5GT, 1A5GT	W45783	PRS150-16	BR1615			M-16-150		UT-161				Out	48801	A-3857		T22S48		A-2937						
448	4 6D6, 6C6, 25L6G, 25Z6G	45783	PRS150-16	BR1615			M-16-150		UT-161				Out	On Spkr.	A-3865		T22S45		A-2928						
449	4 1A7G, 1N5G, 1H5G, 1C5G	W-48122	PRS450-16	BR1645			M-16-450		UT-16				Out	47292	A-3878		T22S47		A-2931		742	4482	4F	2B30	
458	4 1A7G, 1N5G, 1H5G, 1C5G	W-45783	PRS150-16	BR1615			M-16-150		UT-161				Out	47084	A-3878		T22S47		A-2931		740	4485	20F	22308	
459	4 1A7GT, 1N5GT, 1H5GT, 1C5GT	W-48122	PRS450-16	BR1645			M-16-450		UT-16				Out	47292	A-3878		T22S47		A-2931		742	4482	4F	2B30	
468	4 1A7G, 1N5G, 1H5G, 1C5G	W-45783	PRS150-16	BR1615			M-16-150		UT-161				Out	47293	A-3878		T22S47		A-2931		740	4485	20F	22308	
507	4 6A8G, 6U7G, 6Q7G, 6K6G, 5Y3G	W-44012	GL450-16	KR516A			D-16-450		PLS-16				Pwr Out	45149	P-6010		T22R00		P-2950						
517	5 6A8G, 6U7G, 6Q7G, 6K6G, 5Y3G	W-44012	GL450-16	KR516A			D-16-450		PLS-16				Pwr Out	43479	P-6011		T22S88		A-2931						
				W-44012			D-16-450		PLS-16				Pwr Out	41473	A-3852		T22R00		P-2950						
518	5 6A8G, 6U7G, 6Q7G, 6K6G, 5Y3G	W44012	GL450-16	KR516A			D-16-450		PLS-16				Pwr Out	45758	P-6011		T22R00		P-2950						
				W46822			GL450-30		PLS-30				Pwr Out	45799	A-3878		T22S88		A-2931						
519	5 12A8GT, 12SK7GT, 12SG7GT, 5OL6GT, 35Z5GT	W46398	PRS450-16	BR1645			M-16-450		UT-16				Out	†	A-3865		T22S45		A-2928						
529	5 12A8GT, 12SK7GT, 12SQ7GT, 5OL6GT, 35Z5GT	W46398	PRS150-20-20	BRD2215			M-2X20-150		TA-220				Out	48365	A-3865		T22S45		A-2928						
539	5 12A8GT, 12SK7, 12SQ7, 5OL6, 35Z5	45783	PRS150-16	BR1615			M-16-150		UT-161				Chk Out	47704	C-1706		T20C52		C-2975						
547	5 6A8G, 6U7G, 6Q7G, 6K6G, 5Y3	W44012	GL450-16	KR516A			M-16-450		PLS-16				Pwr Out	48884	A-3865		T22S45		A-2928						
				W43450			GL450-16		PLS-16				Pwr Out	43479	P-6011		T22R00		P-2950						
548	5 1C7G, 1D5G, 1H6G, 1H4G, 1G5G	W-45968	PRS450-16	BR1645			M-16-450		UT-16				Out	46802	A-3822		T22S47		A-2932		†	†	†		
549	5 1A7GT, 1N5GT, 1H5GT, 1A5GT, 117Z6GT, (C-7)	W46398	PRSA150-20-20	BRD2215			M-2X20-150		TA-220				Out	On Spkr.	A-3857		T22S48		A-2937						
				W46128			BR2025		UT-202																
				W45783			BR1615		UT-161																
555	5 6A8, 6K7, 6J7, 6F6, 5Z4	W36055	GL450-40	KR540			D-40-450		PLS-40				Pwr Out	G12-28500	P-6011		T22R02		P-2951						
				W36057			GL450-40		PLS-40																
				W36931			BR102A		TA-10																
558	5 1C7G, 1D5G, 1H5G, 1H4G, 1J6G	W45968	PRS450-16	BR1645			M-16-450		UT-16				In Out	G24-29635	A-3831		T22S47		A-2938		†	†	†		



MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
CROSLEY -- Cont'd	5	6A8G, 6U7G, 6Q7G, 6K6G, 5Y3G.	W44012..	GL450-16..		KR516A..		D-16-450..		PLS-16..		Pwr Out	43479..	P-6011..	T22R00..		P-2950..							
567.....	5	6A8G, 6U7G, 6Q7G, 6K6G, 5Y3G.	W44013..	GL450-16..		KR516A..		D-16-450..		PLS-16..		Pwr Out	44538..	A-3852..	T22S88..		A-2931..							
568 (Trooper).....	4	6K7GT, 6J7GT, 25L6GT, 25Z6GT, W46416 Ballast.	W-46398..	PRSA150-20-20..		BRD2215..		M-2X20-150..		TA-220..		Pwr Out	41473..	A-3852..	T22S88..		A-2931..							
577.....	5	6A8G, 6U7G, 6Q7G, 25A6G, 25Z6G.	W-43280..	GL450-30..		KR530..		D-30-450..		PLS-30..		Pwr Out	43465..	A-3877..	T22S60..		A-2930..							
579.....	5	1B7G, 1P5G, 1N5G, 1H5G, 1Q5G..	48122..	PRS250-20..		BR2025..		M-30-350..		UT-202..		Cut Oct	48002..	A-3822..	T22S47..		A-2932..							
587.....	5	6A8G, 6U7G, 6Q7G, 6K6G, 6X5G..	W44769A..	PRSB450-8-8..		EZ588..		CHS-2X8-450..		TU-88..		Pwr Out	45295..	A-3878..	T22S47..		A-2931..							
588.....	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT.	W-46398..	PRSA150-20-20..		BRD2215..		M-2X20-150..		TA-220..		Pwr Out	46587..	A-3863..	T22S45..		A-2928..							
589.....	5	1B7Q, 1P5Q, 1N5Q, 1H5Q, 1Q5Q..	48122..	PRS250-20..		BR2025..		M-30-350..		UT-202..		Pwr Out	48336..	A-3878..	T22S47..		A-2931..							
597.....	5	6A8, 6K7, 6Q7, 25A6, 25Z6..	W-44935..	GL450-30..		KR530..		D-30-450..		UT-202..		Pwr Out	421-29535..	A-3865..	T22S45..		A-2928..							
598.....	4	6K7GT, 6J7GT, 25L6GT, 25Z6GT, W46416 Ballast.	W46398..	PRSA150-20-20..		BRD2215..		M-2X20-150..		TA-220..		Pwr On Spkr.	43865..	T22S45..										
599.....	4	6SK7, 6J7, 25L6, 25Z6, W46416 Ballast.	W46398..	PRSA150-20-20..		BRD2215..		M-2X20-150..		TA-220..		Pwr On Spkr.	43865..	T22S45..										
617.....	6	6A8G, 6U7G, 6Q7G, 6K6G, 5Y3G..	W44438A..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	44695..	P-6290..										
618.....	6	6A8G, 6U7G, 6Q7G, 6K6G, 5W4..	W44438A..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	45188..	P-6290..	T22S74..		A-2904..							
628.....	6	6A8G, 6U7G, 6P5G, 6F5G, 6K6G, 2W3..	W44012..	GL450-15..		KR516A..		D-16-450..		PLS-18..		Pwr Out	45188..	P-6290..	T22S74..		A-2904..							
637.....	6	6A8G, 6U7G, 6Q7G, 6K6G, 5Y3G..	W45968..	PRS450-16..		BR1645..		M-16-450..		UT-16..		Pwr On Spkr.	45903..	A-3823..	T22S47..		A-2901..							
638.....	6	6A8G, 6U7G, 6P5G, 6F5G, 6K6G, 2W3..	W41081..	GL450-16..		KR516A..		D-16-450..		PLS-18..		Pwr On Spkr.	44356..	P-6012..	T22R04..		P-2952..							
639.....	6	6A8G, 6U7G, 6P5G, 6F5G, 6K6G, 5Y3G..	W45568..	PRS450-16..		BR1645..		M-16-450..		PLS-18..		Pwr On Spkr.	45903..	A-3823..	T22S47..		A-2901..							
648.....	5	6A8G, 6U7G, 6Q7G, 25A6G, 25Z6G, W-46773..	W46398..	PRSA150-20-20..		BRD2215..		M-2X20-150..		TA-220..		Pwr On Spkr.	47803..	P-6120..	T22R01..		P-2952..							
649.....	5	6A8GT, 6U7G, 6Q7G, 25L6G, 25Z6G, W-46773 Ballast.	W49222..	PRSA150-30-30..		BRD3315..		M-2X30-150..		TA-330..		Pwr On Spkr.	47171..	A-3865..	T22S45..		A-2928..							
656.....	6	6A8, 6K7, 6H6, 6F5, 6N5, 5Z4MG..	W36055..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	41978A..	P-6012..	T22R04..		P-2952..							
667.....	6	6A8G, 6S7G, 6T7G, 6K6G, 6X5G..	W-44012..	GL450-15..		KR530..		D-16-450..		UT-16..		Pwr Out	40276..	A-3823..	T22S47..		A-2901..							
668.....	6	6A8G, 6S7G, 6T7G, 6K6G, 6X5G..	W-44990..	GL450-30..		KR516A..		D-30-450..		PLS-30..		Pwr Out	44961..	T22S47..										
669.....	6	6A8G, 6U7G, 6P5G, 6F5G, 6V6G, 5Y3G..	W-46128..	PRS250-20..		BR2025..		M-30-350..		UT-202..		Pwr Out	45071..	A-3878..	T22S47..		A-2931..							
689.....	6	6K8GT, 6K7GT, 6SQ7GT, 5P5GT, 6AC5GT, 2W3GT..	W49171..	AF444J..		UP11145..		DY-3X10-450..		EL-310..		Pwr Out	47309..	A-3830..	T22S74..		A-2905..							
718.....	5	6A8GT, 6K7GT, 6SQ7GT, 5P5GT, 25Z6GT, W-46773..	W49326..	AF444D..		UP2215..		DY-3X20-150..		EL-320..		Pwr Out	46687..	A-3865..	T22S45..		A-2928..							
718.....	7	6JB8G, 6U7G, 6P5G, 6F5G, 6V6G, 5Y3G, 6U5..	W44012..	GL450-16..		KR516A..		D-16-450..		UT-16..		Pwr Out	47171..	A-3865..	T22S45..		A-2928..							
749.....	6	12K8GT, 12K7GT, 12SQ7, 50L6GT, 50J6GT, 50J7GT, 6K6G, 6U7G, 6Q7G, 5Y3G..	49343..									In	G28-29535..	A-3301..	T22S60..		A-2905..							
817.....	8	6A8G, 6K6G, 6U7G, 6Q7G, 5Y3G..	W44054..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	44934..	A-3301..	T22S60..		P-2952..							
818.....	8	6A8G, 6K6G, 6U7G, 6Q7G, 5Y3G..	W36057..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	44274..	A-3823..	T22S74..		A-2901..							
819 (Early).....	8	6K8GT, 6SK7, 6SQ7, 25L6G, 25Z6GT..	47702..	PRSA150-30..		KR540..		D-40-450..		PLS-40..		Pwr Out	44057..	P-6120..	T22R02..		P-2952..							
819 (Late).....	8	6K8G, 6SK7, 6SQ7, 25L6G, 25Z6GT..	47702..	PRSA150-30..		KR540..		D-40-450..		PLS-40..		Pwr Out	44274..	A-3852..	T22S74..		A-2904..							
828.....	8	6J5G, 6A8G, 6U7G, 6Q7G, 5Y3G..	W36057B..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	44274..	A-3852..	T22S74..		A-2904..							
1018.....	10	6K6G, 6A8G, 6U7G, 6C5G, 6K5G, 5Y3G..	W44054..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	44274..	A-3852..	T22S74..		A-2904..							
1019.....	8	6K8G, 6SK7, 6SQ7, 25L6G, 25Z6GT..	46128..	PRSA150-30..		KR540..		M-30-350..		UT-202..		Pwr Out	46760..	A-3830..	T22S74..		A-2905..							
1117.....	11	6K6G, 6A8G, 6U7G, 6C5G, 6K5G, 5Y3G, 65G..	W44054..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	48893..	A-3301..	T22S60..		A-2905..							
			W36057B..	GL450-40..		KR540..		D-40-450..		PLS-40..		Pwr Out	48893..	A-3301..	T22S60..		A-2905..							

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS					Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL Photostat Set No.			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	G138-32004	16-5712		455				257 BP 11	ST-165		5E10		Vol	43449A	M-63-Z				D13-137		41	G1				Continued—	CROSLEY 567
2nd.	G139-32004	16-5714						284 BL-4	ST-196		4E45		Vol	46411	M-46-Z				A.	G4,5	D11-123		41	G1,4 5	G1		568 (Troupers)
1st.	G158-32004	16-5712		455				255 BL 6 "Q"	ST-167		5E18		Vol	43449	M-63-Z				A.	D13-137		41	G1				577
2nd.	G159-32004							273 BL 6 "Q"	ST-194		5E45		F1	48328	M-63-Z				A2	D13-137		42	G1				579
1st.	G194-32004	16-5712		455				274-PL-8			F1		F1	43854A													587
2nd.	G195-32004	16-5714		455				274-PL-18 "U"			F1		F1	46633	M-63-Z				A.	D13-137		41	G1				588
1st.	G173-32004	16-5712		455				281-BL-5 "B"	ST-194		5E45		Vol	45786	M-46-Z				A2	D13-137		42	G1				589
2nd.	G174-32004	16-5714						392-PL-9 "B"	ST-105		52A1		Vol	49328	M-63-Z				A.	D13-137		41	G1				597
1st.	G207-32004	16-6661		455				270 BL 6 "O"			F1		F1	44920A	M-63-Z				A.	D13-137		41	G1				598
2nd.	G206-32004							281-BL 5 "H"	ST-194		5E45		Vol	45786	M-46-Z				A.	G4,5	D14-123		41	G1,4 5	G1		599
1st.	G161-32004							284 BL 3 "K"	ST-196		4E45		Vol	48320	M-46-Z				A.	G4,5	D14-123		41	G1,4 5	G1		617
2nd.	G166-32004	16-5714						465 BP 15 "M"					Vol	44467	M-63-Z				A.	D13-137							618
1st.	G161-32004							465 BP 15 "M"					Tone	4024B	M-49-S				A.	S13-128							628
2nd.	G166-32004	16-5714		455				279 BP 12			F2		F2	44457	M-63-Z				A.	D13-137							628
1st.	G187-32004	16-5712		455				365 BP 12 "M"			F2		F2	4024B	M-49-S				A.	S13-128							637
2nd.	G157-32004	16-5714						279 BP 12 "M"			F2		F2	45864	M-63-Z				A.	D13-137							638
1st.	G187-32004	16-5712		455				480-BP-15					Vol	43449A	M-63-Z				A.	D13-137		41	G1				639
2nd.	G188-32004	16-5714						281-BL-7 "B"	ST-194		5E45		Vol	46314	M-63-Z				A.	D13-137X		41	G1				648
1st.	G208-32004	16-5712		455				281-BL-7 "B"	ST-194		5E45		Vol	46847	M-63-Z				A.	D13-137		41	G1				649
2nd.	G209-32004	16-5714						281-BL-7 "B"	ST-194		5E45		Vol	46847	M-63-Z				A.	D13-137		41	G1				656
1st.	G71-32004	16-5712		450				331 BL 9			F2		F2					G6								667	
2nd.	G72-32004	16-5714						51 PP 18 "B"			F1		F1													668	
1st.	G153-32004	16-5712		455				31 PP 18 "A"			F1		F1													669	
2nd.	G179-32004	16-5714						380 BP 12 "B"			F2		F2													679	
1st.	G187-32004	16-5712		455				346 BP 12 "M"			F2		F2													689	
2nd.	G188-32004	16-5714						380 BP 12 "B"					Vol	46124	M-63-Z				A.	D13-137		41	G1				718
1st.	G236-32004	16-5712		455				281-BL-7	ST-194		5E45		Vol	48019	T-109				A.	D13-137X		41	G1				749
2nd.	G235-32004	16-5714						281-BL-7	ST-194		5E45		Vol	48020	M-63-Z				A.	D13-137		41	G1				817
1st.	G209-32004	16-6661						280 BP 12 "U"					Tone	48020-B	M-63-Z				A.	D13-137		41	G1				818
2nd.	G189-32004	16-5712		455				480 BP 15 "B"					Vol	45947	M-63-Z				A.	D13-137		41	G1				819 (Early)
1st.	G189-32004	16-5714						280 BP 12 "W"					Vol	45973	T-109				A.	D13-137X		41	G1				819 (Late)
2nd.	G222-32004	16-5712		455				480 BP 12 "Z"					Vol	48242	T-109				A.	D13-137X		41	G1				828
1st.	G175-32004	16-5712		455				394 BP-11 "M"			F2		F2													1038	
2nd.	G176-32004	16-5714						465 BP-12 "M"			F2		F2													1019	
1st.	G152-32004	16-5712		455				465 BP-12 "M"			10E60		Vol	44773	T-109				A.	D13-137X		21	G1				1117
2nd.	G222-32004	16-5714						594-BP-15			10E60		F2	44081	M-63-Z				A.	S13-128		21	G1				
1st.	G177-32004	16-5712		455				583-CP-18			10E60		F2	44024B	M-49-S				A.	D13-137X		21	G1				
2nd.	G223-32004	16-5714						566-BP18			10E60		F2	44081	M-63-Z				A.	S13-128		21	G1				
1st.	G155-32004	16-5712		455				594-BP-15			10E60		F2	44024B	M-49-S				A.	D13-137X		21	G1				
2nd.	G224-32004	16-5714						566-BP18			10E60		F2	44081	M-63-Z				A.	S13-128		21	G1				
1st.	G162-32004	16-5712		455				566-BP18			10E60		F2	44024	M-49-S				A.	D13-137		21	G1				
2nd.	G155-32004	16-5714																									

\* Information not available.



Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiar Part No.	Note	Photofac Set No.
1st.	G161-32004.							671BP-18 "M"		F2		F2	Vol Tone	44702, 44024B	T-109, M-49-S		A		D13-137X, S13-128		21	G1 G1			Continued—	CROSLEY 1118, 1128
2nd.	G154-32004.	16-5714						571 BP 18 "M"		F2		F2	Vol Tone	44674, 44024B	T-109, M-49-S		A		D13-137X, S13-128		21	G1 G1				1127
1st.	G161-32004.							671 BP 18 "M"		F2		F2	Vol Tone	44702, 44024B	T-109, M-49-S		A		D13-137X, S13-128		21	G1 G1				1137
2nd.	G154-32004.	16-5714		455				668 BP 18 "M"		F2		F2	Vol Tone	44773, 44704A	T-109, M-63-Z		A		D13-137X, D13-137		41	G1 G1				1217, 1218
1st.	G161-32004.			455				668 BP 18 "M"		F2		F2	Vol Tone	44773, 44704A	T-109, M-63-Z		A		D13-137X, D13-137		41	G1 G1				1227, 1228
2nd.	G166-32004.	16-5714		455				464 BP 15 "M"		F2		F2	Vol	43449A	M-63-Z		A		D13-137		41	G1				5517
1st.	G138-32004.	16-5712		455				284-BL-5	ST-194	5E45			Vol	48217	M-63-Z		A		D13-137		41	G1				5519, 5529
2nd.	G139-32004.	16-5714		455				490-BP-15 "T"	ST-737	8E18			Vol	46124	M-63-Z		A		D13-137		41	G1				5539
1st.	G218-32004 or G233-32004.			455				274 PL 18 "H"		F1		F1	Vol	46057A	M-63-Z		A		D13-137		41	G1				5548
2nd.	G221-32004.	16-5714		455				392-PL-6 "W"	ST-105	52A1			Vol	48694												5549
1st.	G188-32004.	16-5712		450				432-CJ-3 "M"		F2		F2	Vol	37395												5555
2nd.	G72-32004.	16-5714						492-PJ-3 "R"	ST-115	8A21			Vol	48336	M-63-Z											5557
1st.	G194-32004.	16-5712		455				474-PJ-2 "M"		F1		F1	Vol	43854A												5587
2nd.	G195-32004.	16-5714		455				492-PJ-3 "R"	ST-115	8A21			Vol	49336	M-63-Z											5589
1st.	G173-32004.	16-5712		455				270 BL 6 "O"		F2		F2	Vol	49337	M-60-Z		A2		D13-137		42	G1				5597
2nd.	G174-32004.	16-5714		455				279-BP-12 "U"		F2		F2	Vol	44920A	M-63-Z		A		D13-137		41	G1				5628
1st.	G167-32004.	16-5712		455				281-BL-7	ST-194	5E45			Vol	45864	M-63-Z		A		D13-137		41	G1				5648
2nd.	G188-32004.	16-5714		455				632CJ3		F2		F2	Vol	41027	M-67-Z											5656
1st.	G208-32004.	16-5712		455				279BP 12 "H"		F2		F2	Vol	42006	M-27-S		A		D13-140		41	G1				6518
2nd.	G209-32004.	16-5661											Vol	41028-A	M-63-Z		A		D13-125		41	G1				6519
1st.	G71-32004.	16-5712		450									Vol	46314	M-63-Z		A		D13-137		41	G1				6579
2nd.	G72-32004.	16-5714																							6689	
1st.	G187-32004.	16-5712		455																					6679	
2nd.	G188-32004.	16-5714																							7669	
1st.	GZ19-32004 or G218-32004 or G233-32004.	16-5712		455				284-BL-5	ST-194	5E45			Vol	46124	M-63-Z		A		D13-137		41	G1				7739 (Mech PB)
2nd.	G194-32004.	16-5712		455				392-PL-9 "B"	ST-105	52A1			Vol	48328	M-63-Z		A2		D13-137		42	G1				7739 (Magnetone)
1st.	G195-32004.	16-5714		455				U-49220		F2		F2	Vol	48019	T-109		A		D13-137X		41	G1				8.
2nd.	G194-32004.	16-5712		455				B-49443		F2		F2	Vol	48020-B	M-60-Z		A		D13-133		41	G1				Barcombo "Jr. & Sr."
1st.	G195-32004.	16-5714		455				U4-9220		F2		F2	Vol	48181-B	T-109		A		D13-137X		41	G1				9.
2nd.	G235-32004.	16-5712		455				C47920		F2		F2	Vol	48019	M-60-Z		A		D13-133		41	G1				100-1000 Series
1st.	G221-32004.	16-5714		455									Vol	48020	T-109		A		D13-137X		41	G1				22.
2nd.	G188-32004.	16-5714											Vol	48019	M-60-Z		A		D13-133		41	G1				DEARBORN 100
1st.	G229-32004.	16-5714		455									Vol	48020-B	M-60-Z											DALBAR M8 "Tonomatic"
2nd.	G188-32004.	16-5714																							DALBAR — 89	

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No. TUBE	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
			"A"	"B"																					
DECCA DP-11	2 50A5, 35Y4,				PRSA150-50-50			EZ5515		OSB-2X50-150		TA-505		Out		A-3865		T22S45		A-2928					
DP29	3 6SL7GT / 7F7, 6V6GT / 7C5, 6X5GT/7Y4							UP6CJ20 & BR202A	A4	DY-313		EL-323		Chk Pwr		C-1709 P-6119		T20C53 T22R02		P-2951					
PT-10	4 7N7, 7C5, 724 (46)				PRSA450-40, PRSA450-8-8			BR4045, EDL8845		M-40-450, M-2X8-450		EL-4, UT-88		Pwr Out		P-6812 A-3823		T22R31 T22S48		P-2952 A-2901					
DELCO R653	6 6K7G, 6A8G, 6Q7G, 6K6G, 6X5G	7234667			PRSA450-8-8			EZ558		DHS-2X8-450		TU-88		Pwr Out		A-3878		T22S47		A-2931					
R664	6 6K7G, 6A8G, 6Q7G, 6F6G, 6X5G	7234117			PRSA450-8-8			EZ88845		DHTS-3X8-450		TU-88		Pwr Cut		A-3878		T22S47		A-2931					
R665	6 6K7G, 6A8G, 6Q7G, 6V6G, 0Z4	7234179			PRSA450-8-8			EZ88845		DHTS-3X8-450		TU-88		Pwr Out		A-3877		T22S58		A-2930					
R666, R667	6 6K7G, 6A8G, 6Q7G, 6V6G, 0Z4	7234679			PRSA450-8-8			EZ88845		DHTS-3X8-450		TU-88		Pwr Cut		A-3877		T22S58		A-2930					
R668, R669	7 6K7G, 6A8G, 6R7G, 6J5G, 6N7G, 0Z4G	7234619			PRSA450-8-8			EZ88845		DHTS-3X8-450		TU-88		In		A-4216		T20D76		A-2922		A-2901			
R673	7 6K7G, 6A8G, 6R7G, 6J5G, 6N7G, 0Z4G	7234635			PRSA450-8-8			BR1225		M-16-250		UT-122		Out		A-4216		T20D76		A-2922		A-2901			
R675	5 6SA7, 6SK7, 6SQ7, 6K6G, 0Z4G	7234886			PRSA450-8-8			BR1225		DHTS-3X8-450		UT-88		Out		A-4216		T22S66		A-2922		A-2901			
R676	6 6K7, 6A8G, 6Q7G, 6K6G, 6X5G	7237451			PRSA450-8-8			BR1225		M-16-250		UT-122		Out		A-4216		T20D76		A-2922		A-2901			
R677	6 6SK7, 6SA7, 6SQ7, 6V6G, 0Z4G	7237818			AF2J			UP1045		DY-10-450		EL-1		Pwr Out		A-3878		T22S47		A-2931					
R678	6 6SU7, 6SA7, 6SQ7, 6V6G, 0Z4G	7237819			PRSA350-12			BR1235		M-10-350		UT-123		Pwr Out		A-3877		T22S58		A-2930					
R685	5 6SA7, 6SK7, 6SQ7, 6K6G, 0Z4	10, 10 Mfd.			PRSA450-10			BR1045		M-10-450		UT-12		Pwr Out		A-3877		T22S58		A-2930					
R686	6 6SK7, 6SA7, 6SQ7, 6K6G, 6X5G	7239831			PRSA450-8-8			EZ8845		M-2X8-450		UT-88		Pwr Out		A-3878		T22S47		A-2931					
R687	6 6SK7, 6SA7, 6SQ7, 6V6GT, 0Z4, (44)	7238830			AF2J4A			UP1145C		DY-316		EL-202		Pwr Out		A-3877		T22S58		A-2930					
R688	6 6SK7, 6SA7, 6SQ7, 6V6GT, 0Z4, 8-8 Mfd.	7238830			PRSA450-8-8			EZ8845		M-2X8-450		UT-88		Pwr Out		A-3877		T22S58		A-2930					
R695	6 6SK7, 6SA7, 6SQ7, 6V6GT, 0Z4	7239831			PRSA450-10			BR1045		M-10-450		UT-12		Pwr Out		A-3877		T22S58		A-2930					
R696	6 6SK7, 6SA7, 6SQ7, 6K6GT, 6X5G	7239831			PRSA450-8-8			EZ8845		M-2X8-450		UT-88		Pwr Out		A-3878		T22S47		A-2931					
R697	6 6SK7, 6SA7, 6SQ7, 6V6GT, 0Z4	7238830			AF2J4A			UP1145C		DY-316		EL-202		Pwr Out		A-3877		T22S58		A-2930					
R698	6 6SK7, 6SA7, 6SQ7, 6K6GT, 6X5G	7239831			PRSA450-8-8			BR1235		M-10-350		UT-123		Pwr Out		A-3877		T22S58		A-2930					
R699	6 6SK7, 6SA7, 6SQ7, 6V6GT, 0Z4	7238830			AF2J4A			UP1145C		M-2X8-450		UT-88		Pwr Out		A-3877		T22S58		A-2930					
R700	6 6SK7, 6SA7, 6SQ7, 6K6GT, 6X5G	7239831			PRSA450-8-8			EZ8845		M-10-350		UT-123		Pwr Out		A-3877		T22S58		A-2930					
R701	6 6SK7, 6SA7, 6SQ7, 6V6GT, 6X5G	7239831			PRSA450-8-8			EZ8845		M-2X8-450		UT-88		Pwr Out		A-3878		T22S47		A-2931					
R1134, R1135, R1139	5 6A3G, 6K7G, 6Q7G, 25L6G, 25Z6G	30-30-40 Mfd.								DSB-302		TA-330				P-6119		T22R01		P-2951					
R1140	5 6A3G, 6K7, 6Q7G, 6K6G, 5Y3G	16, 16 Mfd.			PRSA450-15			BR1645		M-16-450		TA-26		Pwr Out		A-3856		T22S88		A-2900					
R1141	6 K8G, 6A8G, 6K7, 6Q7G, 6K6G, 5Y3G	8, 12 Mfd.			EZ5516						TU-1616				P-6119		T22R01		P-2951						
R1142	7 K8G, 6A8G, 6K7, 6Q7G, 6F6G, 5Y3G, 6U5	8, 12 Mfd.			EZ5516						TU-1616				P-6119		T22S88		A-2900						
R1143	7 K8G, 6A8G, 6K7, 6Q7G, 6F6G, 5Y3G, 6U5, 8 Mfd.	12 Mfd.			PRSA450-12			BR1245		M-12-450		UT-12		Pwr Out		A-3856		T22R02		P-2952					
R1144	10 6K7, 6A8G, 6Q7G, 6F6G, 5Y3G, 6U5, 8 Mfd.	10, 10 Mfd.			PRSA450-12			BR845		M-8-450		UT-8		Pwr Out		P-6120		T22R02		A-2904					
R1145	6 K8G, 6SK7, 6Q7G, 6F6G, 5Y3G, 6U5, 12 Mfd.	12, 12 Mfd.			PRSA450-12			EZ5516		M-12-450		UT-1616		Pwr Out		A-3856		T22R02		P-2952					
R1150	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT	20, 40 Mfd.			PRSA150-40-20			BRD4215		M-2X40-150		TA-240		Pwr Out		A-3876		T22S45		A-2928					
R1151, R1152, R1153	5 12SA7, 12SK7, 12Q7GT, 35L6GT, 35Z6GT	20, 40 Mfd.			PRSA150-40-20			BRD4215		M-2X40-150		TA-240		Pwr Out		A-3876		T22S45		A-2928					
R1154, R1155	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT	40, 20, 20 Mfd.			AF844D			UP42215		DY-403020-150		EL-224		Pwr Out		A-3876		T22S45		A-2928					
R1156	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT	40, 20, 20 Mfd.			AF844D			UP42215		DY-403020-150		EL-224		Pwr Out		A-3876		T22S45		A-2928					
R1157	6 6SK7, 6SA7, 6SQ7, 6K6G, 5Y3G	20, 15, 5 Mfd.			AF44J4A			UP2245C		DY-315		EL-350		Pwr Out		P-6120		T22R04		P-2952					
R1160	9 6SK7, 6K8, 7F6, 6SF5, 6F6G, 5Y3G	1214207, 1213013			PRSA450-12			BR1245		M-12-450		UT-12		Pwr Out		1214239		T22R04		A-2904					
R1170	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT	1214207, 1214262			PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Pwr Out		1214240		T22R04		P-2952					

~~t~~ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
			"A"	"B"																		"A"	"B"	"A"	"B"
DELCO—Continued	R1171, R1172, R1173.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZGT.	1214627.	PRSA150-40-20	BRD4215.		M-2X40-150.		TA-240.		Out	1214533.	A-3865.	T22S45.		A-2928.								
R1174.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZGT, (51).	1214627.	PRSA150-40-20	BRD4215.		M-2X40-150.		TA-240.		Out	1214533.	A-3865.	T22S45.		A-2928.									
R1175.	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35ZGT, (51).	1214738.	PRSA150-50-50	BRD5515.		M-2X50-150.		TA-505.		Out	1214617.	A-3330.			A-3031.									
R1176.	5	12SK7, 12SA7, 12SQ7, 50L6GT, 35ZGT, (51).	1214628.	PRSA150-50-50	BRD5515.		M-2X50-150.		TA-505.		Out	1214633.	A-3330.			A-3031.									
R1177.	6	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, (51).	1214657.	AF22J4A.	UP1145C.		DY-316.		EL-202.		Pwr	1214665.	P-6119.	T22R02.		P-2951.									
R1178.	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3G, (51).	1214676.	AF22J4A.	UP1145C.		DY-316.		EL-202.		Pwr	1214678.	A-3852.	T22S47.		A-2904.									
R1179.	9	6SK7, 6SA7, 6H6, *GSF5, *F6G, 5Y3G, (51).	1214657.	AF22J4A.	UP1145C.		DY-316.		EL-202.		Pwr	1214653.	A-3850.	T22S47.		A-2900.									
R1180.	12	6SK7, 6SA7, 6H6, *GSF5, *K6GT, 5U4G, 605, (51).	1214696.	AF8624A.	UP43145C.		DY-406.		EL-424.		Pwr	1214694.	P-6012.	T22R04.		P-2952.									
R1181.	5	12SK7, 12SA7, 12SQ7, 50L6GT, 35ZGT.	1214628.	PRSA150-50-50	BRD5515.		M-2X50-150.		TA-505.		Out	1214623.	A-3330.	T22S47.		A-2905.									
R1185.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZGT.	1214628.	PRSA150-50-50	BRD5515.		M-2X50-150.		TA-505.		Out	1214633.	A-3330.			A-3031.									
R1186, R1188.	7	6SA7, 6SK7, 6SQ7, 6SF7, *6K6GT, 5Y3GT.	1214741.	AF44J4A.	UP2245C.		DY-315.		EL-350.		Pwr	1214661.	P-6011.	T22R02.		P-2951.									
R1200, R1202.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZGT, (51).	1214626.	PRSA150-20-20	BRD2215.		M-2X20-150.		TA-220.		Out	1215887.	A-3830.	T22S45.		A-2905.									
R1201, R1203.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZGT, (51).	1214626.	PRSA150-20-20	BRD2215.		M-2X20-150.		TA-220.		Out	1214631.	A-3865.	T22S45.		A-2928.									
R1204, R1205.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZGT, (51).	1214728.	PRSA150-50-30	BRD3515.		M-5030-150.		TA-530.		Out	1215758.	A-3865.	T22S45.		A-2928.									
R1206, R1209.	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35ZGT, (51).	1214758.	PRSA150-50-30	BRD3515.		M-5030-150.		TA-530.		Out	1215755.	A-3876.	T22S45.		A-2928.									
R1212.	6	12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35ZGT, (51).	1214758.	PRSA150-50-30	BRD3515.		M-5030-150.		TA-530.		Out	1215758.	A-3865.	T22S45.		A-2928.									
R1214.	8	6SG7, 6SA7, 6SK7, *6SQ7, *25L6GT, 25Z6GT, (44).	1216143.	AF22J4A.	UP1145C.		DY-316.		EL-202.		Pwr	1215779.	P-6012.	T22R04.		P-2952.									
R1216.	9	6SG7, 6SA7, 6SK7, *6SQ7,	7239053.	AF22J4A.	UP1145C.		DY-406.		EL-424.		Pwr	1214692.	A-2312.	T22S74.		A-2901.									
R1217.	11	6SK7, 6SA7, 6SK7, *6SQ7,	1214696.	AF8624A.	UP43145C.		DY-406.		EL-424.		Pwr	1214694.	P-6014.	T22R06.		P-2954.									
R1218.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZGT, (51).	1214758.	PRSA150-50-30	BRD3515.		M-5030-150.		TA-530.		Out	1215633.	A-3330.	T22S45.		A-3031.									
R1220.	8	6SG7, 6SA7, 6SK7, *6SQ7, *6K6GT, 5Y3G, (51 & 55).	1214741.	BR1645.	M-16-450.		UT-16.		Pwr	1216266.	P-6012.	T22R04.		P-2952.											
R1221.	9	6SG7, 6SA7, 6SK7, *6SQ7, 5U4G, (51).	1216188.	AF44J4A.	UP2245C.		DY-315.		EL-350.		Out	1215326.	A-2312.	T22S74.		A-2901.									
R1227, R1228, R1229.	6	12SK7GT, 12SA7, 12SQ7, 35L6GT, 35ZGT, (47).	1217026.	PRSA150-40-40	BRD4415.		DSB-ZX40-150.		TA-440.		Out	1216557.	A-3876.	B3	T22S45...	B3	A-2928.								
R1230A, R1231A, R1232A.	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35ZGT, (47).	1217026.	PRSA150-40-40	BRD4415.		DSB-ZX40-150.		TA-440.		Out	1216571.	A-3876.	B3	T22S45...	B3	A-2928.								
R1234, R1235.	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35ZGT, (47).	1217026.	PRSA150-40-40	BRD4415.		M-2X40-150.		TA-440.		Out	1216557.	A-3876.	B3	T22S45...	B3	A-2928.								
R1236, R1237.	6	12SK7GT, 12SA7, 12SQ7, 35L6GT, 35ZGT, (47).	1217026.	PRSA150-40-40	BRD4415.		DSB-ZX40-150.		TA-440.		Out	1216557.	A-3876.	T22S45.		A-2928.									
R1251, R1252.	15	6BA6, 6BE6, 6JE, *6SG7, 6SH7, 6AL5, 2615, *6SQ7, *6V6GT, 6U4G, (P44).	1217110.	PRSA150-40-40	BRD4415.		DSB-ZX40-150.		TA-440.		Out	1217600.	P-6165.	T22R07.		P-2955.									
R1400.	4	1A7G, 1NSG, 1HSG, 1CSG,	10 Mfd.	PRS25-10.	BR102A.		M-10-25.		TA-10.		Out	1216557.	A-3876.	T22S47.		A-2931.									
R1401, R1402.	4	1A7G, 1NSG, 1HSG, 1ASG,	10 Mfd.	PRS25-10.	BR102A.		M-10-25.		TA-10.		Out	1216557.	A-3857.	T22S48.		A-2937.									
R1405.	5	1A7GT, 1NSG, 1HSG, 1Q5GT, 35ZGT.	20-20-200 Mfd.	AF44D4DA.	UP4CJ61.		DY-304.		EL-351.		Out	1215409.	A-3856.	T22S47.		A-2900.									
R1406.	5	1A7GT, 1NSG, 1HSG, 1Q5GT, 35ZGT.	1215398.	AF44D4DA.	UP4CJ61.		DY-304.		EL-351.		Out	1215409.	A-3856.	T22S47.		A-2900.									
R1407.	6	1A7G, 1A7GT, 1H5GT, 1Q5GT, 35ZGT.	1214758.	PRSA150-50-30	BRD3515.		M-5030-150.		TA-530.		Dut	1215683.	A-3856.	T22S47.		A-2900.									
R1408, R1409.	6	1A7GT, 1NSG, 1HSG, 1Q5GT, 35ZGT, (47).	1217139.	AF888D4.	UP55515C.		DY4194 & PRS25-100.		EL-3404 UHC-202.		Out	1217532.	A-3877.	T22S46.		A-2930.									
R3215.	6	6K8, 6K7, 6Q7G, 6C5G, *25L6G,	1217140.	BRH251.	M-25-25.		M-2X20-150.		TA-220.		Out	1217595.	A-3831.	T22S60.		A-2905.									
R6015.	6	6D8G, 6ST7G, *6L5G, 6ST7G, I9.	8-8 Mfd. 10 Mfd.	PRS25-10-8 PRS25-10.	EZ8845.		M-10-25.		UT-88 TA-10.		Pwr In Out	1214292. A-3848.	A-3878.	T22R20.		741, 742.	8FL.								
DETROLA	274.	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT.	20, 12 Mfd.	PRSA150-20-20	BRD2215.		M-2X20-150.		TA-220.		Out	1214533.	A-3876.	T22S45.		A-2928.								
276U.	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT.	20, 12 Mfd.	PRSA150-20-20	BRD2215.		M-2X20-150.		TA-220.		Out	1214533.	A-3876.	T22S45.		A-2928.									
280.	4	12K7GT, 12F5GT, 35L6GT, 35Z4GT.	20, 8 Mfd.	PRSA150-20-20	BRD2215.		M-2X20-150.		TA-220.		Out	1214533.	A-3876.	T22S45.		A-2928.									

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat Part No.	Note	Product Set No.
1st.	†	16-6658.	455				†	ST-194.		SE45.		Vol	1214582.	M-60-Z.		A6..	G7	D13-133.	H	47	G7			Continued—	DETROLA
2nd.	†	16-6660.						1214590.	ST-194.	SE45.		Vol	1214608.	M-60-Z.		A6..	G7	D13-133.	H	47	G7				R1171, R1172, R1173
1st.	1214580.	16-6658.	455					1214623.	ST-105.	5A1.		Vol	1214608.	M-60-Z.		A6..	G7	D13-133.	H	47	G7				R1174
2nd.	1214581.	16-6660.						1214623.	ST-105.	5A1.		Vol	1214632.	M-64-Z.		A..		D13-130.		41	G1				R1175
1st.	1214620.	16-6658.	455							F2		Vol	1214654.	T-115.		A..		D13-139X.		41	G1				R1176
2nd.	1214621.	16-6660.																						R1177	
1st.	1214629.	16-6658.	455					1214514.		12E10.		Vol	1214667.	T-43.		A6..		D18-150X.		47	G1				R1178
2nd.	1214630.	16-6660.						1214691.		12E10.		Vol	1214689.	T-115.		A6..		D13-139X.		47	G1				R1179
1st.	1214630.	16-6660.						1214515.		12E60.		Vol	1214689.	T-115.		A6..		D13-139X.		47	G1				R1180
2nd.	1214629.	16-6658.	455					1214623.	ST-105.	5A1.		Vol	1214632.	M-64-Z.		A..		D13-130.		41	G1				R1181
1st.	1214629.	16-6658.	455							F1		Vol	1214712.	M-60-Z.				D13-133.			G1				R1185
2nd.	1214630.	16-6660.								F2		Vol	1214654.	T-115.		A..		D13-139X.		41	G1				R1186, R1188
1st.	1214525.	16-6658.	455									Vol	1215335.	M-64-Z.		A6..	G7	D13-130.		47	G1				R-1200, R1202
2nd.	1215336.							1216364.	ST-196.	4E45.		Vol	1214523.	M-55-S.		A..		D14-130.		41	G1				R1201, R1203
1st.	1215370.	16-6658.	455																					R1204, R1205	
2nd.	1214522.							5 Inch.	ST-194.	5E45.		Vol	1214582.	M-60-Z.		A6..	G7	D13-133.	H	47	G7				R1206, R1209
1st.	1214620.	16-6658.	455									Vol	1215727.	M-60-Z.		A6..	G7	D13-133.		47	G1				R1212
2nd.	1215730.							1216366.	ST-194.	5E45.		Vol	1216353.	M-60-Z.		A2..		D13-133.		42	G1				R1214
1st.	1215730.	16-6658.	455					1216367.	ST-105.	F13.		Vol	1215775.	T-120.		A2..		D13-139X.		42	G1				R1216
2nd.	1214620.	16-6658.						1216363.				Vol	1216165.	M-60-Z.		A2..		D13-133.		42	G1				R1217
1st.	1214629.	16-6658.	455									Vol	1215775.	T-120.		A2..		D13-139X.		42	G1				R1218
2nd.	1214630.	16-6660.						1214515.	ST-101.	12A4.		Vol	1215775.	T-120.				D13-133.			G1				R1220
1st.	1214629.	16-6658.	455									Vol	1215707.	M-60-Z.											R1221
2nd.	1214630.	16-6658.						5 Inch.	ST-105.	5A1.		Vol	1215775.	T-120.		A2..		D13-139X.		42	G1				R1222
1st.	1214629.	16-6658.	455					1214815.		F2		Vol	1215775.	T-120.		A2..		D13-139X.		42	G1				R1223
2nd.	1214630.	16-6658.						1216365.	ST-173.	12E15.		Vol	1216332.	T-119.		A..		D18-139XX.		41	G1				R1224, R-1235
1st.	1214629.	16-6658.	455									Bass Treble	1216333.	M-66-Z.		A..		D13-139X.		41	G1				R-1227, R-1228, R-1229
2nd.	1214630.	16-6660.										Vol	1216505.	T-78.		A..		D13-133.		41	G1				R-1230A, R-1231A, R-1232A
1st.	1216605.	16-6658.	456					1217362.	ST-105.	5A1.		Vol	1216477.	M-60-Z.		A6..	G7	D13-133.		41	G1				R-1234, R-1235
2nd.	1216570.	16-6670.						1217361.	ST-105.	F13.		Vol	1216477.	M-60-Z.		A..		D13-133.		41	G1				R-1236, R-1237
1st.	1216504.	16-6658.	456					1216581.	ST-113.	4A1.		Vol	1216505.	T-78.		A..		D13-133X.		41	G1				R-1236, R-1237
2nd.	1217594.	16-6670.						1217146.	ST-113.	F13.		Vol	1216505.	T-78.		A..		D13-133X.		41	G1				R-1231, R-1232
1st.	1216605.	16-6658.	455					1216563.	ST-105.	5A1.		Vol	1216505.	T-78.		A..		D13-133X.		41	G1				R-1234, R-1235
2nd.	1216570.	16-6670.						1217361.	ST-105.	F13.		Vol	1216505.	T-78.		A..		D13-133X.		41	G1				R-1236, R-1237
1st.	1217640.		455 & 7.10.					1217678.				Vol	1217702.	AM-66-Z.	KSS-3.			D13-139.	E						21, R-1251, R-1252
2nd.	1217639.											Vol	1213613.	AM-63-Z.	KSS-3.			D13-137.	E						R-1400
1st.	†	16-5712.	465									Vol	1213615.	AM-63-Z.	KSS-3.			D13-137.	E						R-1401, R-1402
2nd.	†	16-5712.	465									Vol	1213615.	AM-63-Z.	KSS-3.	A2..		D13-137.	E	42					R-1405
1st.	†	16-5712.	465									Vol	†.	M-63-Z.				D13-137.			G1				R1406
2nd.	†	16-5714.	455									Vol	†.	M-63-Z.				D13-137.			G1				R1407
1st.	†	16-6678.	455									Vol	1215678.	M-63-Z.				D13-137.			G1				R1408, R1409
2nd.	†	16-6678.										Vol	1215645.	AM-63-Z.	KSS-3.	A4..		D13-137.	E	45	G1				
1st.	1215407.	16-6678.	455					1217017.	ST-105.	5A1.		Vol	1213408.	M-60-Z.	KSS-3.			D13-133.	E						R3215
2nd.	1215408.	16-6678.						1217411.	ST-105.	F13.		Vol	1213407.	M-46-Z.	KSS-3.	A..		D13-123.	E	41	G1				R6015
1st.	1215687.	16-6678.	455									Vol	1211374.	M-60-Z.	KSS-3.	A..		D13-133.	E	41	G1				
2nd.	1215682.	16-6678.										Vol	†.	M-34-V.				D16-118.							DETROLA
1st.	†	16-5712.	455									Vol	†.	M-58-S.		A..		D11-133.		41	G1				274
2nd.	†	16-5714.	465									Vol	†.	M-34-V.		A..		D16-118.		41	G1				276 U
1st.	†	16-5712.	465									Vol	†.	M-34-V.		A..		D16-118.		41	G1				280

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"	
DETROLA—Continued	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, 1A7, 1N5, 1H5, 1C5	20, 12 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3876		T22S45		A-2928						
281.	4	1A7, 1N5, 1H5, 1C5	8 Mfd.	PRS150-8		BR815		M-8-150		UT-81		Out		A-3878		T22S47		A-2931		742-738		4F	.A60	
284.	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	20, 12 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3876		T22S45		A-2928						
286.	5	1N5, 1A7, 1H5, 1C5	6779	PRS150-8		BR1815		M-8-150		UT-81		Out	On Spkr.	A-3878		T22S47		A-2931		741-482		8F	.B30	
288.	4	1A7, 1N5, 1H5, 1C5	8 Mfd.	PRS150-8		BR815		M-8-150		UT-81		Out		A-3878		T22S47		A-2931		741-482		8F	.B30	
293.	5	6A7, 6K7, 6Q7, 25L6G, 25Z5	8 Mfd.	PRS150-8		BR815		M-8-150		UT-81		Out		A-3878		T22S47		A-2931						
295-1	5	1A7, 1N5, 1H5, 1Q5, 25Z6GT	6640	PRS150-40		BR4015		M-40-150		UT-401		Chk	6639	C-1706		T20C52		C-2975		742-482		4F	.B30	
			5729	PRS150-8		BR815		M-8-150		UT-81		Out		A-3822		T22S47		A-2932						
			6660	PRS25-25		BR252A		M-25-25		TA-25		Pwr	6731	On Spkr.										
297.	4	6K8GT, 6K7GT, 6SQ7GT, 6K6GT, 1A7GT, 3A8GT, 1T5GT, 25Z6GT	6714	PRSA150-8-8		EZ8845		M-2X8-450		UT-88		Out		A-3878		T22S47		A-2931						
299.	4	1A7GT, 3A8GT, 1T5GT, 25Z6GT	40 Mfd.	PRS150-40		BR4015		M-40-150		UT-401		Chk	6639	C-1706		T20C52		C-2975		741-482		6F	.B30	
301.	5	12SA7GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	16, 12 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3881		T22S48		A-2934						
302.	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	20, 12 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3876		T22S45		A-2928						
303.	4	1A7, 1N5, 1H5, 1T5	8 Mfd.	PRS150-8		BR815		M-8-150		UT-81		Out		A-3881		T22S48		A-2934					4GA42	
304.	5	6A7, 6K7, 6Q7G, 25L6G, 25Z5	16, 12 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3865		T22S45		A-2928						
305.	7	6K8, 6K7GT, 6Q7GT, 6J5GT, 25L6GT, 25Z6GT	20, 20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3301		T22S60		A-2905						
310.	6	6K8, 6K7GT, 6Q7GT, 6AE5GT, 25AC5GT, 25Z6GT	24 Mfd.	PRS150-8		BR815		M-8-150		UT-81		Out		A-3849		T22S88		A-2902						
314.	8	5K8G, 6K7G, 8Q7G, 76, 6N6G, GU5.80, 35L6GT, 35Z4GT	16, 16 Mfd.	PRS450-16		BR1645		M-16-450		UT-16		Pwr	7226	P-6012		T22R04		P-2952						
319.	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	20, 10 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3876		T22S45		A-2928						
320.	5	12A8, 12K7, 12Q7, 35L6, 35Z5	20, 20, 20 Mfd.	AF44D4A		UP2215C		DY-302		EL-222		Out		A-3876		T22S45		A-2928						
321, 324.	5	6K8G, 6K7G, 6Q7G, 25L6G, 25Z5	40 Mfd.	PRS150-40		BR4015		M-40-150		UT-401		Out		A-3865		T22S45		A-2928						
327.	7	6K8GT, 6K7GT, 6Q7GT, 6J5GT, 25L6GT, 25Z6GT	20 Mfd.	PRS150-20		BR2015		M-20-150		UT-201		Chk	7660	C-1080		T22S60		C-2977						
328.	6	6K8GT, 6K7GT, 6Q7GT, 6J5GT, 6AE5GT, 25AC5GT, 25Z6GT	5780	PRS150-20		BR2015		M-20-150		UT-201		Out		A-3849		T22S88		A-2905						
333.	7	6K8GT, 6K7GT, 6Q7GT, 6J5GT, 25L6GT, 25Z6GT	20, 20, 20 Mfd.	PRS150-20		BR2015		M-20-150		UT-201		Chk		C-1080		T22S60		C-2977						
335A.	7	6K8GT, 6K7GT, 6Q7GT, 6J5GT, 725AGGT, 25Z6GT, C47	5779	PRS150-8		BR815		M-8-150		UT-81		Out		A-3301		T22S74		A-2905						
			7892	GL450-8		KR508		D-8-450		PLS-8		Out		A-3800				A-2905						
			7894	GL450-16		KR516A		D-16-450		PLS-16		Out		A-3849				A-2902						
339.	6	1P5GT, 1A7GT, 1N5GT, 1H5GT, 305GT, 117M7GT	8010	AF44D4A		UP4CJ61		DY-304		EL-351		Chk	8138					A-3030		746-482		263	.M30	
340, 340-1.	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 117M7GT	8102	PRS150-20		BR2015		M-20-150		UT-201		Chk	8138					A-3030		746-482		263	.M30	
341, 341-1, 341-2.	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 117M7GT	8102	PRS150-20		BR2015		M-20-150		UT-201		Chk	8138					A-3030		746-482		263	.M30	
342.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3865		T22S45		A-2928						
343.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3865		T22S45		A-2928						
345.	5	6K8GT, 6K7GT, 6S07, 6K6GT, 024GT	8211	AF2214A		UPI145C		DY-316		EL-202		Pwr	8229											
349.	5	6K8GT, 6K7GT, 6SQ7GT, 6V6GT, 80, (47)	3285	GL450-16		KR516A		D-16-450		PLS-16		Pwr	8369											
360, 360-1, 360-2.	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 50L6GT, 35Z5GT, (47)	8102	GL450-18		KR516A		D-16-450		PLS-16		Out		A-3830		T22S74		A-2905						
372.	4	1R5, 1T4, 1S5, 1S4, 35Z5GT	5780	PRS150-20		BR2015		M-20-150		UT-201		Chk	8138											
378.	5	1R5, 1T4, 1S5, 3S4, 35Z5GT	8952	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	8975											
379.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20		BRH251		M-100-25		UHC-102		Out		A-3329		T22S47		A-2998		950-467		2R	.XX45	
386.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-40 Mfd.	PRSA150-40-20		BRD2215		M-2X20-150		TA-220		Out		A-3865		T22S45		A-2928						
389, 389-1, 389-2.	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 50L6GT, 35Z4GT	40, 100 Mfd.	PRS150-20		BR2015		M-20-150		UT-201		Out		A-3865		T22S45		A-2928						
390.	8	12SA7GT, 12K7GT, 12SQ7GT, 605, 35Z6G	8425								Pwr	8918												
392.	4	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	89191											
393.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3865		T22S45		A-2928						
394.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out		A-3876		T22S45		A-2928						

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photostat Set No.	MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quar Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat Part No.	Note			
1st.		16-6658		455									F2	Vol	6096	M-60-Z	A		D13-133		41	G1				Continued—	DETROLA	
2nd.		16-5740		455									F1	Vol	6257	M-6	A2		D13-133		42	G1					281	
1st.		16-6662		455									F2	Vol	4872	M-6	A		D11-133		41	G1					282	
2nd.		16-6662		455									F1	Vol	6257	M-	A2		D13-133		4	G1					284	
1st.	6433	16-5740	4-2					6657	ST-105				F1	Vol	6257	—	—		—	—								286
2nd.	6433	16-5740	4-2										F2	Vol	6593	—	A		D13-133		4	G1					288	
1st.		16-6658	4-5										F2	Vol	6593	—	A		D13-133		4	G1					293	
2nd.	6273	16-6662	1										F1	Vol	6257	—	A		D1-133		4	G1					295-1	
2nd.	6274	16-6662	1										F2	Vol	6593	—	A		D1-133		4	G1						
1st.	6689	16-6662	4										F1	Vol	66	M-6	A		—		4	—					297	
2nd.	6730	16-6662	4										F1	Vol	6257	M-60-Z	A2		D13-133		42	G1					299	
1st.		16-6658	4-5										F2	Vol	6944	M-	A		D13-133		41	G1					301	
2nd.		16-6658	4-5										F2	Vol	6	5	A		D13-133		41	G1					302	
1st.		1-6658	4										F1	Vol	—	—	A		D13-133		42	G1					303	
2nd.		1-6658	4										F2	Vol	—	—	A		D13-133		41	G1					304	
1st.		16-6658	455										F2	Vol	6	5	A		D13-133		41	G1					305	
2nd.		16-6658	455										F2	Vol	6625	M-	A		D13-133		41	G1					310	
1st.	346-5	—	5712	455									F1	Vol	5100	—	A		D13-133		—	—					314, 315	
2nd.	346-6	—	5712	455									F1	Tone Vol	5099	—	A		D13-139		41	G1					319	
1st.		1-6658	4										F2	Vol	7025	—	A		D13-133		41	G1						
2nd.		16-666	455										F2	Vol	34	—	A		D13-33		41	G					320	
1st.		16-6662	455										F2	Vol	27	6	A		D13-133		41	G1					321, 324	
2nd.		16-6662	455										F2	Vol	27	6	A		D13-133		41	G1					327	
1st.	6623	16-6662	455					756	ST-194				F1	Vol	625	M-0	A		D13-133		41	G1					328	
2nd.	6624	16-6660	45					10	ST-14				F1	Vol	625	M-0	A		D13-133		41	G1					333	
1st.	6623	16-6662	455										F2	Vol	—	M-0	A		D13-133		41	G1					333	
2nd.	6624	16-6660	455										F2	Vol	27	6	A		D13-133		41	G1					335A	
1st.	7903	16-6658	455					7909	ST-168				F1	Vol	2' 2	M-0	A		D13-33		41	G1					339	
2nd.	7904	16-6660	455										F1	Vol	2' 3	M-0-Z	A		D13-33		41	G1						
1st.	7968	16-6662	455										F1	Vol	7952	M-6-Z	A2		D13-33		42	G1					340, 340-1	
2nd.	7959	16-6662	455										F1	Vol	7952	M-6-Z	A		D13-133		41	G1					341, 341-1, 341-2	
1st.	7968	16-6662	455										F1	Vol	7952	M-0	A		D-3-33		41	G1					342	
2nd.	7959	16-6662	455										F2	Vol	6625	M-60-Z	A		D13-133		41	G1					343	
1st.		5712	5										ST-194	SE45	Vol	6625	A		D13-133		41	G1					346	
2nd.		16-5714	5										F1	Vol	6687	M-60-Z	A		D13-133		41	G1					349	
1&2.		16-6660	455										F2	Vol	6625	M-60-Z	A		D13-133		42	G1					360, 36-1, 360-2	
3rd.		16-6660	455										F1	Vol	952	M-60-Z	A		D13-133		41	G1					372	
1st.	6689	16-6662	455					8223	ST-113				F2	Vol	—	—	A		D13-133		41	G1					378	
2nd.	8821	16-6660	455										F2	Vol	—	—	A		D13-133		41	G1					379	
1st.	8325	16-6660	455										F1	Vol	—	—	A		D13-133		41	G1					386	
2nd.	8326	16-6660	455										F1	Vol	—	—	A		D13-133		42	G1					389, 389-1, 389-2	
1st.	7968	16-6662	455										F1	Vol	952	M-60-Z	A		D13-133		41	G1					390	
2nd.	7969	16-6662	455										F1	Vol	—	—	A		D13-133		41	G1					392	
1st.	8836	16-6658	455										F2	Vol	807	A-60-Z	KSS-3	E	D13-13		41	G1					393	
2nd.	8836	16-6660	455										F1	Vol	—	—	A		D13-13		41	G1					394	
1st.		16-6658	4										F2	Vol	6625	M-60-Z	A		D13-133		41	G1						
2nd.		16-6660	4										F1	Vol	—	—	A		D13-133		41	G1						
1st.		16-6658	4										F2	Vol	6625	M-60-Z	A		D13-133		41	G1						
2nd.		16-6660	4										F1	Vol	—	—	A		D13-133		41	G1						
1st.		16-6660	4										F2	Vol	6625	M-60-Z	A		D13-133		41	G1						
2nd.		16-6660	4										F1	Vol	9106	M-0-Z	A		D13-133		41	G1						
1st.		16-6660	455										F2	Vol	6625	M-0-Z	A		D13-133		41	G1						
2nd.		16-6660	455										F2	Vol	6625	M-60-Z	A		D13-133		41	G1						
1st.		16-6660	455										F1	Vol	—	—	A		D13-133		41	G1						
2nd.		16-6660	455										F2	Vol	6625	M-60-Z	A		D13-133		41	G1						
3rd.		16-6660	455										F2	Vol	6625	M-60-Z	A		D13-133		41	G1						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. TUBES	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Marit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
		Dial Light Type Listed in Parentheses				Part No.				Part No.			Part No.			Part No.		Part No.		"A"	"B"	"A"	"B"		
DETROLA—Contin 397.....	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 3Z5GT, (47)	10 Mfd.	PRS150-12		BR1215		M-10-150		UT-121		Out	†	A-3856		T22S47		A-2900		†		†			
408.....	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 3Z5GT, (47)	10 Mfd.	PRS150-12		BR1215		M-10-150		UT-121		Out	†	A-3877		T22S46		A-2930		†		†			
411-UL 417.....	2	12SK7, 35Z5GT	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3865		T22S45		A-2928							
419.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out		A-3876		T22S45		A-2928							
420.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3865		T22S45		A-2928							
421, 421-1.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3865		T22S45		A-2928							
422.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3865		T22S45		A-2928							
423.....	4	12SA7, 12SJ7, 50L6GT, 35Z5GT	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3865		T22S45		A-2928							
424.....	6	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3876		T22S45		A-2928							
425.....	7	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3876		T22S45		A-2928							
428.....	6	6SA7GT, 6SK7GT, 6SQ7GT, 6X5GT, 6X5GT, (47)	9657			BRD1845					Pwr Out	9664-10055-1	P-6348		T22R00	B1	P-3047		A-2931		A-2928				
429.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3865		T22S45									
433.....	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	8025	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928							
441.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3865		T22S45		A-2928							
442.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†	A-3865		T22S45		A-2928							
446.....	12	12SA7, 12SK7, 12SJ7, 12HE, 12SQ7, 50L6GT, 6N5, 35Z5GT	20-20-10 Mfd.	PRSA150-40-20		BRD4215		M-40-150		UT-401		Out	†	A-3865		T22S45		A-2928							
448.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20	PRSA150-40-20		BRD4215		M-10-25		TA-10		Out	†	A-3865		T22S45		A-2928							
554.....	6	6SK7, 6SA7, 6SQ7GT, 6K6GT, 5Y3GT, (44)	15-10-20 Mfd.	AF44J		UPGC17		EL-205			Pwr Out	P-51502	P-6120		T22R04	B3	P-2952		A-2931		C-2990				
558.....	5	12SA7GT, 12SK7GT, 12SQ7, 50L6GT, 35Z5GT, (47)	A-8948	AF84D4A	A3	UP4215		DY-40+20-150		EL-24	Chk Out	On Spkr. A-51726-2	A-3855	B3	T22S47	B3	C-2990								
568.....	6	12SA7, 12SK7GT, 12SQ7, 50L6GT, 35Z5GT, (47)	A-8948	AF84D20A	A3	UP4215		DY-40X20-150		EL-24	Out	†	A-3856	B3	T22S46	B3	A-2928	B3							
571 Series.....	5	1407, 14A7/12B7, 14B8, 50A5, 35Y4 or Octal Equiv. (47)	A-8948	AF84D4A	A3	UP4215		DY-4020-150		EL-24	Dut	On Spkr.	A-3856	B3	T22S46	B3	A-2900	B3							
572.....	6	6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3GT, (44)	A-51356	AF44J & PRSA25-25		UP6C17		DY-2X20-450 & 20-25		EL-205	Pwr Out	G-51421	P-6120		T22R02		P-2951		A-2930						
576.....	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	A-8948	AF84D4A		UP4215		DY-4020-150		EL-24	Chk Out	B-51726-1	C-1355		T22S46		C-2990								
579.....	6	12SK7, 12SA7GT, 12SQ7, 35L6GT, 35Z5GT, (47)	A-8948	AF84D4A	A3	UP4215		DY-4020-150		EL-24	Out	†	A-3876	B3	T22S45	B3	A-2928	B3							
582.....	6	6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT, (44)	A-51356	AF44J		UP2245		DY-2X20-450		EL-220	Pwr Out	B-51421	P-6312		T22R04		P-2552		A-2901		A-2928				
626 Series.....	3	14B8, 50A5, 35Y4, or Miniature or Octal Equiv.	B-956-1	PRSA150-40-40	A3	ED14215		BR1228		M-10-350	Out	B-51578-2	A-3876		T22S45										
2741.....	5	12A8GT, 12K7GT, 120TGT, 35L6GT, 35Z4GT	A-8948	AF84D20A	A10	BRD2215		DY-4020-150		EL-24	Out	†	A-3876		T22S45		A-2928								
2742.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	12-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220	Out	†	A-3876		T22S45		A-2928								
2811.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	20-12 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220	Out	†	A-3876		T22S45		A-2928								
3041.....	5	6A7, 6K7, 6Q7, 25L6G, 25Z5	16-12 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220	Out	†	A-3865		T22S45		A-2928								
3051.....	7	6K8, 6K7GT, 6Q7GT, 6J5GT, 25L6GT, 25Z6GT	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220	Out	†	A-3301		T22S60		A-2905								
3101.....	6	6K8, 6K7GT, 6Q7GT, 6AE5GT, 25AC5GT, 25Z6GT	20-12 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220	Out	†	A-3849		T22S88		A-2902								
3201, 3202.....	5	12A8G, 12K7G, 12Q7G, 35L6GT, 35Z5	20-20-20 Mfd.	AF44D4A		UP2215C		DY-302		EL-222	Out	†	A-3876		T22S45		A-2928								
3231.....	7	6K8G, 6K7GT, 6Q7G, 6C5G, 25F6, 80	7113	PRS450-16		BR1645		M-16-450		UT-16	Pwr Out	P-6010	T22R01				P-2950								
3271.....	7	6K8GT, 6K7GT, 6Q7GT, 6J5GT, 25L6GT, 25Z6GT	5780	PRS150-30		BR3015		M-30-150		UT-301	Chk Out	7650	C-1080				C-2977								
3281.....	6	6K8GT, 6K7GT, 6Q7GT, 6AE5GT, 25AC5GT, 25Z6GT	5780	PRS150-30		BR3015		M-30-150		UT-301	Out	†	A-3301		T22S60		A-2905		A-2902						
3331, 3332.....	7	6K8GT, 6K7GT, 6Q7GT, 25L6GT, 6J5GT, 25Z6GT	5780	PRS150-30		BR3015		M-30-150		UT-301	Chk Out	7660	C-1080				C-2977								
3422.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220	Out	†	A-3301		T22S60		A-2905		A-2928						
3781.....	5	1R5, 1T4, 1S5, 3S4, 45Z3	30-20-100 Mfd.	PRSA150-30-30		BRD3315		M-2X30-150		TA-330	Out	†	A-3329		T22S47		A-2998		2950, 467		2R, XX45				
3861.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-100-25		UHC-102	Out	†	A-3865		T22S45		A-2928								

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Mfr. Part No.	Radiant Part No.	Note	PhotoFact Set No.		
1st.		16-6658.		456						F1		F1	Vol	9333.	M-63-Z.		A2	D13-137.		42	G1			Continued	DETROLA 397	
2nd.		16-6660.		456	†	L-26 (or) L-40				F1		F1	Vol	9333.	M-63-Z.		A2	D13-137.		42	G1				408	
1st.		16-6658.				L-26									M-60-Z.		A.	D13-133.		41	G1				411-UL 417	
2nd.		16-6660.				L-26									AM-60-Z.	KSS-3	A.	D13-133.	E	41						419
1st.															AM-4E-Z.	KSS-3	A.	D13-133.		41						420
2nd.															AM-60-Z.	KSS-3	A.	D13-133.		41						421, 421-1
1st.															M-60-Z.		A.	D13-133.		41	G1					421, 421-1
2nd.															M-60-Z.		A.	D13-133.		41	G1					422
1st.															M-19-S.	KSS-3	A.	D14-114.	E	41	G1					423
2nd.															AM-60-Z.	KSS-3	A.	D13-133.	E	41	G1					424
1st.															M-60-Z.		A.	D13-133.		41	G1					425
2nd.															M-60-Z.		A.	D13-133.		41	G1					428
1st.															M-60-Z.		A.	D17-139X.	E	41						429
2nd.															AM-60-Z.	KSS-3	A.	D13-133.	E	41						433
1st.															AM-60-Z.	KSS-3	A.	D13-133.	E	41						441
2nd.															AM-60-Z.	KSS-3	A.	D13-133.	E	41						442
1st.															M-60-Z.		A.	D13-133.		41	G1					446
2nd.															M-60-Z.	KSS-3	A.	D17-139X.	E	41						448
3rd.															M-60-Z.	KSS-3	A.	D13-133.		41	G1					448
1st.															M-48-Z.		A.	D13-123.		41	G1					554
2nd.															AT-88.	KSS-3	A.	D18-133X.	E	41						558
1st.	B51415-2	16-6658.		455	†	L-70		C-51512	ST-194.	5E45.		Vol	Tone	6625.. 10180.. B55575-1.. B55550-1..	M-60-Z.	KSS-3	A.	D18-133X.	E	41					558	
2nd.	B51417-2	16-6670.						C-51577	ST-107.	5E45.		Vol	Tone	89051-3..	AM-60-Z.	KSS-3	A.	D13-133.	E	41					568	
1st.	B51010-1	16-6658.		455	A-50802 or A-50812	L-70		C-51014	ST-194.	5E45.		Vol		B9051-5..	AM-60-Z.	KSS-3	A.	D13-133.	E	41					568	
2nd.	B51010-1	16-6670.		455				C-51014	ST-194.	5E45.		Vol		B9051-1..	AM-60-Z.	KSS-3	A.	D13-133.	E	41					571 Series	
1st.	B51010-1	16-6658.		455				C-51413.	ST-194.	5E45.		Vol		B51445-1..	AT-88.	KSS-3	A.	D18-133X.	E	41					572	
2nd.	B51416-1	16-6658.		455																				572		
1st.	B51010-1	16-6658.		455				C-51722.	ST-110..	5A15.		Vol	Tone	B-51725-2.. B-51724-1.. A-9051-2..	AM-60-Z.	KSS-3	A.	D18-133X.	E	41					576	
2nd.	B51011-1	16-6670.		455				C-51058.	ST-194.	5E45.		Vol		A-9051-2..	AM-60-Z.	KSS-3	A.	D13-133.	E	41					579	
1st.	B51011-1	16-6658.		455	A-50802 or A-50812	L-70		C-51961				Vol		B-51445..	AT-88.	KSS-3	A.	D18-133X.	E	41					582	
2nd.	B51417-1	16-6670.		455	A-50812	L-70		C-56029.	ST-113..	4A1.		Vol	Tone	B54466-1.. B54466-1..	M-60-Z.	KSS-3	A.	D13-133.	E	41					626 Series	
1st.		16-6658.	†	455	†	M-22 (or) M-23				F2		F2	Vol	†	M-60-Z.		A.	D13-133.		41	G1				2741	
2nd.		16-6658.	†	455	†	M-22 (or) M-23				F2		F2	Vol	†	M-60-Z.		A.	D13-133.		41	G1				2742	
1st.		16-6658.	†	455						F2		F2	Vol	6096..	M-60-Z.		A.	D13-133.		41	G1				2811	
2nd.		16-6658.	†	455						F2		F2	Vol	7308..	M-60-Z.		A.	D13-133.		41	G1				3041	
1st.		16-6662.	†	455						F2		F2	Vol	6625..	M-60-Z.		A.	D13-133.		41	G1				3051	
2nd.		16-6662.	†	455						F2		F2	Vol	6625..	M-60-Z.		A.	D13-133.		41	G1				3101	
1st.		16-6662.	†	455						F2		F2	Vol	7346..	M-60-Z.		A.	D13-133.		41	G1				3201, 3202	
2nd.		16-6658.	†	455						F2		F2	Vol	2726..	M-60-Z.		A.	D13-133.		41	G1				3231	
1st.		16-6660.	†	455										2737..	M-66-Z.		A.	D13-133.		41	G1				3271	
2nd.		6623.	†	455				7576.	ST-194..	5E45.				6625..	M-60-Z.		A.	D13-133.		41	G1				3281	
1st.		6624.	†	455				7710.	ST-194..	5E45.					AM-63-Z..	KSS-3..	A.	D13-133.	E	41	G1				3331, 3332	
2nd.		6624.	†	455						F2		F2	Vol	6625..	M-60-Z.		A.	D13-133.		41	G1				3422	
1st.		8836.	†	455				7746.	ST-194..	5E45.					M-60-Z..	KSS-3..	A.	D13-133.	E	41	G1				3781	
2nd.		8836.	†	455						F2		F2	Vol	8958..	AM-63-Z..		D13-137.	E						3861		
1st.		16-6658.	†	455						F1		F1	Vol	6625..	M-60-Z..		A.	D13-133.		41	G1					
2nd.		16-6660.	†	455																						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Burgess Part No.		Note	
																				"A" "B"			
DETROLA - Continued	3862, 3863.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	↓	A-3865		T22S45		A-2928					
	7270.....	7 1A8, 7B7, 7C6, 35L6GT, 35Z5GT	A-56154	AF844D		UP4445		DY-402010-150		EL-224		Chk Out	B-51726-2 or B-51726-1 B-57253-1	C-1355			C-2990						
DEWALD	406R, 407.....	4 12K7GT, 12F5GT, 50L6GT, 45Z5GT, (47)	16-16 Mfd.	PRS150-16		BR1615		M-16-150		UT-161		Out	↓	A-3865		T22S45		A-2928					
	408R.....	4 1A7G, 1N5G, 1H5G, 1C5G	8 Mfd.	PRS150-8		BR815		M-8-150		UT-81		Out	↓	A-3857		T22S48		A-2937		742 48Z	8F	7B30	
	409.....	4 1A7G, 1N5G, 1H5G, 1C5G	8 Mfd.	PRS150-8		BR815		M-8-150		UT-81		Out	↓	A-3878		T22S47		A-2931		741 48Z	8F	7B30	
	410, 410A, 410R.....	4 1R5, 1T4, 1S5, 1S4	2521	PRS150-12		BR1215		M-10-150		UT-121		Out	↓	A-3329		T22S47		A-2998		7950 467	2R	XX45	
	411.....	2 12B8GT, 32L7GT	16-16 Mfd.	PRS150-16		BR1615		M-16-150		2UT-161		Out	↓	A-3876		T22S45		A-2928					
	412.....	4 12K7GT, 12F5GT, 50L6GT, 45Z5GT, (47)	16-16 Mfd.	PRS150-16		BR1615		M-16-150		2UT-161		Out	↓	A-3865		T22S45		A-2928					
	414.....	4 12K7GT, 12F5GT, 50L6GT, 45Z5GT, (47)	16 Mfd.	PRS150-16		BR1615		M-16-150		UT-161		Out	↓	A-3865		T22S45		A-2928					
	415, 415R.....	4 1A7GT, 1N5GT, 1H5GT, 1C5GT	8 Mfd.	PRS150-8		BR815		M-8-150		UT-81		Out	↓	A-3878		T22S48		A-2937		743 48Z	6F	7M30	
	A500, A500I, A500W, A501, A502, A503.....	5 12SA7, 12SK7, 12SQ7GT, 50L6GT, 35Z5GT	2002	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928					
	501A.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	24 Mfd.	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	↓	A-3865		T22S45		A-2928					
	A504, A505.....	5 12SA7, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	16 Mfd.	AF66D		UP3315		DY-2X30-150		EL-230		Out	On Spkr.	A-3376		T22S45		A-2928					
	A507.....	5 1R5, 1T4, 1S5, 3Y4, 35W4	2013	PRSA150-50-50		EZ5515 & BRH251		DSB-2X50-150 & & PRSA25-100		TA-330		Out	A-3879	B3	T22S47	B3	A-2932		746 48Z	6G3	7M30		
	A514.....	5 12BE6, 12BA6, 12AT6, 5085, 35W4	2013	PRSA150-50-30		BRH251		M-5030-150		TA-530		Out	↓	A-3878		T22S47		A-2931		718 48Z	2F4	7B30	
	537, 538, 539.....	5 12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT, (47)	2460	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	↓	A-3865		T22S45		A-2928					
	544.....	5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z4GT	50-20 Mfd.	PRSA150-50-30		BRD3515		M-100-25		TA-530		Out	↓	A-3878		T22S47		A-2931		747 48Z	2F4L	7M30	
	545, 545LW, 545SW.....	5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z4GT	2540	PRSA150-50-30		BRH251		M-100-25		UHC-102		Out	↓	A-3881		T22S48		A-2934		747 48Z	2F4L	7M30	
	548, 549, 555, 558, 559.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	↓	A-3865		T22S45		A-2928					
	560.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	16 Mfd.	PRSA150-30-30		BRD3315		M-16-150		UT-301		Out	↓	A-3865		T22S45		A-2928					
	561, 562.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	24-16 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-330		Out	↓	A-3865		T22S45		A-2928					
	563.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (44)	2507	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	↓	A-3865		T22S45		A-2928					
	564.....	5 1R5, 1T4, 1S5, 3S4, 35Z5GT	30-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	↓	A-3329		T22S47		A-2998		7950 467	2R	XX45	
	565.....	5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT, (44)	2540	AF106D20A		UP6CJ64		EL-351		TA-220		Out	↓	A-3881		T22S48		A-2934		747 48Z	2F4L	7M30	
	D566.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (44)	2507A	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	↓	A-3865		T22S45		A-2928					
	568.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	2505	PRSA150-30-30		BRD2235				Pwr		↓		A-3865		T22S45		A-2928					
	A602, A605, A608.....	6 12SK7GT, 12SA7GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	2005-1	AF66D		UP3315		DY-2X30-150		EL-230		Out	↓	A-3865		T22S45		A-2928					
	655, 656.....	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	2460	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	↓	A-3876		T22S45		A-2928					
	662, 662LW.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, G-30-50 Ballast, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	↓	A-3865		T22S45		A-2928					
	663.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, G-30-50 Ballast, (47)	30-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	↓	A-3865		T22S45		A-2928					
	665.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, G-30-50 Ballast, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	↓	A-3865		T22S45		A-2928					
	666.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, G-30-50 Ballast, (47)	30-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	↓	A-3865		T22S45		A-2928					
	667.....	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	2507	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	↓	A-3876		T22S45		A-2928					
	669.....	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (44)	2507	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	↓	A-3876		T22S45		A-2928					
	670.....	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (44)	2535	AF444D		UP22215		DY-3X20-150		EL-320		Out	↓	A-3876		T22S45		A-2928					
	671.....	6 6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT, (44)	2534	PRSA25-25		BR252A		M-25-25		TA-25		Pwr	1635	P-6348		T22R00	B1	P-3047					
	672A.....	7 7B7, 6SA7, 7C6, 6X6GT, 6X5GT, 6N5, (47)	20, 20, 10, 25 Mfd.	PRSA150-20-20		BRD2225		M-2X20-150		TA-220		Pwr	+	A-3878		T22S47		A-2931					
	674.....	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT, (44)	2556A	BRD2215		BR2025		M-2X20-150		TA-220		Pwr	+	A-3878		T22S47		A-2931					
	675.....	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (44)	24-16 Mfd.	PRSA150-20-20		EZ2215C		DSB-3X20-150		TA-220		Pwr	+	A-3876		T22S45		A-2928					
	676.....	7 6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT, 6N5, (47)	2527	EZ2215C		DSB-3X20-150		TA-220		TA-25		Pwr	1625	P-6348		T22R00	B1	P-3047					
	677A.....	7 6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT, 6N5, (47)	2534	PRSA25-25		BR2225		M-2X20-150		TA-220		Pwr	+	A-3878		T22S47		A-2931					
	678.....	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (44)	2556A	BRD2215		BR2025		M-2X20-150		TA-220		Pwr	+	A-3876		T22S45		A-2928					
	679.....	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (44)	24-16 Mfd.	PRSA150-20-20		EZ2215C		DSB-3X20-150		TA-220		Pwr	1625	P-6348		T22R00	B1	P-3047					
	680.....	7 6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT, 6N5, (47)	2527	EZ2215C		DSB-3X20-150		TA-220		TA-25		Pwr	+	A-3878		T22S47		A-2931					

† Information not available.

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS			Section G CONTROLS						Section H VIBRATORS			Photofact Set No.	MFR. & MODEL									
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radial Part No.	Note					
1st.	†	16-6658		455	†			†		F1		F1	Vol	6625	M-60-Z		A		D13-133	41	G1				Continued —	DETROLA 3862, 3863			
2nd.	†	16-6660		455	†	L-705		C-572/2			69A3		Vol & Tone	B-56142-1												16.	7270		
1st.	B-51010-3	16-6658		455	†																								
2nd.	B-51011-3	16-6670																											
1st.	†	16-5712		455				†		F1		F1	Vol	3446	M-40-S		A	G4.5	D14-120	41	G1						DEWALD 406R, 407		
2nd.	†	16-5714		455				†		F1		F1	Vol	3461B	M-63-Z		A2		D13-137	42	G1						408R		
1st.	†	16-5712		455				†		F1		F1	Vol	3461A	M-63-Z		A2		D13-137	42	G1						409		
2nd.	†	16-5714		455				†		F1		F1	Vol	3315	M-63-Z		A2		D13-137	42	G1						410, 410A, 410R		
1st.	†	1621								F1		F1	Vol	3466	M-60-Z		A	G4.5	D13-133	41	G1						411		
2nd.	†	1622								F1		F1	Vol	3446	M-40-S		A	G4.5	D14-120	41	G1						412		
1st.	†	16-5712		455				†		F1		F1	Vol	3446	M-40-S		A	G4.5	D14-120	41	G1						414		
2nd.	†	16-5714		455				†		F1		F1	Vol	3467	M-63-Z		A2		D13-137	42	G1						415, R415		
1st.	†	1000		455				7000		ST-113		4A1		Vol	3002	AM-30-V	RS-3	A		D15-115	F	41					4.	A500, A500I, A500W, A501, A502, A503	
2nd.	†	1002		455				†		F1		F1	Vol	3507	M-60-Z		A		D13-133	41	G1								
1st.	†	16-5712		455				†		F1		F1	Vol	3002-2	AM-60-Z	RS-3	A		D13-133	F	41						16.	A504, A505	
2nd.	†	1000		455				7001A		ST-107		5A15		Vol	3006	AM-63-Z	RS-3	A		D13-133	F	41							
1st.	†	1002		455				†		5A1		5A1		Vol	3006	AM-63-Z	RS-3	A2		D13-137	F	42						26.	A507
1st.	†	1019-1		455				†		ST-105		5A1		Vol	3006	AM-63-Z	RS-3	A2		D13-137	F	42							
2nd.	†	1019-2		455				7000		ST-113		4A1		Vol	3002-1	M-60-Z		A		D13-133	41	G1						27.	A514
1st.	†	16-6668		455				†		F1		F1	Vol	3454	M-60-Z		A		D13-133	41	G1							537, 538, 539	
2nd.	†	1516		455				7243		ST-196		4E45		Vol	3454	M-60-Z		A2		D13-137	42	G1							544
1st.	†	1517		455				†		F1		F1	Vol	3474	M-63-Z		A2		D13-137	42	G1							545, 545LW, 545SSW	
2nd.	†	16-6661		455				†		F1		F1	Vol	3482A	M-63-Z		A2		D13-137	42	G1							548, 549, 555, 558, 559	
1st.	†	16-5712		455				†		F2		F2	Vol	3456	M-60-Z		A		D13-133	41	G1							560	
2nd.	†	16-6660		455				†		F1		F1	Vol	3454	M-60-Z		A		D13-133	41	G1							561, 562	
1st.	†	16-6660		455				†		F1		F1	Vol	3507 (or)	M-60-Z		A	G17	D13-133	41	G1	17.						563	
2nd.	†	16-6660		455				†		F1		F1	Vol	3497A	M-60-Z		A	G17	D13-133	41	G1	17.							
1st.	†	16-6660		455				†		F1		F1	Vol	3497A	M-60-Z		A		D13-133	41	G1								
2nd.	†	16-6660		455				†		F1		F1	Vol	3577	AM-63-Z	KSS-3	A2		D13-137	E	42							564	
1st.	†	1644		455				7316		F1		F1	Vol	3548	M-63-Z		A2		D13-137	42	G1							565	
2nd.	†	1645		455				†		F2		F2	Vol	3507	M-60-Z		G17		D13-133	41	G1	17.						D566	
1st.	†	16-6658		455				†		F2		F2	Vol	3496	M-60-Z		A		D13-133	41	G1	17.						568	
2nd.	†	16-6658		455				†		F2		F2	Vol	3496	M-60-Z		A		D13-133	41	G1								
1st.	†	16-6658		455				†		F2		F2	Vol	3507	M-60-Z		G17		D13-133	41	G1	17.							
2nd.	†	16-6658		455				†		F2		F2	Vol	3496	M-60-Z		A		D13-133	41	G1								
1st.	†	16-6660		455				†		F1		F1	Vol	3577	AM-63-Z	KSS-3	A2		D13-137	E	42								
2nd.	†	16-6660		455				†		F1		F1	Vol	3548	M-63-Z		A2		D13-137	42	G1								
1st.	†	16-6660		455				†		F2		F2	Vol	3507	M-60-Z		G17		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F2		F2	Vol	3496	M-60-Z		A		D13-133	41	G1	17.							
1st.	†	16-6660		455				†		F1		F1	Vol	3507	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F1		F1	Vol	3496	M-60-Z		A		D13-133	41	G1	17.							
1st.	†	16-6660		455				†		F1		F1	Vol	3507	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F1		F1	Vol	3496	M-60-Z		A		D13-133	41	G1	17.							
1st.	†	16-6660		455				†		F2		F2	Vol	3430	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F2		F2	Tone	3432	M-63-Z		A		D13-137	41	G1	17.							
1st.	†	16-6660		455				†		F1		F1	Vol	3519	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F2		F2	Vol	3519A	M-60-Z		A		D13-133	41	G1	17.							
1st.	†	16-6660		455				†		F1		F1	Vol	3519A	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F2		F2	Vol	3519A	M-60-Z		A		D13-133	41	G1	17.							
1st.	†	16-6660		455				†		F2		F2	Vol	3538	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F2		F2	Vol	3539	M-63-Z		A		D13-137	41	G1	17.							
1st.	†	16-6660		455				†		F2		F2	Vol	3538	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F1		F1	Vol	3539	M-63-Z		A		D13-137	41	G1	17.							
1st.	†	16-6660		455				†		F2		F2	Vol	3538	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F1		F1	Vol	3539	M-63-Z		A		D13-137	41	G1	17.							
1st.	†	16-6660		455				†		F2		F2	Vol	3539	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F2		F2	Vol	3519A	M-60-Z		A		D13-133	41	G1	17.							
1st.	†	16-6660		455				†		F1		F1	Vol	3519A	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F2		F2	Vol	3519A	M-60-Z		A		D13-133	41	G1	17.							
1st.	†	16-6660		455				†		F2		F2	Vol	3538	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F2		F2	Vol	3539	M-63-Z		A		D13-137	41	G1	17.							
1st.	†	16-6660		455				†		F2		F2	Vol	3538	M-60-Z		A		D13-133	41	G1	17.							
2nd.	†	16-6660		455				†		F1		F1	Vol	3539	M-63-Z		A		D13-137	41	G1	17.							
1st.	†	16-6660		455				†		F2		F2	Vol	3538	M-60-Z		A		D13-133	41	G1	17.							
2nd.																													

<sup>†</sup>Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
DEWALD—Continued	707	7 <sup>1</sup> 2SK7, 12SA7, 12SQ7, 35L6GT, 35Z6GT, 6N5, (47)	2535	AF444D PRS25-25		UP22215 BR252A		DY-3X20-150 M-25-25		EL-320 TA-25		Out	1635	P-6348, P-3878, P-6012,	T22S45		A-2928, BI	P-3047, A-2931, P-2952					
	708	7 <sup>1</sup> 2SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT, 6U5, (44)	2534			EZ2215C		DSB-3X20-150		TA-220 TA-25 TU-1616		Pwr Out	1635	T22R00 T22S47 T22R04									
814, 815, 816, 817	8	6SA7, 6SK7, 6SQ7, 6K6GT, 5Z4, 6U5	16-16 Mfd.			EZ5116				TU-1616		Pwr Out	1635	A-2312, P-6012, A-2312, P-6012	T22S74		A-2901, P-2952	A-2901, A-2901, A-2901, P-2952					
906, 907, 908	9	6SA7, 6SK7, 6SQ7, 6K6GT, 5Z4, 6U5	16-16 Mfd.			EZ5116				M-16-450		Out	1483	A-3311	T22R04								
1002, 1003	10	6K7, 6A7, 6H6, 6J5, 6F6, 8G, 6U5	2426	PRS450-16		BR1645		M-16-450		UT-16		Out	1483	A-3311	T22S64								
			2425	PRS450-16		BR1645		M-16-450		UT-16		Out	1483	A-3311	T22S64								
1102, 1103	9	6K7, 6ABG, 75, 25B6, 25Z5, 6G5, 8663 & 8664 Ballasts	40-25-8 Mfd.	†		BR105	†	M-10-50	TA-50	†		Chk	†	C-2303									
			2428	PRS50-10		BR105	†	M-16-450	TA-50	†		Out	1336	A-3865, C-2303	T22S45								
1104, 1105	8	6K7, 6A7, 6R7, 25LBG, 25Z5, 6U5, 3440 & 3441 Ballasts	2351A	GL450-40		KR540		D-40-450	PLS-40	TA-10		Out	1509	A-3301	T22S60								
	2383	PRS25-10		PRSA450-16		BR102A		M-10-25	PLS-40	TA-10		Out	1509	A-3301	T22S60								
	2435	PRSA450-16				BR1645		M-16-450	PLS-40	TA-16		Out	1509	A-3301	T22S60								
DUOSONIC	K1, K2	2 35W4, 50B5	20-20-20 Mfd.	PRSA150-20-20 & PRS150-20		EZ42215		DSB-3X20-150	TA-303			Out	On Spkr.	A-3865	B3	T22S45	B3	A-2928	B3				
	K3, K4	2 50L6GT, 35Z5GT	20-20-20 Mfd.	PRSA150-20-20 & PRS150-20		EZ42215		DSB-3X20-150	TA-303			Out	On Spkr.	A-3865	B3	T22S45	B3	A-2928	B3				
DYNAVOX	AP514 (Ch. AT)	3 12S07, 50L6GT, 35Z5GT, or Miniature Equiv. (51)	50-50 Mfd.	PRSA150-50-50		EZ5515		DSB-2X50-150	TA-505			Out	On Spkr.	A-3876		T22S45		A-2928					
M-510	3	12J5GT, 50L6GT, 35Z5GT, (51)	10 Mfd.	PRSS50-10		BR105		M-10-50	TA-510			Out	On Spkr.	A-3876		T22S45		A-2928					
Swing Master	2	50L6GT, 35W4	50-50 Mfd.	PRSA150-40-40		EZ5515		DSB-2X50-150	TA-550			Out	On Spkr.	A-3876		T22S45		A-2928					
			5 PRSA50-30	PRSA50-30		BR550		M-10-50	TA-35			Out	On Spkr.	A-3876		T22S45		A-2928					
			10 Mfd.	PRSA50-10		BRD3515		DSB-5030-150	TA-530			Out	On Spkr.	A-3876		T22S45		A-2928					
ECA	101 (Ch. AA)	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT, (47)	S-CE22M	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	S-TA-115	A-3876		T22S45		A-2928					
102	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	S-CE122M	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	S-TA-115	A-3876		T22S45		A-2928					
104	5	12SA7, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	S-CE122M	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	S-TA-115	A-3876		T22S45		A-2928					
105	5	12SA7, 12SK7GT, 12SQ7, 50L6GT, 35Z5GT, (47)	S-CE122M	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	S-TA-115	A-3876		T22S45		A-2928					
106	5	12SA7, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	S-CE122M	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	S-TA-115	A-3876		T22S45		A-2928					
108	7	6SA7GT, 6SF7, 6SL7GT, 25L6GT, 25Z6GT	S-CE126M	2-PRSA150-40-40		BRD4415 & BRD4215		2-DSB2X40-150	TA-440 & TA-240			Out	S-TA-116	A-3856		T22S62		A-2900					
121	7	6SA7GT, 6SF7, 6SL7GT, 25L6GT, 25Z6GT	S-CE126M	2-PRSA150-40-40		2-BRD-4415		2-DSB2X40-150	TA-440 & TA-240			Out	S-TA-116	A-3856		T22S62		A-2900					
131	5	12SA7, 12SK7GT, 12SQ7, 50L6GT, 35Z6GT, (47)	S-CE122M	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	S-1021	A-3330				A-3031					
133	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	S-CE122M	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	S-TA-115	A-3876		T22S45		A-2928					
201	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35W4, (47)	S-1046-1	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	S-1021	A-3330				A-3031					
ECHOPHONE	EC-112, EC-113	6 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	45B095-2			EZ443150		DSB-40-130-150/20-25 & M-30-150	TA-430 & TA-230			Out	...†...	A-3876		T22S45		A-2928					
EC-306, EX-306	6	12SA7GT, 12SK7, 12SF7, 35L6GT, 35Z5GT, (47)	45B095	AF886D4A		EZ44315C		DY-419	EL-443			Out	55B080-2	A-3876		T22S45		A-2928					
EC-403, EC-404	15	6BA6, 6BE6, 6J6, 6SG7, 6SH7, 6SS7, 6WT7, 6V6GT, 5U4G, (47)	45B099			UP43145C	A4	DY-315 & M-20-150	EL-330 & UT-20			Pwr Out	52C132, 55B086	P-6165, A-3831		T22R07		P-2955, A-2901					
EC-600	4	12BA6, 12BA7, 12AT6, 50B5, 35W4, (47)	45B100	AF8814A PRS150-12	A9	UP43145C BR1215	A9	DY-315 & M-10-150	EL-424 & UT-121			Out	55B085	A-3891		T22S47		A-2901		758		17GD60	
ELCAR	602	6 <sup>1</sup> 2SK7GT, 12SA7GT, 12SQ7GT, 35A5, 35W4, (47)	...†...	PRSA150-40-40		BRD4415 BR505		M-2X40-150 M-50-50	TA-440 TA-550			Chk Out	...†...	C-2303, A-3876		T22S45		A-2928					
ELECTONE	T5TS3	4 12SA7, 12SK7, 12SQ7, 50L6GT	...†...	PRSA150-50-30		BRD3515		M-5030-150	TA-530			Out	...†...	A-3876		T22S45		A-2928					
ELECTRO	B20	6 <sup>1</sup> 2SK7GT, 12SA7, 12SK7, 35L6GT, 35Z5GT, (51)	...†...	PRSA150-40-40		BRD4415		M-2X40-150	TA-440			Out	...†...	A-3876	B3	T22S45	B3	A-2928	B3				
ELECTROMATIC	APH301A, APH301C	3 12SK7GT, 50L6GT, 35Z5GT		PRSA150-40-40 FRS50-10		EZ5515 BR105		DHN-2X50-150 M-10-50	TA-530 TA-510			Out	...†...	A-3876		T22S45		A-2928					

<sup>†</sup>Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed In Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	
ELECTROMATIC 606A, 607A.....	5	Continued 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35W4/35Z5	†	PRSA150-40-40 PRSA150-40-40 & PRS150-40 PRS50-10	A6	BRD3515. EZ44315C.	A6	M-50-30-150 DY-3X40-150	A6	TA-530. EL-340.	A6	Out	†	A-3876.. B3	T22S45.. B3	A-2928.. B3							
ELECTRO-TONE 555, 706, 712.....	6	12SK7GT, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	†	PRSA150-50-30		BRD3515..		M-5030-150..		TA-530..		Out	†	A-3876..	T22S45..	A-3938..							
ELECTRONIC CO R. P. OF AMERICA—(See ECA)																							
ELECTRONIC SPE CIALTY CO.—(See RANGER)																							
E/L (ELECTRONIC LABS.) 76E, 76K, 76M, 76W.....	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 45Z5GT, (47)	C-466A..	PRSA150-40-40		BRD4415..		M-2X40-150..		TA-440..		Out	T1368A..	A-3876..	T22S45..	A-2928..							
76RU ("Radio Utility Phone") 7S (Sub-Station)	6	14A7, 14Q7, 14F7, 50A5, 3Y54, (47)	C-466A.. C-462A..	PRSA150-40-40 PRS25-25		BRD4415.. BR252A..		M-2X40-150.. M-25-25		TA-440.. TA-25..		Mike In Out	TR-4230.. TR-4280.. T-1358A..	A-3876.. A-3823..	T22S45.. T22S60..	A-2928.. A-2901..							
710-B, 710M, 710-T, 710-W, (Ch. 2875).....	10	12SK7GT, 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	C-466A.. C-462A..	PRSA150-40-40 PRS25-25		BRD4415.. BR252A..		M-2X40-150.. M-25-25		TA-440.. TA-25..		Out	T-1384A..	A-3823..	T22S60..	A-2901..							
710 PB, 710PC, (Ch. 2887).....	10	12SK7GT, 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	C-466A.. C-462A..	PRSA150-40-40 PRS25-25		BRD4415.. BR252A..		M-2X40-150.. M-25-25		TA-440.. TA-25..		Mike Out Out	TR-4280A.. TR-4285A.. T1368A..	A-3496.. A-3876.. A-3876..	T22S48.. T22S45.. T22S45..	A-2900.. A-2928.. A-2928..							
2660 "Master Utility Phone".....	3	14A7, 50A5, 3Y4..	C-466A..	PRSA150-40-40		BRD4415..		M-2X40-150..		TA-440..													
2701.....	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT, (47)	C-466A..	PRSA150-40-40		BRD4415..		M-2X40-150..		TA-440..													
EMERSON AB178, AB182, AB183, (Ch. AB).....	14	6K7, 6A8, 76C5/6J5, 6F6, 80, (44/45)	3XC-329.. YC-98A.. IC-43A..	GL450-30.. PRS150-12.. PRS25-10..		KR530.. BR1215.. BR102A..		D-30-450.. M-10-150.. M-10-25		PLS-30.. UT-121.. TA-10..		Pwr Out	3XT-338.. On Spkr.	P-6014.. A-3311..	T22R06.. T22S64..	P-2954.. A-2936..							
AB184 (Ch. AB).....	14	6K7, 6A8, 76J5, 6F6, 80, (44/ 46)	3XC-329.. YC-98A.. IC-43A..	GL450-30.. PRS150-12.. PRS25-10..		KR530.. BR1215.. BR102A..		D-30-450.. M-10-150.. M-10-25		PLS-30.. UT-121.. TA-10..		Pwr Out	3XT-338.. On Spkr.	P-6014.. A-3311..	T22R06.. T22S64..	P-2954.. A-2936..							
AC202, (Ch. AC).....	5	6A7, 6D6, 6Q76, 41, 80, (44/46).....	3RC-318A..	PRSB450-8-8		EZ588..		DH-2X8-450SS..		TU-88..		Pwr Out	3RT-322A.. On Spkr.	P-6119.. A-3878.. A-3865..	T22R01.. T22S47.. T22S45..	P-2951.. A-2951.. A-2928..							
AH171, AH173, AH174, AH176, AH180, AH185, (Ch. AH) (Below 1,711,701).....	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, L49DG, Ballast (44)	4HC-384A.. 1C-43A..	PRSA150-20-20.. PRS25-10..		BRD2215.. BR102A..		M-2X20-150.. M-10-25		TA-220.. TA-10..													
AH171, AH173, AH174, AH176, AH180, AH185, (Ch. AH) (Above 1,711,701).....	5	6A7, 6D6, 6Q7, 25L6G, 25Z5, L49BG Ballast (44)	4HC-384A.. 1C-43A..	PRSA150-20-20.. PRS25-10..		BRD2215.. BR102A..		M-2X20-150.. M-10-25		TA-220.. TA-10..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AH166 (Ch. AH).....	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, L49B, Ballast (44)	4HC-384A.. 1C-43A..	PRSA150-20-20.. PRS25-10..		BRD2215.. BR102A..		M-2X20-150.. M-10-25		TA-220.. TA-10..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AL202 (Ch. AL), (Below 1,436,000).....	5	6A7, 6D6, 6Q7, 25L6G, 25Z5, L49B, Ballast (44)	3CC-261.. 1C-43A..	PRSA150-20-20.. GL450-30..		KR530..		D-30-450..		PLS-30..		Chk Out	4PT-404.. On Spkr.	C-1706.. A-3865.. A-3865..	T20C52.. T22S45.. T22S45..	C-2975.. A-2928.. A-2928..							
AL202 (Ch. AL), (Above 1,435,000).....	5	6A7, 6D6, 6Q7, 25L6G, 25Z5, L49B, Ballast (44)	3CC-261.. 1C-43A..	PRSA150-20-20.. GL450-30..		KR530..		D-30-450..		PLS-30..		Chk Out	4PT-404.. On Spkr.	C-1706.. A-3865.. A-3865..	T20C52.. T22S45.. T22S45..	C-2975.. A-2928.. A-2928..							
AM131, AM153, AM169, AM187, (Ch. AM) (Below 1,533,750).....	5	6A7, 6D6, 6Q7, 25L6, 25Z5, 2UR-224 Ballast (44)	3CC-337.. 3CC-261..	AF8D.. GL450-30..		UP5015.. KR530..		DY-40-150.. D-30-450..		EL-51.. PLS-30..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AM131, AM153, AM169, AM187, (Ch. AM) (Above 1,533,750).....	5	6A7, 6D6, 6Q7, 25L6, 25Z5, 2UR-224 Ballast (44)	4DC-345..	PRSA150-20-20		BRD2215..		M-2X20-150..		TA-220..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AV193, (Ch. AV).....	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, L49D (Ballast), (44)	3CC-337.. 3CC-261..	AF8D.. GL450-30..		KR530..		DY-40-150.. D-30-450..		EL-51.. PLS-30..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AW171, I73, I74, I76, I80, (Ch. AW).....	6	6A7, 6D6, 6Q7, 41, 80, (44)	2NC-246.. 2NC-247..	GL450-15.. GL450-15..		KR516A.. KR516A..		D-16-450.. D-16-450..		PLS-16.. PLS-16..		Pwr Out	3ZT-348.. On Spkr.	P-6012.. A-2312.. A-3865..	T22R02.. T22S74.. T22S45..	P-2952.. A-2901.. A-2928..							
AX211, AX212, AX217, (Ch. AX).....	5	6A8, 6K7, 6Q7, 25L6, 25Z6, (44)	4HC-348B..	PRSA150-20-20		BRD2215..		M-2X20-150..		TA-220..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AX219 (Ch. AX).....	5	6A8, 6K7, 6Q7, 25L6, 25Z6, (44)	4HC-348B..	PRSA150-20-20		BRD2215..		M-2X20-150..		TA-220..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AX221, AX222, AX232, (Ch. AX).....	5	6A8, 6K7, 6Q7, 25L6, 25Z6, (44)	4HC-348B.. 4XC-404..	PRSA150-20-20.. PRS150-30..		BRD2215.. BR3015..		M-2X20-150.. M-30-150..		TA-220.. UT-301..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AX240 (Ch. AX).....	5	6A8, 6K7, 6Q7, 25L6, 25Z6, (44)	4HC-348B.. 4XC-404..	PRSA150-20-20.. PRS150-30..		BRD2215.. BR3015..		M-2X20-150.. M-30-150..		TA-220.. UT-30..		Out	†	A-3865..	T22S45..	A-2928..							
AXLW211, 212, 217, 235, 237, 238, 239, 257, (Ch. AXLW).....	5	6A7, 6K7, 6Q7, 25L6, 25Z6GT, (44)	4HC-348B.. 4XC-404..	PRSA150-20-20.. PRS150-30..		BRD2215.. BR3015..		M-2X20-150.. M-30-150..		TA-220.. UT-301..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AY194, AY195, (Ch. AY).....	5	6A7, 6D6, 6Q7, 25L6, 25Z5, (44)	3CC-337.. 3CC-261..	AF8D.. GL450-30..		UP5015.. KR530..		DY-40-150.. D-30-450..		EL-51.. PLS-30..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							
AZ196, (Ch. AZ).....	6	6A7, 6D6, 6Q7, 76, 76, 6AC5G, 80, (44)	426-379.. 426-380..	GL450-16.. GL450-16..		KR516A.. KR516A..		D-16-450.. D-16-450..		PLS-16.. PLS-16..		Pwr Out	4ZT-426.. On Spkr.	P-6119.. A-3878.. A-3865..	T22R01.. T22S47.. T22S45..	P-2951.. A-2921.. A-2928..							
BA199, BA201, (Ch. BA).....	4	6D5, 6C6, 25L6, 25Z5, L55BG, Ballast, (46)	4DC-345A..	PRSA450-20-20		BRD2215..		M-2X20-150..		TA-220..		Out	On Spkr.	A-3865..	T22S45..	A-2928..							

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofac Sat. No.		
1st.		16-6658.		455	†	L-70.		5 Inch.	ST-107.		5A15.		Vol Tone	RVC-A120. 111-C.	M-60-Z M-60-Z		A		D13-133. D13-133.		41	G1 G1			Continued 5	ELECTROMATIC 606A, 607A		
2nd.		16-6660.																										
1st.		16-6658.		455	†	L-70.		5 Inch.	ST-105.		5A1.		Vol Tone	†	M-60-Z M-60-Z		A		D13-133. D13-133.		41	G1 G1				ELECTRO-TONE 555, 706, 712		
2nd.		16-6660.																										
1st.	T-1361A.	16-6658.		455	†	L-70.																			(See ECA)—	ELECTRONIC CORPORATION OF AMERICA		
2nd.	T-1362A.	16-6660.																								(See Range) ELECTRONIC SPECIALTY CO.		
1st.	T-1361A.	16-6658.		455				H-244A.	ST-107.		5A15.		Vol	W-444A.	M-60-Z		A		D13-133.		41	G1				(Elec- tronic Labs)—E/L 76E, 76K, 76M, 76W		
2nd.	T-1362A.	16-6660.						H-258A.					Vol	W-484A.	AM-60-Z	KSS-3.	A	D13-133.	E	41	G1					20	76RU ("Radioutili- phone") 7S (Sub-Station)	
1st.	T-1361A.	16-6658.		455				H-252.	ST-113.		4A1.		Vol	W-499A.	AM-60-Z	KSS-3.	A	D13-133.	E	41	G1					20	710B, 710M, 710T, 710 W (Ch. 2875)	
2nd.	T-1362A.	16-6660.						H-254A.	ST-108.		6A1.		Treble	W-475A.	AM-63-Z	KSS-3.	A	D13-133.	E	41	G1							
1st.	T-1361A.	16-6658.		455				H-255A.	ST-107.		5A15.		Treble	W-489A.	AM-60-Z	KSS-3.	A	D13-133.	E	41	G1					24	710PB, 710PC, (Ch. 2887)	
2nd.	T-1362A.	16-6660.						H-256A.	ST-102.	F2	12A4.	F3	Bass	W-476A.	AM-63-Z	KSS-3.	A	D13-133.	E	41	G1							
1st.	T-1361A.	16-6658.		455	†			H-235A.	ST-113.		4A1.		Bass	W-476A.	AM-63-Z	KSS-3.	A	D13-133.	E	41	G1					8.	2660 "Master Utiphone"	
2nd.	T-1362A.	16-6660.						H-244A.	ST-107.		5A15.		Treble	W-476A.	AM-63-Z	KSS-3.	A	D13-133.	E	41	G1					4.	2701	
1st.	3BT-269.	16-5712.		456				3XS-237.			12E60.		Vol Tone	3XR-287. 3XR-277.	T-81. M-60-Z		A		D17-133X. D13-133.		41	G1 G1				EMERSON AB178, AB182, AB183 (Ch. AB)		
2nd.	3AT-261.	16-5714.																								AB184(AB)		
1st.	3BT-269.	16-5712.		456	820003	B-2.		3XS-237.			12E60.		Vol Tone	3XR-287. 3XR-277.	T-81. M-60-Z		A		D17-133X. D13-133.		41	G1 G1				AC202 (Ch. AC)		
2nd.	3AT-261.	16-5714.			820008	M-22.																						
1st.	3RT-320B.	16-6658.		455	820008	M-22.		4CS-334.	ST-737.		8E18.		Vol Tone	3FR-256B. 4LR-312A.	M-60-Z		A		D13-133.		41	G1				AH171, AH173, AH174, AH176, AH180, AH185, (Ch. AH), Below 1,711,701		
2nd.	3RT-321B.	16-6660.			455			4HS-252.	ST-194.		5E45.		Vol	3ZR-288.	M-60-Z		A		D13-133.		41	G1						
1st.	4ET-350A.	16-6659.		455																								
2nd.	4ET-351A.	16-6660.																										
1st.	4HT-436.	16-6658.		455				4HS-262.	ST-194.		5E45.		Vol.	2NR-214D.	M-64-Z		A		D13-130.		41	G1				AH171, AH173, AH- 174, AH176, AH180, AH185, (Ch. AH), Above 1,711,701		
2nd.	4HT-435A.	16-6660.																										
1st.	4HT-436.	16-6658.		455	820008	M-22.		4PS-303.	ST-108.		6A1.		Vol	2NR-214D.	M-64-Z		A		D13-130.		41	G1				AH166 (Ch. AH)		
2nd.	4ET-351A.	16-6660.			456	820008	M-22.	3PS-251.			6A1.		Vol Tone	3FR-255.	M-60-Z		A		D13-133.		41	G1				AL202 (AL), Below 1,436,000		
1st.	3RT-320B.	16-6658.		456	820008	M-22.																						
2nd.	3RT-321B.	16-6660.			456			4LS-321.	ST-115.		8A21.		Vol Tone	4LR-312A.	M-60-Z		A		D13-133.		41	G1						
1st.	3RT-320B.	16-6658.		456	820008	M-22.		3CS-254.	ST-189.				Vol Tone	3FR-255.	M-60-Z		A		D13-133.		41	G1						
2nd.	3RT-321B.	16-6660.			456																							
1st.	3CT-274.	16-5712.		456																								
2nd.	3CT-275.	16-5714.			456																							
1st.	4VT-420A.	16-5712.		456				3CS-254.	ST-189.				Vol	3FR-256B.	M-60-Z		A		D13-133.		41	G1				AM131, AM153, AM169, AM187 (Ch. AM), Above 1,533,750		
2nd.	4VT-421A.	16-5714.			456																							
1st.	3RT-320B.	16-6658.		456				3QS-257B.	ST-194.		5E45.		Vol	3FR-256A.	M-60-Z		A		D13-133.		41	G1				AU190 (Ch. AU)		
2nd.	4DT-352.	16-6660.			455			3CS-254.	ST-189.				Vol	3FR-256B.	M-60-Z		A		D13-133.		41	G1						
1st.	4VT-420.	16-5712.		455																								
2nd.	4VT-421A.	16-5714.			455																							
1st.	3ZT-342.	16-5712.		456				4RS-297.	ST-166.		6E10.		Vol	3ZR-288.	M-60-Z		A		D13-133.		41	G1				AV-193 (Ch. AV)		
2nd.	2ND-231.	16-5714.			455																							
1st.	4XT-434.	16-6658.		455	820008	M-22.		4XS-324.	ST-196.		4E45.		Vol	4XR-328A.	M-64-Z		A		D13-130.		41	G1				AW171, I73, I74, I76, 180, I85 (Ch. AW)		
2nd.	4XT-435.	16-6661.			455			4PS-303A.	ST-108.		6A1.		Vol	4XR-328A.	M-64-Z		A		D13-133.		41	G1						
1st.	4XT-434.	16-6658.		455	820008	M-22.																						
2nd.	4XT-435.	16-6661.			455																							
1st.	4XT-434.	16-6658.		455																								
2nd.	4XT-435.	16-6661.			455																							
1st.	4XT-434.	16-6658.		455																								
2nd.	4XT-435.	16-6661.			455																							
1st.	4VT-420.	16-5712.		456				3CS-254A.	ST-189.		6E10.		Vol	3XR-277.	M-60-Z		A		D13-133.		41	G1				AXLW211, 212, 217, 235, 237, 238, 239, 257, (Ch. AXLW)		
2nd.	4VT-421.	16-5714.			456			4RS-306.	ST-166.				Vol	3ZR-288.	M-60-Z		A		D13-133.		41	G1				AY194, 195 (Ch. AY)		
1st.	4VT-425.	16-6658.			456																					AY196 (Ch. AZ)		
2nd.	3RT-321A.	16-6660.			456			3TS-312.	ST-194.		5E45.		Vol	2VR-2190.	M-51-Z		A		D13-138.		41	G1				BA199, BA201 (Ch. BA)		

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Tube Sylvania or Equivalent Dial Light Type Listed In Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
EMERSON—Continued	4	6D6, 6C6, 25L6, 25Z5, 155BG, Ballast, (44).	4DC-345A	I-A150-20		BRD2215		M-2X20-150		TA-1		Out	On Spkr.	A-15	22S45									
BB208, BB209, (Ch. BB)	5	6A7, 6D6, 6Q7, 25L6, 25Z5, Ballast, (44).	3CC-337	A-8D		UP5015		DY-40-150		EL-1		Out	On Spkr.	A-365	T22S45									
BD197, (Ch. BD)	5	6A7, 6D6, 6Q7, 41, 80, (44).	3CC-261	KR530		EZ588		D-30-450		PLS-20														
BE198, (Ch. BE)	5	6A7, 6D6, 6Q7, 41, 80, (44).	3RC-318A	PRSB450-8-8				DH-2X8-450SS				Pwr	3RT-3-2	P-6011	T22R02									
BF191, (Ch. BF)	5	6A7, 6D6, 6Q7, 25L6, 25Z5, Ballast, (44).	3CC-337	AFB8D		UP5015		DY-40-150		EL-51		Out	On Spkr.	A-3824	T22S45									
BG138, 140, 142, 146, 178, 182, 183	6	6A7, 6D6, 6Q7G, 25L6G, 6G3, 25Z5, L42BG, Ballast, (44).	3CC-261	GL450-30		PRSA150-20-20		D-30-450		PLS-30														
BH203 (Ch. BH)	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, Ballast, (44).	3CC-261	L450-30		KR530		M-2X20-150		TA-220		Chk	4PT-404	C-1080	T20C52									
BJ200, 210, 214, (Ch. BJ)	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, L49BG, Ballast, (44).	3CC-261	L450-30		KR530		D-30-450		PLS-1		Out	On Spkr.	A-3865	T22S45									
BJ218, 220, (Ch. BJ)	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, L49BG, Ballast, (44).	3CC-318A	PRSB450-8-8		EZ588		DH-2X8-450SS		TU--		Pwr	3RT-322A	P-6011	T22R02									
BL200, 210, 214, (Ch. BL)	5	6A7, 6D6, 6Q7G, 41, 80, (44).	3RC-318A	PRSB450-8-8		EZ588		DH-2X8-450SS		TU--		Pwr	3RT-322A	P-6011	T22R02									
BL218, 220, (Ch. BL)	5	6A7, 6D6, 6Q7G, 41, 80, (44).	3RC-318A	PRSB450-8-8		EZ588		D-30-450		PLS-1		Out	On Spkr.	A-3865	T22S45									
BM206, 215, BM216, (Ch. BM)	4	6D6, 6C6, 25L6, 25Z5, L55BG, Ballast, (44).	4DC-345A	PSA150-20		BRD2215		M-2X20-150		TA-1		Out	On Spkr.	A-3865	T22S45									
BN206, 215, 216, (Ch. BN)	4	6D6, 6C6, 25L6G, 25Z5, L55BG, Ballast, (44).	4DC-345A	PSA150-20		BRD2215		M-2X20-15		TA-1		Out	On Spkr.	A-3865	T22S45									
BQ223, (Ch. BQ)	6	6K8, 6K7, 6Q7G, 76, 6AC5G, 80, (44).	4ZC-379	4ZC-380		KR516A		D-16-4-0		PLS-16		Pwr	4ZT-426A	P-6119	T22R01									
BQ225, (Ch. BQ)	6	6K8, 6K7, 6Q7G, 76, 6AC5G, 80, (44).	4ZC-379	4ZC-380		KR516A		D-16-4-0		PLS-16		Out	On Spkr.	A-3852	T22S45									
BQ228, (Ch. BQ)	6	6K8, 6K7, 6Q7G, 76, 6AC5G, 80, (44).	4ZC-379	4ZC-380		KR516A		D-16-4-0		PLS-16		Pwr	4ZT-426A	P-6119	T22R01									
BR224, BR224A, (Ch. BR)	13	6K7, 6K8, 6Q7, 3615, 6AC5G, (44).	3CC-329	4ZC-380		KR516A		D-16-4-0		PLS-16		Out	On Spkr.	A-3852	T22S45									
BR226, (Ch. BR)	13	6K7, 6K8, 6Q7, 3615, 6AC5G, (44).	3CC-329	4ZC-380		KR516A		D-16-4-0		PLS-16		Pwr	4ZT-426A	P-6119	T22R01									
BS227, (Ch. BS)	15	6K7, 6K8, 6Q7, 3615, 6AC5G, (44).	3CC-329	4ZC-380		KR516A		D-16-4-0		PLS-16		Out	On Spkr.	A-3852	T22S45									
BT245, (Ch. BT)	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, L49BG, Ballast, (44).	4HC-348D	PRSA150-20-20		BRD2215		M-2X20-150		TA-0		Out	On Spkr.	A-3865	T22S45									
BW231, (Ch. BW)	6	6K8, 6K7, 6Q7G, 76, 6AC5G, 80, (44).	4ZC-379	4ZC-380		KR516A		D-16-4-0		PLS-16		Pwr	4ZT-426A	P-6119	T22R01									
BU229, (Ch. BU)	6	6K8, 6K7, 6Q7, 76, 6AC5G, 80, (44).	4ZC-379	4ZC-380		KR516A		D-16-4-0		PLS-16		Out	On Spkr.	A-3878	T22S45									
BU230, (Ch. BU)	6	6K8, 6K7, 6Q7, 76, 6AC5G, 80, (44).	4ZC-379	4ZC-380		KR516A		D-16-4-0		PLS-16		Pwr	4ZT-426A	P-6119	T22R01									
BY233, (Ch. BY)	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, L49BG, Ballast, (44).	4HC-348B	PRSA150-20-2		BRD2215		M-2X20-15		TA-220		Out	On Spkr.	A-3865	T22S45									
CA208, CA209, CA234, (Ch. CA)	5	6A7, 6D6, 6Q7, 25L6, 25Z5, L49BG, Ballast, (44).	4HC-348B	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865	T22S45									
CB243, (Ch. CB)	8	6K7, 6K8, 6Q7G, 76, 6AC5G, 80, (44).	4ZC-379	4ZC-380		KR516A		D-16-4-0		PLS-16		Out	On Spkr.	A-3878	T22S45									
CD206, CD215, (Ch. CD)	4	6D6, 6C6, 25L6G, 25Z5, L55BG, (Ballast), (44).	4DC-345A	*SA150-2		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3878	T22S45									
CE259 (Ch. CE Early)	5	1A7G, *1N5G, 1H5G, 1C5G, (44).	6EC-414	P-S150-8		BR815		M-8-1		TA-1		Out	On Spkr.	A-3878	T22S45									
CE259 (Ch. CE Late) (Below 2,319,650)	5	1A7G, *1N5G, 1H5G, 1C5G, (44).	6EC-432	*RS150-8		BR815		M-8-1		UT-81		Out	On Spkr.	A-3878	T22S45									
CE259, (Ch. CE Late) (Above 2,319,650)	5	1A7G, *1N5G, 1H5G, 1C5G, (44).	6EC-432	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3878	T22S45									
CE260 (Ch. CE Early)	5	1A7, *1N5, 1H5G, 1C5G, (44).	6EC-414	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3878	T22S45									
CE260 (Ch. CE Late) Below 2,319,650	5	1A7G, *1N5G, 1H5G, 1C5G, (44).	6EC-432	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3878	T22S45									
CE260, (Ch. CE Late) Below 2,319,650	5	1A7G, *1N5G, 1H5G, 1C5G, (44).	6EC-432	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3878	T22S45									
CE263 (Ch. CE Early) Below 2,319,650	5	1A7G, *1N5G, 1H5G, 1C5G, (44).	6EC-432	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3878	T22S45									
CE263 (Ch. CE Late) Above 2,319,650	5	1A7G, *1N5G, 1H5G, 1C5G, (44).	6EC-432	*S150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3878	T22S45									
CF255, (Ch. CF)	2	12BG7, 35L6T, (44).	4HC-348	*SA150-20-2		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865	T22S45									
CG268, CG270, CG272, CG276, (Ch. CG)	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, L49BG, Ballast, (44).	6JC-426U	P-S150-20-2		BRD2215		M-2X20-150		TA-2-0		Out	On Spkr.	A-3865	T22S45									
CG293, CG1-293, (Ch. CG, CG1)	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, L49BG, Ballast, (44).	6QC-437	*SA150-40		BRD4215		M-2X40-1-0		TA-240		Out	On Spkr.	A-3865	T22S45									
CG294, CG1-294, (Ch. CG, CG1)	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, L49BG, Ballast, (44).	6QC-437	P-S150-20-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3865	T22S45									
CG318, (Ch. CG)	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, L49BG, Ballast, (44).	6JC-426U	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865	T22S45									
CH243, CH246, CH253, CH256, (Ch. CH)	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, (44).	4HC-348B	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865	T22S45									

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radial Part No.	Note	Photofac Set No.
1st.	4VT-420	16-5712		456				5BS-333	ST-194		SE45		Vol	2VR-219F	M-48-V		A.	G4	D14-125		41	G1, 4		Continued	EMERSON	
2nd.	4VT-421	16-5714		456				3CS-254A	ST-189				Vol	32R-288	M-60-Z		A.		D13-133		41	G1			BB208, BB209, (Ch. BB)	
1st.	3RT-320B	16-6658		456				4CS-269A					Vol	3FR-256B	V-0-Z		A.		D13-133		41	G1			BD197, (Ch. BD)	
2nd.	3RT-321B	16-6660						3CS-254	ST-189		1. 24		Vol	3FR-256B	V-60-Z		A.		D13-133		41	G1			BE198, (Ch. BE)	
1st.	4VT-420A	16-5712		456				5GS-3	ST 101				Vol	3PR-258	M-4-				D13-130						BF191, (Ch. BF)	
2nd.	4VT-421A	16-5714		456				3FS-2					Vol	3FR-256	M-0-		A.		D13-133		41	G1			BG138, 140, 142, 146, 178, 182, 183	
1st.	4HT-436A	16-6658		455				3FS-1A					Vol	3FR-256B	M-60-Z		A.		D13-133		41	G1			BH203, (Ch. BH)	
2nd.	4ET-351A	16-6660											F1	Vol	3FR-256B	M-60-Z				D13-133		41	G1			BJ200, 210, 214, (Ch. BJ)
1st.	3RT-320B	16-6658		455				4CS-269A					F1	Vol	3FR-256B	M-60-Z				D13-133		41	G1			BJ218, 220, (Ch. BJ)
2nd.	3RT-321B	16-6660											F1	Vol	3FR-256B	M-60-Z				D13-133		41	G1			BL200, 210, 214, (Ch. BL)
1st.	3RT-320B	16-6660		455									F1	Vol	3FR-256B	M-60-Z				D13-133		41	G1			BL218, 220, (Ch. BL)
2nd.	3RT-321B	16-6660																						BM206, 215, 216, (Ch. BM)		
1st.	3RT-320B	16-6660		455																				BN206, 215, 216, (Ch. BN)		
2nd.	3RT-321B	16-6660																						BQ223, (Ch. BQ)		
1st.	3RT-320B	16-6658		455																				BQ225, (Ch. BQ)		
2nd.	3RT-321B	16-6660																						BQ228, (Ch. BQ)		
1st.	4ZT-425A	16-6658		455																				BR224, BR224A, (Ch. BR)		
2nd.	3RT-321C	16-6660																						BR226, (Ch. BR)		
1st.	4ZT-425A	16-6658		455																				BS227, (Ch. BS)		
2nd.	3RT-321C	16-6660																						BT245, (Ch. BT)		
1st.	5RT-441	16-6858		455																				BW231, (Ch. BW)		
2nd.	5RT-442	16-6860																						BU229, (Ch. BU)		
1st.	5RT-441	16-6858		455																				BU230, (Ch. BU)		
2nd.	5RT-442	16-6860																						BY233, (Ch. BY)		
1st.	5RT-441	16-6858		455																				CA208, CA209, CA234, (Ch. CA)		
2nd.	5RT-442	16-6860																						CB243, (Ch. CB)		
1st.	4ZT-425A	16-6658		4.5																				CD206, CD215, (Ch. CD)		
2nd.	3RT-321C	16-6661		4.5																				CE259, (Ch. CE Early)		
1st.	4ZT-425A	16-6658		4.5																				CE259, (Ch. CE Late) Below 2,319,650		
2nd.	3RT-321C	16-6661																						CE259, (Ch. CE Late) Above 2,319,650		
1st.	5YT-445	16-6658		445																				CE260, (Ch. CE Early)		
2nd.	4XT-435A	16-6661																						CE260 (Ch. CE-Late) Below 2,319,650		
1st.	3RT-320C	16-6658		455					5BS-333	ST-194		SE45		Vol	2NR-214E	V-6-Z		A.		D13-130		41	G1			CA208, CA209, CA234, (Ch. CA)
2nd.	3RT-321C	16-6660																						CD260 (Ch. CE-Late)		
1st.	4ZT-425A	16-6658		455																				CE263, (Ch. CE-Late) Above 2,319,650		
2nd.	3RT-321C	16-6660																						CE263, (Ch. CE-Late) Above 2,319,650		
1st.	5YT-445	16-6658		445																				CG255, (Ch. CF)		
2nd.	4XT-435A	16-6661																						CG268, CG268, CG- 270, CG272, CG272		
1st.	3RT-320C	16-6658		455																				CG293, CG1-293, (Ch. CG & CG1)		
2nd.	3RT-321C	16-6660																						CG294, CG1-294, (Ch. CG & CG1)		
1st.	4ZT-425A	16-6658		445																				CG318, (Ch. CG)		
2nd.	4XT-435U	16-6661																						CH243, CH246, CH253, CH256, (Ch. CH)		
1st.	4XT-434DU	16-6658		455																				EMERSON - 105		
2nd.	4XT-435U	16-6661																								
1st.	4XT-434CU	16-6658		455					6GS-4...	ST-101		1.A4		Vol	6SR-362	M-60-Z		A.		D13-133		41	G1			
2nd.	4XT-435CU	16-6661																								
1st.	4XT-434CU	16-6658		455																						
2nd.	4XT-435CU	16-6661																								
1st.	4XT-434CU	16-6658		455																						
2nd.	4XT-435CU	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658		455																						
2nd.	4XT-435U	16-6661																								
1st.	4XT-434DU	16-6658																								

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tube	Sylvania or Equivalent Dial Light Type Listed In Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
EMERSON—Continued	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, (47)	6JC-426U	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928					
CJ21, CJ1-217, CJ1-235, (Ch. CJ)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, (47)	6JC-426AU	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928					
CJ22, CJ1-221, (Ch. CJ, CJ1)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, (47)	4XC-404	PRSI150-30		BR3015		M-30-150		UT-301		Out	On Spkr.	A-3876		T22S45		A-2928					
CJ23, CJ1-232, (Ch. CJ, CJ1)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, (47)	6JC-426AU	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928					
CL246, 253, 256, (Ch. CL)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, (47)	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CM260, (Ch. CM)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, (47)	6JC-426	PRSA150-20-20		BRD2215		M-2X30-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CM266, (Ch. CM)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, (47)	6JC-426	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CM267, (Ch. CM)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, (47)	6JC-426	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928					
CQ269, 271, 273, (Ch. CQ)	6	6K8GT, 6K7GT, 6S07GT, 6A65GT, 25AC5GT, 25Z6GT, L42B Ballast, (44)	6QC-437	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3849		T22S88		A-2902					
CR261, 262, 274, CRLW261, 262, 274, (Ch. CR & CRLW)	5	12A8GT, 12K7GT, 12S07GT, 35L6GT, 35Z5GT, (47)	6JC-426B	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CR297, CRI-297, (Ch. CR, CRI)	5	12A8GT, 12K7GT, 12S07GT, 35L6GT, 35Z5GT, (47)	4XC-404	PRSI150-30		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CR303, CRI-303, (Ch. CR, CRI)	5	12A8GT, 12K7GT, 12S07GT, 35L6GT, 35Z5GT, (47)	4XC-404	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CS258, 270, 272, 276, (Ch. CS)	6	6K8GT, 6K7GT, 6S07GT, 25AC5GT, 25Z6, L42B Ballast, (44)	6QC-437	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3849		T22S88		A-2902					
CT275, (Ch. CT)	5	1A7G, *1N5G, 1H5G, 1Q5G	6EC-432	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3822		T22S47		A-2932		741 4482	8F	*B30	
CUIW261, 262, 265, 274, (Ch. CUIW)	5	12J5GT, 12K7GT, 12S05GT, 35L6GT, 35Z5GT, (47)	6UC-447	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	†	A-3865		T22S45		A-2928					
CU265, (Ch. CU)	5	12J5GT, 12K7GT, 12S05GT, 35L6GT, 35Z5GT, (47)	6UC-447	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3865		T22S45		A-2928					
CV264, 280, 295, 298, 313, 314, 316, (Ch. CV)	5	12A8GT, 12S07GT, 12K7GT, 35Z5GT, (47)	6JC-426B	PRSA150-20-20	A8	BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CV269, 290, CV1-290, (Ch. CV, CV1)	5	12A8GT, 12K7GT, 12S07GT, 35L6GT, 35Z5GT, (47)	6JC-426B	PRSA150-20-20	A8	BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3865		T22S45		A-2928					
CV261, CV1-291	5	12A8GT, 12K7GT, 12S07GT, 35L6GT, 35Z5GT, (47)	6JC-426B	PRSA150-20-20	A8	BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CW279, (Ch. CW)	5	12A8GT, 12K7GT, 12S07GT, 35L6GT, 35Z5GT, (47)	6JC-426B	PRSA150-20-20	A8	BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
CX263, 283, 284, 305, (Ch. CX)	5	1A7G, *1N5G, 1H5G, 1Q5G	6EC-432	PRS150-8	BR815		M-8-150		UT-81		Out	On Spkr.	A-3822		T22S47		A-2932		741 4482	8F	*B30		
CX285, (Ch. CX)	5	1A7G, *1N5G, 1H5G, 1Q5G	6EC-432	PRS150-8	BR815		M-8-150		UT-81		Out	On Spkr.	A-3822		T22S47		A-2932		758		17GD60		
CX292, (Ch. CX)	5	1A7G, *1N5G, 1H5G, 1Q5G	6EC-432	PRS150-8	BR815		M-8-150		UT-81		Out	On Spkr.	A-3822		T22S47		A-2932		741 4482	8F	*B30		
CY269, 271, 273, 286, 288, 319, (Ch. CY)	5	6A8GT, 6K7GT, 6S07GT, 25L6GT, 25Z6GT, L42B Ballast	6JC-450	PRSI150-40		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
DZ282, (Ch. CZ)	5	12A8GT, 12K7GT, 12S07GT, 35Z5GT, (47)	6JC-426D	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
DA287, (Ch. DA)	6	6K8GT, 6K7GT, 6S07GT, 6P56, 7A4-433	6QC-450	PRSI50-16		BR815		M-30-150		UT-301		Pwr	4ZT-426B	P-6119		T22R01		P-2951					
DB296, 301, (Ch. DB)	5	12SA7, 12K7, 12S07, 50L6GT, 35Z5GT, (47)	7A4-444	PRSA150-16		BR1645		M-16-450		UT-16		Out	On Spkr.	A-3878		T22S58		A-2931					
DB296, 301, (Ch. DB)	5	12SA7, 12K7, 12S07, 50L6GT, 35Z5GT, (47)	7A4-444	PRSA150-16		BR1645		M-16-450		UT-16		Out	On Spkr.	A-3865		T22S45		A-2928					
DC308, (Ch. DC)	5	1A7G, *1N5G, 1H5G, 1Q5G	6EC-432	PRS150-8	BR815		M-8-150		UT-81		Out	On Spkr.	A-3822		T22S47		A-2932		741 4482	8F	*B30		
DF302, 306, (Ch. DF)	6	1A7G, *1N5G, 1H5G, 1Q5G, 3Q5GT, 70L7GT, 117L7GT	6JC-426E	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Chk	7FT-512		†					746 2482	8G3	*B30	
DH264, (Ch. DH)	5	1A7G, *1N5G, 1H5G, 1Q5G	6JC-432	PRSI150-8		BR815		M-50-25		TA-50		Out	On Spkr.	A-3822		T22S47		A-2932		†		†	
DJ310, (Ch. DJ)	6	1A7G, *1N5G, 1H5G, 1Q5G, 3Q5GT, 70L7GT, 117L7GT	6JC-426E	PRSA150-20-20		BRD2215		M-50-25		TA-50		Out	On Spkr.	A-3822		T22S47		A-2932		†		†	
DJ311, 312, (Ch. DJ)	6	1A7G, *1N5G, 1H5G, 1Q5G, 3Q5GT, 70L7GT, 117L7GT	6JC-426E	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Chk	7JT-524		†					746 2482	8G3	*M30	
DL330, DL330, (Ch. DLI)	5	12SA7GT, 12K7GT, 12S07GT, 35L6GT, 35Z5GT, (47)	6JC-426C	PRSA150-20-20		BRD2215		M-50-25		TA-50		Out	On Spkr.	A-3822		T22S47		A-2932		†		†	
DM331, DM1-331, (Ch. DM & DMI)	5	6A8GT, 6K7GT, 6S07GT, 25L6GT, 25Z6GT, L42B, Ballast, (44)	6JC-426	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
DP332, DPI-332, (Ch. DP & DPI)	6	6K8GT, 6K7GT, 6S07GT, 6A65GT, 25AC5GT, 25Z6, L42B, Ballast, (44)	60C-437	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3849		T22S88		A-2902					
DQ333, 334, 351, 398, DQ1-333, 334, (Ch. DQ & DQ1)	5	12SA7GT, 12K7GT, 12S07GT, 50L6GT, 35Z5GT, (47)	6JC-426F	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS			Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL Part No.					
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shift	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	
1st.	6JT-466AU	16-6658		455			6JS-368AU	ST-196		4E45		Vol	4XR-335	M-64-Z	A		D13-130		41	G1			Continued—	EMERSON CJ211, 217, 235, 257 (Ch. CJ)	
2nd.	4XT-435CU	16-6661		4**	820008	4-22	6JS-38	ST-196				Tone	4XR-335	M-6-Z	A		D13-130		41	G1				CJ221, CJ1-221 (Ch. CJ & CJ1)	
1st.	6JT-466AU	16-6659		4**	820008	M-22	4PS-303	T-108				Tone	HLR-312B	M-6-Z	A		D13-130		41	G1				CJ232, CJ1-232 (Ch. CJ & CJ1)	
2nd.	4XT-435CU	16-6661								F2		Tone	4XR-335	M-6-Z	A		D13-130		41	G1				CL246, 253, 256	
1st.	6JT-466AU	16-6658		45						F2		Tone	4XR-342	M-6-Z	A		D13-130		41	G1					
2nd.	6MT-472U	16-6661					6MS-395	-				Vol	4XR-335A	M-6-Z	A				41	G1				CM260, (Ch. CM)	
1st.	6JT-466U	16-5712		455			6JS-36	ST-196		4E45		Vol	4XR-335	M-6-Z	A		D13-130							CM265, (Ch. CM)	
2nd.	6MT-472U	16-6660					6MS-3-4	ST-196				Vol	4XR-335A	M-6-Z	A		D13-13							CM267, (Ch. CM)	
1st.	6JT-466U	16-5712		455						F2		F2	Vol	6SR-362	M-60-Z	A		D13-133		41	G1				CQ269, 271, 273, (Ch. CQ)
2nd.	6MT-472U	16-6660								F2		F2	Vol	6VR-364	M-60-Z	A		D13-133		41	G1				CR261, 262, 274, CRLW261, 262, 274, (Ch. CR & CRLW)
1st.	+	16-6658		455									Vol	6VR-364	M-60-Z	A		D13-133		41	G1				CR297, CR1-297, (Ch. CP & CR1)
2nd.	+	16-6661											Vcl	6-R-3-4	M-60-Z	A		I13-133							CR303, CR1-303, (Ch. CR & CR1)
1st.	6RT-479	16-6661		455	820008	**-	6YS-41			4E45			Tone	6R-372	M-61-Z	A		I13-125		41	G1				CS268, 270, 272, 276, (Ch. CS)
2nd.	4XT-435D	16-6661								F2		F2	Tone	6SR-362	M-60-Z	A		D13-133		41	G1				
1st.	6RT-479	16-6661		455									Vol	6V-4	M-6-Z	A		I13-133		41	G1				
2nd.	4XT-435E	16-6661											Vcl	6-R-3-4	M-60-Z	A		D13-133		41	G1				
1st.	6RT-479	16-6661		455									Vcl	6R-372	M-61-Z	A		I13-125		41	G1				
2nd.	4XT-435E	16-6661											Vcl	6SR-362	M-60-Z	A		D13-133		41	G1				
1st.	6QT-480	16-5712		455									Vol	3HR-240C	M-60-Z	A2		D13-133		42	G1				CT275, (Ch. CT)
2nd.	4XT-435D	16-6661											Vcl	6UR-360	M-51-Z	A		D13-133		41	G1				CULW261, 262, 265, 274, (Ch. CULW)
1st.	6JT-466B	16-6658		455									Vcl	6UR-360	M-51-Z	A		D13-133		41	G1				CU265, (Ch. CU)
2nd.	6MT-472A	16-											Vcl	6UR-360	M-51-Z	A		D13-133		42	G1				
1st.	6RT-479A	16-5712		**									Vol	6VR-364	M-60-Z	A		D13-133		41	G1				CY264, 280, 295, 298, 313, 314, 316, (Ch. CV)
2nd.	7BT-489A	16-5714		**									Vol	6UR-364	M-60-Z	A		D13-133		41	G1				CV269, 290, CV1-291, 290, (Ch. CV & CV1)
1st.	6RT-479A	16-5712		455	820008	M-22	6JS-368U	ST-196		4E45			Tone	6UR-366	M-51-Z	A		D13-125		41	G1				CV291, CV1-291
2nd.	7BT-489A	16-5714											Tone	6UR-366	M-51-Z	A		D13-125		41	G1				
1st.	6RT-479A	16-5712		455	820008	M-	6JS-386	ST-196		4E45			Vol	6UR-364	M-6-Z	A		D13-133		41	G1				CW279, (Ch. CW)
2nd.	7BT-489A	16-5714											Vol	6UR-366	M-5-Z	A		D13-125		41	G1				
1st.	6RT-479A	16-5712		455									Tone	7BR-363A	**-1	A		D13-130		41	G1				
2nd.	7BT-489A	16-5714											Vol	3HR-240C	**-1	A		D13-133		41	G1				
1st.	6XT-466DU	16-5712		455			6XS-4-2	ST-113					Vol	3HR-240C	**-1	A		D13-133		42	G1				CX263, 283, 294, 305, (Ch. CX)
2nd.	6XT-514	16-5714					6XS-424	ST-108		6A1			Vol	3HR-240C	**-1	A		D13-133		42	G1				CX285, (Ch. CX)
1st.	6XT-466DU	16-5712		455			6XS-424	ST-108		6A1			Vol	3HR-24-C	M-60-Z	A2		D13-133		42	G1				CX292, (Ch. CX)
2nd.	6XT-514	16-5714											Vol	6YS-418	M-60-Z	A		6SR-36		**-60-					
1st.	6XT-466DU	16-5712		455			6XS-379	ST-194					Vol	6YS-418	M-60-Z	A		D13-133		**-60-					
2nd.	6XT-514	16-5714											Vcl	7BR-363A	**-6	A		D13-133		**-6					
1st.	7AT-488A	16-5712		455									Vcl	7BR-363A	**-6	A		D13-130		41	G1				DA287, (Ch. DA)
2nd.	7AT-491	16-5714											Vcl	7BR-363C	**-6	A		D13-133		41	G1				
1st.	7AT-488A	16-5712		455									Vol	3HR-240D	**-6	A		D13-133		41	G1				
2nd.	7AT-491	16-5714											Vol	3HR-240C	**-6	A		D13-133		42	G1				
1st.	7AT-488A	16-5712		455									Vol	3HR-240C	**-6	A2		D13-133		42	G1				
2nd.	7AT-491	16-5714											Vol	3HR-240D	**-6	A2		D13-133		42	G1				
1st.	7AT-488A	16-5712		455									Vol	3HR-240C	**-6	A		D13-1		**-6					
2nd.	7AT-491	16-5714											Vol	3HR-240C	**-6	A		D13-1		**-6					
1st.	7AT-488A	16-5712		455									Vol	7HR-373	M-6-Z	A2		D13-1		42	G1				DF302, 306, (Ch. DF)
2nd.	7AT-491	16-5714											Vol	7HR-373	M-6-Z	A2		D13-1		42	G1				DH264, (Ch. DH)
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				DJ310, (Ch. DJ)
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7JT-544A	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7JT-544A	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7JT-544A	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7JT-544A	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
1st.	7BT-488E	16-5712		455									Vol	7HR-373	M-6-Z	A		D13-133		41	G1				
2nd.	7BT-488E	16-5714											Vol	7HR-373	M-6-Z	A		D13-133		41</					

~~t~~ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
EMERSON—Continued	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3865		T22S45		A-2928					
DS343, 348, 349, 350, 352, DR1-343, 348, 350, 352, (Ch. DR & DR1), DS3	5	6K7, 6SA7, 6SQ7, 6L6, 6U5, 5Z3	30 Mfd.	P: F6J		EZ5116		DY-30-450		TU-1616, EL-3		Out	On S. r.	P-6012		T22R04		P-2 52					
DU379, 380, (Ch. DU)	4	1RS, 1T4, 1S5, 1S4	30 Mfd.	P: 15-1		UP3045		DY-30-450		EL-3, UT-121		Out	On S. r.	A-3329		T22S74		A-2905					
DV364, (Ch. DV)	8	6SA7GT, 6B8GT, 6SQ7GT, 6P5GT, 6SJ7GT, 6AC5GT, 6E5, 5Y3G	16-16 M			EZ5116				TU-1-1		Pwr	On S.	P-6120		T22R04		P-2952			X4		
DX356, (Ch. DX), (Below 3,842,250)	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G	16 Mfd.	PRSA450-16		BR1645		M-16-450		UT-16		Pwr	↑	P-6010		T22R01		P-2950					
DX356, (Ch. DX), (Above 3,842,250)	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G	16 Mfd.	PRSA450-16		BR1645		M-16-450		UT-16		Out	Un Spkr.	P-6010		T22R01		P-2950					
DY337, 349, 351, DYL-337, 349, 351, (Ch. DY & DY1)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	6JC-426	SA150-20-0		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
DZ371, (Ch. DZ)	8	6SA7GT, 6B8GT, 6SQ7GT, 6P5GT, 6SJ7GT, 6AC5GT, 6E5, 5Y3G	16-16 M			EZ-11				• 61		Out	On S. r.	P-6120		T22R04							
EA312, 338, 339, 357, 385, 389, (Ch. EA)	6	1A7GT, 1N5GT, 1H6GT, 3Q5GT, 117L7GT	6JC-426	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3852		T22S58		A-2 51					
EA1-341, (Ch. EA)	6	1A7GT, 1N5GT, 1H6GT, 3Q5GT, 117Z6GT	20-20 Mfd.	PRSA150-2		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3852		A-3030		2746 2482		2G3	2M30		
EB344, 359, (Ch. EB)	6	1A7GT, 1N5GT, 1H6GT, 3Q5GT, 117L7GT	20-20 Mfd.	PRSA150-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3856		T22S47		A-2900		2746 2482	2G3	2M30	
EC296, 301, 314, 315, 327, 328, 329, EC1-296, 301, 314, 315, 327, 328, 329, (Ch. EC & EC2)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	20-20 M	SA150-20		BRD2215		M-2X20-150		TA-220		Out	On S. r.	A-3856		A-3030		2746 2482		3G 160			
ED354, (Ch. ED), Below 3,816,700	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G	7AC-443	RS450-16		BR1645		M-16-		UT-1		Pwr	↑	8DT-554		T22R04		P-2952					
ED354, (Ch. ED), Above 3,816,700	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G	7AC-444	RS450-16		BR1645		M-16-450		UT-1		Out	On Spkr.	A-3830		T22S74		A-2905					
EE340, 380, (Ch. EE)	6	1A7GT, 1N5GT, 1H6GT, 3Q5GT, 117L7GT	20-20 Mfd.	PRSA150-40		BRD2215		M-2X20-150		TA-220		Out	On S. r.	A-3830		A-928							
EF363, (Ch. EF)	6	1A7GT, 1N5GT, 1H6GT, 3Q5GT, 117L7GT	40 Mfd.	PRSA150-4-0		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3830		A-3030		2746 2482		2G3	2M30		
EG355, (Ch. EG)	6	6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 5U5, 25Z6GT, L42B	20-40 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3865		T22S45		A-3030		2746 2482	2G3	2M30	
EH342, EH1-342, (Ch. EH, EH1)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	BRD2215			BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
EJ378, (Ch. EJ)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	40-20-20 Mfd.	PRSA150-4		EZ42215		DSB-403020-150		TA-24		Out	On S. r.	A-3865		T22S45		A-2 2					
EK377, 403, EK2-377, (Ch. EK & EK2)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA150-2		BRD2215		M-2X20-150		TA-20		Out	On S. r.	A-3865		T22S45		A-2 2					
EL360, 361, 362, (Ch. EI)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
EM345, 341, 382, (Ch. EM, EM1, EM2, EM3)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA150-2		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3865		T22S45		A-2928					
EP357, 375, 381, 405, 406, (Ch. EP)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA150-2		BRD2215		M-2X-1		TA-24		Out	On S. r.	A-3865		T22S45		A-2928					
EQ368, 410, (Ch. EQ)	6	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G	15-15-20 Mfd.	AF444JA		UP2245C		DY-31		TA-24		Pwr	↑	P-6011		22R02		P-2951					
ER369, 370, (Ch. ER)	9	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G	15-15-15 Mfd.	AF444JA		UP6CJ20		DY-3X20-450		EL-350		Out	On S. r.	A-3877		T22S58		A-2930					
ES374, 397, (Ch. ES) Below 3,923,600	6	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G, 5Y4G	7AC-443	P-1-1		BR1645		M-16-450		UT-16		Pwr	↑	P-6012		T22R04		P-2952					
ES374, 397, (Ch. ES) Above 3,923,600	6	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G, 5Y4G	7AC-444	PRSA450-16		BR1645		M-16-450		UT-16		Out	On S. r.	A-3830		T22S74		A-2905					
ET383, (Ch. ET)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	40-20-20 Mfd.	AF444D		UP42215		DY-403-20-150		TA-24		Out	On S. r.	A-3830		T22S74		A-2905					
EV384, (Ch. EV)	7	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5E5, 5Y3G	15-15-25 Mfd.	AF444JA		UP2245C		DY-315		TA-24		Pwr	↑	P-6120		22R04		P-2952					
EW311, (Ch. EW)	6	1A7GT, 1N5GT, 1H6GT, 3Q5GT, 117L7GT	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On S. r.	A-3830		T22S74		A-2905					
EX386, (Ch. EX)	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, (47)	40-40-20 Mfd.	AF844D		UP42215		DY-403020-150		EL-224		Out	On S. r.	C-1706		T22S58		A-2930					
FA374, 408, (Ch. FA)	7	6SA7GT, 6SA7, 6J5, 6SQ7, 6V6GT, 5Y3	16 Mfd.	PRSA450-16		BR1645		M-16-450		UT-1		Out	On Spkr.	A-3865		T22S45		A-2930					
FB2-374, (Ch. FB)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	20-20 Mfd.	PRSA450-16		BR252A		M-25-25		UT-1		Out	On S. r.	P-6119		T22R02		P-2951					
FC-400, (Ch. FC)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	40-20-20 Mfd.	AF444D		UP42215		DY-403020-150		EL-224		Out	On S. r.	A-3830		T22S58		A-2930					

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photofact Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	tRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	†	16-6658	-6.60	455				7RS-452	ST-189				Vol	7BR-363C	M-60-Z			A	D13-133		41	G1				Continued	EMERSON	
2nd.																										DR343, 348, 349, 350, 352, DR1- 343, 348, 350, 352 (Ch. DR & DR1)		
1st.	†	16-6658	16-6660	455						F2		F2	V1		T-1				D-13-X			G1					DS365, 372, (Ch. DS)	
2nd.																										DU-379, 380, (Ch. DU)		
1st.	†	16-5712	16-5714	455	†	-26				F		F1	Vol	7UR-380	M-60-Z				A-1			G1					DV364, (Ch. DV)	
2nd.	†	16-5712	16-5714	455	†	-26						F2	Vol	6SR-362	M-60-Z				A-1			G1						
1st.	†	16-5712	16-5714	455				8DS-4	ST-736		8E10		Vol	6GR-352	M-64-Z			A	D13-130		41	G1					DX-356, (Ch. DX), Below 3,842, 250	
2nd.	8AT-55A	16-5712	16-5714	455				8DS-4	ST-736		8E10		Vol	6GR-352	M-64-Z			A	D13-130		41	G1					DX-356, (Ch. DX), Above 3,842, 250	
1st.	†	16-5712	16-5714	455				7VS-6	ST-194		5E45		Vol	7BR-363C	M-60-Z			A	D13-133		41	G1					DY-337, 349, 351, DY1-337, 349, 351, (Ch. DY&DY1)	
2nd.	†	16-6658	16-6660	455																						DZ-371 (Ch. DZ)		
1st.	†	16-5712	16-5714	455	†	L-						2	F2	Vol	6SR-362	M-60-Z				D13-1		41						
2nd.																												
1st.	†	16-6658	15-6660	455						F1		F1	Vol	3HR-240E	M-6-Z			A2	D13-133		42	G1					EA-312, 338, 339, 357, 385, 389, (Ch. EA)	
2nd.																										EA1-341 (Ch. EA1)		
1st.	†	16-6658	16-6660	455				8AS-500	ST-105		5A1		Vol	3HR-240F	M-60-Z			2	D13-133		4	G1					EB-344, 359, (Ch. EB)	
2nd.										1		1	Vol	3HR-240F	M-60-Z				D-3-133		4	G1					EC-296, 301, 314, 315, 327, 336, 347, 353, 366, 376, EC1- 296, 301, 314, 315, 327, 336, 347, 353, 366, (Ch. EC&EC1)	
1st.	8CT-56B	16-6658	16-6660	455				7BS-40	ST-194		5E45		Vol	7BR-363	M-60-Z				D-3-133		41	G1					ED354 (Ch. ED), Below 3,816, 700	
2nd.	†	16-6658	16-6660	455				7VS-5	ST-194		A1														ED354 (Ch. ED), Above 3,816, 700			
1st.	7OT-54B	16-6658	16-6660	455				8DS-4	ST-736		8E10		Vol	6GR-352	M-6-Z			A	D13-130		4	G1					EE-340, 390 (Ch. EE)	
2nd.	8AT-55A	16-6658	16-6660	455				8DS-6	ST-736		810		Vol	6GR-352	M-64-Z				I-3-130		41	G1					EF363, (Ch. EF)	
1st.	7OT-54B	16-6658	16-6660	455						F1		F1	Vol	3HR-240	M-60-Z			A	D-3-133		4	G1					EG355, (Ch. EG)	
2nd.	7OT-54B	16-6658	16-6660	455				7ST-18			7		Vol	3HR-240E	M-60-Z			A	D-3-133		41	G1						
1st.	7OT-48BE	16-6658	16-6660	455							1		Vol	8GR-391	M-6-Z			A	D13-133		41	G1						
2nd.	7OT-54	16-6658	16-6660	455																								
1st.	†	16-6658	16-6660	455				8HS-0					Vol	8GR-391	M-6-Z			A	D13-133		41	G1					EH-342, EH1-342, (Ch. EH & EH1)	
2nd.								8JS-22	ST-108		6A1		Vol	7BR-363	M-60-Z			A	D13-133		41	G1					EJ-378 (Ch. EJ)	
1st.		16-6658	16-6660	455						F		2	Vol	7BR-363	M-60-Z				D13-133		41	G1					EK-377, 403, EK2-377 (Ch. EK & EK2)	
2nd.		16-6658	16-6660	455									Tone	8KR-417	M-58-S				11-133		41	G1					EL360, 361, 362, 373, (Ch. EL)	
1st.	†	16-6658	16-6660	455									Vol	6VR-364	M-60-Z			A	D13-133		41	G1					EM2, EM3)	
2nd.													F2	Vol	7BR-363	M-60-Z			A	D13-133		41	G1					EP-367, 375, 381, 405, 406, (Ch. EP)
1st.	†	16-6658	16-6660	455									F2	Vol	8QR-420	M-58-S				11-133		41	G1					EQ-368, 41, (Ch. EQ)
2nd.													F2	Vol	8RR-410	M-58-S				11-133		41	G1					ER-369, 370, (Ch. ER)
1st.	†	16-6658	16-6660	455									F2	Vol	8RR-410	M-58-S				11-133		41	G1					ES-374, 397, (Ch. ES) Below 3,923, 600
2nd.													F2	Vol	6SR-362	M-64-Z				11-133		41	G1					ES-374, 397, (Ch. ES) Above 3,923, 600
1st.	†	16-6658	16-6660	455									F2	Vol	6SR-362	M-64-Z				11-133		41	G1					ET-383, (Ch. ET)
2nd.													F2	Vol	6WR-431	M-60-Z				11-133		41	G1					EV-384 (Ch. EV)
1st.	†	16-6658	16-6660	455									F2	Vol	6SR-362	M-64-Z				11-133		41	G1					EW-391, (Ch. EW)
2nd.													F2	Vol	6SR-362	M-64-Z				11-133		41	G1					EX-386, (Ch. EX)
1st.	†	16-6658	16-6660	455									F2	Vol	6SR-362	M-60-Z				11-133		41	G1					FA-374, 408, (Ch. FA)
2nd.													F2	Vol	6SR-362	M-60-Z				11-133		41	G1					FB2-374, (Ch. FB2)
1st.	†	16-6658	16-6660	455									F2	Vol	7BS-40	ST-194			5E45								FC-400 (Ch. FC)	
2nd.													F1	Vol	7BR-363D	M-60-Z			A	D13-133		41	G1					

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	No.	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	No.	Thordarson	Note	Merit	Note	Eveready Part No.	No.	Burgess Part No.	No.	
					Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"		
EMERSON—Continued																								
FD-395, (Ch. FD)	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G.	3DC-522	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	8DT-554	P-6010	T22R01	P-2950								
FE409, (Ch. FE)	6	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G.	8QC-509	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	8QT-584	P-6011	T22R02	P-2951								
FF411, (Ch. FF)	4	1R5, 1T4, 1S5, 1S4	7UC-476	PRS150-12		BRD215		M-10-150		UT-121		Out	On Spkr	A-3329	T22S47	A-2998		950 467			2R	XX45		
FG330, (Ch. FG)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	20-20 Mid	PRS150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
FH413, 440, (Ch. FH)	6	6SD7GT, 6J5GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT	6JC-426R	PRS150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
FJ412 (Ch. FJ)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	8JC-513	PRS150-40-20		EZ42215		DSB403020-150		TA-240		Out	On Spkr	A-3865	T22S45	A-2928								
FL414 to 419, (Ch. FL)	6	7B7, 12SA7, 12SQ7, 50L6, 35Z5, (47)	6JC-426P	PRS150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
FO420, (Ch. FO)	5	12SA7GT, 12SK7, 12SQ7GT, 50L6GT, 35Z5GT, (47)	8JC-513A	PRS150-40-20		EZ42215		DSB403020-150		TA-240		Out	On Spkr	A-3865	T22S45	A-2928								
FP421, 422, (Ch. FP)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	6JC-426Q	PRS150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
FR432, (Ch. FR)	4	1R5, 1T4, 1S5, 1S4	9RC-536	PRS150-12		BRJ215		M-10-150		UT-121		Out	On Spkr	A-3329	T22S47	A-2998		950 467			2R	XX45		
Chassis FS																								
FU424, 427, 428, (Ch. FU)	6	1N557, 1A7GT, 1H5GT, 3Q5GT, 117P7	6JC-426T	PRS150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
FV426, 433, (Ch. FV)	5	1A7GT, 1SA7GT, 1SB6GT, 3B5GT, 117Z4GT	7FC-451	PRS25-50	PRSA150-40-40	BRD4415	M-50-25	TA-50		TA-440		Out	On Spkr	A-3865	T22S47	A-2900								
FW423, (Ch. FW)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	9VC-560	PRSA150-20-20		BRD2215		M-50-50		TA-550		Out	On Spkr	A-3865	T22S45	A-2928								
FY434, FY434, (Ch. FY, FY2)	3	12SQ7, 50L6, 35Z5	8JC-513B	PRS150-40-20		EZ42215		DSB403020-150		TA-240		Out	On Spkr	A-3865	T22S45	A-2928								
FZ452, (Ch. FZ)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, (47)	6JC-426E	PRS150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
GA439, (Ch. GA)	6	6SG7, ESA7, 6SK7, 6SQ7, 25L6, 25Z6	4XC-394A	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
GA441, (Ch. GA)	6	6SG7, 6SA7, 6SK7, 6SQ7, 25L6, 25Z6, (47)	4XC-394A	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
GA1-439, (Ch. GA1)	6	6SG7, 6SA7, 6SK7, 6SQ7, 25L6, 25Z6, (47)	4XC-394A	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
GA1-441, (Ch. GA1)	6	6SG7, 6SA7, 6SK7, 6SQ7, 25L6, 25Z6, (47)	4XC-394A	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
GB439, 441, (Ch. GB)	6	6SS7, 6SA7, 6SQ7, 50L6, 35Z5	6JC-426Q	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
GC448, (Ch. GC)	5	1R5, 1T4, 1S5, 1S4, 11724	6QC-437D	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr	A-3329	T22S47	A-2998		950 467			2R	XX45		
GF462, (Ch. GF)	7	6SG7, 6SA7, 7E7, 6SJ7, 6K6, 6U5, 5Y3	9VC-560	PRSS50-50	EZ5116	BR2045	M-50-50	TA-550	TA-1616	UT-203	Pwr Out	On Spkr	P-6011	T22R02	P-2951									
GH437, 447, GH2-447, (Ch. GH, GH2)	7	12SA7, 12SK7, 12SF7, 12SQ7, 50L6, 35Z5	10NC-580	PRSA150-20-20		BRD4215		M-2X40-150		TA-220		Out	On Spkr	A-3878	T22S47	A-2931								
GI449, (Ch. GI)	2	12SA7, 3575	6YC-450	PRS150-40		BR4015		M-40-150		UT-401		Out	On Spkr	A-3865	T22S45	A-2928								
GI450, GK2-450, (Ch. GK, GK2)	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5GT, (47)	6QC-437E	PRSA150-20-20		BRD4215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
GL457, (Ch. GL)	3	6SQ7, 25L6, 25Z6	8JC-513D	6QC-437E	PRSA150-40-20	BRD4215	M-2X40-150	TA-240			Out	On Spkr	A-3865	T22S45	A-2928									
GU446, (Ch. GU)	8	6J5, 6SK7, 6SQ7, 25L6, 6U5, 25Z6	6QC-437E	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr	A-3865	T22S45	A-2928								
Q157, (Ch. Q)	4	6DG6, 6CG6, 25L6, 25Z5, (46)	3QC-338	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr	A-3865	T22S45	A-2928								
R152, 153, 156, 158, (Ch. R) Late	5	6A7, 6D6, 6Q7G, 41, 80, (44)	3RC-318	PRSB450-8-8	EZ588	BRD2215		DH-2X8-450SS		TU-88		Out	On Spkr	P-6010	T22R01	P-2950								
R189, (Ch. R)	5	6A7, 6D6, 6Q7G, 41, 80, (44)	3RC-318	PRSB450-8-8	EZ588	BRD2215		DH-2X8-450SS		TU-88		Out	On Spkr	A-3878	T22S47	A-2931								
501, 502, 503, 504, (Ch. 12000)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	925000	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	On Spkr	A-3330	T22S47	A-2931								
505, (Ch. 120002)	6	1T4, 1R5, 1S5, 3Q4, 117N7GT	925050	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr	A-3865	T22S45	A-2928								
506, (Ch. 120003)	6	6SS7, 12SA7GT, 12SF7, 50L6GT, 35Z5GT, (51)	925080	PRSA150-40-40	A4	BRD4415		DSB-804020-150		TA-440		Out	On Spkr	A-3876	T22S47	A-3030								
507	5	12BA6, 12AT6, 12AT6, 50B5, 35W4, (47)	925100	PRSA150-40-20	A4	BRD4215		PRSA150-8		TA-420		Out	On Spkr	A-3876	T22S45	A-2928								
508, (Ch. 120008)	4	1R5, 1T4, 1S5, 3S4	925070	PRSA150-8		BRD3515		M-8-150		UT-81		Out	On Spkr	A-3329	T22S46	A-2927		950 467			2R	XX45		
509, (See Model 507)	5	12BE6, 12BA7, 12AT6, 50B5, 35W4, (47)	925000	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	On Spkr	A-3330										
510, 510A, (Ch. 12000, 120029)	5	12BE6, 12BA7, 12AT6, 50B5, 35W4, (47)	925000	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	On Spkr	A-3330										
511, (See Model 507)	6	6SS7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	925110	PRSA150-50-30		BRD3515		M-2X50-150		TA-530		Out	On Spkr	A-3330										
512, (Ch. 120006)	6	7B7, 14Q1, 14B6, 50A5, 35Y4, 35W4, (47)	925011	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out	On Spkr	A-3330										
512, (Ch. 120006)	6	7B7, 14Q1, 14B6, 50A5, 35Y4, 35W4, (47)	925011	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out	On Spkr	A-3330										
514, (Ch. 120007)	6	12SG7, 4GS7, 12SQ7GT, 50L6GT, 35Z5GT, (47)	925012	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out	On Spkr	A-3330										
515, 516	6	6SS7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	925110	PRSA150-50-30		BRD3515		M-2X50-150		TA-530		Out	On Spkr	A-3330										

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS				MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quan Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radart Part No.	Note	Photofac Set No.	
1st.	7QT-548D.	16-5712		455	820008	M-22				F2		F2	Vol	6GR-352	M-64-Z	A.		D13-130			G1				Continued	EMERSON FD-396 (Ch. FD)	
2nd.	8ST-582B									F2		F2	Vol	8QR-420	T-	A.		D19-133X			G1					FE-409 (Ch. FE)	
1st.	7QY-548E	16-5712		455		L-27				F2		F2	Vol	7UR-380	V-			13-139		'2	G1					FF-411 (Ch. FF)	
2nd.	7BY-550									F2		F2	Vol		V-60-Z	A.		D13-133			G1					FG-330 (Ch. FG)	
1st.	7UT-540	16-6668		455						F2		F2	Vol		M-60-Z	A.-3		13-133		E	41					FH-413, 440, (Ch. FH)	
2nd.	7UT-541	16-6669								F2		F2	Vol		9HR-442	AM-60-Z	KSS-3	D13-133		E	41					FJ-412 (Ch. FJ)	
1st.		16-6658		455						F2		F2	Vol		9JR-445	AT-120	KSS-3	D13-139X		E	41					FL-414 to 419 (Ch. FL)	
2nd.	8CT-567-A	16-6658		45						F2		F2	Vol		9LH-446	AM-60-Z	KSS-3	A.	D13-133	E	41					FO-420 (Ch. FO)	
1st.	9HT-61	16-6660								F2		F2	Vol		9OR-447	AM-60-Z			13-139X		41	G1					FP421, 422, (Ch. FP)
2nd.	8PT-586A	16-6658		455						F2		F2	Vol		9RR-449				13-133	E						FR432 (Ch. FR)	
1st.	8PT-587	16-6660								F2		F2	Vol		9SR-452				D13-133	E	41					Chassis FS	
2nd.	9LT-618	16-6660								F2		F2	Vol		9UR-451	AM-60-Z	KSS-3	A2	D13-133	E	42					FU-424, 427, 428, (Ch. FU)	
1st.	7QT-548	16-6658		455		L				F2		F2	Vol		9VR-453	AM-66-Z	KSS-3	A2	D13-139	E	4					FV-426, 433, (Ch. FV)	
2nd.	8ST-588C	16-6658								F2		F2	Vol		9SR-452				D13-133	E	4					FW-423 (Ch. FW)	
1st.	8PT-587	16-6658		45:						F2		F2	Vol		9YR-45	V-67-Z			13-140		41	.1				FY-434, FY2-434, (Ch. FY & FY2)	
2nd.	9UT-62	16-6660		262						F2		F2	Vol		9ZR-476	M-60-Z	KSS-3		13-133		41					FZ-452 (Ch. FZ)	
1st.	9VT-668	16-6658		455						F2		F2	Vol		9PR-447A	AM-60-Z	KSS-3		D13-133	E						GA-439 (Ch. GA)	
2nd.	9VT-632	16-6660								F2		F2	Vol		9PR-447	AM-60-Z	KSS-3		13-133	E						GA-441 (Ch. GA)	
1st.	8PT-586A	16-6658		455						F2		F2	Vol		9PR-447	AM-60-Z	KSS-3		13-133	E						GA1-439 (Ch. GA1)	
2nd.	8PT-587	16-6660								F2		F2	Vol		9PR-447	M-60-Z	KSS-3		13-133	E						GA1-441 (Ch. GA1)	
1st.		16-6658								F2		F2	Vol		9PR-447	M-60-Z	KSS-3		D13-133	E						GB-439, 441, (Ch. GB)	
2nd.		16-6660								F2		F2	Vol		9PR-447	M-60-Z	KSS-3		13-133	E						GC-448 (Ch. GC)	
1st.	8CT-465D	16-6658		45:						F2		F2	Vol		9ZR-476	M-60-Z	KSS-3		13-133		41					GF-462 (Ch. GF)	
2nd.	9HT-638B	16-6660								F2		F2	Vol		9PR-447A	AM-60-Z	KSS-3		D13-133	E						GH-437, 447, GH2- 447, (Ch. GH & GH2)	
1st.	8CT-566D	16-6658		455						F2		F2	Vol		9PR-447	AM-60-Z	KSS-3		13-133	E						GJ-449 (Ch. GJ)	
2nd.	9HT-638B	16-6660								F2		F2	Vol		9PR-447	AM-60-Z	KSS-3		13-133	E						GIK-450, GK2-450, (GI & GK2)	
1st.	8CT-566E	16-6658		455						F2		F2	Vol		9PR-447	M-60-Z	KSS-3		D13-133	E						GL-457, (Ch. GL)	
2nd.	9HT-638B	16-6660								F2		F2	Vol		9PR-447	M-60-Z	KSS-3		13-133	E						GU-446 (Ch. GU)	
1st.	9RT-6	16-6660		45:						F2		F2	Vol		9RHS-592	ST-190											
2nd.	8LT-571	16-5714		45:						F2		F2	Vol		9RHS-592	ST-190											
1st.	9RT-6	16-6660								F2		F2	Vol		9RHS-592	ST-190											
2nd.	8LT-571	16-5714								F2		F2	Vol		9RHS-592	ST-190											
1st.	10PT-1									F2		F2	Vol		10NR-471	AT-120	KSS-3	A.	D13-139X	E	'1						GH-437, 447, GH2- 447, (Ch. GH & GH2)
2nd.	10PT-1									F2		F2	Vol		10NR-472	AT-120	KSS-3	A.	D13-133	E	41	G1					GJ-449 (Ch. GJ)
1st.	10PT-1	16-6658		455						F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-140		41	G1					GIK-450, GK2-450, (GI & GK2)
2nd.	10PT-1	16-6658								F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					GL-457, (Ch. GL)
1st.	10PT-1	16-6658								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					GU-446 (Ch. GU)
1st.	3RT-320A									F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	3RT-321A	16-5712								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	3RT-320A	16-5712		*56						F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	3RT-321A	16-5714								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720000	16-6666		5						F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720100	16-6667								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720200	16-6658		455						F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720300	16-6670								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720100	16-6666		455						F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720200	16-6667								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720300	16-6668		455						F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720400	16-6669								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720300	16-6666		455						F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720400	16-6667								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720300	16-6668								F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720400	16-6669								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720300	16-6666		455						F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720400	16-6667								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720300	16-6668								F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720400	16-6669								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720300	16-6666		455						F2		F2	Vol		10NR-472	M-67-Z	AM-60-Z		13-133	E	41	G1					
2nd.	720400	16-6667								F2		F2	Vol		10NR-471	M-67-Z	AM-60-Z		13-133	E	41	G1					
1st.	720300	16-6668			</td																						

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
	No. Types	Sylvania or Equivalent Dial Light Type Listed In Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note			
EMERSON—Continued																										
515, 516. (Ch. 120056) See Model 512. Ch. 120056)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT/G, (47)	925000 16 Mfd	PRSA150-50-30 PRS150-16		BRD3515 BR1615		M-5030-150 M-16-150		TA-530 UT-161		Out	734000	A-3330						A-3031						
518, (See Model 507)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	925000	PRSA150-50-30		BR1615		M-16-150		UT-161		Out	734000	A-3330						A-3031						
519, (Ch. 120030)	5	12AT6, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	925000	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330						A-3031						
520, (Ch. 120009, 120029) (See Models 501, 502)	3	12AT6, 50B5, 35W4, or Octal Equiv., (47)	30-50 Mfd	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330						A-3031						
521, (Ch. 120013, 120031)	3	12AT6, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	30-50 Mfd	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330						A-3031						
522, (See Model 507)	7	1T4, 1R5, 1S5, 3Q4, 50B5, 35W4	925210	AF88D PRS25-100		UP4215 BRH251		DY-304		EL-351		Chk Out	737010 734040	C-1215	T20C52 T22S47	C-2981 A-3030				746 482	63	BB30				
523	10	6SG7, 6SA7, 6J5, 6H6, 6SL7GT, 6V6GT, 5U4G, 6U5/6G5, (44)	925220 925010 925030	AF8J UP4045 PRSA25-16		UP4045 UP4045 BR1635		DY-40-450 DY-40-450 M-20-350		EL-4 EL-4 UT-163		Chk Chk Pwr Out	737030 737030 734160 734100	C-1002 P-6313 A-3824 A-3330	T20C52 T22R05 T22S56	C-2990 P-2953 A-2936 A-3031										
524	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	925110	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330												
525	8	6AG5, 6BE6, 26BA6, 6AU6, 6AL5, 6V6GT, 5Y3GT, (44)	925268 925190 925005	PRSA450-8 PRSA150-4		UP43145C BR245 BR550		M-8-450 M-4-150		UT-8 TA-55		Chk Pwr Out	737068 730002 734202	C-1001 P-6313 A-3849	T22R05 T22S58	C-2993 P-2953 A-2902										
526, 529-9, (Ch. 12002B), 521, 532, 533	5	6S07, 6SL7GT, 25L6GT/G, 1T4, 1R5, 1S5, 3Q4	925260 925100 16 Mfd	PRSA150-50-30 PRSA150-8 PRSA150-16		BRD3515 BR815 BR1615		M-5030-150 M-8-150 M16-150		TA-530 UT-81 UT-161		Chk Chk Out	737080 734180 734203	C-1708 A-3870 A-3329	T20C52 T22S58 T22S47	C-2975 A-2905 A-2927						758	17GD60			
534, (Ch. 120007)	6	12SG7, 26SS7, 12SQ7GT, 50L6GT, 35Z5GT, (47)	925012	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out	734100	A-3330						A-3031						
535	5	12BE6, 12BA6, 12AT6, 50B5, 35W4, (47)	925000	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330						A-3031						
536, (Ch. 120036)	7	1T4, 1R5, 1S5, 3Q4, 50B5, 35W4	925004					DY-304		EL-351		Chk Out Out	737001 734002 734008	C-1707 P-6313 A-3329	T20C52 T22S58	C-2975 A-3030 A-2927						746 482	63	BB30		
536A	6	1T4, 1R5, 1S5, 3Q4, 11TZ3	925029																							
537, (Ch. 120043)	11	6AG5, 6BE6, 26BA6, 6AU6, 6AL5, 6V6GT, 5U4G, 6U5/6G5, (44)	925006 925190 925005	AF88J PRSA50-8 PRSA150-4		UP4445 BR845 BR550		DY-2X40-450 M-8-450		EL-240 UT-8		Chk Pwr Out	737067 730002 734005	P-6313 A-3850 A-3330	T22R05 T22S58	P-2954 A-2900 A-3031										
539	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, or Miniature Equiv., (47)	30-50 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330												
540A, (Ch. 120042)	5	12BE6, 12BA6, 12AT6, 50B5, 35W4, (47)	925008	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734006	A-3330						A-3031						
541, (Ch. 120010)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT/G, (47)	925000 16 Mfd	PRSA150-50-30 PRSA150-16		BRD3515 BR1615		M-5030-150 M-16-150		TA-530 UT-161		Out	734000	A-3330						A-3031						
542, (SEE Model 521)	5	12BE6, 12BA6, 12AT6, 50B5, 35W4, (47)	925009	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330						A-3031						
543, 544, (Ch. 120046)	5	12BE6, 12BA6, 12AT6, 50B5, 35W4, (47)	925009	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330						A-3031						
545, (Ch. 120049)	5	12BE6, 12BA6, 12AT6, 50B5, 35W4, (47)	925011	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out	734080	A-3330						A-3031						
547A, (Ch. 120050)	5	12BE6, 12BA6, 12AT6, 50B5, 35W4, (47)	925061	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734009	A-3376	T22S45	A-2928										
548, (Ch. 120051)	3	12AT6, 50B5, 35W4	925009	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330						A-3031						
549, (Ch. 120051)	3	12AT6, 50B5, 35W4	925009	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	734000	A-3330						A-3031						
550, (See Model 512, Ch. 120006)																										
550, (See Model 512, Ch. 120056)																										
551A, (See Model 536A)																										
552, (See Model 525)																										
553A, (See Model 536A)																										
560, (Ch. 120016)	4	1R5, 1T4, 1S5, 3S4	925066	PRS150-16		BR1615		M-16-150		UT-161		Out	734014	A-3879	T22S47	A-2932						746 467	63	XX45		
1002, 1003	6	12SA7GT, 26SS7, 12SQ7GT, 50L6GT, 35Z5GT, (47)	925011 925180	PRSA150-50-50 PRS25-10		BRD5515 BR102A		M-2X50-150 M-10-25		TA-505 TA-10		Out	734001 & 734080	A-3330	T20A04	A-3031										
EMPRESS	5	12BE6, 12BA6, 12AT6, 50A5, 35W4, (47)	40-40 Mfd	AF88D		UP4415		DY-2X40-150		EL-25		Out	75-04	A-3876	B3	T-22S45	B3	A-2928								

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photocell Part No.			
1st.	720000.	16-6666.		455				180000.	ST-107.		5A15.		Vol	390000.	AM-60-Z.	KSS-3.	A		D13-133.	E	41					26...	EMERSON		
2nd.	720100.	16-6667.						180000.	ST-107.		5A15.		Vol	390010.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						517 (Ch. 120010)		
1st.	720000.	16-6666.		455				180000.	ST-107.		5A15.																8...		
2nd.	720100.	16-6667.						180000.	ST-107.		5A15.																30...		
1st.	720000.	16-6666.		455				180000.	ST-107.		5A15.																518 (See Model 502)		
2nd.	720100.	16-6667.						180000.	ST-107.		5A15.																519 (Ch. 120030)		
1st.	720000.	16-6666.		455				180011.	ST-110.		6A15.		Vol Tone	390000.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							2...	
2nd.	720100.	16-6667.			†			180006.	ST-107.		5A15.		Vol	390020.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42							7...	
1st.	720170.	16-6652.	D9	455				180016.	ST-110.		6A15.		Vol Tone	390070.	AT-78.	KSS-3.	A		D13-133X.	E	41							5...	
2nd.	720190.	16-6654.		455				180017.	ST-108.		6A11.		Vol Tone	390080.	AM-60-Z.	KSS-3.			D13-133.	E	41							17...	
1st.	720330.	16-6658.		455				180000.	ST-107.		5A15.		Vol	390010.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							21...	
2nd.	720340.	16-6670.						180017.	ST-108.		6A11.		Vol Tone	390378.	AT-109.	KSS-3.			D13-137X.	E								524	
1st.	720000.	16-6666.		455				180000.	ST-107.		5A15.		Vol	390379.	AT-109.	KSS-3.											20...		
2nd.	720100.	16-6667.						180001.	ST-108.		6A11.		Vol Tone	390379.														525	
1st.	720523.	16-6667.		455 &				180008.			46A1.		Vol	390005.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							18...	
2nd.	720524.	10.7						180008.			46A1.		Vol Tone	390180.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							529, 529-9 (Ch. 12002B)	
1st.	720530.	16-6666.						180008.			46A1.		Vol Tone	390280.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							11...	
2nd.	720531.	16-6670.						180008.			46A1.		Vol Tone	390190.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							531, 532, 533	
1st.	720400.	16-6666.		455				180000.	ST-107.		5A15.		Vol	390000.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							27...	
2nd.	720390.							180021.	ST-105.		5A11.		Vol	390003.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							534 (Ch. 120007)	
1st.	720000.	16-6666.		455				180021.	ST-105.		5A11.		Vol	390003.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							20...	
2nd.	720100.	16-6667.		262				180021.	ST-105.		5A11.		Vol	390003.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							21...	
1st.	720001.							180023.	ST-102.	F3	12A6.	F3	Vol Tone	390004.	AT-109.	KSS-3.	A		D13-137X.	E	41							536 (Ch. 120036)	
2nd.	720007.							180023.	ST-102.	F3	12A6.	F3	Vol Tone	390081.														24...	
1st.	720015.							180000.	ST-107.		5A15.		Vol	390010-134.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							23...	
2nd.	720016.							180000.	ST-107.		5A15.		Vol	390010-134.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							539	
3rd.	720014.							180018.			4A07.		Vol	390381.														9...	
1st.	720000.	16-6658.		455				180000.	ST-107.		5A15.		Vol	390000.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							20...	
2nd.	720100.	16-6660.						180018.			4A07.		Vol	390381.														540A (Ch. 120042)	
1st.	720527.							180000.	ST-107.		5A15.		Vol	390000.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							16...	
2nd.	720527.							180000.	ST-107.		5A15.		Vol	390000.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							541 (Ch. 120010)	
1st.	720100.	16-6667.						180000.	ST-107.		5A15.		Vol	390000.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							7...	
1st.	720000.	16-6666.		455				180000.	ST-107.		5A15.		Vol	390015.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							19...	
2nd.	720100.	16-6667.						180008.			46A1.		Vol	390190.	AM-60-Z.	KSS-3.	A		D13-133.	E	41							546 (Ch. 120049)	
1st.	720380.	16-6666.		455	820034.	L-70-S		180008.			46A1.		Vol	390028.	ST-113.	F13	4A1.		D13-133.	E	41							21...	
2nd.	720019.							180028.			46A1.		Vol	390032.	ST-113.	F13	4A1.		D13-133.	E	41							25...	
1st.	720021 (or).	16-6668.		455				180028.			46A1.		Vol	390024.														547A (Ch. 120050)	
1st.	720000A.	16-6666.						180032.			46A1.		Vol	390016.	AM-66-S.	KSS-3.													30...
2nd.	720021 (or).	16-6669.						180025.	ST-108.	6A1.																	548 (Ch. 120051)		
2nd.	720100A.	16-6667.						180011.	ST-110.	6A15.																		549 (Ch. 120051)	
								180008.		46A1.		Vol Tone	390370.																
1st.	720525.	16-6668.		455				180030.	ST-113.		4A1.		Vol	390026.															9...
2nd.	720525.	16-6669.						180038.			4A1.		Vol	390190.	AM-60-Z.	KSS-3.	A	G6	D13-133.	E	41	G6						26...	
1st.	720380.	16-6666.		455				180038.			4A1.		Vol	390180.	AM-60-Z.	KSS-3.	A	G6	D13-133.	E	41	G1						24...	
2nd.	720390.	16-6670.						180038.			4A1.		Vol	390014.														25...	
1st.								2012.	ST-107.		5A15.		Vol	5-196.	M-64-Z.		A		D13-130.			41	G1					7...	
2nd.																											EMPRESS 55, 56		

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
		No. TUBES	Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Eveready Part No.	Note	Burgess Part No.	Note
			Dial Light Type Listed In Parentheses	No. Part No.																	"A"	"B"	"A"	"B"
ESPEY, (Also See P RC20)	H1 HARMONIC) 2 50L6GT, 35Z6GT	80 Mfd.	#PRS150-40	BR815	M-40-150	UT-401	Out	A-3865	T22S45	A-2928														
RRI3, RRI3L	6 7B7, 14Q7, 14B6, 50A5, 35Y4, (47)	20 Mfd.	PRS150-20	BR2015	M-20-150	UT-201																		
WQXR	11 6K7, 6A8G, 6FS, 6H6, 25L6G, 25Z6G, 6U5, K42 & K49, Ballast	30-30-30 Mfd	PRS150-30-30	EZ4431C	M-25-25	TA-25	Out	A-3865	T22S45	A-2928														
030	3 6C5, 6V6G, 80	32-24 Mfd.	#PRS150-40	BR815	M-40-150	UT-401	Chk																	
040	4 1A7GT, 1N5GT, 1H5GT, 1Q5GT	12 Mfd.	PRS150-30	BRD3315	M-2X30-150	TA-330	Out	A-3865	T22S45	A-2928														
052	5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 70L7GT	10-10 Mfd.	PRS150-30-30	BRH251	M-100-25	UHC-102	Out																	
060	6 12SK7, 12ABGT, 12SQ7, 35L6GT, 35Z6GT	16 Mfd.	PRS25-10-10	BRD202A	M-2X10-25	TA-110	Chk																	
080	8 7B7, 7A8, 7C6, 7A4, 6V6G, 80	8 Mfd.	PRV450-8-16			LM-816	Out	A-3876	T22S45	A-2928														
0101	9 7B7, 7A8, 7C6, 7A4, 25L6G, 25Z6G, K23B Ballast	16 Mfd.	PRS25-10-10	BRD202A	M-2X10-25	TA-110	On Spkr.	P-6289	T22R00	P-2949														
0102	10 6SK7, 6SA7, 6H6, 26FS, 26L6, 83V, 6U5	16 Mfd.	PRS450-16	BR1615	M-16-150	UT-161	Chk	A-3876	T22R05	P-2953														
SB1	8 1LNS, 1LC6, 1LH4, 50A5, 35Y4, 3LH4/3Q5GT	80 Mfd.	PRS150-40-40	A4	M-2X40-150	TA-440	A4	A-3301	T22S60	A-2905														
621	2 50A5, 35Y4, (47)	1000 Mfd.	HCLV18-1000	BRD4415	M-2X40-150	TA-440	Out	A-3865	T22S45	A-2928														
641, 642	4 14B6, 33A5, 35Y4, (47)	A-25,020	PRS150-40-40	A25,019	M-2X40-150	TA-440	On Spkr.	A-3301	T22S60	A-2905														
651, 652, 653	5 14Q7, 14A7, 12B7, 14B6, 50A5, 35Y4, (47)	A25,019	PRS150-40-40	BRD4415	M-2X40-150	TA-440	Out	On Spkr.	A-3865	T22S45	A-2928													
851	5 6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT	16-16 Mfd	PRS150-20-20	BRD2215	M-2X20-150	TA-220	Out	A-3865	T22S45	A-2928														
861	5 6A8G, 6K7, 6Q7G, 25L6G, 25Z6G	16-16 Mfd	PRS150-20-20	BRD2215	M-2X20-150	TA-220	Out	A-3865	T22S45	A-2928														
942, 943	4 1A7G, 1N5G, 1H5G, 1Q5G	10-10 Mfd.	PRS25-10-10	BRD415	M-2X10-25	TA-110	Out	A-3822	T22S47	A-2932														
958	5 1A7G, 1N5G, 1H5G, 1Q5G, 25Z6G	60 Mfd.	PRS25-100	BRH251	M-100-25	UHC-102	Out	A-3822	T22S47	A-2932														
960 (AMP)	5 6C5, 25L6, 25Z6, BK-23-B Ballast	40-40 Mfd.	PRS150-40-40	BRD4415	M-2X40-150	TA-440	Out	On Spkr.	A-3301	T22S60	A-2905													
964	6 1A7, 1N5, 1H5, 1G4, 1G6, 25Z6	60 Mfd.	PRS25-10-10	BRD202A	M-2X10-25	TA-110	Chk																	
965	6 1A7, 1N5, 1H5, 1G4, 1G6, 25Z6	60 Mfd.	PRS150-30	BR3015	M-30-150	UT-301	In	A-4292	T20D75	A-2920														
1141	14 7H7/6SK7, 6K8, 6SJ7, 6SQ7, 7A6, 26SF7, 26V6GT, 80, 6U5	16 Mfd.	PRS450-16	BR1645	M-16-450	UT-16	Out	A-3831	T22S48	A-2938														
1150	15 7H7, 6K8, 6SJ7, 2A6, 2SF7, 26V6GT, 80, 6U5	16 Mfd.	PRS25-25	BR1645	M-25-25	TA-25	Chk		T22R06	P-2954														
1152	15 7H7, 6K8, 6SJ7, 7A6, 6H6, 26SF5, 26V6GT, 80, 6U5	25 Mfd.	PRS450-16	BR1645	M-16-450	UT-16	Pwr	A-3311	T22R06	P-2954														
1190	19 14H7, 12K8, 12SJ7, 2A6, 12SF5, 26SJ7, 25L6GT, 25Z6GT, 6AB5	60 Mfd.	PRS150-16	BR1615	M-16-150	UT-161	Out	P-6014	T22R06	P-2954														
2111	II 6SK7, 6SA7, 6SJ7, 7A6, 6SQ7, 6V6, 30, 6U5	16-16-16 Mfd	PRS150-30	BR3015	M-30-150	UT-301	Out	A-3306	T22S72	A-2938														
2113	II 7H7, 6SA7, 6SQ7, 6SJ7, 6H6, 6J5, 6V6, 5Y3, 6U5	16 Mfd.	PRS450-16	BR1645	M-16-450	UT-16	Pwr	A-3877	T22R04	P-2952														
2143	14 7H7, 6SA7, 6SQ7, 6SJ7, 6H6, 6J5, 26V6, 80, 6U5	16 Mfd.	PRS450-16	BR1645	M-16-450	UT-16	Out	P-6012	T22R04	P-2952														
2143 (Late), 2144	14 7H7, 6SA7, 6SQ7, 6SJ7, 6H6, 6J5, 26V6, 80, 6U5	25 Mfd.	PRS450-16	BR1645	M-16-450	UT-16	Chk	P-6014	T22R06	P-2954														
2143	14 7H7, 6SA7, 6SQ7, 6SJ7, 6H6, 6J5, 26V6, 80, 6U5	10 Mfd.	PRS25-25	BR252A	M-25-25	TA-25	Out	A-3311	T22S64	A-2936														
2162	16 7H7, 6SA7, 6SQ7, 6SJ7, 6H6, 6C8, 26J5, 26V6, 80, 6U5	16 Mfd.	PRS450-16	BR1645	M-16-450	UT-16	Chk	P-6014	T22R06	P-2954														
		25 Mfd.	PRS25-25	BR252A	M-25-25	TA-25	Pwr	A-3311	T22S64	A-2936														
		10 Mfd.	PRS25-10	BR102A	M-10-25	TA-10	Out																	

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit. Part No.	Note	Eveready Part No., "A"	No. Note	Burgess Part No., "A"	No. Note			
ESPEY—Continued 2221.....	22	14H7, 1407, 14AB6, 14C7, 27A6, 14F7, 14A4, *6SJ7, *25L6, *2526, 6N5.....	60 Mfd. 30 Mfd. 10 Mfd.	PRS150-30 PRS25-10.....		BR3015 BR102A.....		M-30-150 M-10-25.....		UT-301 TA-10.....		Chk Out.....†	16-002.....†	G-1706 A-3306.....		T20C52 T22S72.....		C-2975.....								
6511, 6511-2, 6511-S, 6514, 6516, 6517, 6520, 6520-2, 6521, 6533, (Ch. FJ97). (See Model 551).																										
6540, 6541.....	5	14Q7, 14A7, 14B6, 50A5, 35Y4, (47).....	A25.019.....	PRSA150-40-40.....		BRD4415.....		M-2X40-150.....		TA-440.....		Out.....	On Spkr.....	A-3865.....		T22S45.....		A-2928.....								
6542.....	5	14Q7, 14A7/12B7, 14B6, 90A5, 35Y4 (47).....	A-25.019.....	PRSA150-40-40.....		BRD4415.....		M-2X40-150.....		TA-440.....		Out.....	On Spkr.....	A-3876.....		T22S45.....		A-2928.....								
6545, (Ch. FJ-97).....	5	14Q7, 14A7, 14B6, 50A5, 35Y4.....	A-25.019.....	PRSA150-40-40.....		BRD4415.....		M-2X40-150.....		TA-440.....		Out.....	On Spkr.....	A-3865.....		T22S45.....		A-2928.....								
6546, (See Model 651).....																										
6547 (See Model 6540, 6541).....																										
6560, (See Model 651).....																										
6611, 12, 13, 14, 15, 30, 31, 32, 34, 35, (Ch. 97A).....	6	14Q7, 14A7, 14B6, *35A5, 35Y4.....	A25.020.....	PRSA150-40-40 & PRS25-25.....		BRD4415 & BR202A.....		DSB-305.....		TA-440 & TA-25.....		Chk Out.....†	TA15.018.....	A-53-C A-3855.....	B7 B6	T20A16 T22S47.....	B8 B6	A-2914 A-2900.....	B7 B6							
7541, (See Model 651).....																										
9161.....	16	*6K7, 6L7, 6H6, *6C5, 6F5, 42L6, *2526, 6U5.....	56-16 Mfd. 80 Mfd. 10 Mfd.	PRSA150-50-30 PRS25-10.....		BRD3515 BR102A.....		M-5030-150 M-10-25.....		TA-530 TA-10.....		Chk Out.....†		C-1706 A-3306.....		T20C52 T22S72.....		C-2975.....								
ESQUIRE 60-10, 65-4.....	5	12SA7GT, 12SK7, 12SQ7, 50L6GT, 35Z5GT.....	SCE-003.....	PRSA150-40-40.....		BRD4415.....		M-2X40-150.....		TA-440.....		Out.....†		A-3876.....	B3	T22S45.....	B3	A-2928.....	B3							
FADA A65PC, A66T.....	6	6A8G, 6K7G, 76, 6F5G, 6VGG, 80,...	20.107.....			EZ5116.....				TU-1616.....		Pwr Out.....	40.73.....†	P-6120 A-3830.....		T22R04 T22S58.....		P-2952 A-2930.....								
A76T, A76PC.....	6	6A8G, 6K7G, 6Q7G, 25L6G, *25I5, 115.68 Ballast.....	20.109.....	PRS25-25.....		BR252A.....		M-25-25.....		TA-25.....		Chk Out.....†	40.3.....†	C-1080.....		T20C52 T22S45.....		C-2977 A-2928.....								
AP104, AP105.....	3	12Q76T, 50L6GT, 50Z7GT.....	20.106C.....	PRSA150-30-30.....		BRD3315.....		M-2X30-150.....		TA-330.....		Out.....†		A-3865.....		T22S45.....		A-2928.....								
B49.....	4	1A7G, 1N5G, 1H5G, 1C5G.....	20.89.....	PRS25-25.....		BR252A.....		M-25-25.....		TA-25.....		Out.....†		A-3878.....		T22S47.....		A-2931.....		742 482.....	4F.....	2B30.....				
B49SW.....	4	1A7G, 1N5G, 1H5G, 1Q5G.....	20.85.....	PRS150-12.....		BR1215.....		M-10-150.....		UT-121.....		Out.....†		A-3822.....		T22S47.....		A-2932.....		742 482.....	4F.....	2B30.....				
C34.....	5	1R5, 1T4, 1S5, 3S4, 35Z5GT.....	20.137.....	PRSA150-30-30.....		BRD3315.....		M-2X30-150.....		TA-330.....		Out.....†		A-3329.....		T22S47.....		A-2927.....		742 482.....	4F.....	2B30.....				
C49.....	4	1A7G, 1N5G, 1H5G, 1C5G.....	20.89.....	PRS25-25.....		BR252A.....		M-25-25.....		TA-25.....		Out.....†		A-3878.....		T22S47.....		A-2931.....		742 482.....	4F.....	2B30.....				
D174.....	7	6SA7GT, 6SK7GT, *6SQ7GT, 20.125.....																								
D175.....	8	6SA7GT, 6SK7GT, *6SQ7GT, 20.125.....																								
F25.....	5	12A8GT, 12K7GT, 12Q7GT, 20.103B.....		PRSA150-40-20.....		BRD4215.....		M-2X40-150.....		TA-240.....		Chk Out.....†		P-60.67 (or) 40.84.....†		T22R02.....		P-2951.....								
F44, F45.....	4	12K7GT, 12J7GT, 50L6GT, 20.106.....		PRSA150-40-20.....		BRD4215.....		M-2X40-150.....		TA-240.....		Out.....†		A-3865.....		T22S45.....		A-2928.....								
F55.....	5	12A8GT, 12K7GT, 12Q7GT, 20.103.....		PRSA150-20-20.....		BRD2215.....		M-2X20-150.....		TA-220.....		Out.....†		A-3876.....		T22S45.....		A-2928.....								
FSS (Late).....	5	12A8GT, 12K7GT, 12Q7GT, 20.103A.....		PRSA150-30-30.....		BRD3315.....		M-2X30-150.....		TA-330.....		Out.....†		A-3865.....		T22S45.....		A-2928.....								
FM16.....	16	6SG7, 6AB7, 6SA7, 6J5, *6SJ7, 6H6, 6Q7, *6SQ7, *6K6GT, 52Z, 6U5.....	20.144.....	PRS450-30 PRS25-25.....		BR3045..... BR252A.....		M-30-450 M-25-25.....		UT-30 TA-25.....		Pwr Out.....†	40.94.....†	P-6014 A-2312.....		T22R06 T22S74.....		P-2954 A-2901.....								
L26.....	5	12SA7GT, 12K7GT, 12SQ7GT, 20.103B.....		PRSA150-40-20.....		BRD4215.....		M-2X40-150.....		TA-240.....		Out.....†		A-3865.....		T22S45.....		A-2928.....								
L67C.....	5	6SA7GT, 6K7GT, 6Q7GT, 25L6G, 25Z5, 115.41 Ballast.....	20.82.....	PRSA150-30-30.....		EZ3215C.....		DSB-302.....		TA-330.....		Chk Out.....†	40.75.....†	C-1325 A-3865.....		T20C52 T22S45.....		C-2981 A-2928.....								
L67T.....	5	6SA7GT, 6K7GT, 6Q7GT, 25L6G, 25Z5, 115.41 Ballast.....	20.82.....	PRSA150-30-30.....		EZ3215C.....		DSB-302.....		TA-330.....		Chk Out.....†	40.75.....†	C-1325 A-3865.....		T20C52 T22S45.....		C-2981 A-2928.....								
L96.....	5	6SA7GT, 6D6, 6Q7G, 25L6G, 25Z5, 115.65 Ballast.....	20.103A.....	PRSA150-30-30.....		BRD3315.....		M-2X30-150.....		TA-330.....		Chk Out.....†	40.75.....†	C-1325 A-3865.....		T20C52 T22S45.....		C-2981 A-2928.....								
L96A.....	5	12SA7GT, 12K7GT, 12SQ7GT, 20.108.....		PRSA150-30-30.....		EZ3215C.....		DSB-302.....		TA-330.....		Chk Out.....†	40.75.....†	C-1325 A-3865.....		T20C52 T22S45.....		C-2981 A-2928.....								
LA60.....	5	12SA7GT, 12K7GT, 12SQ7GT, 20.108A.....		PRSA150-30-30.....		EZ3215C.....		DSB-302.....		TA-330.....		Chk Out.....†	40.75.....†	C-1325 A-3865.....		T20C52 T22S45.....		C-2981 A-2928.....								
LW36.....	5	12SA7GT, 12K7GT, 12SQ7GT, 20.108C.....		PRSA150-30-30.....		EZ3215C.....		DSB-302.....		TA-330.....		Chk Out.....†	40.75.....†	C-1325 A-3865.....		T20C52 T22S45.....		C-2981 A-2928.....								
P22.....	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT.....	20.117A.....	PRSA150-30-30.....		BRD3315.....		M-2X30-150.....		TA-330.....		Out.....†		A-3881.....		T22S48.....		A-2934.....		747 482.....	2F4L.....	2M30.....				
P23.....	6	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 35Z5.....	20.103B.....	PRSA150-40-20.....		BRD4215.....		M-2X40-150.....		TA-240.....		Out.....†		A-3856.....		T22S47.....		A-2900.....		745 482.....	8FL.....	2M30.....				
P24.....	7	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 35Z5GT, 50L6GT, 35Z5GT.....	20.118.....	PRSA150-30-30.....		BRD3315.....		M-2X30-150.....		TA-330.....		Chk Out.....†	40.75A.....†	C-1325.....		T20C52.....		C-2981 A-3030.....		741 482.....	6F.....	2B30.....				

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft Note	Switch	Note	IRC Part No.	Shaft Note	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofac Set No.	
1st.	†							†			F2		F2	Vol Bass Treble Vol	9030. 9016. 9039. A-9.066.	M-60-Z. M-66-Z. M-60-Z. M-60-Z.	A.		D13-133. D13-139. D13-133. D13-133.	41	G1			Continued—	ESPEY 222I		
2nd.	†																								9.		
3rd.	†																								6511, 6511-2, 6511- S, 6514, 6516, 6517, 6520, 6520- 2, 6521, 6533, (Ch. FJ97), See Model 651		
1st.	C2.191-1.	16-6666.	455	†	L-70.	B11.037.	ST-105.	5A1			Vol Tone Vol	A-9.066. A-9.058. A-9.066.	M-60-Z. M-51-Z. M-60-Z.	A.		D13-133. D13-128. D13-133.	41	G1				8.	6540, 6541				
2nd.	C2.191-2.	16-6667.	455	†		B11.037.	ST-105.	5A1																	9.	6542	
1st.	C2.191-1.	16-6566.	455	†	L-70.	B11.037.	ST-105.	5A1			Vol	A-9.066.	M-60-Z.	A.		D13-133.	41	G1							5.	6545 (Ch. FJ97)	
2nd.	C2.191-2.	16-6667.	455	†																					9.	6546 (See Model Model 651)	
																									8.	6547 (See Models 6540 & 6541)	
																									9.	6550 (See Model 651)	
1st.	ZG2.191-1.	16-6666.	455	†	L-70.	C-11.039.	ST-105.	6A1			Vol Tone	RA9.066. RA9.058.	M-60-Z. M-51-Z.	A.		D13-133. D13-128.	41	G1							18.	6611, 12, 13, 14, 15, 30, 31, 32, 34, 35, (Ch. 97A)	
2nd.	ZG2.191-2.	16-6667.	455	†																					9.	7541 (See Model 651)	
1st.	†.	16-5712.	455					†.			F2		F2	Vcl Tone	†.	M-66-Z. M-69-Z.			D13-139. D11-141.		G1					9161	
2nd.	†.	16-5714.	455																								
1st.	STL-003.	16-6658.	455					S400C-8.	ST-113.	4A1				Vol	SRC-004.	M-60-Z.	A.		D13-133.	41	G1					14.	ESQUIRE 60-10, 65-4
2nd.	STL-004.	16-6660.	455																								
1st.	35.70.	16-5712.	456	90.272.	L-25.	105.123. 105.139.	ST-736.	8E10. 10E10.			Vcl	50.61.	T-116.	A.		D18-139X.	41	G1							FADA A66PC, A66T		
2nd.	35.73.	16-5714.	456	90.272.	L-26.	105.126. 105.140.	ST-177. ST-175.	10E15.		Vcl	50.61.	T-116.	A.		D18-139X.	41	G1							A76T, A76PC			
1st.	35.70.	16-5712.	456	90.272.	L-26.	105.127. 105.153.	ST-172. 105.133-1.			F2	55.28.	M-60-Z.			D13-133.		G1							AP104, AP105			
2nd.	35.73.	16-5714.	456			105.133-1.	ST-105.	52A1.		Vcl	50.58.	M-60-Z.	A.		D13-133.	41	G1							B49			
1st.	35.145.	16-5712.	456			105.133-1.	ST-105.	52A1.		Vcl	50.59A.	M-60-Z.	AZ.		D13-133.	42	G1							B49SW			
2nd.	35.146.	16-5714.	456			105.178.	ST-113.	4A1		Vcl	50.75.	M-60-Z.	A.		D13-133.	41	G1							C34			
1st.	35.145.	16-5712.	456			105.135.	ST-105.	52A1.		Vcl	50.58.	M-60-Z.	A.		D13-133.	41	G1							C49			
2nd.	35.162.	16-5714.	456			105.135-1.	ST-105.	52A1.		F2	50.70.	T-114.	A.		D17-139X.	41	G1							D174			
1st.	35.267.	16-5712.	456			105.178.	ST-113.	4A1		F2	55.29.	M-67-Z.	A.		D13-140.	41	G1							D175			
2nd.	35.268.	16-5714.	456			105.135.	ST-105.	52A1.		Vcl	50.75.	M-60-Z.	A.		D17-139X.	41	G1							F25			
1st.	35.145.	16-5712.	456			105.135-1.	ST-105.	52A1.		Vcl	50.58.	M-60-Z.	A.		D13-133.	41	G1							F44, F45			
2nd.	35.205.	16-5714.	456			105.134CU.	ST-196.	4E45.		F2	50.70.	T-114.	A.		D13-123.	41	G1							F55			
1st.	35.206.	16-5712.	456			105.134CU.	ST-196.	4E45.		F2	55.29.	M-67-Z.	A.		D13-133.	41	G1							F55 (Late)			
2nd.	35.206.	16-5714.	456			105.134CU.	ST-196.	4E45.		Vcl	50.70.	T-114.	A.		D13-140.	41	G1							FM 16			
1st.	35.125B-2.	16-5712.	456			105.134-1.	ST-196.	4E45.		Vcl	50.51A.	M-60-Z.	A.		D13-137.		G1							L26			
2nd.	35.144.	16-5714.	456			105.134B.	ST-196.	4E45.		Vcl	50.51A.	M-60-Z.	A.		D13-137.		G1							L67C			
1st.	35.125B.	16-5712.	456			105.134B.	ST-196.	4E45.		Vcl	50.51A.	M-60-Z.	A.		D13-133.	41	G1							L67T			
2nd.	35.144A.	16-5714.	456			105.195.				F2	50.51A.	M-60-Z.	A.		D13-133.	41	G1							L-S6			
1st.	†.					105.195.				F2	50.51A.	M-63-Z.	A.		D13-133.	41	G1							L-96A			
2nd.	†.					105.195.				F2	50.51A.	M-63-Z.	A.		D13-133.	41	G1							LA60			
1st.	35.125B.	16-5712.	456			105.134CU.	ST-196.	4E45.		Vcl	50.51A.	M-60-Z.	A.		D13-133.	41	G1							LW36			
2nd.	35.166.	16-5714.	456			105.141.				F2	50.47A.	M-60-Z.	A.		D13-133.	41	G1							P22			
1st.	35.70.	16-5712.	456			105.132A.	ST-195.	5E27.		Vcl	55.20.	M-60-Z.	A.		D13-133.	41	G1							P23			
2nd.	35.82.	16-5714.	456			105.132A.	ST-195.	5E27.		Vcl	50.64.	M-60-Z.	A.		D13-133.	41	G1							P24			
1st.	35.70.	16-5712.	456			105.132A.	ST-195.	5E27.		Vcl	55.26.	M-60-Z.	A.		D13-133.	41	G1										
2nd.	35.82.	16-5714.	456			105.115.				F13	50.47A.	M-60-Z.	A.		D13-133.	41	G1										
1st.	35.158.	16-5712.	456			105.132A.	ST-195.	5E27.		Vcl	55.20.	M-60-Z.	A.		D13-133.	41	G1										
2nd.	35.157.	16-5714.	456			105.132A.	ST-195.	5E27.		Vcl	50.47A.	M-60-Z.	A.		D13-133.	41	G1										
1st.	35.125A.	16-5712.	456			105.147.	ST-105.	5A1.		Vcl	50.65.	M-60-Z.	AZ.		D13-133.	42	G1										
2nd.	35.186.	16-5714.	456			105.164.				F1	50.65.	M-60-Z.	AZ.		D13-133.	42	G1										
1st.	35.70.	16-5712.	456			105.150.	ST-105.	52A1.		Vcl	50.67.	M-60-Z.	AZ.		D13-133.	42	G1										
2nd.	35.82.	16-5714.	456			105.150.				F1	50.67.	M-60-Z.	AZ.		D13-133.	42	G1										
1st.	35.177.	16-5714.	456			105.147.	ST-105.	5A1.		Vcl	50.67.	M-60-Z.	AZ.		D13-133.	42	G1										
2nd.	35.191.	16-5714.	456			105.164.				F1	50.67.	M-60-Z.	AZ.		D13-133.	42	G1										
1st.	35.198.	16-5714.	456			105.150.	ST-105.	52A1.		Vcl	50.67.	M-60-Z.	AZ.		D13-133.	42	G1										
2nd.	35.207.	16-5714.	456			105.150.				F1	50.67.	M-60-Z.	AZ.		D13-133.	42	G1										
1st.	35.198.	16-5714.	456			105.147.	ST-105.	5A1.		Vcl	50.67.	M-60-Z.	AZ.		D13-133.	42	G1										
2nd.	35.207.	16-5714.	456			105.164.				F1	50.67.	M-60-Z.	AZ.		D13-133.	42	G1										

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No. TUBES	Sylvania or Equivalent Dial Light Type Listed In Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			"A"	"B"																					
FADA—Continued		5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT	20.112, PRS25-25	PRSA150-30-30	EZ3215C		DSB-303		TA-330		Chk Out	40.79	C-1362, A-3881, A-3881	T22S48		C-2976, A-2934, A-2934		747 482	2F4L	=M30				
P28A		5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT	20.117A, 20.120	PRSA150-30-30	BRD3315		M-2X30-150		TA-25		Out	†	A-3881	T22S48		747 482	2F4L	=M30						
P40		4	1A7G, 1N5G, 1H5G, 1Q5G	20.85	PRS150-8	BR815		M-8-150		UT-81		Out	†	A-3822	T22S47		A-2932	741 482	8F	=B30					
P41		5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	20.124, 20.139	PRSA150-40-40	BRD4415		M-2X40-150		TA-440		Out	†	A-3856	T22S47		A-2900	746 482	=G3	=M30					
P49		4	1A7G, 1N5G, 1H5G, 1C5G	20.89	PRS25-25	BR252A		M-25-25		TA-25		Out	†	A-3878	T22S47		A-2931	742 482	4F	=B30					
P49SW		4	1A7G, 1N5G, 1H5G, 1Q5G	20.85	PRS150-8	BR815		M-8-150		UT-81		Out	†	A-3822	T22S47		A-2932	742 482	8F	=B30					
P50, PL50, PUL50		4	6D6, 6C6, 25L6G, 25Z5/25Z6GT	20.100A	PRSA150-20-20	BRD2215		M-2X20-150		TA-220		Out	†	A-3865	T22S45		A-2928								
P58, PL58		5	1A7GT, 1N5GT, 1H5GT, 1Q5GT, 70A7GT	20.82, 20.89	PRSA150-30-30	BRD3315		M-2X30-150		TA-330		Chk Out	40.78	C-1080	T20C52		C-2977, A-3030	741 482	8F	=B30					
P60		5	6A2GT, 6K2GT, 6Q2GT, 25L6GT, 25Z6GT	20.84, 20.83	PRS150-30	BR3015		M-30-150		TA-25		Chk Out	40.75	C-1325	T20C52		C-2981								
P80		4	1R5, 1T4, 1S5, 3S4	22.14	PRSA150-20-20	BR2015		M-20-150		UT-201		Out	†	A-3877	T22S45		A-2928		7950 467	=2R	XX45				
P82		6	1T4, 1R5, 1T4, 1S5, 3Q5GT, 11723	22.11	PRSA150-40-20 & PRS150-30	BRH-151, EZ42215		M-100-15		UHC-151		Out	42.3	A-3878	T22S47		A-2931	746 482	=G3	=482					
P100		6	1T4, 1R5, 1S5, 3Q5GT, 117Z3	22.11	PRSA150-40-30 & PRS150-20	BRH-151, EZ42215		M-250-15		TA-215		Out	42.3	A-3878	T22S47		A-2931	746 482	=G3	=M30					
PL60, PUL60		5	12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT	20.105, 20.104	PRSA150-30	BR2015		M-30-150		UT-301		Chk Out	40.75	C-1325	T20C52		C-2977, A-3865								
PR135, PA11		8	6S07GT, 6SA7GT, 615GT, 6S07GT, 6V6GT, 80	20.89, 20.107A	PRS25-25	BR252A		M-25-25		TA-25		Out	†	A-3877	T22S45		T22R02		P-6011		P-2951				
RE187		8	6SA7GT, 6SK7GT, 6SQ7GT, 6K6GT, 80	20.125	PRSA150-20	BRH-151		M-250-15		UHC-215		Out	40.84	P-6013	T22S58		T22R05		P-2953		A-2930				
S46		5	6A2G, 6K7, 6Q7G, 25L6G, 25Z5, 115.41 Ballast	20.79	PRSA150-20-20	EZ2215C		DSB-302		TA-220		Out	†	A-3878	T22S47		T22S45		A-2928		A-2931				
T49		4	1A7G, 1N5G, 1H5G, 1C5G	20.89	PRS25-25	BR252A		M-25-25		TA-25		Out	†	A-3878	T22S47		A-2931	742 482	4F	=B30					
WP101, WP102		2	12A8, 35Z5	20.142	PRSA150-30	EZ8825		M-2X3-250		LM-28		Out	†	A-3865	T22S45		A-2928								
5F60		5	6A2GT, 6K2GT, 6Q2GT, 25L6GT, 25Z6GT	20.84, 20.83	PRSA150-20	BR2015		M-30-150		UT-301		Out	†	A-3865	T22S45		A-2928								
6A39		5	6A3GT, 6D6, 6S07GT, 25L6G, 25Z5, 115.41 Ballast	20.82	PRSA150-30-30	EZ3215C		M-20-150		UT-201		Out	†	A-3865	T22S45		A-2928								
6A51		5	6A7, 6D6, 6Q7G, 6Y6G, 80	20.96	PRSA150-16	BR1645		M-16-450		UT-16		Pwr Out	40.72A	P-6289	T22R00		T22S60		P-2949		A-2928				
6A54		5	6A7/6A8G, 6K7, 6Q7G, 6Y6G, 80	20.80A	PRSA450-8-8	EZ88345		DH-3X8-430SS		TU-88		Pwr Out	40.72A	P-6289	T22R00		T22S60		P-2949		A-2928				
6A60		5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, 115.41 Ballast	20.84	PRSA150-30	BR3015		M-30-150		UT-301		Out	†	A-3865	T22S45		A-2928								
6A61		5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, 115.41 Ballast	20.95	PRSA150-20	BR2015		M-20-150		UT-201		Out	†	A-3865	T22S45		A-2928								
6A65		6	6A8G, 6D6, 76, 6Q7G, 6V6G, 80	20.86, 20.88, 20.87, 20.89	PRSA25-25	GL450-16, PRSA450-8	KR516A, BR8345	D-16-450	PLS-16		Out	†	A-3877	T22S58		A-2930		P-6120		T22R04		P-2952			
6A70		6	6A8G, 6D6, 76, 6Q7G, 25L6G, 25Z5, 115.55 Ballast	20.92A, 20.83	PRSA150-30-30	BRD3315		M-2X30-150		TA-330		Chk Out	40.1	C-1723, A-3865	T20C52		C-2975, A-2928								
6A80		8	6K7, 6A8G, 6Q7G, 6ES, 6V6G, 80	20.89, 20.94	PRS25-25	BR252A		M-25-25		TA-25		Out	†	A-3877	T22S58		P-6012		T22R04		P-2952		A-2930		
21		4	6K7GT, 6J7GT, 25L6GT, 25Z6GT	20.100A	PRSA150-20-20	BRD2215		M-2X20-150		TA-220		Out	†	A-3865	T22S45		A-2928								
27		5	6SA7GT, 6K7GT, 6SQ7GT, 6Y6G, 80	20.81B	PRBS450-8-8	EZ588		DH-2X8-450SS		TU-88		Pwr Out	40.72B	P-6289	T22R00		T22S60		P-2949		A-2928				
30 (Late)		5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, 115.41 Ballast	20.84	PRSA150-30	BR2015		M-30-150		UT-301		Out	†	A-3865	T22S45		A-2928								
31		5	6A7, 6D6, 6Q7G, 25L6G, 25Z5, 115.41 Ballast	20.84	PRSA150-30	BR3015		M-30-150		UT-301		Out	†	A-3865	T22S45		A-2928								
32 (Late)		5	6A7, 6D6, 6Q7G, 6Y6G, 80	20.87, 20.93	PRSA150-20	BR2015		M-20-150		UT-201		Out	†	A-3877	T22S58		A-2930		P-6289		T22R04		P-2949		
52		5	12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT	20.103A	PRSA150-40-20	BR4215		M-2X40-150		TA-240		Out	†	A-3865	T22S45		A-2928								
53		5	12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT	20.105, 20.104	PRSA150-30	BR3015		M-30-150		UT-301		Out	†	A-3865	T22S45		A-2928								
54		5	6A7 or 6A8G, 6K7, 6Q7G, 6Y6G, 80	20.8CA	PRSA450-8-8	EZ88345		DH-3X8-450SS		TU-88		Pwr Out	40.72A	P-6289	T22R00		T22S60		P-2949		A-2928				
55		5	12SA7GT, 12K7GT, 12SQ7GT, 50L6GT, 35Z5GT	20.103A	PRSA150-40-20	BRD4215		M-2X40-150		TA-240		Out	†	A-3865	T22S45		A-2928								
57		5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, 115.62 Ballast	20.105, 20.104	PRSA150-30	BR3015		M-30-150		UT-301		Out	†	A-3876	T22S45		A-2928								
59		5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, 115.62 Ballast	20.104	PRSA150-20	BR2015		M-20-150		UT-201		Out	†	A-3876	T22S45		A-2928								

†Information not available.

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photofact Set No.	MFR. & MODEL		
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	35.177			456										50.65	M-60-Z		A2		D13-133		42	G1				Continued —	FADA P28
2nd.	35.191			456				105.147	ST-105		5A1		Vol	50.65	M-60-Z		A2		D13-133		42	G1					P28A
1st.	35.177			456				105.137	ST-105		5A1		Vol	50.60	M-60-Z		A2		D13-133		42	G1					P40
2nd.	35.191			456				105.187	ST-105		5A1		Vol	50.60	M-60-Z		A2		D13-133		42	G1					P41
1st.	35.161			456				105.133-1	ST-105		52A1		Vol	50.58	M-60-Z		A		D13-133		41	G1					P49
2nd.	35.162			456				105.133-1	ST-105		52A1		Vol	50.59A	M-60-Z		A2		D13-133		42	G1					P49SW
1st.	35.145	16-5712		456				90.324A	L-26					50.55	M-46-Z		A		D13-123		41	G1					P50, PL50, PUL50
2nd.	35.284			456				105.131			F2		Vol	50.57													
1st.	35.177			456										55.24													
2nd.	35.285			456										50.60													
1st.	35.145	16-5712		456				105.133-1	ST-105		52A1		Vol	50.58	M-60-Z		A		D13-133		41	G1					P49
2nd.	35.146	16-5712		456				105.133-1	ST-105		52A1		Vol	50.59A	M-60-Z		A2		D13-133		42	G1					P49SW
1st.	35.177			456				105.142			F1		Vol	50.65	M-60-Z		A2		D13-133		42	G1					P58, PL58
2nd.	35.174			456	90.324A	L-26		105.132A	ST-195		5E27		Vol	50.51A	M-60-Z		A		D13-133		41	G1					P60
1st.	35.125A	16-5712		456				107.15			4A07		Tone	55.25													
2nd.	35.126A	16-5714		456				107.15					Tone	52.4	M-60-Z		A		D13-133		45	G1					27 P80
1st.	37.14	16-6668		456																							
2nd.	37.14	16-6669		456																							
1st.	37.27	16-6658		456				107.6	ST-105		5A1		Vol	52.9	M-60-Z				D13-133								21 P82
2nd.	37.33	16-6660		456				107.6	ST-105		5A1		Vol	52.9	M-60-Z				D13-133								27 P100
1st.	37.27	16-6658		456				107.6	ST-105		5A1		Vol	52.9	M-60-Z												
2nd.	37.33	16-6660		456																							
1st.	35.125A	16-5712		456	90.341	L-26		105.132A	ST-195		5E27		Vol	50.51A	M-60-Z		A		D13-133		41	G1					PL60, PUL60
2nd.	35.126A	16-5714		456				105.184			10E10		Vol	50.77	M-60-Z		A		D13-133		41	G1					PR-135, PA-11
1st.	35.205			456				105.160			10E10		Tone	55.23	M-60-Z		A		D13-133		41	G1					RE-187
2nd.	35.82	16-5714		456				105.110	ST-194		5E45		Vol	50.70	T-114		A		D19-139X		41	G1					S46
1st.	35.205			456				105.331-1	ST-105		52A1		Vol	50.45	M-63-Z		A		D13-140		41	G1					
2nd.	35.113	16-5712		456				105.331-1	ST-105		52A1		Vol	50.58	M-60-Z		A		D13-137		41	G1					T49
1st.	35.145	16-5712		456																							
2nd.	35.146	16-5714		456																							
1st.	35.125	16-5712		456				105.111	ST-196		4E45		Vol	50.51	M-60-Z		A		D13-133		41	G1					WP101, WP102
2nd.	35.126	16-5714		456				105.106			F2		Vol	50.47A	M-60-Z		A		D13-133		41	G1					5F60
1st.	35.72	16-5712		456				105.114	ST-165		5E210		Tone	55.20	M-60-Z		A		D13-133		41	G1					6A39
2nd.	35.73	16-5714		456				105.101A	ST-165		5E10		Vol	50.47A	M-60-Z		A		D13-133		41	G1					6A51
1st.	35.70	16-5712		456				105.122	ST-194		5E45		Vol	50.47A	M-63-Z		A		D13-137		41	G1					6A54
2nd.	35.72	16-5714		456				105.115	ST-195		5E27		Vol	50.47A	M-60-Z		A		D13-133		41	G1					6A60
1st.	35.72	16-5712		456				105.115	ST-195		5E27		Vol	50.47A	M-60-Z		A		D13-133		41	G1					6A61
2nd.	35.70	16-5714		456				105.166			6E10		Vol	50.53	T-116		A		D18-139X		41	G1					6A65
1st.	35.70	16-5712		456				105.119	10E10																		
2nd.	35.77	16-5714		456																							
1st.	35.70	16-5712		456				105.124	ST-738		8E25		Vol	50.50	M-63-Z		A		D13-137		41	G1					6A70
2nd.	35.77	16-5714		456				105.118	ST-681		10E25		Tone	55.20	M-60-Z		A		D13-133		41	G1					
1st.	35.72	16-5712		456				105.93 (or)			F2		Vol	50.53	T-116		A		D18-139X		41	G1					6A80
2nd.	35.72	16-5714		456				105.123																			
1st.	35.73	16-5714		456				105.IIIA	ST-196		4E45		Vol	50.55	M-46-Z		A		D13-123		41	G1					21
2nd.	35.73	16-5714		456																							
1st.	1B79			456				105.148	ST-166		6E10		Vol	50.64	M-60-Z		A		D13-133		41	G1					27
2nd.	35.82	16-5714		456				105.109	ST-194		5E45		Tone	50.26	M-60-Z		A		D13-133		41	G1					30 (Late)
1st.	35.72	16-5712		456				105.129A	ST-195		5E27		Vol	50.47A	M-60-Z		A		D13-133		41	G1					31
2nd.	35.71	16-5714		456				105.130			F2		Tone	50.47A	M-60-Z		A		D13-133		41	G1					32 (Late)
1st.	35.72	16-5712		456				105.134	ST-196		4E45		Vol	50.51	M-60-Z		A		D13-133		41	G1					52
2nd.	35.72	16-5714		456				105.134	ST-196		4E45		Vol	50.51	M-60-Z		A		D13-133		41	G1					53
1st.	35.125	16-5712		456				105.101A	ST-165		5E10		Vol	50.45	M-63-Z		A		D13-137		41	G1					54
2nd.	35.126	16-5714		456				105.134B	ST-196		4E45		Vol	50.51A	M-60-Z		A		D13-133		41	G1					57
1st.	35.70	16-5712		456				105.111	ST-196		4E45		Vol	50.51A	M-60-Z		A		D13-133		41	G1					59

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
			No.	Tube	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	No.	Eveready Part No.	No.	Burgess Part No.
					Dial Light Type Listed in Parentheses	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"	"A"	"B"
FADA—Continued			60	5 6A7, 6D6, 6Q7G, 25L6G, 25Z5	20.84	PRS150-30	BR3015		M-30-150		UT-301		Out		+	A-3865		T22S45		A-2928					
			61	5 6SA7GT, 6K7GT, 6SQ7GT, 25L6G, 25Z5, 115.41 Ballast	20.83	PRS150-20	BR2015		M-20-150		UT-201		Chk	40.3		C-1080		T20C52		C-2977					
			63	5 6SA7GT, 6K7GT, 6SQ7GT, 25L6G, 25Z5, 115.78 Ballast	20.108	PRS150-30-30	EZ3215C		DSB-303		TA-330		Out	40.3		A-3865		T22S45		A-2928					
			64APC	5 6SA7GT, 6K7GT, 6P5GT, 25L6G, 25Z5, 115.78 Ballast	20.108C	PRS150-30	EZ3215C		DSB-303		TA-25		Chk	40.75		C-1325		T20C52		C-2981					
			65PC	6 6SA7GT, 6K7GT, 6P5GT, 6V6G, 80	20.107A	PRS25-25	BR3015		M-30-150		UT-301		Pwr	40.73A		P-6120		T22R04		A-2928					
			66	6 6A8G, 6K7G, 76, 6F5G, 6V6G, 80	20.107	PRS25-25	EZ5116		BR2524		M-25-25		Out	40.73		P-6120		T22R04		A-2930					
			68	5 6SA7GT, 6K7GT, 6SQ7GT, 25L6G, 25Z5, 115.78 Ballast	20.110	PRS150-30-30	EZ3215C		DSB-303		TA-330		Chk	40.3		C-1080		T20C52		C-2977					
			69	5 6SA7GT, 6K7GT, 6SQ7GT, 25L6G, 25L6G, 25Z5, 115.65 Ballast	20.108	PRS150-30-30	EZ3215C		DSB-303		TA-330		Out	40.3		C-1080		T20C52		A-2928					
			74APC	6 6SA7GT, 6K7GT, 6SQ7GT, 25L6G, 25L6G, 25Z5, 115.68 Ballast	20.109	PRS25-25	BR2524		M-25-25		TA-25		Chk	40.3		C-1080		T20C52		C-2977					
			75PC	6 6ABG, 6K7G, 6Q7G, 25L6G, 25Z5, 115.68 Ballast	20.109	PRS25-25	BR2524		M-25-25		TA-25		Out	40.3		C-1080		T20C52		A-2928					
			107, 108	3 12Q7GT, 35L6GT, 50Z7GT	20.106C	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Chk	40.75		C-1325		T20C52		C-2981					
			114, 136, 148, 202, 209, 220	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	20.103B	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Out	40.3		A-3865		T22S45		A-2928					
			115, 116	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	20.106A	PRS150-40-20	BRD4215		M-2X40-150		TA-240		Out	40.3		A-3865		T22S45		A-2928					
			119	5 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, Ballast	20.122	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Chk	40.75		C-1325		T20C52		C-1981					
			120	4 12K7G1, 12J7GT, 30L6GT, 35Z5GT, 115.96 Ballast	20.103B	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Out	40.3		A-3865		T22S45		A-2928					
			137	5 12SA7GT, 12K7GT, 12SQ7GT, 50L6GT, 35Z5GT	20.103B	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Out	40.3		A-3865		T22S45		A-2928					
			144	4 1A7GT, 1N5GT, 1H5GT, 3Q5GT	20.85	PRS150-8	BR815		M-8-150		UT-81		Out	40.3		A-3856		T22S47		A-2900					
			153	5 6SA7, 6SK7, 6SQ7, 25L6GT, 25Z6GT	20.103B	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Out	40.3		A-3865		T22S45		A-2928					
			154	5 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, 115.89 Ballast	20.124	PRS150-40-20	BRD4215		M-2X40-150		TA-240		Out	40.3		A-3865		T22S45		A-2928					
			169	6 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, 115.68 Ballast	20.121	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Chk	40.75		C-1325		T20C52		C-2981					
			175	8 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, 115.98 Ballast	20.125	PRS450-18	BR1645		M-16-450		UT-16		Chk	40.75		C-1325		T22S45		A-2928					
			176	7 6SK7GT, 6SA7GT, 6P5GT, 6SQ7GT, 6V6GT, 80	20.107A	EZ5116					TA-1616		Pwr	40.73A		P-6120		T22R04		A-2905					
			177	8 6SK7GT, 6SA7GT, 6J5GT, 6SQ7GT, 25L6GT, 25Z6GT, 115.109 Ballast	20.130	EZ5116					TA-1616		Out	40.3		A-3877		T20C52		A-2930					
			185	8 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, 115.98 Ballast	20.125	PRS450-18	BR1645		M-16-450		UT-16		Chk	40.75		C-1325		T20C52		C-2981					
			207APT	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	20.124	PRS150-40-20	BRD4215		M-2X40-150		TA-240		Chk	40.75		C-1325		T22S60		A-2905					
			214	5 6SK7GT, 6SA7GT, 6SQ7GT, 25L6GT, 25Z5GT	20.103B	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Out	40.75		A-3865		T22S45		C-2981					
			215	6 6SK7GT, 6SA7GT, 6SQ7GT, 25L6GT, 25Z5GT	20.124	PRS150-40-20	BRD4215		M-2X40-150		TA-240		Out	40.75		A-3865		T22S45		A-2928					
			252	6 6SS7GT, 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT	20.106A	PRS150-40-20	BRD4215		M-2X40-150		TA-240		Out	40.75		A-3865		T22S45		A-2928					
			253	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	20.103B	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Out	40.75		A-3865		T22S45		A-2928					
			256	5 6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 80	20.131	PRS450-16	BR1645		M-16-450		UT-16		Pwr	40.80		P-6120		T22R04		P-2962					
			263	6 6SK7GT, 6SA7GT, 6SQ7GT, 25L6GT, 25Z5GT	20.132	PRS450-30	BR3045		M-30-450		UT-30		Out	40.75		A-3877		T22S58		A-2930					
			264	6 6SK7GT, 6SA7GT, 6SQ7GT, 25L6GT, 25Z6GT, 115.41 Ballast	20.103B	PRS150-30-30	BRD3315		M-2X30-150		TA-330		Chk	40.75		C-1325		T20C52		C-2981					
			278	7 6SK7GT, 6SA7GT, 6J5GT, 6SQ7GT, 6V6GT, 80	20.89	PRS25-25	BR252A		M-25-25		TA-25		Pwr	40.93		P-6120		T22R04		P-2952					
			286	8 6SK7GT, 6SA7GT, 6SQ7GT, 25K6GT, 80	20.132	PRS450-30	BR3045		M-30-450		UT-30		Pwr	40.93A		P-6103		T22R05		P-2953					
			288, 295	9 6SK7GT, 6SA7GT, 6SQ7GT, 6U5, 25K6GT, 80	20.131	PRS450-16	BR1645		M-16-450		UT-16		Pwr	40.93A		P-6013		T22R05		P-2953					
			352	4 6A7, 6B7, 25L6G, 25Z5, 115.22 Ballast	20.75	PRS150-20-20	EZ2215C		DSB-302		TA-220		Out	40.75		A-2312		T22S45		A-2981					
			360	5 6A7, 6D6, 6Q7G, 25L6G, 25Z5, 115.41 Ballast	20.67	PRS150-40-20	BRD4215		M-2X40-150		TA-25		Chk	40.16		C-1279		T20C52		C-2981					
			361	5 6A7, 6D6, 6Q7G, 25L6G, 25Z5, BK49D Ballast	20.73	PRS150-20-20	PR525		M-20-150		TA-240		Out	40.61		C-1279		T22S58		A-2928					
			365	6 6A8G, 6D6, 76, 6Q7G, 6V6G, 80	20.71	GL450-36	KR516		D-16-450		PLS-16		Pwr	40.298		A-3865		T22R04		A-2928					
			366, 366PT	6 6A8G, 6D6, 76, 6Q7G, 6V6G, 80	20.71	GL450-16	KR516		D-16-450		PLS-16		Out	40.298		P-6120		T22R04		P-2952					
			370	6 6A8G, 6D6, 76, 6Q7G, 25L6G, 25Z5, BK42D Ballast	20.64	PRS150-30	BR3015		M-30-150		UT-301		Chk	40.1		C-1723		T20C52		C-2975					
					20.66							Out			A-3865		T22S45		A-2928						

+Information not available.

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photocat Set No.	MFR. & MODEL		
Use	Mfr. Part No.	Melsner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiar Part No.	Note			
1st.	35.72.	16-5712.		456			105.122.	ST-194.		5E45.		Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1							Continued	FADA 60	
2nd.	35.73.	16-5714.		456	90.341.	L-26	105.141.		F2		F2	Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								61	
1st.	35.70.	16-5712.		456			105.132A	ST-195.		5E27.		Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								63	
2nd.	35.70.	16-5712.		456			105.139.		F2		F2	Vol	50.53.	T-116.	A.	D13-139X.	41	G1								64APC	
2nd.	35.82.	16-5714.		456			105.139.		F2		F2	Vol	50.62.	M-63-Z.	A.	D13-137.	41	G1								65PC	
2nd.	35.82.	16-5714.		456			105.145.	ST-188.		6E25.		Vol	50.64.	M-60-Z.	A.	D13-133.	41	G1								68	
1st.	35.70.	16-5712.		456	90.341.	L-26	105.141.		F2		F2	Vol	50.64.	M-60-Z.	A.	D13-133.	41	G1								69	
2nd.	35.82.	16-5714.		456			105.140.		F2		F2	Vol	50.76.	M-60-Z.	A.	D13-133.	41	G1								74APC	
1st.	35.70.	16-5712.		456			105.140.		F2		F2	Vol	50.79.	M-60-Z.	A.	D13-139X.	41	G1								75PC	
2nd.	35.82.	16-5714.		456	90.272.	L-26	105.140.		F2		F2	Vol	50.82.	M-63-Z.	A.	D13-137.	41	G1								107,108	
2nd.	35.82.	16-5714.		456			105.172.	105.145.	ST-188.	6E25.	F2	Vol	50.85.	M-67-Z.	A.	D13-140.	41	G1									
1st.	35.70.	†		456			†	†			F2	Vol	50.51A.	M-60-Z.	A.	D13-133.	41	G1								114, 136, 148, 202,	
2nd.	35.205.	†		456			105.156A.	ST-195.		4E45.		Vol	50.69A.	M-60-Z.	A.	D13-133.	41	G1								209, 220	
2nd.	35.206.	†		456			105.158A.	ST-195.		5E27.		Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								115, 116	
1st.	35.205.	†		456			105.157.	ST-196.		4E45.		Vol	50.55.	M-46-Z.	A.	D13-123.	41	G1								119	
1st.	35.228.			456			105.157.	ST-196.		4E45.		Vol	50.51A.	M-60-Z.	A.	D13-133.	41	G1								120	
2nd.	35.229.			456			105.164.		F1		F1	Vol	50.44.	M-60-Z.	A.	D13-133.	42	G1								137	
1st.	35.198.			456			105.153.		F2		F2	Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								144	
2nd.	35.207.			456			105.153.		F2		F2	Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								153	
1st.	35.205.			456			105.153.		F2		F2	Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								154	
2nd.	35.206.			456			105.153.		F2		F2	Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								169	
1st.	35.205.			456			†	†		F2		Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								175	
2nd.	35.206.			456			105.161.		F2		F2	Vol	50.70.	T-114.	A.	D17-139X.	41	G1								176	
1st.	35.205.			456			105.170.	ST-736.		8E10.		Vol	50.72.	T-116.	A.	D18-139X.	41	G1								177	
2nd.	35.82.	16-5714.		456			105.170.	ST-736.		8E10.		Vol	50.72.	T-116.	A.	D18-139X.	41	G1									
1st.	35.205.			456			105.161.		F2		F2	Vol	50.70.	T-114.	A.	D17-139X.	41	G1								185	
2nd.	35.206.			456	125.26.	L-40	105.132A.	ST-195.		5E27.		Vol	55.29.	M-67-Z.	A.	D13-140.	41	G1									207APT
1st.	35.228.			456			105.193.		F2		F2	Vol	55.20.	M-60-Z.	A.	D13-133.	41	G1								214	
2nd.	35.229.			456			105.193.		F2		F2	Vol	55.33.	M-60-Z.	A.	D13-133.	41	G1								215	
1st.	35.205.			456			105.193.		F2		F2	Vol	50.91A.	M-60-Z.	A.	D13-133.	41	G1								252	
2nd.	35.206.			456			105.177A.		F2		F2	Vol	50.78.	M-60-Z.	A.	D13-133.	41	G1								253	
1st.	35.286.			456			105.177A.		F2		F2	Vol	50.78.	M-60-Z.	A.	D13-133.	41	G1								256	
2nd.	35.206.			456			105.177A.		F2		F2	Vol	50.78.	M-60-Z.	A.	D13-133.	41	G1								263	
1st.	35.205.			456			105.188.	ST-165.		5E210.		Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								264	
2nd.	35.206.			456			105.188.	ST-165.		5E210.		Vol	55.28.	M-60-Z.	A.	D13-133.	41	G1								278	
1st.	35.316.	16-5714.		456			105.192.		10E10.		10E10.	Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								286	
2nd.	35.82.	16-5714.		456			105.192.		10E10.		10E10.	Vol	55.28.	M-60-Z.	A.	D13-133.	41	G1								288, 295	
1st.	35.297.			456			105.193.		5E27.		5E27.	Vol	55.28.	M-60-Z.	A.	D13-133.	41	G1								352	
1st.	35.205.			456			105.193.		5E27.		5E27.	Vol	50.47A.	M-60-Z.	A.	D13-133.	41	G1								360	
2nd.	35.186.			456			105.186.	ST-166.		6E10.		Vol	55.28.	M-60-Z.	A.	D13-133.	41	G1								361	
1st.	35.205.			456			105.186.	ST-166.		6E10.		Vol	50.77.	M-60-Z.	A.	D13-133.	41	G1								365	
2nd.	35.82.	16-5714.		456			105.192.		10E10.		10E10.	Vol	55.33.	M-60-Z.	A.	D13-133.	41	G1								366, 366PT	
1st.	35.254C.			456			105.181.	ST-736.		8E10.		Vol	50.74A.	T-114.	A.	D17-139X.	41	G1								370	
2nd.	35.82.	16-5714.		456			105.189.		10E10.		10E10.	Vol	55.32.	M-69-Z.	A.	D11-141.	41	G1									
1st.	35.254.			456			105.189.		10E10.		10E10.	Vol	50.70.	T-114.	A.	D17-139X.	41	G1									
2nd.	35.82.	16-5714.		456			105.189.		10E10.		10E10.	Vol	55.35.	M-69-Z.	A.	D11-141.	41	G1									
1st.	35.90.			456			105.86.	ST-189.		6E10.		Vol	50.37.	M-63-Z.	A.	D13-137.	41	G1									
2nd.	35.88.			456			105.87.	ST-189.		5E27.		Vol	50.35.	M-69-Z.	A.	D11-141.	41	G1									
1st.	35.72.	16-5712.		456			105.88.	ST-190.		6E25.		Vol	50.37.	M-63-Z.	A.	D13-137.	41	G1								361	
2nd.	35.73.	16-5712.		456	90.272.	L-26	105.89 (or).	ST-166.		6E10.		Vol	50.37.	M-63-Z.	A.	D13-137.	41	G1								365	
1st.	35.70.	16-5712.		456	90.272.	L-26	105.89 (or).	ST-166.		6E10.		Vol	55.12.	M-60-Z.	A.	D13-133.	41	G1									
2nd.	35.77.	16-5714.		456	90.272.	L-26	105.89 (or).	ST-190.		6E25.		Vol	50.37.	M-63-Z.	A.	D13-137.	41	G1									
1st.	35.89.			D6	456	90.272.	105.89 (or).	ST-190.		6E10.		Vol	55.12.	M-60-Z.	A.	D13-137.	41	G1									
2nd.	35.77.	16-5714.		456	90.272.	L-26	105.89 (or).	ST-190.		6E25.		Vol	50.37.	M-63-Z.	A.	D13-137.	41	G1									
1st.	35.95.						105.89.	ST-166.		6E10.		Vol	50.37.	M-63-Z.	A.	D13-137.	41	G1									
2nd.	35.77.	16-5714.		456	90.272.	L-26	105.89 (or).	ST-190.		6E25.		Vol	55.12.	M-60-Z.	A.	D13-137.	41	G1									
1st.	35.70.	16-5712.		456	90.272.	L-26	105.88 (or).	ST-190.		6E25.		Vol	50.37.	M-63-Z.	A.	D13-137.	41	G1									
2nd.	35.71.	16-5714.		456	90.272.	L-26	105.89 (or).	ST-190.		6E25.		Vol	55.12.	M-60-Z.	A.	D13-137.	41	G1		</td							

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess	Note		
FADA—Continued	8	6A8G, 6K7, 76, 6Q7G, 6V6G, 6G5, 80	20.69	GL450-12	KR512A	D-12-450	PLS-12	Pwr Out	40.32A On Spkr.	P-6012	T22R04	P-2952													
380	8	6A8G, 6K7, 76, 607G, 25L6G, 6G5, 25Z5, 115.42A Ballast	20.3	GL450-16	KR516A	D-16-450	PLS-16																		
	8	6A8G, 6K7, 76, 607G, 25L6G, 6G5, 25Z5, 115.42A Ballast	20.39	PR525-10-10	KR508	M-2X10-25	TA-110																		
390	8	6A8G, 6K7, 76, 607G, 25L6G, 6G5, 25Z5, 115.42A Ballast	20.64	PR5150-30	BRD202A	M-30-150	UT-301	Chk Out	40.3 On Spkr.	C-1080	T20C52	C-2977													
410	10	6A8G, 6J7, 6K7, 6H6, 76, 6Q7G, 6G5, 6V6G, 80	20.69	GL450-12	KR512A	D-12-450	PLS-12	Pwr Out	40.32A On Spkr.	P-6012	T22R04	P-2952													
	8	6A8G, 6J7, 6K7, 6H6, 76, 6Q7G, 6G5, 6V6G, 80	20.4	GL450-16	KR516A	D-16-450	PLS-16																		
	8	6A8G, 6J7, 6K7, 6H6, 76, 6Q7G, 6G5, 6V6G, 80	20.39	PR525-10-10	KR508	M-2X10-25	TA-110																		
413	13	6K7, 6A8G, 6J7, 6H6, 76, 6Q7G, 6G5, 6V6G, 5Z3	20.3	GL450-16	KR512A	D-16-450	PLS-16	Chk	40.59 On Spkr.	C-1708	T20C53	C-2987													
	8	6A8G, 6K7, 6J7, 6H6, 76, 6Q7G, 6G5, 6V6G, 5Z3	20.4	GL450-8	KR508	D-8-450	PLS-8	Pwr	40.68 On Spkr.	P-6014	T22R06	P-2954													
450	4	6D6, 6C6, 25L6G, 25Z5, 115.23 Ballast	20.78	PR525-10-10	BRD202A	M-2X10-25	TA-110	Pwr Out	40.65 On Spkr.	A-3311	T22S64	A-2936													
	8	6D6, 6C6, 25L6G, 25Z5, 115.23 Ballast	20.78	PR5150-20-20	BRD2215	M-2X20-150	TA-220			A-3865	T22S45	A-2928													
451	5	6A8, 6D6, 6Q7G, 6Y6G, 80	20.81	PR5150-16	BR1645	M-16-450	UT-16	Pwr	40.72A	P-6289	T22R00	P-2949													
	5	6A8G, 6K7, 6Q7G, 6Y6G, 80	20.80	PR525-8-8	EZ8845	DH-3X8-450SS	TU-88	Pwr	40.70	A-3876	T22S60	A-2928													
454	5	6A8G, 6K7, 6Q7G, 25L6G, 25Z5, 115.41 Ballast	20.79	PR5150-20-20	EZ2215C	DSB-302	TA-220	Pwr	40.78	A-3876	T22R00	P-2949													
	5	6A8G, 6K7, 6Q7G, 25L6G, 25Z5	20.79	PR525-25	EZ3215C	DSB-303	TA-25			A-3865	T22S45	A-2928													
461	5	6A7, 6D6, 6Q7G, 25L6G, 25Z5	20.82	PR5150-8	BR1815	M-8-150	UT-81	Pwr	40.72A	P-6289	T22R00	P-2949													
	6	6A8G, 6D6, 76, 6Q7G, 6V6G, 80	20.85	PR5150-16	KR516A	D-16-450	PLS-16	Pwr	40.73	A-3876	T22S60	A-2928													
465	6	6A8G, 6D6, 76, 6Q7G, 6V6G, 80	20.88	PR5450-8	BR845	M-8-450	UT-8																		
	8	6A8G, 6K7, 6Q7G, 25L6G, 25Z5	20.89	PR525-25	KR508	D-8-450	PLS-8																		
470	6	6A8G, 6D6, 76, 6Q7G, 25L6G, 25Z5, 115.55 Ballast	20.92	PR5150-30-30	BRD3315	M-2X30-150	TA-330	Chk	40.1	C-1723	T20C52	C-2975													
490	8	6A8G, 6K7, 6Q7G, 25L6G, 25Z5	20.85	PR5150-16	BR1615	M-16-150	UT-161	Chk	40.3	A-3865	T20C52	C-2977													
	5	6A7/6A8G, 6K7, 6Q7G, 6Y6G, 80	20.80A	PR5B450-8-8	EZ8845	DH-3X8-450SS	TU-88	Pwr	40.72A	P-6289	T22R00	P-2949													
602	6	12BA6, 12SA7GT, 12SK7, 12SQ7,	22.4	PR5150-40-40	EZ42215	DSB-40320-150	TA-430 & UT-201	Pwr	42.1	A-3876	T22S45	B3	A-2928	B3											
605, 606 Series	5	12SA7GT, 12SK7GT, 12SQ7GT	22.4	PR5150-40-40	EZ42215	DSB-40320-150	TA-430 & UT-201	Pwr	42.1	A-3876	T22S45	B3	A-2928	B3											
609, 610 Series	5	12SA7GT, 12SK7GT, 12SQ7GT	22.1	UP44415	DY-3X40-150	EL-340	Out	42.1	A-3876	T22S45	B3	A-2928	B3												
633	4	12SL7GT, G, 35L6G1/G, 35Z5GT/G	22.10	PR5150-40-40	EZ42215	DSB-40320-150	TA-430 & UT-201	Pwr	42.4	A-3856	T22S46	B3	A-2905	B3											
	6	12BA6, 12SA7GT, 12SK7, 12SQ7, 35L6G1, 35Z5GT, (47)	22.4	PR525-25	BRD202A	M-25-25	TA-25																		
637	6	12BA6, 12SA7GT, 12SK7, 12SQ7, 35L6G1, 35Z5GT, (47)	22.4	PR5150-40-30	EZ42215	DSB-40320-150	TA-430 & UT-201	Pwr	42.1	A-3876	T22S45	B3	A-2928	B3											
652 Series	6	14A7/12B7, 14Q7, 14B6, 35A5, 35Y4, (47)	22.3	PR5150-40-40	EZ42215	DSB-40320-150	TA-430 & UT-201	Pwr	42.1	A-3876	T22S45	B3	A-2928	B3											
711, 740	5	12BE6, 12BA6, 12AT6, 50P5, 35W4, (47)	22.16	PR5150-40-30	EZ42215	DSB-40320-150	TA-430 & UT-201	Pwr	42.1	A-3876	T22S45	B3	A-2928	B3											
	5	12BE6, 12BA6, 12AT6, 50P5, 35W4, (47)	22.1	AF844D	UP43215	DY-40320-150	EL-340																		
913	12	12K7GT, 6SA7GT, 6P5GT, 6S7QGT, 6SF5GT, 25L6G	20.113	PR5150-30	BR3015	M-30-150	UT-301	Chk	40.75	C-1325	T20C52	C-2991													
	6	12K7GT, 12SA7GT, 12SK7GT, 12SQ7GT, 35L6G1, 35Z5GT	20.104	PR5150-20	BR2015	M-20-150	UT-201																		
1000 Series	6	12SK7, 12SA7GT, 12SK7GT, 12SQ7GT, 35L6G1, 35Z5GT	22.1	AF844D	UP44415	DY-3X40-150	EL-340	Out	42.1	A-3876	T22S45	B3	A-2928	B3											
1001	6	12BA6, 12SA7GT, 12SK7GT, 12SQ7GT, 35L6G1, 35Z5GT, (47)	22.4	PR5150-40-30	EZ42215	DSB-40320-150	TA-430 & UT-201	Out	42.1	A-3876	T22S45	B3	A-2928	B3											
FARNSWORTH	8	6SK7, 6SA7, 6J5GT, 6H6, 6SQ7, 6VG, 5Y3G	25223	PR5450-30	BR3045	M-30-450	UT-30	Pwr	94104																
AC-70, AC-71, (Ch. C3-1)	8	6SK7, 6SA7, 6J5GT, 6H6, 6SQ7, 6VG, 5Y3G	25216	PR5450-16	BR1645	M-16-450	UT-16	Pwr	94108	A-3877	T22S58	A-2930													
AC-90, AC-51, (Ch. C4-1)	10	6SK7, 6SA7, 6J5GT, 6H6, 6SQ7, 6SF5, 6VG, 5Y3G	25216	PR5450-16	BR1645	M-16-450	UT-16	Pwr	94114																
ACL-56, ACL-56, (Ch. C2-3)	7	6SK7, 6SA8GT, 6H6, 6SQ7, 25L6G1, 25Z6G	25223	PR5450-30	BR3045	M-30-450	UT-30	Pwr	94115	A-3311	T22S44	A-2936													
AK-17, (Ch. C1-3)	5	12SA7, 12K7GT, 12SQ7, 50L6GT, 35Z5GT	25211	PR5150-40-20	BRD4215	M-2X40-150	TA-240	Out	945-I	A-3865	T22S45	A-2902													
AK-76, (Ch. C3-2)	8	6SK7, 6SA7, 6J5GT, 6H6, 6SQ7, 6VG, 5Y3G	25223	PR5450-30	BR3045	M-30-450	UT-30	Pwr	94104	A-3877	T22S58	A-2930													
AK-95, AK-96, (Ch. C4-2)	10	6SK7, 6SA7, 6J5GT, 6H6, 6SQ7, 6SF5, 6VG, 5Y3G	25216	PR5450-16	BR1645	M-16-450	UT-16	Pwr	94114																
AKL-58, AKL-59, (Ch. C2-4)	7	6SK7, 6SA8GT, 6H6, 6SQ7, 25L6G1, 25Z6G	25223	PR5450-30	BR3045	M-30-450	UT-30	Pwr	94115	A-3311	T22S44	A-2936													
AT-10, AT-11, AT-12, (Ch. C1-1)	5	12SA7, 12K7GT, 12SQ7, 50L6GT, 35Z5GT	2521	PR5150-40-20	BR2045	M-20-450	UT-201	Out	945-I	A-3865	T22S45	A-2902													
AT-10, AT-11, AT-12, (Ch. C1-1)	5	12SA7, 12K7GT, 12SQ7, 50L6GT, 35Z5GT	259-1	PR5150-40-20	BRD4215	M-2X40-150	TA-240	Out	946-1	A-3865	T22S45	A-2902													
AT-14, AT-15, (Ch. C1-5)	5	12SA7, 12K7GT, 12SQ7, 50L6GT, 35Z5GT	259-1	PR5150-40-20	BRD4215	M-2X40-150	TA-240	Out	946-1	A-3865	T22S45	A-2902													
AT-16, AT-17, (Ch. C1-5)	6	12SA7, 12K7GT, 12SQ7, 35L6G1, 35Z5GT, (47)</																							

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed In Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
FARNSWORTH-C	continued																							
AT-31, (Ch. C7-1)	5	1A7G, 1N5G, 1H5G, 1A5G, 35Z4GT	2516-1	PRSA150-40-40		BRD441S		M-2X40-150		TA-440		Chk	9411-I		†						718 762		2F4	2B30
AT-40, (Ch. C8-1)	4	1A7G, 1N5G, 1H5G, 1A5G	2518-1	PRS25-25		BR252A		M-25-25		TA-25		Out	9410-I		A-3857		T22S48		A-2937		758		17GD60	
ATL-10, ATL-11, ATL-12, (Ch. C1-2)	5	12SA7, 12K7GT, 12SQ7, 50L6GT, 35Z5GT	259-I	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†		A-3865		T22S45		A-2928					
ATL-14, ATL-15, ATL-16, (Ch. C1-6)	5	12SA7, 12K7GT, 12SQ7	259-I	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†		A-3865		T22S45		A-2928					
ATL-50, ATL-51, ATL-52, (Ch. C2-1) (C2-2)	7	26SK7, 6A8GT, 6H6, 6SQ7	251-I	PRS150-20		BR2015		M-20-150		UT-201		Out	On Spkr.		A-3876		T22S45		A-2928					
BC-45	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	2517-1	PRS25-25		BR252A		M-25-25		TA-25		Out	On Spkr.		A-3856		T22S47		A-2900		758		17GD60	
BC-72, 80, 81	8	26SK7, 6A7, 6J5GT, 6SQ7, 6V6G, 5Y3G	2510-I	PRS450-16		BR1645		M-16-450		UT-16		Pwr	†		A-3877		T22S58							
BC-82, BC-83, (Ch C-28)	8	26SK7, 6A7, 6J5GT, 6K6GT, 6X5GT	2533	PRS450-16		BR1645		M-16-450		UT-16		Pwr	Out	94-27	On Spkr.	P-6120	T22R04	BI	A-2930					
BC-103, 105	10	26SK7, 6A7, 6J5GT, 6SQ7, 6V6GT, 5Y3G	2511-I	PRS450-30		BR3045		M-30-450		UT-30		Pwr	Out		P-6013		T22R05		P-2953					
BC601	6	6SA7, 6J5GT, 6SK7, 6SQ7, 6K6GT, 6X5GT	2536	PRS350-24		BR2045		M-20-350		UT-203		Pwr	94-30		A-3878		T22S47		A-2931					
BC1020, BC1020X	10	26SK7, 6A7, 6J5GT, 6SQ7, 26V6GT, SW4GT	25 Mfd	PRS450-30		BR3045		M-30-450		UT-30		Pwr	Out	†	P-6013		T22R05		P-2953					
BC1041	10	26SK7, 6A7, 6J5GT, 6SJ7, 6H6, 6SQ7, 6V6GT, 5Y3G	2511-I	PRS450-30		BR3045		M-30-450		UT-30		Pwr	Out	944-1	P-6014		T22R06		P-2954					
BK73, 77, 78	7	26SK7, 6A7, 6J5GT, 6SQ7, 6K6GT, 6X5GT	2533	PRS450-16		BR1645		M-16-450		UT-16		Pwr	94-26		A-3878		T22S47		A-2931					
BK85, 87, 88, 89	8	26SK7, 6A7, 6J5GT, 6SQ7, 6K6GT, 6X5GT	2533	PRS450-16		BR1645		M-16-450		UT-16		Pwr	94-26		A-3878		T22S47		A-2931					
BK86	8	26SK7, 6A7, 6J5GT, 6SQ7, 6V6G, 5Y3G	2532	PRS450-30		BR3045		M-30-450		UT-30		Pwr	Out	†	A-3878		T22S47		A-2931					
BK106, 107, 108	10	26SK7, 6A7, 6J5GT, 6SQ7, 26V6GT, 5Y3G	2511-I	PRS450-30		BR3045		M-30-450		UT-30		Pwr	Out	†	P-6013		T22R05		P-2953					
BK110, 111, 112	11	26SK7, 6A7, 6J5GT, 6Q7, 26C7, 6V6G, 5Y3G	2538	PRS25-50		BR502		M-25-50		TA-50		Pwr	94-31		P-6013		T22R05		P-2953					
BK602	6	6SA7, 6J5GT, 6SK7, 6SQ7, 6K6GT, 6X5GT	2542	AF441		UP2245		DY-2X20-450		EL-220		Out	94-34		A-3311		T22S64		A-2936					
BK1061, 1071	10	26SK7, 6A7, 6J5GT, 6SJ7, 6H6, 6SQ7, 6V6GT, 5Y3G	2537	PRS350-24		BR2045		M-20-350		UT-203		Pwr	94-30		A-3878		T22S47		A-2931					
BK10305	10	26SK7, 6A7, 6J5GT, 6SQ7, 26V6GT, SW4GT	2542	PRS450-20		BR2045		M-20-450		UT-20		Pwr	94-45		A-3878		T22S47		A-2931					
BKR84	8	26SK7, 6A7, 6J5GT, 6SQ7, 6K6GT, 6X5GT	15 Mfd	PRS450-16		BR1645		M-16-450		UT-16		Pwr	Out	†	A-3878		T22S47		A-2931					
BT20, BT22	6	12SA7, 12K5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	2522	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Pwr	94-15		A-3876		T22S45		A-2928					
BT41	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	2517-1	PRS25-25		BR252A		M-25-25		TA-25		Out	On Spkr.		A-3856		T22S47		A-2900		758		17GD60	
BT52, 53, 54, 55, 66	5	12SA7, 12K7, 12SQ7, 50L6GT, 35Z5GT, (47)	30-20 Mfd	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	†		A-3865		T22S45		A-2928					
BT57	5	1A7GT, 1P5GT, 1N5GT, 1H5GT, 1Q5GT	4 Mfd	PRS150-4		BR415		M-4-150		UT-41		Out	†		A-3822		T22S47		A-2932		758		17GD60	
BT58	5	1A7G, 1N5G, 1H5G, 3Q5GT, 117Z6GT	30-30-40-40- Mfd	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Chk	†		A-3311		T22S64		P-2953					
BT61, 63, 66	6	12SA7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	30-20 Mfd	PRSA150-40-20		BRD4415		M-2X40-150		TA-440		Out	†		A-3876		T22S45		A-2928					
BT70, BT71	7	26SK7, 6A7, 6J5GT, 6SQ7, 6K6GT, 6X5GT	2529	PRS350-24		BR2045		M-20-350		UT-203		Pwr	94-25		P-6248		T22R02	BI	P-3048					
BT600, 600X	6	6SA7, 6J5GT, 6SK7, 6SQ7	2536	PRS350-24		BR2045		M-20-350		UT-203		Pwr	94-30		A-3878		T22S47		A-2931					
BT1010, 1010X	10	26SK7, 6A7, 6J5GT, 6SQ7, 26V6GT, SW4GT	2543	PRS450-20		BR2045		M-20-450		UT-20		Pwr	94-45		P-6013		T22R05		P-2953					
CC70, (Ch. C118-1)	7	26SK7, 6A7, 6J5GT, 6SQ7, 6K6GT, 6X5GT	2533	PRS450-16		BR1645		M-16-450		UT-16		Pwr	94-27		P-6348		T22R02	BI	P-3048					
CC90	9	26SK7, 6A7, 6J5, 26SQ7, 6V6GT, 5Y3G	2510-I	PRS450-16		BR1645		M-16-450		UT-16		Pwr	94-44		A-3878		T22S47		A-2931					
CK58	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	2522	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	94-91		P-6012		T22R04		P-2952					

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL	Photog. Set No.			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quarm Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiar Part No.	Note			
1st.	3831-1	16-5740		455				818-1	ST-105		SA1		Vol	786-1	AM-60-Z	KSS-3			D13-133	E						Continued	FARNSWORTH AT-31 (C7-1)	
2nd.	3832-1	16-5742						819-1	ST-108		6A1		Vol	787-1	AM-60-Z	KSS-3	A2		D13-133	E	42						AT-40 (Ch. C8-1)	
1st.	3835-1	16-5712		455				814-2	ST-105		5A1		Vol	782-1													ATL-10, ATL-11, ATL-12 (Ch. C1-2)	
2nd.	3836-1	16-5714						814-2	ST-105		5A1		Vol	782-1													ATL-14, ATL-15, ATL-16 (Ch. C1-6)	
1st.	387-1	16-5712		455				811-1	ST-165		SE10		Vol	781-1	M-60-Z		A6		D13-133		47	G1					ATL-50, ATL-51, ATL-52 (Ch. C2-1, C2-2)	
2nd.	387-1	16-5712		455																							BC-45	
1st.	38-180			455				81-66		F1		F1	Vol	77-28	M-60-Z		A2		D13-133		42	G1						
2nd.	38-175									F2		F2	Vol	783-1	Tone	784-1											BC-72, BC-80, BC-81	
1st.	↑	16-5712		455				81024		F2		F2	Vol	78-12	Vol	78-10			D13-139			G1					BC-82, BC-83, (Ch. C-28)	
2nd.	38-83	↑	16-5714	455																							BC-103, BC-105	
1st.	38-84																											
1st.	↑	16-5712		455						F2		F2	Vol	78-12	Treble	78-11										BC601		
2nd.	38-125							81-49		F2		F2	Vol	78-12	Bass	78-11												
1st.	38-126																										BC1020, BC1020X	
1st.	↑	16-5712		455																								
2nd.	38-126																											
1st.	38-125																											
2nd.	38-126																											
1st am	38-182			455				815-1		F2		F2	Vol	78-160													BC 1041	
1st fm	38-184			(AM) 4.3																								
2nd am	38-183																											
2nd fm	38-185			(FM) 4.3																								
1st.	38-66	16-5712						81-22		F2		F2	Vol	781-1	M-60-Z		A6		D13-133		47	G1					BK73, BK77, BK78	
2nd.	38-67	16-5714						81-23		F2		F2	Vol	781-1	M-60-Z		A6		D13-133									
1st.	↑	16-5712		455						F2		F2	Vol	781-1	M-60-Z		A6		D13-133		47	G1					BK35, 87, 88, 89	
2nd.	↑	16-5714								F2		F2	Vol	783-1	Tone	784-1			D13-139			G1					BK-86	
1st.	↑	16-5712		455						F2		F2	Vol	78-12	Vol	78-11											BK106, 107, 108	
2nd.	↑	16-5714																										
1st.	38-203	16-5712		455				81-65		F2		F2	Vol	78-15	M-67-Z		A		D13-140		41	G1					BK110, 111, 112	
2nd.	38-204	16-5714																										
1st.	38-125			455				81-49		F2		F2	Vol	781-1	M-60-Z		A6		D13-133		47	G1					BK602	
2nd.	38-126																											
1st am	38-182			455				815-1		F2		F2	Vol	78-12	Bass	78-11											BK1061, 1071	
2nd am	38-183																											
1st fm	38-184																											
2nd fm	38-185																											
1st.	↑	16-5712		455						F2		F2	Vol	78-160	Bass	78-11											BK10305	
2nd.	↑	16-5714																										
1st.	↑			455						F2		F2	Vol	78-10	Treble	78-9			M-60-Z		A		D13-133		41	G1		BKR-84
2nd.	38-43	16-6658		455				81-16		F2		F2	Vol	78-9	M-60-Z		A		D13-133		41	G1					BT-20, 22	
1st.	38-44	16-6660																										
1st.	38-180			455				81-66		F1		F1	Vol	77-28	M-60-Z		A2		D13-133		42	G1					BT-41	
2nd.	38-175									F2		F2	Vol	78-9	+	M-60-Z		A		D13-133		41	G1					
1st.	↑	16-6658		455						F2		F2	Vol	78-9	M-60-Z		A		D13-133		41	G1					BT52, 53, 54, 55, 56	
2nd.	↑	16-6660																										
1st.	↑	16-6658		455						F1		F1	Vol	78-29													BT-57	
2nd.	↑	16-6660								F1		F1	Vol	78-27	M-63-Z				D13-137								BT-58	
1st.	↑	16-6658		455						F2		F2	Vol	78-9	M-60-Z		A		D13-133		41	G1					BT61, 63, 66	
2nd.	↑	16-6660																										
1st.	38-66	16-5712		455				81-21		F2		F2	Vol	781-1	M-60-Z		A6		D13-133		47	G1					BT70, 71	
2nd.	38-67	16-5714																										
1st.	38-125			455				81-26		F2		F2	Vol	781-1	M-60-Z		A6		D13-133		47	G1					BT600, 600X	
2nd.	38-126																											
1st.	↑	16-5712		455						F2		F2	Vol	78-160	Bass	78-11											BT1010, 1010X	
2nd.	↑	16-5714																										
1st.	38-406	16-5712		455				81-24		F2		F2	Vol	70-60	AM-60-Z	KSS-3	A		D13-133		41						CC70	
2nd.	38-407	16-5712								F2		F2	Vol	70-120	AM-66-Z	KSS-3	A		D13-139									
1st.	38-417	16-5712		455	71205	L-40		81-61		F2		F2	Vol	78-57	AM-66-Z	KSS-3	A		D13-139		41						CC 90	
2nd.	38-418	16-5714																	D13-137		41						CK-58	
1st.	38-322			455				L-40		F2		F2	Vol	78-48	AM-60-Z	KSS-3	A		D13-133		41							
2nd.	38-324																		D13-137		41							

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS						Section C BATTERIES							
			No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.
			"A"	"B"																				
FARNSWORTH-C CK66.....	6 12SA7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	25-22	PRSA150-40-20		BRD4215			M-2X40-150		TA-240		Cut	94-91											
CK73, 74, 75.....	7 6SK7, 6SA7, 6J5GT, 6SQ7, 6K6GT, 6X5GT	25-33	PRS450-16		BR1645			M-16-450		UT-16		Pwr Out	94-27	P-6120	B1	T22R04	B1							
CK91, 92, 93.....	9 6SK7, 6SA7, 6J5, 6SQ7, 6V6GT, 5Y3G	2510-1 2511-1	PRS350-24 PRS45-16 PRS450-30		BR2045 BR1645 BR3045			M-20-350 M-16-450 M-30-450		UT-209 UT-16 UT-30		Pwr Out	94-44 94-94 94-100	A-3878 P-6012 A-3311		T22S47	A-2931 P-2952 A-2936							
CK111.....	11 6SK7, 6SA7, 6J5, 6SQ7, 6V6GT, 5Y3G	2511	PRS450-30		BR3045			M-30-450		UT-30		Pwr Out	94-41 94-49	P-6014 A-3311		T22R06 T22S64	P-2954 A-2936							
CT41.....	4 1A7GT, 1N5GT, 1H5GT, 3Q5GT	25-59	PRS150-12		BR1215			M-10-150		UT-121		Cut	On Spkr.	A-3856		T22S47	A-2900	758			17GD60 or 6TA60			
CT43.....	5 1A7G, 1N5G, 1H5G, 3Q5GT, 117Z6	25-163	PRS25-100		UP6CJ64			M-100-25		EL-35I		Out	On Spkr.	A-3856		T22S47	A-2900	758			17GD60 or 6TA60			
CT50, 51, 52, 53, 54.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	25-162 25-22	PRSA150-40-20		BRH251 BRD4215			M-2X40-150		TA-240		Out	94-91											
CT59.....	5 1R5, 1T4, 1S5, 1S4, 3S5	25-131			UP6CJ64					EL-35I		Out	94-37	A-3329		T22S47	A-2927	2950 467			2R	XX45		
CT60.....	6 1N5, 1A7, 1H5, 3Q5, 117Z6	25-132			UP6CJ64			EL-35I				Chk Out	94-88 94-91	A-3856		T22S47	A-2900	745 2482			8FL	^A30		
CT61, 62, 63, 64.....	6 6SS7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	25-22	PRSA150-40-20		BRD4215			M-2X40-150		TA-240		Out	94-91											
DK73, 75.....	7 6SK7, 6SA7, 6J5GT, 6SQ7, 6K6GT, 6X5GT, (47)	25-33 25-29	PRS450-16 PRS350-24		BR1645 BR2045			M-16-450 M-20-350		UT-16 UT-203		Pwr Out	94-27 94-44	P-6120 A-3878	B1	T22R04	B1	A-2931 P-3048						
EC-260.....	6 6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT, (44)	25180			UP9DJ55			DY-404		EL-424		Out	94197			T22R02	B1	A-2930 P-2952						
EK-081, 082, 083.....	8 6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT, (44)	25214						DY-403				Pwr	94104			T22R02	B1	A-2901 P-3048						
EK-262, 263, 264, 265.....	6 6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT, (44)	25180			UP9DJ55			DY-404		EL-424		Out	94195			T22R02	B1	A-2930 P-2952						
EK-681.....	8 6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT, (44)	25214						DY-403		EL-424		Pwr	94104			T22R02	B1	A-2901 P-2952						
ET-050, 61, 63, 64, 65, 66.....	6 6SS7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, (47)	25022	PRSA150-40-20		BRD4215			M-2X40-150		TA-240		Out	94091			T22S45		A-2928						
GK100, 102, 103, 104.....	10 6AG5, 6SA7, 6SB7Y, 6SG7, 6SF7, 6H6, 6SL7GT, 6V6GT, 5Y3GT, (44)	25214 25316	AF444J PRS150-4		UP43145C BR550			DY-403		EL-424		Pwr Out	94204-Z 94239	P-6012 A-3870		T22R04		P-2952 A-2936						
GK-140, 141, 142, 143, 144.....	14 7AG7, 6AG5, 6CA, 6SK7, 6H6, 6SA7, 6SQ7, 6V6GT, 5U4G, (44)	25277 25269 25270	AF444J PRS25-25 PRS150-4	A4	BR502 BR415			DY-406		EL-424		Out	94170-A			T22R05		P-2953 A-2936						
FEDERAL MFG. CO 104, 135.....	3 12SH7, 50B5, 35W4	30-15-10 Mfd.	AF444J		UP6CJ45			DY-3X20-450		EL-432		In Out		A-4743 A-3876		T20A04 T22S43		A-2918 A-2928						
FEDERAL TEL & 1030T, 1540T.....	6 6ADIO CORP. 6SS7, 6SA7, 6SQ7, 50L6GT, 35Z5GT, (1490)	40, 40 Mfd.	AF88D		UP4415			DY-2X40-150		EL-25		Out	FBE-1034-1			A-3330		A-3031						
1040T.....	5 12BE6, 12BA7, 12AT5, 50L6GT, 35W4, (47)	30, 50 Mfd.	PRSA150-50-30		BRD3515			M-5030-150		TA-530		Out		A-3330					A-3031					
FERRAR C-81-B.....	8 14A7, 14Q7, 14R7, 12SL7GT, 250L6GT, 35Y4, (44)	30, 40, 40 Mfd.	PRSA150-40-40 & PRS150-30		EZ44315C			DSB-2X40-150 & M-30-150		UT-301		Chk		C-1080		T20C52		C-2977						
WR-11.....	1 12SL7GT	25, 25 Mfd.	PRS25-25 PRSA150-40-40		BRD202A BRD4415			M-25-25 M-2X40-150		TA-25 TA-440		Chk Out		C-1706 A-3825		T20C52		C-2975 A-2905						
FIRESTONE (Air) 4-A-2.....	5 12BE6, 12BA6, 12AT6, 50B5, 35W4, (47)	N-3302	PRSA150-30-30		EZ3315			DSB-2X30-150		TA-330		Out	N-3899			T22S45		A-2928						
4-A-10.....	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, (47)	N-5193	PRSA150-30-40		BRD4415			DSB-2X40-150		TA-430		Out	N-4875			A-3330		A-3031						
4-A-20.....	6 12SK7, 12SA7, 12SF7, 35L6GT, 35Z5GT, (47)	500256	AF8404A	A3	UP4215			DY-400-150		EL-24		Out	500617			A-3330		A-3031						
4A21X, 4A22X.....	6 6SK7, 6SA7, 6SF7, 6K6GT, 5T3GT, (44)	502207	AF444J & PRS25-25		UP4445C			DY-313		EL-312		Pwr Out	502906 502174			T22R02		P-2952 A-2931						
4-A-23.....	7 6SK7, 6SA7, 6SQ7, 6SJ7, 6K6GT, 5Y3GT, (44)	502207	AF444J		UP4445C			DY-313		EL-312		Pwr Out	502174			T22R02		P-2952 A-2931						
4-A-24.....	4 1A7GT, 1N5GT, 1H5GT, 1A5GT	25E9			BR1215			M-10-150		UT-121		Out	22E4			A-3857		T22S48		758				
4-A-25.....	5 12SA7GT, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (47)	25E1	AF10100		UP5515			DY-2X50-150		EL-25		Out	22E2			A-3877		T22S45		A-2930				
4-A-27.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	B18-283	PRSA150-30-30		EZ3315			DSB-2X30-150		TA-330		Out	A-80-223			A-3876		T22S46		A-2901				
4-A-31.....	6 6GSK7, 6SA7GT, 6SQ7GT, 6V6GT, 6X5GT, (44)	25180	AF444J		UP222245	A3	DY-3X20-450 & EL-312		EL-323		Out	94025 94199			T22R02		A-2930							
4-A-37.....	8 6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT, (44)	25214	AF444JA		UP43145C		DY-406		EL-424		Out	94104			T22R04		P-2952							
4-A-42.....	10 6AG5, 6SB7Y, 6SG7, 6SA7, 6SF7, 6H6, 6SL7GT, 6V6GT, 5Y3GT, (47, 44)	25214	AF444JA		UP43145C		DY-403		EL-424		Out	94195			B12		A-2936							

<sup>†</sup> Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tube	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
FIRESTONE—Cont.	4-A-43.	6-SK7, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3GT (#44).	AF44J	UP2245C	DY-312.	EL-350.	Pwr Out	C51502.	P-6120.	T22R04.	P-2952.													
	4-B-1.	8-SK7, 6SA7, 6SQ7, 6K6GT, 5K6GT, 024, (#51).	25099.	AF32K4A.	UP2235C	DY-312.	EL-212.	Pwr Out	94078.	T22S47.	A-2931.													
	4-B-2.	6-SK7, 6SA7, 6SQ7, 6V6GT, 024, (#51).	25099.	AF32K4A.	UP2235C	DY-312.	EL-212.	Pwr Out	94078.	T22R20.	A-2950.													
	4-B-6.	6-SK7GT, 6SA7, 6SQ7GT, 6K6GT, 5Y3GT, 024, 6X5GT, (#51).	25099.	AF32K4A.	UP2235C	DY-312.	EL-212.	Pwr Out	94078.	T22R20.	A-2930.													
	4-C-3, 4-C-6.	6-IN5GT, 1A7GT, 1H5GT, 3Q5GT, 305GT, 117Z6GT (#44).	25E11.	AF1010D4A.	UP22515C	GY-419.	AI	M-100-25.	UHC-102.	T22R04.	P-2952.													
	R-3051.	5-6A8G, 6U7G, 6Q7G, 6K6G, 5W4G (#44).	110497.	PR525-100.	EZ568.	DH-2X8-450SS.	TU-38.	Pwr Out	110524.	P-6011.	T22R02.	P-2951.												
	3061-3069.	6-L67G, 6C5G, 6U7G, 6Q7G, 6K6G, 5W4G (#44).	89937.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	110537.	A-3378.	T22S47.	A-2931.												
			110768.	PR540-8.	KR540.	D-40-450.	PLS-40.	Pwr Out	112346.	P-6011.	T22R02.	P-2951.												
			112315.	PR540-16.	BR1645.	M-8-450.	UT-8.	Pwr Out	112320.	A-3378.	T22R02.	P-2951.												
			112710.	PR540-8.	BR845.	M-16-450.	UT-16.	Pwr Out	112320.	A-3378.	T22S47.	A-2931.												
			1110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	112346.	P-6011.	T22R02.	P-2951.												
			111689.	PR525-25.	BR252A.	M-25-25.	TA-25.	Pwr Out	112320.	A-3378.	T22S47.	A-2931.												
			89937.	GL450-40.	KR540.	D-40-450.	PLS-40.	Pwr Out	112346.	P-6011.	T22R02.	P-2951.												
			112284.	PR540-8.	BR845.	M-8-450.	UT-8.	Pwr Out	112320.	A-3378.	T22S47.	A-2931.												
			112113.	PR540-8.	BR105.	M-10-50.	TA-10.	Pwr Out	112324.	A-3378.	T22S47.	A-2931.												
			1110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	112385.	P-6013.	T22R06.	P-2953.												
			111469.	PR540-16.	BR1645.	M-16-450.	UT-16.	Pwr Out	111074.	A-3325.	T22S72.	A-3127.												
			111298.	PR5250-12.	BR1225.	M-16-250.	UT-122.	Pwr Out																
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out																
			110377.	UP2245C.	DY-315.	EL-350.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.													
			25-99.	AF44J4A.	UP2245C.	DY-315.	EL-350.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			25-99.	AF44J4A.	UP2245C.	DY-315.	EL-350.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78.	A-3311.	T22S64.	A-2936.												
			110377.	PR525-10.	BR102A.	M-10-25.	TA-10.	Pwr Out	94-78															

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS					Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Product Set No.	
1st.	B51416-2...	16-6658...		455	†	L-70...		C-51512...	ST-194		5E45...		Vol	B55575-1...	AT-88...	KSS-3...	A...	D18-133X...	E	41				Co	ntinued—	FIRESTONE 4-A-43	
2nd.	B51417-2...	16-6670...						11161...	ST-108	I*	6EV6...		Tone	B55550-1...	AM-4...	KSS-3...	I	D13-133...									
1st.	38274	16-6658		455				11171...	ST-108	I*	6EV6...		Sens	78021...													
2nd.	38275	16-6670						81154...	ST-109		6A1...		Vol	78042...	A1-58...	RS-2...	A...	D18-133X...	A	41							
1st.	38274	16-6658		455									Sens	78031...													
2nd.	38275	16-6670											Vol	78042...	AT-88...	RS-2...	A...	D18-133X...	A	41							
1st.	38889	16-6658		455									Sens	78146...	28E13...	AM-60-Z...	KSS-3...	D13-133...	E								
2nd.	38890												Vol														
1st.	20E53	16-6666		150				1E18...	ST-107		6A15...																
2nd.	20E54	16-6667																									
1st.	110514	16-5712		455				R-21/2-A...		F2				Vol	110503...	M-63-Z...	A...	D13-137...	41								
2nd.	110520	16-5714						11/21/2-A...	ST-106		XE10...			Tone	110504...	M-60-Z...	A...	D13-133...	71								
1st.	110851	16-5712		455										Vol	112175...	M-63-Z...	A...	D13-137...	61								
2nd.	112168	16-5714												Tone	112174...	M-60-Z...	A...	D13-133...									
1st.	111213...	16-5712		455				11/21/2-A...	ST-736		8E15...			Vin	1122H5...	M-61-Z...	A...	D13-137...	41								
2nd.	112168	16-5714						111904...	12E10					Tone	112286...	M-60-Z...		D13-133...	61								
1st.	111336	16-5712		455																							
2nd.	111336	16-5712						111905...																			
3rd.	111340	16-5714																									
1st.	38-274	16-5712		455				11-163...		F2				Vol	78-42...												
2nd.	38-275	16-5714						11-164...		F2				Tone	78-31...												
1st.	38-274	16-6658		455						F2				Vol	78-42...												
2nd.	38-275	16-6660																									
1st.	500801	16-5712		155	161280...	I-76A		M-10014...		I?				Voi	501027...	AM-60-Z...	KSS-3...	A...	D13-137...	41							
2nd.	119024	16-5714								F2				Voi	501325...	AM-60-Z...	KSS-3...	A2...	D13-137...	42							
1st.	161340	16-6658		455				R-510466...	ST-108		6A1...			Voi	13104...												
2nd.	13480																										
1st.	18262							R-501350...	ST-105		5A1...			Vol	501353...	AM-1-1-Z...	K'S-1...		D13-137...	41							
2nd.	500759	16-6658		455				N-4...		F2				Voi	N-4629...	AM-60-Z...	KSS-3...	A...	D13-133...	E	41						
1st.	501380	16-6660								I2				Tone	501488...	AM-63-Z...	KSS-3...	A...	D13-137...	E	41						
1st.	N-4646	16-6658		455										Voi	N-3785...	AM-60-Z...	KSS-3...	A...	D13-133...	E	41						
2nd.	N-4647	16-6660																									
1st.	500131	16-6658		455																							
2nd.	119024	16-6650																									
1st.	N-3995	16-5712		456																							
2nd.	N-4069	16-5714		456																							
1st.	500452	16-5712		455																							
2nd.	500455	16-6133																									
3rd.	500457	16-5714																									
1st.	500801	16-6658		455																							
2nd.	119024	16-6660																									
1st.	500131	16-5712		455																							
2nd.	119024	16-5714																									
1st.	N-3816	16-6658		456																							
2nd.	N-3804	16-6660																									
1st.	500131	16-5712		455																							
2nd.	119024	16-5714																									
1st.	N-4069	16-6658		455																							
2nd.	N-4070	16-6660																									
1st.	500801	16-5712		455																							
2nd.	119024	16-5714																									
1st.	500131	16-5712		455																							
2nd.	119024	16-5714																									
1st.	N-3816	16-6658		456																							
2nd.	N-3804	16-6660																									
1st.	500131	16-5712		455																							
2nd.	119024	16-5714																									
1st.	N-3816	16-6658		455																							
2nd.	N-3804	16-6660																									
1st.	38-389	16-5712		455																							
2nd.	38-390	16-5714																									
1st.	500801	16-5712		455																							
2nd.	119024	16-5714																									
1st.	38-158	16-5712		455																							
2nd.	38-160	16-5714																									
1st.	38-389	16-5712		455																							
2nd.	38-390	16-5714																									
1st.	500801	16-5712		455																							
2nd.	119024	16-5714																									
1st.	N-3565	16-6658		455																							
2nd.	N-2890	16-6660																									
					</td																						

MFR. & MDDEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
FIRESTONE—Cont.	n	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-1366	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	On Spkr.	A-3876		T22S45		A-2928					
S-7402-2	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-1366	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	On Spkr.	A-3876		T22S45		A-2928					
S-7402-3 (Ch. TSB)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-1366	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	On Spkr.	A-3876		T22S45		A-2928					
S-7402-3 (Ch. TSU)	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-2599	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	On Spkr.	A-3876		T22S45		A-2928					
S-7402-5	5	12SA1, 12SK1, 12SQ1, 35L6GT	N-3302	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Cut	N-3899	A-3875		T22S45		A-2928					
S-7402-6	6	1A7G, 1N5G, 1H5G, 1A5G, 35L6GT, 35Z4GT. (#47)	11822									Cut	On Spkr.					A-3030					
S-7402-7	5	12SA1, 12SK1, 12SQ1, 35L6GT	N-4015	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Cut	N-4011	A-3876		T22S45		A-2928					
S-7402-8	5	12SA1, 12SK1, 12SQ1, 50L6GT	501213	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	R-501163	A-3865		T22S45		A-2928					
S-7403-1	6	12SK1, 12SA1, 12K7, 12SQ1, 35L6GT, 35Z5GT. (#47)	N-3658	AF1010D		UP5515		DY-2X50-150		EL-25		Cut	N-3782	A-3876		T22S45		A-2928					
S-7403-2	6	12SK1, 12SA1, 12SQ1, 35L6GT, 35Z5GT. (#47)	N-3658	AF1010D		UP5515		DY-2X50-150		EL-25		Cut	N-3782	A-3876		T22S45		A-2928					
S-7403-3	5	6SA1, 6SK1, 6SQ1, 6F6G, 5Y4G	10625	PRSA450-8-8		EZ588		DH-2X8-490SS		TU-88		Pwr	11272	P-6010		T22R00		P-2949					
S-7403-4	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-1366	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Pwr	11272	P-6010		T22S45		A-2928					
S-7403-5	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-2015	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Pwr	N-3040	A-3876		T22S45		A-2928					
S-7403-6	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-3114	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Pwr	N-3072	A-3876		T22S45		A-2928					
S-7403-7	6	12SA1, 12SK1, 12SQ1, 12SK1, 25L6G, 5W4G. (#46)	40-20 Mfd.								Pwr												
S-7403-8	5	6SA1, 6SK1, 6SQ1, 6F6G, 5W4G	117034	PRS25-10		EZ5116		M-10-25		TU-1616		Cut	114530	P-6011		T22S45		A-2928					
S-7403-9	8	6SK7, 6SA1, 6J5GT, 6SQ1, 6F6G, 5W4G	117034	PRS25-10		EZ5116		M-10-25		TU-1616		Cut	U-119846	A-3878		T22S47		P-2951					
S-7404-1	6	6SA1, 6SK7, 6H6, 6SQ1, 6F6G, 5W4G	118252	PRSA450-16		BR102A		M-16-450		TA-10		Cut	115821	P-6012		T22R04		P-2952					
S-7404-2	8	6SA1, 6J5GT, 6SK7, 6H6, 6SF5, 6V6G, 5W4G, 6J5	114972	PRSA450-16		BR1645		M-16-450		UT-16		Cut	U-119863	A-3878		T22S47		A-2931					
S-7404-2 (Prefix A)	8	6SA1, 6J5GT, 6SK7, 6H6, 6SF5, 6V6G, 5W4G, 6J5	40566			BR102A		M-10-25		TA-10		Pwr	118665	P-6120		T22R04		P-2952					
S-7404-2 (Prefix C)	8	6SA1, 6J5GT, 6SK7, 6H6, 6SF5, 6V6G, 5W4G, 6J5	40566			BR1645		M-16-450		UT-16		Pwr	U-113678	A-3877		T22S58		A-2930					
S-7404-3	10	6SK7, 6SA1, 6J5GT, 6SQ1, 6F6G, 5Y3G, 6J5	113261	GL450-8		KR508		D-8-450		PLS-8		Cut	41151	P-6011		T22R02		P-2951					
S-7404-4	8	6SA1, 6J5GT, 6SK7, 6H6, 6SF5, 6V6G, 5W4G, 6J5	114972	PRSA450-16		BR1645		M-16-450		UT-16		Cut	40796	A-3877		T22S58		A-2930					
S-7404-5	6	6SA1, 6J5GT, 6SK7, 6H6, 6SF5, 6V6G, 5W4G, 6J5	40566			BR1645		M-16-450		UT-16		Cut	117633	P-6011		T22R06		P-2954					
S-7404-6	9	6SK7, 6SA1, 6J5GT, 6SQ1, 6F6G, 5Y3G	160008	UP3345		DY-2X30-450		PLS-8		TA-10		Cut	41151	P-6011		T22R02		P-2951					
S-7404-7	11	6SK7, 6J5GT, 6SA1, 6SQ1, 6F6G, 5Y3G	160719	GL450-30		KR530		D-30-450		PLS-8		Cut	117790	A-3311		T22S64		A-2936					
S-7405-5	5	1A7G, 1N5G, 1H5G, 1A5G	112898	PRSA150-16		BR1615		M-16-150		UT-161		Cut	41383	A-3877		T22S58		A-2930					
S-7405-6	5	1A7GT, 1N5GT, 1H5GT, 1A5GT	112898	PRSA150-16		BR1615		M-16-15		UT-161		Cut	119651	A-3857		T22S48		A-2937					
S-7405-8	4	1A7GT, 1N5GT, 1H5GT, 1A5GT	110377	PRS25-10		BR102A		M-10-25		TA-10		Cut	R-500912	A-3857		T22S48		A-2937					
S-7405-9	5	1A7GT, 1N5GT, 1H5GT, 1A5GT	1693	PRSA25-10		BR102A		M-10-25		TA-10		Cut	119651	A-3857		T22S48		A-2937					
S-7405-9 (Ch. A-375)	5	1A7GT, 1N5GT, 1H5GT, 1A5GT	112898	PRSA150-16		BR1615		M-16-150		UT-161		Cut	On Spkr.	A-3857		T22S48		A-2937					
S-7406-5	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-3114	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	N-3128	A-3876		T22S45		A-2928					
S-7406-6	8	6SK7, 6SA1, 6SQ1, 6J5GT, 6F6G, 5Y3G, 6J5	160008	UP3345		DY-2X30-450		TA-10		PLS-8		Cut	160390	P-6312		T22R04		P-2952					
S-7406-7	11	6SK7, 6SA1, 6J5GT, 6SQ1, 6F6G, 5Y3G	25 Mfd.			BR102A		M-10-25		TA-10		Cut	M-160464	A-3311		T22S64		A-2936					
S-7407-3	6	6K7, 6A8, 6Q7, 6V6, 6X5	8-8-2 Mfd.	PRSA25-10		EZ8845		DH-3X8-450SS		TA-10		Cut	P-6013	A-3311		T22R05		P-2953					
S-7407-5 (Early)	6	6SK7GT, 6A8GT, 6Q7GT, 6V6GT, 6V6G, 6X5	20702	PRSA25-10		BR102A		M-10-25		UT-83		Cut	162640	A-3877		T22S64		A-2936					
S-7407-5 (Late)	6	6SK7GT, 6A8GT, 6Q7GT, 6V6GT, 6V6G, 6X5	15-10 Mfd.	PRSA25-10		BR102A		M-10-25		TA-10		Cut	20719	A-3877		T22S58		A-2930					
S-7407-6	6	6SK7, 6A8, 6Q7, 6V6, 6X5	114258	PRSA450-8		BR845		M-8-450		UT-8		Cut	116038	A-3877		T22S58		A-2930					
S-7407-8	6	6K7GT, 6A8GT, 6Q7GT, 6V6G, 6X5	42127			BR845		M-8-450		UT-8		Cut	U-116207	A-3878		T22S47		A-2931					
S-7422-5	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT. (#47)	N-1368	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Cut	42358	A-3877		T22S58		A-2930					
S-7422-9	6	12SK7, 12SA1, 12SQ1, 35L6GT, 35Z5GT. (#47)	N-3658	AF1010D		UP5515		DY-2X50-150		EL-25		Cut	42363	A-3877		T22S45		A-2928					

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photofact Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	N-1598	16-5712		456				N-1585	ST-113		4A1		Vol	N-1595	AM-60-Z	KSS-3	A.	D13-133	E	41					Continued—	FIRESTONE S-7402-1	
2nd.	N-1596	16-5714						N-15 5	ST-113		'A1		Vol	N-1955	AM-60-Z	KSS-3	A.	D13-133	E	41						S-7402-2	
1st.	N-1594	16-6658		456				"-27"	ST-11		4A1		Vol	N-1595	AM-60-Z	KSS-3	A.	D13-133	E	41						S-7402-3	
2nd.	N-1596	6-6658						N-2428	ST-11		4A1		Vol	N-1955	AM-60-Z	KSS-3	A.	D13-133	E	41						(Ch. TSB)	
1st.	N-1594	16-6658		6				"-			"		Vol	N-3877	"	KSS-3	A.	"	E							S-7402-3	
2nd.	N-1956	16-6658																							S-7402-5		
1st.	N-3876			5																							
2nd.	N-3754																										
1st.	10768	1-66		55				11-21			F2		Vol	11112												S-7402-6	
2nd.	10769	16-6660						N-4	ST-113		'1		Vol	N-4014	AM-60-Z	KSS-3	A.	D13-133	E	41						S-7402-7	
1st.	N-4013	16-6658		4				R-5 1	ST-19		'E'5..		Vol	500223												S-7402-8	
2nd.	N-3908							N-3781	ST-105		5A1		Vol	N-4076												S-7403-1	
1st.	501233	16-6658		4				N-37	ST-1		5'1.		Vol	N-3785	M-60-Z	KSS-3	A.	D13-133	E	1					S-7403-2		
2nd.	501166							11 7			F		Vol	4839	M-60-Z	KSS-3		D13-133	E	1					S-7403-3		
1st.	N-3816	16-6658		456				N-2889			F		Fl	Vol	N-2386	AM-60-Z	KSS-3	A.	D13-133	E	41					S-7403-4	
2nd.	N-3804	6-6658						N-3	ST-0		5'		Vol	N-3045	AM-60-Z	KSS-3	A.	D13-133	E	41					S-7403-5		
1st.	N-3043	16-6658		456				N-3071	ST-105		52A1		Vol	N-3065	AM-60-Z	KSS-3	A.	D13-133	E	41					S-7403-6		
2nd.	N-3044	6-6660						ST-1 4			5E4		Vol	115629	AM-63-Z	KSS-3	A.	D13-137	E	41					S-7403-7		
1st.	N-1598	6-6658		456				"-11			F		Vol	119602	M-63-Z	KSS-3		D13-137	E	41					S-7403-8		
2nd.	N-2890							U-115093			F2		F2	Vol	119779	AM-60-Z	KSS-3	A.	D13-133	E	41					S-7403-9	
1st.	119042	16-6658		5				"-115064			F2		F2	Vol	117212	AT-11	KSS-3	A.	D18-137X	E	1					S-7404-1	
2nd.	119221	16-6660																									
1st.	119042	16-5712		455																							
2nd.	119024	16-5714																									
1st.	117254	16-6658		455																							
2nd.	117216	16-6660																									
1st.	118672	16-5712		4							1 El		Vol	118669	AT-	KSS-3	A.	18-137X	E	41					S-7404-2		
2nd.	118664	16-5714									"07"		F	2	Vol	41021	AM-60-Z	KSS-3		13-133	E	41					(Prefix A)
1st.	40673	16-5712		455							R-115070		F2	F2	Vol	117625	"-11			18-137X	E						(Prefix C)
2nd.	40718	16-5714																							S-7404-3		
1st.	117616	16-5712		455																					S-7404-4		
2nd.	117618	16-5714																							S-7404-5		
1st.	40673	16-5712		455	41533						41315		F2	F2	Vol	1437	T-1		A.	D13-139X		41	G1				
2nd.	"0718	16-5714																							S-7404-6		
1st.	119042	16-5712		455							U-115100		F2	F2	Vol	119602	AM-63-Z	KSS-3	A.	D13-137	E	41					S-7404-7
2nd.	119024	16-5714																							S-7404-8		
1st.	119042	15-571		4																					S-7404-9		
2nd.	119024	16-5714		4																					S-7404-10		
1st.	116700	16-5712		4																					S-7404-11		
2nd.	116010	6-5714																							S-7404-12		
1st.	119720	16-6658		455							M-115093	ST-115	8A21		Vol	119551	AM-63-Z	KSS-3	A.	D13-13	E	41					S-7405-5
2nd.	119673	16-6660									M-500350	ST-115	8A21		Tone	1 9552	AM-49-S	KSS-3	A2	11-128	E	4					S-7405-6
1st.	119720	16-6658		455																					S-7405-7		
2nd.	119573	16-6660																							S-7405-8		
1st.	161340	16-6658		455							R-509886	ST-108	6A1		Tone	500356	AM-63-Z	KSS-3	A2	D11-127	E	4					S-7405-9
2nd.	161330	16-6660																							S-7405-10		
1st.	13301	16-6658		4																					S-7405-11		
2nd.	13301	16-6660																							S-7405-12		
1st.	119720	16-6658		4							500	ST-108	A1		Tone	50 3	AM-63-Z	KSS-3	A	13-137	E	4					S-7405-13
2nd.	119673	16-6660																							Ch. A-375		
1st.	N-3043	16-6658		456							N-319	ST-105	52A1		Tone	500357	AM-49-S	KSS-3	A	D11-128	E	41					S-7406-5
2nd.	N-3044																								S-7406-6		
1st.	19042	16-5712		455							M- 5116		F2		Vol	118659	AT-112	KSS-3	A	D18-137X	E	41					S-7406-7
2nd.	119024	16-5714		455																					S-7406-8		
1st.	119024	16-5712																							S-7407-3		
2nd.	119024	16-5714																							S-7407-4		
1st.	20945A	16-5712		4																					S-7407-5 Early		
2nd.	20945	6-5714																							S-7407-5 Late		
1st.	116043	16-6658									-15		2		F2	Vol	116125	T-							"		
2nd.	116040	16-6660									423		F2		Vol	42101									S-7407-6		
1st.	42128A			55							N-1	ST-105	5A1		Tone	Vol	110311	2 Meg.	M-2							S-7407-8	
2nd.	42129																								S-7407-9		
1st.	N-1954	16-6658		456																					S-7422-5		
2nd.	N-1596																								S-7422-9		
1st.	N-3816	16-66 8		456							N-3	ST-105	5A1		Tone	Vol	117385	AM-60	KSS-3	A	13-133	E	41				S-7422-9
2nd.	N-3804	16-6660																							S-7422-9		

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		Part No.	Part No.		Part No.		Part No.		Part No.		Pwr Out	Part No.	Part No.		Part No.		"A"	"B"	"A"	"B"	"A"	"B"	
FIRESTONE—Cont.	Induced	6 6D6G, 1H4G, 6S7G, 6T7G, 6L5G, 1J6G, (49)	C-242.			UP15035.		DY-2X15-350.		EL-254.													
S-7424-3.		5 6A8G, 6U7G, 6Q7G, 6K6G, 6X5G.	50528.	PRS8450-8-8		E2588		DH-2X8-450SS		TU-88.			Pwr Out	T-26.	A-3831.	T22S47.		A-2938.					
S-7425-3.		4 5K7, 6J7, 25L6, 25Z6 (#40).	C-233.			EZ92115.		DSB-3X20-150.					Pwr Out	50644.	A-3878.	T22S47.		A-2931.					
S-7425-4.		5 6A8G, 6K7, 607G, 25L6G, 25Z6G, R-320.	113472.	PRS150-40		BR4015.		M-40-150.		UT-401.			Cut Cut	45889.	A-3876.	T22S45.		A-2931.					
S-7425-5 (Ch.		5 6A8G, 6J7G, 25L6G, 25Z6G, R-320.	112898.	PRS150-20		BR2015.		M-20-150.		UT-201.			Cut	R-114062.	A-3876.	T22S45.		A-2928.					
S-7425-6 (Late)		5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT (#51).	113472.	PRS150-40		BR4015.		M-40-150.		UT-401.			Cut	U-116676.	A-3876.	T22S45.		A-2928.					
S-7425-8UA.		4 6A8G, 6J7G, 25L6G, 25Z6G, L55B	113472.	PRS150-40		BR4015.		M-40-150.		UT-401.			Cut	U-116676.	A-3876.	T22S45.		A-2928.					
S-7425-9 (Ch. R-317).		4 6A8G, 6J7G, 25L6G, 25Z6G, L55B	113472.	PRS150-40		BR4015.		M-40-150.		UT-401.			Cut	R-113343.	A-3865.	T22S45.		A-2928.					
S-7425-9 (Loop).		5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT (#51).	113472.	PRS150-40		BR4015.		M-40-150.		UT-401.			Cut	R-113343.	A-3865.	T22S45.		A-2928.					
S-7426-1.		4 6A8G, 6J7G, 25L6G, 25Z6G (#44).	112898.	PRS150-20		BR2015.		M-20-150.		UT-201.			Pwr Out	R-113343.	A-3865.	T22S45.		A-2928.					
S-7426-2.		6 6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G, L49B Bailast.	113472.	PRS150-40		BR4015.		M-40-150.		UT-401.			Cut	U-116676.	A-3876.	T22S45.		A-2928.					
S-7426-3.		6 6A8G, 6K7, 6Q7G, *6K6G, 5W4G	113808.	PRS450-8		BR845.		M-20-150.		UT-201.			Pwr Out	113813.	P-6011.	T22R02.		P-2951.					
S-7426-4.		(#44).	114009.	PRS450-8		BR845.		M-40-150.		UT-401.			Cut	U-116676.	A-3865.	T22S45.		A-2905.					
S-7426-5.		4 6K7GT, 6J7GT, 25L6GT, 25Z6GT, (44).	C-233.			E232115.		DSB-3X20-150.					Cut	U-116676.	A-3876.	T22S45.		A-2928.					
S-7426-6.		5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (#47).	N-1366.	PRSA150-40-20		BRD4215.		M-2X40-150.		TA-240.			Out	On Spkr.	A-3876.	T22S45.		A-2928.					
S-7426-7 (Roamer).		4 1A7G, 1N5G, 1H5G, 1C5G.	N-1367.	PRS150-8		BR815.		M-8-150.		UT-81.			Out	On Spkr.	A-3876.	T22S47.	A-2931.	742-738.	C6	5DA60.			
S-7426-8.		5 6SA7, 6SK7, 6H6, 6SQ7, 6F6G, 5W4G, (44).	115262.	PRS450-16		BR1645.		M-16-450.		UT-16.			Pwr Out	117217.	P-6119.	T22S47.		P-2951.					
S-7426-9.		3 1A7G, 1N5G, 1N6G.	114258.	PRS450-8		BR845.		M-8-450.		UT-8.			Cut	U-116212.	A-3878.	T22S47.		A-2928.					
S-7427-1 (Ch. R-314).		7 6A8G, 6K7, 6Q7G, *6K6G, 5W4G, 6U5.	112802.			KRS888A.							Pwr Out	113978.	P-6011.	T22R02.		P-2951.					
S-7427-1 (Late).		7 6SK7, 6SA7, 6SQ7, 6F6G, 5W4G, 6U5.	118421.			E25116.				TU-1616.			Cut	U-114135.	A-3825.	T22S42.		A-2905.					
S-7427-2.		8 6K7, 6A8G, 6Q7G, *6K6G, 5Y3G, 6U5.	113261.			GL450-40.		KR540.		D-40-450.			Pwr Out	113498.	P-6119.	T22R02.		P-2951.					
S-7427-3.		10 6K7, 6L7G, 6J5G, 6H6G, 6L6G, 5W4G, 6U5.	113261.			GL450-30.		KR530.		D-30-450.			Pwr Out	M-117091.	A-3878.	T22S47.		A-2931.					
S-7427-5.		5 1A7G, 1N5G, 1H5G, 1A5G, 35Z4GT, 50 Mfd.	110377.			GL450-40.		KR540.		D-40-450.			Pwr Out	113271.	P-6012.	T22R04.		P-2952.					
S-7427-6.		3 1N5G, 1A5G, 5 Mfd.	110377.			GL450-30.		KR530.		D-30-450.			Pwr Out	113192.	A-2312.	T22S74.		A-2901.					
S-7427-7.		5 6SA7, 6SK7, 6SQ7, 6F6G, 5W4G, (44).	113808.	PRS450-16		BR1645.		M-16-450.		UT-16.			Pwr Out	114101.	P-6012.	T22R04.		P-2952.					
S-7427-8.		7 6SA7, 6SJ7, 6SK7, 6SQ7, 6F6G, 5W4G, 6U5.	40666.	PRS450-8		BR845.		M-8-450.		UT-8.			Pwr Out	114097.	A-3825.	T22S72.		A-3127.					
S-7428-1.		4 6D8G, 6S7G, 6T7G, 6G6G.	C-236.										Out	†	A-3857.	T22S48.	A-2937.	742-738.	C6	G4860.			
S-7428-2.		4 1A7G, 1N5G, 1H5G, 1A5G.	1693.	PRS25-10.		BR102A.		M-10-25.		TA-10.			Out	†	A-3857.	T22S48.	A-2937.	†					
FLUSH WALL SP.		5 12SA7GT, 12SK7GT, 12SQ7GT, 35L6/50L6, 35Z6GT.	40-20 Mfd.	PRSA150-40-20		BR04215.		M-2X40-150.		TA-240.			Out	1143.	A-3876.	T22S45.		A-2928.					
FORD (Also See P-6MF080.)		6 1A7G, 7B8, 7B6, 7C5, 7Y4, (55).	22-1387.	AF32K4A.		UP2235C.		DY-2X20-350.	M-25-25.	EL-312.			Pwr Out	95-914.	P-6119.	T22R02.		P-2951.					
FREED 46.		20 6SK7, 6SA7, 6SL7GT, 6J5GT, *6Y6G, 5U4G, *6AG5, 6SA7, *6SG7, *6SH7, 6HK5, 6JS7GT, 6U5, (44).	63-A2.	PRS450-8		BR845.		M-8-450.	DY-2X40-450.	UT-8.	EL-240.		Pwr Out	TP-C2.	A-3830.	T22R07.							
GALVIN—(See Model 1010.)			40-40 Mfd.	AF4444J.		UP4445.							Cut	9.123.	A-3830.	T22S40.		A-2905.					
GAMBLE STORES		(See Coronado)											Cut	9.179.	A-3830.	T22S40.		A-2905.					
GAROD High Fidelity.		15 6GSX7, 6SA7, 6S7G, 6J5, 6C8G, 6XSGT, 6U5, 6J5, 6L6, 5U4G, (51 & 47).	5.343.			t.		t.		t.			Cut	9.180.	A-3830.	T22S40.		A-2905.					
BP4.		4 1A7G, 1N5G, 1H5G, 1C5G.	4 Mfd.	PRS150-4.		BR415.		M-4-150.		UT-41.			Cut	9.123.	A-3830.	T22S40.		A-2905.					
BP5.		5 1A7G, 1N5G, 1H5G, 1C5G, 25Z5.	80-80-40.										Cut	9.179.	A-3830.	T22S40.		A-2905.					
BP9, BP10.		5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 45Z5GT, (47).	80-40-10.										Cut	9.181.	A-3830.	T22S40.		A-2905.					

<sup>a</sup> Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES			
	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Marti Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
																			"A"	"B"	"A"	"B"
GAROD—Continued																						
BP11.....	5 1R5, 1T4, 1S5, 3Q5, 3Z5.....	5.362.....									Out ↑	A-3856.....	T22S47.....		A-2900.....		746 482.....		2G3.....	2M30.....		
BP12.....	6 1A7, 1N5, 1H5, 1T5, 3Z5.....	80-40-20.....									Out ↑	A-3881.....	T22S48.....		A-2934.....		482.....	C4	G5.....	2B30.....		
BP15.....	5 1A7, 1N5, 1H5, 3Q5, 3Z5.....	80-40-200.....									Out ↑	A-3856.....	T22S47.....		A-2900.....		746 482.....		2G3.....	2M30.....		
BP36A.....	6 1A7, 1N5, 1H5, 3Q5, 7Q7 (#47).....	5.362.....									Out ↑				A-3030.....		746 482.....		2G3.....	2A30M.....		
C-119.....	10 6SK7, 6AB8, 26J5, 6SQ7, 25L6, 25Z5, 6U5 (#47).....	80-40-25.....	10-10 Mid.	PRS25-10-10	BRD202A	M-2X10-25	TA-110			Out ↑	A-3301.....	T22S60.....		A-2905.....								
C-120.....	11 6SK7, 6SA7, 26J5, 6SQ7, 26V6GT, 5Y3G, 6U5 (#44).....	16 Mid.	GL450-16	KR516	D-16-450	& M-20-150	PLS-16	Pwr		Out ↑	P-6014.....	T22R06.....		P-2954.....								
4A-1, 4A-2.....	4 1R5, 1T4, 1S5, 3S4.....	5.417.....	PRS25-10	BR102A	M-10-25	TA-10	Out			Out ↑	A-3311.....	T22S64.....		A-2936.....								
			PRS150-8	BR815	M-8-150	UT-81	Out	9.207			A-3329.....				A-2999.....		950 467.....		2R.....	2XX45.....		
5A-1.....	5 12BE6, 12BA6, 12AT6, 50B5, 35W4.....	5.415-2.....	PRS150-20-20	EZ42215.....	DSB-3X20-150	TA-303	Out		On Spkr.	A-3876.....	T22S45.....		A-2928.....									
5A2.....	5 12SA7, 12SK7GT, 12SQ7, 50L6, 50L7GT, 35Z5GT (#47).....	5.400-8.....	PRS150-40-40	BRD4415.....	M-2X40-150	TA-440	Out		On Spkr.	A-3876.....	T22S45.....		A-2928.....									
5A1-Y.....	5 12BE6, 12SK7GT, 12AT6, 50B5, 35Z5GT (#47).....	5.400-8.....	PRS150-40-40	EZ4415C.....	A3 DSB-403020-150	TA-440	Out		On Spkr.	A-3876.....	T22S45.....		A-2928.....									
5D, 5D-2.....	5 1R5, 1T4, 1S5, 3S4, 117Z3.....	5.400-3.....	AF106020A	UP44415	DY-5030-150	EL-340	Out		On Spkr.	A-3876.....	T22S46.....		A-2930.....									
5D-3, 5D-3A.....	5 1R5, 1T4, 1S5, 3S4, 117Z3.....	5.400-3.....	AF106D20A	BR251	M-250-25	UHC-202	Out	9.205		On Spkr.	A-3875.....	T22S45.....		A-2930.....								
6A-2.....	6 6SS7, 12SA7GT, 12SQ7, 50L6, 50L7GT, 35Z5GT (#47).....	5.400-7.....	PRS25-50	UP44415	M-250-25	EL-340	Out	9.205		On Spkr.	A-3876.....	T22S45.....		A-2928.....								
6AU-1.....	6 6SS7, 12SA7, 12SQ7, 50L6, 50L7GT, 35Z5GT (#47).....	5.400-7.....	AF888D	UP84215.....	DY-804020-150	EL-340	Out	9.200		On Spkr.	A-3876.....	T22S45.....		A-2928.....								
6BU-1A.....	6 6SS7, 12SA7GT, 12SQ7GT, 50L6, 50L7GT, 35Z5GT (#47).....	5.400-7.....	AF888D	UP84215.....	DY-804020-150	EL-340	Out	9.200		On Spkr.	A-3876.....	T22S45.....		A-2928.....								
6OPS, 6DPS-A.....	6 6SG7, 6SA7, 6SK7, 6SQ7, 6V6GT, 524 (44).....	5.400-4.....	UP2245	BR102A	M-10-25	TA-10	Pwr	9.201		On Spkr.	A-3877.....	T22R04.....		P-2952.....								
51.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5 (51).....	5.413.....	PRS25-10	EZ42215.....	A4 DSB-403020-150	TA-240	Out	9.200		On Spkr.	A-3865.....	T22S45.....		A-2930.....								
62B.....	6 6BJ6, 12BE6, 12AT6, 50B5, 35W4 (#47).....	5.400-7.....	AF888D	UP84215.....	DY-804020-150	EL-340	Out	9.200		On Spkr.	A-3876.....	T22S45.....		A-2928.....								
105, 125, 135.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5 (51).....	10 Mid.	PRS25-10	BR102A	M-10-25	TA-10	A4 Out	↑	A-3865.....	T22S45.....		A-2928.....										
150.....	5 6A7, 6D6, 6Q7G, 41, 80.....	16-16 Mid.	PRS450-16	BR1645	M-16-450	UT-201	A4 Out	↑	P-6010.....	T22R00.....		P-2949.....										
159.....	5 6A7, 6D6, 6Q7, 41, 80.....	8-8 Mid.							P-6010.....	T22S47.....		A-2931.....										
206, 206C, 206L, 206-1, 206P4.....	6 6A7, 6K7, 6Q7, 42, 80, 6U5.....	16, 16 Mid.	PRS450-16	BR1645	M-16-450	UT-16	Pwr	↑	P-6010.....	T22R00.....		P-2949.....										
225A, B.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5 (51).....	60-20 Mid.	PRS150-40-20	A4 EZ42215.....	A4 DSB-403020-150	TA-240	A4 Out	↑	P-6010.....	T22R00.....		P-2949.....										
237, 337.....	7 6A7, 6D6, 6Q7, 43, 25Z5.....	8 Mid.	PRS150-8	BR815	M-8-150	UT-81	Out	↑	P-6011.....	T22R02.....		P-2951.....										
		20 Mid.	PRS150-20	BR2015	M-20-150	UT-201	Out	↑	P-6011.....	T22S47.....		A-2931.....										
		12 Mid.	PRS150-12	BR1215	M-12-150	UT-121	Out	↑	P-6011.....	T22S45.....		A-2928.....										
245.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5 (51).....	4 Mid.	PRS150-40-20	A4 EZ42215.....	A4 DSB-403020-150	TA-240	A4 Out	↑	A-3865.....	T22S45.....		A-2928.....										
250.....	5 6A7, 6K7, 75, 42, 80.....	9, 9 Mid.	GL450-8	KR500	D-8-450	PLS-8	Pwr	↑	P-6011.....	T22R02.....		P-2951.....										
255, 265, 275, 285.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5 (51).....	60-20 Mid.	PRS150-40-20	A4 EZ42215.....	A4 DSB-403020-150	TA-240	A4 Out	↑	A-3878.....	T22S47.....		A-2931.....										
307, E, L, T, 307-1.....	7 6ABG, 6K7, 6H6, 6F5G, 6V6, 80, 6U5.....	16 Mid.	GL450-16	KR516	D-16-450	PLS-16	Pwr	↑	P-6011.....	T22R02.....		P-2951.....										
309 Series.....	9 6K6, 6ABG, 6H6, 6L6G, 6F5G, 80, 6U5.....	9 Mid.	GL450-8	KR508	D-8-450	PLS-16	Pwr	↑	P-6011.....	T22S58.....		A-2930.....										
		16, 16 Mid.	GL450-16	KR516	D-16-450	PLS-16	Pwr	↑	P-6012.....	T22R04.....		P-2952.....										
			PRSA150-16	BR1645	M-16-450	UT-16	Chk	↑	P-6012.....	T22S72.....		A-3127.....										
369.....	6 6K8, 6D6, 6Q7, 42, 80, 6U5 (#44).....	16 Mid.	PRS450-16	BR845	M-8-450	UT-8	Chk	↑	P-6011.....	T22R02.....		P-2951.....										
379.....	7 6D6, 6K8, 6Q7, 42, 80, 6U5.....	5.338.....	GL450-16	KR516	D-16-450	PLS-16	9.157		P-6011.....	T22S47.....		A-2931.....										
389.....	8 6D6, 6K8, 6AF6G, 6Q7, 6V6, 80, 6U5.....	5.338.....	PRS25-10	BR102A	M-10-25	TA-10	Pwr	↑	P-6011.....	T22R02.....		P-2951.....										
399.....	9 6D6, 6K8, 6ABG, 6Q7, 6AF6G, 6F6, 80, 6U5.....	5.331.....	GL450-16	KR516	D-16-450	PLS-16	Pwr	↑	P-6011.....	T22R02.....		P-2951.....										
453.....	5 12AB, 12K7, 12SQ7, 50L6, 35Z5 (47).....	5.358.....	PRSA150-40-20	BR04215	M-2X40-150	TA-240	Chk	↑	P-6011.....	T22S47.....		A-2931.....										
		40 Mid.	PRS150-40	BR4015	M-40-150	UT-401	Chk	↑	P-6011.....	T22S47.....		A-2931.....										
493.....	9 6D6, 6K8G, 6Q7, 76, 25L6G, 25Z5 (44).....	5.358.....	PRS25-10	BR102A	M-10-25	TA-10	Chk	↑	P-6011.....	T22S47.....		A-2931.....										
501P, 501PD.....	5 12SA7, 12SK7, 12SQ7, 50L6, 35Z5 (51).....	60-20 Mid.	PRSA150-40-20	A4 EZ42215.....	A4 DSB-403020-150	TA-240	A4 Out	↑	P-6011.....	T22S47.....		A-3301.....										
602, 602C, 602L, 602-1.....	5 6A7, 6K7, 6Q7G, 25L6G, 25Z5.....	20-12 Mid.	PRSA150-20-20	BRD2215	M-2X20-150	TA-220	Chk	↑	P-6011.....	T22S45.....		A-3301.....										
610.....	5 6A7, 6D6, 6Q7, 25L6, 25Z5.....	7 Mid.	PRS150-8	BR815	M-8-150	UT-81	Chk	↑	P-6011.....	T22S45.....		A-3301.....										
		16 Mid.	PRS150-16	BR1615	M-16-150	UT-161	Chk	↑	P-6011.....	T22S45.....		A-3301.....										
		40 Mid.	PRS150-40	BR4015	M-40-150	UT-401	Chk	↑	P-6011.....	T22S45.....		A-3301.....										

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Phonifant Set No.
1st.		16-6658.	455				30.176.			F1		F1	Vol	8.153.	M-63-Z			A2.	D13-137.	42	G1				GAROD
2nd.		16-6658.	455							I1		F1	Vol	+	M-13-Z	A2.		D13-137.	42	G1				BP11	
1st.		16-6658.	1.5							I1		F1	Vol	+	M-13-Z	A2.		D13-137.	12	G1				BP12	
2nd.		16-6658.	455							I1		F1	Vol	+	M-13-Z	A2.		D13-137.	42	G1				BP15	
1st.		16-6660.	455							F1		F1	Vol	+	M-13-Z	A2.		D13-137.	42	G1				BP35A	
2nd.		16-5712.	455							F1		F1	Vol	+	M-13-Z	A2.		D13-137.	42	G1				C-119	
1st.		16-5712.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	12	G1				C-120	
2nd.		16-5712.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				21	
1st.		16-5712.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				4A-1, 4A-2	
2nd.		16-5712.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				22	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				5A-1	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				5A-2	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				5A-1Y	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				5D, 5D-2	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				5D-3, 5D-3A	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				5A-2	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				5AU-1	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				5BU-1A	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				6BPS, 6BPS-A	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				51	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				62B	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				105, 125, 135	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				150	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				158	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				205, 206C, L, 206I,	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				205P4	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				225A, B	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				237, 337	
1st.		16-5712.	4.6							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				245	
2nd.		16-5712.	4.6							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				250	
1st.		16-5712.	4.6							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				255, 265, 275, 285	
2nd.		16-5712.	4.6							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				317, E, L, T, 307-1	
1st.		16-5712.	4.6							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				309 Series	
2nd.		16-5712.	4.6							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1					
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				369	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				379	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				389	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				399	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				453	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1					
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				493	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				501P, 501PD	
1st.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				602, C, L, 602-1	
2nd.		16-6658.	455							F2		F2	Tone	8.204.	I-63-Z	A.		D13-137.	42	G1				610	

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS						Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	No. 1	Cornell-Dubilier	No. Note	Solar	No. Note	Sprague	No. Note	Use	Mfr.	Stancor	No. Note	Thordarson	No. Note	Merit	No. Note	Eveready Part No.	No. Note	Burgess Part No.	No. Note
		Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"		
GAROD—Continue 703E, EC, EL.....	d	6 6A7, 6K7, 6Q7G, 25L6G, 25Z5, 6U5 (#44).	20-12 Mfd.	PRSA150-20-20		BRD2215, BR102A		M-2X20-150, M-10-25		TA-220, TA-10		Chk Out		†	A-3865	T/2545		A-2124					
762.....	6	6A7, 6D7, 6F5, 76, 25L6G, 25Z5,	7 Mfd.	PRSA150-8		BRD4215		M-2X40-150		TA-24		Chk Out		†	A-3865	T/2545		A-2124					
782, 782-1.....	6	6A7, 6D6, 6Q7G, 25L6, *25Z5,	10-25 Mfd.	PRSA150-40-20		BR102A		M-10-25		TA-10		Chk Out		†	A-3865	22S45		A-2928					
739.....	6	6K9, 6D6, 6Q7, 25L6, 25Z5, 6U5 (#44).	10-10 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-24		Chk Out		†	A-3865	T/2144		A-2124					
803L, 803T, 803-1.....	7	6A8G, 6K7, 6Q7G, 25L6, *25Z6, 6U5.	10-10 Mfd.	PRSA150-40-20		BRD202A		M-2X10-25		TA-10		Chk Out		†	A-3865	T/2545		A-2124					
839.....	7	6D6, 6K8, 6Q7, 25L6, 25Z5, 6U5 (#44).	10-10 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-24		Chk Cut		†	A-3865	T/2545		A-2124					
903 Series.....	9	6K7, 6A8G, 6B8G, 6Q7G, *25L6, *25Z6, 6G5.	8 Mfd.	PRSA150-40-20		BR102A		M-10-25		TA-10		Chk Cut		†	A-3865	T/2545		A-2124					
939.....	9	6D6, 6K8G, 6Q7, 76, *25LG	80-40-25	GL450-40		KR540		D-40-450		PLS 1		Chk	9.129A		C-1325	T/2052		C-2981					
1039, 1049.....	10	6K7, 6K8, 6A8, 6B8, 6Z7G, *25L6, *25Z5, 6U5 (#44).	80-40-25	PRSA25-10		BR102A		M-10-2		TA-10		Chk Out		†	A-3311	T/2564		A-2124					
1040.....	10	6K7, 6A8, 6R7, *25A6, *25Z6 (#46).	20	PRSA150-20		BRD3315, BR2015		M-2X31-1		TA-33		Chk Out		†	A-3311	T/2564		A-2124					
1203-1204.....	12	6K7, 6A8G, 6B8G, 6Q7G, *25L6, *25Z6, 6U5.	40-25.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Chk Out		†	A-3306	T/2572							
1239.....	13	6K8, 6D6, 6Q7, *25C8G, *25L6, *25Z5, 6U5	80-40-25	PRSA150-20		BR2015		M-20-1		UT-201		Chk Out		†	A-3306	T/2572							
1450, 1550.....	5	12SAJ, 12SK7, 12SQ7, 50L6, 35Z5 (#51).	60-20	PRSA25-10-10		P'S25-10-1P		M-2X10-1		TA-11		Chk Out		†	A-3306	T/2572							
1540.....	15	6K7, 6K8, 6A8G, *6V6G, *6C5, 6H5, *80, 6AF6G.	8 Mfd.	PRSA25-10		BR102A		M-10-2		TA-10		Chk	4.112A		P-6014	T/2206		P-2154					
1603, 1604.....	16	6K7, 6A8G, 6N6, *25L6, 6J5G, 6F5, *25Z6, 6U5 (#44).	10-10 Mfd.	PRSA25-10-10		BRD202A		M-2X10-2		TA-11		Chk Out		†	A-3306	T/2206		A-2124					
1649.....	16	6K7, 6K8, 6A8G, 6H6, *6C5, *25L6, *25Z5, 6AF6 (#44).	40-25 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Chk Out		†	A-3306	T/2572							
1739.....	7	6K7, 6K8, 6S7G, 6T7G, 6S5G, 6Z7, 6U5 (#44).	15-20	PRSA150-20-20		BRD2215		M-2X20-150		TA-22		Chk Pwr in		†	A-3311	T/22574		A-1911					
3011.....	10	*6SK7, 6A8, *6J5, 6SQ7, *25L6, *25Z6, 6U5 (#47).	10-10	PRSA25-10		BR102A		M-10-25		TA-10		Chk Out		†	A-3301	T/22560		A-2124					
3012, 4012.....	11	*6K7, 6A8G, 6K6, *6J5G, *6V6G, 80	16, 16	GL450-16		KR516		D-16-4W		PLS 1		Pwr Out		†	P-6014	T/2206		P-2954					
3016, 4016.....	16	6K7, 6A8G, *6H6, *6J5G, *6V6G, *25L6, 6U5.	16, 16, 16, 16	GL450-16		KR516		D-16-4W		PLS 1		Chk Pwr Out		†	P-6014	T/2206		P-2154					
3109.....	9	*6D6, 6K8G, 6A8G, 6Q7, 76, *41, 80	5,338	GL450-16		KR516		D-16-450		PLS 1		Chk Pwr Out		†	P-6014	T/2206		A-2936					
3119.....	11	6K6, 6D6, 6Q7, *6V6, 80, 6U5	16, 16	PRSA25-10		GL450-16		M-10-25		TA-10		Chk Pwr Out		†	P-6014	T/2206		P-2952					
3790.....	7	*6E6, 6K8, 6Q7, 42, 80, 6U5.	8, 8	PRSA25-10		GL450-8		D-8-431		PLS 1		Chk Pwr Out		†	P-6012	T/2204		A-2901					
4011.....	11	*6SK7, 6SA7, *6J5, 6SQ7, *6V6GT, 5Y3G, 6U5 (#44).	16, 16 Mfd.	PRSA25-10		BR102A		D-16-4.0		PLS 1		Chk Pwr Out		†	P-6011	T/2202		P-2951					
4110.....	11	*6K7, 6L7, 6H6, 6F5, 6C5, *25 5Y3, 6G5.	5 Mfd.	PRSA25-10		BR102A		M-10-2		TA-10		Chk Pwr Out		†	A-3878	T/22547		A-2124					
4123.....	12	6SK7, 6K8, *6S7G, *25L6, *25Z5, 6U5 (#44).	16, 16	*PSA150-20		BRD2015		M-20-1W		TA-21		Chk Pwr Out		†	A-3311	T/22564		A-2940					
4124.....	12	*6SK7, 6K8, *6S7G, *25L6, *25Z5, 6U5 (#44).	16, 16	*PSA150-20		BRD4215		M-2X40-1		TA-240		Chk Pwr Out		†	P-6013	T/2205		P-2154					
4124.....	12	*6SK7, 6K8, *6S7G, *25L6, *25Z5, 6U5 (#44).	16, 16	*PSA150-20		BRD4215		M-20-1W		TA-21		Chk Pwr Out		†	A-3306	T/2572		A-3111					
4124.....	12	*6SK7, 6K8, *6S7G, *25L6, *25Z5, 6U5 (#44).	16, 16	*PSA150-20		BRD4215		M-20-1W		TA-21		Chk Pwr Out		†	A-3306	T/2572		A-3111					
4159.....	15	6K7, 6K8, 6A8, 6H6, 6AF6G, *6C5, *6V6, *80	16, 16	PRSA450-16		BR1645		D-16-4.4		PLS 1		Chk Pwr Out		†	P-6014	T/2206		P-2154					
4410.....	10	6SK7, 6K8, 6H6, 6F5, 6V6, 80, 6U5 (#44).	5,338	GL450-16		KR516		D-16-4.0		PLS 1		Chk Pwr Out		†	A-3311	T/22564		A-2136					
4990.....	9	*6D6, 6K8, 6A8G, 6Q7, 6AF6G, 6F6, 80 (#44).	16, 16	PRSA25-10		BR102A		M-10-2		TA-10		Chk Pwr Out		†	P-6012	T/2204		P-2154					
5140.....	14	6K7, 6L7, 6H6, 6G5, *6C5, *6L6, 5Z3 (#46).	16, 16	GL450-16		KR516		D-16-450		PLS 1		Chk Pwr Out		†	P-6014	T/2206		P-2554					
7390.....	6	6K8, 6D6, 6Q7, 25L6, 25Z5, 6U5	10 Mfd.	PRSA25-10		BR102A		M-10-2		TA-21U		Chk Pwr Out		†	A-3307	T/2568		A-3131					
7390.....	6	6K8, 6D6, 6Q7, 25L6, 25Z5, 6U5	10 Mfd.	PRSA25-10		BR102A		M-10-2		TA-1		Chk Pwr Out		†	A-3865	T/2545		A-2928					

Section D IF COILS				Section E PHONO CARTRIGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photofact Set No.	MFR. & MODEL		
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	'Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.		16-5712		456							F2		F2	Vol Tone	T-109, M-63-Z		A.		D13-137	41	G1					Continued—	GAROD 703E, EC, EL
2nd.		16-5714																	D13-137		G1						
1st.		16-5712		456							F1		F1	Vol Tone	T-109, M-63-Z		A.		D13-137	41	G1						762
2nd.		16-5714									F2		F2	Vol Tone	T-109, M-63-Z		A.		D13-137	41	G1						782, 782-1
1st.		16-5712		456							I2		I2	Vol Tone	T-109, M-63-Z		A.		D13-137X	41	G1						739
2nd.		16-5714									I2		I2	Vol Tone	8.140,		A.		D13-137	41	G1						803L, T, 803I
1st.		16-5712		156							F2		F2	Vol Tone	T-109, M-63-Z		A.		D13-137X	41	G1						
2nd.		16-5712																D13-137		G1							
1st.		16-6658		456																							
2nd.		16-6660																									
1st.	1.163	15-6658		456							F1		I1	Vol Tone	8.139B,		A.		D13-137	41	G1						839
2nd.	1.164	15-6660									F2		F2	Vol Tone	8.140,		A.		D13-137	42	G1						903
1st.		16-5712		456																							
2nd.		16-5714																									
1st.	1.163	16-5712		456							I1		F1	Vol Tone	T-109, M-63-Z		A.		D13-137	41	G1						939
2nd.	1.164	16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-6658		456																							
2nd.		16-6660																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									
1st.		16-5712		456																							
2nd.		16-5714																									

† Information not available.



Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photofact Set No.	MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	iRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	RL-401	16-5712		465				RS-021					Vol	RV-010					D13-130							GEN	ERAL ELECTRIC A-205	
2nd.	RL-402												Bass	RT-702	M-64-Z				D13-128									
3rd.	RL-403												Treble	RT-705	M-51-Z				D14-120								A-205E	
AVC.	RL-404												Sens	RS-802	58-20K				D13-133									
													Vol	RV-024	M-00-7				D13-128									
													Bass	RT-709	M-1-7													
													Tone	RV-025	M-2-7													
													Sens	RR-192	M-2-14													
1st.	RL-401	16-5712		465	RP-01			RS-02					Vol	RV-011													A-208	
2nd.	RL-402												Sens	RS-803	58-11-K													
3rd.	RL-403												Bass	RT-708	M-64-Z				D13-130								A-208E	
AVC.	RL-404												Treble	RT-709	M-51-Z				D13-128									
													Vol	RV-025	M-60-Z				D13-133									
													Bass	RT-709	M-51-Z				D13-128									
													Tone	RV-027	M-2-20													
													Sens	RR-192	M-20K													
1st.	RT-249	16-5712		455				RS-065	ST-158	F12			Vol	RV-016													F-10	
2nd.	RT-250	16-5714						RS-01	ST-148	112			Vol	RV-039	M-1-14				A	D13-139								F-51
1st.	RT-255	16-5712		455				RS-01					Vol	RV-028	I-1-74				A	D13-139X								F-74, F-77
2nd.	RT-256	16-5714											Vol	RV-029	I-1-74					D15-139X								F-80, F-85
1st.	RT-241	16-5712											Vol	RV-035	I-1-74					D14-139X								F-83
2nd.	RT-242	16-5714											Vol	RV-036	M-1-14													F-96
1st&2d	RT-233	16-5712		455	PR-01	H-2		RS-057					Vol	RV-037	M-1-14													F-107
3rd.	RT-232	16-5714											Vol	RV-038	M-1-14													F-109
1st&2d	RT-233	16-5712		465	PR-01	H-2		RS-060					Vol	RV-039	M-1-14													F-135
3rd.	RT-232	16-5714											Vol	RV-040	M-1-14													
1st.	RT-246	16-5712		465				RS-062	ST-173	12E15			Vol	RV-033														FD-62, FD-625
2nd.	RT-247	16-6133											Vol	RV-037	T-115				A	I13-139X								FE-62, FE-67, FE-68
1st.	RT-246	16-5712		455									Vol	RV-031	T-115					I13-139X								FE-82, FE-87
2nd.	RT-247	16-6133											Vol	RV-030	T-124					D15-139X								FE-112, FE-116
1st&2d	RT-233	16-5712		455									Vol	RV-034	T-117					D17-139X								FE-119
3rd.	RT-243	16-6133											Vol	RV-034	T-14					D17-139X								G-50, G-55
1st&2d	RT-233	16-5712		455									Vol	RV-034	M-1-14				A	I14-139X								G-53, G-56
3rd.	RT-243	16-6133											Vol	RV-040	I-1-14													G-57
1st&2d	RT-233	16-5712		455									Vol	RV-040	M-1-14				A	D13-139								G-61, G-66, G-68
3rd.	RT-243	16-6133											Vol	RV-041	T-116					D18-139X								G-69
1st.	RT-253	16-5712		455									Vol	RV-040	I-1-14													G-64
2nd.	RT-254	16-5714											Vol	RV-040	T-117													
1st.	RT-260	16-5712		455				RS-071	ST-168	I12			Vol	RV-040	T-117				A								G-75	
2nd.	RT-259	16-5714						RS-071	ST-173	I12E15			Vol	RV-040	T-117				A								G-76	
1st.	RT-253	16-5712		455				RS-071	ST-173	I2E15			Vol	RV-038	M-1-14				A	D13-139								G-78
2nd.	RT-254	16-5714											Vol	RV-041	T-116					D18-139X								G-85
1st.	RT-261	17-7410		455	RC-5000	H-2		RS-074	ST-166	6E10			Vol	RV-041	T-116					D18-139X								G-95
2nd.	RT-252	17-7410		455	RC-5001	H-2		RS-074		12E10			Vol	RV-041	T-116					D18-139X								G-97
1st.	RT-288	16-5714						RS-074		12E10			Vol	RV-041	T-116					D18-139X								
2nd.	RT-287	16-5714											Vol	RV-051	T-116					D18-139X								
1st.	RT-267	17-7410		455									Vol	RV-051	T-116					D18-139X								
2nd.	RT-266	17-7410											Vol	RV-051	T-116					D18-139X								
1st.	RT-265	16-5714											Vol	RV-051	T-116					D18-139X								
2nd.	RT-264	16-5714											Vol	RV-051	T-116					D18-139X								
1st.	RT-248	16-5712		455									Vol	RV-035	T-116					I18-139X								
2nd.	RT-247	16-6133											Vol	RV-035	T-116					I18-139X								

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note		
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"		
GENERAL ELECTRIC	R	10—Continued																							
G-99	9	6A2G, 6SK7, 6H6, 6F5, 76, 6AC5G, 5Y3G, GU5 (#46)	RC-594	PRS B450-8-8 PRS450-8		EZ88845		DH-3X8-450SS		TU-88 UT-8		Pwr Out	RT-06	P-6120		T22R02		P-2951							
G-105, G-106	10	6K7, 6A2G, 6H6, 6FS, 6J5G, 6VEG, 5U4G, 6US, 6AG, 6K7G, 6H6, 6F5, 6SK6G, 5Y3G (#44)	RC-429 RC-596	GL450-30 P-SA450-8-A		KR530		D-30-150		PLS-30		Pwr Out	RT-10 RT-43	P-6291 A-3311		T22S47									
G-655	6	6A2G, 6SK7, 6H6, 6F5, 6SK6G, 5Y3G (#44)	RC-593			EZ8845		M-2X8-11		UT-11		Pwr Out	RT-05	P-6120		T22S64		A-2935							
GA-62	6	6K7, 6A2G, 6Q7, 6K6G, 6X5G, (#44)	RC-5127	I'S450-8		BR845		M-8-45		UT-8		Pwr Out	RT-0617	A-3878		T22R02		A-2931							
GB-400	4	1A7G, 1N5G, 1H5G, 1C5G, (#44)	RC-5118	I'RS250-12		BR1225		M-16-75		UT-122		Pwr Out	RT-4595	A-3878		T22S47		A-2951							
GD-41, GD-41A, GD-41U	4	6D6, 6C6, 25L6G, 25Z5 (#44)	RC-598W			EZ32115		DSB-3X20-150		TA-220 UT-121		Out	RT-441W	A-3865		T22S45		A-2928							
GD-44A, GD-44B	4	6D6, 6C6, 25L6G, 25Z5 (#44)	RC-598W			EZ32115		DSB-3X20-150		TA-220 UT-121		Out	RT-441W	A-3865		T22S45		A-2928							
GD-51	4	6A8G, 6C6, 25L6G, 25Z6G, (#44)	RC-5113	AF660		UP3315		DY-2X3D-150		EL-230		Out	RT-450	A-3865		T22S45		A-2928							
GD-52, GD-52A	5	6A8G, 6K7, 6Q7G, 25L6G, 25Z5	RC-599	PRSB150-20-20		BR2015		M-20-150		UT-201		Out	RT-44	A-3865		T22S45		A-2928							
GD-60	5	6A8G, 6K7, 6Q7G, 25L6G, 25Z5	RC-599	PRSB250-20-20				DSB-2X20-150SS		TU-11		Out	RT-44	A-3865		T22S45		A-2928							
GD-62, GD-67	5	6A7, 6D6, 75, 25L6G, 25Z6G (#46)	RC-586								Out	RT-451	A-3865		T22S45		A-2928								
GD-63	5	6A8G, 6K7, 6Q7G, 25L6G, 25Z5	RC-5119	AF3404A		UP4215C		DY-305		EL-343		Out	RT-451	A-3865		T22S45		A-2928							
GD-406	4	6K7GT, 6J7GT, 25L6GT, 25Z6GT	RC-5128W	PRS25-10		BR102A		M-10-25		TA-10		Out	RT-460W	A-3865		T22S45		A-2928							
GD-500	5	6K7GT, 6F5GT, 6J5GT, 25L6GT, 25Z6GT	RC-5129W	RC-5120	4'66D	UP8315		DY-2X30-150		IL-10		Out	RT-451	A-3865		T22S45		A-2928							
GD-520, GD-521	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT (#44)	RC-5129W	I'SA150-20-20		BRD2215		M-2X20-150		TA-70		Out	RT-456	A-3865		T22S45		A-2928							
GD-600, GD-630	5	6A8G, 6SK7, 6SF5, 25L6G, 25Z6G (#44)	RC-5121								Out	RT-45	A-3865		T22S45		A-2928								
GD-610, GD-620	5	6A8G, 6SK7, 6SQ7, 25L6G, 25Z6G (#44)	RC-5121								Out	RT-45	A-3865		T22S45		A-2928								
GDE-41A, GDE-41V	4	6D6, 6C6, 25L6G, 25Z5 (#44)	RC-5116W	PRSA150-40-20		BRD4215		M-2X4-150		TA-10		Out	RT-452	A-3865		T22S45		A-2928							
GE-52	5	6A7, 6D6, 75, 41, 80 (#46)	RC-504	PRS25-10	RC-591		BR102A	M-10-2	TA-1		Pwr Out	RT-51	P-6011		T22R02		P-2951								
GE-53	5	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G	RC-5102	PRSB450-8-V		EZ88845		DH-3X8-450SS		TU-8		Pwr Out	RT-434	A-3878		T22S47		A-2931							
GE-54	5	6A8G, 6K7, 75, 6K6G, 5Y3G (#46)	RC-592								Pwr Out	RT-05	P-6010		T22R00		P-2549								
GE-93, GE-96	9	6K7, 6L7, 6J5G, 6H6, 6F5, 6L6G, 5U4G, 6US (#46)	RC-5101	I'S150-8	BR815		M-8-1W		UT-1		Pwr Out	RT-0514	P-6010		T22S47		A-2931								
GM-11	1	12A7	RC-5118	I'S150-8	BR815		M-8-1W		UT-1		Pwr Out	RT-434	A-3878		T22R00		P-2949								
H-73, H-77, H-7H, H-79	7	6A8AT, 6SK7, 6H6, 6SF5, 6J56, 6Y6G, 5Y3G (#44)	RC-5148								Pwr Out	RT-0514	P-6120		T22S47		A-2931								
H-87	8	6SA7, 6SK7, 6SQ7, 6J5G, 6Y6G, 5Y3G (#44)	RC-5148								Pwr Out	RT-46	A-3878		T22R04		P-2552								
H-116, H-118	11	6SA7, 6SK7, 6H8, 6SF5, 6J56, 6Y6G, 5Y3G, 6US (#44)	RC-5130								Pwr Out	RT-463	A-3830		T22S60		A-2905								
H-400	4	12B7, 12F5GT, 50L6GT, 35Z5GT (#47)	RC-5137	I'RSA150-40-70		BRD4215		M-2X40-150		TA-7		Pwr Out	RT-461	A-3830		T22S60		A-2905							
H-406U	4	12SK7GT, 12SF7GT, 50L6GT, 45Z5GT (#47)	RC-5151W	PRSA150-20-20		BRD2215		M-2X20-150		TA-7		Pwr Out	RT-477W	A-3865		T22S45		A-2928							
H-500, H-501, H-511, H-520, H-521	5	12A8GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (#47)	RC-5135			UP5515C		DY-307		IL-17		Pwr Out	RT-46	A-3876		T22S45		A-2928							
H-500U	5	12A8GT / 12A8GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (#47)	RC-5135			UP5515C		DY-307		IL-17		Pwr Out	RT-46	A-3876		T22S45		A-2928							
H-502, H-503	5	12SA7GT, 12B7, 12Q7GT, 35L6GT, 35Z5GT (#47)	RC-5135			UP5515C		DY-307		EL-352		Out	RT-465	A-3876		T22S45		A-2928							
H-508	5	12SA7GT, 12B7, 12Q7GT, 35L6GT, 35Z5GT (#47)	RC-5135			UP5515C		DY-307		EL-352		Out	RT-475	A-3876		T22S45		A-2928							
H-510U, H-520U	5	12SA7GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (#47)	RC-5135			UP5515C		DY-307		EL-352		Out	RT-465	A-3876		T22S45		A-2928							
H-530, H-531	5	12SA7GT, 12B7, 12Q7GT, 35L6GT, 35Z5GT (#47)	RC-5135			UP5515C		DY-307		IL-12		Out	RT-46	A-3876		T22S45		A-2928							
H-532	5	12SA7GT, 12B7, 12Q7GT, 35L6GT, 35Z5GT (#47)	RC-5135			UP5515C		DY-307		IL-12		Out	RT-46	A-3876		T22S45		A-2928							
H-600, H-601, H-610, H-620, H-621	6	6SA7, 6SK7, 6SQ7, 6J5GT, 25L6GT, 25Z5GT (#44)	RC-5136	A1111D		UP5515		DY-2X5I-10		IL-23		Out	RT-464	A-3865		T22S45		A-2928							
H-622, H-623	6	6SA7, 6SK7, 6SQ7, 6J5GT, 25L6GT, 25Z5GT (#44)	RC-5136	A1111D		UP5515		DY-2X50-150		EL-25		Out	RT-469	A-3865		T22S45		A-2928							
H-625, H-630, H-631, H-632, H-633	6	6SA7, 6SK7, 6SQ7, 6J5GT, 25L6GT, 25Z5GT (#44)	RC-5136	A1111D		UP5515		DY-2X50-150		EL-25		Out	RT-468	A-3865		T22S45		A-2928							
H-630U, H-632U	6	6SA7, 6SK7, 6SQ7, 6J5GT, 25L6GT, 25Z5GT (#44)	RC-5136	AF1010D		UP5515		DY-2X50-150		EL-25		Out	RT-469	A-3865		T22S45		A-2928							
H-634, H-638, H-640	6	6SA7, 6SK7, 6SQ7, 6J5GT, 25L6GT, 25Z5GT (#44)	RC-5134			UP5515C		DY-2X50-150		EL-17		Out	RT-461	A-3865		T22S45		A-2928							

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.	
1st.	RT-267	17-7410		455				RS-073			12E10		Vol	RV-051	T-116				D18-139X			G1			Continue	d—GE GENERAL ELECTRIC G-99	
2nd.	RT-260	17-7410						RS-079			12E60		Vol	RV-049	T-111				D18-139X			G1				G-105, G-106	
3rd.	RT-269	16-5714		455				RS-096	ST-1A	F3	12E11		Vol	RV-040	1A	A											G-655
1st.	RT-261			455				RS-10075	ST-108	F8	6EV6		Vol	RV-063-S	T-78	A			D13-133X		41	G1	RV-202S	5331	H1	CA-62	
2nd.	RT-25*							RS-1003W	ST-105		5'1		Vol	RV-059W	M-63-Z				D13-137		42	G1				GB-400	
1st.	RT-3075	16-JJ12		455				RS-072W	ST-194	SE44			Vol	RV-043W	M-40-S	A			D14-120		41	G1				GD-41, GD-41A, GD-41U, GD-44A, GD-44B	
2nd.	RT-3085							RS-08CW	ST-194	SE45			Vol	RV-046W	M-40-S	A			D14-120		41	G1				GD-51	
1st.	RT-299W	16-5714		455				RS-08CW	ST-191	SE45			Vol	RV-047W	H-51-Z	A			D13-128		41	G1				GD-52	
2nd.	RT-30CW							RS-094	ST-194	SE45			Vol	RV-053	M-31-Z	A			D13-116		41	G1				GD-52, A	
1st.	RT-287			455				RS-079	ST-194	SE45			Vol	RV-050	T-115	A			D13-139X		41	G1				GD-60	
2nd.	RT-268	16-5714						RS-079	ST-194	SE45			Vol	RV-044	M-66-Z	A			D13-139		41	G1				GD-62, GD-67	
1st.	RT-269	16-5712		455				RS-084	ST-194	SE45			Vol	RV-053	M-31-Z	A			D13-139		41	G1				GD-63	
2nd.	RT-268	16-5714		465				RS-076	ST-194	6A1			Vol	RV-058	M-31-Z	A			D13-139		41	G1				GD-496	
1st.	RT-253	16-5712						RS-077	ST-115	8A21			Vol	RV-050	I-11	A			D13-139X		41	G1				GD-500	
2nd.	RT-254	16-5714		455				RS-1000	ST-104	5A1			Vol	RV-064W	M-37-U	A			D14-120		41	G1				GD-520, GD-521	
1st.	RT-269	16-5712		455				RS-1008W	ST-113	4A1			Vol	RV-056	M-37-U	A			D13-139		41	G1				GD-600, GD-630	
2nd.	RT-265	16-5714						RS-099	ST-113	4A1			Vol	RV-060R	M-60-Z	A			D13-139		41	G1				GD-610, GD-620	
1st.	RT-301*	16-5712		456				RS-104R	ST-111	4A1			Vol	RV-053	M-31-Z	A			D13-116		41	G1				GDE-41A, GDE-41V	
2nd.	RT-312R							RS-114	ST-194	SE45			Vol	RV-054W	M-40-S	A			D14-120		41	G1				GE-52	
1st.	RT-210	16-6661		455				RS-1001	ST-194	SE45			Vol	RV-057	M-31-Z	A			D13-139		41	G1				GE-53	
2nd.	RT-289							RS-094	ST-194	SE45			Vol	RV-054W	M-40-S	A			D14-120		41	G1				GE-54	
1st.	RT-290	16-6661		455				RS-097W	ST-105	SA1			Vol	RV-039	M-66-Z	A			D13-139		41	G1				GE-93, GE-96	
2nd.	RT-212	16-6661		T-11				RS-070	ST-198	i2			Vol	RV-039	M-66-Z	A			D13-139		41	G1				GM-1	
1st.	RT-216	16-5712		455				RS-083	ST-168	F12			Vol	RV-040	T-118	A			D13-139		41	G1				H-73, H-77, H-78, H-79	
1st.	RT-210	16-5712		455				RS-117	ST-198	i2			Vol	RV-039	M-60-Z	A			D13-139		41	G1				H-87	
2nd.	RT-211	16-5714		455				RS-1014	ST-118	i2			Vol	RV-040	M-60-Z	A			D13-139		41	G1				H-116, H-118	
1st.	RT-211	16-5712		455				RS-1020	ST-113	4A1			Vol	RV-051	M-37-U	A			D14-120		41	G1				H-400	
2nd.	RT-273							RS-1027W	ST-111	4A1			Vol	RV-084W	M-40-S	A			D14-120		41	G1				H-406U	
1st.	RT-313	16-5712		455	RP-44V	RP-44V		RS-1011	ST-111	12A1			Vol	RV-054	M-60-Z	A			D13-139		41	G1				H-500, 501, 510, 511, 520, 521	
2nd.	RT-314	16-5714		455	RP-44V	RP-44V		RS-1012	ST-08	6A1			Vol	RV-057	T-114	A			D19-139X		41	G1				H-502, H-503	
1st.	RT-324	16-5712		455				RS-1014					Vol	RV-056	T-116	A			D18-139X		47	G1				H-508	
2nd.	RT-317	17-7410		455	RP-44W	RP-44W		RS-1014					Vol	RV-069	T-116	A			D18-139X		47	G1				H-510U, H-520U	
1st.	RT-314	16-5714						RS-1020	ST-113	4A1			Vol	RV-051	M-37-U	A			D14-120		41	G1				H-530, 531, 532	
2nd.	RT-312							RS-1027W	ST-111	4A1			Vol	RV-084W	M-40-S	A			D14-120		41	G1				H-600, 601, 610, 611, 620, 621	
1st.	RT-321	16-5714		455				RS-1016	ST-111	4A1			Vol	RV-070	M-66-Z	A			D13-139		41	G1				H-600U, 610U, 620U	
2nd.	RT-312							RS-1017	ST-111	4A1			Vol	RV-086	M-60-Z	A			D13-139		41	G1				H-602, H-603	
1st.	RT-313	16-5714		455				RS-1016	ST-113	4A1			Vol	RV-077	M-66-Z	A			D13-139		41	G1				H-604, H-605	
2nd.	RT-312							RS-1016	ST-111	4A1			Vol	RV-080	M-60-Z	A			D13-139		41	G1				H-606, H-607	
1st.	RT-314	16-6660		455				RS-1026	ST-111	4A1			Vol	RV-081	M-60-Z	A			D13-139		41	G1				H-608	
2nd.	RT-342	16-6660		455				RS-1025	ST-113	4A1			Vol	RV-079	M-60-Z	A			D13-139		41	G1				H-610U, H-620U	
1st.	RT-343	16-6658		455	RP-405	RP-405		RS-1016	ST-111	4A1			Vol	RV-086	M-60-Z	A			D13-139		41	G1				H-630U, 631, 632, 633	
2nd.	RT-342	16-6658		455				RS-1016	ST-111	4A1			Vol	RV-070	M-66-Z	A			D13-139		41	G1				H-632, 623	
1st.	RT-311	16-6661		455				RS-1016	ST-111	4A1			Vol	RV-082	M-60-Z	A			D13-139		41	G1				H-634, 638, 640	
2nd.	RT-341	16-6660		455				RS-1018	ST-105	5A1			Vol	RV-077	M-66-Z	A			D13-139		41	G1				H-630U, 632U	
1st.	RT-342	16-6660		455				RS-1018	ST-105	5A1			Vol	RV-081	M-60-Z	A			D13-139		41	G1				H-630U, 631, 632, 633	
2nd.	RT-328	16-5714		455				RS-1019	ST-105	5A1			Vol	RV-072	M-66-Z	A			D13-139		41	G1				H-635, 636, 637, 638	
1st.	RT-329	16-5714		455				RS-1012	ST-105	6A1			Vol	RV-072	M-66-Z	A			D13-139		41	G1				H-639, 640, 641	
2nd.	RT-329	16-5714		455				RS-1011	ST-105	12A4			Vol	RV-077	M-66-Z	A			D13-139		41	G1				H-642, 643, 644	
1st.	RT-314	16-5714		455				RS-1019	ST-105	5A1			Vol	RV-070	T-114	A			D19-139X		41	G1				G.E. — 141	
2nd.	RT-314	16-5714		455	RP-505	RP-505		RS-1015	ST-105	5A1			Vol	RV-057	T-114	A			D19-139X		41	G1					
1st.	RT-314	16-5714		455				RS-1012	ST-105	6A1			Vol	RV-081	M-60-Z	A			D13-133		41	G1					
2nd.	RT-314	16-5714		455				RS-1012	ST-105	6A1			Vol	RV-057	T-114	A			D19-139X		41	G1					

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No.	Tubes	Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	No. 1	Burgess Part No.	Note
			Dial Light Type Listed in Parentheses		Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"
GENERAL ELECTRIC			Continued																						
H-639.	6	6SA7GT, 6SK7GT, 607GT, 615GT, 25L6GT, 25Z6GT	RC-5145	PRSA150-50-30		BRD3515		M-503C-150		TA-530		EL-354		Out	RT-475										
H-708, H-736.	7	6SA7GT, 6SK7GT, 607GT, 615GT, 25C6G, 25Z6GT (#44)	RC-5132	PRSA150-8		UP3035		M-8-150		UT-81		Out	RT-479												
HB-402, HB-403.	4	1A7G, 1N5G, 1H5G, 1Q5G	RC-5131	PRSA150-8		BR815		M-8-150		UT-81		Out	RT-466	A-3822	T22S47	A-2932	742-738	4F	Z30						
HB-408.	4	1A7G, 1N5G, 1H5G, 1Q5G	RC-5131	PRSA150-8		BR815		M-8-150		UT-81		Out	RT-466	A-3822	T22S47	A-2932	741-482	8F	Z30						
HB-410, HB-411.	4	1A7G, 1N5G, 1H5G, 1Q5G	RC-5131	PRSA150-8		BR815		M-8-150		UT-81		Out	RT-466	A-3822	T22S47	A-2932	745-482	8FL	Z30						
HB-412.	4	1A7GT, 3A8GT, 1T5GT, 117L7GT	RC-5156	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	RT-480												
HB-504, HB-505.	5	1A7GT, 1N7GT, 1H5GT, 1T5GT, 35Z6GT	RC-5144W	PRS25-100		BRH251		M-100-25		UHC-102		Out	RT-474W	A-3881	T22S48	A-2934	718-482	2F4	B30						
HE-50.	5	6SA7, 6SK7, 6SQ7, 6Y6G, 5Y3G, 6U5 (#44)	RC-5130						EL-342		Pwr	RT-196	P-6289	T22R00	P-2949										
HE-64L.	6	6SA7, 6SK7, 6SQ7, 6Y6G, 5Y3G, 6U5 (#44)	RC-5130	PRS250-12		BR1225		M-16-250		EL-342		Pwr	RT-167	A-3876	T22S60	P-2928									
HE-74, HE-74L.	7	6SK7, 6K8, 6SQ7, 6Y6G, 5Y3G, 6U5 (#44)	RC-5100						EL-342		Pwr	RT-196	P-6289	T22R00	P-2949										
HE-100, H-L, LH, HE-105, L.	10	6SK7, 6K8, 6H5, 6SF5, 6J5G, 6V6G, 6U4G, 6U5 (#44)	RC-5142	AF444J4A	UP22245C, KR540		O-40-450		PLS-40		Out	RT-218	P-6120	T22R04	P-2952										
HE-540.	5	6SA7, 6SK7, 6SQ7, 25C6G, 25Z6G (#44)	RC-5132							EL-342		Pwr	RT-461	A-3875	T22S60	A-2928									
HE-640L.	6	6SA7, 6SK7, 6SQ7, 25C6G, 25Z6G, 6U5 (#44)	RC-5132							EL-342		Out	RT-467	A-3876	T22S60	A-2928									
HE-740, HE-740L.	7	6SK7, 6K8, 6SQ7, 25C6G, 25Z6G, 6U5 (#44)	RC-5100	PRS250-12		BR1225		M-16-250		UT-122		Out	RT-461	A-3876	T22S60	A-2928									
HJ-119.	11	6SA7, 6SK7, 6H6, 6SF5, 6J5G, 6Y6G, 5Y3G, 6U5 (#44)	RC-5130						EL-342		Pwr	RT-112	P-6120	T22R04	P-2952										
HJ-614.	5	12SA7GT, 12SK7, 12SQ7, 50L6GT, 35Z5GT	RC-5159	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	RT-463	A-3830	T22S60	A-2905									
HJ-612.	6	6SA7, 6SK7GT, 6Q7GT, 6J5GT, 25L6GT, 25Z5GT	RC-5136	AF1010D		UP5515		DY-2X50-150		EL-25		Out	RT-475												
HJ-618AC, HJ-619AC.	6	6SA7GT, 6SK7GT, 6Q7GT, 6J5GT, 25L6GT, 25Z5GT	RC-5145	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	RT-475												
HJ-624, HJ-628.	6	6SA7GT, 6SK7GT, 607GT, 615GT, 25L6GT, 25Z6GT	RC-5145	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	RT-475												
HJ-737.	7	6SA7GT, 6SK7GT, 6Q7GT, 6J5GT, 25C6G, 25Z6G, 6U5 (#44)	RC-5153	AF844D		UP3035		DY-30-350		EL-354		Out	RT-479												
HJ-905, HJ-908.	9	12SA7, 12SK7, 12SQ7, 12J5GT, 12SF5, 25C6G, 25Z6GT, 6AB5 (#44)	RC-5161						EL-354		Out	RT-484													
HJ-1005.	10	6SA7, 6SK7, 6H6, 6SF5, 6J5, 6Y6G, 5Y3G, 6U5 (#44)	RC-5148						EL-432		Pwr	RT-112	P-6120	T22R04	P-2952										
HJ-1205.	12	6SA7, 6SK7, 6H6, 6SF5, 6J5GT, 6Y6G, 5Y3G, 6U5 (#44)	RC-5130						EL-342		Pwr	RT-112	P-6120	T22R04	P-2952										
HM-3.											Pwr	RT-483	A-5528	T22S60	A-2905										
HM-21.	2	6A8G, 8A	RC-5150	AF66D		UP3315		DY-2X30-150		EL-230		Pwr	RT-112	P-6120	T22R04	P-2952									
HM-30, A, HM-85.	8	6K8, 6SK7, 6SQ7, 6H6, 6SF5, 6Y6G, 5Y3G, 6U5 (#44)	RC-5148						EL-432		Pwr	RT-119	P-6120	T22R04	P-2952										
HM-136, HM-136A.	13	6SK7, 6K8, 6SJ7, 6H6, 6SQ7, 6J5G, 6L6G, 5Y3G, 6U5 (#44)	RC-5141	AF862J4A		UP43145C			EL-431		Pwr	RT-100	P-6013	T22R05	P-2953										
HP-558, HP-559, HP-560, HP-561, HP-657A.	5	12SA7GT, 12K7GT, 12SQ7GT, 50L6GT, 35Z5GT (#47)	RC-5152R	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	RT-478R	A-3865	T22S45	A-2928									
J-51, J-53, J-54, J-54W.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (#47)	RC-5158W	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	RT-481W	A-3876	T22S45	A-2928									
J-62.	6	6SA7, 6SK7, 6SQ7, 6J5, 25L6GT, 25Z5GT (#44)	RC-5163	AF1010D		UP5515		DY-2X50-150		EL-25		Out	RT-482	A-3865	T22S45	A-2928									
J-63.	6	6SA7, 6SK7, 6SQ7, 6J5, 25L6GT, 25Z6GT (#44)	RC-5160	UP3035		DY-30-350					Out	RT-486													
J-64.	6	6SA7, 6SK7, 6SQ7, 6J5GT, 6Y6G, 5Y3G (#44)	RC-5166	t		UP3035		DY-30-350		t		Out	RT-486												
J-65.	6	6SA7GT, 6SK7GT, 6Q7GT, 6J5GT, 6Y6G, 5Y3G (#44)	RC-5164	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Pwr	RT-0520	P-6297	T22R00	P-2949									
J-71.	7	6SK7, 6SA7, 6SQ7, 6J5GT, 6Y6G, 5Y3G (#44)	RC-5164								Pwr	RT-462	A-3876	T22S60	A-2928										
J-105.	10	6SK7, 6SA7, 6J5GT, 6V6G, 5Y3G (#44)	RC-5169	AF444J		UP22245		DY-4X20-450		EL-420		Pwr	RT-0520	P-6119	T22R02	P-2951									
J-501, J-501W, J-502, J-502W.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (#47)	RC-5170W	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr	RT-108	P-6013	T22R05	P-2953									
J-501, J-501W, 502, 502W (Late).	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (#47)	RC-5174	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	RT-498	A-3865	T22S45	A-2928									
J-512.	5	12SA7GT, 12B7, 12SQ7GT, 50L6GT, 35Z5GT (#47)	RC-5176	PRSA150-40-20		EZ42215		DSB-403020-150		TA-240		Out	RT-482	A-3865	T22S45	A-2928									
J-602, J-603.	6	12B7, 12SA7, 12B7, 12SQ7, 35L6GT, 35Z5GT (#47 or #51)	RC-5183	PRSA150-50-50		BRD3515		M-2X50-150		UT-201		Out	RT-4005	A-3876	T22S45	A-2928									

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL	
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photoet Sat No.
1st.	RT-341	16-6660		455	RP-505			RS-1012	ST-108	6A1			Vol	RV-078	M-50-Z		A		D13-133		41	G1		Continue	GE	NERAL ELECTRIC
2nd.	RT-342	16-6660		455				RS-1011	ST-111	12A4			Vol	RV-088	I-78		A		D13-133X		41	G1				H-639
1st.	RT-346	16-5714		455				RS-1010	ST-113	4A1			V/I	RV-066	M-63-Z		A		D13-137		42	G1				H-708, 736
2nd.	RT-347	16-5714		455				RS-1010	ST-113	4A1			V/I	RV-066	M-63-Z		A		D13-137		42	G1				HB-402, 403
1st.	RT-311	16-6658		155				RS-1010	ST-113	4A1			V/I	RV-066	M-63-Z		A		D13-137		42	G1				HB-408
2nd.	RT-311	16-6658		455	RP-505	'12		RS-1010	ST-113	4A1			V/I	RV-066	M-63-Z		A		D13-137		42	G1				HB-410, 411
1st.	RT-311	16-6658		455				RS-1010	ST-113	4A1			Vol	RV-066	M-63-Z		A		D13-137		42	G1				HB-412
2nd.	RT-311	16-6658		455				RS-1010	ST-113	4A1			Vol	RV-066	M-63-Z		A		D13-137		42	G1				HB-504, 505
1st.	RT-341	16-6660		100				RS-1024W	ST-105	5A1			Vol	RV-077W	M-63-Z		A		D13-137		42	G1				HE-50
2nd.	RT-340W	16-6660		100				RS-1012	ST-108	1A1			Vol	RV-071	M-63-Z		A		D13-137		42	G1				HE-64L
1st.	RT-326			455				RS-1012	ST-108	6A1			V/I	RV-071	T-16		A		D18-139X		41	G1				HE-74, 74L
2nd.	RT-327			155				RS-1009L	ST-111	8A21			V/I	RV-065												HE-100, 100H, 100L, 100LH, 105, 105L
1st.	RT-309	16-5714		155				RS-1022	ST-119	F3	10A31		Vol	RV-076												II-540
2nd.	RT-311	16-5714		455				RS-1014	ST-114	6A1			V/I	RV-074	T-10		A		D18-139X		42	G1				HI-640L
1st.	RT-334			455				RS-1012	ST-114	1A1			V/I	RV-074	T-16		A		D18-139X		42	G1				HE-740, 740L
2nd.	RT-321			455				RS-1009L	ST-111	8A21			V/I	RV-065												HJ-119
1st.	RT-317			455	RC-5003	B-2		RS-1014					Vol	RV-069	T-116				D18-139X			G1				HJ-514
2nd.	RT-318			455				RS-1030	ST-113	4A1			Vol	RV-061	M-10-Z		A		D13-133		41	G1				HJ-512
1st.	RT-352	16-6660		455				RS-111	ST-104	5A1			Vol	RV-062	M-60-Z		A		D13-133		41	G1				HJ-618AC, 619AC
2nd.	RT-35	16-6660		455				RS-1017	ST-104	6A1			Vol	RV-078	M-60-Z				D13-133		41	G1				HJ-624, 628
1st.	RT-351	16-5714		455	RP-505			RS-1012	ST-104	6A1			Vol	RV-078	M-60-Z				D13-133		41	G1				HJ-737
2nd.	RT-356	16-5714		455	RP-505			RS-1014	ST-104	12A4			Vol	RV-088	T-78		A		D13-133X		41	G1				HJ-905, 908
1st.	RT-356	16-6648		455				RS-1014					Vol	RV-067	T-114				D17-139X			G1				IJ-1005
2nd.	RT-357				D10	455	RC-5005																		HJ-1205	
1st.	RT-324			455				RS-1012	ST-108	6A1			Vol	RV-069	T-116				D18-139X			G1				HM-3
2nd.	RT-325			455				RS-1014	ST-104	1A1			Vol	RV-069	T-116				D18-139X			G1				HM-21
1st.	RT-317			455	RP-504			RS-1012	ST-104	1A1			Vol	RV-073												HM-80, A, 85, A
2nd.	RT-318			455	RP-504			RS-1012	ST-108	6A1			Vol	RV-089	T-116		A		D18-139Y		47	G1				HM-136, A
1st.	RT-330		2.1		MC			RS-1021	ST-119	F3	10A31		Vol	RV-075												HP-558, 559, 560, 551
2nd.	RT-331							RS-1028R	S-104	1A1			V/I	RV-115P	M-10-Z		A		D13-133		41	G1				HP-157A
1st.	RT-33							RS-1029W	S-105	5A1			Vol	RV-090W	M-60-Z		A		D13-133		41	G1				J-51, 53, 54, 54W
2nd.	RT-334							RS-1035	ST-105	5A1			Tone	RT-715W	M-60-Z		A		D13-133		41	G1				J-62
1st.	RT-336							RS-1035	ST-105	5A1			Vol	RV-097	M-60-Z		A		D13-133		41	G1				J-63
2nd.	RT-336							RS-1056	ST-105	5A1			Vol	RV-099	T-78		A		D13-133X		41	G1				J-64
1st.	RT-344R	16-6658		455				RS-1012	ST-104	6A1			Tone	RT-71	M-63-Z		A		D13-133X		41	G1				J-65
2nd.	RT-344R	16-6658		455				RS-1012	ST-104	6A1			Vol	RV-099	T-115		A		D13-139		41	G1				J-71
1st.	RT-351W	16-6658		455				RS-1012	ST-104	6A1			Vol	RV-101W	M-60-Z		A		D13-133		41	G1				J-105
2nd.	RT-351W	16-6658		455				RS-1012	ST-104	6A1			Vol	RV-101W	M-60-Z		A		D13-133X		41	G1				J-501, 501W, 502, 502W
1st.	RT-351W	16-6658		455				RS-1012	ST-104	6A1			Vol	RV-101W	M-60-Z		A		D13-133		41	G1				J-51, 501W, 502, 502W, Late
2nd.	RT-351W	16-6658		455				RS-1012	ST-104	6A1			Vol	RV-081	M-60-Z		A		D13-133		41	G1				J-512
1st.	RT-351	16-5714		455				RS-1060	ST-105	5A1			Vol	RV-120	M-60-Z		A		D13-133		41	G1				J-602, 603
2nd.	RT-351	16-6658		455				RS-1060	ST-105	5A1			Vol	RV-101W	M-60-Z		A		D13-133		41	G1				

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		"A"	"B"																	"A"	"B"			
GENERAL ELECTRIC	R	1G—Continued																						
J-614, J-664	6	12B7, 12SA7, 12SQ7, 35L6GT, 35Z6GT (#47 or #51)	RC-5183	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out	RT-4006	A-3876		T22S45		A-2928						
J-620	6	6SA7, 6SK7, 6SQ7, 6J5, 25L6G, 25Z6GT (#44)	RC-5180			UP3035		DY-30-350				Out	RT-486											
J-629	6	6SA7GT, 6SK7GT, 6SQ7GT, 6J5GT, 25L6GT, 25Z6GT	RC-5145	PRSA150-50-30		BRD5515		M-5030-150		TA-530		Out	RT-475											
J-644, J-644W, J-654, J-654W	6	6SA7, 6SK7, 6SQ7, 6J5GT, 25L6GT, 25Z6GT (#44)	RC-5178	AF1010D		UP5515		DY-2X50-150		EL-25		Out	RT-468	A-3865		T22S45		A-2928						
J-678	6	6SA7GT, 6SK7GT, 6SQ7GT, 6J5GT, 25L6GT, 25Z6GT	RC-5145	PRSA150-50-30		BRD5515		M-5030-150		TA-530		Out	RT-469											
J-709	7	6SA7GT, 6SK7GT, 607GT, 615GT, 25C6G, 25Z6GT (#44)	RC-5153	AF844D		UP3035, UP4445C, PRSS50-24		DY-30-350, DY-314, M-20-350		EL-354		Out	RT-479											
J-718, J-728	7	6SK7, 6SA7, 6SQ7, 6J5GT, 6Y6G, SY33 (#44)	RC-5132	AF8814A		BR2045, UP4X20-450				EL-420		Pwr	RT-0722	P-6119		T22R02		P-2951						
J-805	8	6SK7, 6SA7, 6SQ7, 6J5GT, 6Y6G, SY33 (#44)	RC-5165	AF4445J					DY-406			Pwr	RT-0813	P-6120		T22R04		P-2952						
J-808, J-809, J-818, J-828	8	6SK7, 6SA7, 6SQ7, 6J5GT, 6Y6G, SY33 (#44)	RC-5168						DY-4X20-450		EL-420		Pwr	RT-0814	P-6120		T22R04		A-2936					
J-106, J-1108	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6K6GT, SY33 (#44)	RC-5165	AF4444J		UP222245				DY-4X20-450		Out	RT-488	A-3813		T22S45		T22S45						
JA-64	6	6EK7, 6A8, 607, 6K6G, 6X5G (#44)	RC-5127S	PRS450-8		BR845		M-8-450		UT-8		Pwr	RT-0617S											
JB-410	4	1R5, 174, 1S8, 154	RC-5175E	PRS150-12		BR1215		M-10-150		UT-121		Out	RT-459S	A-3878		T22S47		A-2931						
JB-420	4	1A7GT, 1N5GT, 1H5GT, 1A5G/-1A5GT	RC-5172E	PRS150-12		BR1215		M-10-150		UT-121		Out	RT-4000E	A-3329		T22S47		A-2927						
JB-508, JB-513	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z4GT (#47)	RC-5143W	PRS25-100		BRH25I		M-100-25		UHC-102		Out	RT-487W	A-3881		T22S48		A-2934						
JB-514	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6GT	RC-5143W	PRS25-100		BRH25I		M-100-25		UHC-102		Out	RT-487W	A-3881		T22S48		A-2934						
JB-520, JB-525	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 3Q5GT	RC-5172W	PRS25-10		BRD4215		M-10-25		TA-10		Out	RT-494E	A-3856		T22S47		A-2900						
JB-523	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z4GT	RC-5187W	PRS150-40-20		BRD4215		M-2X40-150		TA-240		Out	RT-495E	A-3856		T22S47		A-2900						
JB-524	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6GT	RC-5177W	PRS150-40-20		BRD4215		M-25-25		TA-25		Out	RT-496W	A-3881		T22S48		A-2934						
JB-630	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z4GT	RC-5177W	PRS25-25		BRD252A		M-100-25		UHC-102		Out	RT-4001W	A-3881		T22S48		A-2934						
JB-631	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 117Z6GT	RC-5177W	PRS150-40-20		BRD252A		M-100-25		TA-25		Out	RT-497W	A-3856		T22S47		A-2900						
JCP-562	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	RC-5159	PRS25-25		BRD252A		M-25-25		TA-25		Out	RT-4002W	A-3856		T22S47		A-2900						
JCP-595	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5	RC-5179R	PRS150-30-30		BRD3315		M-2X30-150		TA-330		Out	RT-497W	A-3856		T22S47		A-2900						
JE-51, JE-510	5	6SA7, 6SK7, 6SQ7, 25C6G, 25Z6G (#44)	RC-5132	AF8814A		UP4445C, PRS350-24		DY-315, M-20-350		BRH25I		Pwr	RT-0522											
JE-58, JE-61	6	6SA7, 6SK7, 6SQ7, 25C6G, 25Z6G, 6U5 (#44)	RC-5132	AF8814A		UP4445C, PRS350-24		DY-315, M-20-350		BRH25I		Pwr	RT-0522	A-3876		T22S60		A-2928						
JE-61L	6	6SA7, 6SK7, 6SQ7, 25C6G, 25Z6G, 6U5 (#44)	RC-5132	AF8814A		UP4445C, PRS350-24		DY-315, M-20-350		BRH25I		Pwr	RT-0718	P-6120		T22R04		P-2952						
JE-81	8	6SK7, 6K8, 6J5GT, 6SQ7, 6Y6G, 5Y3G, 6U5 (#44)	RC-5132	AF8814A		UP4445C, PRS350-24		DY-315, M-20-350		BRH25I		Pwr	RT-461	A-3876		T22S60		A-2928						
JE101, JE-107	10	6SK7, 6K8, 6J5GT, 6SF5, 6V6G, 5U4G, 6U5 (#44)	RC-5162	PRS250-12		BR1225		M-16-250		UT-122		Pwr	RT-1001	A-3311		T22S64		A-2936						
JE-530, JE-531, JE-531X	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (#47)	RC-2512	PRS150-40-20		BRD4215		M-2X40-150		TA-240		Out	RT-473	A-3865		T22S45		A-2928						
JE-810	8	6SK7, 6K8, 6J5GT, 6SQ7, 25C6G, 25Z6G, 6U5 (#44)	RC-5132	AF8814A		UP4445C, BR2045		DY-315, M-20-350		BRH25I		Out	RT-451	A-3876		T22S60		A-2928						
JFM-90	9	6AB7, 7A4, 6SK7, 6SJ7, 6H6, 5Y3G	RC-5169					DY-406		BRH25I		Pwr	RT-0813	P-6010		T22R00		P-2949						
JFM-165		See J-718 and JFM-90																						
JM-3																								
JM-4																								
JM-6, JM-7																								
JM-23, JM-31, JM-31B, L500, L510, L550, L560, L512 to L580	2	6A8G, 84, 6AB7, 6SK7, 6X5G, 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (#47 or #51)	RC-5130	AF56D		UP3315, UP230, BRD3315		DY-2X30-150, DY-2X30-150, M-2X30-150		EL-230, TA-330		Out	RT-492											
L600, L601, L610, L611, L613, L621, L624, L632, L633, L622	6	12B7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (#47 or #51), 6U5 (#44)	RC-5183	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out	RT-020	A-3876		T22S45		A-2928						
L630	6	6SG7, 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G (#44)	RC-5164																					

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS				Photact Set No.	MFR. & MODEL				
User	Mfr.	Meissner	Note	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quar	Note	User	Mfr.	Clarostat	Shaft	Switch	Note	IRC	Shaft	Switch	Note	Mfr.	Radiat	Note				
		Part No.	Peak Freq.	Part No.	Part No.	Note	Part No.	Part No.	Note	Part No.	Note		Part No.	Part No.	Part No.	Part No.	Note	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.				
1st.	RT-385	16-6658	455				RS-1060	ST-105	5A1		Vol	RV-120	M-60-Z		A.	D-13-133		41	G1						Continued	GE	NERAL ELECTRIC	
2nd.	RT-386	16-6660					RS-104	ST-105	5A1		Vol	RV-099	T-78		A.	D13-133X		41	G1								J-614, 664	
1st.	RT-363	16-6658	455				RS-1017	ST-108	6A1		Vol	RV-078	M-60-Z		A.	D13-133		41	G1								J-620	
2nd.	RT-364	16-6650					RS-1053	ST-105	5A1		Vol	RV-112	M-60-Z		A.	D13-133		41	G1								J-629	
1st.	RT-341	16-6658	455									ST-108	5A1		Vol	RV-119	T-60-Z		A.	D13-133		41	G1					J-644, 644W, 654,
2nd.	RT-342	16-6660																									654W	
1st.	RT-379	16-6658	455																								J-673	
2nd.	RT-378	16-6660																									J-709	
1st.	RT-341	16-6658	415																								J-718, 728	
2nd.	RT-342	16-6680																									J-805	
1st.	RT-346	16-5712	455	RC-50'S																							J-808, 809, 818,	
2nd.	RT-347	16-5714																									828	
1st.	RT-360	16-5712	455	RC-500S																							J-1106, 1108	
2nd.	RT-361	16-5714																									JA-64	
1st.	RT-360	16-5712	455																								JB-410	
2nd.	RT-361	16-5714																									JB-420	
1st.	RT-369E	16-6660	415				RS-1041	ST-104	5A1		Vol	RV-106E	M-10-Z	KSS-1		D13-133	I										JB-508, 513	
2nd.	RT-370E	16-6660					RS-1038W	ST-105	5A1		Vol	RV-100W	M-63-Z		A2	D13-137		42	G1								JB-514	
1st.	RT-365W	16-6658	455	RP-50/W			RS-1038W	ST-105	5A1		Vol	RV-100W	M-63-Z		A2	D13-137		42	G1								JB-520, 525	
2nd.	RT-366W	16-6660					RS-1043L	ST-119	F3	1A31	Vcl	R-V-102E	M-10-Z		A2	D13-133		42	G1								JB-523	
1st.	RT-371E	16-6658	155				RS-1042E	ST-105	6A1		Tone	R-V-102E	M-10-Z		A2	D13-133		42	G1								JE-51, 51W	
2nd.	RT-371E	16-6660					RS-1044W	ST-105	5A1		Vol	RV-100W	M-13-Z		A2	D13-137		42	G1								JE-58, 61, 61L	
1st.	RT-372W	16-6658	455				RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JE-81	
2nd.	RT-373W	16-6658					RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JE-101, 107	
1st.	RT-372W	16-6658	455				RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JE-810	
2nd.	RT-373W	16-6658					RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JFM-90	
1st.	RT-352	16-6658	155				RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JFM-165	
2nd.	RT-353	16-6660					RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JM-3	
1st.	RT-380R	16-6658	455				RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JM-4	
2nd.	RT-381R	16-6660					RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JM-5, 5W	
1st.	RT-326	16-6660	455				RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JE-51, 51W	
2nd.	RT-327	16-6660					RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JE-52, 52W	
1st.	RT-326	16-6658	155				RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JE-53, 53W	
2nd.	RT-327	16-6660					RS-1046	ST-105	5A1		Vol	RV-109	T-10-Z														JE-54, 54W	
1st.	RT-309	16-6658	455				RS-1046	ST-115	5A1		Vol	RV-094															JE-55, 55W	
2nd.	RT-310	16-6658					RS-1046	ST-115	5A1		Vol	RV-094															JE-56, 56W	
1st.	RT-337	16-6658	455				RS-1046	ST-119	F3	1A31	Vol	RV-093															JE-57, 57W	
2nd.	RT-358	16-6660					RS-1046	ST-119	F3	1A31	Vol	RV-093															JE-58, 58W	
1st.	DW-1606	16-6658	455				RS-1046	ST-105	5A1		Vol	RV-3473	M-60-Z		A.	D13-133		41	G1								JE-59, 59W	
2nd.	DW-1607	16-6660					RS-1033	ST-111	5A1		Vol	RV-094															JE-60, 60W	
1st.	RT-309	16-6658	455				RS-1033	ST-119	F3	1A31	Vol	RV-093															JE-61, 61W	
2nd.	RT-310	16-6658					RS-1033	ST-119	F3	1A31	Vol	RV-093															JE-62, 62W	
1st.	RT-2007	16-6658					RS-1033	ST-105	5A1		Vol	RV-3473	M-60-Z		A.	D13-133		41	G1								JE-63, 63W	
2nd.	RT-2008	16-6660					RS-1033	ST-111	5A1		Vol	RV-094															JE-64, 64W	
3rd.	RT-2009	16-6660					RS-1033	ST-119	F3	1A31	Vol	RV-093															JE-65, 65W	
Disc.	RT-2010	16-6658	455				RS-1033	ST-105	5A1		Vol	RV-093															JE-66, 66W	
							RP-504				Vol	RV-073																JFM-165
							RP-505				Vol	RV-073																JM-3
							RC-5006	X-26			Vol	RV-073															JM-4	
							RP-506				Vol	RV-073															JM-5, 7	
							RP-506				Vol	RV-073															JM-23	
							RP-506				Vol	RV-073															JM-31, 31B	
1st.	RT-375	16-6658	455				RS-1059	ST-113	4A1		Vol	RV-096															L500, 510, 550, 560	
2nd.	RT-376	16-6610					RS-1059	ST-113	4A1		Vol	RV-108	M-60-Z		A.	D13-133		41	G1								L512 to L580	
1st.	RT-3015	16-6658	455				RS-1059	ST-113	4A1		Vol	RV-108	M-60-Z		A.	D13-133		41	G1								L600, 601, 610, 611	
2nd.	RT-376	16-6660					RS-1059	ST-113	4A1		Vol	RV-108	M-60-Z		A.	D13-133		41	G1								L613, 621, 624, 632, 633	
1st.	RT-385	16-6660	455				RS-1060	ST-108	5A1		Vol	RV-131	M-60-Z		A.	D13-133		41	G1								L622	
2nd.	RT-386	16-6660					RS-1060	ST-108	5A1		Vol	RV-120	M-60-Z		A.	D13-133		41	G1								L630	
1st.	RT-388	16-6660	455				RS-1060	ST-108	5A1		Vol	RV-120	M-60-Z		A.	D13-133		41	G1								L630	
2nd.	RT-388	16-6660					RS-1060	ST-108	5A1		Vol	RV-120																

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
																				"A"	"B"	"A"	"B"	
GENERAL ELECTRIC	R	IC—Continued																						
L-631	6	12B7 / 14A7, 12SA7, 12SK7, 12SQ7GT, 35L6GT, 35Z5GT, 6SQ7,	RC-5206	PRS150-30-30			BRD3315		M-2X30-150		TA-330		Out	RT-4026	A-3875		T22S45		A-2928					
L-640	6	6S67, 6SA7, 6SK7, 6SQ7, 6V6GT, 6V6GT, 5Y3G (44)	RC-5164										Pwr	RT-0619	P-6011		T22R02		P-2951					
L-641	6	6S67, 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G (44)	RC-5205				I: M.1.1		DY-3X/4-1:0				Out	RT-4013	A-3877		T22S58		A-2930					
L-642	6	12B7 / 14A7, 12SA7, 12SK7, 12SQ7GT, 35L6GT, 35Z5GT, 5Y3G (44)	RC-5206	PRS150-30-30			BRD3315		M-2X30-150		TA-330		Out	RT-0526	P-6011		T22R02		P-2951					
L-643, L-653, L-663, L-673	6	12B7 / 14A7, 12SA7, 12SK7, 12SQ7GT, 35L6GT, 35Z5GT (47 or 51)	RC-5183	I: PRSA150-50-50			BRD551		M-2X50-150		TA-1:1		Out	RT-4024	A-3877		T22S58		A-2930					
L-650, L-651, L-652	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	RC-5194	I: PRSA150-50-50			BRD551		M-2X50-150		A .05		Out	RT-4011	A-3875		T22S45		A-2928					
L-660	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (C-7)	RC-5187	PRS150-40-40			BRD4415		M-2X40-150		TA-440		Out	RT-4009	A-3875		T22S45		A-2928					
L-674	6	12B7 / 14A7, 12SA7, 12SK7, 12SQ7GT, 35L6GT, 35Z5GT	RC-5206	PRS150-30-30			BRD3315		M-2X30-150		TA-330		Out	RT-4011	A-3876		22S45		A-2928					
L-678	6	6SA7GT, 6SK7GT, 60GT, 6J6GT, 25L6GT, 25Z5GT	RC-5145	PRS150-50-30			BRD3315		M-5030-150		TA-530		Out	RT-475										
L-740	7	6SG7, 6SA7, 6SF7, 6SC7, 6K6GT, 5W4GT (44)	RC-5198									Pwr	RT-074	P-6120		22R04		P-2952						
L-915	9	6SG7, 6SA7, 6SK7, 6SQ7, 6J6GT, 6V6GT, 5Y3G (44)	RC-5165	AI-1441			UP22245		Y4X/4-5		11:4:0		Out	RT-4115	A-2312		T22S74		A-2901					
L-915W, L-916	9	6SG7, 6SA7, 6SK7, 6SQ7, 6J6GT, 6V6GT, 5Y3G (44)	RC-5204	AF444J4A			UP22245C					Pwr	RT-0465	P-6012		22R04		P-2952						
LB-412	4	1R5, 1T4, 1S5, 1S4	RC-5175E	PRS150-12			BR1215		M-10-1:1		IT-.21		Out	RT-0465	A-3311		T22R05		P-2936					
LB-424	4	1A7GT, 1N5GT, 1H5GT, 1A5GT	RC-5105	PRS50-10			BR105		M-10-50		TA-510		Out	RT-4027-S	A-3857		T22S48		A-2937		758		17GD60	
LB-502	5	1R5, 1T4, 1S5, 3S4, 3523	RC-5185E	PRS150-40-40			BRD4415		M-2X40-150		TA-440		Out	On Spkr.	A-3329		T22S47		A-2927		2950 167		22R	XX45
LB-530	5	1A7GT, 2IN5GT, 1H5GT, 1Q5GT	RC-5189									Vibr	RL-366											
LB-530X	5	1A7GT, 2IN5GT, 1H5GT, 1Q5GT	RC-5189									Pwr	RT-0524											
LB-603, LB-612, LB-641, LB-642	6	1T4, 1R5, 1S5, 3S4, 35Z5GT	RC-5192-W				UP6CJ64				IL-.51	Out	RT-4010	A-3822		T22S47		A-2932						
LB-673	6	1IN5GT, 1A7GT, 1H5GT, 3Q5GT, 35Z5GT	RC-5213 W	PRSA150-40-20			BRD421		M-2X4-1:1		TA-440		Out	RT-4034-W	A-3856		T22S47		A-2927		744 412		22R	XX45
LB-700, LB-701, LB-702, LB-703	7	1T4, 1A7GT, 1H5GT, 1Q5GT, 11Z6GT	RC-5193									Out	RT-4010	A-3878		T22S47		A-2931		746 412		22R	XX45	
LC-608	6	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G	RC-5191R	AF444J4A			UP2245C		DY-315		EL-350		Pwr	RT-0618R	P-6011		T22R02		P-2951					
LC-619	6	6SG7, 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G (44)	RC-5201									Out	On Spkr.	A-3878		T22S47		A-2931						
LC-619W	6	6SG7, 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G (44)	RC-5212				UPI5D145		Y-Y3X15-450		IL-344		Out	RT-0621	P-6011		T22R02		P-2951					
LC-628, LC-629	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (44)	RC-5170-W	PRSA150-20-II			BRD2215		M-2X20-150		TA-270		Out	RT-0413	A-3877		T22S58		A-2930					
LC-638, LC-649	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (44)	RC-5170-W	PRSA150-20-II			BRD2215		M-2X20-150		A 27		Out	RT-0416W	A-3876		T22S45		A-2928					
LC-648, LC-648W	6	6SG7, 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G (44)	RC-5201									Out	RT-0417W	A-3876		T22S45		A-2928						
LC-658	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (44)	RC-5202W									Out	RT-0417W	A-3876		T22S45		A-2928						
LC-679	6	6SA7GT, 6SK7GT, 60GT, 6J6GT, 25L6GT, 25Z5GT (44)	RC-5145	AI-1441			M-5030-150		TA-440		Out	RT-0417W	A-3876		T22S45		A-2928							
LC-758	7	6SG7, 6SA7, 6SF7, 6SC7, 6K6GT, 5Y3G (44)	RC-5199				DY-401				Out	RT-0417W	A-3876		T22S45		A-2928							
LC-759, LC-759B, LC-768	7	6SG7, 6SA7, 6SF7, 6SC7, 6K6GT, 5Y3G (44)	RC-5214	UPI5D145			DY-3X15-450		EL-344		Out	RT-0417W	A-3876		T22S45		A-2928							
LCP-401	4	12SA7, 12Z07, 50L6GT, 35Z5GT/35Z4GT	RC-5195K	PRSA150-40-40			BRD4411		M-2X40-150		TA-440		Out	RT-0433	A-3877		T22S45		A-2930					
LCP-508	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	RC-5171W	PRSA150-20-II			BRD2214		M-2X20-150		A 440		Out	RT-4012W	A-3865		T22S45		A-2928					
LCP-510	5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT	RC-5200									Out	RT-4012W	A-3865		T22S45		A-2928						
LCP-596	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5	RC-5144R	PRSA150-5-11			BRD3315		M-11-50		TA-530		Out	RT-4012W	A-3876		T22S45		A-2928					
LCP-609	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	RC-5188K	PRSA150-40-40			BRD4415		M-2X40-150		TA-440		Out	RT-4009K	A-3876		T22S45		A-2928					
LF-115, LF-116, LFC-1118, LFC-1118, LFC-1128	11	6SG7, 707, 6SH7, 6SQ7, 7K7, 6V6GT, 5U4G (44)	RC-5200									Pwr	RT-111	P-6013		T22R05		P-215						
LFC-1228	12	6SG7, 707, 6SH7, 6SQ7, 7K7, 6V6GT, 5U4G, 6J5	RC-5200	PRSA25-25			BR252A		Y-406		M-25-25		Out	RT-419	A-3311		T22S54		A-2136					
LM-13, LM-14, LM-20, LM-21, LM-25	5	6SG7, 707, 6SH7, 6SQ7, 7K7, 6V6GT, 5U4G, 6J5	RC-5203									Pwr	RT-111	P-6013		T22R05		P-215						
												Out	RT-4019	A-3311		T22S64		A-2136						

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL						
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clarostat	Shaft	Switch	Note	JRC	Shift	Switch	Note	Mfr.	Radiat	Note	Photog	Sat No.
1st.	RT-385	16-5712		455				RS-1090	ST-194		5E45		Vol	RV-131	M-60-Z				D13-133		41	G1				Continued—GE	NERAL ELECTRIC
2nd.	RT-3022	16-5714						RS-1073	ST-105		5A1		Vol	RV-135	T-116				D18-139X			G1					L631
1st.	RT-3009	16-5712		155				RS-109W	ST-105		5A1		Vol	RV-141	T-116				D18-139X			G1					L640
2nd.	RT-3010							RS-1010	ST-194		5A1		Tone	RT-726	M-60-Z				D13-133		41	G1					L641
1st.	RT-3005	16-5712		155				RS-1077	ST-105		5A1		Vol	RV-131	M-60-Z				D13-133		41	G1					L642
2nd.	RT-3006	16-5712						RS-1064	ST-105		5A1		Vol	RV-123	M-60-Z				D18-139X			G1					L643, 653, 663, 673
1st.	RT-385	16-5712		155				RS-1044	ST-154		5E45		Vol	RV-132	M-60-Z				D13-133		41	G1					1650, 651, 652
2nd.	RT-3022	16-5714						RS-1064	ST-105		5A1		Vol	RV-123	M-60-Z				D13-133		41	G1					L660
1st.	RT-385	16-5712		455				RS-1090	ST-194		5A1		Vol	RV-120	M-60-Z				D13-133		41	G1					L674
2nd.	RT-3022	16-5714						RS-101	ST-108		5A1		Vol	RV-119	M-60-Z				D13-133		41	G1					L678
1st.	RT-341			455	RP-50			RS-1012	ST-108		5A1		Vol	RV-135	T-116				D18-139X			G1					L740
2nd.	RT-342							RS-1079					Vol	RT-723	M-60-Z				D13-133		41	G1					L915
1st.	RT-3011	16-5712		455				RS-1045					Vol	RV-137	T-116				D18-139X		41	G1					L915W, 916
2nd.	RT-3012							RS-1044E					Vol	RV-137	M-60-Z				D18-139X		41	G1					LB412
1st.	RT-3013	16-5712		455				RS-1045					Vol	RT-724	T-116				D13-133		41	G1					LB424
2nd.	RT-3014							RS-1044E					Vol	RV-10E	M-60-Z				D13-133		E						LB502
1st.	RT-3013							RS-1011-5	ST-114		5A1		Vol	RV-143-S	T-116				D13-133		42	G1					LB530
2nd.	RT-3023-S	16-6658		455				RS-1011W			5A07		Vol	RV-122E	AM-66-Z	K51	A2		D13-133		41	G1					LB530X
1st.	RT-3875	16-6660		455				RS-1011	ST-105		5A1		Vol	RV-125	M-60-Z				D13-133			G1	RV-N11				
2nd.	RT-3872							RS-1044	ST-105		5A1		Vol	RV-125	M-60-Z				D13-133			G1	RV-N4				
1st.	RT-393	16-6658		4.5				RS-1044	ST-105		5A1		Vol	RV-125	M-60-Z				D13-133								LB603, 612, 641, 642
2nd.	RT-392	16-6660						RS-1044	ST-105		5A1		Vol	RV-125	M-60-Z				D13-133								LB673
1st.	RT-398W	16-615*		455				RS-1011W	ST-113		4A1		Vol	RV-171W	AM-13-Z	K51-3	A1		D13-133		41	G1					LB700, 701, 702, 703
2nd.	RT-399W	16-615*						RS-1011W	ST-105		5A1		Vol	RV-151W					D13-133		42	G1					LC608
1st.	RT-3038W			455				RS-1011	ST-105		5A1		Vol	RV-134	M-61-Z				D13-133		41	G1					LC619
2nd.	RT-3039W							RS-1068R	ST-108		5A1		Vol	RV-130	M-61-Z				D13-133		41	G1					LC619W
1st.	RT-3000	16-6658		455				RS-1011	ST-101		F1		Vol	RV-128R	T-721R				D13-133		41	G1					LC628, 629
2nd.	RT-3001	16-6660						RS-1011	ST-101		F1		Vol	RV-135	T-722				D13-133		41	G1					LC638, 639
1st.	RT-396R	16-5712						RS-1011	ST-101		F2		Vol	RT-722	M-60-Z				D13-133		41	G1					LC648, 648W
2nd.	RT-397R							RS-1075W	ST-194		SE45		Vol	RV-135	T-116				D18-139X		41	G1					LC658
1st.	RT-3005	16-5712		455				RS-1075W	ST-194		SE45		Vol	RV-135	T-116				D18-139X		41	G1					LC-679
2nd.	RT-3010							RS-1075W	ST-194		SE45		Vol	RV-135	T-116				D18-139X		41	G1					LC-758
1st.	RT-3005	16-572		455				RS-1077W	ST-194		SE45		Vol	RT-722	M-60-Z				D18-139X		41	G1					LC759, LC759B, LC768, LCP-401
2nd.	RT-3010							RS-1077W	ST-194		SE45		Vol	RV-135	T-116				D18-139X		41	G1					LCP-508
1st.	RT-367W	16-6658		455	RC-501W			RS-1076W	ST-194		SE45		Vol	RV-138W	M-60-Z				D13-133		41	G1					LCP-510
2nd.	RT-3016W	16-6658						RS-1076W	ST-194		SE45		Vol	RV-138W	M-60-Z				D13-133		41	G1					LCP-596
1st.	RT-341	16-5712		455	RP-505			RS-1077W	ST-194		SE45		Vol	RV-138W	M-60-Z				D13-133		41	G1					LC-609
2nd.	RT-342	16-5714						RS-1077W	ST-194		SE45		Vol	RV-138W	M-60-Z				D13-133		41	G1					LF-115, 116, LFC-1118, 1128
1st.	RT-3017	16-5712		455				RS-1077W	ST-194		SE45		Vol	RV-138W	M-60-Z				D13-133		41	G1					LFC-1228
2nd.	RT-3018							RS-1078	ST-108		5A1		Vol	RV-135	T-116				D13-133		41	G1					LM-13, 14, LM-20, 21, 25
1st.	RT-3018	16-5712		455				RS-1078	ST-108		5A1		Vol	RV-135	T-116				D13-133		41	G1					G. E. -147
2nd.	RT-3018	16-5714						RS-1078	ST-108		5A1		Vol	RV-135	T-116				D13-133		41	G1					
1st.	RT-3040	16-5712		455				RS-1079	ST-108		5A1		Vol	RV-135	T-116				D13-133		41	G1					
2nd.	RT-3018	16-5714						RS-1079	ST-108		5A1		Vol	RV-135	T-116				D13-133		41	G1					
1st.	RT-3004K	16-6658		455				RS-1079K	ST-113		4A1		Vol	RV-133K	M-60-Z				D13-133		41	G1					
2nd.	RT-367W	16-6658		455				RS-1036	ST-113		4A1		Vol	RV-127W	M-60-Z				D13-133		41	G1					
1st.	RT-368W	16-6660		455				RS-1036	ST-113		4A1		Vol	RV-119	M-60-Z				D13-133		41	G1					
2nd.	RT-368W	16-6660						RS-1036	ST-113		4A1		Vol	RV-119	M-60-Z				D13-133		41	G1					
1st.	RT-380R	16-6658		455				RS-111W	ST-113		FI		Vol	500K													
2nd.	RT-381R	16-6660						RS-1065K	ST-105		5A1		Vol	RV-113R	AM-60-Z	K51-3	A1		RV-113R								
1st.	RT-390K	16-6658		455				RS-1065K	ST-105		5A1		Vol	RV-124K	M-60-Z				D13-133		41	G1					
2nd.	RT-391K	16-6660						RS-1079	ST-108		1"10		Vol	RV-139	T-116				D18-139X		41	G1					
1st.	RT-3019			4.3				RS-1079	ST-108		1"10		Vol	RV-139	T-116				D18-139X		41	G1					
2nd.	RT-3020			4.3				RS-1079	ST-108		1"10		Vol	RV-139	T-116				D18-139X		41	G1					
1st.	RT-3019			4.3				RS-1079	ST-108		1"10		Vol	RV-139	T-116				D18-139X		41	G1					
2nd.	RT-3020			4.3				RS-1079	ST-108		1"10		Vol	RV-139	T-116				D18-139X		41	G1					
1st.	RT-3021							RS-1079	ST-108		1"10		Vol	RV-139	T-116				D18-139X		41	G1					
2nd.	RT-3021							RS-1079	ST-108		1"10		Vol	RV-139	T-116												

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"	
GENERAL ELECTRIC	R	IC—Continued																						
X-105A, X-105V, X-105VB,	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT (47).	RC-5110					DY-11		FL-10		Pwr	RT-0526		BL	T22345		B17						
X-108, X-118	8	707, 6S67, 6SQ7, 6J5GT, 25L6GT, 25Z6GT, 6U5 (44).	RC-519					DY-11				Pwr	RT-0818											
X-115, X-125, X-145	5	6SA7, 6SK7, 6SQ7, 25L6GT, 25Z6GT (44).	RC-5132	AF8814A, PRS350-24.		UP4445C BR204		DY-314				Pwr	RT-0522											
X-127	7	707, 6S67, 7C6, 6G6G, 6AB5 (47).	RC-5132	AF8814A, PRS350-24.		UP4445C BR204		DY-314				Pwr	RT-0822											
X-136, X-166	6	707, 6S67, 6SQ7, 25L6GT, 25Z6GT, 6U5 (44).	RC-5132	AF8814A, PRS350-24.		UP4445C BR2045		DY-314				Pwr	RT-0622		B17	T22345		B17						
X-216A, X-216V	6	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT (47).	RC-519					DY-3		FL-10		Pwr	RT-0420											
X-225A, X-225V	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT (47).	RC-519					DY-11		FL-10		Pwr	RT-0522											
X-226	6	707, 6S67, 7H7, 6SQ7, 6U5, 25L6GT, 25Z6GT (44).	RC-5132	AF8814A, PRS350-24.		UP4445C BR2045		DY-314				Pwr	RT-0622											
X-228	8	707, 6S67, 7H7, 6SQ7, 6U5, 6J5GT, 25L6GT, 25Z6GT.	RC-519					DY-4				Pwr	RT-0822											
X-1708	8	707, 6S67, 6SQ7, 6J5GT, 25L6GT, 25Z6GT, 6U5 (44).	RC-5132	AF8814A, PRS350-24.		UP4445C BR2045		DY-314				Pwr	RT-0822											
20	6	6SA7, 6SK7, 6SQ7, 6J5GT, 25Z6GT (44).	RC-518	A11J		UP3035		DY-3		FL-10		Pwr	RT-0420											
30	7	6S67, 6SA7, 6S7F, 6SC7, 6W6GT, 5Y3G (44).	RC-5214			UP15D15		DY-3X15-41		FL-44		Pwr	RT-0123											
35	10	6SSK7, 6X8, 515ST, 6SF5, 6W6G, 514G, 6U5 (44).	RC-5100	PRS250-12		BR1225		M-16-250		IT-122		Pwr	RT-1001											
40	11	6S67, 707, 6SH7, 6SQ7, YK7, 6W6GT, 5U4G (47).	RC-5200			DY-406					Pwr	RT-473												
	RC-5203	PRS25-25				BR2524		M-25-25		TA-1/2		Pwr	RT-116											
50	4	12SG7, 12SQ7, 50L6GT, 35Z6GT/35W4.	RCE-031	AF86D4A		UP4215C		DY-305		EL-343		Out	RTO-022											
100, 101, 103, 105	5	12SA7, 12SG7, 12SQ7, 50L6GT, 35Z6GT (C-7).	RCE-011	AF88SD		UP5515		DY-35				Out	RTO-111											
106	5	12SA7, 12SG7, 12SQ7, 50L6GT, 35Z6GT (C-7).	RCE-001	AF88SD		UP5515		DY-3		FL-10		Out	RTO-101											
110, 111	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z6GT.	RCE-041	PRSA150-40-40		BRD44		M-2X40-150		TA-1/2		Out	RTO-023											
140	4	1R5, 1U4, 1S5, 3S4.	RCE-011	PRSA150-10-W		BRD31		M-2X40-150		IT-4-1		Out	RTO-034											
180	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT.	RCE-052	PRS25-10		BRH121		M-100-12		UHC-112		Out	RTO-5001											
200, 201, 203, 205, 205M	6	12S67, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT (C-7).	RCE-001	AF88SD		UP5515		DY-307		FL-352		Out	RTO-003											
219, 220, 221	6	12SK7, 12SA7, 12SG7, 12SQ7, 35L6GT, 35Z6GT (C-7).	RCE-007	AF44D		UP2215		DY-2X15-150/ 1200-1.5		EL-221		Chg	RTC-W1											
250	5	1LN5, 1LC6, 1LH4, 3Q5GT.	RCE-007	AF44D		& BRH610		DY-2X15-150/ 1200-1.5		& UHC-1500		Vibr	RTV-JH1											
260	6	1LN5, 1LC6, 1LH4, 3Q5GT.	RCE-007	AF44D		UP2215		DY-2X15-150/ 1200-1.5		EL-221		Out	RTC-001											
	RCE-012	HCLV12-1000		BRH610		DY-2X15-150/ 1200-1.5		EL-221		UHC-1500		Chg	RTV-JH1											
	RCE-016	PRS150-10		BRH61		DY-2X15-150/ 1200-1.5		UT-121		UHC-1500		Out	RTC-002											
	RCE-5001	PRS150-8		BRH615		DGM-1500-6		UT-81		M-8-150		Vibr	RTV-001											
280	5	1N5GT, 1R5, 1H5GT, 3Q5GT.	RCE-011	AF88SD		UP5515C		DY-307		EL-352		Out	RTG-007											
303	6	6S97Y, 6SK7, 6SQ7, 6SC7, 6V6GT, 5Y3G (47).	RCE-013			UP4314C		DY-403		EL-424		Pwr	RTP-02											
321	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z6GT (C-7).	RCE-001			UP5515C		DY-307		EL-352		Out	RTO-013											
326, 327	7	6S67, 6SA7, 6SK7, 6SQ7, 6SC7, 6V6GT, 5Y3G (44).	RCE-002	AF44J4A		UP4314C		DY-403		EL-424		Out	RTP-010											
417	15	6AK5, 6SG7, 6SV7, 6SH7, 6AQ7GT, 6V6GT, 6SC7, 5Y3G (44 & 47).	RCE-029	AF44F		UP15D1		DY-406		EL-253		Out	RTP-004											
	RCE-030	AF44J4A		UP4314C		UP2245		DY-406		EL-324		Out	RTP-020											
		AF44J4		UP2245		EL-324		EL-7-1		A-3849		Out	RTG-012											
GENERAL TELEVISION	IS	ION & RADIO CORP.	10 Mfd.	PRS150-10		BR1215		M-10-150		UT-121		Out	On Spkr.	A-3822										
F56W	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT.	1A7GT, 1N5GT, 1H5GT, 1Q5GT.	PRS150-10		BR1215		M-10-150		UT-121		Out	On Spkr.	A-3876										
1A5, 2A5, 3A5, 5A5. (Ch. 1-1)	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z6GT (47).	3-3	PRS150-40-40		HRD421		DHN-2X50-150		TA-240		Out	On Spkr.	A-3876										
14A4F	4	1LA6, 1LN5, 1LH4, 3LF4.	1LA6, 1LN5, 1LH4, 3LF4.	PRS150-10		BR121		M-10-150		UT-121		Out	On Spkr.	A-3877										
15A5. (See Model 1A5).	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z6GT (47).	40, 20 Mfd.	AF88D		UP4CJ59		A3	DY-40-20-150	EL-24	Out	f.	A-3876											
17A5	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z6GT (47).	346	PRS150-10		BRD421		M-2X40-150		TA-1/2		Out	On Spkr.	A-3876										
19. (Single End Tubes).	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z6GT (47).	348	PRS150-10		BRD421		M-2X40-150		TA-1/2		Out	On Spkr.	A-3876										
19. (Double End Tubes).	5	12A8GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z6GT (47).	348	PRS150-10		BRD421		M-2X40-150		TA-1/2		Out	On Spkr.	A-3876										
19A5. (See Model 1A5).	4	1LA6, 1LN5, 1LH4, 3LF4.	10 Mfd.	PRS150-12		BR1215		M-10-150		UT-121		Out	TA-12-11	A-3878										
21A4	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT.	40, 20 Mfd.	AF84D4A		A3	UP4CJ59	A3	DY-4020-150	EL-24	Out	f.	A-3876											
22A5C	5	1407, 1A47, 14B6, 50A5, 35Y4 (47).	40, 20 Mfd.								Out	A-3876												

†Information not available.

\* Information not available

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Tube Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note Part No.	Cornell-Dubilier Part No.	Note Part No.	Solar Part No.	Note Part No.	Sprague Part No.	Note Part No.	Use	Mfr. Part No.	Stancor Part No.	Note Part No.	Thordarson Part No.	Note Part No.	Merit	Note Part No.	Eveready Part No. "A" "B"	No. Note "A" "B"	Burgess Part No. "A" "B"	No. Note "A" "B"	
	No.	Tubes																						
GENERAL TELEVISION	IS-10N & RADIO CORP.—Continued																							
23A6.....	4 1LA6, 1LH6, 1LH4, 3LF4.....	35, 35, 35, Mfd.	PRSA150-40-40 & PRS150-40	EZ44315C	A3	†			TA-303		Out	TA-112-447	A-3878	B3	T22S47	B3	A-2931	B3	753			F6A60		
485.....	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)	70, 70 Mfd.	PRS25-100, PRSA150-40-20	BRH251	A3	M-100-25			UHC-102		Out	†	A-3876	B3	T22S45	B3	A-2928	B3						
5B5G, 5B5Y.....	5 1A07, 1A47, 1A66, 50A5, 35Y4 (47)	40, 20 Mfd.	PRSA150-20-40	EZ4215C	A3	DSB-2X40-150			TA-240		Out	†	A-3876	B3	T22S45	B3	A-2928	B3						
26B5.....	5 1LA6, 1LH5, 1LH4, 3LF4, 3-6	PRSA150-40-40 & PRS150-40	EZ44315C	A3	DY-3X40-150			TA-303		Out	†	A-3878	B3	T22S47	B3	A-2931	B3	753			F6A60			
26B5.....	5 1R5, 1U4, 1S5, 3V4, 117ZBGT, 35	35, 35, 35 Mfd	PRS25-100, PRSA150-40-40 & PRS150-40	BRH-251	M-100-25			UHC-102		Out	On Spkr.	A-3329		T22S47		A-2927		7935-455		81		XX30		
26, 34, 47, 49, 57, 88, 91.....	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	70, 70 Mfd.	PRSA150-40-20	BRD4215	M-2X40-150	†		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928								
51, (Single End Tubes).....	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	346	PRSA150-40-20	EZ42215	DSB-403020-150			TA-240	UT-201	Out	On Spkr.	A-3301		T22S60		A-2905								
51, (Double End Tubes).....	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	348	PRSA150-20	PRS150-20																				
57.—See Model 19, (Single End Tubes).....	4 12K7GT, 12S7GT, 50L6GT, 35Z5GT	343	PRSA150-40-20	BRD4215	M-2X40-150			TA-240		Out	On Spkr.	A-3876		T22S45		A-2928								
411, 421.....	5 12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT	346	PRSA150-40-20	BRD4215	M-2X40-150			TA-240		Out	On Spkr.	A-3876		T22S45		A-2928								
511A, 521.....	5 12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT (47)	346	PRSA150-40-20	BRD4215	M-2X40-150			TA-240		Out	On Spkr.	A-3876		T22S45		A-2928								
520, 522, 524, 526.....	5 12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT (47)	346	PRSA150-40-20	BRD4215	M-2X40-150			TA-240		Out	On Spkr.	A-3876		T22S45		A-2928								
530.....	5 1A7G, 1N5G, 1H5G, 1T5G, 3S25G (47), (See Model 54).....	345	PRSA150-40-20	BRD4215	M-2X40-150			TA-240		Out	On Spkr.	A-3881		T22S48		A-2934		744-482		F4P1		B30		
GILFILLAN																								
5AD.....	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4, 55Z4	20, 20 Mfd.	PRSA150-20-20	BRD2215	M-2X20-150			TA-220		Out	†	A-3876		T22S45		A-2928								
5B8.....	5 6A8, 6K7, 6Q7, 6F6, 5Z4/5W4, A-10025	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88			Pwr	†	P-6011	B18	T22R02	B18	P-2951	B18									
5G-S, 5G-T.....	5 6SA7, 6SK7, 6SQ7, 6V6GT, 5W4, 8-8 Mfd	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88			Pwr	†	P-6297		T22R02		A-2949										
5G8, 5G8T.....	5 6A7, 78, 75, 42, 80	A-10005	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88		Pwr	†	A-3877		T22S58		A-2930										
5L.....	5 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 117Z5GT	40, 40, 40 Mfd	AF88D	UP4415	DY-3X40-150			EL-340		Pwr	†	A-3878		T22S47		A-2931								
5SJ.....	5 6A8, 6K7, 6Q7, 6F6, 5W4, 8-8 Mfd	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88			Pwr	†	P-6297		T22R00		P-2949										
5S8, SS8T.....	5 6A7, 78, 75, 42, 80	A-10005	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88		Pwr	†	A-3878		T22S47		A-2931										
6B.....	6 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 6X5GT	40-40-100	AF106D20A	UP5CJ64	EL-351			Pwr	†	P-6011	B18	T22R02	B18	P-2951	B18									
6K, 6L, 6R.....	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT	20, 20 Mfd.	PRSA150-20-20	BRD2215	M-2X20-150			TA-220		Pwr	†	A-3878		T22S47		A-2931								
6U.....	6 6K8, 6SK7, 6SQ7, 6V6GT, 6X5G, 6U5	16-4 Mfd	PRS450-8-8	KR508	D-8-450			PLS-8		Pwr	†	P-6297		T22R00		P-2949								
7C8, 7T8.....	7 6A7, 78, 6H6, 6F5, 42, 80, 6T5	8-8 Mfd.	PRS25-10	BR102A	M-10-25			TA-10		Pwr	†	P-6012	B18	T22R04	B18	P-2952	B18							
8CB, 8C8E, BT8, BT8E.....	8 6SM7, 6A8G, 6H6G, 6F5G, 6F6G, 5Y3, 6U5	8-8 Mfd.	PRS450-8-8	BR345	M-8-450			UT-8		Pwr	†	A-3878		T22S47		A-2931								
11F, 11G.....	11 6SK7, 6K8, 6H6, 6F5GT, 6J7GT, 6V6GT, 6S17G, 6U5G, 25 Wfd	10 Mfd.	PRS25-10	BR102A	M-10-25			TA-10		Pwr	†	P-6014	B1	T22R06	B1	P-2954	B1							
13A.....	13 6SK7, 6K8, 6H6, 6F5GT, 6J7GT, 6V6GT, 6S17G, 6U5G, 55W4	10 Mfd.	PRS25-10	BR102A	M-10-25			TA-10		Pwr	†	P-6014	B1	T22R06	B1	P-2954	B1							
13C8, 13C8F.....	13 6K7G, 6A8G, 6H6G, 6F5F, 6C5G, 6F6G, 6Y3, 6U5G	15 Mfd.	PRS450-20	KR502	M-50-25			PLS-12		Pwr	†	P-6014	B1	T22R06	B1	P-2954	B1							
54A (Late).....	5 6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G, 8-8 Mfd	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88			PLS-20		Pwr	†	A-3878		T22S47		A-2931								
56BC-1, 56BCR, 56A, B, C, D, E.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	40, 60, 10 Mfd	AF1010D & PRS25-10	UP5515C	DY-2X50-150 & M-10-25			EL-352		Pwr	†	P-6014	B1	T22R06	B1	P-2954	B1							
56-S.....	5 6A7, 78, 75, 41, 80	8-8 Mfd.	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88		EL-350		Pwr	†	A-3878		T22S45		A-2931								
66A, AM, D, DM.....	6 6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT (47)	20, 20, 20 Mfd	AF44J & PRS25-25	UP2245, BR202A	DY-312			EL-350		Pwr	†	P-6119	B18	T22R02	B18	P-2951	B18							
66B.....	6 1N5GT, 1A7GT, 1H5GT, 3Q5GT, 117Z6GT	40, 50, 10 Mfd	AF88DAA	UP5515C	DY-308			EL-352		Pwr	†	P-6120		T22R04		P-2952								
66P, 66PM.....	6 6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT (44)	20, 20, 20 Mfd	AF44JA	UP2245, BR202A	M-100-50			UHC-102		Chk	†	C-1708		T20C52		C-2975								
66-S.....	6 6K8, 78, 75, 41, 80, 6U5	12 Mfd.	PRS450-16	BR1645	M-16-450			UT-16		Chk	†	A-3878		T22S47		A-2931								
77R.....	7 6K7G, 6A8G, 6H6G, 6F5G, 6F6G, 84	16 Mfd.	PRS450-16	BR1645	M-16-450			UT-16		Chk	†	C-1708		T20C52		C-2975								
			PRS450-8-8	EZ588	DH-2X8-450SS			TU-88		Pwr	†	P-6120		T22R04		P-2952								
										Pwr	†	A-3878		T22S47		A-2931								

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photofact Set No.	MFR. & MODEL	
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Ciarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note		
1st. 2nd.	↑ ↑	16-6668. 16-6669.		455				ST-105.	5A1.		Vol	20-1.	V-66-Z.		A2.		D13-139.		Continued	GENE	RAL TE	LEV	ISION	14.	& RADIO CORP. 23A6		
1st.	15-4.	16-6666.		455				ST-107.	5A15.		Vol	20-1.	M-60-Z.				D13-133.		41	G1					77.	4B5	
1st. 2nd.	↑ ↑	16-6668. 16-6668.		455				ST-107.	5A15.		Vol	20-1.	M-60-Z.		A.		D13-133.		41	G1					27.	5B5G, 5B5Y	
1st. 2nd.	↑ ↑	16-6668. 16-6669.		45.				↑10.	5A1.		Vol	20-4.	M-66-Z.		A4.		D13-131.		45	G1					26.	25B5	
1st. 2nd.	↑ ↑	16-6668. 16-6669.		7.5				B-7.			Vol	20-7.													70.	26B5	
1st. 2nd.	L-6. D-2.			455				8MW.	ST-145.	5A1.	Vol	2009X.	M-66-Z.		A.		14-111.		41	G1						26, 34, 47, 49, 57, 88, S1	
1st. 2nd.	D-1.	16-5714.		45.				843.	ST-108.	(A)	Vol	2010X.	M-66-Z.		A.		D13-133.		11	G1						51 (See Model 19) 51 (See Model 19)	
1st. 2nd.	I-5. D-1.	16-6658. 16-6660.		45.				834.	ST-108.	11.	Vol	2042.	AM-48-V.	KSS-1.	A.		14-116.	I	41							57 (See Model 19) 41, 421	
1st. 2nd.	I-2. D-1.	16-6658. 16-6660.		45.				838.	ST-108.	5A1.	Vol	2009-F.	M-60-Z.		A.		13-133.	I	11	G1						51A, 521	
1st. 2nd.	I-3. D-3.	16-6658. 16-6660.		45.				8'6-R.	ST-145.	5A1.	Vol	2035-S.	M-66-Z.	KSS-3.	A2.		13-139.	I	11	G1						520, 522, 524, 526	
																											616 (See Model 54)
1st. 2nd.	↑ ↑	16-6658. 16-6660.		460				↑.	F2.	F2.	Vol	↑.	M-60-Z.		A.		D13-133.		41	G1						GILFILLAN 5AD	
1st.	A-2800 <sup>1</sup> .	16-5712.		460				↑.	F2.	F2.	Vol	A-33005.	M-60-Z.		A.		D13-133.		41	G1						5B8	
2nd.	A-2800 <sup>1</sup> .	16-5714.		460				↑.	↑.	F2.	Vol	↑.	Y-60-Z.				D13-133.		61							5G-S, 5H-T	
1st.	↑ 16-6658.	16-6660.		460				↑.	↑.	F2.	Vol	↑.	M-64-Z.				D13-121.		61							5GB, 5G8T.	
2nd.	A-2800 <sup>1</sup> .	16-5712.		460				↑.	↑.	F2.	Vol	A-33005.	M-60-Z.		A.		D13-133.		41	G1						5L	
1st.	↑ 16-6658.	16-6660.		460				↑.	F1.	F1.	Vol		M-60-Z.		A2.		D13-133.		42	G1						55J	
2nd.	↑ 16-6658.	16-6660.		460				↑.	F1.	F1.	Vol		M-60-Z.		A.		D13-133.		41	G1						55B, 5S8T	
1st.	N-2100 <sup>15</sup> .	16-5712.		460.				↑.	F2.	F2.	Vol	A-340.	M-60-Z.		A.		D13-133.		41	G1						6B	
2nd.	A-2800 <sup>6</sup> .	16-5714.		460.				↑.	F1.	F1.	Vol	↑.	M-60-Z.				D13-133.		11							6K, 6L, 6R	
1st.	↑ 16-6658.	16-6660.		460				↑.	F2.	F2.	Vol	↑.	M-60-Z.		A.		13-133.		41	G1						6U	
2nd.	↑ 16-6658.	16-6660.		460				↑.	F2.	F2.	Vol	↑.	M-64-Z.				D13-133.		41	G1						7C8, 7T8	
1st.	↑ 16-6658.	16-5712.		460.				↑.	F2.	F2.	Vol	↑.	M-60-Z.		A.		D13-133.		41	G1						8C8, 8T8, 8C8E, 8T8E	
2nd.	↑ 16-6658.	16-5712.		460.				↑.	F2.	F2.	Vol	↑.	M-60-Z.				D13-123.		41	G1						11F, 11G	
1st.	↑ 16-5712.	16-5714.		460.				↑.	F2.	F2.	Vol	↑.	M-60-Z.		A.		D13-133.		11	G1						13A	
2nd.	↑ 16-5712.	16-5714.		460.				↑.	F2.	F2.	Vol	↑.	M-60-Z.				D13-133.		41	G1						13C8, 13C8E	
1st.	↑ 16-5712.	16-5714.		460.				4:0	↑.	F2.	Vol	↑.	M-60-Z.													5A (Late)	
2nd.	↑ 16-5712.	16-5714.		460.				4:0	↑.	F2.	Vol	↑.	M-60-Z.													1	56BC-1, 56BCR, 56AB, C, D, E 56S
1st.	↑ 16-6658.	16-6660.		460.				4:0	↑.	F2.	Vol	↑.	M-60-Z.		A.		D13-133.		41	G1						8.	66A, AM, D, DM
2nd.	B00-23126.	16-6658.		455.				↑.	↑.	ST-113.	5A1.		M-60-Z.				D13-123.		41	G1						66B	
1st.	B00-23127.	16-6660.		455.				↑.	↑.	ST-113.	5A1.		M-60-Z.		A.		D13-133.		41	G1						66P, 66PM	
2nd.	↑ 16-5712.	16-5714.		460.				↑.	↑.	F2.	Vol	↑.	M-0-Z.				A10-23112.		41	G1						66-S	
1st.	↑ 16-5712.	16-5714.		460.				↑.	↑.	F2.	Vol	↑.	M-46-Z.		A.		D13-123.		41	G1						77R	
2nd.	B16-23222.	16-6658.		455.				↑.	↑.	ST-107.	5A15.		Vol	Tone	A10-23114.	AM-63-Z.	M-60-Z.		13-137.	E	12						
1st.	B16-23223.	16-6670.		455.				↑.	↑.	ST-110.	6A15.		Vol	Tone	66PM-1.	M-60-Z.			13-133.		11	G1					
2nd.	B16-23155.	16-6658.		455.				↑.	↑.	ST-107.	5A15.		Vol	Tone	66PM-1.	M-60-Z.			13-133.		11	G1					
1st.	B16-23154.	16-6660.		455.				66PM-1.	ST-110.	6A15.					A.		D13-133.		41	G1							
2nd.	66AM/PM-34.	16-6658.		455.				66PM-1.	ST-110.	6A15.							D13-133.		41	G1							
1st.	66AM/PM-35.	16-6670.		455.				↑.	F2.	F2.	Vol	↑.	M-60-Z.		A.		D13-133.		41	G1							
2nd.	↑ 16-5712.	16-5714.		460.				↑.	F2.	F2.	Vol	↑.	M-46-Z.				A-33001.		41	G1							
1st.	A-2800 <sup>1</sup> .	16-5712.	157.0.					↑.	F2.	F2.	Vol	↑.					D13-123.		41	G1							
2nd.	A-28002.	16-5714.						↑.	F2.	F2.	Vol	↑.					P40A.										

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
GILFILLAN—Cont'd	8	6SG7, 6SA7, 6SK7, 6SQ7, 6VEGT, 5Y3GT (50), 6K7G, 6A8G, 6H6G, 6F5G, 6C5G, 6N2G, 84.	86-25 8 Mfd. A-1002.	PRSA450-8 PRSB450-8-8		BR845 EZ588		BY-2X30-450 M-8-450 DH-2X8-450SS	WR-25 & EL-3 UT-8 TU-88	Pwr Out Chk Pwr Out	86-19 † † †	P-6013 A-3870 A-2201	T22R05 T22S56 T22S66		P-2953 A-2936 A-2901									
86C, 86P, 86U																								
87R	8																							
GLOBE	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 117Z3 or Miniature Equivalent	50 Mfd. 10, 10 Mfd.	PRS150-50 PRS25-10-40		BR5015 BR202A BRD3315		M-50-150 M-2X10-25 M-2X30-150	UT-501 TA-110 TA-230	Out	†	A-3878	T22S46		A-2900	754							G6M60.	
5B1	6	1A4A7/12B7, 14Q7, 14B6, 35A5, 33Y4 (47)	30, 20 Mfd.	PRSA150-30-30																				
6D1-SU1	6	1A4A7/12B7, 14Q7, 14B6, 35A5, 35Y4	40, 20 Mfd.	AFB4D4A	A3	UP4215		DY-4020-150	EL-24	Out	†	A-3876	B3	T22S45	B3	A-2928	B3							
6P1-EAP1	6	1A4A7/12B7, 14Q7, 14B6, 35A5, 35Y4	50, 50 Mfd.	PRSA150-50-30		BRD3515		M-5030-150	TA-530	Out	†	A-3876	B3	T22S45	B3	A-2928	B3							
7CP-1	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	50, 50 Mfd.	PRSA150-50-30																				
51	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	50, 30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150	TA-530	Out	†	A-3876	B3	T22S45	B3	A-2928	B3							
62C	6	14Q7, 1A4A7, 14B6, 35A5, 35Y4 (47)	50, 30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150	TA-530	Out	†	A-3876	B3	T22S45	B3	A-2928	B3							
500	5	7A8, 7C7, 14B6, 35A5, 35Z5GT	30, 20 Mfd.	PRSA150-20-30		BRD3315		M-2X30-150	TA-230	Out	†	A-3876	T22S45		A-2928									
517	5	14Q7, 1A4A7, 14B6, 50L6GT, 35Y4	50, 30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150	TA-530	Out	†	A-3876	T22S45		A-2928									
551	5	14Q7, 1A4A7, 14B6, 35A5, 35Y4 (51)	40, 20 Mfd.	AFB4D4A	A3	UP4215		DY-4020-150	EL-24	Out	†	A-3865	T22S45		A-2928									
552	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	50, 30 Mfd.	PRSA150-50-30		EZ5515		M-5030-150	TA-530	Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3							
553	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	50, 30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150	TA-530	Out	On Spkr.	A-3876	93	T22S45	B3	A-2928	B3							
GODFREY	3	6SJ7GT, 25L6GT, 25Z6GT (47)	20, 20 Mfd.	PRSA150-20-20		EZ2215		DSB-2X20-150	TA-220	Chk In Out	† †	C-1277 A-4705	T20C52 T20A01		C-2977 A-2919									
6AD	3	6SJ7GT, 6V6GT, 5Y3GT, (44)	8, 8 Mfd.	PRSA450-8-8		EZ8845		DH-2X8-450	UT-88	Chk Pwr In Out	† †	C-1277 P-6297 A-4708	T20C52 T22R00 T20A00		C-2977 P-2649 A-2924 A-2904	B20								
6SM	3	6SJ7GT, 6V6GT, 5Y3GT, (44)																						
B. F. GOODRICH	5	(Also See Mantola) 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	P3355	PRSA150-20-30		EDL4215		M-2X30-150	TA-230	Out	P3397	A-3865	B5	T22S45	B5	A-2928	B5							
R412-A, (Ch. 5L)	5	1A7GT, 1N5G, 1H5G, 1Q5G, (44)	P3024	PRS150-8		BR815		M-8-150	UT-81	Out	†	A-3878	T22S47		A2931	742 & #482		4F & #A30						
R413-A, (Ch. 5L)	4	1A7G, 1N5G, 1H5G, 1Q5G	P3024	PRS150-8		BR815		M-8-150	UT-81	Out	†	A-3878	T22S47		A2931	742 & #482		4F & #A30						
R419-B, (Ch. 4Z)	4	1A7G, 1N5G, 1H5G, 1Q5G	P3024	PRS150-8		EZ8825S		DH-2X8-450& M-10-25	LM-28& TA-5	Chk Pwr Out	P2128, P2131	C-1711	T20C52		C-2975									
R422, (Ch. 6A)	6	6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6ZY5G	P2140	PRSA200-8-8& PRS25-10		EZ2215C		DSB-302	TA220 & TA-25	Out	A-3879	T22S47		A-2933										
R424, (Ch. 6M)	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT	20-20-20 Mfd	PRSA-40302		BR202A		M-25-25	TA-25	Out	On Spkr.	A-3878	T22S47		A-2931	758	C1	17GD60	C1					
R426, R427, (Ch. 4A)	4	1A7G, 1N5G, 1H5G, 1Q5G	P2602	PR525-25																				
R429, (Ch. 5NL)	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 70L7GT	P3563	PRSA150-20-30		EZ3315		M-2X30-150	TA-230	Chk Out	P3601 A-3878	T20C52 T22S47		C-2975 A-2931	#482	C4	G5 & #B30							
R437, (Ch. 11B)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Y3G	P1993 P3478	AF88J		KR530 UP2425		M-50-25 D-30-450 PLS-25 DY-2X30-450	TA-50 P3479 P3475 EL-240	Out	P6013 A-3830 A-3876	P22R06 T22S47		P-2959 A-2905 A-2928										
R450, (Ch. X05)	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5 (47)	P3355	PRSA150-20-30		EDL4215		M-2X30-150	TA-230	Out	On Spkr.	A-3876	T22S45		A-2928									
R451, (Ch. XJ55)	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5 (47)	P4212	PRSA150-20-30		EZ3315		M-2X30-150	TA-230	Out	On Spkr.	A-3876	T22S45		A-2928									
R452, (Ch. XJ6)	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z5, BT-1000 Ballast (47)	P3531	PRSA40302		EZ2215C		DSB-302	TA-230 & TA-25	Out	On Spkr.	A-3876	T22S45		A-2928									
R453, (Ch. K6)	6	6SA7, 6SK7, 6SQ7, 6K6G, 6Y3G	P4130	AF44J4A		UP2245C		DY-315	EL-350	Out	On Spkr.	A-3876	T22S45		A-2928									
R454, (Ch. A7)	7	6SK7, 6SA7, 6SQ7, 6K6G, 5Y3G	P4130 P1992	AF44J4A GL450-30		KR530		DY-315 D-30-450	EL-350 PLS-30	Out	On Spkr.	A-3876	T22S45		A-2928									
R455, (Ch. A77)	7	6SK7, 6SA7, 6SQ7, 6K6G, 5Y3G	P4264	AF88J4A		UP4445C		DY-313	EL-330	Out	Chk	P3926 P4143 P4143 P4143	C-1706 T20C52 T22R00 T22S47		C-2990 P-2949 A-2949 A-2949									
R456, (Ch. A11)	12	6AB7, 6SA7, 6SK7, 6SQ7, 6S07, 36J5GT, 6F6G, 6AF6, 5U4G	P4372 P1992	PRSA450-20-20 GL450-30		EZ5116		DH-2X16-450SS D-30-450	TU-1616 PLS-30	Out	Chk	P3926 P4346 P4346	T20C52 T22R06 T22S47		C-2990 P-2949 A-2949									
R460, (Ch. XG6)	6	1IN5, 1A7, 1H5, 3Q5, 1726	P3971	AF886D4A		UP44315C		DY-419	EL-434	Out	Chk	P3958	C-1723	T20C52 T22R04 T22S47		C-2950 P-2952 A-2951								
R470, (Ch. B4)	4	1A7, 1N5, 1H5, 3Q5	P2602	PRS25-25		BR202A		M-25-25	TA-25	Out	Chk	P3926 P4198 P4198	C-1706 P-6120 A-3878	T20C52 T22R04 T22S47		C-2990 P-2952 A-2951								
R471, R478, (Ch. A5)	5	1A7GT, 1P5GT, 1N5GT, 1H5GT, 1Q5GT	P3024	PRSA150-8		BR815		M-8-150	UT-81	Out	†	A-3878	T22S47		A-2931	758	C1	17GD60	C1					

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL									
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photact Sel No.					
1st.	86-34	16-6658		455				860-2 86C/P-7	ST-179		8E10 10E10		Vol Tone Vol Tone	A10-23469 A10-23468 A-33001 †	M-60-Z M-49-S M-60-Z M-46-Z	A		D13-133 D11-128 D13-133 D13-123		41	GI		Continued—	GILBELLAN 85C, 85P, 85U 87R							
2nd.	86-35	16-6670		262.5									F2		A			GI													
1st.	A-28001																														
2nd.	A-28002																														
1st.	S-103	16-6658		455				5 Inch	ST-105		5A1		Vol	†	M-58-S			D11-137			GI			18.	GLOBE 5BPI						
2nd.	S-104	16-6660		455				5 Inch	ST-105		5A1		Vol	†	M-60-Z		A	D13-133		41	GI			20.	6D1, 6U1						
1st.	S-104	16-6658		455				5 Inch	ST-105		5A1		Vol	†	M-60-Z		A	D13-133		41	GI			20.	6P1, 6AP1						
2nd.	K-102-J941	16-6660		455	†	L-26A		5 Inch	ST-107		5A15		Vol	†	M-60-Z		A	D13-133		41	GI			28.	7CP-1						
1st.	†	16-6658		455	†			4 Inch	ST-113		4A1		Vol	†	M-60-Z		A	D13-133		41	GI			19.	51						
2nd.	†	16-6658		455				†	ST-105		5A1		Vol Tone	†	M-60-Z		A	D13-133		41	GI			19.	62C						
1st.	S-103	16-6658		455	†			†	ST-194		5E45		Vol	†	M-60-Z		A	D13-133		41	GI			21.	500						
2nd.	S-104	16-6660		455				†	ST-113		4A1		Vol	†	AM-60-Z	KSS-3	A	D13-133	E	41				21.	517						
1st.	K-102-J45	16-6658		455				42W11	ST-113		4A1		Vol	†	M-60-Z		A	D13-133		41	GI			16.	551						
2nd.	K-102-J941	16-6660		5867				5867	ST-105		5A1		Vol	†	M-60-Z		A	D13-133		41	GI			27.	552						
1st.	†	16-6658		5867				5867	ST-105		5A1		Vol	†	M-60-Z		A	D13-139		41	GI			28.	553						
1st.	P3345	16-6658		455				5 Inch	ST-740				Vol	†	M-60-Z		A	D13-133		41	GI			28.	GODFREY 6AD						
2nd.	P3364	16-6650		455				5 Inch	ST-740				Vol	†	M-60-Z		A	D13-133		41	GI			28.	6SM						
1st.	P3048	16-5712		456	†			P3553	ST-105		5A1		Vol	P3346	AM-60-Z	KSS-3	A	D13-133	E	41											
2nd.	P2517			456				P3029	ST-105		5A1		Vol	P3015	AM-60-Z	KSS-3	A2	D13-133	E	42											
1st.	P3048	16-6658		455				P3465	ST-105		5A1		Vol	P3317	AM-60-Z	KSS-3	A2	D13-133	E	42											
2nd.	P2506	16-6660		5867				P2143					Vol Tone	P2136	P2137	M-51-Z	A2	D13-128		42	GI	P1414	5300	H1	R419-B (Ch. 4Z)						
1st.	P-1735	16-5712		456				P2144					Vol	P2527	AM-60-Z	KSS-3	A	D13-133	E	41						R422, (Ch. 6A)					
2nd.	P1690	16-5714						†	ST-108		6A1		Vol Tone	P2528	AM-60-Z	KSS-3	A2	D13-133	E	42						R424, (Ch. 6ML)					
1st.	†	16-6658		455				†	P2603		6A1		Vol	P2600	AM-60-Z	KSS-3	A2	D13-133	E	42						R426, R427, (Ch. 4A)					
2nd.	P2598	16-5712		456				†	ST-108		6A1		Vol	P3603	ST-105	5A1		P3560	AM-63-Z	KSS-3	A2	D13-137	E	42					R429, (Ch. 5NL)		
1st.	P2617			456				†	ST-194		5E45		Vol	P2716	ST-173	F6	12E10	Vol Bass	P3471	AM-60-Z	KSS-3	A2	D13-133	E	41						R437, (Ch. 11B)
2nd.	P3559	16-6658		455				P4170	ST-194		5E45		Vol	P4170	ST-194	5E45		P4089	AT-90	AM-60-Z	KSS-3	A	D13-133X	E	41						R450, (Ch. XG5)
1st.	P2606	16-6660		455	†			P4170	ST-194		5E45		Vol	P4080	AM-60-Z	KSS-3	A	D13-133	E	41							R451, (Ch. XJ55)				
2nd.	P1506	16-5712		455	†			P4170	ST-194		5E45		Vol	P4080	AM-60-Z	KSS-3	A	D13-133	E	41							R462, (XJ6)				
1st.	P2704	16-6133						P4140	ST-105		5A1		Vol	P4089	AT-90	KSS-3	A	D13-133X	E	41							R453, (Ch. K6)				
2nd.	P3923	16-6658		455				P3991	ST-105		5A1		Vol	P3746	AM-60-Z	KSS-3	A	D13-133	E	41											
1st.	P3924	16-6660		455				P3991	ST-105		5A1		Vol	P4089	AM-60-Z	KSS-3	A	D13-133	E	41											
2nd.	P3923	16-6658		455	†			P4170	ST-194		5E45		Vol	P4080	AM-60-Z	KSS-3	A	D13-133	E	41							R451, (Ch. XJ55)				
1st.	P3924	16-6660		455				P4170	ST-194		5E45		Vol	P4080	AM-60-Z	KSS-3	A	D13-133	E	41							R462, (XJ6)				
2nd.	P3794	16-6658		455				P4140	ST-105		5A1		Vol	P4089	AT-90	KSS-3	A	D13-133X	E	41							R453, (Ch. K6)				
1st.	P4108	16-5712		455				P4206	ST-110		6A21		Vol Tone	P4089	AT-90	AM-60-Z	KSS-3	A	D13-133X	E	41							R454, (Ch. A7)			
2nd.	P4109	16-5714		455				P4283	ST-119	F3	10A31		Vol Tone	P4089	AT-90	AM-60-Z	KSS-3	A	D13-133X	E	41							R458, (Ch. A77)			
1st.	P4108	16-5712		455				P4382			12E60		Vol	P4349				D18-133XX	E	41							R459, (Ch. A11)				
2nd.	P4361	16-5714		455	†			P4007	ST-105		5A1		Vol	P3619	AM-63-Z	KSS-3	A2	D13-137	E	42							R460, (Ch. XG6)				
1st.	P3048	16-6658		455				P4040	ST-108		6A1		Vol	P2600	AM-60-Z	KSS-3	A2	D13-133	E	42							R470, (Ch. B4)				
2nd.	P4178	16-6660		455				P4045	ST-108		6A1		Vol	P3720	AM-63-Z	KSS-3	A2	D13-137	E	42							R471, R478, (Ch. A5)				
1st.	P4360	16-5712		455	†																										
2nd.	P4361	16-5714		455																											
1st.	P3028	16-6658		455																											
2nd.	P2606	16-6660		455																											
1st.	P3048	16-6658		455																											
2nd.	P3736	16-6660																													

Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell- Dabillier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
GOODYEAR																								
01029, (Ch. 860)	8	6A8, 6K7, 6Q7, 6C5, 6F6, 5Y3, 6U5	103-14	GL450-16		KR516A		D-16-450		PLS-16		Pwr	104-87B	P-6120		T22R04		P-2952						
01030, (Ch. 582)	5	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G, 6U5	103-6	GL450-8		KR508		D-8-450		PLS-8		Out	105-54	A-3311		T22S64		A-2936						
01554, (Ch. 505)	5	6D8G, 6S7G, 6T7G, 6K6G, 6ZY5G, 6U5	119-48	PRS25-10		BR102A		M-10-25		TA-10		Pwr	104-124	P-6297		T22R00		P-2949						
010211, (Ch. 602)	5	6A8, 6K7, 6R7, 25L6, 25Z6	119-39	PRSA150-20-20		BRD2215		M-2X0-150		TA-220		Out	105-57	A-3878		T22S47		A-2931						
010222, (Ch. 502)						EZ8825		M-2X8-250		LM-28		Chk	105-52	C-1706		T20C53		C-2975						
010219, (Ch. 415B)	4	1A6, 1A4, 1F6, 1F4	119-28									Out	104-114	A-3865		T22S47		A-2931						
010219, (Ch. 415B)	4	6D8G, 6S7G, 6T7G, 1F5G	119-28			EZ8825		M-2X8-250		LM-28		Chk	105-30	C-1708		T22S45		A-2928						
010219, (Ch. 489)	4	6D8G, 6S7G, 6T7G, 6K6G	119-22	PRS25-10		BR102A		M-10-25		TA-10		Pwr	104-62	A-3881		T22S48		A-2934						
010220, (Ch. 523B)	5	1A7, 1A4, 30, 1G5G	119-22	PRS25-10		BR102A		M-10-25		TA-10		Out	105-30	C-1708		T20C52		C-2987						
010221, (Ch. 804)	7	6S7G, 6D8G, 6T7G, 6L5G, 19, 6N5	119-32			EZ8825		M-2X8-250		LM-28		Chk	105-30	C-1708		T20C52		C-2987						
015040	4	6D6, 6F5G, 25L6G, 25Z5	40, 10, 20 Mfd									Out	104-81	A-3848		T22S47		A-2938						
015050	5	6A7, 6D6, 75, 25L5G, 25Z5	40, 10, 20 Mid									Chk	105-36	A-3865		T22S45		A-2928						
015060	6	6J8G, 6U7G, 6B6G, 25B6G, 25Z6G, 6U5	15, 16 Mfd	PRS150-16		BR1615		M-16-150		UT-161		Out	105-36	A-3876		T22S45		A-2928						
015070	7	6J8G, 6U7G, 6H6, 6B6G, 25L6G, 25Z6G, 6U5 ("44")	16, 32, 8 Mfd	PRS25-25		BR252A		M-25-25		TA-25		Pwr	104-81	A-3876		T22S45		A-2928						
015070, (Ch. 543)	6	6A7, 6D6, 75, 25L6, 25Z5	40, 40 Mfd	PRS25-10		BR102A		M-10-25		TA-10		Out	104-81	A-3301		T22S60		A-2905						
015080	10	6A8G, 6J5G, 6U7G, 6H6, 6Q7G, 6V6G, 5Y3G, 6H5 (47)	25 Mid	GL450-30		KR530		D-30-450		PLS-30		Pwr	106-013	T22R05		P-2953								
015090	13	6B8G, 6J5G, 6A8G, 26U7G, 6H6, 6V6G, 5X4G, 6AE6G, 6AD6G ("44")	25 Mid	GL450-30		KR530		D-30-450		PLS-30		Out	104-62E	A-3311		T22S64		A-2936						
015100	25	6B8G, 6J5G, 6A8G, 26U7G, 6H6, 6V6G, 5X4G, 6AE6G, 6AD6G ("44")	25, 25 Mfd	PRS25-25		BR252A		M-25-25		TA-25		Pwr	106-165	T22R07		P-2955								
015100	4	1A7G, 1N5G, 1H5G, 1A5G	1012118235	PRS25-10		BR102A		M-10-25		TA-10		Out	104-81	A-3857		T22S48		A-2937						
015110	4	6D8G, 6S7G, 6T7G, 6G6G (40)	1012118236									Pwr	1016580160	T22S48		A-2932								
015120	6	1C7G, 1H4G, 1D5GP, 1F7GH, 6G6G, 5AB5	1022119788	PRSA150-30-30		BR252A		M-25-25		TA-25		Out	1026518193	A-3879		T22S48		A-2932						
015130	6	6D8G, 6S7G, 6T7G, 6G6G, 6ZY5G, 6AB5	10 Mfd	PRS25-25								Chk	1026518214	A-3879		T22S48		A-2932						
015130	6	6D8G, 6S7G, 6T7G, 6G6G, 6ZY5G, 6AB5	16, 20 Mfd									Out	1026518575	A-3879										
015140, 015141	4	12K7GT, 12F5GT, 50L6GT, 35Z4GT	40, 10, 20 Mfd	PRS150-30-30		EZ3215C		DSB-303		TA-330		Pwr	104-81	A-3879		T22S48		A-2932						
015150, 015151	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	1012118239	PRS150-30-30		EZ3215C		DSB-303		TA-25		Out	104-81	A-3876		T22S45		A-2928						
100502, (Double Eagle)	6	6K7, 6A8, 6Q7, 6V6, 0Z4, 6X5	8, 8 Mfd	EZ588		PRSB450-8-8		DH-2X8-450SS		TU-88		Chk	104-81	A-3876		T22S45		A-2928						
10500, (Wings Jr.)	5	6A7, 6D6, 6Q7G, 41, 84	4, 4 Mfd	PRS450-4		BR445		M-4-450		UT-4		Chk	1011733269	A-3876		T22S45		A-2928						
101501, (Wings All Weather)	6	6K7, 6A8, 6R7G, 6V6, 6X5G	1012118222	PRS450-8		BR845		M-8-450		UT-8		Chk	1016580157	A-3878		T22S47		A-2931						
101503	6	6A7, 6D5, 75, 25L6G, 25Z5 (51)	1012118227	PRS150-50		BR5015		M-50-150		UT-501		Chk	1011733208	A-3877		T22S58		A-2930						
102506	6	6J8G, 6U7G, 6E6G, 25G6G, 25Z6G, 6U5	1022119727									Out	1016580150	A-3825		T22S52		A-2902						
102507	7	6J8G, 6U7G, 6H6, 6B6G, 25L6G, 25Z6G, 6U5 ("44")	16, 32, 8 Mfd	PRS450-30		BR3045		M-30-450		UT-30		Pwr	1016580153	A-3878		T22S45		A-2928						
102508	10	6A8G, 6J5G, 6U7G, 6H6, 6Q7G, 6V6G, 5Y3G, 6U5 ("44")	1022119079	PRS450-20		BR2045		M-20-450		UT-20		Pwr	104-62	A-3311		T22RC6		P-2954						
102509	13	6B8G, 6J5G, 6A8G, 26U7G, 6H6, 6V6G, 5X4G, 6AE6G, 6AD6G	1022119030	PRS450-30		BR3045		M-30-450		UT-30		Out	104-62	A-3311		T22S64		A-2936						
102512	6	1C7G, 1H4G, 1D5GP, 1F7GH, 6G6G, 6AB5 ("44")	1022118764	PRS150-20-20		BR02215		M-2X0-150		TA-220		Pwr	104-62	A-3311		T22S64		A-2936						
102513	6	6D8G, 6S7G, 6T7G, 6G6G, 6ZY5G, 6AB5 ("44")	1022118938			UP3232C		DSB-3X20-150		M-25-25		Out	104-81	A-3879		T22S48		A-2932						
103533, (Ch. 178-B1)	4	1A7G, 1N5G, 1H5G, 1A5G	10 Mfd	PRS25-10		BR102A		M-10-25		TA-10		Chk	104-81	A-3857		T22S48		A-2937						

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photostat Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	108105D.	16-5712.		465				114-99.			10E10.		Vol Tone Vol	101-97. 101-98. 101-101.	M-63-Z. M-64-Z. M-63-Z.				D13-137. D13-130. D13-137.	41	G1					GOODYEAR C1029 (Ch. 860)	
2nd.	108-106E	16-5714.						111-110.	ST-108.	F1					A	A										01030. (Ch. 582)	
1st.	108-105E	16-5712.						114-95 (or) 114-96.		I/2		I/2	Vol	101-91.	"I-I-I- /				D13-137.	42	G1	124-1.	5401.	H1		01554. (Ch. 505)	
2nd.	108-106F	16-5714.		45																							
1st.	108-104W	16-5712.																									
2nd.	108-104J	16-5714.																									
1st.	108-8711	16-6658		44				114-71.		F2		F2	Vol	101-77.	"I-I-I- /				D13-137.	41	G1					010211. (Ch. 602E)	
2nd.	108-83B	16-5660						114-50.	ST-108.	F8	EEV6.		Vol Tone Fit	101-56. 101-59. 101-44.	M-63-Z. M-64-Z. W-6.				D13-137.	42	G1	126-4.	5411.	H1		010222. (Ch. 602I)	
1st.	108-84	16-6658		465															D13-137.	42	G1	124-1.	5411.	H1		010219. (Ch. 415A)	
2nd.	108-85	16-6660																	D13-137.	41	G1					010219. (Ch. 415B)	
1st.	108-84	16-6658		465				114-48.		I/2		F2	Vol Tone	101-56. 101-59. 101-72.	M-63-Z. M-63-Z.				A	42	G1	126-4.	5411.	H1		010219. (Ch. 415B)	
2nd.	108-85	16-6660																									
1st.	108-104W	16-6658		465				114-96.	ST-104.	A1			Vol	101-91.	M-64- /				D13-137.	42	G1	126-4.	5411.	H1		010219. (Ch. 489)	
2nd.	108-106J	16-6660																									
1st.	108-67	16-6658		44				114-70.	ST-107.	C1			Vol Fil	101-69. 101-44.	M-7- / Z 58-5.				A	D13-137.	41	G1					010220. (Ch. 523B)
2nd.	108-68	16-6660																	D13-133.	42	G1	126-4.	5411.	H1		010221. (Ch. 804)	
1st.	108-93	16-5712		465				8 Inch.	ST-115.	SA21			Vol Tone	101-66. 101-67.	M-60-Z. M-1-Z.				A2	D13-133.	41	G1					
2nd.	108-92	16-5714																	D13-133.	42	G1	126-4.	5411.	H1			
1st.		16-6658		455																						015040	
2nd.		16-6658		115																						015050	
1st.		16-6658		115																						015060	
2nd.		16-6660																									
1st.		16-5712		455																						015070	
2nd.		16-5714																								015070, (Ch. 543)	
1st.		16-6658		44																						015080	
2nd.		16-6660																								015090	
1st.		16-5712		455																						015100	
2nd.		16-5714																								015100	
1st.		16-6658		45																						015110	
2nd.		16-6660																								015120	
1st.		1015510251		455				10151179260.	ST-105.	SA1			Vol	1012524126.	M-61-Z.				A2	D13-137.	42	G1					015130
2nd.		1015710259		16-6610																						015140, 015141, (Ch. 9-67)	
1st.		1015510253		45				10151179256.	ST-10	SA1			Vol	1012524124.	M-60-Z.				A	D13-133.	41	G1	14141.	5411.	H1		015150, 015151, (Ch. 9-562)
2nd.		1015710252																								100502 (Double Eagle)	
1st.		10255197871		455				1025118212.	SI 10*	SA1			Vol	1022519789.													015120
2nd.		1079141000		16-6658																						015130	
1st.		16-5712		155																						015140, 015141, (Ch. 9-67)	
2nd.		16-5714																								015150, 015151, (Ch. 9-562)	
1st.		101511741		455																						100502 (Double Eagle)	
2nd.		1015710283		465																							
1st.		1015510221		455				10151179240.	ST-105.	I/2	5 Vol.		Vol	1012524124.	M-61-Z.				A	D13-133.	41	G1	14141.	5411.	H1		101500 (Wings Jr.)
2nd.		1015710222		16-5714																						101500 (Wings Jr.)	
1st.		1015510225		455				10151179241.		I/2	5 Vol.		Vol	1012524118.	M-60-Z.				A	D13-133.	41	G1	14141.	5300.	H1		101501 (Wings All Weather)
2nd.		1015710226		16-6660															D13-130.	41	G1						
1st.		1015510227		456				10151179241.		F2		F2	Vol	1012524120.	M-50-Z.				D13-133.	41	G1					101503	
2nd.		1015710228		16-5714															D12426116.	41	G1						
1st.		16-5712																	D13-133.	41	G1					102506	
2nd.		16-5714																	D122518881.	41	G1						
1st.		16-5712		455															D13-139.	41	G1					102507	
2nd.		16-5714																	T-120.							102508	
1st.		16-5712		455															D13-139X.	41	G1					102509	
2nd.		16-5714																	D141-1-9X.	41	G1					102509	
1st.		16-5712		455																					102512		
2nd.		16-5714																									
1st.		16-5712		455																					102513		
2nd.		16-5714																									
1st.		16-5712		455																					103533. (Ch. 178-BL)		
2nd.		16-5714																									

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	N o t e	Cornell-Dubilier Part No.	N o t e	Solar Part No.	N o t e	Sprague Part No.	N o t e	Use	Mfr. Part No.	Stancor Part No.	N o t e	Thordarson Part No.	N o t e	Merit Part No.	N o t e	Eveready Part No.	N o t e	Burgess Part No.	N o t e		
		"A"	"B"																	"A"	"B"				
W. T. GRANT—(See Grandline)																									
GRANTLINE 300, Series B . . .	3	12SQ7GT, 50L6GT, 35Z5GT . . .	A8C11415-1 or A-8C-11119	AF88D . . .		UP4415 . . .		DY-2X40-150 . . .	EL-25 . . .		Out	B-12C-100743 . . .	A-3876 . . .		T22S45 . . .		A-2928 . . .								
500, 501 (Series A) . . .	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47) . . .	119-92 . . .	AF88D . . .		UP4CJ59 . . .	A3	DY-4020-150 . . .	EL-24 . . .		Out	On Spkr. . .	A-3876 . . .		T22S45 . . .		A-2928 . . .								
504-7 . . .	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT . . .	40, 40 Mfd . . .	PRSA150-40-40 . . .		BRD4415 . . .		M-2X40-150 . . .	TA-440 . . .		Out				A-3876 . . .		T22S45 . . .		A-2928 . . .						
510-A . . .	5	1A7GT, 1NSGT, 1HSGT, 1A5GT, 35Z5GT . . .	119123 . . .								Out	105127 . . .	A-3496 . . .		T22S48 . . .		A-2934 . . .		744-738 . . .		F4P1 . . .	230 . . .			
605, 606 . . .	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	11994 . . .	AF844D . . .		UP4CJ1 . . .		DY-3X20-150 . . .	EL-224 . . .		Out	10595 . . .	A-3876 . . .		T22S62 . . .		A-2928 . . .								
641 . . .	4	14B6, 35A5, 35Y4 . . .	A25.019 . . .	PRSA150-40-40 . . .		BRD4415 . . .		M-2X40-150 . . .	TA-440 . . .		Out	On Spkr. . .	A-3856 . . .		T22S47 . . .		A-2900 . . .								
651 . . .	5	14Q7, 14A7/12B7, 14B6, 50A5, 35Y4 (47) . . .	A25.019 . . .	PRSA150-40-40 . . .		BRD4415 . . .		M-2X40-150 . . .	TA-440 . . .		Out	On Spkr. . .	A-3876 . . .		T22S45 . . .		A-2928 . . .								
6547 . . .	5	14Q7, 14A7, 14B6, 50A5, 35Y4 (47) . . .	A25.019 . . .	PRSA150-40-40 . . .		BRD4415 . . .		M-2X40-150 . . .	TA-440 . . .		Out	On Spkr. . .	A-3876 . . .		T22S45 . . .		A-2928 . . .								
HALLICRAFTERS CA-2, CA-2A . . .	7	12BE6, 12BA6, 12AT6, -6V6GT, 60J, 6X5GT (44) . . .	45C104 . . .			BRD8845 . . .		M-2X8-450 . . .			Pwr Out	52C126 . . .													
S-10 . . .	10	6K7, -6L7, 6C5, 6R7, 6J7, 6Q7, 6F6, 5Z4 . . .	4216 . . .	GL450-16 . . .		KR516 . . .		D-16-450 . . .			Pwr Out	55A075 . . .													
S-17, SX-17 Late . . .	13	6K7, 6L7, 6J5G, 6R7G, -6V6G, 6J7, 6J7G, 6J5, 5Z3 . . .	42-002 . . .	PRS25-10 . . .		BR102A . . .		M-10-25 . . .	TA-10 . . .		Pwr Out	†	†		†		†		†		†				
S-17, SX-17 Late . . .	13	6K7, 6L7, 6J5G, 6R7G, -6V6G, 6J7, 6J7G, 6J5, 5Z3 . . .	42-019 . . .			BR102A . . .		M-10-25 . . .	TA-10 . . .		Pwr Out	†	†		†		†		†		†				
S-19R (Sky Buddy) . . .	6	6KBG, 6SK7, 5SQ7GT, 41, 76, 80 . . .	10-10-10-10 . . .	AF2222J . . .		UP111145 . . .		DY-4X10-450 . . .	EL-410 . . .		Pwr Out														
S-20 . . .	8	6K7, -6L7, 6C5, 6R7, 6F6, 80 . . .	42-021 . . .	PRS450-8-8 . . .		EZ8845S . . .		DHS-2X8-450 . . .	TU-88 . . .		Pwr Out	†	†		†		†		†		†				
S-20R . . .	9	6SK7, 6K8, 6SQ7, 6F6G, 5H6, 6J5GT, 80 . . .	30-10-10-10 . . .	AF862J4A . . .		UP43145C . . .			TA-25 . . .		Pwr Out														
S-22 . . .	8	6K7, 6L7, -6J5, 6Q7, 25L6, 25Z5 . . .	42-025 . . .	PRS25-25 . . .		BR252A . . .		M-25-25 . . .	TA-25 . . .		Chk Cut	C-1706 . . .			T22R04 . . .		P-2952 . . .								
S-22R . . .	8	6SK7, 6K8, 6SQ7, 6J5, 25L6 . . .	42-026 . . .	AF10D . . .		UP44415 . . .		DY-3X40-150 . . .	EL-340 . . .		Chk Cut	C-1706 . . .			T22R04 . . .		A-2931 . . .								
S-27 . . .	15	956, 954, -1852, 1853, 6SK7, 6H6, 5Z3, VR-150, -6V6 . . .	30-10-10-20 . . .	AF862J4A . . .		UP43145C . . .		M-50-25 . . .	EL-424 . . .		Pwr Out	†	†		†		†		†		†				
SX-28 . . .	15	6SK7, -6SA7, 6L7, -6B8, 6H6, 6J5, 6SC7, 5V6GT, 5Z3 (47) . . .	30-30-40 . . .	10-10-Mfd . . .					TA-50 . . .		Pwr Out	†	†		†		†		†		†				
SX-28A . . .	15	-6AB7, -6SA7, 6L7, -6B8, 6H6, 6L7, 6J5, 6SK7, 6SC7, -6V6GT, 5Z3 (47) . . .	30-30-40 . . .	10 Mfd . . .							Chk Pwr Out	†	†		†		†		†		†				
S-29 . . .	9	IT4, IT5, -1P5GT, 1H5GT, 3Q5GT, -1G4GT, 50Y6GT, (NE, 7, NEON) . . .	60-60 Mfd . . .	60-40-100 . . .							Chk Pwr Out	†	†		†		†		†		†				
S-30 . . .	6	6SK7, 6K8, 6SQ7, 6G6G, 6U5 . . .	8-8 Mfd . . .	PRSA450-8-8 . . .		EZ8845 . . .		M-2X8-450 . . .	UT-88 . . .		Chk Pwr	C-1706 . . .			T22R07 . . .		P-2955 . . .								
S-31 . . .	9	6SK7, 6SA7, 1852, 1853, 6SJ7, 6H6, 6SR7, 80 . . .	30-30 Mfd . . .	PRSA150-30-30 . . .		BRD3315 . . .		M-2X30-150 . . .	TA-330 . . .		Chk Pwr	A-3856 . . .			T22R07 . . .		P-2955 . . .								
S-31A . . .	6	6F5, 6SQ7, 6SC7, 26LG6, 5Z3 (47) . . .	10, 30 Mfd . . .	PRS25-10 . . .		BR102A . . .		M-10-25 . . .	TA-10 . . .		Chk Pwr	C-1706 . . .			T20C52 . . .		C-2975 . . .								
S-31A . . .	6	6F5, 6SQ7, 6SC7, 26LG6, 5Z3 (47) . . .	10, 30 Mfd . . .	PRS25-10 . . .		BR102A . . .		M-10-25 . . .	TA-10 . . .		Chk Pwr	P-6011 . . .			T22R02 . . .		P-2951 . . .								
S-31A . . .	6	6F5, 6SQ7, 6SC7, 26LG6, 5Z3 (47) . . .	10, 30 Mfd . . .	PRS25-10 . . .		BR102A . . .		M-10-25 . . .	TA-10 . . .		Chk Pwr	A-3250 . . .			T22S90 . . .		A-2925 . . .								
S-31A . . .	6	6F5, 6SQ7, 6SC7, 26LG6, 5Z3 (47) . . .	10, 30 Mfd . . .	PRS25-10 . . .		BR102A . . .		M-10-25 . . .	TA-10 . . .		Chk Pwr	P-6011 . . .			T22R02 . . .		P-2951 . . .								
S-31A . . .	6	6F5, 6SQ7, 6SC7, 26LG6, 5Z3 (47) . . .	10, 30 Mfd . . .	PRS25-10 . . .		BR102A . . .		M-10-25 . . .	TA-10 . . .		Chk Pwr	C-1706 . . .			T22R02 . . .		C-2975 . . .								
S-36A . . .	15	956, 954, 6AC7, -6AB7, 6SK7, 6H6, 6SL7GT, 6Y6GT, OD3/VR-150, -6V6GT, 5U4G, 6J5, 955 (44) . . .	42B043 . . .	46A011 . . .		BR252A . . .		M-25-25 . . .	TA-25 . . .		Chk Pwr	C1003 . . .													
S-37 . . .	14	954, 26AC7, 6AB7, 6SK7, 6H6, 6SL7GT, 6Y6GT, OD3/VR-150, 5B4G, 955 . . .	45B033 . . .	46A018 . . .		KL604 . . .		D-4-600 . . .			Chk Pwr	P-5229 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-430 . . .		Chk Pwr	P-5349 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-301 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	45B091 . . .			EZ44315C . . .		DSB-40-30-150/20-25 & M-30-150 . . .	TA-25 . . .		Chk Pwr	P-55010 . . .													
S-38 . . .	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47) . . .	4																						

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
																				"A"	"B"		
HALLICRAFTERS S-40.....	9	Continued 6SG7, 6SA7, 26SK7, 6SQ7, 6F6G, 6H5, 6J5GT, 80 (44)	45A062			UP43145C		DY-4X10-450, M-10-450, M-25-25		EL-424, TA-25, EL-443		Pwr Out	†, †, On Spkr.	P-6012, A-3877, A-3876	T22R04, T22S46, T22S45	P-2952, A-2930, A-2928							
S-41-G, S-41-W....	6	12SA7, 12SK7, 12SQ7GT, 35L6GT, 35Z5GT (47)	45A034 45B087	PRSV25-25, PRSA150-40-30 /25-20		BR252A, EZ43315C		DSB-403020-150, M-25-25				Out											
HAMILTON ELECT H-15-S.....	5	RONICS 6SJ7, 6SC7, *6L6, 5Y3	20-20 Mfd	AF44J		UP2245		DY-2X20-450, DY-2X20-450		EL-220, TA-10		Pwr Out	†, †, TA-10	P-6013, A-3852, P-6131, A-3802	T22R32, T22S72, T2056, T22R34, T22S78	P-2953, A-2904, C-3183							
H-50-2S.....	9	6SJ7, *6SG7, *807/6L6, 83/5Z3 (55)	10-10 Mfd	AF22J		UPI145		PR525-10		KC-6, AX-1025, KC-6		Chk Pwr Out	†, †, TA-25										
HAMILTON RADIO CORP.—(See Olympic)						BR102A																	
HAMMARLUND HQ-129X.....	11	6SS7, 6K8, 5H6, 6SN7GT, 6V6GT, 6SJ7, 5U4G, OC3/VR105 (47)	10-10-10-20	AF2222J & PRS25-10	A4	UP11145C		DY-3X10-450/20-25		EL-431		Chk Pwr Out	6083, 6084, 26012	C-1001, A-3890	T20C53, T20C52, T22R04, T22S87	C-2993, P-3153							
SP-400-X (Super-Pro).....	18	6K7, 6L7, 6J7, 4SK7, *6H6, 6N7, 6SJ7, 6J5, *6F6, 5U4G, 5Y3GT (*40)	23843-4 23842-13 23842-28 5171	10-10-1000-1, GL600-16, GL450-8-8-8 PRS150-40		TLA10010, KR616, KR58A, BR4015		XCGX10-1, D-16-600, D-3X8-450, M-40-150		PC-II, AP-18, PLS-888, UT-401		Chk Pwr In Out	2981, 4819, 4801, 4887, 4888	T20C54, T20C54, A-4405, A-3304	T20D77, T22S76	A-2921, A-2938							
HEATH HBR-5.....	5	1T4, 1R5, 1S5, 3Q4										Out	†										
HOFFMAN A-200.....	5	12SA7, 12SG7, 12SQ7, 50L6GT, 35Z5GT (47)	4201	AF1010D		UP5315		DY-5030-150		EL-35		Out	5101	A-3865									
A-202 (Ch. A-309).....	6	12BA6, 12BE6, 12AT6, 35L6GT, 35W4 (47)	4201	AF1010D		UP5315		DY-5030-150		EL-35		Out	5101	A-3865									
A-300.....	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT (44)	4200	AF44J4A		UP2245, BR202A		DY-2X20-450, M-25-25		EL-350		Pwr Out	5000, 5100, 26012	P-6120, A-3878, C-1001, A-3890	T22R02, T22S47, T22R02, T22S47	P-2951, A-2931, P-2951, A-2931							
A-401.....	6	6SK7, 6SA7, 6SG7, 6SQ7, 6K6GT, 5X5GT (44)	4200	AF44J4A		UP2245, BR202A		DY-2X20-450, M-25-25		EL-350		Pwr Out	5000, 5100, 26012	P-6120, A-3878, C-1001, A-3890	T22R02, T22S47, T22R02, T22S47	P-2951, A-2931, P-2951, A-2931							
A-500.....	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT (44)	4200	AF44J4A		UP2245, BR202A		DY-2X20-450, M-25-25		EL-350		Pwr Out	5000, 5100, 26012	P-6120, A-3878, C-1001, A-3890	T22R02, T22S47, T22R02, T22S47	P-2951, A-2931, P-2951, A-2931							
A-501.....	9	6SK7, 6SA7, 6SQ7, 6J5, *6V6GT, 5U4GT (44)	4200	AF44J4A		UP2245, BR202A		DY-2X20-450, M-25-25		EL-350		Chk Pwr Out	5103, 5001, 26012	P-6120, A-3878, C-1001, A-3890	T22R02, T22S47, T22R02, T22S47	P-2951, A-2931, P-2951, A-2931							
A-700.....	5	1T4, 1R5, 1S5, 3Q4	4203	AF1010D		PRS450-10, PRS25-100		M-10-450, M-10-450		UT-12		Out	5101	A-3865	T22S45								
B-400.....	5	12SA7, 12SG7, 12SQ7, 50L6GT, 35Z5GT (47)	4201	AF1010D		UP5315		DY-5030-150		EL-35		Out	5101	A-3865	T22S45								
B-1000 (Ch. 114).....	10	6SK7, 6SA7, 6SQ7, *6J5, *6V6GT, 5U4GT (44)	4200 4203	AF44J		UP2245, BR1045, BR252A		DY-2X20-450, M-10-450, M-25-25		EL-220, TA-25		Chk Pwr Out	5114, 5113, 5001, 5115, 5100	T22R02, T22S47, T22R02, T22S47	P-3151, A-2936, A-2932, A-3031	F6A60, 754							
HOWARD E-256.....	5	6A7, 6D6, 75, 42, 80	8-4 Mid	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	†, †, TA-240, TA-240, TA-240, TA-240	P-6011, A-3878, C-1001, A-3890, A-2203	T22R02, T22S47, T20C53, T22S46	P-2951, A-2931, C-2977, A-2930							
E-259.....	6	6A7, 6D6, 75, 6K5, 25B5, 25Z5 (40)	40-10 Mfd	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Chk Out	†, †, TA-240, TA-240, TA-240, TA-240	P-6011, A-3878, C-1001, A-3890, A-2203	T22R02, T22S47, T20C53, T22S46	P-2951, A-2931, C-2977, A-2930							
HA-7, HA-9.....	6	6K7G, 6A8G, 6Q7G, 6V6G, CZ4	27-266	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	†, †, TA-240, TA-240, TA-240, TA-240	A-3877, A-3877, A-3877, A-3877	T22S58	A-2930							
HA-8.....	8	6K7G, 6A8G, 6Q7G, *6V6G, 6C5G, CZ4	27-266	PRSB450-8-8		EZ588		DH2X8-450SS		TU-88		Pwr Out	†, †, TA-240, TA-240, TA-240, TA-240	A-3877, A-3877, A-3877, A-3877	T22S58	A-2930							
X-275.....	6	6J8G, 6D5, 75, 6V6G, 80, 6U5 (51)	30-266	AF22J		UPII45		DY-2X10-450		EL-210		Pwr Out	52938, 37-938, On Spkr.	A-3877, A-3877, A-3877, A-3877	T22S58	A-2930							
4-B.....	4	1A7G, 1N5G, 1H5G, 1C5G	4 Mfd	PRS150-4		BR415		M-8-150		UT-41		Out	†, TA-240, TA-240, TA-240, TA-240	A-3878, A-3878, A-3878, A-3878	T22S58	A-2931							
4-BT.....	4	1A7G, 1N5G, 1H5G, 1C5G	36-266	AF-3J		UPI545				EL-15		Out	On Spkr.	A-3878	T22S47	A-2931							
12-B.....	4	1A7G, 1N5G, 1H5G, 1C5G	10 Mfd	PRS250-12		BR1225				UT-122		Out	†, TA-240, TA-240, TA-240, TA-240	A-3878, A-3878, A-3878, A-3878	T22S47	A-2931							
14ACB.....	6	1P5GT, 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 117ZGT	47-266	AF66D		UP3315		DY-2X30-150		EL-230		Chk Out	24-212, TA-240, TA-240, TA-240, TA-240	C-1325, T22S45	T20C52	C-2981							
200.....	4	6K7GT, 6J7GT, 25L6, 25Z5GT	16 Mfd	PRSI50-20		BR2015		M-20-150		UT-201		Out	†, TA-240, TA-240, TA-240, TA-240	A-3876	T22S45	A-2928							
210, 211.....	2	6A8, 1V	20-266	PRSI50-12		BR1215		M-12-150		UT-121		Chk Out	27-938, TA-240, TA-240, TA-240, TA-240	P-6297, T22R00, T22S47	T20C52	P-2949, A-2931							
220.....	5	6A7, 6D6, 75, 41, 80 (51)	31-277	AF22J		UP1145		M-2X20-150		TA-220		Out	†, TA-240, TA-240, TA-240, TA-240	A-3878, A-3878, A-3878, A-3878	T22S47	A-2931							
221.....	5	6A7, 6D6, 75, 25L6, 25Z5 (51)	32-266	AF22J		UPI145		DY-2X10-450		EL-210		Chk Out	19-211, TA-240, TA-240, TA-240, TA-240	C-1325, T22S45	T20C52	C-2981, A-2928							

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Product S/N.		
1st.	50H185.....			455				85C043.....	ST-107.....		5A15.....		Vol Sens	25A535..... 25A533.....	M-60-Z.....				D13-133.....			G1			Continued	HALLICRAFTERS S-40		
2nd.	50C185.....							85C033.....	ST-105.....		5A1.....		Vol	†	M-58-S.....	A.....	D11-133.....	41	G1							10.....	S-41-G, S-41-W	
3rd.	50C192.....												Tone Phono Mike Mike(1) Mike(2) Phono Tone	† † † † † †	M-63-Z..... M-58-S..... M-58-S..... M-60-Z..... M-60-Z..... M-60-Z..... M-60-Z.....	A.....	D13-137..... D11-133..... D11-133..... D13-133..... D13-133..... D13-133..... D13-133.....	41	G1								HAMILTON ELECTRONICS H-15-S	
1st.	E50183.....	16-6658.....		455																					16.....	H-50-2S		
2nd.	G50C184.....	16-6660.....																								P---(See Olympic)		
1st.	6335.....			455																						HAMMARLUND HQ-129X		
2nd.	SA795.....																									8.....		
3rd.	6335.....																									SP-400-X (Super-Pro)		
4th.	SA797.....																											
1st.	29555-G1.....			455																								
2nd.	29555-G1.....																											
3rd.	8A166A.....																											
4th.	SA166A.....																											
5th.	SA167A.....																											
1st.																												
2nd.																												
1st.	5205.....	16-6658.....		455				9003.....	ST-105.....		5A1.....		Vol	4201.....	M-60-Z.....	A.....	D13-130..... D11-114.....	41	G1								HOFFMAN A200	
2nd.	5206.....	16-6660.....						9003.....	ST-105.....		5A1.....		Vol	4802.....	M-60-Z.....		D13-133.....		G1							11.....		
1st.	16-6668.....	D8	455					9000.....			46E15.....		Vol	4800.....	M-60-Z.....	A.....	D13-133..... D13-130.....	41	G1							A202 (Ch. A-309)		
2nd.	16-6669.....	D8						9000.....			46E15.....		Tone	4801.....	M-64-Z.....		D13-130..... D13-133.....	41	G1							4..... A-300		
1st.	5203.....	16-6658.....	D8	455				9012.....	ST-175.....		12E15.....		Vol	4804.....	M-60-Z.....	A.....	D13-130..... D13-133.....	41	G1							A-401		
2nd.	5204.....	16-6650.....						9020.....	ST-102.....	F3	12A6.....	F3	Vol	4805.....	M-64-Z.....	A.....	D13-130..... D13-133.....	41	G1							A-500		
1st.	5203.....	16-6658.....	D8	455				9019.....	ST-107.....		5A15.....		Tone	4804.....	M-60-Z.....	A.....	D13-130..... D14-123.....	41	G1							A-501		
2nd.	5204.....	16-6660.....						9023.....	ST-107.....		5A15.....		Bass	4806.....	M-64-Z.....	A.....	D13-133..... D13-137.....	42	G1							A-700		
1st.	5242.....	16-6658.....		455				9035.....	Nylon 1J		5A15.....		Vol	4802.....	M-60-Z.....		D13-133.....		G1							B-400		
2nd.	5243.....	16-6660.....											Vol	4804.....	M-60-Z.....		D13-133..... D13-130.....	41	G1							B-1000 (Ch. 114)		
1st.	5205.....	16-6658.....		455									Treb	4805.....	M-64-Z.....	A.....	D13-130..... D11-123.....	41	G1									
2nd.	5206.....	16-6660.....											Bass	4806.....	M-64-S.....	A.....	D14-123..... D13-137.....	42	G1									
1st.	5213.....	16-6658.....		455																								
2nd.	5214.....	16-6660.....																										
1st.	5242.....	16-6658.....		455																								
2nd.	5243.....	16-6660.....																										
1st.	5205.....	16-6658.....		455																								
2nd.	5206.....	16-6660.....																										
1st.	5213.....	16-6658.....		455																								
2nd.	5214.....	16-6660.....																										
1st.	16-5712.....		465										F2	F2	Vol	†	M-60-Z.....	A.....	D13-133.....	41	G1						HOWARD E-256	
2nd.	16-5714.....												F2	F2	Vol	†	M-60-Z.....	A.....	D13-133.....	41	G1						E-259	
1st.	16-5712.....		465										†				M-60-Z.....	A.....	D13-133.....	41	G1						HA-7, HA-9	
2nd.	16-5714.....																									HA-8		
1st.	16-5704.....		262										F2	F2	Vol	22-281.....											X-275	
2nd.	16-5706.....												†															
1st.	16-5704.....		262										F2	F2	Vol	22-281.....												
2nd.	16-5706.....																											
1st.	22-936A.....		465					35-810.....	ST-166.....		6E10.....		Vol	11-278.....	M-60-Z.....	A.....	D13-133..... D13-133.....	41	G1									
2nd.	22-936A.....												Tone	23-281.....	M-60-Z.....		D13-133..... D13-133.....											
1st.	22-936.....	16-5712.....	465					1-806.....	ST-108.....		6A1.....		Vol	23-281.....	M-60-Z.....		D13-133.....		G1							4-B		
2nd.	22-936.....	16-5714.....						J8-805.....	ST-105.....		5A1.....		Vol	39-281.....	M-60-Z.....	A2.....	D13-133.....	42	G1							4-BT		
1st.	22-936.....	16-5712.....	465					8-805.....	ST-105.....		5A1.....		Vol	†	M-60-Z.....	A2.....	D13-133.....	42	G1							12-B		
2nd.	22-936.....	16-6660.....						9-805.....			F1.....		Vol	70-281.....	M-60-Z.....	A2.....	D13-133.....	42	G1							14-AC-B		
1st.	22-936.....	16-6658.....	465										F2	F2	Vol	†									200			
2nd.	22-936.....	16-6660.....																										
1st.	22-936.....	16-5712.....	465										†	ST-165.....	52E10.....	Vol	26-281.....	M-63-Z.....	A.....	D13-137.....	41	G1						HOWARD - 159
2nd.	22-936.....	16-5714.....						46-810.....	ST-185.....		5E27.....		Vol	36-281.....	M-60-Z.....	A.....	D13-133.....	41	G1							210, 211		
1st.	22-936.....	16-5712.....	465																							220		
2nd.	22-936.....	16-5714.....																								221		

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed In Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell- Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
HOWARD—Continued																								
225, S225, 250, \$250.	5	6A7, 6D6, 75, 41, 80.	28-266.	PRSB450-8-8		EZ588.		DH-2X8-450SS		TU-88.		Pwr Out		P-6011.		T22R02.		P-2951.						
240-1.	6	6A7, 6D6, 75, 41, 80, 6U5.	28-266.	PRSB450-8-8		EZ588.		DH-2X8-450SS		TU-88.		Pwr Out	27-938.	P-6011.		T22R02.		A-2931.						
240-2.	6	6A7, 6D6, 75, 41, IV, 6U5.	28-266.	PRSB450-8-8		EZ588.		DH-2X8-450SS		TU-88.		Pwr Out	39-938.	P-6011.		T22R02.		A-2931.						
260-S260.	6	6A7, 6D6, 75, 41, 80, 6U5.	28-266.	PRSB450-8-8		EZ588.		DH-2X8-450SS		TU-88.		Pwr Out	On Spkr.	P-6011.		T22R02.		P-2951.						
270.	5	6A7, 6D6, 75, 41, 80 (51).	31-277.	AF22J.		UP1145.		DY-2X10-450.		EL-210.		Pwr Out	27-938.	A-3878.		T22R02.		A-2931.						
271.	5	6A7, 6D6, 75, 25L6, 25Z5 (51).	32-266.	AF22J.		UP1145.		DY-2X10-450.		EL-210.		Out On Spkr.	19-211.	P-6297.		T22R02.		P-2949.						
275, 275C, 275T,	6	6A7, 6D6, 75, 6V6, 80, 6U5.	29-266.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.		Pwr Out	28-938.	A-3876.		T22R02.		A-2931.						
280.	6	6J8G, 6D6, 75, 25L6GT, 25Z5G, 6U5.	32-266.	PRSA150-30-30		BRD3315.		M-2X30-150.		TA-330.		Chk Out	19-212.	A-3877.		T22R02.		P-2952.						
300.	5	6A8GT, 6SK7, 6Q7GT, 6K6G, 80.	39-266.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	27-938.	P-6011.		T22R02.		P-2951.						
3004-301-301APC.	5	6A8GT, 6SK7, 6J5GT, 6Q7GT, 6V6GT, 80.	40-266.	AF44J4A.		UP2245C.		DY-315.		EL-350.		Pwr Out	28-938.	P-6119.		T22R02.		A-2930.						
303-304.	6	6A9GT, 6K7GT, 6J5GT, 6Q7GT, 6V6GT, 80.	40-266.	AF44J4A.		UP2245C.		DY-315.		EL-350.		Pwr Out	20-938.	P-6011.		T22R02.		P-2951.						
302R(RA), 302RT.	7	6A8GT, 6SK7GT, 6Q7GT, 6V6GT, 5W4GT, 6U5.	40-266.	AF44J4A.		UP2245C.		DY-315.		EL-350.		Pwr Out	72-938.	P-6297.		T22R02.		P-2949.						
302S, 302APC.	6	6A8GT, 6SK7, 6J5GT, 6Q7GT, 6V6GT, 80.	40-266.	AF44J4A.		UP2245C.		DY-315.		EL-350.		Pwr Out	28-938.	P-6119.		T22R02.		P-2951.						
305.	5	6A8GT, 6SK7, 6Q7GT, 6K6GT, 80.	39-266.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	27-938.	P-6297.		T22R02.		P-2949.						
306.	5	6A8GT, 6SK7, 6Q7GT, 6K6GT, 80.	39-266.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	27-938.	P-6297.		T22R02.		A-2931.						
307.	5	6A8GT, 6SK7, 6Q7GT, 6K6GT, 80.	39-266.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	27-938.	P-6297.		T22R02.		P-2949.						
307-4, 307TP-2.	5	6SA7, 6SK7, 6SQ7, 6K6GT, SY3G.	39-266.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	27-938.	P-6297.		T22R02.		A-2931.						
308(APC)-C, (TT).	8	6A8GT, 6SK7, 6Q7GT, 6K6GT, 6J5GT, 5W4GT, 6U5.	37-266.	AF44J.		UP1145.		DY-3X10-450.		EL-310.		Pwr Out	72-938.	P-6120.		T22R02.		P-2952.						
318, 325.	10	6K7, 6A7, 6Q7G, 6V6G, 6J5G, 80. 6U5 (51).	8824.	GL450-8.		KR508.		D-8-450.		PLS-8.		Pwr Out	30-938.	P-6013.		T22R02.		P-2953.						
			8826-S.	PRSB450-8-8		EZ588.		DH-2X8-450SS		TU-88.		On Spkr.	A-3311.			T22R02.		A-2936.						
318D, 325D.	7	6K8G, 6A7, 6D6, 75, 6V6, 80.	10-10-10 Mid.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	28-938.	P-6119.		T22R02.		P-2951.						
368.	8	6A7, 6K7, 6H6, 6F5G, 6V6G, 80. 6U5 (51).	13-266.	PRSB450-8-8		EZ8845.		DH-3X8-450SS		TU-88.		Pwr Out	29-938.	P-6012.		T22R02.		P-2952.						
368A.	9	6A7, 6A8, 6K7, 6H6, 6F5G, 6V6G, 80, 6U5 (51).	19-266.	PRSB450-8-8		EZ8845.		DH-3X8-450SS		TU-88.		Pwr Out	29-938.	P-6012.		T22R02.		P-2952.						
375.	7	6K8G, 6A7, 6D6, 75, 6V6, 80, 6U5.	10-10-10 Mid.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	28-938.	P-6011.		T22R02.		P-2951.						
377.	6	6D6, 6A7, 75, 41, 80.	31-266.	AF22J.		UP1145.		DY-2X10-450.		EL-210.		Pwr Out	27-938.	P-6297.		T22R02.		P-2949.						
400, 400A.	12	6K7, 6J5G, 6L7, 6Q7G, 6F5, 6V6, 80, 6U5 (51).	17-266.	GL450-8.		KR508.		D-8-450.		PLS-8.		Pwr Out	14-212.	A-3878.		T22R02.		A-2931.						
			29-266.	PRSB450-8-8		EZ588.		DH-2X8-450SS		TU-88.		Chk Pwr Out	33-938.	P-6290.		T22R02.		P-2953.						
400X.	11	6K7, 6A7, 76, 6F5, 6V6G, 6J5G, 80, 6U5.	8, 8, 8 Mfd.	GL450-8.		KR508.		D-8-450.		PLS-8.		Pwr Out	59-938.	P-6013.		T22R02.		P-2953.						
											On Spkr.	A-3311.			T22R02.		A-2936.							
418.	12	6K7, 6K8G, 6A7, 6Q7G, 6J5G, 6F5G, 6V6G, 80, 6U5.	30-266.	AF22J.		GL450-8.		DY-2X10-450.		EL-210.		Pwr Out	55-938.	P-6013.		T22R02.		P-2953.						
425, 425A.	14	6K7, 6J5G, 6L7, 6H6, 6F5G, 6L6GT, 80, 6U5 (51).	17-266.	GL450-8.		KR508.		D-8-450.		PLS-8.		Pwr Out	14-212.	A-3311.		T22R02.		A-2936.						
			29-266.	PRSB450-8-8		EZ588.		DH-2X8-450SS		TU-88.		Chk Pwr Out	34-938.	P-6165.		T22R02.		P-2955.						
											On Spkr.	32-938.	A-3307.		T22R02.		A-3131.							
430 (Ser. 2).	6	6K8G, 6C5, 6K7, 6Q7G, 41, 5W4 (51).	31-266.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	53-938.	P-6119.		T22R02.		P-2951.						
435.	6	6K8G, 6SK7, 6SQ7, 6K6G, 6C5, 80.	35-266.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Pwr Out	11-961.	A-3878.		T22R02.		A-2931.						
436.	7	6K8G, 6SK7, 6SQ7, 6K6G, 6H6G, 6C5, 80.	37-266.	AF22J4A.		UP1145C.		DY-30-450.		EL-202.		Pwr Out	77-938.	P-6119.		T22R02.		P-2951.						
437.	9	6SK7, 6K8, 6SQ7, 6K6G, 6M5, 6C5, 80.	35-266.	AF22J4A.		UP1145C.		DY-30-450.		EL-3.		Pwr Out	16-961.	A-3878.		T22R02.		A-2931.						
			37-266.	AF6J.		UP3045.		DY-316.		EL-202.		Pwr Out	53-938.	P-6120.		T22R02.		P-2952.						
											On Spkr.	16-961.	A-3878.		T22R02.		A-2931.							

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.	
1st.	22-936	16-5712		465									F2		F2											Continued	
2nd.	23-936	16-5714																								HOWARD	
1st.	32-936	16-5712		465									42-810							D13-133							225, S225, 250, S250
2nd.	33-936	16-5714																		D13-133							240-1
1st.	32-936	16-5712		465									42-110							D13-133							240-2
2nd.	33-936	16-5714																		D13-133							260, S260
1st.	22-936	16-5712		465																D13-133							270 (See Model 220)
2nd.	23-936	16-5714																		D13-133							271 (See Model 221)
1st.	22-936	16-5712		465									35-810		51-10					A.							275, 275C, 275T, 280
2nd.	23-936	16-5714											J5-810							D13-133							285
1st.	22-936-3	16-5712		465									10-805		5E10					A.							300
2nd.	23-936	16-5714																		D13-133							300A, 301, 301APC, 303, 304
1st.	22-936	16-5712		465									3-110		ST-175					A.							302
2nd.	23-935	16-5714											4-120						A.							302R(RA), 302RT	
1st.	22-935	16-5712		465									4-120						A.							302S, 302APC	
2nd.	23-935	16-5714																	A.							305	
1st.	22-935	16-5712		465									4-120						A.							306	
2nd.	23-935	16-5714																	A.							307	
1st.	22-935	16-5712		465									7-800		ST-166					A.							307-4, 307TP-2
2nd.	23-935	16-5714											7-800						A.							308 (APC, C, TT)	
1st.	22-936-3	16-5714		415									4-808		ST-736					A.							318, 325
2nd.	23-936	16-5714											J5-808						A.							318D, 325D	
1st.	22-936-3	16-5712		415									7-800		ST-166					A.							368
2nd.	23-936	16-5714											7-800						A.							368A	
1st.	22-936	16-5712		415									39-812						A.							375 (See Model 318D, 325D)	
2nd.	23-936	16-5714											36-810						A.							377	
1st.	20-936A	16-5712		415									36-810						A.							400	
2nd.	22-936A	16-6133																	A.							400A	
3rd.	23-936A	16-5714																	A.							400X	
1st.	20-936A	16-5712		415									35-810		ST-166					A.							418
2nd.	22-936A	16-6133											35-810						A.							425	
3rd.	23-936A	16-5714		415									35-810		ST-166					A.							425A
1st.	20-936A	16-5712		415									35-810						A.							430 (Ser. 2)	
2nd.	22-936	16-6133																	A.							435	
3rd.	23-936	16-5714		415															A.							436	
1st.	20-936	16-6133																	A.							437	
2nd.	22-936	16-6858																	A.								
3rd.	23-936	16-6850																	A.								
1st.	20-936	16-5712		465									3-810						A.								
2nd.	26-936-J	6-5706											38-810						A.								
1st.	34-936	16-5712		465									38-810						A.								
2nd.	35-936	16-6133																	A.								
3rd.	36-936	16-5714																	A.								
1st.	20-936	16-6133		465									38-810						A.								
2nd.	22-936	16-6858																	A.								
3rd.	23-936	16-6850																	A.								
1st.	20-936	16-5712		465									38-810						A.								
2nd.	22-936	16-6133																	A.								
3rd.	23-936	16-5714		465															A.								
1st.	20-936	16-5712		465									39-810						A.								
2nd.	22-936	16-6133																	A.								
3rd.	23-936	16-5714		465															A.								
1st.	20-936	16-6133		465									39-810		ST-166					A.							
2nd.	22-936	16-6858																	A.								
3rd.	23-936	16-6850																	A.								
1st.	20-936	16-5712		465									4-800		ST-166					A.							
2nd.	22-936	16-6133																	A.								
3rd.	23-936	16-5714		465															A.								
1st.	20-936	16-6133		465									4-800		ST-166					A.							
2nd.	22-936	16-6858																	A.								
3rd.	23-936	16-6850																	A.								
1st.	20-936	16-5712		465									4-800		ST-166					A.							
2nd.	22-936	16-6133																	A.								
3rd.	23-936	16-5714		465															A.								
1st.	20-936	16-6133		465									4-800		ST-166					A.							
2nd.	22-936	16-6858																	A.								
3rd.	23-936	16-6850																	A.								
1st.	20-936	16-5712		465									4-800		ST-166					A.							
2nd.	22-936	16-6133																	A.								
3rd.	23-936	16-5714		465															A.								
1st.	20-936	16-6133		465									4-800		ST-166					A.							
2nd.	22-936	16-6858																	A.								

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	No.	Cornell-Dubilier	No.	Solar	No.	Sprague	No.	Use	Mfr.	Stancor	No.	Thordarson	No.	Merit	No.	Eveready Part No.	No.	Burgess Part No.	No.
		Part No.	Part No.	Note	Part No.	Note	Part No.	Note	Part No.	Note	Note	Part No.	Part No.	Note	Part No.	Note	Part No.	Note	"A"	"B"	"A"	"B"	
HOWARD—Continued	8	6K7, 6K8G, 6C5, 6Q7G, 41. 80 (51)	35-266 30-266	AF22J4A AF22J		UP1145C UP1145		DY-316. DY-2X10-450..		EL-202 EL-210		Pwr Out	63-938. 13-961	P-6120. A-3878		T22R04 T22S47		P-2952. A-2931					
440 (Ser. 1, 2)	9	6K7, 6K8G, 6Q7G, 6J7, 6V6G, 80.	10-10 Mid. 10-10 Mid.	AF22J AF22J		UP1145 UP1145		DY-2X10-450. DY-2X10-450..		EL-210.. EL-210		Chk Pwr Out	28-938-1. 58-938-2	C-1001. †		T20C53. †		C-2993. †					
445	6	12SG7, 12SA7, 12SF7, 12SC7, 35L6GT, 35Z5GT	47-266	AF66D PRS25-25.		UP3315 BR252A..		DY-2X30-150. M-25-25..		EL-230.. TA-25		Chk Pwr Out	26-212	A-3310. C-1080		T22S70 T20C53		A-2905. C-2977					
450, 450A	11	6K7, 6L7, 6J5G, 6J7G, 6Q7G, 6V6G, 80.	8 Mid. 8-8 Mid.	GL45C-8 AF22J		KR508 KR588A		D-8-450		PLS-8		Chk Pwr Out	46-938. †	C-1710. A-3304		T20C54 T22S64		†					
460	10	6K6, 6SK7, 6K8G, 6SQ7, 6H6, 6V6GT, 80, 6SF5	37-266 35-266	AF6J AF22J4A		UP3045 UP1145C		DY-30-450. DY-316..		EL-3.. EL-202		Chk Pwr Out	67-938. †	C-1002. P-6012. A-3877		T20C53.. T22R04 T22S58		C-2990. P-2952. A-2930					
468	9	6K8G, 6A7, 6K7, 6Q7G, 6V6G, 6F5G, 80, 6U5	33-266	AF444J		UP1145		DY-3X10-450..		EL-310..		Pwr Out	58-938. †	P-6120. A-3877		T22R04 T22S58		P-2952. A-2930					
490	14	6AB7, 6SA7, 6SK7, 6SF7, 6H6, 7E7, 6SF5, 6J5, 6K6GT, 5Y3GT (51)	50-266 31-266	AF44J4A AF22J		UP2245C UP1145		DY-315. DY-2X10-450..		EL-350.. EL-210		Chk Pwr Out	18-212. 21-212	†		†		†					
518, 518S, 518APC	12	6SK7, 6A8G, 6J5G, 6F5G, 6V6G, 80, 6U5	45-266 30-266	AF3J AF22J		UP1145 UP1145		DY-20-450. DY-2X10-450..		EL-15.. EL-210		Chk Pwr Out	55-938. †	P-6013. A-3311		T22R05 T22S64		P-2953. A-2936					
520APC	12	6SK7, 6A8GT, 6J5G, 6F5GT, 6L6GT, 83V, 6U5	33-266 45-266	AF444J AF3J		UP1145 UP1145		DY-3X10-450.. DY-20-450..		EL-310.. EL-15..		Chk Pwr Out	71-938. †	P-6014. A-3307		T22R06 T22S68		P-2954. A-3181					
525	14	6K7, 6K8G, 6A7, 6H6G, 6F5G, 6J5G, 6L6G, 80, 6U5	33-266 8824	AF444J GL45C-10		UP1145 UP1145		DY-3X10-450..		EL-310..		Chk Pwr Out	14-212. 32-938.	P-6165. A-3307		T22R07 T22S68		P-2955. A-3131					
528	12	6SK7, 6K8G, 6SJ7, 6H6, 6J5, 6L6, 80, 6U5	33-266 37-266	AF444J AF6J		UP1145 UP3045		DY-3X10-450.. DY-30-450..		EL-310.. EL-3..		Driver Out	80-938. 17-961	P-6165. A-3301		T22R07 T22S74		P-2955. A-3130					
565 (6V, 12V)	6	6D8G, 6S7G, 6T7G, 6L5G, 6Z7G, 6ZY5G	39-266	AF22J4A		UP1145C		DY-316..		EL-202..		Chk Pwr Out	76-938-6V. 76-938-12V.	†		†							
568	9	6SK7, 6A8GT, 6Q7G, 6J5GT, 6V6GT, 80, 6U5	33-266	AF444J		UP1145		DY-3X10-450..		EL-310..		Chk Pwr Out	43-23. 55-938.	A-4713. P-6013.		T20D77 T22S47		A-2922. P-2953.					
568(RA)	10	6SK7, 6A8GT, 6Q7GT, 6V6GT, 6J5GT, 80, 6U5	45-266 33-266	AF3J AF444J		UP1145 UP1145		DY-20-450.. DY-3X10-450..		EL-15.. EL-310..		Chk Pwr Out	55-938. †	A-3311. P-6013.		T22R05 T22R05		A-2936. P-2953.					
575	6	6A8GT, 6K7, 6Q7GT, 6V6GT, 80, 6U5	40-266	AF44J4A		UP2245C		DY-315..		EL-350..		Pwr Out	28-938. †	P-6119. A-3877		T22R02 T22S58		P-2951. A-2930					
580, 580C, 580APC	8	6A8GT, 6SK7, 6Q7GT, 6J5GT, 6K6GT, 80, 6U5	37-266	AF6J		UP3045		DY-30-450..		EL-3..		Pwr Out	59-938. †	P-6013. A-3311		T22R05 T22S64		P-2953. A-2938					
585	6	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT, 6N5	32-266	PRSB250-20-20		DSB-2X20-150		TU-220				Chk Pwr Out	19-212. 38-938.	C-1325. A-3876		T22S45 T20C52		C-2977. A-2928					
650 (Pre-Amp.)	3	6AB7, 80	31-266	AF22J		UP1145		DY-2X10-450..		EL-210..		Chk Pwr Out	19-212. 27-938.	C-1325. P-6297		T22S45 T22R00		C-2977. P-2949					
660 (Freq. Mon.)	2	6KGGT, IV	31-266	AF22J		UP1145		DY-2X10-450..		EL-210..		Pwr Out	47-938. †	A-3876.		T22S45		A-2928.					
700.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	47-266	AF66D		UP3315		DY-2X30-150..		EL-230..		Pwr Out	47-938. †	A-3876.		T22S45		A-2928.					
702.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	47-266	AF66D		UP6CJ20		DY-3X20-450..				Pwr Out	55-938. 19-961.	P-6013. A-3311		T22R05 T22S64		P-2953. A-2936					
718.	12	6SK7, 6SA7, 6A7, 6SF5, 6J5GT, 6V6GT, 5Y3GT, 6U5 (51)	51-266		UP6CJ20		DY-3X20-450..				Pwr Out	20-961. 21-961	P-6014. A-3311		T22R06 T22S64		P-2954. A-2936						
718-FM	14	6SK7, 6SA7, 6AC7, 6SJ7, 6H6, 6SF5, 6J5, 6V6GT, 5Y3G, 6U5 (51)	51-266		UP6CJ20		DY-3X20-450..				Pwr Out	46-938. 21-961	P-6014. A-3311		T22R05 T22S64		P-2954. A-2936						
718-FM (Ser. X)	14	6SK7, 6SA7, 6AC7, 6SJ7, 6H6, 6SF5, 6J5, 6V6GT, 5Y3G, 6U5 (51)	51-266		UP6CJ20		DY-3X20-450..				Pwr Out	45-938. 21-961	P-6014. A-3311		T22R05 T22S64		P-2954. A-2936						
765 (6V, 12V)	6	6SA7, 6S7G, 6T7G, 6L5G, 6Z7G, 6ZY5G	39-266	AF22J4A		UP1145C		DY-316..		EL-202..		Chk Pwr Out	19-212. 75-938. 76-938. 4323.	C-1325. A-4713. A-3311		T20C52		C-2977.					
768.	10	6SK7, 6SA7, 6SQ7, 6J5GT, 6K6GT, 80, 6U5	51-266		UP6CJ20		DY-3X20-450..				Pwr Out	55-938. 19-961.	P-6013. A-3311		T22R05 T22S64		P-2953. A-2936						
780.	7	6SK7, 6SA7, 6SQ7, 6V6GT, 80,	51-266		UP6CJ20		DY-3X20-450..				Pwr Out	20-961. 21-961	P-6014. A-3311		T22R04 T22S58		P-2952. A-2936						
802.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	47-266	AF66D		UP3315		DY-2X30-150..		EL-230..		Pwr Out	83-938. †	P-6012. A-3877		T22R04 T22S45		P-2952. A-2936					

†Information not available.

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quarm Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.	
1st.	30-936			465				J4-806	ST-166		6E10		Vol	40-281		M-63-Z			D13-137			G1				HOWARD 438	
2nd.	31-936	17-7453						1-806	S-104		8A4		Vol Tone Sens	†	M-63-Z M-63-Z M-19-S			D13-137 D13-133 D14-114			G1				440 (Ser. 1, 2)		
3rd.	29-936	16-6131						11-806			8A21		Vol	40-281		M-63-Z			D13-137			G1				445	
4th.	23-936	16-5714						40-810	ST-115				Vol Tone Bto R.F.Gain	26-281 13-278 27-281 28-281	M-63-Z M-60-Z M-58-S M-19-S	A	A	D13-137 D13-133 D11-133 D14-114			41	G1					450, 450A
5th.																											
1st.	30-936			465				40-910	ST-115		8A21		Vol R.F.Gain	46-281 44-281	M-63-Z M-61-Z			D13-137 D14-116			41	G1				460	
2nd.	31-936																										
3rd.	29-936							2-808	ST-736		8E10		Vol Bass	37-281 17-278	M-61-S	A		D11-137			41	G1				468	
4th.	23-936																										
1st.	20-936-2	16-5712		465				45-810		F2	F2		Vol Hi-Tone Lo-Tone Sens	43-281 75-281 74-281 76-281	M-60-Z M-60-Z M-60-Z 58-2K	A		D13-133 D13-135 D13-133 W-2000			41	G1				490	
2nd.	22-936	16-6133																									
3rd.	23-936	16-5712						38-810			12E10		Vol Bass	17-278	M-61-S	A		D11-137			41	G1				518, 518S, 518APC	
4th.	51-936																										
1st.	20-936-3	16-3738		465																							
2nd.	22-936-3	15-3736																									
3rd.	23-936	16-3738																									
4th.	20-936-3	16-3738		465																							
1st.	22-936-3	15-3736																									
2nd.	23-936	16-3736																									
3rd.	20-936-2	16-5712		465																							
4th.	22-936	16-6133																									
5th.	23-936	16-5714																									
1st.	20-936-3	16-3738		465																							
2nd.	22-936-3	16-3736																									
3rd.	23-936	16-3736																									
4th.	20-936-2	16-5712		465																							
5th.	22-936	16-6133																									
1st.	23-936	16-5714																									
2nd.	24-936	16-5714																									
3rd.	23-936	16-5714																									
4th.	24-936	16-5714																									
5th.	23-936	16-5714																									
1st.	41-936-3	16-5742		465																							
2nd.	42-936	16-5742																									
3rd.	41-936-3	16-5742		465																							
4th.	42-936	16-5742																									
5th.	42-936	16-5742																									
1st.	22-936	16-5714		465																							
2nd.	23-936	16-5714																									
3rd.	41-936-3	16-5714		465																							
4th.	42-936	16-5714																									
5th.	22-936	16-5714																									
1st.	23-936	16-5714																									
2nd.	24-936	16-5714																									
3rd.	23-936	16-5714																									
4th.	24-936	16-5714																									
5th.	23-936	16-5714																									
1st.	22-936-2	16-5714		465																							
2nd.	23-936	16-5714																									
3rd.	22-936-3	16-6658		465																							
4th.	23-936	16-6660																									
5th.	46-936	16-5712		465																							
1st.	46-936	16-5714																									
2nd.	47-936	16-5714																									
3rd.	46-936	16-5712																									
4th.	47-936	16-5714																									
5th.	22-936-3	16-6658		465																							
1st.	23-936	16-6660																									
2nd.	46-936	16-5712																									
3rd.	47-936	16-5714																									
4th.	22-936-3	16-6658		465																							
5th.	23-936	16-6660																									
1st.	46-936	16-5714																									
2nd.	47-936	16-5714																									
3rd.	46-936	16-5712																									
4th.	47-936	16-5714																									
5th.	22-936-3	16-6658		465																							
1st.	23-936	16-6660																									
2nd.	46-936	16-5712																									
3rd.	47-936	16-5714																									
4th.	22-936-3	16-6658		465																							
5th.	23-936	16-6660																									
1st.	46-936	16-5714																									
2nd.	47-936	16-5714																									
3rd.	46-936	16-5712																									
4th.	47-936	16-5714																									
5th.	22-936-3	16-6658</																									

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
HOWARD — Contin	6	6SD7GT, 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y5GT (51)	51-266			UP6CJ20		DY-3X20-450				Pwr Out	85-938 24-961	P-6011 A-3877		T22R02 T22S58		P-2951 A-2930					
806-B	8	6SD7GT, 6SA7, 6SK7, 6SQ7, 6J5, 6K6GT, 5Y3GT (51)	51-266			UP6CJ20		DY-3X20-450				Pwr Out	82-958 1	P-6012 A-3311		T22R04 T22S64		P-2952 A-2936					
808-X (Series-X)	8	6SD7GT, 6SA7, 6SK7, 6SQ7, 6J5, 6K6GT, 5Y3GT (51)	51-266			UP6CJ20		DY-3X20-450				Pwr Out	82-938 1	P-6012 A-3311		T22R04 T22S64		P-2952 A-2936					
810	10	7H7, 6SA7, 6SK7, 6SQ7, 6SL7GT, 6K6GT, 5Y3GT, 6U5 (51)	51-266 53-266	AF44J		UP6CJ20 UP2245		DY-3X20-450 DY-2X20-450		EL-220		Pwr Out	32-938 27-961	P-6165		T22R07		P-2955					
865 (Series 1, 2)	6	6SA7, 6S7G, 6T7G, 6L5G, 6Z7G, 6ZY8G	39-266	AF22J4A		UP1145C		DY-316		EL-202		Chk Pwr In Out Pwr Out	16-212 75-938 4323	C-1325		T20CS2		C-2977					
868	10	6SD7GT, 6SA7, 6SK7, 6SQ7, 6J5GT, 6K6GT, 80, 6U5	51-266			UF6CJ20		DY-3X20-450				Out	TO-0002	A-3865		T20D77 T22S47		A-2922 A-2936					
901A-Series (A-E, A-H, A-I, A-M, A-W) (Howard-LS-0001)	5	12SA7GT, 12SK7GT, 12SQ7GT, 501SGT, 352SGT	CE-0003 CE-0005	AF66D PRS25-25		UP3315 BR252A		DY-2X30-150 M-25-25		EL-230 TA-25		Out	TO-0001	A-3876		T22S45		A-2928					
901AP	5	12SA7, 12SK7GT, 12SQ7GT, 50LEGT, 352SGT (47)	40-40 Mfd 25 Mfd	PRSA150-40-40 PRS25-25		BRD4415 BR252A		M-2X40-150 M-25-25		TA-440 TA-25		Out	TO-0001	A-3876		T22S45		A-2928					
905, 906C	6	6SK7, 6SA7, 6SK7GT, 6SQ7, 6V6GT/G, 5Y3GT (47)	CE-0009	AF44J4A		UP4445C		DY-313		EL-330		Chk Pwr Out	LC-0010 TP-0003	C-1708 P-6120		T20C52 T22R04		C-2976 P-2952					
909M	9	6SK7GT, 6SA7, 6SK7, 6SQ7, 6J5, 6V6GT, 5Y3GT (*44)	CE-0006 CE-0005	AF44J PRS25-25		UP22245 BR252A		DY-3X20-450 M-25-25		EL-420 TA-25		Chk Pwr Out	LC-0009 ML-102002	C-1279 P-4081		T20C53 T22R33		C-2981 P-3165					
920	4	1R5, 1U4, 1S5, 3Q4	CE-0008	PRS150-10		BR1215		M-10-150		UT-121		Out	TO-0004	A-3824 A-3878		T22S56 T22S46		A-2901 A-2931		758		17GD80	
HUDSON-TERRAP	L	LANE																					
CB-6	6	6D6, 6A7, 6K7, 85, 6C5, 6A6 (51)	12238-RCA BO-152078									Pwr Out	12231 BO-152117										
DB-37	6	6D6, 6A7, 6K7, 85, 6C5, 6A6 (51)	12234-RCA 12238-RCA	GL450-8		KR508		D-8-450		PLS-8		Pwr Out	BO-152116 12230	A-3307		T22S66 T22S66		A-2900 A-2900					
DB-38	7	6K7G, 6A8G, 6H6G, 6J5G, 6V6G, 8-8 Mfd, 10-10 Mfd	PRSA450-8-8	EZ8845		M-2X8-450		UT-88				Pwr Out	12231 12230	A-3307		T22S66		A-2900					
DB-39	7	6K7G, 6J7G, 6R7G, 6V6G, 0Z4, 110377	PRS25-10 114258	BR102A BR345		M-10-25 M-8-450		TA-10 UT-8				Pwr Out	12231 12230	A-3307 A-3311		T22S66 T22S64		A-2900 A-2936					
DB-40	7	6SK7, 6A8, 6H6, 6SF5, 6V6GT, 6X5 (*55)	117314 118485	AF22J4A PRS250-12		UP1145C BR1225		DY-316 M-16-250		EL-202 UT-122		Chk Out	114352 M-114488	A-3311		T22S64		A-2936					
DB-41	8	6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 0Z4	161025-RCA 161168-RCA	PRSA50-10 PRS450-16		BR1045 BR1645		M-10-450 M-16-450		UT-12 UT-15		Pwr Out	117923 117952	A-3877		T22S58		A-2930					
DB-42	6	6A7, 7B8, 7B6, 7C5, 7Y4	110377-RCA 22-1233	PRS25-10 AF32K4A		BR102A UP2235C		M-10-25 DY-310		TA-10 EL-153		Chk Out	117334 160863	A-3311		T22S64		A-2936					
DB-46 (Ch. 6MH089)	6	6A7, 7B8, 7B6, 7C5, 7Y4 (51 or 44)	22-1644	AF32K4A				DY-2X30-350		EL-311	A4	Pwr Out	95-1023 95-915	A-3877 A-3850		T22S58		A-2930					
DB-47 (Model-DB46)	6	See Model DB-46																					
JA-40 (Ch. 160808)	5	6K6GT, 6K7GT, 6SQ7, 6V6GT, 0Z4	15-10-20 Mfd	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	†	A-3877		T22S58		A-2930					
JA-41	5	6SA7, 6SK7, 6SQ7, 6V6GT, 6X5GT	161024 161025	PRS450-8 PRS450-8-8		BR845 BR845		M-8-450 M-8-450		UT-8 UT-8		Pwr Out	160940 160938	A-3877		T22S58		A-2930					
SA-37	5	6D6, 6A8, 6K7, 6B7, 42 (51)	13114	PRS450-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	12231 12230	A-3355		T20C53 T22S47		C-2990 A-2931					
SA-38	6	6K7G, 6A8G, 6B8G, 6V6G, 6X5G	8-8 Mfd	PRS4450-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	12364 12352	A-3878		T22S58		A-2930					
SA-39	6	6K7G, 6J7G, 6Q7G, 6K6G, 6X5G	114258	PRS450-8		BR845		M-8-450		UT-8		Pwr Out	114354 114348	A-3877		T22S58		A-2930					
SA-40	6	6SK7, 6A8, 6SQ7, 6K6GT, 6X5 (*55)	117314 118485	AF22J4A PRS250-12		UP1145C BR1225		DY-316 M-16-250		EL-202 UT-122		Chk Out	117923 117952	A-3878		T22S47		A-2931					
SA-41	6	6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT	161024 161025	PRS450-8 PRS450-8		BR845 BR845		M-8-450 M-8-450		UT-8 UT-8		Pwr Out	117979 161120	A-3878		T22S47		A-2931					
												Pwr Out	160938	A-3877		T22S58		A-2930					

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Phonofat Set No.					
1st.	23-936-2...	16-5712...		465				12-806...	ST-108...		6A1...		Vol Tone	82-281...	M-60-Z...		A...	D13-133...		41	G1					Continued --	HOWARD 806, 808				
2nd.	23-936-2...	16-5714...						12-808...					Vol Tone	82-281...	M-60-Z...		A...	D13-133...		41	G1							808-B (Spaced Band)			
1st.	23-936-2...	16-5712...		465									Vol Tone	82-281...	M-60-Z...			D13-133...										808-X (Ser. X)			
2nd.	23-936-2...	16-5714...						45-812...			12E60...		Vol Tone	56-281...	M-60-Z...			D13-133...													
1st.	23-936-2...	16-5712...		465		†	L-40...					Vol Tone	84-281...	M-60-Z...		A...	G5	D13-132...		41	G1.5							810			
2nd.	23-936-2...	16-5714...						45-812...			12E60...		Vol Tone	86-281...	M-60-Z...			D13-132...													
1st.	41-936...			465					11-808...				Vol Tone	72-281...	M-63-Z...			D13-137...										865			
2nd.	42-936...							13-808...				Vol Tone	72-281...	M-63-Z...			D13-137...														
1st.	46-936...	16-5712...		465				10-808...				Vol Tone	72-281...	M-63-Z...			D13-137...										868				
2nd.	47-936...	16-5714...										Vol Tone	72-281...	M-63-Z...			D13-137...														
1st.	LI-0006...	16-5662...		455					SK-0003...	ST-105...		5A1...	Vol	VC-0001...	AM-60-Z...	KSS-3...	A...	D13-133...	E	41								1.			
2nd.	LI-0007...	16-5663...										Vol	VC-0001...	AM-60-Z...	KSS-3...	A...	D13-133...	E	41									901 A(Ser. AE, AH, A-I, A-M, A-W) (Howard LS-0001)			
1st.	LI-0010...			455					SK-0005...	ST-107...		5A15...	Vol	VC-0001...	AM-60-Z...	KSS-3...	A...	D13-133...	E	41								10.	901AP		
2nd.	LI-0011...											Vol	VC-0005...	M-60-Z...			D13-133...	E	41												
1st.	LI-0014...	16-5740...		455					SK-0004...			69A3...	Vol	VC-0005...	M-60-Z...		A...	D13-133...		41	G1							17.	906, 906C		
2nd.	LI-0015...	16-5742...										Vol	VC-0002...																		
1st.	LI-0016...	16-6668...		455					SK-0008...			69A3...	Vol	VC-0002...															25.	909M	
2nd.	LI-0017...	16-6669...										Vol	VC-0006...	ST-107...	5A15...	Vol	D13-133...														
1st.	LI-0012...	16-6666...		455								Vol	VC-0003...	M-60-Z...															5.	920	
2nd.	LI-0013...	16-6667...																													
1st.	80152114...			260								†	ST-115...	F8	8EV6...	Vol Tone	B0152119...	T-109...											HUDSON CB-6		
2nd.	80152115...																M-51-Z...	D13-137X...	D13-128...	G1	80783...	5406...	H2								
1st.	13419...	16-6652...		260								†	F2		F2	Vol Tone	12240...	T-109...											DB-37		
2nd.	12229...	16-6654...															M-51-Z...	D13-137X...	D13-128...	G1	80783...	5406...	H2								
1st.	16-6652...	16-6654...		260								†	ST-115...	F8	8EV6...	Vol Tone	156391...	M-60-Z...										DB-38			
2nd.	16-6654...																	D13-133...													
1st.	114411...	16-6652...		262					M-115036...	ST-115...		F8	8EV6...	Vol Tone	114366...														DB-39		
2nd.	114415...	16-6654...															114481...														
1st.	117972...			455					M-115073...	ST-115...		F8	8EV6...	Vol Tone	118216...														DB-40		
2nd.	117998...																117965...	M-60-Z...													
1st.	160721...	16-6652...		262					M-115123...	ST-115...		F8	8EV6...	Vol Tone	160954...														DB-41		
2nd.	160681...	16-6654...															161156...														
1st.	95-819...			265								49-476...	ST-108...	F8	6EV6...	Vol Tone	63-1248...										190-19...	5314...	H1	DB-42	
2nd.	95-820...												49-593...	ST-112...	F8	6EV6...	Vol Tone	63-1539...										190-20...	5301...	H1	DB-46
1st.	95-917...			265																											
2nd.	95-918...																														
1st.	16-6658...			455								†	ST-105...		5A1...	Vol	†	M-60-Z...	A...	D13-133...		41	G1	†	5300...	5309...	H1	DB-47 (See Model DB-45) JA-40 (Ch. 160808)			
2nd.	16-6650...																	161019...	AM-63-Z...	KSS-3...	A...	D13-137...	E	41		160795...	5309...	H1	JA-41		
1st.	160976...	16-6658...		455					U-115121...	ST-105...		F8	5EV6...	Vol	161019...	AM-63-Z...	KSS-3...	A...	D13-137...	E	41								SA-37		
2nd.	150981...	16-6660...		260								†	F2		F2	Vol	13420...	AM-64-Z...	KSS-3...	A...	D13-130...	E	41		80783...	5406...	H1				
1st.	16-5732...			260								†	ST-108...	F8	6EV6...	Vol	†											80985...	5300...	H1	SA-38
2nd.	16-5734...																														
1st.	114411...			262					R-115023...	ST-108...		F8	6EV6...	Vol	114364...	AM-60-Z...	KSS-3...	A...	D13-133...	E	41								SA-39		
2nd.	114413...								U-115072...	ST-108...		F8	6EV6...	Vol	118216...														SA-40		
1st.	117872...	16-6658...		455																											
2nd.	118118...	16-6650...																													
1st.	160841...	16-6658...		455					M-115122...	ST-108...		F8	6EV6...	Vol	160954...														SA-41		
2nd.	160847...	16-6650...																													

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No. Tubs	Sylvania or Equivalent		Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Dial Light Type Listed in Parentheses																						
INDUSTRIAL ELE	C TRONIC CORP.—(See Simpson)																								
JEFFERSON TRA	V IS MR-2B	5 1A7GT, #IN5GT, 1H5GT, 3Q5GT,	25 Mfd.	PRS25-25		BR252A		M-25-25		TA-25		Out	.....+	A-3879		T22S47		A-2932		742 & #482		4F		#B30	
	MR-3	5 1LA6, #ILN5, 1LH4, 3LF4	50-50 Mfd.	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out	.....+	A-3878		T22S47		A-2931		746 & #482		G3		#M30	
JEWEL	300	4 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT	31-1	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	91-4	A-3875		T22S45		A-2928							
500 thru 505 (Ser. A, B, C)	4 12SA7, 12SK7, 12SQ7, 50L6GT, (or) Lock-In (or) Miniature Type Equivalent	50-30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	.....+	A-3875		T22S45		A-2928								
505 (Pin-Up)	4 12BE6, 12BA6, 12AT6, 50B5 (44)	40-20 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	.....+	A-3876		T22S45		A-2928								
KITCHENAIRE	5-Tube Radio (AC-DC)	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (40)	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Chk Out	.....+	C-1355, A-3876		T20C52, T22S45		C-2930, A-2928							
KNIGHT	A9757, A9758 (Ch. 76A)	11 #6K7, 6A8, 6J7, 6H6, #6C5, #6F6, 80	1110, 1653, 3041, 3167	PRS450-8, PRS25-10, PRSA450-8-8, GL450-30, AF886D4A		BR845, BR102A, EZ8845, KR530, UP44315C		M-8-450, M-10-25, M-2X8-450, D-30-450		UT-8, TA-10, UT-88		Pwr Out	3394, On Spkr.	P-6014, A-3311		T22R06, T22S64		P-2954, A-2936							
A10700, A10701	5 1A7, 1N5, 1H5, 3Q5, 117Z6	5 P3971		PRSA150-30-20		EZ42215		DSB-403020-150		TA-230, & UT-201		Chk Out	P3958, On Spkr.	C-1723, A-3878		T22S47		C-2975, A-2931		742 & #482	C2	6FA60		C3	
A10702	5 12A8, 12SK7, 12SQ7, 50L6, 35Z5 (47)	5 P3792		PRSA150-30-20 & PRS150-20		EZ42215		DSB-403020-150		TA-230, & UT-201		Out	P3357, On Spkr.	A-3865, B5		T22S45		A-2928							
A10703, A10704	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	5 P3355		PRSA150-20-30		EDL4215		M-2X30-150		TA-230		Out	On Spkr.	A-3876		T22S45		A-2928							
A10705, 6, 7	5 12SA7, (12SK7, 12SQ7, 50L6, 35Z5 (47))	5 P3355		PRSA150-20-30		EDL4215		M-2X30-150		TA-230		Out	On Spkr.	A-3876		T22S45		A-2928							
A10708, 9, 10	5 12A8, 12SK7, 12SQ7, 50L6, 35Z5 (47)	5 P3792		PRSA150-30-20 & PRS150-20		EZ42215		DSB-403020-150		TA-230, & UT-201		Out	On Spkr.	A-3876		T22S45		A-2928							
A10711, 12, 13	6 #12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	6 P3935		AF66D		UP3315		DY-2X30-450		EL-230		Chk Out	P3926, On Spkr.	C-1706, A-3876		T20C52, T22S45		C-2990, A-2928							
A10715, 16, 17	6 #12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT	6 P20-20 Mfd.		PRSA-403020		EZ2215C		DSB-302		TA-220, & TA-25		Out	P3357, On Spkr.	A-3865, B5		T22S47, T22S45		A-2928							
A10720, A10721	11 6A8G, #6K7G, #6J5G, #6F6G, #5Y3, P1993, P3478	11 GL450-30, AF88J		UP4245		KR530		D-30-450		PLS-25, DY-2X30-450		Pwr In	P3476, P3479	P-6013, A-3830		T22R06, T22S47		P-2953, A-2905							
A10724	5 6A8, 6K7, 6Q7G, 6K6G, 6X5G	5 P2329		PRSB450-8-8		EZ588		DH-2X8-450SS		LM-88		Pwr Out	.....+	A-3876		T22S47		A-2928							
A10725	6 #1N5, 1A7, 1H5, 3Q5, 117Z6	6 P3971		AF886D4A		UP44315C		DY-419		EL-434		Chk Out	P3958, On Spkr.	C-1723, A-3878		T22S47		A-2975, A-2931		742 & #482	C2	6FA60			
A10731, A10732	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	5 N-2915		PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	On Spkr.	A-3876		T22S45		A-2928							
A10733, 34, 35	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	5 N-2015		PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	On Spkr.	A-3876		T22S45		A-2928							
A10736, A10737	4 12K7GT, 12J7GT, 50L6GT, 35Z5GT	4 N-1850		PRSA150-30-30		EZ3215C		DSB-303		TA-320, TA-25		Out	On Spkr.	A-3875		T22S45		A-2928							
A10739	6 6A2GT, 6K7GT, 6Q7GT, 25C6G, #25Z6G (47)	6 N-2436		PRS150-30		BR3015		M-30-150		UT-301		Out	N-2444, On Spkr.	A-3875		T22S45		A-2928							
A10740	6 12A8GT, 12J5GT, 12K7GT, 12K7GT, 35L6GT, 35Z5GT (47)	6 N-2206		PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	On Spkr.	A-3875		T22S45		A-2928							
A10741	7 6A8G, 6K7G, 6Q7G, 6J5G, #6K6G, 80 (47)	7 N-2283		UP15035		DY-2X15-350		EL-254		Pwr Out	N-2149, On Spkr.	P-6119, A-3311		T22R02, T22S64		P-2951, A-2936		742 & #482	C2	6FA60					
A10745	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	5 N-2015		BRD4415		M-2X40-140		TA-440		Pwr Out	N-2149, On Spkr.	P-6012, A-3876		T22S45		P-2952, A-2928									
A10748	5 1A7GT, #IN5GT, 1H5GT, 1A5GT, 35Z5GT (47)	5 N-2748		AF44D4DA		UP4CJ61		DY-304		EL-351		Out	.....+	A-3857		T22S48		A-2937		747 & #482	P4P1	#M30			
A10750, A10751	12 6A2GT, 6K7, 77, #6F6G, 80 (47)	12 N-2459, N-2460		PRS450-16, PRS450-15		BR1645		M-16-450		UT-16		Pwr Out	N-2514, On Spkr.	P-6013, A-3311		T22R05, T22S64		P-2953, A-2936							
A10755	7 6A2GT, 6K7GT, 6Q7GT, 6F6G, 6G6 (47)	7 N-2437		PRSA150-30		BR3015		M-30-150		UT-301		Pwr Out	N-2513, On Spkr.	A-3311		T22S45		A-2928							
A10760	4 6SA7, 6SK7, 6S3Q7, 6K6GT (44)	4 N-2795		AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	N-2447, On Spkr.	A-3876		T22S45		A-2928							
A10765, A10766	6 6SA7, 6SK7, 6SQ7, 6F6G, 6Y4G, 6U5 (44)	6 10E25		PRS350-12		BR1235		M-10-350		UT-123		Pwr Out	N-2750, On Spkr.	A-3878		T22S47		A-2931							
A10768 thru A10774	8 6SA7, 6SK7, 6SQ7, 6SF5, #6K6G, 5Y4G, 6AB5 (44)	8 11324		AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	11272, On Spkr.	P-6011, A-3878		T22R02, T22S47		P-2951, A-2931							
A10775	5 1A7G, #IN5G, 1H5G, 1A5G, 35Z5GT (47)	5 1693		PRS25-10		BR102A		M-10-25		TA-10		Pwr Out	11436, On Spkr.	P-6012, A-3876		T22R04, T22S45		P-2952, A-2936							
A10777, A10778	6 6D8G, 6S7, 6L5G, 6T7G, 6G6G, 6AB5 (47)	6 11150, 1693		PRS25-10		BR102A		M-10-25		TA-10		Chk Pwr Out	4198, 4848	.....+											
A10779	8 #6SK7, 6K8, 6SQ7, 6SF5, #6V6G, 5Y4G, Some Use 6U5	8 20, 20 Mfd.										Pwr Out	On Spkr.	A-3879		T22S48		A-2932							
												Pwr Out	.....+	P-6012, A-3311		T22R04, T22S64		P-2952, A-2936							

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
		Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note		
		Dial Light Type Listed in Parentheses	Part No.																				"A"	"B"		
KNIGHT—Continued																										
A10780.....	11 6K8, 6SK7, 6H6, *6C5, *6SF5, 6K6G, 5Y4G, Some Use 6AB5, 11150.	20, 20 Mid.	AF44J	UP2245	M-16-250.		EL-220, UT-122		Pwr Out	On Spkr	P-6013	T22R05	P-2953													
A10782, A10783.....	5 6D8G, 6S7, 6T7G, 6GG6, 6ZY5G, (47).	1693	PRS25-10	BR102A	M-10-25		TA-10, TA-10		Pwr Out	On Spkr	A-3879	T22S48	A-2932													
A10785, A10787.....	4 1A7G, 1N5G, 1H5G, 1A5G.	1693	PRS25-10	BR102A	M-10-25		TA-10		Out	On Spkr	A-3857	T22S48	A-2937													
A10786.....	4 1A7G, 1N5G, 1H5G, 1A5G.	1693	PRS25-10	BR102A	M-10-25		TA-10		Out	On Spkr	A-3857	T22S48	A-2937													
A10788, 90, 92....	6 1A7G, *1N5G, *1A5G, 1H5G.	1693	PRS25-10	BR102A	M-10-25		TA-10		Out	On Spkr	A-3879	T22S48	A-2932													
A10793, A10794.....	6 6K8, 6SK7, 6SQ7, 6J5G, *25L6G, (47).	11080	PRS50-50	BR505	M-50-50		TA-550		In Out	On Spkr	A-3301	T22S60	A-2905													
A10795.....	5 1A7G, 1N5G, 1H5G, 1A5G, 1N493, 9196, 35ZGT (44).	1693	AF1010D	UP5515	DY-2X50-150.		EL-25		Chk Out	On Spkr	A-3857	T22S48	A-2937													
A10798.....	5 6A8, 6K7, 6Q7G, 6K6G, 6X5G (51).	17-14297	PR252A	UP2235C	M-25-25		TA-25		Pwr Out	On Spkr	CO-16265,	A-3878	T22S47	A-2931												
A10799.....	6 *6SK7, 6A8, 6Q7G, 6V6G, 6X5G (51).	17-14299	AF2214A	UP1145C	DY-316		EL-202		Pwr Out	On Spkr	CO-16305	A-3877	T22S58	A-2930												
A10800, 1, 2—(See Model A10733).																										
A10803, 4, 5....	4 12A8GT, 12J7GT, 50L6GT, 35Z5GT (47).	N-2174	PRS150-30-30	EZ3215C	DSB-303	TA-303			Out	On Spkr	A-3876	T22S45	A-2928													
A10806, A10807—(See Model A10736, 37).																										
A10810.....	5 6A8G, 6K7G, 6Q7G, 6K6G, 80 (47).	N-2224	PRS8450-8-8	EZ588	DH-2X8-450SS	1U-88			Pwr Out	On Spkr	P-6010	T22R01	P-2950													
A10811.....	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47).	N-1366	PRSA150-40-40	BRD4415	M-2X40-150	TA-440			Pwr Out	On Spkr	A-3876	T22S45	A-2928													
A10812—(See Model A10740).																										
A10813.....	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47).	N-2015	PRSA150-40-40	BRD4415	M-2X40-150	TA-440			Out	On Spkr	A-3876	T22S45	A-2928													
A10814—(See Model A10741).																										
A10815—(See Model A10739).																										
A10816—(See Model A10745).																										
A10818.....	4 6A8G, 6K7, 6Q7G, 6G6G	C-236							Pwr Out	On Spkr	A-3879	T22S48	A-2932													
A10818A.....	4 6D8G, 6S7, 6T7G, 6G6G (40).	4833	PRSA150-20-20	BRD2215	M-2X20-150	TA-220			Pwr Out	On Spkr	A-3879	T22S48	A-2932													
A10820, A10821—(See Model A10750).									Pwr Out	On Spkr	A-3879	T22S48	A-2932													
A10822.....	4 6A8GT, 6K7GT, 6Q7GT, 6K6G, (44).	N-1369	AF32K4A	UP2235C	DY-310	EL-153			Pwr Out	On Spkr	N-1540	T22S47	A-2931													
A10825—(See Model A10755).																										
A10826.....	4 1A7G, 1N5G, 1H5G, 1Q5G.	N-1367	PRS150-12	BR1215	M-10-150	UT-121			Out	On Spkr	A-3878	T22S47	A-2931													
A10830, 31, 32....	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47).	P3355	PRSA150-20-30	EDL4215	M-2X30-150	TA-230			Out	P3357	A-3865	B5	T22S45	B5	A-2928											
A10845, A10846.....	11 6A8G, *6K7G, *6J5G, *6F6G, 5Y3, (44).	P1993	KR530	D-30-450	PLS-25				Pwr Out	P3476	P-6013	T22R06	P-2953													
A10848.....	4 1A7G, 1N5G, 1H5G, 1Q5G.	P3024	PRSB150-8	BR815	M-8-150	UT-81			In Out	P3479	A-3878	T22S47	A-2905													
A10851.....	5 6A8, 6K7, 6Q7G, 6K6G, 6X5G.	P2329	PRSB8-8	EZ588	DH-2X8-450SS	LM-88			Pwr Out	On Spkr	A-3878	T22S47	A-2931													
A10852.....	6 *6S7, 6A8G, 6Q7G, 6K6G, 6X5G.	P1293	PRSB450-8-8	EZ-388	DH-2X8-450SS	TU-88			Pwr Out	On Spkr	A-3878	T22S47	A-2931													
A10855.....	5 1A7GT, 1N6GT, 1H5GT, 305GT, 70L7GT, (44).	P3563	PRSA150-20-30	EZ3315	M-2X30-150	TA-230			Pwr Out	On Spkr	A-3878	T22S47	A-2931													
A10865.....	5 6S47, 6SK7, 6SQ7, 6F6G, 5Y4G (44).	P3562	*PRSA25-30	BR502	M-50-25	TA-50			Chk Out	P3926	C-1706	T20C52	C-2990													
A10866, 67, 68—(See Model A10768).									Chk Out	P3476	P-6120	T22R04	P-2952													
A10869, 10870, 10871—(See Model A10769).									Chk Out	P3479	A-3878	T22S47	A-2931													
A10871—(See Model A10781).									Chk Out	P3556	C-1706	T20C52	C-2975													
A10873—(See Model A10783).									Chk Out	11272	A-3878	T22S47	A-2931													
A10875, A10876.....	5 6S47, 6SK7, 6SQ7, 6F6G, 5Y4G, (44) Some Use 6U5.	10625	PRSA450-8	BR845	M-8-450	UT-8			Pwr Out	11272 On Spkr	P-6297	T22R00	P-2949													
A10878—(See Model A10793).									Pwr Out	11272 On Spkr	A-3878	T22S47	A-2931													
A10879, A10880—(See Model A10785).																										
A10882—(See Model A10786).																										
A10884—(See Model A10775).																										
A10885.....	5 1A7G, 1N5G, 1H5G, 1A5G, 25Z6G, 11502, 1693, 11508.	PRSA150-40-40	A4	BRD4415	M-2X40-150	A4	TA-440	A4	Chk Out	11501 On Spkr	A-3857	T22S48	A-2937													
A10886, 87, 88—(See Model A10788).																										
A10889.....	4 1A7G, 1N5G, 1H5G, 1Q5G.	1693	PRS25-10	BR102A	M-10-25		TA-10		Out	10901	A-3822	T22S47	A-2932													
A10890—(See Model A10777).																										
A10892, A10895—(See Model A10788).																										
A10897—(See Model A10775).																										
A10898—(See Model A10885).																										
A10899—(See Model A10793).																										

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quan Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiar Part No.	Note	Photog Set No.		
1st.	†	16-5712		455				†																Continued—	KNIGHT A10780			
2nd.	†	16-5714		455				10149	ST-108	6A1			Vol	Tone	†													
1st.	11007	16-5712		455				11243	ST-119	10A4			Vol	Tone	4871													
2nd.	11008	16-5714		455				4826	ST-105	5A1			Vol	Tone	10148	M-46-Z	KSS-3	A2	D13-133	E	42	G1	4105	5301	H1	A10782, A10783		
1st.	4791	16-6658		455				10123	ST-116	8A31			Vol	Tone	4803	AM-60-Z	KSS-3	A4	D13-133	E	45							
2nd.	4792	16-6658		455				4983	ST-108	6A1			Vol	Tone	11128	AM-60-Z	KSS-3	A2	D13-133	E	42							
1st.	10967	16-6658		455				10123	ST-116	8A31			Vol	Tone	10123	AM-60-Z	KSS-3	A2	D13-133	E	42							
2nd.	10969	16-6658		455				11235	ST-119	10A4			Vol	Tone	11235	AM-60-Z	KSS-3	A2	D13-133	E	42							
1st.	10967	16-6658		455				4983	ST-108	6A1			Vol	Tone	10441	AM-60-Z	KSS-3	A2	D13-133	E	42							
2nd.	10967	16-6660		455				11235	ST-119	10A4			Vol	Tone	11098	AM-60-Z	KSS-3	A2	D13-133	E	42							
1st.	11008	16-5712		455			E2	11216	ST-108	6A1			Vol	Tone	4871	AM-60-Z	KSS-3	A	D13-123	E	41							
2nd.	11008	16-5714		455				11243	ST-119	10A4			Vol	Tone	4872	AM-46-Z	KSS-3	A	D13-133	E	42							
1st.	4791	16-6658		455				11680	ST-105	5A1			Vol	Tone	10441	AM-60-Z	KSS-3	A2	D13-133	E	42							
2nd.	4792	16-6658		455																								
1st.	00-16263			455				17-16517		F2			Vol	Tone	17-14536	AM-60-Z	KSS-3		D13-133	E								
2nd.	00-16264			170				17-16310		F2			Vol	Tone	17-14536	AM-60-Z	DFS-1/2											
1st.	00-16303	16-6658		170				N-2167		3A07			Vol	Tone	17-14505	AM-51-Z	DFS-1/2											
2nd.	00-16304	16-6658		170																								
1st.	N-2172	16-6658		456				N-2167		3A07			Vol	Tone	N-2173	AM-40-S	KSS-3	A	D11-120	E	41							
1st.	N-2159	16-6658		456				N-2225	ST-167	SE18			Vol	Tone	N-2223	M-63-Z	A		D13-137		41	G1						
2nd.	N-1596	16-6658		456				N-2074	ST-113	4A1			Vol	Tone	N-2070	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	N-1598	16-6658		456				N-2254	ST-105	5A1			Vol	Tone	N-2257	M-60-Z	A		D13-133		41	G1						
2nd.	N-1596	16-6658		456																								
1st.	I-27	16-6658		456				S-24		F1			Vol	Tone	V-20	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	I-28	16-6656		456				4837	ST-108	6A1			Vol	Tone	4839	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	3283	16-6658		455				10073	ST-116	8A31			Vol	Tone	4839	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	3284	16-6658		455																								
1st.	N-1248	16-6658		456				N-1235	ST-113	F8	4A1	F8	Vol	Tone	N-1238													
2nd.	N-1596	16-6658		456																								
1st.	N-1391	16-6658		456				N-1507	ST-105	5A1			Vol	Tone	N-1738	AM-60-Z	KSS-3	A2	D13-133	E	42							
2nd.	N-1548	16-6658		455				P3345	ST-105	5A1			Vol	Tone	P3346	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	P3345	16-6658		455				P3553	ST-105	5A1			Vol	Tone	P3471	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	P3364	16-6656		455				P2716	ST-173	F6	12E10	F6	Vol	Bass	P3472	AM-60-Z	KSS-3		D13-133	E	41							
1st.	P1508	16-5712		455				P3465	ST-105	5A1			Vol	Tone	P3317	AM-60-Z	KSS-3	A2	D13-133	E	42							
2nd.	P2704	16-6133		455																								
3rd.	P2711	16-5714		455																								
1st.	P3048	16-6658		455																								
2nd.	P2606	16-6656		455																								
1st.	I-5712	16-5712		456																								
2nd.	I-5714	16-5714		455																								
1st.	I-5712	16-5712		175																								
2nd.	I-5714	16-5714		175																								
1st.	P3559	16-6658		455				P3564	ST-105	5A1			Vol	Tone	P3560	AM-63-Z	KSS-3	A2	D13-137	E	42							
2nd.	P2608	16-6656		455				11278	ST-165	5E10			Vol	Tone	4839	AM-60-Z	KSS-3	A2	D13-133	E	42							
1st.	4404	16-6658		455				11537	ST-736	8E10			Vol	Tone	4839	AM-60-Z	KSS-3	A	D13-133	E	42							
2nd.	4404	16-6658		455																								
1st.	I-5712	16-5712		455			E2			F2			Vol	Tone	†	†												
2nd.	I-5714	16-5714		455																								
1st.	I-5712	16-5712		†																								
2nd.	I-5714	16-5714		†																								
1st.	11539	16-6658		455				4983	ST-108	6A1			Vol	Tone	10441	AM-60-Z	KSS-3	A2	D13-133	E	42							
2nd.	10834	16-6658		455				11235	ST-119	10A4			Vol	Tone	11098													
1st.	10768	16-6658		455				10781	ST-105	5A1			Vol	Tone	10772	AM-60-Z	KSS-3	A2	D13-133	E	42							
2nd.	10769	16-6658		455																								

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND QIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Part No.	Eveready Part No.	Note	Burgess Part No.	Note	
																				"A"	"B"	"A"	"B"	
KNIGHT — Continued																								
B10515 thru B10518, B10527	9	6SK7, 6AB8, 6Q7, 6C5, 6F6, 5Y3, 6G5	12 Mfd.	PRS450-12		EZ1245		DH-16-450		PTM-12		Par Out	525	P-6012		T22R04		P-2952						
			10 Mfd.	PRS450-10		EZ164		DH-16-450		PTM-16		On Spkr.	A-3311		T22S64		A-2936							
B10525, B10526	16	6K7G, 6L7G, 6H6G, 6J7G, 6G5G, 26L6G, 5Z3	10 Mfd.	PRS450-11-11		BR1024		M-10-25		TA-10		Chk Pwr	P200	C-2304		T20C54								
			P1997	PRS450-11-11		EZ8835		DH-2X8-450		UT-88		In Cut	P200	C-1034		T22S70		A-2115						
			P1992	GL450-30		KR530		D-30-450		PLS-25		Out	P2007	A-3830		T22R04		P-2952						
			P1993	GL450-30		WR10		D-30-450		PLS-25		Out	3964	P-6120		T22S47		A-2901						
B10565 thru B10568	8	6AB8, 6K7G, 6Q7G, 6C5G, 6K5G, 5Y4G, 6G5	1108	PRS450-8		EZ8845		D-12-450		LS-12		On Spkr.	A-3823	2271										
B10575	5	6D8G, 6S7G, 6T7G, 41, 6ZY5G	4095	PRS450-8-8		EZ8845		M-8-450		UT-88		Chk												
			1693	PRS25-10		BR102A		M-10-25		TA-10		Pwr Out	4099											
B10577, B10578	5	6AB8, 6K7G, 6Q7G, 6K5G, 5Y4G, 6G5	4140	PRS450-8-8		EZ588		DH-2X8-450SS		TU-88		On S. I.	A-3878		T22S47		A-2931							
B10700	5	6A8GT, 6K7GT, 6J5GT, 25L6GT, 25Z5GT (47)	N-1366	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	4139	P-6297		T22R04		P-2949						
B10702 (Late)	4	6K7GT, 6J7GT, 25L6GT, 25Z5GT (40)	C-233			EZ32115		DSB-3X20-150		TA-220 & UT-201		Out	On Spkr.	A-3876		T22S45		A-2928						
B10726—(See Model B10725)																								
B10765, 65, 67—(See Model B10725)																								
B10780, B10781	8	6A8G, 6J5G, 11.7G, 6Q/G, 10W, 6Z5G	P1741	PPSA21**-4-4		EZ8825		DH-2X8-450 & M-10-25		UT-88		Pwr Chk P+ Out	P212x	A-3879		T22S47		A-2933						
B10782, 84, 86	6	6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6Z5G	P2140	PRSA200-8-8 & PRS25-10		EZ8825S		LM-28 & TA-5						C-1711	T20C52		I-2975							
B10790—(See Model B10791)																								
B10791—(See Model B10852)																								
B17100	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT	40, 90 Mfd.	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out		A-38		T22S45		A-2178						
B17101	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	20.103B	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
B17102	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	20.103B	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On S. I.	A-3876		T22S45		A-2928						
B17103, B17104	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT, 35Z5GT	30, 20, 11	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On S. I.	A-3876		T22S45		A-2928						
B17105	6	6SA7GT, 6SK7GT, 6SQ7GT, 25Z5GG	20.121	PRSA150-30-30		BRD3315		M-2X10-150		TA-330		Chk Out	40.75	C-1723		T20C52		C-2975						
			20.104	PRSA150-20		BR2015		M-20-150		UT-201		On Spkr.	A-3876		T22S45		A-2928							
B17106	8	6SK7GT, 6SA7GT, 6J5GT, 6SQ7GT, 25L6GT, 25Z5GT	20.133	PRSA150-50		BR5015		M-50-150		UT-501		Chk Out	40.3			T22S45		A-2928						
B17109	7	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 50L6GT, 35Z5GT	20.118	PRSA150-31-3		BRD331		M-2A30-140		TA-330		Chk Out	40.75A											
B17110	7	26SK7GT, 6SA7GT, 6J5GT, 6SQ7GT, 6V6GT, 80	20.89	PRS25-25		BR252A		M-25		TA-25		On S. I.	40.93	P-6012		T22R04		I-2952						
B17111, B17112	5	1A7GT, 1N5GT, 1H5GT, 175GT, 20.117A, 35Z5GT	20.117A	PRSA150-31-3		EZ2511		M-2X30-150		TA-330		Out	On S. I.	A-3877		T22S58		A-2930						
B17113, B17114	8	6SK7GT, 6SA7GT, 6SQ7GT, 25Z5GG	20.132	PRSA150-10-10		BRD251		M-100-25		TA-1616		Out	On S. I.	A-3881		T22S48		A-2934						
B17125, B17126	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	N-3302	PRSA150-40-40		BRD4415		M-2X40-150		TA-110		Pwr Out	40.93A	P-6012		T22R04		P-2952						
B17127, 28, 29	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	N-1366	PRSA150-30-30		BRD331		M-2X30-150		TA-330		Out	On S. I.	A-38		T22S45		A-2936						
B17128, 33, 34	5	1R5, 1T4, 1S5, 3S4, 4Z3	N-4206	PRSA150-30-30 & PRS25-100		BRD331		M-2X30-150 & M-100-100		TA-330 & UHC-102		Out	N-42	A-3329		T22S47		A-2927						
B17135	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	N-3114	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	N-35	A-3876		T22S45		A-2928						
B17136	6	6A8GT, 6K7GT, 6Q7GT, 6K6GT, 6X5GT (47)	N-3440			EZ5116				TA-1616		Pwr Out	N-34.1	P-6348		T22R02		B1	P-3048					
B17137, B17138—(See Model B10731)	5	6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT (44)	N-4178			EZ5116				UT-121		Out	N-34.1	A-3878		T22S47		A-2931						
B17140	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	N-1367	PRS150-12		BR252A		M-10-150				Pwr Out	N-41.1			T22S47		A-2931						
B17141, B17142	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	N-1367	PRS150-12		BR1215					Out	N-41.5	A-3878		T22S47		A-2932							
B17145	7	6SK7, 6SA7, 6SQ7, 6J5GT, 6X5GT	18-264	AF441 & PRS25-10		UP2245		DY-2X20-450 & M-50-25		EL-220 & TA-25		Out	80-21	A-3878		T22S47		A-2931						
B17150	5	12SA7GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT	P3355	PRSA150-31-31		BRD331		M-2X30-150		TA-330		Out	80-21.1	A-3878		T22S45		A-2928						
B-17155	7	26SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT, 6U5/6G5 (44)	2534			EZ5116				TA-1616 & TA-25		Pwr Out	1535	P-6011		T22R02		B1	P-3048					
D100, D101	5	12SA7GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT	20.103B	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3878		T22S47		A-2931						
D104, D105	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	N-3302	PRSA150-40-40		BRD4415		M-2X40-150		TA-110		Out	N-38	A-3876		T22S45		A-2928						
D109	6	6SK7GT, 6SA7GT, 6SQ7GT, 25L6GT, 25Z5GT	20.103B	PRSA150-30-30		BRD3315		M-2X30-150		TA-110		Out	A-3875		T22S45		A-2927							
D110	7	6SA7, 6SK7, 6SQ7, 25L6GT, 25Z5GT	18-256	PRSA150-30-30		BRD3315		M-2X30-150		TA-110		Out	On S. I.	A-3301		T22S60		A-2910						
D121, D122	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT	N-3554	PRSA150-40-40		BRD4415		M-2X40-150		TA-110		Out	On S. I.	A-3876		T22S45		A-2928						
D125	7	6SK7GT, 6SA7GT, 6SQ7GT, 6V6GT, 80	20.107A	PRS25-25		EZ5116		M-25-25		TA-25		Pwr Out	40.93	P-6011		T22R02		P-2951						
D127—(See Model B17113)	8	6SK7GT, 6SA7GT, 6SQ7GT, 6V6GT, 80	20.89	PRS25-25		BR252A		M-25-25		TA-25		Out	On S. I.	A-3877		T22S55		A-2930						
D130—(See Model B17140)	8	6SK7GT, 6SA7GT, 6SQ7GT, 6V6GT, 80	20.107A	PRS25-25																				

†Information not available.

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photocat Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st 2nd	300T 300B	16-5712 16-5714		456				732 726	ST-177 ST-178		8F18 12E18		Vol Tone	218 †	V-51-Z				D13-128		G1				Continued	KNIGHT B10515 thru B10518, B10827	
1st 2nd 3rd	P2001 P2002 P2003	15-6133 15-5714		455				P2017	ST-178	F6	12E18		Vol Tone Bass	P1989 P1990 P1991	M-64-Z V-60-Z				D13-130 D13-133		G1 G1					B10525, B10526	
1st 2nd	4110 4111	15-5712 15-5714		465				1858 2440		F2	F2		Vol Tone	4078 2199	AT-115 M-46-Z	KSS-3	A	D18-139X D13-123	E	41	G1					B10565 thru B10568	
1st 2nd	3283 3284	15-5712 15-5714		465				3676 3677	ST-108 ST-115	6A <sub>1</sub> 6A <sub>2</sub>		3671 3545	Vol Tone	3671 M-46-Z	D13-133			D13-133		G1	41:5	5501	H1		B10575		
1st 2nd	3283 3284	15-5712 15-5714		465				4141		F2	F2		Vc	4144	M-50-Z	A	D13-133		41	G1					B10577, B10578		
1st 2nd	N-1433 N-1432	16-6658		465				1-170	S-1-84		5F15		Vol	V-1434	AM-81-Z	KSS-3	A	D13-116		E	41					B10700	
								S-300		F2	F2		Vol	V-23	AM-40-S	KSS-3	A	D13-120	E	41						B10702 (Late)	
1st 2nd	15-5712 15-5714			456						F2	F2		Vcl	P2271												(See Model A 9757) (See Model B 10525)	
1st 2nd	P1735 P1690	16-5712 16-5714		450				P2143 P2144		F2	F2		Vol Tone	P2136 P2137	M-51-Z	A	C13-123		42	G1	P142	5300	H1		B10726, B10765, 66, 67 P2147		
1st 2nd	16-6658			455						F2	F2		Vol	V-50-Z	A	C13-133		41	G1						(See Model A 10724) (See Model A 10852)		
1st 2nd	35-228 35-229	16-6658		455				105.157	ST-195	4E-5			Vol	50.51A	V-50-Z	A	D13-133		41	G1						B10790	
1st 2nd	35-286 35-206	16-6658		456				105.177A		F2	F2		Vol	50.79	M-60-Z	A	C13-133		41	G1						B10791	
1st 2nd	16-6658			456						F2	F2		Vol	-	M-50-Z	A	D13-133		41	G1						B17100	
1st 2nd	35-205 35-206	16-6658		456				105.115	ST-195	5E27			Vol Tone	50.47A	M-50-Z	A	D13-133		41	G1						B17101	
1st 2nd	35-254 35-82	16-5712		456						F2	F2		Vol	50.72	T-116	A	D18-139X		41	G1						B17102	
1st 2nd	35-198 35-207	16-6658		456				105.150		F1	F1		Vol	50.67	M-50-Z	A	D13-133		42	G1						B17103	
1st 2nd	35-205 35-82	16-5712		456		L-26		105.186	ST-168	6E10			Vol	50.77	V-50-Z	A	D13-133		41	G1						B17104	
1st 2nd	35-117 35-151	16-6658		456				105.187 105.147	ST-168 ST-105	8E10 5A1			Tone	55.33	V-50-Z	A	D13-133		42	G1						B17105	
1st 2nd	35-254C 35-191	16-6658		456				105.181	ST-736	8E10 10E10			Vol	50.74A	T-114	A	D17-139X		41	G1						B17106	
1st 2nd	35-254C 35-82	16-6660		456				105.182 105.186	ST-736	8E10 10E10			Vol	55.32	V-50-Z	A	D13-133		42	G1						B17107	
1st 2nd	N-3300 N-3301	16-6658		456				N-3295	ST-105	5A1			Vol	N-3307	AM-60-Z	KSS-3	A	D13-133	E	41						B17108, B17112	
1st 2nd	N-1598 N-2890	16-6658		456				N-2889	ST-111	4A1			Vol	N-2886	AM-60-Z	KSS-3	A	D13-133	E	41						B17109	
1st 2nd	N-170 N-4255			456				N-4255		3A07			Vol	N-4213													B17110
1st 2nd	N-3043 N-3044	16-6658		456	N-3551	L-26		N-2624	ST-103	5A1			Vol	N-3045	AM-60-Z	KSS-3	A	D13-133	E	41						B17111, B-17112	
1st 2nd	N-2938 N-3657	16-5712		456				N-3436	ST-165	5E10			Vol	N-3065	AM-60-Z	KSS-3	A	D13-133	E	41						B17113, B-17114	
1st 2nd	N-4170 N-4171	16-6658		455				N-4175		F2	F2		Vol	N-4125													B17115
1st 2nd	N-3410 N-2643			455				N-3406	ST-108	5A1			Vol	N-3411	M-53-7	A	D13-137		42	G1						B17116	
1st 2nd	10-360 10-212	16-6658		252				79-302		F2	F2		Vol Tone	24-103 26-103 P-3346	A'M-60-Z M-5C-7	KSS-3	A	D13-133	E	41	G1						B17117, B17138
1st 2nd	P3345 P3346	16-5712 16-5714		455				P3553	ST-105	5A1			Vol	50.47A	V-50-Z	A	D13-133		42	G1						B17118, B17142	
1st 2nd	1640 1641			455				7914		F2	F2		Vol Tone	3538 3539 50.51A	M-53-Z M-50-Z	A	D13-137 D13-133		41	G1 G1						D100, D101	
1st 2nd	35-228 35-229	16-5712 16-5714		456				105.157	ST-195	4E45			Vol	50.47A	V-50-Z	A	D13-133		41	G1						D104, D105	
1st 2nd	N-3876 N-3754	16-6658		456				N-4315	ST-113	4A1			Vol	N-3877	A'M-60-Z	KSS-3	A	D13-133	E	41						D109	
1st 2nd	35-205 35-186	16-6658		455				105.154	ST-195	5E27			Vol	50.47A	V-50-Z	A	D13-133		41	G1						DI10	
1st 2nd	10-401 10-422	16-6658		455				79-323		4E45			Vol	55.28	M-50-Z	A	D13-133		41	G1						D-121, D122	
1st 2nd	N-3043 N-3081	16-5712 16-5714		456				N-3538 (15)	ST-113	4A1			Vol	N-3248	A'M-60-Z	KSS-3	A	D13-133X	E	41						D-125	
1st 2nd	35-205 35-82	16-6658		456				N-3539		F2	F2		Vol Tone	50.77 50.33	M-60-Z	A	D13-133		41	G1						(See Model B 17113) (See Model B 17140)	

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note		
KNIGHT—Continued	7	6SK7, 6SA7, 6SQ7, 6X6G, 6N7G.	20, 40, 20 Mfd									Pwr In Out		A-4713	T20D77		A-2922								
D132.....	7	6SK7, 6SA7, 6SQ7, 6X6G, 6N7G.	20, 40, 20 Mfd									Out On Spkr.		A-2201	T22566		A-2901								
D140, D141.....	4	1A7GT, 1NSGT, 1H5GT, 1Q5GT.	N-1367	PRS150-12...		BR1215...		M-10-150...		UT-121...		Out On Spkr.		A-3822	T22547		A-2932								
D149—(See Model D160, C161.....)	8	1A7GT, 1NSGT, 1H5GT, 1T5GT, 117Z4GT.	17113	18-266	PRSA150-30-30	BRD3815...		M-2X30-150...		TA-330...		Out On Spkr.		A-3881	T22548		A-2934								
D165—(See Model D170.....)	8	1A7GT, 1NSGT, 1H5GT, 1T5GT, 117Z4GT.	17109	18-271	PRSA150-40-40	BRD4415...		M-2X40-150...		TA-440...		Out N-3568		A-3876	T22545		A-2928								
D174.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-3114	PRSA150-40-40		BRD4415...		M-2X40-150...		TA-440...		Out N-2952		A-3876	T22545		A-2928								
D176.....	8	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT, 6U5.	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT, 6U5.	8425								Pwr Out 8918, 89191		A-3301	T22560		A-2905								
D180, 185, 186—(See Model D182)	14	6SK7, 6SA7, 6AC7, 6SI7, 6H6, 6J5, 6V6G, 5Y3G, 6U5 (51)	6SK7, 6SA7, 6AC7, 6SI7, 6H6, 6J5, 6V6G, 5Y3G, 6U5 (51)	51-266	AF3...	UP6C120...	DY-3X20-450...	EL-15...			Pwr Out 46-938		A-3311	T22564		A-2936									
D189, D190—(See Model D182)	14	6SK7, 6SA7, 6AC7, 6SI7, 6H6, 6J5, 6V6G, 5Y3G, 6U5 (51)	6SK7, 6SA7, 6AC7, 6SI7, 6H6, 6J5, 6V6G, 5Y3G, 6U5 (51)	45-256	AF3...	UP1545...																			
D197—(See Model D311, 315, 345, 355)	14	(See Model D125)																							
D312.....	9	6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 80, 8U5	20, 131	PRS450-16...	BR1645...	M-16-450...	UT-16...	Pwr Out 40,93A		P-6012	T22R04		P-2952												
D356, D367.....	5	1A7GT, 1NSGT, 1H5GT, 3Q5GT, 35Z5GT	20, 139	PRSA150-40-40	BRD4415...	M-2X40-150...	TA-440...	Out On Spkr.		A-2312	T22574		A-2901												
E10700, E10701—(See Model E10700)	5	1A7GT, 1NSGT, 1H5GT, 3Q5GT, 35Z5GT	20, 124	PRSA150-40-40	BRD4415...	M-2X40-150...	TA-440...	Out On Spkr.		A-3856	T22S47		A-2900												
E10702, E10703.....	4	6X7GT, 6J7GT, 25L6GT, 25Z6GT (40)	C-233		EZ32115...	DSB-3X20-150...	TA-220...	Out On Spkr.		A-3876	T22S45		A-2928												
E10704.....	5	6A8G, 6K7, 6Q7G, 25L5G, 25Z6G	C-237	AF888D...	UP44415...	DY-3X40-150...	EL-340...	Out On Spkr.		A-3876	T22S45		A-2928												
E10705, E10706.....	7	6A8G, 6J5G, 6K7G, 6F5G, 25L6G, 25Z6G	C-237	AF888D...	UP44415...	DY-3X40-150...	EL-340...	Out On Spkr.		A-3876	T22S45		A-2928												
E10707, E10708.....	7	6K8, 6K7, 6Q7G, 6J5G, 25A6G, 25Z6G (47)	C-233	AF444J...	UP11135...	DY-3X10-450...	EL-311...	Pwr Cut T-23		A-2201	T22S47		A-2901												
E10709, E10710.....	7	6K8, 6K7, 6Q7G, 6J5G, 25L6G, 25Z6G (47)	C-241	PRSA150-40-40	BRD4415...	M-2X40-150...	TA-440...	Chk Cut H-8		A-3301	T22S60		A-2905												
E10711, E10712.....	9	6K8, 6K7, 6H6, 26J5G, 5Y3G	C-245	GL450-12	KR512A	D-12-450	PLS-12...	Pwr Cut T-29		A-3311	T22S64		A-2905												
E10713, E10714.....	7	6A8G, 6K7G, 6Q7G, 6J5G, 25L6G, 25Z6G (47)	C-247	GL450-12	KR512A	D-12-450	PLS-12...	Out On Spkr.		A-3301	T22S60		A-2905												
E10715.....	4	1A7G, 1N5G, 1H5G, 1C5G	N-1367	PRS150-12...	BR1215...	M-10-150...	TA-240...	Out On Spkr.		N-1564	T22S47		A-2931												
E10716.....	4	1A7G, 1N5G, 1H5G, 1C5G	N-1367	PRS150-12...	BR1215...	M-10-150...	UT-121...	Out On Spkr.		A-3878	T22S47		A-2931												
E10718.....	5	6K8, 6K7, 6Q7G, 25L6G, 25Z6G (47)	C-238	AF22J4A...	UP1145C...	DY-316...	EL-202...	Out On Spkr.		A-3877	T22S60		A-2930												
E10719—(See Model E10818)	6	6D8G, 1H4G, 6S7G, 6T7G, 6L5G, 1J6G (49)	C-242		UP15035...	DY-2X15-350...	EL-254...	Chk Pwr In T-9, T-26		A-4713	T20D75		A-2900												
E10722—(See Model E10705)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3	P1939	GLS450-8-8	KRC588	D-2X8-450	PLS-88	Pwr Out		A-3830	T22S47		A-2905												
E10723—(See Model E10707)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3	P1937	GL450-3C	KR530	D-30-450	PLS-25	Out On Spkr.		A-3831	T22S47		A-2938												
E10725—(See Model E10822)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3																							
E10726—(See Model E10709)	11	6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G (49)																							
E10727—(See Model E10720)	11	6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G (49)																							
E10728—(See Model E10711)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3																							
E10744, E10745.....	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3	P1939	GLS450-8-8	KRC588	D-2X8-450	PLS-88	Pwr Out		A-3830	T22S47		A-2905												
E10751—(See Model E10724)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3	P1937	GL450-3C	KR530	D-30-450	PLS-25	Out On Spkr.		A-3857	T22S48		A-2937												
E10752—(See Model E10752)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3	1693	PRS25-10	BR102A	M-10-25	TA-10...	Out On Spkr.		A-3857	T22S48		A-2937												
E10765, E10765A.....	4	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10	BR102A	M-10-25	TA-10...	Out On Spkr.		A-3857	T22S48		A-2937												
E10766, E10766A.....	4	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10	BR102A	M-10-25	TA-10...	Out On Spkr.		A-3857	T22S48		A-2937												
E10775—(See Model E10786)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3	P1939	GLS450-8-8	KRC588	D-2X8-450	PLS-88	Out On Spkr.		A-3857	T22S48		A-2937												
E10779, 80, 81, 82—(See Model A10785)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3	P1937	GL450-3C	KR530	D-30-450	PLS-25	Out On Spkr.		A-3857	T22S48		A-2937												
E10783, E10784—(See Model E10766)	11	6A8G, 6K7G, 6J5G, 6F6G, 5Z3	P1939	GLS450-8-8	KRC588	D-2X8-450	PLS-88	Out On Spkr.		A-3857	T22S48		A-2937												
E10785, [E10785A—(See Model E10785)]	5	6D8G, 6S7, 6T7G, 6GGG, 6ZY5G, (Some Use Tuning Eye)																							
E10786.....	6	6K8, 6K7, 6Q7G, 6J5G, 6F6G, 5Z3																							
E10788.....	6	6K8, 6K7, 6Q7G, 6J5G, 6F6G, 5Z3																							
E10790.....	5	6D8G, 6S7, 6L5G, 6T7G, 6GGG, Some Use 6N5	4841, 1693	PRS150-20-20	BRD2215...	M-2X20-150	TA-220...	In Cut Pwr Out		10142	T20D75		A-2922												
E10792—(See Model E10766)	5	6D8G, 6S7, 6L5G, 6T7G, 6GGG, Some Use 6N5	1693	PRS25-10	BR102A	M-10-25	TA-10...	In Cut Pwr Out		10142	T20D75		A-2922												
E10793—(See Model E10766)	5	6D8G, 6S7, 6L5G, 6T7G, 6GGG, Some Use 6N5																							
E10794—(See Model E10788)	5	6D8G, 6S7, 6L5G, 6T7G, 6GGG, Some Use 6N5																							

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL					
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clarostat	Shaft	Switch	Note	IRC	Shaft	Switch	Note	Mfr.	Radiart	Note	Phonoart Set No.
1st. 2nd.				455				6-Sprkr.	ST-108	F8	6EV6		Vcl Tone	36X275. 40X212.	M-66-Z			D13-139			G1	18A33	5438	H2	KNIGHT D-132	
1st. 2nd.	N-3112 N-2648	16-6658		455				N-3408	ST-108	6A1		Vcl	N-3411	M-63-Z	A2		D13-137		42	G1				D-140, D-141		
1st. 2nd.	10-379 10-343	16-6658		455				79-314A	ST-105	5A1		Vcl	24-150	AM-63-Z	KSS-3		D13-137	E				(See Model B	1711	3)	D-149 D-160, D-161	
1st. 2nd.	N-3042 N-3044	16-6658	N-4-180	456	L-40			N-2524	ST-105	5A1		Vcl	N-3045	AM-60-Z	KSS-3	A	D13-133	E	41						D-165 D-170	
1st. 2nd.	N-2938 N-2890	16-6658		456	N-2832	L-26(or) L-40		N-2311	S-113	4A1		Vcl	N-2876	AM-60-Z	KSS-3	A	D13-133	E	41						D-174	
1st. 2nd.	9434 8435	16-6658		455	9424	L-25(or) L-40		8611		F2		Vcl	8910												D-176	
1st. 2nd.	55-936 56-935			456		L-40		46-812		F2		Vcl Bass Treble	85-281 87-281 48-281	M-63-Z M-60-Z		A	D13-137 D13-133		41	G1				(See Model D-125) — D-180, 185, 186 D-182		
3rd.	57-936			4.3																					D189, D190 D197 (See Model D-125) — D311, 315, 345, 355	
1st. 2nd.	35.254	16-6658		455				105.183		F2		F2	Vcl Tone Vol	50.70 55.35 50.60	M-60-Z	T-114		A	D17-139X		41	G1				D312
1st. 2nd.	35.284			456				105.187	ST-105	5A1						A2	D13-133		42	G1				D366, D367		
	35.285							S-300		F2		F2	Vcl	V-38	AM-40-S	KSS-3	A	D11-120	E	41						(See Model B-1711) 3) — E1070, E10701 (See Model D-125) — E10702, E10703
1st. 2nd.	I-27 I-28			456				S-519 S-519B S-615		F2		F2	Vcl Tone	V-22 V-109	M-40-S	M-63-Z		A	D13-137 D11-120		41	G1				E10704
1st. 2nd.	N-1683 N-1689	16-5712		456				N-1687 N-1688 S-613		F2		F2	Vcl Tone	V-22 V-109	M-40-S	T-78		A	D13-133X		41	G1				E10705, E10706
1st. 2nd.	I-29	16-5712		456				S-810 S-810A S-811 S-126		F2		F2	Vcl Tone	V-15 V-13 V-15 V-111	M-50-Z M-53-Z M-60-Z M-60-Z	V-20 V-13 V-15 V-111		A	D13-137 D13-133		41	G1				E10707, E10708
1st. 2nd.	I-31	16-5712		456												A	D13-133		41	G1				E10709, E10710		
1st. 2nd.	I-32	16-5712		456												A	D13-133		41	G1				E10711, E10712		
1st. 2nd.	I-33	16-5712		456												A	D13-133X		41	G1						
1st. 2nd.	I-34	16-5712																								
1st. 2nd.	N-1754 N-1596		N-1732	456	N-22			N-1743 N-1741 N-1544	ST-103 ST-115 ST-105	6A1 8A31 5A1			Vcl Tone Vol	N-1734 N-1735 N-1546	M-60-Z	V-60-Z		A	D13-133		41	G1				E10713, E10714
1st. 2nd.	N-1391	16-6658		456				N-1597	ST-105	5A1		Vcl	N-1604	AM-60-Z	KSS-3	A2	D13-133	E	42						E10715	
1st. 2nd.	N-1545 N-1509	16-6658		455				S-614		F2		F2	Vcl Tone	V-20 V-15	M-63-Z M-60-Z		A	D13-137 D13-133		41	G1				E10716	
1st. 2nd.	I-29	16-5712		456				S-76		F1		F1	Vcl Tone	V-20 V-110	M-63-Z M-60-Z		A	D13-137 D13-133		41	G1	F-4	(See Model A-1081) 8)	5411	H1	E10718
1st. 2nd.	I-28	16-5712		456																					E10720, E10721	
1st. 2nd.	P1920 P2704 P2711	16-5712		455				2-216	ST-173	F6	12E10		Vcl Tone	P27-5 P2705	T-115			D18-139X			G1					(See Model E-1070) 5) — E10722 (See Model E-1070) 7) — E10723 (See Model A-1082) 2) — E10725 (See Model E-1070) 9) — E10726 (See Model E-1072) 0) — E10727 (See Model E-1071) 1) — E10728 E10744, E10745
1st. 2nd.	4791	16-6658		455				4826 10123	ST-105 ST-115	5A1 8A31		Vcl	4103	AM-60-Z	KSS-3	A4	D13-133	E	45						(See Model A-1072) 4) — E10751 (See Model A-1085) 2) — E10752 E10765, E10766A	
1st. 2nd.	4792	16-6658		455				4983 10123	ST-105 ST-115	6A1 8A31		Vcl	4871	AM-60-Z	KSS-3		D13-133	E								
1st. 2nd.	4791	16-6658		455																						
1st. 2nd.	4792																									
1st. 2nd.	4110	16-5712		455				10149	ST-105	6A1		Vcl Tone	4871 10148	M-60-Z	KSS-3		B-3-133	E			4105	5301	H1	E10786		
1st. 2nd.	4111	16-5714		455				10150	ST-115	8A31		Vcl Tone	4871 10148	AM-60-Z	KSS-3		D13-133	E							E10788	
1st. 2nd.	4110	16-5712		455				10144	ST-105	F7		Vcl Tone	4871 10144	AM-46-Z	KSS-3	A	D13-122	E								
1st. 2nd.	4111	16-5714		455				10145	ST-115	F7		Vcl Tone	4872 10145	AM-60-Z	KSS-3		D13-133	E			3693	5413	H1	E10790		
1st. 2nd.	3283	16-5712		455				6 Inch.	ST-105	6A1		Vcl Tone	4871 10145	AM-46-Z	KSS-3	A	D13-123	E	41						(See Model E-1076) 5) — E10792 (See Model E-1076) 6) — E10793 (See Model E-1078) 8) — E10794	
1st. 2nd.	3284	16-5714						8 Inch.	ST-115	8A31		Vcl Tone	4872 10145	AM-46-Z	KSS-3											

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES										
		No. Tubs	Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor	Note	Thordarson Part No.	Note	Marit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note			
			Dial Light Type Listed in Parentheses	Part No.																		"A"	"B"	"A"	"B"			
KNIGHT — Continued		5	6A7, 6K7, 6Q7G, 41, 81, Some Use 6U5.	10245	PRS450-8			BR845		M-8-450		UT-8		Pwr Out	4139	P-6289		T22R00		F-2949								
E10795		5	6A7, 6K8, 6Q7G, 6C5G, 6L6, -6AF5G, 6AE5G, 5Z3	10470	GL450-30			KR530, E28845		D-30-450, OH-3X6-450SS		PLS-30		Chk Pwr Out	10226, 10218	P-6014		T22R06		P-2954								
E10797, 98, 99		11	6K7, 6K8, 6Q7G, 6C5G, 6L6, -6AF5G, 6AE5G, 5Z3	10102	PRS25-10			BR102A		M-10-25		TA-10		On Spkr.	A-3830			T22S47		A-2931								
E10800 — (See Model E10801, E10802)		5	6ASGT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT (40).	C-230	PRS150-16			BR1615		M-16-150		J-151		Out	On Spkr.	A-3875		T22S45		A-2925								
E10803 — (See Model E10704)		5	6D6, 6C6, 25L6, 25Z5 (47).	C-240	PRS150-20			BR2015		M-20-150		UT-201		Out	On Spkr.	A-3876		T22S45		A-2923								
E10805 — (See Model E10718)		4	6D6, 6C6, 25L6, 25Z5 (47).	C-235										Out	On Spkr.													
E10807, 08, 09 — (See Model E10704)		5	6K7, 6K8, 6H6, 6J5G, 6V6G, 5U4G.	C-251	UP15035					DY-2X15-35C		EL-254		Chk Pwr Out	H-10, T-34, On Spkr.	A-3311												
E10808 — (See Model E10704)		4	6D6, 6C6, 25L6, 25Z5 (47).	C-250	PR25-12					D-16-455		PLS-16																
E10809 — (See Model E10711)		5	6K7, 6K8, 6H6, 6J5G, 6V6G, 5U4G.	C-247	BR252A					M-25-25		TA-25																
E10825 thru E10830	— (See Model E10720).																											
E10831, E10832 — (See Model E10818)		4	6C7G, 1D5G-P, 1F7G, 1G5G (49).	C-230	PRS150-16			BR1615		M-16-150		UT-161		Out	On Spkr.	A-3822		T22S47		A-2932		X-125 & 762S		20F2... 5308.				
E10835, E10836		4	6C7G, 1D5G-P, 25Z6	P2434	PRS150-30			BR3015		M-30-150		UT-301		Out	On Spkr.	A-3876		T22S45		A-2928								
E10855, E10855 thru E10858		4	6K7, 6J7, 25L6, 25Z6	P2500	PRS150-12			BR1215		M-10-150		UT-121																
E10880, E10881		16	6K7G, 6L7G, 6H6G, 6J7G, 6F6G, -6J5G, 6L6G, 5Z3	P1997	PPSA450-8-1			FZ8835		DH-2X5-450		UT-65		Chk Pwr In	P2005	C-2304		T20S54										
E10882A, 83A, 84A, 85A, 86A, 87A		5	6D8G, 6S7, 6T7G, 6G6G, 6ZY5G, 6ZY5G.	P1992	GL450-30			KR530		D-30-450		PLS-25																
E10890 — (See Model E10724)		5	6D8G, 6S7, 6T7G, 6G6G, 6ZY5G, 6ZY5G.	P1993	PR5030			P1994		D-30-450		PLS-25																
E10891 — (See Model E10852)		5	1R5, 1T4, 1S5, 1S4, 35Z5	P1989	UP4CJ62			EZ8845		M-2X8-453		EL-351		Out	P4598													
E10895		5	1R5, 1T4, 1S5, 1S4, 35Z5	P4589	DY-304					M-2X8-450				Out														
E10900, 01, 02, 03 — (See Model E10787)		6	6A8G, 6K7, 6Q7G, 6K6G, 5Y4G, 6U5.	4772	PRSA450-8-8			BR102A		M-10-25		TA-8		Pwr Out	4139, On Spkr.	P-6289		T22R03		P-2949								
E10905		6	6A8G, 6K7, 6Q7G, 6K6G, 5Y4G, 6U5.	1693	PR25-10			BR102A		M-10-25		TA-11		Pwr Out	4848			T22S47		A-2331								
E10906, E10907		7	6S7, 6K8, 6T7G, 6G6G, 6Z7G, 6N5	10036	PR25-10			BRD2225		M-10-25		TA-10		Out	On Spkr.	A-3880		T22S47		A-2901								
E10910, E10911		5	1C7G, 1D5G-P, 1H4G, 1E5G-P, 1G5G, 4-1	1093	PRS25-10			BR102A		M-10-25		TA-10		Out	On Spkr.	A-3822		T22S47		A-2932		X-125 & 762S		20F2... 5308.				
E10912, 13, 16, 17 — (See Model E10765)		5	1D7G, 1E5G-P, 1H4G, 1E5G-P, 1G5G, 4-1	40, 40 Mfd	PRSA150-40-40			BRD4415		DSB-2X40-150		-A-4-5		Out	On Spkr.	A-3876		T22S45		A-2928								
E10914, E10915 — (See Model E10766)		5	1D7G, 1E5G-P, 1H4G, 1E5G-P, 1G5G, 4-1	EC-3	PRSA150-40-10			BRD4215		DSB-2X40-150		TA-240		Out	On Spkr.	A-3876	B3	T22S45	B3	A-2922	B3							
E10920 — (See Model E10788)		4	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Y4 (47)	EC-10	PRSA150-40-40			BRD4415		M-2X40-150		TA-440		Out	On Spkr.	A-3878	B3	T22S46	B3	A-2930	B3							
E10925 — (See Model E10755)		5	12BE5 / 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Y4 (47)	EC-3	PRSA150-40-20			BRD4215		DSB-2X40-150		-A-4-5		Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3							
SA190		5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47) (or Miniature Equivalents)	EC-3	PRSA150-40-10					M-2X40-150		TA-440		Out	On Spkr.	A-3878	B3	T22S46	B3	A-2930	B3							
58160		4	12SA7, 12SK7, 12SQ7, 50L6 (47) (or Lock-In Type Equivalent)	EC-10	PRSA150-40-40					M-2X40-150		TA-440		Out	On Spkr.	A-3878	B3	T22S46	B3	A-2930	B3							
58175, 5B176		5	12BE5 / 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35W4 (47)	EC-3	PRSA150-40-20					M-2X40-150		TA-440		Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3							
5B185		4	12SA7, 12SK7, 12SQ7, 50L6GT (47)	A18-280	PRSA150-40			BR4015		M-40-150		UT-40		Out	B80-230	A-3876		T22S45		A-2926								
5C290		4	1A7GT, 1N5GT, 1N5GT, 3Q5GT	EC-4	UP4415					DY-2X40-150		EL-3-5		Out	On Spkr.	A-3878	B3	T22S46	B3	A-2931	B3	746 432		M32				
5A122		6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	EC-6	PR25-100					M-100-25		UHC-12		Out	22E8	A-3877		T22S62		A-2930								
5A127		6	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 11Z6GT (47)	25E6	EZ5515					DHN-2X50-150		EL-25		Out	22E7	A-3877		T22S62		A-2930								
5A127		6	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 11Z6GT (47)	25E1	UP5515					DY-2X50-150		EL-25		Cut	22E7 (3)	A-3878		T22S47		A-2930		746 432		M30				
5A129		6	12SA7, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	EC-3	UP4415					DY-2X40-150		EL-242		Cut	22E9	A-3877		T22S62		A-2930								
5A195		5	12SA7GT, 12BA6, 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT/35W4 (47)	EC-3	UP5515					DY-2X40-150		TA-240		Cut	22E9	A-3875	B3	T22S45	B3	A-2928	B3							
6B122 — (See Model E10727)		6	1A22	N-3558	AF86D					DY-2X40-150		EL-25		Out	N-375	A-3330												
6B122 — (See Model E10727)		6	1A27	6-1A7, 1A7, 14Q7, 14B6, 35A5, 35Y4 (47)	25E22	PR150-12 & AF1010D					DY-2X50-150 & M-10-150		EL-35 & TA-25		Chk Cut	22E21												
6D225, 6D226		6	12BA6, 12BE5, 12S8GT, 50B5	25E3	BR550					M-25-25		EL-55		Cut	22E20	A-3850		T22S46		A-2928								
7B220		6	12BA6, 12BE5, 12S8GT, 50B5	25E23	EZIA135C & BR1225					EZIA135C & BR1225		EL-253 & TA-42		Pwr Out	C-TR2	A-3824		T22R01		A-2904								
88210		8	6SA7, 6SK7, 6SQ7GT, 6SJ7GT, 6K8GT, 6X5GT (47)	15, 15, 15 Mfd	UP4445					DY-2X40-150		EL-203		Pwr Out	C-RT1	A-3824		T22S46		A-2904								
11C300		11	6BA6, 7Q7, 7F8, 7AH7, 7AG7, 7AB, 7CB, 7F7, 7C5, 5Y3GT, (47)	40, 40 Mfd	AF88J					DY-2X40-150		EL-240		Pwr Out	22E13	A-3823		T22R05		A-2904								
				12 Mfd	PR3350-12					M-10-350		UT-123		Pwr Out				T22S60		A-2904								
				4 Mfd	PR250-4					UT-42																		

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL								
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	JRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photocell Set No.					
1st.	4403	16-5712		455	t.	t.		4141	ST-167		5E18		Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41			Continued	KNIGHT	E10795						
2nd.	4404	16-5714						1049C	ST-168		6E18																				
1st.	10220	16-5714		455				10124	ST-757		8E18														E10797, 98, 99						
2nd.	10221	16-5714						10393	ST-175		10E15																				
1st.	-29	16-5712		455				10394	ST-173		12E15																				
2nd.	-30	16-5714																													
1st.	I-35	16-5712		456				S-2C1			F2		F2	Vol	V-13	X-62-Z		A	D13-133		41	G1				(See Model E10704)	E10800				
2nd.	I-36																									E10801, E10802					
3rd.	I-37																														
1st.	I-20	16-6658		455				S-25	ST-105		5A1			Vol	V-18	M-60-Z		A	D13-133X	T-78							(See Model E10720)	E10825 thru E10830			
2nd.	I-21	16-6660							P2435		F1		F1	Vol	P2498	M-51-Z		A	D13-133	D13-133	42	G1				(See Model A10818)	E10831, E10832				
1st.	P2001	16-5712		455				P2017	ST-173	F1	12E18			Vol	P1989	P1991	M-60-Z		D14-125		41	G1				(See Model E10744)	E10830, E10751				
2nd.	P2002	16-6133																	D13-133							E10835 thru E10855					
3rd.	P2003	16-5714																								E10881					
1st.	4110	16-5712		455				10149	ST-108		6A1			Vol	4871	AM-60-Z	KSS-3	C	D13-133	10148							(See Model A10724)	E10882A, 83A, 84A, 85A, 85G, 87A			
2nd.	4111	16-5714						10150	ST-115		8A31			Tone			M-46-Z	A2	D13-123							(See Model A10852)	E10830				
1st.	P4610	16-5712		455				P4623						Vol	P4612	AM-63-Z	KSS-3	A	D13-137	E	41						(See Model E10895)	E10895			
2nd.	P4712	16-5714																													
1st.	3283	16-5712		455				411	ST-157		5F12			Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41						(See Model E10797)	E10900, 01, 02, 03			
2nd.	3284	16-5714						1024	ST-737		8F18							D13-123								E10905					
1st.	4110	16-5712		455				10064	ST-104		8A4			Vol	10057	AT-118	KSS-3		D18-139X	E								E10906, E10907			
2nd.	4111	16-5714						10953	ST-101		12A4			Tone	10058													E10910, E10911			
1st.	4791	16-6658		455				2995	ST-105		6A1			Vol	4803	AM-60-Z	KSS-3	A1	D13-133	E	45										
2nd.	4792							3721	ST-115		8A31			Tone	4852																
1st.	C-191-1	16-6666		455				B1-037	ST-105		5A1			Vol		M-60-Z		A	D13-133		41	G1									
2nd.	C-191-2	16-6667						SPK-4	ST-105		5A1			Vol		M-60-Z		A	D13-133		41	G1									
1st.	L1-1	16-6666		455										Vol		M-63-Z		G1	D13-137		41	G1									
2nd.	L1-2	16-6667																													
1st.	L1-1	16-6658		455	L-75	L-75-A		SPK-4	ST-105		5A1			Vol	VC-4	AM-63-Z	KSS-3	A	D13-137	E	41								SB160		
2nd.	L1-2	16-6660						SPK-4	ST-105		5A1			Vol	VC-3	AM-63-Z	KSS-3	A	D13-137	E	41								SB175, SB176		
1st.	A10-158	16-6658		455	10753	L-73		B79-352	ST-177		5A15			Vol	A24-164	AM-60-Z	KSS-3	A	D13-133	E	41								SB185		
2nd.	B10-454	16-6660						SPK-5	ST-175		5A1			Vol	VC-2	AM-63-Z	KSS-3		D13-137	F									SC-290		
1st.	L1-3	16-6666		455																											
2nd.	L1-4	16-6667						1E1			46A1			Vol	28E7	AM-60-Z	KSS-3	A	G7	D13-133	F	41									6A122
1st.	20E20	16-5740		455				1E12			46A1			Vol	28E8	AM-60-Z	KSS-3	A	D13-133	E									6A127		
2nd.	20E21	16-5742														28E6 (or)	AM-63-Z	KSS-3		D13-137	E										
1st.	20E53	16-6666		455													28E12														
2nd.	20E54	16-6667						SPK-4	ST-125		5A1			Vol	VC-2	M-60-Z		A	G1	D13-133		41	G1								6A195
1st.	L1-1	16-6666		455													M-63-Z		A	D13-137		41	G1								
2nd.	L1-2	16-6667																													
1st.	N-4872	16-6658		455				N-4368	ST-105		5A1			Vol	N-5026 (or)	AM-60-Z	KSS-3	A	C13-133	E	41									6B122	
2nd.	N-5571	16-6660						1E25			46A1			Vol	28E22	AM-60-Z	KSS-3	A	D18-139X	E	41									6B127	
1st.	20E13			455	& 10.7														D13-133	E	41								6C225, 6D225		
2nd.	20E15																												7B220		
1st.	C-LF-1	16-6658		455		L-70		C-SPI	ST-108		5A1			Vol	A-VC-1	C-VC-1	M-60-Z	A	G7	D13-133	D16-119		41	G1							8B210
2nd.	C-LF-2	16-6650																													
1st.																													11C-300		
2nd.																															

<sup>t</sup> Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No.	Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
				Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"	
LAFAYETTE																									
B-13.	8	6J7G, 6C5G, 6K7G, 6H6, 6F5G, 6F6G, 5Y3G, 6G5.	44X31, 45X35.	GL450-12, GL450-8.	KR512, KR508.		D-12-450, D-8-450.		PLS-12, PLS-8.		Pwr Out	†	P-6012, A-3878.	T22R04, T22S47.		P-2952, A-2931.									
B-30, B-32.	12	6K7, +76, +6F6, +80.	P44X20, P44X21, P44X11.	GL450-30, GL450-16.	KR530, KR516A.		D-30-450, D-16-450.		PLS-30, PLS-16.		Chk Pwr In Out	53X82, 50X24, 51X26.	C-1710, P-6163, A-4752, A-3830.	T20C54, T22R07, T20D77, T22S74.		P-2955, A-2921, A-2905.									
B-33.	11	6K7, +6J7G, +6C5G, 6H6, +6F6G, 5Y3G, 6G5.	44X30, 44X11, 45X22.	GL450-16, GL450-16, PRS25-25.	KR516A, KR516A, BR252A.		D-16-450, D-16-450, M-25-25.		PLS-16, PLS-18, TA-25.		Pwr Out	†	P-6013, A-3311.	T22R06, T22S64.		P-2953, A-2936.									
B-49, B-50.	4	6J7, 25L6GT, 25Z5GT (44).	45X237.					DSB-302.			Out	†	A-3876.	T22S45.		A-2928.									
B-64.	6	6F7, 6D6, 6B7, 12A5, 12Z3.	P-81016.		EZ588.		DH-2X8-450SS.		TU-88.		Pwr Chk Out	†		†											
B-87.	6	6K7, +6C5, +6F6, 5Z4, 6G5.	44X10, 44X11, 45X219.	GL450-16, GL450-16, PRS25-25.	KR516A, KR516A, EZ8845S.		D-16-450, D-16-450, M-25-25.		PLS-16, PLS-18, TA-25.		Pwr Chk Out	†	A-2203, A-3311.	T22S46, T22S64.		A-2930, A-2938.									
B-92 (Late).	6	6K7, 6J7, 6B7, 41, 6A6.																							
B-100, B-101, B-102.	9	6SK7, 6SA7, 6SQ7, 36V6GT, 5Y3GT, 6AD6GT.	45X289.	AF88J4A.	UP4445C.		DY-314.																		
B-112.	8	6S17, 6J5GT, +6K7, 6SQ7, 6V6GT, 5Y3G, 6U5.	45X277.	PRS450-40.	BR4045.		M-40-450.																		
B-195.	11	6SK7, 6J5GT, 6S17, +6SQ7, +6K6GT, 5Y3G, 6U5.	45X322.	PRS450-40, PRS450-20.	BR-4045, BR-2045.		M-40-450, M-20-450.																		
BB-1-7.	8	6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3G, 6U5 (51).	44X39, 44X40.	GL450-20, GL450-40.	KR520, KR540.		D-20-450, D-40-450.		PLS-20, PLS-40.		Pwr Out	†	P-6012, A-3877.	T22R04, T22S58.		P-2952, A-2930.									
BB-11.	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6N7.	45X294.																						
BB-22.	5	12SA7, 12SK7, 12SQ7, 35LGQT, 35Z5GT.	45X265, 45X268.	EZ2215C.			DSB-302.																		
BB-27.	6	12SA7, 12SK7, 12SQ7, 35LGQT, 35Z5GT, 5AB5 (51).	45X267, 45X261.	EZ2215C.			DSB-302.																		
BB-68.	6	6SK7, 6SA7, 6H6, 6V6G.	45X252.	BRD2235.																					
BB-69.	5	6SK7, 6SA7, 6SQ7, 41.	45X253.	PRS450-40.	BR4045.		M-40-450.	DY-311.	EL-323.		Pwr Out	†	A-3877.	T22S58.		A-2930.									
BB-73.	6	1A7GT, +1N5GT, 1H5GT, 3Q5GT, 35Z5GT.	45X268, 45X269.	AF88BD, AF44D4DA, UFEC161.	UP44415, DY-304.		DY-3X40-150.	EL-340.	EL-361.		Pwr Out	†	A-3878, A-3856.	T22S45, T22S47.		A-2928, A-2900.	746 & 7482.	6G3 & M30.							
BB-73A.	6	1PG1, 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 117Z6G/GT.	12001, 12179.	PRS150-40-40, PRS25-50.	BRD4415, BR502.		M-2X40-150.	TA-440.	TA-50.		Chk Out Vib	†	A-3856.	T22S47.		A-2900.		746 & 7482.	6G3 & M30.						
BB-75.	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6B6G, 6N7G.	20, 40, 20Mfd.																						
BB-110.	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT.	45X295.																						
BL-1, BL-15.	7	6K7, 76, 5B7, 6F5, 80.	44X10, 44X11.	GL450-16, GL450-16.	KR516A, KR516A.		D-16-450, D-16-450.		PLS-18.		Pwr Out	†	A-3878, P-6012.	T22S47, T22R04.		A-2931, A-2952.									
C-37.	11	6K3, 6D6, 6AF6G, 6Q7, +76, +6V6, 80 (44).	16, 16 Mid.	PRS450-B.	KR516A.		D-16-450.		PLS-16.		Pwr Out	†	A-3878, P-6013.	T22S47, T22R06.		A-2931, P-2953.									
C-38.	11	6K3, 6D6, 6Q7, +76, +6V6, 80 (44).	16, 16 Mid.	PRS450-B.	KR516A.		D-16-450.		PLS-16.		Pwr Out	†	A-3878, P-6013.	T22S47, T22R06.		A-2931, P-2953.									
CC-48.	12	6SK7, 6K6, +6SQ7, +25L6, +25Z5, 6U5 (44).	15 Mid.	PRS150-16.	BR1615.		M-16-150.	UT-161.																	
D-3.	6	6D8G, 1D5GP, 6T7G, +1H4G, 1J6G.	10 Mfd, 18-233.	PRS25-10.	BR102A.		M-10-25.	TA-10.	UT-88.		Pwr In	80-161.	A-4713.	T20D75.		A-2920.									
D-4.	7	6A7, 6D6, 75, 76, 6AC5G, 80, 6G5.	18-256.	PRS450-10-10.	BRD1145.		M-2X10-450.				Pwr Out	80-164.	A-3831.	T22S47.		A-2938.									
D-5.	6	6K8G, 6D6, 75, +25LG, 25Z5.	18-237.	PRS150-40-40.	BRD4415.		M-2X40-150.	TA-440.			Pwr Out	80-159.	P-6011.	T22R02.		P-2951.									
D-6.	5	6A7, 6D6, 6Q7G, 41, 84.	18-238.	PRS25-10.	BR102A.		M-10-25.	TA-10.			Pwr Out	80-162.	A-3878.	T22S58.		A-2931.									
D-9.	6	6SA7GT, 6SK7GT, 6SQ7GT, 25LGQT, 25Z6GT, 6P5GT.	18-236.	PRS450-8.	BR845.		M-8-450.	UT-8.			Pwr Out	80-162.	P-6013.	T22R06.		P-2953.									
D-14.	4	6A7, 34, 1B6, 41 (40).	18-45.		EZ8825.		M-2X8-250.		LM-28.		Pwr Out	80-123.	A-3878.	T22S47.		A-2931.									
D-18.	7	6K7, 6A8, 6K7G, 6R7G, 6V6G, 6R7, 6X5G.	18-221.								Pwr Out	80-154.	A-3878.	T22S47.		A-2931.									
D-19.	6	6A7, 6D6, 75, 41, 80, 6G5 (46).	18-102.		EZ-8825 & BR102A.		M-2X8-250, & M-10-25.		LM-28 & TA-10.		Pwr Out	80-104.	A-3878.	T22R02.		P-2951.									
D-22.	5	6D8G, 6N5, 6S7G, 6T7G, 1F5G (40).	18-45.		EZ8825.		M-2X8-250.		LM-28.		Pwr Out	80-134.	A-3857.	T22S48.		A-2937.									

<sup>†</sup>Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Marin Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note				
																			"A"	"B"	"A"	"B"				
LAFAYETTE—Continued																										
D-23	5 6A7, 6D6, 6Q7G, 25B5, 25Z5 (46)	18-211	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out ↑	A-3877		T22S46		A-2930										
D-26 (Early)	6 6SA7GT, 6SK7GT, 6P5GT, 6SQ7GT, 6K6GT, 5W4GT	10-254			BRD2235						Pwr Out	P-6297		T22R00		P-2949										
D-26 (Late)	6 6A8, 6SK7GT, 6P5GT, 6SQ7GT, 6K6GT, 5W4GT	10-10 Mfd.	PRS25-10		BR102A		M-10-25		TA-10		Pwr Out	A-3878		T22S47		A-2931										
D-33	6 6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z5GT (51)	18-255	PRS150-30-30		BRD3315		M-2X30-150		TA-330		Pwr Out	A-3878		T22S47		P-2949										
D33-G	7 12A8GT, 12SK7, 12SQ7, 12SQ7, 35L6GT, 6N5, 35Z5GT (47)	5.365A	AF101010D4A		UP5515C		DY-419		EL-340 TA-10		Out ↑	A-3876		T22S45		A-2928										
D37	7 6K7, 6AB, 6K7G, 6Q7G, 6J5G, 6N7G, 024	18-204	PRSB450-B-8 PRS450-8		EZ8845		DH-3X8-450SS		TU-88 UT-8		Pwr In Out	80-I11 80-119		A-4405		T20D75		A-2922								
D42	7 6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 6K6GT, 5W4GT, 6U5	18-254	PRS25-25		BRD2235 BR252A		M-25-25		TA-25		Pwr Out	80-179		P-6011		T22R02		P-2951								
D43, D44	4 6D6, 6F5G, 25L6G, 25Z5G	18-234	PRSA150-30-30 PRS25-25		EZ3215C		DSB-303		TA-330 TA-25		Out	On Spkr.		A-3876		T22S45		A-2928								
D52	5 6A7, 6D6, 75, 41, 024	4-8 Mfd.	PRS450-B-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	↑		A-3878		T22S47		A-2931								
D58, D59	5 6A7, 6D6, 75, 25L6, 25Z5	18-232	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	↑		A-3876		T22S45		A-2928								
D64	7 6A7, 6D6, 75, 76, 6AC5G, 80, 6G5	18-266	PRS450-10-10		BRD1145		M-2X10-450				Pwr Out	80-159		P-6011		T22R02		P-2951								
(See Model D4)	6 6SA7GT, 6SK7GT, 6P5GT, 6SQ7GT, 25L6GT, 25Z5GT (51)	18-255	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Pwr Out	On Spkr.		A-3878		T22S58		A-2931								
D66	8 6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 6K6GT, 5W4GT, 6U5	18-243	PRS25-25 AF44J		BR252A UP2245		M-25-25 DY-2X20-450		TA-25 EL-220		Pwr Out	80-195 On Spkr.		P-6011 A-3878		T22R02 T22S47		P-2951 A-2931								
D-69	8 6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 6K6GT, 5W4GT, 6U5	18-256	PRS25-25 AF44J		UP2245		DY-2X20-450		TA-25 EL-220		Pwr Out	80-195 On Spkr.		P-6011 A-3878		T22R02 T22S47		P-2951 A-2931								
D-71	8 6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 6K6GT, 5W4G, 6U5	18-243	AF44J PRS25-25		UP2245 BR252A		EL-220		TA-25		Pwr Out	80-189		P-6011 A-3878		T22R02 T22S47		P-2951 A-2931								
D72, D73	6 6SA7GT, 6P5GT, 6SK7GT, 6SQ7GT, 25L6GT, 35Z5GT (51)	18-255	PRSA150-30-30		BRD3315		M-25-25		TA-25		Out	On Spkr.		A-3876		T22S45		A-2928								
D90	6 6SA7GT, 6SK7GT, 6P5GT, 6SQ7GT, 6K6GT, 5W4GT	18-254	PRS25-25		BRD2235 BR252A		M-25-25		TA-25		Pwr Out	18-179 On Spkr.		P-6011 A-3878		T22R02 T22S47		P-2951 A-2931								
D93	5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT	18-263	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	80-196		A-3881		T22S48		A-2934		744 & 7482		F4P1		^M30		
D131, D132, D133	4 12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	18-265	PRSA150-30-30		UP3315 EZ3215C		DSB-303		TA-330		Out	On Spkr.		A-3876		T22S45		A-2928								
D247	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	18-266	PRS25-25 PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.		A-3876		T22S45		A-2928								
D251	7 6SA7, 6SK7, 6SQ7, 25L6GT, 25Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.		A-3301		T22S60		A-2905								
D294, D314, D315	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.		A-3876		T22S45		A-2928								
E186	6 12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT	12001	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Chk Out	12041 On Spkr.		C-1325 A-3876		T20C53 T22S45		C-2975 A-2928								
E-189	9 6SA7, 6SJ7, 6SK7, 6SQ7, 6SF5, 6K6G, 5Y3G, 6U5	12400	PRS450-10 PRS450-30		BR1045 BR3045		M-10-450 M-30-450		UT-12 UT-30		Pwr Out	11436 ↑		P-6012 A-3311		T22R04 T22S64		P-2952 A-2936								
FA15W, FA15Y	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	40-40 Mfd.	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Out	On Spkr.		A-3876		T22S45		A-2928								
FE-5	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	11953-E	PRSA150-30-30 PRS25-25		EZ3215C		DSB-303		TA-330 TA-25		Out	10588B		A-3876		T22S45		A-2928								
FE-141	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	11994	PRS25-25 AF888D		UP4415		DY-3X40-150		EL-340		Out	105104		A-3876		T22S45		A-2928								
J62, J62C	6 1407, 1447, 1486, 35A5, 35Y4 (47)	50-30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	↑		A-3876		T22S45		A-2928								
JS-130	6 1N5GT, 1A7GT, 1H5GT, 3Q5GT, 35Z5GT	20.103B 20.120	PRS150-30-30 PRS25-100		BRD3315 BRH251		M-2X30-150 M-100-25		TA-330 UHC-102		Out	↑		A-3856		T22S47		A-2900		745 & 7482		8FL		^M30		
JS-177, JS-178	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	20.103A	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	↑		A-3876		T22S45		A-2928								
JS-179, JS-180	5 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT	20-122	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Chk Out	40.75 ↑		C-1227 A-3876		T20C52 T22S45		C-2981 A-2928								
JS-181	6 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT	20.121 16 Mfd.	PRSA150-30-30 PRS150-16		BRD3315 BR1615		M-2X30-150 M-16-150		TA-330 UT-161		Chk Out	40.75 ↑		C-1227 A-3876		T20C52 T22S45		C-2981 A-2928								
MC-108, MC-10X	5 12BE6, 12BA6, 12AT6, 50B5, 35W4	50-30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	↑		A-3876		T22S45		A-2928								
MC-11	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	CL10007	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	TO-10000		A-3863		T22S45		A-2928								

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quant Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photocell Set No.		
1st.	10-177			456				79-221		F2		F2	Vol	24-106	M-63-Z		A.		D13-137		41	G1		(Co	ntr	ued -	LAFAYETTE	
2nd.	10-163							79-278		F2		F2	Vol	24-144	M-60-Z		A.		D13-133		41	G1					D-23	
1st.	10-312	16-5712		455						F2		F2	Vol	†	M-63-Z		A.		D13-137		41	G1					D-26 (Early)	
2nd.	10-312	16-5714		455						F2		F2	Vol	24-144	M-60-Z		A.		D13-133		41	G1					D-26 (Late)	
1st.	10-317	16-5712		455				79-277		F2		F2	Vol	†	M-63-Z		A.		D13-137		41	G1					D-33	
2nd.	10-312	16-5714								F2		F2	Vol	†	M-63-Z		A.		D13-133		41	G1					D-33G	
1st.	1.259	16-5712		455						F2		F2	Vol	†	M-63-Z		A.		D13-137		41	G1					D-37	
2nd.	1.259	16-5714								F2		F2	Vol	24-103														
1st.	10-111	16-6658		262				79-206		F2		F2	Vol	24-103														D-37
2nd.	11-112	16-6660								F2		F2	Vol	24-144	M-60-Z													
1st.	10-315	16-5712		455				79-278		F2		F2	Vol	24-144	M-60-Z		A.		D13-133		41	G1					D-42	
2nd.	10-312	16-5714								F1		F1	Vol	24-277	M-34-V		A.		D16-118		41	G1					D-43, D-44	
1st.	†			456						F2		F2	Vol	†	M-60-Z				D13-133		†	G1					D-52	
2nd.	†			455						F2		F2	Vol	24-124	M-60-Z		A.		D13-133		41	G1					D-58, D-59	
1st.	10-317	16-6658		455				79-283		F2		F2	Vol	24-146	M-60-Z		A.		D13-133		41	G1					D-66	
2nd.	10-312	16-6660								F2		F2	Vol	24-144	M-60-Z												D-69	
1st.	10-315	16-6658		455				79-284		F2		F2	Vol	24-144	M-60-Z		A.		D13-133		41	G1					D-71	
2nd.	10-312	16-6660								F2		F2	Vol	24-144	M-60-Z		A.		D13-133		41	G1					D-72, D73	
1st.	10-317	16-6658		455				79-283		F2		F2	Vol	24-146	M-60-Z		A.		D13-133		41	G1					D-90	
2nd.	10-312	16-6660								F2		F2	Vol	24-144	M-60-Z		A.		D13-133		41	G1					D-93	
1st.	10-355	16-6658		455				79-299	ST-105	5A1		Vol	24-150	AM-63-Z	KSS-3				D13-137	E							D131-D132, D133	
2nd.	10-343	16-6660						79-305	ST-105	5A1		Vol	24-152	AM-63-Z	KSS-3	A.			D13-137	E	41						D247	
1st.	10-359	16-6658		455				79-319		F2		F2	Vol	24-153	AM-60-Z	KSS-3	A.		D13-133	E	41						D251	
2nd.	10-359	16-6658		455				79-323		4" x 6"		F2	Vol	24-160	AT-78	KSS-3	A.		D13-133X	E	41						D294, D314, D315	
1st.	10-382	16-6658		455				79-321		F2		F2	Vol	24-157	AM-63-Z	KSS-3	A.		D13-137	E	41						E-185	
2nd.	10-386	16-6660						12046	ST-105	5A1		Vol	12033	AM-60-Z	KSS-3	A.		D13-133	E	41						E-189		
1st.	11-347	16-6658		455						F2		F2	Vol	12132	AM-60-Z	KSS-3	A.		D13-133	E	41						FA15W, FA15Y	
2nd.	11-376	16-6660								F2		F2	Tone	12350	AM-60-Z	KSS-3	A.		D13-133	E	41						FE-5	
1st.	12388	16-5712		455						F2		F2	Tone	11785	AM-60-Z	KSS-3	A.		D13-133	E	41						FE-141	
2nd.	12388	16-5714								F2		F2	Tone	11785	AM-60-Z	KSS-3	A.		D13-133	E	41						J62, J62C	
1st.	3366	16-6666		455				5887-D	ST-113	4A07		Vol	†	M-60-Z				D13-133		G1						JS-130		
2nd.	3367	16-6667								F2		F2	Vol	†	M-60-Z												JS-177, 178	
1st.	108140F	16-6658		465				114116G	ST-194	5E45		Vol	101127	AM-63-Z	KSS-3	A.		D13-137	E	41						JS-179, 180		
2nd.	108145B	16-6660						114197	ST-105	5A1		Vol	101218	AM-63-Z	KSS-3	A.		D13-137	E	41						JS-181		
1st.	108140H	16-6658		455						5 Inch		5A07	Vol	†	M-60-Z		A.		D13-133		41	G1					MC10B, MC10X	
2nd.	108145	16-6660								F2		F2	Vol	50.67	M-60-Z		A.		D13-133		42	G1					MC11	
1st.	S-103	16-6658		455				105164		F1		F1	Vol	50.67	M-60-Z		A2											
2nd.	S-104	16-6660								F1		F1	Vol	50.67	M-60-Z		A.		D13-133		41	G1						
1st.	35.198	16-6658		456				105134B	ST-196	4E45		Vol	50.51A	M-60-Z		A.		D13-133		41	G1							
2nd.	35.207	16-6660								F2		F2	Vol	50.51A	M-60-Z													
1st.	35.125B	16-6658		456						F2		F2	Vol	50.51A	M-60-Z													
2nd.	35.166	16-6660								F2		F2	Vol	50.51A	M-60-Z													
1st.	35.205			456				105158A	ST-195	5E27		Vol	50.47A	M-60-Z		A.		D13-133		41	G1							
2nd.	35.206									F1		F1	Tone	55.20	M-60-Z		A.		D13-133		41	G1						
1st.	35.205			456				105115	ST-195	5E27		Vol	†	M-60-Z		A.		D13-133		41	G1							
2nd.	35.206									F1		F1	Tone	†	M-60-Z		A.		D13-133		41	G1						
1st.	TS-10000	16-6658		455				SC-10002		4A07		Vol	†	M-60-Z		A.		D13-133		41	G1							
2nd.	TS-10001	16-6666								46A1		Vol	VC-11105	M-63-Z		A.		D13-137		41	G1							
1st.	TS-10000	16-6660								VC-13105		Vol	VC-13105	M-63-Z		A.		D13-137		41	G1							

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	
LAFAYETTE—Cont.																							
MC-12.....	6	12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)	CL-10007.....	PRSA150-50-30.....	BRD3515.....		M-5030-150.....	TA-530.....		Out	TO-10000.....	A-3865.....	T22S45.....		A-2928.....								
MC-13.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZGT	50-30 Mfd.....	PRSA150-50-30.....	BRD3515.....		M-5030-150.....	TA-530.....		Out	†	A-3876.....	T22S45.....		A-2928.....								
MC-16.....	5	12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)	CL-10007.....	PRSA150-50-30.....	BRD3515.....		M-5030-150.....	TA-530.....		Out	TO-10000.....	A-3865.....	T22S45.....		A-2928.....								
S-43 See Model D26.....	6	See Model D26.....																					
S-43G (Late) See Model D26.....	6	See Model D26.....																					
S61, S62.....	9	6A3, 6K7, 6H6, 6C5, 243, 665, 25ZG (44)	20-12 Mfd.....	PRSB250-20-20.....	PRSI50-8.....	BR818.....	DSB-2X20-150.....	TA-220.....	Chk In Cut Pwr Out	†	†	†	A-3301.....	T22S50.....	A-2905.....	P-6012.....	A-3878.....	T22R04.....	P-2952.....	A-2931.....			
399-C31.....	9	6D6, 6K8, 6A8G, 6Q7, 6AF6G, 6F6, 80 (44)	16, 16 Mfd.....																				
1102.....	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, 6U5.....	119-112.....	AF4444J.....	UP222245.....	BR2045.....	DY-4X20-450.....	EL-420.....	Pwr Out	†	†	P-6013.....	T22R05.....	P-2953.....	A-3311.....	T22S54.....	A-2936.....						
1102.....	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6V6GT, 5Y3G, 6U5.....	119-69.....	PRS350-24.....																			
4124 (See Model CC48).....		See Model CC48.....																					
4990 (See Model 399-C31).....		See Model 399-C31.....																					
LAMCO 1000.....	5	12BE6, 12BA6, 12AT6, 50B5, 35W4 (51)	50-30 Mfd.....	PRSA150-50-30.....	BRD3515.....		M-5030-150.....	TA-530.....		Out	†	A-3876.....	T22S45.....	A-2928.....									
LEARADIO 561, 562, 563.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35ZG (47)	B52326.....	PRSA150-50-30.....	BRD3515.....		M-5030-150.....	TA-530.....		Out	52531.....	A-3876.....	T22S45.....	A-2928.....									
565, 565BL, 566, 567, 568.....	5	12SA7, 12SKGT, 12SQ7GT, 50L6GT, 35ZG (47)	52326.....	PRSA150-50-30.....	BRD3515.....		M-5030-150.....	TA-530.....		Out	B5231.....	A-3876.....	T22S45.....	A-2928.....									
661OPC, 661IPC, 6612PC.....	6	6SK7, 6SA7, 6SF7, 6S17, 6V6GT, 6X6GT (47), A-54146.....	B-53393.....	AF32K4A.....	UP2245C.....	DY-312.....	EL-212.....	Pwr Out	E53942.....	E53941.....	A-3855.....	T22R31.....	A-2930.....										
6614, 6615, 6615, 6619.....	6	12SK7, 12SQ7GT, 12SA7, 35L6GT, 35ZG (47)	52326.....	PRSA150-50-30.....	BRD3515.....		M-28-250.....	UT-82.....	Out	B5251.....	A-3876.....	T22S46.....	A-2928.....										
6617PC.....	6	12SK7, 12SA7, 12SF7, 35L6GT, 35ZG (47)	52326.....	PRSA150-50-30.....	BRD3515.....		M-5030-150.....	TA-530.....	Out	52456.....	A-3330.....		A-3031.....										
LEE TONE AP-100.....	4	14B6, 50A5, 35Y4.....	30 Mfd.....	PRS150-30.....	BR3015.....		M-30-150.....	UT-301.....		Out	†	A-3876.....	T22S45.....	A-2928.....									
LEWYT 615A.....	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35ZG (47)	50-30 Mfd.....	PRSA150-50-30.....	BRD3515.....		M-40-150.....	TA-530.....		Out	W73.....	A-3876.....	T22S45.....	A-2928.....									
LEXINGTON 6545.....	5	14Q7, 14A7, 14B6, 50A5, 35Y4 (47)	A25.019.....	PRSA150-30-30.....	BRD3315.....		M-2X30-150.....	TA-330.....		Out	On Spkr.	A-3876.....	T22S45.....	A-2928.....									
LIBERTY A6K, A6P, 6K.....	5	14A7, 14Q7, 12SK7, 14B6, 35L6GT, 35Y4 (47)	30-20-20 Mfd.....	PRS150-20.....	EZ3215C.....	DSB-302.....	TA-303.....	Out	†	A-3865.....	T22S45.....	A-2928.....											
507A.....	5	14Q7, 14A7, 14B6, 50A5, 35Y4 (47)	30-20-20 Mfd.....	PRS150-20.....	EZ3215C.....	DSB-302.....	TA-303.....	Out	†	A-3876.....	T22S45.....	A-2928.....											
LINCOLN S13L-B.....	6	7B7, 14Q7, 14B6, 50A5, 35Y4 (47)	30-30-30	PRSA150-30-30.....	BRD3315.....		M-2X30-150.....	TA-330.....	Out	†	A-3876.....	T22S45.....	A-2928.....										
LINCOLN—(Also See Knight) 5A-110.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35ZG (47)	25E1.....	AF1010D.....	UP5515.....	DY-2X50-150.....	EL-25.....	Out	22E2.....	A-3877.....	T22S46.....	A-2930.....											
LINDEX—(See Swan k.)																							
LYRIC 546TY, 546TY.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50A5, 35ZG (47)	CE-806F.....	PRSA150-40-40.....	EZ3215C.....	DSB-40-30-150/20-25	EL-332.....	Out	On Spkr.	A-3875.....	T22S45.....	A-2928.....											
MAGIC TONE 500, 501.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35ZG (47)	400-37.....	PRSA150-40-30-25-20	EZ3215C.....	M-2X30-150 & M-10-25	TA-230 & TA-5	Out	400-11.....	A-3876.....	E3	T22S45.....	B3	A-2928.....									
504.....	4	12SK7, 12SQ7, 50L6GT, 35ZG (47)	30, 20 Mfd.....	PRS10-25.....	BR03215.....	M-2X30-150	TA-230	Out	†	A-3877.....	T22S46.....	B3	A-2930.....										
			5 Mfd.....	PRSA150-30-30 & PRS25-10	BR102A.....	M-10-25	TA-5	Out	†	A-3856.....	T22S46.....	A-2930.....											

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Project Set No.	MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	TS-10000.	16-6666.		455				SO-10002.			46A1.		Vol	VC11105.	M-63-Z.		A.		D13-137.		41	G1			Continued—	LAFAYETTE MC12	
2nd.	TS-10001.	16-6667.		455	†			SR-10000.	ST-113.		4A07.		Vol	†.	M-60-Z.		A.		D13-133.		41	G1				MC13	
1st.	†.	16-6658.		455				SO-10005.			3A07.		Vol	†.	M-58-S.		A.		D11-133.		41	G1				MC16	
2nd.	TSP-10002.			455																					S-43 (See Model D26) S-43G (See Model D26) S61, S62		
1st.	†.			455					F2.		F2	Vcl Tone	†.	M-60-Z. M-63-Z.				D13-133. D13-137.			G1					399-C31	
2nd.	†.			456					F2.		F2	Vol Tone	†.	M-63-Z.				D13-137.			G1					1102	
1st.	1081770.	16-5712.		455				12 Inch.			12E60.		Vol	101234.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						4124 (See Model CC48) 4990 (See Model 399-C31)	
2nd.	108130E.	16-5714.																									
1st.	S103.	16-6658.		455				4 Inch.	ST-113.		4A07.		Vol	†.	M-60-Z.		A.	D13-133.		41	G1				15.	LAMCO 1000	
2nd.	S104.	16-6660.																									
1st.	D53350.	16-6658.		455				D53450.	ST-105.		5A1.		Vol	D56340.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						1.	LEARADIO 561, 562, 563
2nd.	D53361.	16-6670.						D53450.	ST-105.		5A1.		Vol	56340.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						9.	565, 565BL, 566, 567, 568
1st.	53350.	16-6658.		455				B53933.	ST-120.		10A4.		Vol	D56340.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						9.	661OPC, 6611PC, 6612PC
2nd.	53361.	16-6670.						53450.	ST-105.		5A1.		Vol Tone	56340.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						3.	6614, 15, 16, 19
1st.	53350.	16-6658.		455	†.			53450.	ST-105.		5A1.		Vol	56339.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						16.	6617PC
2nd.	53361.	16-6670.						53631.	ST-108.		6A1.		Vol	56340.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41							
1st.	53350.	16-6658.		455	†.																						
2nd.	54990.	16-6670.																									
1st.	L-70.							5 Inch.	ST-105.		5A1.		Vol Tone	†.	M-63-Z. M-58-S.		A.	D13-137. D11-133.		41	G1					16.	LEETONE AP-100
2nd.																											
1st.	W21.	16-6658.		455	†.	L-70.		X123.	ST-110.		6A21.		Vol	†.	M-60-Z.		A.	D13-133.		41	G1				11.	LEWYT 615A	
2nd.	W19.	16-6670.																									
1st.	†.	16-6666.		455	†.	L-70.		B-11037.	ST-105.		5A1.		Vol	A-9066.	M-60-Z.		A.	D13-133.		41	G1				13.	LEXINGTON 6545	
2nd.	†.	16-6667.																									
1st.	†.	16-6658.		455				5 Inch.	ST-107.		5A15.		Vol	†.	M-60-Z.				D13-133.			G1				20.	LIBERTY A6K, A6P, 6K
2nd.	†.	16-6660.						5 Inch.	ST-107.		5A15.		Vol	†.												20.	507A
1st.	†.	16-6658.		455																							
2nd.	†.	16-6660.																									
1st.	13902.	16-6658.		455				5 Inch.	ST-105.		5A1.		Vol	R-13332.	M-60-Z.		A.	D13-133.		41	G1				2.	(Also See Knight) 5.	
2nd.	13903.	16-6670.																									
1st.	20E21.	16-5740.		455				5 Inch.	ST-105.		5A1.		Vol	28E1.													(See Swank)
2nd.	20E22.	16-5742.																									
1st.	LR-0007.	16-6658.		455				US-0036.	ST-105.		5A1.		Vol	RP-205E.	AM-66-Z.	KSS-3.	A.	D13-139.	E	41						7..	LYRIC 546T, 546TY
2nd.	LR-0008.	16-6660.																									
1st.	1154.	16-6658.		455				400-12.	ST-113.		4A07.		Vol	400-25.	M-60-Z.		A.	D13-133.		41	G1				5.	MAGIC TONE 500, 501	
2nd.	1155.	16-6660.																								22.	504

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES			
	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr.	Aerovox	Note	Cornell-Dubilier	N	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thorderson	Note	Merit	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.	e	Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"
MAGNAVOX																						
A-201	1	105G	273611	PRS25-25		BR252A		M-25-25		TA-25		Out		A-3329	T22S47		A-2927					
A-205	1	70L7GT	270008			AF1010D		DY-2X50-150		EL-25		Out		A-3876	T22S45		A-2928					
A-206A	2	70L7GT	270013			UP5515						Out		A-5528	T22S46		A-2901					
A-307P5	5	6SC7, *25L6, *25Z5	270014	AF1010D	PRS150-30	UP5515		DY-2X50-150		EL-25		Out		A-3301	T22S60		A-2905					
A-401	3	6J5G, 6FG6, 80	270017		279911	AF22J	BR3015	M-30-150	UT-301			Out		A-3878	T22S47		A-2931					
A-1101	4	6J5, *6Y6G, 5Y3G	270012	PRS25-25	PRS350-12	UP1145	BR252A	M-25-25	UT-123			Pwr	300009	P-6014	T22R06		P-2954					
A-3001A	4	6C5, *6L6G, 5Z3	273611	PRS50-25	GL450-10	BR252A	M-25-25	TA-25			In	320001		A-3800	T22S74		A-2905					
A-3001C	4	6C5, *6L6G, 5Z3	270007	AF44J4A		UP2245C		DY-315		EL-350		In	350113		T22R06		P-2954					
			273610								Out	300106		A-3800								
											Chk	320187										
											Pwr	330188										
											Chk	350113										
											Pwr	300106										
											Chk	320240										
											Pwr	330188										
CR-101, CR-101M	9	*6D6, 6A7, 6H6, 6F5, 6C5, 80, 6U5/6G5	279577	PRS25-10	PRS25-10	BR102A	M-10-25		TA-10		Out	309671		A-3878	T22R06		P-2954					
CR-102, CR-103, CR-104, CR-105	6	6A7, 6D6, 6Q7G, 6H6, 6F5, 6C5, 80, 6U5/6G5	279578			E25116	BR102A	M-10-25	TA-10			Out	330228		P-6011	T22R02	P-2951					
CR-106	7	6A7, 6D6, 6H6, 6A5G, 6N6G, 80, 6U5/6G5	279640						TU-1616			Pwr	A-3878	T22S58		A-2931						
CR-107	8	6ABG, 6K7G, 6R7G, *25L6G, 25Z6G, 6N5	32, 50, 16								Out	P-6011	T22R02		P-2951							
CR-108M	9	*6D6, 6A7, 6H6, 6F5, 6C5, 80, 6N5	12, 12 Mfd		GL450-10						On Spkr.	A-3825	T22S58		A-3127							
CR-109		(See Model CR-106)									On Spkr.	A-6011	T22R02		P-2951							
CR-110		(See Model CR-107)									On Spkr.	A-3878	T22R02		P-2951							
CR-111		(See Model CR-106)									On Spkr.	A-6011	T22R02		P-2951							
CR-112		(See Model CR-107)									On Spkr.	A-3878	T22S58		A-2931							
CR-113, CR-114, CR-115	7	6A7, 6D6, 6H6, 6J5G, 6L6G, 80, 6U5/6G5	4, 8, 14 Mfd								Pwr	P-6011	T22R02		P-2951							
CR-117	5	6A7, 6D6, 75, 6V6G, 80	10, 10 Mfd	AF22J		UP1145		DY-2X10-450		EL-210		Out	A-3825	T22S72		A-3127						
CR-118		(See Models CR-113, CR-114, CR-115)									Pwr	P-6011	T22R02		P-2951							
CR-119, CR-120		(See Model CR-107)									Out	A-3878	T22S58		A-2931							
CR-121	8	6ABG, 6K7, 6H6, 6J5G, *6V6G, 5U4G, 6U5/6G5	273610, 273611	PRS25-25		BR252A	M-25-25		TA-25		Pwr	300142	T22R05		P-2953							
CR-122		(See Model CR-108M)									In	320235		A-3311	T22S64		A-2936					
CR-123	7	6K8, 6K7, 6H6, 6J5G, 6L6G, 80, 6U5/6G5	30-10 Mfd, 40 Mfd	PRS25-50		BR502	M-50-25		TA-50		Pwr	A-6012	T22R04		P-2952							
CR-124	8	6ABG, 6K7, 6H6, 6J5G, *6L6G, 5U4G, 6U5/6G5	30-10 Mfd, 20 Mfd	PRS25-25		BR252A	M-25-25		TA-25		Out	300143	T22S72		A-3127							
CR-125		(See Models CR-113, CR-114, CR-115)									Pwr	320235	T22R05		P-2953							
CR-126, CR-127		(See Model CR-107)									On Spkr.	A-3307	T22S74		A-3131							
CR-128		(See Model CR-123)									On Spkr.	A-3878	T22S74		A-3131							
CR-133	4	1A7G, 1M5G, 1H5G, 1C5G	270006	PRS25-10		BR102A	M-10-25		TA-10		Out	A-3878	T22S47		A-2931							
CR-134	7	6SA7, 6SK7, 6H6, 6J5G, 6L6G, 80, 6U5/6G5	273610, 273705	PRS25-50		BR502	M-50-25		TA-50		Pwr	P-6289	T22R00		P-2949							
CR-136	8	6SA7, 6SK7, 6H6, 6J5G, *6L6G, 5U4G, 6U5/6G5	273610, 273611	PRS25-25		BR252A	M-25-25		TA-25		Out	A-3825	T22S62		A-3127							
CR-137		(See Model CR-134)									Pwr	300143	T22R05		P-2953							
CR-140	8	6SA7, 6SK7, 6H6, 6J5G, *6V6G, 5U4G, 6U5/6G5	273610, 273611	PRS25-25		BR252A	M-25-25		TA-25		Pwr	300160	T22R05		P-2953							
CR-141, CR-142	6	6SA7, 6SK7, 6H6, 6J5G, 6L6G, 80, 6U5/6G5	273611, 273705	PRS25-25		BR252A	M-25-25		TA-25		Out	A-3830	T22S74		A-2905							
CR-143, CR-145	9	12SA7, 12SK7, 12H6, 12J5GT, *50L6GT, *35Z4GT, 6N5	270004, 270010, 273611	AF1010D, PRS150-40, PRS25-25		UP5515, BR4015, BR252A	DY-2X50-150, M-40-150, M-25-25		EL-25, UT-401, TA-25		Chk	350123	T22R00		A-2905							
										Out	320241	T22S72		A-3127								
										On Spkr.	A-3301	T22S60		A-2905								

<sup>†</sup> Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready	Note	Burgess	Note		
																			"A"	"B"	"A"	"B"			
MAGNAVOX—Continued (See CR-134).																									
CR-144.	9	6SA7, 6SK7, 6H6, *6J5, *6V6G, 5U4G, 6U5/6G5 (*51)	273610	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300142, 320243, On Spkr.	P-6011		T22R02		P-2951							
CR-146.	9	6SA7, 6SK7, 6H6, *6J5, *6L6G, 5U4G, 6U5/6G5	273611	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300143, On Spkr.	P-6011		T22S74		A-2905							
CR-147.	9	6SA7, 6SK7, 6H6, *6J5, *6L6G, 5U4G, 6U5/6G5	273611	PRS350-12		BR1235		M-10-350		UT-123		Pwr In Out	300143, On Spkr.	P-6011		T22R02		P-2951							
CR-148.	9	6SA7, 6SK7, 6H6, *6J5, *6L6G, 5U4G, 6U5/6G5	273610	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300143, 320243, On Spkr.	A-3830		T22S74		A-2905							
CR-149.	12	*6SK7, 6SA7, 6H6, 6S37, *6J5, *6L6G, *5Y3G, 6N5 (*51)	273611	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300162, On Spkr.	P-6013		T22S74		A-2905							
CR-150, CR-151		(See Model CR-140).	270012	PRS25-25		BR1235		M-25-25		TA-25		Pwr In Out	300162, On Spkr.	P-6013		T22R05		P-2953							
CR-152.	12	*6SK7, 6SA7, 6H6, 6AB7, *6J5, *6L6G, *5Y3G, 6E5 (*51)	273610	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300161, 320244, On Spkr.	P-6013		T22R05		P-2953							
CR-153.	9	6SA7, 6SK7, 6H6, *6J5, *6V6G, 5U4G; 6U5/6G5	273611	PRS350-12		BR252A		M-25-25		TA-25		Pwr In Out	300142, 320243, On Spkr.	P-6013		T22R05		P-2953							
CR-154.	12	*6SK7, 6SA7, 6H6, 6AB7, *6J5, *6L6G, *5Y3G, 6E5 (*51)	273610	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300161, 320246, On Spkr.	P-6013		T22S74		A-2905							
CR-155.	11	*6SK7, 6SA7, 6H6, 6AB7, *6J5, *6V6G, *5Y3G, 6E5 (*51)	273610	PRS350-12		BR1235		M-10-350		UT-123		Pwr In Out	300003, 320246, On Spkr.	P-6013		T22R05		P-2953							
CR-156.	9	6SA7, 6SK7, 6H6, *6J5GT, *6V6G, 5Y3G, 6U5/6G5	273610	PRS450-8		BR845		M-8-450		UT-8		Pwr In Out	300004, 320248, On Spkr.	P-6012		T22R04		P-2952							
CR-157.		(See CR-140).	273611	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300004, 320248, On Spkr.	P-6012		T22R04		P-2952							
CR-158. (FM Tuner).	11	6SA7, *6AC7, *6SK7, VR150, 6SC7, 6H6, 6J5, 5Y3G, 6AD6G (*51).	273610	PRS25-25		BR252A		M-25-25		TA-25		Chk Pwr	350118, 300005	P-6013		T22R05		P-2953							
CR-159.		(See Model CR-141).	273611	PRS25-25		BR252A		M-25-25		TA-25		Chk Pwr	350118, 300005	P-6013		T22R05		P-2953							
CR-160.		(See Model CR-146).																							
CR-161.		(See Model CR-152).																							
CR-165.	10	12SA7, 12SK7, *12J5GT, *50L6GT, *35Z4GT, 6N5 (*51).	40-50 Mfd.	AF10100		UP9515		DY-2X50-150		EL-25		Chk In Out	350123, 350246	P-6013		t		t							
CR-169, CR-170 (Tuner).	8	6SA7, *6SK7, 5AC7, 6H6, 6X5GT, 6U5/6G5 (*51).	270015	PRS25-25		BR4015		M-40-150		UT-4C1		Pwr	300008	A-3301		T22S60		B1	A-2905		P-3048				
CR-171.	8	6SA7, 6SK7, *6J5, *6V6G, 5U4G, 6U5/6G5 (*51).	273610	PRS450-8		BR252A		M-25-25		UT-8		Pwr In Out	300008	P-6348		T22R02									
CR-172.	7	6SA7, 6SK7, *6J5, *6V6G, 5Y3G, (*44).	273611	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300010, 320002	P-6013		T22R05		P-2953							
CR-174, CR-174C.	12	*6SK7, 6SA7, 6H6, 6AB7, *6J5, *6L6G, *5Y3G, 6E5 (*51).	273611	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300010, 320002	A-3311		T22S64		A-2936							
CR-176.	9	6SA7, 6SK7, *6J5, *6V6G, 5Y3G, 6U5/6G5	273611	PRS350-12		BR4545		M-8-450		UT-8		Pwr In Out	300161, 320246	P-6013		T22R05		P-2953							
CR-177.	9	6SA7, 6SK7, *6J5, *6LG, 5U4G, 6U5/6G5 (*51).	273610	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300004, 320248	P-6012		T22S74		A-3128							
CR-178.	7	6SA7, 6SK7, *6J5, *6V6G, 5Y3G (*44).	273611	PRS25-25		BR252A		M-25-25		TA-25		Pwr In Out	300010, 320002	P-6012		T22R04		P-2952							
CR-188.	13	*6SK7, 6SA7, *6J5, 6U5, *6V6G, *5Y3G (*44).	270023G2	AF224A	A9	UP15D145	A4	DY-2X20-450		EL-344	A4	Pwr In Out	300010, 320002	A-3311		T22S64		A-2936							
CR-190A, CR-190B.	9	6SA7, 6SK7, *6J5, 6SN7G, *6V6G 5Y3G, 6U5/6G5 (*51).	270023G2	AF224A	A9	UP145C	A9	DY-10-450/25- 50		EL-202	A9	Pwr In Out	300010, 320002	C300025G1	P-6315	T22R07		P-2955							
CR-192A, CR- 192B (FM).	8	6AG5, 6SB7Y, *6SG7, 6SH7, 6H6, 6X5GT, 6U5/6G5 (*51).	270026G2	PRS25-25		BR252A		DY-10-450/25- 50		EL-1		Pwr In Out	300010, 320002	G300024G1	P-6315	T20A25									
CR-198A, CR- 198B, CR-188C.	10	*6SK7, 6SA7, 6J5GT, 6U5/6G5 6J5, 6SN7GT, *6L6GA, 5U4G (*44).	270023G2	AF224A	A9	UP1145C	A9	DY-10-450/25- 50		EL-220	A9	Pwr In Out	300004, 320248	P-6012		T22R04		P-2952							
			270027G2	AF224A	A9	UP1145C	A9	DY-10-450/25- 50		EL-202	A9	Pwr In Out	300010, 320002	A-3830		T22R02		B1	P-3048		P-2955				
			270027G2	AF224A	A9	UP1145C	A9	M-25-25		TA-25		Pwr In Out	300035G1	P-6314		T22R07									
			270027G2	AF224A	A9	UP1145C	A9	M-25-25		EL-220	A9	Pwr In Out	300035G1	A-3830		T22S64									

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL	Phoneact Set No.							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	†	16-5714			560009	B-4		581420		F2		F2	Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S			D13-133			G1				Continued	MAGNAVOX CR-144 (See Model CR134) CR146		
2nd.	†	16-5714						581421		F2		F2	Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S	A		D13-133			G1					CR147		
1st.	†	16-5714						581421		F2		F2	Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S	A		C11-123			G1					CR148		
2nd.	†	16-5714						581422		F2		F2	Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S	A		C13-133			G1					CR149		
1st.	†	16-5714		455				581421		F2		F2	Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S	A		C11-123			G1					CRI50, 151 (See Model CR140) CRI52		
2nd.	†	16-5714		455				581422		F2		F2	Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S	A		D13-133			G1					CR153		
1st.	†	16-5714		455				581420		F2		F2	Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S	A		C11-123			G1					CR154		
2nd.	†	16-5714		455				581421		F2		F2	Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S	A		D13-133			G1					CR155		
1st.	†	16-5714		455	560022 (or)			581917					Vol Treb Bass	223605 220011 220012	M-60-Z M-44-S	A		D11-123			G1					CR156		
2nd.	†	16-5714		455	560022			581917		F2		F2	Vol Treb Bass	223605 220011 223603	M-60-Z M-44-S	A		D13-133			G1					CR157 (See Model CR140)		
1st.	†	16-5714		455	560023								Vol Treb Bass	223605 220011 223603	M-60-Z M-44-S	A		D13-137			G1					CR158 (FM Tuner)		
2nd.	†	16-5714		4.3 MC	560023								Vol Tone Phono	†	M-60-Z											(See Model C RI41)	CR159	
3rd.	†	16-5714		4.3 MC	560022			581987		F2		F2	Vol Tone Phono	†	M-60-Z			D13-133			G1					(See Model C RI46)	CR160	
1st.	†	16-5714		455	560022			581987		F2		F2	Vol Tone Phono	†	M-60-Z			D11-123			G1					(See Model C RI52)	CR161	
2nd.	†	16-5714		455	560022								Vol Tone Phono	†	M-60-Z			A			G1							CR169, 170 (FM Tuner)
3rd.	†	16-5714		455	560023								Vol Tone Phono	†	M-60-Z			A			G1							CR171
1st.	†	16-5712		455	560022								Vol Tone Phono	†	M-60-Z			A			G1							CR172
2nd.	†	16-5714		455	560022								Vol Tone Phono	†	M-60-Z			A			G1							CR174, 174C
1st.	†	16-5712		455	560023								Vol Tone Phono	†	M-60-Z			A			G1							CR-176
2nd.	†	16-5714		455	560023								Vol Tone Phono	†	M-60-Z			A			G1							CR-177
1st.	†	16-5712		455	560024								Vol Tone Phono	†	M-60-Z			A			G1							CR 178
2nd.	†	16-5714		455	560025								Vol Tone Phono	†	M-60-Z			A			G1							CR188
1st.	†	16-5712		455	560024								Vol Tone Phono	†	M-60-Z			A			G1							CR190A, 190B
2nd.	†	16-5714		455	560025								Vol Tone Phono	†	M-60-Z			A			G1							CR192A, B (FM Tuners)
1st.	†	16-5712		455	560049-62	QT							Vol Tone Phono	†	M-60-Z			A			G1							CR198A, B, C
2nd.	†	16-5714		455	560049-62	QT							Vol Tone Phono	†	M-60-Z			A			G1							17
1st.	†	16-5712		455	360266G1								Vol Tone Phono	†	M-60-Z			A			G1							
2nd.	†	16-5714		455	360267G1								Vol Tone Phono	†	M-60-Z			A			G1							
1st.	†	16-5712		455	360266G1								Vol Tone Phono	†	M-60-Z			A			G1							
2nd.	†	16-5714		455	360267G1								Vol Tone Phono	†	M-60-Z			A			G1							
1st.	†	16-5712		455	360258G1								Vol Tone Phono	†	M-60-Z			A			G1							
2nd.	†	16-5714		455	360258G1								Vol Tone Phono	†	M-60-Z			A			G1							
1st.	†	16-5712		455	360024G1								Vol Tone Phono	†	M-60-Z			A			G1							
2nd.	†	16-5714		455	360025G1								Vol Tone Phono	†	M-60-Z			A			G1							

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague *	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		Part No.	Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"	
MAGUIRE 500 BL, 500 BW, 500DL, 500DW	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47).	50-30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	B-20371-1	A-3876	B3	T22S45	B3	A-2928	B3				
561BL, 561BW, 561DL, 561DW	5	14Q7, 14A7, 14B6, 50A5, 35Y4 (47)	50-30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	B-20371-1	A-3876	B3	T22S45	B3	A-2928	B3				
661, 661-A	5	12SK7, 12SA7GT, 12SQ7GT, 50L6GT (47).	50-30 Mid.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	B-20371	A-3876	B3	T22S45	B3	A-2928	B3				
700-A	7	14Q7, 7A67, 14B6, 14A4, 50A5, 35Z3 (47).	A10427	PRSA150-80-40		EZ44315C	A4	M-8040-150		TA-440 & UT-201		Out	A-28088-2	A-2201		T22S47		A-2901					
700-E	7	14Q7, 7A67, 14B6, 14A4, 50L6GT, 35Z3 (47).	A10427	PRSA150-80-40		EZ44315C	A3	M-8040-150		TA-440 & UT-201		Out	A-28088-2	A-2201		T22S47		A-2901					
MAJESTIC RADIO & TELEVISION CORP.																							
PIA50, PIA50B	5	6A7, 6D6, 75, 41, 80 (44)	Y-CE-43																				
PIA59, PIB59	5	6A7, 6D6, 75, 41, 80 (44)	Y-CE-51																				
T-081A, T-081B	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	CE-35																				
T-081C, T-081D	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	CE-35																				
T-101L-A, T-101L-X	5	12SA7, 12SK7, 12SQ7, 50L6, 35Z3	Y-CE-66-1																				
T-102L-A, T-102L-X	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	CE-66-1																				
T-121-A, T-121-X	5	6SA7GT, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3GT	Y-CE-43																				
T-122-A, T-122-X	5	6K8GT, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3GT	CE-43-A																				
T-131-A, T-131-X (See Model T-121-A)																							
T-132-A, T-132-X (See Model T-122-A)																							
T-201-A	6	6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT	CE-66																				
T-202-A	6	6K8GT, 6SK7GT, 25L6GT, 25Z6GT	CE-66																				
TP-221-A, TP-231-A	6	6SA7GT, 6SK7GT, 6SQ7GT	CE-66																				
TR-321-A, TR-331-A	7	6SA7GT, 5SK7GT, 25L6GT, 25Z6GT	CE-66-2																				
Charlie McCarthy, 1 & 2	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT	CE-42																				
1A50A, 1A50F, 1A50H, 1A50AB, 1A50FB, 1A50HB	5	6A7, 6D6, 75, 41, 80 (44)	Y-CE-43																				
1A59, 1A59B, 1B59	5	6A7, 6D6, 75, 41, 80	Y-CE-51																				
1BR50, 1BR50P	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 25Z6GT	Y-CE-47																				
1D50H	5	6A7, 6D6, 75, 25L5G, 25Z5	Y-CE-50																				
1D50MB	5	6A8G, 6U7G, 6O7G, 25L6G, 25Z6G	Y-CE-46																				
1D59L	5	6A7, 6D6, 75, 25L6G, 25Z6, (L49B Ballast)	Y-CE-50																				
1M40J, 1M40R, 1M40W	4	12SA7GT, 12K7GT, 70A7GT	Y-CE-50																				
1S49	5	12SA7GT, 12K7GT, 35L6GT, 35Z5GT	20-20 Mfd																				
2A50F, FB, FM, FMB	5	6A7, 6D6, 75, 41, 80	Y-CE-43																				
2C66	6	6K8G, 6U7G, 6Q7G, 6P5G, 6AC5G, 5Y3G	Y-CE-43																				
2C60AP	6	6K8G, 6U7G, 6Q7G, 6P5G, 6AC5G, 5Y3G	Y-CE-43																				
2C60P	6	6K8G, 6U7G, 6Q7G, 6P5G, 6AC5G, 5Y3G	Y-CE-60																				
2D60	5	6K8GT, 6K7GT, 6O7GT, 25L6G, 25Z6G, BL49B-G Ballast	CE-46																				
2D69	6	6K8GT, 6U7GT, 6Q7GT, 6AE5GT, 25Z6GT, 25AC5GT	CE-46																				
3C69	6	6SA7, 6SK7, 6Q7G, 76, 6AC5G, 5Y3G	CE-52																				
3C70	7	6SA7, 6SK7, 6Q7G, 76, 6AC5G, 5Y3G, 6U5	Y-CE-52																				
3C80, 3C80P	8	6K8G, 6U7G, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5	Y-CE-52																				

†Information not available.

<sup>†</sup>Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note			
MAJESTIC—Continued	8	6K8G, *6U7G, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5 (51).	Y-CE-52.									Pwr Out	Y-TP-5, Y-SPA-64.	P-6011, A-3852.	T22R02, T22S58.		P-2951, A-2904.									
3SC80, 3SC80B	9	6K8G, *6U7G, *6Q7G, *6K6G, 5Y3G, 6U5 (51). (See Model T081A)	Y-CE-52.									Pwr Out	†	P-6012, A-3852.	T22R04, T22S64.		P-2952, A-2936.									
4B22	4	1A7GT, 1N5GT, 1H5GT, 1C5GT, CE-35.	PRS150-8.		BR815.	V-1-1		UT-81.			Out	†	A-3878.	T22S47.		A-2931.	†									
4PW0	4	1207GT, 5L6GT, 12SA7GT, 35Z5GT.	Y-CE-54.								Out	†	A-3878.	T22S45.		A-2928.										
5A410, 5A430	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47).	19-24.	PRS150-40-40.	BRD4415.	DHN-2X40-10.		TA-240.			Out	12-20.	A-3330.								A-3031.					
5A445, 5A445R	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	19-24.	PRS150-40-20.	BRD4215.	M-4020-150.		TA-240.			Out	12-20.	A-3330.								A-3031.					
5ADA	5	6A7, 6D6, 75, 41, 80 (44).	Y-CE-43.								Pwr Out	Y-TP-30, A-3850.	†	T22R00, T22S47.		P-2941, A-2931.	A-3031.									
5AK711	5	12BE6, 12BA6, 12AT6, 50B5, 35W4 (47).	19-25.	AF84D4A.	A3	UP4215.		DY-40-20-150.		EL-24.	Out	†	A-3330.							A-3031.						
5AK731, 5AK780, (Ch. 5BD5A)	5	12BE6, 12BA5, 12AT6, 50B5, 35W4 (47).	19-25.	AF4411A.	A1	IP4211.	I-1-10-20-1-0.	EL-21.			Out	†	A-3330.							A-3031.						
5BD, 5BDR	6	1A7GT, 1N5GT, 1H5GT, 1D8GT, 70L7GT.	CE-62.								Out								A-3030.							
5BDA, 5BEA	5	6A7, 6D6, 75, 41, 80 (44).	Y-CE-43.								Pwr Out	†	P-6011, A-3878.	T22R02, T22S47.		P-2951, A-2931.	A-3031.									
5C35	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5.	19-21.	PRS150-20-20.	BRD2215.	M-2X20-150.		IA 220.			Out	†	A-3330.							A-3030.						
5C36		(See Model 431X).																								
5CAA		(See Model 2D60).																								
5CDC, 5CEC	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G.	Y-CE-11.																							
5T, 5TO	5	12SA7GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT (44).	Y-CE-55.	AF4410-70.	BRD21.	M-7X40-1.		TA-40.			Out	†	A-3376.	T22R04, T22S47.		I-311, A-2931.										
5T10, 5T10W	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT.	20-40 Mid.	PRS150-40-20.	BRD4215.	M-2X40-150.		TA-210.			Out	†	A-3876.	T22R45.		A-2128.										
5TU10, 5TU10W	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT.	20-40 Mid.	PRS150-40-11.	BRD4215.	M-2X40-150.		TA-240.			Out	†	A-3875.	T22R45.		A-2128.										
5ULBD		(See Model 5BD).																								
6CU35, 6CU36	6	12SA7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT.	20-20 Mid.	PR1-A150-20-11.	BRD2215.	M-2X20-150.		TA-11.			Out	†	A-3876.	T22R45.		A-2128.										
6P1 (Ch. 437)	6	1P5GT, 1A7GT, 1N5GT, 3Q5GT, 70L7GT.	20, 40, 100 Mid.								Out	†							A-3030.	746 & 2482.	763.	"M"				
7C40, 7CU40	7	6SK7, 6SA7, 7E7, 7F7, *25L6, 25Z6.	20-40 Mid.	PRV-A15-1-20.	BRD4215.	M-2X4-15.		TA-24.			Out	†	A-3330.	T22S6.		A-2905.										
7C75, 7CU75	7	6SK7, 6SA7, 7E7, 7F7, *25L6, 25Z6.	20-40 Mid.	PRS150-40-20.	BRD4215.	M-2X0-150.		TA-240.			Out	†	A-3301.	T22S6.		A-2905.										
7C432, 7C447, (Ch. 4706, 4707)	7	6SA7, 6J5, 6SK7, 6H6, 6SQ7, 6V6GT, 5Y3GT (47).	19-25.	AF2214A.	PR202A.	UP15D145 & BR202A.	A4	DY-312.		EL-3.	Pwr Out	2-16, 12-26.	A-3877.	B2	T22R30.		A-3032.									
7JK777R (Ch. 4708R)	7	6SA7, 6J5, 6SK7, 6H6, 6SQ7GT, 6V6GT, 5Y3GT (47).	19-26.	AF2214A.	PR5450-20.	UP15D145 & BR202A.	A4	DY-312.		EL-32.	Out	2-16, 12-26.	A-3877.	B2	T22R30.		P-3160, A-3032.	B12.								
7K60, 7KU60	7	6SK7, 6SA7, 7E7, 7F7, *25L6, 25Z6.	M126.	PRS150-20.	BRD2015.	M-20-1.		UT-21.			Out	On Spkr.	A-3301.		T22S60.		A-2905.									
7P420 (Ch. 4705)	7	*1U4, 1R5, 1S5, 3Q4, 50B5, 35W4.	19-37.			EZ-55615C.		DSB8040-150 & BRC-1225.		UT-4-1.	Out							A-3030.	754.	F6A50.						
7S433, 7S450, 7S470	7	6SA7, 6SK7, 6SQ7GT, 6J5, *6K6GT, 5Y3GT (44).	19-16.	PRS150-16-16.	BRD1845.	DH-X16-450SS.		TU-11.			Chk Pwr Out	2-24, 2-12.	A-6013.	T22R32.		P-2941, A-2901.										
7TU11, (Ch. 439)	7	*6SK7, 6SA7, 6SQ7, 6AE5, 25AC5, 25Z6 (47).	20 Mid.	PRS150-20.	BR21.	M-20-15.		UT-21.			Out	12-23.	A2201.	B21	T22S56.		B21.									
7YR752 (Ch. 7B04A)	7	12SA7, 12SK7, 12SQ7, 50L6GT, 12BA6, 50B5, 35Z5GT (47).	19-24.	PRS150-20-40.	BRD4215.	M-2X40-150.		TA-21.			Out	†	A-3330.							A-3031.						
8FM744, (8B06D)	8	6BA6, 6BE6, *6SG7, 6SH7, 6S8GT, 25L6GT, 25Z5GT (*17).	19-32.	PRS151-20.	BRD2015.	M-20-150.		UT-21.			Chk Pwr Out	2-12, 12-8-2.	A-3823.	T22S87.		P-2941, A-2901.										
8FM755, 8FM776 (Ch. 8B08D, 8B07D)	8	6BA6, 6BE6, *6SG7, 6SH7, 6S8GT, 25L6GT, 25Z5GT.	19-37.	PRS150-50-30 & PRS25-100.	BRD3515.	M-50-30-150.		TA-51.			Out	12-8-2.	A-3849.	B21	T22S56.		B21.									
8S452, 8S473	8	6SA7GT, 6SK7GT, 6SQ7GT, 6J5, *6K6GT, 5Y3GT, VR-105-30 (*44).	19-32.	PRS150-20.	BRH121.	M-100-12.		UHC-112.			Chk Pwr Out	2-32, On Spkr-45.	C-176.	T20C53.		C-2941, A-2902.										
12FM475, 12FM778, (Ch. 41201)	1	6BA6, 6BE6, 6SQ7, 6SA7, *6SG7, 6SH7, 6S8GT, 5Y3GT, 5U4G, (*47) (*44).	19-34.	AF221.	UP1145.	DY-2X10-450.		EL-21.			Out	2-19.	P-4080.	T22R32.		P-3153.										
51B, 51P, 51W, (Ch. 151)	4	6D6, 5C6, 25L6GT, 25Z5, (Belfast)	19-36.	Y-CE-2.	PR525-100.	PR12015.	M-100-12.	UHC-112.			Out	22-43-2.	A-3870.	T22S12.												
						BRH121.	M-30-150.	UT-30.			Out	22-8-2.	A-3876.	B21	T22S66.		A-2936.									
						BR3015.					Out	12-23.	A-3876.	T22S45.		A-2901.										

†Information not available.

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photofact Set No.	MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	Y-IFA-5.	16-5712		455							F2		F2	Vol Tone	Y-VC-39										Continued—	MAJESTIC 3SC80, 3SC90B		
2nd.	Y-IFA-6.	16-5714													Y-VC-39													
1st.	Y-Cl-29.	16-5712		455		t.	L-2-A.				F2		F2	Vol Tone	Y-VC-39											(See T- 081A)	3C90, 3SC90	
2nd.	Y-Cl-30.	16-5714													Y-VC-39													4B22 4C10
1st.	Y-Cl-29.	16-6658		455							F1		F1	V.	Y-VC-43	M-60-Z				D13-133							4PWO	
2nd.	Y-Cl-30.	16-6662		T-2F							F2		F2	V.	Y-VC-36													
1st.	3-116.	16-6658		455							22-11		ST-113		4A1	Vol	13-14	AM-60-Z		A	D13-133							5A410, 5A430
2nd.	3-117.	16-6660									22-32		S-105		5A1	Vol	13-28	AT-78	KSS-3	A	D13-133X							5A445, 5A445R
1st.	3-115.	16-6658		455																							5ADA	
2nd.	3-117.	16-6660																									27.	
1st.	Y-Cl-36.	16-6658		455																							5AK711	
2nd.	Y-Cl-50.	16-6660																									28.	
1st.	S-161.	16-6666		455							22-11				3A07	Vol	13-33											5AK731, 5AK780, (Ch. 5B05A) 5BD, 5BDR
2nd.	S-193.	16-6667									22-36		ST-105		5A1	Vol	13-28											5BDA, 5BEA
1st.	3-161.	16-6668		455																							5C35	
2nd.	3-193.	16-6667																									(See 431X)	
1st.	Y-IFA-17.	16-6658		455																							5C36 5CAA 5CDG, 5CEC	
2nd.	Y-IFA-18.	16-6658																									5T-50	
1st.	Y-Cl-40.	16-5712		455																							5T110, 5T10W	
2nd.	Y-Cl-42.	16-5714		455																							5T10, 5TU10W	
1st.																											(See 5BD)	
2nd.																											5ULBD 6CU35, 6CU36	
1st.	Y-Cl-44.	16-5712		455																							6P1 (Ch. 437)	
2nd.	Y-FA-100.	16-5714																									7C40, 7CU40	
1st.	CI-69.	16-6658		455																							7C75, 7CU75	
2nd.	Y-Cl-32.	16-6658																									7TU11, 7TU10W	
1st.																											7TU10, 7TU10W	
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												
2nd.																												
1st.																												

† Information not available.



Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quar. Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Photact Set No.
1st.	-	-	-	455	-	-	-	-	F1	-	F1	-	Vol	Y-VC-15	M-60-Z	A	-	D13-133	-	41	G1	-	-	-	MAJESTIC 52	
2nd.	-	-	-	455	-	-	-	-	S-195	SE27	-	-	Vol	Y-VC-2	M-46-Z	-	-	D13-123	-	-	G1	-	-	-	55B, 55P, 55W (Ch. 155)	
1st.	Y-Cl-1	16-6658	-	455	-	-	-	Y-SP-4	-	-	-	-	Vol	-	M-50-Z	-	-	D14-133	-	-	G1	-	-	-	56 (Ch. 156)	
2nd.	-	-	-	455	-	-	-	Y-SP-1	-	-	-	-	Vol	-	-	-	-	-	-	-	-	-	-	-	67, 68 (Ch. 157, 1673)	
1st.	Y-Cl-1	16-6658	-	455	-	L-24-A	-	-	-	-	F2	-	Vol	Tone	-	-	-	-	-	-	-	-	-	-	69	
2nd.	Y-Cl-2	16-6712	-	455	f.	L-24-A	-	Y-SP-7	ST-11E	EAI	F2	-	Vol	Tone	Y-VC-3	-	-	-	-	-	-	-	-	-	-	
1st.	Y-Cl-1	16-6712	-	455	f.	L-24-A	-	Y-SP-7	ST-11E	EAI	F2	-	Vol	Tone	Y-TC-2	-	-	-	-	-	-	-	-	-	-	
2nd.	Y-Cl-2	16-6714	-	455	-	-	-	Y-SP-52	ST-113	4A1	-	-	Vol	-	M-60-Z	-	-	D13-133	-	-	G1	-	-	-	130, 130U	
1st.	Y-CS-105	-	-	455	-	-	-	-	-	F2	-	F2	-	Vol	Y-VC-15	M-60-Z	A	-	D13-133	-	41	G1	-	-	-	140, 148
2nd.	Y-CS-107	-	-	455	-	-	-	Y-SP-37	ST-196	4E45	-	-	Vol	Y-VC-29	M-60-Z	A	-	D13-133	-	41	G1	-	-	-	149I, 149N, 149W	
1st.	Y-Cl-1	16-6658	-	455	-	-	-	-	-	F2	-	F2	-	Vol	Y-VC-23	M-60-Z	A	-	D13-133	-	41	G1	-	-	-	150L
2nd.	Y-Cl-2	16-6660	-	455	-	-	-	-	-	F2	-	F2	-	Vol	Y-VC-21	M-60-Z	A	-	D13-133	-	41	G1	-	-	-	250, 250M
1st.	Y-Cl-1	16-6658	-	455	-	-	-	-	-	F1	-	F1	-	Vol	-	M-60-Z	-	-	D13-133	-	-	G1	-	-	-	(See 2C 60AP) 260
2nd.	Y-Cl-2	16-6660	-	455	-	-	-	-	-	F1	-	F1	-	Vol	-	M-60-Z	-	-	D13-133	-	-	G1	-	-	-	310UL
1st.	Y-Cl-1	16-6658	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	(See 3C70)	
2nd.	Y-Cl-2	16-6660	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	(See 3C69)	
1st.	Y-Cl-1	16-6658	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	(See 3C80, P)	
2nd.	Y-Cl-2	16-6660	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	(See 3C80, S)	
1st.	Y-Cl-1	16-6658	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	(See 4C10)	
2nd.	Y-Cl-2	16-6660	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	410A	
1st.	Y-Cl-1	16-6658	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	(See T 681A)	
2nd.	Y-Cl-2	16-6660	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	410C, 410D, 410E 419B, 420, PL 421, PL 431X	
1st.	Y-Cl-1	16-6658	-	455	-	L-24-A	-	-	-	-	F2	-	Vol	Y-VC-26	M-60-Z	A2	-	D13-133	-	42	G1	-	-	-	511, 511A, 519P, 519PA	
2nd.	Y-Cl-2	16-6660	-	455	f.	L-24-A	-	-	-	-	F2	-	Vol	Y-VC-26	M-60-Z	A2	-	D13-133	-	42	G1	-	-	-	551	
1st.	Y-Cl-1	16-6658	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	639, 639B		
2nd.	Y-Cl-2	16-6660	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	651, 651EB		
1st.	Y-Cl-1	16-6658	-	455	f.	L-24-A	-	-	-	-	F2	-	Vol	Y-VC-21	M-60-Z	A	-	D13-133	-	41	G1	-	-	-	(See 6 671, 672, 673) 670, 671, 672, 673	
2nd.	Y-Cl-2	16-6660	-	455	f.	L-24-A	-	Y-SP-3	ST-115	8A31	-	-	Vol	Y-VC-3	Y-VC-2	-	-	-	-	-	-	-	-	-	-	690
1st.	Y-Cl-1	16-5712	-	455	f.	L-24-A	-	Y-SP-3	ST-115	8A31	-	-	Vol	Y-VC-3	Y-VC-2	-	-	-	-	-	-	-	-	-	-	739
2nd.	Y-Cl-2	16-5714	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	839	
1st.	Y-Cl-1	16-5712	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1056, 1057, 1058 (Ch. 11056, 11058)	
2nd.	Y-Cl-2	16-5714	-	455	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1356 (Ch. 11356)	
1st.	Y-Cl-6	15-5714	-	455	-	-	-	Y-SP-9	-	F2	-	Vol	Y-VC-9	M-63-Z	A	-	D13-137	-	41	G1	-	-	-	1356X (Ch. 11356X) (Phone)		
2nd.	Y-Cl-5	15-5714	-	455	-	-	-	Y-SP-9	-	F2	-	Vol	Y-VC-9	M-63-Z	A	-	D13-137	-	41	G1	-	-	-	1656S		
1st.	Y-Cl-8	15-5714	-	455	-	-	-	Y-SP-10	-	F2	-	Vol	Y-VC-9	M-63-Z	A	-	D13-137	-	41	G1	-	-	-	1655X (Phone)		
2nd.	Y-Cl-7	15-5714	-	455	f.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
1st.	Y-Cl-8	15-5712	-	455	-	-	-	-	-	F2	-	Vol	Tone	M-61-Z	M-53-Z	A	-	D13-137	-	41	G1	-	-	-	Chassis 1870 11656	
2nd.	Y-Cl-8	15-5714	-	455	-	-	-	Y-SP-13	-	F2	-	Vol	Tone	M-61-Z	M-53-Z	A	-	D13-137	-	41	G1	-	-	-	-	

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No.	Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
				Part No.	Part No.									Part No.	Part No.		Part No.			"A"	"B"	"A"	"B"		
MANTOLA																									
R630-RP	3	14B6, 50A5, 35Y4		67A10	PRS150-40-40		BRD3515		M-50+30-150		TA-530		Out	78B9-2		A-3856	B3	T22546	B3	A-2930	B3				
R643PM, R643W, 92502	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT		67A4-2	PRS150-4		BR415		M-4-150		UT-41		Out	On Spkr.	A-3878	B3	T22547	B3	A-2931	B3	758		17GD60		
R-652, 652N	5	1N5GT, 1A7GT, 1H5GT, 3Q5GT		67C7-42	AF84D20A		UP6CJ62		DY-304		EL-351		Chk	74A5		C-1325		T20C52		C-2981					
R654-PM, R654-PV, 92503, 92504	5	12SA7, 12SK7, 12SK7, 50L6GT, 35ZGT (47)		67A8			EZ42215		DSB-403020-150		TA-330	& UT-201	A2	TA-530		74A1	B4	T20C52	B3	A-2900	B3	753		F6A60	
R655-W	5	12SA7, 12SK7, 12SQ7, 50L6GT, 36ZGT (47)		67A8	PRS150-40-40	A2	BRD3515		M-30+50-150		EL-340		Chk	78B4		A-3876	B3	T22545		C-2975	B4				
R652, R662N	6	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 11Z6GT		67A8	PRS150-40-40	A2	EDL3515		M-503-0-150		EL-351		Chk	74A5		C-1325		T20C52		C-2981					
R664-PM, PV, W, 92505, 92506	6	12S7, 12SA7, 12SK7, 12SQ7GT		67A8	PRS150-30-30		EZ42215		DSB403020-150		TA-303		Chk	74A1		C-1711	B4	T20C52	B3	C-2975	B4				
R-7543	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35ZGT (47)		3-1	AF88D		UP4215		DY-4020-150		EL-24		Chk	74A1		C-1711	B4	T20C52	B3	A-2900	B3	753		F6A60	
24B6, R-76143	6	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35ZGT (47)		3-3	PRS150-20-40		BRD4215		DSB-2X30-150		TA-240		Out	On Spkr.	A-3876	B3	T22545	B3	A-2928	B3					
MARK SIMPSON	(See Masto)																								
MASCO																									
MA-17, MA-17P	5	7C7, 6SL7, *6L6GA, 5Y3GT (47)		8, 8 Mfd.	PRSA450-8-8		EZ8845		DSB-2X8-450		UT-88		Chk	C-178		C-2303		T20C54		P-6014		T22R06		P-2954	
MA-20HF	6	6SJ7, *6SL7GT, *6L6GA, 5U4G (47)		8 Mfd.	GL-600-8		KR608		D-8-600		AP85		Pwr	MA-17A		P-6014		T22R06		A-2905		T22S68		C-2995	
				8 Mfd.	PRS450-8		BR845		M-8-450		UT-8		Chk	C-235		T20C54		T22R06		A-2905		T22S68		P-3115	
				8, 8 Mfd.	PRS450-8-8		EDL8845		M-2X8-450		UT-88		Pwr	A20HF		P-4081		T22R06		D-20HF		T22S68		A-3129	
MA-25, MA-25P	7	*7B4, *7N7, *6L6GA, 5U4G, (40/ 47)		8 Mfd.	GL-600-8		BR105		M-10-50		TA-510		Chk	C-235		C-2309		T22R07		A-25, (r)A-35		T22R07		P-2954	
				8, 8 Mfd.	PRS450-8-8		EZ8845		M-2X8-450		UT-88		Pwr	A-25		P-6314		T22R07		A-3111		T22S64		A-2936	
MA-35, MA-35RC	8	*7C7, 7N7, *6L6GA, 5U4G (47)		8 Mfd.	GL600-8		BR1215		M-10-150		UT-121		Chk	C-235		A-35		T22R07		P-6314		T22S64		P-2954	
				8, 8 Mfd.	PRS450-8-8		EDL8845		M-2X8-450		UT-88		Pwr	O-25		A-3311		T22R07		A-3311		T22S64		A-2936	
MA-50	10	*7C7, 7F7, 7N7, *6L6GA, *5U4G (47)		8 Mfd.	GL600-8		KR608		D-8-600		AP86		Chk	C-575		C-1703		T20C56				C-3196			
				8 Mfd.	PRS450-8		BR845		M-8-450		UT-8		Pwr	A-50		T22R34		T22R34		A-50		T22S78			
				8, 8 Mfd.	PRS450-8-8		EDL8845		M-2X8-450		UT-88		Out	A-50		A-3802		T22S78							
MA-75	13	*7C7, 7F7, 7N7, *6V6GT, *6L6GT, *5V4G, 5Y3GT (47)		8 Mfd.	GL600-8		BR1645		M-8-600		AP86		Chk	C-575		C-1703		T20C56				C-2993			
				8 Mfd.	PRS450-16		EZ8845		M-16-450		UT-16		Chk	C-178		C-2309		T20C56		A-5825		T22S68		P-3115	
				8 Mfd.	PRS450-8-8		BR845		M-8-450		UT-8		Pwr	A-75		A-4212		T22D78		A-4212		T22S68		A-3133	
MA-121	5	*7F7, *6V6GT, 5Y3GT (47)		8 Mfd.	GL600-8		BRD3515		DSB-2X40-150		TA-440		Chk	C-178		A-4212		T22R02		P-6013		T22S68		P-2952	
				8, 8 Mfd.	PRS450-8-8		EZ8845		M-2X8-450		UT-88		Pwr	O-17		A-3830		T22R02		A-3830		T22S68		A-2935	
MA-808	4	7B4, 7C7, 6L6GA, 5Y3GT (47)		10 Mfd.	PRSS50-10		BR105		M-8-50		TA-510		Chk	C-178		C-2309		T20C54		C-2309		T22S68		P-2952	
				10 Mfd.	PRSS50-10		BR505		M-10-50		TA-510		Pwr	O-8		A-6014		T20C54		A-6014		T22S68		A-3825	
MAP-15	5	*6SL7/7F7, *6L6GA, 5Y3GT (47)		10 Mfd.	PRSS50-10		BR105		M-10-50		TA-510		Chk	C-178		C-2309		T20C54		C-2309		T22S68		P-2952	
				10 Mfd.	PRSS50-10		BR1645		M-16-450		UT-16		Pwr	C-178		A-6014		T20C54		C-2309		T22S68		A-3825	
MAP-105	3	7F7, 6V6GT, 6X5GT (47)		8 Mfd.	PRSS50-10		BR1645		M-16-450		UT-16		Chk	C-178		C-2309		T20C54		C-2309		T22S68		P-2952	
				8 Mfd.	PRSS50-10		BR845		M-8-450		UT-8		Pwr	C-178		A-6014		T20C54		C-2309		T22S68		A-3825	
MAP-120	5	*6SL7GT, *6V6GT, 5Y3GT (47)		8 Mfd.	PRSS50-8-8		BRD4415		M-2X8-450		UT-88		Chk	C-178		C-6013		T22R05		P-6013		T22S68		P-2953	
				10 Mfd.	PRSS50-10		BR105		M-10-50		TA-510		Pwr	O-12S		A-3824		T22R05		A-3824		T22S68		A-2905	
MC-25, MC-25P	7	*7B4, *7N7, *6L6GA, 5U4G (47)		8 Mfd.	GL600-8		KR608		D-8-600		AP86		Chk	C-235		C-2309		T20C54		A-3830		T22S68		P-2953	
				8 Mfd.	PRSS450-8-8		BR845		M-2X8-450		UT-88		Pwr	A-25M		A-6014		T20C54		C-2309		T22S68		A-3825	
				8 Mfd.	PRSS450-8		BR845		M-8-450		UT-8		Out	O-25		A-3311		T20C54		A-3311		T22S68		A-2905	
MPA-3, MPT-4	3	14H7, 50L6, 35Z3		40, 40 Mfd.	PRSA150-40-40		BRD4415		DSB-2X40-150		TA-440		Out	†	A-3875	B3	T22S68		B3	A-2928	B3				
MRC-5	3	14H7, 50L6, 35Z3		40, 40 Mfd.	PRSA150-40-40		BRD4415		DSB-2X40-150		TA-440		Out	†	A-3876	B3	T22S68		B3	A-2930	B3				
TP-16A	4	*6SL7GT, 6V6GT, 6X5GT (47)		16 Mfd.	PRSA450-16		BR1645		M-16-450		UT-16		Chk	C-165		C-1706		T20C52		P-6119		T22R02		P-2951	
				8, 8 Mfd.	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Pwr	A-6D		A-3824		T22R02		A-3824		T22S68		A-2932	
				10 Mfd.	PRSS50-10		BR105		M-10-50		TA-510		Out	O-6S											
76, 7II	3	14F7, 50L6GT, 35Y4 (40)		40, 40 Mfd.	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		In	13-IN-20C		T20A00		T22S62		A-2902					
86, 8II	3	14F7, 50L6GT, 35Y4 (40)		40, 40 Mfd.	PRSA150-40-40		BR105		M-10-50		TA-510		In	13-O-20C		T20A00		T22S62		A-2902					
				10 Mfd.	PRSS50-10							In	13-N-20C												

+ Information not available

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Type	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
		"A"	"B"	"A"	"B"																			
MASON 45-1A.....	6	12SK7GT, 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	30, 50, 20 Mfd	PRSA150-50-30 PRS150-20-		EZ53215C		DSB-40302D-150		TA-530 & UT-201		Out	.....†	A-3876	B3	T22S45	B3	A-2928	B3					
MAYFAIR 510, 510W, 520, 520W, 530, 530W.....	5	12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)	34022			BRD4415		DSB-2X40-150		TA-440		Out	94021		A-3876		T22S45		A-2928					
550, 550W.....	5	12BE6, 12BA7, 12AT6, 50B5, 35W4 (47)	34022			BRD4415		DSB-2X40-150		TA-440		Out	94021		A-3876		T22S45		A-2928					
McGRADE M-100.....	3	12SJ7, 50L6GT, 35Z5GT	20, 20 Mfd 5 Mfd	PRSA150-20-20 PRS-25-10		BRD2215 BR102A		DSB-2X20-150 M-10-25		TA-220 TA-5		Out	Mike	.....†	A-3856 A-3856		T22S46 T22S46		A-2900 A-2900					
MECK PM-5C5-DW10.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (or Lock-In Type Equivalent)	CL-10001	PRS150-20-20 & PRS150-20		EZ42215		DHN-2X20-150 & DH-20-150		TA-220 & UT-201		Out	TO-10000		A-3876	B3	T22S45	B3	A-2928	B3				
PM-5C5-PW10.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (or Lock In Type Equivalent)	20, 20, 20 Mfd	PRSA150-20-20 & PRS150-20		E22215 & BR2015		DSB-3X20-150		TA-220 & UT-201		Out	TO-10000		A-3876	B3	T22S45	B3	A-2928	B3				
RC-5C5-P.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (or Lock-in Type Equivalent)	CL-10001	PRS150-20-20 & PRV150-20		EZ42215		M-40-150 & M2X20-150		TA-430 & UT-201		Out	TO-10000		A-3876		T22S45		A-2928					
SD7-WL18.....	4	1R5, 1U4, 1S5, 3V4	CL-10007	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	TO-10007		A-3878	B3	T22S47	B3	A-2931	B3	4950 4455	52R	2XX30	
6A6-W4.....	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	20, 20, 20 Mfd	PRSA150-20-20 & PRS150-20		EZ42215		DSB-3X20-150		TA-303		Out	.....†	A-3876	B	T22S45	B3	A-2928	B3					
MEDCO (See Telesonic)																								
MEISSNER 9-1047A.....	8	6SK7, 6SA7, 6SJ7, SH6, 6X5GT, 6U565	60, 60 Mfd									Pwr	.....†											
9-1065.....	7	6SA7, 6SF7, 6SJ7, 6SC7, 6V6GT, 5Y3GT (51)	16124 24126	AF22F		UP2245 UP222-25 BR1045		DY-2X20-450 DY-2X20-25 M-10-450		EL-220 EL-325 UT-12	A9	Pwr Out	19847 19851		P-6120		T22R02		P-2952					
9-1067.....	11	7G7, 6SA7, 6SJ7GT, 6H6GT, 7N7, 6X5GT, 6U5	16113 24131 15192	PRS450-10		BR102A		M-10-25		TA-10		Chk Pwr Out	19466 19466		.....†	.....†	.....†	.....†						
9-1084, 9-1085.....	6	12SK7, 12SA7, 12SQ7, 35L6, 35Z5 (47)	40, 80 Mfd									Chk Pwr Out	28250 On Spkr.	C-1080	T20C52	C-2977								
9-1085.....	6	12SK7, 12SA7, 12SQ7, 35L6, 35Z5	20, 20 Mfd	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Chk Pwr Out	25275 On Spkr.	C-1080	T20C52	C-2977								
2961 Series.....	29	9003, 6BE6, 604, 39002, 6AG5, 6AL5, 6AG5, 9001, 6U5, 665, 6J5G1, 6NS7G1, 6L6GA, 5Y3G, 5Y4G (44)	2771 28106 28105	GL450-20-20 PRSS0-50 PRS450-10 PRS25-25		KRC5220 BR505 BR1045 BR252A		DY-2X20-450 M-50-50 M-10-450 M-25-25		EL-220 TA-550 UT-12 TA-25		Chk Pwr Out	29224 29227 29225 29226	C-2304 C-1421	T49790 C-1421 T20C55	T49815A T49814A T22S78	C-2990							
MIDLAND M6B.....	6	12SA7, 12SG7, 12JS5GT, 35L6GT, 35Z5GT (44)	30, 20, 20 Mfd	PRS150-30 & PRS150-20-20		EZ42215		M-30-150 DHN-2X20-150		TA-230 & UT-201		Out	.....†	A-3876	B3	T22S45		A-2928						
MIDWEST Portable (1940).....	5	1A7, 1N5, 1T5, 25Z6, 1H5 (47)	40, 20, 10, 70 Mfd									Out	On Spkr.	A-3881		T22S48		A-2934		.....†				
P-5.....	5	1A7, 1N5, 1H5, 1T5, 25Z6, (47)	40, 10, 20, 70 Mfd									Out	On Spkr.	A-3881		T22S48		A-2934		2482	C4	F4P1	B30	
P-6, PB-6.....	5	1R5, 1T4, 1S5, 3S4	CE-9	PRS150-30		BR3015		M-30-150 M-100-50		UT-301 UHC-102		Out	TA-1	A-3878		T22S47		A-2931	734			G6M60		
S-8, ST-8, TM-8, (Ch. STM-8).....	8	6SK7GT, 6SA7GT, 6J5GT, 6E5, 6S17GT, 6K6GT, 6X5GT	30, 25, 25 Mfd	AF444J4A & PRS25-50	A4	UP93056 & PRS02		DY-315 & M-50-25		EL-330 & TA-50		Pwr Out	TP-1 On Spkr.	P-6013 A-3852		T22R05 T22S47		P-2953 A-2931						
S-12, SG-12, ST-12, (Ch. SGT-12).....	12	7A7, 707, 7A6, 6E5, 7A4, 7C5, 5U4G (45)	CE-6 CE-4	AF88J PRS25-50 PRS150-8		UP4445 BR502		DY-2X40-450 M-50-25 M-8-150		EL-240 TA-50 UT-81		Pwr Out	TP-3 On Spkr.	P-6314 A-3824		T22R07 T22S56		P-2955 A-2905						
S-16, SG-16, ST-16, (Ch. SGT-16).....	16	6BA6, 6BE6, 6C4, 7A7, 707, 6A5, 7A6, 6E5, 7A4, 7C5, 5U4G (46)	CE-6 CE-4 CE-7	AF88J PRS25-50 PRS150-8		UP4445 BR502 BR815		DY-2X40-450 M-50-25 M-8-150		EL-240 TA-50 UT-81		Pwr Out	TP-3 On Spkr.	A-6314 A-3824		T22R07 T22S56		P-2955 A-2905						
T051.....	5	7A8, 7B7, 7C6, 35A5, 35Z5	C248	AF44J4A		UP2245C		DY-315		EL-350		Out	.....†	A-3876		T22S45		A-2928						
5-36.....	5	6A7, 6D6, 75, 41, 0Z4	8, 8 Mfd	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Chk Pwr Out	.....†	C-1723		T20C52		C-2975						

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Part No.	MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note				
1st.		16-6658.		455					ST-107.		5A15.		Vol	†.	M-60-Z.		A.		D13-133.	41	G1				14.	MASON 45-1A			
2nd.		16-6660.																											
1st.	94023			455					73009.		ST-113.		Vol	64017.	M-60-Z.		A.		D13-133.	41	G1				25.	MAYFAIR 510, 510W, 520, 520W, 550, 530W			
2nd.	94024	16-6660.								73009.	ST-113.	4A1.		Vcl	64017.	M-60-Z.		A.		D13-133.	41	G1				24.	550, 550W		
1st.	94023			455	†.																				16.	MC GRADE M-100			
2nd.	94024	16-6660.																											
1st.	TS-10000.	16-6658.		455	†.				SR-10000.	ST-113.	4A1.		Vol	VC-10105.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41						2.	MECK PM-5C5-DW10		
2nd.	TS-10001.	16-6660.								SR-10000.	ST-113.	4A1.		Vol	VC-10105.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41	G6					12.	PM-5C5-PW10	
1st.	TS-10000.	16-6658.		455	†.					SR-10000.	ST-113.	4A1.		Vol	VC-10105.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41						1.	RC-5C5-P	
2nd.	TS-10001.	16-6660.																											
1st.	TS-10000.	16-6658.		455						SRP-10008.		4A07.		Vol	VC-21105.	M-63-Z.	A2.	GG	D13-137.	42	G1	6					21.	5D7-WL18	
2nd.	TS-10001.	16-6660.												Vol	VC-21105.	M-60-Z.	A2.	GG	D13-133.	42	G1						16.	6A6-W4	
1st.	TS-10001.	16-6666.												Tone	VC-21105.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41							(See Telesonic)	MEDCO
2nd.	TS-10001.	16-6667.		455										Sen	VC-21105.	M-60-Z.	M-60-Z.	M-60-Z.	D13-133.										
1st.	16-6664.	16-6664.		4.3																						MEISSNER 9-1047A			
2nd.	16-6664.	16-6664.																								9-1065			
3rd.	16-6664.	16-6664.																								9-1067			
Disc.	01860.	01860.																								9-1084. 9-1086			
1st.	C0272.	16-6658.	D11	455																						9-1085			
2nd.	C0274.	16-6660.	D11																							27.	2961 Series		
1st.																													
2nd.																													
3rd.																													
1st.	40411.	16-5712.		455																									
2nd.	40412.	16-5714.																											
1st.	03971.	16-6658.		455																									
2nd.	03972.	16-6660.																											
1st.	04216.	AM		455	†.				QT (or) Nylon 1-J	29220-2.	ST-122.	F15		Vol	29232.	AT-90.	RS-4.	A.	D13-133.	41	G1	9					3.		
2nd.	04216.													Bass	29260.	43-100.	RS-4.	A.	D11-120.										
3rd.	04238.													Treble	29260.	43-100.													
AVC.	04238.													Vcl	29259.	43-1000.													
1st.	04193.																												
2nd.	04193.																												
3rd.	04193.																												
Lim.	04193.																												
Disc.	04194.																												
1st.	455101.	16-6658.		455					421022W5T.	ST-113.	4A1.		Vol	†.	M-60-Z.		A.	D13-133.	41	G1							MIDLAND MSB		
2nd.	455102.	16-6660.																											
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.																													
1st.																													
2nd.					</																								

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	N o t e	Cornell-Dubilier	N o t e	Solar	N o t e	Sprague	N o t e	Use	Mfr.	Stancor	N o t e	Thordarson	N o t e	Merit	N o t e	Eveready Part No.	N o t e	Burgess Part No.	N o t e
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
MIDWEST—Continued																							
7-39.	7	6A8, 6S7, *6L5, 6Z7, 6N5	C240	AF44J		UP2235		DY-2X20-350		EL-32		Chk	C111		†		†		†				
8-39.	8	6A8, 6K7, 6H6, *6P5, *6P5, 6AC5, 80, 6G5	C240	AF44J		UP2235		DY-2X20-350		EL-32		Pwr	T71										
8-39 AC-DC.	7	6A8, 6K7, *6P5, 25L6, 25Z5, 6G5, (49B Ballast)	C240	AF44J		UP2235		DY-2X20-350		EL-32		Out	T39		A-3848	T22S47		A-2900					
12-39.	12	*6K7G, 6L7G, 6J5G, 6J7G, 6H6G, *6P5G, *6V6G, 80, (46)	C268	GL450-30		KR530		D-30-450		PLS-30		Out	On Spkr		A-6012	T22P04		P-2952					
12-40.	12	*6K7G, 6A8G, 6J5G, 6J7G, 6H6G, *6P5G, *6V6G, 80 (46)	C269	GL450-40		KR540		D-40-450		PLS-30		Chk	C-1706		A-3878	T22S58		A-2931					
12-40.	12	*6K7G, 6A8G, 6J5G, 6J7G, 6H6G, *6P5G, *6V6G, 80 (46)	C248	AF44J4A		UP2245C		DY-315		EL-350		Out	T73		A-3876	T22S45		C-2975					
14-40.	14	6A8G, *6P5, 6K7GT, *6P5G, 26AC5G, *80, 6AF6G	C248	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T73		A-3311	T22S64		A-2936					
14-7-9.	14	6A8G, *6P5, 6K7GT, *6P5G, 26AC5G, *80, 6AF6G	C268	GL450-30		KR530		D-30-450		PLS-30		Out	On Spkr		A-3311	T22S64		A-2936					
14-7-9.	14	6L7G, 6J5, *6K7G, *6P5G, 6H6G, *6J5G, *6AC5G, *80	C269	GL450-40		KR540		D-40-450		PLS-40		Out	T73		A-3823	T22S56		A-2904					
15-40.	15	6A8GT, *6P5G, *6K7GT, *6AC5G, *80, 6AF6G	C248	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T73		A-3823	T22S56		A-2904					
16-38.	16	*6K7, *6C5, 6J7, *6H6, 6L7, *6V6, 280	24 Mfd.	GL450-30		KR530		D-30-450		PLS-30		Pwr	T73		A-3311	T22S64		A-2936					
16-38.	16	*6K7, *6C5, 6J7, *6H6, 6L7, *6V6, 280	40 Mfd.	GL450-40		KR540		D-40-450		PLS-40		Out	T73		A-3311	T22S64		A-2936					
17-39.	17	*6K7G, 6L7G, *6J5G, 6J7G, *6P5G, 6H6G, *6AC5G, *80	24 Mfd.	PR25-10		BR102A		TA-10				Pwr	T73		A-3823	T22S56		A-2904					
17-39.	17	*6K7G, 6L7G, *6J5G, 6J7G, *6P5G, 6H6G, *6AC5G, *80	40 Mfd.	GL450-30		KR530		D-30-450		PLS-30		Out	T73		A-3823	T22S56		A-2904					
51.	5	6A8GT, 6K7GT, 6SQ7GT, 6K6G, 5Y3	C248	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T66		P-6289	T22R00		P-2949					
51BT.	5	1B7, 1NSG7T, 1H5G7, *1Q5G7	10 Mfd.	PRS50-10		BR105		M-10-50		TA-510		Out	On Spkr		A-3878	T22S47		A-2931					
51BT.	5	1B7, 1NSG7T, 1H5G7, *1Q5G7	10 Mfd.	PRS50-10		BR105		M-10-50		TA-510		Out	T66		A-3877	T22S46		A-2930		742 & 2482	4F, 2B30		
62.	6	6SA7GT, 6J5GT, 6K7GT, 6SQ7GT, 6V6G, 5Y3G	20-20-20 Mfd.	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T74		P-6011	T22R02		P-2951					
62B.	6	6SA7GT, 6J5GT, 6K7GT, 6SQ7GT, 6V6G, 6X5	20, 20, 20 Mfd.	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T74		A-3877	T22S58		A-2930					
62D.	6	12SA7G1, 12J5G1, 12K7G1, 12S7G1, 35L6G, 35Z4	20, 20, 20 Mfd.	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T74		A-3877	T22S58		A-2930					
82.	8	6SA7GT, 6J5GT, 6K7GT, 6P5GT, 6V6G, 5Y3G, 6U5	20, 20, 20 Mfd.	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T74		P-6011	T22R02		P-2951					
82R.	8	6SA7GT, 6J5GT, 6K7GT, 6SQ7GT, 6F5GT, 6EVG, 5Y3G, 6U5	20, 20, 20 Mfd.	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T74		A-3877	T22S58		P-2951					
90.	9	6A8GT, *6K7GT, 6P5G, 6V6G, 80, 6AF6G	C248	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T66		P-6012	T22R04		P-2952					
91.	9	6A8GT, *6K7GT, *6P5G, 6V6G, 80, 6AF6G	C248	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T66		A-3877	T22S58		A-2930					
112.	11	*6SK7GT, 6SA7GT, *6J5G7, 28V6G, 5Y3G	25, 25, 25 Mfd.									Pwr	T73		P-6013	T22R05		P-2953					
162, 162R.	16	*6SK7GT, 6SA7GT, *6J5G7, 28S7GT, 6V6G, 5Y3G, 6U5	25, 25, 25 Mfd.									Pwr	T73		A-3311	T22S64		A-2936					
170.	17	6K7, 6A8, 6J5, 6J7, *6K7, *6P5, 6H6, *6AC5G, *80, 6AF6G (45)	C248	AF44J4A		UP2245C		DY-315		EL-350		Pwr	T73		A-3823	T22S56		A-2904					
181.	18	*6K7GT, *6J5GT, 6SA7GT, 7A7, *7C7, 6V6G, 5Y3G, 6U5	25, 25, 30 Mfd.									Pwr	T68		A-3877	T22S56		A-2904					
			20, 20, 20 Mfd.									Out	T171										
MINERVA																							
W-117.	8	*6SK7, 6SA7GT, 6SQ7, 6SC7GT, 25L6G, 25Z6G	40 Mfd.	PRS150-40		BR4015		M-40-150		UT-401		Chk	C-2309		T20C54								
W-117-3.	8	*6SK7, 6SA7, 6SQ7, *25A5, 25Z5GT (47)	40-40 Mfd.	PRSA150-40-40		BRD4415		DSB-2X40-150		TA-440		Chk	C-2308		T22S47								
702-H, 702-H-1.	6	12SK7GT, 12SA7, 12S7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	40-40 Mfd.	PRSA150-40-40		BRD4415		DSB-2X40-150		TA-440		Out	T73		A-3823	T20C54		A-2904					
W-702B, L-702.	6	12SK7GT, 12SA7GT, 12SK7, 12SQ7GT, 35L6GT, 35Z5GT (47) (or Lock-In Type Equivalent)	40, 40 Mfd.	PRSA150-40-40		BR4015		M-40-150		UT-401		Out	T73		A-3876	B3	T22S47	B3	A-2928	B3			
W-710, W-710A, (Ch. W119).	6	12SK7, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	40-40 Mfd.	PRS150-40-40		BRD4415		M-2X40-150		TA-440		Chk	C-1709		T20C52								
L-728, W-728.	5	12SA7, 12SK7, 12SQ7, 12SQ7GT, 50L6, 35Z5 (47) (or Lock-In Type Equivalent)	30, 30, 30 Mfd.	PRSA150-30-30		EZ3315 & BR3015		DSB-2X30-150 & M-30-150		TA-330 & UT-301		Out	A-3876		B3	T22S45	B3	A-2928	B3				
729 (Porta Pal).	5	1R5, 1T4, 1S5, 3Q4, 11723	230005	AF888D & PRS25-100				DY-3X40-150 & M-100-25		EL-340 & UHC-102		Out	A-3878		B3	T22S47	B3	A-2931		#746 & #482	#G3, #M30		
MISSION BELL RA	D	IO CO.	5	6A7, 6D6, 75, 41, 80	8. 8 Mfd.	PRSB450-8-8		EZ588		TU-38		Out	A-3878		T22S47		A-2931						
384, 384 Special.																							

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Melsener Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Phone Set No.	
1st.	T164	16-5712		456				S304	ST-108		6A1		Vol	C363	T-90				D19-133X		41	G1	V13	5409	Continued—	MIDWEST 7-39	
2nd.	T165	16-5714																									
1st.		16-5712	D13	456				S302		F2		F2		Vol	C363	T-90				D19-133X		41	G1				8-39
2nd.		16-5714	D13	456				S302		F2		F2		Vol	C363	T-90				D19-133X		41	G1				8-39 AC-DC
1st.		16-5712	D13	456				S307	ST-173		12E15		Vol	C363	T-90				D19-133X		41	G1				12-39	
2nd.		T161	16-5712	456	↑	↑		S307	ST-173		12E15		Vol	C363	T-90				D19-133X		41	G1				12-40	
3rd.		T162	16-6133																								
1st.		T163	16-5712	456				S307	ST-173		12E15		Vol	C363	T-90				D19-133X		41	G1				14-40	
2nd.		T162	16-6133																								
3rd.		T163	16-5712	456																							
1st.		T48	16-5712	456																							
2nd.		T49	16-5714																								
1st.		16-5712	456																								
2nd.		16-5714																									
3rd.		16-6133																									
1st.		T42	16-5712	456																							
2nd.		T42	16-6133																								
3rd.		T43	16-5714																								
1st.		16-5712	D13	456																D19-133X		41	G1				15-40
2nd.		16-6133	D13																								
3rd.		T43	16-5714																								
1st.		T42	16-5712	456																							
2nd.		16-6133	D13																								
3rd.		T43	16-5714																								
1st.		T50	16-5712	456																							
2nd.		T51	16-5714																								
1st.		T50	16-6658	456				S294		F2		F2		Vol	C363	T-90				D19-133X		41	G1				51
2nd.		T51	16-6660																								
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714																									
1st.		16-5712	456																								
2nd.		16-5714			</																						

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"			
MISSION BELL RA 386.	D 10 CO.—Continued	6 6A7, 6D6, 6H6, 6F5, 6V6G, 80...	8, 8 Mfd.	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Chk Pwr Out	t. t. t.	P-6119, A-3849, P-6010, A-3856, A-3878,	T22R02, T22S87, T22R01, T22S43, T22S47	P-2951, A-2902, P-2950, A-2900, A-2931								
395.	5 6A7, 6D6, 6Q7, 41, 80...	8, 8 Mfd.	PRSB450-8-8			EZ588		DH-2X8-450SS		TU-88		Pwr Out	t. t. t.	P-6119, A-3849, P-6010, A-3856, A-3878,	T22R02, T22S87, T22R01, T22S43, T22S47	P-2951, A-2902, P-2950, A-2900, A-2931								
400.	4 1A7G, 1N5G, 1H5G, 1C5G...	4 Mfd.	PRS150-4			BR415		M-4-150		UT-41		Out	t. t. t.	P-6119, A-3849, P-6010, A-3856, A-3878,	T22R02, T22S87, T22R01, T22S43, T22S47	P-2951, A-2902, P-2950, A-2900, A-2931								
401, 402.	5 6A7, 78, 75, 25L6, 25Z5, (L49B Ballast)	40, 40 Mfd.	PRS150-40			BR4015		M-40-150		UT-401		Out	t. t. t.	A-3876,	T22S45	A-2928.								
404.	5 6K7, 6B8, 6N7, 5W4...	8, 8 Mfd.	PRSA450-8-8			EZ8845		M-2X8-450		UT-88		Pwr	t. t. t.	P-6010,	T22R01	P-2950.								
407, 408, 412.	5 12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT	20, 40 Mfd.	PRS150-40			BR4015		M-40-150		UT-401		Out	t. t. t.	A-3876,	T22S45	A-2928.								
407 Late.	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	1132040754	PRS150-40			BR4015		M-40-150		UT-401		Out	t. t. t.	11313407241, A-3876,	T22S45	A-2928.								
410.	6 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT, 6AF5...	18, 40 Mfd.	PRS150-40 & PRS150-16			BR4015 & BR1615		M-40-150		UT-401		Out	t. t. t.	A-3876,	T22S45	A-2928.								
411.	5 6A7, 6D6, 75, 41, 80	11320411153	PRSB450-8-8			EZ588		DH-2X8-450SS		TU-88		Pwr Out	t. t. t.	11310411150, P-6010, A-3850,	T22R01, T22S47	P-2950, A-2931								
415.	5 6SA7, 6SK7, 6SQ7, 6FG6, 5Y3G...	10, 10 Mfd.	PRS25-25			EZ5116		M-25-25		TU-1616		Pwr	t. t. t.	P-6011,	T22R02	P-2951.								
416.	7 6A8GT, 6K7, *GP3GT, 6SQ7, 6FG6, 5Y3G...	10, 10 Mfd.	PRS25-25			EZ5116		M-25-25		TU-1616		Pwr	t. t. t.	P-6011, A-3852,	T22R02, T22S47	P-2951, A-2931								
417.	7 6A8GT, 6K7, *GP5GT, 6SQ7, 6FG6, 5Y3G...	10, 10 Mfd.	PRS25-25			EZ5116		M-25-25		TU-1616		Pwr	t. t. t.	P-6011, A-3852,	T22R02, T22S47	P-2951, A-2931								
418.	5 6SA7, 6SK7, 6SQ7, 6KG6T, 5W4...	10, 10, 20 Mfd.	AF444A, UP2245C			BR252A		M-25-25		TA-25		Pwr	t. t. t.	P-6011, A-3852,	T22R02, T22S47	P-2951, A-2931								
423.	6 6SA7, 6SK7, 6SQ7, 6SJ7, 6V6GT, 5W4...	10, 10 Mfd.	AF22J			UP1145		DY-2X10-450		EL-210		Chk Pwr	t. t. t.	C-1227,	T20S52	C-2981.								
	8 Mfd.	PRS450-8				BR845		M-8-450		UT-8		Out	t. t. t.	P-6011, A-3854,	T22R02	P-2951.								
	20 Mfd.	PRS25-25				BR252A		M-25-25		TA-25		Out	t. t. t.											
498 (Record Player).	2 6L5G, 70L7G, (K90G Ballast),...	40, 40 Mfd.	PRSA150-40-40			BRD4415		M-2X40-150		TA-440		Out	t. t. t.	A-3876,	T22S45	A-2928.								
500, 501.	4 1A7G, 1N5G, 1H5G, 1Q5G...	4 Mfd	PRS150-4			BR415		M-4-150		UT-41		Out	t. t. t.	A-3822,	T22S47	A-2932.								
503.	4 1A7G, 1N5G, 1H5G, 1Q5G...	6 Mfd	PRS150-8			BR815		M-8-150		UT-81		Out	t. t. t.	A-3822,	T22S47	A-2932.								
504.	5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6GT...	40, 20 Mfd.	PRSA150-40-20			BRD4215		M-2X40-150		TA-240		Out	t. t. t.	A-3881,	T22S48	A-2934.								
638A.	6 6A7, 6K7, 6H6, 75, 41, 84	8, 8 Mfd.	PRS25-100			BRH251		M-100-25		UHC-102		Pwr	t. t. t.	A-3878,	T22S47	A-2931.								
972.	5 6A7, 6D6, 6Q7, G41, 80...	8, 8 Mfd.	PRSB450-8-8			EZ588		DH-2X8-450SS		TU-88		Pwr	t. t. t.	P-6010,	T22R01	P-2950.								
3710.	8 6A7, 6K7, 6H6, 6F5, 242, 76, 80...	4 Mfd	PRS450-4			BR445		M-4-450		UT-4		Pwr	t. t. t.	A-3878,	T22S47	A-2931.								
3716.	5 6A7, 6K7, 75, 41, 84...	30 Mfd	GL450-30			KR530		D-30-450		PLS-30		Pwr	t. t. t.	P-6012,	T22R04	P-2952.								
3749.	5 6A7, 6D6, 75, 41, 80...	6, 6 Mfd.	PRSB450-8-8			EZ588		DH-2X8-450SS		TU-88		Pwr	t. t. t.	A-3876,	T22S45	A-2928.								
3817A, (See 638A).	6 6A7, 6D6, 75, 41, 76, 80...	8, 8 Mfd.	PRSB450-8-8			EZ588		DH-2X8-450SS		TU-88		Pwr	t. t. t.	P-6011,	T22R02	P-2951.								
3849, 3859.	6 6A7, 6D6, 75, 41, 76, 80...	8, 8 Mfd.	PRSB450-8-8			EZ588		M-8-450		UT-8		Pwr	t. t. t.	A-3856,	T22S48	A-2900.								
3869, 3891.	5 6A7, 6K7G, 75, 25L6G, 25Z5...	8, 8 Mfd.	PRS450-8			BR845		M-8-450		UT-8		Pwr	t. t. t.	P-6119,	T22R02	P-2951.								
3871.	4 6K8, 75, 25L6G, 25Z5, (L55B Ballast)	16, 40 Mfd.	PRS150-40 & PRS150-16			BR4015 & BR1615		M-40-150 & M-16-150		UT-401 & UT-161		Out	t. t. t.	A-3876,	T22S45	A-2928.								
MIRRORTONE (See Meek)																								
MOLDED INSULAT	TION CO. (See VIZ).																							
MONITOR	4 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT	50, 30 Mfd.	AF1010D			UP5315		DY-5030-150		EL-35		Out	1300	A-3876	B3	T22S45	B3	A-2928.	B3					
M-500.	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35W4	2073	AF1010D			UP5315		DY-5030-150		EL-35		Out	1300	A-3876	B3	T22S45	B3	A-2928.	B3					
M-510.	4 1R5, 1T4, 1S5, 3Q4	2075	AF1010D & PRSS50-25			UP6CJ41		DY-804020-150		EL-26 & TA-525		Out	1337	A-3878	T22S47	A-2931.		753						
M-3070.	11 6BA6, 6BE5, 6CA4, 6SK7, 6SA7, 6SH7, 6H6, 6SQ7, 6V6GT, 5Y3GT (47)	25 Mfd	PRS25-25			BR252A		M-25-25		TA-25		Chk Pwr	CK-1040, C-1002, T20C53	B102, P-6013, TR-1061	B12	C-2990, P-2953, A-3849								
RA-50.	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)	CD-1226	PRSA150-40-30			BRD4415		DSB-2X40-150		TA-430		Out	On Spkr.	A-3876	B3	T22S45	B3	A-2928.	B3					
TA56M, TW56M.	5 14Q7, 14A7, 14B8, 50A5, 35Y4 (47)	15, 15 Mfd.	CD-1224	PRSA150-20-20		BR102A		M-10-25		TA-10		Out	B-135077	A-3876	T22S45	A-2928.								
						BR2215		M-2X15-150		TA-116		Out												
MONTGOMERY	WARD (See Airline)																							

Section D IF COILS				Section E PHONO CARTRIOGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Start	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.		
1st.	+	16-5712	465				+			F1		F1	Vol Tone	+	M-60-Z M-64-Z		A		D13-133 D13-130		41	G1 G1		Continued — M	ISSI	ON B	BELL RADIO CO. 386
2nd.	+	16-5714					+			F2		F2	Vol		T-78		A		D13-133X		41	G1					395
1st.	+	16-5712	465	+			+			F1		F1	Vol	+	M-60-Z		A2		D13-133		42	G1					400
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					401, 402
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					404
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					407, 408
1st.	+	16-6656	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133	E							407 (Late)
2nd.	+	16-6658	465				+			SE45		SE45	Vol	113244079	AM-60-Z KSS-3				D13-133		41	G1					410
1st.	+	16-6660	465				+			SE45		SE45	Vol	+	M-60-Z		A		D13-133		41	G1					411
2nd.	+	16-6658	465				+			ST-154		ST-154	Vol	+	M-60-Z		A		D13-133		41	G1					412 (See 407, 408)
1st.	+	113394071	16-6658	465			1135840724	ST-154																		415	
2nd.	+	113394072	16-6660	465																						416	
1st.	+	16-6658	465																							417	
2nd.	+	16-6660	465																							418	
1st.	+	113394111	16-6658	465																						423	
2nd.	+	113394112	16-6660																								
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-64-Z		A		D13-133X		41	G1					419
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-64-Z		A		D13-133X		41	G1					420
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					421
1st.	+	16-6658	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					422
2nd.	+	16-6660	465				+			L-40		L-40	Vol	+	M-60-Z		A		D13-133		41	G1					423
1st.	+	16-6658	465				+			F1		F1	Vol	+	M-60-Z		A		D13-133		41	G1					424
2nd.	+	16-6660	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		42	G1					425 (Record Player) 500, 501
1st.	+	16-6658	465				+			F1		F1	Vol	+	M-60-Z		A2		D13-133		42	G1					503
2nd.	+	16-6660	465				+			F1		F1	Vol	+	M-60-Z		A2		D13-133		42	G1					504
1st.	+	16-6658	465				+			F1		F1	Vol	+	M-60-Z		A		D13-133		41	G1					638A
2nd.	+	16-6660	267.5				+			F2		F2	Vol	+	SD-60-Z	DFS%	DC13-133									972	
1st.	+	16-5704	267.5				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					3710
2nd.	+	16-5706	267.5				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					3716
1st.	+	16-6658	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					3749
2nd.	+	16-6660	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					3817A (See 638A) 3849, 3859
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z		A		D13-133		41	G1					3869, 3891
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-64-Z		A		D13-133		41	G1					3871
1st.	+	16-5712	465				+			F2		F2	Vol	+	AM-60-Z	KSS-3	A		D13-133	E	41						(See Meck)
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z			D13-133		41	G1					(See Viz) M O L DED
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-130		41	G1					INSULATION CO.
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-130		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
2nd.	+	16-5714	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					
1st.	+	16-5712	465				+			F2		F2	Vol	+	M-60-Z	M-64-Z	A		D13-133		41	G1					

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
MOPAR 600.....	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 0Z4 (51)	R42260	..†		..†		..†		..†		Pwr Out	R42232	..†		T22S46	A-2930							
601.....	6	7AT, 7Q7, 7B6, 7C5, 0Z4 (44)	R43691	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	R43787	P-4061		T22R20	P-2971							
602.....	6	7AT, 7Q7, 7B6, 7C5, 0Z4 (44)	43691	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	R43787	A-3877		T22S46	A-2930							
802.....	8	7AT, 7B8, 7B6, 7A4, 7C5, 7Y4 (44)	61-0150					DY-404		EL-415		Pwr Out	65-0347			T22S46	A-2930							
													65-0363	A-3856										
MOTOROLA A1.....	4	IR5, 1T4, 1S5, 1S4	23A25546	PRS150-12		BR1215		M-10-150		UT-121		Out	25K24980	A-3329		T22S47	A-2927			950 & 467		2R	XX45	
AR-96-23.....	4	IR5, 1T4, 1S5, 3S4	23A14727	PRS150-12		BR1215		M-10-150		UT-121		Out	25A51574	A-3878		T22S46	A-2930			950 & 467		2R	XX45	
B-150.....	3	1A7GT, 3A8GT, 1Q5GT	23A21877	PRS150-12		BR1215		M-10-150		UT-121		Out	25A21691	A-3329		T22S47	A-2927						3FA60	
BK-6, (Buick).....	8	6SK7GT, 6SA7GT, 6SQ7GT, 6V6GT, 0Z4/6X5GT (44)	23A75429	AF44J & PRS25-25		UP2245C		DY-312		EL-350		Pwr Out	25B70950	P-4063		T22R22	P-4073							
CR6, (Chrysler).....	8	6SK7, 6SA7, 6SK7GT, 6SQ7GT, 6S07, 6V6GT, 6X5GT, 0Z4 (51)	23A75429	AF44J & PRS25-25		UP2245C		DY-312		EL-322		Pwr Out	25B70950	P-4062		T22R20	P-2971							
CR-76, (Chrysler).....	6	6SK7GT, 6SA7GT, 6SK7, 6S07GT, 6V6GT, 6X5GT (51)	23A75429	AF44J & PRS25-25		UP2245C		DY-312		EL-322		Pwr Out	25B70950	P-4062		T22S47	A-2930							
CT-6, (Chevrolet).....	6	6SK7GT, 6SA7GT, 6SK7GT, 6V6GT, 0Z4/6X5GT (44)	23A75429	AF44J & PRS25-25		UP2245C		DY-312		EL-322		Pwr Out	25B70950B	P-4062		T22R20	P-2971							
FD-6.....	6	6SK7GT, 6SA7GT, 6SK7GT, 6V6GT, 0Z4/6X5GT (44)	23A75429	AF44J & PRS25-25		UP2245C		DY-312		EL-322		Pwr Out	25B70950B	P-4062		T22R20	P-2971							
FM-82.....	8	6SK7GT, 6SA7, 6S07, 6H6, 5W4GT (47)	23A27718					DY-311		EL-330		Pwr	25B21248	P-6120		T22R02	P-2951							
NH-6, (Nash).....	6	6SK7GT, 6SA7GT, 6SK7GT, 6V6GT, 0Z4/6X5GT (44)	23A75429	AF44J & PRS25-24		UP2245B & BR202A		DY-312		EL-322		Pwr Out	25B70950B	P-4062		T22R20	P-2971							
													25B72258	A-3856		T22S47	A-2900							
OE-6 (Oldsmobile), (See CT-6).....																								
PC-6 (Pontiac), (See CT-5).....																								
RW-1.....	5	6SK7GT, 6SK7GT, 6K6GT, 5W4GT	23A14963	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	25B21248	P-6120		T22R02	P-2951							
WR6, WR7, WR8.....	2	6SK7GT, 6J5GT	23A22953	PRS25-23		BR252A		M-25-25		TA-25		Pwr Out	25A2173											
			23A20887	PRS150-20-20	& PRS150-12	EZ32115		DSB-3X20-150		TA-122 & UT-121		Pwr	25A174249											
3A5, 3A5-A.....	5	1R5, 1T4, 1S5, 3S4, 117Z6GT	23B27161									Out	25X25768 (or 25K27151)	A-3329			A-2927		950 & 467		2R	XX45		
5A1.....	4	1R5, 1T4, 1S5, 3S4	23A14727	PRS150-12		BR1215		M-10-150		UT-121		Out	25K27151	A-3329			A-2927		950 & 467		2R	XX45		
5A5.....	5	1R5, 1T4, 1S5, 3S4, 117Z3	23A71212									Out	+	A-3329			A-2927		950 & 467		2R	XX45		
5A7, 5A7-A.....	4	1R5, 1U4, 1S5, 3S4	23B470692	AF44D		UP42215		DY-403020-150		EL-224		Out	25B470662	A-3329		T22S47	A-2927		950 & 467		2R	XX45		
8-30.....	6	78, 6A7, 75, 41, 84 (51)	23A5186	PRS25-100		BRH251		M-100-25		UHC-102		Pwr	25B4368											
8-40.....	6	78, 6A7, 75, 41, 84	23A4014	PRS25-8-8 & PRS25-25		EZ8455		DHS-2X8-450		TU-88		Out	25A4019	A-3877		T22S46	A-2930							
8-50.....	6	78, 6A7, 75, 42, 0Z4	23A4309	PRS25-8-8		EZ588		DHS-2X8-450SS		TU-88		Chk	25A4377	†										
8-60.....	6	78, 6A7, 75, 41, 0Z4	23A4309	PRS25-8-8		EZ588		DHS-2X8-450SS		TU-88		Pwr	25B4388	A-3877		T22S46	A-2930							
8-70.....	8	6K7G, 6A8G, 6V7G, 6C5G, 6V6G, 0Z4	23A4571									Out	25B44310	†										
8-80.....	8	6K7G, 6A8G, 6U7G, 6C5G, 6V6G, 0Z4	23A4662									Pwr	25B44315	†										
9A, 9R, 9Y.....	9	6ABG, 6J5G, 6K7G, 6H6G, 6V6G, 5Y3, 6G5	14H37275	GL450-16		KR516A		D-16-450		PLS-16		Out	25B4388	A-3878		T22S47	A-2931							
9-24, 9-24A.....	6	6SK7GT, 6A8GT, 6Q7GT, 6K6GT, 0Z4/6X5, (or Lock-In Type Equivalent)	14H37277	PRS450-8		BR845		M-8-450		UT-8		Out	25B4388	A-3878		T22S47	A-2931							
9-29, 9-39.....	6	78, 6A7, 75, 41, 84 (51)	23A5186	PRS25-8-8 & PRS25-25		EZ88455		DHS-2X8-450 & M-25-25		TU-88 & TA-25		Out	25B4388	A-3878		T22S47	A-2931							
9-44.....	6	78, 6A7, 75, 41, 84	23A14219			UP6CJ20		DY-3X20-450				Chk	25B4416	†										
9-49.....	6	7B7/7A7, 7A8/7BA, 7C6/7B6, 7C5/7B5, 0Z4/6X5	23A12645			UP6CJ20		DY-3X20-450				Out	25A14202	A-3878		T22S47	A-2928							
9-49 (Bantam).....	6	6K7GT, 6A8GT, 6Q7GT, 6K6GT, 0Z4/6X5	23A12645			UP6CJ20		DY-3X20-450				Pwr	25A13763	†										
												Chk	25A13764	†										
												Pwr	25A13760	A-3878		T22S47	A-2931							
												Chk	25A13763	†										
												Pwr	25B13764	A-3878		T22S47	A-2931							
												Out	25A13760	A-3878		T22S47	A-2931							
												Chk	25A13764	†										
												Pwr	25A13764	A-3878		T22S47	A-2931							

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat Part No.	Note	Phonet Set No.				
1st. 2nd.	R42230. R42231.			155				R42301.			F2		Vol	41496..									R43697..	5301..	H1	MOPAR 600				
1st. 2nd.	R43775. R43776.			240				R43775.			/1V1		Vol	44862..									R43697..	5301..	H1	601				
1st. 2nd.	43775.. 43776..	16-6652.. 16-6656..		260				43914.			7EV6		Vol	44862..									43777..	5301..	H1	602				
1st. 2nd.	65-0365.. 65-0366..	16-6658.. 16-6670..		455				73-01H7			7EV6		Vol Sen	67-0040.. 67-0025..									13-0324..	5326-P..	H1	802				
1st. 2nd.	IX24889.. IX24886..			455				IX-K740/1..			3A07		Vol	18A24918..													MOTOROLA A1			
1st. 2nd.	IX24889.. IX24886..			455				50K21690..			4A1		Vol	1A21688..	AM-6A-7..	KVS-3..	A7..	D13-137..	I..	V..							11..	AR-96-23		
1st. 2nd.	IX24889.. IX24886..			455				50C74585.. (or) 50C74479..	ST-115..	F8	8EV6		Vol	18A71925.. (or) 18A7177..													B-150			
1st. 2nd.	IX24889.. IX24886..			455				50B74041.. (or) 50B74946..	ST-108..	F8	6EV6..		Vol	18A71925.. 18A70172..													10..	BK-6 (Buick)		
1st. 2nd.	IX24889.. IX24886..			455				50B77559..	ST-110..		6A15..		Vol	18A71920-A..													20..	CR6 (Chrysler)		
1st. 2nd.	24B70827.. 24B70827..	16-6668.. 16-6667..		455				50B74508.. (or) 50B73808..	ST-108..	F8	6EV6..		Sens Vol	18A70172..													25..	CR-76 (Chrysler)		
1st. 2nd.	24B70827.. 24B70827..	16-6668.. 16-6669..		455				50B74946.. 50B74946..	ST-108..	F8	6EV6..		Vol	18A70172..													8..	CT-6 (Chevrolet)		
1st. 2nd.	24B70827.. 24B70827..	16-6665.. 16-6667..		455				50B71900.. 50B74041..	ST-108..	F8	6EV6..		Vol	18A70172..													13..	FD-6		
1st. 2nd.	IX31305.. IX31307..			4.3 MC				50B74946.. 50B74946.. 50B74041..	ST-108..	F13..	6EV6..		Vol	18A70172..														FM-82		
1st. 2nd.	24B70827.. 24B70827..	16-6666.. 16-6667..		455				50B74946.. 50B74946.. 50B74041..	ST-108..	F13..	6EV6..		Vol	18A70172..													9..	NH-6 (Nash)		
				59X22988									Vol	18A22175..	AV-6A-7..	KVS-3..	A..	D13-137..	I..	V..									(See C1-6) (C1-6)	OE 6 (Oldsmobile) PC-6 (Pontiac) RW-1
				59A71618 57A74887									Bias	18A20889..																WR6, WR7, WR8
1st. 2nd.	IX27072.. IX24886..			455				50B25766.. 50B27147..		F13..	3A07..		Vol	18A24918..															3A5, 3A5-A	
1st. 2nd.	IX24889.. IX24886..			455				50B7141..			3A07..		Vol	18A24918..														5A1		
1st. 2nd.	IX71265.. IX24886..			4.0				50B7101..1..			3A07..		Vol	18A24918-C..														3..	5A5	
1st. 2nd.	24B477W14.. 24B477W14..			155				50B470520.. 50B478023..			3A07..		Vol	18A47170..														14..	5A7, 5A7A	
1st. 2nd.	IX4033.. IX4022..	16-6652.. 16-6652..		21.7				50B4150..	ST-105..	I..	52EV6..		Vol	18A4046..														8-30		
1st. 2nd.	IX4404.. IX4403..	16-6652.. 16-6652..		262				50B4570.. 50B4654..	ST-108..	F8	6EV6..		Vol	18A4238..														27..	8-40	
1st. 2nd.	IX4444.. IX4346..	16-6652.. 16-6652..		16..				50B4421.. 50B4201..	ST-108..	F7..	6EV6..		Vol	18A4164..															8-50	
1st. 2nd.	IX4955.. IX4955..	16-6652.. 16-6652..		21.7				50B4421.. 50B4201..	ST-108..	F7..	6EV6..		Vol	18A4385..															8-60	
1st. 2nd.	IX4631.. IX4630..	16-6652.. 16-6652..		21.7				50B4605.. 50B4994.. 50B4899..	ST-115..	F8	8A4.. (or) 8EV6..		Vol	11A111X..															8-70	
1st. 2nd.	IX4715.. IX4712..	16-6652.. 16-6652..		21.2				50B4605.. 50B4994.. 50B4995..	ST-115..	F8	8A4.. (or) 8EV6..		Vol	18A4740..															8-80	
1st. 2nd.	47H37685A.. 47H37678A.. 47H37670A..			41.5				50H37719.. 50H37721.. 50H37722..	ST-115..	BE10..	12E10.. 10E10..		Vol <sup>*</sup> Tone	60H37827.. 10H37834..		11-4H-7..		A..	D13-132X.. D13-123..	C..	41..	G1..	48A3333..	5342M..	H1..	9A, 9B, 9Y				
1st. 2nd.	IX12809.. IX12815..	16-6658.. 16-6658..		455				50A12868..	ST-105..	F8	5EV6..		Vol	18A12638..	M-6-7..														9-24, 9-24A	
1st. 2nd.	IX12603.. IX12602..	16-6655.. 16-6652..		262				50B126..	ST-105..	F8	5EV6..		Vol	18A4046..															9-23, 9-39	
1st. 2nd.	IX14207.. IX14206..	16-6652.. 16-6652..		262				50B11M..	ST-108..	F8	6EV6..		Vol	11A431..															9-44	
1st. 2nd.	IX13769.. IX13767..	16-6652.. 16-6652..		262				50B13M..	ST-108..	F8	6EV6..		Vol	18A1371..															9-49	
1st. 2nd.	IX13769.. IX13767..	16-6652.. 16-6652..		26..				50B13M..	ST-108..	F8	6EV6..		Vol	18A1371..															9-49 (Bantam)	

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	
MOTOROLA—Cont																								
9-69.....	inued 8-7A7, 7A8/7B8, 7A6, 7C6/7B6, 7C5, 024/6X5 (51).	23A13037.....	AF22J.....		UP1145.....		DY-2X10-450.....		EL-210.....		Chk Pwr In Cut Chk Pwr In Out Pwr Out	25K13746 25B13674 25A16002 25K13745 25K13746 25B13674 25A16002 25K13745 56H37786 66H37959	.....†.....	.....†.....	.....†.....									
9-69, (Bantam).....	8-6K7GT, 6A8GT, 6H6GT, 6Q7GT, 6U8GT, 024/6X5 (51).	23A13037.....	AF22J.....		UP1145.....		DY-2X10-450.....		EL-210.....		Chk Pwr In Cut Chk Pwr In Out Pwr Out	A-3311.....†.....	T22S64.....		A-2936.....†.....									
10Y, (Ch. 10-1).....	10-6K7G, 6A8G, 6J5G, 6H6G, 5Y3, 6G5.....	14H37275..... 14H37288..... 14H37277..... 14H37279.....	PRS450-8..... GL450-16..... PRS450-8..... GL450-16.....		BR845..... KRS16A..... BR845..... KRS16A.....		M-8-450..... D-15-450..... M-8-450..... D-16-450.....		UT-8..... PLS-16..... UT-8..... PLS-16.....		Pwr Out	56H37788 66H37959	P-6014..... A-3877.....	T22R06..... T22S46.....		A-2936.....P-2954..... A-2930.....								
10Y, (Ch. 10-3).....	10-6K7G, 6A8G, 6J5G, 6H6G, 5Y3, 6G5.....	14H37275..... 14H37277..... 14H37279.....	GL450-16..... PRS450-8.....		KRS16A..... BR845.....		D-16-450..... M-8-450.....		PLS-16..... UT-8.....		Pwr Out	56H37788 66H37959	P-6014..... A-3877.....	T22R06..... T22S46.....		P-2954..... A-2930.....								
10-Y, (Ch. 10-2).....	10-6K7G, 6A8G, 6B8G, 6J7G, 6R7G, 6H6G, 6V6G, 5Y3, 6G5.....	14H37273..... 14H37274..... 14H37277..... 14H37279.....	GL450-30..... GL450-30..... PRS450-8..... GL450-30.....		KRS30..... KRS08..... BR845..... KRS30.....		D-30-450..... D-8-450..... M-8-450..... D-30-450.....		PLS-30..... PLS-8..... UT-8..... PLS-30.....		Pwr Out	56H37779 66H37959	P-6290..... A-3852.....	T22S46.....		A-2930.....								
11A.....	1-25A7G.....	25A14727.....	PRS150-12.....		BR1215.....		M-10-150.....		UT-121.....		Pwr Out	56H37780 66H37960	P-6290..... A-3852.....	T22S62.....		A-2934.....								
12Y, 12Y1.....	12-6K7G, 6A8G, 6J5G, 6B8G, 6J7G, 6R7G, 6H6G, 6B6G, 5X4G, 6U5.....	14H37273..... 14H37274..... 14H37277..... 14H37279.....	GL450-30..... GL450-30..... PRS450-8..... UP6CJ20.....		KRS30..... KRS08..... BR845..... UP6CJ20.....		D-30-450..... D-8-450..... M-8-450..... DY-3X20-450.....		PLS-30..... PLS-8..... UT-8..... DY-3X20-450.....		Pwr Out	56H37780 66H37960	P-6290..... A-3852.....	T22S62.....		A-2934.....								
15F.....	6-78, 5A7, 75, 41, 84 (51, 55).....	23A12645.....									Chk Pwr Out	25A13763 25B14155	.....†.....	.....†.....	.....†.....									
16C.....	6-7A7, 7B7, 7B6, 7B5, 0Z4/6X5 (44).....	23A12645.....			UP6CJ20.....		DY-3X20-450.....				Chk Pwr Out	25K13388 25K13393	.....†.....	.....†.....	.....†.....									
17D.....	6-78, 6A7, 75, 6V6, 0Z4/6X5, (51, 55).....	23K13504.....			UP6CJ20.....		DY-3X20-450.....				Chk Pwr Out	25K13365 25A13009	.....†.....	.....†.....	.....†.....									
17DA.....	6-78, 6A7, 6Q7G, 6F6, 0Z4/6X5, (51, 55).....	23K13504.....			UP6CJ20.....		DY-3X20-450.....				Chk Pwr Out	25A13009 25B13007	.....†.....	.....†.....	.....†.....									
17FM41.....	18-6SJ7GT, 6A8GT, 6SK7GT, 6S07GT, 6V6GT, 6SD7GT, 6S5GT, 6SJ7GT, 6H6, 6H6GT, 5Z3, 6E5 ("44").....	23A14963..... 23A11710.....	AF4414A..... PRS350-12.....		UP2245C..... BR1235.....		DY-315 M-10-350		EL-350..... UT-123.....		Pwr Out	25A13008 25A13008	A-3878..... T22S47.....	T22S47.....	A-2931.....									
180.....	6-7A7, 7A8/7B8, 7B6/7C6, 7C5, 0Z4/6X5.....	25A12645.....			UP6CJ20.....		DY-3X20-450.....				Chk Pwr Out	25A13009 25B13007	.....†.....	.....†.....	.....†.....									
19B.....	7-7A7, 7B8, 7B6, 7C5, 0Z4/6X5 (51).....	23A13037.....	AF44J.....		UP1145.....		DY-3X10-450.....		EL-310.....		Chk Pwr Out	25A13108 25B13136	.....†.....	.....†.....	.....†.....									
20P, 24K.....	7-78, 6A7, 6Q7GT, 241, 0Z4/6X5.....	23A12645.....			UP6CJ20.....		DY-3X20-450.....				Chk Pwr Out	25K13746 25B14755	.....†.....	.....†.....	.....†.....									
21A.....	2-6K6GT, 7B.....	23A14727.....	PRS150-12.....		BR1215..... UP6CJ20.....		M-10-150..... DY-3X20-450.....		UT-121.....		Chk Pwr Out	25K13745 25A17449	.....†.....	.....†.....	.....†.....									
21L.....	2-78, 6A7, 6Q7GT, 241, 0Z4/6X5.....	23A12645.....									Chk Pwr Out	25K13746 25B14755	.....†.....	.....†.....	.....†.....									
22A.....	2-6SK7GT, 6J5GT.....	23A20887.....									Chk Pwr Out	25A17449 25B14749	.....†.....	.....†.....	.....†.....									
22B.....	2-6SK7GT, 6J5GT.....	23A20887.....									Chk Pwr Out	25A17449 25B14749	.....†.....	.....†.....	.....†.....									
22S.....	6-78, 6A7, 75, 41, 84 (51).....	23A12645.....			UP6CJ20.....		DY-3X20-450.....				Chk Pwr Out	25A17449 25B14749	.....†.....	.....†.....	.....†.....									
23RC, 23RCW.....	2-6SK7GT, 6J5GT.....	23A20887.....									Chk Pwr Out	25A17449 25B14749	.....†.....	.....†.....	.....†.....									
25F.....	6-6SK7GT, 6SA7GT, 6SQ7GT, 6X5/0Z4 (44).....	23A17738.....	AF32K4A.....		UP2235C.....		DY-310.....		EL-153.....		Chk Pwr Out	25B18377 25A18173	.....†.....	.....†.....	.....†.....									
25N.....	6-78, 6A7, 75, 41, 84 (51).....	23A12645.....			UP6CJ20.....		DY-3X20-450.....				Chk Pwr Out	25A13763 25B14155	.....†.....	.....†.....	.....†.....									
26C.....	6-6SK7GT, 6A8GT, 6Q7GT, 6K6GT, 6X5/0Z4 (44).....	23A17738.....	AF32K4A.....		UP2235C.....		DY-310.....		EL-153.....		Chk Pwr Out	25K18777 25B18765	.....†.....	.....†.....	.....†.....									
26C7.....	7-6SK7GT, 6SA7GT, 6Q7GT, 6K6GT, 0Z4, 44.....	23A17190.....	AF44J.....		UP2245.....		DY-2X20-450.....		EL-220.....		Chk Pwr Out	25B17341 25B17343	.....†.....	.....†.....	.....†.....									
27D.....	7-6K7GT, 6SA7GT, 6Q7GT, 6K6GT, 0Z4 (55).....	23A17190.....	AF44J.....		UP2245.....		DY-2X20-450.....		EL-220.....		Chk Pwr Out	25B17342 25K20519	.....†.....	.....†.....	.....†.....									
27D-6, 27D6, 41.....	6-6K7GT, 6A8GT, 6Q7GT, 6K6GT, 6X5/0Z4.....	23A17738.....	AF32K4A.....		UP2235C.....		DY-310.....		EL-153.....		Chk Pwr Out	25A16963 25B16980	.....†.....	.....†.....	.....†.....									
280, (Oldsmobile).....	7-6K7GT, 6SA7GT, 6Q7GT, 6K6GT, 0Z4.....	23A17190.....	AF44J.....		UP2245.....		DY-2X20-450.....		EL-220.....		Chk Pwr Out	25A16963 25B16981	.....†.....	.....†.....	.....†.....									

Section D IF COILS				Section E PHONO CARTRIODES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Phonaset Set No.	
1st. 2nd.	IX13691 IX13689			262				50B4605	ST-115		8A31		Vol	18A13683					D13-133X	C3	41	G1, 9	48A3333	5300	Continued—	MOTOROLA S-69	
1st. 2nd.	IX13691 IX13689			455				50B4605	ST-115		4A31		Vil	18A13683					D13-133X	C1	41	G1, 9	48A3333	5300	H1	9-69 (Bantam)	
1st. 2nd.	47H3767A 47H3768A	16-5133		465				50H3771			10E1C		Vol	60H37839	V-51-Z	A.			D13-128		41	G1				10Y (Ch. 10-1)	
3rd.	47H3768A												Tone	60H37836	V-60-Z				D13-133			G1					
1st. 2nd.	47H3767A 47H3768A	16-5133		465				50H3772			10E1C		Sen	60H37833	V-30-V				D16-116			G1				10Y (Ch. 10-3)	
3rd.	47H3768A												Vol	60H37839	V-51-Z	A.			D13-130		442						
1st. 2nd.	47H3767A 47H3768A	16-5133		465				50H3771			12E10		Tone	60H37836	V-51-Z	A.			D13-128		41	G1				10Y1 (Ch. 10-2)	
3rd.	47H3768A												Fid	60H37833	M-60-Z				D13-133			G1					
1st. 2nd.	47H3767A 47H3768A	16-5133		465				50H3773			12E10		Sen	60H37831	M-1-V				D16-116			G1					
3rd.	47H3768A												Vol	60H37839	V-51-Z	A.			D13-130		44						
1st. 2nd.	47H3767A 47H3768A	16-5133		465				50H3773			12E10		Tone	60H37836	M-60-Z	A.			D13-128		41	G1				10Y1 (Ch. 10-2)	
3rd.	47H3768A												Fid	60H37833	M-1-V				D13-133			G1					
1st. 2nd.	47H3767A 47H3768A	16-5133		465				50H3773			12E10		Sen	60H37831	M-1-V				D16-116			G1					
1st. 2nd.	47H3767A 47H3768A	16-5133		455				50B1117			1A1		Vol	60H37839	M-51-Z	A.			D13-130		44					11A 12Y, 12Y1	
3rd.	47H3768A												Tone	60H37836	M-60-Z				D13-128		41	G1					
1st. 2nd.	47H3767A 47H3768A	16-5133		455				50B1117			1A1		Fid	60H37833	M-1-V				D13-133		44					10Y1 (Ch. 10-2)	
3rd.	47H3768A												Sen	60H37831	M-1-V				D16-116			G1					
1st. 2nd.	IX14248 IX14247	16-5132 16-5134		455				50B1117			1A1		Vol	18A13761					D13-133		41	G1, 9	48A3333	5342M	H1	15F	
3rd.	IX14248	16-5132		455				50B1117			1A1		Fid	18A13761					D13-133		41			48A3333	5342M	H1	16C
1st. 2nd.	IX13396 IX1339	16-5132		455				50B1117			1A1		Sen	18A13761					D13-133		41			48A3333	5342M	H1	17D
3rd.	IX13396												Vol	18A13761					D13-133X	K	41			48A3333	5300	H1	17D
1st. 2nd.	IX13012 IX13011	16-5132		455				50B1117			1A1		Vil	18A13040					D13-133X	K	41			48A3333	5300	H1	17D-A
3rd.	IX13012	16-5132		455				50B1117			1A1		Vol	18A13040					D14-144X	K	41			48A3333	5300	H1	17D-A
1st. 2nd.	IX27985	4.3		455				50B2441			12E10		Vol	18K28356	AT-1	A.			D11-117X	E	41						17FM41
3rd.	IX12934	16-5132		455				50B12950	ST-115		4A1		Tone	18K28357	AM-017				D13-133	E	41						
1st. 2nd.	IX12924												Fid	18A12999										4A3333	5342M	H4	180
1st. 2nd.	IX1313	16-5132		455				50B12950	ST-115		4A1		Sen	18A12999										4A3333	5342M	H4	19B
3rd.	IX1313	16-5132		455				50B12950	ST-115		4A1		Vol	18A13761					D13-133		41			48A3333	5342M	H1	20P, 24K
1st. 2nd.	IX14248 IX14247	16-5132 16-5134		455				50B12950	S-1A		4A1		Vil	18A13761					D1-114X		41			48A3333	5342M	H1	21A
3rd.	IX14248	16-5132		455				50B12950	ST-108		6A1		Vol	18A13761					D1-114X	(3	41	61		48A3333	5342M	H1	21L
1st. 2nd.	IX14248 IX14247	16-5132 16-5134		455				59B2204W	L-2		5A1		Vil	18A20041					D13-133		41	G1, 9	48A3333	5342M	H1	22A 22B 22S	
3rd.	IX14248			455				59B2204W	L-2		5A1		Vol	18A20041					D13-133		41	G1, 9	48A3333	5342M	H1	23-RC, 23-RCW	
1st. 2nd.	IX18564 IX18564	16-5134		455				59B2204W	ST-108		6A1		Bias	18A20041					48A5067		41			48A5067	5342M	H1	25F
3rd.	IX18564	16-5134		455				59B2204W	ST-108		6A1		Vil	18A20041					48A3333		41			48A3333	5342M	H1	25N
1st. 2nd.	IX17254 IX1726	16-5132		45				50B1151	ST-108		8A1		Vol	18A18675					48A3333		542M			48A3333	542M	H1	26C
3rd.	IX17254	16-5132		45				50B1151	ST-108		8A1		Tone	18A18676					48A3333		542M			48A3333	542M	H1	26C-7
1st. 2nd.	IX17259 IX1726	16-5132		455				50B1771	ST-108		8A21		Vol & Tone	18A18676					48A3333		542M			48A3333	542M	H1	27D
3rd.	IX17259	16-5132		455				50B1771	ST-108		8A21		Vol	18A18676					48A3333		542M			48A3333	542M	H1	27D
1st. 2nd.	IX17344 IX1734	16-5132 16-5134		455				50B1771	ST-108		7EV5		Vol	1K17377					48A3333		542M			48A3333	542M	H1	27D
3rd.	IX17344	16-5132		455				50B1771	ST-108		7EV5		Vil	1K17377					48A3333		542M			48A3333	542M	H1	27D-6, 27D-41
1st. 2nd.	IX17344 IX1734	16-5132 16-5134		455				50B1771	ST-108		7EV5		Vol	1K17377					48A3333		542M			48A3333	542M	H1	28C (Oldsmobile)
3rd.	IX17344	16-5132		455				50B1771	ST-108		7EV5		Vol	1K17377					48A3333		542M			48A3333	542M	H1	28C (Oldsmobile)

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. & Type Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note Part No.	Cornell-Dubilier Part No.	Note Part No.	Solar Part No.	Sprague Part No.	Note Part No.	Use	Mfr. Part No.	Stancor Part No.	Note Part No.	Thordarson Part No.	Note Part No.	Merit Part No.	Note Part No.	Eveready Part No.	Note "A"	Burgess Part No.	Note "A"	Section C BATTERIES		
MOTOROLA--Continued																								
29B	7-6SK7GT, 6SA7GT, 6Q7GT, 6V6GT, 0Z4/6X5.	23A17150	AF44J		UP2245		DY-2X20-450	EL-22G			Chk Pwr In Out	25A17103 25B17107 25A17149 25B17099	A-3311		T22S64		A-2936							
29B6	6-6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 0Z4 (51)	23A17738	AF32K4A		UP2235C		DY-310	EL-153			Chk Pwr Out	25K19288 25B19284 25A19291	A-3878		T22S47		A-2931							
30P (Pontiac)	7-6K7GT, 6SA7GT, 6Q7GT, -6K6GT, 0Z4	23A17190	AF44J		UP2245		DY-2X20-450	EL-220			Chk Pwr In	25A16953 25K17476 25B16981	A-3311		T22S64		A-2936							
34K6	5-6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 0Z4	23A17738	AF32K4A		UP2235C		DY-310	EL-153			Pwr Out	25B20011 25K20031	A-3878		T22S47		A-2932							
34K7	7-6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 0Z4	23A17738	AF32K4A		UP2235C		DY-310	EL-153			Pwr In	25K20015 25K20012	A-3878		T22S47		A-2931							
35F (Ford)	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25B20030 25B21303	A-3311		T22S64		A-2936							
35N	6-6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 0Z4 (44)	23A17738	AF32K4A		UP2235C		DY-310	EL-153			Pwr Out	25K18299 25A18356	A-3878		T22S45		A-2928							
36C1 (Chevrolet)	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25B20310 25B20310	A-3876		T22S45		A-2928							
36C2 (Chevrolet)	6-6SK7GT, 6SA7GT, 6SQ7GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25B20310 25B21303	A-3876		T22S45		A-2928							
37D1	7-6SD7GT, 6SA7GT, 6SK7GT, 6S05GT, 6U5GT, 6V6GT, 0Z4	23A23651			UP15D145		DY-3X15-450	EL-344			Pwr Out	25A24525 25B23653	A-3876		T22S45		A-2928							
37D2	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25A23649 25A23794	A-3877		T22S46		A-2930							
38O (Oldsmobile)	5-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25A23059 25B23059	A-3876		T22S45		A-2928							
39B1 (Buick)	7-6SD7GT, 6SA7GT, 6SK7GT, 6R7GT, 6V6GT, 0Z4 (51)	23A17190	AF44J		UP2245		DY-2X20-450	EL-220			Pwr Out	25A23059 25A23059	A-3876		T22S45		A-2928							
39B2 (Buick)	6-6SK7GT, 6SA7GT, 6Q7GT, 6U6GT, 6X5GT	23A22738			UP3325C			EL-334			Pwr Out	25B26708 25K26707	A-3311		T22S64		A-2936							
40-40B	4-1A7GT, 1N5GT, 1H5GT, 1Q5GT	23A14727	PRS150-12		BR1215		M-10-150	UT-121			Pwr Out	25A15786	A-3822		T22S45		A-2928							
40B1, 40BK, 40BW	4-1A7GT, 1N5GT, 1H5GT, 1Q5GT	23A14727	PRS150-12		BR1215		M-10-150	UT-121			Pwr Out	25A15786	A-3822		T22S47		A-2932		748				17GD60	
40P (Pontiac)	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25B28103 25A28059	A-3876		T22S45		A-2928							
40-50W	5-6A8GT, 6SK7GT, 6SQ7GT, 6K6GT, 80 (44)	23A19877	AF44J4A		UP2245C		DY-315	EL-350			Pwr Out	25B19891 25A19876	A-3876		T22R02		P-2951							
40-60W	6-12S7KT, 12SA7GT, 12SQ7GT, 3SL6GT, 35L5GT (47)	23A18744	PRS150-50-50		BRD5515		M-2X50-150	TA-505			Pwr Out	25A19876 25A14609	A-3876		T22S47		A-2931							
41A, 41E	4-1A7G, 1N5G, 1H5G, 1Q5G	23A14828	PRS25-25		BR252A		M-25-25	TA-25			Pwr Out	25A15786	A-3822		T22S47		A-2932							
41B, 41F	4-1A7G, 1N5G, 1H5G, 1Q5G	23A14828	PRS25-25		BR252A		M-25-25	TA-25			Pwr Out	25A15786	A-3822		T22S47		A-2932							
41B11	4-1A7GT, 1N5GT, 1H5GT, 3Q5GT	23A14727	PRS150-12		BR1215		M-10-150	UT-121			Pwr Out	25A14811 25A15765	A-3881		T22S48		A-2933							
41B12, 41B14	4-1A7GT, 1N5GT, 1H5GT, 3Q5GT	23A14727	PRS150-12		BR1215		M-10-150	UT-121			Pwr Out	25A15786	A-3822		T22S47		A-2932							
41D, 41D1, 41D2	4-1A7G, 1N5G, 1H5G, 1Q5G	23A14828	PRS25-25		BR252A		M-25-25	TA-25			Pwr Out	25A15786	A-3822		T22S47		A-2932		742 & 762		4F		2B30	
41H	4-1A7GT, 3ABGT, 1Q5GT, 2526GT	23A16138 23A16139			BR252A		M-25-25	TA-25			Pwr Out	25A15786	A-3822		T22S47		A-2932		743 & 482		4F		2M30	
41S	4-1A7GT, 1N5GT, 1H5GT, 1T5GT	23K16446	PRS25-25		BR252A		M-25-25	TA-25			Pwr Out	On Spkr.	A-3881		T22S48		A-2934							
42S (Studebaker)	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25B23103 25A23059	A-3876		T22S45		A-2928							
43H (Hudson)	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (44)	23A22738			UP3325C			EL-334			Pwr Out	25B23103 25A23059	A-3876		T22S45		A-2928							
44K (Packard)	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25B23103 25A23059	A-3876		T22S45		A-2928							
45B12	4-1A7GT, 1N5GT, 1H5GT, 3Q5GT	23A14727	PRS150-12		BR1215		M-10-150	UT-121			Pwr Out	25A15786	A-3878		T22S47		A-2931							
45N (Nash)	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25K24261 25K24260	A-3876		T22S45		A-2928							
46C	6-6SK7GT, 6SA7GT, 6SQ7GT	23A22738			UP3325C			EL-334			Pwr Out	25B23068	A-3876		T22S45		A-2928							
47B11	4-1A7GT, 1N5GT, 1H5GT, 3Q5GT	23A14727	PRS150-12		BR1215		M-10-150	UT-121			Pwr Out	25A23794 25B23059	A-3879		T22S47		A-2932		758				17GD60	
47D1, 47D1A	8-6SK7GT, 6SA7GT, 6SQ7GT, 6J5GT, 6V6GT, 0Z4 (44)	23A23651			UP15D145		DY-3X15-450	EL-344			Pwr Out	25B23652 25A23649	A-3311		T22S64		A-2936							
47D2	6-6SD7GT, 6SA7GT, 6SK7GT, 6S07GT, 6U6GT, 6X5GT (51)	23A22738			UP3325C			EL-334			Pwr Out	25K23794 25A23059	A-3876		T22S45		A-2928							
47D2A	6-6SK7GT, 6SA7GT, 6SQ7GT, 6U6GT, 6X5GT (55)	23A22738			UP3325C			EL-334			Pwr Out	25B23068 25A23059	A-3876		T22S45		A-2928							

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiat. Part No.	Note	Photofact Set No.
1st. 2nd.	IX17157 IX17155	16-5714 16-5714		455				50K17399	ST-115		8A31		Vol & Tone	18A17108								48A3333B	5300...	Continued— H1	MOTOROLA 29B	
1st. 2nd.	IX17157 IX17155	16-5712 16-5714		455				50B19302	ST-108		6A1		Vol & Tone	18A17108								48A5067 48A3333	5342M H3	H1	29B6	
1st. 2nd.	IX17259 IX17260	16-5712 16-5714		455				50B17571	ST-108	F8	6EV6		Vol	28B17457								48A3333	5342M	H1	30-P (Pontiac)	
1st. 2nd.	IX20034 IX20032			455				50B20092	ST-108	F8	6EV6		Vol	1K20085								48A3333	5342M	H1	34K6	
1st. 2nd.	IX20034 IX20032			455				50B20091	ST-108	F8	6EV6		Vol	1K20085								48A3333	5342M	H1	34K7	
1st. 2nd.	IX23525 IX23863			262				50B24995 50B26061 50B18357	ST-108	F13	7EV6	F13	Vol	18A24737								48A5067 48A5333	5342M	H1	35-F (Ford)	
1st. 2nd.	IX18304 IX18303			455				50B24158	ST-108		6EV6		Vol	1K18144								48K12312 48K12793	5342M	H3	35-N	
1st. 2nd.	IX23096 IX23094			262				50B24561	ST-108		6EV6		Vol & Tone	18B24046								48A5067 48A5333	5342M	H1	36C1 (Chevrolet)	
1st. 2nd.	IX24527 IX24527			455				50B23678 50B24396		F13	7EV6	F13	Vol & Tone	18B24046								48A5067 48A5333	5342M	H1	36C2 (Chevrolet)	
1st. 2nd.	IX23656 IX23654			262				50B23624 50B24432		F13	7EV6	F13	Vol	1K17377								48K11026	5300...	H1	37D1	
1st. 2nd.	IX23798 IX23096			455				50B24175	ST-108	F8	6EV6	F13	Vol	1K17377								48A3333 48A5067	5342M	H1	37D2	
1st. 2nd.	IX23094 IX23471			262				50B24470 50K23622	ST-115	F13	8EV6	F13	Vol & Tone	18B24254								48A5067 48A5333	5342M	H1	38-O (Oldsmobile)	
1st. 2nd.	IX23469 IX26718			262				50B26740	ST-108	F8	6EV6		Vol	18K23489								48A5067	5300...	H1	39B1 (Buick)	
1st. 2nd.	IX26713 IX19987			455				50B19976	ST-105		5A1		Vol	18A19979	AM-63-Z	KSS-3	A2	D13-137	E	42					40-40 B	
1st. 2nd.	IX19982 IX21342			455				50B19976 50B21223	ST-105		5A1		Vol	18A19979	AM-63-Z	KSS-3	A2	D13-137	E	42					40B1, 40BK, 40BW	
1st. 2nd.	IX21338 IX23525			455				50B21223 50B21259 50B24175	ST-108		6A1		Vol	18A19979	AM-63-Z	KSS-3	A2	D13-137	E	42					40P (Pontiac)	
1st. 2nd.	IX23863 IX19902			262				50B19920	ST-105		5A1		Vol	18K19935	AM-60-Z	KSS-3	A	D13-133	E	41					40-50W	
1st. 2nd.	IX19902 IX19992			455				50B19920	ST-105		5A1		Vol	18A19935	AM-60-Z	KSS-3	A2	D13-133	E	42					40-60W	
1st. 2nd.	IX19953 IX19853			455				50B18747	ST-105		5A1		Vol	18A14629	AM-60-Z	KSS-3	A2	D13-133	E	42					41A, 41E	
1st. 2nd.	IX19848 IX14818			455				50B14815	ST-113		4A1		Vol	18A14812	AM-60-Z	KSS-3	A2	D13-133	E	42					41B, 41F	
1st. 2nd.	IX14818 IX15222			455				50B14843	ST-113		4A1		Vol	18K14839	AM-60-Z	KSS-3	A2	D13-133	E	42					41B11	
1st. 2nd.	IX15264 IX27352			455				50B19976	ST-105		5A1		Vol	18A19979	AM-63-Z	KSS-3	A2	D13-137	E	42					41B12	
1st. 2nd.	IX27350 IX21342			455				50B21223	ST-108		5A1		Vol	18A19979	AM-63-Z	KSS-3	A2	D13-137	E	42					41B12, 41B14	
1st. 2nd.	IX21338 IX14816			455				50B15234	ST-105		5A1		Vol	18K15533	AM-60-Z	KSS-3	A2	D13-133	E	42					41D, 41D1, 41D2	
1st. 2nd.	IX15643 IX15670			455				50B16768	ST-105		5A1		Vol	25A15785												41H
1st. 2nd.	IX15683 IX18092			455				50B16920	ST-113		4A1		Vol	18A15869	AM-63-Z	KSS-3	A2	D13-137	E	42						41S
1st. 2nd.	IX15893 IX15893			262				6 1/2 Inch.	ST-108	F8	6EV6		Vol & Tone	18A15869	AM-63-Z	KSS-3	A2	D13-137	E	42						42S (Studebaker)
1st. 2nd.	IX15893 IX15893			262				6 Inch.	ST-108	F8	6EV6		Vol & Tone	18A15869	AM-63-Z	KSS-3	A2	D13-137	E	42						43H (Hudson)
1st. 2nd.	IX23096 IX24089			262				50B24119	ST-108	F8	6EV6		Vol	1K24074								48A5057 48A5333	5342M	H1	44K (Packard)	
1st. 2nd.	IX28278 IX28277	16-6658 16-6660		455				50B71087	ST-110		6A15		Vol	18A19979	AM-63-Z	KSS-3	A2	D13-137	E	42						45B12
1st. 2nd.	IX24265 IX23094			262				50B24475			7EV6		Vol	18B24193								48K12793	5342M	H1	45N (Nash)	
1st. 2nd.	IX23094 IX23096			455				50B24158	ST-108	F8	6EV6		Vol & Tone	18B24046								48A5067 48A5333	5342M	H1	46C	
1st. 2nd.	IX23094 IX27767			455				50B71087	ST-110		6A15		Vol	18K77615	AM-63-Z	KSS-3	A2	D13-137	E	42						47B11
1st. 2nd.	IX27767 IX27767			262				50B29974			7EV6		Vol	1J30377								48A5067 48A11026	5342M	H1	47D1, 47D1A	
1st. 2nd.	IX23656 IX23654			455				50B29975		F13	7EV6	F13	Vol	1K17377								48A3333 48A5067	5342M	H3	47D2	
1st. 2nd.	IX23798 IX23798			455				50B29909		F13	7EV6	F13	Vol	1K17377								48A5067 48A5333	5342M	H1	47D2A	
1st. 2nd.	IX23798 IX23798			455				50B29957		F13	7EV6	F13	Vol	1K17377								48A5067 48A5333	5342M	H3		
1st. 2nd.	IX23798 IX23798			455				50B29909		F13	7EV6	F13	Vol	1K17377								48A5067 48A5333	5342M	H3		
1st. 2nd.	IX23798 IX23798			455				50B29957		F13	7EV6	F13	Vol	1K17377								48A5067 48A5333	5342M	H3		
1st. 2nd.	IX23798 IX23798			455				50B30153																		

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
		"A"																						
MOTOROLA—Cont'd	49B, 49BU	7 <sup>2</sup> ESK7GT, 6SA7GT, 6R7GT, 6V6GT, 0Z4 (51).	23A17190	AF44J		UP2245		DY-2X20-450		EL-220		Chk In Out	25A17103 25A23466 25B17099 On Spkr	A-3311 A-3857		T22S64 T-22348		A-2936 A-2937		758		17GD60		
49BT1, 49BT2	4	1A7G, 1N5G, 1H5G, 1A5G...	23X12223	PRS25-25		BR252A		M-25-25		TA-25														
50P	6 <sup>2</sup> ESK7GT, 6SA7GT, 6SQ7GT, 6U6GT, 6X5GT (47).	23A22738				UP3325C				EL-334		Pwr Out	25B23068 25A23059	A-3876		T22S45		A-2928						
50W (See Model 40- 50X1, 50X2, 50XC1, 2, 3, 4)	50W	5 <sup>2</sup> 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT.	23A20504	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A20503	A-3876		T22S45		A-2928						
50XH1, 50XH2	5	5 <sup>2</sup> 12SA7GT, 12SK7GT, 12SQ7GT, 50L5GT, 35Z5GT (47).	23A20504	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A20503	A-3876		T22S45		A-2928						
50XW (See Model 51A, 53A, 54A, (Ch. SA))	50X1	5 <sup>2</sup> 12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT (47).	23A14615	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A14609	A-3876		T22S45		A-2928						
51A, 53A, 54A, (Ch. SA))	51A	5 <sup>2</sup> 12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT (47).	23A14615	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A14609	A-3876		T22S45		A-2928						
51C (Ch. 5C)	51C	5 <sup>2</sup> 12A8GT, 12K7GT, 12Q7GT, 50L6GT, 35Z5GT (47).	23A14615	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A14609	A-3876		T22S45		A-2928						
51D, 51D1, 51D2	51D	5 <sup>2</sup> 1A7G, 1N5G, 1H5G, 105G, 25Z6GT (44).	23A16139									Out	25K16137	A-3922		T22S47		A-2932		743 & 762		4F	B30	
51F11	51F11	5 <sup>2</sup> 6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5W4GT (47).	23A27881					DY-311		EL-323		Pwr Out	25B28202 25A19876	P-6011 A-3877		T22R02		P-2951						
51F12	51F12	5 <sup>2</sup> 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 50Y6GT (47).	23A20109	PRSA150-20-20		BR2015		M-20-150		UT-201		Out	25A20503	A-3876		T22S45		A-2928						
51R11	51R11	5 <sup>2</sup> 6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5W4GT (44).	23A27718			BR252A		M-25-25		TA-25		Pwr Out	25B28202 25B28749	P-6011 P-2951		T22R02								
51X11, 12, 15, 16, 17, 19	51X11	5 <sup>2</sup> 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47).	23A25508	PRSA150-20-20 & PRS25-25		EZ2215C		DSB-302		TA-220 & TA-25		Out	25A20503	A-3876		T22S45		A-2928						
51X13, 14, 18, 20	51X13	5 <sup>2</sup> 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	23A25508	PRSA150-20-20 & PRS25-25		EZ2215C		DSB-302		TA-220 & TA-25		Out	25A20503	A-3876		T22S45		A-2928						
52C (See Model 51C)	52C	5 <sup>2</sup> 6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 5W4GT (44).	23A22738			UP3325C				EL-334		Pwr Out	25B23068 25A23059	A-3876 A-3822		T22S45		A-2928						
52T (Ch. B5-I)	52T	4 <sup>2</sup> 1C7G, 1D5G, 1F7G, 1G5G	23A17190									Out	25A17103 25A17103	A-3876 A-3822		T22S47		A-2932						
52T1	52T1	5 <sup>2</sup> 6A8GT, 6SK7GT, 6SQ7GT, 41-80 (47).	23A19877	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	25B22536 25A22538	P-6297 A-3850		T22R02		P-2951						
52XAH1	52XAH1	5 <sup>2</sup> 12A8GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	23A20504	PRSA150-20-20		BRD2215		M-2X20-150		TA220		Out	25A20503	A-3876		T22S45		A-2928						
52Y	52Y	4 <sup>2</sup> 1C7G, 1D5G, 1F7G, 1G5G	23A17190									Out	25A17103 25A17103	A-3876 A-3822		T22S47		A-2932						
53C (See Model 51C)	53C	5 <sup>2</sup> 7Q7, 7A7, 7B6, 7B5, 5Y3GT (44)	23A74827	AF32K4A		UP2245		DY-2X30-350 /50-50		EL-323		Pwr Out	25B21248 25B21175	P-6119 A-3856		T22R01		P-2951						
55F11	55F11	5 <sup>2</sup> 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	23A70008	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25B70063	A-3876		T22S62		A-2928						
56T, 56Y (Ch. B-5-2)	56T	5 <sup>2</sup> 6D8G, 6S7G, 6T7G, 6K6G, 6Z7G	14H37287	PRSA150-20-20		BRD202A		M-2X10-25		TA-110		Chk Pwr	12H37215 56H37790	t t t		T22S62		A-2928						
56XI, A1, A2, AW	56XI	5 <sup>2</sup> 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	23A20504	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25B21248 25B21175	P-6119 A-3856		T22R01		P-2951						
56X11	56X11	5 <sup>2</sup> 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	23B75808	PRSA150-20-20 & PRS150-20		EZ42215		DSB403020- 150		TA-240 & UT-201		Out	25B70063	A-3876		T22S62		A-2928						
57BP1A, 2A, 3A, 4A	57BP1A	5 <sup>2</sup> 1A7G, 1N5G, 1H5G, 3Q5GT, 117Z6G	23A20318	AF1010D		UP5515		M-500-15		TA-220		Out	25B21248 25B21175	P-6119 A-3856		T22R01		P-2951						
57X11, 57X12	57X11	5 <sup>2</sup> 12SA7GT, 12SK7, 12SQ7GT, 50L6GT, 35Z5GT (47)	23B75808	PRSA150-20-20 & PRS150-20		EZ42215		DSB403020- 150		TA-240 & UT-201		Out	25B21248 25B21175	P-6119 A-3856		T22R01		P-2951						
58F1, 58FRC	58F1	5 <sup>2</sup> 6A8GT, 6SK7GT, 6SQ7GT, 6V6GT, 5W4GT (47)	23A19877	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	25B21248 25A19876	P-6111 A-3877		T22R02		P-2951						
59F1	59F1	5 <sup>2</sup> 6A7, 6D6, 75, 6V6G, 80	10-15-20 Mfd	AF32K4A BR445		UP2235C		DY-310		EL-153		Pwr Out	25B21248 25B11342	P-6011 A-3877		T22R02		P-2951						
59K1, 59T5	59K1	5 <sup>2</sup> 6A7, 6D6, 75, 41, 80	23A11338	AF44J4A		UP2245C		M-8-450		UT-8		Pwr Out	25B21248 25B10894	P-6011 A-3878		T22R02		P-2951						
59T1 Early, 59T3	59T1	4 <sup>2</sup> 6A7, 6D6, 75, 25A7G, (M73B Ballast) (51)	23A10845	PRSA150-20-20 & PRS150-20		EZ42215		DSB-403020- 150		TA-240 & UT-201		Out	25A11083	A-3876		T22S45		A-2928						
59T1 (Late)	59T1	4 <sup>2</sup> 6C6, 6D6, 75, 25A7G, (M73B Ballast)	23A11519	UP44415		UP44415		DY-3X40-150		EL-340		Out	25A11083	A-3876		T22S45		A-2928						
59T2, 59T4	59T2	5 <sup>2</sup> 6A7, 6D6, 75, 41, 80	23K11087	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	25B21248 25A11083	P-6011 A-3824		T22R02		P-2951						
60X1, X2, XW	60X1	6 <sup>2</sup> 12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	23A20504	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A11083	A-3876		T22S45		A-2928						
60XA1, 60XA2	60XA1	6 <sup>2</sup> 12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	23A20504	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A20503	A-3876		T22S45		A-2928						
60XW3	60XW3	6 <sup>2</sup> 12SJ7GT, 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	23A20504	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A20503	A-3876		T22S45		A-2928						
61A	61A	5 <sup>2</sup> 6A7, 6D6, 75, 25L6G, 25Z5, (L49B Ballast) (44)	23A14615	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A14609	A-3876		T22S45		A-2928						
61B	61B	5 <sup>2</sup> 6A7, 6D6, 75, 25L6G, 25Z5, (L49B Ballast) (44)	23A14615	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A14609	A-3876		T22S45		A-2928						

† Information not available

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
						Part No.		Part No.		Part No.			Part No.	Part No.		Part No.			"A"	"B"	"A"	"B"			
MOTOROLA—Cont.																									
61C, 61D, (with RF Stage).	6	6D6, 6A7, 75, 41, 80 (44)	23A15246	AF44J4A		UP2245C		DY-315		EL-350		Pwr	25A15086	P-6010	T22R00		P-2949								
61CA, 61DA (with Separate OSC.)	6	6A7, 76, 6D6, 75, 41, 80 (44)	23A15246	AF44J4A		UP2245C		DY-315		EL-350		Pwr	25A15086	P-6012	T22R00		P-294								
61D (with Loop).	6	6A7, 76, 6D6, 75, 41, 80 (44)	23A15246	AF44J4A		UP2245C		DY-315		EL-350		Pwr	25A15072	P-6010	T22R00		A-29-1								
61E	5	6A7, 6D6, 75, 25L6G, 25Z5, (498 Ballast), 44.	23A14615	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A1507	P-6010	T22R00		A-29 1								
61F	6	6A7, 6D6, 6Q7GT, 25B6G, 25Z5 (44)	23A15291	P-150-20		BR2015		M-20-15		UT-201		In	25A152	P-601	T22S47		P-2949								
61F21, 61F23	6	6SD7GT, 6J5GT, 6SK7GT, 6SO7GT, 6K6GT, 5Y3G (44)	23A27718	A-14A		UP2245 & BR202A		DY-311		EL-33		Out	25A1521	P-601	T22R02		A-291								
61K21, 22, 23,	6	6SD7GT, 6J5GT, 6SK7GT, 6SO7GT, 6K6GT, 5Y3G (44)	23A27718	A-14A		UP2245 & BR202A		DY-311		EL-33		Pwr	25B21248	P-6119	T22S47		P-2951								
61L11, 61L12	6	6IN5GT, 1A7GT, 1H5GT, 3Q5GT, 117Z6GT	23A25889	AF88BD		UP4415		DY-3X40-150		EL-340		Out	25A21175	P-6119	T22S47		A-2931								
61T21	6	6SD7GT, 6J5GT, 6SK7GT, 6SO7GT, 6K6GT, 5Y3G (44)	23A27718	AF44J4A		UP2245		DY-311		UHC-1		Out	25K25893	A-3856	T22S47		A-2900								
61T23	6	6SJ7GT, 6SK7GT, 6SO7GT, 6K6GT, 5Y3G (44)	23A27718	A-14A		P-2245		DY-311		EL-33		Out	25B21248	P-6119	T22R02		P-2951								
61X11, 12, 13, 15, 16, 17	6	12S1J7GT, 12SA7GT, 12SK7GT, 12SO7GT, 35L6GT, 35Z5GT (47)	23A2050	A150-20-20		BRD2215		M-2X20-10		TA-22		Out	25A21175	P-6119	T22S47		P-2951								
61X14	6	12S1J7GT, 12SA7GT, 12SK7GT, 12SO7GT, 35L6GT, 35Z5GT (47)	23A20504	A150-20-1		BRD2215		M-2X20-1		TA-22		Out	25A20503	A-3876	T22S45		A-292								
61XW	6	12SK7GT, 12SA7GT, 12SK7GT, 12SO7GT, 35L6GT, 35Z5GT (47)	23A20504	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A20503	A-3876	T22S45		A-2928								
62A (See Model 61A)																									
62B (See Model 61B)																									
62E (See Model 61E)																									
62F1	6	6SK7GT, 6A8GT, 6SQ7G, 80 (44)	23A14983	AF44J4A		UP224 C		D-1		-		Pwr	25A211	P-6119	T-0		A-29 1								
62L (See Model 61C)																									
62L11, 62L12	6	6IN5GT, 1A7GT, 1H5GT, 3Q5GT, 117Z6GT	23A25889	A-14A		UP-15		D-3 4 5		E-34		Out	25K258	A-3856	T22S47		A-29								
62T1	6	6SK7GT, 6A8GT, 6SK7GT, 6SO7GT, 6K6GT, 41, 80 (44)	23A14963	A-14A		PRSA25-100		M-100-2		UHC-102		Out	25B21248	A-3856	T22R02		P-2951								
62T2	6	6SK7GT, 6A8GT, 6SQ7GT, 41, 80 (44)	23A14963	A-14A		UP224 C		Y-15		..-350		Pwr	25B21241	P-6119	T-2547		A-29 1								
63A (See Model 61A)																									
63E (See Model 61E)																									
65BPI, 2, 3, 4.	6	1P5GT, 1A7GT, 1H5GT, 1M5GT, 3Q5GT, 117Z6GT	23A20324	A-10		UP-15		DY-2X50-5		-5		Out	25A157	P-6119	T-0		A-29 0								
65BPI, 2A, 3A, 4A	6	1P5GT, 1A7GT, 1N5GT, 1H5GT, 3Q5GT, 117Z6GT	23A20318	P-25		M-25-2		M-25-25		TA-25		Out	25A15788	A-386	T-47		A-2900								
65F11, 65F12	6	7H7, 7A4, 7A7, 7B6, 7B5, 5Y3GT, (44)	23A20324	AF44J4A		UP5515		DY-2X50-10		EL-2		Pwr	25A211	P-6119	T22R30		P-29								
65F21	6	6SG7, 6J5, 6S07, 6K6GT, 5Y3GT, (51)	23A27718	AF32KA		UP2245 & BR202A		DY-311		EL-323		Pwr	25B21248	P-6119	T22S47		A-29 1								
65L11, 65L12	6	6IN5GT, 1A7GT, 1H5GT, 3Q5GT, 117Z6GT	23A25889	AF88BD		UP4415		DY-3X40-5		EL-340		Pwr	25B21175	P-6119	T22S47		P-2951								
65T21, 65T21B	6	6SG7, 6J5, 6S07, 6K6GT, 5Y3GT, (44)	23A27718	AF44J4A		UP2245 & BR202A		DY-311		EL-32		Pwr	25B21248	P-6119	T22R01		P-29-1								
65X11A, 12A, 13A, 14A, 14B	6	12SJ7GT, 12SA7GT, 12SK7GT, 12SO7GT, 35L6GT, 35Z5GT (47)	23A70008	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	25A20503	A-3876	T22S45		A-29 8								
67X11, 12, 13	6	14C7, 1407, 14A7, 14B6, 35A5, 35Y4 (47)	23B75808	PRSA150-40-20 & PRSA150-20		E242215		DSD-40-0		TA-24 & UT-201		Out	25B7611	A-3876	T22S45		A-29 -								
69K1	6	6A7, 6D6, 6Q7G, 42, 80	23A11357	AF44J4A		UP2245C		DY-315		EL-35		Out	25B76118	A-3876	T22S45		A-292								
71A	6	6A7, 6D6, 6SQ7GT, 25B6G, 25Z5 (44)	23A15291	PRSA150-20		BR2015		M-20-150		UT-201		Pwr	25B76113	P-6012	T22R04		P-292								
72C	7	6A8GT, 6K7GT, 6SQ7GT, 6V6G, 5WAGT (47)	23A17422			DY-311		EL-330		EL-33		Out	25B761136	A-3852	T-2		P-2952								
75F21	7	7Q7, 6SG7, 6S07, 6K6GT, 5Y3G (51)	23A27718	AF44J4A		UP2245 & BR202A		DY-311		EL-323		Pwr	25C75489	P-6119	T22R04		A-29								
75F31, A, B, 76F31	7	7F8, 7Q7, 6SG7, 6SG7/W7, 58GT, 6K6GT/6V6GT, 5Y3GT, (47)	23K77635	AF44J4A		UP2245 & BR202A		DY-311		EL-32		Pwr	25K7407	A-3824	T22S55		A-293								
81C, (Cyl. or Sq. Loop)	8	6A7, 76, 6D6, 6Q7G, 41, 80 (44)	23A14963	AF44J4A		UP2245C		DY-315		EL-350		Pwr	25B15329	P-6012	T22R04		P-29 2								
81F21, 81F22	8	6SD7GT, 6J5GT, 6SK7GT, 6SO7GT, 6F6G, 5Y3G (44)	23A27718	AF44J4A		UP2245 & BR202A		DY-311		EL-323		Pwr	25B263035	P-6012	T22R04		P-29 2								
81K31	8	6SJ7GT, 6SATGT, 6SK7GT, 6SO7GT, 6F6G, 5Y3G (44)	23A27718	AF44J4A		UP2245 & BR202A		DY-311		EL-323		Pwr	25B27651	A-3311	T22R04		P-293								
82A	8	6A7, 6D6, 6Q7G, 41, 84	23A11981			UP2245C		DY-315		EL-35		Pwr	25B265035	P-6012	T22R04		P-295								
83F1	8	81L, K7GT, 12A8GT, 12SQ7GT, 23A14963, A-14J4A, 242, 80 (44)	23A14963	AF44J4A		UP2245C		DY-315		EL-35		Pwr	25B15430	A-3311	T22S64		A-29								
83K1	8	12SK7GT, 12A8GT, 12SQ7GT, 23A14963, A-14J4A, 242, 80 (44)	23A14963	AF44J4A		UP2245C		M-10-350		UT-123		Out	25B22930	A-3311	T-64		A-293								
83K1	8	12SK7GT, 12A8GT, 12SQ7GT, 23A14963, A-14J4A, 242, 80 (44)	23A14963	AF44J4A		UP2245C		DY-315		EL-350		Out	25B21747	A-3311	T22S64		A-29								

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photoint Set No.
1st.	1X16588.	16-5712.					50B15059.	ST-168.	F12			Vol	18K15058.	AM-60-Z	KSS-3	A.	D13-133.	E	41			Continued—	MOTOROLA 61C, 61D (with RF stage)		
2nd.	1X16187.	16-5714.	455				50B15170.	ST-168.	F13	10E15	F13	Vol	18K15058.	AM-60-Z	KSS-3	A.	D13-133.	E	41				61CA, 61DA, (with separate OSC)		
1st.	1X16588.	16-5712.	455				50B15059.	ST-168.	F12			Tone	18A16083.	AM-61-S	KSS-3	A.	D11-137.	E	41				61D (With Loop)		
2nd.	1X16157.	16-5714.					50B15170.	ST-175.	F13	10E15	F13	Vol	18K15058.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X16588.	16-5712.	455				50B15170.	ST-175.		10E15		Tone	18A16083.	AM-61-S	KSS-3	A.	D11-137.	E	41						
2nd.	1X16187.	16-5714.					50B15170.	ST-175.				Vol	18A16083.	AM-61-S	KSS-3	A.	D13-133.	E	41						
1st.	1X14716.	16-6658.	455				50B14691.	ST-194.		5E45.		Vol	18K14681.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
2nd.	1X16232.	16-6660.					50K16318.		F13																
1st.	1X15793.	16-5712.	455	f.	L-22.		50B15728.					Vol	18K15058.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
2nd.	1X15791.	16-5714.					50B27374.	ST-175.		10E15		Vol	18K26678.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X28090.	16-5712.	455	f.	L-40.		50B27374.	ST-175.		10E15		Vol	18K26678.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
2nd.	1X28088.	16-5714.					50B27374.	ST-175.	F12			Vol	18K26678.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X28012.	16-5712.	455				50B27374.	ST-175.	F13	5A1.	F13	Vol	18A25882.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
2nd.	1X28010.	16-5742.					50B27374.	ST-175.	F13	5A1.	F13	Vol	18A25882.	AM-63-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X25904.	16-5712.	455				50B27374.	ST-175.	F12			Vol	18A25882.	AM-63-Z	KSS-3	A.	D13-133.	E	41						
2nd.	1X28012.	16-5712.	455				50B27374.	ST-175.	F12			Vol	18A25882.	AM-63-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X27987.	16-5712.	455				50B28275.		F2			Vol	18K26678.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
2nd.	1X27985.	16-5714.	455				50B28275.		F2			Vol	18K26678.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X26546.	16-6658.	455				50B23173.	ST-194.		5E45.		Vol	18A14629.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
2nd.	1X26543.	16-6660.					50B23173.	ST-194.		5E45.		Vol	18A14629.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X28136.	16-6658.	455				50B28430.	ST-194.																	
2nd.	1X28134.	16-6660.					50B20653.	ST-194.		5E45.		Vol	18A14629.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X20646.	16-6658.	455				50B20653.	ST-194.		5E45.		Vol	18A14629.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
2nd.	1X20643.	16-6660.					50B20653.	ST-194.																	
1st.	1X21181.	16-5712.	455		L-22.		50B22344.			10E10.		Vol	18A21176.	AT-78.	KSS-3	A.	D13-133X.	E	41						
2nd.	1X21179.	16-5714.					50B22344.			10E10.		Tone	18A21481.	AM-61-S	KSS-3	A.	D11-137.	E	41						
1st.	1X25904.	16-6658.	455				50B25891.	ST-105.		5A1.		Vol	18A25882.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
2nd.	1X25902.	16-6660.	D16				50B25891.	ST-105.	F13	5A1.	F13	Vol	18A25882.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
1st.	1X21181.	16-5712.	455				50B21574.	ST-168.	F12			Vol	18A21176.	AT-78.	KSS-3	A.	D13-133X.	E	41						
2nd.	1X21179.	16-5714.					50B21574.	ST-168.	F12			Vol	18A21481.	AM-61-S	KSS-3	A.	D11-137.	E	41						
1st.	1X21181.	16-5712.	455				50B21574.	ST-168.	F12			Vol	18K26578.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
2nd.	1X21179.	16-5714.					50B21574.	ST-168.	F12																
1st.	1X20344.	16-6658.	455				50C20392.	ST-108.		6A1.		Vol	18K20339.	AM-63-Z	KSS-3	A2.	D13-137.	E	42						
2nd.	1X20342.	16-6660.	D17				50C20392.	ST-108.	F13	6A1.	F13	Vol	18K20339.	AM-63-Z	KSS-3	A2.	D13-137.	E	42						
1st.	1X20344.	16-6658.	455				50C20392.	ST-108.	F13	6A1.	F13	Vol	18K20339.	AM-63-Z	KSS-3	A2.	D13-137.	E	42						
2nd.	1X20342.	16-6660.	D17				50C20392.	ST-108.	F13	6A1.	F13	Vol	18K20339.	AM-63-Z	KSS-3	A2.	D13-137.	E	42						
1st.	1X20344.	16-6658.	455				50C21172.																		
2nd.	1X20342.	16-6660.	D17				50C21172.																		
1st.	1X20344.	16-6658.	455				50C20392.	ST-108.		6A1.		Vol	18K20339.	AM-63-Z	KSS-3	A2.	D13-137.	E	42						
2nd.	1X20342.	16-6660.	D17				50C20392.	ST-108.		6A1.		Vol	18K20339.	AM-63-Z	KSS-3	A2.	D13-137.	E	42						
1st.	1X20344.	16-6658.	455				50C21172.																		
2nd.	1X20342.	16-6660.	D17				50C21172.																		
1st.	1X26566.	16-6667.	455	f.			50B71799.	ST-175.	F3	12E10.	F3	Vol	18A70063B.	AT-98.	KSS-3	A.	D13-137X.	E	41						
2nd.	1X26567.	16-6668.	455	f.			50B71799.	ST-175.	F3	12E10.	F3	Tone	18K70086C.	AT-98.	KSS-3	A.	D13-137X.	E	41						
1st.	1X26566.	16-6668.	455	f.			50C70091A.	ST-107.		5A15.		Vol	18A25882-0.	AM-63-Z	KSS-3	A2.	D13-137.	E	42						
2nd.	1X26567.	16-6669.	455	f.			50B71147.	ST-166.		6E10.		Vol	18K70088.	AT-109.	KSS-3	A.	D13-137X.	E	41						
1st.	1X26567.	16-6669.	455	f.			50B71147.	ST-166.		6E10.		Tone	18K70087.	AT-109.	KSS-3	A.	D13-137X.	E	41						
2nd.	1X26568.	16-6670.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A72888.	AM-60-Z	KSS-3	A.	D13-133.	E	41						
1st.	1X26568.	16-6670.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
2nd.	1X26567.	16-6669.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
1st.	1X26568.	16-6669.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
2nd.	1X26567.	16-6669.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
1st.	1X26568.	16-6670.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
2nd.	1X26567.	16-6669.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
1st.	1X26568.	16-6670.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
2nd.	1X26567.	16-6669.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
1st.	1X26568.	16-6670.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
2nd.	1X26567.	16-6669.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
1st.	1X26568.	16-6670.	455	f.			50B71147.	ST-166.		6E10.		Vol	18A70032A.	AM-63-Z	KSS-3	A.	D13-137.	E	41						
2nd.	1X26567.	16-6669.	455	f.			50B71147.	ST-166.</																	

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
MOTOROLA—Cont.																								
85F21	8	6SG7, 6J5, 26SQ7, 26K6GT, 5Y3GT (51)	23A22718	AF44J4A		UP2245C		DY-311		EL-323		Pwr Out	25B26035	P-6013	T22R04		P-2952							
85K21	8	6SG7, 6J5, 26SQ7, 26K6GT, 5Y3GT (51)	23A22718	AF44J4A		UP2245C		DY-311		EL-323		Pwr Out	25B27661	A-2201	T22S74		A-2936							
89K1, 89K2	8	6D6, 6A7, 275, 242, 80, (44, 51)	23A10045	GL450-40	KR540	D-40-450	PLS-40				Pwr Out	25B26035	P-6013	T22R04		P-2952								
89K3	8	6A7, 76, 6D6, 275, 242, 80 (44, 51)	23A10044	GL450-40	KR540	D-40-450	PLS-40				Pwr Out	25B10031	A-3852	T22S74		A-2904								
			23A11951	AF22J	UP2046	DY-40-450	EL-4				Pwr Out	25B11638	A-3852	T22S74		A-2904								
23A12220																								
23A11981																								
93F1	9	12SK7GT, 12ABGT, 12SQ7GT, 242, 80 (47)	23A22051	AF88J4A	UP4445C	DY-314					Pwr Out	25B22403												
95F31, 31B, 33	9	7F8, 707, 28SQ7, 6SG7, 6SQ7, 26K6GT, 5Y3GT (47)	23A22718	AF44J4A	BR1235	DY-311				UT-123	Pwr Out	25B22390	A-3811	T22S64		A-2936								
			23A75235	PRS150-10	BR1215	M-10-150				EL-323	Pwr Out	25C75489	A-3824	T22S56		A-2936								
101C31	10	6SJ7GT, 6A8GT, 26J5GT, 5SK7GT, 26SQ7GT, 26V6GT, 5Y3G (50, 44, 51)	23A14963	AF44J4A	UP2245C	DY-315				UT-123	Pwr Out	25B22026	P-6290											
101F21, 101F22	10	6SJ7GT, 6SA7GT, 6SK7GT, 26SQ7GT, 26P5GT, 5Y3G (44)	23A22718	AF44J4A	UP2245C	DY-311				EL-323	Pwr Out	25B28217	P-6012	T22R04		P-2952								
101R21	10	6SJ7GT, 6SA7GT, 6SK7GT, 26SQ7GT, 6AE7GT, 5Y3 (44)	23A22718	AF44J4A	UP2245C	DY-311				EL-323	Pwr Out	25B28217	P-6012	T22R04		P-2952								
103F1	10	6SK7GT, 6A8GT, 6J5GT, 26SQ6GT, 26V6G, 80 (55)	23A22051	AF88J4A	UP4445C	DY-314				UT-123	Pwr Out	25B22026	P-6290											
103F2	10	6SK7GT, 6A8GT, 6J5GT, 26SQ7GT, 26V6G, 80 (44, 55)	23A22051	AF88J4A	BR1235	DY-314				UT-123	Pwr Out	25B22584	A-3830											
103K1	10	6SK7GT, 6A8GT, 6J5GT, 26SQ7GT, 26V6G, 80 (44)	23A11710	AF44J4A	UP2245C	DY-315				UT-123	Pwr Out	25B22584	A-3830	T22S74		A-2905								
103CK2	10	6SK7GT, 6A8GT, 6J5GT, 26SQ7GT, 26V6G, 80 (50, 44, 51)	23A11710	AF44J4A	UP2245C	DY-315				UT-123	Pwr Out	25B22026	P-5290											
109K1, 109K2	10	6K7G, 6J5G, 6A8G, 6H6G, 607G, 6V7G, 26F6G, 5Z3, (44, 50, 51)	23A10045	GL450-40	KR540	D-40-450	PLS-40				Pwr Out	25B11646	A-3830	T22S74		A-2905								
			23A10244	GL450-40	BR1235	M-10-350				PLS-40	Pwr Out	25B11646	A-3830	T22S64		A-2936								
			23A12220	PRS25-50	BR502	M-50-25				TA-50	In Out	25B11699	A-3811											
			23A11981	AF32K4A	UP2235C	DY-310				EL-153	Pwr Out	25B12804												
250	6	6K7GT, 5A8GT, 6Q7GT, 6K6GT, 024, 6X5 (55)	23A17738	AF32K4A	UP2235C	DY-310				EL-153	Pwr Out	25B12693	A-3878	T22S47		A-2931								
251	6	6SK7GT, 6SA7GT, 6SQ7GT,	23A22738		UP3325C					EL-334	Pwr Out	25B26075												
300	6	6K7GT, 6A8GT, 6Q7GT, 6K6GT, 024 (51)	23A17738	AF32K4A	UP2235C	DY-310				EL-153	Pwr Out	25B26074	A-3876	T22S45		A-2928								
301	6	6SK7GT, 6SA7GT, 6SQ7GT,	23A22738		UP3325C					EL-334	Pwr Out	25B17822	A-3878	T22S47		A-2931								
302	6	6SK7GT, 6SA7GT, 6SQ7GT,	23A22738		UP3325C					EL-334	Pwr Out	25K28294	A-3876	T22S49		A-2928								
350	6	6K7GT, 6A8GT, 6Q7GT, 6K6GT, 024 (51)	23A17738	AF32K4A	UP2235C	DY-310				EL-153	Pwr Out	25K19135	A-3876	T22S45		A-2928								
351	6	6SD7GT, 6SA7GT, 6SK7GT, 6SQ7GT, 6U6GT, 6X5GT (51)	23A22738		UP3325C					EL-334	Pwr Out	25K19132	A-3878	T22S47		A-2931								
352	6	6SK7GT, 6SA7GT, 6SQ7GT,	23A22738		UP3325C					EL-334	Pwr Out	25A26233	A-3876	T22S45		A-2928								
400	7	6K7GT, 7A8GT, 6Q7GT, 6K6GT, 024 (51)	23A17728	AF32K4A	UP2235C	DY-310				EL-153	Pwr Out	25A26236	A-3876	T22S45		A-2928								
											In Out	25B17770												
											25K17994	A-3811	T22S64		A-2936									
401	7	6SD7GT, 6SA7GT, 6SK7GT, 6SQ7GT, 26K6GT, 6X5GT (51)	23A17738	AF32K4A	UP2235C	DY-310				EL-153	Pwr Out	25B17975	A-3811	T22S64		A-2936								
402	7	6SD7GT, 6SA7GT, 6SK7GT, 6Q7GT, 26K6GT, 6X5GT (51)	23A17738	AF32K4A	UP2235C	DY-310				EL-153	Pwr Out	25B17975	A-3811	T22S64		A-2936								
405	6	6SK7GT, 6SA7GT, 6SQ7GT, 6V6GT, 6X5GT (51)	23A22718	AF44J4A	UP2245C	DY-311				EL-323	Pwr Out	25B70850-E	A-3878	T22S45		A-2936								
405M	6	6BA6, 6BE6, 6AT6, 6V6, 6X4	23A75429	AF44J4A	UP2245C	DY-312				EL-322	Pwr Out	25B70171	A-3879	T22S47		A-2932								
450	7	6SK7GT, 6SA7GT, 6K7GT, 6SQ7GT, 26K6GT, 024/6X5 (51)	23A17190	AF44J4A	UP2245C	DY-315				EL-350	Chk	25K19209												
											Pwr Out	25K19205												
											In Out	25K19208	A-3811	T22S64		A-2936								
451	6	6SD7GT, 6SA7GT, 6SK7GT, 6SQ7GT, 6U6GT, 6X5GT (51)	23A22738		UP2235C					EL-334	Pwr Out	25K26487	A-3876	T22S45		A-2928								
452	6	6SK7GT, 6SA7GT, 6SQ7GT, 6U6GT, 6X5GT (51)	23A22738		UP2235C					EL-334	Pwr Out	25K26487	A-3876	T22S45		A-2928								
496BT1	4	6D8G, 6SG7, 6T7G, 6D6G, 6GGG (51)	23A11959	AF88BD	UP44415	DY-3X40-150				EL-340	Pwr Out	25B12157												
500	7	6K7GT, 6A8GT, 6Q7GT, 6K6GT, 024/6X5	23A17190	AF44J4A	UP2245C	DY-315				EL-350	Pwr Out	25A12384	A-3879	T22S47		A-2932								
											In Out	25A19058												

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Product Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	IX11458	16-6658		455	†			50B72379			10E10		Vol Tone	18A70068B	AT-109	KSS-3	A.		D13-137X	E	41				Continued	85F21	
2nd.		16-6659						50B72379			10E10		Vol Tone	18A70068C	AT-109	KSS-3	A.		D13-137X	E	41					5	85K21
1st.		16-6658		455				50B11415					Vol Tone	18A70068B	AM-61-S	KSS-3		D11-137	E								89K1, 89K2
2nd.	IX11457	16-6712		455				50B11415					Vol Tone	18A11423													
1st.	IX12011	16-5712		455				50B11415					Vol Tone	18A11645	T-109			D13-137X			G1						89K3
2nd.	IX12010	16-5714											Vol Tone	18A11953	AM-61-S	KSS-3		D11-137	E								
1st.	IX22459	16-5712		455	†	L-25		50B22450			12E10		Vol Tone	18A22493	AT-103	KSS-3	A.		D13-137X	E	41						93F1
2nd.	IX22407	16-5714						50B72379			10E10		Vol Tone	18A21431	AM-61-S	KSS-3	A.		D11-137	E	41						95F31, 31B, 33
1st.		†				4.3							Vol Tone	18A74831B	AT-109	KSS-3			D13-137X	E	41						
2nd.													Vol Tone	18A28062C													
1st.	IX22043	16-5712		455				50B28516	ST-173	F3	12E15	F3	Vol Tone	18A22010	AT-109	KSS-3		D13-137X	E								101C31
2nd.	IX22041	16-5714											Vol Tone	18A22090	AM-61-S	KSS-3	A.	D11-137	E								
1st.	IX28203	16-5712		455	†	L-40		50B28568			10E10	F3	Vol Tone	18A22065	AT-109	KSS-3	A.	D13-137X	E	41							101F21, 101F22
2nd.	IX28232	16-5714											Vol Tone	18A21481	AM-61-S	KSS-3	A.	D11-137	E	41							
1st.	IX28203	16-5712		455	†	L-40		50B28568			10E10	F3	Vol Tone	18A22065	AT-109	KSS-3	A.	D13-137X	E	41							101R21
2nd.	IX28232	16-5714											Vol Tone	18A21481	AM-61-S	KSS-3	A.	D11-137	E	41							
1st.	IX22409	16-5712		455				50K23012					Vol Tone	18K22590	AT-101	KSS-3	A.	D17-137X	E	41							103F1
2nd.	IX22407	16-5714						50K23012					Vol Tone	18A21481	AM-61-S	KSS-3	A.	D11-137	E	41							103F2
1st.	IX22409	16-5712		455	†	L-25							Vol Tone	18K22590	AT-101	KSS-3	A.	D17-137X	E	41							103K1
2nd.	IX22407	16-5714											Vol Tone	18A221481	AM-61-S	KSS-3	A.	D11-137	E	41							103CK2
1st.	IX22043	16-5712		455				50B22028					Vol Tone	18A22010	AT-109	KSS-3	A.	D13-137X	E	41							
2nd.	IX22041	16-5714						50B22028					Vol Tone	18A22009	AM-61-S	KSS-3	A.	D11-137	E	41							
1st.	IX22043	16-5712		455				50B11739					Vol Tone	18A22010	AT-109	KSS-3	A.	D13-137X	E	41							
2nd.	IX11885	16-5712		455									Vol Tone	18A11645	AM-61-S	KSS-3	A.	D11-137	E	41							108K1, 109K2
1st.	IX11884	16-5714											Vol Tone	18A11730	AM-61-S	KSS-3	A.	D11-137	E	41							
1st.	IX15141	16-6658		455				50A12868			52EV6		Vol	18A18652													250
2nd.	IX12815	16-6658						50B26166	ST-108	F8	6EV6		Vol	18A18652													48K12793
1st.	IX26119	16-6662		455									Vol	18A18652													542M
2nd.	IX26117												Vol	18A17767													48K12793
1st.	IX17824	16-6652		262				50B17862	ST-105	F8	5EV6		Vol	18A17767				D13-133	C3	41	G1, 9						300
2nd.	IX17823	16-6654		262									Vol	18A17767													301
1st.	IX23096	16-6652		262				50B26297			52EV6		Vol	18A17767													302
2nd.	IX26231												Vol	18A29638													350
1st.	IX23535							50B320417	ST-105	F8	5EV6		Vol	18A19113													351
2nd.	IX26231							50B30418		F13			Vol	18A19113													352
1st.	IX19145	16-6652		262									Vol	18A19113													400
2nd.	IX19140												Vol	18A17767													401
1st.	IX26395	16-6652		262									Vol	18A17767													402
2nd.	IX26383												Vol	18K25639													405
1st.	IX26385												Vol	18K25639													405M
2nd.	IX26383												Vol	18K27111													450
1st.	IX17824	16-6652		262				50B18005			7EV6		Vol	18K17853				D13-133	C3	41	G1, 9						451
2nd.	IX17823	16-6654		262									Vol	18K17853													452
1st.	IX26345							50B26339			7EV6		Vol	18A17767													496BT1
2nd.	IX26343							50B32040			7EV6		Vol	1K25619													500
1st.	IX26345							50B26484	ST-108	F8	6EV6		Vol	1K25619													
2nd.	IX26343												Vol	1K25619													
1st.	IX19210	16-6652		262				50B20197			7EV6		Vol	IK19343				D13-133	C3	41	G1, 9						453
2nd.	IX20268	16-6654		262				50B20198			8EV6		Vol	IK19343													
1st.	IX26588	16-6652		262									Vol	18A17767													454
2nd.	IX26586	16-6652		262									Vol	18A25638													455
1st.	IX26588	16-6652						50B12411	ST-105		52A1		Vol	18A12156	M-60-Z			A.	D13-133								
2nd.	IX26586	16-6652											Vol	18A12156	M-60-Z												
1st.	IX12361	16-6658		455				50B20197			52A1		Vol	18A12156	M-60-Z												
2nd.	IX12361	16-6660		262				50B20198			7EV6		Vol	18A19341	(or)												
1st.	IX12399	16-6652		262									Vol	18A19341	IK19343												
2nd.	IX19076	16-6652		262				50B20197			8EV6		Vol	18A19341	IK19343												
1st.	IX20267	16-6654		262				50B20198			8EV6		Vol	18A19341	IK19343												

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES									
		No. Tubs	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note			
			Dial Light Type Listed in Parentheses	Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	"A"	"B"		
MOTOROLA—Continued		7	6SD7GT, 6SA7GT, 6SK7GT, 6Q7GT, *6K6GT, 024 (51)	23A17190	AF44J4A		UP2245C		DY-315		EL-350		Chk Pwr In Out	25K26426, 25K26908, 25B26308	†	†	†	†	A-2936	P-2972	T22S64	A-2932					
501		6	6SK7GT, 6SA7GT, 6SQ7GT, 6V6GT, 6X5GT/024 (47)	23A27718	AF44J4A		UP2245C		DY-311		EL-323		25K26427, 25B70950B, 25B70171E	A-3311, P-4062, A-3879	T22R20	T22S47			A-2936	P-2972	A-2932						
505		6	6SK7GT, 6SA7GT, 6SQ7GT, 6X5GT, 024	23A17190	AF44J4A		UP2235C		DY-310		EL-153		25B20011, 25B20356	†	†	†	†	A-2928									
550		6	6SD7GT, 6A8GT, 6SK7GT, 6SQ7GT, 6UG6GT, 6X5GT/024	23A22738			UP3325C				EL-334		25B22739, 25A22745	A-3876	T22S45			A-2928									
550A		6	6SD7GT, 6A8GT, 6SK7GT, 6SQ7GT, 6UG6GT, 6X5GT/024	23A22738			UP15D145		DY-3X15-450		EL-340		25B26810, 25A26804	A-3311, 1X26834, 25B26810	T22S64			A-2936									
551		8	6SD7GT, 6SA7GT, 6SK7GT, 6SQ7GT, 6J5GT, *6V6GT, 024	23A23651			UP15D145		DY-3X15-450		EL-340		25A26804, 25B26804	A-3311, †	T22S64			A-2936									
552		8	6SK7GT, 6SA7GT, 6SQ7GT, 6J5GT, *6V6GT, 024 (51)	23A23651			UP15D145		DY-3X15-450		EL-340		25B26810, 25A26804, 25B70950E, 25B70171E	A-3311, P-4062, A-3879	T22S64	T22R20			A-2936	P-2972	A-2932						
605		6	6SK7GT, 6SA7GT, 6SQ7GT, 6V6GT, 6X5GT	23A27718	AF44J4A		UP2245C		DY-311		EL-323		25B26810, 25B70950E, 25B70171E	A-3311, P-4062, A-3879	T22S64	T22R20			A-2936	P-2972	A-2932						
700		8	6SK7GT, 6A8GT, 6SQ7GT, 6Q7GT, *6V6GT, 6X5/024 (51)	23A17190	AF44J4A		UP2245C		DY-315		EL-350		25B19243, 25B10954	†	†	†	†	A-2936									
701		8	6SD7GT, 6SA7GT, 6SK7GT, 6Q7GT, 6J5GT, *6V6GT, 024	23A17190	AF44J4A		UP2245C		DY-315		EL-350		25K19247, 25K19248	A-3311, †	T22S64			A-2936									
705		8	6SK7GT, 6SA7GT, *6SQ7GT, *6V6GT, 6X5GT/024	23A27718	AF44J4A		UP2245C		DY-311		EL-323		25B26309, 25B26308	A-3311, P-4062, A-3879	T22S64	T22R22			A-2936	P-4073	A-2901						
MURPHY		5	12SA7GT, 12SK7GT, 12SQ7GT, 5L6GT, 35Z5GT (47)	20-20-20 Mfd.	PRS150-20-20 & PRS150-20		EZ42215		M-2X20-150, & M-20-150		TA-220		Out	On Spkr.	A-3876	T22S45			A-2928								
113		5	14Q7, 12SK7GT, 12SQ7GT, 50B5, 35Z5GT (47)	20-20-20 Mfd.	PRS150-20-20 & PRS150-20		EZ42215		M-2X20-150, & M-20-150		TA-220		Out	TA-160	A-3865	T22S45			A-2928								
122		5	14Q7, 12SK7GT, 12SQ7GT, 50B5, 35Z5GT (47)																								
MUSITRON		4	7N7, 7C5, 7Z4 (46)	40 Mfd.	PRS450-40		BR-4045		M-40-450		EL-4		Pwr	P-6312, A-3823	T22R31			P-2952, A-2936									
PT-10		4	7N7, 7C5, 7Z4 (46)	8-8 Mfd.	PRS450-8-8		EZ8845		M-2X8-450		UT-88		Out	T22S64													
PX		4	7N7, 7C5, 7Z4	16 Mfd.	PRS450-16		BR1645		M-16-450		UT-16		Pwr	P-6312, A-3823	T22R04			P-2952, A-2936									
SRC-3, 101—Piccolo		3	14A4, 50L6GT, 35Z3	20-20 Mfd.	PRS150-20-20		EZ8845		M-2X8-450		UT-88		Pwr	P-6312, A-3823	T22S47			P-2952, A-2936									
		3	14A4, 50L6GT, 35Z3	20 Mfd.	PRS25-25		BRD2215		DSB-2X20-150		TA-220		Out	T22S45													
103-Piccolo		3	ILA4, 117Z6	20 Mfd.	PRS150-20-20		BR2015		M-20-150		UT-201		Out	A-3456	T22S48			A-2900									
105, 202		2	50L6GT, 35Z3	20-20 Mfd.	PRS25-100		BRH251		DSB-2X20-150		TA-220		Out	24-08	A-3876	T22S45			A-2928								
NASH		6	6K7GT, 6SA7GT, 6Q7GT, *6V6GT	22-917	AF44J4A		UP2245C		DY-315		EL-350		Pwr	95-517, 95-618	†	†	†	†									
AC4289		6	6K7GT, 6SA7GT, 6Q7GT, 6K6GT, 6X5GT	22-904	AF22J4A		UPI1145C		DY-316		EL-202		In	95-619	A-3311	T22S64			A-2936								
AC4389		6	6K7GT, 6SA7GT, 6Q7GT, 6K6GT, 6X5GT	22-917	AF44J4A		UP2245C		DY-315		EL-350		Out	95-618, 95-619	A-3878	T22S47			A-2936								
AC6001, (Ch. 7A08)		7	7A7, 7B8, 7B6, 7C5, 6X5GT or 024 (51)	22-904	AF22J4A		UPI1145C		DY-316		EL-202		Pwr	95-615, 95-731	A-3878	T22S64			A-2936								
AC6011, (Ch. 6A17)		6	7A7, 7B8, 7B6, 7B5, 024 or 6X5GT (51)	22-904	AF22J4A		UPI1145C		DY-316		EL-202		In	95-732, 95-735	A-3311	T22S64			A-2936								
SMN082		6	7A7, 7B8, 7B6, 7C5, 7Y4 (51)	22-1387	AF32K4A		UPI1135C		DY-2X20-350, M-25-25		EL-212		Out	95-733, 95-734	A-3878	T22S47			A-2931								
NATIONAL		10	6K8, *6SG7, 6H6, 6SJ7, 6SF7, 6SC7, *25L6GT, 25Z5GT (C-7)	40 Mfd.	PRS150-40		BR4015		M-40-150		UT-401		Chk	95-914, 95-915	C-1355	T20C53			C-2990								
NC-46		10	6K8, *6SG7, 6H6, 6SJ7, 6SF7, 6SC7, *25L6GT, 25Z5GT (C-7)	25 Mfd.	PRS50-25		BR255		M-25-50		TA-525		Out	95-914, 95-915	C-1355	T20C53			C-2990								
NATIONAL UNION	G-613 (Commuter)	6	IA7GT, *1N5GT, 1H5GT, 3Q5GT, 11Z6GT	CE1-4A81, 25 Mfd.	AF101010D4A, PRS25-25		UP55515C, BR25A		DY-419, M-25-25		EL-452, TA-25		Out	TA-7-3	A-3878	T22S47			A-2931								
G-619		6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (51)	50-50 Mfd	PRSA150-40-40		EZ5515		DHN-2X50-150		EL-25		Out	†	A-3876	T22S45			A-2931								
571, 571A, 571B		5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	A-8948	AF844D	A3	UP4215		DY-4020-150		EL-24		Out	On Spkr.	A-3856	T22S46			A-2930								
NEWCOMB	H-10	5	6SC7, 6SJ7, *6V6GT, 6X5GT (47)	8 Mfd.	PRS50-25		BR-850, BR255		M-8-525, M-25-50		UT-85, TA-525		Pwr	P-6011, A-3304	T22R30, T22S66			A-3027									

**Information not available**

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
		No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
				"A"	"B"																			
NEWCOMB --- Cont.	inued	6	6SC7, 6SJ7, 6J5, 26V6GT, 5Y3GT (47)	16 Mfd. 8 Mfd. 25 Mfd.	PR550-25		BR1650, BR850, BR255.		M-16-525, M-8-525, M-25-50.		UT-165, UT-85, TA-525.		Pwr Out	f CS-0459.	A-3304.		P-6312, T22R31... T22S66...		P-2952, A-3027.					
KX-30	13	6J7, 46J5, 6S07, 6AF6, 6SN7GT, 26L6G, 5V4G, 6V6GT (51)	CE-17, 25 Mfd.	PR550-25			#BR250, BR-255.		DO-3X10-475, M26-50.		TA-525.		Chk Pwr Out	TC-5, TC-19, TR-95, TR-90.		T20C51... T20C51... T22R32... T22S68...		P-2954, & P-2944 A-3028.						
NOBLITT-SPARKS	See Arvin																							
OLDSMOBILE 982045	8	6U7, 26J5G, 6V7G, 6N7G, 6X5G, J-912, J-902.	PRS450-8-8 PRS25-10		EZ8845, BRD202A.		M-2X8-450, M-2X10-450.		UT-88, TA-110.		Chk Pwr In In Out	t A-4713, A-2201.		t A-4713, A-2201.		T20D76... T22S66...		A-2922, A-2901.						
982083	6	6U7G, 6A8G, 6B8G, 6V6G, 0Z4G (51)	8-8 Mfd. 10 Mfd.	PRSA450-8-8 PR525-10	EZ8845, BR202A.		M-2X8-450, M-10-25.		TU-88, TA-10.		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
982084	8	6U7G, 6Q7G, 6A8G, 615G, 6N7G, 0Z4G	8-8-2-5-6								Pwr In In Out	t A-4713, A-2201.		t A-4713, A-2201.		T20D76... T22S66...		A-2922, A-2901.						
982085	6	6K7G, 6A8G, 6B8G, 6V6G, 0Z4G (51)	8-8 Mfd. 12 Mfd.	PRSA450-8-8 PRS25-10	EZ8845, BR202A.		M-2X8-450, M-10-25.		UT-88, TA-10.		Chk Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
982126 (3 & 4 Wire Speaker)	7	6K7, 6A8G, 6Q7G, 6J5G, 6N7G, 0Z4G	7236854, 7237190	AF32K4A, PRSA450-8-8	UP2235C, EZ8845, EZ8825.		DY-310, M-2X8-450, M-2X8-250.		EL-153, UT-88, LM-28.		Pwr Out Pwr In In Out	t A-4713, A-2201.		t A-4713, A-2201.		T20D76... T22S66...		A-2922, A-2901.						
982127	5	6A8G, 6K7G, 6Q7G, 6V6G, 6X5G	7237238	PRS450-8-8 & PRS25-25	EZ8845S.		DHS-2X8-450, & M-25-25.		TU-88,		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
982153	6	6U7G, 6A8G, 6B8G, 6V6G, 6X5G	1212441	PRS450-8-8 PRS450-8	EZ8845		DH-3X8-450SS		TU-88, UT-8.		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
982160	7	7A7, 7Q7, 7E6, 7C5, 0Z4G	1213594.						EL-423.		Pwr Out Pwr In In Out	t A-3311.		t A-3311.		T22S64...		A-2936.						
982161	6	7A7, 7B8, 7B6, 7C5, 0Z4	7238829.	AF22J4A.	UP11450.		DY-316.		EL-202.		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
982215	7	7A7, 7A8, 7E6, 7C5, 0Z4G	1214417.	AF6K4A & PRS25-25	UP7DJ52.				EL-323. & TA-25.		Pwr Out Pwr In In Out	t A-3311.		t A-3311.		T22S64...		A-2936.						
982216	6	7A7, 7B8, 7B6, 7C5, 0Z4	7240724.	AF44J4A.	UP2245C.		DY-315.		EL-350.		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
982259	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 0Z4G	10-15-20 Mfd.	AF32K4A.	UP2235C.		DY-310.		EL-153.		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
982282	7	7A7, 7Q7, 7E6, 7C5, 0Z4G	1214417.	AF6K4A PRS25-25	UP7DJ52.				EL-323. & TA-25.		Pwr Out Pwr In In Out	t A-3311.		t A-3311.		T22S64...		A-2936.						
982283	6	7A7, 7B8, 7B6, 7C5, 0Z4	7240724.	AF44J4A.	UP2245C.		OY-315.		EL-350.		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S64...		A-2936.						
982375	7	7A7, 7Q7, 7E6, 7C5, 0Z4G (55)	1214417.	AF6K4A PRS25-25	UP7DJ52.				EL-323.		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
982376	6	7A7, 7B8, 7B6, 7C5, 0Z4	7240724.	AF44J4A.	UP2245C.		DY-315.		EL-350.		Pwr Out Pwr In In Out	t A-3877.		t A-3877.		T22S46...		A-2930.						
OLYMPIC 6-501 Series	5	12SA7GT, 12SK7GT, 12SQ7, 50L6GT, 35Z2GT (47)	CO-107.	PRS150-40-40.	BRD4415.		M-2X40-150.		TA-440.		Out	On Spkr.	A-3876.		T22S45...		A-2928.							
6-502U, P, 6-503, 6-504, 6-504L	6	6SG7, 6SA7, 6SK7, 6SQ7GT	CO-158.	PRV450-10-10 10 PRSA450-10 PR525-50	BRD2045.		DY-3X15-450.		EL-424.		Pwr	TR-112.	P-6013.		T22R04...		P-2952.							
6-601V, 6-601W	6	6V6GT, 5Y3GT (47)			BRD8145.					Out	On Spkr.	A-3310.		T22S62...		A-2930.								
6-602	6	6SG7, 6SA7, 6SK7, 6SQ7GT, 6V6GT, 5Y3GT (47)	CO-158.	PRV450-10-10 10 PRSA450-10 PR525-50	BRD8145. BRD502. BR-2045.		M-50-25.		TA-25.		Pwr	TR-112.	P-6013.		T22R04...		P-2952.							
6-604	6	12BA6, 12BE6, 6SS7, 6SZ7, 50B5, 35W4 (47)	CO-111.	PRS150-40-40 PRS25-50	BRD4415.		M-50-25.		TA-25.		Out	On Spkr.	A-3310.		T22S62...		A-2930.							
6-606	6	11LN5, 1LA6, 1LH4, 1LB4, 35Z2GT (47)	CO-182.		BRD5515.		M-80-40-150.		EL-351.		Cut	CK-114.	C-2803.		T20C53...		A-2928.							
6-606-A	6	11LN5, 1LA6, 1LH4, 1LB4, 35Z2GT (47)	CO-182.		BRH151.		DGM-100-15.		UT-201.		Cut	On Spkr.	A-3876.		T22S45...		A-2931.							
6-606-U	6	11LN5, 1LA6, 1LH4, 1LB4, 11Z8GT	CO-182.	PRS25-50	BRH151.		M-80-40-15.		EL-351.		Cut	On Spkr.	A-3878.		T22S47...		A-2931.							
6-617	6	6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT (47)	CO-158.	BR2045 & BR1045 & BR845.	BRD6515.		M-20-450.		TA-50.		Cut	On Spkr.	A-3878.		T22S47...		A-2931.							
7-526	5	11LN5, 1LA6, 1LH4, 1Q5GT	CO-182.	PRS150-30-10	EZ53215C.		DS8040-150.		TA-50.		Cut	On Spkr.	A-3878.		T22S47...		A-2931.							
7-724	8	6SG7, 6SA7, 6SK7, 6SQ7, 6K6, 5Y3GT (47)	CO-768.	AF44J4A	UP2245C.		M-100-15.		DY-313.		Out	On Spkr.	A-3878.		T22S47...		A-2931.							
										Pwr	TR-981.	P-6013.		T22R05...		P-2953.								
										Out	On Spkr.	A-3823.		T22S47...		A-2901.								

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL								
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quant	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiar Part No.	Note	Project Set No.			
													Treb Bass Mike Phono Vol Tone Phone Mike Ind	RV-41 RV-42 RV-41 RV-38 T-112 RV-62 RV-41 RV-37	M-66-Z M-99-Z M-60-Z M-60-Z M-60-Z M-60-Z M-60-Z M-40-S			D13-139 D11-143 D13-133 DVC-539X D13-133 D18-137X DVC-539X D13-133 D16-120			G1 G1 G1 G1 G1 G1 G1 G1				Continued— 15.		NEWCOMB H-14		
																								(See Arvin) N	OBLITTY-SPARKS				
1st.	1212276.			262				8 Inch.	ST-115.		8EV6.		Vol Tone	8154 & 8219	SD-78.	DFS-1/2.		DC13-133X.			G1	5050673.	5303.	H1	OLDSMOBILE 982045				
2nd.	1210517.							5 Inch.	ST-105.		SEV6.		F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.		G1	5050673.	5303.	H1	982083		
1st.	†	16-5704.		262				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			5050673.	5303.	H1	982084				
2nd.	†	16-5706.		262				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			5050673.	5303.	H1	982085				
1st.	†	16-5704.		262				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			5050673.	5303.	H1	982126 (3 & 4 Wire Speaker) 982127				
2nd.	†	16-5706.		260				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			5050673.	5303.	H1	982153				
1st.	†	16-5712.		455				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			1211594.	5303.	H1	982160				
2nd.	†	16-5714.		455				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			5050673.	5303.	H1	982161				
1st.	†	16-5704.		262				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			8638.	5335.	H1	982162				
2nd.	†	16-5706.		260				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			7238829.	5335.	H1	982163				
1st.	†	16-5706.		260				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			8638.	5335.	H1	982164				
2nd.	†	16-5652.		260				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			8638.	5335.	H1	982165				
1st.	†	16-6652.		260				†			F2		F2	Vol	†	SD-78.	DFS-1/2.		DC13-133X.			8639.	5335.	H1	982216				
2nd.	†	16-6658.		455				†			F2		F2	Vol	†	AM-60-Z.	KSS-3.	A.	D13-133.	E	41	8540.	5300.	H1	982259				
1st.	†	16-6658.		455				†			F2		F2	Vol	†	AM-60-Z.	KSS-3.	A.	D13-133.	E	41	1213671.	5335.	H1	982282				
2nd.	†	16-5704.		260				8 Inch.	ST-115.		F8	8EV6.	Vol Tone	1215914.											7238829.	5335.	H1	982283	
1st.	†	16-6652.		262				8 Inch.	ST-115.		F8	8EV6.	Vol Tone	†											8638.	5335.	H1	982375	
2nd.	†	1216666.		260				1216674.			69A3		Vol Tone	1216673.											8638.	5335.	H1	982376	
1st.	7242079.	16-6652.		262				725527.			69EV6.		Vol Tone	7255298.											8638.	5335.	H1	OLYMPIC 6-501 Series, 6-502 U, P, 6-503, 6-504, 6-504L 6-601V, 6-601W	
2nd.	7242918.																												
1st.	TR-186.	16-6666.	455			SK-110.	ST-194.		5E45.				Vol	PT-102.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41								4.	
2nd.	TR-186.	16-6667.	455		†.	L-70.																					8.		
1st.	TR-118.	16-6658.	455			SK-325.							Vol Tone	PT-435.	AM-66-Z.	KSS-3.	A.	D13-139.	E	41								6-602	
2nd.	TR-118.	16-6660.	455											PT-436.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41								22.	
1st.	TR-118.	16-6658.	455			SK-325.							Vol Tone	PT-233.	AM-66-Z.	KSS-3.	A.	D13-139.	E	41								4.	
2nd.	TR-118.	16-6660.	455											PT-240.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41								11.	
1st.	TR-118.	16-6658.	455			SK-115.	ST-108.		6A1.				Vol Tone	PT-105.	AM-66-Z.	KSS-3.	A.	D13-139.	E	41								22.	
2nd.	TR-118.	16-6660.	455			SK-156.	ST-105.		5A1.				Vol Tone	PT-106.	AM-60-Z.	KSS-3.	A.	D13-133.	E	42								4.	
1st.	TR-186.	16-6666.	455			SK-476.	ST-105.		5A1.				Vol Tone	PT-576.	AM-63-Z.	KSS-3.	A2.	G22.	D13-137.	E	42								11.
2nd.	TR-186.	16-6667.	455		†.	L-70.			SK-325.				Vol Tone	PT-383.	AM-66-Z.	KSS-3.	A2.	G22.	D13-139.	E	42								4.
1st.	TR-118.	16-6658.	455			SK-476.	ST-105.		5A1.				Vol Tone	PT 105.	AM-66-Z.	KSS-3.	A.	D13-139.	E	41								30.	
2nd.	TR-118.	16-6660.	455											PT 106.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41								7-526	
1st.	TR-707.	16-6666.	455			SK-476.	ST-105.		5A1.				Vol	PT 576.	AM-63-Z.	KSS-3.	A2.	D13-135.	E	42								29.	
2nd.	TR-708.	16-6670.	455											PT 383.	AM-66-Z.	KSS-3.	A2.	G22.	D13-139.	E	42								7-724
1st.	TR-781.	16-6658.	455			SK-384.			12E60.	F3			Vol Tone	PT 567.	AT-119.	KSS-3.	A.	D13-139X.	E	41								OLYMPIC — 215	
2nd.	TR-782.	16-6670.	455		†.	L-70.								PT 568.	AM-67-Z.	KSS-3.	A.	D13-140.	E	41									

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS							Section B TRANSFORMERS							Section C BATTERIES						
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"
ORTHOSONIC-(See Electronic Labs)																							
PACIFIC RADIO 3-38	6 6A7, 6D6, 6G5, 75, 25L6, 25Z5.	16-12 Mfd.	PRSB250-20-20		EZ2116		DSB-2X20-150		TU-220		Out		A-3876		T22S45		A-2928						
M7 (38)	5 6A7, 6K7, 6Q7, 41, 84	1718	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Chk Pwr Out	532, 531	C-1227		T20C53		C-2975						
8T-6V	8 6D8, 6AB5, 6S7, 6L5, 6T7, 233, 1H4.	15-15-40 Mfd. 10 Mfd.	PRS25-10		UP2235C BR102A		DY-312 M-10-25		EL-334 TA-10		Out Chk Pwr Out	536, 535, 523,	A-3878, C-1227		T22S47 T20C53		A-2931, C-2975						
11	5 6A7, 6D6, 75, 41, 80	8-4 Mfd.	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Out Pwr Out	503, 505	A-3878, P-6011		T22S47 T22R02		A-2931, P-2951						
12 (38)	6 6A8, 6D6, 6Q7, 41, 80, 6G5	1703	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Out Pwr Out	523, 503, 505	A-3878, P-6011		T22S47 T22R02		A-2931, P-2951						
14 (38)	7 6A8, 6D6, 76, 6K5, 42, 80, 6G5, 6U5	8-4 Mfd. 10 Mfd.	PRSB450-8-8 PRS25-10		EZ588 BR102A		DH-2X8-450SS M-10-25		TU-88 TA-10		Out Pwr Out	505, 523, 505	A-3878, P-6011		T22S47 T22R02		A-2931, P-2951						
15 (38)	9 6K7, 6A8, 6G5, 6Q7, 6C5, 6F6, 5Y3	12 Mfd. 18 Mfd.	GL450-12 GL450-18		KR512A KR516A		D-12-450, D-16-450		PLS-12 PLS-16		Out Pwr Out	523, 523, 523	A-3878, P-6012		T22S47 T22R04		A-2931, P-2952						
21, 22	4 1C7, 1D5, 1H6, 185	8-8 Mfd.	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Out Chk Pwr Out	626, 524, 526, 526	A-3878, P-6011		T22S47 T20C53		A-2931, C-2975						
23	6 6D8, 6S7, 6L5, 1J6	1720			EZ8825		M-2X8-250		LM-28		Out Chk Pwr Out	526, 526, 526	A-3878, P-6011		T22S47 T20C53		A-2931, C-2975						
25	6 6A8, 6S7, 6L5, 4I	1720			EZ8825		M-2X8-250		LM-28		Out Chk Pwr Out	526, 524, 524	A-3878, P-6011		T22S47 T20C52		A-2931, C-2975						
25 (4T)	4 6D6, 6C6, 43, 25Z5	16-12 Mfd.	PRSB250-20-20		EZ2116		DSB-2X20-150		TU-220		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T20C52		A-2930						
35 (38)	6 6A7, 6D6, 6Q7, 25A6, 25Z5, 6U5 (149B-Ballast)	16-12 Mfd.	PRSB250-20-20		EZ2116		DSB-2X20-150		TU-220		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S60		A-2930						
36 (38)	7 6A7, 6D6, 76, 6K5, 25A6, 25Z5, 6U5	32-12 Mfd.									Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T20C53		A-2930						
40	4 6D6, 6C6, 43, 25Z5	16-12 Mfd.	PRSB250-20-20		EZ2116		DSB-2X20-150		TU-220		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S60		A-2930						
41	7 6A7, 6D6, 76, 6K5, 41, 80, 6U5	1703	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S60		A-2930						
42	8 6A7, 6D6, 6Q7, 76, 43, 25Z5, 6U5	1727			EZ5116				TU-1616		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S66		A-2930						
43 (38)	11 6A7, 76, 6D6, 476, 443, 25Z5, 6U5	1729	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S66		A-2930						
302	7 6A8, 6S7, 6AB5, 6L5, 1J6	1732			UP2235C		DY-312		EL-334		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S66		A-2930						
601	5 6A7, 6D6, 6Q7, 41, 80	1732			UP2235C		DY-312		EL-334		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S66		A-2930						
602	6 6A7, 6D6, 6Q7, 25A6, 25Z5, 6U5	1733			UP44315C		DY-419		EL-443		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S66		A-2930						
603	7 6A7, 6D6, 76, 6X5, 25A6, 25Z5, 6U5 (Ballast L29B)	1733			UP44315C		DY-419		EL-443		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S66		A-2930						
702	11 6A7, 76, 6D6, 243, 25Z5, 6U5	1729			EZ5116				TU-1616		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22S66		A-2930						
915	9 6K7, 6A8, 6Q7, 6C5, 6F6, 5Y3, 6G5	18 Mfd. 25 Mfd. 12 Mfd.	GL450-20 GL450-30 GL450-10		KR520 KR530		D-20-450, D-30-450		PLS-20 PLS-30		Out Chk Pwr Out	524, 524, 524	A-3878, P-6011		T22S46 T22R04		A-2930						
PACKARD PA-333915 (Early)	7 6SK7, 6A8, 6A7, 6V6GT, 0Z4 (55)	117314	AF22J4A		UPI1145C		DY-316		EL-202		Chk Pwr In Out	117334, 117297, 117306, 117339	A-3878, P-6011		T22S46 T22S64		A-2936						
PA-333915 (Late) PA-353832	7 6SK7, 6A8, 6R7, 6V6GT, 0Z4 (55)	117314	AF22J4A		UPI1145C		DY-316		EL-202		Chk Pwr In Out	117334, 117297, 117306, 117339	A-3878, P-6011		T22S46 T22S64		A-2936						
PA-351099 PA-351100	7 6SK7, 6A8, 6A7, 6V6GT, 0Z4 (55)	117314	AF22J4A		UPI1145C		DY-316		EL-202		Chk Pwr In Out	117334, 117297, 117306, 117339	A-3878, P-6011		T22S46 T22S64		A-2936						
PA-351101 PA-351102 PA-382042	6 6SK7, 6A8, 6S07, 6V6GT, 6X5GT, (55)	114258	PRS450-8		BR845		M-8-450		UT-8		Out Chk Pwr In Out	117334, 117297, 117565, 117038	A-3878, P-4062		T22S46 T22S64		A-2936						
	8 7A7, 7B8, 7B6, 7A4, 7C5, 7Y4 (44)	61-0150			UP9DJ50		DY-404		EL-415		Out Chk Pwr In Out	117334, 117297, 117565, 117038	A-3878, P-4062		T22S46 T22S64		A-2936						
PACKARD-BELL B-19	18 6SK7, 6SA7, 6H6, 6G5, 6AF6, 6S07, 6S7, 6U5, 6V6, 5U4G	20-20-20 Mfd. 25 Mfd.	PRS25-25		BR252A		M-25-25		TA-25		Chk Pwr Out	117334, 117297, 117565, 117038	A-3878, P-4062		T22S46 T22R06		A-2936						
C-1362	3 6S07, 6V6GT, 6X5GT	24017, 24003, 24006	PRS450-40 PRS450-20 PRS25-25		BR4045, BR2045, BR252A		M-40-350, M-20-350, M-25-25		EL-5, UT-203, TA-25		Pwr Out	89008, 89405	P-6119, A-3877		T22R01 T22S58		P-2950, A-2930						
C-1461	4 1S5, 3Q4, 50B5, 35W4	24007A	AF88D PRS25-100		UP6CU62		DY-304		EL-351		Out	89004							745 & 2482	8FL	7M30		

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photofacet Set No.	MFR. & MODEL								
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note					
																									(See Labs.)	ORTHOSONIC				
1st.	302.	16-5712.		465				731.		F2		F2	Vol	215.	M-60-Z.				D13-133.		G1					PACIFIC RADIO 3-(38)				
2nd.	303.							725.	ST-173.		12E15.		Vol	223.	AM-60-Z.		A.		D13-133.	E	41		1505.	5300.	H1		M7 (38)			
1st.	1199D	16-5712.		456				722.	ST-108.		6A1.		Vol	221.	M-60-Z.		A.		D13-133.		41	G1	1506.	5411.	H1		8T-6V			
2nd.	1199E	16-5714.						723.	ST-115.	F13	8A21.	F13	Vol	215.	M-60-Z.				D13-133.		G1									
1st.	1017.	16-5712.		465				719.		F2		F1	Vol	215.	M-60-Z.				D13-133.		G1					11				
2nd.	1018.	16-5714.						702.	ST-168.		6E18.		Vol	215.	M-60-Z.				D13-133.		G1					12 (38)				
1st.	302.	16-5712.		456				702.	ST-168.		6E18.		Tone	304A.	M-60-Z.				D13-133.		G1					14 (38)				
2nd.	300B.	16-5714.		465				732.	ST-173.		6E18.		Vol	215.	M-60-Z.				D13-133.		G1					15 (38)				
1st.	300T.	16-5712.		465				722.	ST-108.	F13	12E15.	F13	Vol	218.	M-60-Z.		A.		D13-133.		42	G1	480.	5409.	H1		21, 22			
2nd.	300B.	16-5714.																	D13-133.		G1									
1st.	1017.	16-5712.		465				722.	ST-108.		6A1.		Vol	215.	M-60-Z.				D13-133.		G1					23				
2nd.	1018.	16-5714.																	D13-133.		G1									
1st.	1017.	16-5712.		465				722.	ST-108.		6A1.		Vol	221.	M-60-Z.		A.		D13-133.		41	G1	480.	5409.	H1		25			
2nd.	1018.	16-5714.						723.	ST-115.	F2	8A21.	F2	Vol	305.	M-46-Z.		A.		D13-123.		G1					25 (4T)				
1st.	302.	16-5712.		465				739.		F2		F2	Vol	221.	M-60-Z.		A.		D13-133.		41	G1				35 (38)				
2nd.	303.	16-5712.						703A.		F2		F2	Vol	221.	M-60-Z.		A.		D13-133.		41	G1				36 (38)				
1st.	310.	16-5712.		465				745.		F13		F13	Tone	305.	M-46-Z.		A.		D13-123.		G1					40				
2nd.	309.	16-5714.																D13-123.		G1										
1st.	300T.	16-5712.		465				702A.	ST-168.		6E18.		Vol	221.	M-60-Z.		A.		D13-133.		41	G1				41				
2nd.	300B.	16-5714.						743.	ST-737.		8E18.		Tone	305.	M-46-Z.		A.		D13-123.		G1					42				
1st.	309.	16-5712.		465				741.					Vol	221.	M-60-Z.		A.		D13-133.		41	G1				43 (38)				
2nd.	310.	16-5714.						743.	ST-737.		8E18.		Tone	305.	M-46-Z.		A.		D13-123.		G1									
1st.	309.	16-5712.		465				741.					Vol	221.	M-60-Z.		A.		D13-133.		41	G1				302				
2nd.	310.	16-5714.						742.					Tone	305.	M-46-Z.		A.		D13-123.		G1					601				
1st.	1017.	16-5712.		465				722.	ST-108.		6A1.		Vol	221.	M-60-Z.		A.		D13-133.		41	G1				602				
2nd.	1018.	16-5714.						723.	ST-115.	F2	8A21.	F2	Vol	305.	M-46-Z.		A.		D13-123.		G1					603				
1st.	302.	16-5712.		465				719.					Vol	221.	M-60-Z.		A.		D13-133.		41	G1				702				
2nd.	303.	16-5714.																D13-123.		G1					915					
1st.	117281.	16-6658.		455				739.		F2		F2	Vol	221.	M-60-Z.		A.		D13-133.		41	G1								
2nd.	117638.	16-6660.																D13-133.		G1										
1st.	118765.	16-6658.		455																					PACKARD PA-333915 (Early)					
2nd.	118762.	16-6680.																								PA-333915 (Late), PA-353832				
1st.	118765.	16-6658.		455																					PA-351099, PA-351100					
2nd.	118762.	16-6660.																												
1st.	117281.	16-6658.		455																					PA-351101, PA-351102					
2nd.	117723.																									PA-382042				
1st.	65-0352.	16-6652.		265																										
2nd.	65-0410.																													
1st.	†.	†.		456	†.			5 Inch.	ST-194.		5E45.		Vol	†.	M-67-Z.				D13-140.		G1					PACKARD-BELL B-19				
2nd.	†.	†.						12 Inch.					Tone	†.	M-60-Z.				D13-133.		G1									
								63002A.	L-70.		83003.		ST-110.		6A15.		Exp.		25007.	M-60-Z.		A.		D13-133.		41	G1		12.	C-1362
													Volt	25503.	M-67-Z.				D13-140.		G1					12.	C-1461			
													Tone	25004A.	M-60-Z.				A.		D13-140.		41	G1						
													Volt	25005A.	M-67-Z.				D13-140.		G1									

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed In Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
																			"A"	"B"	"A"	"B"	
PACKARD-BELL 5AC	Continued	5 6SA7, 6SK7, 6Q7, 6K6, 6X5	8-8-4 Mfd.	PRSB450-8-8 & PRS450-8		EZ8845		DH-3X8-450SS		TU-88 & UT-8		Pwr Out	†	P-6010-A-3852		T22R01-T22S47		P-2950-A-2931					
5AE, 5AEP	5 6SA7, 6SK7, 6SQ7, 6K6GT, 6X5	16-8-4 Mfd.										Pwr Out	†	P-6010-A-3852		T22R01-T22S47		P-2950-A-2931					
5B	5 6A8, 6SK7, 6SQ7, 6F6, 5W4	8-4 Mfd.	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	†	P-6010-A-3823		T22R01-T22S47		P-2950-A-2931						
5D, 5DP	5 12SA7, 12SK7, 12Q7GT, 35L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	†	P-6010-A-3876		T22R01-T22S47		P-2950-A-2931						
5DA	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	30-20-20 Mfd.	PRSA150-40-20	PRSA25-25	EZ42215C		M-2X40-150		TA-303 & TA-25		Out	89411	A-3876		T22S45		A-2928						
5E, 5EP	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	30-50 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	†	A-3876		T22S45		A-2928						
5FP	5 6SA7, 6SK7, 6S07, 6KG7, 6X5GT (44)	24003, 24005, PRS450-10	PRB2045				M-20-450		UT-203		Pwr Out	89002	P-6297-A-3877		T22R00-T22S46		P-2949-A-2931						
5M	5 6A7, 6D6, 75, 41, 80	8-4 Mfd.	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	89402	P-6011-A-3824		T22R02-T22S47		P-2950-A-2931						
5MP	5 6A7, 6D6, 75, 41, 80	8-4 Mfd.	PRSB450-8-8		EZ-588		DH-2X8-450SS		TU-88		Pwr Out	†	P-6010-A-3878		T22R01-T22S47		P-2950-A-2931						
5N	5 12SA7, 12SK7, 12Q7, 35L6GT, 35Z5GT	20-40 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Chk Out	†	C-1279-A-3876		T20C52		C-2981-A-2928						
5NP	5 12SA7, 12SK7, 12Q7GT, 35L6GT, 35Z5GT	20-40 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Chk Out	†	A-3876		T22S45		A-2928						
5TP	5 6A7, 6D6, 75, 41, 80	8-4 Mfd.	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	†	A-3824		T22S45		A-2928						
6A	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20	PRSA25-50	BRD2215		M-2X20-150		TA-220		Out	†	A-3876		T22S45		A-2928						
6B	6 12SK7, 12SA7, 12SF7, 35L6GT, 35Z5GT	50-30 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	†	A-3876		T22S45		A-2928						
15	5 6C6, 6D6, 75, 41, 80	8-4 Mfd.	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	†	P-6297-A-3878		T22R00-T22S47		P-2949-A-2931						
35L	5 6A7, 6D6, 75, 41, 80	8-4 Mfd.	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Pwr Out	†	P-6010-A-3878		T22R01-T22S47		P-2950-A-2931						
35M (See Model 5)																							
35N	5 12SA7, 12SK7, 12Q7GT, 35L6GT, 35Z5GT	20 Mfd.	PRSI50-20	PRSA150-40-20	BR2015		M-20-150		UT-201		Out	†	A-3876		T22S45		A-2928						
40 (Portable)	4 1A7G, 1N5G, 1H5G, 1Q5G	8 Mfd.	PRSI50-8		BR815		M-2X40-150		TA-240		Out	†	A-3822		T22S47		A-2932	742 & 743	4F	744 & 7482	F4P1	7430	
40B	5 1A7G, 1N5G, 1H5G, 1A5G, 11Z6G	20-10-10-100									Out	†	A-3857		T22S48		A-2937	744 & 7482					
41	4 1A7G, 1N5G, 1H5G, 1A5G	8 Mfd.	PRSI50-8		BR815		M-8-150		UT-81		Out	†	A-3857		T22S48		A-2937						
46D	6 6A7, 6D6, 75, 41, 80, 6G5	12 Mfd.	GL450-12	KR512		D-12-450		PLS-12		Pwr Out	†	P-6011-A-3824		T22R02-T22S47		P-2951-A-2931							
46DP	6 6A7, 6D6, 75, 41, 80, 6U5	12 Mfd.	GL450-12	KR512		D-12-450		PLS-12		Pwr Out	†	P-6011-A-3822		T22R02-T22S47		P-2951-A-2931							
46E	6 6A7, 6SK7, 75, 41, 80, 6AF6G	12 Mfd.	GL450-12	KR512		D-12-450		PLS-12		Pwr Out	†	P-6010-A-3878		T22R01-T22S47		P-2950-A-2931							
46EP	6 6A7, 6SK7, 75, 42, 80, 6AF6G	12 Mfd.	GL450-12	KR512		D-12-450		PLS-12		Pwr Out	†	P-6011-A-3850		T22R02-T22S47		P-2951-A-2931							
46G	6 6SA7, 6SK7, 75, 41, 80, 6AF6G	12 Mfd.	GL450-12	KR512		D-12-450		PLS-12		Pwr Out	†	P-6011-A-3850		T22R02-T22S47		P-2951-A-2931							
46H, 46HC	6 6SA7, 6SK7, 6SQ7, 6K6, 5Y3G, 6AF6G	12 Mfd.	GL450-12	KR512		D-12-450		PLS-12		Pwr Out	†	P-6011-A-3850		T22R02-T22S47		P-2951-A-2931							
46HP	6 6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G, 6AF6G	12 Mfd.	GL450-12	KR512		D-12-450		PLS-12		Pwr Out	†	P-6011-A-3850		T22R02-T22S47		P-2951-A-2931							
46J	6 6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT	16 Mfd.	PRSA50-16	BR1645		M-16-450		UT-16		Pwr Out	†	P-6119-A-3830		T22R02-T22S46		P-2951-A-2930							
48B	7 6A8, 6K7, 6H6, 6F6, 5Z4, 6U5, (CL610-10 Ballast)	8 Mfd.	GL450-8	KR508		D-8-450		PLS-8		Pwr Out	†	P-6012-A-3823		T22R04-T22S47		P-2952-A-2931							
48BP	7 6A8, 6K7, 6H6, 6F6, 5Z4, 6U5	16 Mfd.	PRSA50-8	BR845		M-8-450		PLS-8		Pwr Out	†	P-6011-A-3823		T22R02-T22S47		P-2951-A-2931							
48D, 48DC, 48DK	8 6K8, 6SK7, 76, 41, 6AE6G, 6AF6G, 80	8 Mfd.	PRSA50-8	BR845		M-8-450		UT-8		Pwr Out	†	P-6011-A-3823		T22R02-T22S47		P-2951-A-2931							
48E, 48EP	8 6SA7, 6SK7, 6SQ7, 6J5, 6V6GT, 80, 6AF6G	8-16 Mfd.	PRSA450-8-8	BR1645		M-16-450		UT-16		Pwr Out	†	P-6011-A-3850		T22R02-T22S46		P-2951-A-2936							
48F	8 6SA7, 6SK7, 6SQ7, 6J5, 6V6GT, 5Y3G, 6AF6G	8-8 Mfd.	PRSA450-8-8	BR1645		M-2X8-450		UT-88		Pwr Out	†	P-6011-A-3830		T22R02-T22S46		P-2951-A-2936							
48FPA	8 6SA7, 6SK7, 6SQ7, 6J5, 6V6GT, 5Y3G, 6AF6G	12 Mfd.	PR450-16	BR1645		M-2X8-450		UT-88		Pwr Out	†	P-6011-A-3830		T22R02-T22S46		P-2951-A-2936							
48G, 48GK, 48GP	8 6K8, 6SK7, 6SQ7, 6SF5, 6VG6GT, 6X5GT	20 Mfd.	PRSA450-8-8	EZ8845		M-16-450		UT-16		Pwr Out	†	P-6012-A-3830		T22R04-T22S44		P-2952-A-2936							
48H	8 6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT	15-10 Mfd.	AF44J	UP2245		DY-2X20-450		EL-220		Pwr Out	†	P-6012-A-3311		T22R04-T22S44		P-2952-A-2936							

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL				
Use	Mfr.	Meissner	Note	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quarm	Note	Use	Mfr.	Clarostat	Shaft	Switch	Note	IRC	Part No.	Shaft	Switch	Note	Mfr.	Radiart	Note	Photofact Set No.
1st.		16-6661			460							F1	F1	Vol	+	M-60-Z		A.	D13 133		41	G1			Continued—	PACKARD-BELL 5AC
2nd.	t	16-6660																								SAE, SAEF
1st.		16-6661			460	t	L-2	12	t			F1	F1	Vol	+	M-61-Z		A.	D13-133		41	G1				SB
2nd.		16-6660																								SD, SDP
1st.		16-5712			460							F2	F2	Vol	+	M-60-Z		A.	D13-133		41	G1				SDA
2nd.		16-5714										F2	F2	Vol	+	M-61-Z		A.	D13-133		41	I1				SE, SEP
1st.	t	16-6660				t	L-2	E2	t																I	5FP
2nd.		16-6660																								5M
1st.		16-5712			460																					5MP
2nd.		16-5714																								N
1st.	t	16-6660																								5NP
2nd.		16-6658																								5TP
1st.		29002			444																					6A
2nd.		29003																								6B
1st.	t	16-5712			460							F2	F2	Vol	+	M-60-Z		A.	D13-133		41	G1				35M
2nd.	t	16-5714			160	t						F2	F2	Vol	+	M-61-Z		A.	D13-133		41	G1				35MP
1st.		16-5712										F2	F2	Vol	+	M-61-Z		A.	D13-133		41	G1				N
2nd.		16-5714			460							F2	F2	Vol	+	M-60-Z		A.	D13-133		41	I1				5NP
1st.		16-5714			460							F2	F2	Vol	+	M-60-Z		A.	D13-133		41	G1				5TP
2nd.		16-5712										F2	F2	Vol	+	M-60-Z		A.	D13-133		41	G1				6A
1st.	t	16-5714			460							F2	F2	Vol	+	M-60-Z		A.	D13-133		41	G1				6B
2nd.		16-6660										F2	F2	Vol	+	M-60-Z		A.	D13-133		41	G1				15
1st.		16-6658										F2	F2	Vol	+	M-61-Z		A.	D13-133		41	G1				35L
2nd.		16-5712										F2	F2	Vol	+	M-61-Z		A.	D13-133		41	G1				
1st.		16-5714			460							F2	F2	Vol	+	M-61-Z		A.	D13-133		41	G1		(See Part No. I 54)		35M
2nd.		16-5714										F2	F2	Vol	+	M-61-Z		A.	D13-133		41	G1				35N
1st.		16-5714			460							F1	F1	Vol	+	M-61-Z		A.	D13-133X		41	I1				40 (Portable)
2nd.		16-6661			460							F1	F1	Vol	+	M-61-Z		A.	D13-133X		41	G1				40B
1st.	t	16-6661										F1	F1	Vol	+	M-61-Z		A.	D13-133X		41	G1				41
2nd.	t	16-6661										F1	F1	Vol	+	M-61-Z		A.	D13-133X		41	G1				46D
1st.		16-6650										F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				46DP
2nd.		16-6651			460							F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				41E
1st.		16-6653										F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				46EP
2nd.		16-5712			460							F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				45G
1st.		16-5714										F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				46H, 46HC
2nd.		16-5714										F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				46HP
1st.	t	16-5712			460							F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				46J
2nd.		16-5714										F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				48B
1st.		16-5712			460							F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				48BP
2nd.		16-5712										F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				48DC, 48DK
1st.		16-5714										F2	F2	Vol	+	M-60-Z		A.	D13-133X		41	G1				48E, 48EP
2nd.		16-5714			460							F2	F2	Tone	+	M-67-Z		A.	D13-140		41	G1				48F
1st.		16-5714										F2	F2	Tone	+	M-67-Z		A.	D13-140		41	G1				48FPA
2nd.		16-5714										F2	F2	Tone	+	M-67-Z		A.	D13-140		41	G1				48GK, 48GP
1st.		16-5714			460							F2	F2	Tone	+	M-67-Z		A.	D13-140		41	G1				48H
2nd.		16-5714										F2	F2	Tone	+	M-67-Z		A.	D13-140		41	G1				
1st.	t	16-5712			460	t	L-2	E2				F2	F2	Tone	+	M-67-Z		A.	D13-140		41	G1				PACKARD — 219
2nd.		16-5714			460	t	L-2	E2				F2	F2	Tone	+	M-67-Z		A.	D13-140		41	G1				

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
PACKARD-BELL 50P.....	C	Continued	5, 12SA7, 12SX7, 12SQ7, 35L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20	BRD2215		M-2X20-150		TA-220		Out ↑	A-3876		T22S45		A-2928							
51BPR.....	10	6SA7, *6SK7, *6SQ7, 6U5 *6V6GT, *5Y3GT	16 Mfd									Pwr Out ↑	P-6012		T22R04		P-2952							
56.....	5, 1AT6GT, 1NSGT, 1H5GT, 1Q5GT, 25Z6G	16 Mfd	100-20 Mfd					M-500-15				Out ↑	A-3311		T22S64		A-2936							
57, 57A.....	6, *1NSGT, 1AT6GT, 1H5GT, 1Q5GT, 25Z6G	500 Mfd	20-100 Mfd					M-500-15				Out ↑	A-3822		T22S47		A-2932		745 & 482		8FL	*M30		
58.....	8, 6K8, 6SK7, 6SQ7, 6C5, *6V6, 5U4G, 6AF6G	16 Mfd	GL450-16	KR516A	D-16-450	PLS-16	Pwr Out ↑	P-6011		T22R02		P-2951												
58A.....	8, 6SA7, 6SK7, 6SQ7, 6J5, *6V6GT, 5U4G, 6AF6G	8 Mfd	PRS450-8	BR845	D-16-450	PLS-16	Pwr Out ↑	A-3830		T22S64		A-2936												
65A.....	6, *6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT	10 Mfd	PRS25-10	KR516A	D-16-450	PLS-16	Pwr Out ↑	P-6011		T22R02		P-2952												
65AP.....	5, 6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT	16-8 Mfd	PRS8450-8-16	EZ5816	DH-816-450SS							Pwr Out ↑	P-6348		T22R02	B1	P-3048							
66.....	6, 6A7, *6D6, 7E, 41, 80	12 Mfd	GL450-12	KR512A	D-12-450	PLS-12	Pwr Out ↑	P-6011		T22S47		P-3048												
66D.....	6, *6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT	16-8 Mfd	PRS8450-8-16	EZ5816	DH-816-450SS							Pwr Out ↑	A-3824		T22R02	B1	P-3048							
66DP.....	6, *6SK7, 6SA7, 6SQ7, 6V6GT, 6X5GT	16-8 Mfd	PRS8450-8-16	EZ5816	DH-816-450SS							Pwr Out ↑	P-6348		T22S46	A-3830	A-2930							
66DPA.....	6, *6SK7, 6SA7, 6B8G, 6V6GT, 6X5GT	16-8 Mfd	PRS8450-8-16	EZ5816	DH-816-450SS							Pwr Out ↑	P-6348		T22R02	B1	P-3048							
66DR, 66DRC.....	6, *6SK7, 6SA7, 6B8, 6V6GT, 6X5GT	16-8 Mfd	PRS8450-8-16	EZ5816	DH-816-450SS							Pwr Out ↑	P-6348		T22R02	B1	P-3048							
67B, BA, BK, BKA, BPR, BRRDL, BR.....	7, 6SA7, 6SF7, 6SQ7, 6SK7, 6V6GT, 6X5GT, 6U5	16-8 Mfd	PRS8450-8-16	EZ5816	DH-816-450SS							Pwr Out ↑	P-6348		T22R02	B1	P-3048							
75 (Auto).....	5, 6AB8, 6K7G, 6Q7G, 6K6G, 6X5G, 6X5GT	8-8 Mfd	PRS8450-8-8	EZ588	DH-2X8-450SS							Pwr Out ↑	A-3877		T22S47		A-2931							
78 (Auto).....	8, *6K7, 6A8, 6Q7, 6C5, *6K6G, 6X5G	8-8 Mfd	PRS8450-8-8	EZ588	DH-2X8-450SS							Pwr Out ↑	A-3877		T22S46		A-2930							
88, 88P, 88PA.....	8, *6SK7, 6SA7, 6SQ7, *6V6GT, 6X5GT	20-20 Mfd	PRV450-20-20									Pwr Out ↑	A-3877		T22S74		A-2901							
120AB.....	12, *6K7, 6K8, 6H6, 6F5, *6C5, *6F6, *6W4, 6U5	16 Mfd	GL450-16	KR516A	D-16-450	PLS-16	Pwr Out ↑	P-6012		T22R04		P-2952												
120D, 120DR.....	12, *6SK7, 6K8, *6J5GT, 6AF6G, *6V6GT, *6X5GT	16 Mfd	GL450-16	KR516A	D-16-450	PLS-16	Pwr Out ↑	P-6013		T22S64		A-2936												
120ER.....	12, *6SK7, 6SA7, 6SQ7, 6SR7, 6AF6G, 6U5, 6J5GT, *6V6GT, 5Y3G	20 Mfd	AF4J	UP2045	DY-20-450	EL-2	Pwr Out ↑	A-3852		T22R05		P-2953												
130PR.....	12, *6SK7, 6SA7, 6AF6, *6SQ7, 6SR7, 6U5, *6V6GT, 5Y3	20 Mfd	PRS450-20	BR2045	M-20-450	UT-20	Pwr Out ↑	P-6013		T22R05		P-2953												
160.....	16, 6K7, 6A8, 6J7, 6B8, 6H6, 6F5, *6J5, *6F6, *5W4, 6U5	16 Mfd	GL450-16	KR516A	D-16-450	PLS-16	Pwr Out ↑	P-6291		T22S47		A-2931												
261, 471.....	2, 50BS, 35W4, 4, 1R5, 1T4, 1S5, 3V4	40-20-100 Mfd	AF84D20A, 240C7A	UP4C162, UP4C165	DY-304	EL-351	Out ↑	A-3311		T22S64		A-2936												
551, 551D, 566.....	5, 6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT (*47)	24004B	PRS450-40	BR035	M-40-450	UT-203	Out ↑	89401A		T22R02		P-2952												
561, 563.....	5, 6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT (*44)	24011	PRS450-40	BR2035	M-40-450	UT-203	Out ↑	89401B		T22S46		A-2931												
568.....	5, 12BE6, 12BA6, 12AT6, 50BS, 35W4 (47)	30, 30, 30 Mfd	PRS150-30-30 & PRSA150-30	BRD2215	M-2X30-150 & M-30-150	TA-303	Out ↑	89401A		T22R02		P-2952												
572.....	5, 12BE6, 12BA6, 12AT6, 50BS, 35W4 (47)	25 Mfd	PRS150-40-30 & PRS150-20	EZ42215C	M-25-20	TA-25	Out ↑	89401B		T22S46		A-2930												
651.....	6, *6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT (*47)	24004B	PRS450-40	BR4045	M-40-450	UT-203	Pwr Out ↑	89001A		T22R02		P-2952												
661.....	6, 6SG7, 6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3GT (*44)	24003	PRS450-40	BR2045	M-20-450	UT-20	Pwr Out ↑	89401B		T22S46		A-2931												
662.....	6, *6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT (*44)	24003	PRS450-40	BR2045	M-20-450	UT-203	Pwr Out ↑	89401		T22R01		P-2951												
861.....	8, *6SK7, 6SA7, 6H6, 6SF7, 6SQ7, 6V6GT, 5Y3GT (*44)	24003	PRS450-40	BR4045	M-40-350	UT-203	Pwr Out ↑	89401		T22R01		P-2951												

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Printed Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.		16-6661		460	†								F2	Vol	†	M-60-Z		A.	D13-133		41	G1				Continued	PACKARD-BELL 50P
2nd.		16-6660		456	†	L-70							F2	Vol	†												51BPR
1st.																										56	
2nd.																										57, 57A	
1st.		16-6658		460																						58	
2nd.		16-6658		460																						58A	
1st.		16-6660		460																							
2nd.		16-6660		410																							
1st.		16-5714																									
2nd.		16-5714																									
1st.		16-5714		460	†																						
2nd.		16-5714		460	†	L-24																				65A	
1st.		16-5714		460	†	L-24																				65AP	
2nd.		16-5714		410																						66	
1st.		16-5714		410																						66D	
2nd.		16-5714		410																						66DP	
1st.		16-5712		460	†																					66DPA	
2nd.		16-5712		460	†																						
1st.		16-5712		460	†	L-26																					
2nd.		16-5712		460	†	L-26																				66DR, 66DRC	
1st.		16-5712		456	†	L-70	E2	†																			
2nd.		16-5714		456	†	L-70	E2	†																		67B, BA, BK, BKA, BPR, BPRDL, BR	
1st.		16-5712		460																						75 Auto	
2nd.		16-5712		460																						78 Auto	
1st.		16-5712		460	†																						
2nd.		16-5714		460	†																						
1st.		16-5712		460	†	L-70	E2	†																			
2nd.		16-5714		460	†	L-70	E2	†																			
1st.		16-5712		460																							
2nd.		16-5712		460																							
1st.		16-5712		460	†																						
2nd.		16-5714		460	†																						
1st.		16-5712		460	†	L-26																					
2nd.		16-5714		460	†	L-26																					
1st.		16-5712		460	†	L-26																					
2nd.		16-5714		460	†	L-26																					
1st.		16-5712		460	†	L-26																					
2nd.		16-5714		460	†	L-26																					
1st.		16-5740		410																							
2nd.		16-5740		410																							
1st.		16-5740		410																							
2nd.		16-5740		410																							
1st.	29009								83300	†	ST-110	6A15		Vol	†	H-10-/M-6-7		A.	D13-111		41	G1				261	
2nd.	29009								83203		ST-113	1A1		Vol	2-111A	M-11-Z		A.	D13-140								471
1st.	29004A	16-6660		455					83202		ST-113	1A1		Vol	2-111A	M-11-Z		A.	D13-133		41	G1				551, 551D, 556	
2nd.	29001A	16-6660		455					83204		ST-113	4A1		Vol	2-111A	M-11-Z		A.	D13-133		41	G1					
1st.	29004	16-6658		455	63012				83202		ST-113	1A1		Vol	2-111A	M-11-Z		A.	D13-133		41	G1				561, 563	
2nd.	29007A	16-6670		455	63024				83004		ST-113	4A1		Vol	2-111A	M-11-Z		A.	D13-110		41	G1					
1st.	29002	16-6660		455	63024				83004		ST-113	4A1		Vol	2-111A	M-11-Z		A.	D13-140		41	G1				568	
2nd.	29004D	16-6660		455	63024				83202		ST-105	5A1		Vol	†	H-10-/M-6-7		A.	D13-133		41	G1					
1st.	29014	16-6658		455					83202		ST-105	5A1		Vol	†	H-10-/M-6-7		A.	D13-13		41	G1				572	
2nd.	29015	16-6660		455					83202		ST-105	5A1		Vol	†	H-10-/M-6-7		A.	D13-13		41	G1					
1st.	29004D	16-6658		455					83202		ST-105	5A1		Vol	†	H-10-/M-6-7		A.	D13-13		41	G1				651	
2nd.	29001D	16-6650		455	A-50802	L-70			83303		ST-110	6A15		Vol	25003B	M-6-7		A.	D13-133		41	G1				661	
1st.	29001D	16-6658		455	A-50802	L-70			83303		ST-110	6A15		Vol	25003A	M-6-7-Z		A.	D13-140		41	G1					
2nd.	29004D	16-6658		455	A-50802	L-70			83703		ST-119	10A4		Vol	25010B	T-1-0		A.	D13-137X		41	G1				662	
1st.	29007	16-6670		455	63008				83703		ST-119	10A4		Vol	25506B	M-6-7-		A.	D11-141		41	G1					
2nd.	29007	16-6670		455	63008				83703		ST-119	10A4		Vol	25506B	M-6-7-Z		A.	D13-137X		41	G1				861	

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS										Section B TRANSFORMERS										Section C BATTERIES							
		No. Tubes	Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	Part No.	Note		
			Dial Light Type Listed in Parentheses	Part No.																		"A"	"B"	"A"	"B"				
PACKARD-BELL	Continued	10	6SK7, 6SA7, 26SF7, 26H6, 6SQ7, 6V6GT, 5Y3GT (44)	24001	PRS450-20	BR2045	M-20-450	UT-20	Pwr Out	89003	P-6312	T22R04	P-2952	A-2931															
1052, 1052A		24002	PRS450-10	BR1045	M-10-450	UT-12	Pwr Out	89400	A-2201	T22S47	A-2931																		
1054B		24006	PRS25-25	BR2020A	M-25-25	TA-25	Pwr Out	89006	P-6012	T22R04	P-2952	A-2931																	
1063		24001	PRS450-20	BR2045	M-20-450	UT-20	Pwr Out	89409	A-3878	T22S47	A-2931																		
		24002	PRS450-10	BR1045	M-10-450	UT-12	Pwr Out	89006	P-6012	T22R04	P-2952	A-2931																	
		24006	PRS25-25	BR252A	M-25-25	TA-25	Pwr Out	89409	A-3878	T22S47	A-2931																		
PHILCO		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	32-8055	P-6348	T22R01	B1	P-3047															
A361		8	7A7, 7A8, 7B6, 7A4, 7C5, 7Y4	61-0150	AF444J4A	UP2245C			Pwr Out	65-0454	A-3877	T22S48		A-2930															
AB01									Pwr Out	32-8231	A-3311	T22S64		A-2936															
AR-1, AR-2		6	7A7, 7B8, 7C6, 7A5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0404	A-3876	T22S45		A-2928															
AR-4, AR-5		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0234	A-3877	T22S46		A-2930															
AR-6		6	7A7, 6A7, 75, 41, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0046	A-3878	T22S47		A-2931															
AR-7		6	7A7, 6A7, 75, 41, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0326	A-3878	T22S47		A-2931															
AR-8		7	7A7, 6A7, 75, 7A4, 6Y7G, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	In	65-0097	A-4734	T2CD77		A-2922															
AR-9		6	7L7, 7J7, 7A7, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0234	A-3877	T22S46		A-2930															
AR-10		6	7B7, 7A8, 7C6, 7A5, 7Y4	61-0068	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0404	A-3876	T22S45		A-2928															
AR-40		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0258	A-3876	T22S46		A-2930															
AR-45		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0234	A-3877	T22S46		A-2930															
AR-50		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0408	A-3877	T22S46		A-2930															
AR-55		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0277	A-3877	T22S46		A-2930															
AR-65		6	7L7, 7J7, 7A7, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Pwr Out	65-0234	A-3877	T22S46		A-2930															
AR-75		8	7A7, 7B8, 7B6, 7A4, 7C5, 7Y4	61-0150	AF444J4A	UP2245C	DY-310	EL-153	Pwr Out	65-0408	A-3877	T22S46		A-2930															
C-1423		7	78, 6A7, 75, 41, 84	30-2179	GLS450-8-8	KR588A	D-2X8-450	PLS-88	Chk	32-7928	A-3311	T22S64		A-2936															
C-1550		6	78, 6A7, 75, 42, 84	30-2179	GLS450-8-8	KR588A	D-2X8-450	PLS-88	Chk	32-7634	A-3877	T20C52		C-2981															
C-1606		5	6A7, 78, 75, 41, 84	61-0022	PRSB450-8-8	EZ588	DH-2X8-450SS	TU-88	Chk	32-7722	C-1279	T20C52		C-2981															
C-1608		6	78, 6A7, 75, 42, 84	61-0009	PRSB450-8-8	EZ588	DH-2X8-450SS	TU-88	Chk	32-7722	C-1279	T20C52		C-2981															
C-1708		6	7A7, 7B8, 7B6, 7B5, 7Y4	61-0072	AF444J	A4	UP22245	A4	DY-4X20-450	65-0046	A-3878	T22S47		A-2931															
C-1808, C-1809		8	7A7, 7B8, 7B6, 7A4, 7C5, 7Y4	61-0150	AF444J4A	UP22245C			Pwr Out	65-0046	A-3877	T22S47		A-2931															
C-1908		8	7A7, 7B8, 7B6, 7A4, 7C5, 7Y4	61-0150	AF444J4A	UP22245C			Pwr Out	65-0046	A-3877	T22S47		A-2931															
F-1540		6	78, 6A7, 75, 42, 84	30-2295	GLS450-8-8	KR588A	D-2X8-450	PLS-88	Chk	32-7942	C-1707	T20C52		C-2976															
F-1640		6	78, 6A7, 75, 42, 84	61-0028	AF32K4A	UP2235C	DY-310	EL-153	Chk	32-7942	A-3878	T22S47		A-2931															
F-1641		6	7A7, 7B8, 7B6, 41, 84	61-0028	AF32K4A	UP2235C	DY-310	EL-153	Chk	32-7942	A-3878	T22S47		A-2931															
F-1740		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Chk	32-7942	A-3878	T22S47		A-2931															
F-1840		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Chk	32-7942	A-3878	T22S47		A-2930															
F-1841		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Chk	32-7942	A-3878	T22S47		A-2930															
F-1942		6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Chk	32-7942	A-3878	T22S47		A-2930															
G-1528		7	78, 6A7, 75, 41, 84	30-2258	GLS450-8-8	KR588A	D-2X8-450	PLS-88	Chk	32-7942	A-3877	T22S47		A-2930															
G-1628		6	78, 6A7, 75, 42, 84	30-2295	GLS450-8-8	KR588A	D-2X8-450	PLS-88	Chk	32-7942	A-3877	T22S47		A-2930															

**†** Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES			
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Eveready	Note	Burgess	Note	
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"
PHILCO—Continued	7	78, 6A7, 75, 37, 6Y7G, 84	30-2167 30-4493	GLS450-8-8		KR588A		D-2X8-450		PLS-88		Chk Pwr In Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7811 65-0085 32-7779 32-7829 32-7910 65-0016 65-0024 65-0278 65-0293 65-0354		T20C52		C-2981					
L-1660	6	78, 6A7, 75, 42, 84	30-2255	GLS450-8-8		KR588A		D-2X8-450		PLS-88		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0046		T20D77		A-2922					
L-1760, L-1761	7	7A7, 7B8, 7B6, 7C5, 7Y4	61-0086									Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7811 65-0085 32-7779 32-7829 32-7910 65-0016 65-0024 65-0278 65-0293 65-0354		T22S86		A-2901					
N-1514	6	78, 6A7, 75, 41, 84	30-2150	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0046		T22S47		A-2931					
N-1524	7	78, 6A7, 75, 41, 84	30-2258	GLS450-8-8		KR588A		D-2X8-450		PLS-88		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0046		T22S47		A-2931					
P-1517	6	78, 6A7, 75, 41, 84	30-2150	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0046		T20C52		C-2981					
P-1530	7	78, 6A7, 75, 41, 84	30-2257	GLS450-8-8		KR588A		D-2X8-450		PLS-88		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0046		T22S47		A-2931					
P-1535	7	78, 6A7, 75, 6C6, 6Y7G, 84	30-2167	GLS450-8-8		KR588A		D-2X8-450		PLS-88		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0046		T22S64		A-2936					
P-1617	6	7A7, 6A7, 75, 41, 84	61-0018	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0046		T20D77		A-2922					
P-1630	6	78, 6A7, 75, 42, 84	61-0012	PRSB450-8-8 & PRS25-25		EZ8845S		DHS-2X8-450 & M-25-25		TU-88 & TA-25		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0048		T22S47		A-2931					
P-1635	7	78, 6A7, 75, 6C6, 6Y7G, 84	61-0012	PRSB450-8-8 & PRS25-25		EZ8845S		DHS-2X8-450 & M-25-25		TU-88 & TA-25		Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0048		T20C52		C-2981					
P-1830	6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0072								Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0347		T22S46		A-2930						
P-1835	8	7A7, 7B8, 7B6, 7A4, 7C5, 7Y4	61-0150	AF444J4A		UP22245C					Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0347		T22S64		A-2936						
P-1935	8	7A7, 7B8, 7B6, 7A4, 7C5, 7Y4	61-0150	AF444J4A		UP22245C					Chk Pwr Out Chk Pwr Dut Pwr In Cut Chk C-1279	32-7545 32-7550 32-7495 32-7910 32-7910 65-0409		T22S64		A-2936						
PT-2, PT-4, PT-6	5	7A8, 7B7, 7C6, 50L6GT, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8164	A-3876		T22S45		A-2928				
PT-10, PT-12	6	7C7, 7A8, 7B7, 7C6, 50L6GT, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8164	A-3876		T22S45		A-2928				
PT-25	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928				
PT-25, PT-27, PT-39 (Code 121, 122)	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876		T22S45		A-2928				
PT-26	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876		T22S45		A-2928				
PT-26, PT-28, PT-36	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928				
PT-29, PT-31	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928				
PT-30	5	7A8, 7B7, 7C6, 50L6GT, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8136	A-3876		T22S45		A-2928				
PT-33, PT-41, (Codes 121, 122)	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876		T22S45		A-2928				
PT-35	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876		T22S45		A-2928				
PT-37, PT-53	5	7A8, 7B8, 7C6, 35A5, 35Z3	30-2402	PRSA150-30-30 & PRS25-25		EZ3215C		DSB-303		TA-330 & TA-25		Out	32-8047	A-3876		T22S45		A-2928				
PT-38	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2402	PRSA150-30-30 & PRS25-25		EZ3215C		DSB-303		TA-330 & TA-25		Out	32-8047	A-3876		T22S45		A-2928				
PT-42, PT-44	5	7A8, 7B7, 7C6, 50L6GT, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8144	A-3876		T22S45		A-2928				
PT-43, PT-55	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876		T22S45		A-2928				
PT-45, PT-47	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876		T22S45		A-2928				

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL Photofact Set No.			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	
1st. 2nd.	32-2791 32-2793			260									F2	Vol	33-5246					41-3170	5320P..	Co HI	ntinued	PHILCO L-1560		
1st. 2nd.	65-0002 65-0003	16-6658		470				73-0010					7EV6	Vol	33-5410	58-1K				41-3170	5320P..	HI		L-1660		
1st. 2nd.	65-0303 65-0304	16-6658 16-6650		455				73-0039					7EV6	Vol	67-0025					83-0017	5326P..	HI		L-1760, L-1751		
1st. 2nd.	32-2026 32-2027			260									F2	Vol	33-5121					41-3170	5320P..	HI		N-1514		
1st. 2nd.	32-2791 32-2793			260									F2	Vol	33-5245					41-3170	5320P..	HI		N-1524		
1st. 2nd.	32-2026 32-2027			260									F2	Vol	33-5121					41-3170	5320P..	HI		P-1517		
1st. 2nd.	32-2791 32-2793			260									F2	Vol	33-5245					41-3170	5320P..	HI		P-1530		
1st. 2nd.	32-2554 32-2556			260									F2	Vol Sens	33-5272 33-5248					41-3170	5320P..	HI		P-1535		
1st. 2nd.	65-0044 65-0045	16-6658		470				73-0009						Vol	67-0004					41-3170	5320P..	HI		P-1617		
1st. 2nd.	65-0002 65-0003	16-6658		470				73-0008 36-1384					7EV6	Accessory	Vol Sens	67-0002 33-5264					41-3170	5320P..	HI		P-1630	
1st. 2nd.	65-0002 65-0003	16-6658		470				73-0019 36-1416-3					7EV6	Accessory	Speaker	Vol Sens	67-0005 33-5248-4					41-3170	5320P..	HI		P-1635
1st. 2nd.	65-0352 65-0410	16-6652		270				73-0062					7EV6		Vol	67-0047					83-0026	5326P..	HI		P-1830	
1st. 2nd.	65-0352 65-0353	16-6652		270				73-0050					7EV6		Vol Sens	67-0035 67-0036					83-0026	5326P..	HI		P-1835	
1st. 2nd.	65-0352 65-0410	16-6652		270				73-0066					7EV6		Vol Sens	67-0052 67-0051					83-0026	5326P..	HI		P-1935	
1st. 2nd.	32-3603 32-3604	16-6662		455				36-1533					4E45		Vol	33-5434	M-60-Z				D13-133	41	GI		PT-2, 4, 5	
1st. 2nd.	32-3615 32-3604	16-6663		455				36-1533					4E45		Vol	33-5434	M-60-Z				D13-133	41	GI		PT-10, 12	
1st. 2nd.	32-3149 32-3150	16-6662		455				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-25	
1st. 2nd.	32-3149 32-3150	16-6662		470				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-25, 27, 39 Codes 121 & 122	
1st. 2nd.	32-3390 32-3391	16-6662		455				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-26	
1st. 2nd.	32-3390 32-3391	16-6662		455				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-26, 28, 36	
1st. 2nd.	32-3149 32-3150	16-6662		470				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-29, PT-31	
1st. 2nd.	32-3560 32-3561	16-6662		455				36-1525					F2		Vol	33-5415	M-60-Z				D13-133	41	GI		PT-30	
1st. 2nd.	32-3177 32-3178	16-6662		455				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-33, PT-41 Codes 121 & 122	
1st. 2nd.	32-3149 32-3150	16-6662		470				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-35	
1st. 2nd.	32-3327 32-3150	16-6662		470				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-37, PT-53	
1st. 2nd.	32-3327 32-3150	16-6662		470				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-38	
1st. 2nd.	32-3390 32-3391	16-6662		455				36-1512-9	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-42, PT-44	
1st. 2nd.	32-3177 32-3178	16-6662		455				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-43, PT-55 Code 121 & 122	
1st. 2nd.	32-3149 32-3150	16-6662		470				36-1469	ST-196				4E45		Vol	33-5306	M-60-Z				D13-133	41	GI		PT-45, PT-47	

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
			No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
															"A"	"B"						"A"	"B"		
PHILCO--Continued PT-46, PT-48	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
PT-49, PT-51	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
PT-50	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
PT-57, PT-65	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
PT-59	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
PT-61		See Model PT-33																							
PT-63	4	1A7G, 1NSG, 1H5G, 1A5G	30-2386	PRS150-15	BR1615			M-16-150		UT-161		Out	32-8062	A-3857	T22S48		A-2937							.4GA41	
PT-66	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
PT-67	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
PT-69, (Codes 121, 122)	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
PT-87	5	1A7G, 1NSG, 1H5G, 3Q5G, 117Z6G	30-2492																					.5GA42	
PT-89	4	1LC6, 1LN5, 1LD6, 1LB4	30-2396	PRS150-16	BR1615			M-16-150		UT-161		Out	32-8114	A-3881	T22S48		A-2933								
PT-91, PT-92, PT-93, PT-94, PT-95, RP-1 (Code 121), RP-1, RP-2 (Code 122)	5	7A8, 7B7, 7C6, 5CL6, 35Z3	30-2382	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out	32-8164	A-3876	T22S45		A-2928								
RP-2 (Code 123)	2	6A7, 84	30-2388	EZ8825	M-2X8-250	LW-28	Pwr	32-8043																	
RP-3	2	6A7, 84	30-2388	EZ8825	M-2X8-250	LW-28	Pwr	32-8043																	
S-1516	6	7A7, 6A7, 75, 41, 84	30-2150	PRSB450-8-8	EZ-588	DH-2X8-450SS	TU-88	Chk	32-7545																
S-1526	7	7A7, 6A7, 75, 41, 84	30-2258	GLS450-8-8	KR588A	D-2X8-450	PLS-88	Pwr	32-7495	C-1279	T20C52		C-2981												
S-1616	6	7A7, 6A7, 75, 41, 7Y4	61-0018	PRSB450-8-8	EZ588	DH-2X8-450SS	TU-88	Pwr	32-7928																
S-1622	6	7A7, 7B8, 78, 7B6, 41, 84	61-0050	AF32K4A	UP2235C	DY-310	EL-153	Chk	32-7959																
S-1626	6	7A7, 6A7, 75, 42, 84	30-2295	PRSB450-8-8	EZ588	DH-2X8-450SS	TU-88	Pwr	65-0046																
S-1722	6	7A7, 7B8, 78, 7B6, 7A5, 84	61-0076		UP3325C		EL-334	Pwr	65-0046																
S-1726	6	7A7, 7B8, 7B6, 7C5, 7Y4	61-0089	AF32K4A	UP2235C	DY-310	EL-153	Chk	65-0048																
S-1824	6	7A7, 7B8, 7B6, 7A5, 7Y4	61-0072					Pwr	65-0150																
S-1825	6	7A7, 7B8, 7B6, 7B5, 7Y4	61-0072					Pwr	65-0152																
S-1826	8	7A7, 7B8, 7B6, 7A4, 7C5, 7Y4	61-0150	AF444J4A	UP22245C			Pwr	65-0221	A-3876	T22S45		A-2928												
S-1924	6	7A7, 7B8, 7B6, 7A5, 7Y4	61-0150	AF444J4A	UP22245C			Pwr	65-0227	A-3877	T22S46		A-2930												
S-1926	7	7A7, 7B8, 7A6, 7B5, 7Y4	61-0150	AF444J4A	UP22245C			Pwr	65-0395	A-3876	T22S45		A-2928												
TH-3	5	6A7, 7B, 75, 41, 84	30-2327	GL450-12	KR512A	D-12-450	PLS-12	Pwr	65-0347	A-3876	T22S47		A-2931												
			30-2328	GL450-8	KR508	D-8-450	PLS-8	Pwr	32-7979	P-6348	T22R01		B1 P-3047												
TH-4, TH-4T	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215	M-2X20-150	TA-220	Pwr	32-8046	A-3878	T22S47		A-2931												
TH-5, TH-5T	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215	M-2X20-150	TA-220	Pwr	32-8040	A-3878	T22S47		A-2931												
TH-9, TH-18, TH-22	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2402	PRSA150-30-30 & PRS25-25	EZ3215C	DSB-303	TA-330 & TA-25	Pwr	32-8044	A-3876	T22S45		A-2928												
TH-14, TH-16	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215	M-2X20-150	TA-220	Pwr	32-8047	A-3876	T22S45		A-2928												
TH-15, TH-17	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20	BRD2215	M-2X20-150	TA-220	Pwr	32-8047	A-3876	T22S45		A-2928												

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Phonelist Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	32-3390.	16-6662.		455				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1					Continued—	PHILCO PT-46, PT-48
2nd.	32-3391.							36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						PT-49, PT-51
1st.	32-3149.	16-6662.		470				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						PT-50
2nd.	32-3150.	16-6663.						34-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						PT-57, PT-65
1st.	32-3177.	16-6662.		455				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						PT-59
2nd.	32-3178.							36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						
1st.	32-3149.	16-6662.		470				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						See Model PT-33
2nd.	32-3150.	16-6663.																								PT-61	
1st.	32-3265.	16-6662.		455				36-1481.	ST-105.		5A1.		Vol	33-5331.	M-63-Z.		A2.	D13-137.		42	G1						PT-63
2nd.	32-3266.							36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						PT-65
1st.	32-3177.	16-6662.		455				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						PT-67
2nd.	32-3178.																									PT-69	
1st.	32-3177.	16-6662.		455				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						PT-87
2nd.	32-3178.																									PT-89	
1st.	32-3177.	16-6662.		455				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						PT-91, 92, 93, 94, 95
2nd.	32-3178.																									RP-1 Cnde 121 RP-1, RP-2 Cnde 122 RP-1 Cnde 123 RP-3 S-1516	
1st.	32-3473.	16-6658.		455				36-1521.	ST-105.		52A1.		Vol	33-5339.	M-60-Z.		A2.	D13-133.		42	G1						PT-91
2nd.	32-3473.	16-6658.		455				36-1517.	ST-113.		4A1.		Vol	33-5140.	M-63-Z.		A2.	D13-137.		42	G1						PT-93
1st.	32-3472.	16-6658.		455				36-1542.	ST-196.		4E45.		Vol	33-5429.	M-60-Z.		A.	D13-133.		41	G1						RP-1, RP-2 Cnde 122
2nd.	32-3473.	16-6662.		455																						RP-1 Cnde 123	
1st.	32-3474.	16-6658.		455																						RP-3 S-1516	
					35-2069.	L-22-A.																					
1st.	32-2026.			260	415-1027.	M-22.				F2		F2	Vol	33-5121.													41-3170.
2nd.	32-2027.									F2		F2	Vol	33-5251.													5320P. HI
1st.	32-2791.			260																						S-1526	
2nd.	32-2793.																									S-1616	
1st.	65-0044.	16-6658.		470				73-0009-3.					Vol	67-0014.													41-3398.
2nd.	65-0045.							73-0022-2.					F2	F2	Vol	67-0014-2.										5326P. HI	
1st.	65-0148.	16-6658.		470				73-0022-2.					Sens	33-5264.													41-3398.
2nd.	65-0149.	16-6658.		470				73-0054.					Vol	67-0015.													5326P. HI
1st.	65-0002.	16-6658.		470				73-0007-2.					F2	F2	Vol	67-0014.										41-3170.	
2nd.	65-0003.							73-0053.					Sens	33-5264-4.													S-1626
1st.	65-0148.	16-6658.		470				73-0022-2.					F2	F2	Vol	67-0027.										83-0017.	
2nd.	65-0214.	16-6660.		455				73-0038.	ST-108.		F8	6EV6.	Vol	67-0027.												83-0017.	
1st.	65-0274.	16-6658.		455				73-0054.					Tone	67-0025.													83-0026.
2nd.	65-0275.	16-6660.						7EV6.					Vol	67-0054.													S-1824
1st.	65-0399.	16-6658.		455				73-0052.					Sens	67-0038.													83-0026.
2nd.	65-0400.	16-6652.		270				73-0053.					Vol	67-0054.													S-1825
1st.	65-0352.	16-6652.		270				73-0054.					Tone	67-0054.													83-0026.
2nd.	65-0353.	16-6654.		270				7EV6.					Sens	67-0036.													S-1826
1st.	65-0352.	16-6652.		270				73-0055.					Vol	67-0054.													83-0026.
2nd.	65-0410.	16-6654.						7EV6.					Tone	67-0054.													S-1924
1st.	65-0399.	16-6658.		455				73-0068.					Sens	67-0036.													83-0026.
2nd.	65-0400.							73-0056.					Vol	67-0056.													S-1925
1st.	65-0352.	16-6652.		270				7EV6.					Tone	67-0056.													TH-3
2nd.	65-0448.							73-0057.					Vol	67-0056.													
1st.	32-3120.	16-6662.		470				73-0061.	ST-167.		5E18.		Vol	33-5254.													TH-4, TH-4T
2nd.	32-2674.																									TH-5, TH-5T	
1st.	32-3149.	16-6662.		470				36-1491.	ST-175.		10E15.		Vol	33-5305.	M-60-Z.		A.	D13-133.		41	G1						TH-9, TH-18,
2nd.	32-3150.	16-6653.		470				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						TH-22
1st.	32-3149.	16-6663.		455				36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						TH-14, TH-16
2nd.	32-3150.	16-6663.																								TH-15, TH-17	
1st.	32-3177.	16-6662.		455				35-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						
2nd.	32-3178.							36-1469.	ST-196.		4E45.		Vol	33-5306.	M-60-Z.		A.	D13-133.		41	G1						

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES									
		No. Tubes	Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	No. Note	Burgess Part No.	No. Note		
			Dial Light Type Listed in Parentheses	Part No.																		"A"	"B"	"A"	"B"		
PHILCO—Continued		5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
TP-4, TP-41		5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	32-8044	A-3876	T22S45		A-2928								
TP-5, TP-51		5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
TP-10		5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	32-8044	A-3876	T22S45		A-2928								
TP-11		5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
TP-12		5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	32-8044	A-3876	T22S45		A-2928								
TP-20		5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
TP-21		5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	32-8047	A-3876	T22S45		A-2928								
UN6-100		6	7A7, 7B8, 7B6, 7A5, 7Y4 (422)	61-0068	AF43F4A			UPI1525C		DY-310		EL-331		Pwr	65-0404	P-6301											
UN6-400		6	7A7, 7B8, 7B6, 7C5, 7Y4 (422)	61-0089	AF32K4A			UPI1135C		DY-310		EL-153		Pwr	65-0234	A-3876	T22S45		A-2928								
UNG-450		6	7A7, 7B8, 7B6, 7C5, 7Y4 (422)	61-0089	AF32K4A			UPI1135C		DY-310		EL-153		Pwr	65-0419	A-3877	T22S46		A-2930								
UNG-500		6	7A7, 7B8, 7B6, 7C5, 7Y4 (55)	61-0089	AF32K4A			UPI1135C		DY-310		EL-153		Pwr	65-0234	A-3878	T22S46		A-2930								
10-RP																											
12TP		5	6A7, 7B, 75, 41, 84	30-2235	GL450-8			KR508		D-8-450		PLS-8		Pwr	32-7993	P-6348	T22R02	B1	P-3048								
		30-2235	GL450-10											Out	32-7861	A-3878	T22S47										
38-1		12	6U7G, 5A8G, 6N7G, 6K7G, 6H6G, 6R7G, 6J5G, 6F6G, 5X4G	30-2243	PRSA450-8-8	EZ-8845		KR520		M-2X8-450	UT-38	PLS-20		Chk	32-7115	C-1710											
		30-2240	GL450-20											Pwr	32-7869	A-4711	T20A24		A-2913								
		30-2201	GL450-8	& PRS25-10				KR508		D-8-450	PLS-8	& TA10		In	32-2671	T22S64											
38-2		11	6U7G, 6A8G, 6N7G, 6K7G, 6H6G, 6R7G, 6J5G, 6F6G, 5X4G	30-2243	PRSA450-8-8	EZ8845		KR520		M-2X8-450	UT-38	PLS-20		Out	32-7914	A-3852	T20C54		A-2936								
38-3		9	6U7G, 6A8G, 6N7G, 6K7G, 6H6G, 6Q7G, 6Y4G	30-2201	GL450-20			KR520		D-20-450	PLS-20			Pwr	32-7869	A-3852	T22S64		A-2936								
38-4, 38-5		8	6U7G, 6A8G, 6K7G, 6J5G, 6K5G, 6F6G, 5Y4G	30-2212	GL450-16			KR516A		D-16-450	PLS-16			Pwr	32-7837	P-6012	T22R04		P-2952								
		30-2201	GL450-16											Out	32-7634	A-3852	T22S64		A-2936								
38-7, 38-8, 38-9		6	6A8G, 6K7G, 6J5G, 6K5G, 6F6G, 5Y4G	30-2200	GL450-20			KR520		D-20-450	PLS-20			Pwr	32-8129	P-6011	T22R02		P-2951								
		30-2217	PRSA450-8-8											Out	32-7055	A-3823	T22S47		A-2901								
38-10		5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y4G	30-2217	GL450-10			KR520		M-2X8-450	UT-88	PLS-20		Pwr	32-8129	P-6011	T22S47		P-2951								
38-12		5	6A7, 7B, 75, 41, 84	30-2236	GL450-10			KR516A		D-30-450	PLS-30			Pwr	32-7347	A-3822	T22S47		A-2900								
38-14		5	6A7, 7B, 75, 43, 25Z5	30-2246	GL450-16			KR516A		D-16-450	PLS-16			Chk	32-8116	P-6010	T22R01		P-2950								
		30-2275	GL450-16											Out	32-7868	A-3824	T22S47		A-2931								
38-15		5	6A7, 7B, 75, 41, 84	30-2265	PRSA450-8-8	EZ8845		M-2X8-450	UT-88	PLS-12			Pwr	32-7826	P-6348	T22R02	B1	P-3048									
		30-2263	GL450-12	& PRS25-10				KR512A		D-12-450	PLS-12			Out	32-8116	A-3824	T22S47		A-2931								
38-22, 38-23		6	6A8G, 6K7G, 6R7G, 25L6G	30-2239	GL450-40			EZ2215C		DSB-302		PLS-40		Chk	32-7744	A-3822	T22S47		C-2981								
		30-2237	GL450-40					KR540		D-40-450	EL-51			In	32-7849	A-3822	T22S60		A-2905								
38-33		5	1D7G, 1D5GT, 1H6G, 1H4G, 1E7G	30-2158	PRS450-8	BR845			M-8-450	UT-8			Out	32-7639	A-3857	T22S48		A-2937	X125		20F2	G9006					
38-34		5	1D7G, 1D5GT, 1H6G, 1H4G, 1E7G	30-2160	PRSA450-8-8	EZ8845			M-2X8-450	UT-88			Chk	32-7543													
		30-2160	PRSA450-8-8										Out	32-7639	A-3857	T22S48		A-2937									
38-35		5	6A8G, 6K7G, 6Q7G, 6K6G, 6X5G	30-2270	EZ5116					TU-1616			Chk	32-7038	A-3878	T22S47											
		30-2270	EZ5116										Out	32-7936	A-3878	T22S47		A-2931									
38-38		6	1C7G, 1D5G, 1H4G, 1E5GP, 1H4G, 1J6G	30-2241	EZ8825			DH-3X8-450SS					In	32-7637	A-4713	T20D75		A-2920									
		30-2241	EZ8825					BR845		& M-8-450			Out	32-7639	A-3831	T22S47		A-2938									
38-39		6	1C7G, 1D5G, 1H4G, 1E5GP, 1H4G, 1J6G	30-2226	GL450-10			EZ8825		M-2X8-450	UT-88	PLS-30		Chk	32-7543	A-3878	T22S47		A-2931								
		30-2226	GL450-10					KR530		D-30-450	PLS-30			Pwr	32-7934	A-3878	T22S47		A-2931								
38-40		6	5A8G, 6K7G, 6J5G, 6K5G, 6K6G, 6X5G	30-2291	PRSA450-8-8	EZ8845		KR530		M-2X8-450	UT-88	PLS-30		Chk	32-7543	A-3878	T22S47		A-2931								
		30-2291	PRSA450-8-8										Out	32-7639	A-3831	T22S47		A-2938									
38-60		5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y4G	30-2210	GL450-10			KR516A		D-16-450	PLS-16			Pwr	32-7936	A-3878	T22S47		A-2931								
		30-2210	GL450-10										Out	32-7843	A-3822	T22S47		A-2931									
38-69		5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y4G	30-2211	GL450-10			KR516A		D-16-450	PLS-16			Pwr	32-7583	A-3822	T22S47		A-2931								
		30-2211	GL450-10										Out	32-8116	A-3822	T22S47		A-2931									

Section D IF COILS				Section E PHONO CARTRIGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL					
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quar.	Note	Use	Mfr.	Clarostat	Shaft	Switch	Note	IRC	Shaft	Switch	Note	Mfr.	Radiat	Note	Photocell	Set No.		
1st.	32-3149	16-6662		470				36-1469	ST-196		4E45		Vol	33-5306	M-60-Z	A		D13-133		41	G1				PHILCO	TP-4, TP-41			
2nd.	32-3150	16-6663						36-1469	ST-196		4E45		Vol	33-5306	M-60-Z	A		D13-133		41	G1				TP-5, TP-51,				
1st.	32-3149	16-6662		470				36-1469	ST-196		4E45		Vol	33-5306	M-60-Z	A		D13-133		41	G1				TP-5T				
2nd.	32-3150	16-6663						36-1469	ST-175		10E15		Vol	33-5306	M-60-Z	A		D13-133		41	G1				TP-10				
1st.	32-3149	16-6662		470				36-1469	ST-196		4E45		Vol	33-5306	M-60-Z	A		D13-133		41	G1				TP-11				
2nd.	32-3150	16-6663						36-1469	ST-196		4E45		Vol	33-5306	M-60-Z	A		D13-133		41	G1				TP-12				
1st.	32-3149	16-6662		470				36-1469	ST-196		4E45		Vol	33-5306	M-60-Z	A		D13-133		41	G1				TP-20				
2nd.	32-3178	16-6662		455				36-1469	ST-196		4E45		Vol	33-5306	M-60-Z	A		D13-133		41	G1								
1st.	32-3177	16-6662		455				36-1469	ST-196		4E45		Vol	33-5306	M-60-Z	A		D13-133		41	G1				TP-21				
2nd.	32-3178	16-6662																											
1st.	65-0191	16-6658		455				73-0027	ST-113		4A1		Vol	67-0020												83-0025			
2nd.	65-0192	16-6658		455				73-0059	ST-108	F8	6EV6		Vol	67-0043												83-0025			
1st.	65-0319	16-6658						73-0074-2						7EV6												83-0025			
2nd.	65-0320	16-6670		455				73-0059	ST-108	F8	6EV6		Vol	67-0032												83-0025			
1st.	65-0319	16-6658		455				73-0006		F13	6EV6		Vol	67-0043												83-0025			
2nd.	65-0320	16-6670						73-0006		F13	6EV6		Vol	33-5329												83-0025			
1st.	32-3018	16-5712		470				36-1418					Vol	33-5230	M-60-Z	A		D13-133		41	G1					10-RP			
2nd.	32-2944	16-5712		470				36-1361		F2			Tone	33-5330	M-46-Z			D13-123								12TP			
1st.	32-2741	16-5712						36-1361		F2			Vol	45-5009	T-116			D18-139X								38-1			
2nd.	32-2742	16-5712																											
1st.	32-2604	16-5712		470				36-1299		F2			F2	Vol	45-5009	T-116			G17	D18-139X							38-2		
2nd.	32-2632	16-5712						36-1293		F2			F2	Vol	33-5166	AT-116	DFS-½		G17	D18-139X	G							38-3	
1st.	32-2604	16-5712		470				36-1285		F2			F2	Vol	33-5399	T-116			G17	D18-139X								38-4, 38-5	
2nd.	32-2645	16-5712						36-1293		F2			F2	Vol	33-5399	T-116			G17	D18-139X								38-7, 38-8, 38-9	
1st.	32-2580	16-5714		470				36-1220		F2			F2	Vol (or)	33-5399	T-116			G17	D18-139X								38-10	
2nd.	32-2582	16-5714						36-1009	ST-736	F13	8E10		F2	Vol	45-5007	M-60-Z				D13-133								38-12	
1st.	32-2672	16-5712		470				36-1366		F2			F2	Vol	45-5007	M-60-Z			A	D13-133		41	G1					38-14	
2nd.	32-2674	16-5712		470				36-1367		F2			F2	Vol	45-5007	M-60-Z			A	D13-133		41	G1						
1st.	32-2672	16-5712		470				36-1366		F2			F2	Vol	45-5007	M-60-Z			A	D13-133		41	G1					38-15	
2nd.	32-2944	16-5712						36-1382		F2			F2	Vol	45-5007	M-60-Z												38-15	
1st.	32-2580	16-5712		470				36-1377		F2			F2	Vol	33-5399	T-116				D18-139X								38-22, 38-23	
2nd.	32-2676	16-5712						36-1378		F2			F2	Vol	33-5399	T-116													
1st.	32-2841	16-5712		470				36-1352		F2			F2	Vol	33-5149														38-33
2nd.	32-2795	16-5712						36-1360		F1			F1	Vol	33-5149														
1st.	32-2841	16-5712		470				36-1359		F1			F1	Vol	45-5018	M-60-Z			A2	D13-133		42	G1	41-3222	5411	H1		38-34	
2nd.	32-2795	16-5712						36-1353		F1			F1	Vol	45-5018	M-60-Z			A2	D13-133		42	G1	41-3367	5301	H1		38-35	
1st.	32-2852	16-5714		470				36-1379		F1			F1	Vol	45-5018	M-60-Z			A2	D13-133		42	G1	41-3367	5301	H1			
2nd.	32-2854	16-5714						36-1353		F1			F1	Vol	45-5007	M-60-Z				D13-133								38-38	
1st.	32-2654	16-5712		470				36-1353		F1			F1	Vol	45-5007	M-60-Z												38-39	
2nd.	32-2666	16-5712						36-1351	ST-101	F1	12A4		F1	Vol	45-5007	M-60-Z				D13-133								38-39	
1st.	32-2654	16-5712		470				36-1351	ST-101	F1	12A4		F1	Vol	45-5007	M-60-Z				D13-133									
2nd.	32-2665	16-5712						36-1353		F1			F1	Vol	45-5007	M-60-Z				D13-133									
1st.	32-2580	16-5714		470				36-1380		F1			F1	Vol	45-5007	M-60-Z				D13-133								38-40	
2nd.	32-2582	16-5714						36-1379		F1			F1	Vol	45-5007	M-60-Z				D13-133								38-60	
1st.	32-2580	16-5714		470				36-1009	ST-736	F1	8E10		F1	Vol	33-5165	AT-116	DFS-½		G17	D18-139X	G								
2nd.	32-2582	16-5714						36-1009	ST-736	F1	8E10		F1	Vol	33-5165	AT-116	DFS-½		G17	D18-139X	G								
1st.	32-2100	16-5714		470				36-1350		F2			F2	Vol	33-5165	AT-116	DFS-½		G17	D18-139X	G								38-89
2nd.	32-2100	16-5714						36-1225		F2			F2	Vol	33-5165	AT-116	DFS-½		G17	D18-139X	G								

\*Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
PHILCO—Continued	38-116 (Code 121)	15 6K7G, 6L7G, 6A8G, 6N7G, 6J5G, 6R7G, 6L6G, 5X4G	30-2232 30-2201 30-2026	+		EZ88845		DH-3X8-450SS				Chk	32-7056	C-1710		T20C54								
				GL450-10							Chk	32-7722	C-1279		T20C52			C-2981						
											In	32-7865												
											Out	32-7727	A-3801		T22S74			A-3130						
											Chk	32-7722	C-1279		T20C52			C-2981						
											Pwr	32-7056	C-1710		T20C54									
											In	32-7699												
											Out	32-7727	A-3801		T22S74			A-3130						
											Pwr	32-7583	P-6012		T22R04			P-2952						
											Out	32-8116	A-3852		T22S47			A-2932						
											Chk	32-7543												
											Pwr	32-2382												
											In	32-7637												
											Out	32-7639												
											Chk	32-7056	C-1710		T20C54									
											Pwr	32-7115												
											Chk	32-7885												
											Pwr	32-7888												
											In	32-7876												
											Out	32-7905	A-3830		T22S74			A-3130						
											Pwr	32-7979	P-6299		T22R00			P-2949						
											Out	32-8046	A-3850		T22S47			A-2931						
											Out	32-8040	A-3850		T22S47			A-2931						
											Chk	32-7868	C-1705		T20C52			C-2975						
											Out	32-7874	A-3877		T22S46			A-2930						
											Pwr	32-7984	A-3877		T22S46			A-2930						
											Out	32-7874	P-6348		T22R01			B1						
											Pwr	32-7993	P-6348		T22R01			P-3047						
											Out	32-7861	A-3850		T22S47			A-2931						
											Pwr	32-7974	P-6348		T22R01			P-3047						
											Out	32-8115	A-3823		T22S47			A-2931						
											Pwr	32-7976	A-3848		T22R01			B1						
											Out	32-7978	A-3823		T22S47			P-3047						
											Pwr	32-7976	P-6348		T22R01			B1						
											Out	32-8166	P-6348		T22R01			P-3047						
											Pwr	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-8166	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
											Out	32-7978	A-3823		T22S47			A-2931						
											Pwr	32-7976	P-6348		T22R01			P-3047						
				</																				

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL		
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note Part No.	Mfr. Part No.	Jensen Part No.	Note Part No.	Quar Part No.	Note Part No.	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note Part No.	IRC Part No.	Shaft	Switch	Note Part No.	Mfr. Part No.	Radiat Part No.	Note Part No.	Photofact Set No.	
1 (or) 1st. 2nd. 3rd.	38-8912. 32-2727. 32-2728. 32-2660.		470				36-1284.		F2		F2	Vol Tone	33-5166.. 33-5235.	AT-116. M-61-S.	DFS-½..		G17 G1	D18-139X.. D11-137.	G		G17 G1			Continued—	PHILCO 38-116 Code 121	
1 (or) 1st. 2nd. 3rd.	38-8912. 32-2727. 32-2728. 32-2660.		470				36-1363		F2		F2	Vol	33-5166.. 33-5235.	AT-116. M-61-S.	DFS-½..		G17 G1	D18-139X.. D18-139X.	G		G17 G1				38-116 Code 125	
1st. 2nd. 1st. 2nd.	32-2275. 32-2277. 32-2580. 32-2582.		470				36-1248. 36-1250.		F2		F2	Vol	33-5166.. 33-5166.	AT-116. AT-116.	DFS-½.. DFS-½..		G17 G1	D18-139X.. D18-139X.	G		G17 G1				38-620 38-624	
1st. 2nd. 3rd.	32-2772. 32-2293. 32-2291.		470				†		F2		F2	Vol Tone Bass	33-5240.. 33-5241.. 33-5247..	T-116.											38-690	
1 (or) 1st. 2nd. 1st. 2nd.	32-3120. 32-3231. 32-2674. 32-3018. 32-2674.		470				36-1461.		F2		F2	Vol	45-5007..	T-116.				D18-139X..							39-6, 39-7	
1st. 2nd.	32-3018. 32-2944.		470				36-1362.	ST-190.	GE25			Vol	33-5254..	T-116.				D18-139X..							39-8, 39-8T	
1st. 2nd.	32-3018. 32-2944.		470	415-1027.	M-22..		36-1418.					Vol Tone Vol	33-5230.. 33-5230.. 33-5276..	M-60-Z.	A		D13-133..	41	G1						39-12, 39-12TP	
1st. 2nd.	32-3075. 32-2944.		470				36-1426.	ST-737.	8E1B		F13														39-17	
1st. 2nd.	32-3075. 32-2944.		470				36-1442.	ST-737.	8E1B		F13	Vol	33-5276..												39-18	
1st. 2nd.	32-3075. 32-2944.		470	35-2044. 415-1027.	M-22..		36-1445.	ST-738..	8E25		F13	Vol	33-5276..												39-19, 39-19PA, 39-19PF, PCS, PT	
1st. 2nd.	32-3075. 32-2944.		470				36-1445.	ST-738..	8E25		F13	Vol	33-5276..												39-25	
1st. 2nd.	32-3018. 32-3030.		470				36-1439.		F2		F2	Vol	45-5007..	T-90..				D19-133X..							39-30, 39-35, 39-31, 39-31XF, 39-31XK, 39-30 PCX, 39-3-31PA	
1st. 2nd.	32-3018. 32-3030.		470				36-1439.		F13		F13	Vol	45-5007..	T-90..											39-36	
1st. 2nd.	32-3018. 32-3129.		470				36-1438.	ST-174.	12E25		F2	Vol	45-5009..												39-40, 39-2-40PC, 39-40PCX	
1st. 2nd.	32-3018. 32-3129.		470				36-1438.	ST-174.	12E25		F2	Vol Tone	33-5286.. 33-5287..											39-45		
1st. 2nd.	32-3079. 32-2582.		470				36-1450.		F2		F2	Vol	33-5286.. 33-5287..												39-55	
1st. 2nd.	32-3089. 32-2645.		470				36-1450.		F2		F2	Vol Tone Sen	33-5300.. 33-5287.. 33-5295..	M-44-S.			D11-123..		G1						39-70B, F	
1st. 2nd.	32-2841. 32-3081.	16-5712.	470				36-1481.	ST-105.	52A1			Vol	45-5018..	M-60-Z.	A2..		D13-133..	42	G1						39-71, 39-72T	
1st. 2nd.	32-3103. 32-3176 (or).	16-5712.	470				36-1481.	ST-115.	8A21			Vol	45-5017..	M-63-Z.	A2..		D13-137..	42	G1						39-75T, F	
1st. 2nd.	32-3081. 32-3081.	16-5712.	470				36-1481.	ST-105.	5A1.			Vol	33-5301..	M-63-Z.	A2..		D13-137..	42	G1						39-80B, XF	
1st. 2nd.	32-2841. 32-3081.	16-5712.	470				36-1481.	ST-105.	52A1			Vol	33-5291..	M-60-Z.	A2..		D13-133..	42	G1						39-85	
1st. 2nd.	32-2841. 32-3081.	16-5712.	470				36-1481.	ST-115.	8A21			Vol	33-5288..	M-46-Z.			D13-123..		G1						39-116, 39-116PCX	
1st. 2nd.	32-2841. 32-3081.	16-5712.	470				36-1481.	ST-105.	52A1			Vol	33-5288..	T-116..	A2..	G17	D18-139X..	42	G1						39-117	
1st. 2nd.	32-3089. 32-2645.	16-5712.	470	35-2030.	B-2..		36-1450.	ST-108.	6A1.			Vol	33-5288..	T-116..	A2..	G17	D18-139X..	42	G1						39-118	
1st. 2nd.	32-3075. 32-2944.	16-5712.	470				36-1480.	ST-737.	8E18			Vol	33-5276..												39-119	
1st. 2nd.	32-3075. 32-2944.	16-5712.	470				36-1444.	ST-738..	8E25			Vol	33-5276..													
1st. 2nd.	32-3075. 32-2944.	16-5712.	470				36-1480 (or).	ST-737.	8E18			Vol	33-5276..													
1st. 2nd.	32-3075. 32-2944.	16-5712.	470				36-1449.	ST-737.	F13			Vol	33-5276..													

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT			Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tunes	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stanor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
		"A"	"B"																						
PHILCO—Continued	4	1A7G, 1N5G, 1H5G, 1C5G, . . .	30-2346	PRS450-8	BR845		M-8-450		UT-8		Cut	32-7955	A-3878	T22S47		A-2931		↑		↑					
39-175	4	6K7G, 6J8G, 6M6G, 6J5G, 25F6G, 5Y4G, . . .	30-2367	PRS150-8	BR815		M-8-150		UT-81		Pwr	32-8008	P-6013	T22R05		P-2953									
39-770	11	6K7G, 6J8G, 6M6G, 6J5G, 25F6G, 5Y4G, . . .	30-2366	GL450-40	KR540	D-40-450	PLS-40			Out	32-7997	A-3830	T22S64		A-2936										
40-74, T, CLS.	4	1A7G, 1N5G, 1H5G, 1A5G, . . .	30-2359	PRS150-8	BR815	M-8-150		UT-81		Out	32-8056	A-3857	T22S48		A-2937		742 & 482	4F	2B30						
40-81, T, CSL. (Code 121)	4	1LA6, 1LN5, 1LH4, 1LA4, . . .	30-2396	PRS150-16	BR1615	M-16-150		UT-161		Out	32-8100	A-3857	T22S48		A-2937									4GA42	
40-81, T, CSL. (Code 122), 40-82, 40-83	4	1A7G, 1N5G, 1H5G, 1A5G, . . .	30-2396	PRS150-16	BR1615	M-16-150		UT-161		Out	32-8100	A-3857	T22S48		A-2937									4GA42	
40-84	5	1LA7, 1LN5, 1LH4, 1AL4, 117Z6G, . . .	30-2452								Out	32-8100	A-3857	T22S48		A-2937								4GA42	
40-88T, TL.	5	1LN5, 1LA6, 1LH4, 1LA4, . . .	30-2388		BRD2215	M-2X20-150	TA-220			Out	32-8056	A-3857	T22S48		A-2937		742 & 482	C5	6FA60						
40-90	4	1A7G, 1N5G, 1H5G, 1A5G, . . .	30-2396	PRS150-16	BR1615	M-16-150		UT-161		Out	32-8051	A-3857	T22S48		A-2937		758		17GD60						
40-95	4	1A7G, 1N5G, 1H5G, 1A5G, . . .	30-2396	PRS150-16	BR-1615	M-16-150		UT-161		Out	32-8051	A-3857	T22S48		A-2937		758		17GD60						
40-100	4	1A7G, 1N5G, 1H5G, 1A5G, . . .	30-2396	PRS150-16	BR-1615	M-16-150		UT-161		Dut	32-8051	A-3857	T22S48		A-2937		758		17GD60						
40-105	4	1A7G, 1N5G, 1H5G, 1A5G, . . .	30-2396	PRS150-16	BR1615	M-16-150		UT-161		Out	32-8066	A-3857	T22S48		A-2937		758		17GD60						
40-110	4	1A7G, 1N5G, 1H5G, 1A5G, . . .	30-2408	PRSA150-20-20	BRD2215	M-2X20-150	TA-220			Out	32-8066	A-3857	T22S48		A-2937		758		17GD60						
40-115, 40-120, 40-125, 40-135	6	7C7, 7A8, 7B7, 7C6, 35A5, 35Z3, . . .	30-2403	PRSA150-20-20	BRD2215	M-2X20-150	TA-220			Out	32-8047	A-3876	T22S45		A-2928										
40-140, 40-145	6	7C7, 7A8, 7B7, 7C6, 7B5, 7Y4, . . .	30-2401	PRS450-8	BR845	M-8-450	UT-8			Out	32-8044	A-3876	T22S45		A-2928										
40-150	7	1232, 7J7, 7B7, 7C6, 7B5, 7Y4, 84, . . .	30-2406	PRS450-16	BR1645	M-16-450	UT-16			Pwr	32-8220	P-6119	T22R02		P-2951										
40-155	8	1232, 7J7, 6J8G, 7B7, 7A6, 7C6, 241, 84, . . .	30-2406	GL450-16	KR516A	D-16-450	PLS-16			Pwr	32-8221	P-6119	T22R02		P-2951										
40-158	6	7B7, 7A8, 7C6, 41, 84, . . .	30-2447	PRSB450-8-8	EZ588	DH-2X8-450SS	TU-88			Pwr	32-8221	P-6119	T22R02		P-2951										
40-160	6	7C7, 7A8, 7B7, 7C6, 41, 84, . . .	30-2400	PRSB450-8-8 & PRS450-8	EZ8845	DH-3X8-450SS	TU-88 & UT-8			Pwr	32-8116	A-3878	T22S47		A-2931										
40-165	6	1232, 6J8G, 7B7, 7C6, 41, 84, . . .	30-2400	PRSB450-8-8 & PRS450-8	EZ8845	DH-3X8-450SS	TU-88 & UT-8			Pwr	32-8221	P-6119	T22R02		P-2951										
40-170CS	6	7C7, 7A8, 7B7, 7C6, 7B5, 7Y4, . . .	30-2401	PRS450-8	BR845	M-8-450	UT-8			Pwr	32-8220	P-6119	T22R02		P-2951										
40-180	7	1232, 7J7, 6J8G, 7B7, 7C6, 241, 84, . . .	30-2406	PRS450-16	BR1645	M-16-450	UT-16			Pwr	32-8220	P-6119	T22R02		P-2951										
40-185, 40-190	8	1232, 7J7, 6J8G, 7B7, 7A6, 7C6, 241, 84, . . .	30-2406	GL450-16	KR516A	D-16-450	PLS-16			Pwr	32-8221	P-6119	T22R02		P-2951										
40-195	10	1232, 7J7, 6J8G, 7B7, 7C6, 37, 37, 80, . . .	30-2333	GL450-30	KR530	D-30-450	PLS-30			Pwr	32-8227	P-6013	T22R05		P-2953										
40-200, 40-201	11	1232, 7J7, 6J8G, 7B7, 7A6, 7C6, 37, 37, 80, . . .	30-2335	GL450-20	KR520	D-20-450	PLS-20			Out	32-7997	P-6013	T22R05		P-2963										
40-205	12	7C7, 6J8G, 278, 6J7G, 242, 80, 6J7G, 6ZY5G, 2A4G, 30, . . .	30-2335	GL450-20	KR520	D-20-450	PLS-20			Dut	32-7997	P-6013	T22R05		P-2953										
40-215, 40-217	12	1232, 6J8G, 278, 6Q7G, 242, 80, 6J7G, 6H6G, 2A4G, 30, . . .	30-2334	GL450-8	KR508	D-8-450	PLS-8			Pwr	32-8227	P-6013	T22R05		P-2953										
40-216	14	6J7G, 6ABG, 278, 6Q7G, 37, 37, 80, 6J7G, 6ZY5G, 2A4G, 30, . . .	30-2334	GL450-8	KR508	D-8-450	PLS-8			Pwr	32-7996	P-6014	T22R06		P-2954										
40-501, 40-502, (Code 121)	5	7A8, 7B7, 7C6, 35A5, 35Z3, . . .	30-2382	PRSA150-20-20	BR1645	M-16-450	UT-16			Out	32-8047	A-3876	T22S45		A-2928										
40-502, (Code 122)	5	7A8, 7B7, 7C6, 35A5, 35Z3, . . .	30-2382	PRSA150-20-20	BRD2215	M-2X20-150	TA-220			Out	32-8044	A-3876	T22S45		A-2928										
40-503, 40-506	6	7C7, 7A8, 7B7, 7C6, 7B5, 7Y4, 30-2411, . . .	30-2410	PRS450-16	BR1645	M-16-450	UT-16			Pwr	32-8047	A-3876	T22S45		A-2928										
40-504	4	1A7G, 1N5G, 1H5G, 1C5G, . . .	30-2359	PRS150-8	BR815	M-8-150	UT-81			Out	32-8116	A-3878	T22S47		A-2931		742 & 482	4F	2B30						
40-507	6	1232, 7J7, 7B7, 7C6, 7B5, 7Y4, . . .	30-2410	PRS450-16	BR1645	M-16-45	UT-16			Pwr	32-8068	P-6119	T22R02		P-2951										
										Out	32-8018	A-3877	T22S46		A-2930										

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
																			"A"	"B"	"A"	"B"	
PHILCO—Continued 40-508, 40-509.	8	1232, 6J8G/7J7, 7B7, 7C6, 7A4, 242, 80.	30-2412 30-2413	GL450-16 GL450-12		KR516A KR512A		D-16-450 D-12-450		PLS-16 PLS-16		Pwr Out	32-7958 32-7997	P-6012 A-3311		T22R04 T22S64		P-2952 A-2936					
40-510.	12	7C7, 6J8G, 78, 6Q7G, 242, 80, 78, 6J7G, 6H6G, 2A4G, 30	30-2384 30-2360 30-2200 30-2361 30-2387	GL450-8 GL450-30 GL450-20 GL450-16		KR508 KR530 KR520		D-8-450 D-30-450 D-20-450		PLS-8 PLS-30 PLS-20		Pwr Out	32-8227 32-7997	P-6013		T22R05		P-2953					
40-515—(See Model 40-516)	4	6J7G, 6A8G, 78, 6Q7G, 37, 42, 80, 6J5G, 6ZY5G, 2A4G, 30	30-2384 30-2360 30-2200 30-2361	GL450-8 GL450-30 GL450-20		KR508 KR530 KR520		D-8-450 D-30-450 D-20-450		PLS-8 PLS-30 PLS-20		Pwr Out	32-7283 32-7956	P-6014		T22R06		P-2954					
40-525, 526, 527.	6	7C7, 7A8, 7B7, 7C6, 7B5, 7Y4	30-2401 30-2437	PRS450-8 PRSA150-20-20		KR516A BR845		D-16-450 M-8-450		PLS-16 UT-8		Pwr Out	32-8220 32-8116 32-8047 32-8044	P-6119 A-3878 A-3876 A-3876		T22R02 T22S47 T22S45 T22S45		P-2951 A-2931 A-2928 A-2928					
41-KR.	5	7A8, 7B7, 7C6, 35A5, 35Z3	30-2382	PRSA150-20-20		BRD2215		M-2X20-150		TA-220													
41-RP-1, 2	2	6A7, 84	30-2388		EZ8225		M-2X8-250		LM-28		Pwr Out	32-8043 32-8043 32-8144											
41-RP-6	2	6A7, 84	30-2388		EZ8225		M-2X8-250		LM-28														
41-22CL	6	7C7, 7A8, 7B7, 7C6, 35A5, 35Z3	30-2403	PRSA150-20-20		BRD2215		M-2X20-150		TA-220													
41-81.	4	1A7G, 1NSG, 1H5G, 1A5G	30-2396	PRS150-16		BR16-15		M-16-150		UT-161		Out	32-8100	A-3857		T22S48		A-2937			4GA41		
41-83.	5	1A7G, 1NSG, 1H5G, 1A5G, 21A4	30-2396	PRS150-16		BR16-15		M-16-150		UT-161		Out	32-8107								4GA41		
41-84, (Code 121).	5	1LA6, 1LN5, 1LM4, 1LA4, 11726	30-2452 30-2453	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8100	A-3857		T22S48		A-2937		747 & 482	C6	F5A60	
41-84, (Code 122).	5	1A7G, 1N5G, 1H5G, 1A5G, 117Z6G	30-2452 30-2453	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8100	A-3857		T22S48		A-2937		747 & 482	C6	F5A60	
41-85.	4	1A7G, 1N5G, 1H5G, 1A5G, (or Lock-In Type Equiv.).	30-2452 30-2453	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8100	A-3857		T22S48		A-2937		747 & 482	C6	F5A60	
41-90.	4	1A7G, 1N5G, 1H5G, 1A5G	30-2396	PRS150-16		BR1615		M-16-150		UT-16		Out	32-8100	A-3857		T22S48		A-2937					
41-95.	5	1A7G, 1N5G, 1H5G, 21A5G	30-2396	PRS150-16		BR1615		M-16-150		UT-16		Out	32-8107							758		17GD60	
41-100.	5	1A7G, 1N5G, 1H5G, 21A5G	30-2396	PRS150-16		BR1615		M-16-150		UT-16		Out	32-8107							758		17GD60	
41-105.	5	1A7G, 1N5G, 1H5G, 21A5G	30-2396	PRS150-16		BR1615		M-16-150		UT-16		Out	32-8107							758		17GD60	
41-110.	6	1N5G, 1A7G, 1H5G, 21A5G	30-2396	PRS150-16		BR1615		M-16-150		UT-16		Out	32-8152							758		17GD60	
41-220—(See Model 41-221, 41-226.)	4	1-22CL	6	XXD, 7B7, 7C6, 35A5, 35Z3	30-2491	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8144	A-3876		T22S45		A-2928			
41-225.	6	7C7, 7A8, 7B7, 7C6, 35A5, 35Z3	30-2403	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8144	A-3876		T22S45		A-2928					
41-230, 41-235.	7	XXL, 7B7, 7C6, 7B5, 7Y4	30-2409 30-2451	PRS450-16 PRS450-8		BR1645 BR845		M-16-450 M-8-450		UT-16		Pwr Out	32-8220 32-8116	P-6119 A-3878		T22R02 T22S47		P-2951 A-2931					
41-231.	6	XXD, 7B7, 7C6, 50L6/35A5, 35Z5	30-2491	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8144	A-3876		T22S45		A-2928					
41-240.	7	XXL, 7B7, 7C6, 7B5, 7Y4	30-2477 30-2409	PRS450-16 PRS450-8-8		BR1645 EZ8845		M-16-450 M-2X8-450		UT-16 UT-88		Pwr Out	32-8220 32-8116	P-6119 A-3878		T22R02 T22S47		P-2951 A-2931					
41-245.	7	XXL, 7B7, 7C6, 7B5, 7Y4	30-2409 30-2477	PRS450-8-8 PRS450-16		EZ8845 BR1645		M-2X8-450 M-16-450		UT-88 UT-16		Pwr Out	32-8220 32-8116	P-6119 A-3878		T22R02 T22S47		P-2951 A-2931					
41-246.	7	XXL, 7B7, 7C6, 7B5, 7Y4	30-2409 30-2477	PRS450-8-8 PRS450-16		EZ8845 BR1645		M-2X8-450 M-16-450		UT-88 UT-16		Pwr Out	32-8220 32-8116	P-6119 A-3878		T22R02 T22S47		P-2951 A-2931					
41-250.	8	XXL, 7B7, 7C6, 21L8, 21.84	30-2474 30-2475	PRS450-16		BR1645		M-16-450		UT-16		Pwr Out	32-8221 32-8133	P-6120 A-3496		T22R04 T22S87		P-2952 A-2901					
41-255.	9	XXL, 7B7, 7A6, 7C6, 21L8, 21.84	30-2474 30-2475	PRS450-16		BR1645		M-16-450		UT-16		Pwr Out	32-8121 32-8120	P-6120 A-3496		T22R02 T22S87		P-3048 A-2901					
41-256.	9	XXL, 7B7, 7A6, 7C6, 21L8, 21.84	30-2475 12 Mfd.	PRS450-16		BR1645		M-16-450		UT-16		Pwr Out	32-8121 32-8120	P-6120 A-3496		T22R02 T22S87		P-3048 A-2901					
41-258.	6	XXD, 7B7, 7C6, 50L6, 35Z5GT	30-2403	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8127	A-3876		T22S45		A-2928					
41-260.	7	XXL, 7B7, 7C6, 41, 84	30-2476 30-2471	PRSA450-8-8 PRSA450-16		EZ8845 BR1645		M-2X8-450 M-16-450		UT-88 UT-16		Pwr Out	32-7976 32-8116	P-6348 A-3878		T22R01 T22S47		P-3047 A-2931					
41-265.	7	XXL, 7B7, 7C6, 41, 84	30-2476 30-2476	PRSA450-16 PRSA450-8-8		EZ8845 BR1645		M-16-450 M-2X8-450		UT-16 UT-88		Pwr Out	32-7976 32-8116	P-6348 A-3878		T22R01 T22S47		P-3047 A-2931					

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clustat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photost Set No.	
1st.	32-3245	16-5740		455	35-2030	B-2		36-1450			F2		F2	Vol Tone	45-5009 33-5314	T-116		G17	D18-139X			G				Continued —	PHILCO 40-508, 40-509
2nd.	32-3246 (or)				470	35-2030	B-	36-1450			F2		F2	Vol Tone Sen	33-5300 33-5287 33-5295	V-116			D18-139X			G					40-510
1st.	32-3383																										
2nd.	32-3089																										
1st.	32-2645																										
2nd.																											
1st.	32-3089			*0				36-1450			F2		F2	Vol Tone	33-5300 33-5287 33-5295	V-116			D18-139X			G					40-515
2nd.	32-2645																										40-516
1st.	32-321							36-1450	ST-37		F2		F2	Vol Tone	45-5007	V-6			13-133			G					40-525, 526, 527
2nd.	32-3382							36-1491	ST-175		16	10E15	16	Vol	45-5007	V-6			13-133			G					41-KR
1st.	32-3390							36-1505	ST-19		4E45		16	Vol	33-5007	V-0			A	13-133		41	G1				
2nd.	32-3391																										
1st.	32-321							36-1450	ST-37		F2		F2	Vol Tone	45-5007	V-6			13-133			G					41-RP-1, 2
2nd.	32-3382							36-1491	ST-175		16	10E15	16	Vol	45-5007	V-6			13-133			G					41-RP-6
1st.	32-3390							36-1505	ST-19		4E45		16	Vol	33-5007	V-0			A	13-133		41	G1				41-22C
2nd.	32-3391																										
1st.	32-34							36-1450	ST-196		4E45		16	Vol	45-5007	M-60-Z			A	13-133		41	G1				41-81
2nd.	32-33							36-1481	ST-105		5A1		16	Vol	45-5017	M-63-Z			A2	D13-137		42	G1				41-83
1st.	32-3265							36-1481	ST-105		5A1		16	Vol	45-5017	V-63-Z			A2	D13-137		42	G1				41-84
2nd.	32-32							36-1481	ST-10		5A1		16	Vol	45-5017	V-63-Z			A2	D13-137		42	G1				(Code 121)
1st.	32-33							36-1481	ST-10		5A1		16	Vol	45-5017	M-63-Z			A2	D13-137		42	G1				41-84
2nd.	32-32							36-1481	ST-10		5A1		16	Vol	45-5017	M-63-Z			A2	D13-137		42	G1				(Code 122)
1st.	32-326							36-1481	ST-105		5A1		16	Vol	45-5017	M-63-Z			A2	D13-137		42	G1				41-85
2nd.	32-326							36-1481	ST-105		5A1		16	Vol	45-5017	M-63-Z			A2	D13-137		42	G1				41-90
1st.	32-3199							36-1481	ST-105		5A1		16	Vol	45-5017	V-63-Z			A2	D13-137		42	G1				41-95
2nd.	32-3199							36-1481	ST-115		8A21		16	Vol	45-5017	V-116			A2	D13-137		42	G1				41-100
1st.	32-3198							36-1481	ST-105		5A1		16	Vol	45-5007	T-116			A2	D18-139X	E						41-105
2nd.	32-3199							36-1481	ST-115		5A1		16	Vol	45-5007	T-116			A2	D18-139X	E						41-110
1st.	32-3198							36-1481	ST-115		5A1		16	Vol	45-5007	T-116			A2	D18-139X	E						41-220
2nd.	32-3198							36-1481	ST-115		5A1		16	Vol	45-5007	T-116			A2	D18-139X	E						41-221, 41-226
1st.	32-35							36-1505	ST-115		4E45		16	Vol	45-5007	V-60-Z			A	D13-133		41	G1				41-225
2nd.	32-33							36-1505	ST-115		4E45		16	Vol	45-5007	V-60-Z			A	D13-133		41	G1				41-230, 41-235
3rd.	32-351							36-1505	ST-115		5A1		16	Vol	45-5007	V-60-Z			A	D13-133		41	G1				41-240
1st.	32-34							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-245
2nd.	32-3304							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-246
1st.	32-3465							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-250
2nd.	32-3466							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-255
3rd.	32-3467							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-256
1st.	32-3465							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-258
2nd.	32-3466							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-259
3rd.	32-3467							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-260
1st.	32-3468							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-265
2nd.	32-3468							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-266
3rd.	32-3468							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-267
1st.	32-3508							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-268
2nd.	32-3573							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-269
3rd.	32-3538							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-270
1st.	32-3465							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-271
2nd.	32-3502							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-272
3rd.	32-3467							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-273
1st.	32-3465							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-274
2nd.	32-3466							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-275
3rd.	32-3467							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-276
1st.	32-3468							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-277
2nd.	32-3468							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-278
3rd.	32-3468							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-279
1st.	32-3508							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-280
2nd.	32-3573							36-1505	ST-115		5A1		16	Vol	45-5007	M-60-Z			A	D13-133		41	G1				41-281
3rd.	32-3538							36-1505	ST-115		5A1		16</td														

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Type	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
				Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		"A"	"B"	"A"	"B"				
PHILCO—Continued																									
41-280.....	8 XXL, 7B7, 7C6, 241, 84.	30-2475.....				BR1645.....		M-16-450.....		UT-16.....		Pwr Out	32-8221.....	P-6120.....	B1	T22R04.....	B1	P-3048.....							
		30-2474.....	PRS450-16.....										32-8133.....	A-3496.....		T22S87.....		A-2901.....							
41-285, 41-287, 41-296.....	9 XXL, 7B7, 7A6, 7C6, 241, 84.	30-2475.....				BR1645.....		M-16-450.....		UT-16.....		Pwr Out	32-8221.....	P-6120.....	B1	T22R04.....	B1	P-3048.....							
		30-2474.....	PRS450-16.....										32-8133.....	A-3496.....		T22S87.....		A-2901.....							
41-290.....	10 XXL, 7B7, 7A6, 7C6, 37, 241, 84.	30-2475.....				BR1645.....		M-16-450.....		UT-16.....		Pwr Out	32-8221.....	P-6120.....	B1	T22R04.....	B1	P-3048.....							
		30-2474.....	PRS450-16.....										32-8133.....	A-3496.....		T22S87.....		A-2901.....							
41-295.....	11 XXL, 7B7, 7C6, 37, 242, 80.	30-2473.....	PRS450-8.....			BR845.....		M-8-450.....		UT-8.....		Pwr Out	32-8227.....	P-6013.....		T22R05.....		P-2953.....							
		30-2472.....	GL450-20.....			KR520.....		D-20-450.....		PLS-20.....			32-7997.....												
		30-2333.....	GL450-30.....			KR530.....		D-30-450.....		PLS-30.....															
41-300, 41-315X.....	12 XXL, 7B7, 7A6, 7C6, 37, 242, 80.	30-2473.....	PRS450-8.....			BR845.....		M-8-450.....		UT-8.....		Pwr Out	32-8227.....	P-6013.....		T22R05.....		P-2953.....							
		30-2472.....	GL450-20.....			KR520.....		D-20-450.....		PLS-20.....			32-7997.....												
41-316.....	15 XXL, 7B7, 7C6, 37, 242, 80, 78, 67G, 65, 6ZY5G, 2A4G, 30.....	30-2499.....	PRS450-8.....			BR845.....		M-8-450.....		PLS-30.....		Pwr Out	32-8186.....												
		30-2473.....	PRS450-8.....			BRD2215.....		M-8-450.....		UT-8.....			32-8186.....												
41-601.....	5 7A8, 7B7, 7C6, 50L6GT, 35Z3.....	30-2382.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....		Chk Out	32-8168.....												
41-602.....	5 7A8, 7B7, 7C6, 35A5, 35Z3.....	30-2382.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....		Chk Out	32-8164.....												
41-603.....	6 XXD, 7B7, 7C6, 35A5, 35Z3.....	30-2491.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....		Chk Out	32-7960.....												
41-604, 605, 607.....	6 XXD, 7B7, 7C6, 35A5, 35Z3.....	30-2403.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....		Chk Out	32-7960.....												
41-608, 41-609, (Code 121).....	9 7B5, XXL, 7B7, 7C7, 7C6, 241, 7Y4, (244).....	30-2488.....										Pwr Out	32-8166.....												
41-608, 41-609, (Code 122).....	9 7B5, XXL, 7B7, 7C6, 241, 7Y4 (244).....	30-2488.....										Pwr Out	32-8166.....												
41-610, 41-611.....	10 7B5, XXL, 7B7, 7C8, 7C7, 37, 241, 80 (44).....	30-2480.....										Pwr Out	32-8129.....												
		30-2481.....											32-7997.....												
41-616P, 616PW.....	16 7B5, XXL, 7B7, 7C6, 37, 242, 80, 7C7, 78, 6J7G, 6J5G, 6ZY5G, 2A4G, 30 (244).....	30-2473.....	PRS450-8.....			BR845.....		M-8-450.....		UT-8.....		Pwr Out	32-8186.....												
		30-2360.....	GL450-30.....			KR530.....		D-30-450.....		PLS-30.....			32-7997.....												
		30-2200.....	GL450-20.....			KR520.....		D-20-450.....		PLS-20.....															
41-620.....	5 7F7, 7B5, 7A4, 80 (44).....	30-2495.....										Pwr In	32-8157.....												
		30-2494.....										Out	32-8156.....												
		30-2500.....	PRS25-10.....			EZ8825.....		M-2X8-250.....		LM-28.....		Chk Out	32-8120.....												
41-623, 624, 625.....	7 XXD, 50L6GT, 7B7, 7C6, 50Y6GT (47).....	30-2495.....				BR102A.....		M-10-25.....		TA-10.....		Chk Out	32-8155.....												
41-629.....	9 7B5, XXL, 7B7, 7C6, 241, 6X5G (244).....	30-2497.....	PRS150-16.....			BR1615.....		M-16-150.....		UT-161.....		Pwr Out	32-8133.....												
41-695.....	5 1A7G, 1N5G, 1H5G, 1A5G.....	30-2356.....	PRS150-16.....			BR1615.....		M-16-150.....		UT-161.....		Out	32-8107.....												
41-841, (Runs 1 & 2).....	5 1A7G, 1N5G, 1H5G/1LD5, 35Q5G, 117Z6G.....	30-2492.....										Out	32-8139.....												
41-842, 843, 844.....	7 1LE3, 2LN5, 1LH4, 1LB4, 117Z6G.....	30-2498.....										Out	32-8169.....												
41-851, (Runs 1 & 2).....	5 1A7G, 1N5G, 1H5G/1LD5, 3Q5G, 117Z6G.....	30-2452.....				BRD2215.....		M-2X20-150.....		TA-220.....		Dut	32-8139.....												
		30-2453.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....															
		30-2382.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....		Dut	32-8144.....												
42-KR-3, 42-KR-5.....	5 7A8, 7B7, 7C6, 50L6, 35Z3 (47).....	30-2382.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....			32-8144.....												
42-PT-2, 4, 7.....	5 7A8, 7B7, 7C6, 50L6, 35Z3 (47).....	30-2382.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....		Dut	32-8164.....												
42-PT-10.....	6 7C7, 7A8, 7B7, 7C6, 50L6, 35Z3 (47).....	30-2382.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....		Dut	32-8164.....												
42-PT-87, 88.....	5 1A7, 1N5, 1H5, 3Q5, 117Z6.....	30-2492.....				BRD2215.....		M-2X20-150.....		TA-220.....		Dut	32-8159.....												
42-22CL.....	6 7C7, 7A8, 7B7, 7C6, 35A5, 35Z3 (47).....	30-2403.....	PRSA150-20-20.....			BRD2215.....		M-2X20-150.....		TA-220.....		Dut	32-8144.....												
42-121CB.....	4 1LA6, 1LN5, 1LH4, 1LA4.....	30-2396.....	PRS150-16.....			BR1615.....		M-16-150.....		UT-161.....		Dut	32-8100.....												
42-122T.....	5 1LA6, 1LN5, 1LH4, 1LA4.....	30-2396.....	PRS150-16.....			BR1615.....		M-16-150.....		UT-161.....		Dut	32-8152.....												
42-123F.....	5 1LA6, 1LN5, 1LH4, 1LA4.....	30-2396.....	PRS150-16.....			BR1615.....		M-16-150.....		UT-161.....		Dut	32-8152.....												
42-124T.....	5 XXB, 2LN5, 1LH4, 1LB4.....	30-2396.....	PRS150-16.....			BR1615.....		M-16-150.....		UT-161.....		Dut	32-8175.....												
42-125K.....	5 XXB, 2LN5, 1LH4, 1LB4.....	30-2396.....	PRS150-16.....			BR1615.....		M-16-150.....		UT-161.....		Dut	32-8175.....												

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Photoflot Set No.		
1st.	32-3482			455				36-1535					Vol Tone	45-5009 33-5403	T-116				D18-139X			G1				Continued—	PHILCO 41-280	
2nd.	32-3483			455				36-1535					Vol Tone	45-5009 33-5403	T-116				D18-139X			G1					41-285 41-287, 41-295X	
3rd.	32-3484							36-1535					Vol Tone	45-5009 33-5403	I-116				D18-139X			G1					41-290	
1st.	32-3482			455				36-1535					Vol Tone	33-5286 33-5325													41-295	
2nd.	32-3483							36-1535					Vol Tone	33-5286 33-5325													41-300, 41-315X	
3rd.	32-3484							36-1535					Vol Tone	33-5417 33-5325													41-316	
1st.	32-3482			455				36-1535					Vol Tone	33-5417 33-5325														
2nd.	32-3483							36-1535					Vol Tone	33-5417 33-5325														
3rd.	32-3484							36-1535					Vol Tone	33-5417 33-5325														
1st.	32-3493			455				36-1535					Vol Tone	33-5417 33-5325														
2nd.	32-3494							36-1535					Vol Tone	33-5417 33-5325														
3rd.	32-3495							36-1535					Vol Tone	33-5417 33-5325														
1st.	32-3493			455				36-1535					Vol Tone	33-5417 33-5325														
2nd.	32-3494							36-1535					Vol Tone	33-5417 33-5325														
3rd.	32-3566							36-1535					Vol Tone	33-5417 33-5325														
1st.	32-3603	11-616*		455				36-1541					Vol	33-5437	T-112	A		D18-137X		41	G1					41-601		
2nd.	32-3604			455				36-1541					Vol	33-5462	AT-112	KSS-3	A	D18-137X	E	41						41-602		
1st.	32-3390	16-6662		455				36-1545	11-114		4145		Vol	33-5462	AT-112	KSS-3	A	D18-137X	E	41						41-603		
2nd.	32-3391							36-1481	ST-105		5A1		Vol	33-5462	AT-112	KSS-3	A	D18-137X	E	41								
1st.	32-3508			455	35-2204	L-70-A		36-1545	11-114		5A1		Vol	33-5462	AT-112	KSS-3	A	D18-137X	E	41								
2nd.	32-3509							36-1545	11-114		5A1		Vol	33-5462	AT-112	KSS-3	A	D18-137X	E	41								
3rd.	32-3510							36-1545	11-114		5A1		Vol	33-5462	AT-112	KSS-3	A	D18-137X	E	41								
1st.	32-3508			455	35-2204	L-70-A		36-1545	11-114		5A1		Vol	33-5462	AT-112	KSS-3	A	D18-137X	E	41						41-604, 605, 607		
2nd.	32-3523							36-1528					Vol	45-5009 33-5403	I-114			D18-139X			G1						41-608, 41-609 (Code 121)	
1st.	32-3465			455				36-1528					Vol	45-5009 33-5403	I-114			D18-139X			G1						41-508, 41-609 (Code 122)	
2nd.	32-3466							36-1528					Vol	33-5009 33-5403	T-116			D18-139X			G1						41-610, 41-611	
3rd.	32-3534							36-1528					Vol	45-5009 33-5403	T-116			D18-139X			G1						41-616P, 616PW	
1st.	32-3465			455				36-1528					Vol	33-5009 33-5403	T-116			D18-139X			G1						41-616P, 616PW	
2nd.	32-3464							36-1528					Vol	33-5009 33-5403	T-116			D18-139X			G1						41-616P, 616PW	
3rd.	32-3534							36-1528					Vol	33-5009 33-5403	T-116			D18-139X			G1						41-616P, 616PW	
1st.	32-3482			455				36-1565					Vol	45-5009 33-5403	T-116			D18-139X			G1						41-620	
2nd.	32-3483							36-1565					Vol	33-5432 33-5433														41-620
3rd.	32-3484							36-1565					Vol	33-5432 33-5433														41-620
1st.	32-3515			455				36-1518	ST-119	F3	10A31		Vol	33-5405	M-60-Z	A		D13-133		41	G1						41-623, 624, 625	
2nd.	32-3617							36-1538	11-114	5A1			Vol	33-5408 33-5403	T-116			D13-133X			G1						41-629	
3rd.	32-3618			455				36-1528					Vol	33-5408 33-5403	T-116			D13-133X			G1						41-629	
1st.	32-3623							36-1522	ST-119	F3	10A31		Vol	45-5017	M-61-Z	A2		D13-137		42	G1						41-685	
2nd.	32-3628							36-1519	ST-105	5A1			Vol	45-5017	M-61-Z	A2		D13-137		42	G1						41-841 (Runs 1 and 2)	
3rd.	32-3623							36-1522	ST-119	F3	10A31		Vol	45-5017	M-61-Z	A2		D13-137		42	G1						41-842, 843, 844	
1st.	32-3198	11-161*		455				36-1522	ST-119	F3	10A31		Vol	45-5017	M-61-Z	A2		D13-137		42	G1						41-841 (Runs 1 and 2)	
2nd.	32-3199							36-1519	ST-105	5A1			Vol	45-5017	M-61-Z	A2		D13-137		42	G1						41-841 (Runs 1 and 2)	
1st.	32-3583	16-6662		455				36-1541	ST-105	F6	5A1		Vol	33-5436	M-60-Z	A2		D13-133		42	G1						41-851 (Runs and 2)	
2nd.	32-3256							36-1541	ST-105	F6	5A1		Vol	33-5436	M-60-Z	A2		D13-133		42	G1						41-851 (Runs and 2)	
3rd.	32-3621							36-1541	ST-105	F6	5A1		Vol	33-5436	M-60-Z	A2		D13-133		42	G1						41-851 (Runs and 2)	
1st.	32-3631							36-1541	ST-105	F6	5A1		Vol	33-5436	M-60-Z	A2		D13-133		42	G1						41-851 (Runs and 2)	
2nd.	32-3583	16-6662		455				36-1541	ST-105	F6	5A1		Vol	33-5436	M-60-Z	A2		D13-133		42	G1						41-851 (Runs and 2)	
3rd.	32-3265							36-1541	ST-105	F6	5A1		Vol	33-5436	M-60-Z	A2		D13-133		42	G1						41-851 (Runs and 2)	
1st.	32-3390	15-6662		100				36-1490	51-114	4E45			Vol	45-5007	M-61-Z	A		D13-133		41	G1						42-KR-3, 42-K-5	
2nd.	32-3391							36-1533					Vol	45-5007	M-61-Z	A		D13-133		41	G1						42-PT-2, 4, 7	
1st.	32-3603	16-6662		455				36-1533					Vol	45-5007	M-61-Z	A		D13-133		41	G1						42-PT-10	
2nd.	32-3604							36-1533					Vol	45-5017	M-61-Z	A		D13-133		41	G1						42-PT-87, 88	
1st.	32-3584							36-1533					Vol	45-5017	M-61-Z	A		D13-133		41	G1						42-PT-87, 88	
2nd.	32-3473							36-1533					Vol	45-5017	M-61-Z	A		D13-133		41	G1						42-22CL	
1st.	32-3489	15-6662		455				36-1505	ST-196	149			Vol	45-5007	M-61-Z	A		D13-133		41	G1						42-121C8	
2nd.	32-3304							36-1505	ST-196	149			Vol	45-5007	M-61-Z	A		D13-133		41	G1						42-121C8	
1st.	32-3675	15-6662		400				36-1491	ST-105	5A1			Vol	45-5017	M-61-Z	A		D13-133		42	G1						42-122T	
2nd.	32-3199							36-1491	ST-105	5A1			Vol	45-5017	M-61-Z	A		D13-133		42	G							

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
PHILCO—Continued	6	1LE3, 21LN5, 1LH4, 1LB4	30-2396	PRS150-16		BR1615		M-16-150		UT-161		Out	32-8175	A-3881		T22S48		A-2934		758		17GD60	
42-321—(See Model 42-322.)	4	2-PT-10)										Out	32-8164	A-3876		T22S45		A-2928					
42-322.....	6	7C7, 7A8, 7B7, 7C6, 50L66, 35Z3 (47)	30-2530									Out	32-8173	A-3876		T22S45		A-2928					
42-323.....	6	XXD, 27B7, 7C6, 50L6GT, 35Z3 (47)	30-2503	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8173	A-3876		T22S45		A-2928					
42-327, (Code 121)	6	XXD, 27B7, 7C6, 50L6, 35Z3GT/ 35Z5GT	30-2503	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	32-8173	A-3876		T22S45		A-2928					
42-335.....	7	XXL, 27B7, 7C6, 7B5, 7Y4 (44)	30-2409	PRS450-8	EZ-8845	BR845		M-8-450	UT-8			Pwr Out	32-8220										
42-340.....	7	XXL, 27B7, 7C6, 6B5, 7Y4 (44)	30-2409	PRS450-8-8		EZ8845		M-8-450	UT-8			Pwr Out	32-8172	A-3878		T22S47		A-2931					
42-345.....	7	XXL, 27B7, 7C6, 7B5, 7Y4 (44)	30-2409	PRS450-8	PRSA450-8-8	BR845		M-8-450	UT-8			Pwr Out	32-8220			T22S47		A-2931					
42-350.....	7	XXL, 27V7, XXFM, 7B5, 7Y4 (44)	30-2409	PRS450-8	PRSA450-8-8	BR845		M-8-450	UT-8			Pwr Out	32-8220			T22S47		A-2931					
42-355.....	8	XXL, 27V7, XXFM, 41, 6X5	30-2517	PRS450-20	PRSA450-8-8	BR2045		M-20-450	UT-20			Pwr Out	32-8221	P-6120	B1	T22R04	B1	P-3048					
42-358, (Code 121)	6	XXD, 27B7, 7C6, 50L6, 35Z3	30-2515	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Chk Out	32-8172	A-3878		T22S47		A-2931					
42-358, (Code 122)	6	XXD, 27B7, 7C6, 35L6, 50Y6GT	30-2529									Chk Out	32-8182	C-1277		T20C52		C-2981					
42-360.....	7	XXL, 27B7, 7C6, 41, 84/7Y4 (44 & 47)	30-2471	PRS450-16	PRSA450-8-8	BR1645		M-16-450	UT-16			Pwr Out	32-7975	P-6348		T22R01	B1	P-3047					
42-365.....	7	XXL, 27B7, 7C6, 41, 84/7Y4 (44 & 47)	30-2471	PRS450-16	PRSA450-8-8	BR1645		M-16-450	UT-16			Pwr Out	32-8115	A-3878		T22S47	B1	A-2931					
42-380.....	8	XXL, 27B7, 7C6, 241, 6X5	30-2517	PRS450-20	PRSA450-8-8	BR2045		M-20-450	UT-20			Pwr Out	32-7976	P-6348		T22R01	B1	P-3047					
42-390.....	8	XXL, 27V7, XXFM, 241, 6X5	30-2517	PRS450-20	PRSA450-8-8	BR2045		M-20-450	UT-20			Pwr Out	32-8133	P-6348		T22R01	B1	P-3047					
42-395.....	9	XXL, 27V7, XXFM, 7A4, 27B5, 724	30-2517	PRS450-20	PRSA450-8-8	BR2045		M-20-450	UT-20			Pwr Out	32-8223	P-6120		T22R04		P-2952					
42-400.....	11	XXL, 27B7, 7A6, XXFM, 7A4, 6F66, 5Y4G (44)	30-2525	PRS450-20	KR530	BR2045		M-20-450	UT-20			Pwr Out	32-7997	P-6120	B1	T22R04	B1	P-3048					
42-842, 843, 844.....	7	1LE3, 21LN5, 1LH4, 1LB4, 117Z6G	30-2437	PRS450-8		BR845		M-8-450	UT-8			Out	32-8169	A-3881		T22S48		A-2934		746 & 2482		263	3M30
42-853, 42-854.....	7	1LE3, 21LN5, 1LH4, 1LB4, 117Z6G	30-2498									Out	32-8169	A-3881		T22S48		A-2934		746 & 2482		263	3M30
42-1001P, (Code 121)	5	7A3, 7B7, 7C6, 50L6, 35Z3 (47)	30-2501									Chk Out	32-8168	A-3876		T22S45		A-2928					
42-1001P, (Code 122)	5	7A3, 7B7, 7C6, 50L6GT, 50Y6GT	30-2501	PRS150-16	BR1615		M-16-150	UT-161			Chk Out	32-8164	A-3876		T22S45		A-2928						
42-1002, (Code 121 & 122)	6	7C7, 7A8, 7B7, 7C6, 50L6, 35Z3	30-2507	PRS4150-40-40	BR04415		M-2X40-150	TA-440			Chk Out	32-8168	A-3876		T22S45		A-2928						
42-1003, (Code 121 & 122)	7	XXD, 27B7, 7C6, 50L6GT, 50Y6, 5Y4G (44)	30-2509	PRS150-16	A8	BR1615	M-16-150	A8	UT-161	A8	Chk Out	32-8174	A-3876		T22S45		A-2928						
42-1004.....	6	7C7, 7A8, 7B7, 7C6, 35L6, 50Y6	30-2528									Chk Out	32-8144	A-3876		T22S45		A-2928					
42-1005, (Code 121)	8	XXD, 27B7, 7C6, 35L6, 50Y6GT	30-2509	PRS150-16	A8	BR1615	M-16-150	A8	UT-161	A8	Chk Out	32-8155	A-3876		T22S45		A-2928						
42-1006.....	7	7C7, 7A8, 27B7, 7C6, 35L6GT, 50Y6GT	30-2509	PRS150-16	BR1615		M-16-150	UT-161			Chk Out	32-8202	A-3876		T22S45		A-2928						
42-1008, 42-1009.....	9	XXL, 7C5, 27C6, 27B7, 241, 5Y4G (44)	30-2480	PRS150-16	BR1615	M-16-150	UT-161				Chk Out	32-8206	A-3876		T22S45		A-2928						
42-1010, 42-1011.....	10	XXL, 27B7, 27C6, 7A4, 27C5, 5Y4G	30-2517	FRA450-20	BR2045	M-20-450	UT-20				Pwr Out	32-8226	P-6013		T22R05		P-2953						
			30-2535	PRS450-8-8	EZ8845	M-2X8-450	UT-88				Pwr Out	32-7997	A-3311		T22S64		A-2936						
			30-2500	PRS25-10	BR102A	M-10-25	TA-10																

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photofact Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quar Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	32-3737	16-5712		455				36-1545	ST-105		5A1		Vol	33-5452	T-116		A2	G17	D18-139X		42	G1				Continued—	PHILCO 42-126T	
2nd.	32-3621	11-6133						36-1534			46E4S		Vol	45-5037	M-111-Z		A.		D11-133		41	G1				(Code Model	42-P (T-10)	
3rd.	32-3733							36-1533			46E4S		Vol	45-5007	AM-60-Z	KSS-3	A.		D13-133	E	41							42-321 42-322 42-323
1st.	32-3859	11-6562		455				36-1534			46E4S		Vol	45-5037	M-111-Z		A.		D11-133	E	41	G1						42-327 (Codes 121, 122)
2nd.	32-3360							36-1533			46E4S		Vol	45-5007	AM-60-Z	KSS-3	A.		D13-133	E	41							42-335
1st.	32-3711			455				36-1534			46E4S		Vol	45-5017	AM-60-Z	MSK-3	A.		D11-133	E	41							42-340
2nd.	32-3712							36-1570			46E15		Vol	45-5007	M-60-Z		A.		D11-133	E	61							42-345
3rd.	32-3713							36-1570			46E15		Vol	45-5007	M-60-Z		A.		D13-133								42-350	
1st.	32-3711			455				36-1570			46E15		Vol	45-5007	M-60-Z				D13-133								42-355	
2nd.	32-3712							36-1570			46E15		Vol	45-5007	M-60-Z				D13-133								42-358 (Code 121)	
3rd.	32-3713							36-1570			46E15		Vol	45-5007	M-60-Z		A.		D13-133		41	G1						42-360
1st.	32-3734			455				36-1570			46E15		Vol	33-5470	I-111			G17	D18-139X								42-365	
2nd.	32-3705							36-1570			33-5471		Vol	33-5471	I-111													42-380
3rd.	32-3640							36-1570			33-5471		Vol	33-5471	I-111													42-390
1st.	32-3734			455				36-1570			33-5471		Vol	33-5471	I-111													42-395
2nd.	32-3788							36-1551	ST-100		36-1551		Vol	45-5009	I-110		G4		D18-139X									42-355
3rd.	32-3796							36-1551	ST-100		36-1551		Vol	33-5460	M-61-S				D11-137									42-358 (Code 122)
1st.	32-3787			455				36-1455	ST-110		36-1455		Bass	33-5461	M-60-Z				D13-133									42-360
2nd.	32-3788							36-1455	ST-110		36-1455		Treble	45-5007	M-60-Z		A.		D13-133		41	G1						42-365
3rd.	32-3789							36-1455	ST-110		36-1455		Vol	45-5007	M-60-Z				D13-133									42-380
1st.	32-3773			455				36-1560			36-1560		Vol	45-5007	N-10-Z				D13-133		41	G1						42-390
2nd.	32-3774							36-1560			36-1560		Treble	45-5007	N-10-Z				D13-133									42-395
3rd.	32-3775							36-1560			36-1560		Vol	45-5007	N-10-Z		A.		D13-133		41	G1						42-358 (Code 121)
1st.	32-3773			455				36-1560			36-1560		Vol	45-5007	N-10-Z				D13-133									42-358 (Code 122)
2nd.	32-3774							36-1560			36-1560		Treble	45-5007	N-10-Z				D13-133									42-360
3rd.	32-3775							36-1560			36-1560		Vol	45-5007	N-10-Z				D13-133									42-365
1st.	32-3465			455				36-1515	S-11/5		36-1515		Vol	45-5007	M-110-Z				D13-133		41	G1						42-380
2nd.	32-3639							36-1515	S-11/5		36-1515		Tone	33-5463	M-60-Z		A.		D13-133		41	G1						42-390
3rd.	32-3640							36-1523			36-1523		Vol	45-5007	M-61-Z				D13-133									42-395
1st.	32-3742			455				36-1528			36-1528		Bass	33-5460	M-61-S		G4		D18-139X									42-380
2nd.	32-3743							36-1528			36-1528		Treble	33-5461	M-61-Z				D13-133									42-390
3rd.	32-3744							36-1528			36-1528		Vol	45-5009	T-116				D18-139X									42-395
1st.	32-3787			455				36-1528			36-1528		Bass	33-5460	M-61-N		G4		D11-137									42-400
2nd.	32-3788							36-1528			36-1528		Treble	33-5461	M-60-Z				D13-133									42-405
3rd.	32-3789							36-1528			36-1528		Vol	45-5009	T-116				D18-139X									42-410
1st.	32-3928			455				36-1530			36-1530		Bass	33-5460	T-116				D13-133									42-415
2nd.	32-3836							36-1530			36-1530		Treble	33-5461	M-60-Z				D13-133									42-420
3rd.	32-3829							36-1530			36-1530		Vol	45-5009	T-116				D13-137									42-425
1st.	32-3820			455				36-1530			36-1530		Bass	33-5479	M-61-U				D13-137									42-430
2nd.	32-3821							36-1530			36-1530		Treble	33-5479	M-61-U				D13-137									42-435
3rd.	32-3822							36-1530			36-1530		Vol	33-5470	T-116				D18-139X									42-440
1st.	32-3820			455				36-1549	S-11/6m		36-1549		Bass	33-5418	M-61-Z		A2		D18-139X									42-842, 843, 844
2nd.	32-3821							36-1549	S-11/6m		36-1549		Treble	45-5018	M-61-Z				D13-133									42-853, 42-854
3rd.	32-3631							36-1549	S-11/6m		36-1549		Vol	45-5018	M-61-Z				D13-133									42-1001P (Code 121)
1st.	32-3620			455				36-1549	S-11/6m		36-1549		Vol	45-5018	M-61-Z				D18-137X									42-1001P (Code 122)
2nd.	32-3621							36-1549	S-11/6m		36-1549		Vol	45-5018	M-61-Z				D18-137X									42-1002 (Code 121 & 122)
3rd.	32-3631							36-1549	S-11/6m		36-1549		Vol	45-5018	M-61-Z				D18-137X									42-1003 (Code 121 & 122)
1st.	32-3803	11-6662		155	35-2119			36-1541			36-1541		Vol	33-5437	T-112				A.	D18-139X								42-1004
2nd.	32-3804	16-6662		455				36-1541			36-1541		Treble	46A1	Vol	33-5437	T-112		A.	D18-137X								42-1005 (Code 121)
3rd.	32-3604							36-1541			36-1541		Vol	33-5437	T-112				A.	D18-137X								42-1005 (Code 122)
1st.	32-3595	16-6662		455	35-2524			36-1481	ST-105		36-1481		Vol	33-5462	T-112				A.	D18-137X								42-1006 (Code 121)
2nd.	32-3604	16-6663		455	35-2524			36-1571	ST-105		36-1571		Vol	33-5462	T-112				A.	D18-137X								42-1006 (Code 122)
3rd.	32-3616							36-1571	ST-105		36-1571		Vol	45-5019	T-116				A.	D18-139X								42-1007 (Code 121 & 122)
1st.	32-3616							36-1571	ST-105		36-1571		Vol	45-5019	T-116				A.	D18-139X								42-1007 (Code 122)
2nd.	32-3617							36-1571	ST-105		36-1571		Vol	45-5019	T-116				A.	D18-139X								42-1008, 42-1009
3rd.	32-3617																											



Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photofact Set No.	MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Charstat Part No.	Shft	Switch	Note	IRC Part No.	Shft	Switch	Note	Mfr. Part No.	Radart Part No.	Note				
1st.	32-3843					455			36-1565			12E10		Vol Bass Treble	45-5009 33-5479 33-5480	T-116 M-63-Z M-60-Z			G4	D18-139X D13-137 D13-133	G1			Continued—	PHILCO	42-1012, 42-1013		
2nd.	32-3844																G4											
3rd.	32-3845																											
1st.	32-3820					455			36-1561			12E60		Vol Bass	33-5236 33-5472													42-1015
2nd.	32-3821																											
3rd.	32-3822																											
1st.	32-3801					455			36-1553			F2		Vol Bass	33-5417 33-5472													42-1016
2nd.	32-3802																											
3rd.	32-3803																											
1st.	32-3966	16-6658		455					36-1507	ST-105		5A1		Vol	33-5493	M-63-Z		A2	D13-137	42	G1				5.	46-131		
2nd.	32-3897	16-6670							36-1507	ST-105		5A1		Vol	33-5493	M-63-Z		A2	D13-137	42	G1				4.	46-132		
1st.	32-3949	16-6658		455					36-1592	ST-196		4E45		Vol	33-5429	M-60-Z		A	D13-133	41	G1				1.	46-200, 201, 202, 203		
2nd.	32-3953								36-1591			4E45		Vol	33-5429	M-60-Z		A	D13-133	41	G1				2.	46-250, 250-I, 251		
1st.	32-3967	16-5712		455					3L-1958			46A1		Vol	33-5526											10.	46-350	
2nd.	32-3674								36-1591			46E45		Vol	33-5491													
1st.	32-3958	16-6658		455					36-1591			46E45		Vol	33-5469	M-60-Z		A	D13-133	41	G1				6.	46-420, 46-420I		
2nd.	32-3604	16-6670		265					36-1591			46E45		Vol	33-5458	M-60-Z		A	D13-133	41	G1				5.	46-421, 46-421-I		
1st.	32-3970								36-1590			12E10		Vol	33-5535-1											19.	46-480	
2nd.	32-3971								36-1590			12E10		Vol	33-5535-1													
1st.	32-4026	16-6658		455					36-1591			46E15		Vol	33-5519													
2nd.	32-3948	16-6670							36-1591			46E15		Vol	33-5519													
1st.	32-3952	16-6658		455					36-1591			46E15		Vol	33-5519													
2nd.	32-4014	16-6670		455					36-1533			46E45		Vol	33-5458	M-60-Z		A	D13-133	41	G1				2.	46-427		
1st.	32-3956								36-1590			12E10		Vol	33-5535-1													
2nd.	32-3957								36-1590			12E10		Vol	33-5535-1													
3rd.	32-3958								36-1590			46E15		Vol	33-5519													
1st.	32-4020								36-1590			46E15		Vol	33-5519													
2nd.	32-4022								36-1590			46E15		Vol	33-5519													
3rd.	32-4074								36-1590			46E15		Vol	33-5519													
1st.	32-3958	16-6658		455					36-1581			46E15		Vol	33-5519													
2nd.	32-4005	16-6670							36-1617	ST-107		5A15		Vol	33-5519													
1st.	32-3958	16-6658		455					36-1617	ST-107		5A15		Vol	33-5519													
2nd.	32-4005	16-6670		455					36-1593	ST-112		6A21		Vol	33-5503													
1st.	32-3962	16-6658		455					36-1593	ST-112		6A21		Vol	33-5538-1												6.	46-1203
2nd.	32-4005	16-6670							36-1595			12E60		Vol Tone	33-5535-1 33-5535-1	T-116				D18-139X		G1					13.	46-1209
1st.	32-4106								36-1595			12E60		Vol Tone	33-5535-1 33-5535-1	T-116				D18-139X		G1						
2nd.	32-4107								36-1606			12E60	F4	Vol Bass Treble	33-5535-5 33-5539-8 33-5539-7	T-116 M-61-S M-60-Z				D18-139X		G1					12.	46-1213
3rd.	32-4108								36-1606			12E60	F4	Vol Bass Treble	33-5535-5 33-5539-8 33-5539-7	T-116 M-61-S M-60-Z				D18-139X		G1						
1st.	32-4020-1								36-1611	ST-102		F3	12A6	Vol Tone	33-5535-1 33-5538-1	T-116				D18-139X		G1					15.	46-1226
2nd.	32-4001								36-1595			12E60		Vol	33-5535-1	T-116				D18-139X		G1					25.	46-1227
3rd.	32-4002								36-1595			12E60		Vol Tone	33-5535-1 33-5538-1	T-116				D18-139X		G1					22.	47-1230
1st.	32-4106								36-1595			12E60		Vol	33-5535-1	T-116				D18-139X		G1						
2nd.	32-4107								36-1595			12E60		Vol	33-5535-1	T-116				D18-139X		G1						
3rd.	32-4108								36-1595			12E60		Vol	33-5535-1	T-116				D18-139X		G1						
1st.	32-4146								36-1595			12E60		Vol Tone	33-5535-1 33-5538-1	T-116				D18-139X		G1						
2nd.	32-4156								36-1595			12E60		Vol Tone	33-5535-1 33-5538-1	T-116				D18-139X		G1						
3rd.	32-4147								36-1595			12E60		Vol Tone	33-5535-1 33-5538-1	T-116				D18-139X		G1						
1st.	32-4146								36-1595			12E60		Vol Tone	33-5535-1 33-5538-1	T-116				D18-139X		G1						
2nd.	32-4147								36-1595			12E60		Vol Tone	33-5535-1 33-5538-1	T-116				D18-139X		G1						
3rd.	32-4147								36-1595			12E60		Vol Tone	33-5535-1 33-5538-1	T-116				D18-139X		G1						
1st.	32-3949-1	16-6658		455					36-1507	ST-105		5A1		Vol	33-5554	M-63-Z		A2	D13-137	42	G1				25.	48-141, 48-145		
2nd.	32-3897								36-1615-1			46A1		Vol Tone	33-5539-11 33-5538-14	M-60-Z M-58-S		A	D13-133	41	G1					26.	48-464	
1st.	32-3956-2								36-1608			46A1		Vol Tone	33-5539-4 33-5539-3	M-61-S M-60-Z		A	D13-133	41	G1							
2nd.	32-3957-2								36-1608			46A1		Vol Tone	33-5539-4 33-5539-3	M-61-S M-60-Z		A	D18-139X		G1					30.	48-482	
3rd.	32-3955-2								36-1625	ST-105		5A1		Vol Tone	33-5538-20	M-60-Z		A	D18-139X		G1							
1st.	32-4020-1								36-1625	ST-105		5A1		Vol Tone	33-5538-20	M-60-Z		A	D13-133	41	G1					29.	48-1200	
2nd.	32-4001								36-1625			5A1		Vol Tone	33-5538-20	M-60-Z		A	D13-133	41	G1							
3rd.	32-4002								36-1625			5A1		Vol Tone	33-5538-20	M-60-Z		A	D13-133	41	G1							
1st.	32-3149	16-6662		470	415-1027	M-22			36-1491	ST-175		F3	10E15	F3	Vol Tone	33-5306	M-60-Z		A	D13-133	41	G1						101.
2nd.	32-3150								36-1440	ST-737		F13	8E18	F13	Vol Tone	33-5254	M-60-Z		A	D13-133	41	G1						105.
1st.	32-3121	16-6662		470	35-2031				36-1473			F13	8E18	F13	Vol Tone	33-5220	M-63-Z		A	D13-137	41	G1						
2nd.	32-3121								35-2027			35-2031		Vol Tone	33-5232			A	D13-137	41	G1						107.	
1st.	32-3121								36-1440	ST-737		F13	8E18	F13	Vol Tone	33-5254	M-60-Z		A	D13-133	41	G1						

~~† Information not available.~~

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	N ote	Cornell-Dubilier Part No.	N ote	Solar Part No.	N ote	Sprague Part No.	N ote	Use	Mfr. Part No.	Stancor Part No.	N ote	Thordarson Part No.	N ote	Merit Part No.	N ote	Eveready Part No.	N ote	Burgess Part No.	N ote	
PHILCO—Continued 921, 922, (Run 2, Auto.)	5	6A7, 78, 75, 41, 84 (44)	30-2329	PRSB450-8-8		EZ588		DH-2X8-450SS		TU-88		Chk Pwr Out	32-7960, 32-7962, 32-8000, 32-7959, 32-7958, 32-7956, 32-7822, 32-7951, 32-7967, 32-7959, 32-7951, 32-7963	C-1277		T20C52		C-2981						
926	6	78, 6A7, 75, 41, 84 (51)	30-2315									Chk Pwr Out	†	A-3878		T22S47		A-2931						
927	7	78, 6A7, 75, 41, 84 (51)	30-2316, 30-4568		†	†	†		†	†		Chk Pwr Out	†	A-3878		T22S47		A-2931						
928K	7	78, 6A7, 75, 41, 84 (51)	30-4568, 30-2316		†	†	†		†	†		Chk Pwr Out	†	A-3311		T22S64		A-2935						
931	6	7B7, 7A8, 7C6, 7A5, 7Y4 (55)	61-0068	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	65-0185		A-3311		T22S64		A-2935					
932	6	7B7, 7A8, 7C6, 7A5, 7Y4 (55)	61-0068	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	65-0185		A-3876		T22S45		A-2928					
933	6	7A7, 7B8, 7B6, 7B5, 7Y4 (51)	61-0068	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	65-0221		A-3876		T22S45		A-2928					
936	6	7A7, 6A7, 75, 41, 7Y4 (51)	61-0028	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	65-0162		A-3878		T22S47		A-2931					
937	6	7A7, 6A7, 75, 41, 7Y4 (51)	61-0028	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	65-0046		A-3878		T22S47		A-2931					
938K	7	7A7, 6A7, 75, 7A4, 6Y7G, 7Y4 (51)	61-0028	AF32K4A		UP2235C		DY-310		EL-153		Pwr Out	65-0046		A-3878		T22S47		A-2931					
PHILHARMONIC RR13, RR13L	(Also See Espey)	6-7B7, 14Q7, 14B6, 5CA5, 35Y4 (47)	30-30-30 Mfd. & PRSA150-40 & PRS150-30 AF88!	PRSA150-40-40 & PRS150-30		EZ44315C		DSB-403020-150, DY-2X40-450		TA-303		Out	†	A-3876	B3	T22S45	B3	A-2928	B3					
6810, 68701, 02, 03, 10, 11, 12, (Ch. RR14)	8	6SK7GT, 6SA7, 6SK7, 6SQ7, 6J3, 6V6GT, 5Y3GT (47)	40-40 Mfd.			UP4445				EL-240		Pwr Out	T13370 On Spkr.	P-6013, A-3823	B12	T22R06, T22S47		P-2953, A-2936	B12					
PHILLIPS PETRO L	EUM CO.—(See Wocularoc)																							
PILOT B1, T1	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z9GT	24-40									Out	On Spkr.	A-3876		T22S45		A-2928						
B2 (Late), T2	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z9GT	24-49									Pwr Out	55-2		T22S45		A-2928							
H11	4	1A7G, 1M5G, 1H5G, 1C5G	78704	PRS250-4		BR425		M-8-250		UT-42		Out	On Spkr.	A-3876		T22S45		A-2928						
FM12	13	6AC7/1852, 6K8, 6SJ7, 25H6, 6SQ7, 36L5G, 6C8G, 5U4G, 6U5/6G5	85-046	PRS450-8		EZ88845, BR845		DH-3X8-450SS, M-8-450		UT-8		Chk Pwr Out	55-1	†	P-6014		T22R06		P-2954					
	24-38	PRS450-8	BR845			M-8-450		UT-8		TA-550		Out	On Spkr.	A-3307		T22S68		A-3131						
H12	4	1A7G, 1M5G, 1H5G, 1C5G	23500-H	PRS150-12		BR1215		M-10-150		UT-121		Out	On Spkr.	A-3878		T22S47		A-2931		742 & 7432		8F	7B30	
TP31	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z9GT	24-41									Chk Pwr Out	84540-B	†	T22S45		A-2928							
TP32	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z9GT	24-41									Chk Pwr Out	84540-B	†	T22S45		A-2928							
33, 35, (30 Series)	5	6A8, 6K7, 6Q7, 6F6, 5Y3G	72353, 71045-A, 22481	PRS450-8, PRS25-10		BR845, KRS88A, BR102A		M-8-450		UT-8		Out	On Spkr.	A-3876		T22S45		A-2928						
TD42	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z9GT	24-41									Out	On Spkr.	71336, P-6119, A-3878		T22R02, T22S47		P-2951, A-2931						
TX42	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z9GT	24-41									Chk Pwr Out	84540-B	†	T22S45		A-2928							
T43	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z9GT (51)	24-21	PRS450-40		BR4045		M-40-450		UT-30		Chk Pwr Out	84540-B	†	T22S45		A-2928							
T44	6	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G (51)	24-3	PRS450-30		BR3045		M-30-450		UT-30		Chk Pwr Out	84540-B	†	T22S45		A-2928							
T47	6	6SA7, 6SK7, 6SQ7, 25L6G, 25Z6G, 6U5 (51)	24-11	PRS450-16		BR1645		M-16-450		UT-16		Chk Pwr Out	83412R	P-6011	T22R02		P-2951							
	24-32	PRS25-50	BR502			M-50-25		TA-50				Chk Pwr Out	83412R	P-6011	T22R02		P-2951							
T48	7	6SA7, 6SK7, 6H6, 6SF5, 6F6G, 5Y3G, 6U5 (51)	24-6	PRS25-10		BR102A		M-10-25		TA-10		Chk Pwr Out	83412R	P-6011	T22R02		A-2931							
H64	7	6SA7, 6SK7, 6H6, 6SF5, 6F6G, 5Y3G, 6U5 (51)	20-M	PRS450-10		BR1045		M-10-450		UT-10		Chk Pwr Out	83412R	P-6011	T22R02		P-4075							
T71	5	1A7G, 1M5G, 1H5G, 1C5G, 1T5G, 25Z6G	24-14	PRS25-50		BR102A		M-10-25		TA-10		Chk Pwr Out	83412R	P-6011	T22R02		A-2931							
91, (Ch. T91 & Y91)	5	7A8, 7B7, 7C6, 6G6G, 6ZV5G	23500-MX	AF8J		UP2045		DY-30-450		EL-4		Chk Pwr Out	84752	A-3879	T22S48		A-2934		747 & 7432		2F4L	7M30		
T101	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z4GT (51)	23500-EX	AF6J		UP3045		DY-30-450		EL-3		Chk Pwr Out	84752	A-3879	T22S48		A-2934							
	23500-MX	AF8J	UP4045			DY-30-450		EL-4		EL-3		Chk Pwr Out	83834	C-1706	T20C52		A-2975							
	23500-EX	AF6J	UP3045			DY-30-450		EL-3		EL-3		Chk Pwr Out	83834	A-3876	T22S45		A-2928							

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"		
PILOT—Continued																							
T102.....	5	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G (51)	23500CX 23500DX	PRS450-16 PRS450-8		BR1645 BR845		M-16-450 M-8-450		UT-16 UT-8		Pwr Out	83697 83834	P-6011 C-1706		T22R02 T20C52		P-2951 A-2931					
T121.....	7	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z4GT, 6AB5 (51)	23500MX AF6J	UP4045 UP3045		DY-40-450 DY-30-450		EL-4 EL-3		Chk Out		83834 On Spkr.	A-3878 P-6011	T22S47 T22R02		C-2975 A-2931							
T122.....	7	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6U5	23500CX 23500DX	PRS450-16 PRS450-8		BR1645 BR845		M-16-450 M-8-450		UT-16 UT-8		Pwr Out	83597 On Spkr.	A-3878 84540	T22S47 T22R02		P-2951 A-2931						
T131, T135.....	10	6SK7, 6SA7, 6SQ7, 6SF5, 25L6G, 25Z6G, 6U5, 6G5 (51)	23500DX 23500I-Z	PRS250-12 PRS250-20		BR125 BR2025		M-16-250 M-20-350		UT-122 TA-50 TA-202		Chk Out	A-3301	T22S60		A-2905							
X-131.....	10	6SK7, 6SA7, 6SQ7, 6SF5, 25L6G, 25Z6G, 6U5, 6G5	24-10	PRS250-12 PRS250-20		BR125 BR2025		M-16-250 M-20-350		UT-122 TA-50 TA-202		Chk Dut	84540 On Spkr.	A-3301	T22S60		A-2905						
T132.....	9	6SK7, 6SA7, 6H6, 6SF5, 6F6G, 6AF6G, 5Y3G (51)	24-10	PRS250-20		BR845		M-20-350		UT-8		Pwr Out	83412R On Spkr.	P-6011 A-3878	T22R02 T22S47		P-2951 A-2931						
T133.....	9	7B7, 7A8, 7C6, 7C7, 7G6G, 6ZY5G, 6AB5	24-14	PRS25-10		BR102A		M-10-25		TA-10		Chk Pwr In Out	57-2 84543-B On Spkr.	f. A-3857	f. T								
H134, H135.....	5	6K8, 6K7, 6Q7, 25L6G, 25Z6G, 10 Mid.	85039	AF88J	UP445	DY-2X40-450		EL-240															
H141.....	4	6D6, 6C6, 25L6G, 25Z5	23500A	PRS150-16	BR102A	M-10-25		TA-10															
TH150, H151.....	5	6A8, 6K7, 6Q7, 25L6G, 25Z6G	23500B	PRS25-10	BR102A	M-10-25		TA-10															
173.....	12	6SK7, 6SA7, 6SQ7, 25L6G, 25Z6G, 6U5	24-6	PRS25-10	AF6J	UF3045	DY-30-450	EL-3															
			24-14	PRS25-50	BR102A	M-10-25	TA-10																
			24-32	PRS25-50	BR502	M-50-25	TA-50																
G174, G175, (G170 Ser.) G184, G185, (G180 Ser.)	7	6K7, 6A8, 6Q7, 25L6, 25Z6G, 6G5	85007	PRS150-16 PRS150-40 PRS150-50	BR1615 BR4015 BR5015	M-16-150 M-40-150 M-50-150	UT-161 UT-401 UT-501	TA-10															
T186.....	6	1N5GT, 1A7GT, 1H5GT, 1Q5GT, 25Z6GT	24-37	PRS25-50	BR502	M-50-25	TA-50																
T187.....	6	1N5GT, 1A7GT, 1H5GT, 1Q5GT, 25Z6GT	24-37	PRS25-50	BR502	M-50-25	TA-50																
191.....	12	6SK7, 6SA7, 6SQ7, 25L6G, 25Z6G, 6U5 (51)	23500G 23600G	PRS25-50 AF88J	UP445	M-50-25 M-16-150	TA-50 EL-240	Chk Out	84571 On Spkr.	A-3306	T22S74		A-2905										
193, 194, Late.....	13	6SK7, 6SA7, 6SQ7, 25L6G, 25Z6G, 6SF5, 6U5 (51)	24-6	PRS150-16	BR1615	M-16-150	UT-161																
			24-32	PRS25-50	BR502	M-50-25	TA-50																
			24-37	PRS150-40	BR4015	M-40-150	UT-401																
D194.....	14	6SK7, 6SA7, 6SQ7, 25L6G, 25Z6G, 6U5, 6SC7, 6U5 (51)	24-32	PRS150-16	BR1615	M-16-150	UT-161																
			24-8	PRS25-19	BR102A	M-10-25	TA-10																
			24-14	PRS150-40	BR4015	M-40-150	UT-401																
FM200.....	18	6AC7/1852, 6SA7, 6J5, 6SK7, 6SJ7, 6H6, 6SQ7, 6L6, 5U4G, 6U5, 6G5 (72151, 51)	24-47	PRS25-50	BR502	M-50-25	TA-50																
			24-48	PRS450-40	BR4045	M-40-350	TA-401																
VX201, WX201, X201.....	5	6A7, 6D6, 75, 25L6, 25Z5	22481 85021 85014-B	PRS25-10 AF88J GL450-40	BR102A BRD2215 KR540	M-10-25 M-2X20-150 D-40-450	TA-10 TA-220 PLS-40	Out	On Spkr.	A-3876	T22S45		A-2928										
H224.....	11	5K7, 6R8, 6R7, 25L6G, 25Z6G, 6U5	23600B	AF88J	UP445	DY-2X40-450	EL-240																
G274, G284.....	7	6K7, 6A8, 6Q7, 25L6, 25Z6G, 6G5	23600A	AF444J	BR502	M-50-25	TA-50																
			22481	PRS150-16	BR1615	M-16-150	EL-311																
			85023	PRS25-10	BR102A	M-10-25	TA-10																
			85023	PRS150-50	BR5015	M-50-150	UT-501																
300.....	8	1A07, 7B7, 14H7, 7C7, 7A6, 35A5, 35Y4	24-37	PRS50-50	BR505	M-50-50	TA-550																
			24-28	PRS50-50	BR505	M-50-50	TA-550																
H324.....	11	(See Model H-224)																					
		7	6SG7, 65G1, 6SA7, 6SK7, 6SQ7, 25L6GT, 25Z6GT	24-32	PRS50-50	BR505	M-50-50	TA-550															
			24-28	PRS50-50	BR505	M-50-50	TA-550																
340.....	11	6SG7, 6SA7GT, 6J5, 67K7, 6SQ7, 6SF5GT, 25L6GT, 25Z6GT, 6U5	24-32	PRS25-50	BR502	M-50-25	TA-50																
			24-39	PRS25-50	BR1225	M-16-250	UT-122																
			85021	PRS150-20-20	BRD2215	M-2X20-150	TA-220																
			22481	PRS25-10	BR102A	M-10-25	TA-10																
			85014-B	GL450-40	KR540	D-40-450	PLS-40																
G352, VG352, WG352, G353.....	5	6A7, 6D6, 75, 25L6, 25Z5	24-37	PRS50-50	BR505	M-50-50	TA-550																
			24-28	PRS50-50	BR505	M-50-50	TA-550																
			85021	PRS150-20-20	BRD2215	M-2X20-150	TA-220																
			22481	PRS25-10	BR102A	M-10-25	TA-10																
			85014-B	GL450-40	KR540	D-40-450	PLS-40																

Section D IF CDILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photoact Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiat Part No.	Note				
1st.	73288C	16-6662		455				40884-A					Vol	83529B	T-103		A.	D13-137X		41	G1				Continued—	Pilot			
2nd.	73288C	16-6663						40888	T-1				Tone	84642	M-4-Z		A.	D13-123								T102			
1st.	73288E	16-5740		455				40884					Vol	83529B	T-1		A.	D13-137X		41	G1					T121			
2nd.	73288E	16-5742						41-8	T-1				Tone	792-9D	M-31-Z		A.	D13-116								T122			
1st.	73288E	16-5740											Vol	7-98	T-10		A.	D13-137X		41	G1								
2nd.	73288E	16-5742											Tone	87-1	M-4-Z		A.	D13-123		41	G1								
1st.	273-18	16-5740											Vol	3-2	T-10		A.	D13-137X		41	G1					T131, T135			
2nd.	273-19	16-5742																											
1st.	273-18	16-5740		455					8" Dyn.	ST-177				Vol	36-2	T-103		A.	D13-137X		41	G1					X131		
2nd.	273-19	16-5742																											
1st.	273-20	1-5740		455					40-2	T-17				Vol	-	T-3											T132		
2nd.	273-19	16-5742																											
1st.	273-21	1-6662		*5					41-10		F2		F2	Vol	3-8	T-10		A.	D13-137X		41	G1					H133		
2nd.	273-22	1-6663											Tone	37-3	M-81-Z		A.	D13-116											
1st.	73192A	1-5740		455					40816	ST-738				Vol	...29	T-103		A.	D13-137X		41	G1					H134, H135		
2nd.	73193	16-5742							40817	ST-174	12E25			Tone	83447	M-51-Z		A.	D13-128								H141		
1st.	+	16-5712		455					40852	ST-194	5E45			Vol	83625	M-60-Z		A.	D13-138		41	G1					TH150, H151		
2nd.	+	16-5714							40860	T-194	5E45			Vol	7-429	M-60-Z		A.	D13-1										
1st.	273-37	1-5740							40-8		F2		F2	Vol	3-0	T-103											173		
2nd.	273-38	1-742											Tone	3-3	M-81-Z														
1st.	72110	16-5740		456					40816	T-78	8E25			Vol	78714	M-79-Z		A.	D13-116		41	G1					G174, G175, (G170 Ser.), G184 G185 (G180 Ser.)		
2nd.	71532-B	16-5742												Tone	7-2	M-81-Z		A.	D13-139XX								T18		
1st.	273-12			262					41-4					V	3-4		A.												
2nd.	273-13																												
1st.	273-12			262					1-4	T-105		i														T187			
2nd.	273-13																												
1st.	73288F			455	t				40862	ST-173	12E15			Vol	...52 B	T-1		A.	D13-137X		41	G1					191		
2nd.	73288G	16-5742																											
1st.	73288F	16-5740		455	t				40862	1-13	1			Vol	...52B	T-1											193, 194 Late		
2nd.	73288G	16-5742												Bass	84826	M-7													
1st.	732	1-5742		455	t					ST-173	1			Mixer	83-29	-3		A.	D13-137		41	G1					0194		
2nd.	732	16-5742												V	84826	M-79-Z		A.	D13-137										
1st.	73-10			455	t	L-70		40-11		F2		F2		Treble	84826	M-79-Z											FM-200		
2nd.	73-10			8		4.3		40-10		F2		F2		Mic	36-7														
3rd.	73-12													Vol	236-5														
1st.	73-11													Tone	37-6	M- S		A.	D13-128		41	G1							
2nd.	73-9																												
1st.	73063-A								4-19	S-19	E			Vol	71615	M-51-Z		A.	D13-128								VX201, WX-201, X201		
2nd.	73010													Tone															
1st.		1-5740		55										F2		2	Vol	83529A	T-0		A.	D13-137X		41					H224
2nd.		16-5742												Tone	79209B	M- -Z		A.	D13-116										
1st.	72110			5										Vol	78714	M-81-Z											G274, G284		
2nd.	71532B													Tone	78821														
1st.	273-53			455										Vol	36-14	T-109		A.	D13-137X		41	G1					300		
2nd.	273-54			&										Tone	37-9	M-60-Z		A.	D13-133										
3rd.	273-55			5.4										F2			Vol	3-15	T-1								H324		
1st.	273-59			455					40-16		F2		F2	Tone	37-11	M- -											330		
2nd.	273-0			5					40-13		2			Tone	3-13	T-1											340		
1st.	273-51			16-5740										Vol	37-8	M-1-Z													
2nd.	273-52			16-5742										Tone															
1st.	73108A			456					0819	ST-3				F2			Vol	79561	**9		A.					G352, VG352			
2nd.	73104																Switch								WG352, G353				

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note				
PILOT—Continued	6	5K8, 6K7, 6Q7, 25L6G, 25Z6G, 6U5,	22481, 23500E	PRS25-10, AF6J		BR102A, UP3045	M-10-25, DV-30-450	TA-10, TA-10		Chk, Out	79029A, On Spkr.	C-1080, A-3876	T22S45		C-2977, A-2928												
H384, H385	7	6K7, 6K8, 6Q7, 25L6G, 25Z6G, 6U5	22481, 23500E	PRS25-10, AF88J		BR102A, UP4445	M-10-25, DV-2X40-450	TA-10, EL-240		Chk, Out	79029A, On Spkr.	C-1080, A-3876	T22S45		C-2977, A-2928												
403, 405	5	6A8, 6K7, 6Q7, 6F6, 5Y3G, 5W4	72353, 71045-A	PRS450-8, PRS25-10		BR845, BR102A, KRS58A	M-8-450, M-10-25, D-2X8-450	UT-8, TA-10, PLS-88		Pwr, Out	71336, On Spkr.	P-6119, A-3878	T22R02		A-2951, A-2931												
T411U	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	24-40	PRS450-40		BR4025	M-40-350	UT-402		Pwr	55-2, On Spkr.	A-3876	T22S45		A-2928												
423, 425	6	6K7, 6A8, 6Q7, 25L6G, 25Z6G	71675, 71676	PRS25-10-10		BRD202A	M-2X10-25	TA-110		Chk, Out	79029, On Spkr.	C-1082, A-3876	T22S45		C-2977, A-2928												
H454, H455	5	6K8, 6K7, 6Q7, 25L6G, 25Z6G	22481, 85039	PRS25-10, AF88J		BR102A, UP4445	M-10-25, DV-2X40-450	TA-10, EL-240		Chk, Out	79029A, On Spkr.	C-1082, A-3876	T22S45		C-2977, A-2928												
H474, H475	5	6K8, 6K7, 6Q7, 25L6G, 25Z6G	22481, 85039	PRS25-10, AF88J		BR102A, UP4445	M-10-25, DV-2X40-450	TA-10, EL-240		Chk, Out	79029A, On Spkr.	C-1082, A-3876	T22S45		C-2977, A-2928												
H484, H485		(See Model H-384)																									
T500 Series	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	24-61	AF64D4A		UP4CJ2	DY-303	EL-324		Out	On Spkr.	A-3876	T22S45		A-2928												
T-510, T511	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35L6GT, 35Z5GT (47)	24-40	PRS450-40		BR4025	M-40-350	UT-402		Out	TA0002	A-3876	T22S45		A-2928												
T521	8	6AG5, 6SB7Y, 26SG7, 6H6, 6S17, 25L6GT, 25Z6GT (47)	24-69			UP6CJ44, & BR4015	A4	DY-8040-150, & M-50-150	EL-26, & UT-501	Chk, Out	67-9, On Spkr.	C-2303, A-3876	T22S45		C-2974, A-2928												
T-530 Ser.	8	6SB7Y, 26SG7, 6SJ7, 6H5, 6S17, 25L6GT, 25Z6GT (47)	24-64, 24-Mfd	PRS25-25, PRS150-24		B5252A, BR2015	M-25-25, M-24-150	TA-25, UT-201		Chk, Out	57-9, On Spkr.	C-2303, A-3876	T22S45		C-2974, A-2928												
H554, H555	5	6K8, 6K7, 6Q7, 6F6G, 5Y3G, (51)	22481, 85024	PRS25-10		BR5015 & UP6CJ44	M-40-150, DY-8040-150	EL-51, TA-123		Chk, Out	83412-R, On Spkr.	P-6011, A-3876	T22R02, T22S45		P-2951, A-2928												
BG562, BG563, G562, G563	6	6A8G, 6K7G, 6H6G, 6J7G, 6F6G, 543G (51)	22481, 72353	PRS25-10, PRS450-8		BR252A, BR102A, KRS58A	M-25-25, M-10-23	TA-25, TA-10		Pwr, Out	71388, On Spkr.	A-3876	T22R02, T22S45		P-2951, A-2928												
H594, H597	9	6K8, 26K7, 6J7, 6H6, 6Q7G, 6F6G, 5Y3G, 6U5 (*51)	22481, 85018, 85040	71045-A, 71045-B		BR102A, KRS58A	M-10-25, D-2X8-450	TA-10, PLS-88		Chk, Pwr	79029B, On Spkr.	C-1080, A-3876	T22S45		A-2928, C-2977												
T601 (Pilotuner)	5	6BA6, 6BE6, 6AL5, (47)	24-77							Pwr	55-13																
TH650, H651	5	6A8, 6K7, 6Q7, 6F6G, 5Y3G, (51)	23500D	PRS450-8		BR845	M-8-450	UT-8		Pwr	79428R, On Spkr.	P-6119, A-3878	T22R02, T22S47		P-2951, A-2931												
H664, H665	6	6K8, 6K7, 6Q7G, 6F6G, 5Y3G, 6U5 (*51)	22481, 85024	PRS25-10		BR102A, EZ8845	M-10-25, DH-3X8-450SS	TA-10, TA-10		Pwr, Out	83412R, On Spkr.	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931												
H710	11	6K7, 6K8, 6J7, 6H6, 6R7, 26V6G, 5U4G, 6U5 (*51)	23500D, 85040	AF444J, UP11145		PR500B, BR102A	M-10-25	EL-310, TA-10		Chk, Pwr	83980, 83890R, On Spkr.	C-2303, P-6291	T22S47														
H762, H763	6	6K8, 6K7, 6Q7, 6F6G, 5Y3G, 6U5 (*51)	22481, 23500C	PRS25-10, PRS450-16		UP2245, BR102A, BR1645	DY-2X10-450, M-10-25	EL-220, TA-10		Out, Pwr	83690R, 83877, On Spkr.	A-3311, A-3878	T22S44, T22R02		A-2936, P-2951												
H874, H875, H974, H975	7	6K7, 6K8, 6Q7G, 6F6G, 5Y3G, 6U5 (*51)	22481, 85038	PRS450-8-8, PRS25-10		BR845, EZ8854	M-8-450, DY-2X8-450	UT-16, UT-88		Out, Pwr	83697, On Spkr.	A-3878	T22S47		A-2931												
TP1062	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	71045A, 23500E	AF6J		BR102A, KRS58A	M-10-25, D-2X8-450	TA-10, PLS-88		Chk, Out	79029B, On Spkr.	C-1080, A-3878	T22R04, T22S47		C-2977, A-2931												
T1151 (Early)	5	6SA7, 6SK7, 6SQ7, 25L6G, 25Z6G	23500J	PRS150-40		BR4015	M-40-150	UT-401		Out	83412R, On Spkr.	P-6011, A-3878	T22S47		A-2931												
T1151 (Late)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	23500J	PRS140-50		BR4015	M-50-140	UT-401		Out	On Spkr.	A-3876	T22S45		A-2928												
T1164	5	6K8, 6SK7, 6SQ7, 25L6G, 25Z6G	85035, 78589	PRS150-30-30		EZ8825, PRD3315	M-2X8-250, M-2X30-150	LM-28, TA-330		Out	On Spkr.	A-3876	T22S45		A-2928												
T1252	5	6SA7, 6SK7, 6SQ7, 25L6G, 25Z6G	23500E	AF6J		UP3045	DY-30-450	EL-3		Out	On Spkr.	A-3876	T22S45		A-2928												
X1252	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	23500E	AF6J		UP3045	DY-30-450	EL-3		Out	On Spkr.	A-3876	T22S45		A-2928												
T1264	6	6SA7, 6SK7, 6SQ7, 25L6G, 25Z6G, 6U5 (*51)	23500EX	AF6J		UP3045	DY-30-450	EL-3		Chk	83834, On Spkr.	C-1708, A-3878	T22S45		C-2975, A-2928												
T1351	5	1A7G, 1N5G, 1H5G, 1T5GT, 11726G	23500J	PRS150-40		BR4015, BR502	M-40-150, M-50-25	UT-401, TA-50		Out	On Spkr.	A-3876	T22S45		A-2928												
T1364, T1464 (Early), I464	10	12SA7, 12SK7, 12SQ7, 12SP07, 23500E, 23500GT, 6AB5, (*51)	23500E	AF6J		UP3045	DY-30-450	EL-3		Chk	84463, 84498, On Spkr.	A-3301, A-3306	T22S48		A-2934, A-2905												
1424, Phono, T1424 Ser.	12	6SK7, 6SA7, 6SQ7, 125L6G, 25Z6G, 6U5 (*51)	23500JX, 23500B	PRS150-50, PRS25-10		BR5015, BR102A	M-50-150, M-10-25	UT-501, TA-10		Chk	84571, On Spkr.	A-3301, A-3306	T22S48		A-2905, A-2905												
T1451	5	1A7G, 1N5G, 1H5G, 1Q5G, 25Z6G, 11726G	23500J	PRS150-40		BR4015, BR502	M-40-150, M-50-25	UT-401, TA-50		Chk	84115, 84564, On Spkr.	A-3822, A-3822	T22S47		A-2932, A-2905												
X1451	7	1N5G, 1A7G, 1H5G, 1Q5G, 25Z6G, 11726G	23500B, 40-40 Mfd	PRS25-50, PRS150-40		BR502, BR102A	M-50-25, M-10-25	TA-50, TA-10		Relay Input Out	84564, 84538B, On Spkr.	A-3822, A-3822	T22S47		747 & 7482, 2F4L, 3M30												

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL		
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiar Part No.	Note	Phonist Set No.
1st.	73192C	16-5740		455				40853	ST-188		6E25		Vol	79540	M-64-Z	A..	D13-130		41	G1				Co ntin ued—	Pilot	
2nd.	73193	16-5742						40816	ST-738		8E25		Vol	83529A	T-10		D13-131		'!						H372, H373	
1st.	73192B	16-5740		455				40817	ST-174		12E25		Tone	83447A	M-51		D13-132								H384, H385	
2nd.	73193	16-5742						40735	ST-168				Vol	78-*	M-79	A..	D13-133								403, 405	
1st.	72060 (CR)	16-5740		456									Tone	78-4	M-51		D13-134									
2nd.	72062B	16-5740																								
2nd.	71167	16-5714		455				40-26	ST-194		5 4		Vol	38	M-60	A..	D13-135		41	G1					15.	
1st.	273-14	16-											Tone	37-14	M-81		D13-136								T411U	
2nd.	273-93	16- D							40818	T-188		E25		Vol	79896	M-79		D13-137								423, 425
1st.	72110								40855	T-738		E25		Tone	78987	M-51	A..	D13-128		41	G1					H454, H455
2nd.	71532-B	16-5740		455				40817	ST-174		12E25		Vol	83529C	T-103		D13-129		41	G1					H474, H475	
1st.	73192C	16-5740						40816	ST-738		8E25		Tone	83447C	M-51		D13-130		41	G1						
2nd.	73193	16-5742						40817	ST-174		12E25		Vol	83529B	T-103	A..	D13-131									
1st.	73192A	16-5740		455				40817	ST-174		1'		Tone	83447	M-51		D13-132									
2nd.	73193	16-5742																								
1st.	273-91	16-6658		455				40-19	ST-195		4 7		Vol	36-24	M-60											
2nd.	273-93	16-6666																								
1st.	273-4	16-6658		455				40-26	ST-194		5E45		Vof	36-5	M-60	A..	D13-133		41	G1					5.	
2nd.	273-93	16-						41-20					Tone	37-14	M-81		D13-116								9.	
1st.	273-106	16-											Vof	36-6	AM-63	A..	D13-137		E	41	G1					
2nd.	273-75	&											Tone	37-6	AM-81		D13-116								T521	
3rd.	279-25			10.7																						
1st.	273-73			455				4-16	ST-115		8A21		Vol	36-21	M-60										12.	
2nd.	273-74												Tone	37-12	Z										T530 Ser.	
3rd.	273-75			10.7																				H554, H555		
1st.	73192C	16-5740		455				40850	T-736		1		Vol	83529C	M-51	A..	D13-128								BG562, BG563,	
2nd.	73193	16-5742						40784	ST-173		12.15		Tone	83447C	M-79		D13-128								G562, G563	
1st.	73108B	16-5740		456									Vol	79158	M-51		D13-128								H594, GM597	
2nd.	73103	16-5714											Tone	79159												
1st.	73166	16-5740		455				40849	T-177		1		Vol	83364	T-103		D13-137X									
2nd.	73166	16-5742						40784	T-173		1		S	1												
1st.	273-111			7																				28.		
2nd.	273-119																							F601 (Pilotturner)		
1st.	73108B	16-5740		455				40854	T-167		1		Vol	74	M-0	A..	D13-133		41	G1					H650, H651	
2nd.	73103	16-5742											Tone	74	M-10		D13-137X		41	G1					H664, H665	
1st.	73192	16-5740		455				40850	T-736		12E15		Vol	83447-B	M-51	A..	D13-128								H710	
2nd.	73193	16-5742						40784	ST-173		12E15		Tone	83264	T-10		D13-137X									
1st.	73166	16-5740		455				40865	10E60		1		Vol	83871	M-7		D13-133								H762, H763	
2nd.	73166	6-574						40866	1		1		Tone	83870	Z											
1st.	73192C			455				40851	1				Vol	429	M-60											
2nd.	73193	16-5742											Tone	429	Z											
1st.	73192B	16-5740		4				40849	1		12E15		Vol	8-2	T-	A..	D13-137X		41	G1					H874, H875,	
2nd.	73193	16-5742						40784	T-173		12E15		Tone	83447A	M-51		D13-128								H974, H975	
1st.	73192D	1	-740	4				40860	ST-115		8A21		Vol	79429B	M-60	A..	D13-133								TP1062	
2nd.	73267							40869	ST-194		5E45		Tone	83447F	M-51		D13-128								T1151 Early	
1st.	3192D	1	-740	4				40869	ST-194		5E45		Vol	79429B	M-60		D13-133								T1151 Late	
2nd.	73267																									
1st.	73192D	1	-740	455				40869	ST-194		5E45		Vol	79429B	M-60	A..	D13-133								T1164	
2nd.	73267	16-5740											Tone	79429B	M-60		D13-137		41	G1					T1252	
1st.	73288B	16-5740		455				40879	ST-189		8E25		Vol	8		A..	D13-137		41	G1					X1252	
2nd.	73289B	16-5742						40869	ST-194		8E25		Tone	79429B	V-6		D13-137		41	G1					T1264	
1st.	73192D	16-5740		455				40869	ST-194		8E25		Vol	79429B	M-60		D13-137								T1351	
2nd.	73267												Tone	79429B	M-60	A..	D13-128									
1st.	73192D	16-5740		455				40855	ST-738		8E25		Vol	83529D	M-63		D13-137								T1364, T1464	
2nd.	73193	16-5742						40874	T-101		1		Tone	83447D	M-51		D13-128								(Early), T1464	
1st.	73192-D	16-740		45				40874	T-101		1		Vol	84209	M-6											
2nd.	73193	16-5742																								
1st.	73192-D	16-740		45				40866	T-17		10E15		F2	Vol	78714B	M-63	A..	D13-137		41	G1					T1424 Phono.,
2nd.	73193	16-5742											Tone	79209	M-81		D13-116								T1424 Ser.	
1st.	73274			4 5				40877	ST-105		S2A1		Vol	84105	M-66	A2..	D1	1		4	G1				T1451	
2nd.	73274							40885	ST-108		6A1		Vol	811	V-6		D1	1		4	G1				X1451	
1st.	733 5A			262				40885	ST-108		6A1		Vol	811	V-6		D1	1		4	G1					
2nd.	73-35ii																									

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
PILOT—Continued	5	1A7G, 1N5G, 1H5G, 1C5G, 25Z6G.	23500B.	PRS25-10.		BR102A.		M-10-25.		TA-10.		Chk Out	84115.	C-1001.		C-2993.		745 & 2482.		8F.		2B30.		
XI452, X1453.	7	1N5G, 1A7G, 1H5G, 1Q5GT, 117Z6G.	23500G.	PRS150-40.		BR4015.		M-40-150.		UT-401.		Chk Relay Input	84115.	C-1001.		C-2993.		747 & 2482.		2F4L.		2M30.		
I524 Ser.	10	6SK7, 6SA7, 6H6, 6SF5, 6V6G, 5U4, 6U5.	84045.									Chk Pwr	84564.	A-3831.		T22S47.		A-2938.		†.		†.		
T1564.	6	6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G, 6U5.	23500D.	PRS450-8.		BR845.		M-8-450.		UT-8.		Out Pwr	84115.	A-3311.		T22S64.		A-2936.						
T1580, T1680, T1584, T1684.	8	6SA7, 6SK7, 6R7G, 25L6G, 5U27G, 6U5.	23503E.	PRS450-16.		BR1645.		M-16-450.		UT-16.		Out Chk	84564.	P-6011.		T22R02.		P-2951.						
X1584, X1684.	8	12SA7, 12SK7, 12SQ7, 25OL6GT, 25Z4GT, 6U5 ('51).	23500E.	AF6J.		UP3045.		DY-30-450.		EL-3.		Out Chk	84115.	A-3831.		T22S47.		A-2938.						
T1660, T1664, T1764.	7	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6U5 ('51).	23500D.	PRS450-8.		BR845.		M-8-450.		UT-8.		Out Pwr	84115.	A-3311.		T22S60.		A-2905.						
T1854.	5	6K8, 6SK7, 6SQ7, 6F6G, 5Y3G.	23500D.	PRS450-8.		BR845.		M-8-450.		UT-16.		Out Pwr	84115.	P-6011.		T22R02.		P-2951.						
TP1862, H6204.		(See Model TP-1062)										Out Chk	84115.	A-3301.		T22S60.		A-2905.						
	7	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6U5 ('51).	23500B.	PRS25-10.		UP6CJ20.		DY-3X20-450.		TA-10.		Input Out	79029A.	C-1080.		T20D75.		C-2977.						
						BR102A.		M-10-25.				On Sprk.	83748.	A-4713.		T22S47.		A-2920.						
												On Sprk.	A-3831.					A-2938.						
PONTIAC																								
983569.	7	6U7G, 6A8G, 6R7G, 6J5G, 6N7G, 0Z4G.	1212274.									Pwr In	1211589.											
983570, 983616.	6	6K7G, 6J7G, 6Q7G, 6F6G, 0Z4G.	7232668.	PRSB450-8-8		EZ588.		DH-2X8-450SS.		TU-28.		Out Chk	1210546.	A-2201.		T22S66.		A-2901.						
983617.		(See Model 983569)										Out Pwr	1211612.											
983667.	7	6K7, 6A8, 6R7, 6Z7G, 6V6G.	1213459.	AF22J4A.		UPII145C.		DY-316.		EL-202.		Pwr Out	1211589.	A-3311.		T22S64.		A-2936.						
983679.	7	7A7, 7B8, 7E7, 7F7, 7C5, 0Z4 ('55).	7238830.	AF22J4A.		UPIII145C.		DY-316.		EL-202.		Pwr Out	1213643.	A-3311.		T22S64.		A-2936.						
983680.	5	7A7, 7A8, 7B6, 7C5, 0Z4G.	1213665.	AF44J4A.		UP22245C.					Pwr Out	1213659.	A-3377.		T22S46.		A-2930.							
983705.	7	6SK7, 6SA7, 6SQ7, 6SF5, 6V6G.	1214202.	AF44J4A.		UP2245C.		DY-315.		EL-250.		Chk Out	1213669.	A-3877.		T22S46.		A-2930.						
983775.	5	7A7, 7A8, 7B6, 7C5, 0Z4G.	1213665.	AF44J4A.		BRD202A.		M-2X10-25.		TA-110.		Out Chk	1214200.	A-3311.		T22S64.		A-2936.						
983776.	7	7A7, 7B8, 7E7, 7F7, 7C5, 0Z4.	7238830.	AF22J4A.		UP1145C.		DY-316.		EL-202.		Out Pwr	1214391.	A-3877.		T22S46.		A-2930.						
983777.	7	6K7, 6SA7, 6SK7, 6SQ7, 6SF5, 6V6G ('51).	1214489.	AF22J4A.		UPII145C.		DY-316.		EL-202.		Out Pwr	1214488.	A-3823.	B3	T22S48.		A-2936.						
983910.	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 0Z4 ('44).	1214490.	AF32K4A.		UP43145C.		DY-406.		EL-424.		Out Pwr	1214489.	A-3311.		T22S64.		A-2936.						
983911.	7	7A7, 7B8, 7E7, 7F7, 7C5, 0Z4 ('44).	7238830.	AF44J4A.		UP2235C.		DY-310.		EL-153.		Out Pwr	1214498.	A-3877.		T22S46.		A-2930.						
983912.	8	6K7, 6A7, 6SK7, 6SQ7, 6V6GT, 0Z4 ('51).	1216122.	AF32K4A.		UP2235C.		DY-310.		EL-153.		Out Pwr	12145918.	A-3877.		T22R20.		A-2930.						
984170.	5	7Q7, 7A7, 7V6, 7C5, 0Z4G ('44).	1213868.	AF32K4A.		UP2235C.		DY-310.		EL-153.		Out Pwr	1214488.	A-3823.	B3	T22S48.		A-2936.						
984171.	7	7A7, 7B8, 7E7, 7F7, 7C5, 0Z4 ('44).	7238830.	AF44J & PRS25-25.		UP4CJ13.		DY-313.		EL-353.		Out Pwr	1214488.	A-3877.		T22S46.		A-2930.						
984172.	8	6K7, 6SA7, 6SK7, 6SQ7, 6V6GT, 0Z4 ('51).	1216122.	AF32K4A.		UP2235C.		DY-310.		EL-153.		Out Pwr	1215918.	A-3877.		T22R20.		A-2930.						
PREMIER																								
15LW.	5	14Q7, 7B7, 14B6, 50A5, 35Y4 (47).	30, 30, 30 Mfd.	PRSA150-40-40		BRD3315.		M-2X30-150.		TA-330.		Out	DX5U44.	A-3876.		T22S45.		A-2928.						
						BR3015.		M-30-150.		UT-301.		Out												
						BR505.		M-50-50.		TA-550.		Out												
PURE OIL CO.—		(See Puritan)																						
PURITAN																								
501, 501X, 502, 502X.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT ('47).	45X341.	PRS150-40-40.		EZ5515.		DHN-2X50-150.		TA-530.		Out	51X122.	A-3876.		T22S45.		A-2928.						
503, 503W.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT ('47).	45X341.	PRS150-40-40.		EZ5515.		D5B-2X50-150.		TA-530.		Out	51X123.	A-3876.		T22S45.		A-2928.						
504, 504W.	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT ('47).	45X346.			UP43145C.		DY-2X40-450, /20-25.		EL-330.		Pwr Out	53X28.	A-3823.		T22S47.		A-2930.						
506X, 507X.	6	12SA7, 12SK7, 12SQ7, 35Z5GT ('47).	500256.	AF88D.		UP4215.		DY-40+20-150.		EL-24.		Pwr Out	504244.	A-3330.										

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radial Part No.	Note	Photolab Part No.			
1st.	73277			455				40872	ST-105		5A1		Vol	84105	M-66-Z		A2		D13-139		42	G1				Continued—	PILOT T1452		
2nd.	73274							40885	ST-108		6A1		Vol	+	M-66-Z		A2		D13-139		42	G1					X1452, X1453		
1st.	73335A			252				40886			10E10		Vol	83529A	T-103		A		D13-137X		41	G1					1524 Ser.		
2nd.	73335B							40887			12E10		Tone	84638															
1st.	73192-2D	16-5740		455				40886			8E10		Vol	83529D	M-63-Z		A		D13-137		41	G1					T1564		
2nd.	73193	16-5742						40887					Tone	83447D	M-51-Z		A		S13-128		41	G1							
1st.	73288B	16-5740		455				40885	ST-736		F2		Vol	78986 B (or)	83529D	M-63-Z	A		D13-137		41	G1					T1580, T1584, T1680, T1684		
2nd.	73288B	16-5742						40875					Tone	83447D	M-51-Z		A		D13-128		41	G1							
1st.	73290	16-5740		455							F2		Vol	83529D	M-63-Z		A		D13-137		41	G1					X1584, X1684		
2nd.	73291	16-5742											Tone	83447D	M-51-Z		A		D13-128		41	G1							
1st.	73192D	16-5740		455				40849			F2		Vol	83529F	M-63-Z		A		D13-137		41	G1					T1660, T1664, T1764		
2nd.	73193	16-5742						40856B			F2		Tone	83447E	M-63-Z		A		S13-128		41	G1					T1854		
1st.	73288B	16-6682		455				40884					Vol	83529E	M-63-Z				D13-137		41	G1							
2nd.	73288B	16-6683																								(See TP 1062)	TP1862 H5204		
1st.	73192-2C	16-5740		455				40859	ST-115		8A21		Vol	83763	T-112		A2		D18-137X		42	G1							
2nd.	73193	16-5742											Tone	83447C	M-51-Z				D13-128										
1st.	1212276	16-6652		262				501480	ST-115		F8	8EV6		Vol	1210545	SD-78	DFS-½			DC13-133X		G1	5C50673					PONTIAC 983569	
2nd.	1210550																										983570, 983616		
1st.	7232710	16-6652		262							F2		Vol	7232384	SD-78	DFS-½			DC13-133X		G1	5C50673							
2nd.	7232711																												
1st.	1213467	16-6652		260				1213458	ST-115		F8	8A21		Vol & Tone	1213425								5C53183					See Model 983569	
2nd.	1213468							503376	ST-115		F8	8EV6		Va. & Tone	7238529														983667
1st.	7239010	16-6652		260				7238972	ST-115		8A21		Tone															983679	
2nd.	7238652												Val	1213667														983680	
1st.	1213662	16-6652		260				1213668	ST-105		F8	5EV6		Vol & Tone	1214171														983705
1st.	1214162	16-6652		260				1214198	ST-115		8A21		Va. & Tone	1214388															983775
2nd.	1214163							1214389	ST-108		F8	GEV6		Vol & Tone	1214388														
1st.	1214384	16-6652		260									Val	7240703															983776
1st.	7241139	16-6652		250				7241217	ST-115		8A21		Vol & Tone	7240407															983777
2nd.	7241140							1214829	ST-115		8A21		Va. & Tone	1214829															983911
1st.	1214491	16-6652		260				1214389	ST-108		F8	GEV6		Vol & Tone	1214388														983912
2nd.	1214492							7242532	ST-115		8EV6		Vcl & Tone	1215806															984172
1st.	1215916	16-6652		260				1217417	ST-110		F6	6A15		Vol & Tone	1216541														984170
2nd.	1215917							7242532	ST-115		8A21		Vcl & Tone	7242017															984171
1st.	7242079	16-6652		262				1215808			69EV6		Val & Tone	1215806															984172
2nd.	7242533																												
1st.	1214491	16-6652		260				1214389	ST-108		F6	GEV6		Vol & Tone	1216541														984170
2nd.	1214492							7242110	ST-115		8A21		Vcl & Tone	7242017														984171	
1st.	1215916	16-6652		260				1214389	ST-108		F8	EV6		Val & Tone	1215806														984172
2nd.	1215917							7242532	ST-115		69EV6		Vcl & Tone	1215806															
1st.	7242079	16-6652		260				1214389	ST-108		F13	F13	Val & Tone	1215806															PREMIER 15LW
2nd.	7242533																												
1st.	1214491	16-6652		260				1214389	ST-108		F8	EV6		Val & Tone	1215806														PURE OIL CO.
2nd.	1214492							7242532	ST-115		69EV6		Vcl & Tone	1215806															
1st.	9A1808	16-6652		455				12A432	ST-107		5A15		Vol	36X352	AM-60-Z	KSS-3	A		D13-133	E	41	G1						4... PURITAN 501, 501X, 502,	
2nd.	9A1809	16-6660						12A438	ST-105		5A1		Vol	36X352	AM-60-Z	KSS-3	A		D13-133	E	41	G1						503, 503W	
1st.	9A1808	16-6658	6. I.	205				12A442	ST-110		6A15		Vol	36X354	AT-92	KSS-3	A	G10	D13-133X	E	41	G10						5... 504, 504W	
2nd.	9A1809	16-6650						W-502998	ST-101		12A4		Tone	40X280	AM-67-Z	KSS-3	A	G11	D13-140	E	41	G11						3... 506X, 507X	
1st.	9A1814	16-6658		455				R-502998			F13		Vol	502145	AM-60-Z	KSS-3	A		D13-133	E	41								
2nd.	9A1815	16-6650						A-502998			F13																		
1st.	502102	16-6658		455																									
2nd.	502103	16-6660																											

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS										Section B TRANSFORMERS								Section C BATTERIES			
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	No. 1	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.	Part No.	Part No.		Part No.	Part No.	Part No.	Part No.		Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"		
PURITAN—Continued	7	6SK7, 6SA7, 6S07, 6SJ7, 6K6GT/G, 5Y3GT/G (44)	502207	AF22J4A		UP6CJ13		DY-2X20-400/20-25		EL-312		Pwr Dut	502174, 504124, 504208, 504206	P-6120, A-3878	T22R04, T22S47	B22	P-2952, A-2931							
508.	6	1A7GT, 21N6GT, 1H5GT, 3Q5GT, 11Z26GT	40, 40, 40 Mfd	AF88ED4A, PRSA25-25		UP5515C, BR252A		DY-419, M-25-25		EL-443, TA-25		Dut Dut	TA7-1	A-3879	T22S47	B22	A-2932	748-482		2G3, 2M30				
509.	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (51)	80, 40 Mfd, 20 Mfd	PRSA80-40-150, PRS25-25	A4	EZ53215C		DS8804020-150		TA-440, TA-240		Dut Dut		A-3876	T22S45	B3	A-2928	B3						
R. C. A. 1X, 1X2, 1AX, 1AX2.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	36301	PRSA150-50-50		BRD5515		M-2X50-150		TA-505		Out Out	37912, 37912	A-3330, A-3876	T22S45	B23	A-3031, A-2928	B23						
HF-1.	8	6A8, 6K7, 6R7, 26J5, 26F6, 5T4 (46)	30105, 5212, 14531	GL450-16, GL450-16, GL450-30		KRS16A		D-16-450, D-16-450, D-30-450		PLS-16, PLS-16, PLS-16		Pwr Out	11211, 31062	P-6013	T22R05		P-2953							
QB-1.	5	6SA7, 6S7, 6T7G, 6W7G, 6Z7G	37250, 37367, 32405	PRS250-20, PRS450-30		BR2025, BR3045		M-20-350, M-30-450		UT-202, UT-30, UT-203		Driver Pwr Out	37898, 35544, 37924	A-4713, A-3848	T20D76		A-2922							
HF-2, HF-4.	12	6K7, 6A8, 6J7, 6R7, 5J5, 26F6, 6U5, 5T4 (44 & 47)	31553, 31495	PRS350-24, PRS450-20		EZ5116, BR2045		M-20-450		UT-1616, UT-20		Pwr Out	31225, 31557	A-3848	T22S47		A-2900							
QB2, QB6.	6	1R521N5GT, 1H5GT, 1A5GT, 1G6G	33790	AF66D		UP3315		DY-2X30-150		EL-230		In Dut	35941, 35941	A-4713, A-3831	T20D75, T22S48		A-2920, A-2938	758		.17GD60				
QU2C, QU2M.	6	6SA7, 6SK7, 6S07, 6AD7G, 6F6G, 5Y3G (51)	33014	AF44AJ4A		UP22245C						Pwr Out	14534, 14534	P-6011, A-3311	T22R02, T22S64		P-2951, A-2936							
QB3.	7	6S7, 6SA7, 6T7G, 6W7G, 6N5, 6Z7G (47)	32152	UP15D35				DY-2X15-350		EL-254		Driver Out	37898, 37899	A-4713, A-3848	T20D76, T22S47		A-2922, A-2900							
QU3C, QU3M.	6	6SA7, 6SK7, 6S07, 6AD7G, 6F6G, 5Y3G (51)	33014	AF44AJ4A		UP22245C						Pwr Out	32911, 14534	P-6011, A-3311	T22R02, T22S64		P-2951, A-2936							
4QB, 4QB4.	4	1A7G, 1N5G, 1H5G, 1C5G	33790	AF66D		UP3315		DY-2X30-150		EL-230		Out Out	33805, 33805	A-3878, A-3878	T22S47		A-2931	758		.17GD60				
5Q1.	6	6A8, 6K7, 6Q7G, 6F6G, 5Y3G (46)	11203, 30577	GL450-10, PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Dut	30571, 14615 or 14835	P-6011, A-3878	T22R02		P-2951							
5Q2.	5	6A8G, 6K7, 6Q7G, 6F6G, 5Y3G (44)	11203, 30577	GL450-10, PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	30571, 14355	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
5Q2X.	5	6K8, 6K7, 6Q7G, 25L6G, 25Z6G (47)	14773, 14377, 32222	GL450-15, GL450-15, GL450-15		KRS16A		D-16-450, D-16-450, D-16-450		PLS-16, PLS-16, PLS-16		Out Out	14628, 14628	A-3876, A-3876	T22S45		A-2928							
5Q4.	5	6K8, 6K7, 6Q7G, 6K6G, 5Y3G (44)	31946	AF22J4A		UPI145C		DY-2X15-350, DY-316		EL-254, EL-202		Pwr Out	31945, 14355	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
5Q5 (Ch. RC-477).	5	6SA7, 6K7, 6S07, 6F6G, 5Y3G (44)	32240	AF22J4A		UPI145C		DY-316		EL-202		Pwr Out	32911, 32905	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
5Q5, 5Q55, 5Q56 (Ch. RC-396).	5	6SA7, 6K7, 6S07, 6F6G, 5Y3G (44)	32240	AF22J4A		UPI145C		DY-316		EL-202		Pwr Out	32911, 32905	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
5Q6.	5	6SA7, 6K7, 6S07, 25L6G, 25Z6G (47)	32851	AF84D4A		UP4215C		DY-305		EL-343		Out Out	32911, 32924	A-3878, A-3878	T22S45		A-2928							
5Q8.	5	6SA7, 6K7, 6S07, 25L6G, 25Z6G	32826	AF88J4A		UP4445C		DY-314				Chk Out	32709, 32029	C-1080, A-3876	T22S45		C-2977, A-2928							
5Q12A.	5	6SA7, 6K7, 6S07, 6F6G, 5Y3G...	32240	AF22J4A		UP1145C		DY-316		EL-202		Pwr Out	32611, 32905	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
5Q12.	5	6SA7, 6K7, 6S07, 6F6G, 5Y3G...	32240	AF22J4A		UP1145C		DY-316		EL-202		Pwr Out	32811, 32905	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
5Q66.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	35747									Out Out	32911, 35834	A-3330, A-3330	T22S45		A-3031							
5X5 (Series).	5	12SA7, 12C8, 12SC7, 35L6GT, 35Z5GT (51)	33321	PRSA150-30-30		BR3315		M-2X30-150		TA-330		Out Out	32964, 32964	A-3876, A-3876	T22S45		A-2928							
QB5.	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT...	32548	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out Out	38300, 38300	A-3856, A-3856	T22S47		A-2900							
QU5.	8	6SA7, 6SK7, 6S07, 6AD7G, 6F6G, SU4G, (51, 55)	35016, 35017			UP3345		DY-2X30-450		EL-23		Pwr Out	36473, 36371	P-6012, A-3800	T22R04, T22S74		P-2952, A-3028							
6Q1.	6	6SA7, 6SK7, 6S07, 6F6G, 5Y3G (51)	33014	AF44AJ4A		UP22245C						Pwr Out	31733, 32905	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
6Q4.	6	6SA7, 6SK7, 6S07, 6F6G, 5Y3G	33014	AF44AJ4A		UP22245C						Pwr Out	31733, 32905	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
6Q4X.	6	6SK7, 6SA7, 6S07, 25L6G, 25Z6G	33824									Chk Out	32709, 33826	C-1080, A-3876	T22S45		C-2977, A-2928							
6Q7.	6	6SA7, 6K7, 6S07, 6F6G, 5Y3G, 6E5 (44)	32240	AF22J4A		UP1145C		DY-316		EL-202		Pwr Out	32911, 32911	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
6Q8, 6QK8.	6	6SA7, 6K7, 6S07, 6F6G, 5Y3G, 6E5 (44)	32240	AF22J4A		UP1145C		DY-316		EL-202		Pwr Out	32905, 32911	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
6QU.	6	6SA7, 6K7, 6S07, 6F6G, 5Y3G, 6E5 (44)	32240	AF22J4A		UP1145C		DY-316		EL-202		Pwr Out	32905, 32911	P-6011, A-3878	T22R02, T22S47		P-2951, A-2931							
6X2.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36301	PRSA150-50-50		BRD5515		M-2X30-150		TA-505		Out Out	36800, 38994	A-3330, A-3876	T22S45		A-3031, A-2928							

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL				
Use	Mfr. Part No.	Meisner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quarm Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photostat Set No.
1st. 2nd.	502102 502103	16-6658. 16-6660.		455				D504205. M504205 R504205	ST-567	F13		F13	Vol	502117.	AM-60-Z	KSS-3	A.		D13-133	E	41			Continued— 4...	PURITAN 508	
1st. 2nd.	TM2-12 TM2-13	16-6658. 16-6670.		455				EH6-1	ST-105				Vol		AM-60-Z	KSS-3	A.		D13-133	E	41				26.	509
1st. 2nd.	TM2-10 TM2-11	16-6658. 16-6670.		455				EH6-1	ST-105				Vol	RF5-2	AM-60-Z	KSS-3	A.		D13-133	E	41				25.	515
1st. 2nd.	36232. 37364.	16-6662.		455				RL-81B-2 RL-86A3 RL-86A1 RL-86B1 RL-86B4	ST-105 ST-194	F13		F13	Vol	35344.	M-60-Z		A.		D13-133		41	G1				R.C.A. 1X, 1X2, 1AX, 1AX2
1st. 2nd.	31063. 31064.			455				31072.	ST-173	12E15			Vol	31060.	T-115				D13-139X			G1				HF-1
1st. 2nd.	31065. 35636. 35628.	16-6662. 16-6663.		455				RL-92-5.	ST-105	5A1			Vol	37833.	T-78		A.		D13-133X		41	G1				QB1
1st. 2nd.	31565. 31551.	16-6662. 16-6663.		455				31556.	ST-173	12E15			Vol	31547. 31546	T-115		A.		D13-139X		41	G1				HF-2, HF-4
1st. 2nd.	31549. 35536.	16-6662. 16-6663.		455				RL-92-2.	ST-105	5A1			Vol	36063. 35062.	T-78		A2		D13-133X		42	G1				QB2, QB6
1st. 2nd.	35670. 35628.	16-6662. 16-6663.		455				RL-70W1		12E10			Vol	35620.	T-78		A.		D13-132X		41	G1				QU2C, QU2M
1st. 2nd.	35528. 35536.	16-6662. 16-6663.		455	33905. 32228.			RL-90-5.	ST-115	8A21			Vol	36035. 37897	M-60-Z		A.		D13-133		41	G1				QB3
1st. 2nd.	35528. 35536.	16-6662. 16-6663.		455	33905. 32228.			RL-63J6.	ST-736	8E10			Vol	37926. 35946	M-63-Z		A.		D13-133X		42	G1				QU3C, QU3M
1st. 2nd.	32263. 14281.	16-6662. 16-6663.		455	33905. 32228.			84556-6.	ST-105	5A1			Vol	36416. 33780	M-60-Z		A2		D13-133		42	G1				4QB, 4QB4
1st. 2nd.	32825. 14376.			455				84091 (or) 84001.	ST-166	6E10	F13		Vol	30575. 30574.	T-43		A6		D18-130X		47	G1				5Q1
1st. 2nd.	14308.			455				14360.	ST-736	8E10			Vol	30575. 30574.	M-63-Z		A6		D18-130X		47	G1				5Q2
1st. 2nd.	14376. 14308.			455				32248.	ST-736	8E10			Vol	30575. 30574.	T-43		A6		D18-130X		47	G1				5Q2X
1st. 2nd.	14376. 14308.			455				32248.	ST-736	8E10			Vol	30575. 30574.	M-63-Z		A6		D18-130X		47	G1				5Q4
1st. 2nd.	31267. 31268.			455				31824.	ST-736	8E10			Vol	30575. 30574.	T-43		A6		D18-130X		47	G1				5Q5 (Ch. RC-477)
1st. 2nd.	14376. 32825.	16-6662. 16-6663.		455				32902.	ST-167	5E18			Vol	32818. 34146	M-63-Z		A.		D13-137		41	G1				5Q5, 5Q55, 5Q56 (Ch. RC-396)
1st. 2nd.	14376. 32825.	16-6662. 16-6663.		455				32902.	ST-167	5E18			Vol	32818.	M-63-Z		A.		D13-137		41	G1				5Q6
1st. 2nd.	14376. 32825.			455				84557-2.	ST-165	5E10			Vol	348351.	T-112		A.		D18-137X		41	G1				5Q8
1st. 2nd.	14376. 32825.			455				32925.	ST-105	5A1			Vol	34224.	M-64-Z		A.		D13-137		41	G1				5Q12A
1st. 2nd.	14376. 32825.			455				32902.	ST-167	5E18			Vol	34224. 32818.	M-64-Z		A.		D13-137		41	G1				5Q12
1st. 2nd.	14376. 32825.			455				32933.	ST-168	6E18			Vol	34146. 32818.	M-60-Z		A.		D13-133		41	G1				5Q56
1st. 2nd.	14376. 32825.			455				32933.	ST-168	6E18			Vol	34247. 34851.	M-63-Z		A.		D18-137X		41	G1				5X5 (Series)
1st. 2nd.	14376. 32825.	16-6662. 16-6663.		455				84905-501.	ST-105	5A1			Vol	34247. 34851.	T-112		A.		D18-137X		41	G1				5Q5
1st. 2nd.	14376. 32825.	16-6662. 16-6663.		455				34569.	ST-194	5E45			Vol	34146. 32578.	M-60-Z		A.		D13-133		41	G1				5Q6
1st. 2nd.	35636. 36122.	16-6662. 16-6663.		455				RL-81B-2	ST-105	5A1			Vol	38406.	M-63-Z		A.		D13-137		41	G1				5Q7
1st. 2nd.	35636. 36122.	16-6662. 16-6663.		455				RL-70M-4 (or) RL-71A-4.	ST-173	12E15	F3		Vol	35620.	T-78		A.		D13-133X		41	G1				5Q8, 5QK8
1st. 2nd.	35636. 36122.	16-6662. 16-6663.		455				RL-79A-2.	ST-166	6E10			Vol	35629. 36109.	M-60-Z		A.		D13-133		41	G1				5Q9
1st. 2nd.	33759. 33761.			455				33828.	ST-108	6A1			Vol	33814.											6Q1	
1st. 2nd.	33759. 33826.			455				32933.	ST-168	6E18			Vol	33951.											6Q4	
1st. 2nd.	14376. 32825.			455				32933.	ST-168	6E18			Vol	32928.											6Q4X	
1st. 2nd.	14376. 32825.			455				32933.	ST-168	6E18			Vol	32928.											6Q7	
1st. 2nd.	14376. 32825.			455				32933.	ST-168	6E18			Vol	33553.											6QU	
1st. 2nd.	14376. 32825.			455				RL-81B-2	ST-105	5A1	F13	5E45	Vol	36242.	M-60-Z		A.		D13-133		41	G1				6X2

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	~ Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stanor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
		"A"																						
R.C.A.—Continued																								
HFG	I4	6K7, 6L7, 6J7, 6R7, 6H6, 6U5, 6J5, 6F6, 5J4 (44, 47)	14377, 5212, 14531, 33014	GL450-16, GL450-16, GL450-30, AF444J4A		KR516A, KR516A, KR530		D-16-450, D-16-450, D-30-450		PLS-16, PLS-16, PLS-30		Pwr Out	31691, 31687											
7Q4	7	6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G, 6U5/6G5 (44)	33014	UP22245C								Pwr Out	31735	P-6011	T22R02		P-2951							
7Q4X	7	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT, 6N5 (47)	35188									Out	14355	A-3878	T22S47		A-2931							
7QB	7	6S7G, 6SA7, 6T7G, 6W7G, 26L5G	32152	UP15D35								Out	35186	C-1333	T20C52		C-2981							
7QBK	7	6S7G, 6SA7, 6T7G, 6W7G, 26L5G	32152	UP15D35								Out	14628	A-3876	T22S45		A-2928							
7QK4	7	6SA7, 6SK7, 6SQ7, 6F6, 5Y3G, 6U5/6G5 (44)	33014	AF444J4A		UP22245C						Out	32368	†	†		†							
8M	5	6A8G, 6K7G, 6Q7G, 6K6G, 6X5G (51)	30634	EZ8845								Pwr Out	31725	P-6011	T22R02		P-2951							
8M1 (Run A)	6	6K7G, 6A8, 6K7, 6Q7G, 6K6G, 6X5G (51)	30797	PRS B450-8-8		EZ588						Pwr Out	14355	A-3878	T22S47		A-2931							
8M2	6	6K7G, 6A8, 6K7, 6Q7G, 6K6G, 6X5G (51)	30797	PRS B450-8-8		EZ588						Pwr Out	30633	†	†		†							
8M2 (Run "A")	6	6K7G, 6A8, 6K7, 6Q7G, 6K6G, 6X5G (51)	30797	PRS B450-8-8		EZ588						Pwr Out	30783	A-3878	T22S47		A-2931							
8M2 (Run B & C)	6	6K7G, 7A8, 6K7, 6Q7G, 6K6, 6X5G (51)	30797	PRS B450-8-8		EZ588						Pwr Out	30795	A-3878	T22S47		A-2931							
8M3	6	6K7G, 6A8, 6K7, 5R7G, 6J5, 6N7G (51)	14902, 30828	PRS25-10-10, G450-8-8		BRD202A, KRC588		M-2X10-25, D-2X8-450		TA-110, PLS-88		Pwr Out	31691	A-3878	T22S47		A-2931							
8M4	6	6K7G, 6A8, 6K7, 6R7, 6J5, 6N7G (51)	30828	G450-8-8		KRC588		D-2X8-450		PLS-88		Pwr Out	13111	†	†		†							
8Q1	7	6K7, 6L7, 6J7, 6Q7, 6F6G, 6U5, 5Y3G (44)	5212	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	30827	†	†		†							
8Q2	8	6SK7, 6SA7, 6B8, 6SC7, 6F6G, 5Y3G, 6U5 (44)	33014	AF444J4A		UP22245C						Pwr Out	12230	A-3301	T22S66		A-2901							
8Q4	8	6K7, 6L7, 6J7, 6Q7, 6F6G, 6U5, 5Y3G (44)	5212	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	14355	A-3878	T22S47		A-2931							
8QB, 8QBK	8	6S7G, 6D8G, 6J7, 6T7G, 6L5G, 6Z7G (44)	31778									Driver & Out	31784											
8QU5C, 8QU5M	8	6SK7, 6SA7, 6B8, 6SC7, 6F6G, 5Y3G, 6U5 (44) (47)	33014	AF444J4A		UP22245C						Pwr Out	31733	P-6120	T22R04		P-2952							
HF8	16	6K7, 6L7, 6J7, 6H6, 6U5, 6J5, 6L6, 6T4 (44) (47)	11203, 14377	GL450-10, GL450-16, GL450-16		KR516A, KR516A		D-16-450, D-16-450		PLS-16, PLS-16		Pwr Out	14534	A-3311	T22S64		A-2936							
PSU-8A	5	5Y3G	11203, 12SK7, 12SA7, 12SQ7, 35L6GT, 32575	GL450-10, PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	31685	P-6120	T22R04		P-2952							
U8	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	31598		EZ8845S							Pwr Out	31733	A-3876	T22S45		A-2928							
9M1	5	6A8, 6K7, 6Q7, 6F6, 6X5 (51)	31598		EZ588							Pwr Out	31597	†	†		†							
9M2	6	6K7, 6A8, 6Q7, 6F6, 6X5 (51)	31599	PRS B450-8-8								Pwr Out	31597	A-3878	T22S47		A-2931							
9Q1	9	6SK7, 6SA7, 6B8, 6SC7, 6F6G, 6U5/6G5, 5Y3G (51)	33014	AF444J4A		UP22245C						Pwr Out	31772	A-3878	T22S47		A-2931							
9Q4	9	6SK7, 6SA7, 6B8, 6SC7, 6F6G, 6U5/6G5, 5Y3G (44)	34393	AF444J		DY-3X20-450						Pwr Out	31723	P-6120	T22R04		P-2952							
9QK	9	6SK7, 6SA7, 6B8, 6SC7, 6F6G, 6U5/6G5, 5Y3G (51)	33014	AF444J4A		UP22245C						Pwr Out	14534	A-3311	T22S64		A-2936							
9SX1, 2, 3, 4, 5, 6, 7, 8	5	6A8, 6K7, 6Q7, 25L6, 25Z6 (40)	32386									Pwr Out	31733	P-6120	T22R04		P-2952							
9TX1, 2, 3, 4, 5	5	6A8, 6SK7, 6SQ7, 25L6, 25Z6 (47)	32576	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	32581	A-3876	T22S45		A-2928							
9TX21, 22, 23	5	6A8, 6SK7, 6SQ7, 25L6, 25Z6 (47)	32576	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	32581	A-3876	T22S45		A-2928							
9TX31, 32	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z4G (47)	32576	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	32964	A-3876	T22S45	B22	A-2928							
9TX33	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z4G (47)	32576	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	34174	A-3876	T22S45	B22	A-2928							
9TX50, 9TX50M (RC-435)	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	32576	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	33741	A-3876	T22S45	B22	A-2928							
9TX50, 9TX50M (RC-454)	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	34597	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	34174	A-3876	T22S45	B22	A-2928							
SX, 9X1, 2, 3, 4	4	6K7, 6J7, 25L6, 25Z6 (40)	31323	PRSA150-20		BR2015		M-20-150		UT-201		Out	31317	A-3876	T22S45		A-2928							
SX, 9X11, 12, 13, 14	4	6K7, 6J7, 25L6, 25Z6 (40)	31323	PRSA150-20		BR2015		M-20-150		UT-201		Out	32029	A-3876	T22S45		A-2928							
CV9	1	5Y3G	32223	AF3J		UP15D35		EL-15		EL-254		Pwr Out	32221											
QB9	5	6SA7, 6SS7, 6T7G, 6W7G, 6Z7G, 37867	32750	PRS250-20		BR2023		M-20-350		UT-202		Driver	37898	A-4713	T20D76		A-2922							
	5	6SA7, 6SS7, 6T7G, 6W7G, 6Z7G, 37867	32405	PRS350-24		BR2045		M-30-450		UT-30		Pwr Out	37939											
U9 (RC-482B)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	34873	PRSA150-40-40		BRD4415		M-20-350		UT-203		Pwr Out	37924	A-3848	T22S45	B22	A-2928							
	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	34873	PRSA150-40-40		BRD4415		M-2X40-150		TA-440		Pwr Out	34848	A-3876	T22S45	B22	A-2928							

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL											
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Project Set No.					
1st.	31746.			455				31718.	ST-173.		12E15.		Vol	31682.	T-95.				D18-137XX.		G1			Continued—	RCA.	HF6					
2nd.	31747.							34614.	ST-736.		I-10.		Vol	31339.	AT-1M.	RM-Tin.	A.		D11-1NCX.	I	41						7Q4				
3rd.	31748.		14.5					35114.	ST-115.		KA-1.		Vol	35187.	T-7M.				D13-133X.		G1						7Q4X				
1st.	33759.			455				35192.	ST-115.		8A21.		Vol	31776.	M-111-Z.				D13-139.		41	G1					7QB				
2nd.	33761.							31794.	ST-101.	F3	12A4.	F3	Vol	31776.	M-66-Z.				D13-139.		41	G1					7QBK				
2nd.	33761.			455				RL-111.4.			12E10.		Vol	34389.	AT-43.	RS-14.	A.		D18-130X.	F	41	G1					7QK4				
1st.	33761.												Vol	30628.	M-111-Z.				D13-133.		41	G1	1684.	5300.	H1		8M				
2nd.	30672.			460				30711.	ST-105.	I-18.	5EV6.		Vol	30628.	M-111-Z.																
1st.	30796.							30143.	ST-105.	I-18.	5EV6.		Vol	13420.														8M1 (Run A)			
2nd.	13693.							30817.		I-17.			Vol	12365.														8M2			
1st.	30796.							30807.		F2			Vol	12245.	M-51-Z.				D13-128.		G1							(Run A)			
2nd.	30483.			260						F2			Vol	12365.	M-51-Z.				D13-128.		G1							8M2			
1st.	30483.									F2			Vol	12249.	M-51-Z.																
1st.	30796.			260				30807.		F2			Vol	12365.	M-51-Z.														8M2 (Run B & C)		
2nd.	12229.									F2			Vol	12249.	M-51-Z.																
1st.	30796.			260				30807.		I-17.	5EV6.		Vol	13711.	M-51-Z.				D13-128.		G1							8M3			
2nd.	30483.									I-17.			Vol	13711.	M-51-Z.																
1st.	30796.			260				31111.	ST-115.	F4	RFVA.		Vol	13711.	M-51-Z.														8M4		
2nd.	30483.									F4			Vol	13711.	M-51-Z.																
1st.	31267.	11-51/4.		455				31814.					Vol	31450.	T-11M.				M1-110X.		42	G1						8Q1			
2nd.	31268.	16-5742.						RL-63-J6.	ST-736.	8E10.			Vol	31807.	M-66-Z.				D13-137.									8Q2			
1st.	32263.	16-540.		455									Vol	33814.															8Q4		
2nd.	14308.	16 514 <sup>2</sup> .		155				31821.					Vol	31450.	T-11M.				M1-130X.												
1st.	31064.												Vol	31776.	M-66-Z.																
3rd.	31268.												Vol	31777.	M-66-Z.		A.		D13-139.		41	G1									
1st.	31779.			455				31791.	ST-115.	F3	8A21.	3	Vol	31776.	T-11M.														HQB, 8QBK		
2nd.	31779.							31792.	ST-101.	F3	12A4.	3	Vol	31777.	M-66-Z.		A.		D13-139.		41	G1									
3rd.	31268.												Vol	31777.	M-66-Z.																
1st.	31746.			455				31718.	ST-173.	F3	12E15.	F3	Vol	31682.	T-95.				D18-137XX.		G1								HF-8		
2nd.	31749.												Vol	31682.	T-95.																
3rd.	31749.												Vol	31682.	T-95.																
1st.	32366.	16-6658.	455	431	31172.			31414.	ST-105.	I-18.	5EV6.		Vol	33504.	M-64-Z.		A.		D18-130.		41	G1						PSU-8A U8			
2nd.	32367.							30711.	ST-105.	F13	5EV6.	I-13.	Vol	31637.	M-60-Z.		A.		D13-133.		41	G1	13088.	W100.	H1		9M1				
1st.	14376.	16-6652.	455					31770.		F13	5EV6.	I-13.	Vol	31637.	M-60-Z.		A.		D13-133.		41	G1	13088.	W100.	H1		9M2				
2nd.	30672.							31771.		F13	5EV6.	I-13.	Vol	31638.	M-64-Z.		A.		D13-130.		41	G1	13088.	W100.	H1						
1st.	30957.			455				34671.	ST-716.	8E10.			Vol	34667.	T-43.		A.		D18-130X.		41	G1						9Q1			
2nd.	31593.							34671.	ST-716.	8E10.			Vol	34666.	T-43.		A.		D18-130X.		41	G1						9Q2			
1st.	32263.	16-6662.	455					31691.	ST-731.		8E10.		Vol	34389.	T-43.		A.		D18-130X.		41	G1						9Q4			
2nd.	14308.	16-6663.	455										Vol	34595.	T-43.		A.		D18-130X.		41	G1									
1st.	33759.			455				31761.			12E10.		Vol	34667.	T-43.		A.		D18-130X.		41	G1							9QK		
2nd.	33761.												Vol	34666.	T-43.		A.		D18-130X.		41	G1									
1st.	32263.	16-6662.	455	431				32330.	ST-196.	4E45.			Vol	32385.	M-64-Z.		A.		M13-133.		41	G1						9SX1, 2, 3, 4, 5, 6,			
2nd.	32383.	16-6650.						32513.	ST-196.	4E45.			Vol	32578.	M-64-Z.		A.		G22.	D13-130.		41	G1						7, 8		
1st.	32574.	16-6658.	455					32514.	ST-196.	4E45.			Vol	32580.	M-64-Z.		A.		G22.	D13-130.		41	22						9TX-21, 22, 23		
2nd.	32534.	16-6660.						32515.	ST-196.	4E45.			Vol	32578.	M-64-Z.		A.		G22.	D13-130.		41	22								
1st.	32574.	16-6653.	455					32963.	ST-196.	4E45.			Vol	33291.	M-64-Z.		A.		G22.	D13-130.		41	22						9TX-31, 32		
2nd.	32534.	16-6660.						39105-4.		F13	4E45.	F13	Vol	32578.	M-64-Z.		A.		G22.	D13-130.		41	22								
1st.	32966.	16-6658.	455	431				32578.	ST-196.	4E45.			Vol	33291.	M-64-Z.		A.		G22.	D13-130.		41	22						9TX-33		
2nd.	32917.	16-6660.						32579.		F13	4E45.	F13	Vol	33291.	M-64-Z.		A.		G22.	D13-130.		41	22								
1st.	32366.	16-6658.	154					34567.	ST-196.	4E45.			Vol	33291.	M-64-Z.		A.		G22.	D13-130.		41	22						9TX-50, 50M (Ch. RC-435)		
2nd.	32367.	16-6659.	154					34450.	ST-196.	4E45.			Vol	33291.	M-64-Z.		A.		G22.	D13-130.		41	22						9TX-50, 50M (Ch. RC-454)		
1st.	34441.	16-6658.	455					31329.					Vol	31322.	M-46-Z.		A.		G4, 5	D13-123.		47	GL						9X, 9X1, 2, 3, 4		
2nd.	34442.	16-6660.						31325.					Vol	32026.	M-46-Z.		A.		G4, 5	D13-123.		47	GL						9X6, 11, 12, 13, 14 CV-9		
1st.	35616.	16-6658.	455	431	13122.			RL-14C1.	ST-108.	I-18.	5EV6.		Vol	38412.	T-74.		A.		V11-11X.		41	G1	3554.	5467.	H12		QB9				
2nd.	35628.	16-6660.						31325.	I-18.	F13	5EV6.	F13	Vol	34034.	M-64-Z.		A.		D13-130.		41	G1							U-9		
1st.	34442.	16-6658.	455	431	13122.			8481-1 (o1).	ST-108.	I-18.	F13		Vol	34034.	M-64-Z.		A.		D13-130.		41	G1									

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
	No	Tubes	Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancer	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
			Dial Light Type Listed in Parentheses		Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"			
R.C.A.—Continued U9 (RC-482C)	5	12SA7, 12SK7, 50L6GT, 35Z5GT (51)	34873	PRSA150-40-40	BRD4415		M-2X40-150		TA-440		Out	35904		A-3330				AM3031									
10Q1	9	6K7, 6L7, 6J7, 6K7, 6B8, 79, 6F6G, 6U5	31809 5212	GL450-16	KR516A		D-16-450		PLS-16		Out	14534		A-3311		T22S64		A-2936									
10X (RC1001B)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36301	PRSA150-50-30	BRD3515		M-5030-150		TA-530		Out	38994		A-3876		T22S45		A-2928									
10X (RC1001)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	35348	PRSA150-30-30	BRD3315		M-2X30-150		TA-330		Out	36800		A-3330		B22		A-3031		B22							
BP10	4	1R5, 1T5, 1S5, 1S4	36718	PRS150-16	BR1615		M-16-150		UT-161		Out	36505		A-3328		B22		A-2998				950 & 467		2R	XX45		
U10	5	6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G (51)	32342	AF22J	UP1145		DY-2X10-450		EL-210		Pwr	33112		P-6011		B22		P-2951									
11Q4	11	6K7, 6L7, 6J7, 6Q7, 6F5, 6F6G, 6U5, 5T4 (47, 54)	5212 31495	GL450-16 PRS450-20	KR516A BR2045		D-16-450		PLS-16		Pwr	32905		A-3878		T22S47		A-2931									
11QK	11	6K7, 6L7, 6J7, 6Q7, 6F5, 6F6G, 6U5, 5T4	5212 31495	GL450-16 PRS450-20	KR516A BR2045		D-16-450		PLS-16		Pwr	31308		P-6290		B22		A-2936									
11QU	11	6K7, 6L7, 6J7, 6Q7, 6F5, 6F6G, 6U5, 5T4 (47, 54)	31886 31495	PRS350-16 PRS450-20	BR1635 BR2045		M-20-450		UT-153		Pwr	31308		P-6290		B22		A-2936									
11X1	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	35348	PRSA150-30-30	BRD3315		M-2X30-150		TA-330		Out	38994		A-3876		B22		A-2928									
Q11	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	38327								Out	36800		A-3330		B22		A-3031		B22							
12AX	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36301	PRSA150-50-30	BRD3515		M-5030-150		TA-530		Out	36800		A-3876		B22		A-2928									
12AX2		(See Model 12AX)																									
12Q4, 12QK, 12QU	12	6K7, 6L7, 6R7, 6W5, 6F6, 6U5, 5T4, (In Power Supply Units) (47, 54)	5212	GL450-16	KR516A		D-16-450		PLS-16		Out	31847															
12X, 12X2		(See Model 10X)																									
Q12	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	38327								Out	39345		A-3876		B22		A-2928									
U12	7	6SA7, 6SK7, 6SQ7, 6SF5, 6F6G, 5Y3G	32240	AF44J4A	UP2245C		DY-315		EL-350		Fwr	34261		P-6119		B22		T22R02		P-2951							
14AX, 14AX2	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	36301	PRSA150-50-30	BRD3515		M-5030-150		TA-530		Out	33599		A-3330		B22		A-3031		B22							
14BK	4	1A7, 1N5, 1H5, 3Q5	33911	PRS150-12	BR1215		M-10-150		UT-121		Out	36089		A-3856		T22S47		A-2938				758		17GD60			
14BT-1, 14BT-2	4	1A7, 1N5, 1H5, 3Q5	33911	PRS150-12	BR1215		M-10-150		UT-121		Out	36098		A-3856		T22S47		A-2900				758		17GD60			
14X, 14X2		(See Model 14AX)									Pwr	35757		P-6119		T22R01		P-2951									
Q14, Q15	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G (44)	35761								Out	37984		A-3330		B22		A-3031		B22							
Q14E	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G (44)	39195	PRS450-10-10	BRD1145		M-2X10-450				Pwr	32911		P-6119		T22R01		P-2951									
15BP1, 2, 3, 4, 5, 6	5	1A7, 1N5, 1H5, 3Q5, 35Z5GT	34472 34965	AF44D4DA UP4CJ61 PR25-25	UP4CJ61 BR252A		DY-304		EL-351		Out	32905		A-3878		T22S47		A-2931									
15BP7	5	1A7, 1N5, 1H5, 3Q5, 35Z5GT	34472 34965	AT4D4DA UP4CJ61 PR25-25	AT4D4DA UP4CJ61 BR252A		DY-304		EL-351		Out	36098		A-3856		T22S47		A-2900									
15BT	5	1N5GT, 1A7GT, 1H5GT, 3Q5GT	32548	PRS150-20-20	BRD2215		M-2X20-150		TA-220		Out	36194		A-3856		T22S47		A-2900									
15X (RC452)	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (51)	36301	PRSA150-50-30	BRD3515		M-5030-150		TA-530		Out	38994		A-3876		B22		T22S45		A-2928							
15X (RC1011)	6	12SG7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	35348	PRSA150-30-30	BRD3315		M-2X30-150		TA-330		Out	38994		A-3330		B22		T22S45		A-3031		B22					
Q15E		(See Model Q14E)									Pwr	35587		P-6012		T22R04		P-2952									
16K	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3G (51)	35858	AF22J4A	UP1145C		DY-316		EL-202		Out	31301		A-3878		T22S47		A-2931									
16T2 (RC-509B)	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3GT (51)	35858	AF22J4A	UP1145C		DY-316		EL-202		Pwr	35853		P-6012		T22R04		P-2952									
16T2 (RC-509J)	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3GT (51)	35858	AF22J4A	UP1145C		DY-316		EL-202		Pwr	35879		P-6012		T22S47		A-2931									
16T3 (RC-509A)	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3GT (51)	35858	AF22J4A	UP1145C		DY-316		EL-202		Pwr	35879		P-6012		T22R04		P-2952									
16T3 (RC-509H)	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3GT (51)	35858	AF22J4A	UP1145C		DY-316		EL-202		Pwr	35879		P-6012		T22S47		A-2931									
16T4 (RC-509J)	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3G (51)	35858	AF22J4A	UP1145C		DY-316		EL-202		Pwr	35879		P-6012		T22S47		A-2931									
16T4 (RC-509F)	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3G (51)	35858	AF22J4A	UP1145C		DY-316		EL-202		Pwr	35853		P-6012		T22R04		P-2952									
16X1, 16X2	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (51)	36301	PRSA150-50-30	BRD3515		M-5030-150		TA-530		Out	38994		A-3876		B22		T22S45		A-2931							
16X3	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (51)	36301	PRSA150-50-30	BRD3515		M-5030-150		TA-530		Out	36800		A-3330		B22		A-3031		B22							
16X4	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (51)	36301	PRSA150-50-30	BRD3515		M-5030-150		TA-530		Out	36800		A-3330		B22		A-3031									
16X11	6	12SK7, 12SA7, 12SQ7, 35Z5GT, 35L6GT (51)	36301	PRSA150-50-30	BRD3515		M-5030-150		TA-530		Out	36800		A-3330													

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL									
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quan Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat Part No.	Note	Photost Set No.						
1st.	34844	14-6658		455	33122			35685	ST-105		5A1		Vol	34034	M-46-Z	A.		D13-123		41	G1			Continued—	R.C.A. U9							
2nd.	34442			455				31829	T-73		KEIH		Vol Tone	31450	T-115			D13-189X			G1					10Q1						
1st.	31779			455				5 Inch PM	ST-105					31807	M-63-Z	A2		D13-137			41	G1				10X						
2nd.	31779							5 Inch EM	ST-194	F13	5A1						A.		D13-133		41	(J)				10X (RC 1001)						
3rd.	31268							RL-81-B2	ST-105		5A1								D13-133		41	G1				BP10						
1st.	36232	16-6652		455											36495	M-60-Z	A											U10				
2nd.	36232	16-6652		455												33776	T-101	A.		D13-137X		11	G1					11Q4				
1st.	36232	16-6652		455												31836	T-115			D13-139X			G1									
2nd.	33895								31829	ST-737		8E18		Vol Tone	31546																	
1st.	31864			455																							11QK					
2nd.	31865															31538	ST-173	F3	1P1E1	F3	Vol Tone	31836	T-115									
1st.	31865															31446	ST-173	F3	1P1L1	F3	Vol Tone	31546	T-115								11QU	
3rd.	31258			455													31836	ST-173	F3	1P1L1	F3	Vol Tone	31546	T-115								11X1
1st.	31854																31446	ST-194	F13	5A1	F13	Vol	31454	M-61-Z								Q11
2nd.	31855																										12AX					
3rd.	31268																36584	ST-194	F13	5A1	F13	Vol									(See X-1, 11AX)	
1st.	36232	16-6652		455																							12AX2					
2nd.	36233	16-6652		455													31853	ST-173	F3	1P15	F3	Vol	31446	:95								12Q4, 12QK, 12QU
1st.	31746																										12X, 12X2,					
2nd.	31749																										Q12					
3rd.	31268																										U12					
1st.	35636	16-6652		455					31612	ST-194		5A1		Vol	31454	M-63-Z	A		D13-137		41	G1						14AX, 14AX2				
2nd.	35628	16-6652		455					1L-#3	ST-105		5A1		Vol	31454	T-115	A		D13-137X		41	G1						14BK				
1st.	33722								RL-79A 1	ST-166		6E10		Vol	31446		A		D13-137		11	G1						14BT-1, 14BT-2				
2nd.	33895															31446	ST-194	F13	5E45	F13	Vol	31446	M-61-Z	A2							(See Model 14AX)	
1st.	36232	16-6658		455													31446	ST-194	F13	5A1	F13	Vol	31446	M-61-Z	A2							Q14, Q15
2nd.	36233	16-6658		455													31446	ST-105	F13	5A1	F13	Vol	31446	M-61-Z	A2							Q14E
1st.	36082	16-6658		455													31446	ST-105	F13	8A21	F13	Vol	31446	M-61-Z	A2							15BP1, 2, 3, 4, 5, 6
2nd.	36084	16-6658		455													31446	ST-105	F13	5A1	F13	Vol	31446	M-61-Z	A2							15PB7
1st.	36082	16-6658		455													31446	ST-105	F13	5A1	F13	Vol	31446	M-61-Z	A2							15BT
2nd.	36084	16-6658		455													31446	ST-105	F13	5A1	F13	Vol	31446	M-61-Z	A2							15X (RC 462)
1st.	36082	16-6652		455													31446	ST-194	F13	5E45	F13	Vol	36247	M-60-Z	A6							15X (RC1011)
2nd.	36084	16-6652		455													31446	ST-194	F13	5A1	F13	Vol	36242	M-60-Z	A6							
1st.	35636	16-6662		455													31446	ST-108		6A1		Vol	34406	M-61-Z	A							Q15E
2nd.	35528	16-6663		455													31446	ST-194		6E18		Vol	38406	M-61-Z	A							16K
1st.	35635	16-6662		455													31446	ST-158		6E18		Vol	38406	M-61-Z	A							16T2 (RC509B)
2nd.	35628	16-6662		455													31446	ST-105		6A1		Vol	31446	M-61-Z	A							16T2 (RC509J)
1st.	36121	16-6662		455													31446	ST-105		6A1		Vol	31446	M-61-Z	A							16T3 (RC509A)
2nd.	36122	16-6663		455													31446	ST-105		6A1		Vol	31446	M-61-Z	A							16T3 (RC509H)
1st.	36121	16-6662		455													31446	ST-105		6A1		Vol	31446	M-61-Z	A							16T4 (RC509)
2nd.	36122	16-6663		455													31446	ST-105		6A1		Vol	31446	M-61-Z	A							16T4 (RC509F)
1st.	36121	16-6662		455													31446	ST-105		6A1		Vol	36486	T-115	A							16X1, 16X2
2nd.	36122	16-6663		455													31446	ST-105		6A1		Vol	36242	M-60-Z	A6							16X3
1st.	35790	16-6662		455													31446	ST-194		5A1		Vol	36242	M-60-Z	A6							16X4
2nd.	36232	16-6662		455													31446	ST-194		5A1		Vol	36242	M-60-Z	A6							16X11
1st.	36232	16-6662		455													31446	ST-105		5A1		Vol	36242	M-60-Z	A6							
2nd.	36233	16-6662		455													31446	ST-105		5A1		Vol	36242	M-60-Z	A6							

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
R.C.A.—Continued																								
16X13.	6	12SK7, 12SA7, 12SQ7, 35Z5GT, 35L6GT (51)	36301	PRSA150-50-30		BRD3615		M-5030-150		TA-530		Out	36800	A-3330							A-3031			
16X14.	6	12SK7, 12SA7, 12SQ7, 35Z5GT, 35L6GT (51)	36301	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	36800	A-3330							A-3031			
Q16.	5	6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G (44)	18975			UP3345		DY-2X30-450		EL-23		Pwr	35757	P-6119		T22R02				P-2951				
Q16E.	5	6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G (44)	32342	AF22J		UP1145		DY-2X10-450		EL-210		Pwr	37984	P-6119		T22R02				A-3032				
17K.	7	6SK7, 6SA7, 6H6, 6SF5, 6K6GT, 5Y3G (51)	36858	AF22J4A		UP1145C		DY-316		EL-202		Pwr	32911	P-6119		T22S47				P-2951				
Q17.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	35747								Pwr	35959	P-6012		T22R04				A-2931					
18T.	8	6SK7, 6SA7, 6SQ7, 6SF5, 6F6G, 5Y3G (44)	33014	AF44J4A		UP22245C					Pwr	35757	A-3330		T22S47				A-3031					
Q18.	5	6SA7, 6K7, 6SQ7, 6F6G, 5Y3G (44)	32240	AF22J4A		UP1145C		DY-316		EL-202		Pwr	35809	P-6119		T22R04				P-2952				
19K.	9	6SK7, 6SA7, 6H6, 6SF5, 6F6G, 5Y3G (51)	36858	AF22J4A		UP1145C		DY-316		EL-202		Pwr	32905	P-6012		T22R04				A-2932				
Q20, Q21.	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G (51)	35761								Pwr	33444	A-3311		T22S64				P-2951					
U20.	7	6SA7, 6K7, 6SQ7, 6SF5, 6F6G, 5Y3G (44)	32240	AF22J4A		UP1145C		DY-316		EL-202		Pwr	35774	P-6119		T22R02				A-3032				
VH20.	2	6A8, 25Z6G (47)	32152			UP15035		DY-2X15-350		EL-254		Out	34261	P-6012		T22S64				P-2952				
VA21.	2	6A8, 25Z6G (47)	32152			UP15035		DY-2X15-350		EL-254		Out	33444	A-3311		T22S64				A-2936				
Qsc. 22.	2	6SA7, 25Z6G	32576	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr	32911	P-6119		T22R02				P-2951				
Q22.	6	6SA7, 6SK7, 6SQ7, 6AD7G, 6F6G, 5Y3G (44)	33014	AF44J4A		UP22245C					Pwr	35809	P-6119		T22S64				A-2936					
Q23.	6	6SA7, 6SK7, 6SQ7, 6AD7G, 6F6G, 5Y3G (44)	33014	AF44J4A		UP22245C					Pwr	32911	P-6119		T22R02				P-2951					
QK23.	6	6SA7, 6SK7, 6SQ7, 6AD7G, 6F6G, 5Y3G (51)	33014	AF44J4A		UP22245C					Pwr	35809	P-6119		T22S64				A-2936					
24BT1, 24BT2.	4	1A7, 1N5, 1H5, 3Q5	38593	PRS150-12		BR1215		M-10-150		UT-121		Out	32911	P-6119		T22R02				P-2951				
Q24.	6	12SA7, 12C8, 12SC7, 50L6, 35Z5GT	33824								Out	35940	A-3301		T22S60				A-2905					
25BK.	5	1N5G1, 1A7, 1H5, 3Q5	38706								Out	36184	A-3856		T22S47				A-2900					
25BP.	5	1A7G7, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	34472	AF44D4A		UP44CJ61		DY-304		EL-351		Out	32911	A-3856		T22S47				743 & 482		5F	2M30	
25BT2.	5	1N5GT, 1A7GT, 1H5GT, 3Q5GT	34985	PRS25-25		BR252A		M-25-25		TA-25		Out	35809	A-3856		T22S47				A-2900				
25BT3.	5	1N5GT, 1A7, 1H5, 3Q5	36718	PRS150-16		BR1615		M-16-150		UT-161		Out	32779	A-3856	B22	T22S47				A-2900				
Q25.	6	6SA7, 6SK7, 6SQ7, 6AD7G, 6F6G, 5Y3G (44)	33014	AF44J4A		UP22245C					Out	36194	A-3856	B22	T22S47				A-2900					
U25.	8	6A8G, 6K7, 6Q7G, 6J5, 6K6G, 6U5, 5Y3G (47)	32145	PRS450-4		BR445		M-4-450		UT-4		Pwr	32911	P-6119		T22R02				P-2951				
26BP.	6	17A, 1A7GT, 1T4, 1S5, 305GT, 11Z6GT	38775			EZ8845S					Pwr	32144	A-3311		T22S64				A-2936					
26X1.	6	12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	36301	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	36800	A-3330	B22	T22S45				746 & 482		2G3	2M30	
26X3.	6	12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	36301	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	36800	A-3330	B22	T22S45				A-3031				
26X4.	6	12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	36301	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	36800	A-3330	B22	T22S45				A-3031				
Q26.	7	6SA7, 6SK7, 6SQ7, 6AD7G, 6F6G, 6U5, 5Y3G (51)	33014	AF44J4A		UP22245C					Pwr	32911	P-6119		T22R04				P-2952					
U26.	8	6A8G, 6K7, 6Q7G, 6J5, 6K6G, 6U5, 5Y3G (47)	32145	PRS450-4		BR445		M-4-450		UT-4		Pwr	32144	P-6120		T22R04				P-2952				
27K.	7	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3G (51)	32142	PRS450-4		EZ8845S					Pwr	32911	P-6120		T22S64				A-2936					
Q27.	6	6SA7, 6SK7, 6SQ7, 6AD7G, 6F6G, 5Y3G (44)	38571	AF22J4A		BR445		M-4-450		UT-4		Pwr	35959	P-6012		T22R04				P-2952				
28T.	8	6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3G (44)	33014	AF44J4A		UP1145C		DY-316		EL-202		Pwr	31301	A-3311		T22S47				A-2931				
28X.	8	6SG7, 6SA7, 6SK7, 6SQ7, 25L6, 25Z6 (44)	39152			UP22245C					Pwr	35874	A-3878		T22R04				P-2951					
28X5.	8	6SG7, 6SA7, 6SK7, 6SQ7, 25L6, 25Z6 (44)	39152								Pwr	35874	A-3878		T22S47				A-2936					
29K.	8	6SG7, 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G (44)	38571	AF22J4A		UP1145C		DY-316		EL-202		Pwr	35959	P-6012		T22R04				P-2952				
29K2 (RC570C).	8	6SG7, 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G (44)	38571	AF22J4A		UP1145C		DY-316		EL-202		Pwr	35959	P-6012		T22R04				P-2952				
29K2 (RC570D).	8	6SG7, 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G (44)	38571	AF22J4A		UP1145C		DY-316		EL-202		Pwr	35959	P-6012		T22R04				A-2936				
Q30.	6	6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G (44)	33014	AF44J4A		UP22245C					Pwr	31735	A-3311		T22S64				A-2931					
											Pwr	37948	A-3878		T22R04				P-2952					

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL		
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clarnostat	Shaft	Switch	Note	IRC	Shaft	Switch	Note	Mfr.	Radiant	Note	Photofad	Set No.
	Part No.	Part No.			Part No.	Part No.		Part No.	Part No.		Part No.			Part No.	Part No.			Part No.	Part No.		Part No.	Part No.		Set No.			
1st.	36232	16-6662		455				5 Inch PM	ST-105		5A1		Vol	36242	M-60-Z		A6...	G5	D13-133		47	G1.5			Continued—	R.C.A.	
2nd.	36233	16-6662		455				5 Inch PM	ST-105		5A1		Vol	36242	M-60-Z		A6...	G5	D13-133		47	G1.5				16X13	
1st.	36232	16-6662		455				RL-92-A1	ST-108		6A1		Vol	37980	T-120		A...		D13-139X		41	G1				16X14	
2nd.	35628	16-6663		455				RL-79C-1	ST-168		6E18		Tone	37977	M-60-Z		A...		D13-133		41	G1				Q16	
1st.	35636	16-6662		455				RL-70L5		F3	12E10		Tone	37980	T-120		A...		D13-139X		41	G1				Q16E	
2nd.	35628	16-6663		455				RL-92-6	ST-108		6A1		Vol	36250	M-60-Z		A...		D13-133		41	G1				17K	
1st.	35636	16-6662		455				RL-79-A5	ST-166		6E10		Vol	37980	T-120		A...		D13-139X		41	G1				Q17	
2nd.	35628	16-6663		455				32902	ST-167		5E18		Vol	35807 (cr)	T-43		A...		D18-130X		41	G1				18T	
1st.	35636	16-6662		455				RL-70-J1		F3	12E10		Vol	36250	T-115		A...		D13-139X		41	G1				Q18	
2nd.	35790	16-6663		455				RL-81-A2	ST-105		5A1		Vol	35764	M-63-Z		A...		D13-137		41	G1				19K	
1st.	35636	16-6662		455				34727					Vol	34721	T-115		A...		D13-139X		41	G1				Q20, 21	
2nd.	32623	16-6662		455	33905								Vol				A...		D13-133		41	G1				U20	
1st.	34719	16-6663		455				31050					Vol	32499	M-64-Z		A...		D13-130		41	G1				VA20	
2nd.					33122								Vol	32499	M-64-Z		A...		D13-130		41	G1				VA21	
1st.	35636	16-6662		455				RL-79-A6	ST-166		6E10		Vol	37980	T-78		A...		D13-133X		41	G1				OSC. 22	
2nd.	35628	16-6663		455				RL-79-A6	ST-166		6E10		Tone	35620	M-60-Z		A...		D13-133		41	G1				Q22	
1st.	35636	16-6662		455				RL-70-J3		F3	12E10		Vol	38412	T-78		A...		D13-133X		41	G1				Q23	
2nd.	35628	16-6663		455				RL-85-6	ST-105		5A1		Tone	38409	M-60-Z		A...		D13-133		41	G1				QX23	
1st.	36082	16-6662		455				RL-92-I	ST-108		6A1		Vol	35620	T-78		A...		D13-137		42	G1				24BT1, 24BT2	
2nd.	35636	16-6662		455				92378-1			69A3		Tone	35623	M-60-Z		A...		D13-133		41	G1				Q24	
1st.	36082	16-6662		455				5 Inch PM	ST-105		5A1		Vol	36080	M-63-Z		A...		D13-137		42	G1				25BK	
2nd.	38343	16-6662		455				92322	ST-105		5A1		Vol	36125	M-63-Z		A...		D13-137		42	G1				25BP	
1st.	38343	16-6662		455				RL-85-6		F13	5A1		Vol	36080	M-63-Z		A...		D13-137		42	G1				25BT-2	
2nd.	36082	16-6662		455				RL-91-3	ST-105		5A1		Vol	36080	M-63-Z		A...		D13-137		42	G1				25BT-3	
1st.	35636	16-6662		455				RL-63K5	ST-736		8E10		Vol	35946			A...								Q25		
2nd.	35628	16-6663		455				32146					Tone	35952			A...								U25		
1st.	14376	16-6662		455	f.			RL-81-B2	ST-105		5A1		Vol	31366			A...								26BP		
2nd.	14283	16-6663		455	f.			RL-81-B2	ST-105		5A1		Tone	38915			A...								26X1		
1st.	36232	16-6662		455				RL-81-B2	ST-105		5A1		Vol	38410	M-60-Z		A...		D13-133		41	G1				26X3	
2nd.	36233	16-6662		455				RL-86-B1	ST-196		5E45		Vol	38410	M-60-Z		A...		D13-133		41	G1				26X4	
1st.	36232	16-6662		455				RL-83-K5	ST-736		8E10		Vol	35946			A...								Q26		
2nd.	35628	16-6663		455				32146					Tone	36416			A...								U26		
1st.	14376	16-6662		455	f.			92311-1			F2		Vol	31366			A...								27K		
2nd.	14283	16-6663		455				92196-3			F2		Tone	38404	T-120		A...		D13-139X		42	G1				Q27	
1st.	35636	16-6662		455				92136-3			F13	69A3	F13	Vol	38412	T-78		A...		D13-133X		41	G1				28T
2nd.	35628	16-6663		455				92136-2			F13	69A3	F13	Tone	38409	M-60-Z		A...		D13-133		42	G1				28X
1st.	35636	16-6662		455				92136-2			F13	69A3	F13	Vol	38404	T-120		A...		D13-139X		42	G1				28X5
2nd.	37564	16-6662		455				RL-70J-1			12E10		Tone	38409	M-60-Z		A...		D13-133		42	G1				29K	
1st.	35636	16-6662		455				RL-70J-1			12E10		Vol	38404	T-120		A...		D13-139X		42	G1				29K2 (RC570C)	
2nd.	35790	16-6663		455				RL-70J-1	ST-105		5A1		Vol	38404	T-120		A...		D13-139X		42	G1				29K2 (RC570D)	
1st.	35636	16-6662		455				RL-70B-5	ST-105		12E10		Vol	37051			A...		D13-139X		42	G1				Q30	
2nd.	35790	16-6663		455				92196-501					Tone	37052			A...										

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
R.C.A.—Continued U30.....	10	6A8, 6J7, 6H6, *6F5, 6F6, 5U4G/ 5T4, 6U5 (44, 47).	31495, 31495, 32088, 32435,	GL450-16, PRS450-20,	KP516A, BR2045,	D-16-450, M-20-450,		PLS-16, UT-20,		Pwr Out	31225, 14534,	P-6290, A-3311,	T22S64,	A-2936,										
Q31.....	6	*6S7, 12SA7, 12SQ7, 50L6GT, 35Z5GT (47).	37892,	↑	↑	↑	↑	↑	Out	37950,	A-3330,										A-3031,			
Q33.....	8	*6SK7, 6SA7, 6U5, 6SQ7, 6AD7G, 6F6G, 5Y3G (*44).	33014,	AF444J4,	UP22245C,				Pwr Out	31735, 14534,	P-6012, A-3311,	T22R04, T22S64,	P-2952, A-2936,											
34X (RC-1001E).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	36301,	PRSA150-50-30,	BRD3515,	M-5030-150,	TA-530,		Out	38994,	A-3876,	T22S45,	A-2928,											
34X (RC-1002).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	38994,	A-3876,	T22S45,	A-2928,											
35X (RC-1001C).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	36301,	PRSA150-50-30,	BRD3515,	M-5030-150,	TA-530,		Out	38994, 36800,	A-3876, A-3330,	T22S45, B22,	A-2928, B22,											
35X (RC-1002A).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	38994, 36800,	A-3876, A-3330,	T22S45, B22,	A-2928, B22,											
36X (RC-462A).....	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	38994,	A-3876,	T22S45,	A-2928,											
36X (RC-1011).....	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	38994,	A-3876,	T22S45,	A-2928,											
40X30, 40X31.....	5	12SA7, 12SK7, 12SQ7, 35Z5GT, 35L6GT/50L6GT (51).	32576,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	32964,	A-3876,	T22S45,	A-2928,											
40X50.....	5	12SA7, 12SK7, 12SQ7, 35Z5GT, 35L6GT/50L6GT (51).	32576,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	32954,	A-3876,	T22S45,	A-2928,											
40X52, 40X55.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	34597,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	34174,	A-3876, 35056,	B17, T22S45, B17,	A-2928, B17,											
BT40.....	4	1A7G, 1N5G, 1H5G, 1C5G,	32187,	PRS150-8,	BR815,	M-8-150,	UT-81,		Out	33062,	A-3878,	T22S47,	A-2931,	758,									17GD60,	
CV40.....	1	5U4G,	32826,	AF88J4A,	UP4445C,	DY-314,			Pwr Chk	34559, 34560,	↑, ↑,													
U40.....	7	*6SA7, 6K7, 6S07, 6SF5, *6F6G, 5Y3G (51).	32240,	AF22J4A,	UP1145C,	DY-316,	EL-202,		Pwr Cut	34261,	P-6012,	T22R04,	P-2952,											
BK41.....	4	1A7G, 1N5G, 1H5G, 1Q5GT,	32187,	PRS150-8,	BR815,	BR815,	UT-81,		Out	33444,	A-3311,	T22S64,	A-2936,											
BT41.....	4	1A7G, 1N5G, 1H5G, 1Q5GT,	32187,	PRS150-8,	BR815,	M-8-150,	UT-81,		Out	34386,	A-3822,	T22S47,	A-2932,	758,									17GD60,	
BK42.....	4	1A7G, 1N5G, 1H5G, 1Q5G,	33952,	PRS150-8,	BR815,	M-8-150,	UT-81,		Out	34508,	A-3822,	T22S47,	A-2932,	758,									17GD60,	
BT42.....	4	1A7G, 1N5G, 1H5G, 1Q5G,	33952,	PRS150-8,	BR815,	M-8-150,	UT-81,		Out	33459,	A-3822,	T22S47,	A-2932,	758,									17GD60,	
CV42.....	1	35Z5,	38701,	UP6CJ64,	UP1145C,	DY-316,	EL-202,	Pwr Cut	32144,	P-6120,	T22R04,	P-2952,												
U42.....	8	*6SA7, 6K7, 6S07, 6SF5, *6K6G, *6F6G, 6U5, 5Y3G (51).	32240,	AF22J4A,	UP1145C,	DY-316,	EL-202,	Pwr Cut	33444,	A-3311,	T22S64,	A-2936,												
U43.....	8	*6SA7, 6K7, 6S07, 6SF5, *6K6G, 6U5, 5Y3G (51).	32240,	AF22J4A,	UP1145C,	DY-316,	EL-202,	Pwr Cut	34261,	P-6012,	T22R04,	P-2952,												
Q44.....	12	*6SK7, *6SA7, 6U5/6G5, 6B8G, 6R7, 6AD7G, 6F6G, 5U4G (*51).	35016,	↑	↑	↑	↑	Pwr Cut	33444, 36473,	A-3311, A-3311,	T22S64, T22R06,	A-2936, P-2954,												
U44.....	10	*6SK7, 6SA7, 6H6, *6SF5, *6F6G, 6U5/6G5, 5U4G (34).	31523,	PRS150-16, AF444J4A,	BR1615, UP2245C,	M-16-150, DY-315,	UT-81,	Pwr Cut	34539, 34543,	P-6013, A-3311,	T22R05, T22S64,	P-2953, A-2936,												
45E, 45EM, 45EW.....	5	12SA7, 12SQ7, 12SK7, 50L6GT, 35Z5GT (51).	33952,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	33854,	A-3876,	T22S45,	A-2928,											
45X1, 45X2, (RC-457).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	32576,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	34846,	A-3876,	T22S45,	A-2928,											
45X1, 45X2, (RC-457A).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	32576,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	34846,	A-3876,	T22S45,	A-2928,											
45X3, 45X4.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	32576,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	34846,	A-3876,	T22S45,	A-2928,											
45X5, 45X6.....	6	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	32576,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	34174,	A-3876,	T22S45,	A-2928,											
45X11 (RC-459).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	32576,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	35056,	A-3876,	T22S45,	A-2928,											
45X11, 45X12, (RC459D).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	35056,	A-3876,	T22S45,	A-2928,											
45X11, 45X12, (RC459T).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	36301,	PRSA150-50-30,	BRD3515,	M-5030-150,	TA-530,		Out	35666,	A-3330,		A-3031,											
45X12 (RC459), 45X13, (RC459A).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	32576,	PRSA150-20-20,	BRD2215,	M-2X20-150,	TA-220,		Out	35056,	A-3876,	T22S45,	A-2928,											
45X13, (RC459E).....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	35056,	A-3876,	T22S45,	A-2928,											
45X16, 45X17.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	35056,	A-3876,	T22S45,	A-2928,											
45X18.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	35056,	A-3876,	T22S45,	A-2928,											
45X111, 45X112.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2X30-150,	TA-330,		Out	35056,	A-3876,	T22S45,	A-2928,											
45X113.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	35348,	PRSA150-30-30,	BRD3315,	M-2-			Out	35056,	A-3876,	T22S45,	A-2928,											

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofet Part No.		
1st.	31267	16-5712		455	†			31538	ST-173		12E15		Vol Tone	31249	T-115			D13-139X								RCA-U3C		
2nd.	31268	16-5714												31248	M-63-Z	A.		D13-137		41	G1							
1st.	35636	16-5740		455				92195-502			69A3		Vol	37051													Q31	
2nd.	35615	16-5742						RL-83K5	ST-736		8E10		Vol Tone	37087	T-109			D13-137X		41	G1							
1st.	35638	16-5740		455										36109	M-63-Z	A.		D13-137			G1							Q33
2nd.	36615	16-5742																										
1st.	36232	16-6658		455				RL-86B-1	ST-194		5E45		Vol	36584	M-60-Z			A.	G5	D13-133		41	G1,5					34X(RC1001E)
2nd.	36233	16-6658		455				RL-86B-1	ST-194		5E45		Vol	36584	M-60-Z			A.	G5	D13-133		41	G1,5					34X(RC1022)
1st.	36232	16-6658		455				5Inch PM	ST-105		5A1		Vol	36584	M-60-Z			A.	G5	D13-133		41	G1,5					35X(RC1001C)
2nd.	36233	16-6658		455				5Inch EM	ST-194		5E45		Vol	36584	M-60-Z			A.	G5	D13-133		41	G1,5					35X(RC1022A)
1st.	36232	16-6658		455				5Inch PM	ST-105		5A1		Vol	36584	M-60-Z			A.	G5	D13-133		41	G1,5					36X(RC462A)
2nd.	36233	16-6658		455				5Inch EM	ST-194		5E45		Vol	36242	M-60-Z			A5	G5	D13-133		47	G1,5					36X(1011)
1st.	36232	16-6658		455				RL-86-B1	ST-194		5E45		Vol	36242	M-60-Z			A6	G5	D13-133		47	G1,5					
2nd.	37364							RL-86-B4	ST-194		F13		Vol															
1st.	32966	16-5714		455				34569	ST-196		4E45		Vol	32578	M-64-Z			A.		D13-130		41	G1					40X-30, 40X31
2nd.	32967	16-6661						34559	ST-196		4E45		Vol	32545	M-64-Z			A.		D13-130		41	G1					40X50
1st.	32966	16-5714		455				34450	ST-194		5E45		Vol	32545	M-64-Z			A.		D13-130		41	G1					40X52, 40X55
2nd.	32967	16-6661						33058	ST-113		4A1		Vol	33059	M-60-Z			A2		D13-133		42	G1					BT40
1st.	33057	16-5712		455																						CV40		
1st.	32263	16-5712		455	†			34727					Vol	34721	T-115			A.		D13-139X		41	G1					U40
2nd.	34719	16-5714						84720-1	ST-115		8A21		Vol	34557	M-64-Z			A2		D13-130		42	G1					BK41
1st.	14261	16-5712		455				84226-3	ST-103		5A1		Vol	30947	M-64-Z			A2		D13-130		42	G1					BT41
2nd.	14308	16-5714		455				84649-2	ST-108		6A1		Vol	34120	M-63-Z			A2		D13-137		42	G1					BK42
1st.	14261	16-5712		455				84650-1	ST-105		5A1		Vol	34120	M-63-Z			A2		D13-137		42	G1					BT42
2nd.	34119	16-6661																										
1st.	32263	16-5712		455				34727					Vol	34721	T-115			A.		D13-139X		41	G1					CV42
2nd.	34719	16-5714						RL-70L1					Vol	34721	T-115			A.		D13-139X		41	G1					U42
1st.	32263	16-5712		455				88885-502			10E10		Vol Tone	36619	T-109			A.		D13-137X		41	G1					U43
2nd.	34719	16-5714												36621													Q44	
1st.	36614																											
2nd.	36443																											
3rd.	36615																											
1st.	34698	16-5712		455				RL-70K3	ST-173		12E15		Vol	34780														U44
2nd.	34524																											
1st.	32966			455				33851	ST-105		5A1		Vol	33291	M-64-Z			A.		D13-130		41	G1					45E, 45EM, 45EW
2nd.	32987							35119	ST-195		4E45		Vol	35113	M-64-Z			A.		D13-130		41	G1					
1st.	35114	16-5714		455				35119	ST-196		4E45		Vol	35330	M-64-Z			A.		D13-130		41	G1,5					45X1, 45X2, (RC457)
2nd.	33301	16-6661						35331	ST-196		4E45		Vol	35979	M-64-Z			A.		D13-130		41	G1,5					45X1, 45X2, (RC457A)
1st.	35331	16-5714		455				35331	ST-196		4E45		Vol	35979	M-64-Z			A.		D13-130		41	G1,5					45X3, 45X4
2nd.	33301	16-6661						35611	ST-196		4E45		Vol	35113	M-64-Z			A.		D13-130		41	G1					45X5, 45X6
1st.	32966	16-5714		455				34450	ST-196		5E45		Vol	35057	M-60-Z			A.		D13-133		41	G1					45X11, (RC459)
2nd.	34442																											
1st.	35054	16-5742		455				34450	ST-196		5E45		Vol	35344	M-60-Z			A.		D13-133		41	G1,5					45X11, 45X12, (RC459D)
2nd.	35055	16-5742																										
1st.	35346	16-5742		455				34450	ST-196		5E45		Vol	35344	M-60-Z			A.		D13-133		41	G1,5					45X11, 45X12, (RC459T)
2nd.	35347	16-5742						37612	ST-105		5A1		Vol	35344	M-60-Z			A.		D13-133		41	G1,5					45X12, (RC459T)
1st.	36232	16-5742		455				34450	ST-196		5E45		Vol	35057	M-60-Z			A.		D13-133		41	G1					45X12, (RC459A)
2nd.	35347	16-5742																										
1st.	35346	16-6658		455				34450	ST-196		5E45		Vol	35344	M-60-Z			A.		D13-133		41	G1,5					45X13, (RC459E)
2nd.	35347	16-6658																										
1st.	36232	16-6658		455				34450	ST-196		5E45		Vol	35728														45X16, 45X17,
2nd.	37364																											
1st.	35346	16-6658		455				34450	ST-196		5E45		Vol	35344	M-60-Z			A.		D13-133		41	G1,5					45X111, 45X112
2nd.	35347	16-6658						34450	ST-196		5E45		Vol	35344	M-60-Z			A.		D13-133		41	G1,5					45X113

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
			No.	Tubes	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
					Dial Light Type Listed in Parentheses	Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"	
R.C.A.—Continued			10	6SK7, 6SA7, 6H6, 2SF5, 2F6G, 6U5/6G5, 5U4G (244)	31323 34533	PRS150-16 AF44J4A		BR1615 UP2245C		M-16-150 DY-315		UT-161 EL-350		Pwr Out 14534	34539 A-3311	P-6013 A-3311		T22R05 T22S64		P-2953 A-2936							
46X1, 46X2, (RC459B)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	35064	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	35056	A-3876		T22S45		A-2928									
46X1, 2, 3, (RC459F, H)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	35348	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	35056	A-3876		T22S45		A-2928									
46X3 (RC459C)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	35064	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	35056	A-3876		T22S45		A-2928									
46X11, 46X12, (RC456)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	32576	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	35056	A-3876		T22S45		A-2928									
46X13, (RC456A)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	35673	PRSA150-30-30		BRD3315		M-2X20-150		TA-220		Out	35666	A-3330								A-3051					
46X21, 46X23, 46X24	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	32445									Pwr Out 12568	35027 A-3830														
U46	13	6SK7, 6SA7, 6H6, 2SF5, 2F6G, 6U5/6G5, 5U4G, (44, 51)	35017 35016			UP3345		CY-2X30-450		EL-23		Pwr Out 32568	33112 A-3830										A-3131				
B50	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	38598	PRS150-12		BR1215		M-10-150		UT-121		Out		A-3822		T22S47		A-2932	753							17G66	
K50 (RC418A)	5	6SA7, 6K7, 6SQ7, 6F6G, 5Y3G (51)	32342	AF22J		UP1145		DY-2X10-450		EL-210		Pwr Out 33779	33112 A-3878										P-2951				
K50 (RC497)	5	6SA7, 6K7, 6SQ7, 6F6G, 5Y3G (51)	32240	AF22J4A		UPI1145C		DY-316		EL-202		Pwr Out 33112	33112 A-3878										P-2951				
M50	5	6A8, 6K7, 6Q7, 6K6GT, 0Z4G (51)	32240	AF22J4A		UPI1145C		DY-316		EL-202		Pwr Out 33779	31597 A-3878										T22R02				
050	3	6SF5, 6F6G, 5Y3G	33214									EL-423											31772 A-3878	B22	A-2931	B22	
U50	5	6SA7, 6K7, 6SQ7, 6F6G, 5Y3G (44)	32240	AF22J4A		UP1145C		DY-316		EL-202		Pwr Out 14798	33407 P-6010										T22R01		P-2950		
QU51C, QU51M	8	6SK7, 6SA7, 6U5, 6SQ7, 6AD7G, 6F6G, 5U4G (244)	32187 34185	PRS150-8 AF44J4A		BR815 UP2245C		M-8-150 DY-315		UT-81 EL-350		Pwr Out 33407	33112 P-6010										T22S47		A-2931		
B52	5	1N5GT, 1A7GT, 1H5GT, 3Q5GT	38705	PRS150-30		BR3015		M-30-150		UT-301		Out		A-3856		T22S47		A-2900	t								
QU52C, QU52M	6	6SA7, 6SK7, 6SQ7, 6AD7G, 6F6G, 5Y3G (51)	36718 33014	PRS25-10 AF44J4A		BR102A UP2245C		M-10-25		TA-10		Pwr Out 32911	32911 P-6011										T22R02		P-2951		
54B1, 2, 3, 54B1-N	4	1R5, 1T4, 1S5, 3S4	36714	PRS150-12		BR1215		M-10-150		UT-121		Out	37899	A-3311										33112 A-3311		32959 A-3311	
54B5	4	1R5, 1T4, 1S5, 3S4	36718	PRS150-12		BR1215		M-10-150		UT-121		Out	70440	A-3329										T22S46		950 & 457	2R
55AU, 55U	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	70408	PRSA150-40-40		BRD3515		M-50-30-150		TA-530		Out	70385	A-3330										A-3031			
55F, 55FA	5	1N5GT, 1A7GT, 1H5GT, 3Q5GT	36718	PRS25-10		BR102A		M-10-25		TA-10		Out	70993	A-3878										T22S47		A-2933	753
55X	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	38705 36301	PRS150-30 PRSA150-50-30		BR8015 BR3515		M-30-150 M-5030-150		UT-301 TA-530		Out	38851	t										T22R02		A-2936	17G60
BP55, BP56	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6GT/35Z5GT	34472	AF44J4A		UP4CJ61		DY-304		EL-351		Out	34555	A-3881										T22S48		A-2934	747 & 482
QU55	8	6SK7, 6SA7, 6U5, 6SQ7, 6AD7G, 6F6G, 5T4 (244)	32187 34185	PRS150-8 AF44J4A		BR815 UP2245C		M-8-150 DY-315		UT-81 EL-350		Pwr Out 34183	34183 37997	A-3311									T22S46		A-2904	2F4L M30	
T55, T56	5	6SA7, 6K7, 6SQ7, 6F6G, 5Y3G (51)	32342	AF22J		UP1145		DY-2X10-450		EL-210		Pwr Out 33112	33112 A-3878										T22R02		P-2951		
X55	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	34212	AF-1010D		UP5515		DY-2X50-150		EL-25		Out	32905	A-3878										T22S47		A-2931	
56X, 56X2, 56X3	6	12SG7, 12J8GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	39152	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	36800	A-3330										A-3031			
56X5, 56X10	6	12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	39152	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	36800	A-3330										A-3031			
QU56C, QU56M	5	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G, (44)	35761									Pwr Out 35757	35757 37949	P-6011									T22R02		P-2951		
R56, S8AV, 58V	2	50L6GT, 50Y6GT	39684			BRD2225		M-25-25		TA-50		Out	39683	A-3876										T22S45		A-2928	
59AV1, 59V1	9	6SG7, 6SA7, 6SK7, 6R7, 26SQ7, 26F6G, 5U4G (51)	34533	AF44J4A		UP2245		DY-2X20-450- 20-25		EL-220		Pwr Out 94160-501	94160-501 37899	P-6014									T22R06		P-2954		
K60 (RC415)	6	6SA7, 6SK7, 6H6, 6SF5, 6F6G, 5Y3G (44)	34889	AF44J4A		UP6B138		M-25-25		TA-50		Out	37899	A-3856										T22S48		A-2904	
K60 (RC415B)	6	6SA7, 6SK7, 6H6, 6SF5, 6F6G, 5Y3G (51)	32240	AF22J4A		UPI1145C		DY-316		EL-202		Pwr Out 31301	31301 33112	P-6011									T22R02		P-2951		
M60	6	6K7, 6A8, 6Q7, 6K6GT, 0Z4G	33803	AF22J		UPI1145		DY-2X10-450		EL-202		Pwr Out 31301	31301 31597	P-6011									T22S47		A-2931		
R60	3	6SF5, 6F6G, 5Y3G	33214									Pwr Out 31772	31772 14798	P-6014									T22S47		A-2931		
T60	6	6SA7, 6SK7, 6SQ7, 6F6G, 6U5/ 6G5, 5Y3G (51)	32342	AF22J		UP1145		DY-2X10-450		EL-210		Pwr Out 32905	32905 33112	P-6011									T22R02		P-2951		

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photo Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note				
1st.	34698	16-5740		455	†			RL-70KS	ST-173		12E15		Vol Tone	34780 35686												Continued—	R.C.A. U45		
2nd.	34524	16-5742																											
1st.	35054	16-6662		455				34450	ST-196		5E45		Vol	35057	M-60-Z	A		D13-133		41	G1						46X1, 46X2, (RC459B)		
2nd.	35055	16-6663		455				34450	ST-196		5E45		Vol	35344	M-60-Z	A	G5	D13-133		41	G1, 5						46X1, 2, 3, (RC459F, H)		
1st.	35346	16-6662		455				34450	ST-196		5E45		Vol	35057	M-60-Z	A		D13-133		41	G1						46X3 (RC459C)		
2nd.	35347	16-6663		455				34450	ST-196		5E45		Vol	35086	T-70	A		D18-132X		41	G1						46X11, 46X12 (RC456)		
1st.	35054	16-6662		455				34450	ST-196		5E45		Vol	35086	T-70	A		D18-132X		41	G1						46X13 (RC456A)		
2nd.	35055	16-6663		455				34450	ST-196		5E45		Vol	35023 35022 35026	T-95	A		D18-139XX		41	G1						46X21, 46X23, 46X24 U46		
1st.	35088	16-6662		455				RL-81A1	ST-105		5A1		Vol	35086	T-70	A		D18-132X		41	G1						B50		
2nd.	35089	16-6663		455	33905			RL-75BS	ST-173		12E15		Vol Tone	35023 35022 35026	T-95	A		D18-139XX		41	G1						K50 (RC418A)		
1st.	34698	16-5740		455	16-5742																					K50 (RC497)			
2nd.	34524	16-5742																								M50			
1st.	†	16-6662		455				RL-85-6	ST-105		5A1		Vol	33776	T-109	A		D13-137X		42	G1						050		
2nd.	†	16-6662		455				RL-70J-2			12E10	F3	Vol	34796	T-115	A		D13-139X		41	G1						U50		
1st.	33722	16-6662		455				RL-70J-2			12E10	F3	Vol	31637	M-60-Z	A		D13-133		41	G1						QU51C, QU51M		
2nd.	33723	16-6663		455				30781	ST-105	F8	5EV6	F13	Vol	33222	ST-737	8E18	Vol	33215	T-43	A6		D18-130X		47	G1				B52
1st.	32263	16-5740		455				31770					Vol	33409													QU52C, QU52M		
2nd.	34719	16-5742		455				33222	ST-737		8E18		Vol	37992	T-109	A		D13-137X		41	G1						54B1, 2, 3, 54B1-N		
1st.	14261	16-6662		455				33222	ST-737		8E18		Vol	36109	T-109	A		D13-133		41	G1						54B5		
2nd.	30572	16-6663		455				33222	ST-737		8E18		Vol	35629	M-60-Z	A		D13-137		42	G1						55AU, 55U		
1st.	14376	16-5740		455	33217			33222	ST-737		8E18		Vol	36080	M-63-Z	A2		D13-133X		41	G1						55F, 55FA		
2nd.	32825	16-5740		455	†			RL-70N1	RL-71A4	F3	12E10	F3	Vol	38412	T-78	A		D13-133X		41	G1						BP55, BP56		
1st.	35536	16-5740		455	†			RL-70M-1			ST-105		Vol	38409	M-60-Z	A		D13-133		41	G1						QU55		
2nd.	35636	16-5742		455	†			70428					Vol	70439													T55, T56		
1st.	35628	16-5742		455				70428					Vol	72228													X55		
2nd.	70442			455				70413	ST-105		5A1		Vol	70322	M-60-Z	G7		D13-133		41	G1, 7						56X, 56X2, 56X3		
1st.	70437			455				70381	ST-107		5A15		Vol	36080	M-63-Z	A2	G13	D13-137		42	G1, 13						56X5, 56X10		
2nd.	70387	16-6666		455				RL-8G-A3	ST-194		5E45		Vol	35344	M-60-Z	A	G5	D13-133		41	G1, 5						58AV, 58V		
1st.	70379	16-6658	D27	455				92388-1	ST-105	F13	5A1		Vol	34465	M-63-Z	A2		D13-137		42	G1						6, 59AV1, 59V1		
2nd.	70380	16-6670	D27	455				92388-1	ST-105	F13	5A1		Vol	37992	T-109	A		D13-137X		41	G1						K60 (RC415)		
1st.	36232	16-6662		455				92388-1	ST-105	F13	5A1		Vol	36109	M-60-Z	A		D13-133		41	G1						K60 (RC415B)		
2nd.	37364	16-6662		455				70413	ST-105		5A1		Vol	35629	M-63-Z	A		D13-137		41	G1						M60		
1st.	34466			455				70413	ST-105		5A1		Vol	33631	M-63-Z	A		D13-137		41	G1						R60		
2nd.	35636	16-5740		455				70413	ST-105		5A1		Vol	36242	M-60-Z	A6	G7	DS13-133		47	G1, 7						T60		
1st.	33722	16-6662		455				70413	ST-105		5A1		Vol	36242	M-60-Z	A6	G7	DS13-133		47	G1, 7						Howard W. Sams RADIO INDUSTRY RED BOOK Replacement Parts Buyers' Guide		
2nd.	33723	16-6663		455				70413	ST-105		5A1		Vol	38408	T-109	A		D13-137X		41	G1						RCA — 261		
1st.	35536	16-5740		455	33122			92196-504			69A3		Vol	38410	M-60-Z	A		D13-133		41	G1						QU56C, QU56M		
2nd.	35628	16-5742		455	33686			RL-86C-1	ST-165		5E10		Vol	70573	T-95	A		D18-139XX		41	G1						R56		
1st.	35636	16-5740		455	†			34802	ST-105		5A1		Vol	36342	T-95	A		D18-139XX		41	G1						58AV, 58V		
2nd.	35790	16-5792		455				31770	ST-105		5A1		Vol	33631	M-63-Z	A		D13-137		41	G1								
1st.	35636	16-5740		455	†			92513-IK	ST-173		12E15		Vol	36447	T-95	A		D18-139XX		41	G1						59AV1, 59V1		
2nd.	35790	16-5742		455									Bass	38402	M-66-Z	A		D13-139		41	G1								
1st.	35636	16-5740		455									Treble	38405	M-63-Z	A		D13-137		41	G1								
2nd.	35790	16-5742		455				RL-70-R6			12E10	F3	Vol	33425	T-43	A													
1st.	33428	16-5740		455				RL-70-R6			12E10	F3	Vol	34695	T-115	A	G16	D13-139X		41	G1, 16								
2nd.	14308	16-5740		455				30781	ST-196	F13	5E45	F13	Vol	31638	M-64-Z	A		D13-130		41	G1								
1st.	14376	16-5740		455				31770	ST-196	F13	5E45	F13	Vol	33631	M-63-Z	A		D13-137		41	G1								
2nd.	32825			455				33122	ST-168		6E18		Vol	33215	T-43	A6		D18-130X		47	G1								
1st.	33722	16-6662		455				RL-78-6	ST-165		5E10		Vol	33631	M-63-Z	A		D13-137		41	G1								
2nd.	33723	16-6663		455																									

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Type Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
R.C.A.—Continued																								
X60	6	12SA7, 12SK7, 12SQ7, 35L6GT, 6N5, 35Z5GT (51)	34212	AF1010D		UP5515		DY-2X50-150		EL-25		Out	34803	A-3876		T22S45		A-2928						
K61	6	6SA7, 6K7, 6H6, 6SF5, 6F6G, 5Y3G (51)	32240	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	33112	P-60II		T22R02		P-2951						
K62	6	6SA7, 6K7, 6H6, 6SF5, 6F6G, 5Y3G (51)	32240	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	33101	A-3878		T22S47		A-2931						
T62	6	6SA7, 6SK7, 6SQ7, 6F6G, 6U5/ 6G5, 5Y3G (51)	32842	AF22J		UP1145		DY-2X10-450		EL-210		Pwr Out	33112	P-60II		T22R02		P-2951						
G3E	3	12SQ7, 50L6GT, 35Z5GT	72312	PRS150-80-40		BRD4415 & BR3015	A4	DSB-8040-150		TA-440 & UT-301	A4	Out	32905	A-3878		T22S47		P-2952						
T63	6	6SA7, 6SK7, 6SQ7, 6F6G, 6U5/ 6G5, 5Y3G (51)	32240	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	35587	P-6119		T22R02		P-2951						
64F1, 2, 3	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	38593	PRS150-12		BR1215		M-10-150		UT-121		Out	922225-3	A-3878		T22S47		A-2931						17GD60
T64, T65	6	6SA7, 6SK7, 6SQ7, 6FBG, 6U5/ 6G5, 5Y3G (24)	32240	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	33112	P-60II		T22R04		P-2952						
65AU	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	72317	PRS150-50-30	A4	EZ44315C	A4	DSB-8040-150		TA-440 & UT-301	A4	Out	70385	A-3330				A-3031						
65BR9	5	1A7T4, 1R5, 1SS, 3V4	72077			BRH610 & UP2215		DY-2X20-150, & M-1500-6				Pwr	72109											
65F	5	1N5GT, 1A7GT, 1H5GT, 3Q5GT	36718	PRS25-10		BR102A		M-10-25		TA-10		Out	71159	A-3876	B3	T22S47	B3	A-2931						
65U, 65U-1	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	72317	PRS150-30	A4	PRSA150-50-30	A4	DSB-8040-150		TA-440 & UT-301	A4	Out	70993	A-3878		T22S47		A-2931						
65X1, 65X2	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	70408	PRS150-40-40		BRD3515		M-50+30-150		TA-530		Out	70385	A-3330				A-3031						
66BX	6	1A7T4, 1R5, 1SS, 3Q4/3V4, 1I7Z3	71043			PRSA150-50-30		DY-418 & DGM-250-25	A4	EL-434 & UHC-102	EL-330	Pwr	71047	A-3879		T22S47		A-2932						
66E	6	6J5, 6SO7, 6K6GY, 5Y3GT (55, 51)	71976	AF44J & PRS25-25		BR202A		DY-312		EL-323		Out	71975	P-5120		T22R02		P-2951						
66X1, 2, 3, 4, 7, 8, 9	6	12SG7, 12SA7, 12SK7, 35L6GT, 35Z5GT	70408	PRS150-40-40		BRD3515		DY-20-350 & M-2X20-25		TA-530		Out	922225-4	A-3330				A-3031						
66X11, 12, 13, 14, 15	6	12SG7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT	39152	PRS150-30-50		BRD3515		M-50-30-150		TA-530		Out	36800	A-3878	B2			A-2928		B2				
67AV1, 67V1	7	6SA7, 6SG7, 6SO7, 6K6GT, 5Y3GT (55, 51)	37888	AF44J & PRS25-50	A4	UP2245 & BR502	A4	DY-312 & M-25-25	A4	EL-352 & TA-25	A4	Pwr Out	31380	P-60II		T22R02		P-2951						
68R1, 2, 3, 4	8	6BE5, 6BA6, 6AU6, 6AL5, 6SO7, 6K6GT, 5Y3GT (51)	72271	PRS150-4		BR550		M-25-25 & DY-403		TA-55		Pwr Out	36671	A-3823		T22S87		A-2901						
M70	7	6K7, 6A8, 6SK7, 6R7, 6V6G, 024G (51)	32240	AF44J4A		UP2245C		DY-315		EL-350		Chk	33064											
RS79B, K80 (Ch. RC415A)	8	6SA7, 6SK7, 6SO7, 6SF5, 6F6G, 5Y3G, 6U5/6G5 (24)	32152	AF44J4A		UP15D35		DY-2X15-350		EL-254		Drvr Out	32986											
K80 (Ch. RC415C)	8	6SA7, 6K7, 6SO7, 6SF5, 6F6G, 5Y3G, 6U5/6G5 (24)	33014	AF44J4A		UP22245C					Pwr	32243	A-3311		T22S47		A-2936							
K80 (Ch. RC415D)	8	6SA7, 6K7, 6SO7, 6SF5, 6F6G, 5Y3G, 6U5/GG5 (24)	33014	AF44J4A		UP22245C					Pwr	32371												
T80	8	6SA7, 6SK7, 6SO7, 6SF5, 6F6G, 5Y3G, 6U5/6G5 (24)	33014	AF44J4A		UP22245C					Pwr	33112	P-60II		T22R02		P-2951							
K81, K82	8	6SA7, 6K7, 6SO7, 6SF5, 6F6G, 5Y3G, 6U5/EG5 (24)	33014	AF44J4A		UP22245C					Pwr	33444	A-3311		T22S64		A-2936							
BP85	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 177Z6G/35Z5GT	34472								Pwr	33112	P-60II		T22R04		P-2952							
86T6	6	6A8G, 6K7, 6H6, 6F5, 6W4 (46)	11203	GL450-10		KR588A					Pwr	33444	A-3311		T22R04		A-2936							
R89	3	6F5, 25L6, 25Z6	5212	GL450-16		KR516A		C-16-450		PLS-16		Out	14515	A-3878		T22S47		A-2931						
R91	3	6F5, 25L6, 25Z6, (BK61B Ballast) (47)	31323	PRS150-16		BR1615		M-16-150		UT-161		Out	4935	A-3878	B22	T22S47	B22	A-2931						
R93B, C			31584	PRS150-40		BR4015		M-4-150		UT-401		Out	31203	A-3876		T22S45		A-2928						
R93F	4	1C7G, 1D5G, 1F7G, 1G5G	13610	PRS350-12		BR1235		M-10-350		UT-123		Out	31588	A-3876		T22S47		A-2931						
94BK	4	1A7G, 1N5G, 1H5G, 1C5G	32187	PRS150-8		BR815		M-8-150		UT-81		Out	30974	A-3878		T22S47		A-2931						
94BK2	4	1A7G, 1N5G, 1H5G, 1A5G	31323	PRS150-16		BR1615		M-16-150		UT-161		Out	32272	A-3857		T22S48		A-2937						
94BP1 (Ch. RC407)	4	1A7G, 1N5G, 1H5G, 1C5G	33303	PRS250-12		BR1225		M-16-250		UT-122		Out	33062	A-3878		T22S47		A-2931						
94BP1 (Ch. RC407B)	4	1A7G, 1N5G, 1H5G, 1C5G	33303	PRS250-12		BR1225		M-16-250		UT-122		Out	742 & 7482	A-3878		T22S47		A-2931						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Type Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note Part No.	Cornell-Dubilier Part No.	Note Part No.	Solar Part No.	Note Part No.	Sprague Part No.	Note Part No.	Use	Mfr. Part No.	Stancor Part No.	Note Part No.	Thordarson Part No.	Note Part No.	Merit	Note Part No.	Eveready Part No.	Note Part No.	Burgess Part No.	Note Part No.	
R.C.A.—Continued 94BP4.	4	1A7G, 1N5G, 1M5G, 1C5G (See Model 94BP1).	32187	PRS150-8	BR815		M-8-150	UT-81		Out	32164	A-3878	T22S47	A-2931		742 & 1482	4F	'830						
94BP61, 62, 64, 66, 80, 81	4	1C7G, 1D5G, 1F7G, 1G5G	13610	PRS350-12	BR1235		M-10-350	UT-123		Out	30974	A-3822	T22S47	A-2932		740 & 1485	20F	'2308						
94BT1	4	1A7G, 1N5G, 1M5G, 1C5G	32187	PRS150-8	BR815		M-8-150	UT-81		Out	32164	A-3878	T22S47	A-2931		740 & 1485	20F	'2308						
94BT2	4	1A7G, 1N5G, 1M5G, 1A5G	31323	PRS150-16	BR1615		M-16-150	UT-161		Out	32272	A-3857	T22S48	A-2937		740 & 1485	20F	'2308						
94BT6	4	6A8G, 6K7G, 6Q7G, 6K6G	30961						Pwr	30960														
94BT61	4	6D8G, 6S7G, 6T7G, 6G6G	32152		UP15D35		DY-2X15-350	EL-254	Pwr	30971	A-3878	T22S47	A-2931											
94X	4	6K7, 6J7, 25L6, 25Z6G	30873	PRSA150-20-20	BRD2215		M-2X20-150	TA-220	Pwr	32151	A-3879	T22S48	A-2932											
94X1, 2	4	6K7, 6J7, 25L6, 25Z6G	30873	PRSA150-20-20	BRD2215		M-2X20-150	TA-220	Pwr	30944	A-3876	T22S45	A-2928											
94B									Out	30879	A-3876	T22S45	A-2928											
95T, 1	5	6A8 6K7, 6Q7G, 6KGG, 5Y3G (46)	30898	PRSA450-8-8	EZ8845		M-2X8-450	UT-88	Pwr	30889	P-6119	T22R01	P-2951											
95T5	5	6A8G, 6K7, 6Q7G, 6K6G, 5Y3G (44)	31423	PRSA450-8-8	EZ8845		M-2X8-450	UT-88	Pwr	30941	A-3878	T22S47	A-2931											
95T5LW	5	6A8G, 6K7, 6Q7G, 6KGG, 5Y3G (44)	31423	PRSA450-8-8	EZ8845		M-2X8-450	UT-88	Pwr	31409	P-6119	T22R01	P-2951											
95X	4	6K7, 6J7, 25L6, 25Z5, (BK55B Ballast) (40)	30873	PRSA150-20-20	BRD2215		M-2X20-150	TA-220	Pwr	31474	A-3878	T22S47	A-2931											
95XI	4	6K7, 6J7, 25L6, 25Z6G, (BK55B Ballast) (40)	30873	PRSA150-20-20	BRD2215		M-2X20-150	TA-220	Pwr	31203	A-3876	T22S45	A-2928											
95X6	4	6K7, 6J7, 25L6, 25Z6G, (BK55B Ballast) (40)	31323	PRSA150-16	BR1615		M-16-150	UT-161	Out	31203	A-3876	T22S45	A-2928											
95X11	4	6K7, 6J7, 25L6, 25Z6G, (BK55B Ballast) (40)	31323	PRSA150-16	BR1615		M-16-150	UT-161	Out	31203	A-3876	T22S45	A-2928											
95XL	4	6K7, 6J7, 25L6, 25Z6G, (BK55B Ballast) (40)	30873	PRSA150-20-20	BRD2215		M-2X20-150	TA-220	Out	31203	A-3876	T22S45	A-2928											
95XLW	4	6K7, 6J7, 25L6, 25Z6G, (BK55B Ballast) (40)	31323	PRSA150-16	BR1615		M-16-150	UT-161	Out	31203	A-3876	T22S45	A-2928											
96BK6	6	6D8G, 6S7G, 6T7G, 6W7G, 26L5G (47)	31584	PRS150-40	BR4015		M-40-150	UT-401	Out	32368														
96BT6	6	6D8G, 6S7G, 6T7G, 6W7G, 26L5G (47)	31584						Out	32368														
96E	6	6A8G, 6K7, 6H6, 6F5, 6M6G, 5Y3G (44)	31424						Pwr	31574	P-6120	T22R02	P-2951											
96E2	6	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G (47)	32485	AF444J4A	UP22245C				Out	31444	A-3878	T22S47	A-2931											
96K	6	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G (47)	31371	AF444J4A	UP22245C				Pwr	31290	P-6011	T22R02	P-2951											
96K2	6	6K8, 6K7, 6H6, 6F5, 6F6, 5W4 (47)	31371	AF444J4A	UP2245C				Pwr	31455	A-3878	T22S47	A-2931											
96K5, 96K6	6	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G (47)	32485	AF444J4A	UP2245C				Pwr	31446	P-6011	T22R02	P-2951											
96T	6	6A8G, 6K7, 6H6, 6F5, 6K6G, 5Y3G (44)	31424						Pwr	31301	A-3878	T22S47	A-2931											
96T1	6	6A8G, 6K7, 6H6, 6F5, 6K6G, 5Y3G (44)	31424						Pwr	31380	P-6011	T22R02	P-2951											
96T2	6	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G (47)	31371	AF444J4A	UP22245C				Pwr	31301	A-3878	T22S47	A-2931											
96T3	6	6K8, 6K7, 6H6, 6F5, 6F6, 5W4 (47)	31371	AF444J4A	UP22245C				Pwr	31444	P-6011	T22R02	P-2951											
96T4, 96T5	5	6SA7, 6K7, 6SQ7, 25L6, 25Z6G (47)	32708	AF88D4A	UP4415C		DY-307	EL-352	Pwr	31477	A-3878	T22S47	A-2931											
96T6	5	6SA7, 6K7, 6SQ7, 25L6, 25Z6G (47)	32708	AF88D4A	UP4415C		DY-307	EL-352	Pwr	31574	P-6011	T22R02	P-2951											
96T7	6	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G (47)	32485	AF444J4A	UP22245C				Pwr	31574	A-3878	T22S47	A-2931											
96X1, 2, 3, 4	5	6K8, 6SK7, 6SQ7, 25L6, 25Z6G (47)	32548	PRSA150-20-20	BRD2215		M-2X20-150	TA-220	Pwr	31444	A-3878	T22S47	A-2931											
96X11, 12, 13, 14	5	6K8, 6SK7, 6SQ7, 25L6, 25Z6G (47)	32548	PRSA150-20-20	BRD2215		M-2X20-150	TA-220	Pwr	32920	A-3878	B22	A-2931	B22										
96X5	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	34461						Out	31203	A-3876	T22S45	A-2928											
97E	7	6K8, 6K7, 6H6, 6F5, 6F6, 5W4, 6U5 (47)	34460	AF444J4A	UP22245C				Pwr	31380	P-4079	T22R04	P-2952											
97K (Ch. RC351F)	7	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G, 6U5 (47)	31371	AF444J4A	UP22245C				Pwr	31435	A-3878	T22S47	A-2931											
97K (Ch. RC351F (M))	7	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G, 6U5 (47)	32485	AF444J4A	UP22245C				Pwr	31380	P-4079	T22R04	P-2952											
97K (Ch. RC351F (R))	7	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G, 6U5 (47)	32485	AF444J4A	UP22245C				Pwr	31380	P-4079	T22R04	P-2952											
97K2	7	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G, 6U5 (47)	31371	AF444J4A	UP22245C				Pwr	31435	A-3878	T22S47	A-2931											
97KG	7	6K8, 6K7, 6H6, 6F5, 6F6, 5W4, 6U5 (47)	31371	AF444J4A	UP22245C				Pwr	31380	P-4079	T22R04	P-2952											

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quar. Part No.	Note	Use	Mfr. Part No.	ClaroStat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radart Part No.	Note	Project Set No.	
1st. 2nd.	32263 3..	16-6662..		455				32162..	ST-105..		5A1		Vol	32594..	M-63-Z..		-	D13-137..		42	G'			Continued	RCA, 94BP4		
1st. 2nd.	30908 14261	16-6662, 16-6663		45					ST-10..		5A1		Vol	3047..	M-64-Z..		A6	D13-130..		47	G1			See Mod	94BP61, 62, 64, 66, 30, 81		
1st. 2nd.	32264 30957	16-6662..		455				32162..	ST-105..		5A1		Vol	32262..	M-3-Z..		A6	D13-130..		47	G1				94BT		
1st. 2nd.	32264 30957	16-6662..		455				32270..	ST-108..		A		Vol	3226..	M-64-Z..			D13-137..		42	G1				94BT1		
1st. 2nd.	32264 30957	16-6662..		455				30969..	ST-105..		5-1		Vol	-	V-64-Z..		A6	-	-	G1	11..	5434..	I1		94BT2		
1st. 2nd.	32264 30957	16-6662..		455				32162..	ST-105..		5A1		Vol	30..	V-64-Z..		A6	-	3	47	G1	14..	5434..	I1		94BT6	
1st. 2nd.	32264 30957	16-6662..		455				30942..	ST-194..		5-4..		Vol	84..	V-64-Z..		A6	D13-123..		47	G1				94X		
1st. 2nd.	30902 30903	16-6662..		455				30980..	ST-194..		5E45..		Vol	30874..	M-46-Z..		A6	D13-12..		47	G1				94XL, 2		
1st. 2nd.	30902 30903	16-6662..		455				31050..					Vol	31108..	T-43..			G16	D18-130X..							94B	
1st. 2nd.	30902 30903	16-6662..		455				30939..	T-167..		5E18..		Vol	30891..	V-64-Z..		A6	D13-130..		47	G1				95T, 1		
1st. 2nd.	30957 30903	16-6662..		455				31472..					Vol	31412..	M-1-Z..		A6	D13-130..		47	G1				95T5		
1st. 2nd.	30902 30903	16-6662..		455				31472..					Vol	31412..	M-6-Z..											95T5LW	
1st. 2nd.	30902 30903	16-6662..		455				31201..	T-1..		52..		Vol	31194..	M-46-Z..											95X	
1st. 2nd.	30902 30903	16-6662..		455				31201..	ST-194..		5E45..		Vol	31194..	M-46-Z..		A..	D13-123..		41	G1				95X1		
1st. 2nd.	30902 30903	16-6662..		455				31201..	ST-194..		5E45..		Vol	31194..	M-4-Z..		A..	D13-123..		41	G1				95X6		
1st. 2nd.	30902 30903	16-6662..		455				31201..	ST-194..		5E45..		Vol	31194..	M-46-Z..		A..	D13-123..		41	G1				95X11		
1st. 2nd.	30902 30903	16-6662..		455				31201..	ST-194..		5E45..		Vol	31194..	M-46-Z..		A..	D13-123..		41	G1				95XL		
1st. 2nd.	30902 30903	16-6662..		455				31201..	ST-194..		5E45..		Vol	31194..	M-46-Z..		A..	D13-123..		41	G1				95XLW		
1st. 2nd.	14261 14308	16-6662..		455				32327..	ST-15..		8A21..		Vol	3236..	T-1..		A..	D13-130..		41	I1				96BK6		
1st. 2nd.	14261 14308	16-6662..		45				32325..	ST-108..		A1..		Vol	3..3..	T-43..		A..	D13-130..		41	G1				96BT6		
1st. 2nd.	14261 14308	16-6662..		45				31442..					Vol	3141..											96E		
1st. 2nd.	14261 14308	16-6662..		45				31824..					Vol	3..											96E2		
1st. 2nd.	30957 30903	16-6662..		455				31300..	ST-173..		1F15..		Vol & Tone	3..											96K		
1st. 2nd.	30957 30903	16-6662..		455				31300..	ST-173..		12E15..		Vol & Tone	3..											96K2		
1st. 2nd.	30957 30903	16-6662..		455				31592..	ST-173..		12E15..		Vol & Tone	31..											96K5, 96K6		
1st. 2nd.	14376 14283	16-5740..		5				31442..					Vol	311..											96T		
1st. 2nd.	14376 14283	16-5740..		5				31824..					Vol	31475..											96T1		
1st. 2nd.	14376 14283	16-5740..		5				31442..					Vol	84377-1..											97T2		
1st. 2nd.	14376 14283	16-5740..		5				31442..					Vol	311442..											96T3		
1st. 2nd.	14376 14283	16-5740..		455				32715..	ST-105..		5A1..		Vol	31475..											96T4, 96T5		
1st. 2nd.	14376 14283	16-5740..		455				32718..	ST-11..				Vol	31478..											96T6		
1st. 2nd.	14376 14283	16-5740..		45				31442..					Vol	31442..											96T7		
1st. 2nd.	32533 32534	16-6658..		455				842-2-3..	ST-194..		471..		Vol	3..45..	V-64-Z..		A..	D13-130..		41	G1				96X1, 2, 3, 4		
1st. 2nd.	32533 32534	16-6658..		455				34895..	ST-194..		471..		Vol	325..	V-64-Z..		A..	D13-130..		41	G1				96X11, 12, 13, 14		
1st. 2nd.	32533 32534	16-6658..		455							F1..		F1	F1	Vol	32545..	M-64-Z..		A..	D13-130..		41	G1				96X5
1st. 2nd.	32533 32534	16-6658..		455				31824..					Vol	31366..											97E		
1st. 2nd.	30957 30902	16-6662..		455				31300..	ST-13..		12E15..		Vol	31366..											97K		
1st. 2nd.	30957 30902	16-6662..		455				31300..	ST-173..		12E15..		Vol	31366..											(Ch. RC351F)		
1st. 2nd.	30957 30902	16-6662..		455				31300..	ST-173..		12E15..		Vol	31366..											97K		
1st. 2nd.	30957 30902	16-6662..		455				31300..	ST-173..		12E15..		Vol	31366..											(Ch. RC351F(M))		
1st. 2nd.	14376 14283	16-5740..		455				31592..	ST-173..		12E15..		Vol	31366..											97K		
1st. 2nd.	14376 14283	16-5740..		455				31592..	ST-173..		12E15..		Vol	32668..											(Ch. RC351F(R))		
1st. 2nd.	14376 14283	16-5740..		455				31300..	ST-173..		12E15..		Vol	31366..											97K2		
1st. 2nd.	30957 30903	16-6662..		455									Vol	31366..											97KG		

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
R.C.A.—Continued																									
97T	7	6K8, 6K7, 6H6, 6F5, 6F6, 5W4, 6U5 (47)	31371	AF444J4A		UP22245C							Pwr Out	31380	P-4079		T22R04		P-2952						
97T2	7	6K8, 6K7, 6H6, 6F5, 6F6G, 5Y3G, 6U5 (47)	32485	AF444J4A		UP22245C							Pwr Out	31444	A-3878		T22S47		A-2931						
97X	6	6A8G, 6K7, 6H6, 6F5, 25L6G, 25Z6G (47)	31479	PRS150-20-20		BRD2215		M-2X20-150		TA-220			Pwr Out	31380	P-6011		T22R02		P-2951						
97Y	5	6K8, 6K7, 6H6, 6J7, 25L6, 25Z6 (47)	31576			EZ42215		DSB403020-150					Chk Out	5066	C-1277		T22S45		A-2928						
98EY	7	6K8, 6K7, 6H6, 6J7, 25L6, 6U5, 25Z6 (47)	31576			EZ42215		DSB403020-150					Chk Out	5066	C-1277		T22S45		C-2975						
98K	8	6K8, 6J7, 6K7, 6H6, 6F5, 6F6, 6U5, 5W4 (44, 47)	11203	GL450-10		KR516A		D-16-450		PLS-16			Pwr Out	31298	P-6290		T22S45		A-2928						
98K2	8	6A8G, 6K7, 6Q7G, 6J5, 26K6G, 6U5, 5Y3G (44)	32145	PRS450-4		BR445		M-4-450		UT-4			Pwr Out	31301	A-3878		T22S47		A-2931						
98T	8	6A8G, 6K7, 6Q7G, 6J5, 26K6G, 6U5, 5Y3G (44)	32145	PRS450-4		BR445		M-4-450		UT-4			Pwr Out	31298	P-6120		T22R04		P-2952						
98T2	7	6K8, 6K7, 6H6, 6J7, 25L6, 25Z6, 6U5 (47)	31576			EZ42215		DSB-403020-150					Pwr Out	32690	A-3878		T22S47		A-2932						
98X	7	6K8, 6K7, 6H6, 6J7, 25L6, 6U5, 25Z6 (47)	31576			EZ42215		DSB-403020-150					Pwr Out	31655	A-3876		T22S45		A-2928						
98YG	7	6K8, 6K7, 6H6, 6J7, 25L6, 6U5, 25Z6 (47)	31576			EZ42215		DSB-403020-150					Chk Out	5066	C-1277		T22S45		C-2975						
R98	5	6J5, 2A3, 5U4G	14531	GL450-30		KR530		D-30-450		PLS-30			Chk Out	31666	A-3876		T22S45		A-2928						
99K	9	6A8, 6J7, 6K7, 6Q7, 6F5, 26F6, 6U5, 5T4 (44, 47)	14531	GL450-30		KR516A		D-16-450		PLS-16			Chk Out	31666	A-3876		T22S45		C-2975						
99T	9	6A8, 6J7, 6K7, 6Q7, 6F5, 26F6, 6U5, 5T4 (44, 47)	14531	GL450-10		KR530		D-30-450		PLS-30			Chk Out	31453	A-3876		T20C54		A-2928						
R100	V100	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	36673	PRS150-50-50	BRD5515		M-2X50-150		TA-505			Out	35666	A-3330					A-3031					
V101	6	6SA7, 6SK7, 6SQ7, 25L6GT, 35Z6GT (51)	37845	PRS150-30		BR3015		M-30-150		UT-301			Out	37844	A-3876		T22S45		A-2928						
V102	7	6SA7, 6SK7, 6SQ7, 6SF5, 26F6G, 5Y3G	36675	AF444J4A		UP2245C		DY-315		EL-350			Pwr Out	35959	P-6011		T22R02		P-2951						
U104	4	6K7, 6J7, 25L6G, 25Z6G (40)	31323	PRS150-16		BR1615		M-16-150		UT-161			Out	33599	A-3311		T22S64		A-2936						
K105	10	6SK7, 6SA7, 6H6, *6SF5, 6U5, 26F6G, 5U4G (44)	34533	AF444J4A		UP2245C		DY-315		EL-350			Pwr Out	34539	P-6013		T22R02		P-2953						
V105	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	36301	PRS150-50-50		BRD5515		M-2X50-150		TA-505			Pwr Out	36144	A-3307		T22S64		A-2904						
110K, 110K2	10	6SK7, 6SA7, 6Q7, 6SF5, *6K6GT, 5U4G (51)	36045			UP43145C		DY-406		EL-424			Pwr Out	36044	P-6013		T22R05		P-2953						
CV110 (Power Supp.)	1	5Y3G	32013			EZ5116				TU-1616			Chk Pwr	36144	A-3307		T22R04		A-3131						
111K	12	55SK7, 6SA7, 6H6, *6SF5, *6K6GT, 6U5, 5U4G	36045			UP43145C		DY-406		EL-424			Pwr Out	36044	P-6120		T22R06		P-2954						
CV111 (Power Supp.)	1	5T4G (44)	33810	AF844D		UP42215		DY-403020-150		EL-224			Pwr Out	36783	A-3307		T22S68		A-3131						
U111	5	6A8, 6K7, 6Q7G, 6K6G, 5Y3G (44)	33968	PRS150-40-20		PRV450-10-10		M-2X40-150		TA-240			Pwr Out	31111	P-6011		T22R02		P-2951						
U111 Late, U112	5	6A8, 6K7, 6Q7G, 6K6G, 5W4 (44)	31099	PRV450-10-10									Pwr Out	30888	P-6011		T22R02		P-2951						
CV112 (Converter)	1	25Z6GT	30873	PRS250-20-20		BRH610		DSB-2X20-150		TU-220			Chk Pwr	32504	A-3878		T22S47		A-2931						
CV112X (Power Supp.)	1	25Z6GT	30873	PRS250-20-20		BRH610		DSB2X20-150		TU-220			Chk Pwr	36547	A-3878		T22S47		A-2931						
U115	6	6A8G, 6K7, 6H6, 6F5, 6K6G, 5Y3G (44)	31424	AF22J		UP1145		DY-2X10-450		EL-210			Chk Pwr	36547	A-3878		T22S47		A-2931						
U119, I22E, I24	6	6K8, 6K7, 6H6, 6F5, 6F6, 5W4 (47)	31371	AF444J4A		UP2245C							Pwr Out	31477	P-6011		T22R02		P-2951						
U121, I23, I27E	6	6A8G, 6K7, 6H6, 6F5, 6K6G, 5Y3G	32342	AF22J		UP1145		DY-2X10-450		EL-210			Pwr Out	31477	T22S47		T22S47		A-2931						
UY122E, I24	6	6K8, 6K7, 6H6, 6J7, 25L6, 25Z6 (47)	31576			EZ42215		DSB-403020-150		UT-401			Pwr Out	31477	T22S47		T22S47		A-2931						
U123 (2 Band)	6	6SA7, 6K7, 6H6, *6SF5, 6F6G, 5Y3G	33014	AF444J4A		UP2245C							Pwr Out	32588	A-3878		T22S47		A-2931						
U125	8	6A8G, 6K7, 6Q7G, 6J5, 26K6G, 6U5, 5Y3G (44, 47)	32142			EZ8445S							Pwr Out	32144	P-6120		T22R04		P-2952						
U126, I28	10	6A8, 6J7, 6K7, 6H6, *6SF5, *6F6G, 5U4G/5T4, 6U5 (44, 47)	31495	GL450-16		KR516A		D-16-450		PLS-16			Pwr Out	31453	A-3311		T22S64		A-2936						
U129	10	6A8, 6V7, 6K7, 6H6, *6F5, *6F6, 5U4G/5T4, 6U5, (44, 47)	31495	GL450-16		KR516A		M-20-450		UT-20			Pwr Out	31225	P-6290		A-3311		A-2936						
			31495	PRS450-20		BR2045							Pwr Out	31453	A-3311		T22S64		A-2936						
			32088										Pwr Out	31453	A-3311										
			32435										Pwr Out	31453	A-3311										

† Information not available

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
R.C.A.—Continued																								
X130.....	13	6SK7, 6SA7, 6H6, 6SF5, 6F6G, 6U5/6E5, 5U4G (51, 44)	32445 35017 35016	†		UP3345	†	DY-2X30-450	EL-23			Pwr Out	35027 12368	A-3307		T22S68		A-3131						
U130.....	12	6K7, 6A8, 6J7, 6R7, 6J5, 6F6, 6U5, 5T4 (44, 47)	31553 31495	PRS450-20		EZ5116 BR2045		M-20-450		TU-1616 UT-20		Pwr Out	31225 31557											
U132.....	14	6K7, 6L7, 6J7, 6R7, 6H6, 6U5, 6J5, 6F6, 5T4 (44, 47)	14377 31751 31753	GL450-16 GL450-16 GL450-30		KR516A KR516A KR530		D-16-450 D-16-450 D-30-450		PLS-16 PLS-16 PLS-30		Pwr Out	31691 31687											
U134.....	16	6K7, 6L7, 6J7, 6H6, 6U5, 6J5, 6L6, 5T4 (44, 47)	31751 14377 11203	GL450-16 GL450-16 GL450-10		KR516A KR516A		D-16-450 D-16-450		PLS-16 PLS-16		Pwr Out	31674 31685											
V135.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 50Y6GT (51)	39501 39500	PRS150-20		BR2015		M-20-150		UT-201		Out	35056	A-3876		T22S45		A-2928						
V140.....	6	6SK7, 6SA7, 6SQ7, 25L6GT, 25Z6GT (47)	37845 37846	PRS150-30		BR3015		M-30-150		UT-301		Out	37844	A-3876		T22S45		A-2928						
V170.....	6	6SA7, 6SK7, 6H6, 5SF6, 6KGGT, 5Y3G	35858	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	35959	P-6011		T22R02		P-2951						
V175.....	6	6SK7, 6SA7, 6SQ7, 25L6GT (47)	37845	PRS150-30		BR3015		M-30-150		UT-301		Out	38759	A-3876		T22S45		A-2928						
V200, V201.....	7	6SA7, 6SK7, 6SQ7, 6SF5, 6K6GT, 5Y3G	36589 36589	AF44J4A AF44J4A		UP1545 UP2245C		DY-315 DY-315		EL-350		Pwr Out	35959	P-6011		T22R02		P-2951						
VHR202.....	9	6SA7, 6SK7, 6SQ7, 6SJ7, 6KGGT, 6U5, 5Y3G	32405 32405	PR530-24 PR530-24		BR2045		M-20-350		UT-203		Pwr Out	35959	P-6011		T22R02		P-2951						
V205, V405.....	9	6SK7, 6SA7, 6H6, 6SF5, 6F6G, 5U4G (51, 55)	34533	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	34539	P-6012		T22R04		P-2952						
VHR207, VHR407.....	11	6SK7, 6SA7, 6Q7, 12K7GT, 6H6, 6S17, 6F6G, 6U5, 5U4G	34889 36589	AF44J AF3J		UP2245 UP1545		DY-2X20-450		EL-220		Pwr Out	35959	P-6013		T22R05		P-2953						
V209, V210.....	8	6SG7, 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G (51, 255)	32405 31584	PR530-24 PRS25-50		BR2045 ER502		M-20-350		TA-50		Pwr Out	35959	P-6120		T22R04		P-2952						
211K.....	11	6SK7, 6SA7, 6SQ7, 6K6GT, 5U4G	36045	AF44J4A		UP2245C		M-50-25		TA-50		Pwr Out	36671	A-3311		T22S64		A-2904						
VHR212.....	10	6SG7, 6SA7, 6SK7, 6SJ7, 6Q7, 6KGGT, 6U5, 5Y3G	37877 37888	PR530-16 AF44J4A		BR1645 UP2245C		M-16-450		UT-16		Pwr Out	36044	P-6014		T22R06		P-2954						
V215, 219, 221, 225.....	9	6SG7, 6SA7, 6SK7, 6SQ7, 6R7, 6F6G, 5U4G	34889 37888	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	34539	P-6013		T22R05		P-2953						
V300, 301, 302.....	11	6SK7, 6SA7, 6H6, 6J5, 6F6G, 6U5, 5U4G	36599 32240	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	33444	A-3311		T22S64		A-2936						
VHR307.....	13	6SK7, 6SA7, 6H6, 6SJ7, 12K7GT, 6F6G, 6U5, 5U4G	34150 34065	AF44J4A AF6J		UP2245C UP3045		DY-315 DY-30-450		EL-350		Pwr Out	36613	P-6014		T22R05		P-2954						
612V1, 2, 3.....	12	6BA6, 6BE6, 6AU6, 6AL5, 6AT6, 6J5, 6F6G, 5U4G (51, 44)	36599 31323 31584	PR525-50 & AF44J		BR1645 PR510-16		M-16-450		TA-50		Pwr Out	36445	P-6014		T22R06		P-2954						
711V1, 2, 3.....	11	6BA6, 6BE6, 6AU6, 6AL5, 6SQ7, 6J5, 6F6G, 5U4G (51)	36599 31323 72121	PR525-50 & AF44J		BR1615 UP1A128 BR550		M-16-450		UT-161		Pwr Out	37048	P-6014 A-3856		T22S56		P-2954 A-2904						
910KG.....	10	6A8, 6J7, 6K7, 6H6, 6F5, 6F6, 5U4G/5T4, 6U5 (44, 47)	5212 31495 31495	GL450-16 PR50-20		KR516A KR516A BR2045		D-16-450		PLS-16		Pwr Out	31225 14534	A-3311		T22S64		A-2904						
911K.....	11	6K7, 6A8, 6J7, 6H6, 6F5, 6F6, 6U5, 5T4 (47, 44)	14531 5212 33879	GL450-30 GL450-16 PR50-10		KR530 KR530 KR1045		D-30-450		PLS-30		Pwr Out	31225 14534	A-3311		T22S64		A-2904						
MI8122 (Power Supply) MI13159.....	10	7B4, 7F7, 6J5, 6V6GT, 6X5GT (51)		GL450-40 AF22J4A	A9	KR540 UP1045 & BR2025		D-40-450 DY-10-450/ 25-50		PLS-40		Pwr Z Match	†	P-1882 A-3838		T20A17		A-2921						
				AF22J		UP11145		DY-3X10-450		EL-310		Drvr Out	†	A-4405 A-3830		T22S74		A-2903						
				AF44D		UP2215		DY-2X20-150		EL-221			†											
				PRSA150-20-20		BR202A		M-2X20-150		TA-220														
See Following Page For R.C.A. Chassis Number — Model Number Cross—Reference																								

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Product Set No.		
1st.	34698.	16-5740		455			RL75B-5.	ST-173.	F3	12E15.	F3	Vol	35023.	T-95.		A.	D18-139XX		41	G1			Continued	R.C.A.			
2nd.	34524.	16-5742					31556.	ST-173.	F3	12E15.	F3	Tone	35022.			A.	D13-139X		41	G1				U130			
1st.	31565.	16-5740		455	31156.							Tone	35026.														
2nd.	31551.	16-5742					31718.	ST-173.	F3	12E15.	F3	Vol	31547.	T-115.		A.	D18-139X		41	G1				U132			
3rd.	31549.	16-5742.			455	32632.						Tone	31495.														
1st.	31746.	16-5740					31718.	ST-173.	F3	12E15.	F3	Vol	31682.	T-95.													
2nd.	31747.	16-5742																									
3rd.	31748.	16-5740																									
4th.	31748.	16-5740		455	32632.																						
1st.	35636.	16-5740		455	t.		RL88B-6					Vol	38409.	M-60-Z			D13-133.				G1				V135		
2nd.	35790.	16-5742					RL79B-6	ST-189.				Vol	38408.	T-109.		A.	D13-137X		41	G1					V140		
1st.	35636.	16-5740		455	t.		RL70L-5					I2E10.	F3	Vol	36486.	T-115.		A.	D13-139X		41	G1				V170	
2nd.	36615.	16-5742					RL70N-2					I2E50.	F3	Vol	36487.			A2.	D13-139X		42	G1				VI75	
1st.	35636.	16-5740.		455	t.		RL70L-6					I2E10.	F3	Vol	36534.	T-115.		A.	D13-139X		41	G1				V200, V201	
2nd.	35790.	16-5742		455	t.		RL70M-6					I2E10.	F3	Vol	37604.	T-120.		A.	D13-139X		41	G1				VHR202	
1st.	35636.	16-5740		455	t.		RL70M-2	ST-173.	F3	12E15.	F3	Mic, Vol	37021.	M-60-Z			D13-133.				G1				V205, V405		
2nd.	35790.	16-5742		455	t.		RL70M-5	ST-173.	F3	12E15.	F3	Vol	36337.	T-115.			D13-139X				G1						
1st.	35636.	16-5740		455	t.		RL70M-5	ST-173.	F3	12E15.	F3	Hi Tone	36339.	M-63-Z			A.	D13-137		41	G1				VHR207, VHR407		
2nd.	37055.	16-5742					RL70M-6					Hi Tone	37019.	T-78.		A.	D13-133A.		41	G1							
1st.	35636.	16-5740		455	t.		RL70L-6					Hi Tone	37021.	M-60-Z			D13-133.				G1				V209, V210		
2nd.	35790.	16-5742					RL70L-6					Lo Tone	37024.	M-63-Z			D13-137				G1				211K		
1st.	35636.	16-5740		455	t.		RL70L-4					Lo Tone	37023.	M-66-Z			A.	D13-139		41	G1				VHR212		
2nd.	35790.	16-5742					RL70M-6	ST-105.				Vol	38404.	T-120.		A2.	D13-139X		42	G1							
1st.	35636.	16-5740		455	t.		RL70M-6					I2E10.	F3	Vol	39171.	T-78.									V215, Z19, 221, 225		
2nd.	35790.	16-5742		455	t.		RL70M-6					Mic, Vol	38409.	M-60-Z			D13-133X.				G1						
1st.	35636.	16-5740		455	t.		RL70M-6					Hi Tone	38405.	M-63-Z			D13-133.				G1						
2nd.	35790.	16-5742		455	t.		RL70M-6					Lo Tone	38402.	M-66-Z			D13-137				G1						
1st.	35636.	16-5740		455	t.		RL70M-6					Vol	36447.	T-95.			D13-139.				G1				V300, 301, 302		
2nd.	35790.	16-5742					RL94-1					Tone	38404.	M-66-Z			D13-139X				G1						
1st.	36443.	16-5740		455	t.		RL94-2					Vol	35447.	M-63-Z			D18-130X				G1				VHR-307		
2nd.	36444.	16-5742					RL94-2					Tone	35449.	T-95.			A2.	D18-130X		42	G1						
3rd.	35790.	16-5742		455	t.		RL94-2					Mike	37021.	M-60-Z			D13-133.				G1						
1st.	36443.	16-5740		455	t.		71846.					Vol	37859.	T-95.												V300, 301, 302	
2nd.	36444.	16-5742					71846.					Tone	36449.	T-95.													
3rd.	35790.	16-5742		455	t.		71846.					Vol	37021.	M-60-Z													
1st.	71846.		10.7				71846.					I2E10.	F3	Vol	71595.	T-95.											612V1, 2, 3
2nd.	71845.		10.7				71846.					HF Tone	38405.	M-63-Z													
2nd.	71935.		455				71846.					LF Tone	38401.	M-65-Z													
2nd.	71847.		10.7				71847.																				
3rd.	71848.		455				71848.																				
3rd.	71849.		10.7				71849.																				
1st.	71846.		455	t.			71846.																				
1st.	72593.		10.7				71846.																				
2nd.	71935.		455				71846.																				
2nd.	72594.		10.7				71846.																				
3rd.	71848.		455				71848.																				
3rd.	71934.		10.7				71934.																				
1st.	31267.	16-5740		455			31530.	ST-173.	F3	12E15.	F3	Vol	31450.	T-115.	M-63-Z		A.	G16	D13-139X		41	G1				910KG	
2nd.	31268.	16-5742					31530.	ST-173.	F3	12E15.	F3	Tone	31248.	T-115.	M-63-Z		A.	G16	D13-137.		41	G1					
1st.	31267.	16-5740		455																						911K	
2nd.	31268.	16-5742																								M18122 (Power Supply)	
																										M13159	
See Following Page For R.C.A. chassis Number — Model Number—Cross Reference												Howard W. Sams RADIO INDUSTRY RED BOOK Replacement Parts Buyers' Guide													RCA — 269		

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed In Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	

R.C.A.—Continued

CROSS REFERENCE (CHASSIS NUMBER VS MODEL NUMBER)

Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model
RC-315C	5Q1	RC-345D	05X	RC-354B	HF2, HF4	RC-407B	94BP	RC-443B	8Q5UC, 8QU5M	RC-407B	94BP
RC-325C	5Q2	RC-345E	95XL	RC-355	910K	RC-408A	B740, 5X5 Series	RC-444	90I	RC-408A	BT42
RC-325D	5Q2X	RC-345F	95XLW	RC-357	9M1, 9M2	RC-408C	BK42	RC-444A	90K	RC-408C	BK42
RC-331B	U134	RC-345H	U104	RC-357J	M50	RC-410	94B5	RC-447	018	RC-410	94B5
RC-331C	U132	RC-348	95T5	RC-357K	M60	RC-414	80U	RC-449	BK41, BT41	RC-414	80U
RC-332	94X	RC-348A	96T	RC-366	504	RC-414A	607	RC-453	40X52, 40X55	RC-414A	607
RC-333	94BK, 94BT, 95T, 95T1	RC-348C	96E	RC-381	95X11	RC-414B	608, 6QK8	RC-454	9TX50, 9TX50M	RC-414B	608, 6QK8
RC-333A	94BT5	RC-348D	96T1	RC-381A	95X6	RC-414C	U50	RC-455	BP55, 56, 85	RC-414C	U50
RC-333B	94BK1, 94BT1	RC-348E	U115	RC-386	UY125	RC-415	K60	RC-456	46X11, 46X12	RC-415	K60
RC-333C	94BT61	RC-348F	95T5LW	RC-386A	98K2, 98T	RC-415A	X20	RC-456A	46X13	RC-415A	X20
RC-335	99K	RC-348H	U123	RC-386B	U25, U26	RC-415B	K60, K62	RC-457	45X1, 45X2	RC-415B	K60, K62
RC-335A	98K	RC-349	U121	RC-390	94BK2, 94BT2	RC-415C	K80, K81, K82	RC-457A	45X1, 45X2	RC-415C	K80, K81, K82
RC-335C	1104, 110K	RC-348L	U127E	RC-392	98BK5, 98BT6	RC-415D	K80	RC-457D	45X5, 45X6	RC-415D	K80
RC-335D	U126, U128	RC-349	97X	RC-394	M70	RC-416	T64, T65	RC-458E	45X3, 45X4	RC-416	T64, T65
RC-335E	110U	RC-350	9X, 1, 2, 3, 4	RC-396	505, 5Q55, 5Q56	RC-416A	180	RC-459A	45X11, 45X12	RC-416A	180
RC-335F	910KG	RC-350A	9X6, 11, 12, 13, 14	RC-396B	508	RC-418	T55, T56	RC-459B	46X1, 46X2	RC-418	T55, T56
RC-335H	99T	RC-351	96K, 96T2	RC-396D	5012	RC-418A	K60	RC-459C	46X3	RC-418A	K60
RC-335K	U30, U129	RC-351A	97E, KG, T	RC-396E	5012A	RC-418B	U10	RC-459D	45X11, 45X12	RC-418B	U10
RC-335R	U30, U129	RC-351B	96T3	RC-399	98T4, 98T5	RC-421	U123	RC-459E	45X13	RC-421	U123
RC-336	8QB, 8QBK	RC-351C	U124	RC-399A	98T6	RC-425	T60	RC-459F	46X1, 46X2	RC-425	T60
RC-337	8Q1	RC-351D	U122E	RC-400A	98X1, 2, 3, 4	RC-425A	U12	RC-459H	46X3	RC-425A	U12
RC-337A	804	RC-351E	U119	RC-401	98X11, 12, 13, 14	RC-425D	T62	RC-459J	45X11, 45X12	RC-425D	T62
RC-337B	1001	RC-351F (FM) (FR)	97K	RC-403A	97X21, 22, 23	RC-435	9TX50, 9TX50M	RC-459K	45X113	RC-435	9TX50, 9TX50M
RC-338	1204, 12QK	RC-351K	97K2, 97T2	RC-403Q	97X21, 22, 23	RC-435A	45E, 45M, 45EW	RC-459L	45X	RC-435A	45E, 45M, 45EW
RC-338A	120U	RC-351L	96E2, K5, K6, T7	RC-404A	U8	RC-436	40X50	RC-459M	45X16, 45X17	RC-436	40X50
RC-339	HFI	RC-352	98EY, 98X, 98YG	RC-405A	97X31, 97X32	RC-440	A	RC-459T	45X11, 45X12	RC-440	A
RC-340	94X1, 94X2	RC-352A	97V	RC-405B	97X33	RC-441	40B, 4QB4	RC-461	46X24	RC-441	40B, 4QB4
RC-341	M	RC-252B	UY22E	RC-405C	40X30, 40X31	RC-441A	601	RC-461A	46X23	RC-441A	601
RC-341C	U112	RC-352C	UY124	RC-405D	40X30, 40X31	RC-442	604X	RC-461B	46X21	RC-442	604X
RC-341CM	U111 (Late)	RC-352D	98T2	RC-407	94BP	RC-443	8Q2	RC-462	15X	RC-443	8Q2
RC-345C	95X1	RC-354	U130								

RME																						
ME14	6	1N5G, IA7G, 1H5G, 1A5G																				
DM30X	4	18S2, 6SJ7, 6J5, 80	2.25	2.26																		
41-43	9	7B7, 7J7, 6B6, 7C7, 7A6, 7C5, 80	15, 15, 10 Mfd	20 Mfd	PR525-25	UP15D145	DY-3X15-450	EL-344	Chk	4.1	P-6289	T22R00		P-2949								
45	9	7B7, 7J7, 7B6, 7C7, 7A6, 7C5, 80 (46, 47)	15, 10, 15 Mfd	20 Mfd	AF441 & PRS450-10	UP15D145	DY-3X15-450	EL-344	Chk	4.1	P-6289	T22R00		P-2949								
70	11	6K7G, 6J7G, 6H6, 6A6, 6K7, 6F6, 80	15, 15, 10, 40 Mfd		AF444J	UP22245	DY-4X20-450	EL-420	Chk	4.20												
84	8	7B7, 7S7, 7K7, 6G6, 5Y3G (47)	15, 10, 15 Mfd	20 Mfd	AF441 & PRS450-10	UP6J47	DY-3X15-450	EL-344	Chk	4.21												
99 (Early)	11	7A7, 7A4, 7B8, 7F7, 7A6, 7C5, 80	15, 15, 10, 20 Mfd		AF444J4	BR202A	M-25-25	TA-25	Chk	5.1												
99 (Late)	11	7B7, 7A4, 7B8, 7F7, 7A6, 7C5	15, 15, 10, 20 Mfd		AF444J4 & PRS25-25	UP22245C	BR502A	M-25-25	Chk	5.2												
RADIO DEVELOP	M	ENT & RESEARCH CO.—(See Magic Tone)							Chk	4.2												
RADIOLA	P-5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	34472	AF44D4DA	UP4CJ61	DY-304	EL-351	Out	36098	A-3856	T22S47	A-2900		743 & 482		6F						
25BP (Ch. RC-1020)	5	1A7GT, 1NSGT, 1H5GT, 3Q5GT, 35Z5GT	34472	AF44D4DA	BR252A	M-25-25	TA-25	Out	39538	A-3856	T22S47	B22	A-2900		743 & 482		6F					
25BP (Ch. RC-527D)	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	34472	AF44D4DA	UP4CJ61	DY-304	EL-351	Out	36098	A-3856	T22S47	B22	A-2900		743 & 482		6F					
B50	4	1A7, 1N5, 1H5, 3Q5	34965	PR525-25	BR1215	M-10-25	UT-121	Out	33779	A-3856	T22S47	B22	A-2900		743 & 482		6F					
B52	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	36718	PR5125-10	BR102A	M-10-25	TA-10	Out	38585	A-3856	T22S47	B22	A-2900		743 & 482		6F					
			38705	PR5150-30	BR3015	M-20-150	UT-301	Out	38595	A-3856	T22S47	B22	A-2900		743 & 482		6F					
								Out	33779	A-3856	T22S47	B22	A-2900		743 & 482		6F					

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS				Section H VIBRATORS				MFR. & MODEL						
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clarostat	Shaft	Switch	Note	IRC	Shaft	Switch	Note	Mfr.	Radiant	Note	Photofact Set No.

Continued—R.C.A.

CROSS REFERENCE (CHASSIS NUMBER VS. MODEL NUMBER)

Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model	Chassis	See Model																
RC-462A	16X1, 16X2, 36X	RC-507B	0K23	RC-523	V170	RC-563A	Q65	RC-1001A	IIX1	RC-1001B	10X, 12X, 12X2, 14X, 14X2	RC-1001C	12AX, 12AX2, 35X	RC-1001E	14AX, 14AX2, 34X	RC-1002	28AX	RC-1002A	28X	RC-1003A	IAX, IAY2, 1X, 1X2	RC-1003C	55X	RC-1004A	25BT2	RC-1004B	25BK, 25BT3	RC-1004D	B52										
RC-462B	16X3	RC-507C	QU2C, QU2M	RC-524	V102	RC-563E	O11	RC-1001B	10X, 12X, 12X2, 14X, 14X2	RC-525A	14BT1, 14BT2	RC-564	V215, V221	RC-1001C	12AX, 12AX2, 35X	RC-525B	V219	RC-564A	V225	RC-1001E	14AX, 14AX2, 34X	RC-526	15BT	RC-564B	Q14, Q15	RC-1002	28AX	RC-1002A	28X	RC-1003A	IAX, IAY2, 1X, 1X2	RC-1003C	55X	RC-1004A	25BT2	RC-1004B	25BK, 25BT3	RC-1004D	B52
RC-462C	16X4	RC-507D	QU2C, QU2M	RC-525	14BT1, 14BT2	RC-565A	Q11	RC-1004E	55F, 55FA, 65F	RC-1004F	24BT1, 24BT2	RC-526	15BT	RC-565B	Q14, Q15	RC-1004F	24BT1, 24BT2	RC-527	15BP1, 2, 3, 4, 5, 6	RC-566A	QU56C, QU56M	RC-1005A	15X, 35X, 56X, 56X2, 56X3	RC-1005C	55X	RC-1006A	25BT2	RC-1006B	25BK, 25BT3	RC-1006D	B52								
RC-472F	T63	RC-507F	QU3C, QU3M	RC-526	14BK	RC-566B	Q14, Q15	RC-1007	55F, 55FA, 65F	RC-1007A	15X, 35X, 56X, 56X2, 56X3	RC-527	15BP1, 2, 3, 4, 5, 6	RC-567	27K	RC-1007A	15X, 35X, 56X, 56X2, 56X3	RC-528	15BP7	RC-568	Q51C, QU51M	RC-1008A	15X, 35X, 56X, 56X2, 56X3	RC-1008C	55X	RC-1009A	25BT2	RC-1009B	25BK, 25BT3	RC-1009D	B52								
RC-473A	X55	RC-507H	QU3C, QU3M	RC-529	15BP1, 2, 3, 4, 5, 6	RC-568A	Q55	RC-1009E	55F, 55FA, 65F	RC-1009F	24BT1, 24BT2	RC-530	15BP2	RC-569	28T	RC-1009F	24BT1, 24BT2	RC-531	15T	RC-570	29K	RC-1010A	15X, 35X, 56X, 56X2, 56X3	RC-1010C	55X	RC-1011A	25BT2	RC-1011B	25BK, 25BT3	RC-1011D	B52								
RC-474	X60	RC-507J	Q26	RC-529	15BP2	RC-570	29K	RC-1012A	34X	RC-1012B	34X	RC-532	15T	RC-571	211K	RC-1012A	34X	RC-533	15T	RC-572A	211K	RC-1013A	6X2	RC-1013C	6X2	RC-1014A	26X1	RC-1014C	26X3	RC-1015A	26X4	RC-1015C	26X4						
RC-475	K105	RC-507K	Q27	RC-529	15BP7	RC-573	V209	RC-1016A	55AU, 55U	RC-1016C	55AU, 55U, 65U1	RC-534	15T	RC-574	V210	RC-1016A	55AU, 55U	RC-535	15T	RC-575	V212	RC-1017A	65AU, 65U, 65U1	RC-1017C	65AU, 65U, 65U1	RC-1018A	34X	RC-1018C	34X	RC-1019A	26X1	RC-1019C	26X3	RC-1020A	26X4	RC-1020C	26X4		
RC-477	S05	RC-507L	QU52C, QU52M	RC-529	15BP7	RC-576	V223	RC-1021A	56X5, 56X10	RC-1021C	56X5, 56X2	RC-536	15T	RC-577	V223	RC-1021A	56X5, 56X10	RC-537	15T	RC-578	V224	RC-1022A	35X	RC-1022C	35X	RC-1023A	56X5, 56X10	RC-1023C	56X5, 56X2	RC-1024A	65X1	RC-1024C	65X2						
RC-477A	S06	RC-508	Q24	RC-529	15BP7	RC-579	V224	RC-1025A	65X1	RC-1025C	65X1	RC-538	15T	RC-580	V225	RC-1025A	65X1	RC-539	15T	RC-581	V226	RC-1026A	66BX	RC-1026C	66BX	RC-1027A	66BX	RC-1027C	66BX	RC-1028A	66BX	RC-1028C	66BX						
RC-477B	S06	RC-509A	16T3	RC-529	15BP7	RC-582	V226	RC-1029A	66BX	RC-1029C	66BX	RC-540	15T	RC-583	V227	RC-1029A	66BX	RC-541	15T	RC-584	V228	RC-1030A	66X1	RC-1030C	66X1	RC-1031A	66X1	RC-1031C	66X1	RC-1032A	66X1	RC-1032C	66X1						
RC-477C	S06	RC-509B	16T2	RC-529	15BP7	RC-585	V227	RC-1033A	66X1	RC-1033C	66X1	RC-542	15T	RC-586	V228	RC-1033A	66X1	RC-543	15T	RC-587	V229	RC-1034A	66X1	RC-1034C	66X1	RC-1035A	66X1	RC-1035C	66X1	RC-1036A	66X1	RC-1036C	66X1						
RC-478A	704	RC-509C	16K	RC-529	15BP7	RC-588	V229	RC-1037A	66X1	RC-1037C	66X1	RC-544	15T	RC-589	V230	RC-1037A	66X1	RC-545	15T	RC-590	V231	RC-1038A	66X1	RC-1038C	66X1	RC-1039A	66X1	RC-1039C	66X1	RC-1040A	66X1	RC-1040C	66X1						
RC-478B	704	RC-509F	16K	RC-529	15BP7	RC-591	V231	RC-1041A	66X1	RC-1041C	66X1	RC-546	15T	RC-592	V232	RC-1041A	66X1	RC-547	15T	RC-593	V233	RC-1042A	35X	RC-1042C	35X	RC-1043A	35X	RC-1043C	35X	RC-1044A	26X1	RC-1044C	26X3	RC-1045A	26X4	RC-1045C	26X4		
RC-482B	U9	RC-509H	16T3	RC-529	15BP7	RC-594	V233	RC-1046A	66X1	RC-1046C	66X1	RC-548	15T	RC-595	V234	RC-1046A	66X1	RC-549	15T	RC-596	V235	RC-1047A	66X1	RC-1047C	66X1	RC-1048A	66X1	RC-1048C	66X1	RC-1049A	66X1	RC-1049C	66X1						
RC-482C	U9	RC-509J	16T3	RC-529	15BP7	RC-597	V234	RC-1049A	66X1	RC-1049C	66X1	RC-550	15T	RC-598	V235	RC-1049A	66X1	RC-551	15T	RC-599	V236	RC-1050A	66X1	RC-1050C	66X1	RC-1051A	66X1	RC-1051C	66X1	RC-1052A	66X1	RC-1052C	66X1						
RC-483B	U44	RC-511	18T	RC-529	15BP7	RC-600	V236	RC-1053A	66X1	RC-1053C	66X1	RC-552	15T	RC-601	V237	RC-1053A	66X1	RC-553	15T	RC-602	V238	RC-1054A	66X1	RC-1054C	66X1	RC-1055A	66X1	RC-1055C	66X1	RC-1056A	66X1	RC-1056C	66X1						
RC-483C	U45	RC-512	17K	RC-529	15BP7	RC-603	V237	RC-1057A	66X1	RC-1057C	66X1	RC-554	15T	RC-604	V238	RC-1057A	66X1	RC-555	15T	RC-605	V239	RC-1058A	66X1	RC-1058C	66X1	RC-1059A	66X1	RC-1059C	66X1	RC-1060A	66X1	RC-1060C	66X1						
RC-489	96X5	RC-512A	19K	RC-529	15BP7	RC-606	V239	RC-1061A	66X1	RC-1061C	66X1	RC-556	15T	RC-607	V240	RC-1061A	66X1	RC-557	15T	RC-608	V241	RC-1062A	66X1	RC-1062C	66X1	RC-1063A	66X1	RC-1063C	66X1	RC-1064A	66X1	RC-1064C	66X1						
RC-497	7QB, 7QBK	RC-513A	110K, 110K2	RC-529	15BP7	RC-609	V240	RC-1065A	66X1	RC-1065C	66X1	RC-558	15T	RC-610	V241	RC-1065A	66X1	RC-559	15T	RC-611	V242	RC-1066A	66X1	RC-1066C	66X1	RC-1067A	66X1	RC-1067C	66X1	RC-1068A	66X1	RC-1068C	66X1						
RC-498	K50	RC-514	Q20, Q21	RC-529	15BP7	RC-612	V242	RC-1069A	66X1	RC-1069C	66X1	RC-560	15T	RC-613	V243	RC-1069A	66X1	RC-561	15T	RC-614	V244	RC-1070A	66X1	RC-1070C	66X1	RC-1071A	66X1	RC-1071C	66X1	RC-1072A	66X1	RC-1072C	66X1						
RC-498A	U20	RC-517	V100	RC-529	15BP7	RC-615	V243	RC-1073A	66X1	RC-1073C	66X1	RC-562	15T	RC-616	V244	RC-1073A	66X1	RC-563	15T	RC-617	V245	RC-1074A	66X1	RC-1074C	66X1	RC-1075A	66X1	RC-1075C	66X1	RC-1076A	66X1	RC-1076C	66X1						
RC-498B	U40	RC-517C	V105	RC-529	15BP7	RC-618	V245	RC-1077A	66X1	RC-1077C	66X1	RC-564	15T	RC-619	V246	RC-1077A	66X1	RC-565	15T	RC-620	V247	RC-1078A	66X1	RC-1078C	66X1	RC-1079A	66X1	RC-1079C	66X1	RC-1080A	66X1	RC-1080C	66X1						
RC-498E	U43	RC-517H	V135	RC-529	15BP7	RC-621	V246	RC-1081A	66X1	RC-1081C	66X1	RC-566	15T	RC-622	V247	RC-1081A	66X1	RC-567	15T	RC-623	V248	RC-1082A	66X1	RC-1082C	66X1	RC-1083A	66X1	RC-1083C	66X1	RC-1084A	66X1	RC-1084C	66X1						
RC-498F	K61	RC-518	V302	RC-529	15BP7	RC-624	V247	RC-1085A	66X1	RC-1085C	66X1	RC-568	15T	RC-625	V248	RC-1085A	66X1	RC-569	15T	RC-626	V249	RC-1086A	66X1	RC-1086C	66X1	RC-1087A	66X1	RC-1087C	66X1	RC-1088A	66X1	RC-1088C	66X1						
RC-501	U46	RC-519A	V302	RC-529	15BP7	RC-627	V248	RC-1089A	66X1	RC-1089C	66X1	RC-570	15T	RC-628	V249	RC-1089A	66X1	RC-571	15T	RC-629	V250	RC-1090A	66X1	RC-1090C	66X1	RC-1091A	66X1	RC-1091C	66X1	RC-1092A	66X1	RC-1092C	66X1						
RC-501A	K130	RC-519C	V200	RC-529	15BP7	RC-630	V249	RC-1093A	66X1	RC-1093C	66X1	RC-572	15T	RC-631	V250	RC-1093A	66X1	RC-573	15T	RC-632	V251	RC-1094A	66X1	RC-1094C	66X1	RC-1095A	66X1	RC-1095C	66X1	RC-1096A	66X1	RC-1096C	66X1						
RC-502	704X	RC-521	V205	RC-529	15BP7	RC-633	V251	RC-1097A	66X1	RC-1097C	66X1	RC-574	15T	RC-634	V252	RC-1097A	66X1	RC-575	15T	RC-635	V253	RC-1098A	66X1	RC-1098C	66X1	RC-1099A	66X1	RC-1099C	66X1	RC-1100A	66X1	RC-1100C	66X1						
RC-507	Q22	RC-521B	V405	RC-529	15BP7	RC-636	V252	RC-1101A	66X1	RC-1101C	66X1	RC-576	15T	RC-637	V253	RC-1101A	66X1	RC-577	15T	RC-638	V254	RC-11																	

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tunes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
RADIOOLA—Continued	61-1, 61-2, 61-3...	6 12SG7, 12J6GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	39152...	PRSA150-50-30		BRD3515...		DSB-5030-150...		TA-530...		Out	36800...	A-3330...					A-3031...					
61-5...	6 12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	39152...	PRSA150-40-40			BRD3515...		DSB-5030-150...		TA-530...		Out	36800...	A-3330...					A-3031...					
61-8, 61-9...	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	70408...	PRSA150-40-40			BRD3515...		DSB-5030-150...		TA-530...		Out	70385...	A-3330...					A-3031...					
61-10...	6 12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	39152...	PRSA150-40-40			BRD3515...		DSB-5030-150...		TA-530...		Out	36800...	A-3330...					A-3031...					
500, 501...	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	32576...	PRSA150-20-20			BRD2215...		M-2X20-150...		TA-220...		Out	34846...	A-3876...					T22S45...	A-2928...				
510, 11, 12, 13, (Ch. RC459J, 464A, B)	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	35348...	PRSA150-30-30			BRD3315...		M-2X30-150...		TA-330...		Out	35056...	A-3876...					T22S45...	A-2928...				
515 (Ch. RC1000C)	6 12SK7, 12SA7, 12SQ7, 35Z5GT (51)	36301...	PRSA150-50-30			BRD3515...		M-5030-150...		TA-530...		Out	36800...	A-3330...					A-3031...					
515 (Ch. RC1014A)	6 12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	36301...	PRSA150-50-30			BRD3515...		M-5030-150...		TA-530...		Out	38994...	A-3876...					T22S45...	A-2928...				
516, 517...	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	36301...	PRSA150-50-30			BRD3515...		M-5030-150...		TA-530...		Out	39994...	A-3876...					T22S45...	A-2928...	B22			
522, (Ch. RC-1001C, 1022A)	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	35348...	PRSA150-30-30			BRD3315...		M-2X30-150...		TA-330...		Out	38994...	A-3876...					T22S45...	A-2928...	B22			
526, 527...	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	36301...	PRSA150-50-30			BRD3515...		M-5030-150...		TA-530...		Out	36800...	A-3330...					A-3031...					
560P...	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	36301...	PRSA150-50-30			BRD3515...		M-5030-150...		TA-530...		Out	35666...	A-3330...					A-3031...					
R-566P...	5 12SA7, 12SK7, 12SQ7, 35L6GT, 50Y6GT (51)	39501...	PRS-150-20...			BR2015...		M-20-150...		UT-201...		Out	35056...	A-3876...					T22S45...	A-2928...				
RADIONIC—(Also See Chancellor)	Y62W, Y728...	6 7B7, 14Q7, 14B6, 50A5, 35Y4 (47)	30, 30, 30 Mfd...	PRSA150-40-40 PRS150-30		EZ44315C...		DSB-403020-150...		TA-303...		Out	...	A-3876...	B3	T22S45...	B3	A-2928...	B3					
RANGER	118...	5 1T4, 1R5, 1S5, 3Q4...	50, 30 Mfd...	PRSA150-30-50 PRS-50-10...		BRD5315...		DSB-5030-150 M-10-150...		TA-530...		Out	980...	A-3879...		T22S47...		A-2932...		950 467...	2R...	XX45...		
RADIO MFG. EN	G INEERS—See (RME)																							
RADIO WIRE TEL	L EVISION—See Lafayette)																							
RAULAND—(See Lyric)																								
RAY ENERGY AD...	5 12SA7, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	30, 30, 20 Mfd...	PRSA150-40-40 PRS150-20...			BRD3315...		M-2X30-150...		TA-330...		Out	...	A-3876...		T22S45...		A-2928...						
AD4...	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	24 Mfd... 40, 40 Mfd...	PRSA150-40-40 PRS150-40...			BRD2015...		M-20-150...		UT-201...		Out	...	A-3876...	B3	T22S45...	B3	A-2928...	B3					
SRB-IX...	5 12SA7 / 14Q7, 12SK7 / 14A7, 12SQ7 / 14B6, 50L6GT/50A5, 35Z5GT/35Y4 (47)	50 Mfd... 20 Mfd...	PRSA150-40-40 PRS150-20...			BRD4415...		M-2X40-150...		TA-440...		Out	...	A-3876...		T22S45...		A-2928...						
RECORDIO 6A10, 6A20 (Ch. 6A)	6 67JGT, 6J5GT, 6SQ7GT, 6U6GT, 6E5, 5Y3GT...	12, 12, 12 Mfd...	AF444J...		A5	UP11145C...		DY-4X10-450... & M-12-450...		EL-341...		A3	Pwr Cut	80-2159-2... 81-2093...	P-6119... A-3854...		T22R01...		P-2950...					
6B10, 6B20, 6B30, 6B32...	8 6A8GT, 6SK7GT, 6SQ7GT, 6S7GT, 6E5, 6SN7GT, 6V6GT, 5Y3GT (44)	18-2039... 18-2040...	AF444J & PRS25-25...		A3	UP44315C...		DSB403020-150...		EL-340...		A4	DY-X10-450... & M-2X40-150...	EL-423...	C-1002...	T20C52...	C-2990...	P-6312...	P-2952...	B12				
REGAL—(Tokfone)	Tok-Fon, 20W Amp	7 7C7, 7N7, 26L6G, 5U4G (40)	32 Mfd...	PRPS450-16...		2BR1645...		M-16-450...		ZUT-16...		Pwr Out	...	P-4081... A-3311...		T22R33...								
ARP40, ARP400, ARP450...	4 14F7, 25A5, 35Y4 (51)	16, 16 Mfd...	PRPS450-16...			BR1645...		M-16-450...		UT-16...		Out	...	A-3856...		T22S64...								
L43...	5 14Q7, 14A7, 14B6, 35A5, 35Z3...	20 Mfd...	PRSI50-12...			BR105...		M-10-50...		TA-310...		Out	...	A-3856...		T22S46...		A-2901...						
L46...	6 14Q7, 14A7, 14B6, 35A5, 35Y4 (47)	8 Mfd...	PRSI50-8...			BR1215...		M-10-50...		UT-121...		Out	...	A-3856...		T22S46...		A-2901...						
L-76...	6 12SK7GT / 12SJ7GT, 12SA7GT / 14Q7, 12SQ7GT / 14B6, 35L6GT / 35A5, 35Z5GT / 35Y4 (47)	60-101...	PRSA150-50-50			EZ5515...		M-8-150...		UT-81...		Out	...	A-3856...		T22S46...		A-2901...						
W-700, W-800, 801...	6 12SK7GT / 14A7, 12SA7GT / 14Q7, 12SQ7GT / 14B6, 35L6GT / 35A5, 35Z5GT / 35Y4 (47)	60, 101...	PRSA150-40-40 PRS150-40-40 & PRS150-30	A8 A4, 8	A8	EZ5515...		DSB-2X50-150...		TA-505...		A8	Out	...	A-3876...	B3	T22S45...	B3	A-2928...					
W-900, W-901...	6 12SH7 / 12SK7 / 12SG7, 12SA7, 12SK7, 12S07, 35L6GT, 35Z5GT, or Lock-in Equiv. (47)	60, 101...	PRSA150-50-50			EZ5515...		M-2X50-150...		TA-505...		Out	...	A-3876...		T22S45...		A-2928...						

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL							
Use	Mfr. Part No.	Messner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photostat Set No.						
1st.	70411	16-5740		70412	16-6660	D3	455			70413	ST-105		5A1		Vol	36242	M-60-Z	A6	G7	D13-133		47	G1,7		Continued—	RADIOLA					
2nd.										70413	ST-105		5A1		Vol	36242	M-60-Z	A6		D13-133		47	GI		14	61-1, 61-2, 61-3					
1st.	70413	16-5740		70412	16-6660		455			70470			46A1		Vol	70322	M-60-Z	A6	G7	D13-133		47	G1,7		12	61-5					
2nd.										70413	ST-105		5A1		Vol	36242	M-60-Z	A6		D13-133		47	GI		27	61-8, 61-9					
1st.	70463	16-6658		70466	16-6670		455			35119	ST-196		4E45		Vol	35330	M-64-Z	A		D13-130		41	GI		12	61-10					
2nd.										34450	ST-194		5E45		Vol	35344	M-60-Z	A		D13-133		41	GI		500, 501						
1st.	35346	16-6662		35347	16-6663		455			37612	ST-105		5A1		Vol	36242	M-60-Z	A		D13-133		41	GI		510, 11, 12, 13 (Ch. RC459), 464A, B)						
2nd.										RL-86B-1	ST-105		5A1		Vol	38410	M-60-Z	A		D13-133		41	GI		515 (Ch. RC1000C)						
1st.	36232	16-6662		36232	16-6663	D3	455			5 Inch PM	ST-105		5A1		Vol	36584	M-60-Z	A	G5	D13-133		41	G1,5		515 (Ch. RC1014A)						
2nd.										5 Inch EM	ST-194	F13	5E45	F13	Vol	36584	M-60-Z	A	G5	D13-133		41	GI,5		516, 517						
1st.	36232	16-6662		36232	16-6663	D3	455			5 Inch PM	ST-105	F13	5A1	F13	Vol	36584	M-60-Z	A	G5	D13-133		41	GI,5		522 (Ch. RC1000C, 1022A)						
2nd.										5 Inch EM	ST-194	F13	5E45	F13	Vol	36584	M-60-Z	A	G5	D13-133		41	GI,5		526, 527						
1st.	36232	16-6662		36232	16-6663	D3	455			RL-86A3	ST-194		5E45		Vol	36584	M-60-Z	A		D13-133		GI			560P						
2nd.										RL-81B-4	ST-105		5A1		Vol	37977	M-60-Z	A		D13-133		GI			R-566P						
1st.	35636	16-5740		35790	16-5742		455	33122		RL-86B-6					Vol	38409	M-60-Z	A		D13-133		GI									
2nd.		16-5740																													
1st.	Z-13902	16-6658		2nd.	Z-13903	16-6670	455			5 Inch	ST-107		5A15		Vol	+	M-60-Z	A		D13-133		41	GI		(Also See Chance Hor)—	RADIONIC Y62W, Y728					
2nd.																									26						
1st.	118-6			2nd.	118-7		150			4 Inch	ST-113		4A1		Vol	+	M-49-S	A2		D11-128		42	GI					23	RANGER 118		
1st.	t	16-6658		2nd.	16-6660		455			5 Inch	ST-194		5E45		Vol	118-C-1	M-58-S	A		D11-133		41	GI					7	RAY ENERGY AD		
2nd.	t	16-6658		1st.	16-6660		456			5 Inch	ST-105		5A1		Vol	113-C-1	M-60-Z	A		D13-133		41	GI					7	AD4		
1st.	SLR-124	16-6658		2nd.	SLR-125	16-6660	455			+	ST-105		5A1		Vol	+	M-60-Z	A		D13-133		41	GI					13	SRB-IX		
2nd.																															
										t	6Y-0288-I				Vol	Tone	+	M-60-Z	A		D13-133		41	GI					10	RECORDIO 6A19, 6A29, (Ch. 6A)	
1st.	68-3001A	16-6658		2nd.	68-3002A	16-6670	456	t		+				69A3		Vol	Tone	+	M-60-Z	A		D13-133		41	GI					8	6B10, 6B20, 6B30, 6B32
2nd.																		M-55-S	A		D14-130		41	GI							
																			A		D13-133		41	GI							
1st.	t	16-6658		2nd.	16-6660		455			L-26	6 Inch	ST-109	F6	6A21	F6	Tone	Mike	+	M-60-Z	A		D13-133		41	GI			(To k-Fone ne) —	REGAL Tok-Fone 20W AMP		
2nd.	t	16-6658		1st.	16-6660		455			+			F1		Tone	Phono	+	M-60-Z	A		D13-133		41	GI					15	ARP40, ARP400, ARP450 L43	
1st.	t	16-6658		2nd.	16-6660		455			5 Inch	ST-107		5A15		Vol	D9910		M-60-Z	A		D13-133		41	GI					46	L43	
2nd.	t	16-6658		1st.	16-6660		455			110-101	ST-107		5A15		Vol	7241928	M-63-Z	A		D13-137		41	GI					5	L76		
1st.	30-104	16-5740		2nd.	30-105	16-5742	455			+	ST-105		5A1		Vol	20-101	M-60-Z	A		D13-133		41	GI,6						W700, W800, W801		
2nd.	t	16-6658		1st.	16-6660		455			5 Inch	ST-105		5A15		Vol	20-101	M-63-Z	A		D13-137		41	GI,6						14		
1st.	30-104	16-6658		2nd.	30-105	16-6660	455			+	ST-107		5A15		Vol	20-101	M-60-Z	A		D13-133		41	GI,6						13	W900, W901	
2nd.																		M-63-Z	A		D13-137		41	GI,6							

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	N o t e	Cornell-Dubilier	N o t e	Solar	N o t e	Sprague	N o t e	Use	Mfr.	Stancor	N o t e	Thordarson	N o t e	Merit	N o t e	Eveready Part No.	N o t e	Burgess Part No.	N o t e	
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"		
REGAL—Continued	5	12SA7GT, 12SK7, 12SQ7GT, 50L6GT, 35Z5GT (47). (See Model W-700).	60-101.	PRSA150-50-50		EZ5515.		DSB-2X50-150		TA-505.		Out	On Spkr.	A-3876.		T22S46.		A-2928.						
205.	4	1R5, 1T4, 1S5, 3S4.	30-30 Mfd.	PRSA150-50-50		EZ5515.		DSB-5030-150		TA-530		Out	On Spkr.	A-3878.		T22S46.		A-2931.		950 & 467.		2R.	XX45.	
208.	4	1R5, 1T4, 1S5, 3S4.	200 Mfd.	PRSA25-100.		BRH2525		M-250-25		UHC-202		Out	On Spkr.	A-3876.		T22S46.		A-2928.						
747.	6	12SH7 / S67 / 1A47, 12SAG77 / 1A47, 12SK7GT / 1A47, 12SQ7GT/12B6, 35L6GT/35A5, 35Z5GT/35Y4 (47)	50-50 Mfd.	PRSA150-50-50		EZ5515.		DHN-2X50-150		TA-505.		Out	On Spkr.	A-3876.		T22S46.		A-2928.						
1049.	6	12SH7 / S67 / 1A47, 12SAG77 / 1A47, 12SK7GT / 1A47, 12SQ7GT/12B6, 35L6GT/35A5, 35Z5GT/35Y4 (47)	60-101.	PRSA150-50-50		EZ5515.		DSB-2X50-150		TA-505.		Out	On Spkr.	A-3879.		T22S47.		A-2928.						
1749.	6	12SG7, 12SA7, 12SK7GT, 35L6GT, 35Z5GT (47)																						
REMLER MP5-5-3	5	6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT (44)	16 Mfd.	PRS450-15		A8	BR1645.	M-16-450.	A8	UT-16		Pwr Out	CS-6720	P-6119.		T22R01		P-2950.						
			8-8 Mfd.	PRS450-8-8			EZ588.	DHS-2X8-450.	A8	TU-88			CS-0438	A-3878.		T22S47.		A-2931.						
			4 Mfd.	PRS450-4.			BR445.	M-4-450.		UT-4														
28.	5	6A8, 6K7, 6J7, 25A6, 25Z6, (K49B Ballast) (46)	10-10 Mfd.	PRS150-12.			EZ1215.	M-10-150.		UT-121.		Out		A-3877.		T22S60.		A-2930.						
39.	5	6A7, 6K7, 75, 42, 80 (46)	16-4 Mfd.																					
46.	5	6A7, 6K7, 6Q7, 6F5, 5Z4 (46)	4-4 Mfd.	PRS450-8-8			EZ588.	DH-2X8-450SS		TU-88		Pwr Out		P-6119.		T22R01		P-2950.						
46 (Scottie).	5	6A8, 6K7, 6Q7, 6F5, 5W4 (46)	16-4 Mfd.																					
47 (World Wide Scottie).	5	6A8, 6K7, 6Q7, 6F6, 5Z4 (46)	4-4 Mfd.	PRS450-8-8			EZ588.	DH-2X8-450SS		TU-88		Pwr Out		A-3878.		T22S47.		A-2931.						
49.	4	6D6, 6C6, 41, 80	8-4 Mfd.	PRS450-8-8			EZ588.	DH-2X8-450SS		TU-88		Pwr Out		P-6011.		T22R02		P-2951.						
61.	6	6A7, 6K7, 76, 6D6, 42, 80	4-8 Mfd.	PRS450-8-8			EZ588.	DH-2X8-450SS		TU-88		Pwr Out		A-3878.		T22S47.		A-2931.						
65.	7	6D6, 6K7, 76, 75, 42, 80, 6G5 (46)	10 Mfd.	PRS25-10.			BR102A.	M-10-25.		TA-10.		Pwr Out		P-6011.		T22R02		P-2951.						
73.	6	6K8, 6SK7, 76, 42, 80 (46)	10 Mfd.	PRS450-8-8			EZ8845.	M-2X8-450.		UT-88		Pwr Out		A-3878.		T22S47.		A-2931.						
89.	11	6K7, 6C5, 6L7, 6K7, 6H6, 6FS, 26V6G, 5X4G, 6E5	20 Mfd.	PRS260-20.			BR2025.	M-20-350.		UT-202.		Pwr Out		P-6011.		T22R05		P-2953.						
440.	5	1R5, 1T4, 1S5, 1T5G1, 11N7G1.	10-10-10 Mfd.	PRS450-10.			BR1045.	M-10-450.		UT-12.		Pwr Out		A-3811.		T22S54.		A-2930.		950 & 467.		2R.	XX45.	
4420.	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20			BRD2215.	M-2X20-150.		TA-220.		Out		A-3876.		T22S45.		A-2928.						
462.	5	6A8GT, 6SK7, 6Q7GT, 6K6GT, 6X5G.	4-16 Mfd.																					
467.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	20-20 Mfd.	PRSA150-20-20			BRD2215.	M-2X20-150.		TA-220.		Pwr Out		P-6348.		T22R01		B1		P-3047.				
5300B, 5300B1, 5300I.	5	12BE6, 12BA6, 12ATE6, 50BS5 (44)	60-40 Mfd.	PRSA150-40-80			EZ3315 & BR4015.	DSB-8040-150.		EL-340.		Out		A-3876.		T22S45.		A-2928.						
5500, 5505, 5510, 5515 "Scotie Pup" 5520, 5530 "Scotie Jr."	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	60-40.	PRSA150-50-50			EZ5515.	DSB-2X50-150		TA505.		Out		7-31.		A-3876.		T22S45.		A-2928.				
RENARD L-1A PT-1A, 1B5T-1.	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47).	20-20 Mfd.	PRSA150-20-20			BRD2215.	M-2X20-150.		TA-220.		Out		A-3876.		B3		A-2928.		B3				
SCOTT 800B.	24	6SK7GT, 6J5, 6SA7GT, 6H6GT, 6E5, 6AG6, 6C4, 6AG5, 6AC7, 6SJ7, 6H6, 6E5, 6J5GT, 6SL7GT, 26L6G, 29Y3GT, 003/VR150 (47).	15B481, 15B477.	GL600-4, PRS450-30.			KR604, KRC5220.	D-4-600, DY-2X30-450.		AP46, PLS-216.		Chk		17B492, 17B591.		C-1411.		T20C55.		C-3196.				
			15B481, 15B477.	PRS450-30.			BT25-25.				Pwr		91B492, 91B591.		P-6165.									
			15A15, 15B638.	PRRS50-25.			BR255, EZ8845.	M-25-50, DHS-2X8-450.		TA-525, UT-88.		Dut Relay		91B664, 91B694.		P-4019, A-3890.		T22S66.		A-2905.				
			8-8 Mfd.	PRSA450-8-8.			KRC5220.	DY-2X20-450.		PLS-216.														
			15B475, 15B795.	PRRS25-25.			BR252A.	M25-25.		TA-25.														
SEA PAL Marine Portable.	6	1A7GT, 21N5GT, 1H5GT, 1H5GT, 3Q5GT, 35Z5GT	45X297, 45X301.	AF44D4DA.			UP4CJ61.	DY-304.		EL-351.		Out		On Spkr.		A-3856.		T22S47.		A-2900.		†.		
6P21.	6	1A7GT, 21N5GT, 1H5GT, 1H5GT, 17L7GT	119-125.	AF44D4DA.			UP4CJ61.	DY-304.		EL-351.		Out		105129.							†.			
101, 102, (Radio Compass).	6	21N5GT, 1A7GT, 1H5GT, 1H5GT, 1A5GT, 17L7GT	119-107, 119-113.	AF44D4DA.			UP4CJ61.	DY-304.		EL-351.		Out		105107.							†.			
SEARS-ROEBUCK		(See Silvertone)																						
SENTINEL 44A.	6	6A7, 6D6, 6H6, 6F5, 42, 80.	1476, 1477.	GL450-16, GL450-12.			KR516A, KR512A.	D-16-450, D-12-450.		PLS-16, PLS-12.		Pwr Out		2049, On Spkr.		P-6012, A-3822.		T22R04, T22S47.		P-2952, A-2931.				
46A.	8	6A7, 6K7, 75, 6C5, 36F6, 80, 6E5.	1477.	GL450-12, GL450-16.			KR512A, KR516A.	D-12-450, D-16-450.		PLS-12, PLS-16.		Pwr Out		2191, On Spkr.		P-6013, A-3852.		T22R05, T22S64.		P-2953, A-2936.				

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photolab Set No.	MFR. & MODEL		
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radial Part No.	Note	
1st.	30-104	16-6658		455				110-101	ST-105		5A1		Vol	20-101	M-60-Z		A.	D13-133		41	G1				Continued 26	REGAL 205
2nd.	30-105	16-6660						110-103	ST-113		4A1		Vol	20-102	AM-63-Z	KSS-3	A2	D13-137	E	42				(See Model 27)	W7000 208 747	
1st.	30-114	16-6668		455				110-101	ST-105		5A1		Vol	20-101	M-60-Z		A.	D13-133		41	G1					17 1049
2nd.	30-114	16-1669																							28 1749	
1st.	30-104	16-6658		455				60-101	ST-105		5A1		Vol	20-101	M-60-Z		A.	D13-133		41	G1					
2nd.	30-105	16-6660																								
1st.	30-104	16-6658		455																						
2nd.	30-105	16-6660																								
1st.	L30232	16-6658		450																					REMLER MPS-5-3 8.	
2nd.	L30233	16-6660																								
1st.	+	16-6661		450																					28	
2nd.	+	16-6661																								
1st.	+	16-5712		450																					39	
2nd.	+	16-5714																								
1st.	+	16-6661		450																					46	
2nd.	+	16-6661																								
1st.	+	16-6661		450																					46 Scottie)	
2nd.	+	16-6661																							47 (World-Wide Scottie)	
1st.	+	16-6661		450																					49	
2nd.	+	16-6661																							51	
1st.	+	16-5712		450																					65	
2nd.	+	16-5714																								
1st.	+	16-5712		450																					73	
2nd.	+	16-5714																								
1st.	+	16-5742		450																					89	
2nd.	+	16-5742																								
1st.	+	16-5712		450																					440	
2nd.	+	16-5714																								
1st.	+	16-6658		455																					442C	
2nd.	+	16-6658																								
1st.	+	16-5714		455																					462	
2nd.	+	16-5714																								
1st.	+	16-5714		455																					467	
2nd.	+	16-6658																								
1st.	L-30259	16-6658		450	†	L-72		L-100085			F13	46A1	Vol	L-20393	M-63-Z		A.	D13-137		41	G1				23 5300B, 5300Ft, 5300I	
2nd.	L-30260	16-6660			†	QT		L-100089			F13	4A1	Vol		M-63-Z		A.	D13-137		41	G1				27 5500, 5505, 5510, 5515 "Scottie Pup" 5520, 5530 "Scottie Jr."	
1st.	S-103	16-6658		455																					RENARD L-1A, PI-1A, 185T-1	
2nd.	S-104	16-6660																							SCOTT 800B	
1st.	208615			455				85B490 85B909			JAF-60	F17		Vol Treble Bass Sen (or)	708570 708540 708540 708569	AM-63-Z AT-42 AT-42 RS-3	RS-3 RS-3 RS-3	D13-137 D13-130X D13-130X								14.
2nd.	208616																									
3rd.	208617			10.7																						
1st(P)	208618																									
1st(S)	208619																									
2nd.	208620																									
3rd.	208621																									
1st.	9A1514	16-6658		456				12A358	ST-108		6A1		Vol	36X289	AM-60-Z	KSS-3	A2								SEA PAL Marine Portable	
2nd.	9A1515	16-6660						114244			F1		Vol	101256	AM-63-Z	KSS-3	A2								6P21	
1st.	108174B	16-6658		455				114190			F1		Vol	101212	M-60-Z										101, 102 (Radio Compass)	
2nd.	108175B	16-6660																								
1st.	108174	16-6658		455																					SEARS-ROEBUCK	
2nd.	108175	16-6660																								
1st.	A-2072	16-5712		465																					SENTINEL 44A	
2nd.	A-2052	16-5714																								
1st.	A-2527	16-5712		465																					46A	
2nd.	A-2195	16-5714																								

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
		Dial Light Type Listed in Parentheses																		"A"	"B"	"A"	"B"	
SENTINEL—Continued																								
56U.	8	6A8, 6K7, 6H6, 6F5, 25A6, 25Z6, 6E5.	2159.																					
67L.	6	6A7, 6D6, 75, 76, 24B.																						
72A, 72AE.	5	6A7, 6D6, 75, 41, 80, Some Use 6G5.	3041.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
73B.	5	6D8G, 26STG, 26L5G, 41.	3060.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
74A, 74AE.	5	6A7, 6D6, 75, 41, 80, Some Use 6G5.	3718.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
76A.	11	26K7, 6A8, 6J7, 6H6, 6C5, 26F6, 80.	1110. 1693. 3041. 3167.	PRSA450-8-8		BR845.		M-8-450.		UT-8.														
78B, 78BE.	6	6D8G, 26STG, 26L5G, 19, Some Use 6N5.	1693. 3060.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
80B.	5	1C6, 34, 1F6, 33, 5E1.																						
82A, 82AE.	7	6A7, 6D6, 75, 75, 41, 80, Some Use 6G5.	3718.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
83UE.	7	6A7, 6D6, 76, 6C8, 43, 25Z5, 6G5.	3638.																					
86AE.	8	6A8G, 6K7G, 6Q7G, 6C5G, 26K6G, 5Y4G, 6G5.	1108. 3718.	PRSA450-8-8		BR845.		M-8-450.		UT-8.														
87AE.	9	26K7, 6A8, 6Q7, 6C5, 26F6, 5Y3G, 6G5.	4262. 4261. 1693.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
88BE.	8	26STG, 6D8G, 26L5G, 19, 6N5 (40).	4188. 1693.	PRSA450-8-8		EZ5116.		M-10-25.		TU-1616.														
96BE.	6	6D8G, 26STG, 6L5G, 41, 6N5.	3060. 1693.	PRSA450-8-8		EZ-8845.		M-2X8-450.		UT-88.														
98AE.	7	6A7, 6D6, 76, 75, 41, 80, 6G5.	3718.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
99AE.	11	26K7, 6L7, 6J7, 6H6, 6C5, 6N7, 26L5, 26S3, 6G5.	4321. 1693. 1110.	PRSA450-8-8		BR102A.		M-10-25.		TA-10.														
100X.	5	6D8G, 6STG, 6T7G, 41, 6ZY5G.	4096.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
106A.	5	6A8G, 6K7G, 6Q7G, 6K6G, 5Y4G.	4140.	PRSA450-8-8		EZ588.		DH-2X8-450SS.		TU-88.														
107AE.	6	6A7, 6D6, 75, 41, 80, 6G5.	3718.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
110A.	11	26K7, 6A8, 6J7, 6H6, 26C5, 26F6, 26.	1693. 3041. 3167. 1110.	PRSA450-8-8		BR102A.		M-10-25.		TA-10.														
118B.	4	1A7G, 1N5G, 1H5G, 1A5G.	1693.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
119B.	4	6D8G, 6S7, 6T7G, 6G6G (40).	4841. 1693.	PRSA150-20-20		BRD2215.		M-2X20-150.		TA-220.														
124A, 124AE.	6	6A8G, 6K7, 6Q7G, 6K6G, 5Y4G, 6U5.	4772. 1693.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
125AE.	6	6K8, 6K7, 75, 41, 80, 6U5.	3718.	PRSA450-8-8		EZ8845.		M-2X8-450.		UT-88.														
127B.	4	1A7G, 1N5G, 1H5G, 1A5G.	1693.	PRSA450-8-8		BR102A.		M-10-25.		TA-10.														
128B.	5	1C7G, 1D5G-P, 1H4G, 1E5G-P, 1G5G, 4-1.	1693.	PRSA25-10		BR102A.		M-10-25.		TA-10.														
130B, 130BE.	5	6D8G, 6S7, 6L5G, 6T7G, 6G6G, Some Use 6N5.	4841. 1693.	PRSA150-20-20		BRD2215.		M-2X20-150.		TA-220.														
137U.	4	6K8, 6J7, 25L6, 25Z6.	4895. 4896.	PRSI150-30. PRSI150-12.		BR3015. BR1215.		M-30-150.		UT-301.														
138AE.	7	26K7, 6K8, 6Q7G, 6V6G, 5Y4G, 6U5.	10102. 10188.	PRSA450-8-8		EZ8845.		M-8-450.		UT-8.														
139UE.	8	26K7, 6K8, 6R7, 25L6G, 25Z6G, 6U5.	10113.	PRSA25-50		BR502.		M-50-25.		TA-50.														
140B, 140BE.	7	6S7, 6K8, 6T7G, 6G6G, 6Z7G, 6N5.	1693. 10036.	PRSA25-10		BR102A.		M-10-25.		TA-10.														
141AE.	6	6K8, 6K7, 6Q7G, 6K6G, 5Y4G, 6U5.	10158.	PRSB450-8-8		EZ588.		DH-2X8-450SS.		TU-88.														
142A, 142AE.	5	6K8, 6K7, 607G, 6K6G, 5Y4G, Some Use 6U5.	10158.	PRSA450-8-8		EZ588.		DH-2X8-450SS.		TU-88.														
143L.	6	6K8, 6K7, 5Q7G, 6C5G, 25L6G.																						

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Phonetic Part No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radial Part No.	Note		
1st.	A-2347	16-5712	465				1727	ST-190	F13	6E25	F13	Vol	2055	M-60-Z	A		D13-133		41	G1				Continued—	SENTINEL 56U	
2nd.	A-2195	16-5714					1927	ST-738	F13	8E25	F13	Tone	2239	M-60-Z	A		D13-133		41	G1					67L	
1st.	A-2347	16-5712	465				1817		F2		F13	Tone	2199	M-45-Z	A		D13-123		41	G1					72A, 72AE	
2nd.	A-2259	16-5714					3642	ST-168		6E18		Tone	2775	M-60-Z	A		D13-133		41	G1					73B	
1st.	3283	16-5712	465				3676	ST-108		6A1		Tone	3545	M-46-Z	A		D13-133		41	G1						
2nd.	3284	16-5714					3677	ST-115		8A21		Tone	3546	M-60-Z	A		D13-123		41	G1						
1st.	3283	16-5712	465				3642	ST-168		6E18		Vol	2775	M-60-Z	A		D13-133		41	G1					74A, 74AE	
2nd.	3284	16-5714					1399	ST-737		8E18		Tone	3545	M-46-Z	A		D13-123		41	G1					76A	
1st.	3398	16-5712					2730	ST-173		12E15		Vol	3403													
2nd.	3399	16-5714																								
1st.	3738																									
1st.	3283	16-5712	465				3021		F2		F13	Vol	3761	M-46-Z	A		D13-123		41	G1					78B, 78BE	
2nd.	3284	16-5714					3022					Tone	2199													
1st.	4151	16-5712	465				2999	ST-108		6A1		Vol	2239	M-60-Z	A		D13-133			G1					80B	
2nd.	2052	16-5714					3721	ST-115		8A21		Tone	3761	M-46-Z	A		D13-123		41	G1					82A, 82AE	
1st.	3283	16-5714	465				1350		F2		F13	Tone	2199	M-46-Z	A		D13-123		41	G1					83UE	
2nd.	3284	16-5714					1399					Vol	3761												86AE	
1st.	4110	16-5712	465				1727		F2		F13	Tone	2199	M-46-Z	A		D13-123		41	G1					87AE	
2nd.	4111	16-5714					1927					Vol	4078													
1st.	4110	16-5712	465				2440		F2		F13	Tone	2199	M-46-Z	A		D13-123		41	G1						
2nd.	4111	16-5714					2729					Vol	4186													
1st.	3398	16-5712	465				2730		F13																	
2nd.	4185	16-5714																								
1st.	3398	16-5712	465				3097	ST-119		10A4		Vol	4186													88BE
2nd.	4185	16-5714																								
1st.	3283	16-5712	465				3676	ST-108		6A1		Vol	2775	M-60-Z	A		D13-133		41	G1					96BE	
2nd.	3284	16-5714					3677	ST-115		8A21		Tone	3545	M-46-Z	A		D13-123		41	G1						
1st.	3283	16-5712	465				3642	ST-168		6E18		Vol	2775	M-60-Z	A		D13-133		41	G1					98AE	
2nd.	3284	16-5714					4242		F2		F2	Tone	3545	M-46-Z	A		D13-133		41	G1					99AE	
1st.	3283	16-5712	465				4243					Vol	4304													
2nd.	3284	16-5714																								
1st.	3283	16-5712	465				3676	ST-108		6A1		Vol	3545	M-60-Z	A		D13-133		41	G1					100X	
2nd.	3284	16-5714					3677	ST-115		8A4		Tone	3545	M-46-Z	A		D13-123		41	G1						
1st.	3283	16-5712	465				4141	ST-167		5E18		Vol	4144	M-60-Z	A		D13-133		41	G1					106A	
2nd.	3284	16-5714					1350		F2		F13	Tone	4408	M-60-Z	A		D13-133		41	G1					107AE	
1st.	4403	16-5712	465				1399					Vol	4409	M-46-Z	A		D13-123		41	G1					110A	
2nd.	4404	16-5714					2730	ST-173		12E15		Vol	3403													
1st.	4791	16-5712	455				4926	ST-105		5A1		Vol	4803	AM-60-Z	KSS-3	A4	D13-133	E	45						118B	
2nd.	4792	16-5714					10123	ST-115		8A21		Tone	4839	AM-60-Z	KSS-3	A	D13-133	E	41						119B	
1st.	3283	16-5712	455				4837	ST-108		6A1		Vol	4871	AM-60-Z	KSS-3	A	D13-133	E	41						124A, 124AE	
2nd.	3284	16-5714					10073	ST-115		8A21		Tone	4871	AM-60-Z	KSS-3	A	D13-133	E	41						125AE	
1st.	3283	16-5712	455				4141	ST-167		5E18		Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41						127B	
2nd.	3284	16-5714					10027		F2		F13	Vol	10012	AM-60-Z	KSS-3		D13-133	E							128B	
1st.	4403	16-5712	455				10028					Tone	10013	AM-46-Z	KSS-3		D13-123	E							130B, 130BE	
2nd.	4404	16-5714					10123	ST-115		8A21		Vol	4871	AM-60-Z	KSS-3		D13-133	E							137U	
1st.	4791	16-5712	455				2999	ST-108		6A1		Vol	4803	AM-60-Z	KSS-3	A	D13-133	E	41						138AE	
2nd.	4792	16-5714					3721	ST-115		8A21		Tone	4862	AM-46-Z	KSS-3	A	D13-123	E							139UE	
1st.	4791	16-5712	455				8 inch	ST-108		6A1		Vol	4871	AM-60-Z	KSS-3	A	D13-133	E	41						140B, 140BE	
2nd.	3284	16-5714					8 inch	ST-115		8A21		Tone	4872	AM-46-Z	KSS-3	A	D13-123	E	41						141AE	
1st.	4889	16-5712	455				4881					Vol	4894	AM-46-Z	KSS-3	A	D13-123	E	41						142A, 142AE	
2nd.	4110	16-5712	455				10109	ST-736		8E10		Vol	10057	AT-116	KSS-3		D18-139X	E							143L	
1st.	4110	16-5714					10110					Tone	10058	AT-116	KSS-3		D18-139X	E								
2nd.	4111	16-5714					10408		F13	12E10	F13															
1st.	4110	16-5712	455				10117	ST-104		8A4		Vol	10057	AT-116	KSS-3		D18-139X	E								
2nd.	4111	16-5714					10409					Tone	10058	AT-116	KSS-3		D18-139X	E								
1st.	4110	16-5712	455				10118	ST-101		12A4		Vol	10057	AT-116	KSS-3		D18-139X	E								
2nd.	4111	16-5714					10064	ST-104		8A4		Tone	10058	AT-116	KSS-3		D18-139X	E								
1st.	4110	16-5712	455				10065	ST-101		12A4		Vol	10058	AT-116	KSS-3		D18-139X	E								
2nd.	4111	16-5714					10027	ST-168		6E18		Tone	4871	AM-60-Z	KSS-3	A	D13-133	E								
1st.	4110	16-5712	455				10028	ST-737		8E18		Vol	4872	AM-46-Z	KSS-3	A	D13-123	E	41							
2nd.	4111	16-5714					10144	ST-108		6A1		Tone	4872	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	4110	16-5712	455				10144 (or)		F7	8A21	F7	Vol	4871	AM-60-Z	KSS-3	A	D13-123	E	41							
2nd.	4111	16-5714					10145	ST-115		8A21		Tone	4872	AM-46-Z	KSS-3	A	D13-123	E	41							

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No.	Tubos	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
																				"A"	"B"	"A"	"B"		
SENTINEL—Continued																									
144X, 144XE	5	6D8G, 6S7, 6T7G, 6G6G, 5ZY5G	1693, 4096, 10470, 26K7, 6K8, 6Q7G, 6C5G, 6L6, 6AF6G, 6AE6G, 5Z3,	PRS25-10, PRSA450-8-8, GL450-30, PRS25-10, PRS150-30	BR102A, EZ8845, KR530		M-10-25, M-2X8-450, D-30-450		TA-10, UT-68, PLS-30		Pwr Out Chk Pwr Out On Spkr. On Spkr. Out	10153, 10226, 10218, 4880	A-3879, +, A-3830, A-3876	T22S48, T22R06, T22S63, T22S45		A-2932, +, A-3131, A-2928									
145AE	11	6D8G, 6S7, 6T7G, 6G6G, 5ZY5G	10102, 1693, 4395	PRSI50-30	BR102A, BR3015		M-10-25, M-30-150		TA-10		Pwr Out On Spkr. On Spkr. Out	10240, 4139	P-6289, A-3856, 4139	T22R00, T22S47, T22R00, T22S47		P-2949, A-2931, P-2949, A-2931									
147U	5	6A8, 6K7, 6Q7G, 25L6, 25Z6	4895	PRSI50-30	BR845		M-8-450		UT-8		Pwr Out Pwr Out	10240, 4139	P-6289, A-3856, 4139	T22R00, T22S47, T22R00, T22S47		P-2949, A-2931, P-2949, A-2931									
148A	5	6A7, 6K7, 6Q7G, 41, 80	10245	PRSI50-8	BR845		M-8-450		UT-8		Pwr Out Pwr Out	10240, 4139	P-6289, A-3856, 4139	T22R00, T22S47, T22R00, T22S47		P-2949, A-2931, P-2949, A-2931									
149A, 149AE	6	6A7, 6K7, 6Q7G, 41, 80, 6U5	10245	PRSI50-8	BR845		M-8-450		UT-8		Pwr Out	11272, 11577	P-6119, A-3878	T22R01, T22S47		P-2951, A-2931, P-2951, A-2931									
151BL	4	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10	BR102A		M-10-25		TA-10		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S48, T22S45		A-2937, +, A-2928	741 & 2482, 4F, +, 2B30								
158AE	7	6K7, 6X8, 6C5G, 6F5G, 6V6G, 5Y4G	10102, 10245, 10188	PRSI50-8, PRS25-50	BR845, BR502, BR3015		M-8-450, M-50-25, M-30-150		UT-8, TA-50, UT-301		Pwr Out On Spkr. On Spkr. Out	10105, 10903, 10901	P-6120, A-3849, A-3822	T22R02, T22S46, T22S45		P-2951, A-2930, A-2928									
163UL	5	6A7, 6D6, 75, 25L5G, 25Z5	4895	PRSI50-30	BR3015		M-30-150		UT-301		Dut On Spkr.	11272, 11577	P-6119, A-3878	T22S45		A-2928									
167U	5	6A8, 6SK7, 6SQ7, 25L6, 25Z6	4895	PRSI50-30	BR3015		M-30-150		UT-301		Out	11272, 11577	P-6119, A-3878	T22S45		A-2928									
168B	5	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10	BR102A		M-10-25		TA-10		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S48		A-2937, +, A-2928									
175B	4	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10	BR102A		M-10-25		TA-10		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S48		A-2937, +, A-2928	758, +, 17GD60								
176B	6	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10	BR102A		M-10-25		TA-10		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S48		A-2937, +, A-2928	758, +, 17GD60								
177U	5	6A8GT, 6K7GT, 6Q7, 25L6GT, 25Z6GT	4895	PRSI50-30	BR3015		M-30-150		UT-301		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S45		A-2928									
178BL	4	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10	BR102A		M-10-25		TA-10		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S48		A-2937, +, A-2928	743 & 2482, 6F, +, 2B30								
180XL	5	1A7G, 1N5G, 1H5G, 1Q5G	10847, 9196	AF1010D, PRS25-25	BR102A, BR502A		DY-2X50-150, M-25-25		EL-25, TA-25		Chk Out	10903, 10901	C-2305, A-3822	T20C53, T22S47		718 & 2482, F4P1, +, 2Z30									
181BL	4	1A7G, 1N5G, 1H5G, 1Q5G	1693	PRS25-10	BR102A		M-10-25		TA-10		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S47		A-2932, +, A-2928	743 & 2482, C5, +, 5DA60								
184U, 184UE	5	12A8GT, 12SK7, J2S07, 35L6GT, 35Z5GT, Some Use 6AB5 (47)	11070	PRS150-50	PR5015		M-50-150		UT-501		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S45		A-2928									
185A, 185AE	5	6K8, 6SK7, 6SQ7, 6K6B, 5Y4G, Some Use 6U5 (444)	11031, 1693	PRS25-10	BR102A		DY-2X30-450		TA-10		Pwr Out On Spkr.	11027, 4198, 4848	P-6010, A-3852, A-3822	T22R01, T22S47		P-2950, A-2931, A-2928									
186B, 186BE	5	6D8G, 6S7, 6L5G, 6T7G, 6G6G, Some Use 6AB5 (47)	11150, 1693	PRS25-10	BR102A		M-10-25		TA-10		Chk Out On Spkr.	11027, 4198, 4848	P-6010, A-3852, A-3822	T22R01, T22S47		P-2950, A-2931, A-2928									
189L	6	6K8, 6SK7, 6SQ7, 6J5G, 25L6G (47)	11080, 1693	PRS50-50, PRS25-10	BR505, BR102A		M-50-50, M-10-25		TA-550, TA-10		In Out On Spkr.	11042, 10142, 10901	A-62-C, A-3301	T20A16, T22S60		A-2932, A-2915, A-2905									
191B, 191BE	6	6S7, 6K8, 6T7G, 6G6G, 6Z7G, Some Use 6AB5	10, 30 Mid, 10 Mid	PR5015	BR102A		DY-2X30-450		EL-23, TA-10		Chk In Out	11027, 4198, 4848	A-4713, A-3848, A-3875	T20D77, T22S47, T22S45		A-2922, A-2900, A-2928									
194UL, C-194UL, RC-194UL, I-U-C-194-UL, RCIU-194UL	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	11493, 11494	AF1010D, AF1010D	UP5515		DY-2X50-150		EL-25		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S45		A-2928									
195UL	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	11493	AF1010D	UP5515		DY-2X50-150		EL-25		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S45		A-2928									
IU-195UL	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	11493	AF1010D	UP5515		DY-2X50-150		EL-25		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S45		A-2928									
197-X	5	6D8G, 6S7, 6T7G, 6G6G, 6Z7G, 6Y5G, 6AB5 (47)	11150, 1693	PRSI50-50	BR102A		M-10-25		TA-10		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S45		A-2928									
198A, 198AE	7	6SA7, 6SK7, 6SQ7, 6SF5, 6K6G, 5Y4G, 6AB5 (47)	11324, 1693	PRS25-10, AF441	BR102A, UP2245		M-10-25, DY-2X20-450		TA-10, EL-220		Pwr Out On Spkr.	11151, 11436	A-3879, P-6012, A-3882	T22S48, T22R04		A-2932, P-2952, A-2901									
199A, 199AE	12	6K8, 6SK7, 6R6, 6C5, 6SF5, 6K6G, 5Y4G, 6AB5	8 Mid, 11502	AF441, PRS150-8, BR815, BRD4215	BR102A		M-8-150, M-2X40-150		UT-81, TA-240		Pwr Out On Spkr.	11151, 11436	P-6013, A-3852	T22R06, T22S74		P-2953, A-2901									
200X	5	1A7G, 1N5G, 1H5G, 1A5G, 1ASG, 25Z6G	11508, 11502	AF1010D, PRS25-10, AF1010D	BR102A, UP5515	A4	M-10-25, DY-2X50-450		TA-10, EL-220		Chk Out On Spkr.	11151, 11436	A-3879, P-6012, A-3882	T22S48, T22R04		A-2932, P-2952, A-2901									
201XL	5	1A7G, 1N5G, 1H5G, 1A5G, 1ASG, 35Z5GT (44)	11493, 9196	AF1010D, PRS25-25	BR102A	A4	M-25-25		EL-25		Chk Out On Spkr.	110832, 11601	A-3879, P-6012, A-3882	T22S48, T22S45		718 & 2482, F4P1, +, 2Z30									
202BL	5	1A7G, 1N5G, 1H5G, 1A5G	1693	PRSI50-12	BR102A		M-10-25		TA-10		Out On Spkr.	110832, 11601	A-3879, P-6012, A-3882	T22S48, T22S45		A-2937, +, A-2928	745 & 2482, 8FL, +, 2M30								
203UL	6	12SA7, 12SK7, 12SQ7, 3SL6GT, 35Z5GT (47)	11411	PRS150-30	BR3015		M-30-15		UT-301		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S45		A-2928									
204A, 204AE, PC204A, AE	5	6SA7, 6SK7, 6SQ7, 6F6G, 5Y4G	10625	PRS350-12	BR1235		M-10-350		UT-123		Pwr Out On Spkr.	11272, 11577	P-6119, A-3878	T22R01, T22S47		P-2951, A-2931									
205BL	4	1A7G, 1N5G, 1H5G, 1A5G	1693	PRS25-10	BR102A		M-10-25		TA-10		Out On Spkr.	11272, 11577	P-6119, A-3878	T22S48		A-2937									
206A, 206AE, RC-206A, AE	6	6SA7, 6SK7, 6SQ7, 6F6G, 5Y4G, 6U5 (44)	10625	PRS350-12	BR1235		M-10-350		UT-123		Pwr Out	11272, 11577	P-6119, A-3878	T22R01, T22S47		P-2951, A-2931									

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Part No. Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quan Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	16-5712.	16-5714.	455				8 Inch.	ST-104.	8A4.	F13	Vol	11301.	AT-116.	KSS-3.			D18-139X.	E						Continued	SENTINEL 207U, 207UE	
2nd.	16-5712.	16-5714.	455				10 Inch.	ST-119.	F13	10A4.	F13	Tone	↑													
1st.	10867.	16-5712.	455				12 Inch.	ST-101.	F13	12A4.	F13	Vol	11132.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						210B
2nd.	10869.	16-5714.	455				11128.	ST-105.	F13	5A1.	F13	Vol	11138.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						211U
1st.	11347.	16-5714.	455				11390.	ST-113.		4A1.		Vol	12033.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						212UL, 1U212UL, 212, 1U212
2nd.	11376.	16-5714.	455				5 Inch.	ST-105.		5A1.		Vol	12075.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						213XL, 1U213XL
1st.	16-5712.	16-5714.	455				4 Inch.	ST-113.		4A1.		Vol	11359.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						214U, 214UL, 1U214U, 1U214UL
2nd.	16-5712.	16-5714.	455				5 Inch.	ST-105.		5A1.		Vol	10227.	AT-116.	KSS-3.			D18-139X.	E	EE						216, 216J
1st.	16-5712.	16-5714.	455	↑	↑		10 Inch.		10E10.		Vol	12132.	AM-60-Z.	KSS-3.			D13-133.	E	EE						217, 217P, 219, 219P	
2nd.	16-5712.	16-5714.	455				5 Inch.	ST-105.		5A1.		Vol	12525.	AM-60-Z.	KSS-3.			D13-133.								
1st.	16-5712.	16-5714.	455				5 Inch.	ST-105.		5A1.		Vol	11359.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						218UL, 1U218UL
2nd.	16-5712.	16-5714.	455				6 Inch.	ST-168.	F12	10E15.	F13	Vol	12132.	AM-60-Z.	KSS-3.			D13-133.	E	41						220
1st.	16-5712.	16-5714.	455				10 Inch.	ST-175.	F13	10E15.	F13	Tone	12350.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						
2nd.	16-5712.	16-5714.	455				6 Inch.	ST-166.	F13	6E10.	F13	Vol	12132.	AM-60-Z.	KSS-3.			D13-133.	E	41						221
1st.	16-5712.	16-5714.	455				10 Inch.	ST-166.	F13	10E10.	F13	Tone	12350.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						
2nd.	16-5712.	16-5714.	455				12 Inch.	ST-166.	F13	12E10.	F13	Vol	11389.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						226, 1U226
1st.	11347.	16-5714.	455				11390.	ST-113.	F13	4A1.	F13	Vol	12604.	AM-60-Z.	KSS-3.			D13-133.	E	41						227
2nd.	11376.	16-5714.	455				11393.	ST-113.	F13	4A1.	F13	Tone	13014.	AM-66-Z.	KSS-3.			D13-133.	E							
1st.	12598.	16-5712.	455	D6	455		4 Inch.		3A07.		Vol	12604.	AM-60-Z.	KSS-3.			D13-133.	E								
2nd.	12598.	16-5712.	455	D6	455		5 Inch.	ST-105.		5A1.		Vol	11631.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						228
1st.	12592.	16-5712.	455				8 Inch.					Vol	12537.	AT-116.	KSS-3.	A		D18-139X.	E	41						230
2nd.	12592.	16-5714.	455				10 Inch.					Vol	11035.													231
1st.	16-5712.	16-5714.	455				5 Inch.	ST-165.		5A1.		Vol	12033.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						232
2nd.	16-5712.	16-5714.	455				8 Inch.	ST-736.	F13	8E10.	F13	Vol	12033.	AM-60-Z.	KSS-3.										(See Model 227)	233
1st.	16-5712.	16-5714.	455				5 Inch.	ST-167.	F12	10E15.	F12	Vol	12462.	AM-60-Z.	KSS-3.			D13-133.	E	41						235
2nd.	16-5712.	16-5714.	455				6 Inch.	ST-168.	F12	10E15.	F12	Tone	12461.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						
1st.	16-5712.	16-5714.	455				10 Inch.	ST-175.		6A21.		Vol	12462.	AM-60-Z.	KSS-3.			D13-133.	E	41						236
2nd.	16-5712.	16-5714.	455				6 Inch.	ST-110.		8A31.		Tone	12461.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						
1st.	16-5712.	16-5714.	455				8 Inch.	ST-116.		10A31.		Vol	12462.	AM-60-Z.	KSS-3.			D13-133.	E	41						237
2nd.	16-5712.	16-5714.	455				10 Inch.	ST-119.	F3	10A31.	F3	Vol	12480.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						
1st.	16-5712.	16-5714.	455				6 Inch.	ST-108.	F13	6A1.	F13	Vol	11359.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						238
2nd.	16-5712.	16-5714.	455				6 Inch.	ST-108.	F13	6A1.	F13	Tone	12072.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						240
1st.	16-5712.	16-5714.	455				5 Inch.	ST-105.		5A1.		Vol	10772.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						241
2nd.	16-5712.	16-5714.	455				5 Inch.	ST-105.		5A1.		Vol	12381.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						
1st.	16-5712.	16-5714.	455				5 Inch.	ST-105.		5A1.		Vol	13229.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						249
2nd.	16-5712.	16-5714.	455				6 Inch.	ST-166.	F13	6E10.	F13	Vol	12462.	AM-60-Z.	KSS-3.			D13-133.	E	41						255
1st.	16-5712.	16-5714.	455				6 Inch.	ST-166.	F13	6E10.	F13	Tone	12461.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						
2nd.	16-5712.	16-5714.	455				10 Inch.	ST-108.	F13	10E10.	F13	Vol	13229.	AM-60-Z.	KSS-3.			D13-133.	E	41						
1st.	13240.	16-5712.	455				5 Inch.	ST-105.		5A1.		Vol	12462.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						256
2nd.	13184.	16-5714.	455				13563.	ST-108.	F8	6E10.	F8	Vol	12461.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						
1st.	13240.	16-5712.	455				13564.	ST-108.	F8	10A31.	F8	Tone	12461.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						257
2nd.	13184.	16-5714.	455				12711.	ST-108.		6A1.		Vol	12462.	AM-60-Z.	KSS-3.			D13-133.	E	42						
1st.	16-5712.	16-5714.	455				10149.	ST-108.	F13	6A1.	F13	Vol	12480.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						262P, IU262P
2nd.	16-5712.	16-5714.	455				11243.	ST-119.	F3	10A31.	F13	Vol	11341.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						263, IU263
1st.	16-5712.	16-5714.	455				5 Inch.	ST-105.		5A1.		Vol	13441.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						264 Late, IU264
2nd.	16-5712.	16-5714.	455				16-6658.	ST-105.		5A1.		Vol	13441.	AM-60-Z.	KSS-3.	A	G5	D13-133.	E	41	G5					265
1st.	16-6660.	16-6660.	455				16-6658.	ST-108.	F13	6A1.	F13	Vol	13441.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						266
2nd.	16-6660.	16-6660.	455				16-6660.	ST-119.	F3	10A31.	F13	Vol	12297.	AM-60-Z.	KSS-3.	A2		D13-133.	E	42						267
1st.	16-5712.	16-5714.	455				16-5714.					Vol	13441.	AM-60-Z.	KSS-3.	A		D13-133.	E	42						
2nd.	16-5712.	16-5714.	455				16-5714.					Vol	13441.	AM-60-Z.	KSS-3.	A		D13-133.	E	41						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
SENTINEL—Continued	7	6SK7, 6K8, 6A7, 25L6G, 25Z6G, Some Use 6U5.	10113 1108.	PRS150-50 PRS450-8		BR5015. BR845		2M-50-150. M-8-450.		2UT-501. UT-8.		Chk In Out	† On Spkr.	A-62-C. A-3301 A-3857	T20A15. T22360 T22343.		A-2915. A-2905. A-2937.						
210B.....	4	1A7G, 1N5G, 1H5G, 1A5G.	1693.	PRS25-10		BRI02A		M-10-25.		TA-10		Out	On Spkr.	A-3876	T22S45.		A-2928.						
211U.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11493.	AF1010D		UP5515		DY-2X50-150.		EL-25		Out	On Spkr.	A-3876	T22S45.		A-2928.						
212UL, 1U212UL, 212, 1U212.	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT.	12001.	PRSA150-50-50		BRD5515		M-2X50-150.		TA-505		Chk Out	† On Spkr.	A-3876	T22S45.		A-2928.						
213P, 213XL, 1U-	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6GT.	12001. 12179.	PRSA150-50-50 PRS25-50		BRD5515. BR502		M-2X50-150. M-50-25.		TA-505		Chk Out	† On Spkr.	A-3876	T22S45.		A-2928.						
214U, 214UL, 1U214U, 1U214UL, 216, 216J.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT.	12055.	PRSA150-50-50		BRD5515		M-2X50-150.		TA-505		Out	On Spkr.	A-3876	T22S45.		A-2928.						
217, 217P, 219, 219P.	7	6SK7, 6S7, 6S7, 6SF7, 6F6G, 5Y3G, Some Use 6U5.	12139. 9196.	AF1010D. PRSA150-50-50		UP150145		DY-3X15-450.		EL-344		Pwr Out	† On Spkr.	P-6011	T22R02.		P-2951.						
218UL, 1U218UL.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT.	12055.	PRSA150-50-50		UP150145		DY-3X15-450.		EL-344		Pwr Out	† On Spkr.	P-6012. A-2312	T22R04. T22S74.		P-2952. A-2901.						
220.....	7	6SA7, 6SK7, 6S7, 6SF7, 6F6G, 5Y3G, Some Use 6U5.	12355.																				
221.....	8	6SA7, 6SJ7, 6SK7, 6S7, 6SF7, 6F6G, 5Y3G, Some Use 6U5/ 6G5.	12400.			UP150145		DY-3X15-450.		EL-344		Pwr Out	† On Spkr.	P-6012. A-2312	T22R04. T22S74.		P-2952. A-2901.						
226, 1U226.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11493. 11494.	AF1010D. AF1010D.		UP5515. BRD5515		DY-2X50-150. DY-2X50-150.		EL-25		Out	On Spkr.	A-3876	T22S45.		A-2928.						
227.....	4	1R5, 1T4, 1S5, 1S4.	12750.	PRSA150-12.		BR1215		M-10-150.		UT-121		Out	† A-3329	T22S47.		A-2927.	4950 467.	2	XX45.				
228.....	6	1P5GT, 1A7GT, 1H5GT, 3Q5GT, 50Z7G.	12960. 12179.	PRSA150-50-50 PRS25-50		BRD5515. BR502		M-2X50-150. M-50-25.		TA-505		Out	†							2746 & 2482.	G3.	2M30.	
230.....	9	6SK7, 6K8, 6S07, 6SF7, 6F6G, 5Y3G, 6U5/6G5.	11324.	AF441.		UP2245		DY-2X20-450.		EL-220		Pwr Out	† On Spkr.	P-6013	T22R05.		P-2953.						
231.....	6	1A7GT, 1P5GT, 1N5GT, 1H5GT, 3Q5GT, 35Z4GT.	12001. 12179.	PRSA150-50-50 PRS25-50		BRD5515. BR502		DY-2X50-150. M-50-25.		TA-505		Out	On Spkr.	A-3856	T22S47.		A-2900.						
232.....	5	6SA7, 6SK7, 6S7, 6SF7, 6F6G, 5Y3G, Some Use 6U5/6G5.	11031. 1693.	PRSA150-10.		UP3345. BR102A		DY-2X30-450. M-10-25.		EL-23		Pwr Out	† On Spkr.	P-6010. A-3878	T22R01. T22S47.		P-2650. A-2931.						
233.....	5	See Model 227.	11031. 1693.	PRS25-10.		BR102A		DY-2X30-450. M-10-25.		EL-23		Pwr Out	† On Spkr.	P-6010. A-3878	T22R01. T22S47.		P-2950. A-2931.						
235.....	6	6K8, 6SK7, 6S07, 6K6G, 5Y3G, Some Use 6U5/6G5.	11150. 1693.			UP3345.		DY-2X30-450. M-10-25.		TA-10		Out	On Spkr.	A-3879	T22S48.		A-2932.						
236.....	6	6K8, 6S7, 6L5G, 6T7G, 6G6G, 6AB5.	11150. 1693.	PRS25-10.		UP3345. BR102A		DY-2X30-450. M-10-25.		EL-23		Pwr Out	† On Spkr.	A-3879	T22S48.		A-2932.						
237.....	5	6K8, 6S7, 6T7G, 6GGG, 6ZY5G, Some Use 6AB5.	11150. 1693.	PRS25-10.		BR102A		DY-2X30-450. M-10-25.		EL-23		Chk Pwr Out	† On Spkr.	A-3879	T22S48.		A-2932.						
238.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT.	12055.	PRSA150-50-50		BRD5515		M-2X50-150.		TA-505		Out	On Spkr.	A-3879	T22S48.		A-2932.						
240.....	4	1A7GT, 1N5GT, 1H5GT, 1A5G/ GT.	1693.	PRS25-10.		BR102A		M-10-25.		TA-10		Dut	On Spkr.	A-3857	T22S48.		A-2937.	758.		17GD60.			
241.....	4	1A7GT, 1N5GT, 1H5GT, 1A5G/ GT.	1693.	PRS25-10.		BR102A		M-10-25.		TA-10		Dut	On Spkr.	A-3857	T22S48.		A-2937.	758.		17GD60.			
249.....	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT.	12055.	PRSA150-50-50		BRD5515		M-2X50-150.		TA-505		Out	On Spkr.	A-3876	T22S45.		A-2928.						
255.....	6	5K8, 6SK7, 6S07, 6K6G, 5Y3G, 6U5/6G5.	11031.			UP3345.		DY-2X30-450.		EL-23		Pwr Out	† On Spkr.	P-6011	T22R02.		P-2951.						
256.....	6	6K8, 6S7, 6L5G, 6T7G, 6G6G, 6AB5 (51).	11150. 1693.	PRS25-10.		UP3345. BR102A		DY-2X30-450. M-10-25.		EL-23		Pwr Out	† On Spkr.	A-3879	T22S48.		A-2932.						
257.....	6	6K8, 6S7, 6T7G, 6GGG, 6ZY5G, 6AB5 (51).	11150. 1693.	PRS25-10.		UP3345. BR102A		DY-2X30-450. M-10-25.		EL-23		Pwr Out	† On Spkr.	A-3879	T22S48.		A-2932.						
262P, 1U262P.	6	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 117Z6GT.	13326.	PRSA150-50-50		BRD5515.		M-2X50-150.		TA-505		Out	On Spkr.	A-3876	T22S45.		A-2928.						
263, 1U263.....	6	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT (47).	13242. 13396.	PRSA150-40-40 PRSA150-50-50		BRD4415. BRD3515		M-2X40-150. M-5030-150.		TA-440. TA-530		Out	† A-3330	A-3856	T22S47.		A-2900.						
264 Late, 1U264.....	6	12SG7, 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT.	13396.	PRSA150-50-30		BRD3515.		M-5030-150.		TA-530		Out	† A-3330	A-3857	T22S48.		A-2937.	758.		17GD60.			
265.....	4	1A7GT, 1N5GT, 1H5GT, 1A5G/	1619.	PRS150-12		BR1215		M-10-150.		UT-121		Out	On Spkr.	A-3857	T22S48.		A-2937.	758.		17GD60.			
267.....	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT..	1619.	PRS150-12		BR1215		M-10-150.		UT-121		Out	On Spkr.	A-3856	T22S47.		A-2900.	758.		17GD60.			

†Information not available.

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS					Section G CONTROLS						Section H VIBRATORS				MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.		
1st. 4110	16-5712			455				10149	ST-108	6A1	F13	Vol	4871	AM-60-Z	KSS-3		D13-123	E			4105	5301	Continued	SENTINEL 144X, 144XE				
2nd. 4111	16-5714							10150	ST-115	6A21	F13	Tone	10148	AM-46-Z	KSS-3	A2	D13-123	E								145AE		
1st. 10220	16-6858			455				10393	ST-175	10E15	F13	Vol	10227	AT-116	KSS-3		D18-139X	E										
2nd. 10221	16-5712							10394	ST-173	12E15	F13																	
1st. 10199	16-5712			455	t.	t.	E2	4881		3E45		Vol	10204	AM-60-Z	KSS-3	A	D13-133	E	41							147U		
2nd. 10200									4141	ST-167	SE18	F13	Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41							148A	
1st. 3283	16-5712			455				10124	ST-737	SE18	F13																	
2nd. 3284	16-5714							4141	ST-167	SE18	F13	Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41							149A, 149AE		
1st. 4403	16-5712			455	t.	t.		10490	ST-168	6E18	F13																	
2nd. 4404	16-5714							10124	ST-737	SE18	F13																	
1st. 4791	16-5712			455				4826	ST-105	5A1		Vol	10441	AM-60-Z	KSS-3	A2	D13-133	E	42							151BL		
2nd. 4792	16-5714																									158AE		
1st. 4110	16-5712			455				10109	ST-736	SE10	F13	Vol	10057	AT-116	KSS-3		D18-139X	E								163UL		
2nd. 4111	16-5714							10408	10E10	F13		Tone	10058														167U	
1st. 10698	16-5712			455				10110	12E10	F13																	168B	
2nd. 10699	16-5714							10711	ST-194	5E45		Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41							175B		
1st. 10582	16-5714			455				4881		3E45		Vol	10204	AM-60-Z	KSS-3	A	D13-133	E	41									
2nd. 10200									4983	ST-108	6A1		Vol	10441	AM-60-Z	KSS-3	A2	D13-133	E	42								
1st. 10967	16-5712			455				11235	ST-719	F3	10A31		Tone	11098	AM-60-Z	KSS-3										176B		
2nd. 10967	16-5712							11128	ST-105	6A1		Vol	11132															
1st. 10967	16-5714			455				4983	ST-108	6A1	F13															177U		
2nd. 10969	16-5714							10123	ST-115	8A21	F13															180XL		
1st. 10967	16-5712			455				4983	ST-108	6A1		Vol	10441	AM-60-Z	KSS-3	A2	D13-133	E	42							181BL		
2nd. 10967	16-5712							11235	ST-119	F3	10A31	F13	Tone	11098	AM-60-Z	KSS-3	A	D13-133	E	41						184U, 184UE		
1st. 10199	16-5712			455				4881		3E45		Vol	10204	AM-60-Z	KSS-3	A2	D13-133	E	42							185A, 185AE		
2nd. 10200								10685	ST-105	5A1		Vol	10441	AM-60-Z	KSS-3	A2	D13-133	E	42							186B, 186BE		
1st. 10669	16-5712			455				10781	ST-105	5A1		Vol	4871	AM-60-Z	KSS-3	A	D13-133	E	41							189L		
2nd. 10670	16-5714																									191B, 191BE		
1st. 10833	16-5740			455																								
2nd. 10834	16-5742																											
1st. 10768	16-5712			455	10955	t.		10781	ST-105	5A1		Vol	10772	AM-60-Z	KSS-3	A2	D13-133	E	42								194UL, C-194UL, RC-194UL, 1U-C- 194UL, RC- 194UL, 195UL	
2nd. 10769	16-5714							11219	ST-189			Vol	4871	AM-60-Z	KSS-3	A2	D13-133	E	42								197-X	
1st. 11008	16-5714			455				11242	10E60			Tone	4872	AM-46-Z	KSS-3	A	D13-123	E	41								198A, 198AE, 198ATE, 199A, 199AE	
2nd. 11008	16-5714							11207	ST-163	6E18		Vol	4871	AM-60-Z	KSS-3	A	D13-123	E	41									
1st. 11007	16-5712			455				11241	ST-175	10E15		Tone	4872	AM-46-Z	KSS-3	A	D13-123	E	41									
2nd. 11008	16-5714							4934	ST-108	6A1		Vol	4871	AM-60-Z	KSS-3	A	D13-123	E	41									
1st. 11008	16-5714			455				11244	ST-119	F3	10A31		Tone	4872	AM-46-Z	KSS-3	A	D13-123	E	41								
2nd. 11008	16-5714							11216	ST-108	6A1		Vol	4871	AM-60-Z	KSS-3	A	D13-133	E	41									
1st. 11008	16-5714			455				11245	ST-119	10A31		Tone	4872	AM-46-Z	KSS-3	A	D13-123	E	41									
2nd. 11008	16-5712							8 Inch.	ST-104	8A4		Vol	4871	AT-116	KSS-3	A	D18-139X	E	41									
1st. 11347	16-5714			455				10149	ST-108	6A1	F13	Vol	10441	AM-60-Z	KSS-3	A2	D13-133	E	42									
2nd. 11347	16-5714							11393	ST-113	4A1		Vol	11389	AM-60-Z	KSS-3	A	D13-133	E	41									
1st. 11347	16-5714			455	11907	t.	E2	11364	ST-105	5A1		Vol	11389	AM-60-Z	KSS-3	A	D13-133	E	41									
2nd. 11376	16-5714							11361	ST-105	5A1		Vol	11359	AM-60-Z	KSS-3	A	D13-133	E	41									
1st. 11347	16-5714			465								Vol	11359	AM-60-Z	KSS-3	A2	D13-133	E	41									
2nd. 11376	16-5714											Tone	10148	AM-46-Z	KSS-3	A2	D13-123	E	42									
1st. 11347	16-5714			465				11243	ST-119	F13	10A31		Tone	11434	AT-116	KSS-3	A	D18-139X	E	41								
2nd. 11376	16-5714							11447	ST-166	6E10	F13	Vol	11435	AT-119	KSS-3	A	D18-139XX	E	41									
1st. 11347	16-5714			455				11448		F13	10E10	F2	Vol	11435	AT-116	KSS-3	A	D18-139XX	E	41								
2nd. 11376	16-5714											Tone	10148	AM-46-Z	KSS-3	A2	D13-133	E	42									
1st. 11539	16-5740			455				4983	ST-108	6A1	F13	Vol	10441	AM-60-Z	KSS-3	A2	D13-133	E	42									
2nd. 10834	16-5742							11235	ST-119	F3	10A31	F13	Tone	11098														
1st. 4791	16-5712			455				11680	ST-105	5A1		Vol	10441	AM-60-Z	KSS-3	A2	D13-133	E	42								201XL	
2nd. 4792	16-5714							10781	ST-105	5A1		Vol	11631	AM-60-Z	KSS-3	A2	D13-133	E	42								202BL	
1st. 10967	16-5712			455																						203UL		
2nd. 10967	16-5714							11618	ST-189		F13		Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41								204A, 204AE, PC204A, PC204AE
1st. 11419	16-5714			455				11558		F13			Tone	4862	AM-46-Z	KSS-3	A	D13-123	E	41								205BL
2nd. 4111	16-5714							11278	ST-165	5E10	F13	Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41								206A, 206AE, RC- 206A, 206AE	
1st. 4404	16-5714			455				11537	ST-736	5E10	F13	Vol	4839	AM-60-Z	KSS-3	A	D13-133	E	41									

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"		
SENTINEL—Continued	7	6SG7, 6SA7, 6SK7, 6SQ7, 6F6G, 6AD7G, 5Y3G.	13492.	PRS450-40.		BR4045.		M-40-450.		UT-40.		Pwr Out	On Spkr.	P-6012.		T22R04.		P-2952.						
268.	7	6SG7, 6SA7, 6SK7, 6H6, 6SF5, 6TG6, 5Y3G (44).	13491.	PRS350-24.		BR2045.		M-20-350.		UT-203.		†	A-3311.		T22S64.		A-2936.							
269C, 269F, 269T.	9	6SG7, 6SA7, 6SK7, 6H6, 6SF5, 6TG6, 5Y3G (44).	13493.	PRS450-20.		BR2045.		M-20-450.		UT-20.		Pwr Out	On Spkr.	P-6012.		T22R04.		P-2952.						
	13494.	PRS450-30.		BR3045.		M-30-450.		UT-30.				†	A-3311.		T22S64.		A-2936.							
	1693.	PRS25-10.		BR102A.		M-10-25.		TA-10.				Out	On Spkr.	A-3857.		T22S48.		A-2937.		758.		17GD60.		
271.	4	1A7GT, 1N5GT, 1H5GT, 1A5GT.	13491.	PRS350-24.		BR2045.		M-20-350.		TA-10.		Out	On Spkr.	A-3857.		T22S48.		A-2937.		758.		17GD60.		
273.	5	1A7GT, 1N5GT, 1H5GT, 1A5GT.	1693.	PRS25-10.		BR102A.		M-10-25.		TA-10.		Out	On Spkr.	A-3857.		T22S48.		A-2937.		758.		17GD60.		
275.	4	1A7GT, 1N5GT, 1H5GT, 1A5GT.	1619.	PRS150-12.		BR1215.		M-10-150.		UT-121.		Out	On Spkr.	A-3857.		T22S48.		A-2937.		758.		17GD60.		
L-284I, 284NA, 284NI, 284NR, 284W.	5	1A07, 1A7, 1AB6, 50A5, 35Y4 (47).	25E1.	AF1010D.		UP5515.		DY2X50-150.		EL-25.		Out	22E2.	A-3876.		T22S46.		A-2928.						
284GA, 1U-284GA.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	25E1.	AF1010D.	A11	UP5515.	A11	DY-2X50-150.	A11	EL-25.	A11	Out	22E2.	A-3876.	T22S46.		A-2928.							
284I, NA, NI, W, 1U-284I, NA, NI, W.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	25E1.	AF1010D.	A11	UP5515.	A11	DY-2X50-150.	A11	EL-25.	A11	Out	22E2.	A-3877.	T22S46.		A-2928.							
285P, IU-285P.	6	1N5GT, 1A7GT, 1H5GT, 3Q5GT, 11Z6GT (44).	25E1.	AF1010D.		UP5515.		DY-2X50-150.		EL-25.		Out	22E7 or 22E9.	A-3878.	B17	T22S47.	B17	A-2931.	B17	746 & 2482.	2G3.	2M30.		
286P, 286PR.	4	1RS, 1T4, 1SS, 3Q4, 11Z3.	25E13.	AF88D.		PRSA150-40-40.		UP4415.		DY-2X4-150.		Out	22E16.	A-3329.				A-2927.		750 457.	2R.	XX45.		
289T.	4	1A7GT, 1N5GT, 1H5GT, 1A5GT.	25E5.	PRS150-12.		BR0445.		M-2X4-150.		TA-440.		Out	22E4.	A-3857.	T22S48.		A-2937.		758.		17GD60.			
292K.	6	6SK7GT/G, 6SA7GT/G, 6SF7, 6V6GT/G, 5Y3GT/G (44).	25E2.	AF-44J.		UP4445.		DY-2X20-450.		EL-220.		Pwr	22E5.	P-6312.	T22R04.		P-2952.							
	25E3.	PRS25-20.		AF88D.		BR202A.		M-25-25.		TA-25.		Out	22E5.	A-3823.	T22S87.		A-2932.							
293CT, IU-293CT.	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47).	25E6.	PRS150-50-50.		EZ-5515.		DSB-2X50-150.		TA-505.		Out	22E8.	A-3876.	T22S46.		A-2900.							
293I, T, W, IU-293I, T, W, 293 Ser..	6	12SK7, 12SA7, 12SQ7, 35A5, 35Z5GT (47).	25E6.	PRS150-40-40.		BRD4415.		DHN-2X50-150.		TA-430.		Out	22E8.	A-3876.	T22S45.		A-2928.							
294 Series.	6	12SC7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47).	25E10.	PRS150-40-40.		BRD3315.		DHN-2X50-150.		TA-330.		Out	22E8.	A-3876.	T22S45.		A-2928.							
	25E6.	PRS150-40-40.		BRD4415.		DHN-2X50-150.		TA-430.				Out	22E8.	A-3876.	T22S45.		A-2928.							
295-T.	6	6K8, 6K7/6S7, 6U5/6G5, 6Q7G/6T7G, 6K6GT/6GGG, 6X5GT (51).	25E7.	PRS25-10.		UP4CJ19.	A4	DY-2X20-350.		EL-245.		Chk	22E10.	C-1707.	T20C52.		C-2975.							
	25E8.			BR102A.		M-10-25.		TA-10.				Pwr	22E12.	A-3823.	T22S87.		A-2901.							
309I, 309N, 309R, 309W.	5	12BE6, 12BA6, 12AT6, 50B5, 35W4 (44).	25E24.	PRSA150-50-50.		BRD5515.		DSB-2X50-150.		TA-505.		Out	22E23.	A-3876.	T22S45.		A-2928.							
SETCHELL-CARLS	10	N	6GF5, 6SC7, 6V6, 80.	10-10-10 Mfd.	GL450-12.	KR512A.		D-12-450.		PLS-12.		Chk	S41.	P-6012.	T22R04.		P-2952.							
14 (Amplifier).	6	6GF5, 6SC7, 6L6, 5Z3.	10 Mfd.	PRSS0-10.		BR105.		M-10-50.		TA-510.		Pwr	P13.	A-3311.	T22S64.		A-3027.							
26 (Amplifier).	7	6F5, 6SC7, 6L6, 5Z3.	10-10 Mfd.		GL450-12.	KR512A.	D-12-450.		PLS-12.		Out	P25.	P-6014.	T22R06.		P-2954.								
RA50.	13	6A8, 6B8, 6F5, 6SC7, 6L6, 5Z3.	10 Mfd.		GL450-20.	KR520.	D-20-450.		PLS-20.		Out	P25-1.	A-3801.	T22S68.		A-3028.								
55 (Portable).	5	1A7, 1N5, 1H5, 1A5, 6X5.	10, 10 Mfd.		GL450-12.	KR512A.	D-12-450.		PLS-12.		Pwr	P50.	A-3800.											
	10, 10, 10, 10.	PRSA150-20-20.		BRD2215.		M-10-50.		TA-510.		TA-510.		Out	025-1.	A-3800.										
	75 Mfd.	PRS25-100.		BRH251.		M-20-25.		TA-220.				Pwr	P100.	A-3857.	T22S48.		A-2937.		4950 & 2482.	42R.	2630.			
65B.	11	6F5, 6C5, 6L6, 5Z3.	24, 24 Mfd.		GL450-20.	KR520.	D-20-450.		PLS-20.		Chk	C25.												
	8, 8 Mfd.	GL450-8.		KR508.		M-8-450.		PLS-8.		Pwr	P65.													
	10, 10, 10, Mfd.	PRSS0-10.		BR105.		M-10-50.		TA-510.		In	D78.													
66.	5	1N5, 1A7, 1AB6, 1T5, 35Z5.	40 Mfd.	PRSA150-40.		BR4015.		M-40-150.		UT-401.		Out		A-3881.	T22S48.		A-2934.		10950.		102R.			
	20 Mfd.	PRSA150-20.		BR2015.		M-20-150.		UT-401.				Out												
	10, 10 Mfd.	PRSS25-10.		BR102A.		M-10-25.		TA-10.				Out												
221, 225.	7	6A8, 6K7, 6Q7, 6V6, 6J5, 6X5.	8, 8 Mfd.		KR508.	D-8-450.		PLS-8.		TA-10.		Chk	S41.											
	10, 10, 10 Mfd.	PRSS0-10.		BR105.		M-10-50.		TA-510.				Pwr	P6B.											
332.	9	6AB, 6K7, 6J7, 42L6.									Out	O3A.	A-3311.	T22S64.		A-2936.								
401, 405.	5	1N5, 1A7, 1N5/1P5, 1H5, 1T5/105.	10 Mfd.	PRS25-10.		BR102A.		M-10-25.		TA-10.		Out	t.	A-3822.	T22S47.		A-2932.		48 & 2386.		4FH.	210308.		
411 (Radio-Phone).	5	12A8, 12K7, 12SQ5, 50L6, 35Z5.	50-20 Mfd.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		In	t.											
412.	7	12A6, 12K7, 12SQ7, 12J5, 45L6, 35Z5.	50-20 Mfd.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Out	t.	A-3301.	T22S60.		A-2905.							
413.	6	17A7, 7J7, 7B6, 7B5, 7Y4.	8-8 Mfd.	PRSA450-B-8.		EZB845.		M-2X8-450.		UT-88.		Chk	t.											
	10 Mfd.	PRS25-10.		BR102A.		M-10-25.		TA-10.				Pwr	t.											

†Information not available.

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photobat Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	+	16-5712		455				6 Inch	ST-168	F12	10E15	F13	Vol Tone	12132	AM-60-Z	KSS-3		D13-133	E	41					Continued—	SENTINEL 268	
2nd.	+	16-5714						10 Inch	ST-175	F13	12E15	F13		12350	AM-60-Z	KSS-3	A.	D13-133	E	41						269C, 269F, 269T	
Ist.	4404	16-6658		455				12 inch	ST-173	F13	12E15	F13			12132	AM-60-Z	KSS-3		D13-133	E	41						
2nd.	13510	16-6660						13498	ST-166	F13	6E10	F13	Vol Tone	12350	AM-60-Z	KSS-3	A.	D13-133	E	41							
Ist.	+	16-6658		455				13499		F13	10E10	F13															
2nd.	+	16-6660						13578		F13	12E10	F13															
Ist.	+	16-6658		455				+		F2		F2	Vol	12381	AM-60-Z	KSS-3	A2	D13-133	E	42						271	
2nd.	+	16-6660						6 Inch	ST-108		6A1		Vol	12297	AM-60-Z	KSS-3	A2	D13-133	E	42						273	
Ist.	+	16-6658		455				5 Inch	ST-105	F13	5A1	F13	Vol	12381	AM-60-Z	KSS-3	A2	D13-133	E	42						275	
2nd.	+	16-6660						8 Inch	ST-115	F13	8A21	F13															
Ist.	+	16-6658		455				10 Inch	ST-119	F3	10A31	F13															
2nd.	+	16-6660						5 Inch	ST-105	F13	5A1	F13	Vol	28E1	AM-60-Z	KSS-3	A.	D13-133	E	41						23	
1st.	20E21		D22	455				1E9	ST-105		5A1		Vol	28E1	AM-60-Z	KSS-3	A.	D13-133	E	41						L-284I, 284NA, 284NI, 284W	
1st.	20E21		D22					1E9	ST-105		5A1		Vol	28E1	AM-60-Z	KSS-3	A.	D13-133	E	41						22.	
2nd.	20E22		D22					1E9	ST-105		5A1		Vol	28E1	AM-60-Z	KSS-3	A.	D13-133	E	41						284GA, IU284GA	
1st.	20E21	16-5740		455	+	L-70-A		1E9	ST-105		5A1		Vol	28E1	AM-60-Z	KSS-3	A.	D13-133	E	41						1.	
2nd.	20E22	16-5742						1E9	ST-105		5A1		Vol	28E1	AM-60-Z	KSS-3	A.	D13-133	E	41						284I, NA, NI, W, IU284I, NA, NI, W	
1st.	20E21	16-5740		455				1E12	ST-105		5A1		Vol	28E6 (or)	AM-63-Z	KSS-3		D13-137	E							6.	
2nd.	20E22	16-5742						1E19			4A07		Vol	28E12				D13-139	J							285P, IU285P	
1st.	20E53	16-6666		455				1E19			4A07		Vol	28E14												23.	
2nd.	20E54	16-6667						1E19			4A07		Vol	28E2	AM-60-Z	KSS-3	A2	D13-133	E	42						286P, 286PR	
1st.	20E21	16-5740		455				1E15	ST-108		6A1		Vol	28E4	AM-60-Z	KSS-3	A.	D13-133	E	41						6.	
2nd.	20E21	16-5740						1E15	ST-108		6A1		Vol	28E4	AM-60-Z	KSS-3	A.	D13-133	E	41						289T	
1st.	20E35	16-5742						1E10			46A1		Vol	28E4	AM-60-Z	KSS-3	A.	D13-133	E	41						16.	
1st.	20E41	16-5740		455	+	L-70-S		1E10			46A1		Vol	28E4	AM-60-Z	KSS-3	A.	D13-133	E	41						292K	
2nd.	20E42	16-5742						1E1			46A1		Vol	28E24	AM-60-Z	KSS-3	A.	D13-133	E	41						29.	
1st.	20E21	16-5740		455	+			1E1			46A1		Vol	28E7	AM-60-Z	KSS-3	A.	D13-133	E	41	G6					293CT, IU293CT	
2nd.	20E22	16-5742						1E1			46A1		Vol	28E8	AM-60-Z	KSS-3	A.	D13-133	E	41	G6					1.	
1st.	20E21	16-5740		455				1E1			46A1		Vol	28E7	AM-60-Z	KSS-3	A.	D13-133	E	41	G7					1.	
2nd.	20E22	16-5742						1E1			46A1		Vol	28E8	AM-60-Z	KSS-3	A.	D13-133	E	41	G7					294 Ser.	
1st.	20E21	16-5740		455				1E8	ST-108	F13	6A1	F13	Vol	28E10	AM-60-Z	KSS-3	A.	D13-133	E	41	G7					22.	
1st.	20E21	16-5740						1E18			28E9		Vol	28E10	AM-60-Z	KSS-3	A2	D13-133	E	42						295-T	
2nd.	20E22	16-5742						1E27			3A07		Vol	28E27	AM-60-Z	KSS-3	A.	D13-133	E	41						28.	
1st.	20E22	16-5742											Vol													309I, 309N, 309R, 309W	
2nd.	20E26I-2	16-5742											Vol														
1st.	20E30I	16-6666		455									Vol														
2nd.	20E30I	16-6667											Vol														
2nd.	20E30I	16-6667											Vol														
1st.	20E21	16-6658		450									Vol	VRL	AM-60-Z			D13-133								SETCHELL-CARLSON 14 (Amplifier)	
2nd.	20E21	16-6658											Vol	VR2	AM-60-Z			D13-133								26 (Amplifier)	
1st.	20E22	16-6658		465									Vol	VRL	AM-60-Z			D13-133								RA50	
2nd.	20E22	16-6660											Vol	VR2	AM-60-Z			D13-133								55 (Portable)	
1st.	20E22	16-6649		182									Vol		AM-60-Z			D13-133								66	
2nd.	20E22	16-6658		465									Vol		AM-60-Z			D13-133								221, 225	
1st.	20E22	16-6658											Vol		AM-60-Z			D13-133									
2nd.	20E22	16-6658											Vol		AM-60-Z			D13-133									
1st.	20E22	16-5712		465									Vol		AM-60-Z			D13-133								332	
2nd.	20E22	16-5712											Vol		AM-60-Z			D13-133									
1st.	20E22	16-5700		175									Vol		AM-60-Z			D13-133								401, 405	
2nd.	20E22	16-5702											Vol		AM-60-Z			D13-133									
1st.	20E22	16-6658		465									Vol		AM-60-Z			D13-133								411 (Radio-Dor- Phone)	
2nd.	20E22	16-6658											Vol		AM-60-Z			D13-133								412	
1st.	20E22	16-6658		465									Vol		AM-60-Z			D13-133								413	
2nd.	20E22	16-6660											Vol		AM-60-Z			D13-133									

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	No. Note	Cornell-Dubilier	No. Note	Solar	No. Note	Sprague	No. Note	Use	Mfr.	Stancor	No. Note	Thordarson	No. Note	Merit	No. Note	Eveready Part No.	No. Note	Burgess Part No.	No. Note	
		Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	In	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"						
SETCHELL - CARLSON	S	SON—Continued																						
416	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (44)	50-50 Mfd.	AF1010D		UP5515		DY-2X50-150		EL-25		Out		†	A-3876		T22S45		A-2928					
421RD	5	12A7, 12K7, 12SQ7, 50L6, 35Z5	50-20 Mfd.	PRSA150-50-30		BRD3515		M-5030-150		TA-530		In	D1	0411	†	†	†	†						
427	6	12SK7GT, 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	50-50 Mfd.	AF1010D		UP5515		DY-2X50-150		EL-25		Out		†	A-3865		T22S45		A-2928					
501	5	1L65, 1LA6, 1LR4, 305	10 Mfd.	PRS50-10		BR501		M-10-50		TA-510		Out		†	†	†	†	†		\$950 & 482		52R	830	
588	5	6A8, 6K7, 6Q7, 6K6, 6X5	10 Mfd.	PRS25-10		BR102A		M-10-25		TA-10		Pwr		†	P-6348		T22R01	B1	P-3047					
589	5	6A8, 6K7, 6SQ7, 6K6, 6X5	8-8 Mfd.	PRS25-10		EZ8845		M-2X8-450		UT-88		Out		†	P-6348		T22S47	B1	P-3047					
600	5	IC7, ID5, IF7, IH4, 1J6	10 Mfd.	PRS450-8-8		BR102A		M-10-25		TA-10		Pwr		†	A-3878		T22S47	A-2931	A-2931					
602	6	IC7, 1D5, IF7, 1G5	8-8 Mfd.	PRS450-8-8		EZ8845		M-2X8-450		UT-88		Out		†	A-4713		T20D75	A-2920	A-2938					
613B	5	6F5, 6Y7, 5V6G, 6X5G	10, 10, 10 Mfd	GL450-12		KRS12A		D-12-450		PLS-12		Chk		†	A-3831		T22S46	A-2930	A-2936					
			10, 10 Mfd.	PRS50-10		BR501		M-10-50		TA-510		Pwr		†	A-3877		T22S64	A-2936						
SHERIDAN ELECTRONICS—(See Vogue)																								
SIGNAL	T	RONICS—(See Vogue)																						
341T	4	1R5, 1T4, 1S5, 3S4	50-30-200 Mfd	PRSA150-50-30/25-100 & PRS25-100		BRD3515 & BRH1525		DSB-5030-150 & M-250-15		TA-530 & UHC-212		Out		†	A-3877		T22S46	A-2930	\$950 & 467		52R	2XX45		

SILVERTONE—(Sears-Roebuck)

CROSS REFERENCE (MODEL NUMBER VS. CHASSIS NUMBER)

Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis
S61	100-350	2651	101-604	4563	4564	100-150, A	4585	101-488	101-488	5303	139,700		
R71	101-612-A	2711	101-605	4563	4564	100-151, A	4586	101-483	101-483	R501, A, B	101,618, -1A		
R81	101-613	2721	101-602	4570, 4571	4570, 4584	100-150, A	4688	101-484	101-484	5502	101,687		
R101	101-614-1	2741	101-603	4585	4585	100-151, A	4700	104,235	104,235	5509	101,618-2		
R111	101-615	2751	101-604	4586, 4586A	4586, 4586A	100-156	4701	139,450	139,450	5511, A	101,619, A		
R121	101-616	2761	101-605	4606, 4607	4606, 4607	101,473	4706	139,210	139,210	5511, A	101,617		
R131	101-613	2761	101-643	4608, 4609	4608, 4609	101,472	4707	139,700	139,700	5571	109,358		
201		3011	132-810	4610	4610	101,482	4708	139,200	139,200	5581	101,624		
R301	101-574-2B	3041	132-804, A, 1A, B-1B	4611	4611	101,487	4709	139,630	139,630	5601A	101,628-1A		
R381	101-639	3051	109-352, A-B	4612	4612	101,478	4714	139,156	139,156	5611	101,584		
671	101-612,-A	3061	109-354, A-B,-C	4612A	4612A	101,533	4722	100,179	100,179	5620	130,620		
701	101-574-1A	3111	132-810	4512B	4512B	101,478-A	4723	100,157	100,157	5621	101,632		
721	101-616	3141	132-804, -1, A, 1A, B,-1B	4612C	4612C	101,533	4726	101,473	101,473	5623	130,623		
771	101-645-1	3151	109-352, A-B	4613	4613	100,157	4728	101,472	101,472	5661	101,633,-1		
801	101-574-2B	3161	109-354, A-B,-C	4614	4614	101,497	4740	101,476	101,476	5689, 5690	116SA10		
R-1021	101-989-1A	3211	132-810,-1	4615	4615	100,157	4743	101,503	101,503	5691, 5692	116SA20		
R1661	101-400	3241	132-804, -1, A-1A, B,-1B	4619	4619	101,478	4746	101,473	101,473	5693, 5694	116SA40		
R1771	101-609	3251	109-352, A-B	4620A, 4621A	4620A, 4621A	101,503,-1	4748	101,472	101,472	5695	116RT3		
R1181	101-610,-1	3261	109-354, A-B,-C	4622	4622	100,179	4750	101,476	101,476	5697, 5698	116SA30		
R1261	101-611	3311	132-803 Series	4623	4623	100,157	4761	101,490	101,490	5701	132,809,-1		
1521	100-351	3321	109-357, A-B,-C	4626, 4627	4626, 4627	101,473	4762	101,489	101,489	5710, A	107,450,-2		
1561	100-351, A, B, C	3341	132-802 Series	4628, 4629	4628, 4629	101,472	4763	100,158	100,158	5711	110,409		
1571	101-610	3361	109-356, A-B,-C	4632	4632	101,473	4764	101,480	101,480	5711A	107,450,-2		
1581	101-572-2A	3411	132-803 Series	4632A	4632A	101,505,-1,-X,-IX	4765	101,488	101,488	5721	110,418		
1591	100-353	3421	109-357, A-B,-C	4633	4633	101,473	4766	101,483	101,483	5727, 5728	107,450		
1621	100-355, A, B, C	3441	132-805, -1, A, 1A, B,-1B	4633A	4633A	101,505,-1,-X,-IX	4767	101,498	101,498	5731	109,359		
1661	101-414-1	3451	132-802 Series	4636, 4637	4636, 4637	101,473	4769	101,482	101,482	5732	116SA2232		
1721	110-415-1	3461	109-356, A-B,-C	4638, 4639	4638, 4639	101,476	4771	101,490	101,490	5737	108,371,-1		
1761	100-351	3511	132-803 Series	4640	4640	101,476	4772	101,489	101,489	5737	130,637		
1771	101-645,-1	3521	109-357, A-B,-C	4641A, 4642A	4641A, 4642A	101,503,-1	4773, 4774	101,487	101,487	5741	132,808		
1781-A	101-646-1	3541	132-805, -1, A, 1A, B,-1B	4643	4643	101,157	4776	126,200	126,200	5749, 5750	107,450-S4		
2011	101-642	3551	132-802 Series	4644A, 4645A	4644A, 4645A	101,504,-1,-2	4777	101,498	101,498	5751	110,403		
2051	101-605	3561	109-356, A-B,-C	4646, 4647	4646, 4647	101,473	4781	101,499	101,499	5752, 5753	107,440S1		
2061	101-602	3611	132-811	4648, 4649	4648, 4649	101,472	4783	101,502	101,502	5751	109,359		
2071	101-594-A	3621	109-356, A-B,-C	4650	4650	101,476	4784	101,480	101,480	5771, 5772	109,358		
2151, 2251	101-605	3651	109-353, A-B,-C	4651	4651	101,497	4785	101,488	101,488	5789	116SA3041		
2312	163-34	3661	109-355, A-B,-C	4652	4652	101,478	4786	100,186	100,186	5790	116SA40		
2328	163-300	3711	132-811,-1	4652A	4652A	101,533	4787	101,483	101,483	5791, 5792	116SA20		
2361	101-602	3721	109-357, A-B,-C	4660, 4662	4660, 4662	101,467	4788	100,159	100,159	5793	116SA40		
2411	101-642	3751	109-353, A-B,-C	4663	4663	101,158	4789	100,159	100,159	5797	116SA30		
2421	101-602	3761	109-355, A-B,-C	4664	4664	101,480	4790	101,482	101,482	5815	145,815		
2441	101-603-1	3811	132-811	4665	4665	101,488	4790	101,479	101,479	5818	184,5818		
2451	101-641	3851	109-353, A-B,-C	4666	4666	101,483	4791, 4792	101,483	101,483	5819	178,5819		
2461	101-643	3861	109-355, A-B,-C	4667	4667	101,498	4796	126,201	126,201	5827	134,903		
2471	101-582-A	3872	113-972	4668	4668	103AR156	4798	101,498	101,498	5827	138,903		
2511	101-605	4403, 4463,	4464	4669	4669	101,492	4799	100,159	100,159	5828	138,906		
2511	101-642	4465	100-150, A	4675	4675	101,488	4800	101,498	101,498	5829	138		

**CROSS REFERENCE (MODEL NUMBER VS. CHASSIS NUMBER)**

Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis
R5854	135,241	6074	101,515,-1,-2	6151	101,556	6210	6211	6212	6213	6214	6211, 101,553, A
6000	101,495X	6075, 6076	101,507,-1	6152, 6153	101,537,-1	6215	6211	6212	6213	6214	6211, 101,553, A
6001	101,496X	6077	101,513	6154	101,555,-1	6216	6215	6217	6217	6218	6215, 101,555, A
6002	100,195	6079	101,515,-1,-2	6155, 6156	101,549	6218	6219	6219	6219	6220	6219, 101,555, A
6002	132,818	6082, 6093	101,672-1A, -1B	6157	101,198	6220	6221	6221	6221	6222	6221, 101,553, A
6003, 6004,	101,510,-1,-2,-3,-4	6100	101,680-1A	6158, 6159	101,555,-1	6223	6223	6224	6224	6225	6223, 101,555, A
6007	101,507,-1	6100	101,495	6160, 6161	101,199,-1	6225	6225	6226	6226	6227	6225, 101,570,-1,-1A
6008, 6009	101,524	6102, 6102A	101,526,-1	6163	101,199,-1	6228	6228	6229	6229	6230	6228, 101,572,-1
6010, 6011	101,519	6103, 6103A	101,526,-1	6164	101,505,-X,-1,-1X	6230	6230A	6230A	6230A	6231	6230, 101,598-A
6011, 6012	132,816,A	6104	126,203	6165, 6165A	101,546	6231	6231	6232	6232	6233	6231, 101,598-A
6012, 6013	101,514,-1,-2	6104, 6105	101,662-2B,-2D	6166, 6166A	101,546	6232	6232	6233	6233	6234	6232, 101,576,-1
6014, 6015	101,505,-X,-1,-1X	6105, 6105A	101,525,-1	6167, 6167A	109,216-1	6234	6234	6235	6235	6236	6234, 101,576,-1
6016	132,820	6106	109,278	6168	101,524,-1	6235	6235	6236	6236	6237	6235, 101,598-A
6016, 6017	101,512,A	6106A	101,662-4E	6169, 6169A	109,216	6237	6237	6238	6238	6239	6237, 101,598-A
6018, 6019	101,524	6107, 6108	109,278	6170	100,189	6238	6238	6239	6239	6240	6238, 101,598-A
6021	100,195	6109, 6110,	101,507,-1	6171	101,507,-1	6240	6241	6241	6241	6242	6240, 101,598-A
6022	101,509,-1,-2	6111	101,508,-1	6172	101,513	6242	6243	6243	6243	6244	6242, 101,598-A
6023	100,506	6111, 6111A	101,662-3C,-5F	6173	101,528	6244	6245	6245	6245	6246	6244, 101,598-A
6024	101,510,-1,-2,-3,-4	6112, 6113	101,521	6174	101,524	6246	6247	6247	6247	6248	6246, 101,598-A
6025	101,547,-1	6114, 6115	101,522	6175	109,199,-1	6248	6249	6249	6249	6250	6248, 101,598-A
6027, 6028	126,204	6116	109,278	6176	101,507,-1	6250	6250A	6250A	6250A	6251	6250, 101,598-A
6029	126,205	6118	101,521	6177, 6177A,	101,507,-1	6251	6252	6252	6252	6253	6251, 101,598-A
6031	100,195	6119, 6120,	101,546,-1	6178, 6178A	101,507,-1	6253	6254	6254	6254	6255	6253, 101,598-A
6034	101,510,-1,-2,-3,-4	6120A	101,546,-1,-1A	6179, 6179A	109,279-1	6255	6256A	6256A	6256B	6256	6255, 101,598-A
6036	101,511,-1,-2	6121	100,195	6180	100,189	6256	6256	6257	6257	6258	6256, 101,598-A
6038	101,517,-1,-2	6122	101,509,-1,-2	6181	101,507	6258	6259	6259	6259	6260	6258, 101,598-A
6039	101,503	6123	101,506	6182	101,513	6260	6261	6261	6261	6262	6260, 101,598-A
6040, 6041	101,519	6124	101,510,-1,-2,-3,-4	6183	101,528	6262	6263	6263	6263	6264	6262, 101,598-A
6042, 6043	101,504,-1,-2	6125	101,527	6184	101,515	6264	6265	6265	6265	6266	6264, 101,598-A
6044, 6045	101,505,-X,-1,-1X	6126, 6127	101,546,-1	6185, 6185A	109,279,-1	6265	6266A	6266A	6266B	6267	6265, 101,598-A
6046, 6047	101,512,A	6128, 6128A	101,547,-1	6186	101,507	6266	6267	6267	6267	6268	6266, 101,598-A
6048, 6049	101,524,-1	6129	101,510,-1,-2,-3,-4	6187, 6188	101,513	6267	6268	6268	6268	6269	6267, 101,598-A
6050	132,825-4	6130	101,557,-1	6189	101,515	6268	6269	6269	6269	6270	6268, 101,598-A
6050, 6051	101,503,-1	6131	100,195	6190	126,209	6269	6270	6270	6270	6271	6269, 101,598-A
6052, 6053	101,525,A	6132	101,509,-1,-2	6191	100,189,-1	6271	6272	6272	6272	6273	6271, 101,598-A
6054, 6055	101,532	6133	101,535	6192	101,555,-1	6273	6274	6274	6274	6275	6273, 101,598-A
6056, 6057	101,548	6134	101,510,-1,-2,-3,-4	6193	101,517,-1,-2	6274	6275	6275	6275	6276	6274, 101,598-A
6058, 6059	101,505,-1,-1X	6135	101,527	6194	101,507	6275	6276	6276	6276	6277	6275, 101,598-A
6060	101,495X	6136	101,511,-1,-2	6195, 6196	109,216	6277	6278	6278	6278	6279	6277, 101,598-A
6061	101,496X	6137	101,535	6197	109,216	6279	6280A	6280A	6280B	6281	6279, 101,598-A
6062	101,532	6138	101,517,-1,-2	6198	101,507	6281	6282	6282	6282	6283	6281, 101,598-A
6063, 6064,	101,505,-X,-1,-1X	6139	101,535	6199	101,535	6283	6284	6284	6284	6285	6283, 101,598-A
6065	101,524,-1	6140	101,534,-1	6200	101,546	6285	6286	6286	6286	6287	6285, 101,598-A
6068, 6069	101,524,-1	6141	101,535	6200A	101,500-1	6287	6288A	6288A	6288B	6289	6287, 101,598-A
6070	100,189	6142	101,504,-1,-2	6201	101,547,-1	6288	6289	6289	6289	6290	6288, 101,598-A
6071	101,507,-1	6144	101,505,-X,-1,-1X	6202, 6203	101,535	6290	6291	6291	6291	6292	6290, 101,598-A
6071	132,826-1	6146	101,512,A	6203	101,800-A	6292	6293	6293	6293	6294	6292, 101,598-A
6072	110,454	6147, 6148	101,524,-1	6204, 6205	101,525,A	6293	6294	6294	6294	6295	6293, 101,598-A
6072	101,513	6149	101,524,-1	6206, 6207	101,512,A	6295	6296	6296	6296	6297	6295, 101,598-A
6073	101,528	6150	101,503,-1	6208, 6209	101,554						

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. of Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"		
<b>SILVERTONE</b> —(Sears-Roebuck)—Continued																								
Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	
6404, 6404A.	6404A.	6492.	101.566	6911.	101.417	7025.	132.807,-1,-2	7059.	100.382	7026.	132.808,-1	7061.	100.383	7062.	132.808,-1	7063.	100.364,-1	7065.	101.660	7066.	101.680	7067.	101.662	
6405, 6405A.	6405A.	6493.	101.570	6921.	101.637	7031A.	100.364,-1	7063.	101.682	7032A.	100.381,-1	7065.	101.660	7066.	101.682	7067.	101.682,-1	7068.	101.681	7069.	101.658,-1	7070.	101.682,-1	
6406, 6406A.	6406A.	6493A.	101.610-2A	6951.	101.411	7033.	101.655	7066.	101.682	7034.	100.363,-1	7067.	101.662	7068.	101.682	7069.	101.658	7070.	101.682	7071.	100.384,-1	7072.	100.385	
6407, 6407A.	6407A.	6494.	110.982-1A	6961.	101.621,-1,-1A,-1B,-1C	7035.	100.380,-1	7068.	101.653	7036.	110.421	7070.	101.682	7071.	100.359	7072.	100.384,-1	7073.	101.658	7074.	101.682,-1	7075.	109.383	
6408, 6408A.	6408A.	6495.	101.573	7000.	132.810,-1	7037.	141.415	7076.	101.653	7001.	132.811,-1	7038.	101.653	7077.	101.682	7078.	101.682	7079.	101.674	7080.	101.684	7081.	101.636,-1	
6409, 6409A.	6409A.	6496.	101.566	7002.	132.811,-1	7039.	100.359	7082.	101.658	7003.	132.812,-A,-B	7041.	101.658	7083.	110.426	7084.	101.682	7085.	101.688	7086.	101.814	7087.	101.686-A,-B	
6421.	101.571	6497.	101.595	7004.	132.812,-A,-B	7043.	101.682,-1	7088.	101.682	7005.	100.364,-1	7044.	101.682,-1	7089.	101.682	7090.	101.682	7091.	101.682	7092.	101.682	7093.	101.682	
6424.	101.570	6498.	100.351	7006.	132.812,-A,-B,-1A,-1B,-2,-3	7046.	141.416	7094.	101.682	7007.	132.813,-A,-B,-1A,-1B,-2	7047.	101.682	7095.	101.672	7096.	101.682	7097.	109.409	7098.	101.620,-3	7099.	101.682	
6425.	101.572,-1	6521.	101.621,-1,-1A,-1B,-1C	7008.	132.813,-A,-B,-1A,-1B,-2,-3	7048.	101.657	7099.	101.682	7009.	100.363,-1	7049.	101.672	7100.	101.674	7101.	101.684	7102.	101.682	7103.	101.682	7104.	101.682	
6426.	101.573	6541.	110.401	7010.	100.363,-1	7050.	100.364,-1	7101.	101.674	7011.	100.364,-1	7051.	100.364,-1	7102.	101.684	7103.	101.684	7104.	101.684	7105.	101.684	7106.	101.684	
6436.	101.574	6551.	101.620,-1,-2	7012.	132.814	7054.	101.808	7107.	101.682	7013.	101.622,-A,-1A,-1B,-1C	7055.	110.427	7108.	101.682	7109.	101.682	7110.	101.682	7111.	101.682	7112.	101.682	
6437, 6437A.	101.576,-1	6561.	101.621,-A,-1A,-1B,-1C,-2	7014.	132.815	7056.	141.417	7109.	101.682	7015.	101.622,-A,-1A,-1B,-1C,-2	7057.	141.418	7110.	101.686	7111.	101.686	7112.	101.686	7113.	101.686	7114.	101.686-A,-B	
6438, 6438A.	101.583,-1,-2	6621.	101.637	7016.	132.816	7058.	101.682	7115.	101.682	7017.	100.363,-1	7059.	101.682	7116.	101.682	7117.	101.682	7118.	101.682	7119.	101.682	7120.	101.682	
6438B, 6439.	101.583,-1,-2	6641.	136.410	7018.	100.363,-1	7060.	100.364,-1	7121.	101.682	7019.	100.363,-1	7061.	100.364,-1	7122.	101.682	7123.	101.682	7124.	101.682	7125.	101.682	7126.	101.682	
6439A, 6440.	101.583,-1,-2	6651.	110.402	7020.	100.363,-1	7062.	100.364,-1	7123.	101.682	7021.	100.363,-1	7063.	100.364,-1	7124.	101.682	7125.	101.682	7126.	101.682	7127.	101.682	7128.	101.682	
6441.	101.589	6661.	101.621,-A,-1A,-1B,-1C	7022.	100.363,-1	7064.	100.364,-1	7125.	101.682	7023.	100.363,-1	7065.	100.364,-1	7126.	101.682	7127.	101.682	7128.	101.682	7129.	101.682	7130.	101.682	
6446.	101.584,-1,-2,-3,-4,-5	6685.	139.150,-1	7024.	100.363,-1	7066.	100.364,-1	7127.	101.682	7025.	100.363,-1	7067.	100.364,-1	7128.	101.682	7129.	101.682	7130.	101.682	7131.	101.682	7132.	101.682	
6447.	101.590,-1,-2,-3,-4,-5	6721.	101.622,-A,-1A,-1A	7026.	100.363,-1	7068.	100.364,-1	7129.	101.682	7027.	100.363,-1	7069.	100.364,-1	7130.	101.682	7131.	101.682	7132.	101.682	7133.	101.682	7134.	101.682	
6448.	101.518, A	6751.	101.623,-1	7028.	100.363,-1	7070.	100.364,-1	7132.	101.682	7029.	100.363,-1	7071.	100.364,-1	7133.	101.682	7134.	101.682	7135.	101.682	7136.	101.682	7137.	101.682	
6449.	101.528	6751A.	101.638	7030.	100.363,-1	7072.	100.364,-1	7135.	101.682	7031.	100.363,-1	7073.	100.364,-1	7136.	101.682	7137.	101.682	7138.	101.682	7139.	101.682	7140.	101.682	
6450.	101.573,-1B	6761.	101.622,-A,-1A,-1A	7032.	100.363,-1	7074.	100.364,-1	7138.	101.682	7033.	100.363,-1	7075.	100.364,-1	7139.	101.682	7140.	101.682	7141.	101.682	7142.	101.682	7143.	101.682	
6450B.	101.613-A	6761A.	101.637,-1	7034.	100.363,-1	7076.	100.364,-1	7141.	101.682	7035.	100.363,-1	7077.	100.364,-1	7142.	101.682	7143.	101.682	7144.	101.682	7145.	101.682	7146.	101.682	
6451.	101.982-1A	6821.	110.416-A	7036.	100.363,-1	7078.	100.364,-1	7144.	101.682	7037.	100.363,-1	7079.	100.364,-1	7145.	101.682	7146.	101.682	7147.	101.682	7148.	101.682	7149.	101.682	
6451A.	110.410	6861.	110.412	7038.	100.363,-1	7080.	100.364,-1	7146.	101.682	7039.	100.363,-1	7081.	100.364,-1	7147.	101.682	7148.	101.682	7149.	101.682	7150.	101.682	7151.	101.682	
<b>SILVERTONE</b>																								
100.150, A....	6A7, 606, 6H6G, 6F5G, 6B5, 80.	1002088679.	GL450-16.	KR516A.	D-16-450.	PLS-16.	Pwr	1001088667.	P-6119.	T22R02.	P-2951.													
100.151, A....	8K7G, 6A8, 6H6G, 6F5G, 6N6G, 5Y3, 6G5.	1002088678.	GL450-16.	KR508.	D-8-450.	PLS-8.	Pwr	1001088652.	P-6120.	T22S58.	A-2931.													
100.156....	10K7G, 6A8G, 6H6G, 6F5G, 6C5G, 6F6G, 5V4G, 5V4G, 6G5.	1002088679.	GL450-16.	KR516A.	D-16-450.	PLS-16.	Pwr	1001088672.	P-6120.	T22R04.	P-2952.													
100.157....	6I4G, 6D8G, 1D5GP, 6T7G, 1F5G, 6AB5, GAB5.	10020110377.	PRSA450-8-8	BR102A.	M-10-25.	TA-10.	Chk	1001089582.	P-6120.	T22R04.	P-2952.													
100.158....	6A8G, SU7G, 6Q7G, 6K6G, 5W4G, 5W4G, 6U5.	1002088937.	GL450-30.	KR530.	D-30-450.	PLS-30.	Chk	10014111418.	P-6014.	T22S48.	A-2937.													
100.159....	14K7G, 6L7, 6C5, 6H6, 6L6, 6F5, 5U4G, 6J7.	10020110377.	GL450-16.	KR516A.	D-16-450.	PLS-16.	Chk	10010111395.	P-6014.	T22R05.	P-2954.													
100.179....	4IC7G, 1D5GP, 6T7G, 1F5G.	10020110377.	PRSA450-8-8	BR102A.	M-10-25.	UT-8.	Chk	100141110824.	P-6014.	T22S48.	A-2934.													
100.184....	10K7, 6L7, 6C5, 6H6, 6L6, 6F5, 5U4G, 6J7.	10020111469.	GL450-30.	KR530.	D-16-450.	PLS-30.	Chk	100141112097.	P-6014.	T22R05.	P-2953.													
100.185....	11K7, 6L7, 6C5, 6H6, 6V6, 5U4, 6J7.	10020886937.	GL450-30.	KR508.	D-8-450.	PLS-8.	Chk	100141111331.	P-6014.	T22S74.	A-2905.													
100.186....	14K7, 6L7, 6C5, 6H6, 6V6, 5W4, 6J7.	10020111469.	GL450-16.	KR516A.	D-16-450.	PLS-16.	Chk	100141111330.	C-1710.	T22R06.	P-2954.													
100.189....	5IC7G, 1D5GP, 6T7G, 1F5G, 6AB5.	10020110377.	PRSA450-8-8	BR102A.	M-10-25.	TA-10.	Chk	100141111392.	P-6014.	T22S74.	A-2905.													
100.189-1....	5IC7G, 1D5GP, 6T7G, 1F5G, 6AB5.	10020110377.	PRSA450-8-8	BR102A.	M-10-25.	TA-10.	Chk	100141111331.	P-6014.	T22S74.	A-2905.													
100.195....	6A8G, 6K7G, 6Q7G, 6K6G, 5W4G, 6U5.	10020112883.	PRSB450-8-8 & PRSA450-8	EZ8845.	M-2X8-250.	LM-28.	Chk	100141111351.	A-3881.	T22S48.	A-2934.					</								

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL	
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quam	Note	Use	Mfr.	Clarestat	Shaft	Switch	Note	IRC	Mfr.	Radiant	Note	Product Set No.

Continued—(Sears-Roebuck)—SILVERTONE

Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis	Model	See Chassis
7090	101.688-A	7152	109.626	7225	110.258	7310	125.219	8912	8913,	8912	8913,
7090	101.810	7153	109.627	7227	126.206	7312	126.221	8914		8914	
7091	101.665	7158	101.648-1	7228	126.208	7315	126.224	8915	8916,	8915	8916,
7093	101.555	7165	109.423	7230	105.6H	7318	109.359	8917	8918,	8917	8918,
7094	101.667	7165, 7166	101.823-A, 1A,-1	7231	105.6L	7320	126.225	8919	8920,	8919	8920,
7095	101.826	7167	101.662-1A	7232	105.6U	7321	126.229	8922	8923,	8922	8923,
7099	164.158	7158	101.681-1A,-2	7233	105.6PU	7322	126.231	8924	8925,	8924	8925,
7100	101.661	7159	101.687	7234	105.7MU	7325	126.236	8929	8930,	8929	8930,
7100	101.811	7177	101.594-1B	7235	105.8KU	7327	109.370	8935	8936,	8935	8936,
7102	101.814-1A	7188	109.417	7236	105.8TU	7330	126.227	8937	8938,	8937	8938,
7103	110.466-1	7189	109.378	7237, 7239	104.709	7807, 7808	113.414	8939	8940,	8939	8940,
7104	101.644	7211	110.7211	7241, 7241A	109.246	7814	113.504	8941	8942,	8941	8942,
7106	101.663	7212, 7212A	110.7212	7242, 7242A	109.190	7900	126.233	8950		8950	
7108	101.648	7213	110.7213	7243	110.258	7905	126.234	8960		8960	
7110	101.649	7214	110.7214	7244	110.907	7906	126.235	8970		8970	
7111	434.140	7215	110.7215	7245	107.375	7910	126.237	8980		8980	
7112	101.654	7216	100.184	7246	110.988-1A	7915	126.238	12816, 12817,		12816, 12817,	
7114	101.661	7217	101.183	7250	110.258-1	8900	138.130	12818, 12819,		12818, 12819,	
7115, 7116		7218	101.186	7251, 7252	110.988	8902	138.240	12820, 12821		12820, 12821	
7117	101.825-.1A,-1B	7219	110.7219	7255	110.255	8903	138.210	12822, 12823		12822, 12823	
7127	101.582-1B	7220	110.7220	7300	126.216	8904	138.230	12874, 12875		12874, 12875	
7134	110.448	7221	125.202	7305	126.217	8906, 8907,					
7145	436.200	7222	100.186	7306	126.218	8908, 8909,					
7148, 7148A	1431.188-1	7224	100.185	7307	126.220	8910, 8911					

1st.	1003388644	16-5704	262			10058250	ST-736	F13	8E10	F13	Vol	1002488676	M-60-Z	A.	D13-133	41	G1		SILVERTONE	
2nd.	1003582645	16-5706				10058249	ST-166	F13	6E10	F13	Tone	1002588677	M-60-Z	A.	D13-133	41	G1		100.150, A	
1st.	1003388882		456			10058252	ST-166	F13	6E10	F13	Tone	1002488876	M-64-Z	A.	D13-130	41	G1		100.151, A	
2nd.	1003582885	16-5714				10058251	ST-736	F13	8E10	F13	Tone	1002588677	M-60-Z	A.	D13-133	41	G1			
1st.	1003388882	17-7410	455			10058264			10E60	F13	Vol	1002488954	T-43-	A.	D18-130X	41	G1		100.156	
2nd.	1003582885					10058268			12E60	F13	Tone	1002588677	M-60-Z	A.	D13-133	41	G1			
1st.	10033110819	16-5712	465			10058283	ST-108	F13	6A1	F13	Vol	1002410572	M-63-Z	A2	D13-137	42	G1	10051-110800	100.157	
2nd.	10034110821	16-5714				10058284	ST-115	F13	8A21	F13	Vol	100241110939	M-63-Z	A.	D13-137	41	G1	5421, H1	100.158	
1st.	10033110949		465			10058286	ST-166		6E10		Vol	100241110939	M-63-Z							
2nd.	10034110956										Vol	10024111533							100.159	
1st.	100331111434	17-7410	465			10058290					Vol	100241110672	M-63-Z	A.	D13-137	41	G1		100.179	
2nd.	100341111435	17-7410				10058291					Vol	100241110672	M-63-Z	A.	D13-137	41	G1			
3rd.	100351111436					10058292					Vol	100241110672	M-63-Z	A.	D13-137	41	G1			
1st.	10033110978	16-5712	465			10058283	ST-108		6A1		Vol	100241110672	M-63-Z	A.	D13-137	41	G1		100.184	
2nd.	10034110821	16-5714				100580281			12E60		Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		
1st.	100331111336		465								Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		
2nd.	100351111340										Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		
3rd.	100341111675										Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		
1st.	100351111335		465			10058282			12E60		Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		100.185
2nd.	100351111340										Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		
3rd.	100341111675										Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		
1st.	100331111425		465			10058288		F13	12E60	F13	Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		100.186
2nd.	100331111426					10058115005		F13	10E50	F13	Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		
3rd.	100351111427					10058115007		F13	10E50	F13	Vol	10024111358	AT-109	FS-5.	A.	D13-137X	41	G1		
1st.	100351113288	16-5712	465			10058115022R	ST-105		5A1		Vol	10024113419	M-64-Z	A2	D13-130	42	G1		100.189	
2nd.	100351113514										Vol	10024113419	M-64-Z	A2	D13-130	42	G1			
1st.	100351113228	16-5712	465			10058115040R	ST-105		5A1		Vol	10024113419	M-64-Z	A2	D13-130	42	G1		100.189-1	
2nd.	100351113514										Vol	10024112689	M-58-S	A.	D11-133	41	G1			
1st.	10033112884	16-5712	465			10058115019U		F13		F13	Vol	10024112689	M-58-S	A.	D11-133	41	G1		100.195	
2nd.	100351113496	16-5714				10058115020U		F13		F13	Vol	10024112689	M-58-S	A.	D11-133	41	G1			

<sup>t</sup> Information not available.



Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS			Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat Part No.	Note	Photofac Set No.		
1st.	10038112284.	16-5712.		465				10058115019-U			F13		F13	Vol	10024112889.	M-58-S.	A.		D11-133.		41	G1			Continued	SILVERTONE 100195-1		
2nd.	10035113496.	16-5714.						10058115020-U						Vol	10024111736.	AT-119.	FS-5.	A.	D18-139XX.		41	G1					100196	
1st.	10033111774.	17-7410.		465				6 Inch.			F13		F13	Noise	10026111734.	58-1K.		G22	W-1000.									
2nd.	10045111748.	16-5714.						8 Inch.			F13		F13													22		
1st.	10038114665.	16-5712.		465				10058115037.			F13		F13	Vol	10024114651.	AT-112.	FS-5.	A.	D13-137X.		41	G1					100198	
2nd.	10034114667.	16-5714.						R-10058115037.																				
1st.	10038119220.	16-5712.		455				10058115096.	ST-736.		8E10.			Vol	10024119634.	T-112.											100350	
2nd.	10035119024.	16-5714.						10058115103-U	ST-194.		5E49.			Vol	10023160006.	M-60-Z.			D13-139.								100351	
1st.	10033160070.	16-5712.		455				10058115104-U	ST-189.																			
2nd.	10035160270.	16-5714.																										
1st.	10033112220.	16-5712.		455				10058115117 M.							Vol	10024160558.	T-112.			D13-137X.							100353	
2nd.	1003511024.	16-5714.						1006316061.	7.							Vol	1002310768.	M-64-Z.	A.		D13-130.		41	G1				100355
1st.	W-500801.	16-5712.		455				W-500850M.							Vol	10024160743.	M-64-Z.	A.		D13-130.		41	G1				100356	
2nd.	W-119024.	16-5714.						W-500577R.							Vol	W-500482.	M-63-Z.	A.		D13-137.		41	G1				100359	
1st.	W-500801.	16-5712.		455				W-500616R.							Vol	W-500482.	M-63-Z.	A.		D13-137.		41	G1				100363,-1	
2nd.	W-500835.	16-5712.						W-500616R.							Vol	W-500482.	M-63-Z.	A.		D13-137.		41	G1				100364,-1	
1st.	W-500801.	16-5712.		455				W-500616R.							Vol	W-500482.	M-63-Z.	A.		D13-137.		41	G1				100380,-1	
2nd.	W-500835.	16-5712.						W-500616R.							Vol	W-500482.	M-63-Z.	A.		D13-137.		41	G1				100381,-1	
1st.	W-500801.	16-5712.		455				W-500725.	L-40-A.						Vol	W-500723R.	M-63-Z.	A.		D13-137.		41	G1				100382	
2nd.	W-119024.	16-5714.						W-501170W.							Vol	W-500723.	M-63-Z.	A.		D13-137.		41	G1				100383	
1st.	W-500801.	16-5712.		455				W-501170W.							Vol	W-119634.	T-103.			D19-137X.							100384	
2nd.	W-119024.	16-5714.						W-501170W.							Vol	W-501237.	M-63-Z.	A.		D13-137.		41	G1				100384-1	
1st.	W-500801.	16-5712.		455				W-501446.							Vol	W-501237.	M-63-Z.	A.		D13-137.		41	G1				100385	
2nd.	W-119024.	16-5714.						W-501446.							Vol	1012416445.	M-66-Z.	AZ.		D13-139.		42	G1				101472	
1st.	10133164431.	16-5712.		465				1015816595.	ST-108.		6A1			Vol	1012416445.	M-66-Z.	AZ.		D13-139.		42	G1					101473	
2nd.	10133164431.	16-5712.						1015816523.	ST-115.		8A21			Vol	1012416298.	M-66-Z.	A2.		D13-139.		42	G1						
1st.	1013515753.	16-5714.						1015917055.							Vol	1012416645.	M-66-Z.	AZ.		D13-139.		42	G1					
3rd.	10133162941.	16-5712.		465				1015816320.							Vol	1012416645.	M-66-Z.	AZ.		D13-139.		42	G1					
1st.	1013516295.	16-5714.						1015817058.							Vol	1012416645.	M-66-Z.	AZ.		D13-139.		42	G1					
1st.	10133164741.	16-5712.		465				1015816671.	ST-108.		6A1			Vol	1012416907.	M-66-Z.	AZ.		D13-139.		42	G1					101476	
2nd.	1013516460.	16-5714.						1015816786.	ST-115.		F13			Vol	1012416907.	M-66-Z.	AZ.		D13-139.		42	G1						
1st.	10133147181.	16-5712.		465											Vol	1012416951.	M-63-Z.	A.		D13-137.		41	G1					101478, A
2nd.	1013514148.	16-5714.													Vol	1012416705.	T-119.	A.		D18-139XX.		41	G1					101479
1st.	10133168891.	17-7410.		465																								
2nd.	1013516487.																											
1st.	10133164461.	16-5712.		465				1015816562.	ST-166.		6E10.			Vol	1012416452.	M-66-Z.	A.		D13-139.		41	G1					101480	
2nd.	10135167240.	16-5714.						1015816772.	ST-736.		8E10.			Vol	1012416452.	M-66-Z.	A.		D13-139.		41	G1						
1st.	10133168251.	16-5712.		465				1015816863.	ST-166.		6E10.			Vol	1012416815.	M-66-Z.	A.		D13-139.		41	G1					101482	
2nd.	10135168251.	16-5714.						1015816863.			10E10.			Vol	1012416815.	M-66-Z.	A.		D13-139.		41	G1						
1st.	10133168892.			465				1015817071.							Vol	1012416975.	AT-119.	FS-5.		D18-139X.		41	G1					101483
2nd.	1013316487.	16-5714.						1015816830.							Vol	1012616704.	58-1K.			W-1000.								
1st.	101331683511.	16-5712.		465				1015816776.							Vol	1012416962.	M-66-Z.	A.		D13-139.		41	G1					101487
2nd.	101331683511.	16-5714.						1015816776.							Vol	1012416962.	M-66-Z.	A.		D13-139.		41	G1					
1st.	10133168261.	16-5712.		465				1015816780.							Vol	1012416962.	M-66-Z.	A.		D13-139.		41	G1					101488
2nd.	10135168261.	16-5714.						1015817090.							Vol	1012417004.	T-120.	A.		D13-139X.		41	G1					101484
1st.	10133170261.			465				1015817085.							Vol	1012417004.	T-120.	A.		D13-139X.		41	G1					
2nd.	10135170271.														Vol	1012417213.	M-66-Z.	A.		D13-139.		41	G1					
1st.	10133168502.	16-5712.		465				1015816736.	ST-166.		6E10.			Vol	1012417213.	M-66-Z.	A.		D13-139.		41	G1					101489	
2nd.	10135168502.	16-5714.						1015816865.	ST-166.		6E10.			Vol	1012416343.	M-66-Z.	A.		D13-139.		41	G1					101490	
1st.	101331683511.	16-5712.		465				1015816865.			10E10.			Vol	1012416343.	M-66-Z.	A.		D13-139.		41	G1					101490	
2nd.	101351683511.	16-5714.						1015816865.			10E10.			Vol	1012416343.	M-66-Z.	A.		D13-139.		41	G1					101490	
1st.	10133168291.	16-5712.		262				1015816794.	ST-115.		8EV6.			Vol	1012416101.	DC13-133.			G22								101495, X	
2nd.	10135170570.							1015816794.			8EV6.			Vol	1012517663.													

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES										
		No. Tube	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note			
			"A"	"B"																								
SILVERTONE—Continued		7 1/2 6U7G, 6A8G, 6K7G, 6N7G, 6Z4/6X5G.	1012017576	PRS3450-8-8 & PRS450-8.	EZ8845.			DH-3X8-450SS.		TU-88 & UT-8.		Pwr. 10151161061.	10112160581.	In A-4713.	T20076.	A-2922.												
101.496, X.		7 1/2 6U7G, 6A8G, 6K7G, 6N7G, 6Z4/6X5G.	1012017576	PRS3450-8-8 & PRS450-8.	EZ8845.			DH-3X8-450SS.		TU-88 & UT-8.		In A-4713.	1011316174.	Out A-2201.	T22566.	A-2901.												
101.497.		8 1/2 15. 6D6G, 6T7G, 5Q6G, 6L5G, 1J6G, 6A8G, 6ZY5G.	1012017603									Chk 1011416107.		Out †.		†.												
101.498.		8 1/2 6K7G, 7J5G, 6L7G, 6B6G, 6V6G, 6V5, 5V3G (44).	1012013903	GL450-30.	KR530.			D-30-450.		PLS-30.		Pwr. 10112116449.	1011317551.	In A-4713.	T20075.	A-2920.												
101.499.		10 1/2 6K7G, 6L7G, 6J5G, 6Q7G, 6V6G, 6U5, 5V3G (44).	1012013903	GL450-30.	KR530.			D-30-450.		PLS-30.		Pwr. 1011016737.	1011317681.	In A-3831.	T22548.	A-2938.												
101.500.		10 1/2 6K7G, 6L7G, 6J5G, 6Q7G, 6V6G, 6U5, 5V3G (44).	1012014808	GL450-30.	KR530.			D-30-450.		PLS-30.		Pwr. 1011316827.	1011016827.	In P-60-12.	T22R04.	P-2952.												
101.502.		7 1/2 6K7G, 6A8G, 6B6G, 6V6G, 6U5, 6X5G (44).	1012017861	GL450-16.	KR516A.			D-16-450.		PLS-16.		Pwr. 1011016858.	1011316871.	In A-3877.	T22558.	A-2902.												
101.503.		4 1C7G, 1D5GP, 1F7G/1F7GV, 1G5G.	1012016570.	PRS4450-8-8.	EZ8845.			M-2X8-450.		UT-88.		Pwr. 1011316778.	1011316778.	In A-3877.	T22558.	A-2902.												
101.503-1.		4 1C7G, 1D5GP, 1F7G/1F7GV, 1F7GV, 1G5G.																										
101.504.		6 1C7G, 1H4G, 1F7GH, 1G5G.	1012016259.		EZ8825.			M-2X8-250.		LM-28.		Out 1011318172.	1011318172.	In A-3822.	T22S47.	A-2932.												
101.504-1.		6 1C7G, 1H4G, 1F7GH, 1G5G.	1012016259.		EZ8825.			M-2X8-250.		LM-28.		Out 1011318172.	1011318172.	In A-3822.	T22S47.	A-2932.												
101.504-2.		6 1C7G, 1H47, 1F7GH, 1G5G.	1012016259.		EZ8825.			M-2X8-250.		LM-28.		Out 1011319918.	1011319918.	In A-3822.	T22S47.	A-2932.												
101.505, X.		6 1C7G, 1F7GH, 1H4G/1H6G, 1H4G, 4A6G.	1012016259.		EZ8825.			M-2X8-250.		LM-28.		Int 1011218126.	1011316322.	In A-4292.	T20075.	A-2920.												
101.5051, IX.		6 1C7G, 1F7G, 1H4G/1H6G, 1H4G, 4A6G.	1012016259.		EZ8825.			M-2X8-250.		LM-28.		Int 1011218126.	1011316322.	In A-4292.	T22566.	A-2904.												
101.506.		6 6J8G, 6U7G, 6B6G, 25L6G, 6U5, 25Z6G (40).	1012018161.		EZ42215.			DSB-403020-150.				Out 1011315957.	1011315957.	In A-2201.	T22566.	B22.												
101.507.		6 1C7G, 1H4G, 1D5GP, 1F7GV, 1F7GH, 6G6G, 6AB5.	1012018184.	1012018672.	PRS25-25.			BR252A.		M-25-25.		Out 1011317057.	1011317057.	In A-2201.	T22566.	B22.												
101.507-1.		6 1C7G, 1H4G, 1D5GP, 1F7GV, 1F7GH, 5G6G, 6AB5.	1012018184.	1012018672.	PRS25-25.			BR252A.		M-25-25.		Out 1011317050.	1011317050.	In A-2201.	T22566.	B22.												
101.508-1.		5 1/2 6K7, 6J7, 25A6G, 1V.	1012018223.	PRS3450-8-8 & PRS25-25.	EZ8845S.			DHS-2X8-450 & M-25-25.		TU-88 & TA-25.		Chk 1011418183.	1011418183.	In A-3879.	T22548.	A-2932.												
101.509-1, -2.		7 6J8G, 6U7G, 6H6G, 6B6G, 25L6G, 6U5, 25Z6G (44).	1012018256.									Pwr. 1011318575.	1011318575.	In A-3879.	T22548.	A-2932.												
101.510.		8 6A8G, 6J5G, 6U7G, 6H6G, 6F5G, 6V6G, 6U5, 5V3G (44).	1012013903.	GL450-30.	KR530.			D-30-450.		PLS-30.		Pwr. 1011018409.	1011018409.	In A-3877.	T22545.	A-2928.												
101.510-1, 2, 3, 4.		8 6A8G, 6J5G, 6U7G, 6H6G, 6F5G, 6V6G, 6U5, 5V3G (44).	1012014808.	GL450-30.	KR530.			D-30-450.		PLS-30.		Pwr. 1011018409.	1011018409.	In A-3877.	T22545.	A-2928.												
101.511-1, 2.		10 6U7G, 6A8G, 6J5G, 6Q7G, 6V6G, 6U5, 5V3G (44).	1012013903.	GL450-30.	KR530.			D-30-450.		PLS-30.		Pwr. 1011018416.	1011018416.	In A-3877.	T22545.	A-2954.												
101.512, A.		6 1C7G, 1F7GH, 1H4G, 4A6G.	1012016259.		EZ8825.			M-2X8-250.		LM-28.		Out 1011317090.	1011317090.	In A-3311.	T22564.	A-2904.												
101.512, A.		6 1C7G, 1F7GH, 1H4G, 4A6G.	1012016259.		EZ8825.			M-2X8-250.		LM-28.		Out 1011317090.	1011317090.	In A-4292.	T20075.	A-2920.												
101.513.		6 1C7G, 1H4G, 1D5SP, 1F7GV, 1F7GH, 6G6G, 6AB5.	1012018493.	1012018672.	PRS25-25.			EZ2215C.		DSB-302.		Out 1011318214.	1011318214.	In A-3879.	T22S48.	A-2932.												
101.515.		6 6D8G, 15, 6T7G, 6L5G, 1J6G, 6AB5 (44).	1012018714.									Chk 1011418492.	1011418492.	In A-3879.	T22S48.	A-2932.												
101.515-1, 2.		6 6D8G, 15, 6T7G, 6L5G, 1J6G, 6AB5 (44).	1012018714.									Chk 1011418492.	1011418492.	In A-3879.	T22S48.	A-2932.												

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photogrid Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	101331-0541.	16-5712.		262				1015817578.	ST-115.		8A21		Vol Tone	1012416100 1012517663.	SD-78.			G22	DC13-133X.			G22			Continued	SILVERTONE 101496, X		
2nd.	1013517570.							101581.	ST-108.		6A1.		Vol	1012416907.	M-		A2.		D13-139.		42	G1	1015114-00	5300.	H1		101497	
1st.	10133175481.	16-5712.		465				101581-6-2.	S -.		8A21																	
2nd.	1013517575.																											
1st.	10133168251.	16-571.		465				1015816865.	ST-166.		6E10.		Vol	1012416815.	"-".		A.		1-.	:	4:	1					101498	
2nd.	10133168261.							1015816869.	ST-736.		8E10.	F13																
1st.	101331777.			6				1015816877.			12E60.	F13															101499	
2nd.	101351795.							1015816780.			12E60.	F13																
1st.	10133168462.	16-5712.		465				1015816772.	ST-166.		6E10.		Vol	1012416452.	M-66-Z.		A.		D13-13-		41						101502	
2nd.	1013517240.							1015816772.	ST-736.		"-0		V I	1012416232.	"-".				D13-13		42						101503	
1st.	10133162402.	16-5712.		465				1015816243.																			101503 1	
2nd.	1013518136.							1015818136.																				
1st.	10133162402.	16-5712.		7				10158162402.																				
2nd.	101351181402.																											
1st.	10133179171.	16-5-12.		4				1015811.	ST-108.		"-".		Vol	1012417919.	M-66-Z.				D13-139.		G1						101504	
2nd.	1013517896.							1015811-0.	ST-108.		A-		Vol	1012417919.	M-66-Z.				D13		G1						101504-1	
1st.	1013318124.	16-5712.		465				10158118543.	ST-108.		6A1.	F13	Vol	1012418108.													101504-2	
2nd.	1013518125.							10158119915.	ST-108.		6A1.	F13			1012418350.													101505, X
1st.	1013318124.	16-5712.		455				10158116320.	ST-108.		6A1.	F13	Vol	1012418108.														
2nd.	1013518125.							10158116320.	ST-108.		6A1.	F13	Vol	1012418350.														
1st.	10133181241.	16-5712.		465				10158116323.	ST-115.		8A21.	F13																
2nd.	1013518125.							10158116320.	ST-108.		6A1.	F13	V I	1012418353.				G22		G22						101505X, 1X		
1st.	10133182201.	16-5-11.		465				10158116320.	ST-108.		6A1.	F13															101506	
2nd.	1013518221.							10158116320.	ST-108.		6A1.	F13															101507	
1st.	101331821241.	16-5712.		465				10158118212.	ST-108.		6-1.	-1		1012418163.	"-66-				D13-1		G1	1015114840	5411.	H1		101507		
2nd.	1013518181.							10158118212.	ST-108.		6-1.	-1		1012418163.	"-66-													
1st.	1013318181.	1-1.		65.				10158118458.	ST-115.		8A21.	-01		1012418163.	M-66-Z.				D1-139.		G1	1015114840	5411.	H1		101507-1		
2nd.	1013518181.							10158118458.	ST-115.		8A21.	-01		1012418163.	M-66-Z.													
1st.	1013318181.	1-1.		65.				10158118458.	ST-115.		8A21.	-01		1012418163.	M-66-Z.												101508-1	
2nd.	1013518181.							10158118458.	ST-167.		V I			101241882.	"-".V				31	D13-139.		4, 5						101509-1, -2
1st.	10133182261.	455						10158118503.	ST-166.		6E10.	F13	Vol	1012418259.	"-6-Z.													101510
2nd.	1013518263.							10158118517.	ST-736.		8E10.	F13																
1st.	101331824071.	16-5-1.		4				10158118628.			Vol			1012418394.	M-66-Z.				G16	D13-139.	G1	16						101510-1, 2, 3, 4
2nd.	1013518408.							10158118535.																				
1st.	10133184071.	16-5712.		455				1015811875.	ST-175.		1 E15.		Vol	1012418394.	M-66-				G16	D13-139.	G1	16						101511-1, 2
2nd.	1013518408.							1015811875.	ST-175.		1 E15.			1012418207.	T-114.													
1st.	10133184071.	16-5712.		465				10158118776.			10E60.			1012418394.	T-114.													101511-1, 2
2nd.	1013518408.							10158118776.			12E60.	F13		1012418394.	T-114.													
1st.	10133184071.	16-5712.		465				10158118780.			12E60.	F13		1012418394.	T-114.													
2nd.	1013518408.							10158118780.			12E60.	F13		1012418394.	T-114.													
1st.	1013318434.	1-66.		455				10158118780.	ST-108.		6A1.	F13	Vol	101241833.														101512, A
2nd.	1013518181.							10158118780.	ST-108.		6A1.	F13		101241833.														
1st.	1013318181.	16-5712.		465				10158118782.	ST-108.		6A1.	-1	Vol	1012418259.	M 6 Z.													101513
2nd.	1013518181.							10158118782.	ST-115.		6A1.	-1		1012418259.	M 6 Z.													
1st.	1013318181.	16-1.		455				10158118784.	ST-108.		6A1.	F13	V	101241871.														101515
2nd.	1013518724.							10158118784.	ST-115.		8A21.	F13		101241871.														
1st.	10133187231.	16-5712.		455				10158118777.	ST-108.		8 E6.6.	F8	Vol	1012418715.														10M.515-1, 2
2nd.	1013518724.							10158118777.	ST-115.		8 E6.6.	F8		1012418715.														

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
												"A"	"B"						"A"	"B"			
SILVERTONE—Cont.	13	16B8G, 26J5G, 6A8G, 26U7G, 6H6G, 26V6G, 6AE6G, 6AD6G, 5X4G (44).	1012013903 1012014808 1012018764	GL450-30 GL450-30	KR530 KR530	D-30-450 D-30-450		PLS-30 PLS-30		Chk Pwr Out Out	1011418167 1011018762 1011318953 1011318423	P-6014 A-3311 A-3311 A-3822	T22R06 T22S64 T22S47		P-2954 A-2936 A-2932								
101.519.	4	1C7G, 1D5GP, 1F7GH, 1F7GV, 1G5G																					
101.521.	5	26K7, 6J7, 25A6G, 1V	1012018823	PRS1450-B-8 & PRS25-25	EZ8845S	DHS-2X8-450 & M-25-25		TU-88 & TA-25		Pwr Out Out Out	10111019047 1011318835 1011319013 1011318835	A-3877 A-3877 A-3877 A-3877	T22S60		A-2930								
101.522.	5	26K7, 6J7, 25A6G, 25Z6G	1012018823		EZ8845S					Cut Out Out	1011318835 1011319013 1011318835	A-3877 A-3877 A-3877	T22S60		A-2930								
101.524-1	7	1C7G, 1D5GP, 1F7GH, 1H4G, 4A6G	1012018559 1012018560	PRS150-8 PRS150-12 PRS150-12	BR1215 BR1215	M-8-150 M-10-150 M-10-150		UT-8 UT-121 UT-121		In Out Out	1011218459 1011318745 1011319979	A-4292 A-2201 A-2201	T20D75 T22S66 T22S66		A-2920								
101.525.	6	1C7G, 1H4G, 1F7GH, 1G5G	1012016259		EZ8825	M-2X8-250		LM-28		Out Out Out	1011318748 1011318172 1011318545	A-2201 A-3822 A-3822	T22S66		A-2904								
101.525, A	6	1C7G, 1H4G, 1F7GH, 1G5G	1012016259		EZ8825	M-2X8-250		LM-28		Out Out	1011319918	A-3822	T22S47		A-2932								
101.526,-1	5	26D6, 6F5G, 25L6G, 1Z3	1012017761		EZ42215	DSB-403020-150				Out	1011317766	A-3876	T22S45		A-2928								
101.527.	6	6J8G, 6U7G, 6B6G, 25L6G, 6U5, 25Z6G (44)	1012018869									Pwr Out	1011018888 1011318205	A-3876	T22S45		A-2928						
101.528.	6	6D8G, 6S7G, 6T7G, 6A85, 666G, 6ZY5G (44)	1012018938									Chk Pwr Out	1011418940 1015118934 1011319032	A-3876	T22S48		A-2932						
101.532.	4	1C7G, 1D5GP, 1F7GH, 1F7GV, 1G5G																					
101.533, A	6	5A7, 6D6, 75, 76, 148 (40)																					
101.534,-1	10	6A8G, 26J5G, 6U7G, 6H6G, 6Q7G, 26V6G, 6U5, 5Y3G (44)	1012013903 1012019079	GL450-30 GL450-16	KR530 KR516A	D-30-450 D-16-450		PLS-30 PLS-16															
101.535.	8	6J8G, 6U7G, 26J5G, 6F5G, 6Y6G, 6U5, 6W5G (44)	1012019192																				
101.537.	10	6A8G, 26J5G, 6U7G, 6H6G, 6Q7G, 26V6G, 6U5, 5Y3G (44)	1012013903 1012019079	GL450-30 GL450-16	KR530 KR516A	D-30-450 D-16-450		PLS-30 PLS-16															
101.546,-1, -IA	6	6J8G, 6U7G, 6B6G, 25B6G, 6U5, 25Z6G, (BK42B Ballast) (40)	1012018845 1012019913		EZ42215 PR150-16	D-16-450 DSB-403020-150		PLS-16 M-16-150															
101.547,-1, -A	7	6J8G, 6U7G, 6J5G, 6F5G, 25L6G, 6U5, 25Z6G (44)	1012018869																				
101.547-1B	7	6J8G, 6U7G, 6J5G, 6F5G, 25L6G, 6U5, 25Z6G (44)	1012018869																				
101.548.	5	1C7G, 1F7GH, 1H4G, 1G5G	1012019891	PRS150-16	BR1615	M-16-150		UT-161															
101.549.	21	6A8G, 46J5G, 6U7G, 6H6G, 6Q7G, 26V6G, 6U5, 5Y3G (44)	1012013903 1012019079	GL450-30 GL450-16	KR530 KR516A	D-30-450 D-16-450		PLS-30 PLS-16															
101.550.	5	1A7G, 21N5G, 1H5G, 1A5G	1012019891	PRS150-16	BR1615	M-16-150		UT-161															
101.551.	6	1A7G, 21N5G, 1H5G, 1H4G, 1G4G, 1G6G	1012019891	PRS150-12	BR1215	M-10-150		UT-121															
101.552, A	6	1C7G, 1H4G, 1D5GP, 1F7GH, 6G6G, 6AB5 (44)	1012019788 1012018672	PRS25-25	EZ8845S BR252A	M-25-25		TA-25															
101.553, A	7	6D8G, 6S7G, 6T7G, 6L5G, 6AB5, 6GG6, 6ZY5G (44)	1012018938																				
101.554.	7	1D7G, 1H4G, 1F7GH, 1H6G, 4A6G	1012016259		EZ8825	M-2X8-250		LM-28															
101.555,-1.	11	26U7G, 6A8G, 26J5G, 6Q7G, 26V6G, 6U5, 5Y3G (44)	1012013903 1012014808	GL450-30 GL450-30	KR530 KR530	D-30-450 D-30-450		PLS-30 PLS-30															
101.556,-1.	6	6J8G, 6U7G, 6B6G, 25B6G (44)	1012020722 1012020721	PRS150-30	EZ3215C BR3015	M-30-150 DSB-303		UT-301															
101.557,-1.	6	6J8G, 6U7G, 6B6G, 25B6G, 6U5, 25Z6G (BK42B Bar) (40)	1012019845 1012019913	PRS150-16	BR1615	M-16-150		UT-161															
101.558.	4	1A7G, 1N5G, 1H5G, 1A5G	1012018560	PRS150-12	BR1215	M-10-150		UT-121															
101.561.	5	1A7G, 21N5G, 1H5G, 1A5G	1012019891	PRS150-12	BR1215	M-10-150		UT-121															
101.562.	6	1A7G, 21N5G, 1H5G, 1G4G, 1G6G	1012019891	PRS150-12	BR1215	M-10-150		UT-121															
101.563,-1A.	4	1A7G, 21N5G, 1H5G, 1C5G	1012019891	PRS150-12	BR1215	M-10-150		UT-121															
292 — SILVERTONE	Howard W. Sams RADIO INDUSTRY RED BOOK Replacement Parts Buyers' Guide																						
	†Information not available.																						

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft-	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photocell Set No.	
1st.	10133187591						1015818950			12E60		Vol	1012418616	I 114				D17-139X			G1				SILVERTONE 101.517,-1,-2	
2nd.	10134187601						1015818421	ST-105		5A1		Vol	1012418418	V-66-Z		A2		D13-139		42	G1				101.519	
3rd.	1013518761						1015818832	ST-187		5E18		Vol	1012418827	M-34-V		A	G4, 5	D14-118		41	G1, 4,5					101.521
1st.	10133184171	16-665					1015818832	ST-167	F13	5E18	F13	Vol	1012418827	M-34-V		A	G4, 5	D14-118		41	G1, 5					101.522
2nd.	1013518136						1015818832	ST-167	F13	5E18	F13	Vol	1012418827	M-34-V		A	G4, 5	D14-118		41	G1, 5					101.524,-1
1st.	1013518454	16-6659					1015819010	ST-167	F13	6A1	F13	Vol	1012418808	M-66-Z				D13-139			G1				101.525	
2nd.	1013518454	16-6659					1015819743	ST-108	F13	6A1	F13	Vol	1012418808	M-66-Z				D13-1			G1				101.525A	
1st.	1013518124	16-5712					1015819743	ST-108	F13	6A1	F13	Vol	1012418808	M-66-Z				D13-1			G1				101.526,-1	
2nd.	1013518124	16-5712					1015819745	ST-115	F13	8A21	F13	Vol	1012418844	M-34-V		A	G4, 5	D14-118		41	G1, 4,5					101.527
1st.	10133181241	1 - 51					1015819747	ST-108	F2	6A1	F2	Vol	1012418808	M-66-Z				D13-139			G1				101.528	
2nd.	1013518543						1015819747	ST-108	F2	6A1	F2	Vol	1012418808	M-66-Z				D13-1			G1				101.529	
1st.	1013518124	16-5712					1015819916	-1		6A1		Vol	1012418808	M-66-Z				D13-1			G1				101.530	
2nd.	1013518124	16-5712					101581763					Vol	1012418844	M-34-V				D13-139			G1				101.531	
1st.	10133188861	16-6658	4				1015818202	T-18				Vol	1012418881	V-6-Z				D13-139			G1				101.532	
2nd.	10133188861	16-6658	4				1015819030	ST-108		6A1		Vol	1012418939	M-66-Z				D13-1			G1				101.533	
1st.	101331889351	16-5712	6				1015815243					Vol	1012419021	M-66-Z				D13-139			G1				101.534	
2nd.	101331889351	16-5712	6				1015816881					Vol	1012419219	M-60-Z				D13-133			G1				101.535	
1st.	10133184171	16-6658	465				1015817119	ST-108	F7	5A1	F7	Vol	1012419219	M-60-Z				D13-133			G1				101.536	
2nd.	10133184171	16-6658	465				1015817119	ST-115	F7	8A21	F7	Vol	1012419219	M-60-Z				D13-133			G1				101.537	
1st.	10133184071	16-5712	465				1015819180			1-60		Vol	1012419076	T-114				D17-139			G1				101.538	
2nd.	1013518408	16-5712	465				1015820140			1-60		Vol	1012418259	V-6-Z				D17-139			G1				101.539	
1st.	10133182621	16-6658	455				1015819227			1-60	F13	Vol	1012418259	V-6-Z				D17-139			G1				101.540	
2nd.	10135182						1015819396			1-60	F13	Vol	1012418259	V-6-Z				D17-139			G1				101.541	
1st.	101331871	1 - 12	4				1015819114			1		Vol	1012419207	-							G1				101.542	
2nd.	1013618408						1015819830			52E10		Vol	1012419855	M-60-Z				D13-133			G1				101.543	
1st.	10133188481	16-6658	455				1015812-2					Vol	1012418881	M-66-				D13-139			G1				101.544,-1,-A	
2nd.	10133188887						101584			1		Vol	1012418881	M-66-				D13-139			G1				101.545,-1,-A	
1st.	10133188861	16-6658	455				1015820054	ST-108		A1		Vol	1012419882	T-114				D13-133			G1				101.546	
2nd.	10133188861	16-6658	455				1015819114			10-0		Vol	1012419207	T-114				D17-139X			G1				101.547	
1st.	10133181241	16-5712	455				1015819180			12E60		Vol	1012419207	T-114				D17-139X			G1				101.548	
2nd.	1013518125						1015819933			12E60		Vol	1012419207	T-114				D17-139X			G1				101.549	
1st.	10133203491	16-665	455				1015820395	ST-108				Vol	1012420807	-											101.550	
2nd.	1013520442						1015820395	ST-108		6A1		Vol	1012420807	-											101.551	
1st.	10133203491	16-6658	455				1015820398	-1		A1	1	Vol	1012420807	-											101.552	
2nd.	10135203491						1015818212	ST-108		-1	1	Vol	1012420807	-											101.553	
1st.	10133197871	16-5712	455				1015818212	ST-108		-1	1	Vol	1012420807	-											101.554	
2nd.	1013518125						1015818212	ST-108		-1	1	Vol	1012420807	-											101.555	
1st.	101331889351	16-5712	455				1015819030	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.556	
2nd.	1013518930						1015819925	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.557	
1st.	1013520357	16-5712	455				1015820356	ST-115		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.558	
2nd.	10133197871	16-5712	455				1015818212	ST-108		-1	1	Vol	1012418939	M-66-Z				D13-133			G1				101.559	
1st.	1013518125	16-5712	455				1015816320	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.560	
2nd.	1013518125	16-5712	455				1015816320	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.561	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.562	
2nd.	10135188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.563	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.564	
2nd.	10135188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.565	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.566	
2nd.	10135188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.567	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.568	
2nd.	10135188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.569	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.570	
2nd.	10135188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.571	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.572	
2nd.	10135188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.573	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.574	
2nd.	10135188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.575	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.576	
2nd.	10135188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.577	
1st.	10133188481	16-6658	455				1015817055	ST-108		6A1		Vol	1012418939	M-66-Z				D13-133			G1				101.578	
2nd.	10135188481																									

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
	No. Tunes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	N <sub>o</sub> 1	Cornell-Dubilier	N <sub>o</sub> te	Solar	N <sub>o</sub> 1	Sprague	N <sub>o</sub> te	Use	Mfr.	Stancor	N <sub>o</sub> te	Thordarson	N <sub>o</sub> te	Merit	N <sub>o</sub> te	Eveready Part No.	N <sub>o</sub> te	Burgess Part No.	N <sub>o</sub> te			
			Part No.	Part No.	Part No.	Part No.		Part No.	Part No.	Part No.		Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"				
SILVERTONE—Cont.																										
101.565, A, B...	4	12K7GT, 12F5GT, 35L6GT, 35Z5GT (47)	30-20 Mid.	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	1011320897													
101.566, A-E...	5	12A8GT, 12Q7GT, 12K7GT, 35L6GT, 35Z5GT (47)	1012020935	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	1011320918	A-3876		T22S45		A-2928								
101.566-1, A-E...	5	12A8GT, 12Q7GT, 12K7GT, 35L6GT, 35Z5GT (47)	1012020935	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	1011320918	A-3876		T22S45		A-2928								
101.566-2, A-E...	5	12A8GT, 12Q7GT, 12K7GT, 35L6GT, 35Z5GT (47)	1012020935	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	1011320918	A-3876		T22S45		A-2928								
101.566-3, A-E...	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	1012042405		EZ3215C		DSB-303					Out	1011320918	A-3876		T22S45		A-2928								
101.567, A, B...	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	1012020935	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	1011340635	A-3876		T22S45		A-2928								
101.567-1, A, B...	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	1012020935	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	1011340635	A-3876		T22S45		A-2928								
101.567-2, A, B...	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	1012020935	PRSA150-40-20		EZ3215C		DSB-303				Out	1011340635	A-3876		T22S45		A-2928								
101.567-3, A, B...	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	1012042405		EZ3215C		DSB-303				Out	1011340635	A-3876		T22S45		A-2928									
101.570...	7	6A8G, 6U7G, 6J5G, 6F5G, 25L6G, 6U5, 25Z6G (44)	1012040101		EZ3215C		DSB-303				Out	1011340671	A-3876		T22S45		A-2928									
101.570-1, A...	7	6A8G, 6U7G, 6J5G, 6F5G, 25L6G, 6U5, 25Z6G (44)	1012040101		EZ3215C		DSB-303				Out	1011340671	A-3876		T22S45		A-2928									
101.571-1, A, B...	6	6K8G, 6U7G, 6J5G, 6F5G, 25L6G, 25Z6G (44)	1012040101		EZ3215C		DSB-303				Out	1011340671	A-3876		T22S45		A-2928									
101.572-1...	8	6K8G, 6U7G, 6J5G, 6F5G, 25B6G, 6U5, 25Z6G (47)	1012040158	PRS150-30	BR3015		DY-311	EL-330		Pwr	1011340166	A-3876		T22S45		A-2928										
101.572-2A...	8	6K8G, 6U7G, 6J5G, 6F5G, 25B6G, 6U5, 25Y3G (44)	101204157	UP2245C	DY-315	EL-350				Pwr	1011443314	P-6011		T22R02		P-2951										
101.573-1B...	8	6K8G, 6U7G, 6Q7G, 25L6G, 6U5, 25Z6G (47)	1012040274							Pwr	1011404275	A-3878		T22S47		A-2931										
101.574...	10	6K8G, 6U7G, 6Q7G, 6P5G, 26AC5G, 6U5, 5Y3G (44)	1012013903	GL450-30	KR530	D-30-450	PLS-30			Out	1011340230	A-3301		T22S60		A-2905										
101.574-1A-2B...	10	6K8G, 6U7G, 6Q7G, 6P5G, 26AC5G, 6U5, 5Y3G (44)	1012013903	GL450-30	KR530	D-30-450	PLS-30			Out	1011340252	A-3301		T22S60		A-2905										
101.576-1...	13	6U7G, 6K8G, 6P5G, 6F5G, 26AC5G, 6U5, 5X4G (44 & 51)	1012041502	GL450-30	KR530	D-30-450	PLS-30			Pwr	1011040406	P-6013		T22R05		P-2953										
101.577...	5	1A7G, 1N5G, 1H5G, 1A5G...	1012019891	PRS150-12	BR1215	M-10-150	UT-121			Out	1011340254	A-3823		T22S74		A-2904										
101.578...	5	1A7G, 1N5G, 1H5G, 1A5G...	1012019891	PRS150-12	BR1215	M-10-150	UT-121			Out	1011320522	A-3857		T22S48		A-2937										
101.579...	6	1A7, 1N5G, 1H5G, 1A5G...	1012019891	PRS150-12	BR1215	M-10-150	UT-121			Out	1011340520	A-3831		T22S48		A-2938										
101.580...	4	1A7G, 1N5G, 1H5G, 1A5G...	1012019891	PRS150-12	BR1215	M-10-150	UT-121			Out	1011340522	A-3831		T22S48		A-2938										
101.580-1...	4	1A7G, 1N5G, 1H5G, 1A5G...	1012019891	PRS150-12	BR1215	M-10-150	UT-121			Out	1011320428	A-3857		T22S48		A-2937										
101.581...	6	1A7G, 1N5G, 1H5G, 1A5G...	1012019891	PRS150-12	BR1215	M-10-150	UT-121			Out	1011240428	A-4713		T20D75		A-2920										
101.582-A...	7	6D8G, 6S7G, 6T7G, 6L5G, 6AB5G, 6GG6, 6ZY5G (51)	1012041756								Out	1011340522	A-3831		T22S48		A-2938									
101.582-1B...	7	6D8G, 6S7G, 6T7G, 6L5G, 6AB5G, 6GG6, 6ZY5G (51)	1012041756								Out	1011319032	A-3879		T22S48		A-2932									
101.583-1, -2...	11	6K7G, 6K8G, 6Q7G, 6P5G, 26AC5G, 6U5, 5X4G (44)	1012013903	GL450-30	KR530	D-30-450	PLS-30			Out	1011320355	A-3879		T22S48		A-2932										
101.584-1 Thru-5...	11	6U7G, 6K8G, 6Q7G, 6P5G, 26AC5G, 6U5, 5X4G (44)	1012013903	GL450-30	KR530	D-30-450	PLS-30			Pwr	1011040450	P-6013		T22R05		P-2953										
101.585...	6	12A8GT, 12K7GT, 12Q7GT, 6H4GT, 35L6GT, 35Z5GT (47)	1012020935	PRSA150-40-20	BRD4215	M-2X40-150	TA-240			Out	1011340544	A-3823		T22S74		A-2904										
101.590-1 Thru-5...	6	6K8G, 6U7G, 6B8G, 6AF6G, 25AC5G, 25Z6G (44)	1012041596		UP3345	DY-2X30-450	EL-23			Pwr	1011040450	P-6013		T22R05		P-2953										
101.593-A-B...	4	12K7GT, 12F5GT, 35L6GT, 35Z5GT (47)	30-20 Mid.	PRSA150-40-20	BRD4215	M-2X40-150	TA-240			Out	1011340671	A-3876		T22S45		A-2928										
101.594, A...	7	6D8G, 6S7G, 6T7G, 6L5G, 6AB5, 6GG6, 6ZY5G (51)	1012041756								Chk	1011441752	†		†		†									
101.594-1B...	7	6D8G, 6S7G, 6T7G, 6L5G, 6AB5, 6GG6, 6ZY5G (51)	1012041756								Out	1011319032	A-3879		T22S48		A-2932									
101.595...	11	6U7G, 6K8G, 6Q7G, 6P5G, 26AC5G, 6U5, 5X4G (44)	1012041502	GL450-30	KR530	D-30-450	PLS-30			Out	1011320355	A-3879		T22S48		A-2932										
101.598,-A...	6	6K7GT, 6A8GT, 6Q7GT, 6V6G, 0Z4G (51)	1012042423	AF32K4A	UP2235C	DY-310	EL-153			Pwr	1011340479	A-3823		T22S74		A-2904										
101.599...	9	6U7G, 6K8G, 6Q7G, 6P5G, 25C6G, 6U5, 25Z6G (47)	1012042115								Out	1011340479	A-3877		T22S58		A-2930									
											Out	1011342126	A-3830		T22S60		A-2905									

Information not available.

Section D IF COILS				Section E PHONO CARTRIODES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photobat Set No.	MFR. & MODEL				
User	Mfr. Part No.	Messner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	ClaroStat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	10133209091	16-66-8.		455				1015820894			3E45		Vol	1012420888	M-34-V				D14-118		41	GI		Continued—	SILVERTONE			
2nd.	1013509010							101588 15.	ST-196		4E45		• I	1012420911												101.555, A, B		
1st.	10133209091	16- 6 .		455				101582 915.	ST-196		4E45		V I	1012420911												101.566, A-E		
2nd.	1013509010							1015820915	ST-196		4E45		Vol	1012420911												101.566-1, A-E		
1st.	10133421701	16-6658.		455				1015820915	ST-196		4E45		V I	1012420911												101.566-2, A-E		
2nd.	1013342185							1015820915	ST-196		4E45		V I	1012420911												101.566-3, A-E		
1st.	1013342406	16-66		4-				1015840588	ST-196		4		• I	1012420911													101.567, A, B	
2nd.	1013542435							1015840588	ST-196		4		Vol	1012420911													101.567-1, A, B	
1st.	10133209091	16-66 8.		4 5				1015840588	ST-196		4		Vol	1012420911													101.567-2, A, B	
2nd.	1013540694							1015840588	ST-196		4 45		Vol	1012420911													101.567-3, A, B	
1st.	10133209091	16-6658.		45				1015840588	ST-196		4 45		Vol	1012420911													101.567-4, A, B	
2nd.	1013540694							1015840588	ST-196		4 45		Vol	1012420911													101.567-5, A, B	
1st.	10133209091	16-6658.		455				1015840588	ST-196		4E45		Vol	1012420911													101.567-6, A, B	
2nd.	1013542476							1015840588	ST-196		4E45		Vol	1012420911														
1st.	10133401711	16- 658.		55				1015840668	ST-194		1		• I	1012440078	V- 0-Z				C13-133								101.570	
2nd.	10135401311							1015840669	ST-194		1		V I	1012440078	V- -				C13-133								101.570-1, A	
1st.	10133401711	16- 6		--				1015840669	ST-194		1		Vol	1012440078	V- 0-Z				C13-1								101.571-1, A, B	
2nd.	10135401311							1015840669	ST-194		1		Vol	1012440078	V- 0-Z				C13-1								101.571-2, A, B	
1st.	10133401711	16-6658.		55				1015840669	ST-166		6 1		Vol	1012440208					013	S2	G31					101.572-1		
2nd.	1013540163							1015840669	ST-166		6E10		Vol	1012440349					D13-137	S2	G31						101.572-2A	
1st.	10133401621	16- 5712.		455				1015840669	ST-104		--		V	1 12440208													101.573-1B	
2nd.	1013540163							1015840669	ST-119	F13	104A	I	1	E60	1012440330					-	S	-1						101.574
1st.	10133405311	16- 5712.	D-2	45				101584 3-			10 6		Vol	1012443065					-13-	S1	G22						101.574-1A, 2B	
2nd.	1013540273							101584 3-			10 6		V I	1012440330					-13-	S2	G22							
1st.	10133403081	16- 5712.		455				101584 3-			10 6		Vol	1012440330					-13-	S2	G22							
2nd.	1013540309							101584 3-			10 6		V I	1012440330					-13-	S2	G22							
1st.	10133434131	16- 5712.		455				101584 3-			10 6		Vol	1012440330					-13-	S2	G22							
2nd.	1013543414							101584 3-			10 6		V I	1012440330					-13-	S2	G22							
1st.	10133404481	16- --		455				01 8- 2 2			10 6		• I	1012440381					7-3	S	-1						101.576-1	
2nd.	1013540405							1015820520	ST-105		A1		• I	1012440087	M-50-Z				D13-133								101.577	
1st.	10133204401	16- 5712.		455				1015820520	ST-105		A1		• I	1012440087	M-50-Z													101.578
2nd.	1013520442							1015840159	ST-108		--		Vol	1012420515	V- -													101.579
1st.	10133204401	16- 571.		455				1015840159	ST-108		--		Vol	1012420515	V- -													101.579
2nd.	1013520442							1015840159	ST-108		--		Vol	1012420515	V- -													101.579
1st.	10133403201	16- --		4				1015840519	ST-108		--		V I	1012440271														101.580
2nd.	1013540321							1015840521	ST-115	F13	8A21	I	V I	1012440271														101.580
1st.	10133203781	16- 772.		455				1015820426	ST-105		5A1		Vol	1012440005	M-50-Z				A2	G17	D13-133							101.580
2nd.	1013520379							1015820426	ST-105		5A1		Vol	1012440005	M-50-Z				A2	G17	D13-133							101.580-1
1st.	1013342380	16- 5712.		455				1015820426	ST-105		5A1		Vol	1012440005	M-50-Z				A2	G17	D13-133							101.581
2nd.	1013542381							1015820426	ST-105		5A1		Vol	1012440005	M-50-Z				A2	G17	D13-133							101.581
1st.	10133403201	16- 772.		--				1015840540	ST-108		A1		Vol	1012440271														101.582-A
2nd.	1013540321							1015840540	ST-108		A1		Vol	1012440271														101.582-1A
1st.	10133417581	16- 5712.		45				1015819030	ST-108	F8	1V6		Vol	1012441753														101.582-1B
2nd.	1013541741							1015820356	ST-115	F8	1V6		Vol	1012441753														101.582-1C
1st.	1013341758	16- 5712.		455				R-44805	ST-108	F13	6A1		Vol	R-45599														101.582-1B
2nd.	1013541741							R-45976	ST-115	F13	8A21		Vol	R-45599														101.582-1C
1st.	10133404481	16- 5712.	1	- 71				1015840477		F13	10E60		Vol	1012440381														101.583-1-2
2nd.	1013540449							1015840477		F13	12E60		Vol	1012440381														101.584-1 Thru 3
1st.	10133209091	16- 6658.	45					1015840477		L-25	1015840765		Vol	1012440381														101.585
2nd.	1013541284							1015840477		L-25	1015841	14	Vol	1012420911														101.590-1 Thru 5
1st.	10133401711	16- 6		455				1015840477		L-25	1015841		Vol	1012441616	T-1 0													101.593-A-B
2nd.	1013541608							1015840477		L-25	1015841695		Vol	1012420889	M-34-V				A		D14-118							101.594, A
1st.	10133417-1	1	-	4				1015810 0	ST-108	F13	6 1		V	1012441753														101.594-1B
2nd.	10154171							101582	ST-115	F13	21		V	1012441753														101.594-1B
1st.	10133417-1	1	-	4				R4480	ST-108	F13	6A1		Vol	1012441753														101.594-1B
2nd.	101354171							R4597	ST-115	F13	8A21		Vol	1012441753														101.594-1B
1st.	10133404481	16- 1		455				1015840477			12E60		Vol	1012440381														101.595
2nd.	1013540449							1015840477			12E60		Vol	1012442244														101.596, A
1st.	10133422461			455				1015840477			12E60		Vol	1012442244														101.596
2nd.	1013542247							1015840477			12E60		Vol	1012442244														101.596
1st.	10133421161	16- 71		455				1015840477		</td																		

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
			No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			"A"	"B"																					
SILVERTONE—Co	ntinued	6	6C7G, 1H4G, 1D5GP, 1F7GM, 6GG, GAB5	1012018184. 1012018672.	PRS25-25			BR232A		M-25-25		TA-25		Chk	1011418183. 1011418193.	t	t	t	t	t	t	t	t	t	
101.602.		6	6C7G, 1H4G, 1D5GP, 1F7GM, 6GG, GAB5	1012018184. 1012018672.	PRS25-25			BR232A		M-25-25		TA-25		Pwr	1011343353.	A-3879.	T22S48	A-2932.							
														Out	1011342449.	A-3857.	T22S48	A-2937.							
101.603.-1		4	1A7G, 1N5G, 1H5G, 1A5G	1012019891.	PRS150-12			BR1215		M-10-150		UT-121		Out	1011342620.	A-3857	T22S48	A-2937.							
101.604.		5	1A7G, 1N5G, 1H5G, 1A5G	1012019891.	PRS150-12			BR1215		M-10-150		UT-121		Out	1011342708.	A-3857.	T22S48	A-2937.							
101.605.		5	1A7G, 1N5G, 1H5G, 1A5G	1012019891.	PRS150-12			BR1215		M-10-150		UT-121		Out	1011340151.	A-3857.	T22S48	A-2937.							
101.606.		6	1A7G, 1N5G, 1H5G, 1A5G	1012019891.	PRS150-12			BR1215		M-10-150		UT-121		Out	1011341964.	A-3857.	T22S48	A-2937.							
101.609.		6	6K8G, 26U7G, 6Q7G, 25CGG, 35Z6G (44)	1012042439.	PRS150-50			BR5015		M-50-150		UT-501		Out	1011342649.	A-3876.	T22S45	A-2928.							
101.610.-1,-2,A		7	6K8G, 26U7G, 6J5G, 6F5G, 25CGG, 35Z6G (44)	1012042453.	PRS150-50			BR5015		M-50-150		UT-501		Out	1011342753.	A-3876.	T22S45	A-2928.							
101.611.		8	6K8G, 26U7G, 6J5G, 6Q7G, 6F6G, 6U5, 5Y3G (44)	1012042454.	PRS150-50			UP2245C		DY-315		EL-350		Pwr	1011042993.	P-6012.	T22R04	P-2952.							
101.612,-A		7	6K8G, 26U7G, 6Q7G, 6J5G, 6F6G, 5Y3G (44)	1012042494.	AF44J4A			UP2245C		DY-315		EL-350		Pwr	1011342973.	P-6012.	T22R04	P-2952.							
101.613,-A		8	6K8G, 26U7G, 6Q7G, 6F6G, 5Y3G (44)	1012043107.	PRS450-20			BR2045		M-20-450		UT-20		Pwr	1011043119.	P-6012.	T22R04	P-2952.							
101.614,-1		10	6U7G, 6K8G, 6J5G, 6Q7G, 6V6G, 6U5, 5Y3G (44)	1012043064.	AF4444J			UP22245		DY-4X20-450		EL-420		Pwr	1011043062.	P-6013.	T22R05	P-2953.							
101.615.		11	6U7G, 6K8G, 6J5G, 6Q7G, 6V6G, 6U5, 5X4G (44)	1012010903.	GL450-30			KR530		D-30-450		PLS-30		Pwr	1011340373.	A-3311.	T22S64	A-2904.							
101.616.		12	6U7G, 6K8G, 6J5G, 6H8G, 26Q7G, 6V6G, 6U5, 5X4G	1012010903.	GL450-30			KR530		D-30-450		PLS-30		Pwr	1011043126.	P-6013.	T22R05	P-2953.							
101.617.		6	6K8G, 26U7G, 6Q7G, 6V6G, 5Y3G (44)	1012043441.	AF88J4A			UP4445C		DY-314		EL-220		Pwr	1011043484.	P-6012.	T22R04	P-2952.							
101.618,-1,A,-2		10	6U7G, 6K8G, 6J5G, 6Q7G, 6V6G, 6U5, 5Y3G (44)	1012043064.	AF4444J			UP22245		DY-4X20-450		EL-420		Pwr	1011043062.	P-6013.	T22R05	P-2953.							
101.619,-A		11	6U7G, 6K8G, 6J5G, 6Q7G, 6V6G, 6U5, 5X4G (44)	1012013903.	GL450-30			KR530		D-30-450		PLS-30		Pwr	1011043126.	P-6013.	T22R05	P-2953.							
101.620,-1,-2		5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 5Y3G (44)	1012042644.	AF44J			UP22245		DY-2X20-450		EL-220		Pwr	1011342615.	A-3311.	T22S64	A-2936.							
101.620-3		5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 5Y3G (44)	1012043897.	AF44J			UP22245		D-12-450		PLS-12		Chk	1011442615.	A-3857.	T22S48	A-2937.							
101.621,-A,-1,C,-2		6	1A7GT, 1N5GT, 1H5GT, 1A5GT, 5Y3G (44)	1012042644.	AF44J			UP22245		DY-2X20-450		PLS-12		Chk	1011442615.	A-3857.	T22S48	A-2937.							
101.622,-A,-1,-1A		6	1A7GT, 1N5GT, 1H5GT, 1A5GT, 25Z6GT	1012042644.	AF44J			UP22245		DY-314		EL-220		Chk	1011442615.	A-3856.	T22S47	A-2937.							
101.623-1		5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 25Z6GT	1012042644.	AF44J			UP22245		D-30-450		PLS-12		Chk	1011442615.	A-3856.	T22S47	A-2900.							
101.628,-1,A		10	6U7G, 6K8G, 6J5G, 6J7G, 6Q7G, 6V6G, 6U5, 5Y3G (44)	1012043888.	GL450-12			KR512A		D-12-450		PLS-12		Pwr	1011342615.	A-3311.	T22S64	A-2936.							
101.631,-A		11	6U7G, 6K8G, 6J5G, 6J7G, 6J5G, 6J7G, 6V6G, 6U5, 5X4G	1012043634.	GL450-12			KR512A		D-12-450		PLS-12		Pwr	1011342678.	A-3857.	T22S48	A-2937.							
101.632.		8	6K8G, 26U7G, 6B8G, 6Q7G, 6V6G, 6J7G, 6U5, 653G	1012044225.	AF44J4A			UP22245		DY-4X20-450		EL-420		Pwr	1011342678.	A-3857.	T22S48	A-2937.							
101.633,-1		6	6K8G, 26U7G, 6Q7G, 6V6G, 5Y3G (44)	1012043441.	AF88J4A			UP4445C		DY-314		EL-240		Pwr	1011044281.	A-3857.	T22R04	P-2952.							
101.634.		8	6K8G, 26U7G, 6Q7G, 6F6G, 5Y3G (44)	1012043995.	AF88J			UP4445		DY-2X40-450		EL-240		Pwr	1011044281.	A-3856.	T22R04	P-2952.							
101.636.		5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 117Z6GT	1012044264.	AF44J			UP22245		D-315		EL-350		Pwr	1011342578.	A-3857.	T22S48	A-2937.							
101.636-1		5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 117Z6GT	1012042644.	AF44J			UP22245		D-315		EL-350		Pwr	1011040408.	P-6013.	T22R05	P-2953.							
101.637-1		6	1A7GT, 1N5GT, 1H5GT, 1A5GT, 117Z6GT	1012042031.	AF44J			UP22245		DY-314		EL-350		Pwr	1011343911.	A-3311.	T22S64	A-2936.							
101.639.		8	6K8G, 26U7G, 6J5G, 6Q7G, 6F6G, 6U5, 5Y3G (44)	1012042033.	AF44J4A			UP22245		DY-315		EL-350		Pwr	1011044207.	P-6013.	T22R04	P-2952.							
101.641.		5	1A7G, 1N5G, 1H5G, 1A5GT	1012019891.	PRS150-12			BR1215		M-10-150		UT-121		Pwr	1011344290.	A-3856.	T22S47	A-2937.							
101.642.		5	1A7GT, 1N5GT, 1H5GT, 1A5GT	1012019891.	PRS150-12			BR1215		M-10-150		UT-121		Out	1011342973.	P-6012.	T22R04	P-2952.							
101.643.		6	1A7GT, 1N5GT, 1H5GT, 1A5GT	1012019891.	PRS150-12			BR1215		M-10-150		UT-121		Out	1011343882.	A-3878.	T22S47	A-2937.							
101.644.		5	1A7GT, 1N5GT, 1H5GT, 1A5GT	R19891.	PRS150-12			BR1215		M-10-150		UT-121		Out	1011342620.	A-3857.	T22S48	A-2937.							
101.645,-1		7	6J5GT, 26U7GT, 6Q7GT, 6F6G, 5Y3G (44)	1012044553.	AF88J4A			UP4445C		DY-314		EL-350		Out	1011344427.	A-3857.	T22S48	A-2937.							
101.646,-1		8	6J5GT, 26U7G, 6Q7G, 6F6G, 6U5, 5Y3G	1012044581.	UP6C120			BR252A		M-25-25		TA-10		Pwr	1011344427.	A-3878.	T22S47	A-2937.							
101.648,-1		5	1A7GT, 1P5GT, 1H5GT, 1A5GT	R19891.	PRS150-12			BR1215		M-10-150		UT-121		Out	1011344460.	A-3878.	T22S47	A-2937.							
													Out	1011344460.	A-3878.	T22S47	A-2937.								
													Out	1011344460.	A-3878.	T22S47	A-2937.								

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL Part No.			
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clustat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat. Part No.	Note	Produc. Set No.		
1st.	10133432681.	16-5712.		455			1015843351.	ST-115.		8A21.		Vol	1012443234.	M-66-Z.				D13-139.			G1	1015114840	5411.	Continued	SILVERTONE 101.602		
2nd.	1013543269.	16-5712.					1015842447.	ST-105.		5A1.		Vol	1012440005.	M-60-Z.		A2.	G17	D13-133.		42	G1					101.603-1	
1st.	10133423801.			455			1015841800.	ST-105.		5A1.		Vol	1012442433.	M-60-Z.			G17	D13-133.			G1					101.604	
2nd.	1013542381.			455			1015842692.	ST-108.		6A1.	F13	Vol	1012442450.	M-60-Z.			G17	D13-133.			G1					101.605	
1st.	1013542395.			455			1015840159.	ST-108.		6A1.	F13	Vol	1012442872.	M-60-Z.			G17	D13-133.			G1					101.606	
2nd.	1013542395.						1015841957.	ST-108.		6A1.	F13	Vol	1012442645.	M-63-Z.				D13-137.			G1					101.609	
1st.	10133428459.			455			1015842845.	ST-194.		5E45.		Vol	1012442751.	T-88.			G22	D18-133X.			G1					101.610-1,2A	
2nd.	1013542845.			455			1015842845.	ST-194.		5E45.		Vol	1012442800.	T-88.			G22	D18-133X.			G22					101.611	
1st.	10133424361.	16-6658.		455			1015843001.	ST-738.		8E10.		Vol	1012442951.	D18-133X.				D18-133X.	SI		G32					101.612-A	
2nd.	1013542437.	16-6658.		455			1015843112.			10E10.		Vol	1012443108.	D18-133X.				D18-133X.	SI		G32					101.613-A	
1st.	10133426631.	16-6658.		455			1015843070.			10E80.		Vol	1012443065.				D17-139X.	SI		G32					101.614-1		
2nd.	1013542664.	16-6658.		455			1015843161.			12E60.		Vol	1012443157.	D13-139XX.			A	D13-137.	SI		G17					101.615	
1st.	10133429861.	16-6658.		455			1015843134.			12E60.		Vol	1012443158.	D13-139XX.			A	D13-137.	SI		G17					101.616	
2nd.	1013542987.	16-6658.		455			1015843134.			12E60.		Vol	1012443133.	T-109.			A	G17.	D13-127X.			G17					101.617
1st.	10133429881.	16-6658.		455			1015843134.			10E10.		Vol	1012443434.	M-63-Z.			A.	G4.	D13-137.			G4					101.618-1A,-2
2nd.	10135429882.	16-6658.		455			1015843134.			12E60.		Vol	1012443137.	D13-139XX.			A.	G4.	D13-137.			G17					101.619-A
1st.	10133431171.	16-6658.		455			1015843134.			10E10.		Vol	1012443137.	D13-139XX.			A.	G4.	D13-137.			G17					101.620-1,-2
2nd.	10135431143.	16-6658.		455			1015843134.			12E60.		Vol	1012443137.	D13-139XX.			A.	G4.	D13-137.			G17					101.621-A,-1,C,-2
1st.	10133434381.	16-6658.		455			1015843134.			12E60.		Vol	1012443137.	D13-139XX.			A.	G4.	D13-137.			G17					101.622-A,-1,A
2nd.	10135430531.	16-6658.		455	101644089	L-26.	1015843346.			12E60.		Vol	1012443137.	D13-139XX.			A.	G4.	D13-137.			G17					101.623-1
1st.	10133404481.	16-6712.		455	1016442-1	L-26.	1015843161.			12E60.		Vol	1012443137.	D13-137.			A.	G4.	D13-137.			G1					101.624-1
2nd.	1013543123.	16-6712.		455			1015842876.	ST-105.		5A1.		Vol	1012442622.	M-63-Z.			A.	G4.	D13-137.			G1					101.625-1,-2
1st.	10133425111.	16-6658.		455			1015842876.	ST-105.		5A1.		Vol	1012442622.	M-63-Z.			A.	G4.	D13-137.			G1					101.626-3
2nd.	10135425121.						1015842876.	ST-105.		5A1.		Vol	1012442622.	M-63-Z.			A.	G4.	D13-137.			G1					101.627-A,-1,C,-2
1st.	R44852A.	16-6658.		455			1015842813.	ST-105.		5A1.		Vol	1012442622.	M-63-Z.			A.	G4.	D13-137.			G1					101.628-1A
2nd.	R45117.						1015842813.	ST-105.		5A1.		Vol	1012442622.	M-63-Z.			A.	G4.	D13-137.			G1					101.629-1A
1st.	10133426131.			455			1015842813.	ST-105.		5A1.		Vol	1012442976.	M-63-Z.			A.	G4.	D13-137.			G1					101.630-1
2nd.	1013542614.			455			1015842813.	ST-105.		5A1.		Vol	1012442976.	M-63-Z.			A.	G4.	D13-137.			G1					101.631-1
1st.	10133429211.			455			1015842676.	ST-105.		5A1.		Vol	1012442976.	M-63-Z.			A.	G4.	D13-137.			G1					101.632-1
2nd.	1013542612.			455			1015842676.	ST-105.		5A1.		Vol	1012442622.	M-63-Z.			A.	G4.	D13-137.			G1					101.633-1
1st.	10133430531.	16-5712.		455	1016442-1	L-26.	1015843825.			12E60.		Vol	1012443157.	D13-139XX.			A.	G4.	D13-137.			G1					101.634-1
2nd.	1013543054.	16-5712.		455			1015842070.			12E60.		Vol	1012443157.	D13-139XX.			A.	G4.	D13-137.			G1					101.635-1
1st.	10133404481.	16-5712.		455	10164422-1	L-70.	1015842070.			12E60.		Vol	1012443157.	D13-139XX.			A.	G4.	D13-137.			G1					101.636-1
2nd.	1013543128.						1015844330.	ST-738.		8E10.		Vol	1012444631.	T-109.			A.	G4.	D13-137X.			G1					101.637-1
1st.	10133441171.	16-6658.		455	1016442-1	L-70.	1015844330.	ST-738.		8E10.		Vol	1012444631.	T-109.			A.	G4.	D13-137X.			G1					101.638-1
2nd.	10135441178.						1015844403.	L-70.		1015844180.		Vol	1012444029.	T-109.			A.	G4.	D13-137X.			G1					101.639-1
1st.	10133440031.	16-5712.		455	1016442-1	L-70.	1015844403.			1015844620.		Vol	1012444027.	M-61-S.			A.	G4.	D13-137X.			G1					101.640-1
2nd.	10133443991.	16-5712.		455	1016442-1	L-70.	1015844620.			1015844274.		Vol	1012444347.	T-109.			A.	G4.	D13-137X.			G1					101.641-1
1st.	10133443991.						1015844274.	ST-105.		5A1.		Vol	1012444265.	M-63-Z.			A.	G4.	D13-137.			G1					101.642-1
2nd.	10135442781.						1015844274.	ST-105.		5A1.		Vol	1012444265.	M-63-Z.			A.	G4.	D13-137.			G1					101.643-1
1st.	1013544279.			455			1015844274.	ST-105.		5A1.		Vol	1012444265.	M-63-Z.			A.	G4.	D13-137.			G1					101.644-1
2nd.	R44853A.			455			1015844288.	ST-105.		5A1.		Vol	1012444265.	M-63-Z.			A.	G4.	D13-137.			G1					101.645-1
1st.	1013342911.			455			1015844324.			1015843824.		Vol	1012444341.	D13-133.			A.	G4.	D13-133.			G1					101.646-1
2nd.	10135442982.			455			1015841800.	ST-105.		5A1.		Vol	1012444452.	M-60-Z.			A.	G4.	D13-133.			G1					101.647-1
1st.	10133423941.			455			1015842692.	ST-108.		6A1.	F13	Vol	1012444452.	M-60-Z.			A.	G4.	D13-133.			G1					101.648-1
2nd.	1013542395.			455			1015842692.	ST-108.		6A1.	F13	Vol	1012444452.	M-60-Z.			A.	G4.	D13-133.			G1					101.649-1
1st.	1013342395.						1015842692.	ST-108.		6A1.	F13	Vol	1012444452.	M-60-Z.			A.	G4.	D13-133.			G1					101.650-1
2nd.	1013542395.						1015842692.	ST-108.		6A1.	F13	Vol	1012444452.	M-60-Z.			A.	G4.	D13-133.			G1					101.651-1
1st.	10133428451.			455			10158428451.			5A1.		Vol	1012444452.	M-60-Z.			A.	G4.	D13-133.			G1					101.652-1
2nd.	1013542846.			455			1015842846.			5A1.		Vol	1012444452.	M-60-Z.			A.	G4.	D13-133.			G1					101.653-1
1st.	R-45013A.	16-6662.		455			R-45001.	ST-105.		5A1.		Vol	1012444452.	M-60-Z.			A.	G4.	D13-133.			G1					101.654-1
2nd.	R-45014.						1015844445.			5A1.		Vol	1012444452.	M-60-Z.													

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
SILVERTONE—Continued																								
101.649.....	5	1P5GT, 1A7GT, 1H5GT, 1A5GT...	10 Mfd	PRS150-12...		BR1215...		M-10-150...		UT-121...		Out	R44889...	A-3857...	T22S48...		A-2937...							
101.653.....	8	7H7, 6J5GT, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G	R45108					DY-311...		EL-330...		Pwr	R45577...	P-5011...	T22R02...		P-2951...							
101.657.....	8	6J5GT, 7H7, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G	R45392			UP3345...		DY2X30-450...		EL-23...		Pwr	R45646...	A-2312...	T22S74...		A-2901...							
101.658,-1....	10	6J5GT, 7H7, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G (44)	R45779	AF444J...				DY-3X20-450...				Pwr	R45510...	P-6012...	T22R04...		A-2952...							
101.660.....	6	6SA7GT, 6SK7GT, 6SQ7GT, 6K6GT, 6X6GT (44)	R45421	PRV450-16-16 & PRS25-10		EZ16D3SS...		DY-2X20-400...		TU-1616...		Pwr	R45417...	P-6312...	T22R01...		P-2950...							
101.660-1A....	5	6SA7GT, 6SK7GT, 6SQ7GT, 6K6GT, 6X6GT (44)	R45421	PRV450-16-16 & PRS25-10		EZ16D3SS...		DY-2X20-400...		TU-1616...		Pwr	R45476...	P-6312...	T22R01...		A-2931...							
101.661.....	4	1A7GT, 1NSGT, 1H5GT, 1A5GT...	R19831	PRS150-12...		BR1215...		M-10-150...		UT-121...		Out	R45056...	A-3857...	T22S48...		A-2937...							
101.662.....	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6SKGT/6K6G 5Y3G (44)	R45828	2PRS450-30...		BR3045...		M-30-450...		UT-30...		Pwr	R45963...	P-6312...	T22R04...		P-3152...							
101.662-1A....	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6SKGT/6K6G 5Y3G (44)	R45829	2PRS450-30...		BR3045...		M-30-450...		UT-30...		Pwr	R45963...	P-6312...	T22R04...		P-3152...							
101.662-2D,-2B,-3C	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G (44)	R45829	2PRS450-30...		BR3045...		M-30-450...		UT-30...		Pwr	R45953...	P-6312...	T22R04...		P-3152...							
101.662-4E,-5F....	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G (44)	R61272	PRS450-40...		BR4045...		M-40-450...		UT-40...		Pwr	R45953...	P-6312...	T22R04...		P-3152...							
101.663.....	5	1A7GT, 1P5GT, 1H5GT, 1A5GT...	R19831	PRS150-12...		BR1215...		M-10-150...		UT-121...		Out	R45340...	A-3857...	T22S48...		A-2937...							
101.664.....	6	1P5GT, 1A7GT, 1H5GT, 1A5GT, 11Z6GT	R45368			BR1215...		M-10-150...		UT-121...		Out	R45617...	A-3857...	T22S48...		A-2937...							
101.665.....	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, Q24	R19831	PRS150-12...	10-15-20 Mfd	AF32K4A...		DY-310...		EL-133...		Pwr	R45162...	A-3877...	T22S46...		A-2930...							
101.666.....	6	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, Q24	R45167			AF32K4A...		DY-310...		EL-133...		Pwr	R45162...	A-3877...	T22S46...		A-2930...							
101.666-1B....	6	7A7, 7Q7, 7B6, 7C5, Q24G (44)	R45167			AF32K4A...		DY-310...		EL-133...		Pwr	R45162...	A-3877...	T22S46...		A-2930...							
101.667,A....	6	6K7GT, 6A8GT, 6SK7GT, 6SQ7GT, 6V6GT, Q24G (51)	10-15-20 Mfd	AF32K4A...		UP2235C...		DY-310...		EL-133...		Pwr	R45079...	A-3877...	T22S46...		A-2930...							
101.672.....	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6K6GT/6K6G 5Y3G (44)	R45829	PRS450-30...		BR3045...		M-30-450...		UT...		Pwr	R45953...	P-6312...	T22R04...		P-3152...							
101.672-1A,-1B...	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6K6GT/6K6G 5Y3G (44)	R45829	2PRS450-30...		BR3045...		M-30-450...		UT-30...		Pwr	R45953...	P-6312...	T22R04...		P-3152...							
101.674.....	10	6J5GT, 7H7, 6SK7GT, 6SQ7GT, 6V6GT, 5Y3G (44)	R45779	AF444J...				DY-3X20-450...				Pwr	R45820...	P-6012...	T22R04...		P-2952...							
101.677B.....	6	6K7GT, 6A8GT, 6SK7GT, 6SQ7GT, 6V6GT, Q24G (51)	10-15-20 Mfd	AF32K4A...		UP2245C...		DY-310...		EL-133...		Pwr	R45100...	A-3877...	T22S46...		A-2930...							
101.680.....	6	6SA7GT, 6SK7GT, 6SQ7GT, 6K6GT/6K6G	16-16-25 Mfd									Pwr	R45079...	A-3850...	T22S46...		A-2930...							
101.681,-1A,-2....	9	7E6, 7H7, 6SK7GT, 6SQ7GT, 6Q2GT, 6K6GT, 6U5, 5Y3G	R46021									Pwr	R45417...	P-6312...	T22R01...		P-2950...							
101.682,-1....	10	6J5GT, 7H7, 6SK7GT, 6SQ7GT, 6Q2GT, 6V6GT, 6U5, 5Y3G	30-20-20 Mfd	AF444J...				DY-3X20-450...				Pwr	R45853...	P-6312...	T22R04...		P-3152...							
101.684.....	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6K6GT/6K6G 5Y3G (44)	R45829	2PRS450-30...		BR3045...		M-30-450...		UT-30...		Pwr	R45953...	P-6312...	T22R04...		P-3152...							
101.686,A,B....	6	1A7GT, 1P5GT, 1H5GT, 3Q5GT, 5Q5GT	R43897									Chk	R42615...	↑	↑		↑	↑	↑	↑	↑	↑	↑	↑
101.687.....	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6K6GT/6K6G 5Y3G (44)	R45829	PRS450-30...		BR3045...		M-30-450...		UT-30...		Chk	R42815...	A-3857...	T22S48...		A-2937...							
101.688,A.....	6	1A7GT, 1P5GT, 1H5GT, 3Q5GT, 11Z6GT	R42031			UP8015...		DY-30-150...		EL-300...		Chk	R47535...	P-6312...	T22R04...		P-3152...							
101.690-1.....	4	1LC6, 1LC5, 1LD5, 1LB4...	R57054	PRS150-12...	BR1215...	M-10-150...		UT-121...		Out		Chk	R46214...	A-3377...	T22S46...		A-2930...							
101.690-2.....	4	1LC6, 1LC5, 1LD5, 1LB4...	R57054	PRS150-12...	BR1215...	M-10-150...		UT-121...		Out		Chk	R46260...	P-6012...	T22R04...		P-2952...							
101.690-3.....	4	1LC6, 1LC5, 1LD5, 1LB4...	R57054	PRS150-12...	BR1215...	M-10-150...		UT-121...		Out		Chk	R46096...	A-3311...	T22S46...		A-2936...							
101.691.....	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6K6GT/6K6G 5Y3G (44)	R45829	2PRS450-30...		BR3045...		M-30-450...		UT-30...		Pwr	R45953...	P-6312...	T22R04...		P-3152...							
101.692.....	8	7E6, 7H7, 6SK7GT, 6SQ7GT, 6K6GT/6K6G 5Y3G (44)	R45829	PRS450-30...		BR3045...		M-30-450...		UT-30...		Pwr	R45953...	P-6312...	T22R04...		P-3152...							
101.693.....	6	1A7GT, 1P5GT, 1H5GT, 3Q5GT, 11Z6GT	R42033			UP8015...		DY-30-150...		EL-300...		Pwr	R45690...	A-3312...	T22S46...		A-2930...							
101.694.....	4	1LC6, 1LC5, 1LD5, 1LB4...	R57054	PRS150-12...	BR1215...	M-10-150...		UT-121...		Out		Chk	R44290...	A-3856...	T22S47...		A-2930...							
101.695.....	5	1L6S, 1LC6, 1LC5, 1LD5, 1LB4...	R57128	AF22F...		UP2215...		DY-2X10-150...		EL-101...		Out	R57075...	A-3879...	T22S47...		A-2933...							
101.696.....	5	1L6S, 1LC6, 1LC5, 1LD5,	R57128	AF22F...		UP2215...		DY-2X10-150...		EL-101...		Out	R57075...	A-3879...	T22S47...		A-2933...							
101.697,A....	5	1L6S, 1LC6, 1LC5, 1LD5,	R57128	AF22F...		UP2215...		DY-305...		EL-340...		Out	R56075...	A-3330...	T22S47...		A-3031...							
101.698.....	6	7B7, 14Q7, 7C6, 50A5, 35Y4 (47)	R60416	AF84D4A...		UP4415C...		DY-305...		EL-340...		Out	R60675...	A-3330...	T22S47...		A-3031...							
101.699.....	6	7B7, 14Q7, 7C6, 50A5, 35Y4 (47)	R60416	AF88D4A...		UP4415C...		DY-305...		EL-340...		Out	R60781...	A-3330...	T22S47...		A-3031...							
101.700.....	6	7B7, 14Q7, 7C6, 50A5, 35Y4 (47)	R60416	AF88D4A...		UP4415C...		DY-305...		EL-340...		Out	R60675...	A-3330...	T22S47...		A-3031...							
101.701.....	6	7B7, 14Q7, 7C6, 50A5, 35Y4 (47)	R60416	AF88D4A...		UP4415C...		DY-305...		EL-340...		Out	R61038...	A-3330...	T22S47...		A-3031...							
101.702.....	8	14Q7, 7B7, 7C6, 50A5, 35Y4 (47)	R61507	UP6B135...				EL-245...		EL-402...		Out	R61506...											
101.703.....	6	14Q7, 14A7, 7C6, 50A5, 35Y4...	R61517	BR4025...				DY-305...		EL-352...		Out	R61506...											
101.704.....	6	14Q7, 14A7, 7C6, 50A5, 35Y4...	R60416	UP44150...				DSB-303...		TA-245 & TA-25...		Out	R61699...	A-3876...	T22S45...		A-2928...							
101.705.....	5	1R5, 1L4, 1S5, 1LB4, 117Z3...	R60803	PRS150-40-20 & PRS25-25		EZ4215C...		M-40-350...		EL-352...		Out	R60817...											
101.706.....	9	7H7, 7F8, 7W7, 7C7, 7A6, 7C6, 7CS, 7Z4 (47)	R60730	AF64K4A...	R57054...	BR1215...	DY-313...	M-10-150...	EL-330...	UT-121...		Pwr	R60737...	t...	T22R02...		A-3032...					4950 467...	42R...	XX45...

</div

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photogrid Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	R45084A	16-6662		455				R45086	ST-108		SA1		Vol	R45083	M-63-Z			G17	D13-137			G1, 1	7		Continued	SILVERTONE	
2nd.	R4508							R4*					Vol	R45627	-20			G17	D13-139X			G1	16			101.649	
1st.	R4562		5712	45									Vol	R45470	-0			G17	D13-139X			G1	17			101.653	
2nd.	R45402												Vol	R45910	--61-			A	G34	D1-1	41	G1	3, 4			101.657	
1st.	R45401		5712	455				R4597					Tone	R45908	M-66-Z			A	G34	D13-13	41	G1	17			101.658,-1	
2nd.	R45402							R4547	ST-736		SE10		Vol	R45414	M-66-Z			A	G17	D13-139	41	G1	17			101.660	
1st.	R45776		1-5712	455				R45061	ST-736		SE10		Vol	R45414	M-66-Z			A	G17	D13-139	41	G1	17			101.660-1A	
2nd.	R45777							R4597					Vol	R45055	M-6-Z			A2	G17	D13-137	42	GL	1			101.661	
1st.	R45390							R4547					Vol	R45827	M-61-S			A	G17	D13-139XX	41	GL	1			101.662	
2nd.	R45391							R45835					Tone	R47240	T-119			A	G34	D14-137	41	GL	3, 4			101.662-1A	
1st.	R57276		16-6658	455	†	L-70		R5710	ST-736		SE10		Vol	R45414	M-66-Z			A	G17	D13-139XX	41	GL	1			101.662-2D,-2B,-3C	
2nd.	R57277							R45061	T-15		A1		Vol	R45055	M-6-Z			A	G17	D13-139	41	GL	1			101.662-4E,-5F	
1st.	R45005A							R4585			10-10		Vol	R45827	M-61-S			A	G17	D13-139XX	41	GL	1			29	
2nd.	R45006							R45835					Tone	R47240	T-119			A	G34	D14-137	41	GL	3, 4				
1st.	R45305		16-6658	455	R-47584	L-53		R45835			1CE10		Vol	R45267	--61-			A	G17	D13-139XX	41	GL	1			101.663	
2nd.	R45306							R452	ST-108		A1		Vol	R45235	M-61-S			A	G34	D14-137	41	GL	1			101.664	
1st.	R45305				D23	455	†	L-70-S	R57				Vol	R45235	M-61-S			A	G17	D13-139XX	41	GL	1			101.665	
2nd.	R45306							R512	ST-120	F3	10A31		Tone	R47235	M-61-S			A	G34	D14-137	41	GL	3, 4				
1st.	R45013		6662	*5				R453					Vol	R45898	M-60-Z												101.666
2nd.	R45014							R450	ST-108		A1		Vol	R45267	--61-												
1st.	R45630							R452	ST-105	B	EV6		Vol	R45235	M-61-S												
2nd.	R45631							R451			7EV6		Vol	R45139	M-61-S												
1st.	R45250							R612	6		7EV6		Vol	R45139	M-61-S												
2nd.	R45251							R6097			7EV6		Vol	R42244	M-61-S												
1st.	R45168		16-6658	455				R451			7EV6		Vol	R45139	M-61-S												
2nd.	R45169							R612	6		7EV6		Vol	R42244	M-61-S												
1st.	R45168S		6662					R6097			7EV6		Vol	R45139	M-61-S												
2nd.	R45169S							R4501			7EV6		Vol	R42244	M-61-S												
1st.	R45018							R612	6		7EV6		Vol	R45139	M-61-S												
2nd.	R45019							R47221			7EV6		Vol	R42244	M-61-S												
1st.	R45308		6658	D23	455			R47252			10E10		Vol	R47240	T-119			A	G17	D13-139XX	41	GL	1			101.667, A	
2nd.	R45306		16-670					R47252			10E10		Tone	R47240	T-119			A	G34	D14-137	41	GL	3, 4			101.672	
1st.	R45776		16-5712	455				R45866			12E50		Tone	R47240	M-61-			A	G17	D13-139XX	41	GL	1			101.674	
2nd.	R45777							R611			12E50		Tone	R45910	M-61-S			A	G34	D14-137	41	GL	3, 4			101.677B	
1st.	R45018							R45016			12E10		Tone	R47240	T-119			A	G17	D13-139XX	41	GL	1			101.680	
2nd.	R45390		16-5712	455	R-47584	L-53	E-1	R45971	ST-736		10E10		Vol	R45827	T-11			A	G17	D13-139XX	41	GL	1			101.681-1A,-2	
1st.	R45966		1-5712	45	R47584	L-5		R462			10E10		Tone	R46489	M-1-S			A	G34	D14-137	41	GL	1			101.682,-1	
2nd.	R45306				R47584	L-52		R46100			12E50		Tone	R46490	T-61			A	G17	C14-1	41	GL	1			101.684	
1st.	R46103		16-5712	4				R47252			12E10		Tone	R47240	T-119			A	G34	D14-137	41	GL	3, 4			101.686, A, B	
2nd.	R46104							R4281	ST-10		5A1		Tone	R47235	M-61-			A	G17	D13-139XX	41	GL	1			101.687	
1st.	R47305		16-5712	455				R47252			12E10		Vol	R47240	T-119			A	G34	D14-137	41	GL	1			101.688,-8	
2nd.	R45306							R44288	ST-105		5A1		Tone	R45694	M-61-S			A	G17	D13-139XX	41	GL	1				
1st.	R57094		16-5712	455				R570	ST-107		5A5		Vol	R57072	V-6			A	G17	D13-139	41	GL	1			101.690-1	
2nd.	R57116							R616	7		5A1		Vol	R60430	M-61-S			A	G17	D13-139XX	41	GL	1			101.691	
1st.	R57120		16-6658	D24	455			R701	ST-108		6A1		Vol	R57071	M-61-S			A	G17	D13-139XX	41	GL	1			101.801,-A	
2nd.	R57095		16-6670					R5702	ST-109		6A21		Vol	R57071	M-61-S			A	G17	D13-139XX	41	GL	1			101.802,-1	
1st.	R57120		16-6658	D24	455			R60431	5A1		5A21		Vol	R60430	M-61-S			A	G17	D13-139XX	41	GL	1			16, 101.807, A	
2nd.	R57095		6-6670					R610	ST-115		8A31		Vol	R60505	T-120			A	G17	D13-139XX	41	GL	1				
1st.	R60417		16-6658	D25	455			R610	ST-115		8A21		Vol	R60505	M-51-Z			A	G17	D13-139XX	41	GL	1			16, 101.811	
2nd.	R60418		16-6670	D25	455			R610	ST-115		8A21		Tone	R61232	M-51-Z			A	G17	D13-139XX	41	GL	1				
1st.	R60417		16-6658	D25	R-5282			R611	ST-108		6A1		Vol	R61128	T-88			A	G17	D13-139XX	41	GL	1				
2nd.	R60418		16-6670	D25				R615	ST-117	F1	8A31		Tone	R61128	M-66-Z			A2	G17	D13-139XX	41	GL	1				
1st.	R61111		16-6658	D25	455	R61977	L-71-A	R6151	ST-113		4A1		Vol	R61684	M-60-Z			A	G17	D13-139	41	GL	1			30, 101.814	
2nd.	R61142		16-6670	D25	455			R615	ST-113		3A07		Tone	R60807	M-63-Z			A	G17	D13-139	41	GL	1				
1st.	R61688		6666		455	R-5282	L-7-A	R615	ST-113		4A1		Vol	R60807	M-63-Z			A	G17	D13-139	41	GL	1			30, 101.817	
2nd.	R61689							R608			3A07		Tone	R60807	M-63-Z			A	G17	D13-139	41	GL	1			10, 101.823,-1, A, -1A	
1st.	R60815							R610			10A31		Vol	R60807	M-63-Z			A	G17	D13-137	41	GL	1			10, 101.825,-1A, -1B	
2nd.	R60816							R610			10A31		Tone	R60807	M-63-Z			A	G17	D13-137	41	GL	1				
3rd.	R 734							R610			10A31		Vol	R60807	M-63-Z			A	G17	D13-137	41	GL	1			10, 101.825,-1A, -1B	

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note				
SILVERTONE—Continued																											
103.AR166.....	6	6A7, 6D6, 276, 41, 80 (44)	2NC-246	GL450-16	KR516A	D-16-450	PLS-16	Pwr Out	3ZT-345	P-6011	T22R02	P-2951															
104.235.....	5	6ABG, 6K7G, 6Q7G, 6V6G, 6X5G	2NC-247	GL450-16	PRSA450-8-8	KR516A	D-16-450	PLS-16	ON Spkr.	A-3878	T22S47	A-2951															
			1042021.....		E28845	M-2X8-450	UT-88	Chk	104147	↑	↑	↑															
104.709.....	9	6K7G, 6L7G, 6J7G, 6K7, 6Q7G, 6FGG, 6H5, 6U5, 80	1042023	GL450-40	KR540	D-40-450	PLS-40	Pwr Out	A-3877	T22S58	A-2930																
105.6H.....	5	6A7, 6D6, 75, 25B6G, 25Z5, (49B) BALLAST	1042026	GL450-16	PRSB250-20-20	KR516A	D-16-450	PLS-16	Chk	A-3311	T22S64	A-2904															
105.6L.....	5	6A7, 6D6, 75, 25B6, 25Z5, (49B) BALLAST	1042026	PRSB250-20-20	P1561	DSB-2X20-150	TU-220	Chk	A-3876	T22S45	A-2928																
105.6PU.....	6	6D8G, 6S7G, 6T7G, 6U5, 19	P958			DSB-2X20-150	TU-220	Chk	A-3876	T22S45	A-2928																
105.7MU.....	7	6A7, 6D6, 76, 75, 42, 6U5, 80	P1755		EZ2215C	DSB-302	Audio	Out	P719	P4713	T20D75	A-2920															
105.8KU.....	8	6A7, 6D6, 276, 75, 242, 80	P1825		EZ8845	DH-3X8-450SS	PI	Pwr Out	P1795	A-3848	T22R02	A-2951															
105.8TU.....	7	6A7, 6D6, 75, 76, 243, 25Z5, (17A) BALLAST	P1783	PRS25-10	BR102A	M-10-25	TA-10	PI	P1828	A-3878	T22R04	A-2952															
107.375.....	7	6K8G, 6A7, 6D6, 75, 6U5, 6V6G, 80	107205321	PRSB25-10	P1783	M-10-25	TA-10	PI	P1848	A-2201	T22S64	A-2936															
107.440-S1.....	9	6K7, 6K2G, 6Q7G, 6V6G, 80, 6GJ7G (51)	1072030266	AF221	UP1145	DY-2X10-450	EL-210	PI	P1858	P-6012	T22S64	A-2904															
			1072031266	AF221	UP1145	DY-2X10-450	EL-210	PI	P1858	1071028938	C-1001	A-2930															
						EL-210	PI	P1858	1071128938	On Spkr.	A-3310	T22S74	A-2902														
107.A450.....	12	6K7, 6L7, 6J5G, 6Q7G, 6V6G, 80, 6GJ7G	1072029266	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88	PI	1071418212	P-6013	T22R05	P-2953															
			1072017266	GL450-16	KR516A	D-16-450	PLS-16	PI	1071046938	A-3311	T22S64	A-3027															
107.A450-S4.....	12	6K7, 6L7, 6J5G, 6Q7G, 6V6G, 80, 6GJ7G	1072029266	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88	PI	10714118212	P-6013	T22R05	P-2953															
			1072017266	GL450-16	KR516A	D-16-450	PLS-16	PI	107139961	A-3311	T22S64	A-3027															
107.450,-2.....	10	6K7, 6L7, 6J5G, 6Q7G, 6V6G, 80, 6GJ7G, 6U5	1072029266	PRS450-8-8	EZ588	DH-2X8-450SS	TU-88	PI	1071417212	P-6013	T22R05	P-2953															
			1072017266	GL450-16	KR516A	D-16-450	PLS-16	PI	107130958	P-6013	T22R05	P-2953															
109.190.....	8	6ABG, 6D6, 75, 76, 242, 6U5, 80	109203375	GL450-16	KR516A	D-16-450	PLS-16	Pwr Out	109104387	A-3311	T22S64	A-2904															
109.199-1.....	5	6A8, 6K7, 6Q7, 25L6, 25Z5	109205893	GL450-8	KR508	M-8-450	PLS-8	PI	1091348568	A-3876	T22S45	A-2928															
109.216.....	4	6K7, 6L7, 25L6, 25Z5	109205750	PRSB25-20-20	BR2015	M-20-150	UT-201	PI	109134797	A-3876	T22S45	A-2928															
109.216-1.....	4	6K7, 6L7, 25L6, 25Z6	109205780	PRSB25-20	PR5150-20	BR2015	M-20-150	UT-201	PI	109134797	A-3876	T22S45	A-2928														
109.246.....	7	6A8G, 6D6, 76, 76K5G, 6V6G, 6U5, 80	109205101	GL450-16	KR516A	M-8-150	PLS-16	Pwr Out	109104931	A-3876	T22S58	A-2930															
109.278.....	4	12K7GT, 12K7GT, 35L6GT, 35Z4GT	109202733	GL450-8	KR508	M-8-150	PLS-8	PI	109104931	A-3876	T22S45	A-2928															
109.279.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	109205759	PRSB15-20	BR2015	M-20-150	UT-201	PI	109136177	A-3876	T22S45	A-2928															
109.279-1,2.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT	109205893	PRSB15-20	PR5150-12	BR2015	M-20-150	UT-201	PI	109136177	A-3876	T22S45	A-2928														
109.290,-A.....	4	1A7, 1N5, 1H, 1C5, 8 Mfd.	109205780	PRSB15-20	PR5150-8	BR2015	M-8-150	UT-81	PI	109136177	A-3876	T22S45	A-2928														
109.352,A,B.....	5	12SA7GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	109208391	AT660	UP3315	DY-2X30-150	EL-230	PI	109138405	A-3876	T22S45	A-2928															
109.353,A,B.....	5	12A8GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	109208630	PRSA150-20-20	BRD2215	M-2X20-150	TA-220	PI	109138533	A-3876	T22S45	A-2928															
109.354,A,B,C.....	8	12SA7GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	109208525	PRSA150-40-20	BRD4215	M-2X40-150	TA-240	PI	109138702	A-3876	T22S45	A-2928															
109.355,A,B.....	6	12SA7GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	109208525	PRSA150-40-20	BRD4215	M-2X40-150	TA-240	PI	109138703	A-3876	T22S45	A-2928															
109.356,A,B,C.....	6	12SA7GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	109208526	PRSA150-40-20	EZ8825	M-2X8-250	LM-28	PI	109138702	A-3876	T22S45	A-2928															
109.357,A,B,C.....	6	12SA7GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	109208526	PRSA150-40-20	EZ8825	M-2X8-250	LM-28	PI	109138703	A-3876	T22S45	A-2928															
109.358.....	7	12SA7GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z6GT (47)	109208425	PRSA150-40-20	BRD4215	M-2X40-150	TA-240	PI	109108433	A-3301	T22S50	A-2905															
109.359.....	7	6A8G, SU7G, 6Q7G, 6V6G, 6U5, 5Y3G	109208399	AF2214A	UPI1450	DY-316	EL-202	PI	109108433	P-6119	T22R02	P-2951															
109.369.....	6	1A7GT, 1NSGT, 1HSGT, 1QS GT, 117M7GT	1092085780	PRSA150-20	BR2015	M-20-150	UT-201	PI	109148138	C-108D	T22S45	C-2977															
			109208102					PI	1091387411			A-3030															

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No.	Filament	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	N o t e	Cornell-Dubilier Part No.	N o t e	Sohar Part No.	N o t e	Sprague Part No.	N o t e	Use	Mfr.	Stancor Part No.	N o t e	Thordarson Part No.	N o t e	Merit	Part No.	N o t e	Eveready Part No.	N o t e	Burgess Part No.	N o t e
																					"A"	"B"		"A"	"B"
SILVERTONE—Continued	109.370.	6	12A8G, 212K7GT, 12SQ7GT, 25L6GT, 25Z6GT (47).	109208525	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Pwr Out	109108749 109138751	A-3876		T22S45		A-2928						
109.371.-1.	8	12SA7GT, 12K7GT, 12SQ7GT, 23SL6GT, 6U5, 35Z6G (47).	109208425										Pwr Out	109108918 1091389191	A-3330				A-3031						
109.378.	5	1R5, 1T4, 1S5, 3S4, 4E23, 3Z5GT.	D9892		UP6CJ64								Out	D9975	A-3329				A-2927						
109.383.	5	1A7GT, 1M5GT, 1H5GT, 1A5GT, 3Z5GT.	D92175	PRS150-12	BR1215		M-10-150		EL-351	EL-261	UT-121		Out	On Spkr	A-3857		T22S48		A-2937		744 & 2482		F4P1	2M30	
109.409.	5	1A7GT, 1M5GT, 1H5GT, 1A5GT, 3Z5GT.	D9218	PRS150-12	BR1213		M-10-150		EL-351	EL-261	UT-121		Out	On Spkr	A-3857		T22S48		A-2937		744 & 2482		F4P1	2M30	
109.417.	5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	D9395	PRSA150-40-20	BRD4215		M-2X40-150		TA-240		Drn Spkr		Out	Drn Spkr	A-3876		T22S45		A-2928						
109.428.	6	6SA7GT, 6SK7GT, 6SQ7GT, 6K6G, 6X5GT (47).	D9657	PRS25-10	BR102A		M-10-25		TA-10		Pwr Out	D9664	P-6348		T22R02	B1	P-3048								
109.426.	3	12AT6, 50B5, 35W4.	DA-8948	AF66D	UP4215		DY-4020-150		EL-24		Out	D-51055-1	A-3878		T22S47		A-2928								
110.255.	5	6A7, 6D6, 75, 25L6G, 25Z5 (M49HG BALLAST) (51).	1102010	PRSA150-20-20	BRD2215		M-2X20-150		TA-220		Out	†	A-3876		T22S45		A-2928								
110.258.	5	6A8G, 6U7G, 6C7G, 25L6G, 25Z6G (M49HG BALLAST) (51).	1102012	PRSA150-40-20	BRD4215		M-2X40-150		TA-240		Out	†	A-3876		T22S45		A-2928								
110.258-1.	5	6A8G, 6X7G, 607G, 25L6G, 25Z6G (M49HG Ballast) (51).	1102012	PRSA150-40-20	BRD4215		M-2X40-150		TA-240		Out	†	A-3876		T22S45		A-2928								
110.391.	5	1A7G, 1N5G, 1H5G, 1A5G, 3Z5GT.	1102031	PRS150-40	BR4015		M-40-150		UT-401		Out	†	A-3857		T22S48		A-2937		†	†	†	†	†	†	
110.391-1.	5	1A7G, 1N5G, 1H5G, 1A5G, 3Z5GT.	1102032	PRS150-40-40	BRD4415		M-2X40-150		TA-440		Out	†	A-3857		T22S48		A-2937		†	†	†	†	†	†	
110.400.	6	12A8GT, 12K7GT, 6MA, 12J7GT, 35L6GT, 35Z5GT.	1102058	PRSA150-30-30	E242215		DSB-403020		TA-303		Out	†	A-3876		T22S45		A-2928								
110.401.	4	1A7GT, 1N5GT, 1H5GT, 1A5GT.	1102046	PRS150-8	BRD3315		M-2X30-150		TA-330		Out	1101315	A-3957		T22S48		A-2937		†	†	†	†	†	†	
110.402.	5	1A7GT, 1N5GT, 1H5GT, 1A5GT.	1102025	PR815	M-8-150		UT-81		Out	1101316	A-3881		T22S48		A-2933		743 & 2482		6F	2B30					
110.403.	5	12A8GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z6GT (47).	1102053	AF888D	UP44415		DY-3X40-150		EL-340		Out	†	A-3876		T22S45		A-2928								
110.409.	5	12A8GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	1102053	AF888D	UP44415		DY-3X40-150		EL-340		Out	†	A-3876		T22S45		A-2928								
110.410.	6	6A8G, 6U7G, 6H4GT, 6F5G, 6V6G, 5Y3G (51).	1102063										Pwr Out	1101018	P-6011		T22R02	B1	P-2951						
110.411.	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 50Y6GT.	1102057										Out	1101320	A-3877		T22S58		A-2930						
110.412.	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 50Y6GT.	1102057										Out	1101315	A-3857		T22S48		A-2937		742 & 2482		4F	2M30	
110.414-1.	6	12A8GT, 12K7GT, 6H4GT, 12J7GT, 35L6GT, 35Z5GT.	1102058	PRSA150-40-20	BRD4215		M-2X40-150		TA-240		Out	1101319	A-3876		T22S45		A-2928								
110.415-1.	6	12J7GT, 35L6GT, 35Z5GT.	1102058								Out	1101318	A-3876		T22S45		A-2928								
110.416-A.	6	1A7GT, 21N5GT, 1H5GT, 3Q5GT, 50Y6GT.	1102056								Out	1101317	A-3856		T22S47		A-2900		746 & 2482		G3	2B30			
110.417.	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 50Y6GT.	1102056								Out	1101315	A-3857		T22S48		A-2937		742 & 2482		4F	2N30			
110.418.	6	6SA7GT, 6SK7GT, 6SQ7GT, 6S7GT, 6F6GT, 6X5GT.	1102063										Pwr Out	1101019	P-6348		T22R02	B1	P-3048						
110.421.	6	7H7, 6SK7GT, 6SQ7GT, 6J5GT, 6K6G, 6X5GT (47).	A2057										Out	1101321	A-3878		T22S47		A-2931						
110.426.	5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	A2056	AF888D	UP44415		DY-3X40-150		EL-340		Out	A1020	P-6348		T22R02	B1	P-3048								
110.427.	5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	A2056	AF888D	UP44415		DY-3X40-150		EL-340		Out	A1323	A-3878		T22S47		A-2931								
110.428.	7	7H7, 6J5GT, 6SK7GT, 6SQ7GT, 6K6G, 6X5GT (47).	A2067										Out	A1325	A-3876		T22S45		A-2928						
110.430.	2	12SA7GT, 35Z4GT, 35Z5GT.	A2069										Pwr Out	A1020	P-6348		T22R02	B1	P-3048						
110.448.	6	12SA7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	A2065	PRSA150-40-40	BRD4415		M-2X40-150		TA-440		Out	A1322	A-3876		T22S45		A-2928								
110.449.	6	12SA7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	A2065	PRSA150-40-40	BRD4415		M-2X40-150		TA-440		Out	A1322	A-3876		T22S45		A-2928								
110.451.	6	12SA7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	A2065	PRSA150-40-40	BRD4415		DSB-2X40-150		TA-440		Out	A1322	A-3876		T22S45		A-2928								
110.452.	6	12SA7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	A2068-D	PRSA150-40-40 & PRS25-25	BRD4415 & BRD235 & BR1635		DSB-305		TA-440 & TA-25		Out	A1330	A-3876		T22S45		A-2928								
110.454.	5	6SA7GT, 6SK7GT, 6SQ7GT, 6V6GT, 6X5GT (47).	A20102	PRV450-20-20 & PRS350-16	BRD235 & BR1635		DY-3X20-450		UT-201 & UT-1616		Pwr Out	A1020	P-6348		T22R01	B1	P-3047								
110.455.	6	12SA7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	A20109	PRSA150-40-40	BR1645		M-16-450		UT-16		Chk	A1400	C-1355												
110.466-1.	7	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT.	A20108	PRS25-25	BR252A		PR826D4A		TA-25		Out	A1336	A-3876		T22S45		A-2928								
110.497.	5	6D6, 6C6, 25L6G, 25Z5, 76. (M49HG BALLAST) (51).	1102018	PRS25-50	BR502		PR826D4A		TA-25		Out	A1336	A-3876		T22S45		A-2928								
110.507.	5	6D6, 6C6, 25L6G, 25Z5, 76. (M49HG BALLAST) (51).	1102018	PRSA150-40-20	BRD4215		M-2X40-150		TA-240		Out	A1336	A-3876		T22S45		A-2928								
110.582-2.	6	6A8G, 6K7G, 6H6G, 6F5G, 6V6G, 6X5G.	1102028	PRSA150-40-20	BR2045		M-20-350		UT-203		Pwr Out	1101011	P-6348		T22R02	B1	P-3047								
110.582-IA.	6	6A8G, 6K7G, 6H6G, 6F5G, 6V6G, 6X5G (51).	1102018	PRSA150-40-20	BR2045		M-20-350		UT-203		Pwr Out	1101011	P-6348		T22S58		A-2930								
110.982-IA.	6	6A8G, 6K7G, 6H6G, 6F5G, 6V6G, 6X5G (51).	1102018	PRSA150-40-20	BR502		M-50-25		TA-50		Pwr Out	1101011	P-6348		T22R02	B1	P-3047								
110.982-IB.	6	6A8G, 6K7G, 6H6G, 6F5G, 6V6G, 6X5G (51).	1102018	PRSA150-40-20	BR2045		M-50-25		TA-50		Pwr Out	1101011	P-6348		T22S58		A-2930								

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL	Product Sel No.		
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quamm Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	109338747.			455				109588750.	ST-105.		5A1.		Vol	109248524.	M-60-Z		A.	D13-133.		41	G1				Continued--	SILVERTONE 109.370	
2nd.	109348748.							1	--1				.ol	109248910.	M-3-Z		A.	D13-1-7.		4	G1					109.371-1	
3rd.	109358538.	16-6660.		455	1096386									Vol	D8958.	AM-63-Z	KSS-3.		D13-137.							109.378	
1st.	109338434.	16-6662.						D8808.					Vol	D9179.												109.383	
2nd.	109358435.	16-6660.						D9193.	--11		4A1.		Vol	D9394.												109.409	
1st.	D8836.	16-6662.		455.				D9438.	S-113.		--1		Vol	D10038.	M-60-Z		A.	D13-3-		41	G1					109.417	
2nd.	D9191.	16-6658.		455.				D9733.	ST-194.		5E45.		Vol	D9655.	AT-114	KSS-3.	A.	D17-139X	E	41						109.428	
1st.	D9192.	16-6660.		455.				D10055.					Vol	D9656.	AM-60-Z	KSS-3.		D13-133.	E							109.625	
2nd.	D9192.	16-6658.		455.				C5602.	--113.		4A		Vol	D9656.	DB-54466-1.	KSS-3.		D13-133.	E							109.625	
1st.	D9472.			455.	DL-40S.	L-40-S.		D10244.					Vol	D9656.	DB-54466-1.	M-60-Z	A.	D17-139X	E	41	G1					110.255	
2nd.	D10030.			455.	DL-40S.	L-40-S.		D10244.					Vol	D9656.	AM-60-Z			D13-133.		41	G1					110.258	
1st.	D9893.							D10244.					Vol	D9656.	AM-60-Z			D13-133.		41	G1					110.258-1	
2nd.	D9893.							D10244.					Vol	D9656.	AM-60-Z			D13-133.		41	G1					110.391	
1st.	1103358.	1-	--	'56				11058.	ST-194.		5E45.		Vol	110244.	M-60-Z		A.	D13-133.		41	G1					110.391-1	
2nd.	1103359.							11058.	ST-194.		5E-		Vol	110244.	M-60-Z		A.	D13-133.		41	G1					110.409	
1st.	1103311.	16-6658.		455				1105812.	ST-194.		5E-		Vol	110244.	M-60-Z		A.	D13-133.		41	G1					110.410	
2nd.	1103511.	16-6658.		455				1105825.	ST-105.		5A1.		Vol	1102430.	M-6-Z		A.	1-		4	G1					110.411	
1st.	1103513.	16-6658.		455				110583.	ST-105.		5A1.		Vol	1102430.	M-6-Z		A.	D13-133.		41	G1					110.412	
2nd.	1103514.	16-6658.		455				110583.	ST-105.		5A		Vol	1102430.	M-6-Z		A.	D13-133.		41	G1					110.413	
1st.	1103516.	16-6658.		4				110583.	ST-105.		5A		Vol	1102433.	--6-		A.	D13-133.		41						110.414	
2nd.	1103514.	16-6650.						1105839.	ST-105.		5A		Vol	1102433.	--6-		A.	D13-133.		41						110.415	
1st.	1103519.	16-6650.						1105845.	ST-105.		5A1		Vol	1102439.	M-6-		A2.	D13-133.		42	G1					110.416	
2nd.	1103321.	16-6658.		'55				1105845.	ST-105.		5A1		Vol	1102439.	M-6-		A.	D 3-133.		42	G					110.417	
1st.	1103521.	16-6660.						1105845.	ST-105.		5A1		Vol	1102446.	--0-		A.	D13-133.		41	G1					110.418	
2nd.	1103321.	16-6652.		455	11063	L-0.		1105845.	ST-105.		5A		Vol	1102446.	M-60-Z		A.	D13-133.		41	G1					110.419	
1st.	1103521.	16-6650.						1105846.	ST-105.		5A		Vol	1102450.	--			1-133X								110.420	
2nd.	1103319.	1-6650.						1105846.	ST-105.		5A1		Vol	1102514.	M-40-S			D11-120								110.421	
1st.	1103519.	1-6714.						1105846.	ST-105.		5A1		Vol	1102449.	M-60-Z		A4.	D13-133.		45	G1					110.422	
2nd.	1103322.	1-6712.		455				1105847.	ST-105.		5A1		Vol	1102449.	M-6-		A4.	D 3-133.		45	G1					110.423	
1st.	1103522.	1-6660.						1105847.	ST-105.		5A		Vol	1102433.	--6-Z		A.	D13-13		4	G1					110.424	
2nd.	1103317.	16-6662.		455				1105848.	ST-105.		5A1		Vol	1102433.	--6-Z											110.425	
1st.	1103517.	16-6650.						1105848.	ST-105.		5A1		Vol	1102453.	M-6-		A.	--		42	G1					110.426	
2nd.	1103322.	16-6652.		455				1105848.	ST-105.		5A1		Vol	1102453.	M-6-											110.427	
1st.	1103522.	16-6650.						1105848.	ST-105.		5A1		Vol	1102449.	M-60-		A4.	D13-133.		45	G1					110.428	
2nd.	1103322.	16-6652.						1105848.	ST-105.		5A1		Vol	1102433.	--6-Z		A.	D13-133X		41	G1					110.429	
1st.	1103517.	16-6650.						1105848.	ST-105.		5A1		Vol	1102453.	M-6-		A.	--		42	G1					110.430	
2nd.	1103322.	16-6652.						1105848.	ST-105.		5A1		Vol	1102449.	M-6-											110.431	
1st.	1103522.	16-6650.						1105848.	ST-105.		5A1		Vol	1102449.	M-6-		A4.	D13-133.		45	G1					110.432	
2nd.	1103322.	16-6652.						1105848.	ST-105.		5A1		Vol	1102433.	--6-		A.	D13-133X		41	G1					110.433	
1st.	1103519.	6-6650.						1105848.	ST-105.		5A1		Vol	1102453.	M-5-S			11-133		41	G1					110.434	
2nd.	1103320.	6-6650.						1105848.	ST-108.		6A1		Vol	1102454.	T-7-											110.435	
1st.	1103519.	6-6650.						1105860.	ST-105.		A*		Vol	1102457.												110.436	
2nd.	1103323.	6-6652.						1105860.	ST-105.		A		Vol	A2457.												110.437	
1st.	A3323.	16-6658.		455	A6333.	L-40.		A585.	ST-105.		A		Vol	A2	--0-			D1-1-3.		4	G1					110.438	
2nd.	A3529.	16-6660.						A585.	ST-105.		A1		Vol	5	M-0-Z			A	1-1-3.		4	G1					110.439
1st.	A3329.	16-6658.		455	A6333.	L-40.		A585.	ST-105.		A1		Vol	A2463.												110.440	
2nd.	A3529.	16-6658.						A585.	ST-105.		A1		Vol	A2463.	M-60-Z												110.441
1st.	A3329.	16-6650.						A585.	ST-105.		A1		Vol	A25017.	M-60-Z												110.442
2nd.	A3529.	16-6650.						A585.	ST-105.		A1		Vol	A24059.	M-60-Z												110.443
1st.	A3329.	16-6658.		455	A6333.	L-40.		A585.	ST-105.		A1		Vol	A2463.	M-60-Z											110.444	
2nd.	A3529.	16-6658.						A585.	ST-105.		A1		Vol	A2463.	M-60-Z												110.445
1st.	A3359.	16-6658.						A585.	ST-107.		5A15.		Vol	A2463.	M-60-Z												110.446
2nd.	A3529.	16-6660.						A585.	ST-107.		5A15.		Vol	A2474.	--6-												110.447
1st.	3329.	16-6658.		455				A585.	ST-107.		5A15.		Vol	1102417.	M-40-S												110.448
2nd.	3529.	16-6660.						A585.	ST-107.		5A15.		Vol	1102416.	M-64-Z												110.449
1st.	3329.	16-6658.		455				A585.	ST-107.		5A15.		Vol	1102444.	M-6-Z												110.450
2nd.	3529.	16-6660.						A585.	ST-107.		5A15.		Vol	1102444.	M-60-Z												110.451
1st.	A3360.	16-6658.		455				A585.	ST-107.		5A15.		Vol	A2474.	--6-												110.452
2nd.	A3530.	16-6660.						A585.	ST-107.		5A15.		Vol	1102417.	M-40-S	</											

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS									Section B TRANSFORMERS							Section C BATTERIES						
		No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	No. 1	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	No. 1	Thordarson	Note	Merit	Note	Eveready Part No.	No. 1	Burgess Part No.	Note
					Part No.		Part No.		Part No.		Part No.		Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"		
SILVERTONE -- Co	Continued																							
110.382-3	6 6A8G, 6K7G, 6H6G, 6F5G, 6V6G, 6X5G (51)	1102029	PRS350-24	BR2045	M-20-350		UT-203		Pwr Out	1101011	P-6348	T22R02	B1	P-3047										
110.987	5 12K7GT, 12J5GT, 12F5GT, 35LEGT, 35Z5GT (47)	1102028	PRS350-24	BR2045	M-20-350		UT-203		Out	On Spkr.	A-3877	T22S58		A-2930										
110.987-1	5 12K7GT, 12J5GT, 12F5GT, 35LEGT, 35Z5GT (47)	1102034	PRSA150-40-40	BRD4415	M-2X40-150		TA-50			TA-440		A-3876	T22S45		A-2928									
110.988-1A, -2	6 12A8GT, 12K7GT, 6H4, 12F5GT, 35LEGT, 35Z5GT	1102034	PRSA150-40-40	BRD4415	M-2X40-150		EL-340		Cut	†	A-3876	T22S45		A-2928										
110.989-1A	6 12A8GT, 12K7GT, 6H4, 12J7GT, 35LEGT, 35Z5GT	1102050	AF88D	UP4415	DY-2X40-15		EL-25		Out	†	A-3876	T22S45		A-2928										
110.990	6 12A8GT, 12K7GT, 6H4, 12J7GT, 35LEGT, 35Z5GT	1102049	AF88D	UP4415	DY-2X40-150		TA-303		Out	†	A-3876	T22S45		A-2928										
110.991	4 1A7G, 1N5G, 1H5G, 1A5G	1102025	PRS150-8	BR815	M-8-150		EL-25		Out	†	A-3857	T22S48		A-2937										
110.7211	4 6B6, 6C6, 38, 76 (51)	1102016		BR4610	M-1000-6		UHC-1000		Out	†	A-3879	T22S47		A-2932										
110.7212	4 6D6, 6C8, 25L6G, 25Z5	1102007	PRSA150-20-20	BRD2215	M-2X20-150		TA-220		Out	†	A-3876	T22S45		A-2928										
110.7212	4 6D6, 6C6, 25L6G, 25Z5, (M55HG BALLAST)	11020101	PRSA150-20-20	BRD2215	M-2X20-150		TA-220		Out	†	A-3876	T22S45		A-2928										
110.7214	5 6A7, 6D6, 75, 25L6G, 1V (51)	1102042		EZ5116			TU-1616		Pwr Out	1101088	A-3875	T22S45		A-2928										
110.7215	5 6A7, 6D6, 75, 25L6G, 25Z5, (M49HG BALLAST) (51)	1102043	PRSA150-40-20	BRD4215	M-2X40-150		TA-240		Out	†	A-3875	T22S45		A-2928										
110.7219	4 6D6, 6C6, 25L6G, 25Z5, (M55HG BALLAST) (51)	1102011	PRSA150-30-30	BRD3315	M-2X30-150		TA-330		Out	†	A-3875	T22S45		A-2928										
110.7220	5 6A7, 6D6, 75, 25L6G, 25Z5, (M49HG BALLAST) (51)	1102043	PRSA150-40-20	BRD4215	M-2X40-150		TA-240		Out	†	A-3876	T22S45		A-2928										
113.414	5 6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G, (44)	1132041453	AF22J4A	UPII45C	DY-316		EL-202		Pwr Out	1131041450	P-6011	T22R02		P-2951										
113.504	5 1A7G, 1N5G, 1H5G, 1A5G, 35Z4GT	11350453	AF44D40A	UP4CJ61	DY-304		EL-351		Out	1131341241	A-3878	T22S47		A-2931										
113.972	5 6A7, 6D6, 6Q7G, 41, 80	1132097253	PRS8450-8-8	EZ588	DH-2X8-450SS		TU-88		Pwr Out	1131097250	P-4078	T22R02		P-3151										
116.RT3																								
116.SA10	3 77, 6B5, 80	116204250	GL450-10						Pwr In	11610103	P-6010	T22R01		P-2950										
116.SA20	5 6C6, 6B5, 80/5Z3	116204165	PRS25-25	BR252A	M-25-25		TA-25		Out	11612183	†	T22S47		A-2931										
116.SA2232	5 6J7, 6C5, 6L6, 5U4G	116204194	GL450-10						Chk Pwr In	116140115	†													
116.SA30	6 6J7, 6N7, 5Z3	116204194	GL450-10	BR252A	M-25-25		TA-25		Chk Pwr In	116120219	†													
116.SA40	7 6J7, 6C5, 6L6, 5Z3	116204194	GL450-10	BR252A	M-25-25		TA-25		Chk Pwr In	116130218	†													
116.SA3041	3 6L6, 5Z3	116204194	GL450-10	BR502	M-50-25		TA-50		Chk Pwr In	116141110	†													
126.200	6 6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 6U5	1262014377	GL450-16	KRS16A	D-16-450		PLS-16		Pwr In	11610105	†													
126.201	6 6A8G, 6K7G, 6Q7G, 6F6G, 6U4, 5Y3G	126205212	GL450-16	KRS16A	D-16-450		PLS-16		Pwr Out	11612185	†													
126.202	11 6K7G, 6A8G, 6H6G, 6F5G, 6F6G, 6U5, 5U4G	1262014213	GL450-10	EZ5116			TU-1616		Pwr Out	11614110	†													
126.203	5 6A8, 6K7, 6Q7, 6F6, 6X5, (51)	1262014531	GL450-30	KRS50	D-30-450		PLS-30		Pwr Out	11610105	†													
126.204	5 6A8, 6K7, 6Q7G, 6K6G, 5Y3 (44)	1262031099	GL450-18	KRS16A	D-16-450		PLS-16		Pwr Out	1161313908	†													
126.205	10 6K7G, 6A8G, 6J7G, 6Q7G, 6F5G, 6F6G, 6U5	1262032400	AF4J	UP2045	DY-20-450		EL-2		Pwr Out	1161031225	P-6290	T22R02		P-2951										
126.206	6 6K8, 6K7G, 6H6G, 6F5G, 6F6G, 6U5	1262032405	PRS450-16	BR1645	M-16-450		UT-16		Pwr Out	1261314534	A-3311	T22S47		A-2936										
126.208	6 6K8, 6K7G, 6H6G, 6F5G, 6F6G, 6U5, 5Y3 (44)	1262032485	AF44J4A	UP22450					Pwr Out	1261031246	P-6011	T22R02		P-2951										
126.209	6 6K7, 6A8, 6SK7, 6SQ7, 6K6G, 6Z4G (51)	1262032240	AF22J4A	UP1145C	DY-316		EL-202		Pwr Out	1261031230	A-3878	T22S47		A-2931										
126.210	2 6A8, 6K7, 6SK7, 6R7, 6V6G, 6Z4G (51)	1262032240	AF22J4A	UP1145C	DY-316		EL-202		Pwr Out	1261131597	A-3878	T22S47		A-2931										
126.211	7 6K7, 6A8, 6SK7, 6R7, 6V6G, 6Z4G (51)	1262032240	AF22J4A	UP1145C	DY-316		EL-202		Chk Pwr Audio Out	12611322986	A-3311	T22S47		A-2936										
126.212																								

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photofac Sel No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radart Part No.	Note			
1st.	1103313	16-5712	" 5		1105822								Vol	1102444	M-60-Z			A.	D13-133		41	GI				Continued --	SILVERTONE 110.982-3	
2nd.	1103514	1 - 5714			1108314			110582	T-105	5A1			Tone	1102571	M-6-Z			A.	D13-1 3			GI					110.987	
					1106314			11005824	T-105	5A1			Vol	1102428	M-40-S			A.	D11-12			GI					110.987-1	
1st.	1103317	16-5712	455		1105824			1105824	T-105	5A1			Tone	1102429	M-64-Z			A.	D11-1' 0			GI					110.988-1A-2	
2nd.	1108517												Vol	1102428	M-40-S			A.	D13-1		41	GI					110.988, 1A	
1st.	1103313	16-6658	455		1105840			110583	ST-105	" 1			-ol	1102433	M-60-			A.	D13-1	" 1	GI						110.990	
2nd.	110354	16-6660			110583			110583	ST-105	" A			-ol	1102433	M-6-Z			A.	D13-133		41	GI					110.991	
1st.	1103317	1 - 658			1105837	ST-		1105837	ST-	5A1			Vol	1102423	M-6-Z			A.	D13-		42	" 1					110.7211	
2nd.	1103514	16-666	455															A.	D11-12		41	GI				110.7212		
																		A.	D11-120		41	GI				110.7213		
1st.	1103356	16-5712	456															A.	D11-120		41	GI				110.7214		
2nd.	1103357	16-5714	" 6		11058	5												A.	D13-133		41	GI				110.7215		
1st.	1103358	" 6	" 4		110581	T-194												A.	D13-133		41	GI				110.7219		
2nd.	1103359																	A.	D11-120		41	GI				110.7220		
1st.	1103356	1	4		11058	ST-194												A.	D13-133		41	GI				113.414		
2nd.	1103357	16-5714	465		1135841424	ST-168			1135841424	E48				Vol	1135841424	M-6-			A.	D13-139	" 1							113.504
1st.	11334141	16-6658	465		11350424	ST-105			11350424	ST-105	5A1			-ol	1135049	M-6-Z			A.	D13-137								113.972
2nd.	1335142	16-6660																A.	D13-133		41	GI				116.RT3		
1st.	1135041	16-6658	" 6															A.	D13-133		41	GI				116.SA10		
2nd.	1135042	16-6660																A.	D13-137		41	GI				116.SA20		
1st.	1133572	16-6658	" 4		116	25												A.	D13-137		41	GI				116.SA2232		
2nd.	1133572	16-6660																A.	D13-137		41	GI				116.SA30		
																	A.	D13-137		41	GI				116.SA40			
																	A.	D13-137		41	GI				II6.SA3041			
																	A.	D13-137		41	GI				126.200			
1st.	1263314376	16-5740	460	1266330708				1265830710						V	1 - 2430 04	" 4			A.	D11-0		" 1						126.201
2nd.	1263314308	16-5742																A.	D11-1		" 1	GI				126.202		
1st.	1263314376	16-570	4 0	126633 0				1265814395	T-173	" 1			Vol	1262430704	M-64-Z			A.	D13-139X			GI					126.203	
2nd.	1263314308	16-5742							1265831530	ST-173								A.	D13-139X			GI					126.204	
1st.	1263314376	16-5740	4 5	12	1 2				1265831530	ST-105	F8	SEV6		Vol	1262431517	M-60-			A.	D13-139X			GI					126.205
2nd.	1263314283	16-5740	4						1265831763	ST-105	F8	SEV6		Vol	1262431637	M-60-			A.	D13-139X			GI					126.206
1st.	1263314376	16-5740	4						1265831109									A.	D13-139X			GI					126.208	
2nd.	126333092	16-6682	45	126633105														A.	D13-139X			GI					126.209	
1st.	126333093	16-6682	45	126633105														A.	D13-139X			GI					126.210	
2nd.	126333093	16-6683	53		1255331050				1265831538	ST-173		1 "		Vol	1262431052	M-64-			A.	D13-139X			GI					126.211
1st.	1263314376	16-5740	4.5	126633	1050				1265831592	ST-173	F8	SEV6		Vol & Tone	1262431366	M-4-Z			A.	D13-139X			GI					126.212
2nd.	1263314283	16-5740	4.5	1266331050														A.	D13-139X			GI						
1st.	126332990	16-5740	2 0		1266331050				12658297	ST-115	F8	SEV6		Vol	1262432499	M-64-Z			A.	D13-130		41	GI					SILVERTONE - 305
2nd.	126332991	16-5742	60	1266331050														A.	D13-130		41	GI						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
		No. Tubs	Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stanecor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	No. Note	Burgess Part No.	No. Note	
			Dial Light Type Listed in Parentheses	Part No.																		"A"	"B"	"A"	"B"	
SILVERTONE—Continued																										
126.216.....	5 6SA7, 6K7, 6SQ7, 6F6G, 5Y3G	1262032240	AF22J4A		UPI1145C			DY-316		EL-202			Pwr	1261032852												
126.217,218,220	7 6SK7, 6SA7, 6SQ7, 6F6G, 6U5, 5Y3G (44)	1262033014	AF44J4A		UP22245C								Pwr	1261032911	P-6011	T22R02	T22S47	P-2951	A-2931							
126.219.....	9 6SK7, 6SA7, 6SQ7, 6SF5, 6F6G, 6U5, 5Y3G (44)	1262034185	AF44J4A		UP2245C			DY-315		EL-350			Pwr	1261031795												
126.221.....	9 6SK7, 6SA7, 6SQ7, 6SF5, 6F6G, 6U5, 5Y3G (44)	1262034185	AF44J4A		UP2245C			DY-315		EL-350			Pwr	1261031795	A-3878	T22S47	T22S47	A-2931	A-2931							
126.222.....	2 12A8GT, 35Z4GT (44)	1262032152	AF44F		UP2225			DY-2X20-350		EL-120			Pwr	1261034183												
126.223.....	4 6SA7, 6SK7, 6SQ7, 5V6	1262032240	AF22J4A		UPI1145C			DY-316		EL-202			Pwr	12610314534	A-3311	T22S64	T22S64	A-2936	A-2936							
126.224.....	5 6SA7, 6SK7, 6SQ7, 5K6GT, 5Y3G (51)	1262035761											Pwr	1261135544												
126.225.....	5 6SA7, 6K7, 6SQ7, 6F6G, 5Y3G (51)	1262032240	AF22J4A		UPI1145C			DY-316		EL-202			Pwr	1261035759	P-6011	T22R02	T22S47	P-2952	A-3032							
126.226.....	6 6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G (51)	1262033014	AF44J4A		UP22245C								Pwr	1261032852	P-6119	T22R02	T22S47	P-2951	A-2931							
126.227.....	8 6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G (44)	1262033014	AF44J4A		UP22245C								Pwr	1261032905	A-3878	T22S47	T22S47	A-2931	A-2931							
126.229.....	4 1A7G, 1M5G, 1H5G, 1C5G	1262033790	AF66D		UP3315			DY-2X30-150		EL-230			Pwr	1261031733	P-6012	T22R04	T22S64	P-2952	A-2931							
126.231.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT, (91452-1 Ballast) (51)	1262035747											Pwr	12611337126	A-3330			A-3031								
126.233.....	5 6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G (44)	1262035195			BRD1845								Pwr	1261032852												
126.234.....	6 6SA7, 6SK7, 6SQ7, 6AD7G, 6F6G, 5Y3G (51)	1262033014	AF44J4A		UP22245C								Pwr	12610339336	A-3878	T22S47	T22S47	A-2931	A-2931							
126.235.....	5 6SA7, 6SS7, 6T7G, 6W7G, 6Z7G	1262037250	PRS250-20		BR2025			M-20-350		UT-202			Pwr	1261035544	P-6011	T22R02	T22S64	P-2951	A-2936							
126.237.....	7 6SK7, 6SA7, 6SQ7, 6F6G, 6U5, 5Y3G	1262033014	AF44J4A		UP22245C								Pwr	1261032221	A-4713	T2DD76	T22S47	A-2920	A-2900							
126.238.....	9 6SK7, 6SA7, 6SQ7, 6F6G, 6U5, 5Y3G (51)	1262033014	AF44J4A		UP22245C								Pwr	1261032905	A-3848	T22S47	T22S47	A-2931	A-2931							
130.278.....	9 6J7, %N7, %L6, %X5	130203064			EZ5116								Pwr	1261031735	A-3878	T22S47	T22S47	A-2931	A-2931							
130.282.....	7 %E7, %N7, %V6, 5V4	130203056	PRSA450-8-8		EZ8845			M-2X8-450		TU-1616			Out	12610337899	A-3311	T22S64	T22S64	A-2936	A-3028							
130.282.....	8-8 Mfd	130203059	PRSA450-10		EZ8845			M-10-25		TA-10			Out	130141008												
130.282.....	12-12 Mfd	130203061	PRSA450-10-10		EZ8845			M-2X10-25		TA-110			Out	130103101												
130.282.....	8-8 Mfd	130203061	PRSA450-8-8		EZ5116			M-2X8-450		TA-110			Out	130132085	A-3885	T22S68	T22S68	A-3028	A-3028							
130.620.....													Pwr	130103078	P-6013	T22R05	T22S64	P-2953	A-3027							
130.623.....													Pwr	130132078	A-3311	T22S64	T22S64	A-3027	A-3027							
130.637.....	6 6J7, %N7, %L6, 6W5	130203064			EZ5116			M-2X8-450		TU-1616			Pwr	130103098												
130.637.....	6 6J7, %N7, %L6, 6W5	130203056	PRSA450-8-8		EZ8845			M-2X10-25		TA-110			Pwr	130103097												
132.802,A,B,-1A-E	5 12A8GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z4GT (C7)	1322016719			BRD202A			M-2X10-25		TA-110			Out	130132065	A-3885	T22S68	T22S68	A-3028	A-3028							
132.803,A,B,-1B-E	5 12A8GT, 12K7GT, 12SQ7GT, 35L6GT, 35Z4GT (C7)	1322016707	PRSA150-40-20		BRD4215			M-2X40-150		TA-240			Chk	1321416732												
132.804,A,B,-1A-B	4 12K7GT, 12SQ7GT, 35L6GT, 35Z4GT (C7)	1322016838			EZ3215C			DSB-303					Chk	1321316733	A-3876	T22S45	T22S45	A-2923	A-2923							
132.805,A,B,-1A-B	4 12K7GT, 12Q7GT, 35L6GT, 35Z4GT (C7)	1322016838			EZ3215C			DSB-303					Chk	1321316734	A-3876	T22S45	T22S45	A-2923	A-2923							
132.806,1.....	5 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N16719	AF88D		UP4215			DY-4020-150		EL-24			Chk	N16732												
132.807,1.....	5 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N16707	AF84D4A	A3	UP4215			DY-4020-150		EL-24			Chk	N16733	A-3876	T22S45	T22S45	A-2928	A-2928							
132.807,2.....	5 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N16707	AF84D4A	A3	UP4215			DY-4020-150		EL-24			Chk	N16684	C-1706	T20C52	T20C52	C-2975	C-2975							
132.808.....	4 12K7GT, 12SQ7GT, 35L6GT, 35Z5GT	1322014370											Chk	N16685	A-3876	T22S45	T22S45	A-2923	A-2923							
132.809,1.....	4 12K7GT, 12SQ7GT, 35L6GT, 35Z4GT	1322014370											Chk	N16686	A-3876	T22S45	T22S45	C-2975	C-2975							
132.810,1.....	5 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT	1322017140			EZ3215C			DSB-303					Out	1321317160	A-3330											
132.811,1.....	5 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT	1322014403			EZ3215C			DSB-303					Out	1321317145	A-3330											
132.812,A,B.....	5 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	1322016719	AF88D		UP4215			DY-4020-150		EL-24			Chk	1321416732												
132.812,A,B.....	5 12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	1322016719	AF88D		UP4215			DY-4020-150		EL-24			Chk	1321316733	A-3876	T22S45	T22S45	A-2928	A-2928							

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
		No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
SILVERTONE—Continued		5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N16719	AF88D		UP4215		DY-4020-150		EL-24		Chk	N16732		†	T22S45		A-2928							
132.812-1,A,B		5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N16719	AF88D		UP4215		DY-4020-150		EL-24		Chk	N16732		†	T22S45		A-2928							
132.812-2,-3,A,B		5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	1322016707	AF84D4A	A3	UP4215		DY-4020-150		EL-24		Chk	1321416684	C-1706	T20C52	C-2975									
132.813-1,A,B,-2		5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N16707	AF88D		UP4215		DY-4020-150		EL-24		Chk	1321316685	C-1706	T22S45	A-2928									
132.814		5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N16719	AF88D		UP4215		DY-4020-150		EL-24		Chk	N16684	A-3876	T22S45	C-2975									
132.815		5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N16707	AF88D		UP4215		DY-4020-150		EL-24		Out	N17353	A-3876	T22S45	A-2928									
132.816,A		5	12SA7GT, 12SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	N19360	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	N16685	A-3876	T22S45	A-2928									
132.818		4	12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT	N19176	PRSA150-40-20 & PRS25-25		EZ4215C		M-2X4-150 & M-25-25		TA-240 & TA-25		Out	N18258	A-3876	T22S45	A-2928									
132.820		6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N19239	AF88D		UP4215		DY-4020-150		EL-24		Chk	N18583	C-1723	T20C52	C-2975									
132.825-4		6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N19239	AF84D4A	A3	UP4215		DY-4020-150		EL-24		Chk	N18583	A-3876	T22S45	A-2928									
132.826-1		6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (C7)	N19239	AF84D4A	A3	UP4215		DY-4020-150		EL-24		Chk	N18583	C-1723	T20C52	C-2975									
133.333		3	6K8, 6B8, 25Z5	1332001482	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	N18582	A-3876	T22S45	A-2928									
134.802,-1		2	6A7, 25Z5	16 Mfd.	PRS150-16		BR1615		M-16-150		UT-161															
134.903		3	6Q7G, 6K6G, 80	8 Mfd.	PRS158-8		BR815		M-8-150		UT-81		Pwr Out	134802030	P-6119	T22R01	P-2951									
		3	6Q7G, 6K6G, 80	134182014	PRS450-8		BR845		M-8-450		UT-8		Out	134802030	A-3876	T22S47	A-2931									
135.240				134182015	PRS450-8		BR845		M-8-450		UT-8															
136.410		4	1R5, 1T4, 1S5, 1S4	136252I	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3329		A-2927									
138.007		3	6SC7, 6LG6, 5Y3G	8-8 Mfd.	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	P-6011	A-3825	T22R02	P-2951									
138.100		5	6J7G, 6Y7G, 26V6G, 5V4G	20 Mfd.	PRS25-10		BR102A		M-10-25		TA-10		Out	On Spkr.	A-3127	T22S72										
		5	6J7G, 6Y7G, 26V6G, 5V4G	13820107	PRSA450-8		BR845		M-8-450		UT-8		Pwr Out	P-6012	A-3127	T22R04	P-2952									
138.110		7	6J7G, 6N7G, 6C5G, or 6N7G, 6LG6, 5V4G (51)	13820107	PRSA450-8		BR252A		M-25-25		TA-25		Out	138133001	A-3311	T22S64	A-2904									
		7	6J7G, 6N7G, 6C5G, or 6N7G, 6LG6, 5V4G (51)	13820108	PRSA450-20-20		BR845		M-8-450		UT-8		Pwr Out	138102002	P-6013	T22R05	P-2953									
138.120		6	6J7G, 6N7G, 6LG6, 5W4 (51)	13820106	PRSA450-20-20		BR252A		M-2X20-150		TA-220		Out	138133002	A-3885	T22S68	A-3028									
138.130				13820113	PRS25-25		EZ8845		M-25-25		TA-25		Pwr Out	138102003	A-3885	T22S68	A-3028									
138.140		5	6J7G, 6Y7G, 6LG6, 80 (51)	13820108	PRS25-25		BR252A		M-25-25		TA-25		Pwr Out	13810200	A-3825	T22S72	A-3127									
138.160		17	6J7G, 6N7G, 6LG6, 5V4G (51)	40-40-10 Mfd.	PRS25-25		BR252A		M-25-25		TA-25		fil-pwr Out	138124002												
		17	6J7G, 6N7G, 6LG6, 5V4G (51)	20 Mfd.	PRS25-25		BR252A		M-25-25		TA-25		PI-Pwr Out	138102111												
138.170		8	6N7G, 6LG6, 5U4G (51)	13820121	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		DRV R Out	13811209												
		8	6N7G, 6LG6, 5U4G (51)	13820115	PRSA450-8-8		BR252A		M-25-25		TA-25		Out	138113004												
138.180		9	6J7G, 6N7G, 6C5G, 6LG6, 5V4G	13820121	PRS25-25		EZ8845		M-25-25		TA-25		Chk	138140003												
		9	6J7G, 6N7G, 6C5G, 6LG6, 5V4G	13820108	PRS25-25		EZ8845		M-25-25		TA-25		Pwr Out	138102005												
138.190,1,2,3		10	6J7, 6N7, 6C5, 6LG6, 5W5 (51)	13820113	PRSB450-8-8		EZ588		M-2X8-450SS		TU-88		Pwr Out	138102006	A-3885	T22S68	A-3028									
		10	6J7, 6N7, 6C5, 6LG6, 5W5 (51)	13820102	PRSB450-8-8		EZ588		M-25-25		TA-25		Out	138133003	A-3885	T22S68	A-3028									
138.210		7	6SQ7G, 6SC7G, 6N7G, 6LG6, 5V4G (51)	13820113	PRSB450-8-8		EZ588		M-2X8-450SS		TU-88		Pwr Out	138102003	A-3885	T22S68	A-3028									
		7	6SQ7G, 6SC7G, 6N7G, 6LG6, 5V4G (51)	13820102	PRSB450-8-8		EZ588		M-25-25		TA-25		Pwr Out	138133002	A-3885	T22S68	A-3028									
138.230		8	6Q7GT, 6SC7, 6J5GT, 6LG6, 5V4G (51)	13820108	PRSB450-8-8		EZ8845		M-2X8-450SS		TA-25		Pwr Out	138102005	A-3885	T22S68	A-3028									
		8	6Q7GT, 6SC7, 6J5GT, 6LG6, 5V4G (51)	13820102	PRSB450-8-8		EZ8845		M-25-25		TA-25		Out	138102005	A-3885	T22S68	A-3028									
138.240		12	6J7G, 6N7G, 6Q7G, 6SA7GT, 6LG6, 5V4G (51)	13820113	PRSB450-8-8		EZ588		M-2X8-450SS		TU-88		Pwr Out	138102005	A-3885	T22S68	A-3028									
		12	6J7G, 6N7G, 6Q7G, 6SA7GT, 6LG6, 5V4G (51)	13820112	PRSB450-8-8		EZ588		M-25-25		TA-25		Out	138133002	A-3885	T22S68	A-3028									
138.903		3	6Q7G, 6K6G, 6X5G	138202012								Pwr Out	13810001	A-3878	T22S47	A-2931										
138.904		3	6J5GT, 6K6GT, 6X5GT	138202012								Pwr Out	13810001	A-3878	T22S47	A-2931										
138.905		2	35L6GT, 35Z5GT	30-30-20 Mfd.								Pwr Out	13810001	A-3876	T22S45	A-2928										

+ Information not available.

~~t~~ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS							Section C BATTERIES										
		No. Types	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
					Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"			
SILVERTONE—Continued	2 35L6GT, 35Z5GT.....	30-30-20 Mfd												Out	13810001	A-3878	†	T22S45	A-2928								
138.906.....	2 6N7GT, 6V6GT, 6X5GT.....	138202012			J2037	PRSA150-8-8		EZ8825	BRH615	M-2X20-150	DGM-1500-6	TA-88	UHC1500	Pwr Out	1381061	A-3878	†	T22S47	A-2931								
138.907.....	3 6N7GT, 6V6GT, 6X5GT.....				J2038									Chk	1391061	C-1707		T20C52	†								
139.150-1.....	1 6J5GT.....				1391046	PRS150-8		BR815	BRH615	M-8-150	DGM-1500-6	UT-81	UHC1500	Chk	1391055												
139.156.....	1 6X5GT.....				1391048									Pwr	1391042		†										
139.200.....	I 25Z5GT.....				1391005	AF44F		UP2225		EL-120		EL-120		Chk	1391014												
					1391006			BRH610		M-1000-6		UHC1000		Pwr	1391002		†										
					1391007									Chk	1391025												
139.210.....	I 6P5GT.....				1392017	PRS150-8-8		BR102A	EZ8825	M-10-25	M-2X20-150	TA-10		Chk	1391414		†										
139.450.....	I 25Z6GT.....				1392016									Pwr	1391011												
					1391308	AF44F		UP2225		EL-120		EL-120		Chk	1391002		†										
					1391007									Pwr	1391000												
139.600.....					1391006			BRH610		M-1000-6		UHC1000		Chk	1391019		†										
					1391013									Pwr	1391018		†										
139.700.....	I 6P5GT.....				1392036	PRS150-8-8		EZ8825	BR1645	M-2X20-150	M-16-450	TA-88	UT-15	Chk	1391434		†										
141.415.....	7 6J5GT, 7H7, 6SK7GT, *6SQ7GT, 6K6GT, 5Y3G (47).....	1392037	PRS150-8-8		M550	PRS450-16		BR1645		M-16-450		UT-15		Pwr	1391091												
141.416.....	6 6J5GT, 7H7, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G (47).....	M482	PRS450-16		M550	PRS450-16		BR1645		M-16-450		UT-16		Pwr	M1128	P-6012		T22R04	P-2952								
141.417.....	7 6J5GT, 7H7, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G (47).....	M550	PRS450-16		M550	PRS450-16		BR1645		M-16-450		UT-16		Pwr	M1127	A-3878		T22S47	A-2931								
141.418.....	7 6J5GT, 7H7, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G (47).....	M550	PRS450-16		B228	PRS25-10		BR1645		M-16-450		UT-16		Pwr	M1134	P-6011		T22R02	P-2951								
145.815.....	2 35L6GT, 35Z4GT.....	B228	PRS150-40-20		B259	PRS150-40-20		BRD4215		M-10-25	M-2X40-150	TA-10	TA-240	Pwr	WP-3135	P-6011		T22R02	P-2951								
163.34.....	4 6J7, 6SF5, 6V6GT, 5Y3G.....	30A3075			30A3075	AF44F		UP1145		M-16-450	DY-3X10-450	UT-16	EL-310	Pwr	WP-3137	P-6013		T22R05	P-2953								
163.300.....	5 6J7, 6SC7, *6V6GT, 5Y3G.....	30A3064			30A3067	*PR25-25		F271		M-25-25	M-25-25	TA-25	TA-25	Pwr	WP-3109	P-6011		T22R02	P-2951								
163.400.....	7 6J7, *6SC7, *6V6GT, 5Y4G.....	30A3075	AF44F		30A3075	PRS25-25		UP1145		DY-3X10-450	M-30-450	EL-310	UT-30	Pwr	WP-3137	A-3211		T22S64	A-2936								
164.158.....	15 *6K8GT, 6SK7GT, 6S07GT, *7H7, 6S17GT, 6H6GT, *6J5GT, *6Y6G, 6U5, 5X4G.....	20 Mfd	PRS25-25		F271	PRS25-25		B252A		M-25-25	M-25-25	TA-25	TA-25	Pwr	F742		†										
					F271	PRS450-8		B252A		M-8-450	D-40-450	UT-8	PLS-40	Out													
184.5818.....	2 35L6GT, 35Z5GT.....	1842065	PRS150-40-40		1842070	PRS25-10		BRD4415		M-2X40-150	TA-440	TA-10	TA-10	Out	1841325	A-3876		T22S45	A-2928								
184.5819.....	2 35L6GT, 35Z5GT.....	2065	PRS150-40-40		2070	PRS25-10		BRD4415		M-2X40-150	TA-440	TA-440	TA-440	Out	1325	A-3876		T22S45	A-2928								
431.188,-1.....	2 50A5, 35Y4.....	YA-8C-880						BRD4415		M-10-25	TA-440	TA-440	TA-440	Out	YB-18A-949	A-3876		T22S45	A-2928								
434.140.....	8 6SK7GT, 6SA7, 6SK7, 6S07, 6J5, *6V6GT, 5Y3GT (47).....	40 Mfd				UP4445		DSB-8040-150		DY-2X40-450	EL-240	EL-240	EL-240	Pwr	X13970	P-6013		B12	T22R06	P-2954							
436.200.....	2 50L6GT, 35Z5GT.....	16 Mfd	PRS150-16		BRD4415			DSB-8040-150		M-16-150	UT-161	UT-161	UT-161	Out	X15.019	A-3823		T22S48	A-2901								
														Out	UA-750	A-3876		T22S45	A-2928								
SIMPSON CA-5.....	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47).....	40,20,20 Mfd	PRS150-40-20		51407/12BE6, 14A7/12BA6, 14B6/12AT6, 50A5/50B5, 35Y4/35W4 (47).....	CO127	PRS150-20	EZ42215		DSB-403020-150	TA-240	TA-201	TA-201	Out	TR139	A-3876		T22S45	A-2928								
														Out	502213(R)												
														Out	502424(W)												
														Out	TO-1000	A-3876		T22S45	A-2928								
SKY KNIGHT—(See Air Knight)																											
SKY ROVER N5-R-D-250, N5-R-O-251.....	6 12SK7, 12SA7, 12SF7, 35L6GT, 35Z5GT (47).....	500256	AF-88D		500256	AF-88D		UP4215		A4	DY-4-20-150	EL-24	EL-24	Out	502904(A)	A-3330	B3		A-3031	B3							
N5-R-O-251.....	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47).....	CLP-10007	PRS150-50-30		CLP-10007	PRS150-50-30		BRD3515		M-5030-150	TA-530	TA-530	TA-530	Out	502213(R)												
SKY WEIGHT 81B.....	3 12AT6, 50B5, 35W4.....	30, 50 Mfd	PRS150-50-30		30, 50 Mfd	PRS150-50-30		BRD-3515		M-5030-150	TA-530	TA-530	TA-530	Out	N-1540	A-3876	B3	T22S45	A-2928	B3							
82.....	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47).....	40, 40 Mfd	PRS150-40-40		40, 40 Mfd	PRS150-40-40		BRD-4415		DSB-2X40-150	TA-440	TA-440	TA-440	Out	On Spkr.	A-3876	B3	T22S45	A-2928	B3							
SONORA AU10.....	4 6A8GT, 6K7GT, 6Q7GT, 6K6GT (44).....	N-1369												Pwr	N-1540												
B, BA (Ch. A, B, D-D), BA (Ch. D)	5 6A8G, 6K7, 6Q7G, 25L6G, 25Z6G, K49B & BALLAST (47).....	C-237	AF844D		C-237	AF844D		UP42215		DY-403020-150	EL-224	EL-224	EL-224	Out	On Spkr.	A-3876	T22S47	A-2931	T22S45	A-2928							

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note Part No.	Mfr. Part No.	Jensen Part No.	Note Quam Part No.	Note Part No.	Use	Mfr. Part No.	Claroetal Part No.	Shaft	Switch	Note IRC Part No.	Shaft	Switch	Note Part No.	Mfr. Part No.	Radial Part No.	Note Part No.	Notes Part No.				
																									SILVERTONE		
																									138.906		
																									138.907		
																									15. 139.150-1		
																									139.156		
																									139.200		
																									139.210		
																									139.450		
																									139.600		
																									139.700		
1st.	M1125	16-5712	455					M1148.			Vol	M1103.													141.415		
2nd.	M1126	16-5714	455					M1172.			Vol	M1193.													141.416		
1st.	M1295	16-5712	455					M1173.			Vol	M1239.													141.417		
2nd.	M1296	16-5714	455	M1785.				M1688.			Vol	M1676.													141.418		
1st.	M1250	16-5712	455	B598.				8591.			F1	Mike Vol	M1533.	M-66-Z			D13-139			G1					145.815		
2nd.	M1251	16-5712	455	M1785.				8591A.			F2	Tone	B301.	M-60-Z			D13-133			G1					163.34		
																									163.300		
																									163.400		
1st.	F234		462					F3716.			F2		F2												164.158		
1st.	F241		4.3					F3719.																	184.5818		
2nd.	F235		462																						184.5819		
2nd.	F242		4.3																						23. 431.188-1		
3rd.	F243	16-5714	462																						30. 434.140		
3rd.	F251		4.3																						23. 436.200		
1st.	X13902	16-6658						1846341.			1845858.	ST-105.	SA1.	Vol	1842465.	M-60-Z			D13-133			G1				184.5818	
2nd.	X13903	16-6670						6341.			5858.	ST-105.	SA1.	Tone	1842520.	M-60-Z			D13-133			G1				184.5819	
								YA-59A-974.	L-72-A.		YB-18A-949.	ST-107.	SA15.	Tone	2565.	M-60-Z			D13-133			G1					
1st.	X13902	16-6658						X281012-1	L-70-A.		X13939.	ST-119.	F3	10A31.	Vol	2520.	M-60-Z			D13-133			G1				23. 431.188-1
2nd.	X13903	16-6670							L-72-A.		UB-41C.	ST-113.	4A1.	Vol	YA-10A-821.	M-63-Z			D18-133X.			G1				30. 434.140	
																									23. 436.200		
1st.		16-6658	455	409A3.	L-70-A.			SP-105.	ST-107.		5A15.		Vol	PT-109W.	M-60-Z			A.	D13-133	A	41				22. SIMPLON CA-5		
2nd.	1F107	16-6660	455					SP-105.	ST-107.		5A15.		Vol	PT-109W.	M-60-Z			A.	D13-133	A	41				17. WVV2		
																									SKY KNIGHT		
1st.	S02102	16-5712	455					A-502998.	ST-105.		SA1.		Vol	502145.	AM-60-Z.	KSS-3.	A.	D13-133	E	41						SKY ROYER NS-R-D-250	
2nd.	S02103	16-5714	455					R-502998.	ST-105.		SA1.		Tone	502145.	AM-60-Z.	KSS-3.	A.	D13-133	E	41						NS-R-D-251	
1st.	TSP-10002		455					W-502998.	ST-105.		SA1.		Vol	VCP-12105.												21. N5-RD295	
								SRP-10005.																			
																									SKYWEIGHT 81B		
1st.	N-1248.	16-5712	456						L-46-A.		ST-105.		5A1.	Vol		M-64-S.			D11-123.			G1			20. 82		
2nd.	N-1596.										ST-105.		5A1.	Tone		M-63-Z.			D13-137.			G1					
1st.	I-27.	16-5712	456														M-60-Z.			D13-133.			G1				
2nd.	I-28.																										
1st.																									SONORA AU-10		
2nd.																									B, BA (Ch. A, B, D-D), BA (Ch. D)		

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
																			"A"	"B"	"A"	"B"			
SONORA—Continued	5	6K8, 6K7, 6Q7G, 25L6G, 25Z6G, (K49B/165R4G)	C-237	AF844D		UP42215		DY-403020-150		EL-224		Out	On Spkr.	A-3876		T22S45		A-2923							
BE.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	N-2015	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928							
BJI.....	5	12SA7/GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	N-2015	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928							
BS, E, EA.....	5	6K8, 6K7, 6Q7G, 25A6G, 25Z6G (47)	C-238	AF2214A		UP1145C		DY-316		EL-202		Out	On Spkr.	A-3877		T22S60		A-2930							
F.....	7	6K8, 6K7, 6Q7G, 6J5G, 25A6G, 25Z6G (47)	C-239	AF444K		UP11135		DY-3X10-450		EL-311		Pwr Out	T-23	A-2201		T22S66		A-2901							
G, GA.....	9	6K8, 6K7, 6H6, 45J5G, 25F6G, 5Y3G	C-245	GL450-12	KR516A	D-16-450	PLS-16	TA-25		Pwr Out	T-23	P-6013		T22R05		A-2931		F-2953							
KA.....	12	6K7, 6K8, 6H6, 45J5G, 25V6G, 5U4G	C-247	PR525-25	BR252A	DY-2X15-350	PLS-16	TA-25		Pwr Out	T-23	A-3311		T22S64		A-2904									
KA.....	12	6K7, 6K8, 6H6, 45J5G, 25V6G, 5U4G	C-251	PR525-25	UP15D35	D-16-450	PLS-16	TA-25		Pwr Out	T-23	A-3311		T22S64		A-2937									
KA.....	12	6K7, 6K8, 6H6, 45J5G, 25V6G, 5U4G	C-250	PR525-25	BR252A	M-25-25	TA-25		Pwr Out	T-23	A-3311		T22S64		A-2937										
KB-73.....	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT (47)	N-2748	AF44D4DA	UP4CJ61	DY-304	EL-351			Out	On Spkr.	A-3857													
KD-75.....	6	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT (47)	N-2827																						
KE-78.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	N-2915	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	N-2952	A-3876		T22S45		A-2928							
KF-KFU.....	4	12SK7GT, 12SJ7GT, 50L6GT, 35Z5GT	N-3734			EZ325C		DSB-303				Out	N-3729	A-3876		T22S45		A-2928							
KL-185.....	9	6SA7, 6J7, 5SK7, 6B8G, 6SQ7, 26K6GT, 5Y3G, 6U5/G5	N-2947	AF44J	UP2245	DY-2X20-450	EL-220			Pwr Out	N-3367	P-6012		T22R04		P-2952									
KNF, KNUF.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	N-3114	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	N-3568	A-3876		T22S45		A-2928							
KTU.....	5	12SA7, 12S7K, 12SQ7, 35L6GT, 35Z5GT (47)	N-3302	PRSA150-40	BR4015 & PRS150-30	EZ-32215C	M-40-150 & M-30-150	UT-401 & UT-301			Out	N-3296	A-3876		T22S45		A-2928								
KU-9.....	4	6SA7, 6SK7, 6SQ7, 6K6GT (44)	N-2795			BR3015	M-30-150	UT-301		Pwr Out	N-2790	On Spkr.	A-3878		T22S47		A-2931								
KVU-85, KVU-97.....	2	50L6GT, 35Z5GT	N-1875	PRS150-30	BR3015	M-30-150	UT-301			Out	N-3619	A-3876		T22S45		A-2928									
KWU-78.....	2	35Z5GT, 50L6GT (47)	N-3617			BR3015	M-30-150	UT-301		Out	N-3668	A-3876		T22S45		A-2928									
KWF, KXFU.....	2	35Z5GT, 50L6GT (47)	N-3617			BR3015	M-30-150	UT-301		Out	N-3646	A-3876		T22S45		A-2928									
KY, KYU.....	7	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y4G	N-3688	AF44J	UP2245	DY-2X20-450	EL-220			Pwr Out	N-3665	P-6011		T22R02		P-2951									
KZ.....	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	N-1367	PRS150-12	BR1215	M-10-150	UT-121			Out	N-3673	A-2312		T22S74		A-2901									
L.....	4	1C7G, 1D5G-P, 1F7G, 1G5G (49)	C-230	PRS150-12	BR1215	M-10-150	UT-121			Out	On Spkr.	A-3329		T22S47		A-2927									
LB, LBU.....	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT	N-3554	PRSA150-40-40	BRD4415	M-2X40-150	TA-440			Out	On Spkr.	A-3876		T22S45		A-2928									
LC, LCU.....	6	6A8GT, 6K7GT, 26Q7GT, 6K6GT, 6X5GT (47)	N-3440							Pwr Out	N-3438	P-6348		T22R02		P-2951									
LD, LDU.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	N-3658	AF1010D	UP5515	DY-2X50-150	EL-25			Out	N-3437	P-6348		T22R02		P-2951									
LKS, LKSU.....	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	N-4015	PRSA150-40-40	BRD4415	M-2X40-150	TA-440			Out	N-3296	A-3878		T22S45		A-2928									
LMS, LMSU.....	5	12SA7, 12SK7, 12SQ7, 35L6GT (44)	N-4015							Out	N-3899	A-3876		T22S45		A-2998									
LP.....	5	1R5, 1T4, 1S5, 3S4, 45Z3	N-4208							Out	N-4256	A-3329		T22S47		A-2927									
LQS, LQSU.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	N-4015	PRSA150-40-40	BRD4415	M-2X40-150	TA-440			Out	N-4011	A-3876		T22S45		A-2958									
LR.....	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT	N-2748	AF44D4DA	UP4CJ61	DY-304	EL-351			Out	On Spkr.	A-3857		T22S48		A-2937									
LTF, LTFU.....	5	12ABGT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	N-3114	PRSA150-40-20	BRD4215	M-2X40-150	TA-240			Out	N-3568	A-3876		T22S45		A-2928									
LU.....	5	6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT (44)	N-4178							Pwr Out	N-4151														
LV181, LV186.....	7	6SG7/6SD7GT, 6J5GT, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G/GT (47)	N-4429							Pwr Out	N-4176	A-3878		T22S47		A-2931									
LW.....	7	6SD7GT/6SG7, 6J5GT, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G/GT (47)	N-4411							Pwr Out	N-4427	P-6011		T22R02		P-2951									
LWU.....	7	6SD7GT/6SG7, 6J5GT, 6SK7GT, 6SQ7GT, 6K6GT, 5Y3G/GT (47)	N-4429							Pwr Out	N-4426	A-3878		T22S47		A-2931									
LZ.....	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	N-1367	PRS150-12	BR1215	M-10-150	UT-121			Out	On Spkr.	A-3329		T22S47		A-2927									
M.....	4	6A8G, 6K7, 6Q7G, 6G6G (47)	C-236							Pwr Out	T-22	On Spkr.	A-3879		T22S48		A-2932								
MTF-164.....	4	(See Model KE78)								Out	On Spkr.	A-3876		T22S45		A-2928									
P.....	4	6K7/GT, 6J7GT, 25L6GT, 25Z6GT (40)	C-233		EZ32115	DSB-3X20-150				Out	On Spkr.	A-3876													

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quem Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Photofact Set No.		
1st.	I-20E	16-5712		456				S-519	ST-193		5E27		Vol	V20	M-63-Z		A.	D13-137		41	G1				Continued	SONORA BE		
2nd.	I-28E	16-5714		456				N-2245E	ST-105		5A1		Vol	N-2257	M-60-Z		A.	D13-133		41	G1					BJE		
1st.	N-1598E	16-5712		456				N-2254E	ST-105		5A1		Vol	N-2257	M-60-Z		A.	D13-133		41	G1					BJI		
2nd.	N-1596E	16-5712		456				S-614	ST-166		6E10		Vol	V-20	M-63-Z		A.	D13-137		41	G1					BS		
1st.	N-1598E	16-5712		456				S-613	ST-189				Tone	V-15	M-60-Z		A.	D13-133		41	G1					EA		
2nd.	N-1596E	16-5712		456				S-811					Tone	V-20	M-63-Z		A.	D13-137		41	G1					F		
1st.	I-20	16-5712		456				S-1206			12E60		Vol	V-15	M-60-Z		A.	D13-133		41	G1					G, GA		
2nd.	I-28	16-5714		456				S-1207					Tone	V-22	M-60-Z		A.	D13-133		41	G1					KA		
1st.	I-20	16-5712		456				S-1207					Bass	V-111	M-60-Z		A.	D13-133		41	G1					KB-73		
2nd.	I-36							N-2747	ST-105		5A1		Vol	N-2623	AM-63-Z		KSS-3			D13-137	E					KD-75		
3rd.	I-37							N-2624	ST-105		5A1		Vol	N-2623	AM-63-Z		KSS-3			D13-137	E					KE-78		
1st.	†	16-6658		456				N-2914	ST-113		4A1		Vol	N-2876	AM-60-Z		KSS-3			D13-133	E	41				KF, KFU		
2nd.	N-2647	16-6658		456				N-3730	F1		F1		Vol	N-3728	AM-40-S		KSS-3		A.	G5	D14-120	E	41	G5		KL-185		
1st.	N-2648	16-6658		456				N-2958	F2		F2		Vol	N-4462	T-78		A.	D13-133X		41	G1					KNF, KNU		
2nd.	N-2958	16-5712		456	N-4463			N-2624	ST-105		5A1		Tone	N-3369	M-61-S		A.	D11-137		41	G1					XTU		
1st.	N-2959	16-5712		456	N-4463			N-3295	ST-105		5A1		Vol	N-2963	M-64-Z		A.	D13-130		41	G1					XU9		
2nd.	N-2961	16-5714		456				N-2787	ST-113		4A1		Vol	N-3045	AM-60-Z		KSS-3		A.	D13-133	E	41				KVU-85, KVU-97		
1st.	N-3043	16-6658		456				N-2914	ST-113		4A1		Vol	N-3248	AM-60-Z		KSS-3		A.	D13-133	E	41	G5		KWU78			
2nd.	N-3044	16-6660		456				N-3129	ST-105		52A1		Vol	N-1864	AM-60-Z		KSS-3		A.	D13-133	E	41	G1		KWU79			
1st.	N-3300	16-6658		456				N-3645	F2		F2		Vol	N-2982	AM-60-Z		A.	D13-133		41	G1					KXF, KXFU		
2nd.	N-3301							N-3668					Tone	N-3369	AM-63-Z		KSS-3		A.	D13-137	E	41				KY, KYU		
1st.	N-2791	16-5712		456				N-3406	ST-108		6A1		Vol	N-2982	AM-60-Z		KSS-3		A.	D13-133	E	41				KZ		
2nd.	N-1596							S-25	ST-105		5A1		Vol	N-3369	AM-63-Z		A.	D13-137		42	G1					L		
1st.	N-3664	16-5712		456	†			N-3129	ST-105		5A1		Vol	N-1864	AM-60-Z		A.	D13-133		42	G1					LB, LBU		
2nd.	N-3657	16-5714		456				N-3645	F2		F2		Vol	N-2982	AM-60-Z		A.	D13-133		42	G1					LC, LCU		
1st.	N-3636	16-5712		456				N-3668					Tone	N-3369	AM-63-Z		KSS-3		A.	D13-137	E	41	G1					LD, LDU
2nd.	N-3687	16-5714		456				N-3406	ST-108		6A1		Vol	N-2982	AM-60-Z		A.	D13-133		42	G1					LKS, LKSU		
1st.	N-3410	16-6658		456				N-3633	ST-105		4A1		Vol	N-3369	AM-63-Z		KSS-3		A.	D13-133	E	41	G1					LMS, LMSU
2nd.	N-2648							N-4478	F2		F2		Vol	N-4071	AM-60-Z		KSS-3		A.	D13-133	E	47					LP	
1st.	I-20	16-6658		456				N-4318	ST-113		4A1		Tone	N-4033	AM-60-Z		KSS-3		A.	D13-133	E	41					LQS, LQSU	
2nd.	I-21	16-6660		456				N-4255			3A07		Vol	N-3877	AM-60-Z		KSS-3		A.	D13-133	E	41					LR	
1st.	N-3043	16-6658		456				N-4010	ST-113		4A1		Vol	N-4213	AM-63-Z		KSS-3		A.	D13-137	E					LTF, LTFU		
2nd.	N-3091							N-2747	ST-105		5A1		Vol	N-4014	AM-60-Z		KSS-3		A.	D13-133	E	41					LU	
1st.	N-1598	16-6658		456	N-3443			N-2624	ST-105		5A1		Vol	N-2623	AM-63-Z		KSS-3		A.	D13-137	E					LV181, LV186		
2nd.	N-3463							N-4175	ST-105		F8	5EV6	Vol	N-3045	AM-60-Z		KSS-3		A.	D13-133	E	41					LW	
1st.	N-3633	16-5712		456				N-4438	F2		F2		Vol	N-4125	AM-60-Z		KSS-3		A.	D13-133	E	41					LWU	
2nd.	N-4069	16-6658		456				N-4394	F2		F2		Tone	N-4398	AM-60-Z		KSS-3		A.	D13-133	E	41					LZ	
1st.	N-4070	16-6660		456				N-4425	F2		F2		Vol	N-4398	AM-58-S		KSS-3		A.	D14-133	E	41					M	
2nd.	N-3876	16-6658		456				N-3406	ST-108		6A1		Vol	N-3411	AM-58-S		KSS-3		A.	D13-133	E	41					MTF-164P	
1st.	N-3754							S-24	F1		F1		Vol	V-20	M-63-Z		A.	D13-137		41	G1	F-4	5436	H1				
2nd.	N-4170							S-300	F2		F2		Vol	V-23	AM-40-S		KSS-3		A.	D14-120	E	41						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No. Tuned	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Ncote	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	N Note	Burgess Part No.	N Note
SONORA—Continued PL29, PL37	4 1A7G, 1N5G, 1H5G, 1C5G	N-1367	PRS150-12		BR1215			M-10-150		UT-121				Out	N-1564	A-3329	T22S47		A-2927		742 & 738		4F.....Z30		
PS	5 6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT (40)	C-230	PRS150-12		BR1215			M-10-150		UT-121				Out	On Spkr.	A-3876	T22S45		A-2928						
Q, QA	6 6D8G, 1H4G, 637G, 677G, 6L5G, 1J6G (49)	C-240	PRS150-16		BR1615			M-16-150		UT-161				Chk	H-9										
R, RA	7 6K8, 6K7, 6Q7G, 6J5G, *25L6G, 25Z6G (47)	C-241	PRSA150-40-20		BRD4215			M-2X40-150		TA-240				In	I-103	A-4713	T20D75		A-2920						
RBU 175, RB 207	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT (47)	N-3302	PRSA150-40-40		BRD4415			M-2X40-150		TA-430				Out	On Spkr.	A-3831	T22S47		A-2938						
RCU-208	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT (47)	N-3658	PRSA150-40-40		BRD4415			M-2X40-150		TA-440				Chk	H-8	C-1355	T20C53								
RDU-209	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z6GT (47)	N-3658	PRSA150-40-40		BRD4415			M-8-150		UT-81				Out	N-4875	A-3330	T22S46		A-2905						
RET-210	7 6SG7, 6J5, 6K7, *6S7Q, 6K8GT, 5V3GT (47)	N-4411	PRSA450-10-10		EZ12D455			PR25/10		EL-353				Pwr	N-4396	P-6113	T22R01		P-2951						
RGMF-212	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)	N-4586	PRSA150-40-40		EZ5515			DSB2X40-150		TA-440				Out	N-4395	P-3878	T22S47		A-2931						
RGMF-230	6 12BA6, 12BE6, 12AT6, 35L6GT, 35W4 (47)	N-5051	PRSA150-40-40		BRD4415			M-2X40-150		TA-440				Out	N-4875	A-3330	T22S46		B3	A-2928	B3				
RKRU-215																									
RMR 219, 402A	8 6S5G, 6J5, 6K7, *6S7Q, 25L6GT, 25Z6GT (47)	N-5395	AF-88BD & PRS150-50		UP7D119 & BR3015	A4,3		DY-419 & M-50-150		EL-25 & TA-330				Out	N-5588	A-3825	T22S60		A-2905						
RNR 220, 245	6 12SK7, 12SA7, 12SQ7, 35L6GT, 35Z6GT (47)	N-3658	PRSA150-40-40		BRD4415			M-2X40-150		TA-440				Out	N-4875	A-3330									
RQU-222																									
RWFU-238	2 50L6GT, 35Z6GT	N-5439	AF88D4A		UP5515C			DY-305		EL-352				Out	N-4875	A-3330	T22S46		B3	A-3031					
RX-223	4 1A7GT, 1N5GT, 1H5GT, 3Q5GT	N-1367	AF88D4A		BR-815			M-8-150		UT-81				Out	N-4875	A-3330	T22S46		B3	A-2930		758		17GD60	
SL	5 1A7G, 1N5G, 1H5G, *1A5G	N-1367	PRS150-8		BR815			M-8-150		UT-81				Out	On Spkr.	A-3881	T22S48		A-2933						
SM	5 6A8G, 6K7, 6Q7G, 6G6G, 6ZY5G (47)	N-1468												Pwr	N-1476										
TB	7 6A8G, 6K7G, 6Q7G, 6J5G, 25L6G, 25Z6G (47)	N-1755			EZ42215			DSB-403020-150					Out	On Spkr.	A-3879	T22S48		A-2932							
TC	5 6A8G, 6K7, 6Q7G, 25L6G, 25Z6G (47)	N-1312	AF44F		UP2225			DY-2X20-350		EL-120				Pwr	N-1315		T22S45		A-2928						
TD	7 6A8G, *6J5G, 6K7G, 6F5G, 25L6G, 25Z6G (47)	C-237	AF88D		UP4415			DY-3X40-150		EL-34C				Out	On Spkr.	A-3876	T22S45		A-2928						
TE38, TE40, TE41	1 70L7GT	N-1866			EZ3215C			DSB-303					Out		A-3876	T22S45		A-2928							
TF 39	4 1A7G, 1N5G, 1H5G, 1C5G	N-1367	PRS150-8		BR815			M-8-150		UT-81				Out	On Spkr.	A-3329	T22S47		742 & 482		4F.....B30		5DA60.....6TA60		
TH-46	4 1A7G/GT, 1N5G/GT, 1H5G/GT, 1A5G/GT	N-1367	PRS150-8		BR815			M-8-150		UT-81				Out	On Spkr.	A-3857	T22S48		A-2937						
TJ62, TJ63	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-2015	PRSA150-40-20		BRD4215			M-2X40-150		TA-240				Out	On Spkr.	A-3876	T22S45		A-2928						
TJF 68	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-2015	PRSA150-40-20		BRD4215			M-2X40-150		TA-240				Out	On Spkr.	A-3876	T22S45		A-2928						
TK-44	4 12K7GT, 12J7GT, 50L6GT, 35Z6GT (47)	N-1850			EZ3215C			DSB-303					Out	On Spkr.	A-3876	T22S45		A-2928							
TKE	4 12K7GT, 12J7GT, 50L6GT, 35Z6GT (47)	N-2380			EZ3215C			DSB-303					Out	On Spkr.	A-3876	T22S45		A-2928							
TL	4 1A7G, 1N5G, 1H5G, 1C5G	N-1367	PRS150-8		BR815			M-8-150		UT-81				Out	On Spkr.	A-3329	T22S47		A-2927						
TM	4 6A8G, 6K7, 6Q7G, 6G6G (47)	N-1468												Pwr	N-1476										
TN 45	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-1366	PRS150-30-30		BRD3315			M-2X30-150		TA-330				Out	On Spkr.	A-3876	T22S45		A-2928						
TNE	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-1366	PRS150-30-30		BRD3315			M-2X30-150		TA-330				Out	On Spkr.	A-3876	T22S45		A-2928						
TNF 60, TNF 68	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-2015	PRSA150-40-20		BRD4215			M-2X40-150		TA-240				Out	On Spkr.	A-3876	T22S45		A-2928						
TP 108	4 12K7GT, 12J7GT, 50L6GT, 35Z6GT	N-1850			EZ3215C			DSB-303					Out	On Spkr.	A-3876	T22S45		A-2928							
TPE	4 12K7GT, 12J7GT, 50L6GT, 35Z6GT	N-2380			EZ3215C			DSB-303					Out	On Spkr.	A-3876	T22S45		A-2928							
TR 53	6 12A8GT, 12J5GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-2206	PRSA150-40-20		BRD4215			M-2X40-150		TA-240				Out	On Spkr.	A-3876	T22S45		A-2928						
TS	5 6A8GT, 6K7GT, 6J5GT, 25L6GT, 25Z6GT (47)	N-1366	PRS150-30-30		BRD3315			M-2X30-150		TA-330				Out	On Spkr.	A-3876	T22S45		A-2928						
TSA-105, TSA-106	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-1366	PRS150-30-30		BRD3315			M-2X30-150		TA-330				Out	On Spkr.	A-3876	T22S45		A-2928						
TSB 47	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-1366	PRS150-30-30		BRD3315			M-2X30-150		TA-330				Out	On Spkr.	A-3876	T22S45		A-2928						
TSBU	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-2599	PRSA150-40-20		BRD4215			M-2X40-150		TA-240				Out	On Spkr.	A-3876	T22S45		A-2928						
TSG-R	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-2763	PRSA150-40-20		BRD4215			M-2X40-150		TA-240				Out	On Spkr.	A-3876	T22S45		A-2928						
TSU-105	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z6GT (47)	N-1366	PRSA150-40-20		BRD4215			M-2X40-150		TA-240				Out	On Spkr.	A-3876	T22S45		A-2928						

<sup>†</sup>Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	No. 1	Cornell-Dubilier Part No.	Note	Solar Part No.	No. 1	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	No. 1	Burgess Part No.	No. 1	
		"A"	"B"																						
SONORA—Continued	5	6A8G, 6K7G, 6Q7G, 6K6G, 80 (47)	N-2224	PRSB450-8-8		EZ588			DH-2X8-450SS		TU-88		Pwr Out	N-2226	P-6010	T22R01		P-2950							
TT 52, TT 64, TU 64, TV48, TVU48	4	12A8GT, 12J7GT, 50L6GT, 35Z5GT (47)	N-2174			EZ3215C			DSB-303				Out	On Spkr.	A-3878	T22S47		A-2931							
TW49, TWU49	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT (47)	N-2015	PRSA150-40-20		BRD4215			M-2X40-150		TA-240		Out	On Spkr.	A-3876	T22S45		A-2928							
TX53, TX58	6	6A8GT, 6K7G, 6Q7G, 25C6G, 25Z6G (47)	N-2436	PRS150-30		BR3015			M-30-150		UT-301		Out	On Spkr.	A-3876	T22S45		A-2928							
TXF 67	7	6A8GT, 6K7G, 6Q7G, 25C6G, 25Z6G, 6U5/6G	N-2436	PRS150-30		BR3015			DY-311		EL-330		Out	On Spkr.	A-3876	T22S45		A-2928							
TY 54	7	6A8G, 6K7G, 6Q7G, 6J5G, 6K6G, 80 (47)	N-2283			UP15D35			DY-311		UT-301		Pwr Out	N-2447	A-3876	T22S45		A-2928							
TZ 55	12	6A8GT, 6K7G, 6Q7G, 6F6G, 80 (47)	N-2459	PRSA50-16		BR1645			M-16-450		UT-16		Pwr Out	N-2149	P-6119	T22R02		P-2951							
W17, W19, W24	1	32L7GT	N-1675	PRSA150-30		BR3015			M-16-450		UT-16		Pwr Out	N-2514	A-2912	T22S74		A-2901							
WAU 243	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	N-5051	PRSA150-40-40		BRD4415			DSB-2X40-150		TA-440		Out	On Spkr.	N-6131	A-3330	T22S45		A-3031						
WDU 233	4	1R5, 104, 155, 3V4	N-6006						DY-304		M-100-25		Out	N-6004	A-3879	T22S47		A-2932		753					
WG FU 241, WG FU 242	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	N-5051	PRSA150-40-40		BRD4415			DSB-2X40-150		TA-440		Out	N-4375	A-3330	T22S45		A-3031							
XL 28	4	1A7G, 1N5G, 1H5G, 1C5G	N-1367	PRS150-12		BR1215			M-10-150		UT-121		Out	On Spkr.	A-3329	T22S47		A-2927		742 & 738		4F		7830	
SOUND, INCORPORATED	3	ATED	20, 20 Mfd.	PRSA150-20-20		EZ2215			M-2X20-150		TA-220		Mic Out	T-4103	A-3876	T22S45		A-2928							
INTERCOM SYSTEM..	4	12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT	20, 20 Mfd.	PRSA150-20-20		EZ2215			M-2X20-150		TA-220		Mic Out	T-4103	A-3876	T22S45		A-2928							
5R2	5	6SQ7, 6SL7GT, 26V6GT, 6X5GT	40 Mfd. 140 Mfd. 25 Mfd.	AF8J		UP4045 UP12535 BR252A			DY-40-450 DY-125-350		EL-4		Chk Pwr Out			T20A19	B7								
MB7E3	5	6SQ7, 6SL7GT, 26V6GT, 6X5GT (51)	40 Mfd. 140 Mfd. 25 Mfd.	PRS25-25		UP25-25 UP4045 UP12535 BR252A			M-25-25		TA-25		Chk Pwr Out	A-3870	T22R32	T22S88									
MB7E8	5	6SQ7, 6SL7GT, 26V6GT, 6X5GT (51)	40 Mfd. 140 Mfd. 25 Mfd.	PRS 25-25					M-25-25		TA-25		Chk Pwr Out			T20A19	B7								
SPARKS - WITHIN G	TON—(See Sparton)																								
SPARTON																									
5A116, SAW16	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	PA4301-1	PRSA150-40-20		BRD4215			DSB-2X40-150		TA-240		Out	On Spkr.	A-3876	T22S45		A-2928							
5AM26-PS	5	6SA7GT, 6SK7GT, 6SQ7GT, 6F6GT, 5Y3GT (44)	10, 10, 20 Mfd.	AF22J4A		DY-2X10-450-20-25			EL-202				Pwr Out	P-6119	T22R01		P-2951								
5AH06, 5A106, 5A/W06	5	14Q7, 14A7, 14B7, 50L6GT, 35Z5GT (47)	PA4301	PRS150-40-40		BR4415			M-40+30-150		TA-430		Out	On Spkr.	A-3878	B3	A-2931	B3							
6AM26, 6AW26PA	6	6A8GT, 7A7, 7B6, 6K6GT/G, 5Y3GT/G (51)	PA4300-5	AF44J4A		UP6C147			DY-316		EL-312		Pwr Out	A-3876	P-6120	B9	T22R02		P-2951						
6F1 (Ford 1940)	6	7A7, 7B8, 6SQ7GT, 6K6GT, 6X5GT	A-13946	AF32K4A		UP2235C			DY-310		EL-153		Pwr Out	B-844002-1	A-3823	T22S47		A-2901							
6F1D (Ford)	6	7A7, 7B8, 7B6, 7C5, 7Y4	A-13946	AF32K4A		UP2235C			DY-310		EL-153		Pwr Out	B-8311	A-8325	T22S47		A-2931							
6F2D (Ford)	6	7A7, 7B8, 6SQ7GT, 6V6GT, 6X5GT	A-20092	AF32K4A		UP2235C			DY-310		EL-153		Pwr Out	B-8312-1	A-3877	T22S46		A-2930							
7-36, 7EW36	7	6SK7GT, 6SA7GT, 6SQ7GT, 6F6G, 5Y3G	A-14684-7 A-14732-8	PRS450-8 PRSA50-8		UP15D145 BR845			DY-3X15-450		EL-344		Pwr Out	B-8285-1	P-6012	T22R04		P-2952							
7-46, 7AM46-7AM46PA, 7RM46PA, 7BW46PA	7	7A7, 7Q7, 7B6, 26F6, 5Y3GT/G	PA4300-1 PA4303-1	AF-222-J PRSA50-4		UP6C147 BR445			M-8-450		UT-8		Pwr Out	A-3311	T22S64		A-2904								
8-36, 8 (Series) 8-61, 8W31, 8W71	8	7A7, 7Q7, 7B6, 26F6, 5Y3G, 6U5	A-14684-7 A-14782-8 A-14782-6 A-14782-9 A-14684-7	PRS450-8 PRS450-8 PRS25-50 PRS25-25 UP15D145		BR845 BR845 BR502 BR252A UP15D145			M-8-450 M-8-450 M-50-25 M-25-25		EL-344 UT-8		Pwr Out	A-3850	P-6012	T22R04		P-2952							
8-46, 8AM46	8	7A7, 7Q7, 7B6, 26F6, 5Y3GT/G, 6U5/6G5	PA4300-1	AF-222-J		UP15D145			M-4-450		UT-8		Pwr Out	A-3850	T22S64		A-2904								
10AB76-PA, 10AM76-PA, 10BM76-PA, 10BW76-PA, 1015	10	6SG7, 7Q7, 6SK7GT, 6E5, 6S6J7GT, 6SSGT, 6V6GT/G, 5Y3GT (44)	PA4303-1 PA4300-1 PA4302-20 PA4303-4	AF-222-J PRSA50-4 UP15D145 BR202A PRSA50-8		BR445 UP15D145 BR202A BR845			DY-3X15-450		EL-344		Pwr Out	A-3850	P-6012	T22R04		P-2952							
1021, Y21, Y31, B31, W41, Y41, W61	10	7A7, 7Q7, 7B6, 2A4, 6V6G, 5Y3G, 6AF6G	A-14684-7 A-14792-6 A-14792-8	PRS25-50 PRS450-8		UP15D145 BR502			DY-3X15-450		EL-344		Chk Pwr Out	A-15386	P-6012	T22R04		P-2952							
11-36	11	7A7, 7Q7, 7B6, 6SJ7GT, 7A4, 26V6G, 5Y3G, 6U5/6G5	A-14782-8 A-14782-6 A-14782-7 A-14782-7	PRS450-8 PRS25-50 UP15D145		BR502 BR845 UP15D145			M-8-450 M-8-450 M-30-25		UT-8 TA-50		Chk Pwr Out	A-15386	P-6012	T22R06		P-2952							
219P, 219PD, 409GL	2	6A7, 25Z5 & BK-80B Ballast	A-14927-1	AF66D		UP3315 EZ3215C			M-10-25		TA-10		Chk Pwr Out	A-15386	P-6014	T22R06		P-2954							
	4	6A8GT, 6J7GT, 25L6GT, 25Z6GT & BK3A Ballast	A-14972			DSB-303			DY-2X30-150		EL-230		Out	On Spkr.	A-3876	T22S45		A-2928							

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quar Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Product Set No.		
1st.	N-2159.	16-6658.	456				N-2225.	ST-167.		5E18.		Vol	N-2223.	M-63-Z.			D13-137.		41	G1			Cont	ued	SONORA		
2nd.	N-1596.						N-2167.			3A07.		Vol	N-2173.	AM-40-S.	KSS-3	A.	G33	D16-120.	E	41	G33					TT52, TT64, TT164, TV48, TVU48	
1st.	N-2172.	16-6658.	456				N-2014.	ST-105.	F13	5A1.	F13	Vol	N-2087.	AM-60-Z.	KSS-3	A.	G22	D13-133.	E	41	G22					TW49, TWU49	
2nd.	N-1596.	16-5712.	456				N-2519.		F2		F2	Vol	N-2522.	AM-60-Z.	KSS-3	A.	33	D13-133.	E	41	33					TX53, TX58	
1st.	N-2461.	16-6658.	456				N-2431.		F13		F2	Vol	N-2411.	M-60-Z.	KSS-3	A.		D13-133.	E	41	G1					TXF67	
2nd.	N-2462.	16-6660.	456				N-2432.		F2		F2	Tone	N-2435.	M-60-Z.	KSS-3	A.		D13-133.		41	G1						
1st.	N-2461.	16-5712.	456				N-2433.		F2		F2	Vol	N-2411.	M-60-Z.	KSS-3	A.		D13-133.		41	G1						
2nd.	N-2462.	16-5714.	456				N-2237.					Tone	N-2435.	M-60-Z.	KSS-3	A.		D13-137.		41	G1						
1st.	N-2159.	16-6658.	456				N-2300.					Vcl	N-2282.	M-63-Z.		A.		D13-137X.								TY54	
2nd.	N-2286.	16-6660.	456				N-2512.					Tone	N-2281.	M-63-Z.		A.		D13-133.								TZ56	
1st.	N-2531.	16-5712.	456				N-2512.					Vol	N-2482.	T-103.				D13-137X.									
2nd.	N-2532.	16-5714.	456				N-2512.					Tone	N-2483.	M-60-Z.				D13-133.									
1st.	N-4913.	16-6658.	456			L-24	N-6187.	ST-107.		5A15.		Vol	N-2087.	AM-60-Z.	KSS-3	A.		D13-133.	E	41						W17, W19, W24	
2nd.	N-4846.						N-5988.	ST-113.		4A1.		Vol	N-6007.	M-63-Z.		A2.		D13-137.		42	G1					WAU-243	
1st.	N-5973.		456				N-6102.	ST-113.		4A1.		Vol	N-6097.	AM-60-Z.	KSS-3	A.		D13-133.	E	41						WDU-233	
2nd.	N-4846.						N-1507.	ST-105.		5A1.		Vol	N-1504.	T-103.				D13-137X.								WG FU241,	
1st.	N-1391.	16-6658.	456				N-1507.																		WG FU242		
2nd.	N-1509.																								XL28		
1st.							30E080X20.	ST-113.		4A1.		Vol	.....†														SOUND, INC.
								†.	ST-107.	5A15.		Vol	.....†													INTER COM.	
								†.		46A1.		Mike Phono Tone	.....†	M-60-Z				D13-133.								SYSTEM (3 Tubes)	
												Mike Phono Tone	.....†	M-60-Z				D13-133.								5R2	
																									MB7E3		
																									26.		
																									MB7E8		
1st.	AA6800-12.	16-6658.	456				PC-63000-3.	ST-107.		5A15.		Vol	PA-4400-3.	AM-60-Z.	KSS-3	A.		D13-133.	E	41				(See	Sparton	PARK	S-WITHINGTON
2nd.	AA6800-2.	16-6660.	456				63000-4.					Vol	PA4400-3.	AM-60-Z.	KSS-3	A.		D13-133.	E	41							SPARTON
1st.	†.	16-6658.	455	†.	L-40.		63000-3C.	ST-107.		5A15.		Vol	PA4400-2.	AM-60-Z.	KSS-3	A.		D13-133.	E	41							5A116, 5AW116
2nd.		16-6660.	455				63000-3C.					Vol	PA4400-2.	AM-60-Z.	KSS-3	A.		D13-133.	E	41							5A26-PS
1st.	AA6800-1.	16-6658.	455				C-2280-102.	ST-108.		6A1.		Vol	PA4400-1.	AM-60-Z.	KSS-3	A.		D13-133.	E	41							5AH06, 5AI06, 5AW06
2nd.	AA6800-2.	16-5560.	456				C-2280-102.	ST-108.	F8	5EV6.		Vol	PA4400-5.	AM-60-Z.	KSS-3	A.		D13-133.	E	41							6AM26, 5AW26PA
1st.	AA6800-3.	16-5558.	456	†.	L-71.		C-2280-101.		F2			Sen.	A-15144.														A-15949.
2nd.	AA6800-2.	16-6660.	455				C-2280-101.		F2			Vol	A-15142.														6F1 (Ford 1940)
1st.	A-15955.						C-2280-11.					Tone	A-15143.														A-15949.
2nd.	A-15955-1.											Sen.	A-15952.														6F1D (Ford)
1st.	A-15955-2.		265									Vol	A-15146.														A-15949.
2nd.	A-15955-3.											Tone	A-15952.														6F2D (Ford)
1st.	A-12064-45.	16-5712.	456				C-2280-90A.			10E10.		Sen.	A-15140-3.	AM-66-Z.	KSS-3	A.		D13-139.	E	41							7-36, 7EW36
2nd.	A-12064-46.	16-5714.	456				PC63000-1M.			10E50.		Tone	A-15140-3.	AM-66-Z.	KSS-3	A.		D13-130.	E	41							7-46, 7AM46,
1st.	AA6800-5.	16-6658.	456	†.	L-71.		C-2280-90A.			10E10.		Val	PA4401-2.	AM-66-Z.	KSS-3	A.		D13-139.	E	41							7AM4PA,
2nd.	AA6800-6.	16-6660.	456				C-2280-110.			10E10.		Vol	PA4401-2.	AM-66-Z.	KSS-3	A.		D13-130.	E	41							7BW4PA,
1st.	A-12064-45.	16-5712.	456				C-2280-110.			10E10.		Tone	A-15128-8.	AM-64-Z.	KSS-3	A.		D13-130.	E	41							8-36
2nd.	A-12064-46.	16-5714.	456	†.			C-2280-110.			10E10.		Val	A-15128-8.	AM-64-Z.	KSS-3	A.		D13-139.	E	41							8 (Series), 8-61,
1st.	AA6800-5.	16-6658.	456				C-2280-107.			10E10.		Vol	A-15129-12.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							8W31, 8W61,
2nd.	AA6800-6.	16-6660.	456				C-2280-107.			10E10.		Tone	A-15129-12.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							8W71
1st.	AA6800-5.	16-6658.	456				PC63000-1M.			10E60.		Val	PA4401-2.	AM-66-Z.	KSS-3	A.		D13-139.	E	41							1.
2nd.	AA6800-6.	16-6660.	456				PC63000-11.			10E60.		Vol	PA4401-2.	AM-66-Z.	KSS-3	A.		D13-130.	E	41							15.
1st.	AA6803-1.											Vol	PA4401-2.	AM-66-Z.	KSS-3	A.		D13-139.	E	41							10AB76-PA,
2nd.	AA6803-1.											Tone	PA4400-6.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							10AM76-PA,
3rd.	AA6804-1.		10.7									Val	PA4400-6.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							10BM76-PA,
												Tone	A-15129-12.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							10BW76-PA,
												Vol	A-15129-12.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							10L15
1st.	A-12064-45.											Tone	A-15129-12.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							10-21, Y21, Y31,
2nd.	A-12064-46.	16-5712.	456	†.								Val	A-15129-12.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							B31, W41, Y41,
1st.	A-12064-45.	16-5712.	456				C-2280-110.			10E10.		Tone	A-15129-12.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							W61
2nd.	A-12064-46.	16-5714.	456				C-2280-107.			10E10.		Vol	A-15129-12.	AM-60-Z.	KSS-3	A.		D13-139.	E	41							11-36
1st.	A-12983-6.	16-5712.	456	†.			M-22.			F2.		Vol	A-12708-A1.	M-20-U.		A.		D11-114.		41	G1						219-P, 219-PD
							C-2280-64.			F2.		Tone	A-12708-A1.	M-20-U.		A.		D11-114.		41	G1						409GL

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES									
	No.	Type Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note Part No.	Cornell-Dubilier Part No.	Note Part No.	Solar Part No.	Note Part No.	Sprague Part No.	Note Part No.	Use	Mfr. Part No.	Stancor Part No.	Note Part No.	Thordarson Part No.	Note Part No.	Merit	Note Part No.	Eveready Part No.	Note "A" "B"	Burgess Part No.	Note "A" "B"					
SPARTON—Continued	4	1A7G, 1N5G, 1H5G, 1Q5G	A-14958	PRS150-12		BR1215		M-10-150		UT-121		Out	On Spkr.	A-3329		T22S47		A-2927		741 & 7482		8F		2M30				
411-1	4	6A7, 6F7, 41, 80	A-12706			EZ8845S						Pwr	B-6697	C-2758-3	A-3878	T22S47		A-2931										
417X	4	5 12A8GT, 12K7GT, 12Q7GT, 35L6GT, 40Z5GT	A-15124	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Dut	On Spkr.	A-3876	T22S45		A-2928											
500, 500D	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 40Z5GT	A-15124-1	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876	T22S45		A-2928											
500C, C9, CG, CR, Y, Z	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 40Z5GT	A-15093	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876	T22S45		A-2928											
510, 510D	5	12S47, 12SK7, 12TQ7, 50L6GT, 35Z5GT	A-20135	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876	T22S45		A-2928											
511, 511U	5	12S47, 12SK7, 12TQ7, 50L6GT, 35Z5GT	A-14428			EZ8845S						Pwr	B-6778-1	P-6011	T22R02		P-2951											
518, 518X	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G	A-14684	AF22J4A		UPI1145C		DY-316		EL-202		Dut	On Spkr.	P-6119	A-3822	T22R02		P-2951										
520M	5	6A8GT, 6K7GT, 6Q7GT, 6K6GT, 6X5GT	A-14684-4	AF22J4A		UPI1145C		M-10-150		TA-10		Dut	On Spkr.	A-3877	T22S46		A-2930											
527-2	5	1C7G, *1D5G, 1H6G, 33	A-14273	PRS150-12		BR1215		M-10-150		TA-10		Dut	On Spkr.	A-3877	T22S46		A-2930											
528-2	5	1C7G, *1D5G, 1H6G, 33	A-14273	PRS150-12		BR1215		M-10-150		TA-10		Dut	On Spkr.	A-3877	T22S46		A-2930											
530X	5	6A7, 78, 75, 42, 80	A-14675									Pwr	B-7185	P-6011	T22R02		P-2951											
531X	5	6A8GT, 6SK7GT, 6SQ7GT, 6F6G, 5Y3G	A-14780-1									Pwr	B-7197-AB	P-6011	T22R02		P-2951											
532X	5	6A8GT, 6SK7GT, 6SQ7GT, 6F6G, 5Y3G	A-14780-1									Pwr	B-7197-AB	P-6011	T22R02		P-2951											
538, 538X	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G	A-14073	GL450-16		KR516A		D-16-450		PLS-16		Dut	On Spkr.	A-3878	T22S47		A-2931											
540LX	5	6J8G, 6K7G, 6Q7G, 6F6G, 5Y3G	A-14072	GL450-30		KR530		D-30-450		PLS-30		Dut	On Spkr.	A-3878	T22S47		A-2931											
540SX	5	6J8G, 6K7G, 6Q7G, 6F6G, 5Y3G	A-14072-A	GL450-30		KR530		D-30-450		PLS-30		Dut	On Spkr.	A-3878	T22S47		A-2931											
541SX	5	6J8G, 6K7G, 6Q7G, 6F6G, 5Y3G	A-14072-A	GL450-16		KR530		D-16-450		PLS-16		Dut	On Spkr.	A-3878	T22S47		A-2931											
548X	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G	A-14072-A	GL450-30		KR530		D-30-450		PLS-30		Dut	On Spkr.	A-3878	T22S47		A-2931											
549-1	5	1A7G, *1N5G, 1H5G, 1C5G	A-14958	PRS150-12		BR1215		M-10-150		UT-121		Dut	On Spkr.	A-3329	T22S47		A-2927											
550M	5	6J8G, 78, 75, 42, 80	A-14780									Pwr	B-8054	P-6011	T22R02		P-2951											
558 Series	5	(See Model 518, 518X)	A-14428			EZ8845S						Pwr	B-6778-1	P-6011	T22R02		P-2951											
568, 568X	5	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G	A-14428			EZ8845S						Pwr	B-6778-1	P-6011	T22R02		P-2951											
570M	5	6A8GT, 6K7GT, 6Q7GT, 6K6GT, 6X5GT	A-14684-3	AF44J4A		UP2245C		DY-315		EL-350		Dut	On Spkr.	P-6119	A-3852	T22S47		A-2931										
578, 578X	5	(See Models 518, 518X)	A-14715			EZ8845S						Pwr	B-7185-1	P-6011	T22R02		P-2951											
580X	5	6A7, 78, 75, 42, 80	A-14715			EZ8845S						Pwr	B-7185-1	P-6011	T22R02		P-2951											
581X	5	6A7, 78, 75, 42, 80	A-14715			EZ8845S						Pwr	B-7185-1	P-6011	T22R02		P-2951											
587-2	5	1C7G, *1D5G, 1H6G, 33	A-14273	PRS150-12		BR1215		M-10-150		UT-121		Dut	On Spkr.	A-3877	T22S46		A-2930											
588-2	5	1C7G, *1D5G, 1H6G, 33	A-14273	PRS150-12		BR1215		M-10-150		UT-121		Dut	On Spkr.	A-3877	T22S46		A-2930											
590-1	5	1A7G, 1N5G, 1H5G, 1A5G, 35Z5GT	A-14684-5	AF44D		UP22215		DY-3X20-150		EL-320		Chk	A-15272		T22S48		A-2937											
601B	6	12S47GT, 12A8GT, 12SQ7GT, 35L6GT, 35Z5GT	A-15571	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3857	T22S45		A-2928											
601MS	6	6A8GT, 6SK7GT, 6SQ7GT, 6X5GT	A-14782-5	PRS450-20		BR2045		M-20-450		UT-20		Out	B-8230	P-6134	T22F10		P-2945											
601S	6	6A8GT, 6SK7GT, 12A8GT, 12SQ7GT, 35L6GT, 35Z5GT	A-14782-4	PRS350-24		BR2045		M-20-350		UT-203		Out	B-8230	P-6134	T22S47		A-2931											
608, B, G, K, R, V, W	5	6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G (BX49B-Ballast)	A-14500	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876	T22S45		A-2928											
620M	6	6J8G, 78, 75, 76, 6AC5G, 80	A-14799			EZ8845		DH-3X8-450SS		TU-88 & UT-8		Pwr	B-8054	P-6011	T22R02		P-2951											
628, 628X	6	6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 6E5	A-14073	GL450-16		KR516A		D-16-450		PLS-16		Pwr	B-7048	P-6011	T22R02		P-2951											
637-6, 687-6	6	1C7G, *1D5G, 1H6G, 1H4G, 1E7G	A-14273	PRS250-12		BR1225		M-16-250		UT-122		Chx	A-12597		T22S47		A-2931											
638-6	6	1C7G, *1D5G, 1H6G, 1H4G, 1E7G	A-14273	PRS250-12		BR1225		M-16-250		UT-122		In	B-7081	A-4713	T20D75		A-2920											
			A-14326	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Out	A-14353	A-3857	T22S48		A-2937											

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS					Section G CONTROLS							Section H VIBRATORS				MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat. Part No.	Note	Photolab Set No.		
1st.	A-12064-35	16-5712		456				C-2280-98	ST-105		5A1		Vol	A-15132-1	M-6C-Z		A		D13-133		41	G1				Continued—	SPARTON	
2nd.	A-12064-35	16-5714		456				C-2758		F2		F2	Vol	A-12708	M-51-Z		A		D13-128		41	G2					411-1	
1st.	A-12064-6	16-5712		456				C-2280-66	ST-196		4E45		Vol	A-15129	AM-60-Z	KSS-3	A		D13-133	E	41						417X	
2nd.	A-12064-6	16-6661		456				C-2280-66	ST-196		4E45		Vol	A-15129-1	AM-60-Z	KSS-3	A		D13-133	E	41						500, 500D	
1st.	A-12064-17	16-5712		456				C-2280-44	ST-168		F1	F13	Vol	A-15129	AM-60-Z	KSS-3	A		D13-133	E	41						500CB, CG, CR, Y, Z	
2nd.	A-12064-17	16-5714		456				C-2280-55	ST-196		4E45		Vol	A-15129 (cr)	AM-60-Z	KSS-3	A		D13-133	E	41						500, 500D	
1st.	A-12064-17	16-5714		456				C-2280-65A		F1		F13	Vol	A-15129-1	AM-60-Z	KSS-3	A		D13-133	E	41						500, 500D	
2nd.	A-20139	16-5712		456				C-2280-103U		F13		F13	Vol	A-20137	AM-60-Z	KSS-3	A		D13-133	E	41						510, 510D	
1st.	A-20140	16-5714		456				C-2280-44	ST-168		F12		Vol	A-14216-A	M-6C-Z				D13-133								511, 511U	
2nd.	A-12064-16	16-5712		456				C-2280-58M	ST-167		F12		Vol	A-14216-A	M-63-Z				D13-133								518, 518X	
1st.	A-12064-17	16-5714		456				C-2280-38		F1		F13	Vol	A-14274	M-60-Z		A		D13-133	E	41	G1					520-M	
2nd.	A-12064-17	16-5712		456				C-2280-37		F13		F13	Tone	A-12987	M-63-Z				D13-137								527-2	
1st.	A-12064-15	16-5714		456				C-2280-38		F1		F1	Vol	A-14274-A	M-6C-Z				D13-133								528-2	
2nd.	A-12064-14	16-5712		456				C-2280-38		F1		F1	Tone	A-12987-A	M-51-Z				D13-128								530X	
3rd.	A-12064-15	16-5714		456				C-2280-57	ST-168		F12		Vol	A-15129-2	AM-6C-Z	KSS-3	A		D13-133	E	41						531X	
2nd.	A-12064-17	16-5714		456				C-2280-59X		F2		F2	Vol	A-15130-5	AM-60-Z	KSS-3	A		D13-133	E	41						532X	
1st.	A-12064-39	16-5712		456				C-2280-59X		F2		F2	Tone	A-15130-5	AM-60-Z	KSS-3	A		D13-133	E	41						538, 538X	
2nd.	A-12064-17	16-5714		456				C-2280-24	ST-168		F12		Tone	A-15129-2	AM-60-Z	M-60-Z			D13-133								540LX	
1st.	A-12064-17	16-5712		456				C-2280-44	ST-168		F12		Vol	A-15130	AM-60-Z	KSS-3	A		D13-133								540SX	
2nd.	A-12064-29	16-5712		456				C-2280-44	ST-168		F12		Tone	A-15130	AM-60-Z	KSS-3	A		D13-133								541SX	
1st.	A-12064-30	16-5714		456				C-2280-77		F2		F2	Vol	A-15130	AM-60-Z	KSS-3	A		D13-133								548X	
2nd.	A-12064-30	16-5714		456				C-2280-24	ST-168		F12		Tone	A-14216-A-1	M-60-Z	KSS-3	A		D13-133								549-1	
1st.	A-12064-20	16-5710		345				C-2280-63		F1		F1	Vol	A-14217-A-1	M-63-Z	M-51-Z			A2								550M	
2nd.	A-12064-21	16-5710		456				C-2280-44	ST-168		F12		Tone	A-14217-A-1	M-63-Z	M-51-Z			D13-137								(See Model 518, 518X)	
1st.	A-12064-14	16-5712		456				C-2280-63		F1		F1	Vol	A-14217-A-1	M-63-Z	M-51-Z			D13-128								558 Series 558, 568X	
2nd.	A-12064-31	16-5712		456				C-2280-44		F12		F12	Vol	A-15129-4A	AM-6C-Z	KSS-3	A		D13-133	E	41							570M
1st.	A-12064-24	16-5714		456				C-2280-44	ST-168		F12		Vol	A-15129-3	AM-60-Z	KSS-3	A		D13-133	E	41							578, 578X
2nd.	A-12064-17	16-6663		456				C-2280-58M	ST-167		F12		Tone	A-15128	AM-64-Z	KSS-3	A		D13-130	E	41							580X
1st.	A-12064-16	16-5712		456				C-2280-29	ST-168		F12		Vol	A-14216-A	M-60-Z				D13-133								587-2	
2nd.	A-12064-17	16-5714		456				C-2280-58AX	ST-167		F12		Tone	A-14217-A	M-63-Z				D13-137								588-2	
1st.	A-12064-34	16-5712		456				C-2280-37		F1		F1	Vol	A-15129-4A	AM-6C-Z	KSS-3	A		D13-133	E	41							590-1
2nd.	A-12064-17	16-5714		456				C-2280-37		F1		F1	Tone	A-15129-4A	AM-60-Z	KSS-3	A		D13-133	E	41							601B
1st.	A-12064-14	16-5712		456				C-2280-37		F1		F1	Vol	A-14274-A	M-60-Z				D13-133								601MS	
2nd.	A-12064-14	16-5714		456				C-2280-37		F1		F1	Tone	A-12987-A	M-51-Z				D13-128								601S	
3rd.	A-12064-15	16-5714		456				C-2280-67	ST-105		5A1		Vol	A-15132-1	AM-60-Z				A2								602, B, G, K, R. V., W	
1st.	A-12064-16	16-6661		456				C-2280-81U	ST-196		5E45		Vol	A-15129-7	AM-60-Z	KSS-3	A		D13-133	E	41							620M
2nd.	A-12064-32	16-5712		456				C-2280-92	ST-168		F12		Vol	A-15129-6	AM-60-Z	KSS-3	A		D13-133	E	41							628, 628X
1st.	A-12064-32	16-5712		456				C-2280-100U		F1		F1	Vol	A-15129-8	AM-60-Z	KSS-3	A		D13-133	E	41							637-6, 687-6
2nd.	A-12064-32	16-5714		456				C-2280-47					Vol	A-14503	M-60-Z				D13-133								638-6	
1st.	A-12064-17	16-5714		456				C-2280-44	ST-168		F12		Vol	A-15130-1	AM-60-Z	KSS-3	A		D13-133	E	41							638-6
2nd.	A-12064-17	16-5714		456				C-2280-29	ST-168		F12		Vol	A-14216-A	M-60-Z				D13-130	E	41							640B
1st.	A-12064-19	16-5712		456				C-2280-42		F1		F1	Vol	A-14217-A	M-63-Z				D13-133								640B	
2nd.	A-12064-19	16-5714		456				C-2280-42		F1		F1	Tone	A-14274	M-60-Z	KSS-3	A		D13-133	E	41							640B
3rd.	A-12064-19	16-5714		456				C-2280-42		F1		F1	Vol	A-12987-A	M-63-Z				A2								640B	
1st.	A-12064-14	16-5712		456				C-2280-42		F1		F1	Vol	A-14274-A	M-60-Z	KSS-3	A		D13-133								640B	
2nd.	A-12064-14	16-5712		456				C-2280-42		F1		F1	Tone	A-12987-A	M-63-Z				A2								640B	
3rd.	A-12064-15	16-5714		456				C-2280-42		F1		F1	Vol	A-14274-A	M-60-Z	KSS-3	A		D13-133								640B	

+ Information not available.

MFR. & MDDEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell- Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			No.	Mfr. Part No.																					
SPARTON—Continued																									
640LX	6 6K7G, 6J8G, 6Q7G, 6F6G, 5Y3G	A-14684-2	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	B-7270-1	P-6011	T22R02		P-2951									
640SX	6 6K7G, 6J8G, 6Q7G, 6F6G, 5Y3G	A-14684-2	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	B-7270-1	P-6011	T22S47		A-2931									
642X	6 7A7, 7J5, 7B6, 7B5, 7Z4	A-14782-9	PRS25-25		BR252A		M-25-25		TA-25		Pwr Out	B-8375	A-3852	T22R02		P-2951									
649-6L, 649-6S	6 6J8G, 1ID5GP, 6T7G, 1G5G, 6ZY5G	A-14684-3	AF44J4A		UP2245C		DY-315		EL-350		Op Spkr.	A-3878	T	T22S47		A-2931									
651 Series	6 6A8GT, 6SK7GT, 6SQ7GT, 6F6G, 5Y3G	A-15755	UP6CJ20		DY-3X20-450					Pwr Out	B-8234	A-3329	T22S47		A-2927										
652X, 652XD	6 7B8, 6SK7GT, 6SQ7GT, 26F6G, 5Y3G	A-20316	PRS450-16		BR1645		M-16-450		UT-16		Pwr Out	B-8233-1	A-3311	T22S64		A-2904									
660M	6 SA7, 7B, 75, 76, 6AC5G, 80	A-14799	EZ8845		DH-3X8-450SS		TU-38 & UT-8		Pwr Out	B-8054	A-3852	T22S58		A-2931											
661RP	7 6SA7GT, 6SK7GT, 6SQ7GT, 6F6G, 6SQ7GT, 5Y3G, 6US/6G5	A-14780-2	PRS250-12		BR1225		M-16-250		UT-122		Pwr Out	B-8054-2	P-6011	T22R02		P-2951									
668, 668X	6 6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 6E5	A-14073	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	B-7048	P-6011	T22R02		P-2951									
670-5L, 670-6S	6 6J8G, 1ID5GP, 6T7G, 1G5G, 6ZY5G	A-14782-1	PRS250-12		KR530		D-30-450		PLS-30		Chk	A-12597	A-3822	T22S47		A-2931									
672-6XA, 672-6XE	6 7A8, 7B7, 7C6, 26G6G, 6ZY5G	A-14927-2			BR1225		M-16-250		UT-122		Pwr Out	B-7283	T												
678, 678X	6 6A8G, 6K7G, 6Q7G, 6F6G, 5Y3G, 6E5	A-14073	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	B-7048	P-6011	T22S48		A-2937									
687-6	6 1C7G, 1ID5G, 1H6G, 1H4G, 1E7G	A-14273	PLS250-12		KR530		D-30-450		PLS-30		Chk	A-12597	A-3822	T22S47		A-2931									
688-6	(See Model 638-6)				BR1225		M-16-250		UT-122		Pwr Out	B-8348	A-3329	T22S47		A-2927									
690M	6 6J8G, 7B, 75, 76, 6AC5G, 80	A-14799			EZ8845		DH-3X8-450SS		TU-38 & UT-8		Pwr Out	B-8054	P-6011	T22R02		P-2951									
699	6 6D6, 6A7, 6Q7, 41, 024	6-8 Mfd. 10 Mfd.	PRS450-8-8		EZ588		DH-2X8-450SS		TU-38		Chk	A-3852	T22S58	A-2931											
711X	7 12SK7GT, 12A8GT, 6H4GT, 12SF5GT, 35LGGT, 35Z5GT	A-15571	PRS450-30-30		BRD3315		M-2X30-150		TA-330		Pwr Out	B-8356	A-3876	T22S56		A-2902									
728X	7 6K7G, 6A8G, 6Q7G, 6F6G, 5Y3G, 6E5/6	A-14403	GL450-30		KR530		D-30-450		PLS-30		Pwr Out	B-7144	P-6120	T22R04		P-2952									
738	7 6A8G, 6K7G, 6H6G, 6J7G, 6Q7G, 6V6G, 5Y3G	A-14072	GL450-16		KR530		D-16-450		PLS-16		Pwr Out	B-7167-2	P-6012	T22R04		P-2952									
740LX, 740LXPA	7 6K7G, 6J8G, 6Q7G, 6F6G, 5Y3G, 6U5	A-14073	GL450-30		KR530		D-30-450		PLS-30		Pwr Out	B-7270-1	P-6011	T22R02		P-2951									
740SX, 740SXPA	7 6K7G, 6J8G, 6Q7G, 6F6G, 5Y3G, 6U5	A-14684-2	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	B-7270-1	P-6011	T22S47		A-2931									
748X	7 6K7G, 6A8G, 6Q7G, 6F6G, 5Y3G, 6E5	A-14073	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	B-6775-2	P-6012	T22R04		P-2952									
760PS	7 6SA7GT, 7B, 75, 6AC5G, 5WAGT, 6U5	A-14799	GL450-30		EZ8845		DH-3X8-450SS		TU-38 & UT-8		Pwr Out	B-8054	P-6120	T22S47		A-2931									
761	7 6SA7GT, 26P5GT, 6SK1GT, 6SF5GT, 6K6GT, 5Y3G	A-14780								Pwr Out	B-8129-1	P-6011	T22R02		P-2951										
768, 768X	7 6K7G, 6A8G, 6Q7G, 6F6G, 5Y3G, 6E5	A-14403	GL450-30		KR530		D-30-450		PLS-30		Pwr Out	B-7048-1	P-6012	T22R04		P-2952									
770, 770PA	7 6J8G, 6K7G, 6P5G, 6F5G, 6F6G, 5V3G	A-14684-7	GL450-30		EZ15D145		DY-3X15-450		EL-344		Chk	A-15386	T												
778, 778X	(See Model 768, 768X)									Pwr Out	B-8108	A-3830	T22R04		P-2952										
782, 782PA	7 6SD7GT, 6SA7GT, 6SK7GT, 6SQ7GT, 26F6G, 5Y3G	A-20110	AF44J4A		UP22245C		M-16-450		UT-16		Chk	A-15386	T												
83IX	8 6SK7GT, 6SA7GT, 6J5GT, 6SQ7GT, 6AC5G, 7Y4	A-15741			BR252A		M-25-25		TA-25		Pwr Out	B-6285	P-6011	T22S54		A-2936									
842SX	8 7B7, 7J7, 6K7G, 7B6, 26F6G, 5Y3G, 6E5	A-14782-9	PRS25-25		UP15D145		DY-3X15-450		EL-344		Pwr Out	B-8240	P-6120	T22R04		P-2952									
880	8 6K7G, 6J8G, 6Q7G, 6J5G, 6AC5G, 5V3G, 6U5	A-14799-2			EZ8845		DH-3X8-450SS		TU-38 & UT-8		Pwr Out	B-8240	P-6120	T22S58		A-2931									
880A	8 6J8G, 6K7G, 6P5G, 6F5G, 6F6G, 5V3G, 6U5	A-14684-7			UP15D145		DY-3X15-450		EL-344		Chk	A-15386	T												
928X	9 6K7G, 6ABG, 6Q7G, 6C5G, 6V6G, 5Y3G, 6E5	A-14113	GL450-30		KR530		D-30-450		PLS-30		Pwr Out	B-8367	P-6012	T22R04		P-2952									
940LX, 940SX	9 6K7G, 6J8G, 6H6G, 6F5G, 6F6G, 5Y3G, 6U5	A-14516	GL450-16		KR530		D-16-450		PLS-16		Pwr Out	B-8054-1	P-6012	T22R04		P-2952									
968, 968X	9 6K7G, 6A6G, 26Q7G, 6O5G, 6V6G, 5Y3G, 6E5	A-14113	GL450-30		KR516A		D-30-450		PLS-30		Pwr Out	B-8054-1	P-6012	T22S58		A-2931									
		A-14122	GL450-16		KR530		D-16-450		PLS-30		Pwr Out	B-8108	P-6012	T22R04		P-2952									
		A-14072-A	GL450-30		KR530		D-30-450		PLS-30		Pwr Out	B-7034-1	P-6013	T22R05		P-2953									
		A-14113	GL450-30		KR516A		D-16-450		PLS-16		Pwr Out	B-7025	P-6013	T22R05		P-2953									
		A-14516	GL450-30		KR530		D-30-450		PLS-30		Pwr Out	A-3830	T22S46												

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat. Part No.	Note	Photost. Set No.		
1st.	A-12064-33.	16-5712.		45				.. 0--	ST-168.	1			Volt	A-15127.	AM-64-Z	KSS-3		13-130.	E							Continued—	SPARTON 640LX	
2nd.	A-12064-17.	16-5714.						.. 22-0-44	ST-168.				Tone	A-15128-1.	AM-64-Z	KSS-3	A	13-130.									640SX	
1st.	A-12064-33.	16-5712.	45					C-2280-99X.					Volt	A-15127.	AM-64-Z	KSS-3		13-130.									642X	
2nd.	A-12064-17.	16-5714.						C-2280-53.					Tone	A-15128-1.	AM-64-Z	KSS-3	A	13-130.									649-6L, 649-6S	
1st.	A-14794-3.	16-5712.	45										Volt	A-15130-7.	AM-60-Z	KSS-3		13-133.										
2nd.	A-12064-42.	16-5714.											Volt	A-15128-5.	AM-64-Z	KSS-3	A	13-130.										
1st.	A-12064-14.	16-5712.	456										Volt	A-14075-A1.	M-64-Z	M-64-Z		13-130.										
2nd.	A-12064-2.	16-6133.											Volt	A-14778.	M-64-Z	A		D13-130.										
3rd.	A-12064-15.	16-5714.											Tone	A-14075-A1.	M-64-Z	M-64-Z												
1st.	A-12064-39.	16-5712.	456	1				C-22-					Volt	A-15130-4.	AM-50-Z	KSS-3		D13-133.									651 Series	
2nd.	A-12064-17.	16-5714.						C-22-.					Volt	A-15131-1.	AM-53-Z	KSS-3	A	D13-137.									652X, 652XD	
1st.	A-12064-47.	16-5712.	6					C-2280-95B.					Volt	A-15130-6.	AM-50-Z	KSS-3		D13-133.									660M	
2nd.	A-12064-48.	16-5714.						C-2280-96B.					Volt	A-15131-2.	AM-50-Z	KSS-3	A	D13-133.									661RP	
1st.	A-14794.	16-6858.	45					C-2280-60.					Tone	A-15130-1.	AM-60-Z	KSS-3		D13-133.										
2nd.	A-12064-17.	16-5714.						C-2280-93.					Volt	A-15128.	AM-64-Z	KSS-3	A	13-130.										
1st.	A-12064-41.	16-5712.	456	1				C-2280-60.	ST-737.	12			Volt	A-15130-5.	AM-60-Z	KSS-3	A	13-133.										
2nd.	A-12064-17.	16-5714.											Tone	A-15128.	AM-64-Z	KSS-3												
1st.	A-12064-19.	16-5712.	45					C-228-6.					Volt	A-14216-A.	M-60-Z	M-60-Z		D13-133.									668, 668X	
2nd.	A-12064-17.	16-5714.						C-22-0.					Volt	A-14217-A.	M-63-Z	M-63-Z		D13-137.									670-6L, 670-6S	
1st.	A-12064-14.	16-5712.	4										Volt	A-14075-A1.	M-64-Z	M-64-Z		D13-130.										
2nd.	A-12064-2.	16-6133.											Tone	A-14778.	M-64-Z	M-64-Z		D13-130.										
3rd.	A-12064-15.	16-5714.						C-22- X.					Volt	A-15145.	AT-88.	SS-3		D18-133X.										
1st.	A-12064-43.	16-5712.	456										Tone	A-15129-10.	AM-60-Z	SS-3		D13-133.									672-SXA, 672-SXE	
2nd.	A-12064-44.	16-5714.						C-22- 4.					Volt	A-14216-A.	M-60-Z	M-60-Z		D13-133.									678, 68X	
1st.	A-12064-19.	16-5712.	456										Tone	A-14217-A.	M-63-Z	M-63-Z		D13-137.									687-6	
2nd.	A-12064-17.	16-5714.						C-22-0-4.					Volt	A-14274.	M-60-Z	M-61-Z		D13-128.										
1st.	A-12064-14.	16-5712.	456										Tone	A-12987.	M-61-Z													
2nd.	A-12064-15.	16-5714.											Volt	A-15130-1.	AM-60-Z	KSS-3		D13-133.										
1st.	A-15211.	16-6662.	45										Volt	A-15128-1.	AM-54-Z	KSS-3		D13-130.									688-6	
2nd.	A-12064-17.	16-6663.											Volt	A-15128-1.	M-66-Z			D13-139.									690M	
1st.	A-15211.	16-6663.	22										Volt	A-15128-1.	M-66-Z													699
2nd.	A-12064-17.	16-5704.											Volt	A-15128-1.	M-66-Z													
1st.	A-12064-32.	16-5712.	456					C-22 - 1.		1			Volt	A-15129-1.	A**-1.	A		D13-133.									711X	
2nd.	A-12064-17.	16-5714.											Volt	A-14075-A.	M-4-Z	M-6-Z												
1st.	A-12064-12.	16-5712.	456										Volt	A-12987-A.	M-6-Z			D13-130.									728X	
2nd.	A-12064-17.	16-5714.											Volt	A-14075-A.	M-4-Z	M-6-Z		D13-137.										
1st.	A-14602.	16-5712.	456										Volt	A-14075-A1.	M-64-Z	M-64-Z											738	
2nd.	A-14503.	16-5712.											Tone	A-14088-A.	M-60-Z	M-60-Z		D13-133.										
1st.	A-12064-33.	16-5712.	456					C-2280-44.	ST-168.	F12			Volt	A-15127.	AM-64-Z	KSS-3		D13-130.									740LX, 740LXPA	
2nd.	A-12064-17.	16-5714.						C-2280-46.		F13			Volt	A-15128-1.	AM-64-Z	KSS-3	A	D13-130.									740SX, 740SXPA	
1st.	A-12064-33.	16-5712.	456					C-2280-44.	ST-168.	F12			Volt	A-15127.	AM-64-Z	KSS-3		D13-130.										
2nd.	A-12064-17.	16-5714.											Volt	A-15128-1.	AM-64-Z	KSS-3		D13-130.										
1st.	A-12064-17.	16-5712.	345										Volt	A-15128-1.	AM-64-Z	KSS-3		D13-130.										
2nd.	A-12064-22.	16-5710.											Tone	A-14518.	M-64-Z	M-64-Z		D13-130.									748X	
1st.	A-15211.	16-6662.	456					C-22-.		F12			Volt	A-15130-1.	AM-60-Z	KSS-3		D13-133.									760PS	
2nd.	A-12064-17.	16-6663.											Tone	A-15128-1.	AM-64-Z	KSS-3	A	D13-130.									761	
1st.	A-12064-39.	16-5712.	56					C-2280-76.		F2			Volt	A-15130-2.	AM-60-Z	KSS-3	A	D13-133.									768, 768X	
2nd.	A-12064-17.	16-5714.											Tone	A-15128-1.	AM-64-Z	KSS-3	A	D13-130.										
1st.	A-12064-12.	16-5712.	56					C-2280-35.		F2	2		Volt	A-14075-A.	M-64-Z	M-63-Z		D13-130.										
2nd.	A-12064-17.	16-5714.											Tone	A-12987-A.	M-63-Z			D13-137.										
1st.	A-12064-37.	16-5712.	456	+				C-2280-72.		F2			Volt	A-15130-1.	AM-60-Z	KSS-3	A	D13-133.									770, 770PA	
2nd.	A-12064-38.	16-5714.											Volt	A-15129-5.	M-60-Z													
1st.	A-14794-3.	16-5712.	456	+	L-26.	E2	C-2280-90A.		F2			Volt	A-15130-6.	AM-60-Z	KSS-3	A	D13-133.									(See Model 768, --)		
2nd.	A-12064-42.	16-5714.											Volt	A-15129-9.	AM-60-Z	KSS-3	A	D13-133.									778, 778X, 782, 782PA	
1st.	A-12064-39.	16-5712.	4-6				C- 0-99X.						Volt	A-15130-1.	M-60-Z	KSS-3		D13-133.									83IX	
2nd.	A-12064-17.	16-5714.											Volt	A-15128-2.	M-64-Z	KSS-3	A	D13-130.										
1st.	A-14794-1.	16-5712.	456										Volt	A-15140-1.	A**-66-Z	KSS-3		D13-139.									842SX	
2nd.	A-14794-2.	16-5714.											Volt	A-15129-11.	AM-60-Z	KSS-3	A	D13-133.										
1st.	A-12064-33.	16-5712.	456				C-2280-46.		F2				Volt	A-15127.	AM-64-Z	KSS-3		D13-130.									880	
2nd.	A-12064-17.	16-5714.						C-2280-72.	</td																			

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
		No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
				Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		"A"	"B"	"A"	"B"				
SPARTON—Continued		10	78, 6A7, 76, 6K7, 6H6, 5F5, 42, 80, 5E5	A-12048-1									Pwr Out	B-6210-2 On Spkr.	P-6012	T22R04	P-2952									
977															A-3852	T22S47	A-2931									
1005, 1006, 1007, 1008	8 6BA5, 6BE5, 27A7, 7C7, 6S8GT, 7B5, 5Y3GT (F44)	PA-4302, PA-4303-6, PA-4303-2	AF88J, PRS150-8, PRS25-25	UP4445, BR815, BR202A	DY-2X40-450, M-8-150, M-25-25	EL-240, UT-81, TA-25	Pwr Out	AB44010-1, AB44056-1	P-6011, A-3878	B12	T22R02	B12	P-2951	A-2931	812											
1068, 1068X	10 6K7G, 6A8G, 6H6G, 6J7G, 6Q7G, 6V6G, 5Y3G, 5E5	A-14113, A-14122, A-14516	GL450-30, GL450-16, GL450-30	KR530, KR516A, KR530	D-30-450, D-16-450, D-30-450	PLS-30, PLS-16, PLS-30	Pwr Out	B-7149, On Spkr.	P-6013, A-3830	T22R05	T22S46	P-2953	A-2930													
1071PA, 1071PAD	10 7L7, 6SA7GT, 6SK7GT, 6SQ7GT, 6PSGT, 6AC5G, 5Y3G	A-15696	UP6CJ20	DY-3X20-450	Pwr Out	B-8200, On Spkr.	P-6013, A-3852	T22R05	T22S56	P-2953	A-2930															
1071RPA	11 7L7, 6SA7GT, 6SK7GT, 6S07GT, 6PSGT, 6AC5G, 5Y3G, 6U5, 6G5	A-15729	AF4444J	UP222245	DY-4X20-450	EL-420	Pwr Out	B-8200, A-15730	P-6013, A-3823	T22R05	T22S56	P-2953	A-2904													
1078, 1078X	(See Model 1058)												Pwr Out	B-8177, On Spkr.	P-6013, A-3830	T22R05	T22S64	P-2953	A-2904							
1081	10 7L7, 6SA7GT, 6SK7GT, 6S07GT, 6PSGT, 6F5G, 6AF6G, 5Y3G	A-14684-9	UP6CJ20	DY-3X20-450	Pwr Out	B-8177, On Spkr.	P-6013, A-3830	T22R05	T22S64	P-2953	A-2904															
1089	10 6K7G, 6A8G, 6H6G, 6J7G, 6Q7G, 6V6G, 5Y3G, 5E5	A-14113, A-14122, A-14516	GL450-30, GL450-16, GL450-30	KR530, KR516A, KR530	D-30-450, D-16-450, D-30-450	PLS-30, PLS-16, PLS-30	Pwr Out	B-7116, On Spkr.	P-6013, A-3830	T22R05	T22S46	P-2953	A-2930													
1091	11 6SK7GT, 6A8G, 6K7G, 6S07GT, 6J5G, 6V6G, 6P5G, 6AF6G, 5Y3G	A-14584-7, A-14782-8, A-14782-6	PRS450-8, PRS25-50	UP150D145, BR845, BR502	DY-3X15-450, M-8-450, M-50-25	EL-344, UT-8, TA-50	Chk	A-15386, +	+ , +	+ , +	+ , +	+ , +														
1160	11 6K7G, 6A8G, 6H6G, 6J7G, 6Q7G, 6FBG, 5Y3G, 5E5	A-14113-A, A-14122-A, A-14516-A	GL450-30, GL450-16, GL450-30	KR530, KR516A, KR530	D-30-450, D-16-450, D-30-450	PLS-30, PLS-16, PLS-30	Pwr Out	B-8266, On Spkr.	P-6013, A-3830	T22R05	T22S64	P-2953	A-2904													
1268	12 6K7G, 6A8G, 6J7G, 6RTG, 6H6G, 6J5G, 245, 5Y3G, 5E5	A-14073, A-14138, A-14139, A-14184	GL450-16, GL450-16, GL450-16	KR516A, KR516A, KR516A	D-16-450, D-16-450, D-16-450	PLS-16, PLS-16, PLS-16	Chk	A-14140, B-3374-1, B-3374-3	+ , +	+ , +	+ , +	+ , +														
1271	12 6SK7GT, 6SA7GT, 6S07GT, 6PSGT, 6AC5G, 6AF6G, 5Y3G	A-15625	EZ5116			TU-1616	Pwr In	B-7145, A-10161-2	P-6008, A-73-C	T20A23	T22S74	A-2914	A-2905													
1281	12 7L7, 6SA7GT, 6SK7GT, 6S07GT, 6PSGT, 6AC5G, 6AF6G, 5Y3G	A-14684-9	UP6CJ20	DY-3X20-450	Pwr Out	B-8177, On Spkr.	P-6013, A-3852	T22R05	T22S64	P-2953	A-2904															
1288, 1288P	(See Model 1288)												Pwr In	A-14140, B-3374-1, B-3374-3	+ , +	+ , +	+ , +	+ , +	+ , +	+ , +	+ , +	+ , +	+ , +	+ , +		
1288LXP	12 6K7G, 6A8E, 6J7G, 6RTG, 6H6G, 6J5G, 245, 5Y3G, 5E5	A-14073, A-14138, A-14139, A-14184	GL450-16, GL450-16, GL450-16	KR516A, KR516A, KR516A	D-16-450, D-16-450, D-16-450	PLS-16, PLS-16, PLS-16	Chk	A-14140, B-3374-1, B-3374-3	+ , +	+ , +	+ , +	+ , +														
1291RPA	13 6SK7GT, 6J8G, 6K7G, 6S07GT, 6J5G, 6V6G, 6SJ7GT, 6PSGT, 6AF6G, 5Y3G	A-14684-7, A-14782-6, A-14782-7, A-14782-8	PR525-50, PR525-10, PR525-10	UPI50D145, BR8502, BR102A, BR102A	DY-3X15-450, M-50-25, M-10-25, M-10-25	EL-344, TA-50, TA-10, TA-10	Pwr Cut	B-8266, B-2555, A-15730	P-6014, A-4774	T22R06	T22S64	P-2954	A-2905													
1567	15 6K7, 6A8, 6K7G, 6Q7G, 6J7G, 6C5G, 245, 2A3, 5Y3G, 5Z3, 5E5	A-14138, A-14139, A-14148, A-14250, A-14259	GL450-16, GL450-16, GL450-16	KR516A, KR516A, KR516A	D-16-450, D-16-450, D-16-450	PLS-16, PLS-16, PLS-16	Chk	A-14261, A-7155, A-10161-2	A-4774, A-4774	T20A23	T22S74	A-2915	A-2905													
1568, 1588P	15 6K7G, 6A8G, 6J7G, 6H6G, 6Q7G, 6J5G, 6RTG, 6C5G, 5Y3G, 5E5, 2A3, 5X4G	A-14184, A-14545-1, A-14587-1, A-14260, A-14548, A-14259	GL450-16, GL450-16, GL450-16, GL450-16	KR516A, KR516A, KR516A, KR516A	D-16-450, D-16-450, D-16-450, D-16-450	PLS-16, PLS-16, PLS-16, PLS-16	Chk	A-14544, A-14544, A-14261, A-14261, B-7147, B-7059	A-4774, A-4774	T22R06	T22R11, T22S74	P-2954	A-3131													
1867	18 6K7, 6L7, 26J5G, 6K7G, 6Q7G, 6J7G, 6C5G, 5Y3G, 5X4G, 6L6G, 6E5	A-14315, A-14310-1, A-14139, A-14184, A-14306, A-14310, A-14305	GL450-16, GL450-16, GL450-16, GL450-16, GL450-16, GL450-16	KR516A, KR516A, KR516A, KR516A, KR516A, KR516A	D-16-450, D-16-450, D-16-450, D-30-450, M-50-50, D-16-450, D-30-450	PLS-16, PLS-16, PLS-16, PLS-30, TA-550, PLS-16, PLS-30	Chk	A-14544, A-14544, A-14261-1, A-14261-2, B-7147, B-7059	A-4774, A-4774	T20A23	T22S74	A-2915	A-3131													
4121	4 1A7G, 1N5G, 1H5G, 1Q5G	A-14958	PRS150-12	BR1225	M-10-150	UT-121	Pwr Out	A-14318, A-14318, A-14261-1, A-14261-2, B-7070	A-3307, A-3307	T22S88	T22S47	A-2927	758											17GD60		
5008	4 6K7G, 6J7G, 25L6G, 25Z6G (BK55-BJ Ballast)	A-14691	PRSA150-40-20	BRD4215	M-2X40-150	TA-240	Pwr Out	A-14313, A-14313, A-14261-1, A-14261-2, B-7071	A-3329, A-3329	T22R11	T20D78	A-3124														

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS					Section G CONTROLS							Section H VIBRATORS			Photofac. Set No.	MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	iRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note					
1st.	A-12064-2	16-5712		456				C-2280-			F2		E	A-11297-1	AM-6'-	-S-	A		D13- 30	F	41					Continued	SPARTON 977			
2nd.	A-12064-2	16-6133						PC-630			10A 1		I	PA4407-1	M-50-	-		13	D13- 33								2	1005, 1006, 1007, 1008		
3rd.	A-12064-2	16-5714		456 & 10.7				C-2280-45			10 10		I	A-14075-A	M-54-	-	3	13	D13-133	E	41	G13						1058, 1068X		
1st.	A-12064-18	16- 12		456				C-2280-90			F2		F2	Voi Tone	A-15130-2	AM-60-Z	KSS-3	A	D13-130									1071PIA, 071PAD		
2nd.	A-12064-18	16-6133												A-15128-4	AM-64-Z	KSS-3	A	D13-130	E	41	G1						1071RPA			
3rd.	A-14443																	D13-133												
1st.	A-12064-39	16-5712		456				C-2280-90			F2		F2	Voi Tone	A-15130-2	AM-60-Z	KSS-3	A	D13-133	E	41									
2nd.	A-12064-17	16- 1												A-15128-4	AM-64-Z	KSS-3	A	D13-1	E	41										
1st.	A-12064-3	16- 712		*							12E 0		I	A-15130-2	AM-60-Z	KSS-3	A	D13-1	E	41								1078, 1078X		
2nd.	A-12064-17	16-5714																D13- 1 0	E	41							1081			
1st.	A-12064-18	16-5712		456							-2280-45		10E 0		Voi Tone	A-14075-A	M-64-Z			D13-130									1089	
2nd.	A-12064-18	16-6133												A-14 12-A	M-60-Z		A	D13-133												
3rd.	A-14443																											1091		
1st.	A-14794-1	16-5712		456				C-2280-97			F2		F2	Voi Tone	A-15140	AM- Z			D13-139											
2nd.	A-14794-2	16- 1												A-15823																
1st.	A-12064-18	16- 1		4				C-2 0-2			F2		Voi Tone	A-14075-A	M-64-Z			D										110		
2nd.	A-12064-18	16-6133												A-14112-A	M-60-Z			D13-133		41										
3rd.	A-14443-A																											1268		
1st.	A-12064-18	16-5712		4 6				C-2280-3			F2		F2	Voi Tone	A-14533	T-11			D18-137X										1271	
2nd.	A-12064-18	16- 61												A-14547	M-63-Z		A	D13-137		41										
3rd.	A-14443																													
1st.	A-12064-39	16- 1		456				C- 2- 8			I 0		V I Tone	A-15130-2	AM-60-Z			D1 -	E	41									1281	
2nd.	A-12064-17	16- 11																D13-133	E	41										
1st.	A-12064-39	16-5712		4 6				C- 0- 7			12E10		Voi Tone	A-15130-2	AM-60-Z	KSS-3	A	D13-130	E	41									1288, 1288P 1288XP	
2nd.	A-12064-17	16-5714																												
1st.	A-12064-18	16- 512		456				C-2280-30			F2		F2	Voi Tone	A- 4 33	T-11			C18- 1		41									1291RPA
2nd.	A-12064-1	16- 613													A- 4 4	M- 12-Z			C18- 0											
3rd.	A-14443																													
1st.	A-14794-1	16- 5		4				C-2280-			F2		F2	Voi	A-15 41															1567
2nd.	A-14794-2	16- 14																												
1st.	A-12064-2	16- 1		4				C-22 0-40			F2		V I Tone	A- 4 0	T-78			D1 -											1568, 1588P	
2nd.	A-12064-2	16-6133													A- 4 3	M-63-Z			D3		41									
3rd.	A-1424																													
1st.	A-12064-1	16- 133		456				C-2280- 1			F2		F2	oI	A-11 47			A	D1 -		41									187
2nd.	A-12064-18	16-6133						C-2280- 1			F2		F2	oI Tone	A-14110			A	D13-133X		41									
3rd.	A-14443														A-14137	M-63-Z			D13-137											
1st.	A-12064-2	16- 512		45				C-2280- 1			F2		F2	oI Tone	A-14110			A	D13-133X		41									
2nd.	A-12064-2	16-6133																												
3rd.	A-14254																													
1st.	A-12064-35	16-5712		456				C-22 0-			A1		I	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	- 1- 2-	421			
2nd.	A-12064-3	16- 514						C-2280-47																				5008		

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
												"A"	"B"					"A"	"B"					
SPARTON—Continued	4	6K7G, 6J7G, 25L6G, 25Z6G (BK55B-J Ballast)	A-14691	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						
5018	4	6A7, 77, 25L6G, 25Z5	A-14907			EZ3215C		DSB-303		TA-330 & TA-25		Out	On Spkr.	A-3876		T22S45		A-2928						
5028	5	6A7, 78, 75, 42, 80	A-14780								Pwr	P-7185-2	P-6012		T22R04		P-2952							
5218	5	6A8GT, 6SK7GT, 6SQ7GT, 6F6G, 5Y3G	A-14780-1								Out	On Spkr.	A-3823		T22S47		A-2931							
5321, 5521	5	6A7, 78, 75, 42, 80	A-14780-1								Pwr	P-8054-3	P-6011		T22R02		P-2951							
5518, 5518A, 5518AX	5	6A7, 78, 75, 42, 80	A-14715			EZ8845S					Out	On Spkr.	A-3878		T22S47		A-2931							
6021	6	174, 1R5, 174, 1S5, 3Q5GT, 117Z6GT	A-14684-10								Out	On Spkr.	A-3823		T22S47		A-2931							
6218	6	6A7, 78, 75, 76, 6AC5G, 80	A-14799			EZ5116				TU-1616		Pwr	P-7185-2	P-6012		T22R04		P-2952						
6521	6	7B8, 6SK7GT, 6SQ7GT, 6F6G, 5Y3G	A-20316	PRS450-16		UP15D145		M-16-450		EL-344		Out	On Spkr.	A-3830		T22S53		A-2931						
7618	7	6A7, 78, 75, 76, 6AC5G, 80, E5	A-14782-11	A-14789		BR1645		M-16-450		UT-16		Out	On Spkr.	A-6012		T22R04		P-2952						
8618	8	6GK7G, 6J8G, 6H6G, 6J5G, 6Q7G, 5Y6G, 5Y3G	A-14829-D7	AF4J		EZ5116		DY-20-450		EL-2		Out	On Spkr.	A-3878		T22S53		A-2931						
SPIEGEL—(See Air Castle)																								
STARK	5	7B4, 7F7, 7C5, 7Z4 (*47)	IC3S-422-400	AF444J	A4	UP222245	A4	DY-4X20-450		EL-420		Chk	1TC-410	C-1709		T22C53		C-2993						
410			IC2S-22-25	AF44D		UP2215		DY-2X20-25		EL-221		Pwr	1TP-410	P-4079		T22R31		P-3152						
											Out	1TC-410	A-3870		T22S56		A-2904							
STEELMAN	200	50A5, 35Y4	50, 50 Mfd	PRSA150-50-50		EZ5515		DSB-2X50-150		TA-505		Out	.....†	A-3865		T22S45		A-2928						
303	3	7A4, 7C5, 7Y4	30-25-20 Mfd			DY-313		EL-323		Out	.....†	P-6119		T22R02		P-2951								
350, 351	3	6SL7GT/*7F, 6U6GT/*7C5, 6X5GT/*7Y4	30-25-20 Mfd	AF64K4A		UP6BJ37		DY-313		EL-323		Chk	1C-1709	C-1709		T20C53		A-2931						
											Pwr	1P-6119	P-6119		T22R02		P-2951							
STEWART-WARNER	E	R	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	112898	PRS150-16	BR1615		M-16-150		UT-161		Out	116788	A-3876		T22S45		A-2928						
01-5D9, 5D9-WT (Ch. 01-5D)	5	6SA7, 6SK7, 6SQ7, 6F6G, 5W4G (244)	113472	PRS150-40	BR4015	M-40-150		UT-401		UT-1616		Pwr	114999	P-6119		T22R02		P-2951						
01-5H1 to 01-5H9 (Ch. 01-5H)	5	6SA7, 6SK7, 6SQ7, 6F6G, 5W4G (244)	117034		EZ5116		DSB-303		EL-323		Out	117091	A-3852		T22S47		A-2931							
01-5A, 5B, 5D	6	6SA7, 6SK7, 6H6, 6SQ7, 6F6G, 5W4G (244)	117356	PRS25-19	BR102A	M-10-25		TA-10		UT-16		Pwr	114530	P-6011		T22R02		P-2951						
01-6C9 (Ch. 01-6C)	6	6SA7, 6SK7, 6H6, 6SQ7, 6F6G, 5W4G (244)	114972	PRS450-16	BR1645	M-16-450		UT-16		UT-16		Pwr	114530	B17	B17	B17	B17	A-2931						
01-6E1 to 01-6E9 (Ch. 01-6E)	6	6SA7, 6SK7, 6H6, 6SQ7, 6F6G, 5W4G (244)	114258	PRS450-B	BR845	M-8-450		UT-8		UT-16		Pwr	114999	P-6119		T22R02		P-2951						
01-6F3 (Ch. 01-6F)	6	6SK7, 6SA7, 6H6, 6SQ7, 6F6G, 5W4G (344)	115262	PRS450-16	BR1645	M-16-450		UT-16		UT-1616		Pwr	118498	P-6011		T22R02		P-2951						
01-6G1, 01-6G4-I to 01-6G4-5 (Ch. 01-6G)	6	6SK7, 6SA7, 6H6, 6SQ7, 6F6G, 5W4G (244)	110377	PRS25-10	BR102A	M-10-25		TA-10		UT-1616		Pwr	117004	A-3878		T22S47		A-2931						
01-6G1-2, 01-6G4-1-Z (Ch. 01-6G-Z)	6	6SK7, 6SA7, 6H6, 6SQ7, 6F6G, 5W4G (244)	118421	PRS450-16	EZ5116	M-16-450		UT-16		UT-1616		Pwr	119205	P-6011		T22R02		P-2951						
											Out	119226	A-3878		T22S47		A-2931							
01-6K1, (Ch. 01-6K)	6	12K7GT, 12SA7, 12SQ7, 25L6G, 6X5G (251)	119343								Pwr	119223												
01-6M9 (Ch. 01-6M)	8	6SK7, 6SA7, 6J5GT, 6H6, 6SF5, 5V6G, 5W4G (244)	114972	PRS450-16	BR1645	M-16-450		UT-16		Out	117830	P-6011		T22R02		P-2951								
01-8A1 to 01-8A9 (Ch. 01-8A)	8	6SK7, 6SA7, 6J5GT, 6H6, 6SF5, 5V6G, 5W4G (244)	110377	PRS450-16	BR1645	M-16-450		UT-16		Out	118144	A-3830		T22S46		A-2930								
01-8B1 to 01-8B9 (Ch. 01-8B)	8	6SK7, 6SA7, 6J5GT, 6H6, 6SF5, 5V6G, 5W4G (244)	114972	PRS450-16	BR1645	M-16-450		UT-16		Out	118665	P-6011		T22R02		P-2951								
01-8C, 01-8CZ	8	6SK7, 6SA7, 6J5GT, 6H6, 6SF5, 5V6G, 5W4G (244)	110377	PRS25-10	BR102A	M-10-25		TA-10		Out	117946	A-3830		T22S47		A-2931								
01-9A7 (Ch. 01-9A)	9	12SK7, 12A8GT, 6J5GT, 6H6, 6SQ7, 6F6G, 5Y3G (244)	110377	PRS25-10	BR102A	M-10-25		TA-10		Out	119381	R-119512	A-2312	T22S74		A-2901								
01-9A7-Z (Ch. 01-9A-Z)	9	12Q7GT, 6K6G, 5Y3G (244)	114972	PRS450-16	BR1645	M-16-450		UT-16		Out	114999	P-6119		T22R02		P-2951								
01-521 to 01-529 (Ch. 01-52)	5	6A8G, 6K7, 6Q7G, 6F6G, 5W4G (244)	114258	PRS450-8	BR845	M-8-450		UT-8		Out	114994	A-3878		T22S47		A-2931								
01-531 to 01-539 (Ch. 01-53)	5	6A8G, 6K7, 6Q7G, 6F6G, 5W4G (244)	110377	PRS25-10	BR102A	M-10-25		TA-10		Out	114530	P-6011		T22R02		P-2951								
01-531S to 01-539S (Ch. 01-53S)	5	6A8G, 6K7, 6Q7G, 6F6G, 5W4G (244)	110377	PRS450-16	BR1645	M-16-450		UT-16		Out	114530	P-6011		T22R02		P-2951								
01-541 to 01-549 (Ch. 01-54)	5	6A8G, 6K7, 6Q7G, 6F6G, 5W4G (244)	114258	PRS450-8	BR845	M-8-450		UT-8		Out	116180	P-6119		T22R02		P-2951								
01-541S to 01-549S (Ch. 01-54S)	5	6A8G, 6K7, 6Q7G, 6F6G, 5W4G (244)	114258	PRS450-8	BR345	M-8-450		UT-8		Out	116180	P-6119		T22S47		A-2931								
											Out	116180	A-3823		T22R02		P-2951							

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
			No.	Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
																							"A"	"B"	"A"	"B"
STEWART - WARNER	R—Continued																									
01-611 to 01-619... (Ch. 01-61)	6A8G, 6K7, 6H6, 6Q7G, 6F6G, 5W4G (44).	110377 112113	PRS25-10, PRS50-10.		BR102A, BR105.		M-10-25 M-10-50.		TA-10, TA-510.		Pwr Out	116352 U-116212.	P-6011, A-3878.		T22R02 T22S47.		P-2951, A-2931.									
01-611S to 01-619S... (Ch. 01-61S)																										
01-611 to 01-619... (Ch. 01-61)	6A8G, 6K7, 6H6, 6Q7G, 5W4G (44).	11*9 11*8	R- 5 1 - 5 -	B 1 B 1			M-16-450, M-8-450.	-1 -T-			Pwr Out	116352 U-116212.	P-11, A-1.		T22-0 T22S7.		P-2951, A-293.									
01-611S to 01-619S... (Ch. 01-61S)																										
01-811 to 01-819... (Ch. 01-81)	6K7, 6A8G, 6J5G, 6H6, 6Q7G, 6F6G, 5W4G (44).	13985 116263 13118	GL450-16, PRS450-16, PRS450-8, PRS150-12.		BR1215		D-16-450, M-16-450, M-8-450, M-10-150.		PLS-16, UT-16, UT-8, UT-121.		Pwr Out	114697 114927.	P-612, A-3852.		T22R04 T22S47.		P-2952, A-2931.									
02-4A1 to 02-4A9... (Ch. 02-4A)	4A7GT, 1N5GT, 1H5GT, 1C5GT.	113118					M-10-150.		UT-121.		Out	117782	A-3329.		T22S47.		743 & 2482.	6F								
02-4B1 to 02-4B9... (Ch. 02-4B)	4A7GT, 1N5GT, 1H5GT, 1A5GT.	112898					M-16-150.		UT-161.		Out	R-119457.	A-3857.		T22-0.		A-293.									
02-4C1 to 02-4C9... (Ch. 02-4C)	4A7G, 1N5G, 1H5G, 1A5G.	112898					M-16-150.		UT-161.		Out	M-11974.	A-3857.		T22-0.		A-293.									
02-5T1 to 02-5T9... (Ch. 02-5T)	4A7G, 1N5G, 1H5G, 1Q5G.	112898					M-16-150.		UT-161.		Out	O-119862.	A-3329.		T22-0.		A-2931.									
02-411 to 02-419... (Ch. 02-41)	4A7G, 1N5G, 1H5G, 1C5G.	113118					M-10-150.		UT-121.		Out	R-116462.	A-3329.		T22S47.		A-2931.									
03-5A1 to 03-5A9... (Ch. 03-5A)	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	113472 112898	PRS150-40, PRS150-16.		BR4015		M-40-150, M-16-150.		UT-401, UT-161.		Out	U-116676.	A-3876.		T22S45.		A-2928.									
Senior Variety... (Ch. 03-5B)	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	113472 112898	PRS150-40, PRS150-16.		BR1615		M-16-150.		UT-161.		Out	U-116676.	A-3876.		T22S45.		A-2928.									
03-5C1 (Ch. 03-5C)	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	113472 112898	PRS150-40, PRS150-16.		BR4015		M-40-150.		UT-401.		Out	116788.	A-3876.		T22-0.		A-92.									
Ch. 03-5E, 03-5J... (Ch. 03-5J)	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	112898 113472	PRS150-40, PRS150-16.		BR1615		M-16-150.		UT-161.		Out	116846.	A-3876.		T22-0.		A-2928.									
03-5K1 to 03-5K9... (Ch. 03-5K)	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	117559	PRS150-30-30.		BRD3315		M-2X30-1 4.		TA-330.		Out	R-17484.	A-3876.		T22-45.		A-2928.									
03-5R1, 03-5R3 to 03-5R6 (Ch. 03-5R)	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	118911			BRD2215		M-2X20-1 0		TA-220.		Out	R-118960.	A-3876.		T22-0.		A-2928.									
03-5S1, 03-5S2... (Ch. 03-5S)	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	118911	PR-150-20-20.		BRD2215		M-2X20-1 0		TA-220.		Out	R-118995.	A-3876.		T22-0.		A-292.									
03-6J1, 03-6J1-Z... (Ch. 03-6J, Ch. 036JZ)	6 6SK7, 6SA7, 6SQ7, 25L6, 25Z6GT (44).	119021									Out	118996.	A-3876.		T22-45.		A-2928.									
03-6L7, (Ch. 03-6L)	6 6SK7, 6SA7, 6SQ7, 25L6GT, 25Z6GT (44).	119021									Chk	119266.	A-3876.		T22-15.		A-292.									
03-6L7-Z (Ch. 03-6L7)	6 6SK7, 6SA7, 6SQ7, 25L6GT, 25Z6GT (44).	119021									Out	M-11951.	A-3876.		T22-15.		A-292.									
03-6N-1, (Ch. 03-6N)	6 6SK7, 6SA7, 6SQ7, 25L6GT, 25Z6GT (44).	119021									Out	118996.	A-3876.		T22S5.		A-292.									
(Ch. 036NZ)																										
05-5L1 to 05-5L9... (Ch. 05-5L)	5 1A7GT, 1N5GT, 1H5GT, 1Q5GT, 70L7GT.	117759	PRSA150-20-20.		BRD2215		M-2X20-150.		TA-220.		Chk	117888.	A-3876.		T22-0.		743 & 2482.	2F4.	B							
A6, 07-31...	3 12SA7, 25B8GT, 70L7GT.	116 87	PRSA150-20-20.		BRD2215		M-2X20-150.		TA-220.		Out	117891.	A-3876.		T22S45.		A-2928.									
A6S...	3 12SA7, 25D8GT, 70L7GT.	116587	PRSA150-20-20.		BRD2215		M-2X20-150.		TA-220.		Out	R-116533.	A-3876.		T22S45.		A-2928.									
06-6H1 (Ch. 06-6H)	6 1C7G, 1H4G, 1D5GP, 1H4G, 1F5G (44).	113422 118452	PRS25-12, PRS25-100.		BR1225		M-16-250, M-100-25.		UT-122, UHC-102.		Chk	118453.	A-3876.		T22S4.		A-2934.									
07-5B...	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	113422 112898	PRS150-16.		BR1615		M-20-350.		UT-202.		Out	119233.	A-3876.		T22S45.		A-2928.									
07-5EX...	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	113422 117622	PRS150-40.		BR4015		M-40-150.		UT-401.		Out	119467.	A-3876.		T22S45.		A-2928.									
07-5NX...	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	117622 117623	PRS150-20.		BR2015		M-20-150.		UT-201.		Out	117621.	A-3876.		T22-5.		A-292.									
07-5R1, 5R3 to 5R6	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	117622 118248	PRS150-20. PRS450-30.		BR2015 BR3045.		M-40-150. M-30-450.		UT-401. UT-30.		Out	117621.	A-3876.		T22S4.		A-292.									
07-511 to 07-519... (Ch. 07-51)	5 6A8G, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT (44).	114869	PRSA150-20-20.		BRD2215		M-2X20-1 0.		TA-220.		Out	R-114885.	A-3876.		T22-0.		A-292.									
07-511H to 07-519H... (Ch. 07-51H)	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	116470	AF66D.		UP3315.		DY-2X30-150.		EL-230.		Out	O-11634.	A-3876.		T22S45.		A-292.									
07-511S to 07-519S... (Ch. 07-51S)	5 6A-GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT (44).	116470	AF66D.		UP3315.		DY-2X30-150.		EL-230.		Out	U-11630.	A-7		T S45.		A-292.									
07-551 to 07-559...	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51).	116470	AF66D.		UP3315.		DY-2X30-150.		EL-230.		Out	U-11630.	A-7		T S45.		A-292.									
07-631 to 07-639... (Ch. 07-63)	5 6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G (44).	112898 113472	PRS150-16, PRS150-40.		BR1615 BR4015		M-16-150. M-40-150.		UT-161. UT-401.		Out	116342.	A-3876.		T22S4.		A-292.									
010-6K1-X... (Ch. 010-6KX)	5 12SA7, 12SK7, 12SQ7, 12KG1, 25L6G, 6X5G (44).	119343									Pwr Out	119486.	A-3876.		T22-45.		A-2928.									
11-2A-1 (Ch. 11-2A)	2 35L6GT, 35Z5GT.	116470	AF66D.		P3315. EZ3215C.		DY-2X30-150.		EL-230.		Out	U-119228.	A-3876.		T22-45.		A-2928.									
11-5V9	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	1160012			DSB-303.		M-2X20-150.		EL-230.		Out	R-119944.	A-3876.		T22S45.		A-292.									
11-5W1 to 11-W9... (Ch. 11-5W)	5 6SA7, 6SK7, 6SQ7, 6F6G, 5W4G (44).	114258	PRS4-0-8.		BR845.		M-8-450.		UT-8.		Pwr Out	1603.	P-6119.		T22R02.		P-295.									
11-6T1 to 11-6T9... (Ch. 11-6T)	6 6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G (44).	1160174 114009	AF4-14A. PRS. 5 4.		U-2245C. R435.		DY-315. M-4-450.		EL-350. UT-43.		Pwr Out	160172.	P-6119.		T22S47.		A-2931.									
11-6T1-Stop1-6T9-S	6 6SA7, 6SK7, 6SQ7, 6Q7Q, 6F6G, 5W4G (44).	110377	PRS25-10.		102A.		M-10-25.		TA-10.		Pwr Out	112887.	P-6119.		T22R02.		P-2951.									
11-6U-1 to 11-U-9... (Ch. 11-6U)	6 6SA7, 6SK7, 6SQ7, 6Q7Q, 6F6G, 5W4G (44).	117034									Pwr Out	M-160618.	A-3852.		T22S47.		A-2931.									
11-6U1-Z to 11-6U9-Z... (Ch. 11-6U-Z)	6 6SA7, 6SK7, 6SQ7, 6Q7Q, 6F6G, 5W4G (44).																									

†Information not available.

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photact Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat Part No.	Note			
1st. 2nd.	112884 112804	16-5712. 16-5714.		4 :				U-11504.	ST-		1	V	162	M- 0-Z		A		D1 -1 3		41						Continue	EWART-WARNER	
1st. 2nd.	116358 116362	16-5712. 16-5714.		:				U-11504.				Vol		M-60-		A		D1 -									01-611 to 01-619 (Ch. 01-61) 1-611S to 01-619S (Ch. 01-61S) 010-611 to 010-619 (Ch. 010-61) 01-611S to 01-619S (Ch. 01-61S) 01-811 to 01-819 (Ch. 01-81)	
1st. 2nd.	113237 113229	16-5712. 16-5714.		465				R-115042.			10E10	Vol	114928.	T-112				D18-1		41	G1							
1st. 2nd.	117743 117742	16-5712. 16-5714.		455				U-11506	ST-		4A1	Vol	117706.	AM-6	- S-3	A2		D13-13*		4								02-A1 to 02-A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	116049 118411	16-5712. 16-5714.		455				R-11509	11		4A1	Vol	1194	AM-6	- S	A2		D13-17		4								SENIOR VARSITY (Ch. 03-5B) 03-SC1 (Ch. 03-5C) CH. 035E, 03-5J
1st. 2nd.	115720 115673	16-5712. 16-5714.		455				M-115095.	ST-108		6A1	Vct	119	AM-63-Z	KSS-3	A2		D13-17		42								02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	115673 116385	16-5712. 16-5714.		455				O-115099.	ST-108		6A1	Vol	1195	AM-63-Z	KSS-3	A2		D13-1	D11-128	E	42							02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	116386 116667	16-5712. 16-5714.		465				R-115049.	ST-105		52A1	Vol	116393.	AM-63-Z	KSS-3	A2		D13-137		42	G1							02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	116667 116672	16-5712. 16-5714.		455				V-115055.	ST-194		1	Vol	116	M-63				D13-17		1	1							02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	116672 116667	16-5712. 16-5714.		455				U-11505	T-194		5	Vct	116	M-6				D13-1		41	1							02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	116572 116782	16-5712. 16-5714.		455				U-115055.	ST-194		5E5	Vol	11	AM-63-Z	KSS-3	A.		D13-1		1								02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	116809 116848	16-5712. 16-5714.		455				U-115058.	ST-194		5E45	Vol	116	34	AM-63-Z	KSS-3	A.	D13-1		1	1							02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	117798 117385	16-5712. 16-5714.		455				R-115066.	F2		F2	Vol	114879.	M-63-Z		A.		D13-137		41	G1							02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	117384 117394	16-5712. 16-5714.		455				R-115081.	S-1		4	Vol	119	3	AM-63-Z	KSS-3		D13-17	E	41								02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	118614 118903	16-5712. 16-5714.		455				R-11508				Vt	119	AM-63-Z	K-1	A.		D13-1									02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)	
1st. 2nd.	119042 119042	16-5712. 16-5714.		455				R-11508	ST-194			Vt	116	3	AM-63-Z	K-1		D13-1									02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)	
1st. 2nd.	119042 119042	16-5712. 16-5714.		455				M-115087.	T-182		5	Vol	11	AM-63-Z	KSS-3	A.		D13-1		41								02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	119042 119042	16-5712. 16-5714.		455				R-115083.	ST-194		5E45	Vct	116834.	AM-63-Z	KSS-3	A.		D13-137		41								02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	117743 117742	16-5712. 16-5714.		455				R-115069.	ST-105		5A1	Vol	117	AM-63-Z	KSS-3	A2		D1 -137		42								02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	116605 116603	16-5712. 16-5714.		455				R-11505				Vol	116	AM-	- S-	A.		D1 -11		41								02-4A1 to 02-4A9 (Ch. 02-4A) 02-B1 to 02-B9 (Ch. 02-4B) 02-C1 to 02-C9 (Ch. 02-4C) 02-5T1 to 02-5T9 (Ch. 02-5T) 02-411 to 02-419 (Ch. 02-41) 03-5A1 to 03-5A9 (Ch. 03-5A)
1st. 2nd.	116605 116605	16-5712. 16-5714.		455				R-11505			E5	Vol	117					D13-1									A6	
1st. 2nd.	117097 117097	16-5712. 16-5714.		455				R-11508	ST-196		6A1	Vol	119357.	AM-64-Z	KSS-3	A2		D13-130	E	42								05-5H1 (Ch. 05-6H)
1st. 2nd.	118447 118447	16-5712. 16-6133.		455				M-115092.	ST-108		6A1	Vol	119357.	AM-64-Z	KSS-3	A2		D13-130	E	41								05-5H1 (Ch. 05-6H)
1st. 2nd.	118442 118442	16-5712. 16-5714.		455				U-115055.	ST-194		5E4	Vol	116891.	M-63				D13-1		41	G1							05-5H1 (Ch. 05-6H)
1st. 2nd.	116667 116672	16-5712. 16-5714.		455				U-11505	ST 1		45	Vol	116	AM-6	Z	K-S-3		D13-1		41								05-5H1 (Ch. 05-6H)
1st. 2nd.	117673 117673	16-5712. 16-5714.		455				R-115057.			2	Vol	116	AM-63-Z	KSS-3			D13-1		41								05-5H1 (Ch. 05-6H)
1st. 2nd.	117674 117674	16-5712. 16-5714.		455				R-115081.	ST-196		4E45	Vol	119	AM-6	- Z	SS-3	A	D13-137	E	41								05-5R1, 07-5R8 to 07-5R6 (Ch. 07-5R) 07-5L1 to 07-5L9 (Ch. 07-5L) 07-5L1H to 07-5L1H (Ch. 07-5LH)
1st. 2nd.	118 14 118903	16-5712. 16-5714.		455				R-115041.	ST-196		4E45	Vol	114879.	M-63-Z				D13-137		41	G1							05-5R1, 07-5R8 to 07-5R6 (Ch. 07-5R) 07-5L1 to 07-5L9 (Ch. 07-5L) 07-5L1H to 07-5L1H (Ch. 07-5LH)
1st. 2nd.	114822 114822	16-5712. 16-5714.		465				R-115041.	ST-196		F13	Vol	114879.	M-63-Z				D13-137		41	G1							05-5R1, 07-5R8 to 07-5R6 (Ch. 07-5R) 07-5L1 to 07-5L9 (Ch. 07-5L) 07-5L1H to 07-5L1H (Ch. 07-5LH)
1st. 2nd.	114880 114880	16-5712. 16-5714.		465				R-115041.	ST-196		F13	Vol	114879.	M-63-Z				D13-137		41	G1							05-5R1, 07-5R8 to 07-5R6 (Ch. 07-5R) 07-5L1 to 07-5L9 (Ch. 07-5L) 07-5L1H to 07-5L1H (Ch. 07-5LH)
1st. 2nd.	116474 116474	1 - 712. 16-5714.		465				R-115041.	1		4 4	Vol	114	7	M-63-Z			D13-1		1	G1							05-5L1S to 07-519S
1st. 2nd.	116474 116475	1 - 714. 16-5714.		465				R-115041.	0-11505		F13	F2	Vol	114	M-63-Z			D13-17			1							05-5L1S to 07-519S
1st. 2nd.	116475 116475	1 - 714. 16-5714.		465				U-11504			F2		Vol	114	M-63-Z			D13-137		4	1							05-551 to 07-559 (Ch. 07-55)
1st. 2nd.	113046 113046	16-5712. 16-5714.		465				U-11504			F2		Vol	116272.	M-63-			D13-137		4	1							05-551 to 07-559 (Ch. 07-55)
1st. 2nd.	113046 113046	16-5712. 16-5714.		465				U-11504			F2	</																

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
			No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Eveready Part No.	Note	Burgess Part No.
																				"A"	"B"		
STEWART - WARNER	TUBE COMPLEMENT AND DIAL LIGHT																						
11-6V-1 to 11-6V-9 (Ch. 11-6V)	E	R—Continued	6	6SA7, 6SK7, 6J5GT, 6S07, 6F6G, 5Y3G (*44)	161193	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	161200	P-6119	T22R02		P-2951				
11-7A-1 to 11-7A-9 (Ch. 11-7A)	7	6SA7, 6SK7, 6S07, 6J5, 6F6G, 5Y3G (*44)	160008	AF44J	UP2245			DY-2X2-4-0		EL-220		Pwr Out	160390	A-3852	T22S47		A-2931						
11-8F1 to 11-8F9 (Ch. 11-8F)	8	6SK7, 6J5, 6S07, 6A7, 6J6G, 5W4G (*44)	114972	I'PS450-16 PR525-10	I'R1645			M-16-4-1		I'L-11		Pwr Out	160358	A-6012	T22R04		P-2952						
11-8F1-Z to 11-8F9-Z (Ch. 11-8F-Z)			114977		HR102A			M-10-2-1		TA-10		Pwr Out	118655	A-3311	T22S64		A-2930						
11-8R8, 11-8R9 (Ch. 11-8R)	8	6SA7, 6SK7, 6S07, 6S07, 6U5, 6F6G, 5Y3G (*44)	160008	A1411	I'P2245			DY-2X2-4-0		EL-220		Pwr Out	160390	P-6012	T22R04		P-2952						
11-9S1 to 11-9S9 (Ch. 11-9B)	9	6SK7, 6J5GT, 6SA7, 6SK7, 6S07, 6F6G, 5Y3G (*44)	160008	A1411	I'P2245			DY-2X20-4-0		EL-220		Pwr Out	119900	A-6012	T22R04		P-2952						
11-9S1-Z to 11-9S9-Z (Ch. 11-9B-Z)												Pwr Out	160424	A-3311	T22S64		A-2930						
11-10A-1 to 11-10A-10 (Ch. 11-10A)	10	6SK7, 6SA7, 6J5GT, 6SK7, 6S07, 6V6GT, 5U4G, 6U5 (51, *44)	160417	AF44D	I'L-11			DY-Y3X-1-0		I'L-11		Pwr Out	160420	P-6013	T22R06		P-2953						
12-4D1 (Ch. 12-4D)	4	1A7GT, 1N5GT, 1H5GT, 1A5GT	114311	I'MS7-10	BR102A			M-10-25		TA-10		Gut	161332	A-3857	T22S48		A-2937						
13-5U1 to 13-5U9 (Ch. 13-5U)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	160012	PR5150-20-20	EZ3215C			DSB-304		M-2X2-1-0		Out	R-119944	A-3876	T22S45		A-2938						
13-6P1 to 13-6P9 (Ch. 13-6P)	6	12SA7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT	112898	PR5150-16	BR1615			M-16-150		UT-161		Out	R-119944	A-3876	T22S45		A-2938						
15-5X1 to 15-5X9 (Ch. 15-5X)	5	1LA6, 1LN5, 1LM4, 1LA4, 35Z3	118452	PR5150-30-30	BR2251			M-100-25		UHC-102		Chk	117888	t									
			117559	PR5150-30-30	BR2315			M-2X30-150		TA-330		Out	R-160532	A-3857	T22S48		A-2937						
15-5Y1 to 15-5Y9 (Ch. 15-5Y)	5	1LA6, 1LN5, 1LM4, 3Q5GT, 35Z3	117559	PR5150-30-30	BRD3315			M-2X30-150		TA-331		Chk	117888	t									
17-7B	7	6SA7, 6SK7, 6S07, 6J5GT, 6F6G, 25L6G, 25Z5G	116470	AF66D	UP3315			M-50-25		TA-5		Out	U-16125	A-3329	T22S47		A-2947						
A51T1, 2, 3, 4... (Ch. A51T)	5	12BE6, 12BA6, 12AT6, 50B8 35W4	504431	PR5150-20	BR2015			DY-2X30-150		UT-40		Chk	161256	t									
C51T1 (Code 9054-A) C51T2 (Code 1054-B)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	506030	PR5150-20-30	EZ3315			DSB-2X3-150		TA-230		Out	506089	A-3876	T22S45		A-2938						
51T46 (Code 9024-B) 51T56 (Code 9024-C)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	500256	A1411	UP4215			DY-4020-150		EL-24		Out	502817	A-3330									
51T126, 51T136	5	12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)	500256	AF4414A	A3	UP4215		DY-4020-140		EL-24		Out	502187	A-3330									
A61CR1, 2, 3, 4...	6	6J5, 6SG7, 6SF7, 6SJ7, 6V6GT, 5Y3GT (*44)	502207	A1222J	A4	UP2245C		DY-312		EL-312		Out	504583	B22	B22								
A61P1 (Code 9036A) A61P2 (Code 9036B) A61P3 (Code 9036C)	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	500714	A1444D	UP2215			DY-3X3-1-0		EL-311		Chk	502174	P-6120	T22R02		A-2952						
61T16 (Ch. 9021A) 61T26 (Ch. 9022B)	6	12SA7, 12SK7, 12SF7, 35L6GT, 35Z5GT (47)	500256	AF444D	A4	UP22215		PR5150-4		EL-311		Out	505305	A-3878	T22S86		A-2930						
61TR38, 51TR46 61TR56 (Ch. 9029)	6	6SGT, 6J5GT, 6SF7, 6SJ7, 6V6GT, 5Y3GT (*44)	502207	A1444A	UP2245C			DY-312		I'L-312		Out	502528	C-1080	T20C52		C-2977						
62T16, 62TC16, 62TC26, 62TC36	6	6SA7, 6SK7, 6SF7, 6SJ7, 6K6GT, 5Y3GT (*44)	502207	A1444A	UP2245C			DY-312		I'L-312		Out	502528	R-502491	B3	B3	A-2958	753					
62T36	6	12SK7, 12SA7, 12SF7, 35L6, 35Z5GT (47)	500256	AF88D	UP4'15			DY-4020-150		EL-24		Out	502213	A-3330									
72CR16, 72CR26	7	6SK7, 6SA7, 6SF7, 6SJ7, 6K6GT, 6V6GT/G, 5Y3GT/G	502207	A1444J4A	UP2245C			DY-312		EL-312		Out	502904	A-3330									
A72T1, 2, 3, 4...	7	12BA6, 12BE6, 12H5, 6AQ6, 50B5 (44)	504980	A1101004A	UP55515C			DY-604W-15		M-40-150		Out	502174	P-6120	T22R02		P-2952						
91-511 to 91-519	5	6A8G, 6K7, 6Q7G, 6K6G, 5W4G, (44)	113956	+ PR5150-8-8	EZ588			I'L-312		EL-311		Out	502174	A-3877	T22S58		A-2930						
91-531 to 91-539	5	6A8G, 6K7, 6Q7G, 6K6G, 5W4G (44)	112802	+ PR5150-8-8	EZ588			I'L-312		EL-311		Out	504892	P-6120	T22R02		P-2952						
91-611 to 91-619	6	6A8G, 6K7, 6Q7G, 6K6G, 5W4G (44)	89937	GL450-30	KR530			D-30-450		PLS-30		Out	502174	P-6120	T22R02		P-2952						
91-621 to 91-629	6	6A8G, 6K7, 6Q7G, 6K6G, 5W1G, 6U5 (44)	110377	PR5150-8-8	I'R102A			M-10-2-1		TA-10		Out	504122	P-6120	T22R02		P-2952						
91-641 to 91-649	6	6A8G, 6K7, 6Q7G, 6K6G, 5W4G (44)	113808	PR5150-8	BR845			M-8-45		UT-8		Out	504244	P-6120	T22R02		P-2952						
91-648 (With "S" Stamped on Chassis)	6	6A8G, 6K7, 6H6, 6Q7G, 6K6G, 5W4G (44)	113808	PR5150-8	BR845			M-8-45		UT-8		Out	504244	A-3878	T22S58		A-2930						
91-711 to 91-719	7	6L7G, 6B5G, 6U7G, 6Q7G, 6K6G, 5W4G, 6U5 (44)	110768	PR5150-8	BR845			M-8-45		UT-8		Out	506283	P-6120	T22R02		P-2952						
91-811 to 9-813	8	6K7, 6A8G, 6Q7G, 6K6G, 5Y3G, 6U5 (44)	110377	PR5150-10	BR102A			M-16-4/1		UT-1		Out	502904	A-3876	T22S47		A-2930						
91-821 to 91-829 (Ch. 91-82)	8	6A8G, 6K7, 6H6, 6Q7G, 6K6G, 5U4G, 6U5 (44)	113961	PR5150-12	BR1225			I'S-450-8		PLS-30		Out	502904	A-3876	T22S47		A-2930						
91-821 to 91-829 (Ch. 91-82)	8	6A8G, 6K7, 6H6, 6Q7G, 6K6G, 5U4G, 6U5 (44)	113961	PR5150-10	BR1043			M-10-2-1		UT-12		Out	502904	A-3876	T22S47		A-2930						
			113962	PR5150-12	BR1043			M-10-4/0		UT-12		Out	502904	A-3876	T22S47		A-2930						
			113963	PR5150-15	BR1045			M-16-4/1		UT-16		Out	502904	A-3876	T22S47		A-2930						
			113965	GL450-16	KR516A			M-16-4/0		PLS-16		Out	502904	A-3876	T22S47		A-2930						

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL Part No.			
Use	Mfr.	Meissner	Note	Peak Freq.	Mfr.	Astatic	Note	Mfr.	Jensen	Note	Quar.	Note	Use	Mfr.	ClaroStat	Shaft	Switch	Note	IRC	Shift	Switch	Note	Mfr.	Radiat.	Note			
1st.	119042.	16-5712			161289.	-26-A.		M-115112.		10E1.			Vol	160238.	AT-112.	KSS-3.	A.	D18-137X.	E	41						Continued	EWART-WARNER	
2nd.	119024.	16-5714						M-1151 9.					Tone	160361.	AM-63-Z.	KSS-3.		D13-137.	E	41							11-6V1 to 11-6V9 (Ch. 11-6V)	
1st.	119042.	16-5712	4		161289.	-26-A.		M-1151 9.					Tone	160238.	AT-112.	KSS-3.	A.	D18-137X.	E	41							11-7A1 to 11-7A9 (Ch. 11-7A)	
2nd.	119024.	16-5714						U-1150 1.		1.			Vol	160361.	AM-63-Z.	KSS-3.		D13-137.	E	41							11-8F1 to 11-8F9 (Ch. 11-8F)	
1st.	119042.	16-5712													11-6 9.	AT-112.	KSS-3.		D1-171.	E	41							11-8F1-Z to 11-8F9-Z (Ch. 11-8F-Z)
2nd.	119024.	16-5714	455																								11-8R8, 11-8R9 (Ch. 8R)	
1st.	119042.	16-5712	455	161289.	L-25-A.			M-1151					Vol	160483.	AM-63-Z.	KSS-3.		D13-137.	E								11-9B1 to 11-9B9 (Ch. 11-9B)	
2nd.	119024.	16-5714	4	161288.	X-26.			M-115111		1 -			Tone	160486.	AM-63-Z.	KSS-3.			1 - 3	E							11-9B1-Z to 11-9B9-Z (Ch. 11-9B-Z)	
1st.	119042.	1 - 5712						M-115111		10E10.			Vol	160486.	AM-63-Z.	KSS-3.											11-10A1 to 11-10A10 (Ch. 11-10A)	
2nd.	119024.	1 - 5714						M-115111		12E10.																		
1st.	119042.	1 - 5712						M-115111										D1 -										
2nd.	119024.	1 - 5714																										
1st.	161340.	1 - 5712	455					M-115126.	ST-10.	6A1.			Treble	160413.	**-60-	**-3.	*	3-133.	E	4.								12-4D1 (Ch. 12-4D)
2nd.	161330.	16-5714						R-115102.	ST-194.	5E45.			Bass	160414.	**-60-	**-3.	*											13-5U1 to 13-5U9 (Ch. 13-5U)
1st.	119335.	16-5712	455					R-115102.	ST-194.	5E45.			Vol	119912.	AM-63-Z.	SS-3.	A.	D13-137.	E	41							13-5P1 to 13-5P9 (Ch. 13-5P)	
2nd.	118903.	16-5714						R-115102.	ST-194.	E*			Vol	119912.	AM-63-Z.	SS-3.	A.	D13-137.	E	41							15-5X1 to 15-5X9 (Ch. 15-5X)	
1st.	119042.	16-5712						R-115111.	ST-113.	A1.			Vol	1-02.	**-60-	**-3.	*	D13-137.	E	41								
2nd.	119024.	16-5714																										
1st.	119411 (or)	16-5714																										
1st.	161248.	16-5714																										
2nd.	161248.	16-5714	4																									
1st.	119758.	16-5712	455																								15-5Y1 to 15-5Y9 (Ch. 15-5Y)	
2nd.	119759.	16-5714																									17-7B	
1st.	504392.	16-5658	455																									
2nd.	504392.	16-5659	455																									
1st.	506083.	16-5740	455																									
2nd.	506084.	16-5742																										
1st.	502326.	16-5556	455																									
2nd.	502327.	16-5557																										
1st.	502926.	16-5556	455																									
2nd.	502927.	16-5557																										
1st.	502926.	16-5556	455																									
2nd.	502927.	16-5557																										
1st.	502657.	16-6658	455	505100.						F3			Vol	505318.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41								51T126, 51T136 51T146, 51T176 A61CR1, 2, 3, 4
2nd.	502658.	16-6658	455																									
1st.	502495.																											
2nd.	500749.																											
1st.	502102.	16-5712	4	5																								
2nd.	502103.	16-5714																										
1st.	502857.																											
1st.	502102.	16-6658	455	502461.	-71																							
2nd.	502103.	16-6660																										
1st.	502057.																											
1st.	112803.	16-5712	455																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712	465																									
2nd.	113047.	16-5714																										
1st.	112803.	16-5712																										

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"		
STEWART - WARNER																							
91-1111 to 91-1119 (Ch. 91-111)	11	6K7, 6L7G, 6J5G, 6R7G, 6V6G, 5W4G, 6U5 (44)	89937, 110377,	GL450-30, PRS25-10		KR530, BR102A, UP2245C		D-30-450, M-10-25, DY-312		PLS-30, TA-10, EL-20		Pwr Out	113394, 113351	P-6291, A-3830		T22S64		A-2934					
A92CR3, A92CR3S, (Ch. 9028C)	9	6BA6, 6SB7G, 6AL5, 6SQ7, 6SJ7, 6U6GT, 5Y3GT (44)	161193	AF441		PRSA50-10		PRSA450-16		UR1645, BR445		M-16-45, M-4-450		UT-18, UT-4		Pwr Out	504643, 505029, 505394	P-6013, A-3824	T22R05, T22S58	P-2953, A-2931			
A92CR5, A92- CR6S, (Ch. 9028F)			505150, 504719, 504937,			PRSA450-4, PRSA150-4		PRSA150-4		BR550, BR1615		M-4-150, M-16-150		TA-55, UT-151		Out	502994		R113343	A-3876	T22S41	A-292X	
97-521 to 97-529, (Ch. 97-52)	5	6A8G, 6K7, 6Q7G, 25L6G, 25Z6G, & 148B ballast (44)	112898			PRSA150-16																	
97-561 to 97-569, (Ch. 97-56)	4	6A8G, 6J7G, 25L6G, 25Z6G, & L55B ballast (44)	112898, 113472	PRS150-16, PRS150-40		BR1615, BR4C15		M-16-150, M-40-15		UT-161, UT-401		Out	R113343	A-3876	T22S45	A-2924							
97-551S to 97-559S (Ch. 97-565)	4	6A8G, 6J7G, 25L6G, 25Z6G, & L55B ballast	112898, 113472	PRS150-16, PRS150-40		BR1615, BR4C15		M-16-150, M-40-15		UT-161, UT-401		Out	R113343	A-3876	T22S45	A-2924							
97-571 to 97-579, (Ch. 97-57)	5	6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G (44)	112898, 113472	PRS150-16, PRS150-40		BR1615, BR4015		M-16-150, M-40-15		UT-161, UT-401		Out	R114062	A-3876	T22S45	A-2928							
205AA to 205AZ, (Ch. 205A), 205BA to 205B2 (Ch. 205B)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 33Z5GT (47)	500256	AF88D		UP4215		DY-4020		EL-24		Out	C-500615	A-3330				A-3031					
205CA to 205CZ, (Ch. 205C)	5	1A7GT, 1IN5GT, 1H5GT, 1A5GT	117401	PRS150-16		II-111C		M-16-150		UT-161		Out	M-16134	A-3857	T22S48	A-2917	738	17GD60					
205FA, (205F)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (C7)	117401			DSB-303						Out	M-503314	A-3857	T22S48	A-2917							
205GA to 205GZ, (Ch. 205G)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	501211	PRSA150-40		IRD4215		M-2X40-1-1		A-40		Out	R-501163	A-3876	T22S45	A-2924							
206BA to 206BZ, (Ch. 206B), 206CA to 206CZ, (Ch. 206C)	6	14H7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	500256	AF88D		UP4215		DY-4020-150		EL-24		Out	R-500617	A-3330				A-3031					
206HAS to 206BZS, (Ch. 206BS)	6	14H7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (C7)	500256	A-18D		II-111C		DY-10-1-1		II-14		Out	R-500925	A-3876	T22S45	A-2928							
206CAS to 205- CZS, (Ch. 206CS)	6	14H7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (C7)	500256	AF88D		UP4215		DY-1-10-150		II-24		Out	R-500621	A-3330				A-3031					
206DA to 206DZ, (Ch. 206D), 206EA to 206EZ (Ch. 206E)	6	14H7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (C7)	500256	AF88D		UP4215		DY-4020-150		EL-24		Out	R-500921	A-3876	T22S45	A-2928							
206DAS to 206DZS, (Ch. 206DS) 206EAS to 206EZS (Ch. 206ES)	6	14H7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT (C7)	500256	A-18D		UP4215		DY-4020-150		EL-24		Out	R-500424	A-3330				A-3031					
206F	6	14H7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT	500256	A-18D		UP4215		DY-4020-150		EL-24		Out	R-500424	A-3330				A-3031					
206GA to 206GZ, (Ch. 206G)	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	500714, 161273	PR550-50		II-111C		DY-22215		EL-32		Chk	117888	I-6012	T22R04	P-2957							
206HA	6	14H7, 12J5GT, 12SK7, 12SQ7, 35L6GT, 35Z5GT	501213	PRSA150-40		IRD4215		M-50-50		TA-551		Out	R-501721	A-3329	T22R04	A-2927							
207A	7	6SJ7, *6J5GT, 6SK7, 6SQ7, 6F6G, 5W4G (44)	160174	AF441A		UP2245C		DY-315		EL-350		Pwr	117774	I-6012	T22R04	P-2957							
207BA to 207BZ (Ch. 207B)	7	6SJ7, *6J5GT, 6SK7, 6SQ7, 6F6G, 5Y3G (44)	500201	PRS150-10		II-111C		DY-3X20-1-10		TA-551		Chk	117888	I-6012	T22R04	A-2931							
207CA to 207CZ, (Ch. 207C)	7	*1N5GT, 1A7GT, 1H5GT, 3Q5GT, 35Z5GT	500766	AF441D		II-111C		DY-3X20-150		EL-320		Out	R-500710	A-3329	T22S45	P-2951							
207DK, (Ch. 207D)	7	7H7, *5J5GT, 6SK7, 6SQ7, 6F6G, 5Y3G	501060	PRS150-10		BR505		M-50-50		TA-550		Chk	117888	I-6012	T22R04	P-2957							
207FK, (Ch. 207F)	7	7H7, *5J5GT, 6SK7, 6SQ7, 6K6GT, 5Y3G (44)	501060								Pwr	117774	I-6012	T22R04	A-2931								
208A	8	6SK7, 6J5GT, 6SA7, 6SQ7, 6K6GT, 5W4G (44)	500026	PRS450-16		BR1145		I-14-4-N		II-6		Pwr	117774	I-6012	T22R04	P-2957							
208BK, 208CK, (Ch. 208B, 208C)	8	7H7, 6J5GT, 6SK7, 6SQ7, 5F4G, 5Y3G (44)	501060								Pwr	500116	P-6012	T22R04	P-2957								
1471 to 1479, (Ch. R-147)	8	6K7, 6A6, 6A6, 6F5, GL6, 524, 665 (44)	85431, 88033	GL450-16		KR516A		D-16-450		PLS-1		Out	M-501304	A-3311	T22S64	A-2904							
1481 to 1489, (Ch. R-148)	10	6K7, 6A6, 6A6, 6C5, *6L6, 5V4G, 5G5	88576, 83803	GL450-8		KR508		D-8-450		PLS-8		Out	88898	P-6012	T22R04	P-2952							
1611D to 1619 D, (Ch. R-161-D)	6	1C7G, 1D5G, *1H4G, 1H6G, 1R1G Ballast	88583, 88007	GL450-8		KR516A		D-8-450		PLS-8		Out	88870	A-3825	T22S72	A-3127							
1621D to 1629D, (Ch. R-162-D)	6	1C7G, 1D5G, 1H6G, *1H4G, 1R1G Ballast	88007	GL450-8		KR516A		D-16-450		PLS-8		In	89223	A-4713	T20D75	A-2920							
1691 to 1695, (Ch. R-169)	5	6A8G, 6K7G, 6Q7G, 6K6G, 5V4G	88511, 88512	GL450-16		KR516A		D-16-450		PLS-16		Pwr	88481	I-6011	T22R02	P-2951							
1721 to 1729, (Ch. R-172, 172X)	6	6ABG, 6G5, 6K7G, 6Q7G, 6K6G, 5V4G	88511, 88512	GL450-16		KR516A		D-16-450		PLS-16		Out	88796	A-3852	T22S47	A-2931							
1731 to 1739, (Ch. R-173, 173X)	7	6A8, 6K7, 6H6, 6F5, 6F6, 6G5, 5Z4	88511, 88512	GL450-16		KR516A		D-16-450		PLS-16		Out	88912	P-6011	T22R02	P-2951							
1781, (Ch. R-178)	6	6K7, 6J7, 6Q7, 6F6, 6X5 (51)	110376, 110377	PRS25-10		BR102A		M-10-25		PLS-16		Out	88796	A-3852	T22S47	A-2931							
1801 to 1809, (Ch. R-180)	5	6A8G, 6U7G, 6Q7G, 6K6G, 5W4G (44)	110377, 110497	PRS25-10		BR102A		M-10-25		PLS-16		Out	88796	A-3852	T22S47	A-2931							
				PRS450-8-8		EZ588		DH-2X8-450SS		PLS-16		Out	88796	A-3852	T22S47	A-2931							
										TA-10		Out	110375										
										TA-10		Out	110313	A-3878	R/2S47	A-2931							
										TA-10		Out	110524	P-6011	T22R02	P-2951							
										TA-10		Out	110537	A-3824	T22S47	A-2931							
										TA-10		Out	117100	B22									

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quain Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photocell Set No.	
1st.	113382.	16-5712.		465				R-115018.		F2		F2	Vol	113258.	T-109.				D13-137X.		41	G1			Continue	d-ST	
2nd.	11322.	16-5 1.						E-502302.	-175.		12E15.	F1	Vol	21	M-60-Z.	KSS-3.	A.		-1	E	41				91-1111 to 91-1119 (Ch. 91-111)		
1st.	50464							O-502302.																29	A92CR3 A92- CR3S (Ch. 9028C) A92CR6 A92CR6B (Ch. 9028F)		
2nd.	50464							M-502302.																			
1st.	112803.	16-6658.		465				R-1 0			2		2	Vol	113049.	M- 0-Z.				1-13		41	G1			97-521 to 9-529 (Ch. 97-52)	
2nd.	113047.	16-6660.							R-11 1	ST-194.		5E45.		Vol	113501.	AM-37-U.	KSS-3.	A.								97-561 to 91-569 (Ch. 97-56)	
1st.	113275.	16-6658.		465					-1150 5.	ST-19		5E45.		Vol	113501.	AM-37-U.	KSS-3.	A.								97-561S, 97-569S (Ch. 97-56S)	
1st.	11373.	16-6658.						R-150 9.	ST-19							114814.	M-63-Z.	KSS-3.								97-571 to 7-579 (Ch. 97-57)	
2nd.	114802.	16-6658.						C-5 05 4.	ST-11.		'A1		Vol	500480.	=M-63-Z.	KSS-	A.	13-37	E	41					205AA to 205AZ (Ch. 205A), 205BA to 205BZ (Ch. 205B) 205CA to 205CZ (Ch. 205C)		
2nd.	114804.	16-6660.							M-115126.	ST-10.		8A1		Vol	500356.	AM-63-Z.	KSS-3.	A2.	D13-137	E						205FA (Ch. 205F)	
1st.	500131.	16-6658.		455				M-500350.	ST-115.		8A21.		Vol	500357.	AM-49-S.	KSS-3.		D11-128	E	41					205GA to 205GZ (Ch. 205G)		
2nd.	501233.	16-6658.						501166.	6-6660.		'0		Vol	119912.	AM-63-Z.	KSS-3.	A.	D13-137	E	41					206BA to 206BZ (Ch. 206B), 206CA to 206CZ (Ch. 206C) 206AS to 206BZS, (Ch. 206BZS)		
1st.	501233.	16-6658.						501166.	6-6660.		4		Vol	500223.	AM-63-Z.	KSS-3.	A.	13-137	E	41					206CAS to 206CZS (Ch. 206CZS)		
2nd.	500131.	16-6658.						500131.	16-6660.				ST-105.		V 1	500480.	AM -Z.		A.	D1. 1 7.		'1				206DA to 206DZ (Ch. 206D), 206EA to 206EZ (Ch. 206E) 206DAS to 206DZS (Ch. 206DZS)	
1st.	500131.	16-6658.		455							924.	ST-105.		5A1		Vol	500480.	AM-63-Z.	=1-3.	A.	D1. 1 7.		41				206EAS to 206EZS (Ch. 206EZS) 206F
2nd.	119024.	16-6660.							R-50062.		F1		F1	Vol	500480.	AM-63-Z.	KSS-3.	A.	13-137	E	41					206GAS to 206GZ (Ch. 206GZ)	
1st.	500131.	16-6658.		45					R-500 2				F	Vol	5004	AM -Z.	=5-3.	A.	D13-137	E	41					206GDA to 206GD (Ch. 206GD)	
2nd.	119024.	16-6660.							R-500423.					Vol	1 6-3.	AM-63-Z.	K. S-3.		D13-137	E	'1					206EAS to 206EZS (Ch. 206EZS) 206F	
1st.	500131.	16-6658.							R-500730.	ST-10		5A1		Vol	500481.	AM-63-Z.	KSS-3.		13-137	E	45					206GA to 206GZ (Ch. 206GZ)	
2nd.	119024.	16-6660.												Vol	501405.	AM-63-Z.	KSS-3.	A.	13-137	E	41					206HA	
1st.	500131.	16-6658.												Vol	500208.	AM -Z.	KSS-3.	A.	13-137	E	41					207A	
2nd.	500131.	16-6658.												Vol	500439.	M -Z.	KSS-3.	A.	D13-137	E	41					207BA to 207BZ (Ch. 207B)	
1st.	500131.	16-6658.												Vol	500749.	M-63-Z.	KSS-3.	A.	D13-137	E						207CA to 207CZ (Ch. 207C)	
2nd.	500749.	16-6666.		455					R-500730.	T-105.				Vol	500801.	M-63-Z.	KSS-3.	A.	D13-137	E						207DK (Ch. 207D)	
1st.	500801.	16-5712.		455	501366.									Vol	118669.	T-112.	KSS-3.	A.	D18-137X.	E						207FK (Ch. 207F)	
2nd.	11924.	16-5714.							M-501223.		F2		F2	Vol	119634.	T-112.		A.	D18-137X.		'1	G1				207FA (Ch. 207F)	
1st.	500801.	16-5712.		455	501238.				M-5011.		F2		F2	Vol	117685.	T-112.	KSS-3.	A.	D18-137X.		'1	G1				207FA (Ch. 207F)	
2nd.	11924.	16-5714.						M-50 0 0.		F.		F.	Vol	118669.	T-112.	KSS-3.	A.	D18-137X.		'1	G1				207FA (Ch. 207F)		
1st.	500801.	16-5712.		455	5014.									Vol	88487.	M-60-Z.		A.	D18-137X.		41	G1				207FA (Ch. 207F)	
2nd.	11924.	16-5714.							R-2 1.					Tone	88488.			A.	D18-130X.		41	G1				207FA (Ch. 207F)	
1st.	89005.	16-5712.		456										Vol	88487.			A.	18-130X.		41	G1				207FA (Ch. 207F)	
2nd.	89005.	16-5714.												Vol	88488.	M-60-Z.			D13-133.							1481 to 1489 (Ch. R148)	
1st.	89226.	6-6658.		45										Vol	89330.	M-60-Z.		A2.	D13-133.		42	G1				1611D to 1619D (Ch. R161D)	
2nd.	8227.	6-6650.							R-2 4.					Vol	89331.	M-60-Z.		A2.	D13-133.		42	G1				1621 to 1629D (Ch. R162D)	
1st.	89226.	6-6658.							R-2 5.					Vol	89330.	M-60-Z.										1691 to 1695 (Ch. R169)	
2nd.	89227.	16-6660.							R-2 1.					Vol	89306.	M-61-Z.		A.	D13-130.		41	G1					
1st.	89508.	16-6652.		26					R-24.					Vol	88488.	M-60-Z.			D13-133.		41	G1					
2nd.	89609.	16-6554.												Vol	89605.	M-64-Z.		A.	13-130.		41	G1					
1st.	89608.	16-5704.		262	1.				R-2 1.					Vol	89605.	M-60-Z.			D13-133.		41	G1				1721 to 1729 (Ch. R-172, 172X)	
2nd.	89609.	16-5706.							R-24 A.					Vol	88488.	M-60-Z.											
1st.	88466.	6-5712.		456					R-2 2.					Vol	88487.	-43		A.	D18-130X.		41	G1				1731 to 1739 (Ch. R-173, R-173X)	
2nd.	88468.	16-5714.							R-24 :					Vol	88488.	M-60-Z.			D13-133.		41	G1					
1st.	110312.	110312.							R-27 A.					Vol	110311.											1781 (Ch. R-178)	
2nd.	110514.	110520.							R-27 :					Vol	110310.												
1st.	110514.	110520.							R-27 :					Vol	110503.	M-63-Z.		A.	D13-133.		41	G1				1801 to 1809 (Ch. R180)	
2nd.	110520.	110520.							R-285A.					Vol	110504.	M-60-Z.											

\*Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES												
		No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	No. Note	Burgess Part No.	No. Note					
			"A"	"B"																		"A"	"B"	"A"	"B"					
STEWART-WARNER	R-Continued 1811 to 1819 (Ch. R-181)	6	6L7G, 6CSG, 6U7G, 6Q7G, 6K6G, 5W4G (44)	110768	GL450-8	KR508		D-8-450, D-39-450, M-10-25, D-30-450		PLS-8, PLS-30, TA-10, PLS-30		Pwr Out	110862, 110789	A-3824		T22S47		A-2931												
	1821 to 1829 (Ch. R-182, 182W)	7	6C5G, 6L7G, 6U7G, 6H6G, 6K5G, 6V6G, 5W4G (44)	110377	PR525-10	BR102A		KR530		TA-10, PLS-30		Pwr Out	110862, 110925	A-3855		T22S46		A-2930												
	1831 to 1839 (Ch. R-183)	8	6C5, 6K7, 6L7, 6H6, 6F5, 6L6, 5Y3G (44)	110768	GL450-8	KR508		112108		KR508		D-8-450, PLS-8, TA-10, M-10-25, D-10-50		112154	A-3855	T22S46		A-2930												
	1841 to 1849 (Ch. R-184)	10	6K7, 6C5, 6J7, 6L7, 6H6, 6F5, 6L6, 5U4G (44)	110377	PR525-10	BR102A		111298		PR525-10		M-10-25, TA-10, UT-122		111447, 111361	P-6013, A-3825	T22R05		P-2953												
	1851 to 1859 (Ch. R-185 Ser.)	11	6K7, 6L7, 6C5, 6J7, 6H6, 6V6, 5U4G (44)	110377	PR525-10	BR102A		111469		GL450-16		M-16-450, PLS-16		111330, 111331	C-1710	T22R06		P-2954												
	1861 to 1869 (Ch. R-186)	14	6K7, 6L7, 6C5, 6J7, 6H6, 6V6, 5W4G (44)	110377	PR525-10	BR102A		111469		PR525-10		M-16-250, TA-110, M-2X10-25		111330, 111331	C-1710	T22R06		P-2954												
	R-3581 to 3589 (Ch. R-358)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	500256	AF88D	UP4215		88680		GL450-8		D-8-450, PLS-8, TA-10, M-10-50		111330, 111331	C-1710	T22R06		P-2954												
	R-3581S to R-3589S (R-358S)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	500256	AF88D	UP4215		88937		PR525-10		M-16-250, TA-10, UT-122		111330, 111331	P-6014, A-3830	T22S64		A-2904												
	R-3861 to R-3869 (Ch. R-386)	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	501213	PRSA150-40-20	BRD202A		9000B		PR525-10		M-16-250, TA-110, M-2X10-25		111330, 111331	C-1710	T22S64		A-2904												
	R-3581 to 3589 (Ch. R-358)	5	12SA7, 12SK7, 12SF7, 35L6GT, 35Z5GT (47)	500256	AF84D4A	A3	UP4215	89937	GL450-30		KR530		D-30-450, PLS-30		111330, 111331	C-1710	T22R06		P-2954											
	9001, C, D, E, F...	6	6SK7, 6SA7, 6SF7, 6K6GT, 5Y3GT (44)	502207	AF44J & PRS25-25	UP6C1J13		502207		AF88D		DY-4020-150		EL-24		111330, 111331	C-1710	T22R06		P-2954										
	9002, A, B, P, R...	6	12SK7, 12SA7, 12SF7, 35L6GT, 35Z5GT (47)	500256	AF88D	UP4215		502207		AF88D		DY-4020-150		EL-24		111330, 111331	C-1710	T22R06		P-2954										
	9005-A, B...	4	1A7GT, 1NSGT, 1H5GT, 1A5GT	502286	PRS25-10	BR102A		502286		AF88D		M-10-25		TA-10		111330, 111331	C-1710	T22R06		P-2954										
	9007, A, F, G...	6	1A7GT, 1NSGT, 1H5GT, 3Q5GT, 35Z5GT	500714	AF44F & PRS250-20	UP6C1J17		500714		AF88D		DY-309 & M-20-150		A3 EL-320		111330, 111331	C-1710	T22R06		P-2954										
	9017A...	6	12SA7, 12J5GT, 12SN7, 12SK7, 42S07, 50L6GT, 35Z5GT (47)	500256	AF88D	UP4215		500256		AF88D		DY-4020-150		EL-24		111330, 111331	C-1710	T22R06		P-2954										
	STRATOVOX 579-1-58A...	6	12SK7, 12SA7GT, 12SQ7, 35L6GT, 35Z5GT (47)	40, 20 Mfd.	AF88D	UP4CJ59	A3	40, 20 Mfd.		AF88D		DY-40-20-150		EL-24		111330, 111331	C-1710	T22R06		P-2954										
	STROMBERG-CARLSON 32...	6	6SC7, 6J5, 6L6G, 5Y3G (51)	35590	AF444J & PRS50-50	A4	UP4445 & BR505	34598	AF2222 & PRS50-25	A3	UP1145C & BR202		DY-406 & M-50-50, DY-4X10-450- & M-25-50, M-50-25		A3 EL-424 & TA-50, EL-311 & TA-525		Pwr Out	46316, 46317	P-6314, A-3885	T22R07, T22S66	P-2955									
	126L, 126H...	7	6K7, 6A8, 6Q7, 243, 2575	26164	AF100	UP5015		41157		AF100		EZ8825		M-2X8-250		EL-51		26865, 26855	A-2201	T22S66		A-2901								
	127H, 127M...	9	6K7, 6A8, 6Q7, 248, 6E5, 2525	26164	AF100	UP5015		26162		AF100		EZ8825		M-2X8-250		EL-51		26865, 26855	A-3301	T22S66		A-2901								
	140-H-HB-K-KB, -L-LB, -P...	9	6K7, 6AB, 6Q7, 6E5, 6F6, 5Z3...	27014	AF100	UP5015		22757		AF100		UP5015		D-8-450, D-8-450, D-8-450, D-16-450, M-8-450		EL-51, PLS-8, PLS-8, PLS-15, TA-110, UT-8		26865, 26855, 26845, 26845	A-2201, A-3301	T22S66		A-2901								
	150-L-, LB...	12	6K7, 6AB, 6J7, 26H6, 26L6, 6E5, 5Z3...	25788	PR5450-8	BRD202A		25788		PR5450-8		BRD202A		M-2X10-25		UT-8		26865, 26855, 26845, 26845	A-2201, A-3301	T22S66		A-2901								
				24207	PR525-10	BR102A		22757		GL450-8		KR508		D-8-450, D-8-450, D-8-450, D-16-450, M-8-450		UT-8		26865, 26855, 26845, 26845	A-2201, A-3301	T22S66		A-2901								
				26510	GL450-8	KR508		26510		GL450-16		KR516A		D-16-450, M-16-450		UT-15		26865, 26855, 26845, 26845	A-2201, A-3301	T22S66		A-2901								
				26723	GL450-16	KR516A		26723		GL450-16		KR516A		D-16-450, M-16-450		UT-15		26865, 26855, 26845, 26845	A-2201, A-3301	T22S66		A-2901								
				25498	PR525-10-10	BRD202A		25498		PR525-10-10		BRD202A		M-2X10-25		TA-110		26865, 26855, 26845, 26845	A-2201, A-3301	T22S66		A-2901								
				24580	PR5450-8	BR845		26693		PR5450-8		BR845		M-8-450, M-8-450		UT-8		26865, 26855, 26845, 26845	A-2201, A-3301	T22S66		A-2901								
				26693	PR5450-8	BR845							M-8-450		UT-8		26865, 26855, 26845, 26845	A-2201, A-3301	T22S66		A-2901									

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiar Part No.	Note	Photofac Set No.	
1st. 2nd.	110851. 110853.	16-5712. 16-5714.		465				R-276A. R-279A.		F2 F2		F2 F2	Vol Tone	110766. 110767.	M-63-Z. M-60-Z.		A..	D13-137. D13-133.	41	G1 G1						1811 to 1819 (Ch. R181)	
1st. 2nd.	110851. 110853.	16-5712. 16-5714.		465				R-280A. R-277A.	ST-736.	10E10. 8E10.			Vol Tone	110927. 110767.	T-109. M-60-Z.		A..	D13-137X. D13-133.	41	G1 G1						1821 to 1829 (Ch. R182, 182W)	
1st. 2nd.	111081. 111082.	16-5712. 16-5714.		465				R281A. R287A.			12E60.		Vol	111096.	T-109.		A..	D13-137X..	41	G1						1831 to 1839 (Ch. R183)	
1st. 2nd. 3rd.	111335. 111675. 111340.			465				R281A.			12E60.		Vol	..†..	T-109.		A..	D13-137X..	41	G1						1841 to 1849 (Ch. R184)	
1st. 2nd. 3rd.	111336. 111675. 111340.			465				R282.			12E60.		Vol	111358.	AT-109.	FS-5..	A..	D13-137X..	41	G1						1851 to 1859 (Ch. R185 Ser.)	
1st. 2nd. Disc. 4th.	111425. 111425. 111426. 111427.			465				R-288. 115006. 115007.		12E60. 10E60. 8A4.			Vol	111358.	AT-109.	FS-5..	A..	D13-137X..	41	G1						1861 to 1889 (Ch. R186)	
1st. 2nd.	500233. 500236.	16-6658.		455				C-500257.	ST-113.	4A1..			Vol	500223.	AM-63-Z.	KSS-3..	A..	D13-137..	E	41							R-3581 to R-3589 (Ch. R358)
1st. 2nd.	500233. 500236.	16-6658.		455				C-500257.	ST-113.	4A1..			Vol	500223.	AM-63-Z.	KSS-3..	A..	D13-137..	E	41							R-3581S to R-3589S (Ch. R358S)
1st. 2nd.	501233. 501233.	16-6658.		455				R-500916.	ST-196.	4E45..			Vol	500223.	AM-63-Z.	KSS-3..	A..	D13-137..	E	41							R-3861 to R-3869 (Ch. R386)
1st. 2nd.	501166. 502102.	16-6658. 16-6658.		455				R-502998. A-502998.	ST-107.	5A15..			Vol	502145.	AM-60-Z.	KSS-3..	A..	D13-133..	E	41							9000B
2nd.	502103.	16-6660.						W-502998.		F13..			Vol	502145.	AM-60-Z.	KSS-3..	A..	D13-133..	E	41							11..
1st. 2nd.	502102. 502103.	16-6658. 16-6660.		455				D502168. M502168. R502168.	ST-166.	6E10..			Vol	502148.	AM-60-Z.	KSS-3..	A..	D13-133..	E	41							8.. 9001, C, D, E, F
1st. 2nd.	512102. 512103.	16-6658. 16-6660.		455				502998. 502208.	ST-107.	5A15..			Vol	502145.	AM-60-Z.	KSS-3..	A..	D13-133..	E	41							38.. 9002, A, B, P, R
1st. 2nd.	502279. 502880.	16-6658. 16-6660.		455				502998. 502208.	ST-112.	6A21..			Vol	161325.	AM-60-Z.	KSS-3..	A2..	D13-133..	E	42							13.. 9005-A, B
1st. 2nd.	502495. 500749.	16-6658. 16-5742.		455				A-502491.	ST-107.	5A15..			Vol	502525.	AM-63-Z.	KSS-3..	A4..	D13-137..	E	45							10.. 9007, A, F, G
1st. 2nd.	504065. 504066.			455				R-504100. A-504100.	ST-105.	5A21..			Vol	502145.	AM-60-Z.	KSS-3..	A..	D13-133..	E	41							9017A
1st. 2nd.	B51010-1. B51011-1.	16-6658. 16-6670.		455				C-51058..	ST-194.	5E45..			Vol	..†..	AM-60-Z..	KSS-3..	A..	D13-133..	E	41							6.. STRATOVOX 579-1-58A
1st. 2nd.	26141. 25506.	16-5712. 16-5714.		465				26886. 26887.		†..		†..	Vol Sens.	26114. 26095.	M-63-Z..			D13-137..		G1						STROMBERG-CARLSON 32	
1st. 2nd.	26141. 25506.	16-5712. 16-5714.		465						†..		†..	Vol Sens.	26114. 26095.	M-63-Z..			D13-137..		G1						126L, 126H	
1st. 2nd.	26141. 25506.	16-5712. 16-5714.		465						†..		†..	Vol Sens.	26114. 26095.	M-63-Z..			D13-137..		G1						127H, 127M	
1st. 2nd. 3rd.	26266. 26269. 26270.	16-5712. 16-6133. 16-5714.		465	†..			26171. 26170.		†..		†..	Vol Sens.	26114. 26095.	M-63-Z..			D13-137..		G1						140-H, HB-K, KB-L, LB-P	
1st. 2nd. 3rd.	26481. 26482. 26483.			465				26170.		†..		†..	Vol Tone	26077. 25439.	T-109..			D13-137X..		G1							150-L-LB

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note		
STROMBERG - CA 160-L, -LB, -P	14	-6K7, 6A8, -6J7, -6H6, 6F6, -6C6, 6E5, 5Z3	25788, 22757, 25498, 26773, 26772, 24580, 26693, 24207, 25788, 25757, 26693,	PRS450-8, PRS25-10-10, BRD202A, KRS16A, BR102A, BR845, BR845, KRS588A, PRS450-8, PRS25-10, PR540-8		BR845, KRS508, KRS16A, KRS16A, BRD202A, BR102A, BR845, BR845	M-8-450, D-8-450, M-2X10-25, D-16-450, M-10-25, M-8-450, M-8-450, M-10-25, M-8-450	UT-8, TA-110, PLS-16, TA-10, UT-8, UT-8, TA-10, UT-8	Chk Pwr Audio Out, Chk Pwr Audio Out	26704, 26587, 26706, 26708, 26704, 26782, 26706, 26708, 26162, 26133, 26135	P-6165, A-3307, A-3307	T22R07, T22S68, T22S68	P-2955, A-3131, A-3131												
180-L, -LB	17	-6K7, 6A8, -6J7, -6H6, -6F6, -6L6, 6E5, 5Z3	25788, 25757, 26693,	PRS450-8, PRS25-10-10, PR540-8		KRS588A, KRS16A, KRS16A, BRD202A, BR102A, BR845, BR845	M-8-450	UT-8	Chk Pwr Audio Out, Chk Pwr Audio Out	26704, 26782, 26706, 26708	A-3307, A-3307	A-3131, A-3131													
225	5	6A8, 6K7, 6Q7, 25A6G, 25Z6G, 26162, 27014, 26164,	AF100	UP5015			EL-51																		
228-H, -HB, -L, -LB	6	6A8, 6K7, 6Q7, 6F6G, 6G5, 5Y4G, 27552, 27553, 27554,	GL450-18, PRS25-20, PR540-10-10, BRD202A	KRS588A, KRS16A, KRS16A, KRS16A, KRS16A, KRS16A	D-16-450, M-20-350, M-2X10-25, D-10-450, D-10-450	PLS-16, UT-202, TA-110, PLS-30, PLS-16	Pwr Out, Pwr Out, Pwr Out, Pwr Out, Pwr Out	27555, 27550, 27550, 26403	P-6011, A-3852, P-6011, A-3852, T22R02, T22S47	P-2951, A-2900															
229-P	8	-6K7, 6A8, 6H6, 6F5, 6F6, 80, 6G5,	27554, 27555, 27556, 27557, 27558, 27559, 27560, 27561, 27562, 27563, 27564, 27565, 27566, 27567, 27568, 27569, 27569, 27570, 27571, 27572, 27572, 27573, 27573, 27574, 27574, 27575, 27575, 27576, 27576, 27577, 27577, 27578, 27578, 27579, 27579, 27580, 27581, 27582, 27582, 27583, 27583, 27584, 27584, 27585, 27585, 27586, 27586, 27587, 27587, 27588, 27588, 27589, 27589, 27590, 27590, 27591, 27591, 27592, 27592, 27593, 27593, 27594, 27594, 27595, 27595, 27596, 27596, 27597, 27597, 27598, 27598, 27599, 27599, 27600, 27600, 27601, 27601, 27602, 27602, 27603, 27603, 27604, 27604, 27605, 27605, 27606, 27606, 27607, 27607, 27608, 27608, 27609, 27609, 27610, 27610, 27611, 27611, 27612, 27612, 27613, 27613, 27614, 27614, 27615, 27615, 27616, 27616, 27617, 27617, 27618, 27618, 27619, 27619, 27620, 27620, 27621, 27621, 27622, 27622, 27623, 27623, 27624, 27624, 27625, 27625, 27626, 27626, 27627, 27627, 27628, 27628, 27629, 27629, 27630, 27630, 27631, 27631, 27632, 27632, 27633, 27633, 27634, 27634, 27635, 27635, 27636, 27636, 27637, 27637, 27638, 27638, 27639, 27639, 27640, 27640, 27641, 27641, 27642, 27642, 27643, 27643, 27644, 27644, 27645, 27645, 27646, 27646, 27647, 27647, 27648, 27648, 27649, 27649, 27650, 27650, 27651, 27651, 27652, 27652, 27653, 27653, 27654, 27654, 27655, 27655, 27656, 27656, 27657, 27657, 27658, 27658, 27659, 27659, 27660, 27660, 27661, 27661, 27662, 27662, 27663, 27663, 27664, 27664, 27665, 27665, 27666, 27666, 27667, 27667, 27668, 27668, 27669, 27669, 27670, 27670, 27671, 27671, 27672, 27672, 27673, 27673, 27674, 27674, 27675, 27675, 27676, 27676, 27677, 27677, 27678, 27678, 27679, 27679, 27680, 27680, 27681, 27681, 27682, 27682, 27683, 27683, 27684, 27684, 27685, 27685, 27686, 27686, 27687, 27687, 27688, 27688, 27689, 27689, 27690, 27690, 27691, 27691, 27692, 27692, 27693, 27693, 27694, 27694, 27695, 27695, 27696, 27696, 27697, 27697, 27698, 27698, 27699, 27699, 27700, 27700, 27701, 27701, 27702, 27702, 27703, 27703, 27704, 27704, 27705, 27705, 27706, 27706, 27707, 27707, 27708, 27708, 27709, 27709, 27710, 27710, 27711, 27711, 27712, 27712, 27713, 27713, 27714, 27714, 27715, 27715, 27716, 27716, 27717, 27717, 27718, 27718, 27719, 27719, 27720, 27720, 27721, 27721, 27722, 27722, 27723, 27723, 27724, 27724, 27725, 27725, 27726, 27726, 27727, 27727, 27728, 27728, 27729, 27729, 27730, 27730, 27731, 27731, 27732, 27732, 27733, 27733, 27734, 27734, 27735, 27735, 27736, 27736, 27737, 27737, 27738, 27738, 27739, 27739, 27740, 27740, 27741, 27741, 27742, 27742, 27743, 27743, 27744, 27744, 27745, 27745, 27746, 27746, 27747, 27747, 27748, 27748, 27749, 27749, 27750, 27750, 27751, 27751, 27752, 27752, 27753, 27753, 27754, 27754, 27755, 27755, 27756, 27756, 27757, 27757, 27758, 27758, 27759, 27759, 27760, 27760, 27761, 27761, 27762, 27762, 27763, 27763, 27764, 27764, 27765, 27765, 27766, 27766, 27767, 27767, 27768, 27768, 27769, 27769, 27770, 27770, 27771, 27771, 27772, 27772, 27773, 27773, 27774, 27774, 27775, 27775, 27776, 27776, 27777, 27777, 27778, 27778, 27779, 27779, 27780, 27780, 27781, 27781, 27782, 27782, 27783, 27783, 27784, 27784, 27785, 27785, 27786, 27786, 27787, 27787, 27788, 27788, 27789, 27789, 27790, 27790, 27791, 27791, 27792, 27792, 27793, 27793, 27794, 27794, 27795, 27795, 27796, 27796, 27797, 27797, 27798, 27798, 27799, 27799, 277100, 277100, 277101, 277101, 277102, 277102, 277103, 277103, 277104, 277104, 277105, 277105, 277106, 277106, 277107, 277107, 277108, 277108, 277109, 277109, 277110, 277110, 277111, 277111, 277112, 277112, 277113, 277113, 277114, 277114, 277115, 277115, 277116, 277116, 277117, 277117, 277118, 277118, 277119, 277119, 277120, 277120, 277121, 277121, 277122, 277122, 277123, 277123, 277124, 277124, 277125, 277125, 277126, 277126, 277127, 277127, 277128, 277128, 277129, 277129, 277130, 277130, 277131, 277131, 277132, 277132, 277133, 277133, 277134, 277134, 277135, 277135, 277136, 277136, 277137, 277137, 277138, 277138, 277139, 277139, 277140, 277140, 277141, 277141, 277142, 277142, 277143, 277143, 277144, 277144, 277145, 277145, 277146, 277146, 277147, 277147, 277148, 277148, 277149, 277149, 277150, 277150, 277151, 277151, 277152, 277152, 277153, 277153, 277154, 277154, 277155, 277155, 277156, 277156, 277157, 277157, 277158, 277158, 277159, 277159, 277160, 277160, 277161, 277161, 277162, 277162, 277163, 277163, 277164, 277164, 277165, 277165, 277166, 277166, 277167, 277167, 277168, 277168, 277169, 277169, 277170, 277170, 277171, 277171, 277172, 277172, 277173, 277173, 277174, 277174, 277175, 277175, 277176, 277176, 277177, 277177, 277178, 277178, 277179, 277179, 277180, 277180, 277181, 277181, 277182, 277182, 277183, 277183, 277184, 277184, 277185, 277185, 277186, 277186, 277187, 277187, 277188, 277188, 277189, 277189, 277190, 277190, 277191, 277191, 277192, 277192, 277193, 277193, 277194, 277194, 277195, 277195, 277196, 277196, 277197, 277197, 277198, 277198, 277199, 277199, 277200, 277200, 277201, 277201, 277202, 277202, 277203, 277203, 277204, 277204, 277205, 277205, 277206, 277206, 277207, 277207, 277208, 277208, 277209, 277209, 277210, 277210, 277211, 277211, 277212, 277212, 277213, 277213, 277214, 277214, 277215, 277215, 277216, 277216, 277217, 277217, 277218, 277218, 277219, 277219, 277220, 277220, 277221, 277221, 277222, 277222, 277223, 277223, 277224, 277224, 277225, 277225, 277226, 277226, 277227, 277227, 277228, 277228, 277229, 277229, 277230, 277230, 277231, 277231, 277232, 277232, 277233, 277233, 277234, 277234, 277235, 277235, 277236, 277236, 277237, 277237, 277238, 277238, 277239, 277239, 277240, 277240, 277241, 277241, 277242, 277242, 277243, 277243, 277244, 277244, 277245, 277245, 277246, 277246, 277247, 277247, 277248, 277248, 277249, 277249, 277250, 277250, 277251, 277251, 277252, 277252, 277253, 277253, 277254, 277254, 277255, 277255, 277256, 277256, 277257, 277257, 277258, 277258, 277259, 277259, 277260, 277260, 277261, 277261, 277262, 277262, 277263, 277263, 277264, 277264, 277265, 277265, 277266, 277266, 277267, 277267, 277268, 277268, 277269, 277269, 277270, 277270, 277271, 277271, 277272, 277272, 277273, 277273, 277274, 277274, 277275, 277275, 277276, 277276, 277277, 277277, 277278, 277278, 277279, 277279, 277280, 277280, 277281, 277281, 277282, 277282, 277283, 277283, 277284, 277284, 277285, 277285, 277286, 277286, 277287, 277287, 277288, 277288, 277289, 277289, 277290, 277290, 277291, 277291, 277292, 277292, 277293, 277293, 277294, 277294, 277295, 277295, 277296, 2772																						

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.				
1st.	26481			465	†		26170		†		†	Vol & HF	26077 26485	T-109			D13-137X		G1		Continue	d—	STRO	MBERG-CARLSON					
2nd.	26482											Vol Tone & HF	26798 26114 27311	...-137/ M-63-/ M-63-'			D13-137		G1										
3rd.	26243	16-5714										Bass Vol Tone			A		D13-137		G1						180-L-LB				
1st.	16-5714			465			26170		†		†	Vol Tone	27111 27117	T-112			D13-137X		G1							225			
2nd.	26482											M-58-S			A		D13-137X		G1						228-H-HB-L-LB				
3rd.	26243	16-5714															D11-133		G1										
1st.	25121	16-5714	235				26053		†		†	Vol Tone	27111 27117	T-112			D13-137X		G1							229-P			
2nd.	25506	16-5714					27557		†		†	Vol Tone	27311	M-58-S			A		D13-137		G1						230-H-HB-L-LB		
1st.	26121	16-5712		465			27605		†		†	Vol Tone	27111 27117	T-112			D13-137X		G1							231-F-FB-P-R-RB			
2nd.	25506	16-5714										Vol Tone	27311	M-58-S			A		D13-137		G1						235-H-HB-L-LB		
1st.	27069		415				26171		†		†	Vol Tone	27110 27111	-137/ -137-			D13-137X		G1								240-H-HB-L-LB-M-MB-R-RB-S-SB-W-WB-P		
2nd.	27070						27375		†		†	Vol Tone	27114 27311	M-61-/ M-61-1			A		D13-137		G1							245-L-LB-M-MB-R-RB-S-RB-P	
1st.	27069		415	PC28262	B-2		26170		†		†	Vol Tone	27111 27311	T-112			D13-137X		G1								250-L-LB		
2nd.	27612			465			27375		†	F13	F13	Vol Tone	27111 27311	T-112			A		D13-137		G1							255-L-LB	
1st.	27314		465	PC28262	B-2		27503		†	F13	F13	Vol	27569				D18-137XX		G1								310		
2nd.	27616						27445		†	F13	F13																320-H-HB-T-TB		
1st.	27655		465	PC28262	B-2		27504		†			Vol	27569				D18-137XX		G1								325-J-JB-N-NB-S-SB		
2nd.	27692		465									VII	27569															335-L-LB-336-P	
3rd.	27693																												
4th.	27694																												
1st.	27695																												
1st.	27692		415				27504		†			Vol	27569															310	
2nd.	27693											VII	27569															320-H-HB-T-TB	
3rd.	27694																												
4th.	27695																												
1st.	27914		415				26170		†			Vol Tone	28389 27897	M-60-Z			D18-137XX		G1								325-J-JB-N-NB-S-SB		
2nd.	27915						27427		†								D13-137		G1								335-L-LB-336-P		
3rd.	28285																												
1st.	W-28853	16-5714	455				W-2957		†		F1	Vol	W-2957															310	
2nd.	W-28663	16-5714	455	†			28677		†		F1	Vol	26114	M-13-7			D13-137		G1									320-H-HB-T-TB	
1st.	28663	16-5712	455	†								Vol	26114	M-13-7			D13-137		G1									325-J-JB-N-NB-S-SB	
2nd.	28664	16-5714	455									Vol	26114	M-13-7			D13-137		G1									335-L-LB-336-P	
1st.	28823	16-5714	455				29464		†		F1	Vol	27610 27311	T-112 M-61-2			A		D18-137XX		G1								310
2nd.	28854	16-5714	455				29464		†		F1	Vol Tone	27610 27311	T-112 M-61-2			A		D18-137X		G1								320-H-HB-T-TB

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES										
	No.	Type Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note Part No.	Cornell-Dubilier Part No.	Note Part No.	Solar Part No.	Note Part No.	Sprague Part No.	Note Part No.	Use	Mfr. Part No.	Stancor Part No.	Note Part No.	Thordarson Part No.	Note Part No.	Merit Part No.	Note Eveready Part No.	Note Part No.	Burgess Part No.	Note Part No.							
STROMBERG - CA	R	LSDN—Continued	7	6K8, 6K7, 6H6, 6F5, 6F6G, 80, 6U5.	28730.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	28903.	P-6012.	T22R04	P-2952.	A-2931.													
337-H, -HB, -L, -LB	28731.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	29387.	A-3823.	T22S47																			
340-F, -FB, -H, -HB, -M, -MB, -V, -VB, -P, 341-R, -RB, -P	9	6A8, 6K7, 6H6, 6F5, 6C5, 26V6G, 80, 6U5.	28914.	GL450-30.	A8	KR530	A8	D-30-450.	A8	PLS-16	Pwr Out	28954.	P-6013.	T22R05	P-2953.	A-2904.													
	28915.	GL450-16		KR516A	A8	D-16-450.	A8	PLS-16	A8	PLS-16	Pwr Out	28945.	A-3830.	T22S64															
	28916.	GL450-16		KR516A	A8	D-16-450.	A8	PLS-16	A8	PLS-16	Pwr Out	27134.	A-3830.	T22S64															
	29003.	GL450-16		KR516A	A8	D-16-450.	A8	PLS-16	A8	PLS-16	Pwr Out	28945.	P-6013.	T22R05	P-2953.	A-2904.													
345-F, -FB, -M, -MB	10	6K8, 6K7, 6H6, 6F5, 6C5, 26V6G, 80, 6U5.	28914.	GL450-30		KR530	D-30-450.	PLS-16	Pwr Out	28964.	P-6013.	T22R05	P-2953.	A-2904.															
	28915.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	28945.	A-3830.	T22S64																			
350-M, -MB, -P, -R, -RB, -V, -VP	II	6K7, 6A8, 6F8G, 6H6, 6B8, 6C5, 26F5, 5Z3, 6U5.	27123.	GL450-15		KR516A	D-16-450.	PLS-16	Chk	26260.	C-1709.	T20C53																	
	27124.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	29123.	P-6165.	T22R07	P-2955.	A-2904.																	
	27622.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	27134.	A-3830.	T22S64																			
360-M, -MB	12	6K7, 6A8, 6F8G, 6B8, 6H6, 6R7, 6N7, 26F6, 5Z3, 6U5.	29118.	GL450-16		KR516A	D-16-450.	PLS-16	Chk	26260.	C-1709.	T20C53																	
	29119.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	29197.	P-6292.	A-3830.	T22S64	A-2904.																	
	29120.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	27134.	A-3830.	T22S64																			
	29121.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	27134.	A-3830.	T22S64																			
370-M, -MB	14	6K7, 6A8, 6F8G, 6H6, 6R7, 6F5, 6C5, 26L6, 5Z3, 6U5.	27753.	GL600-8		KR608	D-8-600.	AP-86.	Chk	27767.	C-1709.	T20C53																	
	27754.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	29312.	P-6292.	A-3800.	T22S68	A-3131.																	
	27755.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	27765.	A-3800.	T22S68																			
400-H, -HB, -N, -NB, -S, -SB	5	6A8G, 6K7, 6SQ7, 6VGG, 80.	30119.	AF4414A		UP2245C	DY-315.	EL-350.	Pwr Out	28649.	P-6119.	T22R02	P-2951.	A-2930.															
402	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	31024.	PRS150-12		BR1215	M-10-150.	UT-121.	Pwr Out	SD31.	A-3830.	T22S47	A-2927.	741 & 2482.	BF														
405-H	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	30426.			UP5515C	DY-307.	EL-352	Chk	30399.	†	T22S45	A-2928.																
410-H, -HB, -J, -JB, -T, -TB, 411-PF	5	6A8G, 6K7, 6SQ7, 6F6G, 80.	30399.			UP43145C	DY-406.	EL-424	Pwr Out	30945.	A-3876.	T22R02	P-2951.	A-2931.															
412-H, -HB	6	6A8, 6J5, 6K7, 6B8, 6K6G, 80 (44).	28730.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	30396.	P-6011.	T22R02	P-2951.	A-2931.															
420-H, -HB, -L, -LB, -PL, -PR	7	6A8G, 6K7, 6H6, 6SQ7, 6F6G, 80, 6AF6G.	30399.			UP43145C	DY-406.	EL-424	Pwr Out	30397.	P-6011.	T22R02	P-2951.	A-2931.															
425-H, -HB	8	6SA7, 26AC7/1852, 6SJ7, 6H6, 6SF5, 6F6G, 80 (44).	30399.			UP43145C	DY-406.	EL-424	Pwr Out	31437.	P-6120.	T22R04	P-2952.	A-2931.															
430-H, -HB, -L, -LB, -M, -MB, -PF, -PL	9	6A8, 6K7, 6H6, 6SQ7, 26VGG, 80, 6AF6G (44).	27685.	PRS25-25.	A4	BR252A	M-25-25.	TA-25.	Pwr Out	30424.	P-6012.	T22R04	P-2952.	A-2904.															
	30499.	AF444J	A4	UP222245	A4	DY-4X20-450.	A4	EL-420	A4	Pwr Fm-Pwr Out	31850.	P-6120.	T22R02	P-2951.	A-2904.														
	31856.	AF444J	A4	UP222245	A4	DY-4X20-450.	A4	EL-420	A4	Pwr Fm-Pwr Out	27134.	A-3830.	T22S64	A-2904.															
435-M	16	6A8, 6K7, 26H6, 6SA7, 26AC7/1852, 6SJ7, 6SK7, 26SQ7, 26VGG, 80, 6AF6G (44).	27685.	PRS25-25.	A8	BR252A	M-25-25.	TA-25.	Pwr Out	30424.	P-6012.	T22R04	P-2952.	A-2904.															
	30499.	AF444J	A4	UP222245	A4	DY-4X20-450.	A4	EL-420	A4	Pwr Fm-Pwr Out	31850.	P-6120.	T22R02	P-2951.	A-2904.														
	31856.	AF444J	A4	UP222245	A4	DY-4X20-450.	A4	EL-420	A4	Pwr Fm-Pwr Out	27134.	A-3830.	T22S64	A-2904.															
440-M, -MB	10	6A8, 6J5, 6K7, 6H6, 6SQ7, 26VGG, 80, 6AF6G.	27685.	PRS25-25.	A4	BR252A	M-25-25.	TA-25.	Pwr Out	30424.	P-6012.	T22R04	P-2952.	A-2904.															
	30499.	AF444J	A4	UP222245	A4	DY-4X20-450.	A4	EL-420	A4	Pwr Fm-Pwr Out	30247.	A-3830.	T22S64	A-2904.															
450-M, -MB	11	6K7, 6A8, 6J5, 6H6, 6SQ7, 26F6G, 5Z3, 6AF6G.	27336.	GL450-16		KR516A	D-16-450.	PLS-16	Chk	30233.	†	T22S68	A-2904.																
	27336.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	30229.	A-3830.	T22S68	A-2904.																		
	30231.	AF444J		UP222245	DY-2X20-450.	EL-220	Pwr Out	30247.	A-3830.	T22S64	A-2904.																		
455-M, -MB, -PL	12	6SK7, 6SA7, 26AC7/1852, 6H6, 6SJ7, 6SC7, 26VGG, 5Z3, 6U5 (44).	30539.	PRS25-25.	A4	BR252A	M-25-25.	TA-25.	Pwr Out	31532.	P-6014.	T22R06	P-2954.	A-2904.															
	27685.	AF444J	A4	UP222245	A4	DY-4X20-450.	A4	EL-420	A4	Pwr Fm-Pwr Out	31553.	A-3830.	T22S64	A-2904.															
	31531.	AF444J	A4	UP222245	A4	DY-4X20-450.	A4	EL-420	A4	Pwr Fm-Pwr Out	31553.	A-3830.	T22S64	A-2904.															
460-M, -MB	12	6K7, 6A8, 6F8G, 6B8, 6H6, 6R7, 6N7, 26F6, 5Z3, 6U5.	29118.	GL450-16		KR516A	D-16-450.	PLS-16	Chk	26260.	C-1710.	T22R04	P-2952.	A-2904.															
	29119.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	29197.	P-6292.	A-3852.	T22S64	A-2904.																	
	29120.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	27134.	A-3852.	T22S64	A-2904.																		
	29121.	GL600-16		KR516A	D-16-600.	AP-16.	Pwr Out	27134.	A-3852.	T22S64	A-2904.																		
470-M, -MB	14	6K7, 6A8, 6F8G, 6H6, 6R7, 6F5, 6C5, 26L6, 5Z3, 6U5.	27753.	GL600-8		KR608	D-8-600.	AP-86.	Chk	27767.	C-1709.	T20C53																	
	27754.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	29312.	P-6292.	A-3800.	T22S68	A-3131.																	
	27755.	GL450-16		KR516A	D-16-450.	PLS-16	Pwr Out	27765.	A-3800.	T22S68	A-3131.																		
480-M, -MB	20	6SK7, 6F8G, 26SA7, 6K7, 6H6, 6SJ7, 6CR7, 6SC8, 6SQ7, 6GL6, 5Z3, 6AF6G.	31335.	AF444J		UP222245	DY-4X20-450.	EL-420	Chk	26704.	P-6292.	T22S68	A-3131.																
	31405.	AF444J																											

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photofact Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	28810.			455				27557.		†		†	Vol Tone	29518.	M-63-Z				D13-137			G1			Continued ---	STRO	MBERG-CARLSON 337-H, -HB, -L, -LB	
2nd.	28854.							27605.		†		†		27311.	M-63-				D13-137			G1						
1st.	28810.			455	PC22262		E2	27610.	.11.				Vol Tone	27610.	T-11				D18-I37X			G1					340-F, -FB, -H, -HB, -M, -MB, -V, -VB, -P, -341-R, -RB, -P	
2.	29951.	1 - 14.													27311.	M-63-				D13-1			G1					
1.	-10							170.					Vol Tone	27610.	T-112				D18-X			G1					345-F, -FB, -M, -MB	
2nd.	29569.														27311.	M-6-Z				D18-13			G1					
1st.	29030.			455		†							Vol	27569.	T-95				D18-135XX			1					350-M, -MB, -P, -R, -RB, -V, -VB	
2nd.	29031.							2 504.		†		†																
1st.	29209.			455									Vol	27610.	T-112				D18-I37X			G1					360-M, -MB	
2nd.	29209.							29072.		†		†																
1.	2-320.							9					V		T-112				X			G1					370-M, -MB	
2nd.	29321.																											
1st.	30127.	16-572.						3 137.		†		F2	Vol	30136.	†			D13-133			1					400-H, -HB, -N, -NB, -S, -SB		
2nd.	30128.	16-5714.						31001.		F1		F1	Vol	30126.	M-6-		A.	D13-137			41	G1				402		
1st.	30996.	16-5712.						29757.		F1		F1	Vol	30136.	M-60-			D13-133			1					405-H		
2nd.	30997.	16-5714.											Vol	29560 (or)	T-10			D18-I37X			G1					410-H, -HB, -J, -JB, -TB, 411-PF, -PT		
1st.	30991.	16-5712.						30304.		F2		F2	Vol	30136.	M-60-			D13-133			1	G1						
2nd.	30944.	16-5712.		4	PC2226								Tone	30136.	M-63-			D13-137			1	G1						
1st.	30127.	16-5712.		455				30602.		F2		F2	Vol	29518.	M-6-Z			D13-137			1	G1				412-H, -HB		
2nd.	30405.	16-5714.											Vol	30136.	M-60-Z			D13-133			1					420-H, -HB, -L, -LB, -PL, -PR		
1st.	30127.	16-5712.			SD-73.	B-2.		27557.					Vol	30136.	M-60-Z			D13-133			1					425-H, -HB		
2nd.	30405.	16-5714.						27605.					Vol	30136.	M-60-Z			D13-133			1							
1st.	31441.							30873.					Vol	30136.	M-63-			D13-133			G1					430-H, -HB, -L, -LB, -M, -MB, -PL, -PF		
2nd.	31442.							31451.					Tone	30136.	M-63-			D13-137			41	G1						
3rd.	31**2.												Vol	29560.	T-10			D18-I37X			G1							
1st.	3 5 4.	16-1		1				30358.					Tone	27311.	M-63-			D13-133			1	G1						
2nd.	302.	16-14.						27834.					Vol	27311.	M-63-			D13-137			41	G1						
								30359.					Tone	26170.	T-10			D18-13			41							
1st.	30504.			455				26 71.		†			Vol	29560.	T-10			D13-137			41	G1				435-M		
1st.	311:1.			2.1				30359.		†			Tone	27311.	T-1			D13-137X			41	G1						
2nd.	30245.			455									Vol	30136.	M-63-			D13-137			41	G1				440-M, -MB		
2nd.	311:2.			2.1									Tone	30136.	M-63-			D13-137			41	G1						
3rd.	31442.			2.1									Vol	30136.	M-63-			D13-137			41	G1				450-M, -MB		
1st.	30249.	i -		455									Tone	30136.	M-63-			D13-137			41	G1						
2nd.	30566.	16-5714.											Vol	30136.	M-63-			D13-137			41	G1						
1st.	3 24	16-12.		455				2751.		†			Vol	30136.	M-63-			D13-137			41	G1						
2nd.	3 24	16-571.											Vol	30136.	M-63-			D13-137			41	G1						
1st.	3 14.			4.				2-2.					Vcl	311:1.				1.			4.	1				455-M, -MB, -PL		
1st.	31443.			2.									Tone	311:3.	M-63-Z													
2nd.	31551.			455									Vcl	311:3.	M-63-Z													
2nd.	31442.			2.1									Tone	311:3.	M-63-Z													
3rd.	31442.			2.1									Vcl	311:3.	M-63-Z													
1st.	2 2.			455									Vcl	311:3.	M-63-Z													
2nd.	2 2 9.												Vcl	311:3.	M-63-Z													
1st.	2 32.			455				9 72.		†		†	Vcl	27610.													40-M, -MB	
2nd.	2 321.												Vcl	27610.														
1st.	3 196.			3.0									Vcl	02.	10												480-M, -MB	
2nd.	31195.			16-6660.				31126.		†		†	Vcl	02.	10													
2nd.	31195.			455									Vcl	02.	10													
3rd.	31196.			3.0									Vcl	02.	10													
3rd.	31196.			3.0									Vcl	02.	10													
4th.	31197.			3.0									Vcl	316:4.	M-63-Z												500-H, J, S	
1st.	31686.			455				31696.		†		†	Vcl	316:4.	M-63-Z													
2nd.	31690.			16-100.				31697.		†		†	Vcl	316:4.	M-63-Z													

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
		No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubielier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	
STROMBERG - CAIR 505-H, -HB	LSON -Continued 9-6AC7, 6SA7, 6AB7, 6SK7, 6H6, 6SF5, 6F6G, 80 (44)	30399					UP43145C		DY-306		EL-424		Pwr Out	31437 31453	P-6120 A-3852		T22R04 T22S47		P-2952 A-2931					
509-PF, -PT	5, 6A8G, 6K7, 6SQ7, 6F6G, 80	30477	AF8J	A8	UP4045	A8	DY-40-450	A8	EL-4		A8	Pwr Out	30395 30522 31850	P-6010 A-3852 P-6012		T22R01 T22S47		P-2950 A-2931						
515-M	17 6AB, 6K7, 6H6, 6SA7, 6AB7, 6AC7, 6SJ7, 6SK7, 6SQ7, 6V6G, 8B8, 6AF6G (44)	27685 30499 31856	PRS25-25 AF444J AF444J	A4 A4 A4	BR252A UP222243 UP222245		M-25-25 DY-4X20-450 DY-4X20-450	A4 A4 A4	TA-25 EL-420 EL-420		A4	Pwr Out	30424 27134	P-6120 A-3830		T22R02 T22S64		P-2951 A-2904						
520-H, -HB, -J, -JB, -L, -LB, -PF, -PL, -PG	7-6SK7, 6SA7, 6SR7, 6SC7, 6V6GT, 5Y3G, 6U5 (44)	32052					UP43145C		DY-306		EL-424		Pwr Pwr Out	32891 32050 32065	P-8012 P-6012 B22		T22R04 T22R04 T22S46		P-2952 A-2952 B22					
530-PL	9-6SK7, 6SA7, 6SR7, 6SC7, 6V6GT, 5Y3G, 6U5 (44)	27685 32479	PRS25-25		BR252A		M-25-25 DY-311		TA-25 EL-330			Pwr Out	32233 32255	P-6012 A-3801		T22R04 T22S64		P-2952 A-2904						
535-M, -PG, -PL, -PS	15-6SK7, 6SA7, 6SR7, 6SC7, 6V6GT, 5U4G, 6U5, 6AB7, 6SA7, 6AC7, 6SJ7, 6H6 (44)	27685 32479 32055 32238	PRS25-25 PRS25-25		BR252A BR252A		M-25-25 DY-311 M-25-25		TA-25 EL-330 TA-25			Pwr Out	32739 32461	P-6165 A-3801		T22R07 T22S64		P-2955 A-2904						
555-M, -MB, -PL	12 6AB7, 6SA7, 6AC7, 26H6, 6SJ7, 6SC7, 6V6G, 5Z3, 6U5 (44)	27685 31531	PRS25-25 AF444J		BR252A UP222245		M-25-25 DY-4X20-450		TA-25 EL-420			Pwr Out	31532 31533	P-6014 A-3830		T22R06 T22S64		P-2954 A-2904						
585-M	19 6SK7, 6AB7, 6F8G, 6SA7, 6K7, 6SK7, 5H6, 6SJ7, 6R7, 6CBG, 6L6, 5Z3, 6AF6G	30539 31335 31405 31406 31495	AF444J GL600-8 KR516A UP11145		UP222245 D-8-600 D-16-450 DY-3X10-450	A4	DY-4X20-450 EL-420 AP-36 PLS-16 DY-3X10-450	A4	Chk Pwr Out	26704 31181 31205	A4	†	P-6165 A-3801		T22R07 T22S68		P-2954 A-3131							
600-H	6-12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT	31682	AF888D		UP44415		DY-3X40-150		EL-340			Out	SD-234	A-3876		T22S45		A-2928						
900-H, -J	6-12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT	31682	AF888D		UP44415		DY-3X40-150		EL-340			Out	SD-234	A-3876		T22S45		A-2928						
920-H, -HB, -L, -LB, -PF, -PG	7-6SK7, 6SA7, 6SF7, 6SC7, 6V6GT, 5Y3G (44)	33894			UP43145C		DY-306		EL-424			Pwr Out	33900	P-6013		T22R05 T22S64		P-2953 A-2904						
925-H, -HB, -L, -LB, -PF, -PFM, -PS, -PSY	14 6AB7, 6AC7/7V7, 6SA7, 6SK7, 6AC7, 6SQ7GT, 6SC7, 6F6G, 5U4G, 6U5, 6SJ7, 6H6 (44)	33526 34013										Pwr Out	33853 33502 33556	P-6014 A-3311		T22R07 T22S64		P-2954 A-2904						
935-M, -PF, -PL, -PR	16-6AB7/6SG7, 6AC7/7V7, 6SA7, 6AC7, 6SJ7, 6H6, 6SQ7GT, 6SC7, 6L6G, 5U4G, 6U5 (44)	33739 34050 34052	PRS450-16 AF444J		BR1645 UP222245		M-16-450 DY-4X20-450		UT-16 EL-420			Chk Pwr Out	34055 33753 34053	†		†		†		†				
955-PF	16-6AB7/6SG7, 6AC7/7V7, 6SA7, 6SC7, 6SJ7, 6H6, 6SQ7GT, 6SC7, 6L6G, 5U4G, 6U5	33739 34050 34052 34116 34122	PRS450-16 AF444J		BR1645 UP222245		M-16-450 DY-4X20-450		UT-16 EL-420			Chk Chk Chk Pwr Pwr Pwr In	34055 30233 27604 34090 33753 34086 34088	†	†	†	†	†	†	†				
1000-H, -J	6-14A7, 14Q7, 14B6, 35A5, 35Y4	34506			UP43145C		DY-306		EL-424			Out Out Out	34053 30234 SD-234	A-3307 A-3876		T22S68 T22S45		A-3131 A-2928						
1020-PLM	7-6SK7, 6SA7, 6SF7, 6SC7, 6V6GT, 5Y3G (44)	33894										Pwr Out	33900 33853	P-6013 A-3311		T22R05 T22S64		P-2953 A-2936						
1025 (Series)	14 6AB7, 6AC7/7V7, 6SA7, 6SK7, 6AC7, 6SQ7GT, 6SC7, 6F6G, 5U4G, 6U5, 6SJ7, 6H6 (44)	33526 34013										Pwr Out	33502 33556	P-6014 A-3311		T22R07 T22S64		P-2954 A-2904						
1035 (Series)	16-6AB7/6SG7, 6AC7/7V7, 6SA7, 6AC7, 6SJ7, 6H6, 6SQ7GT, 6SC7, 6LEG, 5U4G, 6U5 (44)	33739 34050 34052	PRS450-16 AF444J		BR1645 UP222245		M-16-450 DY-4X20-450		UT-16 EL-420			Chk Pwr Out	34055 33753 34053	†		†		†		†				
1055 (Series)	16-6AB7/6SG7, 6AC7/7V7, 6SA7, 6AC7, 6SJ7, 6H6, 6SQ7GT, 6SC7, 6LEG, 5U4G, 6U5 (44)	33739 34050 34052 34116 34122	PRS450-16 AF444J		BR1645 UP222245		M-16-450 DY-4X20-450		UT-16 EL-420			Chk Chk Chk Pwr Pwr Pwr In	34055 30233 27604 34089 33753 34086 34088	†	†	†	†	†	†	†				
1100-H, -H1 (Series 10, 11, 12)	6-14A7, 14Q7, 14B6, 35A5, 35Y4	34506										A8	DY-2X40-150 DY-2X40-150	A8	A8	A8	A8	A-3307 On Spkr	A-3876	B3	T22S68 T22S45	B3	A-3131 A-2928	B3
1101-HB, -H1, -HM, -HW, -HY (Series 10, 11)	6-12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	33894										A8	UP5515	A8	A8	A8	A8	161004 On Spkr	C-1706 A-3876	B3	T22C52 T22S45	B3	C-2975 A-2928	B3

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No. Tubs	Sylvania or Equivalent		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Dial Light Type Listed in Parentheses	Part No.																		"A"	"B"	"A"	"B"
STROMBERG - CARLSON	LSON—Continued	8	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	111001	AF88D			UP4415		DY-2X40-150		EL-240		Chk Out	161004	C-1706		T20C52		C-2975					
1101 HPW		6	1LG3, 1LC8, 1LD5, 3LF4, 11Z6GT	111008	AEF106D20A & PRS25-100			UP9D148 & BRH251		DY-304 & M-100-25		EL-351 & UHC-102		Out	155020	A-3876	T22S45		A-2928						
1105		111013	PRS150-30	111010	PR525-100			BR3015		M-30-150		UT-301			155011	A-3878	T22S47		A-2931						
1110-HW, -PTW, (Series 10).	6 6SK7, 6SA7, 6SF7, 6SC7, 6V6GT, 5Y3C (44)	111004	AEF64K4A		UP6C117			DY-312		UHC-106		EL-323		Chk Pwr Out	161001	C-1002		T22C53		C-2990					
1120 (Series).	7 6SK7, 6SA7, 6SF7, 6SC7, 6V6GT, 5Y3C (44)	33894			UP43145C			DY-406		EL-424					161042	P-6348	T22R02								
1121-HW, -LW, -M1, -M2, -M2-Y, -PGM, -PGW, -PLW, -PSM, -PLW (Series 10, 11)	11 6SG7, 6SB7, 6SH7, 6H6, 6SC7, 6V6GT, 5Y3C (44)	111002	AF444J	A4	UP4445			DY-2X40-450		EL-240		EL-248		Out	33900	P-6013	T22R05								
		111003	AF444JA	A4	UP15D25C			DY-2X40-450		EL-240		EL-248		Chk Pwr Out	161203	C-2309	T22S64								
														161204	P-6314	T22R07		P-2955							
														161401	A-3831	T22S47		A-2901							
1135-PFM, -PLM, -PLW (Series 10, 11)	16 6SG7, 6SB7, 6SH7, 6SJ7, 6H6, 6SA7, 6SL7, 6USG, 6S07, 6SN7, 6L6GT, 5R4G (44)	111006	GL450-20		KR520			D20-450		PLS-20		Chk Pwr Out	161002												
		111007	AF444J		UP4245			DY-3X20-450	A4	EL-425	A9.4	EL-432	A9	Out	151403										
		111005	AF88J & PRS250-20	A4	UP9D155			DY-406		EL-432	A9				151206	A-3851									
1204	7 12BA6, 12BE6, 12H6, 12AQ6, 5OL5GT	111001	AF283		UP4415			DY-2X40-150		EL-25					159029	A-3876	T22S45		A-2928						
1210-M2-M, -M2-W, -M2-Y, -PGM, -PLM, -PGW	11 6BA6, 6BE6, 6AU6, 6H6, 6AT6, 6SC7, 6V6GT, 5Y3GT (44)	111027	AF101004A		UP5115C			DY-419		EL-452					159029	A-3876	T22S45								
		111025	PR5100-4		BR550			M-8-150		TA-55					159029	A-3876	T22S45								
		111021	AF444J	A4	UP222245			DY-4X20-450	A4	EL-420	A4	M-20-350		Out	161006	C-2303	T22SR05		P-2953						
		111026	PR520-20		BR2025			TA-25		TA-25		M-25-25			161411	P-6013	T22S56		A-2904						
		111030	PR525-25		BR550			M-4-450		TA-25					161226	A-3852									
STUDEBAKER	6 7A7, 7B8, 7B6, 7A5, 7Y4 (44)	61-0150			UP9DJ50			DY-404		EL-415					65-0404	P-6301	T22S48		P-2969						
S-4624, S-4625	8 7A7, 7B8, 7B6, 7A4, 7C5, 7Y4 (44)	61-0150			UP9DJ50			DY-404		EL-415					65-0395	A-3865	T22R20		A-2930						
S-4626, S-4627														65-0358	P-4062	T22S47		P-2971							
														65-0409	A-3856			A-2900							
SWANK	DU-101 (5 tube Radio-Phone)	5 12SA7GT, 12SK7GT, 12SQ7GT, 5OL6GT, 35Z5GT (47)	20-30-20 Mfd	PRSA150-20-20 & PRS150-30	EZ42215			DSB-403020-150		TA-220 & JT-301		-Out			A-3876	T22S45			A-2928						
ER61	3 12SL7GT, 5OL5GT, 35Z5GT	20-20 Mfd	PRSA150-20-20	PRS25-25	BRD2215			M-2X20-150		TA-220		Out			A-3876	T22S45			A-2928						
TELECOIN	M5TS4	4 12SA7GT, 12SK7GT, 12SQ7GT, 5OL6GT (C7)	40-20 Mfd	PRSA150-20-40	BR04215			M-2X40-150		TA-430		Out			A-3876	B3	T22S45	B3	A-2928	B3					
TELEQUIP	5135, 5136, 5140-A	4 12SN7GT	40-40 Mfd	PRSA150-40-40	BRD4415			DSB-2X40-150	A8	TA-440	A8	Out			B-12C-738	A-3306	T22S74		A-2905						
			50-30 Mfd	PRSA150-40-40	BRD3515			M-50-150		TA-530	A8	UT-401													
			40 Mfd	PRS150-40	BR4015			M-40-150																	
TELESONIC — Med Co	6 14A7, 14Q7, 14B6, 50A5/35A5, 35Y4 (47)	40-40 Mfd	PRSA150-40-40	BRD4415			M-2X40-150		TA-440		Out			A-3876	B3	T22S45	B3	A-2928	B3						
1635	5 14A7, 14Q7, 14B6, 35A5, 35Y4 (47)	20 Mfd	PRS150-20	BR2015			M-20-150		TA-201		Out			A-3876	T22S45			A-2928							
1636	5 14A7, 14Q7, 14B6, 35A5, 35Y4 (47)	40 Mfd	PRSA150-40-40	BRD4215			M-2X40-150		TA-240		Out			A-3876	T22S45			A-2928							
1642	5 12SA7GT, 12SK7GT, 12SQ7GT, 5OL6GT, 35Z5GT	40-40 Mfd	PRSA150-40-40	BR4015			M-40-150		UT-401						A-3876	B3	T22S45	B3	A-2928	B3					
1643	5 14Q7, 14A7, 14B6, 50L6GT, 35Y4 (47)	40-40 Mfd	PRSA150-40-40	BRD4415			M-2X40-150		TA-440		Out			A-3876	B3	T22S45	B3	A-2928	B3						
TELE-TONE	100, 100-A, 101, 109, 111, 113, 122, 123, 125, 127, 130, 131 (Series A)	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (Cr Miniature Equivalent) (47)	20-20-20 Mfd	PRSA150-20-20 & PRS150-20	EZ42215			DSB-3X20-150		TA-220 & UT-201		Out			On Spkr.	A-3876	B3	T22S45	B3	A-2928	B3				
109	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)	20-20-20 Mfd	PRSA150-20-20 & PRS150-20	EZ42215			DHN-2X20-150 & DH-20-150		TA-220 & UT-201		Out			On Spkr.	A-3876	T22S46		A-2928							
110, 117, 117A, 118, 119, 120, 124, 126, 132	5 14Q7, 14A7/12B7, 14B6, 35L6GT, 35Y4 (47)	20-20-20 Mfd	PRSA150-20-20 & PRS150-20	EZ42215			DHN-2X20-150 & DH-20-150		TA-220 & UT-201		Out			On Spkr.	A-3876	T22S62		A-2928							
133	8 6SA7, 6SK7, 6SQ7GT, 6SJ7GT, 6K6GT, 6X6GT (47)	15-15-15 Mfd	EZ1A135C & BR1635	A3	DY-3X15-450			EL-253 & EL-203	A7	TRI-215	A7	Pwr Out			C-TR2	P-6348	T22R01	B1	P-3047	A-2901					
134	8 6SA7, 6SK7, 6SQ7, 6SJ7, 6K6GT, 6X6GT (47)	15-15-15 Mfd	AF444J	A7	BR02235 & BR2035			DY-3X15-450		TRI-215		Pwr Out			C-TR2	A-3842	T22S48	B1	P-3047	A-2901					
135	5 12BE6, 12BA6, 12AT6, 50B5, 35W4	20-20-20 Mfd	PRSA150-20-20 & PRS150-20	EZ42215			DSB-3X20-150		TA-220 & UT-201		Out			C-TR1	P-6348	T22R01	B1	P-3047	A-2901						
138	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	CE-11	PRSA150-20-20 & PRS150-20	EZ42215			DSB-3X20-150		TA-303		Out			C-TR1	A-3842	T22S48	B3	A-2928	B3						
145	4 1R5, 1U4, 1SS, 3S4	CE-12	PRSA150-20-20 & PRS150-20	EZ42215			DSB-3X20-150		TA-220 & UT-201		EL-351		Out		TR-7	A-3329	T22S46	B3	A-2927	B3					
148	5 12BE6, 12BA6, 12AT6, 50B5, 35W4	A-CE-1	PRSA150-20-20 & PRS150-20	EZ42215			DSB-3X20-150		TA-220 & UT-201		H-TR3		Out		A-3876	B3	T22S46	B3	A-2928	B3	\$950 & 467	\$2R	XX45		

<sup>†</sup> Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS							Section C BATTERIES										
		No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note			
				Part No.	Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"					
TELE-TONE—Continued																											
150 161, 162, 167, 168, 171, 174, 156, 172, 176...	4 12BE6, 12AT6, 50B5, 35W4...	CE-13...	PRSA-40302...		EZ4215C...		DSB-403020-150...		TA-240 & TA-25...		Out	TR-3...	B3	T22S45...	B3	A-2928...	B3										
159...	4 1R5, 1U5, 1S5, 3S4...	20 Mfd.	PRS150-20...		BR2015...		M-20-150...		UT-201...		Out	Dn Spkr.	A-3878...	T22S47...		A-2931...		950 & 457...		2R...	XX45...						
160...	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)...	CE-14...	PRS150-16...		BR1615...		M-16-150...		UT-161...		Out	H-TR3...	A-3876...	B3	T22S45...	B3	A-2928...	B3									
	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)...	CE-11...	PRS150-20-20 & PRS150-20...		EZ42215...		DSB-3X20-150...		TA-220 & UT-201...		Out	TR-1...	A-3876...	B3	T22S45...	B3	A-2928...	B3									
TELEVOX RP...	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47)...	40-20 Mfd.	PRSA150-40-20...		BRD4215...		M-2X40-150...		TA-240...		Out		A-3876...	T22S45...		A-2928...											
27JB-ZW...	2 5OL6GT, 35Z5GT...	30 Mfd.	PRS150-30...		BR2015...		M-30-150...		UT-301...		Out		A-3876...	B3	T22S46...	B3	A-2928...	B3									
27K-W...	2 5OL6GT, 35Z5GT...	20 Mfd.	PRS150-20...		BRD4215...		M-2X40-150...		TA-240...		Out		A-3876...	B3	T22S45...	B3	A-2928...	B3									
27-P-T...	2 5OL6GT, 35Z5GT...	40 Mfd.	PRS150-40...		BR2015...		M-20-150...		TA-201...		Out		A-3876...	T22S45...		A-2928...											
TEMPLE E301...	3 5OL6GT, 35Z5GT (47)...	80-40-20 Mfd.	AF886D4A...	A4	UP44315C...		DY-419...	A4	EL-443...	A4	Out	851.514...	A-3876...	T22S45...		A-2928...											
E510, 512, 514, 519...	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (51)...	161.520...	AF886D4A...		UP55515C...		DY-3X40-150 & M-25-25...		EL-452...		Out	851.514...	A-3876...	T22S45...		A-2928...											
E511...	5 12SA7GT, 12SK7, 12SQ7GT, 50L6GT, 35Z5GT (51)...	30 Mfd.	PRS150-30...		BR3015...		M-30-150...		UT-301...		Out																
F301...	3 50A5 / 5016GT, 35A5 / 35L6GT, 35Y4 / 35Z5GT...	CE-1A83...	AF886D4A...		EZ53215C...	A4	BR252A...		DSB-804020-150...	A4	Out	851.514...	A-3876...	T22S45...		A-2928...											
F611...	6 1NSGT, 1A7GT, 1HSGT, 3QSGT, 117Z6GT...	CE-1A81...	PRSA150-40-40...		UP44415...		DY-419...	A3	TA-240 & TA-440...		Out	TA-7-1...	A-3878...	T22S47...		A-2931...	746 & 482...	G3...	^M30...								
F616...	6 12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (51)...	80-40 Mfd.	PRSA150-40-40...		UP44415 & BR2014...		DY-419...	A3.4	DSB-2X50-150...	EL-452...	Out	TA-7-1...	A-3878...	T22S45...		A-2928...											
F617...	6 12SK7, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT...	161.522...	AF884D & PRS150-40...	A4	UP44415 & BR2015...		DY-804020-150...		EL-123 & EL-24...		Out	851.514...	A-3876...	T22S45...		A-2928...											
G410...	4 1A7GT, 1N5GT, 1H5GT, 3Q5GT...	CE-1A81...	PRSA150-40-40...		AF883D & PRS150-20...		DY-419 & UP4215...	A4	DSB-2X50-150...	TA-505...	Out	TA-7-1...	A-3878...	T22S47...		A-2931...	753...		F6A60...								
G418, G419...	4 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT...	50-50 Mfd.	PRSA150-50-50...		EZ5315...		DSB-2X50-150...		TA-505...		Out		A-3876...	B3	T22S45...	B3	A-2928...	B3									
G513...	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)...	50-50 Mfd.			EZ5315...		DSB-2X50-150...		TA-505...		Out		A-3876...	B3	T22S45...	B3	A-2928...	B3									
G515...	5 14Q7 / 12SA7, 14A7 / 12SK7, 14B6 / 12SQ7, 50L6GT, 35Y4 / 35Z5GT (47)...	80-40-20 Mfd.	PRSA150-80-40 & PRS150-20...		EZ55515C...	A4	DSB-804020-150...		TA-303 & TA-240...	A4	Out		A-3876...	B3	T22S45...	B3	A-2928...	B3									
G516...	5 12SA7GT, 12SK7, 12SQ7GT, 50L6GT, 35Z5GT...	80-40-20 Mfd.			UP84215...		DY-804020-150...		EL-340 & UT-201...		Out	On Spkr.	A-3876...	T22S45...		A-2928...											
G518...	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT...	80-40-20 Mfd.	AF8804...	A4	UP84215...		DY-804020-150...		EL-340 & UT-201...	A4	Out	On Spkr.	A-3876...	B3	T22S45...	B3	A-2928...	B3									
G521...	5 1L6, 1LN5, 1LH4, 3LF4...	CE-1A81...	AF883D & PRS150-20...		UP84215C & BR4015...		DY-419 & M-20-150...		EL-452 & UT-201...		Out	On Spkr.	A-3876...	T22S47...		A-2931...	746 & 482...	G3...	^M30...								
G522...	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT...	CE-1A80...	UP84215 & BR2015...		UP84215...		DY-804020-150...		EL-340 & UT-201...	A4	Out	851.514...	A-3876...	T22S45...		A-2928...											
G619...	6 12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)...	50-50 Mfd.	PRSA150-50-50...		EZ5515...		M-2X50-150...		TA-505...		Out	851.514...	A-3876...	T22S45...		A-2928...											
G721, 722, 723, 7205...	7 707, 7H, 7B6, 7C7, 7Y3GT (C51, 47)...	15-15 Mfd.	AF44...		UP2245...		DY-2X20-450...		EL-220...		Pwr Out	TP-9 TA-8...	P-6013 A-3823...	T22R05...		P-2953...											
G724, H727...	7 6SB7Y, 12SG7, 7A6, 127Q7, 35L6GT, 35Z5GT (C7)...	100-50 Mfd.	PRSA150-50-50 & PRS150-50...		UP55515C...	A9	DSB-804020-150...		TA-505 & UT-501...	M-4-450...	Out	A-3875...	T22S45...		A-2928...												
G725...	7 6SB7Y, 12SG7, 7A6, 127Q7, 35L6 (C7)...	4 Mfd.	PRSA150-4...		BR445...		DY-604020-150 & M-20-150...		EL-340 & UT-201...	TA-55...	Out	On Spkr.		T22S87...													
TEMPLETONE—(See Temple)																											
TEMPOTONE 500E (Series)...	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)...	A-40045-1...	PRS150-40-40...		BRD3515...		M-5030-150...		TA-530...		Out	20371...	A-3876...	B3	T22S45...	B3	A-2928...	B3									
THORDARSON T-30W08A...	4 6GSJ7, 6L6/G, 5Y3GT...	CE2004...	AF22J4A...		UP1145C...		DY-316...		EL-202...		Chk Pwr Out	T20C53... T22R31... T22S70...	C-1002... P-4079... A-3310...	T20C53... T22R31... T22S70...		C-2990... P-3152... A-3127...											
T-31W10A...	7 6GSJ7, 6J5, 6SN7GT, 6B4G, 5U4G...	8 Mfd.	GL600-8...		KR608...		D-8-600...		AP-86...		Chk Pwr Out	T49809C... T40387A...	C-2309...	T20C74...													
	8-8 Mfd.	GL475-8-8...	KRC588...		BR1045...		^DH-8-525...		CL-88...		Chk Pwr Out	T49810C... T49812A...	P-4004... A-3800...	T22R32...													
	10 Mfd.	PRS450-10...	BR4015...				M-10-450...		UT-12...					T22S70...		A-3131...											
	40 Mfd.	PRS150-40...					M-20-150...		UT-401...																		

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS						Section C BATTERIES							
			No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			"A"	"B"																				
THORDARSON —	C	continued																						
T-31W25A.....	7	6SJ7, 6N7GT, 26L6G, 5X4G (40)	CE601-805 CE50-506 CE2004 CE451-106 CE25-256	GL600-8 PRS60-50 AF22J4A PRS450-10 PRS25-25	KR608 BR505 UP1145C TC72 TC26	D-8-600 M-50-50 DY-312 M-10-490 M-25-25	TA-550 EL-202 UT-12 TA-25	AP-86 TA-550 EL-202 UT-12 TA-500 TA-550 TA-25	Cbk Pwr Drv Out	T49809A T49810A T49811A T49812A	C-2309 P-4050 A-4216 A-3800	T22R33 T20D79 T22S70	A-3131											
T-31W50A.....	13	6SJ7, 6J5, 6V6GT, 46L6G, 25X4G, 6X5GT (40)	8 Mfd. 20-20 Mfd. 10 Mfd. 10 Mfd. 50 Mfd. 25 Mfd.	AF44J4A PRS250-8 PRS50-25	GL600-8 UP2245 BR1045 BR105 BR505 BR252A	D-8-600 DY-2X20-450 M-10-450 M-10-50 M-50-50 M-25-25	EL-220 UT-12 TA-510 TA-550 TA-25	Chk Chk Chk Pwr Drv Out	T49462 T20C52 T40387A T20C56A T49895A T20D77 T22S78	C-2308 C-1707	T20C55 T20C52 T20C74	C-2975												
TONE PAK AC8HF.....	4	6SJ7GT, 6L6GA, 5Y3GT (44)	20-20-20 Mfd. 8 Mfd. 25 Mfd.	AF44J4A PRS250-8 PRS50-25	UP2245C BR825 BR255	DY-312 M-8-250 M-25-50	EL-322 UT-82 TA-525	Pwr Out	P-4080	T22R32 T22S88	P-3153 A-2935													
TRAV-LER B70, 71, 72.....	4	1A7GT, 3A8GT, 1T5GT, 35Z4GT	80 Mfd.											Out	On Spkr.	A-3881	T22S48	A-2932	744 & 738	F4P1, *B30				
FB73.....	4	1A7GT, 3A8GT, 1T5GT, 117Z6GT	80 Mfd.											Out	On Spkr.	A-3881	T22S48	A-2932	747 & 7482	2F4, *B30				
FB82.....	5	1A7GT, 1N5GT, 1N5GT, 1T5GT, 117Z6GT	80 Mfd.											Out	On Spkr.	A-3881	T22S48	A-2932	747 & 7482	2F4, *B30				
T501L, T530A-L.....	5	1A7GT, 14A7, 14B6, 50L6GT, 35Y4 (47)	7-301	PRSA150-40-20	BRD4215		M-2X40-150		TA-240					Out	On Spkr.	A-3876	T22S45	A-2928						
T2625.....	6	12SA7GT, 312SK7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	7-302											Out	On Spkr.	A-3876	T22S45	A-2928						
TAC-3726.....	7	6A8GT, 6K7GT, 6Q7GT, 6J5GT, 26V6GT, 5Y3GT	7-307											Pwr	11-301	P-6012	T22R04	P-2952						
TB512.....	5	1A7GT, 1N5GT, 1H5GT, 305GT, 50Y6GT (47)	7-304 7-305	PRS150-20	E242215 BRZ015	DSB-403020-150		UT-201						Out	On Spkr.	A-3311	T22S64	A-2927	746 & 7482	*G3, *M30				
TB601.....	6	1N5GT, 1A7GT, 1H5GT, 305GT, 50Y6GT (47)	6-308 7-303	PRS25-25	BR252A	M-25-25		TA-25						Out	On Spkr.	A-3329	T22S47	A-2927	746 & 7482	*G3, *B30				
TK509, TK510.....	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	7-301	PRSA150-40-20	BRD4215	M-2X40-150		TA-240						Out	On Spkr.	A-3876	T22S45	A-2928						
112.....	12	6K7G, 6C6CG, 6L7G, 6H6G, 26V6G, 5Y3G, 6E5G	7-36 7-39 7-40	GL450-8 GL450-30	KR508 KR530	D-8-450 D-30-450	PLS-8 PLS-30	Audio Out	12-11 11-31	A-3311				Out	On Spkr.	A-3311	T22S64	A-2904						
115.....	15	6K7G, 6C6CG, 6L7G, 6H6G, 26V6G, 5Y3G, 6E5G	7-36 7-38 7-39 7-42	GL450-8 GL450-4 GL450-30	KR508 BR445 KR530	D-8-450 M-4-450 D-30-450	PLS-8 UT-4 PLS-30	Chk Pwr Out	13-13 12-12 11-32					Out	On Spkr.	A-3329	T22S47	A-2927	746 & 7482	*G3, *B30				
131.....	11	6K7, 6A8, 6H6, 6F5, 6C5, 26F6, 580, 6G5	4804-6 10 Mfd.	GL450-12	KR512A BR102A	D-12-450 M-10-25	PLS-12 TA-10	Out	5904-A	A-3307				Out	On Spkr.	A-3307	T22S70	A-2935						
315.....	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6G, (L49C Ballast) (46)	7-64	PRSA150-40-20	BRD4215	M-2X40-150		TA-240						Out	On Spkr.	A-3311	T22S64	A-2904						
315SW.....	5	6K8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, (L49C Ballast) (46)	40-12 Mfd.	PRSA150-40-20	BRD4215	M-2X40-150		TA-240						Out	On Spkr.	A-3876	T22S45	A-2928						
325.....	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z5GT (40)	7-53	PRSA150-40	BR4015	M-40-150		UT-401						Out	On Spkr.	A-3876	T22S45	A-2928						
337.....	6	6K8G, 6K7G, 76, 75, 25L6G, 25Z6G (46)	7-54 12-40 Mfd.	PRSA150-40-20	BRD4215	M-12-150		UT-121						Out	On Spkr.	A-3876	T22S45	A-2928						
400.....	4	6K7GT, 6F6GT, 25L6GT, 25Z5GT (40)	10 Mfd.	PRSA150-40	BR4015	M-2X40-150		TA-240						Out	†	A-3876	T22S45	A-2928						
415.....	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT (40)	12 Mfd.	PRSA150-40	BR1215	M-12-150		UT-121						Out	On Spkr.	A-3876	T22S45	A-2928						
420A, 420S.....	4	6K7G, 6F6G, 25L6G, 25Z5GT, (L56B Ballast) (46)	12-40 Mfd.	PRSA150-40-20	BRD4215	M-40-150		UT-401						Out	†	A-3876	T22S45	A-2928						
538M.....	7	6K7, 6K8, 6Q7, 6F6G, 5Y3G, 6U5	20 Mfd. 16 Mfd.	GL450-20 GL450-16	KR520 KR516A	M-40-150 M-16-150	PLS-20 PLS-16	Pwr Cut	P-6012 A-3823	T22R02 T22S47	P-2952 A-2931													
539M (1st Type).....	9	6K7, 6K8, 6R7, 26V6G, 5X4G, 6U5	25 Mfd. 20 Mfd.	GL450-20 GL450-16	KR530 KR520	M-40-150	PLS-30 PLS-20	Pwr Cut	P-6120 A-4752	T22R04 T20D77	P-2952 A-2931													
539M (2nd Type).....	9	6K7G, 6K8G, 6R7G, 6J5G, 26V6G, 5X4G, 6U5 (46)	7-51	GL450-30 GL450-16	KR530 KR516A	D-16-450	PLS-30 PLS-16	Pwr Cut	11-52 12-18	A-4752 A-3830	T20D77 T22S64	A-2921 A-2904												
552B.....	4	1A7G, 1N5G, 1H5G, 1C5G	7-66	GL450-16	KR516A	D-16-450	PLS-16	Out	On Spkr.	A-3830	T22S64									758	17GD60			
553, BT; 554, BT.....	4	1A7G, 1N5G, 1H5G, 1Q5G	10 Mfd.	PRSA25-10	BR102A	M-10-25	TA-10	Out	On Spkr.	A-3329	T22S47	A-2927									742 7482	4F, *B30		
555, BT.....	5	1A7G, 1N5G, 1H5G, 1Q5G	7-56	PRSA150-12	BR1215	M-10-150	UT-121	Out	On Spkr.	A-3329	T22S47	A-2927									742 7482	4F, *B30		
556, B, BT.....	5	1A7G, 1N5G, 1H5G, 1T5G, 25Z6G	7-67 7-53 8-8 Mfd.	PRS25-100 PRS150-40 PRSA450-8-B	BRH251 BR4015 EZ8845	M-100-25 M-40-150 M-2X8-450	UHC-102 UT-401 UT-98	Chk Out Pwr Out	13-9 On Spkr. †	t t t	T22S48 T22S48 T22S48	A-3881 A-3881 A-3879									718 7482	F4P1, *B30		
560.....	5	6D8G, 6S7G, 6T7G, 6G6G, EZY5G																						

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofac- Set No.		
													Treble	RCP-1-2545...	M-64-Z		A.		D13-130...		41	G1				Continued— 9...	THORDARSON T-31W25A	
													Bass	RCP-3-905...	M-99-Z				D13-137...			G1					20.	T-31W50A
													Phone	RCP-1-105...	M-63-Z				D13-137...			G1						
													Mike(1)	RCP-1-105...	M-63-Z				D13-137...			G1						
													Mike(2)	RCP-1-105...	M-63-Z				D13-137...			G1						
													Treble	R-1068...														
													Bass	R-1068...														
													Phone	†														
													Mike(1)	†														
													Mike(2)	†														
													Mike(3)	†														
					</td																							

† Information not available.



Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photofact Set No.	MFR. & MODEL										
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Cuam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note						
1st.		16-6658..		456							F1		F1	Vol		1-73..		41	D13-133X..		41	G1		5300..	Contin HI	ued—	TRAV-LER 570B				
2nd.		16-6660..																													
1st.		16-6658..		456							F1		F1	Vol		M-60-Z..			D13-133..			G1		5300..	HI		576, 576B				
2nd.		16-6660..														M-60-Z..			D13-133..			G1		5300..	HI		600				
1st.	16-34..	16-6656..		456							F2		F2	Vol	5-44..	M-50-Z..												620 (Early)			
2nd.	16-35..	16-6657..														M-50-Z..													620 (Late)		
1st.	16-59..	16-6658..		456							F1		F1	Vol		M-60-Z..			D13-133..			G1		5300..	HI		645E				
2nd.	16-43..	16-6660..														M-60-Z..			D13-133..			G1		5300..	HI		679				
1st.		16-6658..		456												M-60-Z..			D13-133..			G1		5300..	HI						
2nd.		16-6660..																													
1st.		16-6658..		456							F1		F1	Vol		M-60-Z..			D13-133..			G1		5300..	HI						
2nd.		16-6660..														M-60-Z..			D13-133..			G1		5300..	HI						
1st.		16-5712..		446												M-60-Z..			D13-133..			G1		5300..	HI						
2nd.		16-5714..														M-60-Z..			D13-133..			G1		5300..	HI						
1st.	16-34..	16-6666..		456							F1		F1	Vol		M-60-Z..			D13-133..			G1		5300..	HI						
2nd.	16-35..	16-6667..														M-60-Z..			D13-133..			G1		5300..	HI						
1st.	16-34..	16-6666..		456							F1		F1	Vol	5-41..	M-60-Z..			D13-133..			G1		5300..	HI		680				
2nd.	16-35..	16-6667..														M-60-Z..			D13-133..			G1		5300..	HI						
1st.	16-51..	16-6662..		456							F1		F1	Vol	5-65..	V-13 Z..			A2	D13-137..		42	G1					1555, BT			
2nd.	16-52..	16-6663..														V-13 Z..			D13-137..			42	G1						1556, B, BT		
1st.	16-51..	16-6662..		456							F1		F1	Vol	5-65..	M-6-L-Z..			A2	D13-137..		42	G1								
2nd.	16-52..	16-6663..														M-6-L-Z..			D13-137..			42	G1								
1st.	LI-1..	16-6666..		455							SPK-1..		SPK-1..	ST-10..	5A1..	Vol		M-60 Z..	A..	D13-133..		41	G1, 2..						5000, 5000I		
2nd.	LI-2..	16-6667..														M-60 Z..	A..	D13-137..		41	G1										
1st.	LI-1..	16-6665..		455							SPK-4..		SPK-4..	ST-10..	5A1..	Vol		M-60 Z..	A..	D13-133..		41	G1, 2..						5002 Series		
2nd.	LI-2..	16-6667..														M-60 Z..	A..	D13-137..		41	G1										
1st.	LI-1..	16-6659..		456							SPK-4..		SPK-4..	ST-10..	5A1..	Tone	VC-3..	AM-63 Z..	KSS-3..	D13-137..		41	G1, 2..						5007, 8, 9		
2nd.	LI-2..	16-6660..														VC-3..	AM-40 S..	KSS-3..	D13-120..		41										
1st.	LI-1..	16-6658..		456							SPK-4..		SPK-4..	ST-10..	5A1..	Tone	VC-3..	AM-53 Z..	KSS-3..	D13-137..		41	G1						5010, 11, 12		
2nd.	LI-2..	16-6660..														VC-3..	AM-40 S..	KSS-3..	D11-120..		41										
1st.	LI-1..	16-6658..		455							SPK-6..		SPK-6..	ST-11..	5A0..	Tone	VC-4..	AM-63 Z..	KSS-3..	D11-111..		41							5015		
2nd.	LI-2..	16-6660..														VC-4..	AM-63 Z..	KSS-3..													
1st.	LI-5..	16-6668..		455							SPK-8..		SPK-8..	ST-10..	5A1..	Vol	VC-8..												5019		
2nd.	LI-3..	16-6666..														VC-8..	M-63 Z..	KSS-3..	D13-137..		41										
1st.	LI-4..	16-6666..		455							SPK-5..		SPK-5..	ST-10..	5A1..	Vol		M-63 Z..	KSS-3..	D13-137..		41							5020		
2nd.	LI-3..	16-6666..														M-63 Z..	M-60 Z..	KSS-3..	D13-133..		41										
1st.	LI-4..	16-6657..									SPK-5..		SPK-5..	ST-10..	5A1..	Vol		M-60 Z..	KSS-3..	D13-137..		41							5027		
2nd.	LI-5..	16-6658..		455												M-60 Z..	AM-63 Z..	KSS-3..													
1st.	LI-5..	16-6659..									SPK-4..		SPK-4..	ST-10..	5A0..	Vol		AM-63 Z..	KSS-3..	D13-137..		41							5028		
2nd.	LI-5..	16-6668..		455												AM-63 Z..	KSS-3..	D13-137..		41											
1st.	LI-1..	16-6658..		455							SPK-5..		SPK-5..	ST-10..	5A1..	Vol	VI-4..	AM-41 Z..	KSS-3..	D11-111..		41							5029		
2nd.	LI-2..	16-6660..														AM-41 Z..	KSS-3..	A..	D13-137..		41										
1st.	LI-1..	16-6656..		456							SPK-4..		SPK-4..	ST-10..	5A1..	Vol	VI-4..	AM-41 Z..	KSS-3..	D13-137..		41							5030, 5031		
2nd.	LI-2..	16-6667..														AM-41 Z..	KSS-3..	A..	D13-137..		41										
1st.	LI-8..			456							SPK-4..		SPK-4..	ST-10..	5A1..	Vol	VC-9..												5054		
2nd.	LI-6..	16-6666..														VC-9..															
1st.	LI-7..	16-6667..		455							SPK-12..		SPK-12..	ST-115..	5A1..	Vol	VC-13..	AM-61 Z..	KSS-3..	D13-137..		41							5066		
2nd.																AM-61 Z..	KSS-3..	A..	D13-133..		41										
1st.																AM-60 Z..	M-61 S..	KSS-3..	D13-137..		41								7003		
2nd.																M-61 S..	M-65 Z..	KSS-3..	D13-139..		41										
1st.	P108-32..	16-5700..		175							F2		F2	Vol	P101-9..	M-60 Z..			A..	D13-133..		41	G1						14..		
1st.	9A957..	16-5714..		46							F2		F2	Vol	36X250..	AT-114..	KSS-3..	A..	D13-139X..		41	G1							TRUETONE D580		
2nd.	9A958..	16-5714..		456							P-12A246..		P-12A246..	ST-108..	5A1..	Vol	40X228..	AM-13-Z..	KSS-3..	D13-137..		41								D689	
1st.	9A619..										P-12A245..		P-12A245..	ST-108..	5A1..	Vol	36X221..	T-114..		A..	D13-139X..		41								D695
2nd.	9A620..															40X214..															
3rd.	9A621..																														
1st.	9A782..	16-5783..		156							1/2A25..		1/2A25..	ST-108..	5A1..	Vol	40X224..	16X16..	M-13..	D13-137..		41								D697	
2nd.	9A777..	16-5714..		46							12A246..		12A246..	ST-108..	5A1..	Vol	40X223..	16X16..	M-13..	A..	D13-137..		41							D698	

**t** Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
		No.	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
					Part No.	Part No.		Part No.		Part No.		Part No.		Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"		
TRUEZONE—Cont.																									
D699.	8 6A8, 6K7, 6Q7, 6C5, 6F6, 5Y3, 6G5.	103-6. 103-14.	GL450-8. GL450-16.	KRS08. KRS16A.		D-8-450. D-16-450.		PLS-8. PLS-16.		Pwr Out	104-87. On Spkr.	P-6120. P-3852.	T22R04. T22S64.		P-2952. A-2904.										
D699-724.	8 6A7, 6D6, 75, 76, 242, 80, 6G5.	3351. 3351.	GL450-10. GL450-16.	KRS16A.		D-16-450.		PLS-16.		Pwr Out	3343. On Spkr.	P-6119. P-3850.	T22R02. T22S64.		P-2951. A-2904.										
D700.	7 6A7, 6D6, 75, 76, 242, 80.	3351.	GL450-10. GL450-16.	KRS16A.		D-16-450.		PLS-16.		Pwr Out	3343. On Spkr.	P-6119. P-3850.	T22R02. T22S64.		P-2951. A-2904.										
D701.	8 6K7, 6C5, 6Q7, 6F6, 5Z4MG, 6G5.	45X209. 44X11. 44X10.	PRS25-10. BR102A. GL450-16.	M-10-25. KRS16A.		D-16-450.		PLS-16.		Pwr Out	53X174. 51X61.	P-6013. A-3311.	T22R05. T22S64.		P-2953. A-2936.										
D705.	11 6U7G, 6J7G, 6G5G, 6H6, 6F6G, 5Y3G, 6U5.	45X209. 44X30. 45X238.	PRS25-50. BR502. GL450-40.	M-50-25. TA-50. D-40-450.				PLS-16.		Pwr Out	53X174. 51X61.	P-6013. A-3311.	T22R05. T22S64.		P-2953. A-2936.										
D706.	8 6S7G, 6D8G, 6L5G, 6T7G, 19, 6N5.	119-32.	EZ8825.	M-2X8-250.				LM-28.		Chk Pwr In	105-30. 104-81.	T.	T.												
D709 (Ch. 6D).	6 6A8G, 6J5G, 6U7G, 6Q7G, 6G6G, 6ZY5G.	2251.	PRSA200-8-8.	EZ8825.		DH-2X8-450.		UT-88.		Chk Pwr Out	105-36. On Spkr.	A-4713. A-3848.	T20D76. T22S47.		A-2920. A-2938.										
D714.	6 6K8G, 6K7, 6Q7G, 6P5G, 6AC5G, 5Y3G.	11969.	PRS150-16.	BR1615.		M-16-450.		UT-161.		Pwr Out	104124G. 10575B.	A-3897. P-6120. A-3852.	T22S47. T22R02. T22S47.		A-2933. P-2951. A-2904.										
D716 (Ch. 7A).	7 6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6ZY5G, 6AB5.	2140.	PRSA200-8-8 & PRS25-10.	EZ8825S.		DH-2X8-450 & M-10-25.		LM-28 & TA-5.		Pwr Out	104124G. 10575B.	A-3879.	T22S48.		A-2932.										
D717.	5 6A7, 6K7, 75, 41, 80.	11938.	PRSB450-8-8.	EZ588.		DH-2X8-450SS.		TU-88.		Pwr Out	104100B. 10553.	P-6119. A-3850.	T22R02. T22S47.		P-2951. A-2931.										
D717 (6V-110V).	7 6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6ZY5G, 6AB5.	2140.	PRSA200-8-8 & PRS25-10.	EZ8825S.		DH-2X8-450 & M-10-25.		LM-28 & TA-5.		Pwr Out	104124G. 10575B.	A-3879.	T22S48.		A-2932.										
D721.	8 6K7, 6C5, 6Q7, 6F6, 5Z4MG, 6G5.	45X209. 44X11. 44X10.	PRS25-10. BR102A. GL450-16.	M-10-25. KRS16A. KRS16A.		D-16-450.		TA-10. PLS-16. PLS-16.		Pwr Out	53X119. 50X34. 50X34.	P-6012. P-6014.	T22R04. T22S47. T22R06.		P-2952. A-2931.										
D722.	11 6K7, 6C5, 6F6, 5Z4MG, 6G5.	45X213. 44X11.	GL450-16. KRS16A.	D-16-450.		PLS-16.				Pwr In	53X113. P50X34.	P-6014.	T22R06.		P-2954.										
D723 (127).	7 6A7, 6D6, 75, 76, 242, 80.	3351. 3375.	GL450-16. GL450-10.	KRS16A.		D-16-450.		PLS-16.		Pwr Out	53X113. P51X41.	A-3311. P-6119.	T22S64. T22R02.		A-2904.										
D723 (723).	4 6D8G, 6S7G, 6T7G, 6K6G.	11959C.	PRSA150-30-30.	BRD3315.		M-2X30-150.		TA-330.		Pwr Out	104137C. 10582.	A-3878. A-3876.	T22S47. T22S45.		A-2931. A-2928.										
D731.	5 6A8, 6K7, 6Q7, 25L6, 25Z6 & L49B Ballast (44).	11953.								Pwr Out	104-52.	P-6012.	T22R04. T22S47.		P-2952. A-2931.										
D732.	7 6L7, 6C5, 6K7, 6Q7, 6F6, 5Y3G.	103-6. 103-7.	GL450-8. GL450-8.	KRS08. KRS08.		D-8-450. D-8-450.		PLS-8. PLS-8.		Pwr Out	104-52. +.	A-3878.	T22R04. T22S47.		P-2952. A-2931.										
D745.	6 6K7, 6J7, 6B7, 41, 6A6.	45X2II.								Pwr In	53X124.	A-4713.	T20D77.		A-2921.										
D746 (577).	5 6A8, 6K7, 6Q7, 6K6, 6X5 (51).	11950.	PRSB450-8-8.	EZ588.		DH-2X8-450SS.		TU-88.		Pwr Out	53X124. 51X43.	A-4713.	T20D77.		A-2921.										
D746 (577C).	5 6SA7, 6SK7, 6Q7, 6K6, 6X5/024.	11950.	PRSB450-8-8.	EZ588.		DH-2X8-450SS.		TU-88.		Pwr Out	53X124. 51X43.	A-4713.	T20D77.		A-2921.										
D746D.	5 6SA7, 6SK7, 6SQ7, 6K6G, 6X5G (51).	119105.	AF44J4A.	UP2245C.		DY-315.		EL-350.		Pwr Out	104131. 10567.	A-3878.	T22S47.		A-2931.										
D747.	6 6K7, 6A8, 6Q7, 6V6, 024/6X5 (51).	11951.				EZ5116.		TU-1616.		Pwr Out	104131. 10562.	A-3878.	T22S47.		A-2931.										
D748 (C-7).	6 6U7G, 6J7G, 6B8G, 6K6G, 6N7G.	45X235. 45X240. 45X239.	PRS4450-8-8. PRS450-8. PRS25-10.	EZ8845. BR345. BR102A.		M-2X8-450. M-8-450. M-10-25.		UT-88. UT-8. TA-10.		Pwr In	104131. 10561.	A-3877. C-1706.	T22S58. T20C52.		A-2930. C-2975.										
D748 (C-11).	6 6U7G, 6J7G, 6B8G, 6K6G, 6N7G, (51).	45X239. 45X240. 45X235.	PRS25-10. PRS450-8. PRS4450-8-8.	BR102A. BR345. EZ8845.		M-10-25. M-8-450. M-2X8-450.		TA-10. UT-8. UT-88.		Pwr Out	52X51. 53X177.	A-4713.	T20D75.		A-2920. +.										
D904.	7 6A8G, 6K7G, 6Q7G, 6C5G, 6F6G, 80.	7113.				EZ5116.				Pwr In	52X51. 50X38.	A-4713.	T20D75. T22R04.		A-2920. A-2901.										
D905.	5 6A7, 6D6, 6Q7G, 25L6G, 25Z5 & (BK49BG, Ballast).	16, 8 Mfd.								Pwr Out	51X60.	A-2201. A-3311.	T22R04. T22S64.		P-2952. A-2904.										
D906.	11 6K7G, 6K8G, 6Q7G, 76, 80, 6AC5, (6US Opt.).	7400. 5780.	PRS450-16. PRS150-20.	BR1645. BR2015.		M-16-450. M-20-150.		UT-16. UT-201.		Pwr Out	7295. On Spkr.	P-6014. A-3823.	T22R05. T22S56.		P-2954. A-2904.										
D909f.	4 12K7GT, 12F5GT, 35L6GT 35Z4GT.	5779. 5780.	PRS150-8. PRS150-20.	BRB15. BR2015.		M-8-150. M-20-150.		UT-81. UT-201.		Pwr Out	5176.	A-3876.	T22S45.		A-2928.										
D910.	6 6K3G, 6SK7, 6Q7G, 6P5G, 6AC5G, 5Y3G.	11980.	PRS450-16.	BR1645.		M-16-450.		UT-16.		Pwr Out	104139C. 10585B.	P-6011. A-3878.	T22R02. T22S47.		P-2951. A-2931.										
D911.	8 6K8G, 6D6, 6G5, 6Q7G, 76, 241, 80.	3285. 5101.	GL450-16. GL450-18.	KRS16A. KRS16A.		D-16-450. D-16-450.		PLS-16. PLS-16.		Pwr Out	5091.	P-6012.	T22R04. T22S64.		P-2952. A-2904.										
D912.	5 6A7, 6D6, 75, 25L6, 25Z5 & L49B Ballast.	3373.	PRSA150-50-30.	BRD3515.		M-50-30-150.		TA-530.		Pwr Out	104131. 10585B.	A-3311. A-3876.	T22S45.		A-2928.										
D913 (7B).	7 6A8G, 6P5G, 6K7G, 6Q7G, 25L6.	2936.	PRSA150-20-20.	BRD2215.		M-2X20-150.		TA-220.		Pwr Out	104131. 10585B.	A-3876.	T22S45.		A-2928.										
D913 (7K).	7 6A8G, 6P5G, 6K7G, 6Q7G, 25L6, 25Z6G.	3531.	PRSA150-20-20.	BRD2215.		M-2X20-150.		TA-220.		Pwr Out	104131. 10585B.	A-3876.	T22S45.		A-2928.										
D913 (7K).	7 6A8G, 6P5G, 6K7G, 6Q7G, 25L6, 25Z6G.	3531.	PRSA150-20-20.	BRD2215.		M-2X20-150.		TA-220.		Pwr Out	104131. 10585B.	A-3876.	T22S45.		A-2928.										

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL Ref. No.					
Use	Mfr. Part No.	Meissner Part No.	Note	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Photo Ref. Set No.	
1st..	108-105.	16-5712.		465			114-68.			F1		F1	Vol Tone	101-74.	M-63-Z.		A.	D13-137.		41	G1			Continued—	TRUETONE D699	
2nd..	108-106.	16-5714.		456			3710.	ST-736.		8E10.			Vol Tone	101-75.	M-64-Z.			D13-130.			G1				D699-724	
2nd..	3244.	16-5712.		456			3346.	ST-736.		8E10.			Vol Tone	2726.	M-60-Z.		A.	D13-133.		41	G1				D700	
1st..	3344.	16-5712.		456			12A211.			F2			Vol Tone	2737.	M-66-Z.		A.	D13-139.		41	G1				D701	
2nd..	3345.	16-5714.		456			12A221.			F13			Vol Tone	2737.	M-60-Z.		A.	D13-133.		41	G1					
1st..	9A559.			456						F2			Vol Tone	36X215.	T-118.		A6.	D13-139.			G1					
2nd..	9A560.																									
1st..	9A933.			456			12A307.			12E10.	F4		Vol Tone	36X245.	AT-114.	KSS-3.		D19-139X.	E						D705	
2nd..	9A934.	16-5714.		456														D13-137.								
1st..	108-95.	16-5712.		465			8 Inch.			F2			Vol Tone	101-66.	M-60-Z.		A2.	D13-133.		42	G1				D706	
2nd..	108-92.	16-5714.		465														D13-128.								
1st..										F2			Vol	2271.											D709 (Ch. 6D)	
2nd..																										
1st..	108122B.	16-5712.		465			114125B.			F1			Vol Tone	101142.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41					D714	
2nd..	108106L.	16-5714.		456						F1			Vol Tone	2136.	AM-64-Z.			D13-130.							D716	
1st..																										
2nd..																										
1st..	10882B.	16-5712.		465			11497.	ST-167.		5E18.			Vol Tone	10194.	M-63-Z.		A.	D13-137.		41	G1				D717	
2nd..	10883C.	16-5714.		456						F1			Vol Tone	10159.	M-63-Z.			D13-137.							D717 (6V-110V)	
1st..																										
2nd..																										
1st..	9A559.			456			12A211.			F2			Vol Tone	36X215.	T-118.		A6.								D721	
2nd..	9A566.						12A221.			F13			Vol Tone	40X211.												
1st..	9A625.			456						F2			Vol Tone	36X219.	T-114.		A.	D19-139X.		41	G1				D722	
2nd..	9A626.																									
3rd..	9A627.	16-5714.		456			3346.	ST-736.		8E10.			Vol Tone	2725.	M-60-Z.		A.	D13-133.		41	G1				D723	
1st..	3344.	16-5712.		456									Vol Tone	2737.	M-66-Z.			D13-139.							D723 (Ch. 723)	
2nd..	3345.	16-5714.		456			114142.	ST-105.		5A1.			Vol Tone	101108.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41						
1st..	10896E.	16-5712.		465			114116.	ST-194.		5E45.			Vol	101108.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41					D731	
2nd..	10895E.	16-5714.		456						F2			Vol	101446.	M-63-Z.		A.	D13-137.		41	G1				D732	
1st..	10882F.	16-5712.		465									Vol	10153.	M-46-Z.			D13-123.								
2nd..	10883F.												Vol	36X217.	M-63-Z.			D13-137.								
1st..	10874.	16-5712.		465																					D745	
2nd..	10873.	16-5714.		456																						
1st..	9A983.	16-5700.		175			12A242.	ST-105.		F8	52EV6.			Vol Tone	101108.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41					D746 (577)
2nd..	9A984.																									
1st..	10896D.	16-5712.		465			114114.	ST-105.		F8	5EV6.			Vol	101110.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41					D746 (577C)
2nd..	10895C.	16-5714.		456									Vol	101110.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41					D746 (577C)	
1st..	108139.	16-5712.		465			114114.	ST-105.		F8	5EV6.			Vol	101110.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41					D746D (577D)
2nd..	108121.	16-5714.		456									Vol	101110.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41						
1st..	108139.	16-5712.		465			114114R.	ST-105.		F8	5EV6.			Vol	101110.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41					D747
2nd..	108121B.	16-5714.		456									Vol	101110.	AT-109.	KSS-3.	A.	D13-137X.	E	41						
1st..	108120.	16-5712.		465			114113.	ST-115.		F8	8EV6.			Vol	101109.	AT-109.	KSS-3.	A.	D13-137.	E	41					D748 (C7)
2nd..	108115.	16-5714.		456																						
1st..																										
2nd..																										
1st..																										
2nd..																										
1st..	9A917.	16-5700.		175			12A308.	ST-108.		F8	6EV6.			Vol Tone	36X246.	40X212.	M-63-Z.		D13-139.	B	41					D748(C11)
2nd..	9A918.																	D13-137.								
1st..																										
2nd..																										
1st..																										
2nd..																										
1st..	108131.	16-6658.		465			114161A.			F2			Vol Tone	5100.	M-60-Z.		A.	D13-133.			G1				D904	
2nd..	108132.	16-6660.		456						F2			Vol Tone	5511.	M-51-Z.		A.	D13-128.		41	G1				D905	
1st..	3463-5.	16-5712.		455			5185.			F2			Vol Tone	5100.	M-60-Z.		A.	D13-133.		41	G1					
2nd..	3463-6.	16-5714.		456			P2218.	ST-194.		5E45.			Vol Tone	5099.	M-66-Z.		A.	D13-139.		41	G1				D911	
1st..	P2998.	16-6658.		456									Vol	5099.	M-60-Z.		A.	D13-133.		41	G1				D912	
2nd..	P3282.	16-5712.		455			P3284.						Vol	P3099.	M-60-Z.		A.	D13-133.		41	G1				D913 (7B)	
1st..	P3283.	16-5714.		455			P3284.						Vol	P3279.	M-60-Z.		A.	D13-133.		41	G1				D913 (7K)	
2nd..	P3283.	16-5714.		455									Vol	P3527.	M-50-Z.		A.	D13-133.		41	G1					
1st..													Vol	P3528.	M-60-Z.		A.	D13-133.		41	G1					

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"		
TRUEZONE—Cont'd																							
D914 (7BS).....	7	6A8G, 6P5G, 6K7G, 6Q7G, 25L6G, 25Z6G	3169.									Out	+	A-3876.		T22S45.		A-2928.					
D914C (7KS).....	7	6A8G, 6P5G, 6K7G, 6Q7G, 25L6G, 25Z6G	3531.	PRSA40302.	EZ2215C			DSB-302.		TA-230. & TA-25.		Out	+	A-3876.		T22S45.		A-2928.					
D915, W.....	5	12SA7, 12SK7GT, 12SQ7, 50L6GT, 35Z5GT	3355.	PRSA150-30-30	BRD3315			M-2X30-150.		TA-330.		Out	On Spkr.	A-3876.		T22S45.		A-2928.					
D915A, C.....	5	12SA7, 12K7GT, 12SQ7, 50L6GT, 35Z5GT	3355.	PRSA150-30-30	BRD3315			M-2X30-150.		TA-330.		Out	On Spkr.	A-3876.		T22S45.		A-2928.					
D920.....	8	6K8G, 6A8G, 6K7, 6Q7G, 25L6G, 5Y3G, 6U5	11964.		EZ5116.					TU-1616.		Pwr Out	104143B. 10577.	P-6120. A-3830.		T22R04. T22S64.		P-2952. A-2936.					
D921.....	9	6K8G, 6K7, 6J5, 6Q7, 26K6, 5Y3, 6U5	11969.	PRS450-16. II973B.	BR1645. BR1645.			M-16-450.		UT-16.		Pwr Out	104160. 10554C.	P-6120. A-3830.		T22R04. T22S64.		P-2952. A-2904.					
D924, C.....	11	6K7G, 6K8G, 6Q7G, 26AC5, 80, 6U5.	5780. 5101. 3285.	PRS150-20. BR2015. GL450-16.	BR2015. †.			M-20-150. D-16-450.		UT-201. PLS-16.		Pwr Out	7295. Or Spkr.	P-6014. A-3823.		T22R06. T22S56.		P-2954. A-2904.					
D925.....	8	6K8G, 6K7G, 6Q7G, 76, 26N6G, 80, 6U5	5101. 3285.	GL450-16.	KR516A.			D-16-450.		PLS-16.		Pwr Out	†.	P-6013. DA Spkr.		T22R05. T22S64.		P-2953. A-2904.					
D925B.....	8	6K8G, 6K7G, 6Q7G, 76, 26N6G, 80, 6U5	16 Mfd.	GL450-16.	KR516A.			D-16-450.		PLS-16.		Pwr Out	†.	P-6013. DA Spkr.		T22R05. T22S64.		P-2953. A-2904.					
D926, B.....	11	6SK7, 6SA7, 26PSG, 6S07, 26V6G, 5Y3G, 6AD6G (247)	44X30. 44X36.	GL450-16. GL450-49.	KR516A. KR540.			D-16-450.		PLS-16.		Pwr Out	53X174. 51X70.	P-6014. TA-10.		T22R06. T22S64.		P-2954. A-2904.					
D929.....	7	6K8G, 6K7, 6Q7G, 6P5G, 6AC5G, 5Y3G, 6U5	11980.	PRS450-16.	BR1645.			M-16-450.		UT-16.		Pwr Out	104139B. †.	P-6119. A-3852.		T22R02. T22S47.		P-2951. A-2931.					
D934.....	6	1A7G, 1P5G, 1H5G, 1C5G, 1G4G	20, 30 Mfd.	PRSA150-30-30	BRD3315			M-2X30-150.		TA-330.		Out	†.	A-3831.		T22S48.		A-2938.	†.				
D935.....	4	1A7G, 1N5G, 1H5G, 1C5G	2602.	PRS25-25.	BR252A.			M-25-25.		TA-25.		Out	On Spkr.	A-3329.		T22S47.		A-2927.					
D937.....	5	1A7G, 1N5G, 1H5G, 1C5G	45X250.	PRS150-8.	BR815.			M-8-150.		UT-81.		Out	†.	A-3879.		T22S47.		A-2932.	741 & 742.	4F.	2B30.		
D938.....	4	1A7G, 1P5G, 1H5G, 1A5G	45X250.	PRS150-8.	BR815.			M-8-150.		UT-81.		Out	On Spkr.	A-3857.		T22S48.		A-2937.	741 & 742.	4F.	2B30.		
D939.....	4	1A7G, 1N5G, 1H5G, 1Q5G	3024.	PRS150-8.	BR815.			M-8-150.		UT-81.		Out	†.	A-3878.		T22S47.		A-2931.	742 & 738.	4F.	2A30.		
D940, A.....	5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 70L7GT	3562. 3563.	PRS25-50. PRSA150-30-30	BR502. BRD3315			M-50-25.		TA-50.		Chk Out	3556. On Spkr.	†.		A-3330. A-2928.		†.	482.	C4	G5.	2B30.	
D941, (Issue A).....	6	12SA7, 12SK7, 12SJ5GT, 12SQ7, 35L6GT, 35Z5GT (44)	11953D.					M-2X30-150.		TA-330.		Out	10588.	A-3876.		T22S45.							
D941 (Issue B).....	6	12SA7, 12SK7, 12J5GT, 12SQ7, 35L6GT, 35Z5GT (47)	11994. 11995.	AF888D.	UP44415.			DY-3X40-150.		EL-340.		Out	105104B. †.	A-3876.		T22S45.		A-2928.					
D976.....	6	6K7, 6A8, 6Q7, 6K6, 6X5 (44)	11981. 11981B.	PRS350-24. PRS350-24.	BR2045. BR2045.			M-20-350.		UT-203.		Pwr Out	104159. 10586.	A-3878.		T22S47.		A-2931.					
D978.....	6	6K7, 6A8, 6SK7, 6Q7, 6J5, 6N7	11978.					M-20-350.		UT-203.		Pwr Out	104158.	A-3878.		T22S47.		A-2920.					
D978B.....	6	6K7, 6A8, 6SK7, 6Q7, 6J5, 6N7 (51)	11988.	AF44J4A.	UP2245C.			DY-315.		EL-350.		In Out Pwr	104158. 10584.	A-4713. A-2201.		T22S66.		A-2920.					
D978C.....	6	6K7GT, 6A8GT, 6SK7, 6Q7, 6J5GT, 6N7G	11988.	AF44J4A.	UP2245C.			DY-315.		EL-350.		In Out Pwr	104158. 10584.	A-4713. A-2201.		T22S66.		A-2920.					
D1001.....	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z4GT	11982.	AF66D.	UP3315.			DY-2X30-150.		EL-230.		In Out Pwr	104158. 10584.	A-4713. A-2201.		T22D75.		A-2920.					
D1002.....	7	6K8G, 6K7G, 6Q7G, 6CSG, 26F6G, 80	16, 16 Mfd.	GL450-16.	KR516A.			D-16-450.		PLS-16.		Out	105106.	A-3876.		T22S45.		A-2928.					
D1003.....	7	6SK7, 6SA7, 6SQ7, 6K6G, 5Y3G	4130.	AF44J4A.	UP2245C.			DY-315.		EL-350.		Out	10588.	A-4713. A-2201.		T22S66.		A-2920.					
D1005.....	6	6SA7, 6SK7, 6SQ7, 6P5G, 6AC5G, 5Y3G (44)	119102.		UP3345.			DY-2X30-450.		EL-23.		Out	10588.	A-4713. A-2201.		T22D75.		A-2920.					
D1011, 1012.....	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	11994.	AF888D.	UP44415.			DY-3X40-150.		EL-340.		Out	10595B.	A-3876.		T22S45.		A-2928.					
D1013, 1014, 1014S.....	7	6SA7, 65Q, 6SK7, 6SQ7, 25L6G, 25Z6	4106. 3355.	PRSA150-30-30	A8	EZ3215C	A8	DSB-303. M-2X30-150.	A8	TA-330.	A8	Out	105117.	A-3876.		T22S45.		A-2928.					
D1015, 1016.....	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	11992.	AF444D.	A4	UP22215.	A4	DY-3X20-150.	A4	EL-320.	A4	Out	105117.	A-3876.		T22S45.		A-2928.					
D1017.....	10	6SK7, 6SA7, 6SQ7, 6PSQ, 26F6G, 5Y3G, 6U5 (44)	119106.		UP6C120.			DY-3X20-450.		EL-333.		Pwr Out	104202. 10554B.	P-6013. A-3311.		T22R05. T22S64.		P-2953. A-2904.					
D1020.....	4	1A7G, 1N5G, 1H5G, 1Q5G	3024.	PRS150-8.	BR815.			M-8-150.		UT-81.		Out	†.	A-3878.		T22S47.		A-2931.	758.	C1	17GD60.	C1	
D1021.....	5	1A7GT, 1P5GT, 1N5GT, 1H5GT, 105GT	3024.	PRS150-8.	BR815.			M-8-150.		UT-81.		Out	On Spkr.	A-3329.		T22S47.		A-2927.					
D1022.....	6	6D8G, 6L5G, 6S7G, 6T7G, 666G, 6X5GT	4224.	AF43F4A.	UP2235C.			DY-309.		EL-333.		Chk Pwr Out	4228. 4220. On Spkr.	A-3879.		T22S48.		A-2932.					

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photofact Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note				
1st.	P3282	16-5712		455				P3284					Vol	P3098	M-60-Z		A	D13-133		41	G1				Co	ntinued—	TRUETONE D914 (7BS)		
2nd.	P3283	16-5714						P3638	ST-194		5E45		Tone	P3279	M-60-Z		A	D13-133		41	G1							D914C (7KS)	
1st.	P3282	16-5712		455				3553	ST-105		5A1		Tone	P3099	M-60-Z		A	D13-133		41	G1							D915, D915W	
2nd.	P3283	16-5714						P3356	ST-105		5A1		Vol	P3946	AM-60-Z	KSS-3	A	D13-133	E	41	G1							D915A, D915C	
1st.	P3345			455									Vol	P3346	AM-60-Z	KSS-3	A	D13-133	E	41								D920	
2nd.	P3364			455									Vol	101133	AM-63-Z	KSS-3		D13-137	E									D921	
1st.	P3345												Tone	101134	AM-64-Z	KSS-3		D13-130									D924, D924C		
2nd.	P3364			455									Vol	101135	AM-63-Z	KSS-3		D13-133											
1st.	I08105K	16-5712		465									Vol	101136	AM-63-Z	KSS-3		D13-137	E										
2nd.	I08106K	16-5714											Tone	101137	AM-64-Z	KSS-3		D13-130											
1st.	I08122C	16-5712		465									Vol	101159	AM-63-Z	KSS-3		D13-137	E										
2nd.	I08106P	16-5714											Tone	101165	AM-63-Z	KSS-3		D13-137	E										
1st.	7293	16-5712		455	†	†	E2	7300		F2			Vol	7357	M-60-Z		A	D13-137	E	41								D925	
2nd.	7294	16-5714											Tone	7195				D13-133			G1						D925B		
1st.	†	16-5712		455									Vol	7196	M-60-Z			D13-133									D926		
2nd.	†	16-5714											Tone	7195	T-116			D18-139X									D926B		
1st.	9A1141	16-5712		456				12A336		F2			Vol	36X270	AT-120	KSS-3	A	D13-133	E	41	G1						D929		
2nd.	9A1142	16-5714											Tone					D13-139X											
1st.	I08122	16-5712		465				114148					Vol	101137	AM-63-Z	KSS-3		D13-137	E	41									
2nd.	I08106J	16-5714											Tone	101157	AM-63-Z	KSS-3	A	D13-137	E	41									
1st.	†	16-5712		456		†		ST-108		6A1			Vol	†													D934		
2nd.	†	16-5714											Vol	P2603	ST-108	6A1		A2	D13-133	E	42							D935, D936	
1st.	P2598	16-6658		455									Tone	36X258	AM-60-Z	KSS-3	A2	D13-133	E	42								D937	
2nd.	P2617												Vol	36X258	AM-60-Z	KSS-3	A2	D13-133	E	42								D938	
1st.	†	16-5712		456		†		ST-108		6A1			Tone	36X258	AM-60-Z	KSS-3	A2	D13-133	E	42								D939	
2nd.	†	16-5714											Vol	P3448	ST-105	5A1		A2	D13-133	E	42							D940, D940A	
1st.	P3048	16-6658		455									Tone	3317	AM-60-Z	KSS-3	A2	D13-133	E	42								D941 (Issue A)	
2nd.	P2605	16-6660											Vol	P3564	ST-105	5A1		A2	D13-137	E	42								
1st.	P3559	16-6658		455									Tone	P3560	AM-63-Z	KSS-3	A2	D13-137	E	42									
2nd.	P2606	16-6660											Vol	101108	AM-63-Z	KSS-3	A	D13-137	E	41									
1st.	I08140C	16-6658		465				114184		5A1			Vol	101108	AM-63-Z	KSS-3	A	D13-137	E	41								D941 (Issue B)	
2nd.	I08145	16-6660											Tone																
1st.	I08137	16-6658		465				114154		F8	6EV6		Vol	101161															D976
2nd.	I08138	16-6660						114155		F8	8EV6		Vol	101161															D978
1st.	I08120B	16-6658		465									Tone	101162	AM-66-Z	KSS-3		D13-139	E									D978B	
2nd.	I08115B												Vol	101161	AM-66-Z	KSS-3		D13-139	E									D978C	
1st.	I08120B	16-6658		465				114155		F8	8EV6		Vol	101161	AM-66-Z	KSS-3		D13-139	E									D1001	
2nd.	I08115B	16-6658											Tone	101162	AM-66-Z	KSS-3		D13-139	E									D1002	
1st.	I08157D	16-6658		465				114187		ST-113		4A1	Vol	101209	AM-60-Z	KSS-3	A	D13-133	E	41								D1003	
2nd.	I08157E	16-6660											Tone	†	M-60-Z		A	D13-133										L..	
1st.	†	16-5714		455		†							Vol	P4206	ST-110	6A21	F2	D13-133										D1004	
2nd.	P4108	16-5712		455									Tone	P4039	AT-90	KSS-3	A	D19-133X	E	41	G1							D1014S	
1st.	P4109	16-5714											Vol	P4133	M-60-Z			D13-133										D1015, D1016	
2nd.	108159	16-5712		455				11445		ST-177			Vol	101208	AM-63-Z	KSS-3	A	D13-137	E	41	G1							D1017	
1st.	108106S	16-5714											Tone	101211	AM-63-Z	KSS-3	A	D13-137	E	41								D1020	
2nd.	108140C	16-6658		455									Vol	P3465	ST-105	5A1		A2	D13-133	E	42							D1021	
1st.	P4108	16-6658		455									Tone	P4107	ST-108	F6	6A1	F2	Vol	P4089	AT-90	KSS-3	A	D19-133X	E	41		D1022	
2nd.	P4109	16-6660											Vol	101230	AM-60-Z	KSS-3	A	D13-133	E	41									
1st.	I08157J	16-6658		455				114113		ST-113		4A1	Vol	101214	AM-60-Z	KSS-3		D13-133	E	41									
2nd.	I08157K	16-6660											Tone	101213				D13-133	E	41									
1st.	I08130C	16-5712		465				114192					Vol	P4233	ST-108	6A1		A2	D13-133	E	42								
2nd.	I08169C	16-5714											Tone																
1st.	P3048	16-6658		455									Vol	P3465	ST-105	5A1		A2	D13-133	E	42								
2nd.	P2606	16-6660											Tone	4040	ST-108	F6	6A1	F6	Vol	P3720	AM-63-Z	KSS-3	A2	D13-137	E	42			
1st.	P3048	16-6658		455									Vol	P4233	ST-108	6A1		Vol	P4231	AM-60-Z	KSS-3	A2	D13-133	E	42				
2nd.	P3736	16-6660											Tone																
1st.	P4245	16-5712		455									Vol																
2nd.	P4244	16-5714											Tone																

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"		
TRUEZONE—Cont'd	11	*6SK7, 6SA7, *6SQ7, *6V6GT, 5Y3G, 6AD6G	45X247, 45X273	PRS250-4, PRSA150-20-20		BR425, BRD2215	M-4-450, M-2X20-150	UT-42, TA-220		Pwr Out	53X211, 51X76	P-6013, A-3311		T22R05, T22S64		P-2953, A-2904									
D1026	11	44X21, 44X36	GL450-30, GL450-40	KR530, KR540	D-30-450, D-40-450		PLS-30, PLS-40			Out	On Spkr.	A-3329		T22S47		A-2927									
D1035	4	1A7G, 1N5G, 1H5G, 3Q5G	2602			UP3345	DY-2X30-450	EL-23		Pwr	104189, 104202	P-6011, P-6013		T22R02, T22S47		P-2951, A-2931									
D1040	6	6SA7, 6SK7, 6SQ7, 6P5G, 6AC5G, 5Y3G	119102			UP6CJ20	DY-3X20-450			Pwr	10554B	A-3311		T22R05, T22S64		P-2953, A-2904									
D1041	10	*6SK7, 6SA7, 6SQ7, 6P5G, *6F6G, 5Y3G, 6U5 (*51)	119106																						
D1042	11	*6SK7, 6SA7, *6SQ7, *6V6GT, 5Y3G, 6AD6G	45X247, 45X273	PRS250-4, PRSA150-20-20		BR425, BRD2215	M-4-450, M-2X20-150	UT-42, TA-220		Pwr Out	53X211, 51X76	P-6013, A-3311		T22R05, T22S64		P-2953, A-2904									
D1045	6	6SA7, *6SK7, 6SQ7, 6V6GT, 5Y3G (*44)	119115			KR530, KR540, EZ5116	D-30-450, D-40-450	PLS-30, PLS-40, TU-1616		Pwr	104225B	P-6011		T22R02, T22S47		P-2951, A-2931									
D1050	7	6K6G, 6KT6, 6Q7G, 6J5G, *6F6G, 80	7113	PRS450-20		BR2045	M-20-450	UT-20		Pwr	105118, 7207	P-6012, P-6012		T22R04, T22S64		P-2952, A-2904									
D1055, 1056	11	80, *6SK7, 6SA7, *6J5GT, 6SQ7, *6V6GT, 5Y3G, 6U5 (*51)	14670	AF44J		UP2245	DY-2X20-450	EL-220		Pwr	25035	P-6013		T22R05, T22S64		P-2953, A-2904									
D1070	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (*47)	11994	AF888D		UP4415	DY-3X40-150	EL-340		Out	105108	A-3376		T22S45		A-2928									
D1075	7	6K6G, 6KT6, 6Q7G, 6J5G, *6F6G, 80	7113	PRS450-20		BR2045	M-20-450	UT-20		Pwr	7207, On Spkr.	P-6012, A-3311		T22R04, T22S64		P-2952, A-2904									
D1076	6	6SA7, *6SK7, 6SQ7, 6V6GT, 5Y3G	119115			EZ5116		TU-1616		Pwr	104225B	P-6011		T22R02, T22S47		P-2951, A-2931									
D1077	11	*6SK7, 6SA7, *6J5GT, 6SQ7, *6V6GT, 5Y3G, 6U5 (*51)	14670	AF44J		UP2245	DY-2X20-450	EL-220		Pwr	25035	P-6013		T22R05, T22S64		P-2953, A-2904									
D1080, 1080B	5	1A7GT, 1N5GT, 1H5G, 1A5GT, 35Z5GT & 5459 Ballast (*47)	119104	AF44D4DA		UP4CJ61	DY-304	EL-351		Out	On Spkr.	A-3387		T22S48		A-2937		744		F4PI	2A30				
D1081	6	1N5, 1A7, 1H5, 3Q5, 11726	4414, 4415	AF86D, AF88J4A		UP3315, UP4445C	DY-2X30-150, DY-314	EL-230	Chk	4421, On Spkr.	A-3329		T22S47		A-2927				743 & 7482		6F	2B30			
D1090, A, C, D1091	6	*6SK7, 6SA7, 6B8G, 6K6G, 6N7G, 45X271							In	53X177, 50X40	A-4713		T20D77		A-2921										
D1104	7	6J5J, 6J5GT, *6SK7, 6SQ7, *6V6GT, 5Y3GT	45X277						Out	51X74, 53X235	P-6011, P-6011		T22R02, T22S58		P-2951, A-2930										
D1109	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	8948	PRSA150-40-20		BRD4215	M-2X40-150	TA-240	Out	On Spkr.	A-3377, A-3376		T22S45		A-2928										
D1110	8	6SA7, *6SK7, 6SQ7, 6J5GT, *6K6GT, 5Y3, 6U5 (*51)	14670	AF44J		UP2245	DY-2X20-450	EL-20	Pwr	14815, 25272	P-6012, A-3311		T22R04, T22S64		P-2952, A-2904										
D1117	7	12SA7, *12SK7, 6L5G, 12SQ7, 35L6GT, 35Z5GT (*51)	45X295						Out	51X85	A-3376		T22S45		A-2928										
D1118	7	12SA7, *12SK7, 6L5G, 12SQ7, 35L6GT, 35Z5GT (*51)	45X308						Out	51X78	A-3375		T22S45		A-2928										
D1120	4	1A7, 1N5, 1H5, 3Q5	2602	PRS25-25		BR252A	M-25-25	TA-25	Out	On Spkr.	A-3329		T22S47		A-2927		758		C1	.17GD60	C1				
D1123	6	1A7GT, *1N5GT, 1H5GT, 3Q5GT, 35Z5GT	4568	AF888D		UP4415	DY-3X40-150	EL-340	Chk	4565, On Spkr.	A-3329		T22S47		A-2927		758		C1	.17GD60	C1				
D1124	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	119117	PRS150-16		BR1615	M-16-150	UT-161	Out	10591C	A-3329		T22S47		A-2927										
D1125	5	1P5GT, 1A7GT, 1N5GT, 1H5GT, 3Q5GT	25396, 17080	PRS150-20, PRS25-10		BR2015, BR102A	M-20-150, M-10-25	UT-201, TA-10	Out	25333	A-3329		T22S47		A-2927										
D1126	11	*6SK7, 6SA7, *6J5GT, 6SQ7, *6V6GT, 5Y3G, 6U5 (*51)	14670	AF44J		UP2245	DY-2X20-450	EL-220	Pwr	25035, 25330	P-6013, A-3311		T22R05, T22S64		P-2953, A-2904										
D1135	4	1A7, 1N5, 1H5, 3Q5	2602	PRS25-25		BR252A	M-25-25	TA-25	Out	On Spkr.	A-3329		T22S47		A-2927		758		C1	.17GD60	C1				
D1136	6	1A7GT, *1N5GT, 1H5GT, 3Q5GT, 35Z5GT	4568	AF888D		UP4415	DY-3X40-150	EL-340	Chk	4565, On Spkr.	A-3329		T22S47		A-2927										
D1143	8	6SA7, 6SK7, 6SQ7, 6J5GT, *6K6GT, 5Y3, 6U5 (*51)	14670	AF44J		UP2245	DY-2X20-450	EL-220	Pwr	14815, 25272	P-6012, A-3311		T22R04, T22S64		P-2952, A-2904										
D1144	11	*6SK7, 6SA7, *6J5GT, 6SQ7, *6V6GT, 5Y3G, 6U5 (*51)	14670	AF44J		UP2245	DY-2X20-450	EL-220	Pwr	25035, 25330	P-6013, A-3311		T22R05, T22S64		P-2953, A-2904										
D1145	6	6SA7, *6SK7, 6SQ7, 6V6GT, 5Y3G	45X277						Pwr	53X227, On Spkr.	P-6011, A-3377		T22R02, T22S58		P-2951, A-2930										
D1150	8	6SA7, 6SK7, 6SQ7, 6J5GT, *6K6GT, 5Y3, 6U5 (*51)	14670	AF44J		UP2245	DY-2X20-450	EL-220	Pwr	14815, 25272	P-6012, A-3311		T22R04, T22S64		P-2952, A-2904										
D1169	6	1A7GT, *1N5GT, 1H5GT, 3Q5GT, 35Z5GT	4568	AF888D		UP4415	DY-3X40-150	EL-340	Chk	4565, On Spkr.	A-3329		T22S47		A-2927										
D1170	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (*47)	8525	PRSA150-40-20		BRD4215	M-2X40-150	TA-240	Out	On Spkr.	A-3376		T22S45		A-2928										
D1171	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	4683	PRSA150-50-30		BRD3515	M-5030-150	TA-530	Out	4684	A-3330					A-3031									

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photofact Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radial Part No.	Note			
1st..	9A1227			456				12A336					Vol	36X276												Continued	TRUE TONE DI026	
2nd..	9A1228	16-5714																										
1st..	P3048	16-6658		455				P4040	ST-108	F6	6A1		F6	Vol	P2600	AM-60-Z	KSS-3	A2	D13-133	E	42							D1035
2nd..	P2608	16-6660						11445	ST-177					Vol	P101208	AM-63-Z	KSS-3	A	D13-137	E	41							D1040
1st..	108169	16-5712		465				114192			10E50			Vol Tone	101214	AM-60-Z	KSS-3	A	D13-133	E	41							D1041
2nd..	108106S	16-5714									10L213																	
1st..	108130C	16-5712		465										Vol	36X276													D1042
2nd..	108169C	16-5714																										
1st..	9A1227			456				12A336																				
2nd..	9A1228	16-5714																										
1st..	108169E	16-5712		455	†	L-40		114126	ST-736		8E10			Vol	101232	AM-63-Z	KSS-3	A	D13-137	E	41							D1045
2nd..	108106U	16-5712		455	†			7493	ST-115		8A21			Vol	101231	AM-63-Z	KSS-3	A	D13-137	E	41	G1						D1050
1st..	5344	16-5712		455	†			25018			12E60			Vol	2726	M-60-Z			D13-133								D1055, D1056	
2nd..	5345	16-5712		456	†	L-40								Tone	2737	M-66-Z			D13-139									
1st..	25028	16-5712		456	†									Vol	25004	T-120			D13-139X									
2nd..	25029	16-5714																										
1st..	108140F	16-6658		465	†	L-26		114193	ST-105		5A1			Vol	101217	AM-60-Z	KSS-3	A	D13-133	E	41							D1070
2nd..	108145D	16-6660																										
1st..	5344	16-5712		455	†	L-26		7493	ST-115		8A21			Vol	2726	M-60-Z		A	D13-133		41	G1						D1075
2nd..	5345	16-5714		455	†			114126	ST-736		8E10			Vol	101232	AM-63-Z	KSS-3	A	D13-137	E	41	G1						D1076
1st..	108169E	16-5712		455	†	L-26		25018			12E60			Vol	101231	AM-63-Z	KSS-3	A	D13-137	E	41	G1						D1077
2nd..	108106U	16-5712		456	†	L-26																						
1st..	108171B	16-6658		465				114189	ST-105		5A1			Vol	101210	AM-63-Z	KSS-3	A2	D13-137	E	42							D1080, D1080B
2nd..	108172	16-6660																										
1st..	P4418	16-6658		455				P4416	ST-105		5A1			Vol	P4418	AM-63-Z	KSS-3	A2	D13-137	E	42							D1081
2nd..	P4420	16-6660						12A341	ST-108	F8	6EV6			Vol	36X275													D1090, A.C. D1091
1st..	9A1200	16-6658		456										Tone	40X212	M-66-Z												
2nd..	9A1201	16-6660																										
1st..	9A1522	16-5712		456				12A407						Vol	36X280	AM-60-Z	KSS-3	A	D13-133	E	41							D1104
2nd..	9A1523	16-5714						9017	ST-113		4A1			Vol	40X248	AM-67-Z	KSS-3	A	D13-140	E	41	G4						D1109
1st..	9015	16-6658		455				25242	ST-736		8E10			Vol	9008	M-60-Z		A	D13-133	E	41	G1						D1110
2nd..	9016	16-6660																										
1st..	25028	16-5712		456																								
2nd..	25029	16-5714																										
1st..	9A1364	16-6658		456				12A377	ST-194		5E45			Vol	36X297	AT-78	KSS-3	A	D13-133X	E	41							D1117
2nd..	9A1365	16-6660																										
1st..	9A1445	16-6658		456				12A396	ST-194		5E45			Vol	36X309	AT-78	KSS-3	A	D13-133X	E	41							D1118
2nd..	9A1446	16-6660																										
1st..	P3048	16-6658		455				P4919	ST-105		5A1			Vol	P4916	AM-60-Z	KSS-3	A2	D13-133	E	42							D1120
2nd..	P2608	16-6660						P4572	ST-108		6A1			Vol	P3720	AM-63-Z	KSS-3	A2	D13-137	E	42							D1123
1st..	P4369	16-6658		455				114213	ST-113		4A1			Vol	101210	AM-63-Z	KSS-3	A2	D13-137	E	42							D1124
2nd..	P4420	16-6660																										
1st..	108202B	16-6658		455				25332	ST-105		5A1			Vol	25367	M-60-Z		A2	D13-133		42	G1						D1125
2nd..	108153C	16-6660						25327			8E10			Vol	25004	T-115		A	D13-139X		41	G1						D1126
1st..	14722	16-6658		456	†			114213	ST-113		4A1			Vol	25367	M-60-Z		A2	D13-133		42	G1						
2nd..	14723	16-6660																										
1st..	14723	16-6660		456	†			25327			8E10			Vol	25004	T-115		A	D13-139X		41	G1						
2nd..	14724	16-6660																										
1st..	P3048	16-6658		455				P4572	ST-108	F8	6A1			Vol	P4916	AM-60-Z	KSS-3	A2	D13-133	E	42							D1135
2nd..	P2608	16-6660						P5001	ST-104		8A4			Vol	P3720	AM-63-Z	KSS-3	A2	D13-137	E	42							D1136
1st..	P4369	16-6658		455				25242	ST-736		8E10			Vol	25004	T-115		A	D13-137	E	42							D1143
2nd..	P4420	16-6660																										
1st..	14724	16-6660		456	†			25327			8E10			Vol	25004	T-115		A	D13-139X		41	G1						D1144
2nd..	14725	16-6660																										
1st..	9A1398	16-5712		456	†	L-40		12A382	ST-177					Vol	36X280	AM-60-Z	KSS-3	A	D13-133	E	41							D1145
2nd..	9A1399	16-5714						25242	ST-736		8E10			Vol	40X248	AM-67-Z	KSS-3	A	D13-140								D1150	
1st..	25028	16-5712		456	C-B27090									Tone	25004	T-115		A	D13-139X		41	G1						
2nd..	25029	16-5714												Vol	25004	T-115		A	D13-139X		41	G1						
1st..	P4569	16-6658		455				P5001	ST-104		8A4			Vol	P3720	AM-63-Z	KSS-3	A2	D13-137	E	42							D1169
2nd..	P4420	16-6660			455	†	L-26	9053	ST-105	5A1			Vol	9051	M-60-Z		A	D13-133		41	G1						D1170	
1st..	8042							P4792	ST-105		5A1			Vol	P4060	AM-60-Z	KSS-3											

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES													
	No.	Type Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note									
TRUEZONE—Cont'd	6	6SA7, 6SK7, 6SQ7, 6V6GT, 6X5GT (44)	45X277									Pwr Out	53X240, On Spkr.	P-5348	T22R02, T22S58	P-3048																
D1172	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47)	8525	PRSA150-40-20	BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3877	A-3876	T22S45	A-2930, A-2928																
D1173	6	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	9363	PRSA150-40-20	BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45	A-2928																
D1174	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	14670	AF44J	UP2245		DY-2X20-450		EL-220		Pwr Out	14815, 25272	P-5012	T22R04, T22S64	P-2952, A-2904																	
D1175	8	6SA7, 6SK7, 6SQ7, 6J5GT, 6K6GT, 5Y3G, 6U5 (51)	45X277								Pwr Out	53X227, On Spkr.	P-6011	T22R02, T22S58	P-2951, A-2930																	
D1176	6	6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G	45X277								Pwr Out	4228	†	†	†																	
DW1177	6	6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6X5GT	4224								Pwr Out	4220, On Spkr.	A-3879	T22S48	A-2932																	
D1180	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT	45X309								Chk	51X38	†	†	†																	
D1181	6	1N5, 1A7, 1H5, 3Q5, 117Z6, 35Z5GT	4860								Out	105127	A-3329	T22S47	A-2927	743 & 482	6F, 2M30															
D1182	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT	119123								Out	A-3857	T22S48	A-2937																		
D1183	5	1R5, 1T4, 1S5, 3S4, 35Z5, 35Z5GT	4589	AF44D4DA	UP4CJ61		DY-304		EL-351		Out	4698	A-3329	T22S47	A-2927	2950 & 467	2R, XX45															
D1184	5	1R5, 1T4, 1S5, 3S4, 45Z3	8952	AF44D4DA	UP4CJ61		DY-304		EL-351		Out	8975	A-3329	T22S47	A-2927	2950 & 467	2R, XX45															
D1189	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6X5/ 6X5GT (51)	45X296								Pwr Out	53X232, 51X38	A-3878	T22S47	A-2931																	
D1191	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6N7 (51)	45X294	AF88J4A	UP44450		DY-314				Pwr Out	53X231, 50X42, 51X88	A-4713	T20D77	A-2921																	
D1192	6	6SK7, 6SA7, 6SQ7, 6J5GT, 6N7 (51)	119118	AF44J4A	UP2245C		DY-315		EL-350		Pwr Out	104261, 105121, 105122, 51X78	A-4713, A-2201, A-3876	T20D76, T22S66, T22S45	A-2920, A-2901, A-2928																	
D1202	7	12SA7, 12SK7, 6L5G, 12SQ7, 35L6GT, 35Z5GT	45X308								Out	105958	A-3876	T22S45	A-2928																	
D1203	5	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47)	11994	AF88D	UP44415		DY-3X40-150		EL-340		Out	104202C, 105123	P-6012	T22R04, T22S58	P-2952, A-2930																	
D1210	8	6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3G, 6U5 (44)	11991B	AF44J	UP15D145		DY-3X15-450		EL-344		Pwr Out	104261, 105121, 105122, 105123	A-4713, A-2201, A-3876	T20D77, T22S66	A-2920, A-2901, A-2928																	
D1215	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	11992	AF440	A4	UP22215	A4	DY-3X20-150	A4	EL-320	A4	Out	105117	A-3876	T22S45	A-2928																
D1224	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	119117	PRS150-16	BR1615		M-16-150		UT-161		Out	105910C	A-3329	T22S47	A-2927																	
D1250	11	6SK7, 6SA7, 6SQ7, 6J5GT, 6F6G, 5Y3G, 6U5 (44)	119124								Pwr Out	104202C, 10554B	P-6013	T22R05, T22S64	P-2953, A-2904																	
D1281	6	1N5, 1A7, 1H5, 3Q5, 117Z6, 35Z5GT	4860A								Chk	4824, On Spkr.	A-3329	T22S47	A-2927																	
D1294	6	6SK7, 6SA7, 6SQ7, 6J5GT, 6N7 (51)	119118	AF44J4A	UP2245C		DY-315		EL-350		Pwr Out	104261, 105121, 105122, 105123	A-4713, A-2201, A-3876	T20D77, T22S66	A-2921, A-2901																	
D1296	5	6SA7, 6SK7, 6SQ7, 6K6GT, 6X5 (51)	119105	AF44J4A	UP2245C		DY-315		EL-350		Pwr Out	104295, 105125	A-3878, A-3879	T22S47	A-2931																	
D1512	6	6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT (47)	25688	AF44J	UP2245		DY-312		EL-353		Pwr Out	25723	P-6120	T22R02, T22S46	P-2952, A-2902																	
D1644	6	6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3GT (44)	A18-274	PRS25-25	BR202A		M-16-450		UT-16		Pwr Out	25713	A-3823	T22R02, T22S46	P-2951																	
D1645	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT (44)	A18-279	PRS450-16	BR1645		M-16-450		UT-16		Pwr Out	A80-222	A-3823	T22S47	A-2931																	
D1747, D1748	8	6SK7, 6SA7, 6SK7GT, 6SQ7GT, 6J5, 6K6GT, 5Y3GT	119109	AF44J	UP15D145		DY-3X15-450		EL-344		Out	53X282, On Spkr.	A-3877	T22S88	A-2930																	
D1752	8	6BA6, 6BE6, 6SG7, 6H6, 6V6GT, 5Y3GT (47)	A-57950-B-55520-1	AF862J4A	UP34145C		DY-403		EL-424		Pwr Out	C-57934, 6-57997-1	P-6013, A-3849	T22R05, T22S87	A-2902																	
D1845	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT (51)	45X346	AF88J4A	UP4445C		DY-314		EL-424		A4	Pwr Out	53X282, 51X134	A-3823	T22R02, T22S87	A-2900																
D1845 B, C	7	6BE6, 6BA6, 6AL5, 6AT6, 6V6GT, 5Y3GT (51)	45X359									DY406	EL424, UT-203	53X290, 51X134	A-3823	T22R02, T22S87	A-2902															
D1910	8	6K8G, 6K7G, 6Q7G, 76, 6N6G, 80, 6U5	5101	GL450-16	KR516A		D-16-450		PLS-16		Pwr Out	51X134	A-3823	T22R02, T22S87	A-2900																	
DI926 (Ser.)	11	6SK7, 6SA7, 6P5G, 6SQ7, 6V6G, 5Y3G	44X30	GL450-16	KR516A		D-16-450		PLS-16		Pwr Out	51X174	A-3311	T22R05, T22S64	P-2953, A-2904																	
DI932	11	6K7G, 6K8G, 6Q7G, 76, 6AC5, 80, 6U5	45X351	PRSI50-4	BR415		M-8-150		PLS-16		Pwr Out	51X70	A-3311	T22R06, T22S64	P-2954, A-2904																	
												D-10-25	TA-10	Pwr Out	7295, On Spkr.	P-6014, A-3823	T22R06, T22S64	P-2954, A-2904														

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photocat Sat No.	MFR. & MODEL		
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quan Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radial Part No.	Note		
1st..	9A1398	16-5712..		456	+	L26		12A364					Vol	36X280	AM-60-Z	KSS-3	A	D13-133	E	41						Continued—	TRUE TONE DI172
2nd..	9A1399	16-5714..		455	869424	L40		9230	ST-105		5A1		Vol	9221	M-60-Z		A	D13-133		41	G1						DI173
1st..	8042			455				9594	ST-194		5E45		Vol	9051	M-60-Z		A	D13-133		41	G1						DI174
2nd..	8043			455	+	L26		25242	ST-736		8E10		Vol	25004	T-115		A	D13-139X		41	G1						DI175
1st..	9A1398	16-5712..		456	B-27090	L-26																					
2nd..	9A1399	16-5714..		455																							
1st..	P4245	16-5712..		456																							
2nd..	P4244	16-5714..		455																							
1st..	9A1449	16-6658..		456																							
2nd..	9A1450	16-6660..		455																							
1st..	P4818..	16-6658..		455																							
2nd..	P4819..	16-6660..		455																							
1st..	108201	16-6658..		455																							
2nd..	108200	16-6660..		455																							
1st..	P4610..	16-6666..		455																							
2nd..	P4712..	16-6666..		455																							
1st..	8836..	16-6666..		455																							
2nd..	8836..	16-6666..		455																							
1st..	9A1368..	16-5712..		456																							
2nd..	9A1369..	16-5714..		455																							
1st..	9A1356..	16-6658..		456																							
2nd..	9A1358..	16-6660..		455																							
1st..	9A1359..	16-6660..		455																							
1st..	108194..	16-6658..		455																							
2nd..	108195..	16-6660..		455																							
1st..	9A1445..	16-6658..		456																							
2nd..	9A1446..	16-6660..		455																							
1st..	108140G..	16-6658..		455																							
2nd..	108145C..	16-6660..		455																							
1st..	108177E..	16-5712..		455																							
2nd..	108176D..	16-5714..		455																							
1st..	108157J..	16-6658..		455																							
2nd..	108157K..	16-6660..		455																							
1st..	108202B..	16-6658..		455																							
2nd..	108153C..	16-6660..		455																							
1st..	108169K..	16-5712..		455	+	L-40																					
2nd..	108130G..	16-5714..		455	+	L-40																					
1st..	4818..	16-6658..		455																							
2nd..	4819..	16-6660..		455																							
1st..	108194..	16-6658..		455																							
2nd..	108195..	16-6660..		455																							
1st..	108139B..	16-6658..		455																							
2nd..	108211..	16-6660..		455																							
1st..	25715..	16-6658..		455																							
2nd..	25714..	16-6670..		455																							
1st..	B10-412..	16-6658..		455																							
2nd..	B10-444..	16-6660..		455																							
1st..	9A1815..	16-6658..		455	+	L-70																					
2nd..	9A1815..	16-6660..		455	+	L-70																					
1st..	108177..			455	A50812..	L-70-A..			C-18B-13181..																		
2nd..	108176..			455																							
1st..	B-57954-1..	16-6658..		455	+	L-70-A..			C-59310..																		
2nd..	B-57972-1..	16-6659..		455	&																						
3rd..	B-57958-1..	16-6659..		10.7																							
3rd..	B-57963-1..	16-6670..		455																							
3rd..	B-57976-1..	16-6670..		455																							
1st..	9A1814..	16-6658..		455	+	L-70..			12A477..																		
2nd..	9A1815..	16-6660..		455	+	L-70..																					
1st..	9A1934..	16-5712..		455	+	L-70..																					
2nd..	9A1935..	16-5714..		455	+	L-70..																					
1st..	9A1932..	16-5712..		455	+	L-70..																					
2nd..	9A1933..	16-5714..		455	+	L-70..																					
1st..	9A1141..	16-5712..		455	+	L-70..																					
2nd..	9A1142..	16-5714..		455	+	L-70..																					
1st..	7293..	16-5712..		455	+	L-70..																					
2nd..	7294..	16-5714..		455	+	L-70..																					
					E2	7300..			F2					F2		Volt	Tone	7357..	M-60-Z		A		D13-133..		41	G1	
																		7195..									
																		7195..									
																		AT-120..									

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Merit	Eveready Part No.	Note	Burgess Part No.	Note		
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.	Part No.	"A"	"B"	"A"	"B"		
TRUEZONE—Cont.	7	6A8G, 6K7G, 6G7G, 6C5G, 26F6G, 80.	7113.	PRS450-16.		BR1645.		M-16-450.		UT-16.		Pwr Out	P-6012.	T22R04.		P-2952.							
D1943.	4	1A7G, 1N5G, 1H5G, 1C5G.	2602.	PRS25-25.		BR252A.		M-25-25.		TA-25.		Out	A-3311.	T22S64.		A-2904.							
D2010.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11992.	AF444D.	A4	UP4215.		DY-4020-150.		EL-24.		Out	105117.	A-3876.	T22S45.	A-2928.							
D2011.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11992.	AF444D.	A4	UP4215.		DY-4020-150.		EL-24.		Out	105117.	A-3876.	T22S45.	A-2928.							
D2015, 2016.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (47).	11994.	AF888D.		UP44415.		DY-3X40-150.		EL-340.		Out	10595B.	A-3876.	T22S45.	A-2928.							
D2019.	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z4GT.	11992.	AF444D.	A4	UP4215.		DY-4020-150.		EL-24.		Out	105106.	A-3876.	T22S45.	A-2928.							
D2023, 2024.	7	6SA7, 6J5G, 6SK7, 6SQ7, 25L6GT, 25Z5GT.	4106.			EZ3215C.		DSB-303.		TA-330 & TA-25.		Out	On Spkr.	A-3876.	T22S45.	A-2928.							
D2032.	7	6K8G, 6K7G, 6Q7G, 6C5G, 26F6G, 80.	16, 16 Mid.									Pwr Out	P-6012.	T22R04.	P-2952.								
D2033.	7	6SK7, 6SA7, 6SQ7, 6KG6, 5Y3G.	4130.									Out	4198.	T22S64.	A-3311.	A-2904.							
D2042.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11994.	AF888D.		UP44415.		DY-3X40-150.		EL-340.		Out	105108.	A-3876.	T22S45.	A-2928.							
D2063.	4	1A7G, 1N5G, 1H5G, 1Q5G.	3024.	PRS150-8.		BR815.		M-8-150.		UT-81.		Out	†	A-3878.	T22S47.	A-2931.	758.	C1	17GD60.	C1			
D2066.	4	1A7G, 1N5G, 1H5G, 3Q5G.	2602.	PRS25-25.		BR252A.		M-25-25.		TA-25.		Out	On Spkr.	A-3329.	T22S47.	A-2927.		†		†			
D2069.	5	1A7GT, 1P5GT, 1N5GT, 1H5GT, 1Q5GT.	3024.	PRS150-8.		BR815.		M-8-150.		UT-81.		Out	On Spkr.	A-3329.	T22S47.	A-2927.		†		†			
D2072.	6	608G, 6L5G, 6SQ7, 6T7G, 666G, 6X5GT.	4224.	AF43F4A.		UP2235C.		DY-309.		EL-333.		Chk	4228.	T22S48.	A-3879.	A-2932.							
DW2090.	5	1A7GT, 1N5GT, 1H5GT, 23Q5GT.	9146.	PRS150-12.		BR1215.		M-10-150.		UT-121.		Out	4220.	T22S46.	A-2203.	A-2998.							
D2106.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT.	8948.	PRSA150-40-20.		BRD4215.		M-2X40-150.		UT-240.		Out	On Spkr.	A-3876.	T22S45.	A-2928.							
D2121.	5	1P5GT, 1A7GT, 1N5GT, 1H5GT, 305GT.	25396.	PRSA150-20.		BR2015.		M-20-150.		UT-201.		Out	17080.	PRSA25-10.	BR102A.	TA-25.	25333.	A-3329.	T22S47.	A-2927.		†	
D2125.	7	12SA7, 12SK7, 6L5G, 12SQ7, 35L6GT, 35Z5GT.	45X295.									Out	SI6X5.	A-3876.	T22S45.	A-2928.							
D2127.	7	12SA7, 12SK7, 6L5G, 12SQ7, 35L6GT.	45X308.									Out	SI6X78.	A-3876.	T22S45.	A-2928.							
D2133.	7	6SJ7, 6J5GT, 6SK7, 6SQ7, 6V6GT, 5Y3G (51).	45X277.									Pwr Out	53X235.	P-6011.	T22R02.	P-2951.							
D2142.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	8525.	PRSA150-40-20.		BRD4215.		M-2X40-150.		TA-240.		Out	On Spkr.	A-3876.	T22S58.	A-2930.	A-2928.						
D2144.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT.	4683.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Out	4684.	A-3330.									
D2148.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	45X277.									Pwr Out	53X240.	P-6348.	T22R02.	P-3048.							
D2155.	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT.	8525.	PRSA150-40-20.		BRD4215.		M-2X40-150.		TA-240.		Out	On Spkr.	A-3876.	T22S45.	A-2930.	A-2928.						
D2161.	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT.	119117.	PRS150-16.		BR1615.		M-16-150.		UT-161.		Out	10591C.	A-3329.	T22S47.	A-2927.		†		†			
D2163.	4	1A7, 1N5, 1H5, 3Q5.	2602.	PRS25-25.		BR252A.		M-25-25.		TA-25.		Out	On Spkr.	A-3329.	T22S47.	A-2927.	758.	C1	17GD60.	C1			
D2166.	4	1A7, 1N5, 1H5, 3Q5.	2602.	PRS25-25.		BR252A.		M-25-25.		TA-25.		Out	On Spkr.	A-3329.	T22S47.	A-2927.	758.	C1	17GD60.	C1			
D2189.	6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT.	4568.	AF888D.		UP44415.		DY-3X40-150.		EL-340.		Chk	4565.	On Spkr.	A-3329.	T22S47.	A-2927.	758.	C1	17GD60.	C1		
D2206.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT.	8948.	PRSA150-40-20.		BRD4215.		M-2X40-150.		TA-240.		Out	On Spkr.	A-3876.	T22S45.	A-2928.							
D2210.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11992.	AF444D.	A4	UP4215.		DY-4020-150.		EL-24.		Out	105117.	A-3876.	T22S45.	A-2928.							
D2211.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11992.	AF444D.	A4	UP4215.		DY-4020-150.		EL-24.		Out	105117.	A-3876.	T22S45.	A-2928.							
D2215.	6	12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (47).	11994.	AF888D.		UP44415.		DY-3X40-150.		EL-340.		Out	10695B.	A-3876.	T22S45.	A-2928.							
D2224.	7	12SA7, 12SK7, 6L5G, 12SQ7, 35L6GT, 35Z5GT (47).	11995.									Out	51X78.	A-3876.	T22S45.	A-2928.							
D2245.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	9363.	PRSA150-40-20.		BRD4215.		M-2X40-150.		TA-240.		Out	On Spkr.	A-3876.	T22S45.	A-2928.							
D2261.	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT.	119117.	PRS150-16.		BRI615.		M-16-150.		UT-161.		Out	10591C.	A-3329.	T22S47.	A-2927.		†		†			
D2269.	6	1N5, 1A7, 1H5, 3Q5, 11726.	4860A.			UP6C164.				EL-351.		Chk	4824.	On Spkr.	A-3329.	T22S47.	A-2927.		†		†		
D2603.	3	1485/12SQ7GT, 50A5/50L6GT, 38Y4/35Z5GT.	2065.	PRSA150-40-40.		BRD4415.		M-2X40-150.		TA-440.		Out	On Spkr.	A-3876.	T22S45.	B3	A-2928.	B3					
D2604.	3	12AT6, 50B5, 35W4.	67A10.	PRS150-40-40.		BRD3515.		DSB-5030-150.		TA-530.		Out	98A4.	A-3856.	T22S46..	B5	A-2930.	B5					
D2605.	2	50L6GT, 35Z5GT.	A-8C-11119.	AF88D.		UP5515.		DY-2X40-150.		EL-25.		Out	B-12C-10074-3.	A-3876.	T22S45.	A-2928.							
D2610.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11992.	AF444D.	A4	UP4215.		DY-4020-150.		EL-24.		Out	On Spkr.	A-3876.	T22S45.	A-2928.							
D2611.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	11992.	AF444D.	A4	UP4215.		DY-4020-150.		EL-24.		Out	On Spkr.	A-3876.	T22S45.	A-2928.							

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				Photoc Set No.	MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quan. Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat. Part No.	Note					
1st.	+	16-5712.		455	+																					Continued—	TRUETONE			
2nd.	P2558	16-6658.		456				P2603	ST-108.		F2		F2	Vol Tone Vol	5100. 5511. P2600.	M-60-Z. M-51-Z.		A.	D13-133. D13-128.		41	G1					D1943	D1959		
2nd.	P2617	16-6658.		455				114213.	ST-113.		4A1			Vol	101230.	AM-50-Z.	KSS-3.	A.	D13-133.	E	41							D2010		
1st.	108157J	16-6658.		455				114213.	ST-113.		4A1			Vol	101230.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41							D2011		
2nd.	108157K	16-6660.		455				114213.	ST-113.		4A1			Vol	101230.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41							D2015, D2016		
1st.	108157J	16-6658.		455				114191.	ST-105.		5A1			Vol	101211.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41							D2019		
2nd.	108157K	16-6660.		455				114187.	ST-113.		4A1			Vol	101209.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41									
1st.	108157D	16-6658.		465																										
2nd.	P4108	16-6658.		455				P4107			F2		F2	Vol	P4089.	AT-90.	KSS-3.	A.	D19-133X.	E	41							D2023, D2024		
2nd.	P4109	16-6660.		455																							D2032			
1st.	+	16-5712.		455																							D2033			
2nd.	+	16-5714.		455																							D2042			
1st.	P4108	16-6658.		455				P4206	ST-110.		6A21			Vol Tone Vol	P4089. P4193.	AT-90.	KSS-3.	A.	D19-133X.	E	41							D2063		
2nd.	P4109	16-6660.		455				114193.	ST-105.		5A1			Vol	101217.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41							D2066		
1st.	108140F	16-6658.		465	†	L-40.		P3465.	ST-105.		5A1			Vol	P3317.	AM-60-Z.	KSS-3.	A2.	D13-133.	E	42							D2069		
2nd.	108145D	16-6660.		455																							D2072			
1st.	P3048	16-6658.		455																							D2125			
2nd.	P2606	16-6660.		455				P4040	ST-108.		F6	6A1		F6	Vol	P2600.													D2127	
1st.	P3048	16-6658.		455				P4040	ST-108.		F6	6A1		F6	Vol	P3720.	AM-63-Z.	KSS-3.	A2.	D13-137.	E	42							D2133	
2nd.	P2606	16-6660.		455				P4233	ST-108.		6A1			Vol	P4231.	AM-60-Z.	KSS-3.	A2.	D13-133.	E	42							D2142		
1st.	9155	16-6666.		455	†			9157	ST-108.		6A1			Vol	9143.	M-60-Z.		A.	D13-133.		41	G1						D2144 Early		
2nd.	9156	16-6667.		455				9017	ST-113.		4A1			Vol	9008.	M-60-Z.		A.	D13-133.		41	G1						D2149		
1st.	9015	16-6658.		455				25332.	ST-105.		5A1			Vol	25367.	AM-60-Z.	KSS-3.	A2.	D13-133.	E	42							D2155		
2nd.	9016	16-6660.		455				12A377.	ST-194.		5E45.			Vol	35X297.													D2161		
1st.	14722	16-6655.		456				12A396.	ST-194.		5E45.			Vol	36X309.	T-78.		A.	D13-133X.		41	G1						D2166		
2nd.	14723	16-6657.		455				12A407.			F2		F2	Vol Tone Vol	36X280. 40X248. 9051.	AM-60-Z. AM-67-Z. M-60-Z.	KSS-3.	A.	D13-133.	E	41							D2170		
1st.	9A1364	16-6655.		456				9053.	ST-105.		5A1			Vol	P4060.	M-60-Z.		A.	D13-133.		41	G1						D2174		
2nd.	9A1365	16-6650.		456																							D2178			
1st.	9A1445	16-6658.		456																							D2182			
2nd.	9A1446	16-6650.		456																							D2186			
1st.	9A1522	16-5712.		455																							D2190			
2nd.	9A1523	16-5714.		455																							D2194			
1st.	8042	16-6658.		455	†	L-40.		9230.	ST-105.		5A1			Vol	P4916.	AM-60-Z.	KSS-3.	A.	D13-134.	E	41							D2200		
2nd.	8043	16-6660.		455				114213.	ST-113.		4A1			Vol	101210.	M-63-Z.		A.	D13-133.		41	G1						D2204		
1st.	108202B	16-6658.		455				9744.	ST-196.		4E45.			Vol	9008.	M-60-Z.		A.	D13-133.		41	G1						D2208		
2nd.	108153C	16-6660.		455				P4919.	ST-105.		5A1			Vol	P4916.	AM-60-Z.	KSS-3.	A2.	D13-133.	E	42							D2212		
1st.	P3048	16-6658.		455				P4572.	ST-108.		F6	6A1		F8	Vol	P4916.	AM-60-Z.	KSS-3.	A2.	D13-133.	E	42							D2216	
2nd.	P2606	16-6660.		455				P4572.	ST-108.		F6	6A1		F8	Vol	P3720.	AM-63-Z.	KSS-3.	A2.	D13-137.	E	42							D2220	
1st.	P3048	16-6658.		455				114213.	ST-113.		4A1			Vol	101210.	M-63-Z.		A.	D13-137.		41	G1						D2224		
2nd.	P2606	16-6660.		455				114213.	ST-196.		4E45.			Vol	9051.	M-60-Z.		A.	D13-133.		41	G1						D2228		
1st.	108157J	16-6658.		455				114266.	ST-196.		4E45.			Vol	101230.	M-60-Z.		A.	D13-133.		41	G1						D2232		
2nd.	108157K	16-6660.		455				114213.	ST-113.		4A1			Vol	101230.	M-60-Z.		A.	D13-133.		41	G1						D2236		
1st.	108157J	16-6658.		455				114266.	ST-196.		4E45.			Vol	101230.	M-60-Z.		A.	D13-133.		41	G1						D2240		
2nd.	108157K	16-6660.		455				114266.	ST-196.		5A1			Vol	101211.	M-63-Z.		A.	D13-133.		41	G1						D2244		
1st.	108140G	16-6658.		455				114191.	ST-105.		5A1			Vol	101210.	M-63-Z.		A.	D13-137.	E	42							D2248		
2nd.	108145C	16-6660.		455				114266.	ST-194.		5E45.			Vol	36X309.	T-78.		A.	D13-133X.	E	41							D2252		
1st.	9A1445	16-6658.		456				12A396.	ST-194.		5E45.			Vol	9051.	M-60-Z.		A.	D13-133.		41	G1						D2256		
2nd.	9A1446	16-6660.		456				114213.	ST-113.		4A1			Vol	101210.	AM-63-Z.		A2.	D13-137.	E	42							D2260		
1st.	9472.			455	†	L-40.		9594.	ST-194.		5E45.			Vol	9051.	M-60-Z.		A.	D13-133.		41	G1						D2264		
2nd.	9473.			455				114213.	ST-113.		4A1			Vol	101210.	AM-63-Z.		A2.	D13-137.	E	42							D2268		
1st.	108202B	16-6658.		455				114213.	ST-113.		4A1			Vol	101210.	AM-63-Z.		A2.	D13-137.	E	42							D2272		
2nd.	108153C	16-6660.		455				P4795.			F1		F1	Vol	P4820.	AM-63-Z.		KSS-3.	A2.	D13-137.	E	42							D2276	
1st.	P4818.	16-6658.		455																							D2280			
2nd.	P4819.	16-6660.		455				6943.	L-70.																			D2284		
								5855.	ST-107.		5A15.			Vol	2472. 2473. 7591-9.	M-60-Z. M-55-S. AM-63-Z.		KSS-3.	A.	D13-133.	E	41							13.	D2603
								78B9-2.	ST-107.		5A15.			Vol	101230.	AM-60-Z.		A.	D13-133.	E	41								13.	D2604
								B-18A-11546.			3A07.			Vol	A-1CA-11555.	AM-63-Z.		KSS-3.	A.	D13-133.	E	41								

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
			No.	Tube Sylvania or Equivalent	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
	No.	Dial Light Type Listed in Parentheses	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"	"A"	"B"		
TRUEZONE—Continued																										
D2612.	6	12SK7, 12SA7, 12SF7, 35L6GT, 35Z5GT (47).	500256.	AF88D.		UP3515.		DY-40+20-150.		EL-24.		Cut	502213.	A-3390.					A-3031.							
D2613.	6	12SK7, 12SA7, 12SF7, 35L6GT, 35Z5GT (47).	500256.	AF84D4A.	A3	UP4CJ59.	A3	DY-4020-150.	A3	EL-24.	A3	Cut	502904.	A-3330.					A-3031.							
D2615.	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT.	11994.	AF84D.		UP22215.		DY-3X20-150.		EL-224.		Cut	502213.	A-3330.					A-3031.							
D2616.	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT.	A-8C-10077.	AF66D.		UP22215.		DY-3X20-150.	M-20-150.	EL-224.		Cut	504244.	A-3330.					A-3031.							
D2618.	6	12SK7, 12SA7, 12SF7, 12SJ7, 35L6GT, 35Z5GT.	A-8C-10077.	PRS150-20.		UP42215.		DY-403020-150.		EL-224.		Cut	504244.	A-3330.					A-3031.							
D2619.	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47).	C-466A.	PRSA150-40-40.		BRD4415.		DSB-2X40-150.		TA-440.		Cut	502904.	A-3330.					A-3031.							
D2620.	5	12SA7, 12SK7GT, 12SQ7, 50L6GT, 35Z5GT (47).	67A3.	PRSA150-50-30.		BRD3515.		DHN-2X50-150.		TA-530.		Cut	7884-1.	A-3876.					A-2928.							
D2621.	5	1NSGT, 1A7GT, 1H5GT, 3Q5GT.	25800.	PRS150-16.		BR1615.		M-16-150.		UT-161.		Cut	25894.	A-3329.					A-2927.						17GD60	
D2622.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	67A8.	PRSA150-40-40.		EZ42215.		DSB-40+30+.		TA-330.		Chk	74A1.	C-1711.					T20CS2.	C-2975.						
								PRSA150-20.		TA-201.		Out	74A1.	A-3876.	B3	T22S45.	B3	A-2928.								
D2623.	6	6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 5Y3GT (44).	A-18-274.	PRS150-16.		BRD3515.		M-50+30-150.		TA-530.		Pwr	C80-223.	P-6119.					T22R02.	P-2951.						
D2624.	7	12SA7, 12SK7, 6SS7, 12SQ7, 12SJ7, 35L6GT, 35Z5GT (47).	45X342.	PRS15050-Z.		BR1645.		DH-16-450.		UT-15.		Out	A-3879.	T22S47.					T22S47.	A-2931.						
D2630.	7	12SA7, 12SK7, 6SS7, 12SQ7, 12SJ7, 35L6GT, 35Z5GT (47).	45X342.	PRSA5050-Z.		ED10405.		DSB-2X50/20X25.		UT-501.	TA-25.	Out	51X120A.	A-3876.					T22S45.	A-2928.						
D2634.	6	6SK7, 6SA7, 6SQ7, 6V6GT, 5Y3GT (47).	25688.	AF44J.		UP2245.		DY-312.		EL-353.		Pwr	25723.	P-6120.					T22R02.	P-2951.						
D2642.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	67A8.	PRSA150-40-40.		EZ42215.		DSB-403020-150.		TA-330.		Out	25713.	A-3823.					T22S46.	A-2930.						
D2644.	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT.	A18-273.	PRS150-4.		BRD3515.		M-5030-150.		TA-330.		Chk	74A1.	C-1711.					T20CS2.	C-2975.						
D2645.	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT (47).	45X346.	UP43145C.		BR415.		M-4-150.		TA-41.		Out	74A1.	A-3876.	B3	T22S45.	B3	A-2928.								
D2661.	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT.	119117.	PRS150-12.		BR1215.		M-12-150.		UT-121.		Out	A-3878.	T22S47.					T22S47.	A-2931.						
D2663.	4	1A7GT, 1NSGT, 1H5GT, 3Q5GT.	6744-2.	PRS150-4.		BR415.		M-4-150.		UT-41.		Out	74A1.	A-3876.					T22S46.	A-2927.						
D2665.	4	1R5, 17A, 1S5, 3S4.	A-8C-10528.	AF44D.		UP2215.		DY-2X10-150.		EL-221.		Out	B-12C-1032B.	A-3878.					T22S46.	A-2931.						
D2692.	6	12SK7GT, 12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT.	40, 40, Mfd.	PRSA150-40-40.		BRD4415.		M-2X40-150.		TA-440.		Out	t.	A-3876.					T22S47.	A-2928.						
D2709.	4	12SA7, 12SK7, 12SQ7GT, 50L6GT, 35Z5GT.	2073.	AF1010D.		UP5315.		DY-5030-150.		EL-35.		Out	1300.	A-3876.	B3	T22S45.	B3	A-2928.								
D2710.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	45X341.	PRSA150-50-50.		BRD5515.		M-2X50-150.		TA-505.		Out	51X132.	A-3876.					T22S45.	A-2928.						
D2718.	7	12SA7, 12SK7, 6SS7, 12SQ7, 12SJ7, 35L6GT, 35Z5GT (47).	45X342.	PRSA5050Z.		ED10405.		DSB-304.		TA-505.	TA-25.	Out	51X118.	A-3876.					T22S46.	A-2928.						
D2743.	4	12SA7GT, 12SQ7GT, 50L6GT, 35Z5GT.	2073.	AF88D.		UP5315.		DY-5030-150.		EL-35.		Out	1322.	A-3876.	B3	T22S45.	B3	A-2928.								
D2745.	6	6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT (47).	45X346.	UP43145C.		BRD4215.		DY-2X40-450.	/20-25.	EL-330.		Pwr	53X282.	On Spkr.					T22S88.	A-2930.						
D2748.	5	12BE6, 12BA6, 12AT6, 50B5, 35W4 (47).	B-9564-1.	BRD4215.		M-2X40-150.		TA-250.		EL-250.		Out	On Spkr.	A-3876.	B3	T22S45.	B3	A-2928.								
D2810.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47).	45X363.	AF88D.		UP4415.		DY-2X40-150.		EL-35.		Out	51X135.	A-3876.					T22S45.	A-2928.						
D2851.	5	12BE6, 12BA6, 12AT6, 50B5, 35W4 (47).	A-8C-10077.	AF844D.		UP42215.		DY-403020-150.	M-25-25.	EL-224.	TA-25.	Out	B-12C-12356.						A-2998.	B24.						
D2906.	4	12K7GT, 12F5GT, 35L6GT, 35Z4GT.	5779.	BR252A.		BR252A.		M-2X30-150.		TA-330.		Out	5176.	A-3876.					T22S45.	A-2928.						
D2910, 2911.	5	12SA7, 12SK7GT, 50L6GT, 35Z5GT (47).	3355.	PRSA150-30-30.		BRD3315.		M-2X30-150.		TA-330.		Out	On Spkr.	A-3876.					T22S45.	A-2928.						
D2919.	7	6BA6, 6BE6, 6AL5, 6AT6, 6V6GT, 6X5GT (47).	46X380.	UP4445C.		BR415.		DY-314.	M-4-450.	EL-432.	UT-141.	A9	Pwr	53X291.	On Spkr.					T22R01.	A-2901.					
D2924.	7	6A8G, 6P5G, 6K7G, 6Q7G, 25L6G, 25Z6G.	3169.									Chk	104139C.	A-3876.					T22S45.	A-2928.						
D2933.	6	6K8G, 6SK7, 6Q7G, 6P5G, 6AC5G, 5Y3G.	11980.	PRS450-16.		BR1645.		M-16-450.		UT-16.		Pwr	104139C.	P-6011.					T22R02.	P-2951.						
D2937.	8	6K8G, 6D6, 6G5, 6Q7G, 76, 80, 5101.	3285.	GL450-16.		KR516A.		D-16-450.		PLS-16.		Pwr	105858.	A-3878.					T22S47.	A-2931.						
D2973.	6	1A7G, 1PG, 1H5G, 1C5G, 164G, 20, 30 Mfd.	11965C.	PRS350-24.		BR2045.		M-20-350.		UT-203.		Pwr	104159B.	A-3878.					T22S48.	A-2938.						
DE3000.	6	6K7G, 6A8G, 6Q7G, 6K6G, 6X5G (51).	11965C.	PRS350-24.		BR2045.		M-20-350.		UT-203.		Pwr	10537.	A-3878.					T22S47.	A-2931.						

<sup>†</sup> Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES									
			No.	Tubes	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
					Dial Light Type Listed in Parentheses	Part No.	Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"				
TRUEZONE—Continued			6	6D8G, 6L5G, 6S7G, 6T7G, 6G6G, 6X5GT	4224				UP2235C		DY-312		EL-334		Chk Pwr Out	4228, 4220, On Spkr. Out	†	†	†	†	†							
DE-3001			5	1A7GT, 2IN5GT, 1H5GT, 3Q5GT	9146			PRS150-12		BR1215		M-10-150		UT-121		On Spkr. Out	A-3879, A-2203	T22S48, T22S46	A-2932, A-2958	†	†							
DE3002			5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35ZGT, & 5459 Ballast	119104			AF44D40A		UP4CJ61		DY-304		EL-351		Out	On Spkr.	A-3857	T22S48	A-2937	†	†						
D3015			5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35ZGT, & 5459 Ballast	119104			AF44D40A		UP4CJ61		DY-304		EL-351		Out	On Spkr.	A-3857	T22S48	A-2937	†	†						
D3030			6	1IN5, 1A7, 1H5, 3Q5, 117Z6	4414			PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Chk Out	4421, On Spkr. Out	A-3329, A-3857	T22S47, T22S48	A-2927, A-2937	†	†			743-752	6FPI, 2B30PI		
D3115			5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35ZGT	4415			PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3857	T22S48	A-2937	†	†						
D3119			5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35ZGT	119123										Out	105127	A-3857	T22S48	A-2937	744 & 482	F4PI, 2A30							
D3123			5	1R5, 1T4, 1S5, 3S4, 35Z5	4589			AF44D40A		UP4CJ61		DY-304		EL-351		Out	4698	A-3329	T22S47	A-2927	950 & 467	2R, XX45						
D3124			5	1R5, 1T4, 1S5, 3S4, 45Z3	8952			AF84D20A		UP4CJ62		DY-304		EL-351		Out	8795	A-3329	T22S47	A-2927	950 & 467	2R, XX45						
D3130			6	1IN5, 1A7, 1H5, 3Q5, 117Z6	4860										Chk Out	4824, On Spkr. Out	A-3329, A-3879	T22S47	A-2927	†	†			745 & 482	4F, 2A30			
D3230			6	1IN5, 1A7, 1H5, 3Q5, 117Z6	4860A										Chk Out	4824, On Spkr. Out	A-3329, A-3879	T22S47	A-2927	†	†			745 & 482	4F, 2A30			
D3615			5	1R5, 1U4, 1S5, 3Q4, 117Z3	45X349			PRSA150-40-50		BRD4415		DSB-2X40-150		TA-40		Out	105119C	A-3879	T22S47	A-2927	754	F6A60						
B3619			5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35ZGT (47)	119123			AF888D		UP4A315C	A3	DY-419	A3	EL-340	UHC-212	Out	105119C	A-3879	T22S47	A-2927	754	F6A60						
D3630, N			5	1IN5GT, 1A7GT, 1H5GT, 3Q5GT	57C7-42			AF106520A		UPGCJ62		DY-304		EL-351		Chk Out	74A1, On Spkr. Out	C-1711, A-3822	T20C52	C-2975	754	G6M60						
D3635			6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35ZGT	500714			AF44D		PR25-100	A4	PR25-100	A4	DSB-2X40-250	EL-354	Out	502902, 502492	A-3822	T22S47	A-2927	746 482	G3, M-30						
D3720			4	1R5, 1U4, 1S5, 3Q4	AA-18-281			AF5227		BR502		M-50-25		TA-50		Out	502902, 502492	A-3822	B80-232	A-2932	754	G6BB60						
								AF866D4A		UP4A315C		DY-419	M-100-25	EL-224	UHC-102	Out	B80-232	A-3822	B22	B22	753	F6A60						
D3721			4	1R5, 1U4, 1S5, 3Q4	A18-281				UP42215		DY-401	M-100-25	EL-224	UHC-102	Out	B80-232, B80-228	A-3822	T22S47	A-2932	753	F6A60							
D3810			5	1R5, 1U4, 1S5, 3S4, 117Z3	CE-12			PRSA302010-150		UP10025	EZ-3315	DSB-2X30-150	M-100-12	TH-330	UHC-112	Out	TR-7	A-3877	B3	A-2900	B3	950 467	2R, XX45					
D3906			5	1A7G, 2IN5G, 1H5G, 1C5G	45X250										Out	†	A-3879	T22S47	A-2932	741 482	8F, 2B30							
D3908			4	1A7G, 1N5G, 1H5G, 1Q5G	3024			PRSA150-3		BR815		M-8-1S0		UT-81		Out	†	A-3878	T22S47	A-2931	742 482	4F, 2A30						
D3915			5	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35ZGT, 70L7GT	3562			PR25-50		BR502		M-50-25		TA-50		Chk Out	3556, On Spkr. Out	†	†	†	†	†	2482, C4	65, 2B30				
D4035 Series, A, C, D 4040			6	6SK7, 6SA7, 688G, 6K6G, 6N7G	45X271			PR25-50		PR25-50		M-2X30-150		TA-330		Pwr	53X177	A-4713	T20D77	A-2921								
D4135			6	6SK7, 6SA7, 6SQ7, 6KGGT, 6X5/6X5GT (51)	45X296			AF88J4A		UP4445C		DY-314		EL-314		In	50X40, 51X74	A-4713	T20D77	A-2921								
D4140 Issue A, B			6	6SK7, 6SA7, 6SQ7, 6KGGT, 6N7 (51)	45X294			AF88J4A		UP4445C		DY-314		EL-314		Out	53X232, 51X89	A-3878	T22S47	A-2931								
D4150			6	6SK7, 6SA7, 6SQ7, 6J5GT, 6N7 (51)	119118			AF44J4A		UP2245C		DY-315		EL-350		Pwr	50X42, 51X88	A-4713	T20D77	A-2921								
D4220			5	6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT (51)	119105			AF44J4A		UP2245C		DY-315		EL-350		Out	104261, 105121	A-4713, A-2201	T22S46	A-2920, A-2901								
D4230			6	6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT (51)	45X296			AF88J4A		UP4445C		DY-314		EL-350		Out	104261, 105122	A-4713, A-2201	T22S47	A-2931								
D4240			6	6SK7, 6SA7, 6SQ7, 6K6GT, 6N7 (51)	45X294			AF88J4A		UP4445C		DY-314		EL-350		Out	104261, 105122	A-4713, A-2201	T22S47	A-2931								
D4255			6	6SK7, 6SA7, 6SQ7, 6J5GT, 6N7 (51)	119118			AF44J4A		UP2245C		DY-315		EL-350		In	50X42, 51X88	A-4713	T20D77	A-2921								
D4620			5	6SA7, 6SK7, 6SQ7, 6K6GT, 6X5GT (51)	119105			AF32K4A		UP2245C		DY-310		EL-326		Out	104261, 105121	A-4713, A-2201	T22S46	A-2920, A-2901								
D4630			6	6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT (51)	45X295					EZ1A135C		DSB-2X30-350	A4	EL-323		Pwr	104295, B-12C-10235	A-3878, A-3831	T22R20	P-2969, P-2931								
D4920			5	6A8, 6K7, 6Q7, 6K6, 6X5	11950			PRSB450-B-8		BR4035		/50-55		TU-88		Out	104131, 10567	A-3831, A-3878	T22S47	P-2971, A-2931								
ULTRADYNE L-46			6	14Q7, 21A7, 14B6, 35A5, 35Y4 (47)	50-50 Mfd.			AF101DD		UP5515		DY-2X50-150		EL-25		Out	†	A-3876	T22S45	A-2928								
UNITED MOTORS			SERVICE—(See Delco, Buick, Chevy., Olds, Pontiac)																									

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS				MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiar Part No.	Note	Photoef ct S/N.		
1st.	P4245	16-5712		455				P4233	ST-108		6A1		Vol	P4231	M-60-Z		A		D13-133		41	G1	P4221	5421	H1	Continued	TRUEZONE DE3001	
2nd.	P4244	16-5714												Vol	9143													DE3002
1st.	9155	16-6658		455	†	†		9157	ST-108		6A1		Vol	101210	AM-63-Z	KSS-3	A2		D13-137	E	42						DS015	
2nd.	9196	16-6660							114189	ST-105		5A1		Vol	P4418	AM-63-Z	KSS-3	A2		D13-137	E	42						DS030
1st.	108171B	16-6658		465																							DS115	
2nd.	108172	16-6660																									DS119	
1st.	P4419	16-6658		455				P4416	ST-105		5A1		Vol	36X310	M-60-Z		A		D13-133		41	G1						D3123
2nd.	P4420	16-6660																									D3124	
1st.	9A1449	16-6658		455				12A397	ST-105		5A1		Vol	101252	AM-63-Z	KSS-3	A2		D13-137	E	42						DS130	
2nd.	9A1450	16-6660							114241	ST-105		5A1		Vol	P4706	AM-63-Z	KSS-3			D13-137	E							DS230
1st.	108201	16-6658		455																						DS315		
2nd.	108200	16-6660																								DS319		
1st.	P4610			455				P4620A																			D3125	
2nd.	P4712																										D3126	
1st.	8836			455				8808																			D3127	
2nd.	8836																										D3128	
1st.	P4818	16-6658		455				P4795	ST-105		5A1		Vol	P4795	AM-63-Z	KSS-3	A2		D13-137	E	42						DS231	
2nd.	P4819	16-6660						P4795	ST-105		5A1		Vol	P4820	M-63-Z		A		D13-133		41	G1					DS232	
1st.	P4818	16-6662		455					12A448	ST-107		5A15		Vol	36X310	AM-60-Z	KSS-3	A2		D13-133	E	42					DS315	
2nd.	P4819	16-6660							114241B	ST-107		5A15		Vol	101252	AM-63-Z	KSS-3	A2		D13-137	E	42					DS319	
1st.	9A1837			455																							D3129	
2nd.	9A1838																										D3128	
1st.	108201	16-6658		455																							D3127	
2nd.	108200	16-6660																									D3126	
1st.	72B9-2	16-6658		455				78B8	ST-107		5A15		Vol	75B1-10C	AM-63-Z	KSS-3	A2		D13-137	E	42						DS3620, N	
2nd.	72B10-2	16-6660																									D3635	
1st.	502495			455				502491	ST-105		5A1		Vol	502525														D3720
2nd.	500749																											
1st.	C10-475	16-6658	D22	455				B79-350	ST-107		5A15		Vol	A24-170	AM-63-Z	KSS-3	A2		D13-137	E	42						32. D3721	
1st.	C10-473	16-6660	D22																								39. D3810	
1st.	C10-462																										D3906	
1st.	C10-471																										D3908	
2nd.	C10-475	16-6658	D22	455				B79-352	ST-107	F13	5A15	F13	Vol	A-24-170	AM-63-Z	KSS-3	A2		D13-137	E	42						DS3615	
2nd.	C10-474	16-6660	D22					B79-350					Vol	VC-6													DS3619	
1st.	C10-472							SP41-7					Vol	36X258	AM-60-Z	KSS-3	A2		D13-133	E	42						D4040, D4040	
1st.	16-5712			455									Vol	P3448	ST-105	5A1			P3317	AM-60-Z	KSS-3	A2		D13-133	E	42		
2nd.	LF22	16-6658		455									Vol	P3564	ST-105	5A1			P3560	AM-63-Z	KSS-3	A2		D13-137	E	42		
1st.	LF22	16-6660											Vol	12A341	ST-108	F8	6EV6	Tone	36X275		M-63-Z							D4035, D4040
2nd.													Vol	40X212														
1st.	9A1200	16-6658		455									Vol	12A376	ST-108	F8	6EV6		36X296									D4135
2nd.	9A1201	16-6660											Vol	12A375	ST-108	F8	6EV6	Volt	36X298	40X257	AM-66-Z	KSS-3		D13-139	E			D4140 (Issue A8)
1st.	108194	16-6658		455									Vol	114232	ST-108	F8	6EV6	Volt	101242									D4150
2nd.	108195												Vol	114232		F13	5EV6	Tone	101245									D4255
1st.	108139B	16-6658		455									Vol	114273	ST-105	F8	5EV6		101276	M-60-Z		A		D13-133		41	G1	12629, 5307, H1
2nd.	108211	16-6660											Vol	12A386	ST-108	F8	6EV6		36X296									D4220-
1st.	9A1368	16-6658		455									Vol	12A384	ST-105	F13	52EV6											D4230
2nd.	9A1359	16-6660											Vol	12A385	ST-108	F8	6EV6		36X298	40X257	AM-66-Z	KSS-3		D13-139	E			D4240
1st.	9A1358	16-6658		455									Vol	114232	ST-108	F13	52EV6		101242									D4255
2nd.	9A1359	16-6660											Vol	114232	ST-108	F8	6EV6		101245									D4255
1st.	108194	16-6658		455									Vol	108139B-10236	ST-105	F8	5EV6		101276									D4620
2nd.	108195												Vol	12A386	ST-108	F8	6EV6		35X296	AM-60-Z	KSS-3	A	G19	D13-133	B	41	G19	19A37, 5307, H1
1st.	3A1368	16-6658		455									Vol	12A384	ST-105	F13	5EV6		101110	AM-63-Z	KSS-3	A		D13-137	E	41		12629, 5307, H1
2nd.	9A1359	16-6660											Vol	114114	ST-105	F8	6EV6											D4920
1st.	108960	16-6658		455									Vol						(See D13-133)									4. ULTRADYNE L-46
2nd.	10895C	16-6660											Vol						(See D13-133)									MOTORS SERVICE

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
U.S. TELEVISION SA16, 5916, 5C16, 5A66, 5B66, 5C66, 5D66 MPA.	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	PA4300-1, 16-16 Mfd.	PRS150-40, PRSA150-20-20		BR4015, BRD2215		M-40-150, DSB-2X20-150		UT-401, TA-116		Out	TR-2123-1	A-3876		T22S45		A-2928					
5-16M.	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT	PA4301-1	PRS25-10		BR102A		M-10-25		TA-10		Out	On Spkr.	A-3876		T22S45		A-2928					
5-46	5	12BE6, 12BA6, 12AT6, 50B5, 35W4	PA4301-1	PRS150-40		BR4015		M-40-150		UT-401		Out	On Spkr.	A-3876		T22S45		A-2928					
8-16M.	8	7A7, 7Q7, 7B6, 7A4, 25V6GT, 5Y3GT (47)	PA4300-1 PA4311-1 PA4386-3 PA4300-3 PA4386-2	PRS150-25 AF444J PRSA25-25 PRSA450-4 PRSA25-50		BR102A BR1215 UP150145 BR202A BR448 BR502		M-10-25 M-10-150 DY-3X15-450 M-25-25 M-4-450 M-50-25		UT-121, EL-344, TA-23, UT-4, TA-50		Chk Pwr Out	PA-7353 PC-67000-60 On Spkr.	C-2303 P-6013 A-2312		T22R05		P-2953		A-2901			
UNITONE 88	6	14A7/12B7, 14Q7, 14B6, 35L6GT, 35Z5GT (47)	40-40 Mid. 25 Mfd.	PRS150-40-40, PRS25-25		BRD4415 BR252A		M-2X40-150 M-25-25		TA-440, TA-25		Chk Out	†	A-3876		T20C53 T22S45		A-2928					
V-M 1001-A	3	12SJ7GT, 50L6GT, 45Z5GT	15A0068 15A0069	PRSA150-20-20 PRS150-10		BRD2215 BR1215		M-2X20-150 M-10-150		TA-220, UT-121		Out	13A0017	A-3875		T22S45		A-2928					
VAN CAMP 576-1-6A	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	A-8948	AF84D20A	A3	UP4215		DY-4020-150		EL-24		Chk Out	B-51726-1	C-1355 A-3876		B3	T22S46	B3	A-2928				
VIEWTONE RC-201A, RRC-201	5	14Q7, 14A7/12B7, 14B6, 50A5, 35V4 (47)	50-30 Mfd. 10 Mfd.	PRSA150-40-40 PRS25-10		BRD3515 BR102A		M-5030-150 M-10-25		TA-530, TA-10		Out	†	A-3876		T22S45		A-2928					
VIZ RS-1	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	30-20-20 Mfd.	AF64D4A		UP4CJ2		DY-303		EL-324		Out	†	A-3876		T22S45		A-2928					
VOGUE 532A-P	3	12SQ7GT, 50L6GT, 35Z5GT	15-2	AF84D4A		UP4CJ2		DY-304		EL-343		Out	On Spkr.	A-3876		T22S45		A-2928					
553R, 554R	5	12SA7GT, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	15Y11	PRSA150-40-40		BRL4215		M-4020-150		TA-240		Out	On Spkr.	A-3875		T22S45		A-2928					
WARWICK—See Clarification for Post-War Models	3	12SA7GT, 25D8GT, 70A7GT (47)	18-251	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	80-176	A-3876		T22S45		A-2928					
0-30	4	1A7GT, 1N5GT, 1H5GT, 1C5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	†	A-3329		T22S47		A-2927	742 & 482	4F	FB30		
0-40	4	1A7GT, 1N5GT, 1H5GT, 1C5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	†	A-3329		T22S47		A-2927	†		†		
0-41	4	1A7GT, 1N5GT, 1H5GT, 1C5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	†	A-3329		T22S47		A-2927	†		†		
0-42	4	1A7GT, 1N5GT, 1H5GT, 1C5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	†	A-3329		T22S47		A-2927	†		†		
0-43, O-44	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3879		T22S47		A-2932	†		†		
0-46	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	80-200	A-3329		T22S47		A-2927					
0-50	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT	18-259	PRS50-50 PRS150-16		BR505 BR1615		M-50-50 M-16-150		TA-550, UT-161		Out	80-178	A-3857		T22S48		A-2937	†		†		
0-51	5	6SA7GT, 6SK7GT, 6SQ7GT, 6KG7GT, 5W4GT (51)	18-254	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	80-179 On Spkr.	P-6297 A-3878		T22R00 T22S47		P-2949 A-2931					
0-53	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT	18-263	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	80-196	A-3881		T22S48		718 & 482	2F4	FM30			
0-54	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (51)	18-241	PRSA150-20-20		AF65D BRD2215		DY-2X30-150 M-2X20-150		EL-230 TA-220		Out	On Spkr.	A-3876		T22S45		A-2928					
0-60	5	6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM49C Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928					
0-61	5	6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM49B Ballast) (51)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3875		T22S45		A-2928					
0-62	5	6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM49B Ballast) (51)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928					
0-63	6	6SA7GT, 6SK7GT, 6PSGT, 6SQ7GT 6KG7GT, 5W4GT	18-254	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	80-179	P-6297 On Spkr.		T22R00 T22S47		P-2949 A-2931					
0-64	5	6SA7GT, 6PSGT, 6SK7GT	18-254	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	80-179	P-6297 On Spkr.		T22R00 T22S47		P-2949 A-2931					
0-65	6	6SA7GT, 6KG7GT, 6W4GT	18-254	PRSA25-25		BR2245		M-25-25		EL-220		Pwr Out	80-179	P-6297 On Spkr.		T22R00 T22S47		P-2949 A-2931					
0-66	6	6SA7GT, 6SK7GT, 6PSGT, 6SQ7GT, 6KG7GT, 5W4GT	18-254	AF44J		UP2245		M-25-25		EL-220		Pwr Out	80-179	P-6297 On Spkr.		T22R00 T22S47		P-2949 A-2931					
0-67	6	6SA7GT, 6SK7GT, 6PSGT, 6SQ7GT, 6KG7GT, 5W4GT	18-254	AF44J		UP2245		M-25-25		TA-25		Pwr Out	80-179	P-6297 On Spkr.		T22R00 T22S47		P-2949 A-2931					
0-70	7	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 6AC5GT, 5W4GT	18-254	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	80-179	P-6297 On Spkr.		T22R00 T22S47		P-2949 A-2931					

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			X S N E C L O D E M F R M O D E				
Use	Mfr.	Melsener Part No.	Note	Peak Freq.	Mfr.	Astatic Part No.	Note	Mfr.	Jensen Part No.	Note	Quartz Part No.	Note	Use	Mfr.	Clerestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr.	Radiant Part No.	Note			
1st.	AB42202	16-6658.		455		↑		L-70.		PC-63000-3.	ST-105.		SA1.		Vol	PA-4400-2.	M-60-Z.		A.	D13-133		41	G1				U. S. TELEVISION	
2nd.	AB42203	16-6660.								PC-63000-2.	ST-194.		SE45.		Vol	PA4400.	M-60-Z.		A.	D13-133		41	G1				5A16, 5B16, 5C16, 5A66, 5B66, 5C66, 5D66MPA	
1st.	AB42202	16-6658.		455						PC-63000-3.	ST-194.		SE45.		Vol	PA4400.	M-60-Z.		A.	D13-133		41	G1				5-16M	
2nd.	AB42203	16-6660.																							5-46			
1st.	AB42216-1	16-6658.		455		↑		L-70.		PC-63000-8.	ST-101.		12A4.		Vol Tone	PA4403	AM-66-Z.	KSS-3.	A.	D13-139	E	41					26.	
2nd.	AB42216-2	16-6660.														PA4402	AM-64-Z.	KSS-3.		D13-130							B-16M	
1st.																												
2nd.																												
1st.		16-6658.		455																					5.			
2nd.		16-6660.																							UNITONE 88			
																									VM 1001-A			
1st.	B51010-1	16-6658.		455						C-51722.	ST-110.		6A21.		Vol Tone	B-51725-2	AT-68.	KSS-3.	A.	D13-133X.	E	41					7.	
2nd.	B51011-1	16-6670.															B-51724-1.	AM-60-Z.	KSS-3.		D13-133							VAN CAMP 576-1-6A
1st.																												
2nd.																												
1st.		16-6658.		455		↑		(QT-M. (or) QT-J)								ST-108.	6A1.	M-60-Z.	A.	D13-133.		41	G1				11.	
2nd.		16-6660.																M-52-S.	D11-129.						VIEWTONE RC-201, RRC-201			
1st.																												
2nd.																												
1st.	12Y4.	16-6666.		456		↑		L-70-A.		45-Y-4.	ST-105.		SA1.		Vol	↑.	M-60-Z.	A.	D13-133.		41	G1				14.		
2nd.	12Y8.	16-6657.								4586.	ST-105.		SA1.		Vol Tone	26-Y-8.	M-61-Z.	A.	D11-137.		41	G1				VOGUE 532A-P		
1st.																	26-Y-2.	M-55-S.	A.	D11-130.		41	G1				553R, 554R	
2nd.																	26-Y-3.	M-63-Z.		D13-137.								
1st.	10-296.	16-6660.		455						79-270.		F1		F1	Vol	24-139.	M-60-Z.	A.	D13-133.		41	G1				WARWICK 0-30		
2nd.	10-297.	16-5712.		455						79-272.					Vol	24-138.	M-63-Z.	A2.	D13-137.		42	G1				0-40		
1st.	10-293.	16-6661.								79-272.					Vol	24-138.	M-63-Z.	A2.	D13-137.		42	G1				0-41		
2nd.	10-281.	16-6661.								79-280.	ST-105.		SA1.		Vol	↑.	M-63-Z.	A2.	D13-137.		42	G1				0-42		
1st.	10-293.	16-5712.		455						79-297.	ST-105.		SA1.		Vol	24-149.	M-63-Z.	A2.	D13-137.		42	G1				0-43, 044		
2nd.	10-295.	16-5714.		455						79-301.	ST-113.		4A1.		Vol	24-151.	M-63-Z.	A2.	D13-137.		42	G1				0-46		
1st.	10-342.	16-5714.		455						79-274.	ST-105.		SA1.		Vol	24-138.	M-63-Z.	A2.	D13-137.		42	G1				0-50		
2nd.	10-343.	16-5714.								79-276.		F13	SA1.	F13	Vol	24-138.	M-63-Z.	A2.	D13-137.		42	G1						
1st.	10-355.	16-6658.		455						79-275.	ST-165.		SE10.		Vol	24-140.	M-60-Z.	A.	D13-133.		41	G1				0-51		
2nd.	10-281.	16-6661.								79-299.	ST-107.		SA15.		Vol	24-150.	AM-63-Z.	KSS-3.	D13-137.	E						0-53		
1st.	10-355.	16-6659.		455						79-283.	ST-194.		SE45.		Vol	24-142.	M-60-Z.	A.	D13-133.		41	G1				0-54		
2nd.	10-343.	16-6660.								79-277.		F2		F2	Vol	24-140.	M-60-Z.	A.	D13-133.		41	G1				0-60		
1st.	10-333.	16-6660.		455						79-283.	ST-194.		SE45.		Vol	24-142.	M-60-Z.	A.	D13-133.		41	G1				0-61		
2nd.	10-281.	16-6661.								79-275.	ST-165.		SE10.		Vol	24-142.	M-60-Z.	A.	D13-133.		41	G1				0-62		
1st.	10-333.	16-6660.		455						79-278.	ST-165.		SE10.		Vol	24-142.	M-60-Z.	A.	D13-133.		41	G1				0-63		
2nd.	10-261.	16-6661.								79-275.	ST-165.		SE10.		Vol	24-144.	M-60-Z.	A.	D13-133.		41	G1				0-64		
1st.	10-317.	16-6660.		455						79-278.	ST-165.		SE10.		Vol	24-145.	M-60-Z.	A.	D13-133.		41	G1				0-65		
2nd.	10-312.	16-6660.								79-278.	ST-166.		SE10.		Vol	24-144.	M-60-Z.	A.	D13-133.		41	G1				0-66		
1st.	10-315.	16-6660.		455						79-275.	ST-165.		SE10.		Vol	24-146.	M-60-Z.	A.	D13-133.		41	G1				0-67		
2nd.	10-312.	16-6660.								79-278.	ST-166.		SE10.		Vol	24-147.	M-60-Z.	A.	D13-133.		41	G1				0-70		
1st.	10-315.	16-6660.		455						79-278.	ST-166.		SE10.		Vol	24-147.	M-60-Z.	A.	D13-133.		41	G1						
2nd.	10-312.	16-6660.																										

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"		
WARWICK—Continued	6	GP5GT, 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42B Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						
0-71	6	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42B Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						
0-72	6	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42B Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						
0-73	6	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Chk Out	On Spkr.	A-3876		T22S45		A-2928						
0-74	7	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	16-256	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	On Spkr.	P-6011		T22R02		P-2951						
						BR252A		M-25-25		TA-25		On Spkr.	A-3878		T22S47		A-2931							
0-75	7	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	16-256	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	On Spkr.	P-6011		T22R02		P-2951						
0-76	6	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42B Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						
0-77	6	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42B Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						
0-78	6	6PSGT, 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						
0-79	7	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	18-254	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	On Spkr.	P-6297		T22R00		P-2949						
						BR252A		M-25-25		TA-25		On Spkr.	A-3878		T22S47		A-2931							
0-80	8	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	18-256	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	On Spkr.	P-6011		T22R02		P-2951						
0-81	8	12SA7GT, 12SK7GT, 12SQ7GT, 125L6GT, 125Z6GT, (BM42C Ballast) (51)	18-261	PRS150-40		BR4015		M-40-150		UT-401		Out	On Spkr.	A-3878		T22S47		A-2931						
0-82, 82B, 82C	8	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	18-256	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	On Spkr.	P-6011		T22R02		P-2951						
0-83	8	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	18-256	AF44J		UP2245		DY-2X20-450		EL-220		Pwr Out	On Spkr.	P-6011		T22R02		P-2951						
0-84	7	6SA7GT, 6PSGT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM42C Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						
0-300 to 309	3	12SA7GT, 25D8GT, 70A7GT (47)	18-251	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	80-176	A-3876		T22S45		A-2928						
0-407	4	1A7GT, 1N5GT, 1H5GT, 1C5GT	18-250	PRS150-8		BR815		M-8-150		UT-81									742 & 7482	4F	2B30			
0-411	4	1A7GT, 1N5GT, 1H5GT, 1C5GT	18-250	PRS150-8		BR815		M-8-150		UT-81									742 & 7482	4F	2B30			
0-420 thru 0-429	4	1A7GT, 1N5GT, 1H5GT, 1C5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	f.	A-3329		T22S47		A-2927	f.	f.	f.	f.		
0-430 to 439, 0-440 to 449	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3878		T22S47		A-2931	f.	f.	f.	f.		
0-461 thru 469	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	80-200	A-3329		T22S47		A-2931	745 & 7482	8FL	2M30			
0-501	5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 3524GT	18-259	PRS50-50		BR505		M-50-50		TA-550		Out	80-178	A-3857		T22S48		A-2937	718 & 7482	2F4	2B30			
			18-258	PRS150-16		BR1615		M-16-150		UT-161		Out												
0-530	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 3525GT	18-263	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	80-196	A-3881		T22S48		A-2934	744 & 7482	F4P1	2B30			
0-540 to 549	5	12SA7GT, 12SK7GT, 12SQ7GT, 125L6GT, 125Z6GT, (BM42C Ballast) (51)	18-262	AF66D		UP3315		DY-2X30-150		EL-230		Out	On Spkr.	A-3876		T22S45		A-2928						
0-610 to 619	5	6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM49B Ballast) (51)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928						
0-620 to 629	5	6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT, (BM49B Ballast) (51)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876		T22S45		A-2928						
1-40	4	12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	18-265	EZ3215C		DSB-303					Out	80-205	A-3876		T22S45		A-2928							
1-41	4	12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	18-265	EZ3215C		DSB-303					Out	80-205	A-3876		T22S45		A-2928							
1-42	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3329		T22S47		A-2927	f.	f.	f.	f.		
1-43	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3329		T22S47		A-2927	f.	f.	f.	f.		
1-50	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
1-52	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	80-205	A-3876		T22S45		A-2928						
1-53	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z5GT (47)	18-263	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3881		T22S48		A-2999					2FA60	
1-54	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6GT	18-263	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3881		T22S48		A-2999					2FA60	
1-55	5	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	18-265	DSB-303		EZ3215C		DY-2X30-150		EL-230		Out	80-205	A-3876		T22S45		A-2928						
1-56	5	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	18-265	EZ3215C		DSB-303		DY-2X30-150		EL-230		Out	80-205	A-3876		T22S45		A-2928						
1-60	6	12SK7, 12SA7, 12SQ7, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Chk Out	33-222	On Spkr.	A-3876		T22S45		A-2928					

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarnostat Part No.	Shaft	Switch	Note	I.R.C. Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photact Set No.		
1st.	10-317							79-2	ST-194		SE45		Vol	24-146		V-1	-		A..	D13-133		41	GI				WARWICK 0-71	
2nd.	10-312	16-6660		455				79-	ST-194		SE45		Vol	24-145		V-1	-			D13-133		41	GI				0-72	
1st.	10-317							27						Vol	24-144		V-1	-		A..	D13-133		41	GI				0-73
2nd.	10-312	16-6660						79-2		F2	F2	F2		Vol	24-144		M-60-Z		A..	D13-133		41	GI				0-74	
1st.	10-315	16-6660		455				79-1	ST-115	F13	8A21	F2	Vol	24-144		M-60-Z		A..	D13-133		41	GI				0-75		
2nd.	10-312	16-6660						2			2		2	Vol	24-143		M-60-Z		A..	D13-133		41	GI				0-76	
1st.	10-317	16-6660		455				-	T-1					Vol	24-144		V-0	-			D13-133		41	GI				0-77
2nd.	10-312	16-6660						79-283	ST-194		54			Vol	24-144		M-60-Z		A..	3-133		4	GI				0-78	
1st.	10-315	16-6660		455				79-277		F2		F2		Vol	24-144		M-60-Z		A..	D13-133		41	GI				0-79	
2nd.	10-312	16-6660						79-27						Vol	24-131					D13-133							0-80	
1st.	10-315	16-6660		455				-		F2		F2		Vol	24-131												0-81	
2nd.	10-312	16-6660						79-2						Vol	24-144		V-1	-		A..	13-133		4	1				0-82, 82B, 82C
1st.	10-315	16-6660		455				79-2	ST-10					Vol	24-144		M-1	-	A..	D13-133		41	GI				0-83	
2nd.	10-312	16-6660						79-2		F		F2		Vol	24-144		M-1	-	A..	D13-133		41	GI				0-84	
1st.	10-317	16-6660		455				79-277						Vol	24-144		M-60-Z		A..	D13-133		41	1				0-300 to 309	
2nd.	10-312	16-6660						79-2		F		F1		Vol	24-139		V-60	-	A..	D13-1		4	GI				0-407	
1st.	10-293	16-5712		455				79-2	T-113		4A1		Vol	24-138		V-1	-	A2.	-	-	-	G				0-411		
2nd.	10-281	16-6661						79-272						Vol	24-138		M-3	-	A2.	13-137		2	GI				0-420 Thru 429	
1st.	10-233	16-5712		455				79-2	ST-105		5A1		Vol	24-138		M-3	-									0-430 to 439, 0-440 to 449, 0-451 Thru 469		
2nd.	10-295	16-5712						79-2	ST-105		5A1		Vol	24-138		M-3	-									0-501		
1st.	10-293	16-5712						79-2	ST-105		5A1		Vol	24-138		V-63	-		D13-1	7		2	GI				0-610 to 619	
2nd.	10-295	16-5714						79-2	ST-105		5A1		Vol	24-151		V-1	-		13-137		42	GI				0-620 to 629		
1st.	10-342	16-5712						79-2	ST-105		5A1		Vol	24-151		M-3	-									1-40		
2nd.	10-343	16-5714						79-2	ST-105		5A1		Vol	24-151		M-3	-									1-41		
1st.	10-355	16-6658		55				79-3	ST-113		4A1		Vol	24-151		V-1	-									1-42		
2nd.	10-343	16-6660						79-2	ST-105		5A1		Vol	24-138		M-3	-									1-43		
1st.	10-303	16-6658		4				79-2	ST-105		5A1		Vol	24-138		M-3	-									1-44		
2nd.	10-304	16-6660						79-2	F13		F13		Vol	24-138		M-3	-									1-45		
1st.	10-356	16-6658						79-2	ST-107		5A15		Vol	24-150		A**-1	-									1-46		
2nd.	10-343	16-6650						79-2	ST-194		SE45		Vol	24-142		M-63	-									1-47		
1st.	10-333	16-6660						79-2						Vol	24-142		V-63	-									1-48	
2nd.	10-261	16-6661		45				79-3			545		Vol	24-142		V-6	-									1-49		
1st.	10-368	16-6660		5				79-3	ST-105		5A1		Vol	24-152		A**-1	-									1-50		
1st.	10-369	16-6660		4				79-30	ST-105		5A1		Vol	24-152		AM-63-Z		KSS-3		D13-137	E	41	GI				1-51	
1st.	10-342	16-6658		4				79-29	ST-105		5A1		Vol	24-154		V-1	-									1-52		
2nd.	10-342	16-6658						-10	ST-115		5A1		Vol	24-148		V-1	-									1-53		
1st.	10-369	16-6660		4.5				79-0	ST-105		5A1		Vol	24-153		AM-60-Z		KSS-3		A..	D1..-1	E	41	GI			1-54	
2nd.	10-370	16-6660		4.5				79-30	ST-105		5A1		Vol	24-153		AM-60-Z		KSS-3		A..	D13-133	E	41	GI			1-55	
1st.	10-369	16-6660		4				79-3	ST-105		5A1		Vol	24-152		A**-63-Z		KSS-3		D13-137	E	41	GI				1-56	
2nd.	10-370	16-6660		455				79-05	ST-105		5A1		Vol	24-156		A-115		KSS-3		A..	D13-139X	E	41	GI				1-57
1st.	10-369	16-6660		455				79-308	F1		F1		Vol	24-153		A**-60-Z		KSS-3		A..	13-133	E	41	GI				1-58

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tunes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
WARWICK—Continued																								
1-61.	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5W4GT	18-267	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	80-199	P-6119		T22R02		P-2951						
1-400 to 409.	4	12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	18-265			EZ3215C		DSB-303				Out	On Spkr.	A-3878		T22S47		A-2931						
1-420 to 429.	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3329		T22S47		A-2928						
1-430 to 439.	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3329		T22S47		A-2927						
1-500 to 509.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
1-541, 1-543.	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 11Z6GT	18-263	PRSA150-30-30		BRD3315		UP3315		TA-330		Out	On Spkr.	A-3881		T22S48		A-2999						
1-550 to 559.	5	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	18-265	EZ3215C		DSB-303						Out	80-205	A-3876		T22S45		A-2928						
1-561.	5	12SK7, 12SA7, 12SQ7, 50L6GT, 35Z5GT (47)	18-265			EZ3215C		DSB-303				Out	80-205	A-3876		T22S45		A-2928						
1-621, 1-622.	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5W4GT	18-267	AF44J4A		UP2245C		DY-315		EL-350		Pwr Out	80-189	P-6011		T22R02		P-2951						
2-40.	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3329		T22S47		A-2927						
2-50.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
2-53.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
2-54.	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 11Z4GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3881		T22S48		A-2999						2F4A60
2-55.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
2-56.	5	1A7GT, 1N5GT, 1H5GT, 1Q5GT, 11Z4GT	18-271	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3329		T22S47		A-2927		758				17GD60
2-61.	6	12SA7, 12SK7, 12SQ7, 12Z5GT, 35L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
2-70.	7	6SA7, 6SK7, 6SQ7, 25L6GT, 25Z5GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3301		T22S60		A-2905						
2-71.	7	6SA7, 6SK7, 6SQ7, 25L6GT, 25Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3301		T22S60		A-2905						
2-400 to 409.	4	1A7GT, 1N5GT, 1H5GT, 1Q5GT	18-250	PRS150-8		BR815		M-8-150		UT-81		Out	On Spkr.	A-3329		T22S47		A-2927						
2-500 to 509.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
2-530 to 539.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
2-541, 2-543.	5	1A7GT, 1N5GT, 1H5GT, 1T5GT, 11Z4GT	18-265	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3881		T22S48		A-2999						
2-550 to 559.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
2-560 to 569.	5	1A7GT, 1N5GT, 1H5GT, 1Q5GT, 11Z4GT	18-271	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3329		T22S47		A-2927		758				17GD60
2-610 to 619.	6	12SA7, 12SK7, 12SQ7, 12Z5GT, 35L6GT, 35Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
2-701, 703, 704, 708, 709.	7	6SA7, 6SK7, 6SQ7, 25L6GT, 25Z5GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3301		T22S60		A-2905						
2-711 to 714.	7	6SA7, 6SK7, 6SQ7, 25L6GT, 25Z5GT (47)	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3301		T22S60		A-2905						
3-560 thru 569.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
3-570 thru 579.	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
3-620 thru 629.	6	12SA7, 12SK7, 12SQ7, 12Z5GT, 35L6GT, 35Z5GT	18-266	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3876		T22S45		A-2928						
9-21 (Phone-Oscill.)	2	6A7, 76, 12B8GT, 32L7GT (47)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Fil Pwr Out	80-170	P-6134		T21F08		P-2944						
9-22.	2	12B8GT, 32L7GT (47)	18-249	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	80-176	A-3876		T22S45		A-2928						
9-23.	2	12SA7, 35Z4GT	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	80-176	A-3876		T22S45		A-2928						
9-41.	4	6D8G, 6S7G, 6T7G, 6G6G (40)	18-236	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Pwr Out	1016580160			A-2932								
9-42.	4	1A7G, 1N5G, 1H5G, 1A5G	18-235	PRS25-10		BR102A		M-10-25		TA-10		Out	On Spkr.	A-3879		T22S48		A-2932						
9-43, 9-45.	4	1A7G, 1N5G, 1H5G, 1Q5G	18-243	PRS25-25		BR252A		M-25-25		TA-25		Out	On Spkr.	A-3329		T22S47		A-2927		742 & 482		8F.		M30.
9-44.	4	6D8G, 6S7G, 6T7G, 6G6G (40)	18-236	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Pwr Out	1016580160			A-3879		T22S48		A-2932				
9-46.	4	12K7GT, 12F5GT, 50L6GT, 35Z5GT	40-10-20 Mfd.			EZ3215C		DSB-303		TA-420 & TA-25		Out	On Spkr.	A-3876		T22S45		A-2928						
9-48.	4	1A7G, 1N5G, 1H5G, 1Q5G	18-243	PRS25-25		BR252A		M-25-25		TA-25		Out	On Spkr.	A-3329		T22S48		A-2932						
9-51, 52, 54.	4	6D6, 6F5G, 25L6G, 25Z5, (55A Ballast)	40-10-20 Mfd.			EZ3215C		DSB-303		TA-420 & TA-25		Out	On Spkr.	A-3876		T22S45		A-2928						
9-53.	5	1A7G, 1N5G, 1H5G, 1A5G	18-235	PRS25-10		BR102A		M-10-25		TA-10		Out	On Spkr.	A-3881		T22S48		A-2933						
9-55.	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z4GT (47)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	80-172			A-3876		T22S45		A-2928				
9-58.	5	12A8GT, 12K7GT, 12Q7GT, 35L6GT, 35Z5GT	40-10 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876		T22S45		A-2928						

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiart Part No.	Note	Photofet Set No.			
1st.	10-358.	16-6658.		455				79-300.	ST-165.		5E10.		Vol	24-145.	M-60-Z.	A.	D13-133.		41	G1		Continued—	WARWICK	1-61					
2nd.	10-312.	16-6660.		455				79-305.	ST-105.		5A1.		Vol	24-152.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41				.400 to 409					
1st.	10-36.	16-6660.		455				79-297.	ST-105.		5A1.		Vol	24-154.	AM-63-Z.	—	A2.	D13-137.	E	42				.420 to 429					
1st.	10-3.	16-6658.		455				79-310.	ST-115.		8A21.		Vol	24-148.	M-63-Z.	A2.	D13-137.		42	G1				.430 to 439					
2nd.	10-3.	16-6660.		455																									
1st.	10-342.	16-6658.		455																									
2nd.	10-343.	16-6660.		455																									
1st.	10-36.	16-6660.		55					ST-1.			A		Vol	24-153.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41				.00 to 509				
2nd.	10-37.	16-6660.		455					-314.	ST-105.		5A1.		Vol	24-150.	AM-63-Z.	KSS-3.		D13-137.	E						1-541, 1-543			
1st.	10-37.	16-6658.		45.																						.50 to 559			
2nd.	10-34.	16-6660.		455					79-3 5.	ST-105.		5A1.		Vol	24-152.	AM-63-Z.	— S.	A.	D13-137.	E	41								
1st.	10-368.	16-6660.		455					79-30.	ST-105.		5A1.		Vol	24-156.	AT-115.	KSS-.	A.	D13-139X.	E	41							1-561	
1st.	10-35.	16-6658.		455				79-2-6.					F2	Vol	24-155.													1-621, 1-622	
2nd.	10-31.	16-6660.		455				79-32.	ST-0.		A.		Vol	24-154.	AM-63-Z.	—	A.	1.	E	42							2-40		
1st.	10-342.	16-6658.		455				7- 21.			2		F2	Vol	24-157.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41						2-50		
2nd.	10-34.	16-6660.		455				7- 1.	ST-19.		4.		Vol	24-153.	AM-60-Z.	KSS-.	A.	D13-133.	E	41						2-53			
1st.	10-38.	16-6658.		5				7- 1.	ST-1.		A1.		Vol	24-150.	AM-63-Z.	KSS-.		D13-137.	E							—4			
2nd.	10-38.	16-6660.		455				79-3 -.	ST-1 4.		5-4.		Vol	24-153.	AM-60-Z.	KSS-.	A.	D13-133.	E							2-55			
1st.	10-369.	16-6660.		4				79-3 6.	ST-10.		5A1.		Vol	24-162.	AM-63-Z.	KSS-3.	A.	D13-137.	E	4						2-56			
2nd.	10-370.	16-6660.		455				7- 324.			F2		F2	Vol	24-161.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						2-61		
1st.	10-379.	16-6658.		55				79-323.			4 4.		Vol	24-160.	AT-78.	KSS-.		D3-133.		41						2-70			
2nd.	10-343.	16-6660.		4.				7- 2.			Vol		24-160.	AT-78.	= SS.	A.	D1-133.	E	41						—1				
1st.	10-40.	16-6658.		4.				7- 32.			F13.		Vol	24-154.	AM-63-Z.	KSS-3.	A2.	D13-137.	E	4						2-400 to 409			
2nd.	10-402.	16-6660.		4.				79-322.	ST-105.		5A1.	'1	Vol	24-153.	AM-60-Z.	KSS-.	A.	D13-137.	E	41						2-500 to 509			
1st.	10-342.	16-6658.		4				79-321.			F2		Vol	24-157.	AM-63-Z.	KSS-3.	A.	D13-137.	E	41						2-530 to 539			
2nd.	10-36.	16-6660.		4.				79-3 9.	ST-194.		5E45.		Vol	24-153.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						2-541, 2-543			
1st.	10-379.	16-6658.		455				- 14A.	ST-10.		A1.		Vol	24-150.	AM-63-Z.	KSS-3.		D13-137.	E							2-550 to 559			
2nd.	10-34.	16-6660.		455				9-319.	ST-1 4.		E45.		Vol	24-153.	AM-60-Z.	KSS-.	A.	D13-133.	E	41						2-560 to 569			
1st.	10-369.	16-6660.		4.				79-	ST-105.		5A1.		Vol	24-162.	AM-63-Z.	KSS-3.		D13-137.	E	42						2-610 to 619			
2nd.	10-370.	16-6658.		455				79-32.			F2		Vol	24-161.	AM-60-Z.	KSS-3.	A.	D13-133.	E	41						2-701, 703, 704, 708, 709			
1st.	10-405.	16-6660.		455				79-3 3.			46E45.		Vol	24-160.	AT-78.	KSS-3.	A.	D13-133X.	E	41						2-711 to 714			
2nd.	10-37.	16-6660.		455							2		Vol	24-160.	AT-78.	KSS-.	A.	D13-133.	E	41						3-560 thru 569			
1st.	10-401.	16-6658.		455							5		Vol	24-15.	AM-60-Z.	KSS-.	A.	D13-133.	E							3-570 thru 579			
2nd.	10-402.	16-6660.		455							2		F2	Vol	24-324.											3-620 thru 629			
1st.	10-369.	16-6660.		4.				83-130.			2-0.		Vol	24-136.												9-21 (Phono-Oscil)			
2nd.	10-410.	16-6660.		455							1		Vol	24-124.	V- 0.		A.	1-1		41	G1	34-103.	5421.	H1	9-22				
1st.	10-36.	16-6660.		455									Vol	24-126.	M-63-Z.		A.	D13-137.		42	G1				9-23				
2nd.	10-370.	16-6660.		455									Vol	24-150.	AM-63-Z.	—		D13-137.	E							9-41			
1st.	10-36.	16-6660.		455									Vol	24-124.	M-60-Z.	A.	D13-133.		41	G1						9-42			
2nd.	10-37.	16-6660.		455									Vol	24-132.	M-60-Z.	A.	D13-133.		41	G1						9-43, 9-45			
1st.	10-36.	16-6660.		455									Vol	24-136.	V-63-Z.	A.	V-1-1.		41	G1						9-44			
2nd.	10-370.	16-6660.		455									Vol	24-134.	V-34-V.			D16-118.		41	G1						9-4		
1st.	10-251.	16-6662.		45.				79-271.	T- 5.		—		Vol	24-130.	V-63-Z.			D13-137.		41	G1						9-48		
2nd.	10-261.	16-6661.		455					T- 1.				Vol	24-130.	V-63-Z.			D13-137.		41	G1						9-51, 52, 54		
1st.	10-261.	16-6662.		455				79-264.	ST-10.		A		Vol	24-130.	V-63-Z.			D13-137.		41	G1						9-53		
2nd.	10-261.	16-6661.		455				79-266.	ST-194.		5E45.		Vol	24-132.	M-60-Z.	A.	D13-133.		41	G1						9-55			
1st.	10-261.	16-6658.		455									Vol	24-130.	M-60-Z.	A.	D13-133.		41	G1						9-58			

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tube	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell- Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
WARWICK—Continued	5	6SA7, 6D6, 75, 41, 84	18-246									Pwr Out	80-175 On Spkr.	A-3878	T22S47	A-2931									
9-59.	5	6A7, 6D6, 75, 25L6G, 25Z5, (BK49B Ballast)	40-10 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	80-175 On Spkr.	A-3878	T22S45	A-2928									
9-61, 63, 64.	5	6SK7, 6SA7, 6SQ7, 6K6GT, 5W4GT	18-267	AF4414A		UP2245C		DY-315		EL-350		Pwr Out	80-189 On Spkr.	P-6011	T22R02	P-2951									
9-62.	5	6A7, 6D6, 75, 25L6G, 25Z5, (BK49B Ballast) (40)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	80-189 On Spkr.	A-3878	T22S47	A-2931									
9-66.	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, (BK49B Ballast) (47)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	80-189 On Spkr.	A-3876	T22S45	A-2928									
9-67.	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, (BK49B Ballast) (47)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876	T22S45	A-2928									
9-68.	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, (BK49B Ballast) (47)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876	T22S45	A-2928									
9-220 to 229.	2	1288GT, 32LTGT (47)	18-249	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Cut	80-176 On Spkr.	A-3876	T22S45	A-2928									
9-480 to 489.	4	1A7G, 1N5G, 1H5G, 1Q5G	18-243	PRS25-25		BR252A		M-25-25		TA-25		Cut	80-176 On Spkr.	A-3329	T22S47	A-2927	758								17GD60
9-550 to 559.	5	12A8GT, 12K7GT, 12Q7GT, 35LBGT, 35Z4GT (47)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	80-172 On Spkr.	A-3876	T22S45	A-2928									
9-627.	6	6A7, 6D6, 6R7, 76, 41, 6Z4/84	18-240									Chk	33-219	†											
9-670 to 679.	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, (BK49B Ballast) (47)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Pwr Out	80-169 On Spkr.	A-3876	T22S47	A-2931									
9-680 to 689.	5	6A8GT, 6K7GT, 6Q7GT, 25L6GT, 25Z6GT, (BK49B Ballast) (47)	18-241	PRSA150-20-20		BRD2215		M-2X20-150		TA-220		Out	On Spkr.	A-3876	T22S45	A-2928									
10-70.	6	6P5GT, 6SA7GT, 6SK7GT, 6SQ7GT, 25L6GT, 25Z6GT (BM42B Ballast) (51)	18-255	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876	T22S45	A-2928									
10-72.	7	6SK7, 6SA7, 6SQ7, 6J5GT	18-264			UP2235C		DY-312		EL-334		Pwr Out	80-202 80-201	A-3878	T22S47	A-2931									
401.	4	6K7, 6F5, 25L6, 25Z6	18-219									Out	80-148	A-3876	T22S45	A-2928									
401LW.	4	6K7, 6F5, 25L6, 25Z6	18-219									Out	80-148	A-3876	T22S45	A-2928									
404.	4	3K7, 6F5, 25L6, 25Z6	18-230			EZ32115		DSB-3X20-150		TA-240		Pwr Out	101580160	A-3876	T22S45	A-2928									
405.	4	6D8G, 6S7G, 6T7G, 6G6G (40)	18-236	PRSA150-40-20		BRD4215		EZ8825		M-2X8-250		Chk	3307	†											
453.	4	6D8G, 6S7G, 6T7G, 1F5G (40)	1845							LM-28		Pwr Out	80-134	A-3879	T22S48	A-2932									
542.	4	6D6, 6F5G, 25L6G, 25Z5, (55A Ballast)	40-10-20 Mfd.			EZ32150		DSB-303		TA-240 & TA-25		Out	On Spkr.	A-3876	T22S48	A-2934									
542 (Late).	4	6D6, 6F5G, 25L6G, 25Z5, (55A Ballast)	18-234			EZ3215C		DSB-303		TA-240 & TA-25		Out	On Spkr.	A-3876	T22S45	A-2928									
553.	5	6D8G, 6S7G, 6T7G, 1F5G, 6N5 (40)	1845			EZ8825		M-2X8-250		LM-28		Chk	3307	†											
610.	5	6A7, 6D6, 6Q7G, 25B5, 25Z5, (L49B Ballast) (46)	18-211	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3877	T22S48	A-2934									
630, 631.	5	6A7, 6D6, 75, 25L6G, 25Z5, (BK49B Ballast)	40-10 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Out	On Spkr.	A-3876	T22S45	A-2928									
645.	6	6A7, 6D6, 75, 41, 80, 6G5 (46)	18-102								Pwr Out	80-104 On Spkr.	P-6011	T22R02	P-2951										
652B.	6	6D8G, 1D5GP, 6T7G, 1H4G, 1J6G	18-233	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		Pwr Out	80-161	A-3878	T22S47	A-2931									
710.	6	6A7, 6D6, 6Q7G, 25B5, 25Z5, 6G5, (L42B Ballast)	18-211	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3877	T22S48	A-2930									
715A.	6	6A7, 6D6, 6Q7G, 25B5, 25Z5, 6G5, (L42B Ballast)	18-211	PRSA150-30-30		BRD3315		M-2X30-150		TA-330		Out	On Spkr.	A-3877	T22S58	A-2930									
735.	7	6A7, 6D6, 6Q7G, 6V6G, 76, 80	18-201	GL450-12		KR512A		D-12-450		PLS-12		Pwr Out	80-105	P-6011	T22R02	P-2951									
741.	7	75, 6A7, 6D6, 75, 41, 80, 6G5 (246)	18-200	GL450-12		KR512A		D-12-450		PLS-12		Pwr Out	80-106	A-3877	T22S58	A-2930									
746.	7	6K7, 6A8, 6K7G, 6Q7G, 6J5G, 6N7G, 024	18-204			EZ8845S				TU-88 & TA-25		Out	On Spkr.	A-3878	T22S47	A-2931									
747.	7	6K7, 6A8, 6K7G, 6R7, 6R7G, 6V6G, 6X5G	18-221	PRSB450-8-8		EZ-588		DH-2X8-450SS		TU-88		Chk	33-213	†											
749, 749B.	6	6K8G, 6D6, 75, 25L6G, 25Z5, (B1240 Ballast) (244)	18-237	PRSA150-40-20		BR4015		M-40-150		SUT-401		Pwr Out	80-111	A-3877	T22S47	A-2931									
846.	8	6K7, 6A8, 6K7G, 6Q7G, 6J5G, 6N7G, 024	18-204			PRSA25-10		M-10-25		TA-10		In	80-111	A-3877	T22S47	A-2931									
910.	6	6SK7, 6SA7, 6SQ7, 6K6GT, 5W4GT	18-267	AP4414A		UP2245C		DY-315		EL-350		Pwr Out	80-119	P-6011	T22D76	A-2922									
1101.	11	6A8G, 6K7G, 6H6, 6J7G, 6V6G, 6C5G, 80, 6G5 (46)	18-214	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	80-119	A-3878	T22R02	P-2951									
1105.	11	6A8G, 6K7G, 6H6G, 6J7G, 6V6G, 36C5G, 6G5, 80 (46)	18-215	GL450-16		KR516A		D-16-450		PLS-16		Pwr Out	80-141	A-3311	T22S47	A-2931									
											Out	On Spkr.	A-3311	T22S64	A-2904										

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Messner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Phonefac Set No.		
1st.	10-280.	16-5712.		455				79-269.	ST-105.	F8	SEV6.		Vol	24-135.	M-63-Z.		A.	D13-137.		41	GI	34-102.	5300.	Co	ntin H1	ued—	WARWICK	
2nd.	10-284.							79-247.		F2			Vol	†.	M-60-Z.		A.	D13-133.		41	GI						9-59	
1st.	10-284.	16-6658.		455				79-286.		F2			Vol	24-155.														9-61, 53, 64
2nd.	10-284.	16-6661.						79-268.		F2			Vol	24-124.	M-60-Z.		A.	D13-133.		41	GI						9-62	
1st.	10-358.	16-6658.		455				79-268.		F2			Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-66	
2nd.	10-312.	16-6660.						79-266.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-67	
1st.	10-278.	16-5712.		455				79-266.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-68	
2nd.	10-271.	16-6660.						79-266.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-68	
1st.	10-269.	16-6658.		455				79-266.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-68	
2nd.	10-281.	16-6661.						79-270.	ST-105.		5A1		Vol	24-136.	M-63-Z.		A2.	D13-137.		42	GI						9-220 to 229	
1st.	10-251.	16-6662.		455				79-271.	ST-105.		5A1		Vol	24-130.	M-63-Z.		A.	D13-133.		41	GI						9-480 to 489	
2nd.	10-261.	16-6660.						79-268.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-550 to 559	
1st.	10-269.	16-6658.		455				79-240.	ST-105.	F8	SEV6.		Vol	24-119.	M-60-Z.		A.	D13-133.		41	GI	34-102.	5300.	H1			9-627	
2nd.	10-271.	16-6660.						79-240.	ST-105.	F8	SEV6.		Vol	24-119.	M-60-Z.		A.	D13-133.		41	GI						9-627	
1st.	10-221.	16-6658.		455				79-266.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-670 to 679	
2nd.	10-222.	16-6660.						79-266.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-670 to 679	
1st.	10-268.	16-6658.		455				79-266.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-680 to 689	
2nd.	10-281.	16-6661.						79-266.	ST-194.		SE45.		Vol	24-132.	M-60-Z.		A.	D13-133.		41	GI						9-680 to 689	
1st.	10-317.			455				79-263.	ST-194.		SE45.		Vol	24-146.	M-60-Z.		A.	D13-133.		41	GI						10-70	
2nd.	10-312.	16-6660.						79-263.	ST-194.		SE45.		Vol	24-146.	M-60-Z.		A.	D13-133.		41	GI						10-70	
1st.	10-360.	16-5712.		455				79-302.		F2			Vol	24-103.	M-60-Z.			D13-133.	B	41	GI	34-104.	5307.	H1			10-72	
2nd.	10-212.	16-5714.						79-238.		F2			Tone	26-103.	M-47-S.			D13-133.		41	GI						401	
								79-238.		F2			Tone	24-117.	M-47-S.		A.	D13-125.		41	GI						401LW	
								79-244.		F2			Tone	24-117.	M-47-S.		A.	D13-125.		41	GI						434	
1st.	10-253.	16-6662.		455				79-256.	ST-105.		5A1		Vol	24-124.	M-60-Z.		A.	D13-133.		41	GI	34-103.	5421.	H1			406	
2nd.	10-252.	16-6661.						79-256.	ST-105.		5A1		Vol	24-106.	M-63-Z.		A.	D13-137.		41	GI						453	
1st.	10-194.	16-5712.		456				79-251.	ST-194.		SE45.		Vol	†.	M-35-W.			G5										542
2nd.	10-163.							79-251.	ST-194.		SE45.		Vol	24-127.	M-34-V.		A.	D16-118.		41	GI						542 (Late)	
1st.	10-194.	16-5712.		456				79-221.		F1			Vol	24-106.	M-63-Z.		A.	D13-137.		41	GI						553	
2nd.	10-163.	16-5712.						79-247.		F2			Vol	24-106.	M-63-Z.		A.	D13-137.		41	GI						610	
1st.	10-194.	16-6658.		455				79-247.		F2			Vol	†.	M-60-Z.		A.	D13-138.		41	GI						630, 631	
2nd.	10-194.	16-6661.						79-221.		F2			Vol	24-105.	M-60-Z.		A.	D13-138.		41	GI						645	
1st.	10-195.	16-5712.		455				79-254.	ST-108.		6A1		Vol	24-106.	M-63-Z.		A.	D13-137.		42	GI						652B	
2nd.	10-247.	16-5712.		456				79-254.	ST-108.		6A1		Vol	24-126.	M-63-Z.		A2.	D13-137.		41	GI						652B	
1st.	10-248.	16-5714.						79-221.		F2			Vol	26-118.	M-60-Z.		A.	D13-133.		41	GI						652B	
2nd.	10-177.	16-5712.		456				79-221.		F2			Vol	24-106.	M-63-Z.		A.	D13-137.		41	GI						710	
1st.	10-163.	16-5712.						79-221.		F2			Vol	24-108.	M-63-Z.		A.	D13-137.		41	GI						715A	
1st.	10-201.	16-5712.		456				79-222.		F2			Vol	24-108.	M-60-Z.			D13-133.		41	GI						735	
2nd.	10-202.	16-5714.		456				79-222.		F2			Tone	26-108.	M-60-Z.		A.	D13-133.		41	GI						741	
1st.	1123.	16-5712.						79-217.		F2			Vol	24-101.	M-60-Z.			D13-133.		41	GI						741	
2nd.	1124.	16-5714.						79-206.		F2			Tone	26-101.	M-60-Z.		A.	D13-133.		41	GI						746	
1st.	10-111.	16-5704.		262				79-206.		F2			Vol	24-103.	M-60-Z.		A.	D13-133.		41	GI	30-100.	5300.	H1			746	
2nd.	10-112.	16-5706.						79-242.		F2			Vol	24-103.	M-60-Z.			D13-133.		41	GI						746	
1st.	10-211.	16-5704.		262				79-242.		F2			Tone	26-114.	M-60-Z.			D13-133.		41	GI	34-101.	5300.	H1			747	
2nd.	10-212.	16-5706.						79-243.		F2			Tone	24-123.	M-63-Z.		A.	D13-137.		41	GI						749, 749B	
1st.	10-244.	16-5712.		455				79-217.		F2			Tone	26-118.	M-60-Z.			D13-133.		41	GI						846	
2nd.	10-245.	16-5714.						79-217.		F2			Tone	24-103.	M-60-Z.		A.	D13-133.		41	GI						846	
1st.	10-171.	16-5704.		282				79-286.		F2			Vol	24-155.														910
2nd.	10-172.	16-5708.						79-286.		F2			Vol	24-155.														910
1st.	10-358.	16-6658.		455				79-286.		F2			Vol	24-115.														1101
2nd.	10-312.	16-6660.						79-235.		F2			Vol	26-112.														1105
1st.	10-208.	16-5712.		455				79-235.		F2			Vol	24-115.														1105
2nd.	10-207.	16-5714.						79-235.		F2			Vol	26-112.														1105
1st.	10-206.	16-5712.		455				79-235.		F2			Vol	24-115.														1105
2nd.	10-207.	16-5714.						79-235.		F2			Vol	26-112.														1105

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
			Part No.	Part No.		Part No.		Part No.		Part No.		Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	"A"	"B"		
WATTERSON P6B	4	6A7, 34, 1B5, 41	8-4 Mfd. 10-10 Mfd.	PRSA450-8-8 PRS25-10-10		EZ8845 BRD202A		M-2X8-450 M-2X10-25		UT-88 TA-110		Chk Pwr Out Chk Pwr Out Out		A-3878		T22S47		A-2931							
W6B	4	6A7, 34, 1B5, 41	12 Mfd. 8-8 Mfd.	PRS25-10		BR102A EZ8825		M-10-25 M-2X6-250		TA-10 LM-28		Chk Pwr Out Chk Pwr Out Out		A-3878		T22S47		A-2931							
49	4	1A7G, 1N5G, 1H5G, IC5G	10 Mfd.	PRS25-10		BR102A		M-10-25		TA-10		Chk Pwr Out Out		A-3878		T22S47		A-2931							
67	4	6D8, 6S7, 6T7, 41	8-8 Mfd. 25 Mfd.	PRSA450-8-8 PRS25-25		EZ8845 BR252A		M-2X8-450 M-25-25		UT-88 TA-25		Chk Pwr Out Out		A-3878		T22S47		A-2931							
AC405	5	6A8G, 6U7G, 75, 41, 80	12-4 Mfd.	PRSA150-40-20		BRD4215		M-2X40-150		TA-240 80-160		Pwr Out On Spkr.		A-3878		T22S48		A-2932							
406	4	6D8G, 6S7G, 6T7G, 6GGG (40)	18-236	PRSA150-40-20		BRD4215		M-2X40-150		TA-240		Pwr Out Out		A-3878		T22S48		A-2932							
AC406	6	6A8G, 6U7G, 75, 6P5G, 6AC5G, 80	20 Mfd. 8 Mfd.	PRS450-20 PRS450-8		BR2045 BR8845		M-20-450 M-8-450		UT-20 UT-8		Pwr Out Out		A-3878		T22R02		P-2951							
L440	4	1A7G, 1N5G, 1H5G, IC5G	10 Mfd.	PRS25-10		BR102A		M-10-25		TA-10		Out		A-3878		T22S58		A-2931							
500	4	6D6, 6C6, 43, 25Z5	16-12	PRSB250-20-20		EZ2116		DSB-2X20-150		TU-220		Chk Out		C-1277		T22S58		C-2975							
L540, L540W	5	6A8G, 6U7G, 75, 41, 80	12-4 Mfd.			EZ5116				TU-1616		Pwr Out		A-3878		T22R02		P-2951							
6V600	6	106, *34, *30, 19 (*40)	8-8 Mfd.	PRSA450-8-8		EZ8845		M-2X8-450		UT-88		In Out		A-4713		T20D75		A-2920							
L640W	6	6A8G, 6U7G, 75, 6P5G, 6AC5G, 80	20 Mfd. 8 Mfd.	PRS450-20 PRS450-8		BR2045 BR8845		M-20-450 M-8-450		UT-20 UT-8		Pwr Out		P-3848		T22S47		A-2938							
W651	6	30, 1A6, 1A4, 6T7G, 6L5G, 19 (40)	16-100 18-45	PRS25-10		BR102A EZ8825		M-10-25 M-2X8-250		TA-10 LM-28		Chk Pwr Aud Out		A-3878		T22S58		P-2951							
669	6	6A8, 6S7, *6L5, 1J6	15-15-40 Mfd.	AF44J4A		UP2245C		DY-315		EL-350		Chk In Out		A-4713		T20D75		A-2920							
ARC4591A	6	12SK7, 12SA7GT, 12SQ7GT, 3SL6GT, 35Z5GT (47)	19W17 19W5 19W6 19W5 30 Mfd.	AF8604A PRS150-30 PRS150-20 PRS150-20		UP4215C BR2015 BR2015 BR2015		DY-305 M-30-150 M-20-150		EL-343 UT-301 UT-201		Out		A-3876		T22S47		A-2938							
PA4585, APA4587	3	12SK7GT, 50L6GT, 35Z5GT	30 Mfd. 20 Mfd.	PRS25-25		BR3015 BR202A		M-20-150 M-30-150		UT-201 UT-301		Out		12W1		A-3876		B3		A-2928		B3			
RC4581	5	12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47)	19W16 19W5 19W18 19W2	PRS150-40-40 PRS50-10 AF64D4A		BRD3315 BR3015 BR3015		M-2X30-150 M-30-150 M-10-50		TA-25 TA-330 UT-301		Out		A-3876		T22S45		B3		A-2928		B3			
4581	5	12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47)	40-30-20 Mfd.	AF64D4A	A8	UP4CJ2	A8	DY-3020-150/ 25-25		EL-343 DY-2X40-150/ 40-25		Out		12W1		A-3876		B3		A-2928		B3			
4582	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	19W4	PRS25-10		BR102A		M-10-25		TA-10		Out		12W2		A-3878		T22S47		A-2931			6TA60		
4782	4	1A7GT, 1N5GT, 1H5GT, 3Q5GT	19W11	PRS25-10		BR102A		M-10-25		TA-10		Out		12W2		A-3878		T22S47		A-2931			17GD60		
4790	6	12SK7G, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5GT (47)	30 Mfd. 40-30-25 Mfd.	PRS150-30 AF8604A		BR3015 UP515C		M-30-150 DY-306		UT-301 EL-343		Out		A-3876		T22S45		A-2928							
WEBSTER 661A	4	6N7, *6V6GT, 5Y3GT	15-15-15 Mfd.	AF44J & PRS450-16		UP15D145 & BR445 BR102A		DY-3X15-450 M-10-25		EL-344 & UT-4 TA-10		Chk Pwr Out		67P006 68P003 67P007		C-1706 P-4079 B12		T20C52 T22R31 T22S47		612		C-2975			
WELLS-GARDNER A-1	8	6J7G, 6C5G, 6K7G, 6H6, 6F5G, 6F6G, 5Y3G, 6G5/6U5	44X31 55X35	GL450-12 GL450-8		KR512 KR508		D-12-450 D-8-450		PLS-12 PLS-8		Pwr Out		P-5012 A-3878		T22R04 T22S47		P-2952 A-2931							
A-2	11	*6K7, *6J7G, *6C5G, 6H6, *6F6G, 5Y3G, 6G5	44X30 44X11 45X22	GL450-16 GL450-16 PRS25-25		KR516A KR516A BR252A		D-16-450 D-16-450 M-25-25		PLS-16 PLS-16 TA-25		Pwr Out		P-6013 A-3311		T22R06 T22S64		P-2953 A-2936							
A-3	13	*6K7, 6J7, *6C5, 6H6, 6L6, *5Y3G, 6U5/6G5	44X21 44X36 45X224	GL450-30 GL450-40 PRS25-25		KR-530 WR-40 BR252A		Z-30-500 Z-40-500 M-25-25		PLS-30 LS-40 TA-25		Chk Pwr In Out		C-2303 P-6165		T20C54 T22R07		C-2993 P-2955							
A-4	7	6J7, 6K7, 6C5, 6Q7, 6F6, 5Y3G, 6U5/6G5	44X31 44X35	GL450-12 GL450-30		WR-10 WR-30		ZD-12-500 Z-30-500		LS-12 LS-30		Pwr Out		A-3830 P-6120		T22S74		A-2935 P-2952							
A-5	9	6K7, 6J7, 6C5, 6H6, 6F6, 5Y3G, 6U5/6G5	44X10 44X11	GL450-16 GL450-16		KR516A KR-516A		D16-450 D16-450		PLS-16 PLS-16		Pwr Out		A-3823 P-6012		T22S47		A-2901 P-2952							
A-6	12	6K7, 6J7, 6C5, 6L6, *5Y3G, 6U5/6B5	44X21 44X36 45-224	GL450-30 GL450-40 PRS25-25		GL450-40 WR-40 BR252A		Z-30-500 Z-40-500 M-25-25		PLS-30 LS-40 TA-25		Chk Pwr In Out		C-2303 P-6165		T20C54 T22R07		C-2993 P-2955							
A-7	9	6K7, 6J7, 6H6, 6F6, 6C5, 5Y3GT, 6U5/6GS	44X11 44X10	GL450-16 GL450-16		KR516A KR516A		D16-450 D16-450		PLS-16 PLS-16		Pwr Out		53X159 On Spkr.		P-6012 A-3878		T22R04 T22S47		P-2952 A-2931					

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofet Sel No.		
1st.	†	16-6658.		456				†			F1		F1	Vol	†	M-60-Z.			D13-133.			G1	†	5411...	H1	WATTERSON P6B		
2nd.	†	16-6660.																										
1st.	†	16-6658.		456				†			F2		F2	Vol	†	M-60-Z.			D13-133.			G1	†	5411...	H1	W6B		
2nd.	†	16-5660.																										
1st.	†	16-5712.		455				†			F1		F1	Vol	†	M-60-Z.			A2.	D13-133. D13-123. D13-133.	42	G1				49		
2nd.	†	16-5714.		455				†			F1		F1	Tone Vol	†	M-46-Z.					G1							67
1st.	†	16-5712.		455				†			F1		F1	Vol	†	M-60-Z.												
2nd.	†	16-5714.		455																								
1st.	†	16-5712.		456				†			F2		F2	Vol	†	M-60-Z.			D13-133.			G1					AC 405	
2nd.	†	16-5714.		456																								
1st.	10-253	16-5712.		455				79-256.	ST-105.		5A1			Vol	24-124.	M-60-Z.		A.	D13-133.		41	G1	34-103...	5421...	H1	406		
2nd.	10-252	16-5714.		455																								
1st.	†	16-5712.		456				†			F1		F1	Vol	†	M-60-Z.			D13-133.			G1					AC406	
2nd.	†	16-5714.		456																								
1st.	†	16-5712.		455				†			F1		F1	Vol	†	M-60-Z.			A2.	D13-133. D13-123. D16-116.	42	G1				L440		
2nd.	†	16-5714.		455							F2		F2	Tone Vol	†	M-46-Z.											500	
1st.	†	16-5712.		456				†			F2		F2	Vol	†	M-60-Z.			D13-133.			G1					L540, L540W	
2nd.	†	16-5714.		456																								
1st.	†	16-5712.		456				†			F1		F1	Vol	†	M-60-Z.			D13-133.			G1					6V600	
2nd.	†	16-5714.		456																								
1st.	†	16-5712.		456				†			F1		F1	Vol	†	M-60-Z.			D13-133.			G1					L640W	
2nd.	†	16-5714.		456																								
1st.	1133	16-5712.		456				†			F1		F1	Vol	24-101. 26-102.	M-60-Z.			D13-133.			G1					W651	
2nd.	1134	16-5714.		456																								
1st.	†	16-5-12.		465				†			F1		F1	Vol	†	M-60-Z.			D13-133.			G1	†	5411...	H1	669		
2nd.	†	16-5714.		465																								
1st.	3W36			455	†			22W22.	ST-108.		6A1			Vol	13WI.	M-60-Z.		A.	D13-133.		41	G1					16. ARC-4591A	
2nd.	3W37							21W8.			22W10.	ST-105.	5A1		Vol	13WI.	M-60-Z.		A.	D13-133.		41	G1					3. PA4585, APA4587
1st.	3W20	16-6658.		455	†			†	ST-105.		5A1			Vol	13WI. 13W3.	M-60-Z. M-55-S.		A.	D13-133. D13-130.		41	G1					16. RC4581	
2nd.	3W21	16-6660.						22W20.	ST-194.		5A45.			Vol	13WI.	AM-60-Z.		A.	D13-133.		41	G1					3. 4581	
1st.	3W24	16-6658.		455				22W10B.	ST-105.		5A1			Vol	13W2.	M-60-Z.		A2.	D13-133.		42	G1					6. 4582	
2nd.	3W25	16-6660.		455				22W10B.	ST-105.		5A1			Vol	13W2.	M-60-Z.		A2.	D13-133.		42	G1					24. 4782	
1st.	3W24	16-6658.		455				22W22.	ST-108.		6A1			Vol	†	M-60-Z.		A.	D13-133.		41	G1					16. 4790	
2nd.	3W21	16-6660.																										
								76PD14.	ST-116.		8A3I.			Vol	AM-63-Z. AM-63-Z.	KSS-3. KSS-3.		A.	D13-137. D13-137.	E	41						WEBSTER 66-1A	
1st.	†			456				8 Inch. 10 Inch. 12 Inch. 12 Inch.	ST-177. ST-175. ST-173. ST-173.		8E10. 10E15. 12E15. 12E15.		Vol	36X295. 40X223.	M-60-Z. M-51-Z.		A.	D13-133. D13-128.		41	G1						WELLS-GARDNER A-1	
2nd.	†	16-5712.		456										Vol	36X236. 40X224.	T-81. M-63-Z.		A.	D17-133X. D13-137.		41	G1						A-2
1st.	†	16-5714.		456				†			12E10.			Vol	36X238. 40X225.	T-114. M-66-Z.		A.	D17-139X. D13-139.		41	G1						A-3
2nd.	†							†	ST-735.	F4	8E10.	F4	Vol	38X235. 40X223.	M-60-Z. M-51-Z.		A.	D13-133. S13-128.		41	G1						A-4	
1st.	†			456				8 Inch. 10 Inch.	ST-736.		8E10. 10E10. 12E10.	F4	Vol	36X236. 40X223.	T-81. M-51-Z. T-114. M-66-Z.		A.	D17-133X. S13-128. D17-139X. D13-139.		41	G1						A-5	
2nd.	†	9A798.		456	†									Vol	36X238. 40X225.	T-114. M-66-Z.		A.	D17-139X. D13-139.		41	G1						A-6
1st.	9A799.																											
2nd.	9A800.																											
1st.	9A782.			456				12A285.	ST-736.	F4	8E10. F13	F4	Vol	36X236. 40X223.	M-60-Z. M-51-Z.		A.	D13-133. S13-128.		41	G1						A-7	
2nd.	9A777.							12A290.																				

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.	"A"	"B"	"A"	"B"	
WELLS-GARDNER	Continued																						
A-8	6 6A8, 6K7, 6Q7, 6F6, 5W4, 6U5/6G5 (*51)	44X32, 44X31	GL450-16, GL450-12		KR516A, WR-10	D-16-450, ZD-12-500		PLS-16, LS-12		Pwr Out	53X134 On Spkr.	P-6119, A-3823	T22R02, T22S47		P-2951, A-2931								
A-9	8 6J7, 6J5, 6K7, 6H6, 6F5, 6F6, 5Y3G, 6U5/6G5 (*51)	44X37	GL450-20		KR520, KR540	ZD-20-500, D-40-450		PLS-20, PLS-40		Pwr Out	53X170 On Spkr.	P-3878	T22S47		A-2931								
A-10	7 6A8G, 6J5G, 6U7G, 6Q7G, 6KGG, 5Y3G, 6U5/6G5	44X37	GL450-20		KR520, KR540	ZD-20-500, D-40-450		PLS-20, PLS-40		Pwr Out	†	P-6297	T22R00		P-2949, A-2900								
A-11	4 6J7, 25L6GT, 25Z5GT (*44)	45X237	EZ-2215C		DSB-302					Out	†	A-3876	T22S45		A-2928								
A-12	11 6U7G, 6J7G, 6J5G, 6H6, 6F6G, 5Y3G, 6U5	44X36, 44X30, 45X238	GL450-40, GL450-16, PRS25-50		KR540, KR516-A, BR-502	D-40-450, D-16-450, M-50-25		PLS-40, PLS-16, TA-50		Pwr Out	†	P-6012, A-3311	T22R04, T22S64		P-2952, A-2936								
A-13	7 6A8G, 6U7G, 607G, 6J5G, 6KGG, 5Y3G, 6U5/6G5	20 Mid	GL450-20		KR520, KR540	D-20-450, D-40-450		PLS-20, PLS-40		Pwr Out	53X179	P-6120	T22R04		P-2952								
A-14	9 6U7G, 6J5G, 6J7G, 6H6, 6F5G, 6K6G, 5Y3G, 6U5	44X39, 44X40, 45X239	GL450-20, GL450-40, PRS25-10		KR520, KR540, BR102A	D-20-450, D-40-450, M-10-25		PLS-20, PLS-40, TA-10		Pwr Out	53X182, 51X62	P-6012, A-3878	T22R04, T22S47		P-2952, A-2931								
A-15	7 6A8G, 6J5G, 6U7G, 6Q7G, 6KGG, 5Y3G, 6U5	44X37	GL450-20		KR520, KR540	ZD-20-500		PLS-20, PLS-40		Pwr Out	†	P-6289	T22R00		P-2949, A-2900								
A-16	13 6U7G, 6J7G, 6J5G, 6H6, 6F8G, 6F6G, 5U4G, 6U4	44X21, 44X36, 44X244, 44X239	GL450-30, GL450-40, PRS25-50		KR530, KR540, BR505	Z-30-500, Z-40-500, M-50-50		LS-30, LS-40, TA-50		Pwr Out	†	P-6114, A-3870	T22R07, T22S47		P-2955, A-2905								
A-17	11 6D6, 6C6, 476, 241, 80, 6U5	40 Mid	GL450-40		KR520, KR540	ZD-20-500		PLS-20, PLS-40		Pwr Out	†	P-6314	T22R07		P-2955								
A-20, 22	9 6A7, 76, 6D6, 75, 241, 80, 6U5 (*51)	44X41, 44X42, 45X247, 45X239	GL450-20, GL450-40, PRS250-4, BR425		KR520, KR540, BR425	ZD-20-500, Z-40-500		PLS-20, PLS-40, UT-42		Pwr Out	53X193 On Spkr.	P-6120, A-3823	T22R04, T22S66		P-2952, A-2904								
A-23	7 6A7, 76, 6D6, 75, 41, 80, 6U5 (*51)	44X41, 44X42	GL450-20, GL450-40		KR520, KR540	ZD-20-500, Z-40-500		PLS-20, PLS-40		Pwr Out	53X195 On Spkr.	P-6120, A-3823	T22R04, T22S47		P-2952, A-2901								
A-24	9 6A7, 76, 6D6, 75, 241, 80, 6U5 (*51)	44X41, 44X42, 45X247, 45X239	GL450-20, GL450-40, PRS250-4, GL450-40		KR520, KR540, BR425, KR540	ZD-20-500, Z-40-500, M-4-450, Z-40-500		PLS-20, PLS-40, UT-42		Pwr Out	53X193 On Spkr.	P-6120, A-3856	T22R07, T22S56		P-2955, A-2904								
A-25	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (*51)	20-20 Mid			KR520, KR540	†	†	Chk	†	†	†	T22S45	†	A-2928									
A-26	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, 6AB5	20-20-20	PRSA150-20-20 & PRS150-20-20		EZ42215	DSB-3X20-150	LM-220, & UT-201	LM-220, & UT-201	Out	Out	†	A-3876	T22S45	†	A-2928								
A-27	6 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, 6AB5 (*51)	20-20-20 Mid	PRSA150-20-20 & PRS150-20-20		EZ42215	DSB-3X20-150	LM-220, & UT-201	Out	†	A-3876	T22S45	†	A-2928										
A-28	11 6SK7, 6SA7, 6P5G, 6SQ7, 6V6G, 5Y3G, 6AB6G (47)	44X30, 44X36, 45X239	GL450-16, GL450-40, PRS25-10		KR516A, KR540, BR102A	D-16-450, D-40-450, M-10-25	PLS-16, PLS-40, TA-10	Pwr Out	53X174, 51X70	P-6013, A-3311	T22R05, T22S64		P-2953, A-2904										
A-29 (Ch. D)	11 6SK7, 6SA7, 6P5G, 6C8G, 6V6G, 6D6G, 5Y3G, 6U5/6G5	40-40 Mid	40-40 Mid		KR520, KR540	†	†	Out	†	P-6165	T22R07, T22S64		P-2955, A-2904										
A-30	8 6SK7, 6SA7, 6SQ7, 6V6G, 5Y3G, 6U5 (*51)	40 Mid	GL450-40		KR540	D-40-450	PLS-40	Pwr Out	53X174, 51X70	P-6012, A-3830	T22R04, T22S58		P-2952, A-2930										
A-31	8 6SK7, 6SA7, 6SQ7, 6V6G, 5Y3G, 6U5 (*51)	44X39	GL450-20		KR520	D-40-450	PLS-20	Pwr Out	†	P-6012	T22R04, T22S58		P-2952										
A-32	8 6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6AD6G (51)	40	GL450-40		KR540	D-40-450	PLS-40	Pwr Out	†	P-6012	T22R04, T22S58		A-2930										
A-33	10 6SK7, 6SA7, 6SQ7, 6P5G, 6V6G, 6AD6G (51)	20	GL450-20		KR520, KR540	D-40-450	PLS-20	Pwr Out	†	P-6012	T22R04, T22S58		P-2952										
A-34	8 6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6AD6G	14	GL450-16		KR516A, KR540	D-16-450	PLS-16	Chk	†	P-6012	T22R04, T22S58		P-2952										
A-35	8 6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6AD6G	20	GL450-20		KR520, KR540	D-20-450	PLS-20	Pwr Out	†	P-6012	T22R04, T22S58		P-2952										
A-36	8 6SK7, 6SA7, 6SQ7, 6P5G, 6V6G, 6AD6G (51)	14	GL450-16		KR516A, KR540	D-16-450	PLS-16	Pwr Out	†	P-6012	T22R04, T22S58		P-2952										
A-37	8 6SK7, 6SA7, 6SQ7, 6F6G, 5Y3G, 6AD6G (51)	20	GL450-20		KR520, KR540	D-20-450	PLS-20	Pwr Out	†	P-6012	T22R04, T22S58		P-2952										
A-38	5 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (*51)	20-20 Mid	PRSA150-20-20 & PRS150-20-20		EZ42215	DSB-3X20-150	LM-220, & UT-201	Out	†	A-3878	T22S47, T22S45		A-2931										
A-39	11 6SK7, 6SA7, 6SQ7, 6V6G, 5Y3G, 6AD6G (47)	45X247, 45X273	PRSA150-20-20		BR425	M-4-450	UT-42	Pwr Out	53X211, 51X76	P-6013, A-3311	T22R05, T22S64		P-2953, A-2936										
A-40	7 6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G	40-20-20	AF8814A		KR530, KR540	D-30-450, D-40-450	PLS-30, PLS-40	Pwr Out	†	P-6119	T22R02, T22S56		P-2951										
A-41	7 6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G	40-20-20	AF8814A		UP4445C	DY-315	EL-330	Pwr Out	†	P-6119	T22R02, T22S56		A-2904										
A-42	8 6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G, 6AD6G	40-20-20	AF8814A		UP4445C	DY-315	EL-330	Pwr Out	†	P-6119	T22R02, T22S56		P-2951										
A-43	6 6SA7, 6SK7, 6SQ7, 6K6G, 5Y3G, 6AD6G	20-40 Mid	PRS450-40 & PRS450-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	†	P-6120	T22R04, T22S74		P-2952										
A-44	6 6SA7, 6SK7, 6SQ7, 6V6G, 5Y3G (44)	45X277	PRSA150-20-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	53X227	P-6010	T22R01, T22S58		P-2950										
A-45	9 6SK7, 6SA7, 6SQ7, 6V6G, 5Y3G	45X293	PRSA150-20-20		BR525	M-8-250	UT-82	Pwr Out	A-3830	P-6012	T22R04, T22S44		A-2930										
A-46	9 6SK7, 6SA7, 6SQ7, 6V6G, 5Y3G	45X293	AF8814A		UP4445C	DY-314	UT-82	Pwr Out	†	A-3311	T22S44		A-2936										

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL				
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiot. Part No.	Note	Photot. Set No.
1st. 2nd.	9A694 9A695	16-5712 16-5714		456				12A257 12A260 12A258 12A303 12A302 6 Inch. 8 Inch.	ST-177 ST-175 ST-166 ST-736 ST-168 ST-177	F4 F4 F4 F4 F4 F2	10E15 6E10 8E10 6E10 8E10 F2		Volt	36X227	M-60-Z		A		D13-133		41	G1			Continued—	WELLS-GARDNER A-8
1st. 2nd.	9A902 9A903	16-5714		456				6 Inch. 8 Inch.	ST-168 ST-177	F4 F4	36X235 40X223 36X243 40X227 36X244	M-60-Z M-51-Z M-60-Z M-51-Z AM-27-S		A		D13-133 D13-128 D13-133 S13-128 D11-116		41	G1				A-9			
1st. 2nd.	† 16-5714	16-5714		456						F2	Volt	36X245 40X228	AT-115 M-61-S	KSS-3			D13-139X D11-137	E		G1				A-10		
1st. 2nd.	† 16-5714	16-5714		456				6 Inch. 8 Inch.	ST-168 ST-177	F4 F4	36X249 40X229 36X250 40X228	AM-67-Z AM-64-Z T-114 M-61-S	KSS-3 KSS-3	A		D13-140 S13-128	E	41						A-11		
1st. 2nd.	9A957 9A958	† 16-5714		456						F2	Volt	36X249 40X229	AM-67-Z AM-64-Z	KSS-3 KSS-3	A		D13-140 S13-128	E	41	G1				A-12		
1st. 2nd.	† 16-5714	16-5714		456						F2	Volt	36X249 40X229	AM-67-Z AM-64-Z	KSS-3 KSS-3	A		D13-140 S13-128	E	41					A-13		
1st. 2nd.	† 16-5714	16-5714		456						F2	Volt	36X253 40X232	AT-114	KSS-3			D19-139X	E						A-14		
1st. 2nd.	† 16-6183	16-6183		456						F2	Volt	36X253 40X232	AT-114	KSS-3			D19-139X	E						A-15		
1st. 2nd.	† 16-5712	16-5712		456				10 Inch		10E10		Volt	36X251 40X230	AM-66-Z AM-63-Z	KSS-3	A		D13-139		41					A-16	
1st. 2nd.	9A1025 9A1027	16-5712 16-5714	B-1	456 B-1	B-1			12A31		10E10	F4	Volt	36X251 40X230	AM-66-Z AM-63-Z	KSS-3	A		D13-137		41					A-17	
1st. 2nd.	9A1046 9A1047	16-5712 16-5714		456				12A305 12A304 12A320	ST-168 ST-177 ST-175	6E10 8E10 10E15	F4 F4	Volt	36X256 40X238	AM-60-Z AM-67-Z	KSS-3 KSS-3	A		D13-133		41					A-20,22	
1st. 2nd.	9A1026 9A1027	16-5712 16-5714		456	B-1	B-1		12A31		10E10	F4	Volt	36X255 40X235	AT-114 AM-67-Z	KSS-3 KSS-3	A		D19-139X		41					A-23	
1st. 2nd.	† 16-6658	16-6658		456							Volt	+	M-60-Z M-64-Z		A		D13-133		41	G1				A-24		
1st. 2nd.	† 16-6660	16-6660		456				5 Inch	ST-194	5E45	Volt	36X252					D13-130		41					A-25		
1st. 2nd.	† 16-6658	16-6658		456						F2	Volt	+	AM-60-Z	KSS-3	A		D13-133		41	G1				A-26		
1st. 2nd.	9A1141 9A1142	16-6660		456				12A336		12E60	F4	Volt	36X270	T-114		A		D19-139X		41	G1				A-27	
1st. 2nd.	† 16-5712	16-5712		456						F2	Volt	+	M-66-Z M-31-Z		A		D13-139		41	G1				A-28		
1st. 2nd.	† 16-5712	16-5712		456						F2	Volt	+	M-66-Z M-31-Z		A		D13-116		41	G1				A-29 (Ch. D)		
1st. 2nd.	† 16-5712	16-5712		456				10" Dyn.		10E60		Volt	36X272 40X241	AT-115 AM-57-Z	KSS-3 KSS-3			D13-139X		E					A-30	
1st. 2nd.	† 16-5712	16-5712		456				8 Inch.	ST-736	8E10	Volt	36X272 40X241	AT-115 AM-57-Z	KSS-3 KSS-3			D13-140		E					A-31		
1st. 2nd.	† 16-5712	16-5712		456				10 Inch		10E10		Volt	36X267 40X241	AM-67-Z	KSS-3			D13-139X		E					A-32	
1st. 2nd.	† 16-5712	16-5712		456				8 Inch.				Volt	36X266 40X240	AM-67-Z	KSS-3			D13-140		E					A-33	
1st. 2nd.	† 16-5712	16-5712		456				10 Inch		10E60	F4	Volt	36X266 40X241	AM-67-Z	KSS-3			D13-139X		M					A-34	
1st. 2nd.	† 16-5712	16-5712		456				8 Inch.				Volt	36X266 40X240	AM-67-Z	KSS-3			D13-140		E					A-35	
1st. 2nd.	† 16-5712	16-5712		456				10 Inch		10E60	F4	Volt	36X266 40X240	AM-67-Z	KSS-3			D13-140		E					A-36	
1st. 2nd.	† 16-5712	16-5712		456				8 Inch.				Volt	36X267 40X241	AM-67-Z	KSS-3			D13-140		E					A-37	
1st. 2nd.	† 16-6658	16-6658		456				8 Inch.		F2		Volt	36X268 40X241	AM-67-Z	KSS-3			D13-140		E					A-38	
1st. 2nd.	† 16-6660	16-6660		456				12A336		F2		Volt	36X268 40X245	AM-60-Z	KSS-3	A		D13-140		E					A-39	
1st. 2nd.	† 16-5714	16-5714		456							Volt	36X276	T-114				D19-139X			G1						
1st. 2nd.	† 16-6558	16-6558		456				10 Inch	ST-119		10A31	Volt	36X277 40X246	AM-60-Z AM-67-Z	KSS-3 KSS-3	A		D13-133		E	41					A-40
1st. 2nd.	† 16-5712	16-5712		456				10 Inch	ST-119	F3	10A31	Volt	36X278 40X246	AT-92	KSS-3	A		D13-140		E	41					A-41
1st. 2nd.	† 16-5712	16-5712		456				8 Inch	ST-115		8A21	Volt	36X278 40X246	AM-67-Z	KSS-3			D13-133X		E	41					A-42
1st. 2nd.	† 16-6558	16-6558		456				6 Inch	ST-168	6E10	F4	Volt	36X280 40X248	AM-60-Z AM-67-Z	KSS-3 KSS-3	A		D13-140		E	41					A-43
1st. 2nd.	† 16-6658	16-6658		456				8 Inch	ST-177	8E10	F4	Volt	36X280 40X248	AM-60-Z AM-67-Z	KSS-3 KSS-3	A		D13-140		E	41					A-44
1st. 2nd.	9A1250 9A1251	16-6558 16-6550		456				12A364	ST-168	6E10	F4	Volt	36X280 40X248	AM-60-Z AM-67-Z	KSS-3 KSS-3	A		D13-133		E	41					A-45
1st. 2nd.	9A1251 9A1252	16-5712 16-5714		456				12A365	ST-737	F1	F1	Volt	36X281 40X254	AT-78	KSS-3	A		D13-140		E	41					A-46

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
			No. TUBES	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.
																				"A"	"B"	"A"	"B"	
WELLS-GARDNER			11	6D6, 6C6, 6J5GT, 376, 41, 80, 6U5/6G5.	44X39	GL450-20, 44X40		KR520, KR540	Z-40-500, M-10-25	ZD-20-500, TA-10	PLS-20, PLS-40	Pwr Out	f. t.	P-6012, A-2312	T22R04, T22S88	P-2952, A-2901								
A-48			6	6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G	45X277	PRS25-10, PRS450-40 & PRS450-20		BR102A, BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	58X227, On Spkr.	P-6010, A-3830	T22R01, T22S58	P-2950, A-2930									
A-50			8	6SA7, 6J5GT, 6SK7, 6SQ7, 6V6GT, 5Y3G, 6U5/6G5	45X277	PRS450-40, PRS450-20		BR4045, BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	f. t.	P-6012, A-3877	T22R04, T22S88	P-2952, A-2930									
A-51			6	6SA7, 6SK7, 6SQ7, 6V6GT, 5Y3G, 6U5/6G5	45X277	PRS450-40, PRS450-20		BR4045, BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	53X240, On Spkr.	A-3877	T22S58	A-2930									
A-54			6	6SA7, 6SK7, 6SQ7, 6V6GT, 6X5GT (44)	45X277	PRS450-40, PRS450-40 & PRS450-20		BR4045, BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	P-6012, A-2312	T22R04, T22S58	P-2952, A-2901										
A-55			8	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G, 6U5/6G5	20-40	PRS450-40 & PRS450-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	f. t.	P-6012, A-2312	T22R04, T22S58	P-2952, A-2901									
A-56			8	6SA7, 6SK7, 6SQ7, 6K6GT, 5Y3G, 6U5/6G5	20, 40	PRS450-40 & PRS450-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	f. t.	P-6012, A-2312	T22R04, T22S58	P-2952, A-2901									
A-58			7	6SJ7, 6S17, 6SQ7, 6J5GT, 6V6GT, 5Y3G (51)	45X277	PRS450-40 & PRS450-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	f. t.	P-6012, A-2312	T22R04, T22S58	P-2952, A-2901									
A-61			7	6SJ7, 6SK7, 6SQ7, 6J5GT, 6V6GT, 5Y3G (44)	45X277	PRS450-40 & PRS450-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	53X240, 51X97	A-3877	T22S58	A-2930									
A-62			11	6SK7, 6SJ7, 6J5GT, 6SQ7, 6V6GT, 5Y3G, 6U5/6G5	20, 40 Mfd.	PRS450-40 & PRS450-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	f. t.	P-6012, A-2312	T22R04, T22S58	P-2952, A-2901									
A-63			11	6SK7, 6J5GT, 6SJ7, 6SQ7, 6K6GT, 5Y3G, 6U5/6G5	45X322	PRS450-40 & PRS450-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	f. t.	P-6012, A-2312	T22R04, T22S58	P-2952, A-2901									
A-66			7	6SJ7, 6J5GT, 6SK7, 6SQ7, 6V6GT, 5Y3G (44)	45X277	PRS450-40 & PRS450-20		BR4045 & BR2045	M-40-450 & M-20-450	UT-30	Pwr Out	53X235	P-6011, A-3877	T22R02, T22S58	P-2951, A-2930									
B-1			4	1D7E, 1D5G, 1H6G, 1F3G	45X212	PRS150-4		BR413	M-8-150	UT-41														
B-2			7	1C7G, 1D5G, 1H4G, 1E5G	45X225	PRS8150-20-20		EDL2215SS	M-20-150	TU-220	In Out	f. t.	A-4713, A-3831	T20D75, T22S56	A-2920, A-2901									
B3, B4			5	1A7G, 1N5G, 1H5G, 1C5G	45X250	PRS150-8		BR815	M-8-150	UT-81	Out	f. t.	A-3879	T22S47	A-2932	741 & 482	8F	8B30						
B-5			4	1A7G, 1P5G, 1H5G, 1A5G	45X250	PRS150-8		BR815	M-8-150	UT-81	Out	On Spkr.	A-3857	T22S48	A-2937	741 & 482	4F	4B30						
B-7			6	1A7G, 1N5G, 1H5G, 3Q5G, 35Z5GT (51)	20, 40, 10, 40, 200	AF844D		UP42215	DY-403020-150	EL-224	Out	f. t.	A-3879	T22S47	A-2932	746 & 482	8G & 8B30							
B-8			5	1A7G, 1N5G, 1H5G, 1Q5G	45X250	PRS250-8		BR825	M-8-250	UT-82	Out	On Spkr.	A-3329	T22S47	A-2927	741 & 482	8F & 8B30							
B-10			6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	45X288, 45X284						Out	f. t.	A-3329	T22S47	A-2927	746 & 482	8G & 8B30							
B-11			4	1A7GT, 1N5GT, 1H5GT, 1A5GT	4 Mfd.	PRS150-4		BR415	M-8-150	UT-41	Out	f. t.	A-3857	T22S48	A-2937	742	4FL & 8B30							
B-12			5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT	45X280					Out	On Spkr.	A-3857	T22S48	A-2937	744 & 482	F4P1 & 8B30								
B-13			4	1A7G, 1N5G, 1H5G, 1A5G	4 Mfd.	PRS150-4		BR415	M-8-150	UT-41	Out	f. t.	A-3857	T22S48	A-2937	744 & 482								
B-14			5	1A7GT, 1N5GT, 1H5GT, 3Q5G, 20, 30 Mfd.	40-40-20	PRSA150-40-20		BRD4215	M-2X40-150	TA-240	Out	f. t.	A-3329	T22S47	A-2927	746 & 482	8G & 8B30							
B-15			6	1A7G, 1N5G, 1H5G, 3Q5G, 35Z5GT	10-40-20, 40-200	AF844D		UP42215	DY-403020-150	EL-224	Out	f. t.	A-3329	T22S47	A-2927	746 & 482								
B-16			6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT	40-20-10	AF844D		UP42215	DY-403020-150	EL-224	Out	f. t.	A-3329	T22S47	A-2927	746 & 482								
B-17			5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT	45X290	PRS250-8		BR825	M-8-250	UT-82	Out	f. t.	A-3857	T22S48	A-2937	746 & 482								
B-18			6	1A7G, 1N5G, 1H5G, 3Q5G, 35Z5GT	45X301, 45X297, 45X283	EZ42215		DSB-403020-150	M-8-150	UT-81	Out	f. t.	A-3329	T22S47	A-2927	746 & 482	8G & 8B30							
B-19			4	1R5, IT4, IS5, 3S4	8 Mfd.	PRS150-8		BR815	M-8-150	UT-81	Out	f. t.	A-3329	T22S48	A-2927	746 & 482								
B-20			5	1R5, LT4, IS5, 3S4, 35Z5GT	45X303					Out	51X94	A-3329	T22S48	A-2927	746 & 482									
B-21			4	1A7G, 1N5G, 1H5G, 1A5G	4 Mfd.	PRS150-4		BR415	M-8-150	UT-41	Out	f. t.	A-3857	T22S48	A-2937	746 & 482								
B-22			6	1A7GT, 1N5GT, 1H5GT, 3Q5GT, 35Z5GT (51)	45X244, 45X293	PR50-50, PRS250-8		BR505, BR825	M-50-50, M-8-250	TA-550, UT-82	Out	On Spkr.	A-3329	T22S47	A-2927	746 & 482								
B-24			5	1A7GT, 1N5GT, 1H5GT, 1A5GT, 35Z5GT	45X309					Out	51X98	A-3857	T22S48	A-2937	746 & 482									
C-1			6	6D6, 6C6, 75, 41, 84	15X210					Chk	52X42, 53X123	f. t.	t. t.	T22S47, T20C52	A-2931, C-2975									
C-5			6	6K7, 6J7, 6B8G, 6K6G, 6N7G	45X219	PRSA450-8-8, PRS25-10		EZ-8845	M-2X8-450, M-10-25	UT-88, TA-10	Chk	f. t.	A-3878, C-1708	T22S47, T20C52	A-2931, C-2975									
C-6			5	6A8G, 6U7G, 6H6, 6F5G, 6K6G	45X235, 45X239	PRS25-10		BR102A	M-10-25	TA-10	Pwr	f. t.	A-3878	T22S47	A-2931									
C-7			6	6U7G, 6J7G, 6B8G, 6K6G, 6N7G	45X235, 45X240, 45X239	PRS450-8-8, PRS30-4, PRS25-10		EZ8845, BR445, BR102A	M-2X8-450, M-4-450, M-10-25	UT-88, UT-4, TA-10	Chk	f. t.	A-3878	T22S47	A-2931									
C-9			6	6SK7, 6SA7, 6H6, 6V6G	45X252			BRD2235, BR4045	M-40-450	EL-323	In Out	f. t.	A-4713, A-2201	T20D76, T22S66	A-2921, A-2901									
C-10			5	6SK7, 6SA7, 6SQ7, 41	45X253, 45X251				DY-311	Pwr Out	f. t.	A-3878	T22S45	A-2928										

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL	
Use	Mfr. Part No.	Meissner Part No.	Note Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note Quam Part No.	Note	Use	Mfr. Part No.	Ciarcostat Part No.	Shaft	Switch	Note IRC Part No.	Shaft	Switch	Note Mfr. Part No.	Radiart Part No.	Note Photot Set No.		
1st.	†	16-5712	456				†		10E10		Vol Tone	36X251, 40X258	AM-66-Z AM-63-Z	KSS-3 KSS-3	A	D13-139, D13-137	E	41			Continued—	WELLS-GARDNER A-48	
2nd.	†	16-5714									Vol Tone	36X280	AM-60-Z	KSS-3	A	D13-133	E	41					A-50
1st.	9A1398	16-5712	456	†	L-40		12A382	ST-177	F4		Vol Tone	40X248	AM-67-Z	KSS-3	A	D13-140	E	41					A-51
2nd.	9A1399	16-5714	456				†			F2		36X303	AT-88	KSS-3	A	D13-133X	E	41					A-54
1st.	†										Vol Tone	40X259	AM-67-Z	KSS-3	A	D13-140	E	41					A-55
2nd.	9A1398	16-5712	456		L-40		12A364				Vol	36X280	AM-60-Z	KSS-3	A	D13-133	E	41					A-56
1st.	†	16-5712	456				6 Inch.	ST-168	6E10	F4	Vol Tone	36X306	AM-60-Z	KSS-3	A	D13-133	E	41					A-58
2nd.	†	16-5714					10 Inch.	ST-175	10E15		Vol Tone	40X261	AM-67-Z	KSS-3	A	D13-140	E	41					A-61
1st.	†	16-5712	456				8 Inch.	ST-117	8E10	F4	Vol Tone	36X313	AT-78	KSS-3	A	D13-133X	E	41					A-62
2nd.	†	16-5714	456				†			F2	Vol	40X261	AM-67-Z	KSS-3	A	D13-140	E	41					A-63
1st.	†	16-5712	456				6 Inch.	ST-168	6E10	F4	Vol Tone	36X311	AM-60-Z	KSS-3	A	D13-133	E	41					A-66
2nd.	†	16-5714					12A400	ST-168	6E10	F4	Vol Tone	40X259	AM-67-Z	KSS-3	A	D13-140	E	41					B-I
1st.	9A1250	16-5712	456	SB27099			†				Vol Tone	36X280	AM-60-Z	KSS-3	A	D13-133	E	41					B-2, B-2A
2nd.	9A1251	16-5714	456								Vol Tone	40X248	AM-67-Z	KSS-3	A	D13-140	E	41					B-3, B-4
1st.	†	16-5712	456								Vol	36X237	M-63-Z		A2	D13-137	E	42	G1				B-5
2nd.	†	16-5714									Fil	43X70	S8-6										B-7
1st.	†	16-5712	456				8 Inch.	ST-115	8A21		Vol	36X239	M-53-Z		A4	D13-137	E	45	G1				B-8
2nd.	†	16-5714					6 Inch.	ST-108	6A1		Tone	40X226	M-51-Z		A	S13-128			G1				B-10
1st.	†	16-5712	456				†	ST-108	6A1		Vol	36X258	AM-60-Z	KSS-3	A2	D13-133	E	42					B-11
2nd.	†	16-5714					12A407				Vol Tone	36X280	AM-60-Z	KSS-3	A	D13-133	E	42					B-12
1st.	9A1092	16-5712	456								Vol	40X259	AM-67-Z	KSS-3	A	D13-140	E	42					B-13
2nd.	9A1093	16-5714	456								Fil	43X70	S8-6										B-14
1st.	†	16-6658	456				5 Inch.	ST-108	6A1		Vol	36X274	AM-60-Z	KSS-3	A2	D13-133	E	42					B-15
2nd.	†	16-6660					12A340	ST-108	6A1		Vol	36X288	AM-60-Z	KSS-3	A2	D13-133	E	42					B-16
1st.	9A1192	16-6658	456				6 Inch.	ST-108	6A1		Vol	36X288	AM-60-Z	KSS-3	A2	D13-133	E	42					B-17
2nd.	9A1193	16-6660	456				†			F1	Fil	36X287	AM-60-Z	KSS-3	A2	D13-133	E	42					B-18
1st.	†	16-6658	456							Vol	36X287	AM-60-Z	KSS-3	A2	D13-133	E	42					B-19	
2nd.	†	16-6660								Vol	36X284	AM-60-Z	KSS-3	A2	D13-133	E	42					B-20	
1st.	9A1279	16-6658	456				12A356	ST-105	5A1		Vol	36X284	AM-60-Z	KSS-3	A2	D13-133	E	42					B-21
2nd.	9A1280	16-6660	456				†			F1	Fil	36X284	AM-60-Z	KSS-3	A2	D13-133	E	42					B-22
1st.	†	16-6658	456							Vol	36X284	AM-60-Z	KSS-3	A2	D13-133	E	42					B-24	
2nd.	†	16-6660								Vol	36X282	AM-60-Z	KSS-3	A2	D13-133	E	42					C-1	
1st.	†	16-6658	456				6 Inch.	ST-108	6A1		Vol	36X282	AM-60-Z	KSS-3	A2	D13-133	E	42					C-5
2nd.	†	16-6660					4 Inch.	ST-113	4A1		Vol	36X305	AM-63-Z	KSS-3	A	D13-137	E						C-6
1st.	†	16-6669	456				12A388	ST-113	4A1		Vol	36X305	AM-63-Z	KSS-3	A	D13-137	E						C-7
2nd.	†	16-6658	456				5 Inch.	ST-105	5A1		Vol	36X302	AM-60-Z	KSS-3	A2	D13-133	E	42					C-9
1st.	†	16-6658	456				†	ST-105	5A1		Vol	36X302	AM-60-Z	KSS-3	A2	D13-133	E	42					C-10
2nd.	†	16-6660					5 Inch.	ST-105	5A1		Tone	40X252	AM-67-Z	KSS-3	A2	D13-140	E	42					
1st.	9A1432	16-6658	456				5 Inch.	ST-108	5A1		Vol	36X299	AM-60-Z	KSS-3	A2	D13-133	E	42					
2nd.	9A1433	16-6660	456				†			F1	Vol	36X307	AM-60-Z	KSS-3	A	D13-133	E	41	G1				
1st.	9A1449	16-6658	456				12A397	ST-105	5A1		Vol	36X310	M-60-Z		A	D13-133		41	G1				
2nd.	9A1450	16-6660	456				12A234	ST-105	F8	52EV6	Vol	36X234											
1st.	†	16-5700	175				†			F1	Vol	36X207	M-63-Z										
2nd.	†	16-5700	175							F1	Vol	36X232				D13-137							
1st.	†		456				6 Inch.	ST-108	F8	6EV6	Vol	36X247	AM-66-Z	KSS-3	A	D13-139	E	41					
2nd.	†	16-5700	175				†			F1	Vol	36X246				D13-139	B	41					
1st.	†		456				6 Inch.	ST-108	F8	6EV6	Vol	36X281											
2nd.	†	16-5700	456				6 Inch.	ST-108	F8	6EV6	Vol	36X280	AM-60-Z	KSS-3	A	D13-133	E	41					

\* Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
WELLS-GARDNER		Continued																						
C-11	6	*6U7G, 6J7G, 6B8G, 6K6G, 6N7G (51)	45X239 45X240 45X235	PRS25-10 PRS350-4 PRSA450-B-8		BR102A BR445 E78845		M-10-25 M-4-450 M-2XB-450		TA-10 UT-4 UT-88		Chk Pwr In Out Pwr In Out Pwr Out Pwr In Out Pwr Out Pwr Out Pwr Out	S2X51 53X177 50X38 51X60	†	†	†	†	†	†	†	†			
C-13, 14	6	*6SK7, 6SA7, 6SQ7, 6K6G, 6B8G, 6N7G	20, 40, 20 Mfd	AF8814A		UP4465C		DY-314														A-2921	A-2901	
C-15	7	*6SK7, 6SA7, 6SQ7, 6K6G, 6N7G	20, Mfd 40 Mfd	PRS450-20 PRS450-40		BR2045 BR4045		M-20-450 M-40-450		UT-20											A-2922	A-2901		
C-17	6	*6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT	45X296																		A-2901			
C-18	6	*6SK7, 6SA7, 6SQ7, 6K6GT, 6N7	45X294																		A-2931			
D-1	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT, 6AB5	45X261 45X260	PRS440302 PRS440302		EDL2215C		DSB-302													A-2922	A-2901		
D-2	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	45X265 45X266	PRS440302 †		EZ-2215C		DSB-302													A-2928			
D-3	6	*12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT	20-20-20 20	PRS150-20-20 PRS150-20		EZ-2215C		DSB-3X20-150		TA-220 UT-201										A-2928				
D-4	6	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	20-20-20-20	PRS150-20-20 PRS150-20-20		BR2015 E742215C		M-20-150 DSB-2X20-150		TA-220										A-2928				
D-5	7	12SA7, 12SK7, 6L5G, 12SQ7, 35L6GT, 35Z5GT	80-40-20-20	†				DSB-2X20-150		TA-220									A-2928					
D-7	6	*12SK7, 12SA7, 12SQ7, 35L6GT, 35Z5GT (51)	45X299 45X282	PRS150-20 PRS150-20-40		EZ-2215C		DSB-302		UT-201									A-2928					
D-8	5	12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT (51)	45X300 45X317	PRS25-25 BR202A		BR202A		M-20-150 M-2X30-150		TA-240									A-2928					
D-9, D-9-2	7	12SA7, *12SK7, 6L5G, 12SQ7, 35L6GT, 35Z5GT (51)	45X308	PRS150-20		BR2015		M-20-150 DSB-2X20-150		TA-240 UT-201								A-2928						
D-11-3	7	12S17, *12SK7, 12SQ7, 6L5G, 35L6GT, 35Z5GT	30-30 Mfd	PRS150-30-30		GRD3315		M-2X30-150		TA-330									A-2928					
GEL	11	6K7, 6C5, 6F6, 5Z4MG, 6G5	P-45X213 P-44X11 P-44X10	GL450-16 GL450-16 GL450-16	KR516A KR515A EZ1603SS	D-16-450 D-16-450		PLS-16		P-53X113 P-50X34 P-51X41									A-2904	C-2975				
S-2	6	6D8G, *6SJ7G, 6T7G, 6G6G, 6AB5	45X243	PRV250-16-16		PRS25-10		PLS-16		LM-2016														
S-3	5	6D8G, 6SJ7, 6T7G, 6G6G, 6AB5	45X239 45X254	PRS25-10 †	BR102A	M-10-25		TA-10											A-2932					
T-1	7	6A8G, 6C5G, *6U7G, 6V7G, 25A6G, 6N7G	45X227	PRS50-50 & PRS25-10	BR505 & BR102A	M-50-50 & M-10-25		TA-550 & TA-10											A-2932					
T-2	7	6A8G, *6U7G, 6V7G, 6J5G, 25A6G, 6N7G	45X241	PRS150-40-20	BRD4215	M-2X40-150		TA-240											A-2920	A-2900				
T-3	7	6A8G, 6J5G, *6U7G, 6V7G, 25A6G, 6N7G (51)	45X241	PRS150-40-20	BRD4215	M-2X40-150		TA-240											A-2920	A-2900				
T-4	7	6SA7, 6J5G, *6SK7, 6V7G, 25A6G, 6N7G (51)	30-20 Mfd	PRS150-20-30	EZ-3315	DSB-2X30-150		TA-230											A-2920	A-2900				
T-5	7	6SA7, 6J5G, *6SK7, 6V7G, 25A6G, 6N7G (51)	45X262	PRS150-20-30	EDL-2215	M-2X30-150		TA-230											C-2975					
2-CM	12	6K7, 7F6, 4F6, 280	P44X20 P44X21 P44X11	GL450-30 GL450-16	KR530 KR516A	D-30-450 D-16-450		PLS-30		P-53X124 P-50X32 P-50X24									P-2955					
2-DL	13	6K7, 6H6, *6C5, *6L6, *5Z4MG, 6G5	45X216 44X11 45X209	PRS250-4 GL450-16 PRS25-10	BR425 KR516A BR102A	M-8-250 D-16-450 D-10-25		UT-42 PLS-16		P-53X124 P-50X32 P-50X24 P-51X26 P-52X46 P-53X129 P-50X34									A-2921	A-2905				
5-F, 5-FL	6	6A8, 6K7, 6Q7, 6F6, 5W4, 6G5	44X32 44X31	GL450-30 GL450-12	KR530 KR516A KR512A	D-30-450 D-16-450 D-12-450		PLS-16 PLS-12 PLS-16		P-53X124 P-50X32 P-51X36 P-51X31 P-53X136 P-51X31									A-3131	P-2951				
5-K, 5-KL	6	6A8, 6K7, 6Q7, 6F6, 5W4, 6G5	44X32 44X31	GL450-16 GL450-12	KR516A KR512A	D-16-450 D-12-450		PLS-16 PLS-12 PLS-16		P-53X124 P-50X32 P-51X36 P-51X31 P-53X136 P-51X31								A-2931	P-2951					
6-J, 6-JB	6	*6K7, 6J7, 6B7, 41, 6A6	45X219	PRS8450-8-8 PRS25-25	EZ8845S	M-25-25		TU-88 TA-25											C-2975					
6K	6	*6K7, 6J7, 6B7, 41, 6A6	45X211																A-2900					
7-F, 7-FL	8	*6K7, 6Q7, 6C5, 6G5, 6F6, 5Z4G	45X209 44X11 44X10	PRS25-10 GL450-16 GL450-16	BR102A KR516A KR516A	M-10-25 D-16-450 D-16-450		TA-10 PLS-16 PLS-16		P-53X124 P-50X32 P-51X43 P-50X16 P-51X31									A-2921	A-2900				
7G	7	*6K7, 7F6, 6B7, 6F6, 80	44X10 44X11	GL450-16 GL450-16	KR516A KR516A	D16-450 D16-450		PLS-16 PLS-16		P-53X124 P-50X32 P-51X43 P-50X16 P-51X31								P-2957	A-2931					

†Information not available.

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photof. Set No.	MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiar Part No.	Note		
1st.	†	16-5700		175				I2A308	ST-108	F8	6EV6		Vol Tone	36X246 40X212	AM-63-Z	KSS-3		D13-139 D13-137	B	41		19A33	5438	Co min H2	WELLS-GARDNER C-11		
2nd.	†							6 Inch	ST-108	F8	6EV6		Vol Tone	36X275 40X212	AM-63-Z	KSS-3		D13-137	E			R19A33	5438	H2	C-13, 14		
1st.	†			456				6 Inch	ST-108	F8	6EV6		Vol	†	T-114			D19-139X							C-15		
2nd.	†							6 Inch	ST-108	F8	6EV6		Vol	36X296				D13-139X D13-139	E	E		19A37	5300	H1	C-17		
1st.	†			456				6 Inch	ST-108	F8	6EV6		Vol Tone	36X298 40X257	AT-120 AM-66-Z	KSS-3 KSS-3								19A33	5438	H2	C-18
2nd.	†							5 Inch	ST-194		5E45		Vol	36X268	AM-60-Z	KSS-3	A	D13-133	E	41					D-1		
1st.	†			456				5 Inch	ST-194		5E45		Vol	36X273	AM-60-Z	KSS-3	A	D13-133	E	41					D-2		
2nd.	†							5 Inch	ST-194		5E45		Vol Tone	36X279 40X247	AM-60-Z	KSS-3	A	D13-133	E	41					D-3		
1st.	†			456				5 Inch	ST-194		5E45		Vol	36X285	AM-60-Z	KSS-3	A	D13-133	E	41					D-4		
2nd.	†							5 Inch	ST-194		5E45		Vol Tone	36X290	AM-60-Z	KSS-3	A	D13-133	E	41					D-5		
1st.	†			456				5 Inch	ST-194		5E45		Vol Tone	36X293	AM-60-Z	KSS-3	A	D13-133	E	41					D-7		
2nd.	†							5 Inch	ST-194		5E45		Vol	36X279	AM-60-Z	KSS-3	A	D13-133	E	41					D-8		
1st.	†			456				5 Inch	ST-194		5E45		Vol	36X288	AM-60-Z	KSS-3	A	D13-133	E	41					D-9, D-9-2		
2nd.	†							5 Inch	ST-194		5E45		Vol	36X273	AM-60-Z	KSS-3	A	D13-133	E	41					D-11-3		
1st.	9A1377	16-6658	456					12A379	ST-194		5E45		Vol	36X301	AM-60-Z	KSS-3	A	D13-133	E	41					OEL		
2nd.	9A1378	16-6660	456					12A380	ST-113	F2	4A1		Vol	36X301	AM-60-Z	KSS-3	A	D13-133	E	41					S-2		
1st.	9A1384	16-6658	456					12A408		F2			Vol	36X309												S-3	
2nd.	9A1385	16-6660	456										Vol	†											T-1		
1st.	9A1445	16-5712	456					12A396	ST-194		5E45		Vol	36X309												T-2	
2nd.	9A1446	16-5714	456										Vol	†											T-3		
1st.	†	16-5712	456										Vol	†											T-4		
2nd.	†	16-5714	456										Vol	†											T-5		
1st.	P-9A625		456										Vol	P-36X219 P-40X213	T-114											2-CM	
2nd.	P-9A626		456										Vol	36X249 40X231	AM-67-Z	KSS-3	A	D13-140	E	41	G1					2-DL	
1st.	P-9A627		456										Vol	36X249 40X231	AM-67-Z	KSS-3	A	D13-140	E	41	19A28	5411	H1				
2nd.	†	16-5712	456										Vol	36X262				D13-133	L	41	19A36	5436	H1				
1st.	†	16-6658	456										Vol	36X213 40X209	M-60-Z M-51-Z		A	D13-133	E	41	G1					T-1	
2nd.	†	16-6660	456										Vol	46X213 40X209	AM-67-Z AM-64-Z	KSS-3	A	D13-125	E	41	G1					T-2	
1st.	†	16-5712	456										Vol	36X252 40X229	AM-67-Z AM-64-Z	KSS-3	A	D13-140	E	41						T-3	
2nd.	†	16-5714	456										Vol	36X252 40X229	AM-67-Z AM-64-Z	KSS-3	A	D13-128	E	41						T-4	
1st.	†	16-5712	456										Vol	36X269 40X242	AM-64-Z	KSS-3	A	D13-140	E	41						T-5	
2nd.	†	16-5714	456										Vol	36X269 40X242	AM-64-Z	KSS-3	A	D13-130	M	41							
1st.	9A1459		456					12A288	ST-108	F7	6A1		Vol	36X288	AM-67-Z	KSS-3	A	D13-140	E	41						2-CM	
2nd.	9A1470		456					12A287	ST-115	F7	6A1		Vol	36X314 40X263	AM-67-Z AM-51-Z	KSS-3	A	D13-140	E	41						2-DL	
3rd.	9A1471		456										Vol	36X314 40X263	AM-67-Z AM-51-Z	KSS-3	A	D13-128	E	41							
1st.	9A413		456					12A205	12E10				Vol	36X210 40X206	M-67-Z			D13-140			G1						
2nd.	9A414		456					12A226	12E10				Vol	36X210 40X206	M-67-Z			D13-140									
3rd.	9A415		456					12A204	12E10				Vol	36X210 40X206	M-67-Z			D13-140									
1st.	9A619		456					P-12A246	ST-175	F4	10E15		Vol	36X221 40X214	T-114		A	D17-138X		47	G1						
2nd.	9A620		456					P-12A245					Vol	36X221 40X214	T-114		A	D17-138X		47	G1						
3rd.	9A621		456										Vol	36X221 40X214	T-114		A	D17-138X		47	G1						
1st.	9A708	16-5712	456	†				12A258	ST-175	F4	10E15		Vol	36X227	M-60-Z		A	D13-133		41	G1					5F, 5FL	
2nd.	9A709	16-5714	456	†				12A257	ST-175	F4	10E15		Vol	36X227	M-60-Z		A	D13-133		41	G1					5K, 5KL	
1st.	9A694	16-5712	456	†				12A257	ST-108	F8	6EV6		Vol	36X233 40X212	M-63-Z			D13-137			G1					6-J, 6-JB	
2nd.	9A695	16-5714	456	†				12A258	ST-108	F8	6EV6		Vol	36X217 40X212	M-63-Z			D13-137			G1					6K	
1st.	P-9A9A3	16-5700	175					12A242	ST-108	F8	6EV6		Vol	36X217 40X212	M-63-Z			D13-137			G1					7F, 7FL	
2nd.	P-9A9A4	16-5702	175										Vol	36X217 40X212	M-63-Z			D13-137			G1					7G	
1st.	9A673	16-5712	456	†				12A211	ST-738	F4	8E10		Vol	36X215 40X211													
2nd.	9A674	16-5714	456	†				12A221	ST-738	F4	8E10		Vol	36X204 40X203	M-51-Z			D13-128			G1						
1st.	†		456					6 Inch		F2			Vol	36X204 40X203	M-51-Z			D13-128			G1						
2nd.	†		456					8 Inch		F2			Vol	36X204 40X203	M-51-Z			D13-128			G1						

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT ANO DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
			No. Tubs	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
	Dial Light Type Listed in Parentheses	Part No.	Part No.		Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		"A"	"B"	"A"	"B"			
WELLS-GARDNER 7L	Continued 8 6K7, 6C5, 6Q7, 6F6, 5Z4G, 6G5.	45X209. 44X11. 44X10. 44X30.	PRS25-10. GL450-16. GL450-16. GL450-16.		BR102A. KRS16A. KRS16A. KRS16A.		M-10-25. D-16-450. D-16-450. D16-450.		TA-10. PLS-16. PLS-16. PLS-16.		Pwr Out	53X119 On Spkr.	P-6012. A-3878.	T22R04. T22S47.		P-2952. A-2931.										
80-J	11 6K7, 6C5, 6F6, 5Z4G, 6G5/6U5.	44X30.	PRSA150-50-30.		KR530. KR516A. KR425.		Z-30-500. ZD-16-500. M-8-250.		PLS-30. SC-16. UT-42.		Aud Pwr Out		P-6014. A-3852.	T22R06. T22S4.		P-2954. A-2904.										
82-D	13 6K7, 6C5, 6H6, 6G5/6U5, 26L6, 5Z4.	44X21. 44X11. 44X216.	GL450-30. GL450-16. PRS250-4.		KR530. KR516A. KR425.						Aud Pwr Out		P-6165. A-3830.	T22R07. T22S74.		P-2955. A-2935.										
WESTERN AUTO	(See Truetone)																									
WESTINGHOUSE H-104, H-105	7 6SK7, 6SA7, 6SF7, 6Y6G, 5U4G (44).	V-3216.			UP43145C.		DY-403010-450 /20/25.		EL-424.		Pwr Out	V-3250.														
H-104A, H-105A, H-107A, H-108A	7 6SK7, 6SA7, 6AT6, 6Y6G, 5U4G (44).	V-3236. V-3216.	PRS25-25.		BR202A. UP43145C.		DY-403010-450 /20/25.		TA-25. EL-424.		Pwr Out	V-3250.														
H-107, H-108, H-110, H-111	7 6SK7, 6SA7, 6SF7, 6Y6, 5U4 (44).	V-3236. V-3216.	PRS25-25.		BR202A. UP43145C.		DY-403010-450 /20/25.		TA-25. EL-424.		Pwr Out	V-3250.														
H-113, H-114, H-116, H-117, H-119	14 6SG7, 6SB7Y, 6SJ7GT, 6H6GT, 6SQ7GT, 6Y6GT, 5U4G, 6E5.	V-3302. PRSA150-50-30.	A4 UP4445 & BR1635.		BR202A. UP43145C.		DY-403010-450 /20/25.		TA-25. EL-424.	A3	Pwr Out	V-3295 On Spkr.	P-6315. A-3880.	B12 T22R07. T22S58.		A-2905.										
H-122	6 6SA7, 6SF7, 6SC7, 25L6GT, 25Z6GT (47).	V-3304.	20 Mfd. PRSA150-50-30.		BR252A. BRD3515.		M-25-25. M-5030-150.		TA-25. TA-530.		Pwr Out	V-3297.	A-3823.	T22S46.		A-2900.										
H-125, H-126	6 12SK7, 12SA7, 12SF7, 12SJ7, 35A5, 35Z5GT	V-3470.	AF1010D.		UP5515C.		DY-2X50-150 /40/25.		EL-352.		Pwr Out	V-3496.	A-3876.	T22S62.		A-2928.										
H-130	6 6SA7, 6SF7, 6SC7, 25L6GT, 25Z6GT (47).	V-3304.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Pwr Out	V-3297.	A-3823.	T22S46.		A-2900.										
H-133	5 1LA6, 3E6, 1LD5, 2LB4.	V-3581.	PRSA150-12.		BR1215.		M-10-150.		UT-121.		Pwr Out	V-3576.	A-3877.	T22S46.		A-2930.										
H-137, H-138	7 6SK7, 6SA7, 6SF7, 6Y6G, 5U4G (44).	V-3216.			UP43145C.		DY-403010-450 /20/25.		EL-424.		Pwr Out	V-3250.		T22S45.												
H-147	5 12BE6, 12BA6, 12AT6, 50B5, 35W4 (47).	V-4044.	PRSA150-30-30.		BRD3515.		DSB-5030-150.		TA-530.		Pwr Out	V-4061.	A-3876.	T22S45.		A-2928.										
H-148	4 1LA6, 3E6, 1LH4, 3LF4.	V-3851. V-3866.	PRSA150-30-30.		BRD3515. BRH251. EDL5315.		M-5030-150. M-100-25. DSB-5030-150.		TA-530. VHC-102. TA-530.		Pwr Out	V-3868.	A-3878.	T22S47.		A-2931.	754.	F6A60.								
H-153A, H-155, H-171	6 6SA7, 6SF7, 6SC7, 25L6GT, 25Z5GT (47).	V-3304.	PRSA150-50-30.		UP43145C.		DY-403010-450 /20/25.		EL-424.		Pwr Out	V-3297.	A-3823.	T22S46.		A-2900.										
H-154	7 6SK7, 6SA7, 6AT6, 6Y6G, 5U4G (44).	V-3216.			PRSA150-50-30.		PRSA150-50-30.		BR202A. BRD3515.		Pwr Out	V-3297.	A-3823.	T22S46.		A-2900.										
H-155	6 6SA7, 6SF7, 6SC7, 25L6G, 25Z6GT (47).	V-3304.	PRSA150-50-30.		EDL5315.		DSB-5030-150.		TA-530.		Pwr Out	V-3297.	A-3823.	T22S46.		A-2900.										
H-157	6 6SA7, 6SF7, 6SC7, 25L6GT, 25Z6GT	V-3304.	PRSA150-50-30.		DSB-5030-150.		TA-530.		TA-530.		Pwr Out	V-3297.	A-3823.	T22S46.		A-2900.										
H-161, H-168, H- 168A (Ch. V-2118)	8 6J6, 28A6, 6AU6, 7A6, 6AT6, 6LG6, 5AZ4 (51) (44).	V-4635. V-4536. V-4885. V-3302.	PRSA150-25. PRSA150-4. AF4444 & BR1635.		UP3345. BR502. BR445. DY-406.		DY-2X50-450 /M-50-25. M-4-450.	A3	EL-330. TA-50. UT-4. EL-423.		Pwr Out	V-4553. V-4702 (or) V-4945. DY-406.	P-6013. A-3825. A-3830. A-3880.	T22R05. T22S87. T22S87. T22S58.		P-2953. A-2904. A-2904. A-2905.										
H-162	14 6SG7, 6SB7Y, 6SJ7GT, 6H6GT, 6SQ7GT, 6Y6GT, 5U4G, 6E5.	V-3302.	A4	AF4444 & BR1635.	PRSA150-4. BR252A. UP5515. BRH251. UHC-102.		M-25-25. M-50-25. M-4-450.	A3	EL-330. TA-50. UT-4. EL-423.		Pwr Out	V-4553. V-4702 (or) V-4945. DY-406.	P-6315. B12 T22R07. T22S58.	T22R07. T22S58.		A-2905.										
H-165	5 1U4, 1R5, 1S5, 3V4.	V-4791.	AF1010D.		UP4445 & BR1635.		DSB-5030-150.		TA-530.		Pwr Out	V-3856.	A-3856.	T22S45.		A-2900.	754.	G6M60.								
H-164, H-166, H-167	12 7F8, 27BA6, 6AU6, 6H6, 6AT6, 6SC7, 6Y6G, 5U4G (44).	V-3666. V-3302.	PRSA25-100.		UP4445 & BR1635.		DY-406.	A3	EL-240. UT-163.		Pwr Out	V-4761.	P-6315.	B12 T22R07. T22S87.												
H-169 (Ch. V-2224-1)	14 7F8, 26SG7, 6SH7, 6H6, 6SC7, 6SQ7, 6U5, 6E5, 6SN7GT, 6LBGT, 5U4GT (44) (51).	V-4928. V-3236. V-5115. V-4928. V-4885. V-3236. V-5311.	PRSA25-25. UP1145. UP43145C. UP1145. PRSA150-4. PRSA150-4.		UP1145. BR202A. UP43145C. UP1145. PRSA150-4. PRSA150-4.		DY-2X10-450 /M-25-25. M-4-450.	A3	EL-210. TA-25. EL-210.		Pwr Out	V-5137.	P-6314. & P-6134.	T22R07.	P-2955.	B12										
H-178	5 1LA6, 3E6, 1LD5, 2LB4.	V-3581.	PRSA150-12.		BR1215.		M-10-150.		UT-121.		Pwr Out	V-3576.	A-3877.	T22S46.		A-2930.	758.	I7GD60.								
H-1251	6 12SK7, 12SA7, 12SF7, 12SJ7, 35A5, 35Z5GT	V-3470.	AF1010D.		UP5515C.		DY-2X50-150 /40/25.		EL-352.		Pwr Out	V-3496.	A-3876.	T22S62.		A-2928.										
WR-12K1, WR- 12X1, WR12X2	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36301.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Pwr Out	35056.	A-3876.	T22S45.		A-2928.										
WR-12X3, WR12X5, WR-12X6	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36301.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Pwr Out	38994.	A-3876.	T22S45.		A-2928.										
WR-12X4, (Ch. RC1010A)	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51).	36301.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Pwr Out	35056.	A-3876.	T22S45.		A-2928.										
WR-12X8, (Ch. RC1001E)	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36301.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Pwr Out	38994.	A-3876.	T22S45.		A-2928.										
WR-12X9, (Ch. RC1009A)	6 12S67, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	36301.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Pwr Out	36800.	A-3330.	B23 T22S45.		A-3031.										
WR-12X10, WR-12X11	6 12S67, 12SA7, 12SK7, 12SQ7, 35Z5GT	36301.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Pwr Out	38994.	A-3876.	T22S45.		B23 T22S45.										
WR-12X12, (Ch. RC1009)	6 12S67, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	36301.	PRSA150-50-30.		BRD3515.		M-5030-150.		TA-530.		Pwr Out	36800.	A-3330.	B23 T22S45.		A-3031.										
												38994.	A-3876.	B23 T22S45.		A-2928.										

†Information not available.

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL						
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shift	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofet Part No.	Set No.	MFR. & MODEL		
1st.	9A559	16-5712		456				12A211	ST-736	F4	8E10 10E10	F4	Vol Tone	36X215 40X211											Continued		WELLS-GARDNER 7L	WESTERN AUTO		
2nd.	9A560	16-5734		456				12A221		F2		F2	Vol Tone	36X21 40X22		A.	D17-139X		4	G								80-J		
1st.	9A751			456				†																				82-D		
2nd.	9A752																												(See Trans.)	
3rd.	9A75																													
1st.	9A72			456				†		F2		F2	Vol Tone	36X221 40X22	-114	A.	D17-139X		41	G1										
2nd.	9A73																													
3rd.	9A731																													
1st.	†	16-6658		455				V-3294					Vol Tone	V-3221 V-3222	T-120 M-56-Z	A.	D13-139X D13-139		41	G1								4.	WESTINGHOUSE H104, H105	WESTERN AUTO
2nd.	†	16-6660						V-2					Vol Tone	V-3221 V-3222	T-120 M-56-Z	A.	D13-139X D13-139		41	G1								21.	H-104A, H-105A, H-107A, H-108A	
1st.	V-321	16-6658		455				..3..4.					Vol Tone	V-3221 V-3222	T-120 M-6-Z	A.	D13-139 D13-139		41	G1							4.	H107, H108, H110, H111		
2nd.	V-324	16-6670																												
1st.	V-321	16-6658		455				..292..					Vol Tone	V-3293 V-3305	M-..		D13-139 D13-137		41	G1							11.	H113, H114, H116, H117, H119		
2nd.	V-332	16-6658		455	+			..613..					Vol Tone	V-3298 V-3303	M-63-Z	A.	D13-137 D13-137		41	G1							6.	H-122		
1st.	V-332	16-6670		4.				V-3222	ST-10	6A15		13	Vol Tone	V-3303 V-3476	M-63-Z	A.	D13-137 D13-137		41	G1						3.	H-125, H-126			
2nd.	V-347	16-6666						V-3222	ST-110	6A15		i	Vol Tone	V-3298 V-3303	M-63-Z	A.	D13-137 D13-137		41	G1						6.	H-130			
1st.	V-332	16-6658		4				V-2					Vol Tone	V-3304 V-3364	M-63-Z	A.	D13-137 D13-137		42	G1						14.	H-133			
2nd.	V-332	16-6670						V-0					Vol Tone	V-3221 V-3222	T-120 M-66-Z	A.	D13-139X D13-139		41	G1							15.	H-137, H-138		
1st.	V-387	16-6658						V-1					Vol Tone	V-3221 V-3222	T-120 M-66-Z	A.	D13-137		42	G1									H-155, H-157, H-154	
2nd.	V-3876	16-6658						V-1					Vol Tone	V-3298 V-3303	M-63-Z	A.	D13-137 D13-137		41	G1							35.	H-153A, H-155, H-171		
1st.	V-332	16-6658		455				V-3	2.				Vol Tone	V-3303 V-3221	T-120 M-66-Z	A.	D13-139X D13-139		41	G1						1.	H-154			
2nd.	V-332	16-6670						V-1					Vol Tone	V-3221 V-3222	T-120 M-66-Z	A.	D13-137		42	G1						11.	H-162			
1st.	V-321	16-6658		45				V-3292	ST-110	6A15		F13	Vol Tone	V-3298 V-3303	M-63-Z	A.	D13-137		41	G1						2.	H-165			
2nd.	V-3249	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		42	G1						6.	H-164, 165, 167			
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1						37.	H-169 (Ch. V-2224-1)			
2nd.	V-3329	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1									H-161, H-188, H-168A, (Ch. 2118)	
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1							34.	H-161, H-188, H-168A, (Ch. 2118)		
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
1st.	V-3328	16-6658		455				V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1										
2nd.	V-3328	16-6670						V-3612					Vol Tone	V-3305	M-63-Z	A.	D13-137		41	G1				</						

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note
													"A"	"B"						"A"	"B"		
WESTINGHOUSE WR-12X14.....	Continued	6 12SK7, 12SA7, 12SQ7, 25L6GT, 35Z5GT	36301	PRSA150-50-30		BRD3515		M-5030-150		TA-530		Out	36800	A-3330					A-3031				
WR-12X15, (Ch. RC1015A).....	6 12SG7, 12SA7, 12SK7, 12SQ7, 35L6GT, 35Z5GT	36301	PRSA150-50-30			BRD3515		M-5030-150		TA-530		Out	38994	A-3876	B23	T22S45	B23	A-2928		A-2928			
WR-12X16, (Ch. RC1002B).....	8 6SG7, 6SA7, 6SK7, 26SQ7, 25L6GT, 25X6GT (44)	39152										Out	35056	A-3876		T22S45		A-2905					
WR-13K5, (Ch. RC1003).....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36301	PRSA150-50-30			BRD3515		M-5030-150		TA-530		Out	35056	A-3876		T22S45		A-2928					
WR-13X8, (Ch. RC1001E).....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36301	PRSA150-50-30			BRD3515		M-5030-150		TA-530		Out	38994	A-3876		T22S45		A-2928					
WR42K11.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	40-20 Mid	PRSA150-40-20			BRD4215		M-2X40-150		TA-240		Out		A-3876		T22S45		A-2928					
WR42X1, (Ch. RC517).....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT	36-301	PRSA150-50-30			BRD3515		M-5030-150		TA-530		Out	35666	A-3330				A-3031					
WR42X2.....	6 6SK7, 6SA7, 6SQ7, 25L6GT, 25Z6GT	37-846	PRS150-30			BR3015		M-30-150		UT-301		Out	37844	A-3876		T22S45		A-2928					
WR42X3, (Ch. RC582B).....	6 6SK7, 6SA7, 6SQ7, 25L6GT, 25Z6GT	37-846	PRS150-30			BR3015		M-30-150		UT-301		Out	38759	A-3876		T22S45		A-2928					
WR42X4, WR42X5, (Ch. RC573D).....	8 6SG7, 6SA7, 6SK7, 26SQ7, 25K6GT, 5Y3GT	37-977	PRS450-16			BR1645		M-16-450		UT-16		Pwr	35659	P-6012		T22R04		P-2952					
WR42X7, (Ch. RC582C).....	6 6SK7, 6SA7, 6SQ7, 25L6GT, 25Z6GT	37-846	PRS150-30			BR3015		M-30-150		UT-301		Out	36671	A-3311		T22S64		A-2904					
WR42X14, WR42X15, (Ch. RC573D).....	8 6SG7, 6SA7, 6SK7, 26SQ7, 25K6GT, 5Y3GT	37-888	PRS450-16			BR1645		M-15-450		UT-16		Out	38759	A-3876		T22S45		A-2928					
WR62K1, WR62K2, (RC562A).....	6 2IN5GT, 1A7GT, 1H5GT, 3Q5GT, 35Z5GT	38-775	PRS450-16			UP2245C		M-15-450		UT-16		Pwr	35959	P-6012		T22R04		P-2952					
WR62K3.....	5 1R5, 1T5, 1S5, 3S4, 4Z3	D8952	PRSA150-50-30			BRD3515		M-5030-150		TA-530		Out	38775	A-3329		T22S47		A-2927		746 & 4482	#G3	#M30	
WR-I20.....	5 6A8G, 6K7G, 6Q7G, 25B6G, 25Z6G	CE9559	AF100			UP5015		DY-10-150		EL-51		Out	TR9588	A-3876		T22S45		A-2928					
WR-140.....	5 6A8, 6K7, 6Q7, 25L6, 25Z6G, (K49CB-Ballast)	CE9560	GL450-8			KR508		D-8-450		PLS-8		Out	TR9588	A-3876		T22S45		A-2928					
WR150.....	4 6J7, 25L6GT, 25Z6GT, (L55B-Ballast)	45X237				UP5015		DY-10-150		EL-51		Out		A-3876		T22S45		A-2928					
WR152.....	4 6A8G, 6K7G, 6Q7G, 25L6G, (EK42BG-Ballast)	D5499	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out	D5484T	A-3876		T22S45		A-2928					
WR154.....	5 6A8G, 6K7, 6Q7G, 25L6G, 25Z6G (47)	16-16 Mid	PRSA150-20-20			BRD2215		M-2X20-150		TA-220		Out		A-3876		T22S45		A-2928					
WR158.....	6 6A8G, 6K7, 6H6, 6F5, 25L6, 16-16 Mid	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out		A-3876		T22S45		A-2928							
WR162.....	8 6K3, 6K7G, 6Q7G, 6C5G, 25A6G, 25Z6GT	D5780	PRS150-30			BR3015		M-30-150		UT-301		Chk	D5548					A-2901		A-2928			
WR165.....	5 6A8, 6SK7, 6S7, 25L6, 25Z6, 20-12 Mid (47)	D5958	PRSA150-40-10			BRD2215		M-40-150		UT-401		Out	A-2201			T22S66		A-2901					
WR166.....	5 12SA7, 12SK7, 12SQ7, 50L6, 32576	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out		32964	A-3876		T22S45		A-2928						
WR166A, WR166L.....	5 12SA7, 12SK7, 12SQ7, 50L6, 32576	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out		34174	A-3876		T22S45		A-2928						
WR-168, WR168A, (Ch. RC451).....	5 12SA7, 12SK7, 12SQ7, 50L6G, 33850	PRSA150-30-30	BRD3315			M-2X30-150		TA-330		Out		33854	A-3876		T22S45		A-2928						
WR-168B, WR168B, (Ch. RC451B).....	5 12SA7, 12SK7, 12SQ7, 50L6G, 33850	PRSA150-30-30	BRD3315			M-2X30-150		TA-330		Out		33854	A-3876		T22S45		A-2928						
WR-169.....	5 12SA7, 12SK7, 12SQ7, 50L6G, WR2482	PRSA150-30-30	BRD3315			M-2X30-150		TA-330		Out		WR1561	A-3876		T22S45		A-2928						
WR-17D.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 34212	AF1010D	UP5515			DY-2X50-150		EL-25		Out		34294	A-3876		T22S45		A-2928						
WR-172.....	6 12SA7, 12SK7, 12SQ7, 6N5, 34212	AF1010D	UP5515			DY-2X50-150		EL-25		Out		34294	A-3876		T22S45		A-2928						
WR-173L.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 32576	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out		34846	A-3876		T22S45		A-2928						
WR-174L, (Ch. RC457C).....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 32576	PRSA150-20-20	BRD2215			M-2X20-150		TA-220		Out		34174	A-3876		T22S45		A-2928						
WR-175, WR180, (Ch. RC460B).....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35348	PRSA150-30-30	BRD3315			M-2X30-150		TA-330		Out		33854	A-3876		T22S45		A-2928						
WR182 (Ch. RC463).....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35348	PRSA150-30-30	BRD3315			M-2X30-150		TA-330		Out		33854	A-3876		T22S45		A-2928						
WR182A.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 36301	PRSA150-50-30	BRD3515			M-5030-150		TA-530		Out		35666	A-3330					A-3031					
WR184.....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35673	PRSA150-50-30	BRD3515			M-5030-150		TA-530		Out		35666	A-3330					A-3031					
WR186, (Ch. RC537A).....	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35673	PRSA150-50-30	BRD3515			M-5030-150		TA-530		Out		35666	A-3330					A-3031					
WR224.....	5 6A8G, 6K7, 6Q7G, 6V6G, 5Y3G, CE9568	GL450-8	KR508			D-8-450		PLS-8		Pwr	TR95128	P-6119		T22R02		P-2951							
WR226.....	6 6A8, 6K7, 6H6, 6F5, 6V6, 5Y3G, CE9562	GL450-16	KR516A			D-16-450		PLS-16		Out	TR95141	A-3830		T22S58		A-2930							
WR228.....	8 6K7, 6A8, 6Q7, 26F6G, 6U5, 5Y3G, CE9568	GL450-8	KR508			D-8-450		PLS-8		Pwr	TR95132	P-6120		T22R02		P-2951							
		CE9562	GL450-16			D-16-450		PLS-16		Out	TR95143 (or)	A-3849		T22S46		A-2930							
		CE9564	GL450-16			D-16-450		PLS-16		Pwr	TR95154	A-3849		T22S46		A-2902							
		CE9566	GL450-8			D-8-450		PLS-8		Out	TR95153 (or)	P-6013		T22R05		P-2953							
		CE9562	GL450-16			D-16-450		PLS-16		Out	TR95150	A-3852		T22S64		A-2904							

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS					Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL								
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quan Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radial Part No.	Note	Photot Sel No.				
1st.	36232	16-6658		455							F2		F2	Vol	36242	M-60-Z		A	G7	D13-133		41	GI, 7				Continued—	WESTINGHOUSE WR-12X14		
2nd.	37364	16-6650									F2		F2	Vol	38410	M-60-Z		A		D13-133		41	GI					WR-12X15, (Ch. RC1015A)		
1st.	36232	16-6658		455												Vol	38404	*-120		D13-139X			GI							
2nd.	37364	16-6650														Tone	38409	*-60-Z		D13-133			GI							
1st.	36232	16-6658		455												Vol	35344	*-60-Z		D13-133			GI							
2nd.	37364	16-6650																									WR-13X5, (Ch. RC1002B)			
1st.	36232	16-6658																									WR-13X8, (Ch. RC1003)			
2nd.	37364	16-6650																									WR-13X9, (Ch. RC1001E)			
1st.																											WR-42K11			
2nd.																														
1st.	35638	16-6658		455																							WR-42X1			
2nd.	35790	16-6650																									WR-42X2			
1st.	35638	16-6658		455																							WR-42X3, (Ch. RC582B)			
2nd.	35790	16-6650																									WR-42X4,			
1st.	35638	16-6658																									WR-42X5			
2nd.	35790	16-6650																									WR-42X7, (Ch. RC582C)			
1st.	35638	16-6658		455																							WR-42X14, WR-2X15			
2nd.	35790	16-6650																									WR-62K1, WR-62K2			
1st.	36189	16-6657																									WR-62K3			
2nd.	D8836																													
1st.	IC9510	16-6658																									WR-120			
2nd.	IC951	16-6660																									WR-140			
1st.	IC951	16-6658		55																										
2nd.	IC9511	16-6658																												
1st.																											WR-150			
1st.	D287	16-6658		455							D5484		F2	F2	Vol	36X244	M-27-S	KSS-3	A	D11-16	E	41						WR-152		
2nd.	D500																										WR-154			
1st.																											WR-158			
2nd.																											WR-162			
1st.																											WR-165			
2nd.																											WR-166			
1st.																											WR-166A, WR-166L			
2nd.																											WR-168, WR-168A			
1st.																											WR-168B, (Ch. RC451B)			
2nd.																											WR-169			
1st.	32966	16-6658		455							F2		F2	Vol	32578	M-64-Z		A	D13-130		41	GI						WR-170		
2nd.	33057	16-6660																									WR-172			
1st.	32966	16-6658																									WR-173L			
2nd.	32967	16-6660																									WR-174L			
1st.	32966	16-6658									ST-10		4E45		Vol	32578	M-64-Z		A	D13-130		41	GI						WR-176	
2nd.	32967	16-6660																									WR-177			
1st.	34884	16-6658		455							F2		F2	Vol	32578	M-64-Z		A	D13-130		41	GI						WR-178		
2nd.	34442	16-6660																									WR-179			
1st.	WR154	16-6658		455																							WR-180 Incl.			
2nd.	WR151	16-6660																									WR-181			
1st.	33722	16-6658		455							ST-108		6A1		Vol	33631	M-64-Z		A	D13-139		41	GI						WR-182A	
2nd.	34026	16-6660																									WR-183			
1st.	33722	16-6658		455																							WR-184			
2nd.	34026	16-6660																									WR-185			
1st.	35331	16-6658																									WR-186, (Ch. RC537A)			
2nd.	33301	16-6660																									WR-224			
1st.	35331	16-6658																												
2nd.	34442	16-6660																												
1st.	35346	16-66-8		455							F2		F2	Vol	35728	*-60-		A	D13-133		41	GI						WR-225		
2nd.	35347	16-6660																									WR-226			
1st.	35346	16-6658		455							F2		F2	Vol	36584	M-60-Z		A	D13-133		41	GI						WR-227		
2nd.	36432	16-6660																									WR-228			
1st.	36432	16-6658		455							F2		F2	Vol	36584	M-60-Z		A	D13-133		41	GI								
2nd.	35636	16-6658																												
1st.	35636	16-6658									F1		F1	Vol	36390	M-64-Z		A	D13-130		41	GI								
2nd.	35790	16-6660																												
1st.	35636	16-6658		455							F1		F1	Vol	36390	M-64-		A	D13-130		41	GI								
2nd.	35790	16-6660																												
1st.	IC951 9	16-5712																												
2nd.	IC95110	16-5714																												
1st.	IC95113	16-5712		455							SK		F2	Vol	VR-9548	*-0-		A	“13-133		41	GI								
2nd.	IC95114	16-5714									SK		F1	Vol	VR-9548	*-0-		A	“13-133		41	GI								
1st.	IC95119	16-5712		45							SK		F1	Vol	VR-9553	*-60-Z		A	D13-133		41	GI								
2nd.	IC95120	16-5714									SK		F1	Vol	VR-9553	*-60-Z		A	D13-133		41	GI								

\*Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
		No. Tubes	Sylvania or Equivalent	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
			Dial Light Type Listed in Parentheses	Part No.	Part No.		Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		Part No.		"A"	"B"	"A"	"B"		
WESTINGHOUSE WR256	Continued 5 6A8, 6K7, 6Q7G, 6K6G, 5Y4G (44)	5-5 Mfd.	PRSA450-8-8	EZ8845			M-2X8-450		UT-88		Pwr Out		P-6010	T22R02		P-2951										
WR258	5 6A8G, 6K7, 6Q7G, 6K6G, 5Y4G (44)	5-5 Mfd.	PRSA450-8-8	EZ8845			M-2X8-450		UT-88		Pwr Out		P-6297	T22S47		A-2931										
WR260	5 6A8G, 6K7, 6Q7G, 6K6G, 5Y4G (44)	5-5 Mfd.	PRSA450-8-8	EZ8845			M-2X8-450		UT-88		Pwr Out		P-6297	T22R01		P-2949										
WR262	6 6A8G, 6K7G, 6Q7G, 6V6G, 6U5, 5Y4G (40)	D5101 D3285 10-10-5-20	GL450-16 GL450-16	KR516A KR516A	D-16-450 D-16-450		PLS-16		PLS-16		Pwr Out	D5550 D5567T	P-6011 A-3877	T22S47		A-2931										
WR264	7 5K8, 6K7, 6H6, 6F5, 6K6G, 6U5, 5Y4G (47)										Pwr Out		P-6011 A-3823	T22R02 T22S47		P-2951 A-2931										
WR270	5 6SA7, 6SK7, 6SQ7, 6F6G, 5Y4G (51)	10, 10 Mfd.	AF22J	UP1145			DY-2X10-450		EL-210		Pwr Out		P-6119 A-3862	T22R02 T22S47		P-2951 A-2931										
WR272	6 6SA7, 6SK7, 6SQ7, 6F6G, 6U5, 5Y4G (51)	34022	AF22J	UP1145			DY-2X10-450		EL-210		Pwr Out	34260	P-5119	T22R02		P-2951										
WR272L	5 6SA7, 6K7, 6SQ7, 6F6G, 5Y4G (51)	32240	AF22J4A	UPII45C			DY-316		EL-202		Pwr Out	35444	P-6119	T22R02		P-2951										
WR274	7 6SA7, 6SK7, 6H6, 6SF5, 6U5, 6F6G, 5Y4G (44)	32240	AF22J4A	UPII45C			DY-316		EL-202		Pwr Out	32905	P-3852	T22S47		A-2931										
WR288	6 6SK7, 6SA7, 6SQ7, 6K6GT, 5Y3G, 35885		AF22J4A	UPII45C			DY-316		EL-202		Pwr Out	33112	P-6011	T22R02		P-2951										
WR290	8 6SK7, 6SA7, 6SQ7, 6SF5, 5Y3G (51), 6K6GT, 5Y3G (51)	33014	AF44J4A	UP22245C							Pwr Out	32905	P-3852	T22S47		A-2931										
WR311	6 6A8, 6K7, 6H6, 6F5, 6F6, 5Y3/5Z4, CE9535	CE9535 CE9536 CE9537	GL450-16 GL450-12 PRSA450-8-8	KR516A KR512A EZ8845	D-16-450 D-12-450 M-2X8-450		PLS-16		PLS-12		Pwr Out	35880	P-6012	T22R04		P-2952										
WR326	6 6A8, 6K7, 6H6, 6F5, 6V6, 5Y3G, CE9554	CE9554 CE9556 CE9558	GL450-16 GL450-16 GL450-8	KR516A KR516A KR508	D-16-450 D-16-450 D-8-450		PLS-16		PLS-16		Pwr Out	35879	P-3878	T22S47		A-2931										
WR328	8 6K7, 6A8, 6Q7, 6F6G, 6U5, 5Y3G, CE9558	CE9554 CE9562	GL450-8 GL450-16 GL450-16	KR508 KR516A KR516A	D-8-450 D-16-450 D-16-450		PLS-8		PLS-8		Pwr Out	35880	P-3880	T22S64		A-2934										
WR330	10 6K7, 6A8, 6H6, 6F5, 6C5, 6F6G, 6U5, 5Y3G, CE9562	CE9554 CE9562	CE9528 GL450-8	KR508 KR516A	D-8-450 D-16-450 D-16-450		PLS-8		PLS-8		Pwr Out	TR95157	P-6011	T22R02		P-2951										
WR334	12 6K7, 6A8, 6Q7, 6C5, 6V6, 6J7, 6H6, 6U5, 5X4G, CE9562	CE9554 CE9556 CE9559	CE9554 CE9556 CE9559	GL450-16 GL450-16 GL450-16	D-16-450 D-16-450 D-16-450		PLS-16		PLS-16		Pwr Out	TR95151	A-3823	T22S47		A-2931										
WR338	6 6A8, 6K7, 6H6, 6F5, 6V6, 5Y3G, CE9552	CE9554 CE9558	GL450-16 GL450-16 GL450-8	KR516A KR516A KR508	D-16-450 D-16-450 D-8-450		PLS-16		PLS-16		Pwr Out	TR95132	P-6120	T22R02		P-2951										
WR342	8 6K7, 6A8, 6Q7, 6F6G, 5Y3G, 6U5, CE9554	CE9562	GL450-16	KR516A	D-16-450		PLS-16		PLS-16		Pwr Out	TR95145	A-3849	T22S46		A-2902										
WR366	8 6K7, 6A8, 6Q7G, 6F6G, 6U5, 6J7, 5Y4 (54, 47)	10 Mfd.	GL450-12	KR512A	D-8-450		PLS-8		PLS-12		Pwr Out	TR95145	A-3849	B22	T22S46	B22	A-2902	B22								
WR368	10 6K7, 6A8, 6J7, 6Q5G, 6F5, 6F6G, 6U5, 5U4C, 25 Mfd.	GL450-30	KR530	D-30450	PLS-30					Pwr Out	TR95154	P-6013	T22R05		P-2953											
WR370	12 6K7, 6A8, 6R7, 6J5, 6F6, 6U5, 5J4, 6J7 (54, 544), 20 Mfd.	PRSA450-20	BR2049 EZ5116	D-16-450 M-20-450	PLS-16 TU-1616					Pwr Out	TR95125	A-3830	T22S64		A-2904											
WR372	6 6SA7, 6SK7, 6H6, 6SF5, 6F6G, 34022	AF22J	UP1145		DY-2X10-450		EL-210		Pwr Out	TR95152	A-3311	T22S64		A-2904												
WR372L	6 6SA7, 6K7, 6H6, 6SF5, 6F6G, 5Y4G (54)	10, 10 Mfd.	AF22J	UP1145	DY-2X10-450		EL-210		Pwr Out	TR95145	A-3849	T22S46		A-2902	B22	T22S46	B22	A-2902	B22							
WR373	7 6SA7, 6SK7, 6H6, 6SF5, 6U5, 32342	AF22J	UP1145		DY-2X10-450		EL-210		Pwr Out	TR95143	A-3849	B22	T22S46	B22	A-2902	B22										
WR373L	7 6SA7, 6K7, 6H6, 6SF5, 6F6, 5Y4G, 6U5	10, 10 Mfd.	AF22J	UP1145	DY-2X10-450		EL-210		Pwr Out	TR95154	A-3830	T22S47		A-2931												
WR373Y	6 12SA7, 12SK7, 12SQ7, 35L6GT, 34212	AF1010D	UP5515		DY-2X50-150		EL-25		Pwr Out	TR95156	A-3311	T22S64		A-2904												
WR374, WR374L	8 6SA7, 6SK7, 6Q7, 6F6G, 6SF5, 6F6G, 5Y4G (51)	33014	AF44J4A	UP22245C					Pwr Out	30889	P-6011	T22R02		P-2951												
WR375	6 6SA7, 6K7, 6H6, 6SF5, 6F6G, 5Y4G (47)	32240	AF22J4A	UPII45C	DY-316		EL-202		Pwr Out	34169	P-6011	T22R02		P-2951												
WR386	6 6SK7, 6SA7, 6SQ7, 6K6, 5Y3G (51)	36675	AF22J4A	UPII45C	DY-316		EL-202		Pwr Out	33619	P-6011	T22R02		P-2951												
WR388	9 6SK7, 6SA7, 6H6, 6SF5, 6F6G, 35858	AF22J4A	UPII45C	DY-316	EL-202		Pwr Out	33719	P-6011	T22S47		A-2931														
WR468, WR468L	5 12SA7, 12SK7, 12SQ7, 35L6GT, 33850	PRSA150-30-30	BRD3315	M-2X30-150	TA-330			Pwr Out	34566	P-6012	T22S47		A-2931													
WR470	5 6SA7, 6SK7, 6SQ7, 6F6G, 5Y4G (51)	32342	AF22J	UPII45C	DY-316		EL-210		Pwr Out	33112	P-6012	T22R04		P-2952												
WR472	5 6A8, 6K7, 6Q7G, 6K6G, 5Y3G, 5Y4G (44)	32240	AF22J4A	UPII45C	DY-316		EL-202		Pwr Out	33444	P-6012	T22S64		A-2904												
WR473	7 6SA7, 6SK7, 6SQ7, 6SF5, 6F6G, 32240	AF22J4A	UPII45C	DY-316	EL-202		Pwr Out	33101	P-6012	T22R02		P-2951														
WR474, WR474L	8 6SA7, 6SK7, 6SQ7, 6SF5, 6F6G, 5Y4G (51)	32240	AF22J4A	UPII45C	DY-316		EL-202		Pwr Out	33557	P-6012	T22R02		P-2951												
								Pwr Out	31301	P-6012	T22S47		A-2931													
								Pwr Out	35959	P-6012	T22R04		P-2952													
								Pwr Out	33444	P-6012	T22S64		A-2904													
								Pwr Out	33854	P-6012	T22S45		A-2928													

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			Photofact Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.		16-5712.		:5					ST-16	SE18			Vol		M-6-Z				13-130		4	G1				WESTINGHOUSE		
2nd.		16-5714.							ST-167	SE18			Vol		M-6-Z				13-130		7	G1				WR-256		
1st.		16-5712.							ST-167	SE18			Vol		M-60-Z		A6		13-133			G1				WR-258		
2nd.		16-5714.							D5567				Vol	D5576	M-60-Z				D13-133		41	G1				WR-260		
1st.		16-5712.							D5567				Tone	D5575	M-51-Z		A	D13-128								WR-262		
2nd.		16-5714.											Vol & Tone	85479-2													WR-264	
1st.		16-5740.																										
2nd.		16-5742.																										
1st.		16-6658.							RL-73-3	ST-166			F2	Vol	84304-8	M-63-Z	A	D13-137		41	G1						WR-270	
2nd.		16-6660.																										
1st.		33722.																									WR-272	
2nd.		16-5712.																									WR-272L	
1st.		33723.																									WR-274	
2nd.		16-5714.																									WR-288	
1st.		32263.																									WR-288	
2nd.		34719.																									WR-290	
1st.		33428.																									WR-311	
2nd.		14308.																									WR-311	
1st.		35636.																									WR-326	
2nd.		35790.																									WR-326	
1st.		35636.																									WR-328	
2nd.		35790.																									WR-328	
1st.		IC95112.																									WR-330	
2nd.		IC95114.																									WR-330	
1st.		IC95119.																									WR-334	
2nd.		IC95120.																									WR-334	
1st.		IC9511.																									WR-338	
2nd.		IC9512.																									WR-338	
1st.		IC9511.																									WR-342	
2nd.		IC9512.																									WR-342	
1st.		33722.																									WR-366	
2nd.		33723.																									WR-368	
1st.		16-5712.																									WR-370	
2nd.		16-5714.																									WR-370	
1st.		33722.																									WR-372	
2nd.		33723.																									WR-372L	
1st.		16-5712.																									WR-373	
2nd.		16-5714.																									WR-373L	
1st.		33722.																									WR-373Y	
2nd.		34026.																									WR-374L	
1st.		32263.																									WR-374, WR-374L	
2nd.		34719.																									WR-375	
1st.		32263.																									WR-386	
2nd.		34719.																									WR-388	
1st.		35636.																									WR-468, WR-468L	
2nd.		35790.																									WR-470	
1st.		32966.																									WR-472	
2nd.		32967.																									WR-473	
1st.		33722.																									WR474, WR474L	
2nd.		33895.																										

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"	
WESTINGHOUSE WR475	Continued	5 12SA7, 12SK7, 12SQ7, 35L6, 35Z5 (47)	20, I2 Mfd.	PRSA150-20-20	BRD2215		M-2X20-150	TA-220			Out		A-3876	T22S45	A-2928								
WR476	7 6SA7, 6K7, 6SQ7, 6SF5, 6F6G, 5Y4G (51)	32240	AF22J4A	UPI1145C		DY-316	EL-202			Pwr Out	32144, 33444, 35666	P-6011, A-3830, A-3330	T22R02, T22S64	P-2951, A-2904, A-3031									
WR478	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (51)	35673																					
WR480	5 6SA7, 6SK7, 6SQ7, 6F6G, 5Y3G (51)	35858	AF22J4A	UPI1145C		DY-316	EL-202			Pwr Out	33112, 35879	P-6011, A-3878, P-6011	T22R02, T22S47	P-2951, A-2931									
WR482	6 6SA7, 6SK7, 6SQ7, 6AD7, 6F6G, 5Y3G (51)	10-15-40 Mfd	AF44J4A	UP2245C		DY-315	EL-350			Pwr Out		A-3830	T22R02, T22S64	P-2951, A-2904, A-2930									
WR484	7 6SA7, 6SK7, 6SQ7, 6SF5, 6K6, 5Y3G (51)	10-15-40 Mfd	AF44J4A	UP2245C		DY-315	EL-350			Pwr Out		P-6011, A-3830	T22R02, T22S64	P-2951, A-2904, A-2930									
WR486	9 6SA7, 6SK7, 6Q7, 6K6GT, 6SJ7, 6U5, 5Y3	10-15-40 Mfd	AF44J4A	UP2245C		DY-315	EL-350			Pwr Out		P-6012, A-3878	T22R04	P-2952									
WR503	7 6K7, 6A8, 6H6, 6F5, 6F6, 0Z4	CE9524, CE951	PRS25-10, PRS450-8-8	BR102A, EZ588		M-10-25, DH-2X8-450SS	TA-10, TU-88			Chk Pwr Out	RC95157, TR9547, TR9543	A-3878	T22S47	A-2931									
WR610	4 6D8G, 6ST7G, 6T7G, 6K6G	CE9573, CE9560	GL450-8, PRS25-50	KR508, BR602		D-8-450, M-50-25	PLS-8, TA-50			Chk Pwr Out	TR9526, TR95106, TR95157	A-3878, A-3329	T22S47	A-2931, A-2927	742 & 732,	8F	2B30						
WR674	4 1A7G, 1N5G, 1H5G, 1C5G	8 Mfd.	PRS150-8	BR815		M-8-150	UT-81			Out	33459	A-3329	T22S47	A-2927	741 & 7482	8F	2B30						
WR675	4 1A7G, 1N5G, 1H5G, 1C5G	33303	PRS150-8	BR815		M-8-150	UT-81			Out	33459	A-3329	T22S47	A-2927	741 & 7482	8F	2B30						
WR675A	4 1A7G, 1N5G, 1H5G, 1Q5G	33303	PRS150-8	BR815		M-8-150	UT-81			Out	33459	A-3329	T22S47	A-2927	741 & 7482	8F	2B30						
WR676	5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 117Z6G, 35Z5	34965, 34472	PRS25-25, AF44D40A	BR252A, UP4CJ61		M-25-25	TA-25, DY-304			Dut	34555	A-3881	T22S48	A-2999	747 & 7482	2F4L, 2M30							
WR677	4 1A7GT, 1N5GT, 1H5GT, 1Q5GT	24593	PRS150-12	BR1215		M-10-150	UT-121			Out		A-3329	T22S47	A-2927	758	17GD60							
WR578, WR679	5 1A7GT, 1N5GT, 1H5GT, 1T5GT, 35Z4	40-20-100 Mfd	UP6CJ64			EL-351				Out		A-3881	T22S48	A-2999	747 & 7482	2F4L, 2M30							
WR680, WR681	6 1A7, 1N5, 1H5, 3Q5, 35Z5	5.362								Out		A-3329	T22S47	A-2927	746 & 7482	2G3, 2M30							
WR682, WR682A	4 1R5, 1T4, 1S5, 1S4	36718	PRS150-16	BR1615		M-16-150	UT-161			Out	36505, 37806	A-3329, B17	T22S47, B17	A-2927, B17	950 & 467	2R	XX45						
WILCOX-GAY—(Al)	See Recordio																						
A51 (Ch. 8C4)	4 6K7, 6J7, 25L6, 25Z6	18-2011, 18-2010	PRS150-8, PRS150-16	BR815, BR1615		M-8-150, M-16-150	UT-81, UT-161			Out	81-2004	A-3876	T22S45	A-2928									
A53 (Ch. 8J5)	5 6A8, 6K7, 6Q7, 25L6, 25Z6	18-2012, 18-2011, 18-2010, 18-2012	PRS25-10, PRS150-8, PRS150-16, PRS25-10	BR102A, BR815, BR1615, BR102A		M-10-25, M-8-150, M-16-150	TA-10, UT-81, UT-161			Chk Out	14-2002, On Spkr	C-1003, A-3876	T20CS2, T22S45	C-2987, A-2928									
A58 (Ch. 8R4)	4 1A7G, 1N5G, 1H5G, 1C5G									Out		A-3329	T22S47	A-2927									
A61 (Ch. 9A2)	2 12A8, 35Z4	16 Mfd.	PRS150-16	BR1615		M-16-150	UT-161			Out		A-3876	T22S45	A-2928									
A63 (Ch. 9B3), A64 (Ch. 9G3)	3 12A8, 35L6, 25X6	40 Mfd.	PRS150-40	BR315, BR4015		M-8-150, M-40-150	UT-81, UT-401			Out		A-3876	T22S45	A-2928									
A65 (Ch. 9F2)	2 12SA7, 35Z4	8 Mfd.	PRS25-10	BR102A, BR1215		M-10-25	TA-10			Out		A-3876	T22S45	A-2928									
A69 (Ch. 9L5)	5 6A8, 6K7, 6Q7, 6K6, 5W4	18-2015, 18-2012	PRS150-8, PRS25-10	BR1615, BR345		M-16-150, M-8-450	UT-81, TA-10			Pwr Out	80-2030, 80-2031	P-6119, A-3852, P-6013	T22R01, T22S47	P-2951, A-2931, P-2953									
A70 (Ch. 9J9)	9 6A8, 6K7, 6Q7, 6K6, 6J7, 6U5, 5W4	18-2017, 18-2012	AF44J4A, PRS25-10	BR102A, BR1615		M-10-25	TA-10			Out	81-2006	A-3876	T22S45	A-2928									
A71 (Ch. 9M5)	5 12J7, 12Q7, 35L6, 45Z5, 6N5	18-2010, 18-2011, 18-2012	PRS150-16, PRS150-8, PRS25-10	BR1615, BR815, BR102A		M-16-150, M-8-150	UT-161, UT-81			Chk Out	81-2002, 80-2032	A-3876	T22S47	A-2927									
A72 (Ch. 9Q5)	5 6J7, 6Q7, 6K6, 6U5, 5W4	18-2012, 18-2017	PRS25-10, AF44J4A	BR102A, UP2245C		M-10-25	TA-10			Dut	81-2007	P-6119	T22R01	P-2951									
A73 (Ch. 9E5)	5 1A7, 1N5, 1H5, 1A5, 45Z5	18-2018	UP4315C			DY-419	EL-443			Out	81-2008	A-3857	T22S48	A-2937	747 & 7482	4FPI	2B30						
A74 (Ch. 9R5)	5 12A8, 12K7, 12Q7, 35L6, 45Z5	18-2010, 18-2011, 18-2012	PRS150-16, PRS150-8	BR1615, BR815		M-16-150, M-8-150	UT-161, UT-81			Chk Out	14-2002, 18 heavy filter												
A78 (Ch. 9P7)	7 6A8, 6K7, 6Q7, 6K6, 5W4	18-2006	GL450-16, PRS450-8	BR102A, BR345		M-10-25	TA-10			Pwr Out	80-2022, 80-2031	P-6119, A-3852, P-6013	T22R02, T22S64	P-2951, A-2936									
A79 (Ch. 9N7)	7 6A8, 6K7, 6Q7, 6K6, 5W4	18-2006, 18-2012	GL450-16, PRS450-8	KR516A, BR102A, BR345		M-16-450	TA-10			Pwr Out	60-2022, 64-2070	P-6119, A-3852	T22R02, T22S64	P-2951, A-2934									
A81, A82 (Ch. 9J9)	9 6A8, 6K7, 6Q7, 6K6, 6J7, 6U5, 5W4	18-2017, 18-2012	AF44J4A, PRS25-10	BR102A, UP2245C		M-10-25	TA-10			Pwr Out	80-2031, 81-2009	P-6013	T22R05	P-2953									
A85, A87, A88, A89	7 6A8, 6K7, 6Q7, 6J7, 6U5, 6K6, 5W4	18-2017, 18-2012	AF44J4A, PRS25-10	BR102A, UP2245C		M-10-25	TA-10			Pwr Out	81-2006, 81-2035	P-6011	T22R02	P-2957									
A89, A91, A92, A93, A94	10 6K7, 6A8, 6Q7, 6K6, 6J7, 6U5, 5W4	18-2020	AF44J4A, UP1145	BR252A		M-25-25	TA-25			Pwr Out	80-2036, 81-2006	P-6013	T22R05	P-2953									
A95	2 12A8, 35Z4	18-2011	PRS150-8	BR815		M-8-150	UT-81			Pwr Out													

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES					
			Notes	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	Note	Cornell-Dubilier	Note	Solar	Note	Sprague	Note	Use	Mfr.	Stancor	Note	Thordarson	Note	Merit	Eveready Part No.	Note	Burgess Part No.	Note
		No.	Part No.	Part No.				Part No.		Part No.		Part No.			Part No.	Part No.		Part No.		"A"	"B"	"A"	"B"	
WILCOX-GAY—Cont.	5 6A8, 6K7, 6SQ7, 6K6, 5W4, . . .	18-2020 18-2021	AF444J PRS25-25		UPI1145 BR252A		DY-3X10-450 M-25-25		EL-310 TA-25					Chk Out	14-2002 80-2038 81-2011	P-697 A-3878 P-6011	+ T22R00 T22S47 T22R02		P-2949 A-2931 P-2951					
A103	5 6J7, 6Q7, 6V6, 6U5, 5Y3, . . .	10-10-10 Mfd. 20 Mfd.	AF444J PRS25-25		UPI1145 BR252A		DY-3X10-450 M-25-25		EL-310 TA-25					Pwr Out	+ T	P-6011	T22R02		P-2951					
A104	7 6A8, 6K7, 6Q7, 6K6, 6J7, 6U5, 5W4, . . .	10-10-10 Mfd. 10 Mfd.	AF444J PRS25-25		UPI1145 BR102A		DY-3X10-450 M-10-25		EL-310 TA-10					Pwr Out	+ T	P-6011	T22R02		P-2951					
A105	6 6A8, 6K7, 6SQ7, 6J5, 6K6, 5Y3, . . .	20 Mfd.	AF444J PRS25-25		UPI1145 BR252A		DY-3X10-450 M-25-25		EL-310 TA-25					Pwr Out	+ T	P-6011 A-3878	T22R02 T22S47		P-2951 A-2931					
A106 (FM Tuner)	8 6SK7, 6SA7, 6SJ7, 6H5, 6U5, 6X5, . . .	50-60 Mfd.	+ t							+ t														
A107	7 6A8, 6K7, 6Q7, 6K6, 6J7, 6U5, 5W4, . . .	10-10-10 Mfd. 10 Mfd.	AF444J PRS25-10		UPI1145 BR102A		DY-3X10-450 M-10-25		EL-310 TA-10					Pwr Out	+ t	P-6011	T22R02		P-2951					
A111, A112	9 6A8, 6K7, 6SQ7, 6K6, 6J7, 6U5, 5Y3, . . .	10-10-10 Mfd. 20 Mfd.	AF444J PRS25-25		UPI1145 BR252A		DY-3X10-450 M-25-25		EL-310 TA-25					Pwr Out	80-2036 81-2013	P-6013	T22R05		P-2953					
A113, A114, A115	11 6K7, 6A8, 6SQ7, 6K6, 6J5, 6U5, 5Y3, . . .	10-10-10 Mfd. 20 Mfd.	AF444J PRS25-25		UPI1145 BR252A		DY-3X10-450 M-25-25		EL-310 TA-25					Pwr Out	80-2036 81-2014	P-6013	T22R05		P-2953					
WILMAK W-446 (Den Chum)	4 1R5, 1T4, 1S5, 3Q4, . . .	15A0816												Out	13A0814									
WOOLAROC 3-1A, 3-2A	6 12SK7, 12SA7, 12SF7, 35L6GT, 35Z5GT (47), . . .	500256	AF88D		UP4215	A4	DY-4020-150		EL-24					Out	502210 (pr.) 502904 (or.)	A-3330			A-3031					
3-3A	7 6SK7, 6SA7, 6SQ7, 6SJ7, 6K6GT, 5Y3GT (44), . . .	502207	AF444JA		UP6CJ13		DY-2X20-400 /20-25		EL-312					Out	504224 502174 504124 504208 504205	P-60120 A-3878	T22R02 T22S47		P-2951 A-2931	B22	B22	B22		
3-5A	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (47), . . .	40, 20 Mfd.	AF88D		UP4215	A4	DY-4020-150		EL-24					Out	+ t	A-3878	B3	T22S45	A-2928	B3	B3	B3		
3-6A/5	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (51), . . .	80, 40, 20 Mfd.	PRSA150-80/40 & PRS25/25		EZ5515C		DSB-804020-150							Out										
3-9A, 3-10A	5 12SA7, 12SQ7, 12SK7, 50L6GT, 35Z5GT (47), . . .	45X341	PRSA150-40/40		EZ5515		DHN-2X50-150		TA-530					Out	51X122	A-3878	T22S45		A-2928					
3-11A	6 6SA7, 6SK7, 6SF7, 6SJ7, 6V6GT, 6X5GT (47), . . .	45X346			UP43145C				EL-330					Pwr	53X282 On Spkr.	A-3923	T22S47		A-2931					
3-12A/3	6 1A7GT, 1N5GT, 145GT, 3Q5GT, 117Z6GT, . . .	40, 40, 40, 20	PRSA150-40-40		EZ4415C		DY-3X40-150 M-20-150		TA-440					Out	+ t	A-3878	T22S47		+46 & +482					
3-14A, 3-15A, 3-16A	4 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (44), . . .	50 Mfd	PRSA150-50-50		BR4015		DY-2X20-150		TA-440					Out	EH-23A	A-3876	T22S45		A-2928					
3-17A, 3-18A	5 12SA7, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT (51), . . .	80 Mfd	PRSA150-40-80	CE-81	EDL4415 & BR4015		DSB-8040-150 TA-440 & UT-401		TA-440					Out	+ t	A-3876	B3	T22S45	B3	A-2928	B3			
3-20A	5 12SA7GT, 12SK7GT, 12SQ7GT, 50L6GT, 35Z5GT, . . .	80-40-20 Mfd	PRSA150-50-50	CE-81	EZ5515		DSB-2X50-150 DY-804020-150		TA-505					Out	+ t	A-3876	B3	T22S45	B3	A-2928	B3			
3-29A	5 12SA7, 12SK7, 12SQ7, 50L6GT, 35Z5GT (47), . . .	45X341	PRSA150-40-40		EZ5515		DHN-2X50-150		TA-530					Out	51X123	A-3876	T22S45		A-2928					
3-70A	7 7Q7, 7H7, 7B6, 7C7, -7CS, 5Y3GT (51 & 47), . . .	16-16 Mfd.	AF444J		UP2245		DY-2X20-450		EL-220					Pwr	TP-9	P-6013	T22R05		P-2953					
3-71A	7 6SB7Y, 12SG7, 7A6, 12SQ7, 35L6GT, . . .	CE-87, PRS150-4	AF8880	CE-88	UP-44415		DY-604020-150 M-4-450		EL-340 TA-55					Out	TP-8 On Spkr.	A-3823	T22S47		A-2936					
ZENITH S622, S7000, S7001, S7002, S7003, S8500, S8501, S8501Z, S8502Z, S9000, S9001, S9002	2 6L7G, 6X5G, 12SA7GT, 35Z5GT	22-768, 22-876	PRSA150-40-20	BRD4215		M-2X40-150		TA-240						Pwr	95-567									
S9005 (Ch. 6B25)	6 7G7, 7C7, 7A5, 7B4, 6V6G, 5Y4G, . . .	22-991, 22-1321	PRSA150-20-20	EZ5516				TU-1616						Pwr	95-883 On Spkr.	P-6011 A-3877	T22R02 T22S46		P-2951 A-2930					
4B231 (Ch. 5409)	4 6D6G, 6S7G, 6T7G, 38, . . .	22-1320, 22-582	PRS460-40	BR4045 EZ8845S		M-40-450		TU-88 & TA-25						Chk	95-298 95-445									
4B231, 4B355 (Ch. 5410)	4 6A8G, 6D6G, 6K7G, 6S7G, 6Q7G, 6T7G, 6G6G, . . .	22-739		UP6CJ20		DY-3X20-450							Pwr	95-552 206-262	A-3879	T22S47		A-2932						
4B231, 4B317	4 6A8G, 6D8G, 6K7G, 6S7G, 6Q7G, 6T7G, 6G6G, . . .	22-739		UP6CJ20		DY-3X20-450							Pwr	95-552 206-282	A-3879	T22S48		A-2932						
4B22, 4B437, 4B466, 4B468 (Ch. 5417)	4 1A7G, 1N5G, 1H5G, 1Q5G, . . .	22-742, 22-961		UP6CJ20		DY-3X20-450							Pwr	95-635 205-345	A-3879	T22S48		A-2932						
													Pwr	206-328	A-3329	T22S47		A-2927						
													Pwr	206-342	A-3329	T22S47		A-2927						
													Pwr	206-359	A-3329	T22S47		A-2927						

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL Phonefact Set No.					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiat. Part No.	Note	
1st.	68-2051	16-5712		456	23-2035	L-20		64-2170	SI-11		4A1		Vol	11C0727	M-60-Z	A	D13-133	41	G1					Continued—	WILCOX-GAY A100	
2nd.	68-2056	16-5714			23-2024	M-22			I2		F2		Tone		M-60-Z	A	D13-133	41	G1						A103	
1st.	†	16-5712		456	23-2024	M-22					F2		Tone		M-64-Z	A	D13-130	41	G1						A104	
2nd.	†	16-5714													M-60-Z	A	D13-133	41	G1						A105	
1st.	†	16-5712		456	21-2164	L-40					F2		Tone		M-64-Z	A	D13-133	41	G1						A106	
2nd.	†	16-5714													M-64-Z	A	D13-130	41	G1						A107	
1st.	†	16-5712		456	21-2124	M-22					F2		Tone		M-60-Z	A	D13-133	41	G1						A111, A112	
2nd.	†	16-5714			23-2140	I-40		64-2067	12E10				Volt	11C0727	M-60-Z	A	D13-133	41	G1						A113, A114, A115	
1st.	68-2051	16-5712		456	23-2034	I-40		64-2067	12E10				Tone	11C0727	M-64-Z	A	D13-130	41	G1							
2nd.	68-2056	16-5714			23-2055	LP-21		64-2066	12E10				Volt	11C0727	M-60-Z	A	D13-133	41	G1							
1st.	88A0799			456				14B0822					Vol	11C0727	M-60-Z	A	D13-133	41	G1						21. WILMAK W-446, (Den Chum)	
2nd.	88A0800																									
1st.	502102	16-5712		455				R-502398	ST-105		5A1		Vol	502145	AM-60-Z	KSS-3	A	D13-133	E	41						WOOLAROC 3-1A, 3-2A
2nd.	502103	16-5714						A-502398	ST-105		5A1															
1st.	502102	16-6658		455				W-502398	ST-105		AI		Vol	502117	AM-60-Z	KSS-3	A	D13-133	E	41						3-3A
2nd.	502103	16-6650						D-504205	ST-166		6E10															
1st.	†	16-6668		150				R-502398	ST-105		5A1		Vol	502145	AM-60-Z	KSS-3	A	D13-133	E	41						17. 3-5A
2nd.	†	16-6669						A-502398	ST-105		5A1															
1st.	TM2-1	16-6658		455				†	ST-105		5A1		Vol	AM-60-Z	KSS-3	A	D13-133	E	41						23. 3-5A/	
2nd.	TM2-3	16-6670						ST-105		5A1																
1st.	TM2-1	16-6658		455				1/A4/2	ST-107		5A15		Vol	AM-60-Z	KSS-3	A	D13-133	E	41						7. 3-9A, 3-10A	
2nd.	TM2-3	16-6670						1/A4/2	ST-107		5A15															
1st.	9A1808	16-6658		455				12A4/2	ST-110		6A15		Vol	36X354	AT-92	KSS-3	A	G10	D13-133X	E	41					1. 3-11A
2nd.	9A1809	16-6660						EH6-3	ST-107		6A15		Tone	40X280	AT-92	KSS-3	A	G11	D13-140	E	41					
1st.	9A1814	16-6658		455				EH6-3	ST-107		6A15		Vol	AM-60-Z	KSS-3	A	D13-133	E	41						23. 3-12A/3	
2nd.	9A1815	16-6660						EH23-A	ST-113		4A07		Vol	4P-1	M-60-Z	A	D13-133	E	41						3-14A, 3-15A,	
1st.	TM2-12	16-6660		455				EH6-1	ST-105		MW		Vol	4P-1	M-60-Z	A	D13-133	E	41						3-15A	
2nd.	TM2-13	16-6660																							34. 3-17A, 3-18A	
1st.	TM2-9	16-6660		455																						
1st.	TM2-10	16-6658		455																						24. 3-20A
2nd.	TM2-11																									7. 3-29A
1st.	TM2-1	16-6658		455																						1. 3-70A
2nd.	TM2-3	16-6670																								36. 3-71A
					142-16	M-22																				ZENITH S6622 S7000, S7001, S7002, S7003 S8501, S8501, S8501Z S8500Z S9000 S9001, S9002 S9005 (Ch. 6B25)
					142-32																					
					142-30																					
					142-31																					
					142-4																					
					142-50																					
					142-51																					
					95-88																					
1st.	95-444	16-5712		456				49-191	ST-110		F8	SEV6	Vol	63-547	M-60-Z	KSS-3	A	D13-133	E	41						4B231 (Ch. 5409)
2nd.	95-444	16-5714						49-262	ST-105		F8	SEV6	Vol	63-955	M-64-Z	KSS-1	A									
1st.	95-513	16-5712		415				49-282	ST-115		F8	SEV6	Vol	63-955	M-64-Z	KSS-1	A								4B313, 4B355 (Ch. 5410)	
2nd.	95-520	16-5714						49-262	ST-105		F8	SEV6	Vol	63-955	M-64-Z	KSS-1	A									
1st.	95-513	16-5712		155				49-262	ST-105		F8	SEV6	Vol	63-955	A-164-Z	KSS-3	A								4B314, 4B317	
2nd.	95-520	16-5714						49-345	ST-105		5A1		Vol	63-1079	AM-6-Z	KSS-3	A	D13-137	E	41						4B422, 4B424, 4B465 (Ch. 5417)
1st.	95-513	16-5714		455				49-342	ST-108		F3	10A31	Vol	63-1079	AM-6-Z	KSS-3	A									
2nd.	95-520	16-5668						49-321	ST-119		8A21		Vol	63-1079	AM-6-Z	KSS-3	A									
					19-357	ST-115																				

† Information not available.



Section D IF COILS				Section E PHOND CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Photofact Set No.	MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	95-589.	16-6658		455				19-345.	ST-105.		5A1		Vol	63-1079.	AM-63-Z.	KSS-3.	A		D13-137.		41		190-17.		Co	tinued	ZENITH
2nd.	95-590.	16-6661						19-323.	ST-108.		6A1		Vol	63-1079.	AM-63-Z.	KSS-3.	A		D13-137.	E	41		190-17.				4B515, 4B536 (Ch. 4A01, 4A03)
1st.	95-589.	16-6654		455				49-473.	ST-108.	F8	6EV		Vol	63-1079.	AM-63-Z.	KSS-3.	A		D13-137.	E	41		190-17.				4B639 (Ch. 4B04)
2nd.	95-590.	16-6654						19-209.	ST-104.		6A1		Vol	63-544.	M-63-Z.		A2		D13-137.		42	G1					4F227 (Ch. 5408)
1st.	95-419.	16-5711		456				49-587.			3A-7		Vol	63-155.													35.
2nd.	95-420.	16-5714						49-519.	S-107.		5A1		Vol	63-131.	AM-63-Z.	KSS-3.	A		D13-137.		12						4G800
1st.	95-1015.	16-6678		455				49-450.	T-111.		5A1		Vol	63-125.	AM-63-Z.	KSS-3.	A		D13-137.		1						6.
2nd.	95-1015.	16-6674						19-286.	ST-145.		6A1		Vol	63-997.	AM-60-Z.	DFS%	A2		D13-137.		42	G1					4K016 (Ch. 4C52)
1st.	95-814.	16-6654		450				49-287.	ST-146.		6A1		Vol	63-544.	M-63-Z.		A2		D13-137.		1						6.
2nd.	95-239.	16-6661						49-209.	ST-114.		6A1		V-I	63-544.	M-63-Z.		A2		D13-137.		42	G1					4K035
1st.	95-814.	16-6654		455				49-294.	ST-104.		52A		Vol	63-1026.	AM-63-Z.	KSS-3.	A		D13-137.		41						4K311, 4K331, 4K355 (Ch. 5412) 4K329 (Ch. 5413)
2nd.	95-839.	16-6555						49-111.	S-113.		1A1		Vol	63-1034.													4K400CL, M, S (Ch. 5416)
1st.	95-513.	16-5717		411				19-244.	ST-115.		6A1		Vol	63-1077.	AM-63-Z.	KSS-3.	A		D13-137.		1						4K402D, L, M, Y (Ch. 5419)
2nd.	95-520.	16-5714						49-342.	ST-115.		8A21		Vol	63-1077.	AM-63-Z.	KSS-3.	A		D13-137.		41						4K422, 4K435, 4K465, 4K466, (Ch. 5420)
1st.	95-419.	16-5711		451				49-328.	ST-116.		6A1		Vol	63-544.	M-63-Z.		A2		D13-137.		42	G1					4K515 (Ch. 4A02), 4K535, 4K570, (Ch. 4A04)
2nd.	95-420.	16-5714						49-339.	ST-116.		8A21		Vol	63-1176.												4K600 (4B01)	
1st.	95-59.	16-6660		455				49-433.	ST-117.		3A-7		Vol	63-1176.													4K616, 4K635, 4K658 (Ch. 4B02), 4B03)
2nd.	95-59.	16-6660						49-514.	S-115.		5A1		Vol	63-1240.	AM-63-Z.	KSS-3.	A2		D13-137.		42						3.
1st.	95-541.	16-6651		451				49-328.	ST-118.		5A1		V-I	63-1172.	AM-63-Z.	KSS-3.	A2		D13-137.		41						5D011, 5D027
2nd.	95-541.	16-6660						49-359.	ST-117.		8A21		Vol	63-1216.	AT-112.	KSS-3.	A		D18-137X.	E	42						5D012T (Ch. 5C50T)
1st.	95-74.	16-6654		455				49-547.	ST-119.		4A1		Vol	63-133.												5D610, 5D610W, 5D625 (Ch. 5B01) 5D611, 5D627 (Ch. 5B02)	
2nd.	95-74.	16-6660						49-21.	ST-119.		4E4		Vol	63-1354.												5F233, 5F251, (Ch. 5522)	
1st.	95-814.	16-6651		455				49-439.	ST-119.		1A1		Vol	63-1112.	AM-60-Z.	KSS-3.	A		D13-137.		41						17.
2nd.	95-814.	16-6660						49-461.	ST-119.		8A21		Vol	63-1112.	AM-60-Z.	KSS-3.	A		D13-137.		41						5G003 (Ch. 5C41)
1st.	95-91.	16-6658		455				49-450.	ST-108.		6A1		Vol	63-1216.	AT-112.	KSS-3.	A		D18-137X.	E	42						30.
2nd.	95-91.	16-6660						49-547.	ST-119.		4A1		Vol	63-133.												5G003Z, 5G03ZZ	
1st.	95-91.	16-6660		455				49-21.	ST-119.		4E4		Vol	63-1354.												30.	
2nd.	95-91.	16-6658						49-439.	ST-119.		1A1		Vol	63-1112.	AM-60-Z.	KSS-3.	A		D13-137.		41						5G036
1st.	95-61.	16-6658		455				49-337.	ST-119.		8A21		Vol	63-1024.	AM-61-Z.	KSS-3.	A2		D19-137X.	I	41						5G401D, L, M, Y (Ch. 5537)
2nd.	95-794.	16-6660						49-333.	ST-119.		10A3		Vol	63-1083.												5G438, 5G467 (Ch. 5536)	
1st.	95-69.	16-6658		415				49-316.	ST-119.		8A21		V-I	63-1111.	AM-60-Z.	KSS-3.	A		D13-133.		41						5G441, 5G442, 5G461 (Ch. 5536)
2nd.	95-714.	16-6660						49-317.	ST-119.		10A31		Vol	63-1111.	AM-60-Z.	KSS-3.	A		D13-137.		42	G1					5G504 (Ch. 5A03)
1st.	95-417.	16-5712		416				49-162.	ST-104.		6A1		Vol	63-541.	M-63-Z.		A		D13-137.		42	G1					5G510, 5G534, 'Ch. 5A10)
2nd.	95-417.	16-5714						49-154.	ST-114.		8A21		Vol	63-154.												5G57, 5G72, (Ch. 5A02)	
1st.	95-91.	16-6658		455				49-410.	ST-1.		4A1		Vol	63-154.												5G603 (Ch. 5B07)	
2nd.	95-91.	16-6670						49-547.	ST-111.		4A1		Vol	63-154.	AT-112.	KSS-3.	A2		D19-137X.	I	41						5G617, 5G636, (Ch. 5B03, 5B..6)
1st.	95-91.	16-6670		455				49-523.	ST-110.		6A15		Vol	63-1230.	AT-111.	KSS-3.	A2		D19-137X.	I	41						5J217, 247, 255
2nd.	95-59.	16-5712		455				49-337.	ST-110.		52A1		Vol	63-1024.	AM-61-Z.	KSS-3.	A2		D13-137.		42						5K637 (Ch. 5B04)
1st.	95-594.	16-5714		455				49-332.	ST-115.		8A21		Vol	63-1083.												5L22, 237 (Ch. 5525A)	
2nd.	95-594.	16-5714						49-333.	ST-115.		10A3		Vol	63-1083.												5M291 (Ch. 5527)	
1st.	95-594.	16-5714						49-316.	ST-115.		8A21		Vol	63-1111.	AM-60-Z.	KSS-3.	A		D13-137.		42	G1					
2nd.	95-60.	16-6658		14				49-317.	ST-119.		10A31		Vol	63-1111.	AM-60-Z.	KSS-3.	A2		D13-137.		42	G1					
1st.	95-614.	16-6660						49-318.	ST-119.		10A31		Vol	63-1111.	AM-60-Z.	KSS-3.	A		D13-137.		42	G1					
2nd.	95-593.	16-5712		155				49-337.	ST-115.		52A1		Vol	63-1026.	AM-63-Z.	KSS-3.	A2		D13-137.		42	G1					
1st.	95-54.	16-5714						49-393.	ST-115.		8A21		Vol	63-1121.	AM-63-Z.	KSS-3.	A		D13-137.		41						5G484 (Ch. 5534)
2nd.	95-701.	16-5712		455				49-386.	ST-115.		52A1		Vol	63-1121.	AM-63-Z.	KSS-3.	A		D13-137.		41						5G500 (Ch. 5A01)
1st.	95-70.	16-5714						49-408.	ST-115.		4A1		Vol	63-1126.	AM-63-Z.	KSS-3.	A2		D13-137.		42						5G504 (Ch. 5A03)
2nd.	95-72.	16-5658		14				49-408.	ST-115.		4A1		Vol	63-1144.	AM-63-Z.	KSS-3.	A2		D13-137.		42						5G510, 5G534, 'Ch. 5A10)
1st.	95-72.	16-6658		455				49-408.	ST-115.		4A1		Vol	63-1121.	AM-63-Z.	KSS-3.	A		D13-137.		42	G1					
2nd.	95-72.	16-6658						49-454.	ST-105.		5A1		Vol	63-124.	AT-112.	KSS-3.	A		D18-137X.	E	42						5G57, 5G72, (Ch. 5A02)
1st.	95-711.	16-6658		75				49-454.	ST-105.		5A1		Vol	63-124.	AT-112.	KSS-3.	A		D18-137X.	E	42						5G603 (Ch. 5B07)
2nd.	95-712.	16-6658		4.5				49-393.	ST-115.		8A21		Vol	63-1124.	AT-112.	KSS-3.	A		D18-137X.	E	42						5G617, 5G636, (Ch. 5B03, 5B..6)
1st.	95-814.	16-6654		455				49-450.	ST-114.		GA1		Vol	63-1234.	T-112.	KSS-3.	A2		D18-137X.	E	42						

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES						
	No. Tubes	Sylvania or Equivalent	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note		
		Dial Light Type Listed in Parentheses																							
ZENITH—Continued	5M294. (Ch. 5530)..	5 6A8G, 6K7G, 6Q7G, 6F6G, 6X5G..	22-659..			EZ8845S..			TU-88 & TA-25..			Chk	95-516..		†		†								
												Pwr Out	95-500..		A-3878..	T22S47..	A-2931..								
												On S,kr	95-507..		A-3876..	T22S45..	A-2928..	B3							
SR080, 5R086..	5 12SA7GT, 12SK7GT, 12SQ7..	22-1381..	A144D..			UP61U4..		DY-IX10-10..	IL-1/2..			Pwr Out	95-41..		P-6011..	T22R02..	P-2951..								
5R216, 226, 236.. (Ch. 5526)	5 6A8G, 6K7G, 6Q7G, 6F6G, 5Y4G..	22-596..										Pwr Out	95-51..		A-3878..	T22S47..	A-2931..								
5R203, 312, 318.. 317, 337. (Ch. 5528)	5 6A8G, 6K7G, 6Q7G, 6K6G, 6X5G..	22-691..	PRS450-8..			IIR84..	M-8-4..		IL-1/2..			Pwr Out	95-51..		P-6348..	T22R02..	P-3048..								
5R680. (Ch. 5B03)..	5 12SA7GT, 14R7.. 12SK7GT..	22-1026..	PRS450-8..			BR845..	M-8-4..		UT-8..			Chk Out	95-81..		A-3824..	T22S47..	A-2931..								
5R680X (Ch. 5B14)..	5 12SA7GT, 14R7.. 12SK7GT..	22-1026..	AF88D..			UP4215..	DY-4020-150..		IL-24..			Chk Out	On S,kr		A-3876..	T22S45..	A-2928..								
5R686, 688J.. (Ch. 5B13)..	5 12SA7GT, 14R7.. 50L6GT, 35Z5GT..	22-1026..	A144D..			UP415..	DY-4020-150..		IL-14..			Out	On S,kr		A-3876..	T22S45..	A-2928..								
5S042AT.. (Ch. 5C63)	5 7A7, 7Q7, 6S8Q7GT, 6K6GT, 6X5G..	22-1381..										Pwr Out	95-41..		P-6011..	T22R02..	P-2951..								
5S201, 218, 220, 228, 237, 250, 252. (Ch. 5521)..	5 6A8G, 6K7G, 6Q7G, 6F6G, 5Y4G..	22-596..										On Spkr	95-41..		A-3878..	T22S47..	A-2931..								
5S313B.. (Ch. 5535BT)..	5 6J8G, 6U7G, 6Q7G, 6K6G, 6X5G..	22-775..	PRS450-8..			BR845..	M-8-450..		UT-8..			Pwr Out	95-570..		A-3878..	T22S47..	A-2931..								
5S319, 327, 330.. 338, 339. (Ch. 5529)	5 6A8G, 6K7G, 6Q7G, 6K6G, 6X5G..	22-700..	PRS450-8..			BR845..	M-8-450..		UT-8..			Pwr Out	95-51..		P-6348..	T22R02..	P-3048..								
5X230, 248, 274.. (Ch. 5523)..	5 6A8G, 6K7G, 6Q7G, 6V6G, 6X5G..	22-647..	PRS450-8-B..			EZ8845..	M-ZX8-450..		UT-88..			Chk	95-467..		A-3877..	T22S46..	A-2930..								
6A203, 223, 229, 239, 241. (Ch. 5640AT)	6 6L7S, 6J5G, 6K7G, 6Q7G, 6V6G, 5Y4G..	22-633..										Pwr Out	206-192..		A-3877..	T22S45..	A-2930..								
6B321. (Ch. 5653)..	6 6D8G, 6S7G, 6T7G, 6G6G..	22-741..	PRS250-12..			PR117..	UP61J2..		UT-1/2..			Pwr Out	206-194..		A-3877..	T22S45..	A-2930..								
6D014, 014W, 029, 029G. (Ch. 6C01)..	6 14C7, 14Q7, 12SQ7GT, 35LG7T, 35Z5GT..	22-1519..	AF84D20A..			UPECJ4..	DY-320-450..		IL-24..			Pwr Out	95-45..		A-3878..	T22S45..	A-2930..								
6D015, 5D015Y, 6C030..	6 12S7J, 12SA7GT, 12BA6..	22-1519..	AF844D..			UPECJ4..	DY-40320-150..		IL-24..			Out	On S,kr		A-3330..	T22S45..	A-3031..								
6D202, 219, 221, 238.. (Ch. 5639)..	5 6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G..	22-560..				EZ3215C..	DSB-303..		IA-330.. & TA-25..			Chk	95-41..		A-3876..	T22S45..	A-2928..								
6D302, 311, 326.. 336, 360. (Ch. 5646)..	5 6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G..	22-680..	PRS150-1..			BR1615..	M-16-150..		UT-161..			Out	206-237..		A-3876..	T22S45..	A-2928..								
6D312, 316, 317, 337..	5 6A8G, 6K7G, 6Q7G, 25L6G, 25Z6G..	22-680..	PRS150-1..			BR4015..	M-40-150..		UT-401..			Out	206-241..		A-3876..	T22S45..	A-2928..								
6D315. (Ch. 5657)..	5 6A8G, 6J7G, 6Q7G, 25L6G, 25Z6G..	22-680..	PRS150-1F..			BR1615..	M-16-150..		UT-161..			Out	206-241..		A-3876..	T22S45..	A-2928..								
6D410, 411, 425.. (Ch. 5659, 5663)..	5 12A8G, 12K7G, 12Q7G, 35LG6..	22-835..				PR117..	DSB-303..		TA-1/2.. & TA-2..			Chk	206-194..		C-1080..	T22S45..	C-2977..								
6D413, 414.. (Ch. 5660, 5664)..	5 12A8G, 12K7G, 12Q7G, 35LG6..	22-835..				EZ3215C..	UW1..		TA-330.. & TA-25..			Chk	206-3/4..		A-3876..	T22S45..	A-2928..								
6D426, 427, 445, 455.. (Ch. 5660, 5664)..	5 12A8G, 12K7G, 12Q7G, 35LG6..	22-101..	AF441..			UP2215..	DY-2X.. -150..		IL-1..			Chk	206-3/4..		C-1080..	T22S45..	C-2977..								
6D512, 525, 526.. (Ch. 6A01, 6A10)..	6 12J7G, 12SA7G, 12K7G..	22-101..	AF441..			UP2215..	DY-2X.. -150..		IL-1..			Chk	206-3/4..		A-3876..	T22S45..	A-2928..								
6D512, 512W, 539.. (Ch. 6A16)..	6 14H7, 12SA7G, 12K7G..	22-101..	AF84D4A..			UP4215..	DY-305..		IL-1..			Chk	206-414..		A-3876..	T22S45..	A-2928..								
6D516. (Ch. 6A24)..	6 12J7G, 12SA7G, 12K7G..	22-1014..	AF44D..			UP2215..	DY-2X20-150..		EL-22..			Out	On Spkr		A-3876..	T22S45..	A-2928..								
6D520, 520W, 538.. (Ch. 6A26)..	6 12J7G, 12SA7G, 12K7G..	22-1014..	A144U..			UP2215..	DY-2X20-150..		EL-2..			Out	On S,kr		A-3876..	T22S45..	A-2928..								
6I525, 526.. (Ch. 6A01)..	6 12J7G, 12SA7G, 12K7G..	22-1014..	A-441..			UP2215..	DY-2X20-150..		IL-1..			Chk	95-71..		C-1227..	T20C53..	C-2975..								
6D539. (Ch. 6A16)..	6 14H7, 12SA7G, 12K7G..	22-1073..	AF84D4A..			UP4215..	DY-305..		EL-343..			Out	206-414..		A-3876..	T22S45..	A-2928..								
6D612, 612W, 622, 628.. (Ch. 6B04)..	6 12J7G, 12SA7G, 12K7G..	22-1014..	AF44D..			UP2215..	DY-2X20-150..		EL-22..			Out	On Spkr		A-376..	T22S45..	A-2928..								
6D614, 614W, 621, 629.. (Ch. 6B01)..	6 14C7, 14Q7, 14R7, 14A7/12B7..	22-1014..	AF44D..			UP2215..	DY-2X20-150..		EL-2..			Out	On S,kr		A-3876..	T22S45..	A-2928..								
6D615, 615W, 623, 630.. (Ch. 6B05)..	6 14C7, 14Q7, 14R7, 14A7/12B7..	22-1014..	AF44D..			UP2215..	DY-2X20-150..		EL-2..			Out	On S,kr		A-3876..	T22S45..	A-2928..								
6D620, 624, 644.. (Ch. 6B14)..	6 12SK7GT, 12SA7GT, 12SQ7GT..	22-128..	A-44D..			UP2215..	DY-2X20-150..		IL-27..			Out	On S,kr		A-3876..	T22S45..	A-2928..								
6D6212, 612W, 622, 628.. (Ch. 6B04)..	6 12J7G, 12SA7G, 12K7G..	22-2014..	A144U..			UP2215..	DY-2X20-150..		IL-27..			Out	On S,kr		A-3876..	T22S45..	A-2928..								
6D6214. (Ch. 6B01)..	6 14C7, 14Q7, 14R7, 14A7/12B7..	22-1014..	AF44D..			UP2215..	DY-2X20-150..		EL-27..			Out	On S, I		A-3876..	T22S45..	A-2928..								
6D6215. (Ch. 6B05)..	6 14C7, 14Q7, 14R7, 14A7/12B7..	22-101..	AF44D..			UP2215..	DY-2X20-150..		EL-22..			Out	On S, I		A-3876..	T22S45..	A-2928..								

Section D IF COILS				Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			Photofact Set No.	MFR. & MODEL					
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note		
1st.	95-504	16-5712		456				41-237	5-117	F8	8EV4		Vol	63-952	AT-78	KSS-3	A	D13-133X	E	41		190-13	5321	Continued	ZENITH SM294 (Ch. 5530)		
2nd.	95-504	16-5714						13-118	ST-1		5A1		Vol	63-1314												5R080, 5R086	
1st.	95-911	16-6658		456				41-202					Vol	63-565	M-60-Z	A	D13-133		11	41						W215, 226, 236 (Ch. 5526)	
2nd.	95-916	16-6660						41-218					Vol	63-955	AM-64-Z	KSS-3	A	D13-130	E	41						5R303, 312, 316, 317, 337 (Ch. 5528)	
1st.	95-401	16-5712		455				41-191	5-1-3		FA1		Vol	63-1112	AM-60-Z	K.S-3	A	D13-133	E	41						5R680 (Ch. SB03)	
2nd.	95-401	16-5714						49-451	ST-11		4A1		Vol	63-1111	AM-60-Z	WSS-3	A	D13-133	I	41						5R680X (Ch. SB14)	
1st.	95-811	16-6658		455				49-480	ST-114		5E4		Vol	63-1117	AM-60-Z	KSS-3	A	D13-133	I	41						5R686, 686J, (Ch. SB13)	
2nd.	95-811	16-6660						11-518					Vol	63-1348													5S042AT (Ch. SC63)
1st.	95-919	16-6660		455				11-178					V.I	11-565	M-60-Z	A	D13-133		41	G1						5S201, 218, 219, 228, 237, 250, 252, (Ch. 5521)	
2nd.	95-919	16-5714						49-180																			
1st.	95-919	16-5714						49-179																			
2nd.	95-919	16-5714						49-208																			
1st.	95-595	16-5712		455				49-295					V.I	63-1027													5S313B (Ch. 5535BT)
2nd.	95-596	16-5714						49-242					Vol	63-956	A11-64-Z	KSS-3	A	D13-133	I	41						5S319, 327, 330, 338, 339 (Ch. 5529)	
1st.	95-501			455				49-244																			
2nd.	95-414							49-240																			
1st.	95-501							11-111	ST-114	F7	6A1	F7	Vol	63-520	M-60-Z			D13-133		41	G1						5X230, 248, 274, (Ch. 5523)
2nd.	95-414							41-111	ST-115	F7	8A21	F7	Tone	63-521	M-46-Z			D13-123		G1	G1						
1st.	95-461			455				49-226		F2			Vol	63-525	M-60-Z	A	D11-11		41	G1							
2nd.	95-462							49-229		F2																6A203, 223, 229, 239, 241 (Ch. 5640AT)	
1st.	95-521	16-5712		455				49-741	ST-114		6A1		Vol	63-983	AM-64-Z	KSS-3	A	D13-130	E	41						6B321 (Ch. 5653)	
2nd.	95-531	16-5714						49-549	ST-114		5A15		Vol	22-151	AT-78	KSS-3	A	D13-133X	E	41							
1st.	95-81	16-6658						49-549	ST-114		5A15		Vol	63-687													
2nd.	95-554	16-6660						11-111	ST-111		4A1		Vol	63-1337													
1st.	95-929	16-6658		455				49-237	ST-114		5E27		Vol	63-687	11-111	A	D13-133		41	G1						6D014, 014W, 029, 029G, (Ch. 6C01)	
2nd.	95-930	16-6660						49-237	ST-114		5E45		Vol	63-953	AM-64-Z	V.S-3	A	D13-130	E	41						6D030	
1st.	95-407	16-5712		456				49-237	ST-114		5E45		Vol	63-1004												6D202, 219, 221, 238, (Ch. 5639)	
2nd.	95-407	16-5714						49-237	ST-114		5E45		Vol	63-1004												6U302, 311, 326, 331, 360, (Ch. 5646)	
1st.	95-511	16-5712		455	142-9			49-237	ST-114		5E45		Vol	63-1028												6D312, 316, 317, 318	
2nd.	95-514	16-5714						49-237	ST-114		5E45		Vol	63-1028												6D-15, (Ch. 5657)	
1st.	S-6902			455				49-114	ST-113		4A1		Vol	63-1028													
2nd.	S-6903							49-114	ST-113		4A1		Vol	63-1028													
1st.	S-6902			455				49-324	ST-113		4A1		Vol	63-1028													
2nd.	S-6903							49-330	ST-113		5A1		Vol	63-1028													
1st.	95-691	16-5712		455				49-385	ST-191		4E45		Vol	63-1117	AM-60-Z	KSS-3	A	II-111	I	41							
2nd.	95-697	16-5714						49-403	ST-191		4E45		Vol	63-1117	AM-60-Z	KSS-3	A	II-111X	E	41							
1st.	95-756	16-6658		455				42-414	ST-194		5-15		Vol	63-1130	AM-60-Z	KSS-3	A	II-111X	E	41							
2nd.	95-601	16-6660						42-414	ST-194		5-15														6D510, 525, 526, (Ch. 6A01, 6A10)		
1st.	95-757	16-6660						42-414	ST-194		5-15														6D512, 512W, 539, (Ch. 6A16)		
1st.	95-760	16-6658		455				49-444	ST-194		51-1		Vol	63-1137	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	95-790	16-5712						49-444	ST-194		4E45		Vol	63-1149	AT-78	KSS-3	A	D13-133X	E	41							
1st.	95-691	16-5712		155				49-444	ST-194		4E45		Vol	63-1149	AT-78	KSS-3	A	D13-133X	E	41							
2nd.	95-697	16-5714						41-145	ST-195		4E45		Vol	63-1117	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	95-696	16-5712		455				49-403	ST-195		4E45		Vol	63-1117	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	95-697	16-5714						49-414	ST-195		4E45		Vol	63-1131	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	95-761	16-6658		455				49-414	ST-195		4E45		Vol	63-1131	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	95-759	16-6660						49-185	S-196		4E45		Vol	63-1112	AM-60-Z	KSS-3	A	D13-133	I	41							
1st.	95-601							49-185	ST-194		5E45		Vol	63-1238	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	95-808	16-6658		455				49-185	ST-194		5E45		Vol	63-1112	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	95-809	16-6658		455				49-185	ST-194		5E45		Vol	63-1112	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	95-807	16-6658		455				49-185	ST-194		5E45		Vol	63-1238	AM-60-Z	KSS-3	A	D13-133	E	41							
1st.	95-808	16-6658		455				49-185	ST-194		5E45		Vol	63-1238	AM-60-Z	KSS-3	A	D13-133	E	41							
2nd.	95-807	16-6658		455				49-185	ST-194		5E45		Vol	63-1238	AT-78	KSS-3	A	D13-133X	E	41							
1st.	95-806	16-6658		455				49-185	ST-194		5E45		Vol	63-1238	AT-78	KSS-3	A	D13-133X	E	41							
2nd.	95-807	16-6658		455				49-414	ST-114		5E45		Vol	63-1233												6D2514 (Ch. 6B01)	
1st.	95-806	16-6658		455				49-414	ST-114		5E45		Vol	63-1233												6D2615 (Ch. 6B05)	

+ Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses -	Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note	
ZENITH - Continued 6DL260. (Ch. 6814)	6	12SK7GT, 12SA7GT, 12SQ7GT, 35L6GT, 35Z5G	22-1280	AF44D		UP2215		DY-2X20-150	EL-22		Out	On Spkr.	A-3876		T22S45		A-2928						
6DL120, 121, 122, (Ch. 5636)	5	6A8 G, 6K7 G, 6Q7 G, 25A6 G, 25Z6 G	22-517	PRSA150-20-20		BRD2215	M-2X20-150	TA-220		Chk	95-345		↑										
6G001, 6G001Y	6	1L5, 1LA6, 1LH4, 3Q5GT, 11726GT	22-1443	AF88D & PRS25-100	A3	BRH1225	M-8450	UT-8		Out	On Spkr.	A-3877		T22S46		A-2930							G6B60
				AF844D		UP5015 & BRH1225	DY-3X40-150	EL-432 & UHC-212	A3	Out	On Spkr.	A-3878		T22S47		A-2931							
6G004Y	6	1L5, 1LA6, 1LH4, 3Q5GT, 11726GT	22-1443	AF88D & PRS25-100	A3	BRH1225	DY-4020-150	EL-313		Out	On Spkr.	A-3878		T22S47		A-2931							G6B60
6G038. (Ch 6C50).	6	1N5GT, 1A7GT, 1LD5, 3Q5GT, 11726GT	22-1047	AF844D	A4	AF44D40A	DY-40-150 & M-250-12	EL-14 & UHC-212		Out	206-454	A-3849		T22S87		A-2901							↑
6G501F, L, M, 6G505. (Ch. 6A19)	6	1L5, 1LA6, 1LH4, 3Q5G, 11726G	22-1026	AF88D		UP4215	DY-4020-150	EL-24		Out	206-420	A-3329		T22S47		A-2927							G6B60
6G533, 560. (Ch. 6A25)	6	1L5, 1LA6, 1LH4, 3Q5G, 11726G	22-1026	AF88D		UP4215C	DY-4020-150	EL-343		Out	On Spkr.	A-3329		T22S47		A-2927							↑
6G601D, L, M, MH, ML. (Ch. 6B03)	6	1L5, 1LA6, 1LH4, 3Q5G, 11726G	22-1026	AF844A		UP4215C	DY-305	EL-343		Out	On Spkr.	A-3329		T22S47		A-2927							G6B60
6G638, 660. (Ch. 6B09)	6	1N5GT, 1A7G, 1M5GT, 3Q5GT, 11726G	22-1047	AF844D		UP43215	DY-4020-150	EL-313		Out	On Spkr.	A-3329		T22S47		A-2927							↑
6J230, 257. (Ch. 5642)	6	6D8G, 6S7G, 6T7G, 6L5G, 1J6G, 6ZY5G	22-577			EZ8845S		TU-88 & TA-25		Chk	95-324		↑										
6J322, 357.	6	6D8G, 6S7G, 6T7G, 6G6G, 6ZY5G	22-405	PRS50-10		BR105	M-10-50	TA-510		Pwr	95-425												A-2938
			22-742			UP6C120	DY-3X20-450		Pwr	95-555													
6J436, 463. (Ch. 5679)	6	6D8G, 6S7G, 6T7G, 6G6G, 6ZY5G	22-974	AF44F		UP2225	DY-2X20-350	EL-120		Pwr	95-645												
6M292, 293. (Ch. 5645)	6	6K7G, 6A8G, 6Q7G, 6V6G, 6X5G	22-656			EZ8845S		TU-88 & TA-25		Chk	95-497												A-9231
6M295	6	6K7G, 6A8G, 6Q7G, 6V6G, 6X5G	22-656			EZ8845S		TU-88 & TA-25		Pwr	95-498												A-2930
6M390	6	78, 6A7, 75, 42, 84 (51, 55)	22-721	AF22J4A		UP1145C	DY-316	EL-202		Pwr	95-499												A-2930
6MF080. (Ch. 6CA1)	6	7A7, 7B8, 7B6, 7C5, 7Y4 (55)	22-1387	AF32K4A		UP4CJ5	DY-2X20-350 & M-25-25	EL-212		Pwr	95-566												A-2931
6MF490.	6	7A7, 7B8, 7B6, 7C5, 7Y4	22-955	AF22J4A		UP1145C	DY-316	EL-202		Pwr	95-565												A-2931
6MF590, 591 (Ch. 6A21)	6	7A7, 7B8, 7B6, 7C5, 7Y4 (51)	22-955	AF22J4A		UP1145C	DY-316	EL-202		Pwr	95-914												A-2930
6MF593, (Ch. 6A23)	6	7A7, 7B8, 7B6, 7B5, 6X5GT	22-1179	AF22J4A		UP1145C	DY-316	EL-202		Pwr	95-915												A-2931
6MF690.	6	7A7, 7B8, 7B6, 7C5, 7Y4 (55)	22-1305	AF44J4A		UP2245C	DY-315	EL-350		Pwr	95-782												A-2931
6MH081 (DB46)	6	7A7, 7B8, 7B6, 7C5, 7Y4	22-1378							Pwr	95-782												A-2930
6MM089 (DB47)	6	7A7, 7B8, 7B6, 7C5, 7Y4	22-1644	AF32K4A			DY-2X20-350	EL-311	A4	Pwr	95-795												A-2930
6MH699 (DB42)	6	7A7, 7B8, 7B6, 7C5, 7Y4 (51)	22-1233	AF32K4A		UP2235C	DY-310	EL-153		Pwr	95-832												A-2930
6MM889 (DB48)	6	7A7, 7B8, 6B86, 7B6, 6V6GT, 7Y4 (744)	22-1644	AF44J		UP2235	DY-2X20-350	EL-212	A9	Pwr	95-837												A-2930
6MN495 (AC4389)	6	6K7GT, 6SA7GT, 6Q7GT, 6K6GT, 6X5GT	22-904	AF22J4A		UP1145	DY-316	EL-202		Pwr	95-1066												A-2930
6MN496 (AC4289)	6	6K7GT, 6SA7GT, 6Q7GT, 6V6GT	22-917	AF44J4A		UP2245C	DY-315	EL-350		Pwr	95-1030												A-2900
6MN595 (AC6011)	6	7A7, 7B8, 7B6, 7B5, 6X5GT, 024 (51)	22-904	AF22J4A		UP1145	DY-316	EL-202		Pwr	95-832												A-2904
6MN695	6	7A7, 7B8, 7B6, 7C5, 7Y4 (51)	22-1233	AF32K4A		UP2235C	DY-310	EL-153		Pwr	95-837												A-2931
6MW693	6	7A7, 7B8, 7B6, 7C5, 7Y4	22-1233	AF32K4A		UP2235C	DY-310	EL-153		Pwr	95-886												A-2930
6P416, 417 (Ch. 5661, 5665)	5	12A8G, 12K7G, 12Q7G, 35L6G, 50Z7G, (100-79 Ballast)	22-840							Out	206-303												A-2928
6P418, 419 (Ch. 5662, 5666)	5	12A8G, 12K7G, 12Q7G, 35L6G, 50Z7G	22-840							Out	206-303												A-2928
6P428, 429, 430, 447, 448, 457. (Ch. 5662, 5666)	5	12A8G, 12K7G, 12Q7G, 35L6G, 50Z7G	22-840							Out	206-303												A-2928
										Out	206-303												A-2928
										Out	206-298												A-2928
										Out	206-307												A-2928

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS							Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astmatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.			
1st.	95-869	16-6658		455				49-492	ST-194		5E45		Vol	63-1238	KSS-1	A	D13-133	I	41				Continued	ZENITH	6D2620 (Ch. 6B14)				
2nd.	95-870							49-141	ST-195		SE27		Vol	63-54	M-60-Z	A2	D13-133		42	I					6DL120, 121, 122, (Ch. 5636)				
1st.	95-378	16-6674		456				49-512	S-111		5A1		Vol	63-1211	AM-63-Z	KSS-3	A2	D13-117	I	47					3.	6G001, 6G001Y			
2nd.	95-347							41-12	5-111		5A1		Vol	63-1211	AM-63-Z	KSS-3	A2	D13-117	I	47									
1st.	95-414	16-6674		455				19-404	ST-117		8A1		Vol	63-1244EX				D18-139XX	J						20.	6G004Y			
2nd.	95-801	16-6674						49-445	ST-111	F3	8A1		Vol	63-1111	M-63-Z	A2	D13-137		42	I					32.	6G038 (Ch. 6C50)			
1st.	95-414	16-6674		455				49-437	ST-111	F3	8A1		Vol	63-1111	M-63-Z	A2	D13-137		42	I						6G501F, L, M, 6G505, (Ch. 6A19)			
2nd.	95-805	16-6674		455				49-445	ST-105		52A1		Vol	63-1111	AM-63-Z	KSS-3	A2	D13-137		42	I					6G533, 560, (Ch. 6A25)			
1st.	95-821	16-5712		455				49-414	S-115	F3	8A21		Vol	63-1244											5G601D, L, M, MH, ML, (Ch. 6B03)				
2nd.	95-822	16-5712						49-414	ST-111	F3	10A11		Vol	63-1244											6G638, 660, (Ch. 6B09)				
1st.	95-739	16-6654		455				49-162	ST-108		6A1		Vol	63-1111	M-63-Z	A2	D13-137		42	G	190-11	5300	H1	6J230, 257, (Ch. 5642)					
2nd.	95-740							49-164	ST-115		FA2		Vol	63-1111	M-63-Z	A2	D13-137		42	G	190-11	5300	H1						
1st.	95-792	16-6674		455				49-270	ST-108		6A1		Vol	63-991	AM-51-Z	KSS-3	A2	D13-137		42	I	12	190-11	I	II.	6J322, 357			
2nd.	95-793							49-270	ST-119		10A31		Vol	63-991	AM-51-Z	KSS-3	A2	D13-137		42	I	12	190-11	I	II.				
1st.	95-804	16-6674		455				49-348	ST-111	F3	8A21		Vol	63-991	AT-95	KSS-3	A2	D18-139XX	E	42	190-11	5300	H1	6J436, 463, (Ch. 5679)					
2nd.	95-805							49-348	ST-111	F3	10A11		Vol	63-991	AT-95	KSS-3	A2	D18-139XX	E	42	190-11	5300	H1						
1st.	95-821	16-6674		455				49-230	ST-119		F2		Vol	63-951											6M292, 293, (Ch. 5645)				
2nd.	95-822							49-230	ST-119		F2		Vol	63-951															
1st.	95-811	16-6674		152.5				49-236		F2		I2	Vol	63-951											6M295				
2nd.	95-801							49-236		F2		I2	Vol	63-951															
1st.	95-561	16-6674		415				49-285	ST-111	F8	8EV1		Vol	63-991										190-14	5321	H1	6M390		
2nd.	95-564	16-6660		415				49-285	ST-111	F8	8EV1		Vol	63-991															
1st.	95-916			415				49-574	691 V	F13	Vcf-Tone		Vol	63-1111											190-20	5301	H1	6MF080 (Ch. 6CA1)	
2nd.	95-942			415				49-539		F13	Sen		Vol	63-1379												190-15	5300	H1	6MF490
1st.	S-7573	16-6658		455				49-341	7EV6		Vol		Vol	63-271												6MF590, 591, (Ch. 6A21)			
2nd.	S-7574	16-6660		455				49-421			Sens		Vol	63-991															
1st.	95-742	16-6658		455				49-421			Tone		Vol	63-1197															
2nd.	95-743							49-421			Sens		Vol	63-1131															
1st.	95-789	16-6658		455				49-434	ST-105	F8	5EV6		Vol	63-1197											190-15	5300	I	6MF593 (Ch. 6A23)	
2nd.	95-794							49-434	ST-105	F13	5EV6		Vol	63-1197															
1st.	95-811	16-6674		210				49-411			6U1 V		Vol	63-1258											190-19	5314	H1	6MF690	
2nd.	95-810							49-411			6U1 V		Vol	63-1258															
1st.	95-916			265				49-134	ST-112		6FV1		Vol & Tone	63-1267											190-20	5301	H1	6MH08I (DB46)	
2nd.	95-917			265				49-134	ST-112		6FV1		Vol & Tone	63-1334															
1st.	95-915			265				49-593	ST-112		1EV6		Vol & Tone	63-1379											190-20	5314	I	6MH089 (DB47)	
2nd.	95-917			265				49-593	ST-112		1EV6		Vol & Tone	63-1539															
1st.	95-819			265				49-476	ST-111		5EV6		Vol & Tone	63-1379											190-19	5314	H1	6MH699 (DB42)	
2nd.	95-820			265				49-623			69A3		Vol & Tone	63-1248											190-22	5314	H1	6MI:889 (DB48)	
1st.	S-7346	16-6658		455				49-325	ST-108	F8	6EV6		Vol & Tone	63-1579												6MN495 (AC4389)			
2nd.	S-7359			455				49-324	ST-113	F8	4A1		Vol & Tone	63-1047	A1-104	KSS-3	A	D13-137X	E	41	190-19	5314	H1	6MN496 (AC4289)					
1st.	S-7346	16-6658		455				49-325	ST-113	F8	8EV6		Vol & Tone	63-1040	A1-104	KSS-3	A	D13-137X	E	41	190-19	5314	H1						
2nd.	S-7359							49-325					Vol & Tone	63-1040	A1-104	KSS-3	A	D13-137X	E	41	190-19	5314	H1						
1st.	95-711	16-6651		455				49-412			11V1		Vol	63-1128	AM-64-Z	KSS-3	A	D13-130	E	41	190-15	5314	H1	6MN595 (AC6011)					
2nd.	95-716							49-412			11V1		Vol	63-1128	AM-64-Z	KSS-3	A	D13-130	E	41	190-19	5314	H1						
1st.	95-819	16-6652		265				49-100	ST-115	F8	11V1		Vol	63-1200											190-19	5314	I	6MN695	
2nd.	95-821			265				49-100	ST-115	F8	11V1		Vol	63-1200															
1st.	95-815	16-6652		265				49-471			71V1		Vol	63-1254											190-19	5314	H1	6MW593	
2nd.	95-817			265				49-471			71V1		Vol	63-1254															
1st.	S-6915	16-6658		455				49-303					Vol	63-1024												6P416, 417 (Ch. 5661, 5665)			
2nd.	S-6914			455				49-303					Vol	63-1024															
1st.	S-6914	16-6651		455				49-298					Vol	63-1024												6P418, 419 (Ch. 5662, 5666)			
2nd.	S-6914			455				49-307					Vol	63-1024												6P428, 429, 430, 447, 448, 457, (Ch. 5662, 5666)			

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubs	Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr.	Aerovox	No.	Cornell-Dubilier	No.	Solar	No.	Sprague	No.	Use	Mfr.	Stancor	No.	Thordarson	No.	Merit	No.	Eveready Part No.	Note	Burgess Part No.	Note
			Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	Part No.	"A"	"B"	"A"	"B"	
ZENITH—Continued																							
6R084 (Ch. 6C21)	6	6SK7, 6SA7, 6SQ7, 6K6GT, 6X5GT ("44")	22-1372	PRS450-16		BR1645		DHS-2X16-450	TU-1518			Pwr Out	95-911..	P-6120	T22R02		P-2951..						
6R087 (Ch. 6C22)	6	6SK7GT, 6SA7, 6SQ7GT, 6K6GT, 6X5GT ("44")	22-1372		EZ5116							Chk	95-1039..	A-3877	T22S46	B3	A-2930..						
6R481 (Ch. 5675)	5	12A8G, 12K7G, 12Q7G, 35L6G, 50Z7G	22-894	PRS450-30		BR3045		DY-311.. M-30-450	EL-330.. UT-30..			Pwr Out	95-911..	P-6120	T22R02		C-2990..						
6R485 (5672-P)	5	12A8G, 12K7G, 12Q7G, 35L6G, 50Z7G	22-894	PRS450-30		BR3045		DY-311.. M-30-450	EL-330.. UT-30..			Out	206-320..	A-3876	T22S45		P-2951..						
6R583, 592, (Ch. 6A08)	6	12J7G, 12SA7G, 12K7GT, 12SQ7GT, 35L6G, 35Z5G	22-1014	AF66D	UP3315		DY-2X30-150..	EL-230..			Chk	95-713..	C-1711..	T20C33		C-2975..							
6R631 (Ch. 6B02)	6	7A7, 7Q7, R7, 7C7, 6K6GT, 6X5G, 688, (Ch. 6B06)	22-1221									Pwr Out	95-828..	P-6348	T22RC2		A-2928..						
6R683, 684, 687R, 688, (Ch. 6B06)	6	6SK7GT, 6SA7GT, 6SQ7GT, 6K6GT, 6X5G, 688, (Ch. 6B06)	22-1719	PRS350-24		BR2045		M-20-350..	UT-203..			Out	95-840..	P-6348	T22R02		P-3048..						
6R886..	6	12SA7GT, 12SK7, 6AQ6, 6C4, 50A4, 35W4	22-1707			UP44315C..	A3	DY-419..	A3	EL-340..		Out	95-1025..	A-3876	T22S45		A-2928..						
6S071T, (Ch. 5C61T)	6	12SA7GT, 12SK7GT, 7C6, 50L6GT, 35Z5G, 7F7	22-1441									Out	On Spkr.	A-3876	T22S45		A-2928..						
6S203, 222, 223, 229, 239, 241, (Ch. 5638)	6	6A8G, 6K7G, 6H6G, 6F5G, 6F6G, 5Y4G	22-596									Pwr Out	95-415..	P-6011..	T22R02		P-2951..						
6S254, 256, (Ch. 5644)	6	6A8G, 6K7G, 6H6G, 6F5G, 6F6G, 5Y4G	22-551	GL450-16	KR516A	D-16-450	PLS-16..					Pwr Out	95-438..	P-6011	T22R02		P-2951..						
6S301, 304, 305, 306, 321, 322, 340, (Ch. 5651)	6	6A8G, 6K7G, 6J5G, 6F5G, 6F6G, 5X5G	22-719	PRS450-16	BR1545	M-16-450	PLS-20..					Pwr Out	95-526..	P-6011	T22R02		P-2951..						
6S330, 361, (Ch. 5648)	6	6A8G, 6K7G, 6H6G, 6F5G, 6F6G, 5Y4G	22-596									Pwr Out	95-56..	A-3822	T22S47		A-2900..						
6S341, 362..	6	6A8G, 6K7G, 6H6G, 6F5G, 6F6G, 5Y4G ("44")	22-551	GL450-16	KR516A	D-16-450	PLS-16..					Pwr Out	95-249..	A-3822	T22S47		A-2900..						
6S439, 469, (Ch. 5678)	6	26K7G, 6A8G, 6Q7G, 6F6G, 6X5G, 22-575..	22-576..	PRS450-20	BR2045	M-20-450..	PLS-20..					Pwr Out	95-255..	A-3822	T22S47		A-2900..						
6S511, 527, 528, 580, (Ch. 6A02, 04, 13, 14)	6	7H7, 7B8, 7A7, 7B6, 6K6G, 6X5G, 22-1029										Pwr Out	95-266..	A-3822	T22S47		A-2900..						
6S532 (Ch. 6A05R)	6	7H7, 7B8, 7A7, 7B6, 6F8G, 6X5G, 22-1034	22-1036	AF44J	UP2245	DY-2X20-450..	EL-220..					Pwr Out	95-345..	P-6011	T22R02		P-2951..						
6S546, 556, (Ch. 6A05)	6	7H7, 7B8, 7A7, 7B6, 6F6G, 6X5G, 22-1034		AF44J	UP2245	DY-2X20-450..	EL-220..					Pwr Out	95-348..	A-3822	T22S47		A-2900..						
6S580..	6	7H7, 7B8, 7A7, 7B6, 6K6G, 6X5G, 22-1029										Pwr Out	95-356..	A-3822	T22S47		A-2900..						
6S586, 597, (Ch. 6A20)	6	7H7, 7B8, 7A7, 7B6, 6F6G, 6X5G, 22-1034	22-1036	AF44J	UP2245	DY-2X20-450..	EL-220..					Pwr Out	95-364..	A-3822	T22S47		A-2900..						
6S632, 646, 656, (Ch. 6B08)	6	7H7, 7B8, 7A7, 7B6, 6F6G, 6X5G, 22-1034	22-1036	AF44J	UP2245	DY-2X20-450..	EL-220..					Pwr Out	95-700..	P-6348	T22R01		P-3048..						
7D203, 222, 223, 229, 239, 241, 243, 253, (Ch. 5710)	6	6A8G, 6K7G, 6H6G, 6F5G, 25L6G, 25Z6G	22-559									Pwr Out	95-710..	P-6348	T22R02		P-3048..						
7G605, (Ch. 7B04)	7	ILN5, ILA6, ILE3, ILD5, 3Q5G, 117Z6G..	22-1307									Pwr Out	95-710..	A-3878	T22S47		A-2931..						
7J045T, (Ch. 7C61T)	7	7H7, 7B7, 7C6, 6K8GT, 6L5G, 1J6G, 6X5GT, 22-1198	22-1069	PRS25-25	BR252A	M-25-25..	TA-25..					Pwr Out	95-710..	P-6348	T22R02		P-3048..						
7J232, 259, (Ch. 7F11)	7	657G, 6D8G, 6T7G, 6L5G, 1J6G, 6ZYG..	22-577		EZ8845S		TU-88.. & TA-25..					Pwr Out	95-710..	P-6348	T22R02		P-3048..						
7J323, 368, (Ch. 5715)	7	6S7G, 6D8G, 6T7G, 6G6G, 6ZYG..	22-405	PRS50-10	BR105.. UP6CJ20	M-10-50.. DY-3X20-450..	TA-510..					Pwr Out	95-710..	A-3824	T22S47		A-2931..						
7ML592, (Ch. 7A09)	7	7A7, 7B8, 7B6, 7C5, 6X5GT/024 (44)	22-917	AF44J4A	BR1225.. UP2245C	M-16-250.. DY-315..	UT-122.. EL-350..					Pwr Out	95-710..	A-3824	T22S47		A-2931..						
7MN596, (Ch. AC6001)	7	7A7, 7B8, 7B6, 7C5, 6X5GT/024 (51)	22-917	AF44J4A	UP2245C	DY-315..	EL-350..					Pwr Out	95-710..	A-3824	T22S47		A-2931..						
7R070 (Ch. 6C08)	7	6SA7, 7R7, 7F7, 6SC7, 25L6GT, 25Z6GT	22-1381	AF8D	UP4025.. BR1645	DY-3X40-150.. M-16-450..	EL-340.. EL-14.. UT-16..					Pwr Out	95-710..	A-3824	T22S47		A-2931..						
7S204, 232, 240, 242, 258, 260, 261, (Ch. 5709)	7	6A8G, 6K7G, 6T5G, 6H6G, 6F5G, 6F6G, 5Y4G..	22-569	PRS450-16								Pwr Out	95-418..	P-6012.. A-3822	T22R04.. T22S47		P-2952.. A-2931						

†Information not available.

Section D IF COILS				Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS				MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Charostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofact Set No.	
1st..	95-909			455		L-76-S		49-515	ST-194		5E45		Vol	63-1340	AT-90	KSS-3	A		D19-133X		41			Continued—	ZENITH R084 (Ch. 6C21)		
2nd..	95-910			455		t		49-581	ST-120	F13	10A4	F13	Tone	63-1341	AM-63-Z	KSS-3	A		D13-137		41				GR087 (Ch. 6C22)		
1st..	95-909			455				49-526			63-1340		Vol	63-1028		KSS-3	A		D19-133		41						
2nd..	95-910			455		142-23		49-326					V	63-10											R481 (Ch. 5675)		
1st..	S-6-0			455				49-326																	GR485 (Ch. 5672-P)		
2nd..	S-690			455		14..		4.. 3																	6R583, 592 (Ch. 6A08)		
1st..	S-69.. 2			455																						6R581 (Ch. 6B02)	
2nd..	S-6903			455																						R683, 684, 687R, 688, (Ch. 6B06)	
1st..	95-696	1-66 ..		455	1 - 1	..		4 - 4	S**.1		'A		Vol	63-1112	AM-60-Z	KSS-3	A		D13-133		E	41				R886	
2nd..	95-697			455				49-456					Vol	63-12	AT-116	KS-3	A		D18-139X		E	41					
1st..	95-823	15-6658		455				49-467					Vol	63-1246	AT-90	KSS-3	A		D19-133X		E	41					
2nd..	95-825			455		142-5		49-459					Vol	63-116	AM-60-Z	KSS-3	A		D13-133		E	41					
1st..	95-841	16-6658		455		142-55		49-465					Vol	63-1155	AM-83-S	KSS-3	A										
2nd..	95-842			455				49-602	ST-105		10E60	52A1	Vol	63-1555	AM-83-S	KSS-3	A										
1st..	95-919	16-6658		455		t		49-602	ST-105				Vol	63-1555	AM-83-S	KSS-3	A										
2nd..	95-9			455				4 - 5 2					Vol	63-1357													
1st..	95-9	16-665		455									Vol	63-62	**-0-	A			.1 - 1 3		41	G1				6S071T (Ch. 5C61T)	
2nd..	95-9			455									Vol	63-79	T-120	A			D13-139X		41	G1				6S203, 222, 223, 226, 239, 241, 254, 256 (Ch. 5638)	
1st..	95-4.. 3	16-571		456									Vol	63-983	AM-64-Z	KSS-3	A		D13-130		E	41					
2nd..	95-414	16-5714		456									Vol	63-982	AM-46-Z	KSS-3	A		D13-123		E	41					
1st..	95-416	16-5712		456									Vol	63-79	T-120	A			D13-139X		41	G1					
2nd..	95-417	16-5714		455									Vol	63-983	AM-64-Z	KSS-3	A		D13-130		E	41					
1st..	95-529	16-5712		455									Vol	63-982	AM-46-Z	KSS-3	A		D13-123		E	41					
2nd..	95-530	16-5714		455									Vol	63-79	T-120	A			D13-139		41	G1					
1..	95-5	16-5	12	**6				4 - 180					Vol	63-521	M-45-Z				D1 - 1		41	G1				6S330, 361, (Ch. 5648)	
2nd..	95-9	4	16-5714	**6				49-381					Vol	63-799	T-120	A			D13-139		41	G1				341, 362	
1st..	95-916	16-5712		455				49-206					Vol	63-799	T-120	A			D13-139		41	G1					
2nd..	95-91	16-5714		455				49-208					Vol	63-1030	AT-116	KSS-3	A		D18-139X		E	41					
1st..	95-60	16-5712		455				49-364					Vol	63-1030	AT-116	KSS-3	A		D18-139X		E	41					
2nd..	95-5	16-5714		455				4 - 344					Vol	63-1118	AM-60-Z	KSS-3	A		D13-133		E	41					
1st..	95-6	16-571		4	142-2		1 - -	49-384	T-167		10E60	5E18	Vol	63-1118	AM-60-Z	KSS-3	A		D13-133		E	41				6S511, 527, 528, 580, (Ch. 5A02, 04, 13, 14)	
2nd..	95-6	16-5714		4				4 - 3					Vol	63-11	T-1	A			D18-139		41	G1					
1st..	95-7	16-5712		455				4 - 4 8					Vol	63-11	T-116	A			D18-139		41	G1					
2nd..	95-7	16-5714		455				49 - -					Vol	63-11	T-116	A			D18-139		41	G1					
1st..	95-7	16-5712		455				49-390					Vol	63-1118	AM-60-Z	KSS-3	A		D13-133		41	G1					
2nd..	95-6	16-5712		455		142-26	L-26-A	49-384	ST- 67		F13	F13	Vol	63-1118	AM-60-Z	KSS-3	A		D18-139		41	G1					
1st..	95-7	16-571		455		142-3	-26	49-396					Vol	63-1123	T-116	A			D18-139X		41	G1					
2nd..	95-7	16-5714		455				49-380					Vol	63-1123	T-116	A			D18-139X		41	G1					
1st..	95-7	16-5712		455									Vol	6 - 112	T-11	A			D18-139X		41	G1					
2nd..	95-709	16-5714		455									Vol	6 - 112	T-11	A			D18-139X		41	G1					
1st..	95-411	16-5712		456				49-204					Vol	63-520	M-60-Z				D13-133		1	1					
2nd..	95-412	16-5714		456				49-190	ST-190		8E2	6E2	Vol	63-520	M-60-Z				D13-133		1	1					
1st..	95-8	- 1		*				49-193	ST-738		8E2	6E2	Vol	63-1265	AT-112	A2			D18-137		42						
2nd..	95-86			*				49-193	ST-1		52A1		Vol	63-1265	AT-112	A2			D18-137		42						
1st..	95-774	16-5712		4				49-444	T- 1		A		Vol	6 - 11												7J045* (Ch. 7C61T)	
2nd..	95-77	16-5714		4									Vol	63-568													
1st..	95-41	16-5712		4				49-2	7	ST-115	F3	10A	Vol	63-568					D - -		1	-1					7J232, 259, (Ch. 5711)
2nd..	95-417	16-5714		4				49-198	ST-119				Vol	63-568					D - -		1	-1					
1st..	95-5	16-5712		**5				49-267	ST-115		8*2	10	Vol	63-990	AT-95	K-S-3	A2		D18-139 X		E	42		190-11	5300	H1	7J323, 368, (Ch. 5715)
2nd..	95-5	16-5714		**5				49-269	ST-119		F3	10	Vol	63-990	AT-95	K-S-3	A2		D18-139 X		E	42		190-11	5300	H1	
1st..	95-737	16-6660		45				49-1					Vol	63-1134												7W-E592, (Ch. 7A09)	
2nd..	95-7	16-6660		45									Vol	63-1134													
1st..	95-7	16-6660		4									Vol	63-1134													7MN596 (AC6001)
2nd..	95-7	16-6660		4									Vol	63-147													
1st..	95-9	16-6650		455		t		49-556	ST-109		6A2		Vol	63-611	T-115	A			D13-13		41	G					7R070 (Ch. 6C06)
2nd..	95-9	16-6670		455				49-203					Vol	63-611	T-115	A			D13-13		41	G					
1st..	95-4	16-5712		455				49-206					Vol	63-611	T-115	A			D13-13		41	G					7S204, 232, 240, 242, 258, 260, 261, (Ch. 5709)
2nd..	95-4	16-5714		455				49-81					Vol	63-611	T-115	A			D13-13		41	G					

† Information not available.

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES							
	No.	Tubes Sylvania or Equivalent Dial Light Type Listed in Parentheses	Mfr. Part No.	Aerovox Part No.	Note Part No.	Cornell- Dubilier Part No.	Note Part No.	Solar Part No.	Note Part No.	Sprague Part No.	Note Part No.	Use	Mfr. Part No.	Stancor Part No.	Note Part No.	Thordarson Part No.	Note Part No.	Merit	Note Part No.	Eveready Part No. "A"	Note "B"	Burgess Part No. "A"	Note "B"			
ZENITH—Continued	7	6A8G, 6K7G, 6J5G, 6F5G, 6F6G, 6X5G, 6U5. (Ch. 5714)	22-718 22-719	PRS450-16 PRS450-16	BR1645 BR1645	M-16-450 M-16-450	UT-16 UT-16	Pwr Out	95-526. 206-179.	P-6011. A-3822.	T22R02 T22S47	P-2951. A-2900.														
7S432, 433, 434, (Ch. 5719)	7	6A8G, 6K7G, 6Q7G, 6AF5G, 25AC5G, 25Z6G. (Ch. 5719)	22-852 22-851	AF6J	UP3045	DY-30-450	EL-3	Out	206-208.	A-3822.	T22S47	A-2900.														
7S432, 433, 434, 449, 450, 458, 459, 460, 461, 462. (Ch. 5724)	7	6K7G, 6A8G, 6J5G, 6F5G, 6F6G, 6X5G. (Ch. 5724)	22-719 22-941	PRS450-16 AF44J	BR1645 UP2245	M-16-450 DY-2X20-450	UT-16 EL-220	Pwr Out	95-634. On Spkr.	P-6348. A-3852.	T22R02 T22S47	P-3048. A-2931.														
7S449, 450, (Ch. 5724)	7	6K7G, 6A8G, 6J5G, 6F5G, 6X5G. (Ch. 5724)	22-719 22-941	PRS450-16 AF44J	BR1645 UP2245	M-16-450 DY-2X20-450	UT-16 EL-220	Out	206-301.	A-3852.	T22S47	A-2900.														
7S458, 459, 460, (Ch. 5719)	7	6A8G, 6K7G, 6Q7G, 6AF5G, 25AC5G, 25Z6G. (Ch. 5719)	22-852 22-851	AF6J	UP3045	DY-30-450	EL-3	Out	206-314.	A-3852.	T22S47	A-2900.														
7S487, 488, 490, (Ch. 5721)	7	6A8G, 6K7G, 6Q7G, 6AF5G, 25AC5G, 25Z6G. (Ch. 5721)	22-852 22-851	AF6J	UP3045	DY-30-450	EL-3	Out	206-309.	A-3849.	T22S88	A-2902.														
7S487, 488, 490, (Ch. 5225)	7	6K7G, 6A8G, 6J5G, 6F5G, 6F6G, 6X5G. (Ch. 5225)	22-719 22-941	PRS450-16 AF44J	BR1645 UP2245	M-16-450 DY-2X20-450	UT-16 EL-220	Pwr Out	95-634. On Spkr.	P-6348. A-3832.	T22R02 T22S47	P-3048. A-2931.														
7S529, 530, 547, 557, 558, 559, (Ch. 7A02)	7	1232, 7B8, 7A7, 7A4, 7B4, 6F6G, 6X5G. (Ch. 7A02)	22-1034 22-1036	AF44J PRS450-16	UP2245 BR1645	DY-2X20-450 M-16-450	EL-220 UT-16	Pwr Out	95-705. On Spkr.	P-6011. A-3832.	T22R02 T22S86	P-2951. A-2900.														
7S581, 582, 584, (Ch. 7A04)	7	1232, 7B8, 7A7, 7A4, 7B4, 6F6G, 6X5G. (Ch. 7A04)	22-1034 22-1036	AF44J PRS450-16	UP2245 BR1645	DY-2X20-450 M-16-450	EL-220 UT-16	Pwr Out	95-705. On Spkr.	P-6011. A-3852.	T22R02 T22S86	P-2951. A-2900.														
7S585 (Ch. 7A01)	7	6K7G, 5A8G, 6J5G, 6F5G, 6F6G, 6X5G. (Ch. 7A01)	22-719 22-941	PRS450-16 AF44J	BR1645 UP2245	M-16-450 DY-2X20-450	UT-16 EL-220	Pwr Out	95-634. On Spkr.	P-6011. A-3852.	T22R02 T22S86	P-2951. A-2900.														
7S584 (Ch. 7A11)	7	7G7/1232, 7B8, 7A7, 7B6, 6AD7G, 6F5G, 5Y4G. (Ch. 7A11)	22-1187	AF44J	UP15D145	DY-3X15-450	EL-344	Pwr Out	95-756. On Spkr.	P-6348. A-3878.	B17	T22R02 T22S47	P-3048. B17													
7S633, 634, 657, (Ch. 7B01)	7	7H7, 7B8, 7A7, 7B6, 6P5G, 6AC5G, 6X5G. (Ch. 7B01)	22-1036	UP15D145	DY-3X15-450	EL-344	Pwr Out	95-756. On Spkr.	P-6012. A-3830.	T22R04 T22S74	P-2952. A-2904.															
7S633R, 634R, 657R, (Ch. 7B01R)	7	7H7, 7B8, 7A7, 7B6, 6AD7G, 6F6G, 5Y4G. (Ch. 7B02)	22-1187	AF44J	UP15D145	DY-40+20+10- 150	EL-224	Out	On Spkr.	A-3496.	B3	T22S48	B3	A-2900.	B3	752W.										
8G005Y	8	1LN5, 1LC6, 1LD5, 1LE3, 1LB4, 117Z6GT	22-1426 22-1234	AF844D	UP8CJ44 UP4AJ25	DY-40+20+10- 150	EL-224	Out	On Spkr.	A-3496.	B3	T22S48	B3	A-2900.	B3	752W.										
8H023, 8H034	8	6A6G, 6S87, 6SG7GT, 6SH7, 6S8GT, 25L6G1, 25Z6GT (447)	22-1366	AF88D4A	BRH1225 UP6CJ44	DY-40-150 DGM-250-12 DY-2X40-150 740-25	EL-340	Out	On Spkr.	A-3876.	T22S45	A-2928.														
8H032, 33, 50, 51, 52, 61	8	6A6G, 6S87, 6SG7GT, 6SH7, 6S8GT, 6K6GT/G, 5Y3GT/G (444)	22-1382	UP8C611T	EL-240 TA-50		Pwr Out	95-922. On Spkr.	P-4078. A-3878.	T22R31 T22S47	P-3151. A-2931.															
8ML692	8	7A7, 7B8, 7B6, 7A4, 7C5, 7Y4 (51)	22-1272	AF44JMA	UP2245C	DY-315	EL-350	Pwr Out	95-873. 95-874.	A-3830.	T22S74	A-2904.														
8S359 (Ch. 5807)	8	6A6G, 6K7G, 6J5G, 6F5G, 6AC5G, 6X5G, 6U5. (Ch. 5807)	22-718 22-719	PRS450-16 PRS350-24	BR1645 BR2045	M-16-450 M-20-350	UT-16 UT-203	Pwr Out	95-526. 206-249.	P-6348. A-3878.	T22R02 T22S47	P-3048. A-2931.														
8S432, 433, 434, 449, 450, 458, 459, 460, 461, 462. (Ch. 5810)	8	1232, 6A8G, 6K7G, 6Q7G, 6AF5G, 25AC5G, 25Z6G. (Ch. 5810)	22-852 22-851	AF6J	UP3045	DY-30-450	EL-3	Out	95-756. On Spkr.	A-3878.	T22S47	A-2931.														
8S443, 451, 463, (Ch. 5808)	8	1232, 6A8G, 6K7G, 6J5G, 6F5G, 6F6G, 6X5G, 6U5. (Ch. 5808)	22-933 22-719	PRS350-24	BR2045	M-20-350	UT-203	Pwr Out	95-627. 206-179.	P-6012. A-3878.	T22R04 T22S47	P-2952. A-2931.														
8S531, 548, 563, (Ch. 8A02)	8	1232, 6A8G, 6K7G, 6J5G, 6F5G, 6F6G, 6AC5G, 6X5G. (Ch. 8A02)	22-1035	UP15D145	DY-3X15-450	EL-344	Pwr Out	95-627. 206-208.	P-6012. A-3878.	T22R04 T22S47	P-2952. A-2931.															
8S586. (Ch. 8A01)	8	1232, 6A8G, 6K7G, 6J5G, 6F5G, 6F6G, 6X5G, 6U5. (Ch. 8A01)	22-933	PRS350-24	BR2045	M-20-350	UT-203	Pwr Out	95-627. 206-208.	P-6012. A-3878.	T22R04 T22S47	P-2952. A-2931.														
BS587, 588, (Ch. 8A03)	8	1232, 6A8G, 6K7G, 6J5G, 6F5G, 6P5G, 6AC5G, 6X5G. (Ch. 8A03)	22-1035	UP150145	DY-3X15-450	EL-344	Pwr Out	95-627. 206-208.	P-6012. A-3878.	T22R04 T22S47	P-2952. A-2931.															
BS593, 594, (Ch. 8A04)	8	7H7, 7B8, 7A7, 7B6, 6V6G, 5Y4G (444)	22-1099 22-1036	PRS25-25 PRS450-16	BR252A BR1645 UP2245	M-25-25 DY-3X20-450 M-16-450	TA-25 206-249. UT-16	Pwr Out	95-756. On Spkr.	P-6012. A-3878.	T22R04 T22S47	P-2952. A-2931.														
8S647, 661, (Ch. 8B01)	8	7H7, 6A8G, 6S87GT, 6SQ7GT, 6J5G, 6F6G, 5Y4G. (Ch. 8B01)	22-1108	AF44J	UP9BJ39 BR502 UP4AJ29	DY-2X20-450 /40-25 DY-30-350	EL-220 TA-50 EL-23	Pwr Out	95-756. On Spkr.	P-6012. A-3878.	T22R04 T22S74	P-2952. A-2904.														
9H079, 79E, 79R, 81, 82R, 85R, 88R.	9	6A6G, 6S87, 6SG7GT, 6SH7, 6S8GT, 6K6GT, 5Y3GT, 7F7 (444)	22-1382	AF444J	UP9BJ39 BR502 UP4AJ29	DY-2X40-450 /40-25 DY-30-350	EL-240 TA-50 EL-23	Pwr Out	95-922. On Spkr.	P-4078. A-3310.	T22R31 T22S46 T22S46	P-3151. A-2900. A-2931.														

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS						Section H VIBRATORS			MFR. & MODEL							
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarostat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photocell Part No.		
1st. 2nd.	95-536 95-537	16-5712 16-5714		455				49-179 49-251 49-208 49-249 4 -					Vol	63-985	AT-95	KSS-3	A	D18-139XX	E	41					Continued—	ZENITH 75323, 342, 343, 363, 364, 366, (Ch. 5714)		
1st. 2nd.	95-60 95-61 95-6 - 95-59	16-6658 16-6660 16-5712 16-5714		455				4 - - 1 49-376 49-377 49-368 49-367 49-249					Vol	63-1030	AT-11	KSS-3	A	D18-139XX	E	41						7S432, 433, 434, (Ch. 5719) 7S432, 433, 434, 449, 450, 458, 459, 460, 461, 462, (Ch. 5724)		
1st. 2nd.	95-600 95-59 95-536 95-537	16-5712 16-5714 16-5712 16-5714		455				49-301 49-314 49-308 49-314 49-309 49-311 49-312 49-309 10E66 10E65 10E60 12E60					Vol	63-985	AT-95	KSS-3	A	C18-139X	E	41						7S449, 450, (Ch. 5724) 7S458, 459, 460, 461, 462, (Ch. 5719)		
1st. 2nd.	95-60 95-51	16-6658 16-6660		455	142	142		49-314 49-377 49-369 49-249 49-391 49-389 49-377 49-368					Vol	63-1035												7S487, 488, 490, (Ch. 5721)		
1st. 2nd.	95-60 95-61	16-6658 16-6660		455	†	†		49-377 49-369 49-249 49-391 49-389 49-368					Vol	63-1122				13-139X	41	G1						7S487, 488, 490, (Ch. 5725)		
1st. 2nd.	95-703 95-704	16-5712 16-5714		455			L-26-A	49-397 49-369 49-386 49-363					Vol	63-1115												7S529, 530, 547, 557, 558, 559, (Ch. 7A02)		
1st. 2nd.	95-703 95-704	16-5712 16-5714		455	142-28			49-397 49-369 49-386 49-363					Vol	63-1122				D13-139XX	†	G1						7S581, 582, 584, (Ch. 7A04)		
1st. 2nd.	95-600 95-685	16-5712 16-5704		455	†	†		49-397 49-369 49-386 49-363					Vol	63-1115												7S585 (Ch. 7A01) 7S598, (Ch. 7A11)		
1st. 2nd.	95-70 95-761	16-5712 16-571		455	42-7	-26-A		49-397 49-369 49-386 49-363					Vol	63-1122				D13-139XX	41	G1						7S633, 634, 657, (Ch. 7B01) 7S 32R, 634R, 657R, (Ch. 7B01R) 7S681, 682, 685, (Ch. 7B02)		
1st. 2nd.	95-70 95-709	16-571 16-5709		455				49-460 49-457 49- 5 49-397					Vol	63-1122				D13-139X	41	G1						7S633, 634, 657, (Ch. 7B01) 7S 32R, 634R, 657R, (Ch. 7B01R) 7S681, 682, 685, (Ch. 7B02)		
1st. 2nd.	95-708 95-8 4	16-5712 16-5712		455				49-474 49-470 49-475 49-517	ST-736		8E10 10E10		Vol	63-1344	—	-SS-3	†	D1 -	E	•						7 8G005Y		
1st. 2nd.	95-912 95-913	16-5740 16-6670		455				49-475 49-517	ST-107		5A15		Vol	63-1344	—	-SS-3	†	D1 -	E	•						4 8H023, 8H034		
1st. 2nd.	S12249 S12250			4:5				4 - - 6					V	63-133													8H032, 33, 50, 51, 52, 61	
3rd.	S124			8.3										V	63-133													
1st. 2nd.	S12249 S12250			455				49-544 49-564					V	63-1466				D13-139XX	E	41						8H032, 33, 50, 51, 52, 61		
3rd.	S12250			8.3				49-564					V	63-1466				D13-139XX	E	41								
1st. 2nd.	95-871 95-872	16-6652 16-6652		265				49-493					V	63-1466				D13-139XX	E	41						8ML692		
1st. 2nd.	95-536 95-537	16-6658 16-6660		*-5				49-49					V	63-1466				D13-139XX	E	41						8S359 (Ch. 5807)		
2nd.	95-600 95-596	16-5712 16-5714		4 5				49- 0 49- 14 49-308 49-311 49-309					Vol	63-1030	AT-11	KSS-3	A	C18-139X	E	41						8S432, 433, 434, 450, 451, 458, 459, 460, 461, 462, (Ch. 5810)		
1st. 2nd.	95-625 95-663	16-5712 16-5714		*-5				49-17					Vol	63-1030	AT-11	KSS-3	A	C18-139XX	E	41						8S443, 453, (Ch. 5808)		
1st. 2nd.	95-625 95-663	16-5712 16-5714		45				49- 1 49- 7 49-66					Vol	63-1075				13-139XX	E	41	19					8S531, 548, 563, (Ch. 8A02)		
1st. 2nd.	95-625 95-663	16-5712 16-5714		45				49- 1 49- 7 49-66					Vol	63-1117				13-139XX	E	41	19					8S588, 588, (Ch. 8A03)		
1st. 2nd.	95-625 95-663	16-5712 16-5714		455				49- 1 49- 4					Vol	63-1117				13-139XX	E	41	19					8S587, 588, (Ch. 8A04)		
1st. 2nd.	95-708 95-761	16-5712 16-5712		455	142-38			49- 1 49- 4					Vol	63-1146				A	X	1						8S647, 661, (Ch. 8B01)		
1st. 2nd.	5-826 95-827	16-5712 16-5712		455				49- 1 49- 4					Vol	63-1075				13-139XX		41								
1st. 2nd.	S12249 S12250 S12251			455 & 8.3				49-537 49-534 49-550 49-5-5					Vol	63-1466				D13-139XX	E	41						7 9H079, 79E, 79R, 81, 82R, 85R, 88R		

† Information not available.


MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT		Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES				
	No. Tubes	Sylvania or Equivalent	Mfr.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit	Note	Eveready Part No.	Note	Burgess Part No.	Note
		Dial Light Type Listed in Parentheses																					
ZENITH—Continued 9S204, 232, 242, 244, 262, 263, 264 (Ch. 5905)	9	6K7G, 6L7G, 6J5G, 6H6G, 6F5G, 6F6G, 5Y4G, 6T5...	22-569. 22-571.	PRS450-16...		BR1645. EZ88845...		M-16-450. DH-3X8-450SS		UT-16. TU-88. & UT-8...		Pwr Out	95-418. On Spkr.	P-6012. A-3878.		T22R04. T22S47...		P-2952. A-2931...					
9S307, 324, 344, 367, 359 (Ch. 5907)	9	6K7G, 6L7G, 6J5G, 6F5G, 6F6G, 5Y4G, 6U5...	22-711. 22-710.	AF22J. AF44J		UP1145. UP2245...		DY-2X10-450. DY-2X20-450...		EL-210. EL-220...		Pwr Out	95-525. 206-179	P-6012. A-3878.		T22R04. T22S47...		P-2952. A-2900...					
9S365 (Ch. 5906)...	9	6K7G, 6L7G, 6J5G, 6H6G, 6F5G, 6F6G, 5Y4G, 6U5...	22-569. 22-571.	PRS450-16...		BR1645. EZ88845...		M-16-450. DH-3X8-450SS		UT-16...		Pwr Out	95-418. 206-148	P-6012. A-3878.		T22R04. T22S47...		P-2952. A-2931...					
10H551, 571, (Ch. 10A3)...	10	6AC7/1852, 7J7, 7C7/1232, 7C7, 7A6, 7136, 6V6G, 5Y4G...	22-1123. 22-1125. 22-1124.	PRS350-12... AF6J...		BR1235. UP6CJ20... UP3045...		M-10-360. DY-3X20-450...		UT-123... EL-3...		Pwr Out	95-771. 206-424	P-6013. A-3830.		T22R05. T22S74...		P-2953. A-2904...					
10H571R, 10H573, (Ch. 10A3R)...	10	7V7, 7J7, 7C7, 7A6, 7B6, 6V6G, 5Y4G...	22-1123. 22-1178. 22-1124.	PRS350-12... AF6J...		BR1235. UP6CJ20... UP3045...		M-10-350. DY-3X20-450... DY-30-450...		UT-123... EL-3...		Pwr Out	95-771. On Spkr.	P-6013. A-3830.		T22R05. T22S74...		P-2953. A-2904...					
10S443, 452, 464, 470, 491, 492, (Ch. 1005)...	10	1232, 6A8G, 6K7G, 6Q7G, 6J5G, 6V6G, 6X5G, 6U5...	22-934...	AF44J...		UP2245...		DY-2X20-450...		EL-220...		Pwr Out	95-630. On Spkr.	P-6013. A-3830.		T22R05. T22S74...		P-2953. A-2904...					
10S531, 549, 566, (Ch. 10A1)...	10	1232, 6A8G, 6K7G, 6J5G, 6F5G, 6V6G, 6X5G...	22-934...	AF44J...		UP2245...		DY-2X20-450...		EL-220...		Pwr Out	95-707. On Spkr.	P-6013. A-3830.		T22R05. T22S74...		P-2953. A-2904...					
10S589, 590, (Ch. 10A2)...	10	1232, 6A8G, 6K7G, 6J5G, 6F5G, 6V6G, 6X5G...	22-934...	AF44J...		UP2245...		DY-2X20-450...		EL-220...		Pwr Out	95-707. On Spkr.	P-6013. A-3830.		T22R05. T22S74...		P-2953. A-2904...					
10S669, (Ch. 10B1) 10S690, (Ch. 10B2)...	10	7GT/1232, 6A8G, 6J5GT, 6K7G, 6F5G, 6J5C, 6V6G, 5Y4G...	22-1108...	AF44J...		UP2245...		DY-2X20-450...		EL-220...		Pwr Out	95-833. On Spkr.	P-6013. A-3830.		T22R05. T22S74...		P-2953. A-2904...					
11S474 (Ch. 1103)...	11	1232/7G, 6A8G, 6K7G, 6K5G, 6F5G, 6V6G, 6X5G, 6U5/6G...	22-934...	AF44J...		UP2245...		DY-2X20-450...		EL-220...		Pwr Out	95-630. 206-352	A-3311...		T22S64...		A-2904...					
12H090, 91, 92, 93, 94, (Ch. 11C21)...	12	6AC5, 6SB7Y, 6SG7, 7W7, 6SH7, 6S8GT, 6AL7GT, 7F7, 6J5GT, 6V6GT, 5Y3GT (244)...	22-1496. 22-1449...	AF6J...		UP98J39. UP4AJ29...		DY-2X30-450... DY-30-450...		EL-240... EL-33...		Pwr Out	95-921. On Spkr.	P-4080. A-3870...		T22R08. T22S56...		P-3153. A-2904...					
12H650, 670, 671, 691, (Ch. 12B1)...	12	6SD7GT, 7S7, 7C7, 7A6, 7B6, 7A4, 6V6G, 5X4G...	22-1178. 22-1124...	AF6J...		UP3045...		DY-30-450...		EL-3...		Pwr Out	95-843. On Spkr.	P-6013. A-3811...		T22R05. T22S64...		P-2953. A-2904...					
12H678, 679, (Ch. 12A6)...	12	7V7, 7J7, 7C7, 7A6, 7A4, 7F7, 6V6G, 5Y4G...	22-1178. 22-1123. 22-1124...	PRS350-12... AF6J...		BR1235. UP3045...		M-10-350. DY-30-450...		UT-123... EL-3...		Pwr Out	95-818. f	A-3311...		T22S64...		A-2904...					
12H689, 695, 696, (Ch. 12B2)...	12	6SD7GT, 7S7, 7C7, 7A6, 7N7, 7F7, 6V6G, 5X4G...	22-1178. 22-1124...	AF6J...		UP3045...		DY-30-450...		EL-3...		Pwr Out	95-854. On Spkr.	A-3311...		T22S64...		A-2904...					
I2S205, 232, 245, 265, 266, 267, 268, (Ch. 1204)...	12	6K7G, 6L7G, 6J5G, 6H6G, 6V6G, 5Y4G, 6T5...	22-572. 22-573. 22-566...	PRSA450-8-8...		EZ88845...		M-2X8-450...		UT-88...		Pwr Out	95-421. On Spkr.	P-6013. A-3811...		T22R05. T22S64...		P-2953. A-2904...					
I2S345, 370, 371, (Ch. 1206)...	12	6K7G, 6L7G, 6J5G, 6F8G, 6V6G, 5Y4G...	22-714. 22-712. 22-728...			EZ5116...		TU-1616...		TU-1616...		Pwr Out	95-820. 206-185	P-6013. A-3811...		T22R05. T22S64...		P-2953. A-2904...					
I2S445, 453, 471, 475, 494, (Ch. 1207)...	12	6K7G, 6A8G, 6J5G, 6F8G, 6V6G, 6X5G, 6U5...	22-991. 22-970...	AF44J...		EZ5116...		DY-2X20-450...		TU-1616... EL-220...		Pwr Out	95-639. On Spkr.	A-3311...		T22S64...		A-2904...					
I2S550, 568, 569, (Ch. 12A3)...	12	6K7G, 6A8G, 6J5G, 6V5G,	22-991...	AF44J...		EZ5116...		DY-2X20-450...		TU-1616... EL-220...		Pwr Out	95-639. On Spkr.	A-3311...		T22S64...		A-2904...					
I2S595, (Ch. 12A4)...	12	1232, 7B8, 6J5G, 6K7G, 6AE7GT, 7, 12S569E, 2, (Ch. 12A1)...	22-1053...			EZ5116...		TU-1616...				Pwr Out	95-714. 206-351	P-6014. A-3823...		T22R06. T22S74...		P-2954. A-2904...					
I2S595Z, (Ch. 12A2)...	14	6SD7GT, 7S7, 7C7, 7A6, 7N7, 7F7, 6V6G, 5X4G, 7B6, 6U5...	22-1178. 22-1235. 22-1124...	AF6J...	A10	UP3045...	A10	DY-30-450... M-10-350...		EL-3... UT-123...	A10	Pwr Out	95-854. On Spkr.	A-3823...		T22S74...		A-2904...					
I4H697, (Ch. 14B1)...	14	6SD7GT, 7S7, 7C7, 7A6, 7N7, 7F7, 6V6G, 5X4G, 7B6, 6U5...	22-1178. 22-1235. 22-1124...	AF6J...	PRS350-12...							Pwr Out	95-854. On Spkr.										

Section D IF COILS					Section E PHONO CARTRIDGES			Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Claristat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note	Photofit Set No.
1st.	95-416	16-5712		456				49-117			8E10		Vol	63-568	T-120				D13-139XX		G1			Continued	ZENITH	9S204, 232, 242, 244, 262, 263, 264 (Ch. 5905)
2nd.	95-417	16-5714						49-716			10E10		Vol	63-1074	11-171	A	C14	118-139XX	I	11	G1				9S365 (Ch. 5906)	
1st.	95-538	16-5712		455	142-1			49-141	E2	49-1-1	12E10		Vol	63-1074	11-171	KSS-1	A	118-139XX	I	11	G1				10H551, 571, (Ch. 10A3)	
2nd.	95-539							49-712					Vol	63-1074	11-171				D13-139XX	E	41	G19				
1st.	95-416	16-5712		455				49-44			12E10		Vol	63-1074	T-120				D13-139XX		G1					
2nd.	95-417	16-5714						49-44					Vol	63-1074	11-171				D13-139XX	E	41	G19				
1st.	95-765		AM &					49-44					Vol	63-1074	11-171				D13-139XX	E	41	G19				
2nd.	95-766		FM										Vol	63-1074	11-171				D13-139XX	E	41	G19				
1st.	95-767		45										Vol	63-1074	11-171				D13-139XX	E	41	G19				
2nd.	95-768		&										Vol	63-1074	11-171				D13-139XX	E	41	G19				
3rd.	95-769		4										Vol	63-1074	11-171				D13-139XX	E	41	G19				
4th.	95-772												Vol	63-1074	11-171				D13-139XX	E	41	G19				
1st.	95-765			455				49-44					Vol	63-1074	11-171				D13-139XX	E	41	G19				
2nd.	95-766							49-44					Vol	63-1074	11-171				D13-139XX	E	41	G19				
1st.	95-785												Vol	63-1074	11-171				D13-139XX	E	41	G19				
2nd.	95-786												Vol	63-1074	11-171				D13-139XX	E	41	G19				
3rd.	95-787												Vol	63-1074	11-171				D13-139XX	E	41	G19				
1st.	95-625	16-5712		455	142-1	E2		49-46			10E60		Vol	63-1074					D13-139XX	E	41	G19				10S443, 452, 464, 479, 491, 492, (Ch. 1005)
2nd.	95-664	16-5714						49-51			10E60		Vol	63-1074					D13-139XX	E	41	G19				
								49-379			12E60		Vol	63-1074					D13-139XX	E	41	G19				
								49-352			12E60		Vol	63-1074					D13-139XX	E	41	G19				
								49-353			12E60		Vol	63-1074					D13-139XX	E	41	G19				
								49-356			12E60		Vol	63-1074					D13-139XX	E	41	G19				
1st.	95-625	16-5712		455	142-46	E2		49-395			10E60		Vol	63-1074	11-171				D13-139XX	E	41	G19				10S531, 549, 566, (Ch. 10A1)
2nd.	95-664	16-5714						49-399			10E60		Vol	63-1074	11-171				D13-139XX	E	41	G19				
								49-392			12E60		Vol	63-1074	11-171				D13-139XX	E	41	G19				10S588, 590, (Ch. 10A2)
1st.	95-625	16-5712		455	142-46	LP-21	E2	49-416			12E60		Vol	63-1074					D13-139XX	E	41	G19				10S669 (Ch. 10B1); 10S690 (Ch. 10B2)
2nd.	95-664	16-5714						49-442			12E60		Vol	63-1075					D13-139XX	E	41	G19				
1st.	95-625	16-5712		455	142-46	LP-21	E2	49-400			12E60		Vol	63-1074					D13-139XX	E	41	G19				11S474, (Ch. 1103)
2nd.	95-664	16-5714						49-402			12E60		Vol	63-1074					D13-139XX	E	41	G19				
1st.	S12249		4-1					4-1					Vol	63-1349	AM-66-1	KSS-1	A		D13-139XX	E	41					2. 12H090, 91, 92, 93, 94 (Ch. 11C21)
2nd.	S12250		&					8-3					Vol	63-1349	AM-66-1	KSS-1	A		D13-139XX	E	41					
3rd.	S12251												Vol	63-1074	11-171				D13-139XX	E	41					
1st.	95-849		AM &					49-503			12E60		Vol	63-1074					D13-139XX	E	41					12H550, 670, 671, 691, (Ch. 12B1)
2nd.	95-850		FM					49-471			12E60		Vol	63-1074					D13-139XX	E	41					
1st.	95-849		455										Vol	63-1074					D13-139XX	E	41					
2nd.	95-850		&										Vol	63-1074					D13-139XX	E	41					
3rd.	95-787		8-3										Vol	63-1074					D13-139XX	E	41					
1st.	95-765		AM &	142-4	11-1			49-453			12E60		Vol	63-1074					D13-139XX	E	41					12H678, 679, (Ch. 12A6)
2nd.	95-766		FM										Vol	63-1074					D13-139XX	E	41					
1st.	95-785		455										Vol	63-1074					D13-139XX	E	41					
2nd.	95-786		&										Vol	63-1074					D13-139XX	E	41					
3rd.	95-787		8-3										Vol	63-1074					D13-139XX	E	41					
1st.	95-849		AM &	169-89				49-502					Vol	63-1251					D13-139XX	E	41					12H689, 695, 696, (Ch. 12B2)
2nd.	95-850		FM	169-89				49-471					Vol	63-1251					D13-139XX	E	41					
1st.	95-849		455										Vol	63-1251					D13-139XX	E	41					
2nd.	95-850		&										Vol	63-1251					D13-139XX	E	41					
3rd.	95-787		8-3										Vol	63-1251					D13-139XX	E	41					
1st.	95-416	16-5712		455	11-1			49-184			12E60		Vol	63-1251	11-171				D13-139XX	E	41					12S205, 232, 245, 265, 266, 267, 268, (Ch. 1204)
2nd.	95-417	16-5714						49-184			12E60		Vol	63-1251	11-171				D13-139XX	E	41					
1st.	S6374			455				49-185			12E60		Vol	63-1251	11-171				D13-139XX	E	41					12S341, 370, 371, (Ch. 1206)
2nd.	S6375							49-253			12E60		Vol	63-1251	11-171				D13-139XX	E	41					
3rd.	S6376							49-185			12E60		Vol	63-1251	11-171				D13-139XX	E	41					
1st.	95-637	16-5712		455	16-16			49-3			10E60		Vol	63-1251	11-171				D13-139XX	E	41					12S445, 453, 471, 475, 494, (Ch. 1207)
2nd.	95-638	16-5714						49-3			10E60		Vol	63-1251	11-171				D13-139XX	E	41					
								49-3			10E60		Vol	63-1251	11-171				D13-139XX	E	41					
								49-3			10E60		Vol	63-1251	11-171				D13-139XX	E	41					
								49-3			10E60		Vol	63-1251	11-171				D13-139XX	E	41					
1st.	95-637	16-5712		455	169-42	E2		49-351			10E60		Vol	63-1078					D13-139XX	E	41					12S554, 568, 569, (Ch. 12A3)
2nd.	95-638	16-5714						49-404			10E60		Vol	63-1078					D13-139XX	E	41					
1st.	95-637	16-5712		455	169-42	E2		49-401			10E60		Vol	63-1078			</td									

MFR. & MODEL	TUBE COMPLEMENT AND DIAL LIGHT	Section A CAPACITORS								Section B TRANSFORMERS								Section C BATTERIES								
		No. Tubes	Sylvania or Equivalent Dial Light Type Listed in Parentheses		Mfr. Part No.	Aerovox Part No.	Note	Cornell-Dubilier Part No.	Note	Solar Part No.	Note	Sprague Part No.	Note	Use	Mfr. Part No.	Stancor Part No.	Note	Thordarson Part No.	Note	Merit Part No.	Note	Eveready Part No.	Note	Burgess Part No.	Note	
			"A"	"B"																		"A"	"B"	"A"	"B"	
ZENITH—Continued 14H789, (Ch. 13D22).....	14 6BA6, 6SB7Y, 6SG7, 7W7, 6SH7, 6SBGT, 6AL7GT, 7F7, 6J5, 6V6GT, 5U4G (44)	22-1515			UP22245C	A4,3	DY-4X20-450	A4,3	EL-15 & UT-30			Chk	95-957			P-6315		T22R34								
15S308, 346, 372, 373, (Ch. 1502).....	15 6K7G, 6L7G, 6J5G, 6F8G, 6V6G, 2Y4G, 6U5.....	22-1449 22-748 22-569 22-681 22-700 22-712 22-727 22-728 22-747 22-747 22-960 22-569 22-727 22-727 22-580 22-578 22-569 22-568 22-1178 22-1124 22-719 22-1304 22-893 22-1303	AF6J PR450-16 PR150-40 PRS450-8 PRSA450-8-8 PRSA450-16 EZ8845 PRSA450-8-8 PRSA450-16 EZ8845 PRSA450-8-8 EZ8845 PRSA450-8-8 EZ8845 PRSA450-8-8 EZ8845 PR350-24 AF3J PR5250-20 AF88J		UP3035	A8	DY-30-350	A8	EL-33		A8	Chk	95-956		Out	206-600			T22S74		A-2935					
15S479, 15S495, (Ch. 1503).....	15 6K7G, 6A8G, 26J5G, 6C5G, 6F8G, 6V6G, 2Y4G, 6U5.....				UP5515C	A8	DY-307	A8	EL-352			Chk	95-442		Out	206-374										
15U246, 269, 270, 271, 272, 273.....	15 6K7G, 6L7G, 6J5G, 6H6G, 6V6G, 2Y4G, 6T5.....				PRSA450-16 EZ8845		BR1645	M-16-450	UT-16			Chk	95-533		Out	206-375										
22H698, 22H699, (Ch. 22B1 Phono).....	22 6SD7GT, 7S7, 7C7, 7A6, 7N7, 7A4, 5X4G, 6A3, 6AD7G, 5X4G.....	22-1178 22-1124 22-719 22-1304 22-893 22-1303	AF6J UP3045 BR2045 AF3J UP1545 BR2025 AF88J		DY-30-450 M-20-350		EL-3		UT-203			Chk	95-254		Out	95-879										
												Pwr	95-867													
												Pwr	95-866													
												Pwr	95-865													
												On Spkr.														

Section D IF COILS					Section E PHONO CARTRIDGES				Section F SPEAKERS				Section G CONTROLS								Section H VIBRATORS			Part No. Set	MFR. & MODEL			
Use	Mfr. Part No.	Meissner Part No.	Note	Peak Freq.	Mfr. Part No.	Astatic Part No.	Note	Mfr. Part No.	Jensen Part No.	Note	Quam Part No.	Note	Use	Mfr. Part No.	Clarestat Part No.	Shaft	Switch	Note	IRC Part No.	Shaft	Switch	Note	Mfr. Part No.	Radiant Part No.	Note			
1st.	S-12249			455	†			49-600	ST-102	F3	12A4	F3	Vol	63-1349				D13-139XX	E	41					Continued—	ZENITH 14H785 (Ch. 13D22)		
2nd.	S-12250													Vol	63-980	AT-95	KSS-3	A	D18-139XX	E	41							15S308, 346, 372, 373, (Ch. 1502)
3rd.	S-12251		8.3					E2	49-254																			
1st.	S-6374		455	142-11	†			49-186																				
2nd.	S-6375																											
3rd.	S-6376																											
1st.	S8103			455	169-36			49-374						Vol	63-980	AT-95	KSS-3	A	D18-139XX	E	41							15S479, 15S495, (Ch. 1503)
2nd.	S-6375				169-37			49-375																				
3rd.	S-6376																											
1st.	95-439		16-5712	456				49-200						Vol	63-688	T-95			D18-139XX			G1					15U246, 269, 270, 271, 272, 273, (Ch. 1501)	
2nd.	95-440			16-5714				49-186																				
3rd.								49-187																				
1st.	95-849			455	169-92			49-188											D13-139XX	E	41	G19					22H698, 22H699, (Ch. 22B1 Phone)	
2nd.	95-850							49-488																				
1st.	95-849							49-490	ST-174	F17	12E25	F17	Vol Hum	63-1074 63-1270														
2nd.	95-850							49-489																				
3rd.	95-888																											

† Information not available.



# INSTALLATION NOTES

# INSTALLATION NOTES

---

## CAPACITOR NOTES

### Section "A"

**A1**—Use an additional low voltage unit of sufficient capacity to duplicate the by-pass section of the original electrolytic capacitor.

**A2**—Used only in models employing a filter choke.

**A3**—Do not use the by-pass section of this recommended capacitor when making this replacement.

**A4**—Parallel sections of this replacement capacitor to duplicate the capacity of the original unit.

**A5**—Physical size of original capacitor unknown.

**A6**—Used only in combination radio-phonograph units.

**A7**—This replacement capacitor may require a mounting strap.

**A8**—This capacitor is not used in all models.

**A9**—Do not use one section of this replacement capacitor.

**A10**—Alternate filter capacitors used in some production runs.

**A11**—This capacitor is used in Underwriters Approved models only.

## TRANSFORMER NOTES

### Section "B"

**B1**—Disregard the 5 volt secondary winding of this transformer when making this replacement.

**B2**—Add extra hum filter if necessary when using this replacement part.

**B3**—When using this replacement part, bend the mounting tabs down, file out the mounting holes and mount on the original bracket.

**B4**—This unit is used in early models only.

**B5**—When using this replacement unit, bend the mounting tabs down and solder unit in place.

**B6**—This replacement is a universal output transformer. Select the taps which will duplicate the impedance of the original unit.

**B7**—Connect the secondary *only* of this replacement unit.

**B8**—When replacing this unit, connect the primary of the replacement part to the coupling capacitor and B minus. Also connect the secondary center tap to B minus.

**B9**—Mount this replacement vertically, instead of horizontally, beneath the chassis.

**B10**—Remove the chassis cut-out plate to mount this replacement unit.

**B11**—Use two of these replacements mounted in the holes provided.

**B12**—When using this replacement unit, add a series resistor to reduce the plate voltages.

**B13**—Connect only the primary winding of this replacement unit.

**B14**—Reverse the primary and secondary windings of this replacement transformer.

**B15**—Use one filament winding of this replacement transformer for the amplifier section, and the second filament winding for the tuner.

**B16**—If the receiver oscillates after installing this replacement unit reverse the secondary connections.

**B17**—This unit is not used in all models.

**B18**—Reconnect the pilot light to the filament winding.

**B19**—This unit is used in models having motor tuning.

**B20**—When using this replacement unit, use one-half of the primary winding and taps 1 and 6 of the secondary winding.

**B21**—This part is used only in models having a PM speaker.

**B22**—This unit is an alternate part for some production runs.

**B23**—This part is used only in models having an electrodynamic speaker.

# INSTALLATION NOTES

## BATTERY NOTES Section "C"

- C1—This replacement is an "A-B" pack of 1½ and 90 volts.
- C2—Use an adapter with these replacement batteries.
- C3—This replacement is an "A-B" pack of 7½-9 volts and 90 volts.
- C4—There is no "A" Battery replacement available from this manufacturer.
- C5—This replacement is an "A-B" pack of 6 and 90 volts.
- C6—Installation of separate "A" & "B" batteries require separate battery leads and plugs.

## IF COIL NOTES Section "D"

- D1—When using this replacement, add 70K ohm resistor in series with the lead normally going to the high side of the volume control.
- D2—From the low end of the secondary of the replacement coil, add; 250 MMFD capacitor to ground, 47K ohms to the high side of the volume control, and 1 megohm to the AVC line.
- D3—When using this replacement coil, add 100 MMFD capacitor from the low end of the secondary to ground.
- D4—Disregard the green lead of this replacement coil.

- D5—Shunt both the FM primary and secondary windings with 100K ohm resistors.
- D6—This coil is used in early models only.
- D7—When using this replacement coil, add a 200 MMFD capacitor from the high side of the volume control to ground.
- D8—Remove the original external trimmer capacitors as well as the coil when making this replacement since the replacement coil has internal trimmer capacitors.
- D9—When using this replacement unit, add the following; 47K ohms between the low end of the secondary winding and the high side of the volume control, 100 MMFD capacitor from the low end of the secondary to ground.
- D10—When using this replacement coil, add 100 MMF capacitor in parallel with a 470K ohm resistor from the black lead of the replacement coil to ground.
- D11—When making this replacement, use the shield of the original coil.
- D12—Use in F. M. position only.
- D13—When using this replacement coil, connect 5K ohms in series with the low end of the primary winding and bypass with a .05 MFD capacitor.
- D14—Connect 75K ohm resistor across the primary winding of this replacement transformer.
- D15—When making this replacement, install a 220 MMFD capacitor across the two outside terminals of the volume control.
- D16—When installing this replacement coil, connect the following from the low end of the secondary winding; 150 MMFD capacitor to ground and 150K ohm resistor to the high side of the volume control.
- D17—When installing this replacement coil connect a 150 MMFD capacitor in parallel with a 150K ohm resistor from the low end of the secondary winding to the low side of the volume control.
- D18—When installing this replacement coil, connect the following from the low side of the secondary winding; a 300 MMFD capacitor to ground, and a 620K ohm resistor to the low side of the first IF coil secondary winding.
- D19—When using this replacement coil connect a 500 MMFD capacitor from the low side of the secondary winding to the low side of the volume control.
- D20—When using this replacement coil connect a 250 MMFD capacitor from the low side of the secondary winding to the low side of the volume control.
- D21—When installing this replacement coil it is necessary to connect the following from the low side of the secondary winding; a 500 MMFD capacitor to low side of volume control, and a 1 megohm resistor to the AVC line.
- D22—These are alternate IF coils.
- D23—When installing this replacement coil, add 150K ohm resistor from the low end of the secondary winding to ground.

# INSTALLATION NOTES

**D24**—When using this replacement unit, connect a 15 megohm resistor paralleled with a 250 MMFD capacitor from the low end of the secondary winding, to ground.

**D25**—When using this replacement coil, connect a 220 ohm resistor from the low side of the secondary winding to ground.

**D26**—This unit is not used in all models.

**D27**—When installing this replacement coil, connect a resistor of approximately 50K ohm between the low side of the secondary winding and the high side of the volume control.

## PHONO CARTRIDGE NOTES Section "E"

**E1**—This cartridge used in early models only.

**E2**—This unit is used only in radio-phono combination models.

## SPEAKER NOTES Section "F"

**F1**—Mechanical and electrical specifications of the original permanent magnet speaker unknown. Determine voice coil impedance and select a permanent magnet speaker of proper size for this application.

**F2**—Mechanical and electrical specifications of the original electro-dynamic speaker unknown. Determine field coil and voice coil values and

select speaker with specifications to duplicate those of the original.

**F3**—When using this replacement, change the output transformer to match 6-8 ohm voice coil.

**F4**—When using this replacement, add a resistor of proper value and sufficient wattage in series with the field coil to give the proper bias voltages.

**F5**—Some production runs use PM type speaker while other runs use an electrodynamic type.

**F6**—When using this replacement, change the output transformer to match the 3-4 ohm voice coil.

**F7**—Replace the "32 volt field" dynamic speaker with the recommended permanent magnet speaker.

**F8**—Replace the "6 volt field" dynamic speaker with the recommended permanent magnet speaker.

**F9**—Add a 1500 ohm 10 watt resistor in parallel with the field coil of this replacement speaker.

**F10**—Remount the output transformer when using this replacement unit.

**F11**—This unit is used only in radio-phono combination model.

**F12**—Use the 300 ohm tap on the field coil of the replacement speaker to obtain the correct field resistance.

**F13**—This unit is an alternate speaker.

**F14**—Add a 650 ohm 2 watt resistor in parallel with the field coil of the replacement speaker.

**F15**—Add transformer (1500 to 16 ohms) to match replacement unit to the receiver output.

**F16**—This unit used in later production.

**F17**—This unit is used as a "tweeter" speaker.

## CONTROL NOTES Section "G"

**G1**—Use the shaft supplied with this unit.

**G2**—Select replacement shaft to duplicate that of the original control.

**G3**—Use the 500K ohm tap only on this replacement control.

**G4**—Ground the center terminal of the replacement control.

**G5**—Use an external bias resistor, if necessary, in series with the right hand terminal of the replacement control (with shaft side of the control toward the viewer and terminals down).

**G6**—This control is used in early models only.

**G7**—Install a 50K ohm resistor in series with the right hand terminal of the replacement control, and the lead connecting to the same terminal of the original control. (Control viewed from shaft side, terminals down.)

**G8**—This unit employs a knurled shaft.

# INSTALLATION NOTES

**G9**—When using this replacement control use a "C3" coupling unit and part of the original shaft to obtain the desired length.

**G10**—Use only the 100K ohm tap on this replacement control.

**G11**—Attach the original arm to the tone control shaft to actuate the radio-phono switch.

**G12**—Install a 22K ohm resistor in series with the right hand terminal of this replacement control, and the lead connecting to the same terminal of the original control. (Control viewed from shaft side, terminals down.)

**G13**—Use the original pulley or sleeve on the shaft of this replacement control.

**G14**—Ream the mounting hole when installing this replacement control.

**G15**—When installing this replacement control, use sleeve bushing "S-5."

**G16**—The original control had a dummy terminal used as a junction. When using the recommended replacement control, solder and tape all wires originally connecting to the dummy tap.

**G17**—Ground the left hand terminal with the grounding lug provided when using this replacement control.

**G18**—Overall value of original control unknown. For correct replacement, select control having same overall resistance and same shaft characteristics as those of the original control.

**G19**—Fashion slot in the shaft of this replacement control to duplicate that of the original unit.

**G20**—When using this replacement control also use sleeve bushing "S-3."

**G21**—Disregard the second tap on the replacement control.

**G22**—This unit is not used in all models.

**G23**—Add 330 ohm external bias resistor.

**G24**—Add 470 ohm external bias resistor.

**G25**—Use this replacement control when the original control is not tapped for tone compensation.

**G26**—Use this replacement control when the original control has two taps for tone compensation.

**G27**—When using this replacement control use insulated coupling "C-2."

**G28**—Use the original insulating sleeve to isolate the control from the chassis. Use the bushing ground strap provided as the shell connection for the by-pass capacitor.

**G29**—Use the original mounting nut to provide a groove for the dial cord string.

**G30**—In some production, this control does not use switch.

**G31**—When using this replacement control also use sleeve bushing "S-2."

**G32**—When installing this replacement control also use sleeve bushing "S-1."

**G33**—When installing this replacement control, ground one side of the line switch.

**G34**—Ground the right hand terminal of this replacement control with the strap provided. (Control viewed from shaft side, terminals down.)

**G35**—When installing this replacement control, use the original spacer nut between the chassis and the front panel.

## VIBRATOR NOTES

### Section "H"


**H1**—Check the buffer capacitor before installing the new vibrator unit.

**H2**—The original vibrator had a 6 or 7 prong plug. The center prong and two other small prongs are not necessary for satisfactory operation and have been omitted from the recommended replacement vibrator unit. Check buffer capacitor before installing the new unit.


**H3**—Alternate vibrator.

**H4**—Some of the original vibrators had three prongs. The recommended four prong replacement vibrator will work satisfactorily.

**H5**—Remove the 500K ohm "Globar" resistor before installing the recommended vibrator.



**ELECTRICAL AND MECHANICAL  
SPECIFICATIONS  
FOR PRODUCTS LISTED IN  
THE RED BOOK**

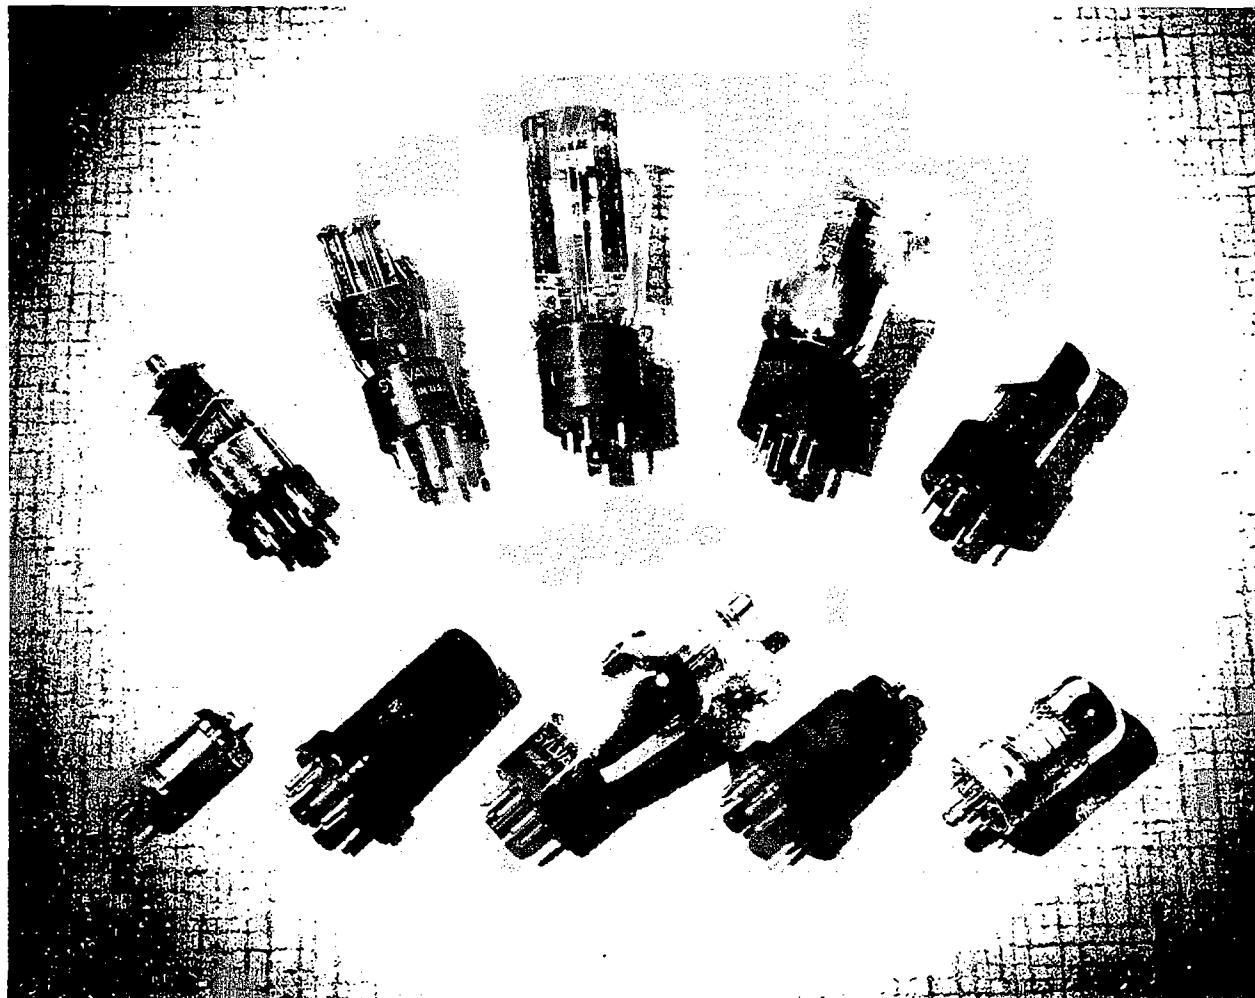


Tube Type	Base Diagram	Tube Type	Base Diagram
DZ4	4R	1LC6	7AK
1A5GT	6X	1LD5	6AX
1A7GT	7Z	1LH4	5AG
1C5GT	6X	1LN5	7AO
1H5GT	5Z	1N5GT	5Y
1LA4	5AD	1Q5GT	6AF
1LA6	7AK	1R5	7AT
1LB4	5AD	1S4	7AV
1LC5	7AO	1S5	6AU


Tube Type	Base Diagram	Tube Type	Base Diagram
1T4	6AR	5Y3GT	5T
3A8GT	8AS	5Z3	4C
3LF4	6BB	5Z4GT	5L
3Q5GT	7AP	6A7	7C
3S4	7BA	6A8GT	8A
3V4	6BX	6AB3/6N5	6R
5U4G	5T	6AC7	8N
5V4G	5L	6AK5	7BD
5W4GT	5T	6AL5	6BT

Tube Type	Base Diagram	Tube Type	Base Diagram
6AT6	7BT	12A8GT	8A
6AU6	7BK	12AH7GT	8BE
6BA6	7BK	12AT6	7BT
6BE6	7CH	12B8GT	8T
6C5GT	6Q	12BA6	7BK
6C6	6F	12BE6	7CH
6D6	6F	12F5GT	5M
6D8G	8A	12H6	70
6E5	6R	12J5GT	60
6F5	5M	12J7GT	7R
6F6GT	7S	12K7GT	7R
6H6GT	7Q	12K8GT	8K
6J5GT	6Q	12Q7GT	7V
6J7GT	7R	12SA7	8R
6K6GT	7S	12SA7GT	8AD
6K7GT	7R	12SC7	8S
6K8GT	8K	12SF5GT	6AB
6L5G	6Q	12SF7	7AZ
6L6G	7AC	12SG7	8BK
6L7G	7T	12SH7	8BK
6N6G	7AU	12SJ7GT	8N
6N7GT	8B	12SK7GT	8N
6P5GT	6O	12SL7GT	8BD
6Q7GT	7V	12SN7GT	8BD
6R7GT	7V	12SO7GT	8Q
6S7G	7R	12SR7	8Q
6SA7	8R	14A4	5AC
6SA7GT	8AD	14A7	8V
6SC7	8S	14B6	8W
6SF5G	6AD	14B8	8X
6SF7	7AZ	14C5	6AA
6SG7G	8BK	14C7	8V
6SH7GT	8BK	14E6	8W
6SJ7GT	8N	14F7	8AC
6SK7GT	8N	14H7	8V
6SL7GT	8BD	14N7	8AC
6SN7GT	8BD	14Q7	8AF
6SQ7GT	8Q	14R7	8AE
6SR7GT	8Q	14W7	8BJ
6SS7	8N	25A6GT	7S
6U5/665	6R	25L6GT	7AC
6V6GT	7AC	25Z5	6E
6X5GT	6S	25Z6GT	7Q
6Y6G	7AC	32LZGT	8Z
6ZY5G	6S	25A5	6AA
7A4	5AC	35LG6T	7AC
7A6	7AJ	35W4	5BQ
7A7	8B	35Y4	5AL
7A8	8U	35Z3	4Z
7B4	5AC	35Z4GT	5AA
7B5	6AE	35Z5GT	6AD
7B6	8W	40Z5/45Z5GT	6AD
7B7	8V	42	6B
7B8	8X	43	6B
7C5	6AA	45	4D
7C6	8W	45Z3	5AM
7C7	8V	47	5B
7E6	8W	50A5	6AA
7E7	8AE	50B5	7BZ
7F7	8AC	50C6G	7AC
7F8	8BW	50LG6T	7AC
7H7	8V	50X6	7AC
7J7	8BL	50Y6GT	7Q
7N7	8AC	70L7GT	8AA
7Q7	8AL	75	6G
7R7	8AE	76	5A
7S7	8BL	78	6F
7T7	8V	80	4C
7V7	8V	117L7/M7GT	8AO
7W7	8Bj	117N6GT	8AV
7Y4	5AB	117Z6GT	7Q
7Z4	5AB		

# TUBES

**SYLVANIA**

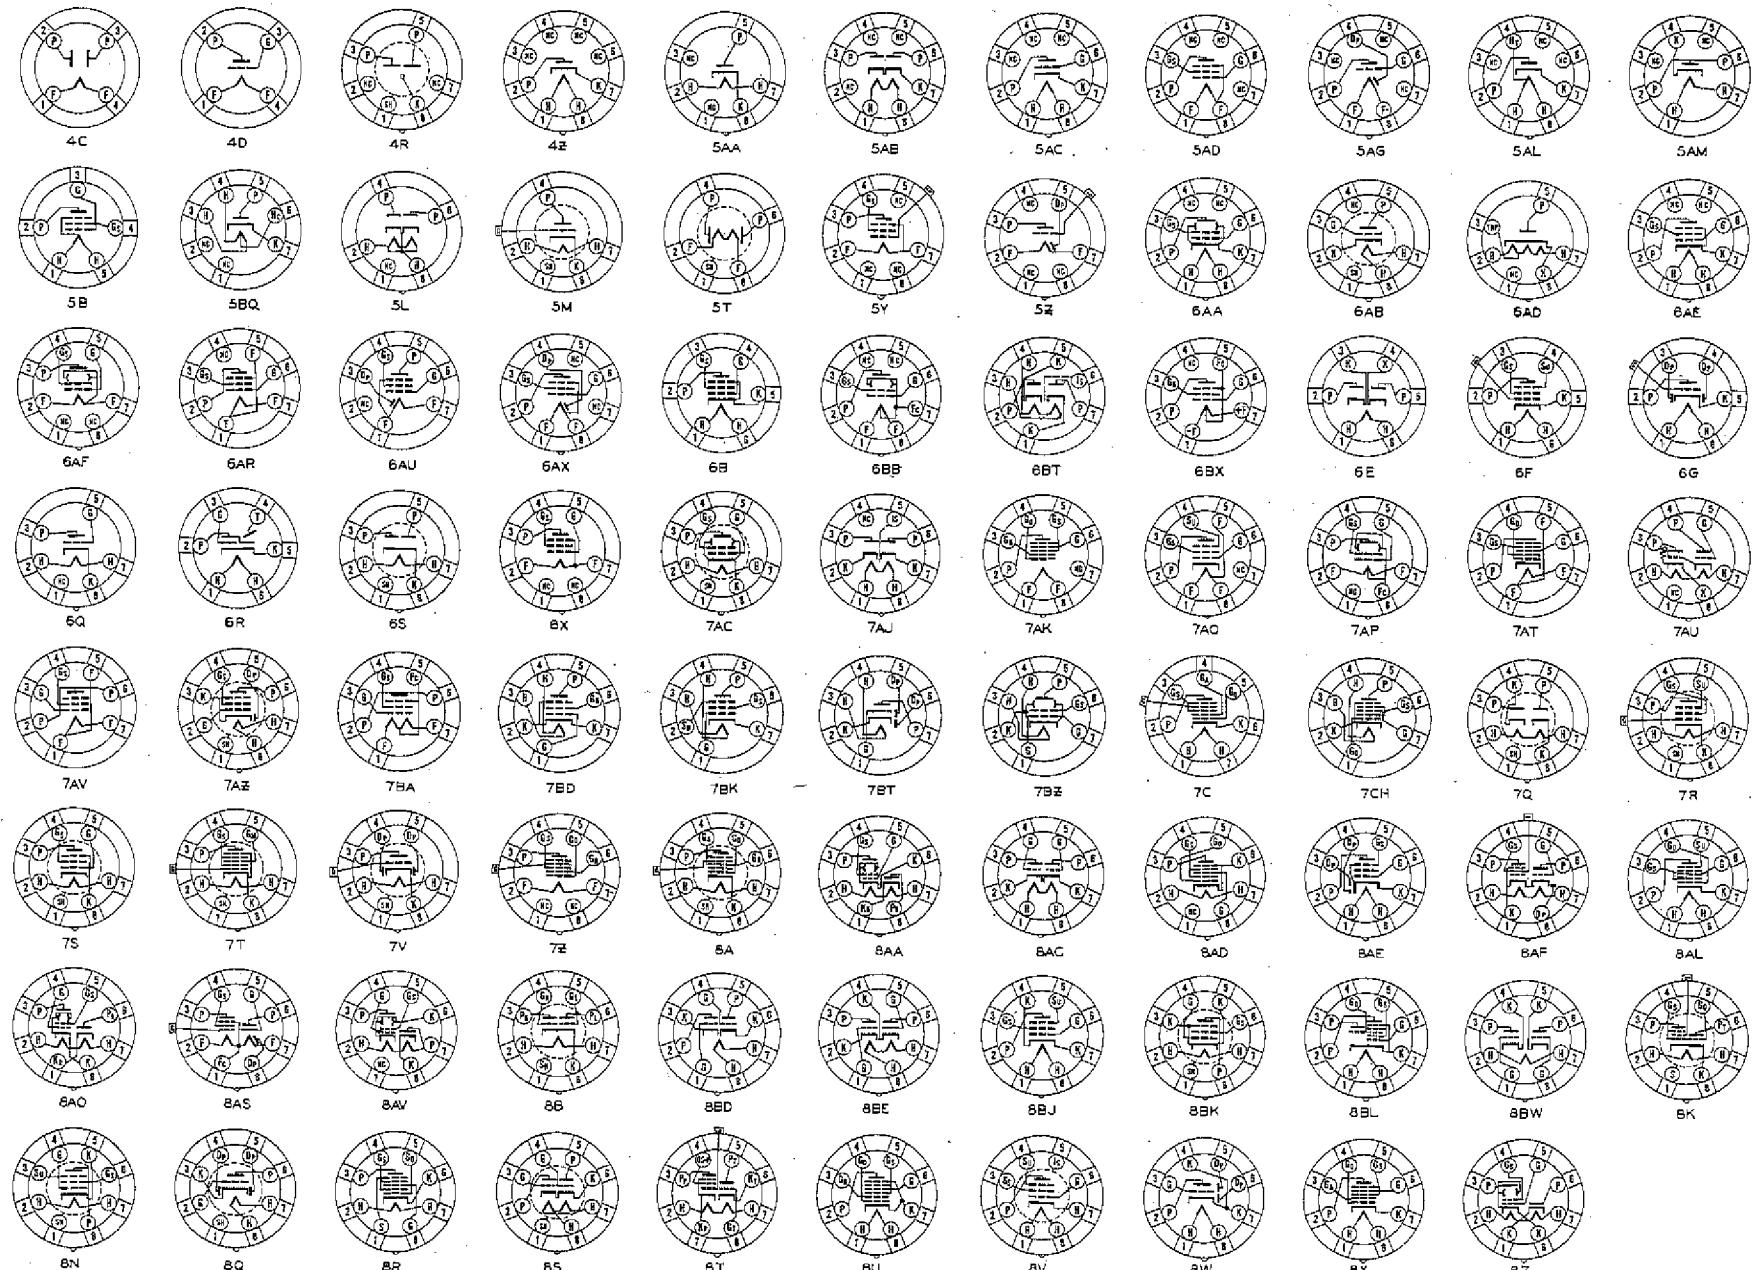

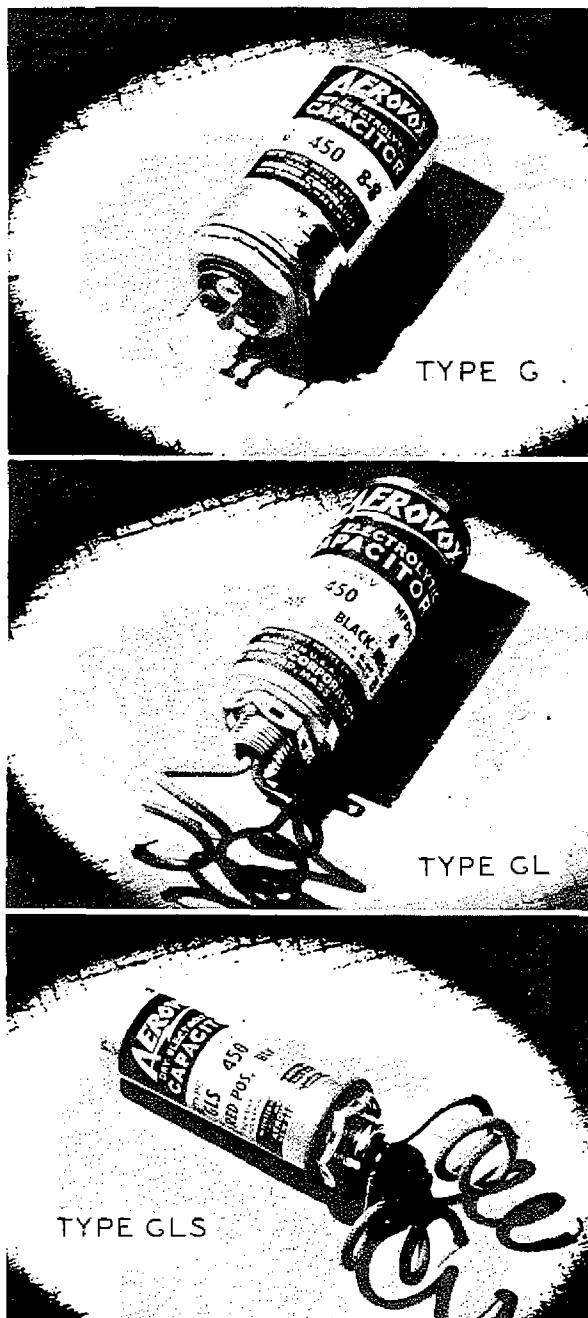

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>INSULATED SCREW MOUNTING—TYPE G SINGLE SECTION</b>			
G475-4	4	475	1½ x 2¼
G475-8	8	475	1½ x 2¼
G450-4	4	450	1¾ x 2¼
G450-8	8	450	1¾ x 2¼
G450-10	10	450	1¾ x 2¼
G450-12	12	450	1¾ x 2¼
G450-16	16	450	1¾ x 2¼
G450-20	20	450	1¾ x 2¼
G450-30	30	450	1¾ x 2¾
G450-40	40	450	1¾ x 2¾
G450-80	80	450	1¾ x 4¼
<b>DUAL SECTION</b>			
G450-8-8	8-8	450	1¾ x 2¼
G450-8-16	8-16	450	1¾ x 2¼
G450-10-10	10-10	450	1¾ x 2¼
G450-12-12	12-12	450	1¾ x 2¼
G450-16-16	16-16	450	1¾ x 2¾
G450-20-20	20-20	450	1¾ x 2¾
<b>SCREW MOUNTING—WIRE LEAD—TYPE GL SINGLE SECTION</b>			
GL600-4	4	600	1¾ x 4
GL600-8	8	600	1¾ x 4½
GL600-16	16	600	1¾ x 4½
GL475-8	8	475	1¾ x 3
GL475-12	12	475	1¾ x 3
GL475-16	16	475	1¾ x 3
GL450-4	4	450	1¾ x 3
GL450-8	8	450	1¾ x 3
GL450-10	10	450	1¾ x 3
GL450-12	12	450	1¾ x 3
GL450-16	16	450	1¾ x 3
GL450-20	20	450	1¾ x 3
GL450-30	30	450	1¾ x 3
GL450-40	40	450	1¾ x 3
GL450-80	80	450	1¾ x 4
<b>DUAL SECTION</b>			
GL475-8-8	8-8	475	1¾ x 4
GL450-8-8	8-8	450	1¾ x 4
GL450-8-16	8-16	450	1¾ x 4
GL450-10-10	10-10	450	1¾ x 4
GL450-12-12	12-12	450	1¾ x 4
GL450-16-16	16-16	450	1½ x 4
GL450-20-20	20-20	450	1½ x 4
<b>TRIPLE SECTION</b>			
GL450-8-8-8	8-8-8	450	1½ x 4
GL450-10-10-10	10-10-10	450	1½ x 4
<b>MINIATURE TUBULAR—ALUMINUM CAN—TYPE PRS SINGLE SECTION</b>			
GL450-8-8-8	8-8-8	450	1½ x 4
GL450-10-10-10	10-10-10	450	1½ x 4
<b>MIDGET SCREW MOUNTING—WIRE LEAD—TYPE GLS SINGLE SECTION</b>			
GLS450-4	4	450	1 x 2¾
GLS450-8	8	450	1 x 2½
GLS450-12	12	450	1 x 3¼
GLS450-16	16	450	1 x 3¼
GLS250-4	4	250	1 x 2¾
GLS250-8	8	250	1 x 2½
GLS250-12	12	250	1 x 2½
GLS250-16	16	250	1 x 3¼
<b>DOUBLE SECTION</b>			
GLS450-8-8	8-8	450	1¾ x 3


Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>CLEAT MOUNTING—METAL CAN—TYPE PRVC SINGLE SECTION</b>			
PRVC600-4	4	600	1¾ x 4
PRVC600-8	8	600	1½ x 4
PRVC600-16	16	600	1¾ x 4½
PRVC475-8	8	475	1¾ x 3
PRVC475-12	12	475	1¾ x 3
PRVC475-16	16	475	1¾ x 3
PRVC450-4	4	450	1¾ x 3
PRVC450-8	8	450	1¾ x 3
PRVC450-10	10	450	1¾ x 3
PRVC450-12	12	450	1¾ x 3
PRVC450-16	16	450	1¾ x 3
PRVC450-20	20	450	1¾ x 3
PRVC450-30	30	450	1¾ x 3
PRVC450-40	40	450	1¾ x 3
PRVC450-80	80	450	1¾ x 4
<b>DUAL SECTION</b>			
PRVC475-8-8	8-8	475	1¾ x 4
PRVC450-8-8	8-8	450	1¾ x 4
PRVC450-8-16	8-16	450	1¾ x 4
PRVC450-10-10	10-10	450	1¾ x 4
PRVC450-12-12	12-12	450	1¾ x 4
PRVC450-16-16	16-16	450	1½ x 4
PRVC450-20-20	20-20	450	1½ x 4
<b>TRIPLE SECTION</b>			
PRVC450-8-8-8	8-8-8	450	1½ x 4
PRVC450-10-10-10	10-10-10	450	1½ x 4
<b>HIGH CAPACITY—LOW VOLTAGE—TYPE HCLV</b>			
HCLV50-1000	1000	50	2⅓ x 4½
HCLV50-2000	2000	50	2⅓ x 4½
HCLV25-500	500	25	1⅓ x 3
HCLV25-1000	1000	25	1⅓ x 4½
HCLV25-2000	2000	25	2⅓ x 3½
HCLV25-3000	3000	25	2⅓ x 4½
HCLV25-4000	4000	25	2⅓ x 4½
HCLV18-500	500	18	1⅓ x 3
HCLV18-1000	1000	18	1⅓ x 4½
HCLV18-2000	2000	18	1⅓ x 4½
HCLV18-4000	4000	18	2⅓ x 4½
HCLV12-500	500	12	1⅓ x 3
HCLV12-1000	1000	12	1⅓ x 3½
HCLV12-2000	2000	12	1⅓ x 4½
HCLV12-3000	3000	12	2⅓ x 4½
HCLV12-4000	4000	12	2⅓ x 4½
<b>MINIATURE TUBULAR—ALUMINUM CAN—TYPE PRS</b>			
<b>SINGLE SECTION</b>			
PRS450-4	4	450	1¾ x 1¾
PRS450-8	8	450	1¾ x 1¾
PRS450-10	10	450	1¾ x 1¾
PRS450-12	12	450	1¾ x 1¾
PRS450-16	16	450	1¾ x 2¼
PRS450-20	20	450	1½ x 2¼
PRS450-30	30	450	1⅔ x 2¼
PRS450-40*	40	450	1⅔ x 3¼
PRS350-4	4	350	1⅓ x 1¾
PRS350-8	8	350	1⅓ x 1¾
PRS350-12	12	350	1⅓ x 2¼
PRS350-16	16	350	1⅓ x 2¼
PRS350-24	24	350	1⅓ x 2¼
PRS250-4	4	250	1⅓ x 1¾
PRS250-8	8	250	1⅓ x 1¾
PRS250-12	12	250	1⅓ x 1¾
<b>*Two leads at one end. Supplied with bracket.</b>			

# CAPACITORS

AEROVOX

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>MINIATURE TUBULAR—ALUMINUM CAN—TYPE PRS SINGLE SECTION (continued)</b>			
PRS250-16	16	250	1 1/8 x 2 1/4
PRS250-20	20	250	1 1/8 x 2 1/4
PRS150-4	4	150	1 1/8 x 1 3/4
PRS150-8	8	150	1 1/8 x 1 3/4
PRS150-12	12	150	1 1/8 x 1 3/4
PRS150-16	16	150	1 1/8 x 1 3/4
PRS150-20	20	150	1 1/8 x 1 3/4
PRS150-24	24	150	1 1/8 x 1 3/4
PRS150-30	30	150	1 1/8 x 1 3/4
PRS150-40	40	150	1 1/8 x 2 1/4
PRS150-50	50	150	1 1/8 x 2 1/4
PRS50-10	10	50	1 1/8 x 1 3/4
PRS50-25	25	50	1 1/8 x 1 3/4
PRS50-50	50	50	1 1/8 x 1 3/4
PRS50-100	100	50	1 1/8 x 1 3/4
PRS25-10	10	25	1 1/8 x 1 1/2
PRS25-25	25	25	1 1/8 x 1 3/4
PRS25-50	50	25	1 1/8 x 1 3/4
PRS25-100	100	25	1 1/8 x 1 3/4
<b>DUAL SECTION</b>			
PRS450-8-8	8-8	450	1 1/8 x 2 1/4
PRS450-8-16	8-16	450	1 1/8 x 2 1/4
PRS450-10-10	10-10	450	1 1/8 x 2 1/4
PRS200-8-8	8-8	200	1 1/8 x 1 3/4
PRS200-8-16	8-16	200	1 1/8 x 1 3/4
PRS200-16-16	16-16	200	1 1/8 x 1 3/4
PRS150-8-8	8-8	150	1 1/8 x 1 3/4
PRS150-8-16	8-16	150	1 1/8 x 1 3/4
PRS150-20-20	20-20	150	1 1/8 x 1 3/4
PRS150-40-40	40-40	150	1 1/8 x 2 1/4
PRS50-10-10	10-10	50	1 1/8 x 1 3/4
PRS25-10-10	10-10	25	1 1/8 x 1 3/4
<b>TWIST PRONG BASE—TYPE AF SINGLE SECTION</b>			
AF5A	25	25	1 x 2
AF5D	25	150	1 x 2
AF6D	30	150	1 x 2
AF8D	40	150	1 x 2
AF10D	50	150	1 x 2
AF20D	100	150	1 x 2 1/2
AF4F	20	250	1 x 2
AF3G	15	300	1 x 2
AF16H	80	400	1 1/8 x 2 1/2
AF2J	10	450	1 x 2
AF3J	15	450	1 x 2
AF4J	20	450	1 x 2
AF6J	30	450	1 x 2 1/2
AF8J	40	450	1 x 3
<b>DUAL ELEMENT</b>			
AF44D	20-20	150	1 x 2
AF66D	30-30	150	1 x 2
AF88D	40-40	150	1 x 2 1/2
AF1010D	50-50	150	1 x 2 1/2
AF22F	10-10	250	1 x 2
AF44F	20-20	250	1 x 2
AF22J	10-10	450	1 x 2
AF44J	20-20	450	1 x 3
AF88J	40-40	450	1 1/8 x 3
<b>TRIPLE SECTION</b>			
AF44D	20-20-20	150	1 x 2
AF88D	40-20-20	150	1 x 2 1/2
AF44D4A	40-40-40	150	1 x 3
AF44D4A	20-20/20	150/25	1 x 2
AF44D40A	20-20/200	150/25	1 x 3



Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>MINIATURE TUBULAR—ALUMINUM CAN—TYPE PRS SINGLE SECTION (continued)</b>			
AF64D4A	30-20/20	150/25	1 x 2
AF84D4A	40-20/20	150/25	1 x 3
AF84D20A	40-20/100	150/25	1 x 3
AF86D4A	40-30/20	150/25	1 x 2 1/2
AF88D4	40-40/20	150/25	1 x 2 1/2
AF106D20A	50-30/100	150/25	1 x 3
AF1010D4A	50-50/20	150/25	1 x 3
AF33F4A	15-15/20	250/25	1 x 2
AF43F4A	20-15/20	250/25	1 x 2
AF32K4A	15-10/20	350/25	1 x 2 1/2
AF64K4A	30-20/20	350/25	1 x 3
AF22J	10-10-10	450	1 x 3
AF44J	20-20-20	450	1 1/8 x 2 1/2
AF22J4A	10-10/20	450/25	1 x 2 1/2
AF44J4A	20-20/20	450/25	1 x 3
AF88J4A	40-40/20	450/25	1 1/8 x 3
<b>QUADRUPLE SECTION</b>			
AF444D4A	20-20-20/20	150/25	1 1/8 x 2
AF886D4A	40-40-30/20	150/25	1 1/8 x 2
AF101010D4A	50-50-50/20	150/25	1 1/8 x 2
AF222J	10-10-10-10	450	1 1/8 x 2
AF444J4	20-20-20-20	450	1 1/8 x 3
AF444J4A	20-20-20/20	450/25	1 1/8 x 2 1/2
AF852J4A	40-30-10/20	450/25	1 1/8 x 3
<b>TUBULAR—CARDBOARD CONTAINER—TYPE PRSA DUAL SECTION</b>			
PRSA450-8-8	8-8	450	1 x 2 1/2
PRSA450-8-16	8-16	450	1 x 2 1/2
PRSA450-10-10	10-10	450	1 x 2 1/2
PRSA450-16-16	16-16	450	1 x 3 1/4
PRSA450-20-20	20-20	450	1 1/8 x 3 1/4
PRSA250-8-8	8-8	250	1 1/8 x 3
PRSA250-10-10	10-10	250	1 1/8 x 2 1/2
PRSA250-16-16	16-16	250	1 1/8 x 3
PRSA250-20-20	20-20	250	1 1/8 x 3 1/4
PRSA200-8-8	8-8	200	1 1/8 x 2 1/2
PRSA200-8-16	8-16	200	1 1/8 x 2 1/2
PRSA200-16-16	16-16	200	1 1/8 x 2 1/2
PRSA150-8-8	8-8	150	1 1/8 x 2 1/2
PRSA150-8-16	8-16	150	1 1/8 x 2 1/2
PRSA150-10-20	20-20	150	1 1/8 x 2 1/2
PRSA150-20-30	20-30	150	1 1/8 x 2 1/2
PRSA150-20-40	20-40	150	1 1/8 x 2 1/2
PRSA150-30-30	30-30	150	1 1/8 x 2 1/2
PRSA150-30-50	30-50	150	1 1/8 x 2 1/2
PRSA150-40-40	40-40	150	1 x 2 1/2
PRSA150-40-80	40-80	150	1 1/8 x 2 1/2
PRSA150-50-50	50-50	150	1 x 3 1/4
PRSA50-10-10	10-10	50	1 1/8 x 2 1/2
PRSA25-10-10	10-10	25	1 1/8 x 2 1/2
<b>TRIPLE SECTION</b>			
PRSA-302010	30-20/100	150/25	1 x 2 1/2
PRSA-503010	50-30/100	150/25	1 x 3 1/4
PRSA-40302	40-30/20	150/25	1 x 2 1/2
PRSA-50502	50-50/20	150/25	1 x 3 1/4
<b>TYPE PRSB DUAL—SEPARATE SECTION</b>			
PRSB450-8-8	8-8	450	1 x 3
PRSB450-8-16	8-16	450	1 1/8 x 3 1/2
PRSB450-16-16	16-16	450	1 1/8 x 3 1/2
PRSB250-8-8	8-8	450	1 x 2 1/2
PRSB250-16-16	16-16	250	1 x 3
PRSB250-20-20	20-20	150	1 x 2 1/2
PRSB250-20-40	20-40	150	1 x 3
<b>TYPE PRSA</b>			

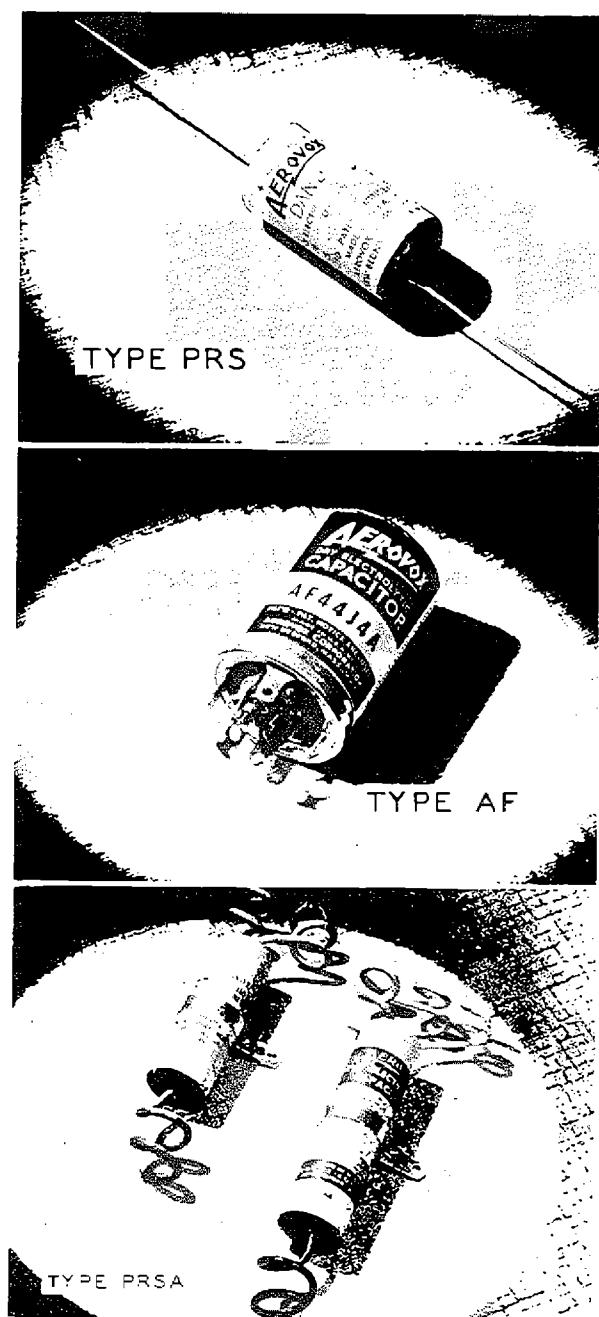

# AEROVOX


## CAPACITORS

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>TYPE PBS SINGLE SECTION</b>			
PBS600-4	4	600	1 $\frac{7}{16}$ x 1 $\frac{1}{8}$ x 2 $\frac{7}{16}$
PBS600-8	8	600	1 $\frac{7}{16}$ x 1 $\frac{1}{8}$ x 3 $\frac{3}{16}$
PBS450-2	2	450	1 $\frac{1}{2}$ x 3 $\frac{3}{16}$ x 2 $\frac{7}{16}$
PBS450-4	4	450	1 $\frac{1}{2}$ x 1 x 2 $\frac{7}{16}$
PBS450-6	6	450	1 $\frac{1}{2}$ x 1 $\frac{1}{8}$ x 2 $\frac{7}{16}$
PBS450-8	8	450	1 $\frac{1}{2}$ x 1 $\frac{1}{8}$ x 2 $\frac{7}{16}$
PBS450-10	10	450	1 $\frac{1}{2}$ x 1 $\frac{1}{8}$ x 3 $\frac{3}{16}$
PBS450-12	12	450	1 $\frac{1}{2}$ x 1 $\frac{1}{8}$ x 3 $\frac{3}{16}$
PBS450-16	16	450	1 $\frac{1}{2}$ x 1 $\frac{1}{8}$ x 2 $\frac{7}{16}$
<b>DUAL SECTION</b>			
PBS450-8-8	8-8	450	1 $\frac{1}{4}$ x 1 $\frac{1}{8}$ x 2 $\frac{7}{16}$
PBS450-8-16	8-16	450	1 $\frac{1}{4}$ x 1 $\frac{1}{8}$ x 3
<b>TRIPLE SECTION</b>			
PBS450-8-8-8	8-8-8	450	1 $\frac{1}{4}$ x 1 $\frac{1}{8}$ x 3

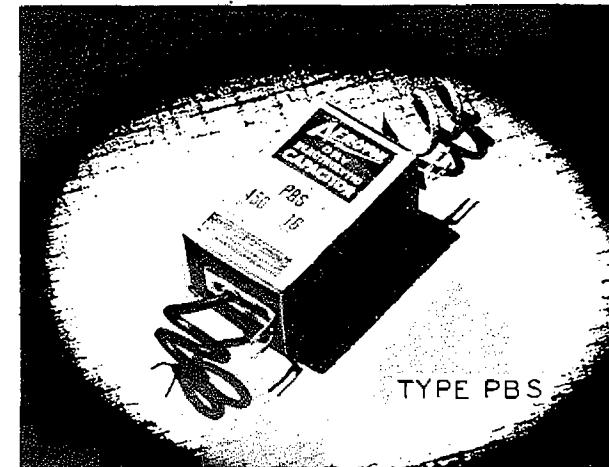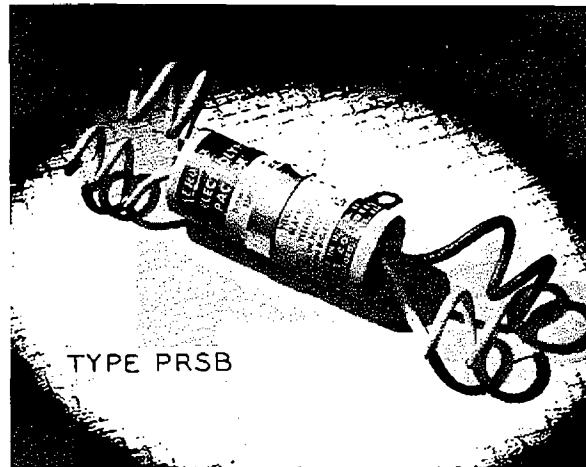

# CORNELL-DUBILIER

## CAPACITORS

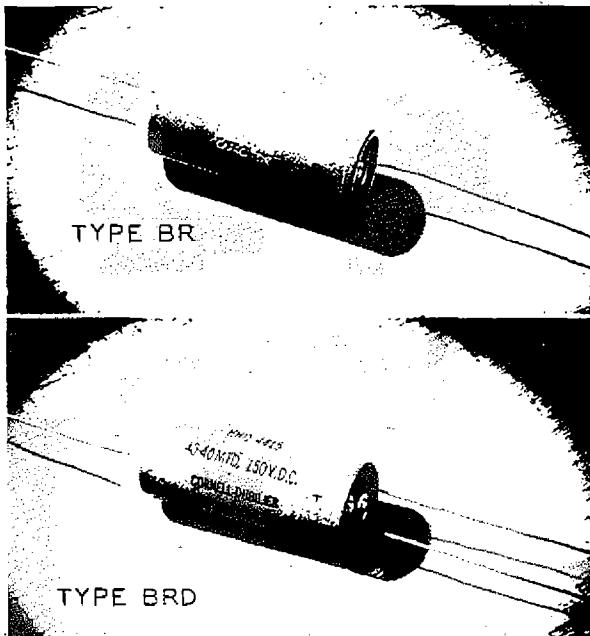


Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>TUBULAR CAN-TYPE BR SINGLE SECTION</b>			
BR102A	10	25	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR202A	20	25	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR252A	25	25	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR502	50	25	1 $\frac{1}{2}$ x 1 $\frac{7}{16}$
BR550	5	50	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR105	10	50	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR205	20	50	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR255	25	50	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR505	50	50	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR415	4	150	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR815	8	150	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR1215	12	150	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR1615	16	150	1 $\frac{1}{2}$ x 1 $\frac{7}{16}$
BR2015	20	150	1 $\frac{1}{2}$ x 1 $\frac{11}{16}$
BR3015	30	150	1 $\frac{1}{2}$ x 2
BR4015	40	150	1 $\frac{1}{2}$ x 2
BR5015	50	150	1 $\frac{1}{2}$ x 2
BR8015	80	150	1 $\frac{1}{2}$ x 2 $\frac{11}{16}$
BR425	4	250	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR825	8	250	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR1225	12	250	1 $\frac{1}{2}$ x 2
BR1625	16	250	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BR2045	20	250	1 $\frac{1}{2}$ x 1 $\frac{11}{16}$
BR4025	40	250	1 $\frac{1}{2}$ x 2 $\frac{1}{2}$
BR4335	4	350	1 $\frac{1}{2}$ x 1 $\frac{7}{16}$
BR835	8	350	1 $\frac{1}{2}$ x 1 $\frac{11}{16}$
BR1235	12	350	1 $\frac{1}{2}$ x 2
BR1635	16	350	1 $\frac{1}{2}$ x 2
BR145	1	450	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
<b>DUAL SECTION</b>			
BRD202A	20-20	25	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BRD220A	20-20	150	1 $\frac{1}{2}$ x 1 $\frac{1}{16}$
BRD3315	30-30	150	1 x 2
BRD3515	30-50	150	1 x 2 $\frac{1}{2}$
BRD4215	40-20	150	1 x 2
BRD4415	40-40	150	1 x 2 $\frac{1}{2}$
BRD2225	20-20	250	1 x 2
BRD2235	20-20	350	1 x 3
BRD1145	10-10	450	1 x 2 $\frac{1}{2}$
BRD1845	18-18	450	1 x 3
<b>PRONG-BASE STYLE-TYPE UP SINGLE SECTION</b>			
UP1M-15	1000	15	1 x 3
UP2M-15	2000	15	1 $\frac{1}{2}$ x 3
UP40-25	40	25	3 $\frac{1}{2}$ x 2

# CAPACITORS

**CORNELL-DUBILIER**

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>PRONG-BASE STYLE—TYPE UP SINGLE SECTION</b>			
UP100-25	100	25	1 x 2
UP500-25	500	25	1 x 3
UPI1M-25	1000	25	1½ x 2½
UP3015	30	150	¾ x 2
UP5015	50	150	1 x 2
UP8015	80	150	1 x 2
UP2025	20	250	¾ x 2
UP3025	30	250	1 x 2
UP4025	40	250	1 x 2
UP1535	15	350	1 x 2
UP3035	30	350	1 x 2
UP5035	50	350	1 x 3
UPI2535	125	350	1½ x 3
UP8040	80	400	1½ x 3
UPI045	10	450	1 x 2
UPI1545	15	450	1 x 2
UP2045	20	450	1 x 2
UP2045	30	450	1 x 3
UP4045	40	450	1 x 3
UP8045	80	450	1½ x 3
UPI050	10	500	1 x 2
UP2050	20	500	1 x 2½
UP3050	30	500	1 x 3
<b>DUAL SECTION</b>			
UPI1M-15	1000-1000	15	1½ x 3
UP44-25	40-40	25	1 x 2
UP4015C	40/20	150/25	1 x 2
UPI045C	10/20	450/25	1 x 2
UP2045C	20/20	450/25	1 x 2
UP4045C	40/20	450/25	1 x 3
UPI115	10-10	150	1 x 2
UP2215	20-20	150	1 x 2
UP3215	30-20	150	1 x 2
UP3315	30-30	150	1 x 2
UP4215	40-20	150	1 x 2
UP4315	40-30	150	1 x 2
UP5315	50-30	150	1 x 2
UP4415	40-40	150	1 x 2
UP5515	50-50	150	1 x 3
UP8415	80-40	150	1 x 3
UP2225	20-20	250	1 x 2
UP3325	30-30	250	1 x 3
UPI1535	15-15	350	1 x 2
UP2235	20-20	350	1 x 3
UPI145	10-10	450	1 x 2
UPI15D45	15-15	450	1 x 3
UP2145	20-10	450	1 x 3
UP2245	20-20	450	1 x 3
UP3345	30-30	450	1½ x 3
UP4245	40-20	450	1½ x 3
UP4445	40-40	450	1½ x 3
UP8140	80-10	400	1½ x 3
UP2250	20-20	500	1½ x 2½
<b>TRIPLE SECTION</b>			
UP2215C	20-20/20	150/25	1 x 2
UP4215C	40-20/20	150/25	1 x 2
UP4415C	40-40/20	150/25	1 x 2
UP5515C	50-50/20	150/25	1 x 3
UPI5D25C	15-15/20	250/25	1 x 2
UP3325C	30-30/20	250/25	1 x 3
UPI1135C	10-10/20	350/25	1 x 2
UP2235C	20-20/20	350/25	1 x 3
UPI145C	10-10/20	450/25	1 x 2
UP2245C	20-20/20	450/25	1 x 3
UP4445C	40-40/20	450/25	1½ x 3


Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>SPECIAL TRIPLE SECTION</b>			
UP222-25	20-20-20	25	1 x 2
UP444-25	40-40-40	25	1 x 2
UP22215	20-20-20	150	1 x 2
UP42215	40-20-20	150	1 x 2
UP43215	40-30-20	150	1 x 3
UP44415	40-40-40	150	1 x 3
UP64215	60-40-20	150	1 x 3
UP84215	80-40-20	150	1 x 3
UPI1135	10-10-10	350	1 x 2
UP22135	20-20-10	350	1 x 3
UPI1145	10-10-10	450	1 x 3
UPI5D145	15-15-10	450	1 x 3
<b>QUADRUPLE SECTION</b>			
UP4CJ65	40-20/100	150/25	1 x 2
UP6C164	50-30/100	150/25	1 x 3
UP4C158	20-20/100	150/6	1 x 2
UP4CJ59	40-20/100	150/6	1 x 2
UP4CJ60	20-20/250	150/6	1 x 2
UP4CJ61	40-20/250	150/6	1 x 2
UP4CJ62	40-20/100	150/12	1 x 2
UP6C120	20/15-10	450/300	1 x 3
UP6CJ17	15/20/20	450/350/200	1 x 3
<b>SPECIAL QUADRUPLE SECTION</b>			
UP7DJ63	40-40-40/100	150/25	1½ x 2
UP9DJ50	20/15-15/20	450/350/25	1½ x 3
UP9DJ55	20-20/30-30	450/300	1½ x 3
<b>HARDWARE FOR TYPE UP</b>			
Catalog Number	Item	Description	
22272	Wrench	For Mounting UP Units	
19891	Bakelite Washer	For ¼ UP	
19884	Bakelite Washer	For 1 UP	
19888	Bakelite Washer	For 1½ UP	
19890	Metal Washer	For ¾ UP	
19883	Metal Washer	For 1 UP	
19887	Metal Washer	For 1½ UP	
21368-1	Mounting Clip	For ¾ UP	
21368-2	Mounting Clip	For 1 UP	
21368-3	Mounting Clip	For 1½ UP	
22153-1	Insulating Tube	For ¾ x 2 UP	
22153-4	Insulating Tube	For 1 x 2 UP	
22153-6	Insulating Tube	For 1 x 3 UP	
22153-7	Insulating Tube	For 1½ x 2 UP	
22153-9	Insulating	For 1½ x 3 UP	
<b>DRY REPLACEMENTS FOR WET TYPES—LUG TERMINAL</b>			
TYPE WR			
WR10	10	450	1½ x 2½
WR20	20	450	1½ x 2½
WR30	30	450	1½ x 3¼
WR40	40	450	1½ x 3¼

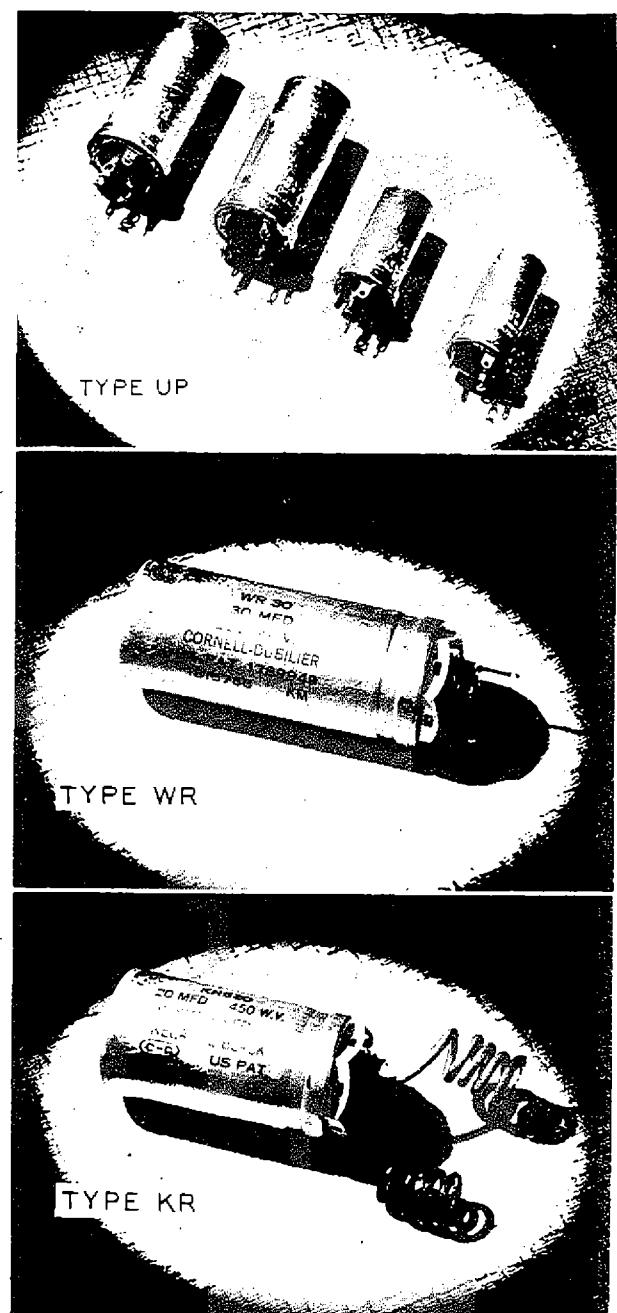

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>SCREW NECK TYPE WITH LEADS—TYPE KR</b>			
KR105	50	25	1 x 2½
KR204	4	250	1 x 2½
KR208	8	250	1 x 2½
KR212	12	250	1 x 2½
KR225	25	250	1 x 3½
KR350	50	300	1¾ x 3¾
KR504	4	450	1 x 2½
KR508	8	450	1 x 2½
KR512A	12	450	1 x 2½
KR516A	16	450	1 x 2½
KR520	20	450	1¾ x 2½
KR530	30	450	1¾ x 3½
KR540	40	450	1¾ x 4¾
KR604	4	600	1¾ x 3½
KR608	8	600	1¾ x 4½
KR616	16	600	1½ x 4½
<b>DUAL SECTION COMMON NEGATIVE</b>			
KRC248	4-8	250	1 x 3
KRC288	8-8	250	1 x 3
KRC548	4-8	450	1 x 3
KRC588	8-8	450	1¾ x 2½
KRC5116	16-16	450	1¾ x 3½
KRC5220	20-20	450	1¾ x 4¾
<b>SEPARATE SECTION</b>			
KR248	4-8	250	1¾ x 2¾
KR288	8-8	250	1¾ x 2¾
KR548A	4-8	450	1¾ x 3
KR588A	8-8	450	1¾ x 3
KR5816A	8-16	450	1¾ x 4½
<b>TRIPLE SECTION COMMON NEGATIVE</b>			
KRC2888	8-8-8	250	1¾ x 3
KRC5888	8-8-8	450	1¾ x 3½
<b>SEPARATE SECTION</b>			
KR2888	8-8-8	250	1¾ x 3½
KR2881	8-8-16	250	1¾ x 3½
KR2811	8-16-16	250	1¾ x 3½
KR5883A	8-8-8	450	1¾ x 4½
<b>HIGH CAPACITY TUBULARS—TYPE BRH</b>			
BRH601	100	6	5/8 x 1½
BRH6025	250	6	5/8 x 1½
BRH605	500	6	5/8 x 2½
BRH610	1000	6	7/8 x 2
BRH615	1500	6	7/8 x 2½
BRH620	2000	6	1 x 2½
BRH121	100	12	5/8 x 1½
BRH1225	250	12	5/8 x 2
BRH125	500	12	7/8 x 2½
BRH151	100	15	5/8 x 1½
BRH1525	250	15	5/8 x 2
BRH155	500	15	7/8 x 1½
BRH251	100	25	5/8 x 2
BRH2525	250	25	7/8 x 2
BRH255	500	25	1 x 2½
BRH501	100	50	5/8 x 2

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>CARDBOARD TUBULAR—TYPE EDL DUAL—COMMON NEGATIVE</b>			
EDL210E	10-10	25	5/8 x 1¾
EDL115	10-10	50	5/8 x 2½
EDL2115	20-10	150	7/8 x 2½
EDL2215	20-20	150	7/8 x 2½
EDL4215	40-20	150	1⅓ x 2¾
EDL4415	40-40	150	1 x 3
EDL5315	50-30	150	1 x 3
EDL8125	8-16	250	7/8 x 2¾
EDL1125	16-16	250	1 x 2¾
EDL8845	8-8	450	1 x 2¾
EDL8145	8-16	450	1⅓ x 3¼
<b>SEPARATE SECTION</b>			
EDL2215SS	20-20	150	1⅓ x 2¾
<b>TRIPLE SECTION—COMMON NEGATIVE</b>			
EDL2215C	20-20/20	150/25	1 x 2½
EDL4215C	40-20/20	150/25	1 x 2¾
EDL5315C	50-30/20	150/25	1⅓ x 3
<b>TYPE EZ—SINGLE SECTION</b>			
EZ825	8	250	7/8 x 2½
EZ1625	16	250	1 x 2¾
EZ2425	24	250	1⅓ x 2¾
EZ835	8	350	1⅓ x 2½
EZ1235	12	350	1⅓ x 2¾
EZ1635	16	350	1 x 2¾
EZ2435	24	350	1 x 3½
EZ845	8	450	7/8 x 2¾
EZ1245	12	450	1 x 2¾
EZ1645	16	450	1⅓ x 2¾
EZ3045	30	450	1⅓ x 3½
<b>DUAL SECTION—COMMON NEGATIVE</b>			
EZ2215	20-20	150	1 x 2½
EZ3315	30-30	150	1⅓ x 2¾
EZ5515	50-50	150	1⅓ x 3½
EZ8825	8-8	250	1 x 2¾
EZ8835	8-8	350	1⅓ x 3½
EZ8845	8-8	450	1 x 3½
<b>SEPARATE SECTION</b>			
EZ288	8-8	250	1⅓ x 2¾
EZ2116	16-16	250	1⅓ x 3¾
EZ388	8-8	350	1⅓ x 3
EZ3112	12-12	350	1⅓ x 3¾
EZ3116	16-16	350	1⅓ x 3¾
EZ588	8-8	450	1⅓ x 3
EZ5816	8-16	450	1⅓ x 3¾
EZ5112	12-12	450	1⅓ x 3¾
EZ5116	16-16	450	1⅓ x 4¾
<b>TRIPLE SECTION—COMMON NEGATIVE</b>			
EZ2215C	20-20/20	150/25	1 x 2½
EZ3215C	30-20/20	150/25	1 x 2½
EZ3115C	30-10/20	150/25	—
EZ4215C	40-20/20	150/25	—
EZ32115	30-20/10	150	—
EZ42215	40-20/20	150	—
EZ1A135C	15-10/20	350/25	—
EZ2143C	20-10/20	400/350/25	—

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>SEPARATE SECTION*</b>			
EZ8825S	8-8/20	250/25	1¾
EZ8835S	8-8/20	350/25	1¾
EZ12D35S	12-12/20	350/25	1¾
EZ16D35S	16-16/20	350/25	1¾
EZ8845S	8-8/20	450/25	1¾
EZ12D45S	12-12/20	450/25	1¾
EZ88825	8-8-8	250	1¾
EZ88835	8-8-8	350	1¾
EZ88845	8-8-8	450	1¾
*First Section Separate, Others Common Negative			
<b>QUADRUPLE SECTION—COMMON NEGATIVE</b>			
EZ8815CC	8-8/10-10	150/25	1 x 2¾
EZ3215CC	30-20/10-10	150/25	1¾ x 3
EZ42215C	40-20-20/20	150/25	1¾ x 3
EZ53215C	50-30-20/20	150/25	1¾ x 3½
EZ44315C	40-40-30/20	150/25	1¾ x 3½
EZ5515C	50-50-50/20	150/25	1¾ x 3½
<b>SEPARATE SECTION*</b>			
EZ16D15SS	16-16/10-10	150/25	1¾ x 3
EZ8845SS	8-8/10-10	450/25	1¾ x 3¾
EZ43215SS	40-30-20/20	150/25	1¾ x 3¾
*First Section Separate, Others Common Negative			
<b>MOUNTING HARDWARE</b>			
Catalog Number Description			
14582	Mounting Ring For 1 Dia. Cans		
I2125	Mounting Ring For 1¾ Dia. Cans		
15591	Mounting Ring For 1½ Dia. Cans		
16693	Mounting Ring For 1¾ Dia. Cans		
14464	Mounting Ring For 2 Dia. Cans		
13590	Mounting Ring For 2½ Dia. Cans		
13591	Mounting Ring For 3 Dia. Cans		
15266	Mounting Ring For 3½ Dia. Cans		
17842	Mounting Ring For 1 Dia. Cans		
19213	Mounting Ring For 1½ Dia. Cans		
18573	Mounting Ring For 1¾ Dia. Cans		
17843	Mounting Ring For 1¾ Dia. Cans		
17844	Mounting Ring For 1½ Dia. Cans		
21368-1	Mounting Clip For ¾ Dia. Cans		
21368-2	Mounting Clip For 1 Dia. Cans		
21368-3	Mounting Clip For 1¾ Dia. Cans		
17920	"C" Clamp For ¾-1 Units		
17921	"C" Clamp For 1-1½ Units		
17922	"C" Clamp For 1½-1½ Units		
17923	"C" Clamp For 1¾-1½ Units		
16279 to 16287	Universal Tubular Mounting Straps		

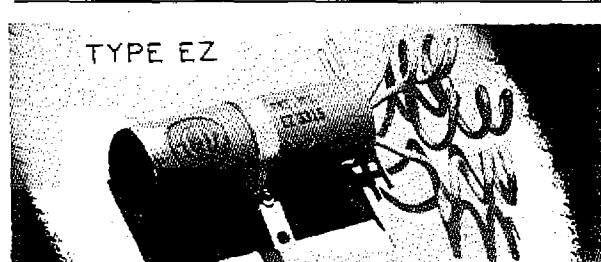

## CAPACITORS

Catalog Number	Capacity (in Mfd.)	Working Voltage	Size D x L
Dimensions are for metal tubes. Add $\frac{1}{16}$ " to diameter and $\frac{1}{8}$ " to length for over-all dimensions over cardboard insulating tube.			

TUBULAR STYLE—TYPE "M"  
SINGLE SECTION

M-8-525	8	525	$\frac{7}{8} \times 2\frac{1}{16}$
M-16-525	16	525	$1 \times 2\frac{3}{16}$
M-4-450	4	450	$\frac{5}{8} \times 1\frac{1}{16}$
M-8-450	8	450	$\frac{3}{4} \times 1\frac{1}{16}$
M-10-450	10	450	$\frac{3}{4} \times 1\frac{1}{16}$
M-12-450	12	450	$\frac{3}{4} \times 1\frac{1}{16}$
M-16-450	16	450	$\frac{3}{4} \times 2\frac{1}{16}$
M-20-450	20	450	$1 \times 2\frac{1}{16}$
M-30-450	30	450	$1 \times 2\frac{3}{16}$
M-40-450	40	450	$1 \times 2\frac{1}{16}$
M-10-350	10	350	$\frac{3}{4} \times 1\frac{1}{16}$
M-20-350	20	350	$\frac{3}{4} \times 1\frac{1}{16}$
M-40-350	40	350	$1 \times 2\frac{1}{16}$
M-8-250	8	250	$\frac{3}{4} \times 1\frac{1}{16}$
M-16-250	16	250	$\frac{3}{4} \times 1\frac{1}{16}$
M-8-150	8	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-10-150	10	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-12-150	12	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-16-150	16	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-20-150	20	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-24-150	24	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-30-150	30	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-40-150	40	150	$\frac{3}{4} \times 2\frac{1}{16}$
M-50-150	50	150	$\frac{3}{4} \times 2\frac{1}{16}$
M-10-50	10	50	$\frac{3}{4} \times 1\frac{1}{16}$
M-25-50	25	50	$\frac{3}{4} \times 1\frac{1}{16}$
M-50-50	50	50	$\frac{3}{4} \times 1\frac{1}{16}$
M-100-50	100	50	$\frac{3}{4} \times 1\frac{1}{16}$
M-10-25	10	25	$\frac{3}{4} \times 1\frac{1}{16}$
M-25-25	25	25	$\frac{3}{4} \times 1\frac{1}{16}$
M-50-25	50	25	$\frac{3}{4} \times 1\frac{1}{16}$
M-100-25	100	25	$\frac{3}{4} \times 1\frac{1}{16}$
M-250-25	250	25	$\frac{3}{4} \times 2\frac{1}{16}$
M-500-25	500	25	$1 \times 2\frac{3}{16}$
M-100-15	100	15	$\frac{3}{4} \times 1\frac{1}{16}$
M-250-15	250	15	$\frac{3}{4} \times 2\frac{1}{16}$
M-500-15	500	15	$\frac{3}{4} \times 2\frac{3}{16}$
M-100-12	100	12	$\frac{3}{4} \times 1\frac{1}{16}$
M-250-12	250	12	$\frac{3}{4} \times 2\frac{1}{16}$
M-500-12	500	12	$\frac{3}{4} \times 2\frac{1}{16}$
M-1000-6	1000	6	$\frac{3}{4} \times 2\frac{1}{16}$
M-1500-6	1500	6	$\frac{3}{4} \times 2\frac{1}{16}$
M-2000-6	2000	6	$1 \times 2\frac{3}{16}$

"S" Suffix Types Furnished With Mounting Strap.

## DUAL SECTION

M-2X8-450	8-8	450	$\frac{7}{8} \times 2\frac{1}{16}$
M-2X10-450	10-10	450	$\frac{7}{8} \times 2\frac{1}{16}$
M-2X20-150	20-20	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-2X30-150	30-30	150	$\frac{3}{4} \times 1\frac{1}{16}$
M-2X40-150	40-40	150	$\frac{3}{4} \times 2\frac{1}{16}$
M-5030-150	50-30	150	$\frac{3}{4} \times 2\frac{1}{16}$
M-2X50-150	50-50	150	$1 \times 2\frac{1}{16}$
M-80-150	80-40	150	$1 \times 2\frac{3}{16}$
M-2X10-25	10-10	25	$\frac{3}{4} \times 1\frac{1}{16}$

"S" Suffix Types Furnished With Mounting Strap.

"UNIVERSAL REPLACEMENT" DRY'S—TYPE DH  
SINGLE SECTION

DH-20-150	20	150	$\frac{7}{8} \times 2\frac{1}{2}$
DH-8-250	8	250	$\frac{7}{8} \times 2\frac{1}{2}$
DH-16-250	16	250	$\frac{7}{8} \times 2\frac{1}{2}$
DH-8-350	8	350	$\frac{7}{8} \times 2\frac{1}{2}$
DH-16-350	16	350	$\frac{7}{8} \times 2\frac{1}{2}$
DH-8-450	8	450	$\frac{7}{8} \times 2\frac{1}{2}$
DH-16-450	16	450	$\frac{7}{8} \times 2\frac{1}{2}$

Catalog Number	Capacity (in Mfd.)	Working Voltage	Size D x L
DH-20-450	20	450	$1 \times 2\frac{7}{8}$
DH-30-450	30	450	$1 \times 3\frac{1}{2}$
DH-8-525	8	525	$1 \times 2\frac{7}{8}$
DH-16-525	16	525	$1 \times 3\frac{1}{2}$

## DUAL SECTION—COMMON NEGATIVE

DH-2X20-150	20-20	150	$\frac{7}{8} \times 2\frac{1}{2}$
DH-2X50-150	50-50	150	$1 \times 2\frac{7}{8}$
DH-2X8-450	8-8	450	$1 \times 2\frac{7}{8}$

## SEPARATE SECTION

DH-2X20-150SS	20-20	150	$1 \times 3$
DH-2X8-450SS	8-8	450	$1\frac{1}{4} \times 3$
DH-816-450SS	8-16	450	$1\frac{3}{4} \times 3$
DH-2X16-450SS	16-16	450	$1\frac{3}{4} \times 3\frac{1}{2}$

## TRIPLE SEPARATE SECTION

DH-3X8-450SS	8-8-8	450	$1\frac{3}{4} \times 4$
--------------	-------	-----	-------------------------

CARDBOARD TUBULARS—TYPE DSB  
DUAL SECTION—COMMON NEGATIVE

DSB-2X10-25	10-10	25	$\frac{5}{8} \times 2\frac{1}{2}$
DSB-2X20-150	20-20	150	$\frac{3}{4} \times 2\frac{1}{2}$
DSB-2X30-150	30-30	150	$\frac{3}{8} \times 2\frac{1}{2}$
DSB-2X40-150	40-40	150	$1 \times 2\frac{1}{2}$
DSB-5030-150	50-30	150	$1 \times 2\frac{1}{2}$
DSB-2X50-150	50-50	150	$1 \times 3$
DSB-8040-150	80-40	150	$1\frac{1}{2} \times 3$

## SEPARATE SECTION


DSB-2X20-150SS	20-20	150	$1 \times 2\frac{1}{2}$
----------------	-------	-----	-------------------------

## TRIPLE SECTION—COMMON NEGATIVE


DSB-3X20-150	20-20-20	150	$1 \times 2\frac{1}{2}$
DSB-403020-150	40-30-20	150	$1 \times 3$
DSB-804020-150	80-40-20	150	$1\frac{1}{2} \times 3\frac{1}{4}$
DSB-301	30-10/20	150/25	$1 \times 2\frac{1}{2}$
DSB-302	30-20/20	150/25	$1 \times 2\frac{1}{2}$
DSB-303	40-30/20	150/25	$1 \times 3$
DSB-304	50-50/20	150/25	$1 \times 3\frac{1}{4}$
DSB-305	40-40/40	150/25	$1 \times 3\frac{1}{4}$



"TWIST PRONG" BASE—TYPE DY  
SINGLE SECTION

DY-3000-10	3000	10	$1\frac{3}{4} \times 3$
DY-1000-15	1000	15	$1 \times 3$
DY-2000-15	2000	15	$1\frac{3}{4} \times 3$
DY-25-25	25	25	$1 \times 2$
DY-100-25	100	25	$1 \times 2$
DY-500-25	500	25	$1 \times 2$
DY-1000-25	1000	25	$1\frac{3}{4} \times 3$
DY-500-50	500	50	$1\frac{3}{4} \times 3$
DY-20-150	20	150	$1 \times 2$
DY-40-150	40	150	$1 \times 2$
DY-80-150	80	150	$1 \times 2$
DY-20-350	20	350	$1 \times 2$
DY-30-350	30	350	$1 \times 2$
DY-50-350	50	350	$1 \times 2$
DY-125-350	125	350	$1\frac{3}{4} \times 3\frac{1}{2}$
DY-10-450	10	450	$1 \times 2$
DY-20-450	20	450	$1 \times 2$
DY-30-450	30	450	$1 \times 2\frac{1}{2}$
DY-40-450	40	450	$1 \times 3$
DY-50-450	50	450	$1 \times 3\frac{3}{4}$
DY-80-450	80	450	$1\frac{3}{4} \times 3\frac{1}{2}$
DY-10-525	10	525	$1 \times 2\frac{1}{2}$
DY-20-525	20	525	$1 \times 3$

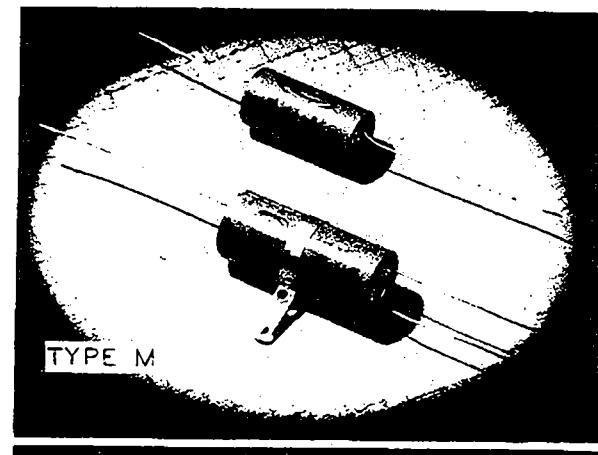

TYPE D

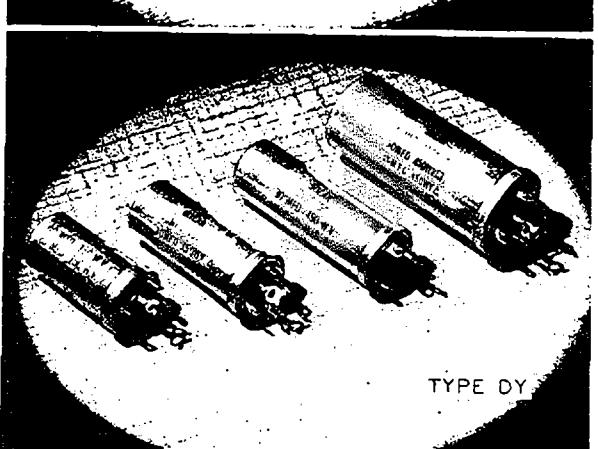

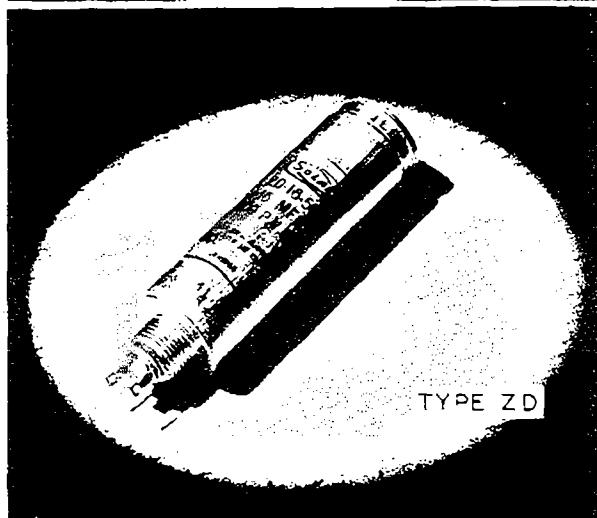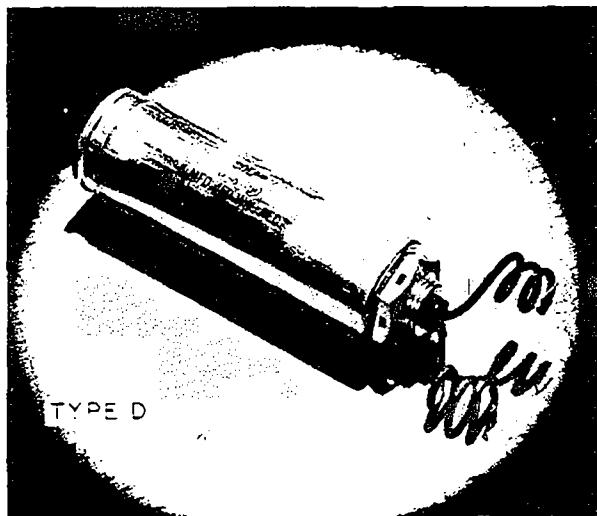

Catalog Number	For Tubes And Cans Of The Following Diameters
<b>HARDWARE</b>	
HMC-3	3/8 and 7/16
HMC-4	1/2 and 9/16
HMC-5	5/8 and 11/16
HMC-6	3/4 and 13/16
HMC-7	7/8 and 15/16
HMC-8	1 and 1 1/16
HMC-11	1 1/8 and 1 1/4

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>MOUNTING STRAPS FOR TUBULAR UNITS</b>			
HLC-2	3/8		
HLC-3	7/16		
HLC-4	1/2		
HLC-5	9/16		
HLC-6	5/8		
HLC-7	11/16		
HLC-8	3/4		
HLC-9	13/16		
HLC-10	7/8		
HLC-11	15/16		
HLC-12	1		
HLC-13	1 1/8		
HLC-14	1 1/4		
HLC-15	1 1/2		
HLC-16	1 3/8		
HLC-17	2		

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>"TWIST PRONG" BASE—TYPE DY DUAL SECTION</b>			
DY-2X20-25	20-20	25	1 x 2
DY-2X10-150	10-10	150	1 x 2
DY-2X20-150	20-20	150	1 x 2
DY-3020-150	30-30	150	1 x 2
DY-2X30-150	30-30	150	1 x 2
DY-4020-150	40-20	150	1 x 2
DY-4030-150	40-30	150	1 x 2
DY-2X40-150	40-40	150	1 x 2
DY-5030-150	50-30	150	1 x 2
DY-2X50-150	50-50	150	1 x 2 1/2
DY-8040-150	80-40	150	1 x 2 1/2
DY-2X15-350	15-15	350	1 x 2
DY-2X20-350	20-20	350	1 x 2 1/2
DY-40-150/20-50	40/20	150/50	1 x 2
DY-20-400/20-25	20/20	400/25	1 x 2
DY-10-450/25-50	10/25	450/50	1 x 2
DY-2X10-450	10-10	450	1 x 2
DY-2X20-450	20-20	450	1 x 3
DY-2X30-450	30-30	450	1 1/8 x 2 1/2
DY-2X40-450	40-40	450	1 1/8 x 3

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>TRIPLE SECTION</b>			
DY-3X20-25	20-20-20	25	1 x 2
DY-3X20-150	20-20-20	150	1 x 2
DY-3X40-150	40-40-40	150	1 x 2 1/2
DY-402010-150	40-20-10	150	1 x 2
DY-403020-150	40-30-20	150	1 x 2
DY-604020-150	60-40-20	150	1 x 2 1/2
DY-804020-150	80-40-20	150	1 x 3
DY-301	15-15/1200	150/1.5	1 x 2
DY-302	15-15/40	150/25	1 x 2
DY-303	30-20/25	150/25	1 x 2
DY-304	40-20/100	150/25	1 x 2 1/2
DY-305	40-40/40	150/25	1 x 2
DY-306	50-30/30	150/25	1 x 2
DY-307	50-50/40	150/25	1 x 3
DY-308	60-40/10	150/25	1 x 2 1/2
DY-309	30-30/25	300/50	1 x 2 1/2
DY-310	15-15/20	250/25	1 x 2 1/2
DY-311	30-30/30	350/50	1 1/8 x 2 1/2
DY-312	20-20/20	450/25	1 x 3
DY-3X10-450	10-10-10	450	1 x 3
DY-3X15-450	15-15-15	450	1 x 3 1/8
DY-3X20-450	20-20-20	450	1 1/8 x 2 1/2
DY-313	30-30/20	450/25	1 1/8 x 3
DY-314	40-40/40	450/25	1 1/8 x 3 1/8
DY-315	40-20/25	450/50	1 1/8 x 3
DY-316	15-10/40	450/25	1 x 3
DY-317	15-15/10	450/50	1 x 3

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>QUADRUPLE SECTION</b>			
DY-418	20-20-20/20	150/25	1 1/8 x 2
DY-419	40-40-40/20	150/25	1 1/8 x 2
DY-401	40-30-20/20	150/25	1 1/8 x 2
DY-4X10-450	10-10-10-10	450	1 1/8 x 3 1/8
DY-4X20-450	20-20-20-20	450	1 1/8 x 3 1/8
DY-402	10-10-10/20	450/25	1 1/8 x 2
DY-403	30-30-20/20	450/25	1 1/8 x 3 1/8
DY-404	20/20/20/20/20	450/400/350/25	1 1/8 x 2 1/2
DY-405	20-20/20/20/20	450/400/25	1 1/8 x 2 1/2
DY-406	40-30-20/20	450/25	1 1/8 x 3 1/8

Catalog Number	Description
HDYP-3	Metal Grounding Plate For 1 Cans
HDYP-7	Metal Grounding Plate For 1 1/8 Cans
HDYP-4	Insulating Plate For 1 Cans
HDYP-8	Insulating Plate For 1 1/8 Cans

Catalog Number	Type	Size
D-8-250	8	250
D-12-250	12	250
D-24-250	24	250
D-8-450	8	450
D-12-450	12	450
D-16-450	16	450
D-20-450	20	450
D-30-450	30	450
D-40-450	40	450
D-2X8-450	8-8*	450
D-3X8-450	8-8-8*	450
D-8-475	8	475

Catalog Number	Type	Size
D-4-600	4	600
D-8-600	8	600
D-16-600	16	600

Catalog Number	Type	Size
DI-8-450	8	450
DI-16-450	16	450
DI-2X8-450	8-8†	450
DI-3X8-45	8-8-8†	450

Catalog Number	Type	Size
DM-8-450	8	450
DM-16-450	16	450
*Separate Section. †Common Negative. ‡Type "DM" has #8-18 mounting thread.		

Catalog Number	Type	Size
ZD-8-500	8	500
ZD-12-500	12	500
ZD-16-500	16	500
ZD-20-500	20	500
ZD-24-500	24	500

Catalog Number	Type	Size
Z-30-500	30	500
Z-40-500	40	500
ZV-8-600	8	600
ZV-16-600	16	600

# CAPACITORS

**SPRAGUE**

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>SINGLE SECTION TUBULAR</b>			
TA-5	5	25	1 1/16 x 1 13/16
TA-10	10	25	1 1/16 x 1 13/16
TA-25	25	25	1 1/16 x 1 13/16
TA-50	50	25	1 1/16 x 1 13/16
TA-55	5	50	1 1/16 x 1 13/16
TA-510	10	50	1 1/16 x 1 13/16
TA-525	25	50	1 1/16 x 1 13/16
TA-550	50	50	1 1/16 x 1 13/16
UT-41	4	150	1 1/16 x 1 13/16
UT-81	8	150	1 1/16 x 1 13/16
UT-121	12	150	1 1/16 x 1 13/16
UT-161	16	150	1 1/16 x 1 13/16
UT-201	20	150	1 1/16 x 1 13/16
UT-301	30	150	1 1/16 x 1 13/16
UT-401	40	150	7/8 x 1 13/16
UT-501	50	150	1 5/16 x 1 13/16
UT-42	4	250	1 1/16 x 1 13/16
UT-82	8	250	1 1/16 x 1 13/16
UT-122	12	250	1 1/16 x 1 13/16
UT-162	16	250	1 1/16 x 1 13/16
UT-202	20	250	1 1/16 x 1 13/16
UT-402	40	250	1 5/16 x 2 1/16
UT-43	4	350	1 1/16 x 1 13/16
UT-83	8	350	1 3/16 x 1 13/16
UT-123	12	350	1 3/16 x 1 13/16
UT-163	16	350	1 3/16 x 1 13/16
UT-203	20	350	1 3/16 x 1 13/16
UT-4	4	450	1 1/16 x 1 13/16
UT-8	8	450	1 3/16 x 1 13/16
UT-12	12	450	1 3/16 x 1 13/16
UT-16	16	450	1 3/16 x 2 1/16
UT-20	20	450	1 3/16 x 2 1/16
UT-30	30	450	1 3/16 x 2 1/16
UT-40	40	450	1 1/16 x 2 13/16
UT-85	8	500	1 3/16 x 1 13/16
UT-165	16	500	1 3/16 x 2 1/16
UT-205	20	500	1 1/16 x 2 1/16

#### DUAL SECTION—COMMON NEGATIVE

TA-110	10-10	25	5/16 x 2 1/2
TA-100	10-10	50	5/16 x 2 1/2
TA-88	8-8	150	1 1/16 x 2 1/2
TA-122	12-20	150	5/8 x 2 1/2
TA-116	16-16	150	5/8 x 2 1/2
TA-220	20-20	150	13/16 x 2 1/2
TA-230	20-30	150	7/8 x 2 1/2
TA-240	20-40	150	15/16 x 2 1/2
TA-330	30-30	150	15/16 x 2 1/2
TA-430	40-30	150	1 x 2 1/2
TA-440	40-40	150	1 x 2 1/2
TA-530	50-30	150	1 x 2 1/2
TA-505	50-50	150	15/16 x 3 1/2
TA-816	8-16	200	5/8 x 2 1/2
TA-212	12-12	200	13/16 x 2 1/2
TA-216	16-16	200	19/16 x 2 1/2
AT-816	8-16	250	19/16 x 2 1/2
AT-261	16-16	250	15/16 x 2 1/2
UT-88	8-8	450	1 x 2 1/2
UT-816	8-16	450	1 x 2 1/2


#### DUAL SECTION—SEPARATE SECTIONS

TU-220	20-20	150	1 x 2 1/2
TU-420	40-20	150	1 1/16 x 2 1/2
TU-816	8-16	250	1 x 2 1/2
TU-216	16-16	250	1 x 2 1/2
TU-88	8-8	450	1 1/16 x 3 1/2
TU-1616	16-16	450	1 1/16 x 3 1/2


#### TRIPLE SECTION—SEPARATE SECTIONS

TA-303	30-30-30	150	1 5/16 x 2 1/2
--------	----------	-----	----------------

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>SINGLE SECTION TUBULAR—UNIVERSAL MOUNTING</b>			
LM-121	20	150	3/4 x 2 1/2
LM-8	8	450	5/8 x 2 1/2
LM-16	16	450	1 x 2 1/2
<b>DUAL SECTION TUBULAR—UNIVERSAL MOUNTING</b>			
LM-220	20-20	150	1 x 2 1/2
LM-28	8-8	250	1 x 2 1/2
LM-216	16-16	250	1 x 3 3/8
LM-88	8-8	450	1 x 3 3/8
LM-816	8-16	450	1 1/8 x 3 3/8
LM-1616	16-16	450	1 1/8 x 3 3/8
<b>TRIPLE SECTION TUBULAR—UNIVERSAL MOUNTING</b>			
LM2016	20-16/25	250/25	1 1/4 x 3 7/8
LM-4020	40-20/25	250/25	1 1/4 x 3 7/8
<b>HIGH CAPACITY, LOW VOLTAGE TUBULARS</b>			
UHC-106	100	6	1 1/16 x 1 13/16
UHC-206	250	6	1 3/16 x 1 1/16
UHC-506	500	6	1 1/16 x 1 13/16
UHC-1000	1000	6	1 1/16 x 2 1/16
UHC-1500	1500	6	1 1/16 x 3 5/16
UHC-112	100	12	1 1/16 x 1 13/16
UHC-212	250	12	1 9/16 x 1 13/16
UHC-512	500	12	1 1/16 x 1 13/16
UHC-1012	1000	12	1 1/16 x 2 1/16
UHC-115	100	15	1 1/16 x 1 13/16
UHC-215	250	15	1 5/16 x 1 13/16
UHC-515	500	15	1 5/16 x 2 5/16
UHC-1015	1000	15	1 1/16 x 3 5/16
UHC-102	100	25	1 9/16 x 1 13/16
UHC-202	250	25	1 1/16 x 1 13/16
UHC-502	500	25	1 1/16 x 2 1/16
UHC-105	100	50	1 5/16 x 1 13/16
<b>SELF MOUNTING CAN-TYPE EL— SINGLE SECTION</b>			
EL-13	3000	10	1 9/16 x 3
EL-111	1000	15	1 x 3
EL-121	2000	15	1 3/16 x 3
EL-142	40	25	3/4 x 2
EL-112	100	25	3/4 x 2
EL-152	500	25	1 x 2 1/2
EL-122	1000	25	1 3/4 x 2
EL-50	150	50	3/4 x 2 1/2
EL-55	500	50	1 3/4 x 2 1/2
EL-31	30	150	3/4 x 2
EL-51	50	150	3/4 x 2 1/2
EL-14	40	200	1 x 2
EL-12	20	250	3/4 x 2
EL-30	30	250	3/4 x 2 1/2
EL-42	40	250	1 x 2
EL-6	60	250	1 x 2 1/2
EL-203	15	300	3/4 x 2
EL-33	30	300	1 x 2
EL-53	50	300	1 x 2 1/2
EL-123	125	300	1 1/16 x 3
EL-5	50	350	1 x 3
EL-125	125	350	1 3/8 x 3
EL-10	10	400	3/4 x 2
EL-20	20	400	1 x 2
EL-80	80	400	1 1/8 x 2 1/2
EL-1	10	450	3/4 x 2
EL-15	15	450	1 x 2
EL-2	20	450	1 x 2
EL-3	30	450	1 x 2 1/2
EL-4	40	450	1 x 3
EL-115	10	525	1 x 2

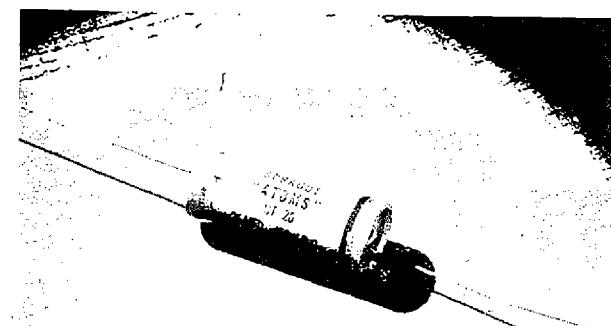

TYPE UT

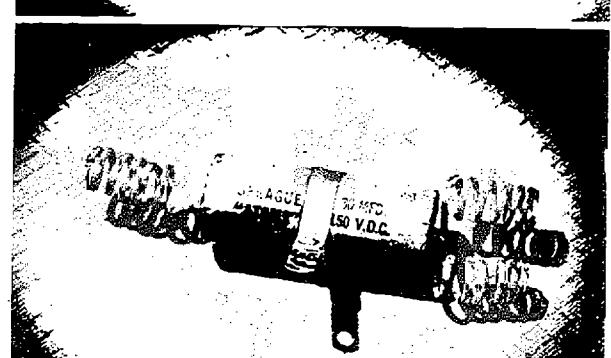


TYPE TA



TYPE TU

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>DUAL SECTION</b>			
EL-242	40-40	25	1 x 2
EL-250	50-50	50	1 x 2
EL-221	20-20	150	1 x 2
EL-231	30-15	150	1 x 2
EL-230	30-30	150	1 x 2
EL-24	40-20	150	1 x 2
EL-35	50-30	150	1 x 2
EL-25	50-50	150	1 x 2
EL-26	60-60	150	1 x 3
EL-101	10-10	250	1 x 2
EL-120	20-20	250	1 x 2
EL-245	40-40	250	1 x 3
EL-21	10-10	300	1 x 2
EL-253	15-15	300	1 x 2
EL-22	20/20	300/25	1 x 2
EL-23	30/30	350/300	1 x 3
EL-32	30-20	350	1 x 3
EL-254	15-15	400	1 x 2½
EL-214	80-10	400	1 x 3
EL-210	10-10	450	1 x 2
EL-151	15-10	450	1 x 2½
EL-220	20-10	450	1 x 3
EL-240	40-40	450	1 x 3
<b>TRIPLE SECTION</b>			
EL-325	20-20-20	25	1 x 2
EL-335	30-30-30	50	1 x 2
EL-313	10-30-30	150	1 x 2
EL-320	20-20-20	150	1 x 2
EL-224	40-20-20	150	1 x 2
EL-340	40-40-40	150	1 x 3
EL-321	30-20/100	150/6	1 x 2
EL-220	20-20/20	150/25	1 x 2
EL-324	30-20/20	150/25	1 x 2
EL-332	30-30/20	150/25	1 x 2
EL-43	30-40/25	150/25	1 x 2
EL-343	40-30/20	150/25	1 x 2
EL-351	50-30/100	150/25	1 x 2
EL-352	50-50/20	150/25	1 x 2½
EL-355	10-15-15	250	1 x 2
EL-315	10-15-30	250	1 x 2
EL-354	40-20-20	250	1 x 3
EL-331	15-15/20	250/25	1 x 2
EL-334	30-30/20	250/25	1 x 2½
EL-314	10-20/30	250/350	1 x 3
EL-316	10-10-10	300	1 x 2
EL-333	20-20/20	300/25	1 x 2
EL-341	40-15/20	300/25	1 x 2½
EL-102	10-10/20	350/25	1 x 2
EL-153	15-10/20	350/25	1 x 2
EL-326	15-15/20	350/25	1 x 2½
EL-212	20-10/20	350/25	1 x 2½
EL-323	30-20/20	350/25	1 x 3
EL-311	10-10-10	400	1 x 2½
EL-342	15-15/40	400/25	1 x 2½
EL-322	20-20/20	400/25	1 x 3
EL-310	10-10-10	450	1 x 2½
EL-344	15-15-10	450	1 x 3
EL-362	20-15/10	450/300	1 x 3
EL-363	10/10/20	450/350/25	1 x 2
EL-364	15/20/20	450/250/250	1 x 2
EL-345	10-10/10	450/25	1 x 2
EL-202	10-10/10	450/25	1 x 3
EL-312	10-20/20	450/25	1 x 3
EL-353	15-15/20	450/25	1 x 3
EL-205	20-15/20	450/25	1 x 3
EL-350	20-20/20	450/25	1 x 3
EL-330	30-30/20	450/25	1 x 3
EL-360	15-15/10	450/300	1 x 3
EL-215	15-15/15	450/350	1 x 3

Catalog Number	Capacity (In Mfd.)	Working Voltage	Size D x L
<b>QUADRUPLE SECTION</b>			
EL-434	30-30-30/40	150/25	1 ½ x 2
EL-443	40-40-30/20	150/25	1 ½ x 2
EL-452	50-50-50/20	150/25	1 ½ x 2
EL-422	40-20-10/20	200/25	1 ½ x 2
EL-412	10-10-10/20	300/25	1 ½ x 2
EL-432	40-40-20/20	350/300/25	1 ½ x 3
EL-415	20-10-5/10	350/25	1 ½ x 2
EL-442	20-20-20/20	400/25	1 ½ x 2½
EL-410	10-10-10-10	450	1 ½ x 2
EL-420	20-20-20-20	450	1 ½ x 3
EL-421	20-15-15/20	450/350/25	1 ½ x 2
EL-423	20-15/20-20	450/25	1 ½ x 2
EL-425	20-20/30-30	450/300	1 ½ x 3
EL-431	10-10-10/20	450/25	1 ½ x 2
EL-424	40-30-10/20	450/25	1 ½ x 3
<b>TYPE PLS</b>			
PLS-4	4	450	1 x 2 ½ ¼
PLS-8	8	450	1 x 2 ½ ¾
PLS-12	12	450	1 x 2 ½ ¾
PLS-16	16	450	1 x 2 ½ ¾
PLS-20	20	450	1 ½ x 2 ½ ¾
PLS-25	25	450	1 ½ x 3 ½ ¾
PLS-30	30	450	1 ½ x 3 ½ ¾
PLS-40	40	450	1 ½ x 3 ½ ¾
PLS-48	4-8	450	1 ½ x 2 ½ ¾
PLS-88	8-8	450	1 ½ x 2 ½ ¾
PLS-888	8-8-8	450	1 ½ x 2 ½ ¾
<b>TYPE LS</b>			
LS-8	8	450	1 ½ x 2 ½ ¾
LS-12	12	450	1 ½ x 2 ½ ¾
LS-16	16	450	1 ½ x 2 ½ ¾
LS-20	20	450	1 ½ x 2 ½ ¾
LS-25	25	450	1 ½ x 3 ½ ¾
LS-30	30	450	1 ½ x 3 ½ ¾
LS-40	40	450	1 ½ x 3 ½ ¾
LS-88	8-8	450	1 ½ x 2 ½ ¾
<b>TYPE SC</b>			
SC-4	4	475	1 x 3 ¾
SC-8	8	475	1 ½ x 4 ¾
SC-12	12	475	1 ½ x 4 ¾
SC-16	16	475	1 ½ x 4 ¾
SC-88	8-8	475	1 ½ x 4 ¾
<b>TYPE CL</b>			
CL-8	8	475	1 ½ x 4 ¾
CL-16	16	475	1 ½ x 4 ¾
CL-88	8-8	475	1 ½ x 4 ¾
<b>TYPE WR</b>			
WR-8	8	500	1 x 4 ¾
WR-16	16	500	1 ½ x 4 ¾
WR-25	25	500	1 ½ x 5 ¾

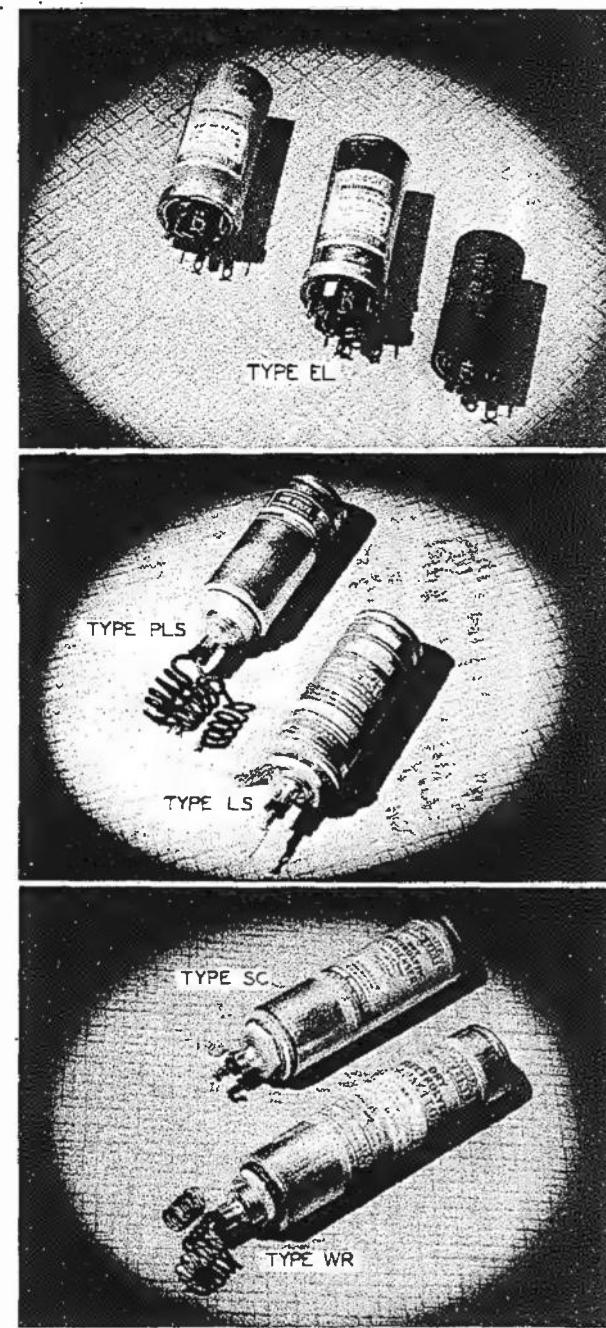

# TRANSFORMERS

**STANCOR**

## INTERSTAGE TRANSFORMERS

Part No.	Application	Turns Ratio	Core	Max. Pri. D.C.	Dimensions H x W x D
PLATE TO GRID INTERSTAGE SINGLE PLATE (7000 TO 20,000 OHMS) TO SINGLE CLASS "A" GRID.					
A-4205	Single plate to Single grid	2.4:1	1 x 1	15 ma	3 3/16 x 2 5/16 x 2 1/8
PUSH-PULL INPUT—SINGLE PLATE (7000 TO 15,000 OHMS) TO PUSH-PULL CLASS "A" GRIDS.					
A-2132	Single plate to Push-pull grids This unit recommended for coupling screen grid or power detector has a special shield for hum elimination.	1:1	1 x 1	10 ma	3 1/8 x 3 5/8 x 2 1/4
A-52-C	Single plate to Push-pull grids	2:1	1/2 x 1/2	10 ma	1 1/8 x 2 3/8 x 1 1/2
A-62-C	Single plate to Push-pull grids	2:1	5/8 x 5/8	10 ma	1 1/8 x 2 3/8 x 1 1/2
A-4741	Single plate to Push-pull grids	2:1	5/8 x 5/8	10 ma	2 x 2 5/8 x 1 1/2
A-4745	Single plate to Push-pull grids Recommended for use in super-regenerative circuits. Has a static shield between pri. and sec. windings.	2:1	3/4 x 1	10 ma	2 1/16 x 2 3/8 x 2 5/16
A-53-C	Single plate to Push-pull grids	3:1	1/2 x 1/2	10 ma	1 1/8 x 2 3/8 x 1 1/2
A-63-C	Single plate to Push-pull grids	3:1	5/8 x 5/8	10 ma	1 1/8 x 2 3/8 x 1 1/2
A-4740	Single plate to Push-pull grids	3:1	5/8 x 5/8	10 ma	2 x 2 3/8 x 1 1/2
A-73-C	Single plate to Push-pull grids	3:1	5/8 x 5/8	10 ma	2 x 3 1/4 x 1 1/2
A-4750	Single plate to Push-pull grids	3:1	5/8 x 5/8	10 ma	2 5/16 x 2 7/8 x 1 1/2
A-4719	Single plate to Push-pull grids	3:1	5/8 x 5/8	10 ma	2 1/16 x 2 3/4 x 2 3/16
A-83-C	Single plate to Push-pull grids	3:1	5/8 x 5/8	10 ma	2 1/8 x 3 3/8 x 2 1/4
A-103-C	Single plate to Push-pull grids	3:1	1 x 1	10 ma	2 5/8 x 4 x 2 1/4
A-64-C	Single plate to Push-pull grids	4:1	5/8 x 5/8	10 ma	2 x 2 5/8 x 1 1/2
A-4206	Single plate to Push-pull grids This unit has a pie-wound split secondary.	3.25:1	1 x 1	15 ma	3 1/8 x 2 5/16 x 2 1/8

### PUSH-PULL INTERSTAGE—PUSH-PULL PLATES (7000 TO 15,000 OHMS) TO PUSH-PULL CLASS "A" GRIDS.

A-4711	Push-pull plates to PP grids	1:1	5/8 x 5/8	10 ma	1 1/8 x 2 3/8 x 1 1/2
A-4155	Push-pull plates to PP grids	3:1	5/8 x 5/8	10 ma	2 1/4 x 2 3/16 x 1 1/2


### PUSH-PULL INTERSTAGE—PUSH-PULL PLATES (7000 TO 20,000 OHMS) TO PARALLEL OR PUSH-PULL GRIDS.



A-4208	P. P. plates to Parallel or PP grids	0.7:1	1 x 1	15 ma	3 3/16 x 2 5/16 x 2 1/4
A-4772	P. P. plates to Parallel or PP grids	1.5:1	1 x 1	10 ma	3 1/8 x 3 5/8 x 2 1/4
A-4777	P. P. plates to Parallel or PP grids	1.5:1	1 x 1	10 ma	3 1/8 x 2 3/8 x 2 1/4
A-4774*	P. P. plates to Parallel or PP grids	3:1	5/8 x 5/8	10 ma	2 5/16 x 2 7/8 x 1 1/2
A-4773*	P. P. plates to Parallel or PP grids	3:1	5/8 x 5/8	10 ma	2 1/16 x 2 3/4 x 2 3/16
A-4775*	P. P. plates to Parallel or PP grids	3:1	5/8 x 5/8	10 ma	2 1/16 x 3 x 2 1/4

## DRIVER TRANSFORMERS

Part No.	Application	Pri./1/2 Sec. Ratio	Core	Max. Pri. D.C.	Dimensions H x W x D
SINGLE DRIVERS—SINGLE PLATE TO PUSH-PULL GRIDS.					
A-4405	Sgl. plate (10,000 ohm) to P. P. grids	1.24:1	1 x 1	40 ma	3 3/16 x 2 5/16 x 2 1/4
A-4713	Sgl. plate (10,000 ohm) to P. P. grids	2:1	5/8 x 5/8	30 ma	1 1/8 x 2 3/8 x 1 1/2
A-4752	Sgl. plate (10,000 ohm) to P. P. grids	2.1/5:1:1	3/4 x 3/4	40 ma	2 x 3 1/4 x 1 1/2
A-4722	Sgl. plate (10,000 ohm) to P. P. grids	2:1	3/4 x 1	30 ma	2 1/16 x 2 3/4 x 2 3/16
A-4292	Sgl. plate (10,000 ohm) to P. P. grids	2.5:1	5/8 x 5/8	20 ma	1 1/8 x 2 3/8 x 1 1/2
A-4734	Sgl. plate (10,000 ohm) to P. P. grids	2.5:1	3/4 x 3/4	25 ma	2 5/16 x 2 7/8 x 1 1/2
A-4401	Sgl. plate (20,000 ohm) to P. P. grids	2.66:1	3/4 x 3/4	25 ma	2 5/16 x 2 7/8 x 1 1/2
A-4723	Sgl. plate (10,000 ohm) to P. P. grids	3:1	5/8 x 5/8	30 ma	1 1/8 x 2 3/8 x 1 1/2
A-4721	Sgl. plate (10,000 to 22,500 ohm) to P. P. grids	3:2:1	3/4 x 1	25 ma	2 1/16 x 2 3/4 x 2 3/16
A-4210	Sgl. plate (1,500 to 5,000 ohm) to P. P. grids	3:1	1 x 1	40 ma	3 3/16 x 2 5/16 x 2 1/4
A-4216	Sgl. plate (10,000 ohm) to P. P. grids	5:1	3/4 x 1	20 ma	2 1/16 x 2 3/4 x 2 3/16
A-4702	Sgl. plate (1,500 to 5,000 ohm) to P. P. grids	5:1	1 x 1	80 ma	3 3/16 x 2 5/16 x 2 1/4
PUSH-PULL DRIVERS—PUSH-PULL PLATES TO PUSH-PULL GRIDS.					
A-4406	P. P. plates (3,000 to 5,000 ohms) to P. P. grids	1.7:1	1 x 1	95 ma	3 3/16 x 2 5/16 x 2 1/4
A-4404	P. P. plates (3,000 to 5,000 ohms) to P. P. grids	2:1	1 1/8 x 1 1/8	90 ma	3 3/16 x 3 x 3 3/8
A-4208†	P. P. plates (20,000 to 30,000 ohms) to P. P. grids	2.8:1	1 x 1	15 ma	3 3/16 x 2 5/16 x 2 1/4

†These units have split secondaries for individual bias adjustment and/or use of inverse feedback.

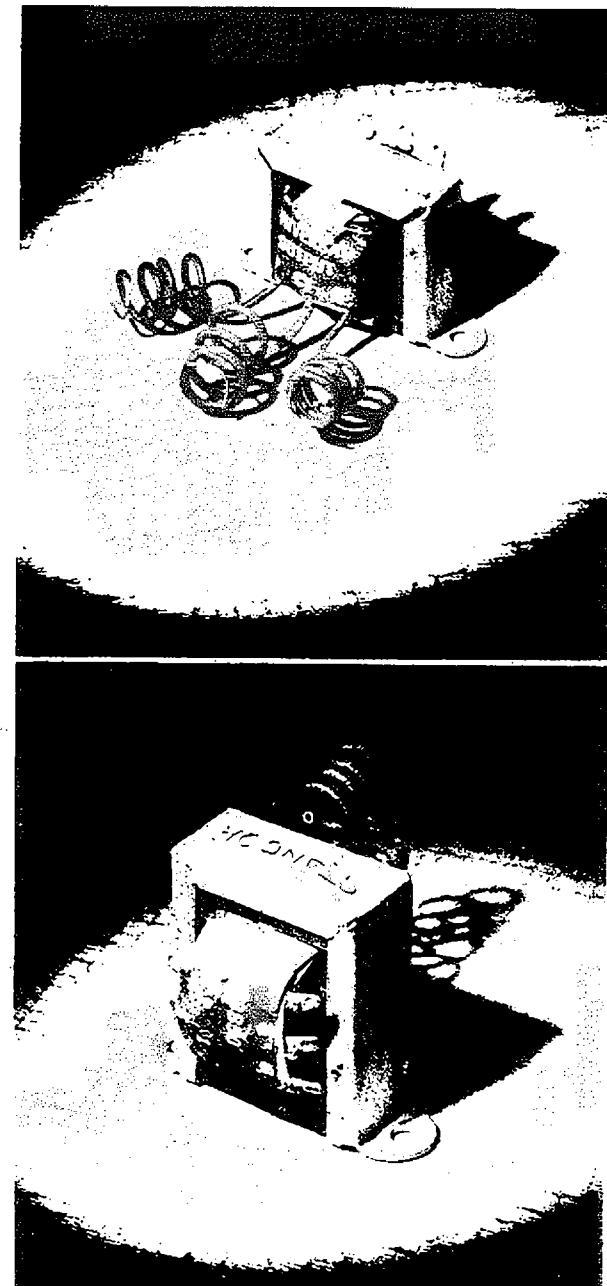

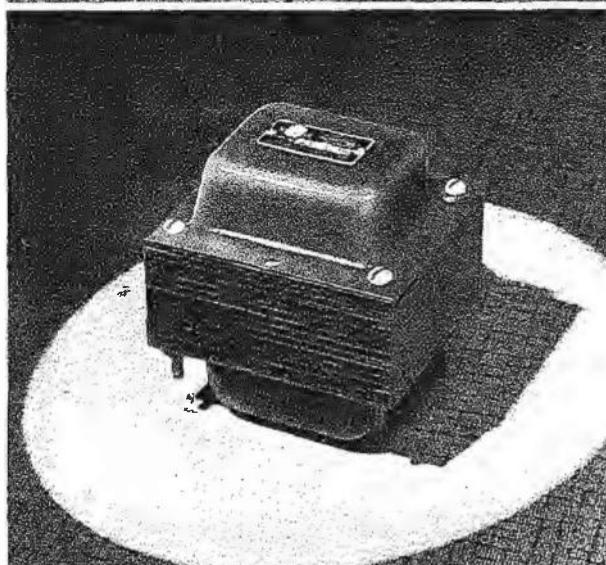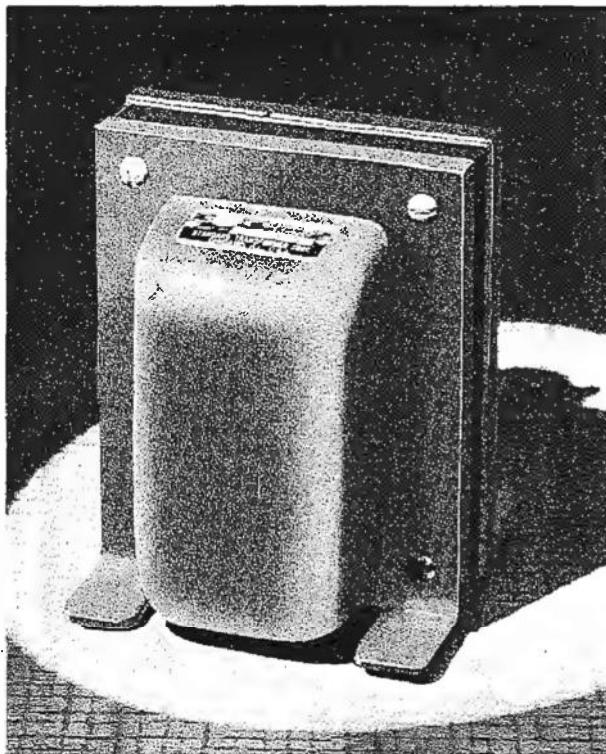

## DRIVER TRANSFORMERS (continued)

Part No.	Application	Pri./½ Sec. Ratio	Core	Max. Pri. D.C.	Dimensions	H x W x D
PUSH-PULL DRIVERS—PUSH-PULL PLATES TO PUSH-PULL GRIDS (continued)						
A-4712	P. P. plates (20,000 ohms) to P. P. grids	3:1	½ x ½	10 ma	1½ x 2¾ x 1½	
A-4755	P. P. plates (20,000 ohms) to P. P. grids	3:1	¾ x ¾	15 ma	2⅓ x 2¾ x 2⅓	
A-4701†	P. P. plates (20,000 ohms) to P. P. grids	3:1	1 x 1	25 ma	3¾ x 2¾ x 2¾	
A-4212	P. P. plates (1,500 to 5,000 ohms) to P. P. grids	3.2:1	1 x 1	50 ma	3¾ x 2¾ x 2¾	
A-4416†	P. P. plates (3,000 to 10,000 ohms) to P. P. grids	5:1	1 x 1	40 ma	3¾ x 2¾ x 2¾	
A-4703†	P. P. plates (3,000 to 10,000 ohms) to P. P. grids	5:1	1½ x 1½	95 ma	3¾ x 3 x 3½	

†These units have split secondaries for individual bias adjustment and/or use of inverse feedback.

## OUTPUT TRANSFORMERS

Part No.	Application	Class	Typical Output Tubes	Max. Audio Watts	Max. Pri. D.C.	Dimensions H x W x D
SINGLE PLATE TO VOICE COIL						
A-3865	Single 1,500 ohm plate to 6/4/2 ohms	A	48, 25B6, 25L6, 50L6	5	55 ma	1½ x 2¾ x 1¾
A-3876	Single 2,000 ohm plate to 4 ohms	A	2A3, 6A3, 6B4, 6W6, 6Y6, 25AC5, 25B5, 25B6, 25L6, 35A5, 35L6, 50L6	5	60 ma	1½ x 2¾ x 1¾
A-2203	Single 4,000 ohm plate to 8 ohms	A	31, 43, 45, 48, 71A, 12A5, 25A6	5	40 ma	1½ x 2¾ x 1½
A-3877	Single 5,000 ohm plate to 4 ohms	A	31, 43, 59, 2B6, 6V6, 7C5, 25A5	5	40 ma	1½ x 2¾ x 1¾
A-3310	Single 5,000 ohm plate to 500/15/8/4 ohms	A	45, 2B6, 6L6, 6V6, 25A6, 25A7	20	55 ma	3¾ x 2¾ x 2¾
A-3878	Single 7,000 ohm plate to 4 ohms	A	20, 31, 33, 42, 2A5, 6A5C, 6B5, 6F6, 6K6, 6N6, 7B5	5	30 ma	1½ x 2¾ x 1¾
A-2313	Single 7,000 ohm plate to 8 ohms	A	33, 41, 42, 47, 59, 89, 2A5, 6A5C, 6F6, 6K6, 6N6, 7B5	10	40 ma	2 x 3¼ x 1¾
A-3879	Single 10,000 ohm plate to 4 ohms	A	38, 1J6, 3C5, 6A4, 6G6, 6N7	.5	30 ma	1½ x 2¾ x 1¾
A-3881	Single 15,000 ohm plate to 4 ohms	A	1D8, 1E7, 1F4, 1F5, 1J5, 1T5, 6V7, 6Y7, 12A7	5	10 ma	1½ x 2¾ x 1¾

PUSH-PULL PLATES TO VOICE COIL						
A-3306	P. P. Par. 2,500 ohm plates to 500/15/8/4 ohms	AB	45, 48, 2A3, 25L6	25	100 ma	3¾ x 3 x 3½
A-3301	P. P. 3,000 ohm plates to 500/15/8/4 ohms	AB	48, 2A3, 6A3, 6B4, 25L6	30	55 ma	3¾ x 3 x 3½
A-3802	P. P. 3,800/3,300 ohm plates to 500/250/15/8/4 ohms	AB2, AB1	45, 6L6, Par. 6L6	75	250 ma	4¾ x 4 x 3¾
A-5528	P. P. 4,000 ohm plate to 500/15/8/4 ohms	AB	6Y6, 25L6	8	65 ma	3¾ x 2¾ x 2¾
A-3851*	P. P. 4,400 ohm plates to 500/250/15/8/4 ohms	AB1	6L6	30	70 ma	3¾ x 3 x 3½
A-3872	P. P. 5,000 ohm plates to 15/8/4 ohms	AB	45, 2A3, 6A3, 6L6	18	75 ma	2⅓ x 2¾ x 2¾
A-3800	P. P. 5,000 ohm plates to 500/250/15/8/4 ohms	AB	45, 2A3, 6A3, 6L6	30	80 ma	3¾ x 3 x 3¾
A-3307	P. P. 6,000 ohm plates to 500/15/8/4 ohms	B, AB2	46, 59, 42, 2A5, 6F6, Par. 53, 6A6, 6N7	30	100 ma	3¾ x 3 x 3½
A-3801	P. P. 6,600 ohm plates to 500/250/15/8/4 ohms	AB1	6L6	35	150 ma	4 x 3¾ x 3¾
A-3855	P. P. 7,000 ohm plates to 2,000 and 10 ohms	AB	45, 12A5	5	40 ma	2⅓ x 2¾ x 2¾
A-2201	P. P. 8,000 ohm plates to 6 ohms	AB	43, 45, 48, 71, 25A6	10	40 ma	2 x 3¼ x 1¾
A-3885	P. P. 9,000 ohm plates to 500/250/15/8/4 ohms	ABI	6L6	35	150 ma	4 x 3¾ x 3¾
A-3304	P. P. 10,000/7,000 ohm plates to 500/15/8/4 ohms	AB	45, 6V6, 6AC5	25	60 ma	3¾ x 2¾ x 2¾
A-3311	P. P. 10,000 ohm plates to 500/15/8/4 ohms	AB	6F6, 6V6, 6AC5	25	70 ma	3¾ x 3 x 3¾
A-3839	P. P. 10,000 ohm plates to 2,000 and 15/8/4 ohms	AB	30, 49, 1H4	10	30 ma	2⅓ x 2¾ x 2¾
A-3831	P. P. 10,000 ohm plates to 8/4/2 ohms	AB	30, 49	5	40 ma	2¾ x 2¾ x 1½
A-2312	P. P. 14,000 ohm plates to 4 ohms	AB	33, 41, 42, 47, 49, 2A5, 6F6, 6K6, 7B5	10	40 ma	2 x 3¼ x 1¾
A-3496	P. P. 14,000 ohm plates to 4 ohms	AB	33, 41, 42, 47, 49, 2A5, 6F6, 6K6, 7B5	5	25 ma	2¾ x 2¾ x 1¾
A-3303	P. P. 14,000 ohm plates to 500/15/8/4 ohms	AB	41, 42, 47, 59, 89, 2A5, 6F6, 6K6, 7B5	20	55 ma	3¾ x 2¾ x 2¾
A-3857	P. P. 25,000 ohm plates to 4 ohms	A	1F4, 1F5, 1J5, 1T5, 6G6, 12A7, 950	5	10 ma	1½ x 2¾ x 1¾

\*This unit has a tertiary winding to provide 10% inverse feedback.

## UNIVERSAL OUTPUT

Part No.	Application	Audio Watts	Max. Pri. D.C.	Dimensions	H x W x D
A-3856	Single or Push-pull plates (4,000 to 14,000 ohms) to voice coil	4	35 ma	1¾ x 2¾ x 1¾	
A-3822	Single plate (7,000 to 10,000 ohms) to voice coil	4	35 ma	1¾ x 2¾ x 1¾	
A-3848	Single plate (7,000 to 16,000 ohms) to voice coil	5	10 ma	1¾ x 2¾ x 1¾	
A-3823	Single or Push-pull plates (4,000 to 14,000 ohms) to voice coil	8	40 ma	1¾ x 2¾ x 1½	
A-3850	Single or Push-pull plates (4,000 to 14,000 ohms) to voice coil	8	40 ma	2 x 2¾ x 1½	
A-3825	Single plate (1,500 to 4,500 ohms) to voice coil	8	75 ma	2 x 3¼ x 1¾	

# TRANSFORMERS

**STANCOR**

## OUTPUT TRANSFORMERS (continued)

Part No.	Application	Audio Watts	Max. Pri. D.C.	Dimensions H x W x D
<b>UNIVERSAL OUTPUT (continued)</b>				
A-3824	Single or Push-pull plates (6,000 to 10,000 ohms) to voice coil	8	75 ma	2 x 3 1/4 x 2
A-3849	Single plate (1,500 to 10,000 ohms) to voice coil	10	55 ma	1 5/8 x 2 1/8 x 1 1/2
A-3880	Push-pull plates (4,000 to 14,000 ohms) to voice coil	15	40 ma	2 1/4 x 3 3/4 x 2 1/4
A-2855	Push-pull plates (4,000 to 14,000 ohms) to voice coil	15	50 ma	2 x 2 9/16 x 1 3/4
A-3890	Push-pull plates (4,000 to 14,000 ohms) to voice coil	15	50 ma ea. 1/2	2 11/16 x 2 1/8 x 2 3/16
A-3852	Push-pull plates (4,000 to 14,000 ohms) to voice coil	18	40 ma ea. 1/2	2 5/16 x 2 1/8 x 2
A-3870	Push-pull plates (4,000 to 14,000 ohms) to voice coil	18	50 ma ea. 1/2	2 x 3 1/4 x 2
A-3830	Push-pull plates (3,000 to 10,000 ohms) to voice coil	20	60 ma ea. 1/2	2 11/16 x 3 3/16 x 2 1/4

## POWER TRANSFORMERS

Part No.	A.C. Volts	Plate Supply @ D.C. Milliamperes	Rectifier Filament Volts — Amperes	Amplifier Filament Volts — Amperes	Dimensions H x W x D
<b>2.5 VOLT AMPLIFIER FILAMENT SUPPLY</b>					
P-4042	350-0-350	70	5.0 3.0	2.5 CT 3.5	4 x 3 1/4 x 3
P-4043	350-0-350	90	5.0 3.0	2.5 CT 3.5	4 1/16 x 3 5/8 x 3 3/8
P-4044	350-0-350	110	5.0 3.0	2.5 CT 3.5	4 1/16 x 3 5/8 x 3 3/8
P-1505	350-0-350	120	5.0 CT 3.0	2.5 CT 3.5 2.5 CT 4.0 2.5 CT 9.0	4 3/4 x 4 x 3 3/4
<b>6.3 VOLT AMPLIFIER FILAMENT SUPPLY</b>					
P-4076	325-0-325	40	5.0 2.0	6.3 CT 2.0	3 3/16 x 2 1/8 x 2 7/8
P-4077	350-0-350	50	5.0 2.0	6.3 CT 2.6	3 5/8 x 3 x 3
P-4078	350-0-350	70	5.0 3.0	6.3 CT 3.0	4 x 3 1/4 x 3
P-4079	350-0-350	90	5.0 3.0	6.3 CT 3.5	4 1/16 x 3 5/8 x 3 3/8
P-4080	350-0-350	110	5.0 3.0	6.3 CT 4.5	4 3/4 x 4 x 3 3/8
P-6143	440-0-440	130	5.0 3.0	6.3 CT 3.5	4 1/16 x 3 5/8 x 3 3/8
P-4081	400-0-400	160	5.0 3.0	6.3 CT 4.5	4 3/4 x 4 x 3 3/8
P-5059*	337.5-0-337.5	200	5.0 CT 3.0	6.3 CT 5.0	4 3/4 x 4 x 4 1/8
P-6170	600-0-600	200	5.0 3.0	6.3 3.0	4 3/4 x 4 x 4
				6.3 4.0	
*Primary for 117/107 volts.					
<b>1.5 AND 2.5 VOLT AMPLIFIER FILAMENT SUPPLY</b>					
P-1501	300-0-300	60	5.0 CT 3.0	1.5 4.0 1.5 1.0 2.5 CT 4.0 5.0 CT 0.5	4 x 3 1/4 x 3 3/8
P-1503	350-0-350	120	5.0 CT 3.0	1.5 5.0 1.5 CT 1.0 2.5 CT 4.0 2.5 CT 3.5	4 3/4 x 4 x 3 3/8
<b>2.5 AND 6.3 OR 7.5 VOLT AMPLIFIER FILAMENT SUPPLY</b>					
P-4045	300-0-300	40	5.0 2.0	2.5 CT 5.25	3 3/16 x 2 5/8 x 2 5/8
P-4046	350-0-350	50	5.0 2.0	2.5 CT 7.25	3 5/8 x 3 x 3
P-4047	350-0-360	70	5.0 3.0	2.5 CT 9.0	4 x 3 1/4 x 3
P-4048	350-0-350	90	5.0 3.0	2.5 CT 10.0	4 1/16 x 3 5/8 x 3 3/8
P-4049	350-0-350	110	5.0 3.0	2.5 CT 14.0	4 3/4 x 4 x 3 3/8
P-3005*	360-0-360 80V Bias	125	5.0 CT 3.0 5.0 CT 2.0	6.3 CT 4.5 2.5 CT 10.0 6.3 CT 4.0	4 3/4 x 4 x 3 3/8

\*Primary for 117/107 volts.

## POWER TRANSFORMERS (continued)

Part No.	Plate Supply A.C. Volts	Rectifier Filament Volts — Amperes	Amplifier Filament Volts — Amperes	Dimensions H x W x D	
2.5 AND 6.3 OR 7.5 VOLT AMPLIFIER FILAMENT SUPPLY (Continued)					
P-4050	400-0-400 80v Bias	180 5.0	2.5 CT 2.5 6.3	14.0 1.75 4.5	4 1/4 x 4 x 3 1/8
P-4004*	400-0-400 80v Bias	175 5.0 CT	3.0 2.5 6.3 CT 6.3 CT	1.75 2.5 2.5	4 1/4 x 4 x 3 1/8
P-6169	600-0-600	200 5.0 CT	3.0 2.5 CT 7.5 CT	10.0 3.0	4 1/4 x 4 x 4
*Primary for 117/107 volts.					
2.5 VOLT AMPLIFIER FILAMENT SUPPLY					
P-2750	325-0-325	40 5.0	2.0 2.5 CT	3.75	A B C D
P-2770	325-0-325	40 5.0	2.0 2.5 CT	4.5	2 1/2 3 1/8 2 1/2
P-2868	325-0-325	40 5.0	2.0 2.5 2.5	1.75 3.5	2 1/2 3 1/8 2 1/2
P-2869	350-0-350	50 5.0	2.0 2.5 CT	1.75 5.25	2 1/2 3 3/8 1 1/8 3
P-2859	350-0-350	70 5.0	3.0 2.5 CT	3.5	3 1/4 3 3/8 1 1/8 3 1/8
P-2860	350-0-350	90 5.0	3.0 2.5 CT	3.5 9.0	3 1/2 4 1/4 2 1/8 3 1/2
6.3 VOLT AMPLIFIER FILAMENT SUPPLY					
P-2751	325-0-325	40 5.0	2.0 6.3 CT	1.6	A C B D
P-2771	325-0-325	40 5.0	2.0 6.3 CT	2.0	2 1/2 3 1/8 2 1/2
P-947	350-0-350	50 5.0	2.0 6.3 CT	2.0	2 1/2 3 3/8 2 1/2 3 1/4
P-948	338-0-338	70 5.0	3.0 6.3 CT	2.5	3 1/2 3 3/8 2 3 1/4
P-949	350-0-350	120 5.0	3.0 6.3 CT	3.0	3 1/2 4 1/4 2 1/8 3 1/2
P-6335	350-0-350	120 5.0	3.0 6.3 CT	3.0	2 1/2 3 3/8 2 5/8 3 1/4
P-6336	300-0-300	150 5.0	3.0 6.3 CT	2.5	2 1/2 3 3/8 2 5/8 3 1/4
P-955	400-0-400	160 5.0	3.0 6.3 CT	4.5	3 1/2 4 1/2 2 1/2 4
2.5 VOLT AMPLIFIER FILAMENT SUPPLY					
P-6001	325-0-325	40 5.0 CT	2.0 2.5 CT	4.0 7.25	A B C D
P-6002	350-0-350	50 5.0 CT	2.0 2.5 CT	7.25	2 1/2 3 2 1/4 3 1/8
P-6009	275-0-275	70 5.0 CT	3.0 2.5 CT	10.5	2 1/2 3 3/8 2 1/2 3 1/4
P-6005	350-0-350	70 5.0 CT	3.0 2.5 CT	9.0 3.5	2 1/2 3 3/8 3 1/4 4 1/4
P-6003	350-0-350	70 5.0 CT	2.0 2.5 CT	9.0	2 1/2 3 3/8 2 1/8 3 1/2
P-6004	350-0-350	90 5.0 CT	3.0 2.5 CT	12.5	3 1/8 3 3/4 1 1/8 3
P-6007	400-0-400	110 5.0 CT	3.0 2.5 CT	15.0 3.5	3 1/8 3 3/4 2 1/2 3 1/2
P-6006	350-0-350	120 5.0 CT	3.0 2.5 CT	12.5 3.5	3 1/8 3 3/8 2 5/8 3 1/2
6.3 VOLT AMPLIFIER FILAMENT SUPPLY					
P-6289	210-0-210	40 5.0 CT	2.0 6.3 CT	2.0	A B C D
P-6297	240-0-240	40 5.0 CT	2.0 6.3 CT	2.0	2 1/2 3 2 1/8 3 1/8
P-6010	325-0-325	40 5.0 CT	3.0 6.3 CT	2.0	2 1/2 3 1 1/4 2 1/4
P-6119	300-0-300	55 5.0 CT	2.0 6.3 CT	2.7	2 1/2 3 2 2 1/2
P-6120	315-0-315	70 5.0 CT	3.0 6.3 CT	3.5	2 1/2 3 3/8 2 1/4 3 1/2
P-6011	350-0-350	70 5.0 CT	3.0 6.3 CT	2.5	2 1/2 3 2 3/8 3 1/2
P-6312	290-0-290	90 5.0 CT	3.0 6.3 CT	2.8	2 1/2 3 3/8 2 5/8 3 1/2
P-6012	350-0-350	90 5.0 CT	3.0 6.3 CT	3.5	2 1/2 3 3/8 2 5/8 3 1/2

# TRANSFORMERS

**STANCOR**

## POWER TRANSFORMERS (continued)

Part No.	A.C. Volts	Plate Supply @ D.C. Milliamperes	Rectifier Filament Volts — Amperes	Amplifier Element Volts — Amperes	Dimensions H x W x D	
<b>6.3 VOLT AMPLIFIER FILAMENT SUPPLY (continued)</b>						
P-6013	350-0-350	120	5.0 CT 3.0	6.3 CT 4.7	3½ 3¾ 2¼ 3¾	
P-6313	290-0-290	125	5.0 CT 3.0	6.3 CT 4.5	3½ 4½ 2½ 3¾	
P-6014	375-0-375	150	5.0 CT 3.0	6.3 CT 5.0	3½ 3¾ 2¾ 3¾	
P-6314	350-0-350	200	5.0 CT 3.0	6.3 CT 5.5	3¾ 4½ 2¾ 3¾	
P-6165	400-0-400	200	5.0 CT 4.0	6.3 CT 5.5	3¾ 4½ 2¾ 4¾	
P-6315	370-0-370	275	5.0 CT 3.0	6.3 CT 7.0	3¾ 4½ 3 4¼	
<b>2.5 AND 6.3 VOLT AMPLIFIER FILAMENT SUPPLY</b>						
P-6293	300-0-300	60	5.0 CT 3.0	2.5 CT 7.5	2½ 3¾ 2¾ 3¾	
P-6294	375-0-375	85	5.0 CT 3.0	2.5 CT 9.0 6.3/5/2.5 CT 3.5	2½ 3¾ 2¾ 3¾	
P-6295	350-0-350	90	5.0 CT 3.0	2.5 CT 9.0 6.3/2.5 CT 3.5	3½ 3¾ 2¾ 3½	
P-6234	330-0-330	90	5.0 CT 3.0	2.5 CT 12.0 2.5 CT 1.75 6.3/5/2.5 CT 4.0	3½ 3¾ 2½ 3¾	
P-6008	375-0-375	180	5.0 CT 3.0	2.5 CT 6.0 6.3 CT 3.3	3½ 4½ 2¼ 3¾	
<b>50/24/18 VOLT MOTOR-TUNER SUPPLY</b>						
P-6290	350-0-350	120	5.0 CT 3.0	6.3 CT 4.7	3½ 3¾ 2¾ 3¾	
P-6291	375-0-375	150	5.0 CT 3.0	6.3 CT 5.0	3½ 3¾ 2¾ 3¾	
P-6292	400-0-400	200	5.0 CT 3.0	6.3 CT 5.2	3¾ 4½ 2¾ 4¾	
<b>SPEAKER FIELD SUPPLY</b>						
Part No.	A.C. Volts	Plate Supply @ D.C. Milliamperes	Rectifier Filament Volts — Amperes	Dimensions H x W x D		
P-6149	120-0-120	100	5.0 3.0	3¾ x 3 x 3½		
P-6146	120-0-120	250	5.0 3.0	4 x 3½ x 3½		
P-6147	325-0-325	200	5.0 3.0	4½ x 3¾ x 3¾		
<b>VIBRATOR TRANSFORMERS WITH 6 VOLT DC PRIMARY</b>						
Part No.	Secondary D.C. To Filter Volts @ Milliamperes	Secondary A.C. Volts	Dimensions H x W x D			
P-6301	150 40	110-0-110	2½ x 2¾ x 1¾			
P-4060	225 40	240-0-240	3½ x 2½ x 2¾			
P-4061	250 50	290-0-290	3½ x 2½ x 2¾			
P-4062	260 65	300-0-300	3½ x 2½ x 2¾			
P-4063	285 75	320-0-320	3½ x 2½ x 2¾			
P-6131	330 100	370-0-370	3½ x 2¾ x 2¾			
<b>FILTER CHOKES</b>						
SMOOTHING CHOKES FOR DC POWER SUPPLIES.						
Part No.	Inductance	Rating At	Ma. D.C.	D.C. Res.	R.M.S. Volts Insulation	Dimensions H x W x D
C-1515	20.0 hy	at	15 ma	900	1½ x 2¾ x 1½	
C-1706	4.5 hy	at	50 ma	300	1½ x 2¾ x 1¾	
C-1707	7.0 hy	at	50 ma	550	1¾ x 2¾ x 1¾	
C-1003	16.0 hy	at	50 ma	580	2 x 3¼ x 1¾	
C-1708	13.0 hy	at	65 ma	500	2 x 3¼ x 1¾	
C-1355	8.0 hy	at	75 ma	290	2¼ x 2¾ x 1¾	
C-1002	15.0 hy	at	75 ma	400	2¼ x 3¾ x 2¼	
C-1420	16.0 hy	at	80 ma	360	3½ x 2¾ x 2¾	

# STANCOR

## TRANSFORMERS

### FILTER CHOKES (continued)

Part No.	Inductance	Rating At	Ma. D.C.	D.C. Res.	R.M.S. Volts Insulation	Dimensions H x W x D
SMOOTHING CHOKES FOR POWER SUPPLIES (continued)						
C-1709	8.0 hy	at	85 ma	250	1500	2 x 3 1/4 x 2
C-2305	5.0 hy	at	100 ma	300	1500	2 1/16 x 2 3/16 x 2 3/16
C-1001	10.5 hy	at	110 ma	225	3000	2 5/8 x 4 x 2 1/4
C-2303	2.5 hy	at	130 ma	100	2000	2 x 3 1/4 x 1 3/4
C-1421	7.0 hy	at	140 ma	165	3000	3 3/16 x 2 5/8 x 2 5/8
C-2304	2.3 hy	at	150 ma	60	1500	2 x 3 1/4 x 1 3/4
C-2309	3.0 hy	at	150 ma	90	2000	2 1/4 x 3 3/4 x 2 1/4
C-1710	7.0 hy	at	150 ma	200	1500	2 5/8 x 4 x 2 1/4
C-1410	4.0 hy	at	175 ma	100	3000	3 3/16 x 2 5/8 x 2 5/8
C-1846	5.0 hy	at	200 ma	90	5000	4 x 3 1/4 x 3 3/8
C-1411	4.5 hy	at	200 ma	80	3000	3 3/8 x 3 x 3 1/8
C-1721	8.5 hy	at	200 ma	120	3000	3 3/8 x 3 1/4 x 3
C-1703	4.0 hy	at	250 ma	60	3000	3 1/4 x 2 7/8 x 3 1/8
C-1412	4.0 hy	at	250 ma	60	3000	3 3/8 x 3 x 3 1/8
C-1722	8.0 hy	at	300 ma	80	3000	4 5/8 x 3 3/4 x 3 1/2
C-2308	8.0 hy	at	300 ma	80	3000	4 3/8 x 4 x 3 3/8
C-1413	8.0 hy	at	300 ma	80	5000	4 3/8 x 4 x 4 1/8
C-1414	7.5 hy	at	400 ma	60	5000	4 3/8 x 4 x 5 1/8
C-1415	6.0 hy	at	500 ma	75	7500	7 5/8 x 6 1/8 x 7

### FOR USE IN AC-DC POWER SUPPLIES

Part No.	Inductance	at	Ma. D.C.	D.C. Res.	R.M.S. Volts Insulation	Dimensions H x W x D
C-1080	3.5 hy	at	50 ma	200	1500	1 5/8 x 2 7/8 x 1 1/2
C-1325	5.0 hy	at	50 ma	250	1500	1 5/8 x 2 7/8 x 1 1/2
C-1277	7.0 hy	at	50 ma	300	1500	1 5/8 x 2 7/8 x 1 1/2
C-1711	4.5 hy	at	50 ma	325	1500	1 5/8 x 2 7/8 x 1 3/8
C-1723	4.5 hy	at	50 ma	325	1500	1 5/8 x 2 7/8 x 1 3/8
C-1227	7.0 hy	at	50 ma	350	1500	1 5/8 x 2 7/8 x 1 1/2
C-1279	8.5 hy	at	50 ma	400	1500	1 5/8 x 2 7/8 x 1 1/2
C-1333	8.0 hy	at	50 ma	450	1500	1 5/8 x 2 7/8 x 1 1/2
C-1215	9.0 hy	at	50 ma	500	1500	1 5/8 x 2 7/8 x 1 1/2
C-1362	9.5 hy	at	50 ma	550	1500	1 5/8 x 2 7/8 x 1 1/2

# THORDARSON

## TRANSFORMERS

### INTERSTAGE TRANSFORMERS

Type No.	Ohms Impedance Primary	Secondary	Turns Ratio	Primary Current	Centerleg Stack	Mounting Centers	W	Dimensions D	H
SINGLE PLATE TO SINGLE OR PUSH-PULL GRIDS									
T-20A16	10,000	40,000 CT	1:2	8 ma	1/2 x 1/2	2	2 5/8	1 1/4	11 1/32
T-20A17	10,000	40,000 CT	1:2	8 ma	1/2 x 1/2	17/16	1 1/16 diam.	2	
T-20A22	10,000	90,000 CT	1:3	8 ma	3/4 x 1	2 5/8	3/4	2 1/2	11 5/16
T-20A23	10,000	90,000 CT	1:3	8 ma	3/4 x 1	2 5/8	2 5/16	2 5/16	
PUSH-PULL PLATES TO PUSH-PULL GRIDS									
T-20A24	20,000 CT	180,000 CT (Split Secondary)	1:3	8 ma (balanced)	3/4 x 1	2 5/8	2 5/16	2 5/16	

# TRANSFORMERS

# THORDARSON

## INTERSTAGE TRANSFORMERS (continued)


Type No.	Ohms Primary	Impedance Secondary	Turns Ratio	Primary Current	Centerleg Stack	Mounting Centers	W	Dimensions D	H
SINGLE OR PUSH-PULL PLATES TO SINGLE OR PUSH-PULL GRIDS									
T-20A19	10,000- 20,000 CT	90,000- 180,000 CT	1:3	8 ma	5/8 x 5/8	2 1/8	2 1/8	1 1/8	1 1/8
T-20A25	10,000- 20,000 CT	20,000- 40,000 CT (Fully potted; hum-bucking coil and core) (Split Secondary)	1:1.41	8 ma (balanced)		1 1/16 x 1 5/16	1 1/8 diam.	2	



## CHOKES

Type No.	Zero D.C.	Inductance Rated D.C.	Max. D.C.	Current Rated M.A.	Max. M.A.	D.C. Res. Ohms	RMS Test Volts	Max. Excit. Volts	Mtg. Centers	Dimensions		
									W	D	H	
UNIVERSAL TYPES—SWINGING AND SMOOTHING												
T20C50	475	350	75	5	25	5500	2000	500	2 1/8	3 1/4	2	2
T20C51	70	35	15	15	25	1850	1200	250	2	2 1/8	1 1/4	1 1/8
T20C52	13	8	4	40	65	450	1200	150	2	2 1/8	1 1/4	1 1/8
T20C53	24	12	8	80	100	375	2000	500	2 1/8	3 1/4	2	2
T20C54	16	8	4	150	200	145	2700	500	2 x 1 1/16	2 17/32	2 3/4	3 1/8
T20C55	11	6	2	200	300	75	2700	500	2 1/4 x 2	2 1/8	3 1/4	3 1/2
T20C56	10	7	4	300	375	60	3500	700	2 1/2 x 3	3 3/16	4 1/16	3 7/8
T20C57	16	10	6	500	600	65	7500	1500	2 1/16 x 7	4 1/16	7 3/4	6

## DRIVER TRANSFORMERS

Type No.	Driver Tubes Application	Output Tubes Application	Ratio Pri. to 1/2 Sec.	Pri. M.A.	Mounting		Dimensions		
					W	D	W	D	H
T-20D75	1-30, 1-49, 1-6C5, 1H4, (Single Plate)	1J6, 19, 2-30, 2-49, (Class B)	2.4:1	5	2		2 1/8	1 1/4	1 1/8
T-20D76	1-6N7, 6A6, 53, 1-76 (Single Plate)	1-6N7, 6A6, 53 (Class B)	5.2:1	15	2		2 1/8	1 1/4	1 1/8
T-20D77	1-89, 6F6, etc. Triode 1-6C5 (Single Plate)	79, 2-46, 59 (Class B) 2-6F6, 26L6 (Class AB <sub>2</sub> )	2.5:1	30	2 1/8		2 1/8	2 1/16	2 3/16
T-20D78	2-6F6 etc. Triode 2-6A6, S3	2-6L6 (Class AB <sub>2</sub> ) 2-6N7 (Class B)	4:1	40	2 x 1 1/16		2 1/8	2 1/16	3 1/8
T-20D79	2-6N7 etc. (Single or P-P Pri.)	2-6N7 etc. (P-P Class B Grids)	5.2:1	30	2 1/8		2 1/8	2 1/16	2 3/16
T-20D80	2-2A3, 45, 6L6 (P-P Pri.)	203A, T20, T55, 805 100TH, etc. (Class B)	3.2:1 2:1	100	2 x 1 1/16		2 1/8	2 1/16	3 1/8
T-20D81	P-P 845, etc. (P-P Pri.)	P-P 805, 833, etc. (P-P Class B Grids)	5:1	100	2 1/2 x 2 1/8		3 3/16	3 7/16	3 7/8
T-20D82	2-2A3, 45, 6L6 (P-P Pri.)	PP- 805, 833 etc. (P-P Class B Grid)	5:1 4:1 3.2:1	100	2 x 1 1/16		2 1/8	2 1/16	3 1/8
T-20D83	Pri. 500 ohm Line	(Class B Grids) Ratio 1:75, 1:85, 1:125, 1:14, 1:175, 1:2, 1:25, 1:25, 1:275, 1:3			1 3/4 x 4 1/2		4 1/8	4 3/4	4
					20 watts capacity				

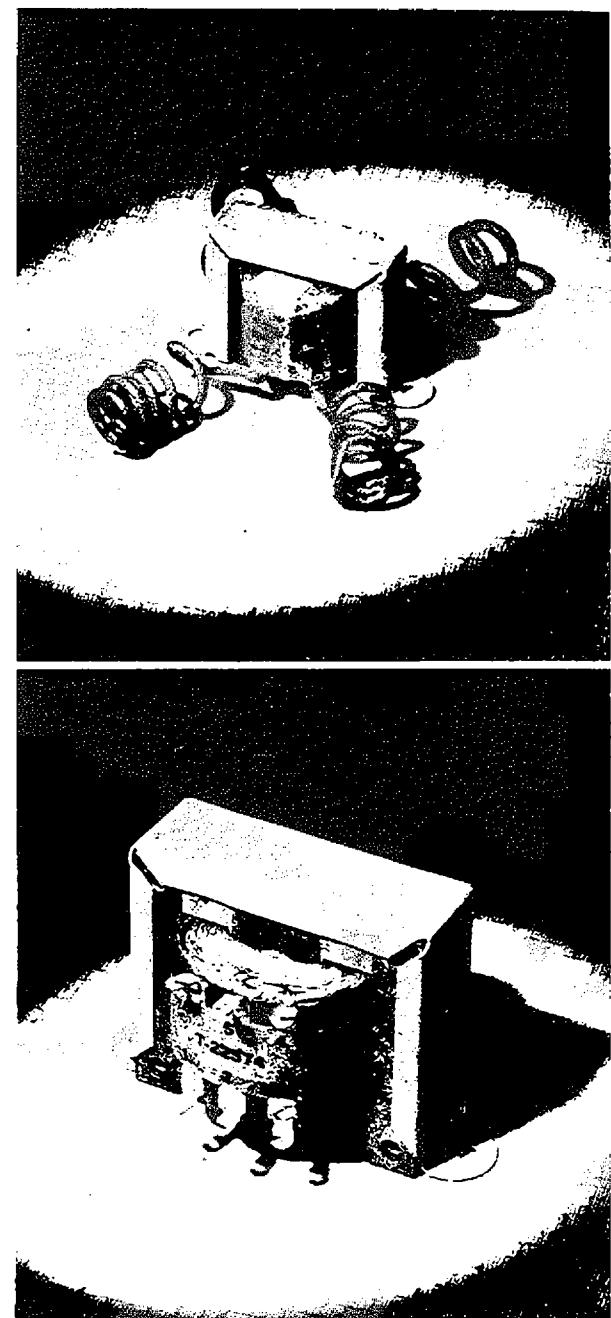

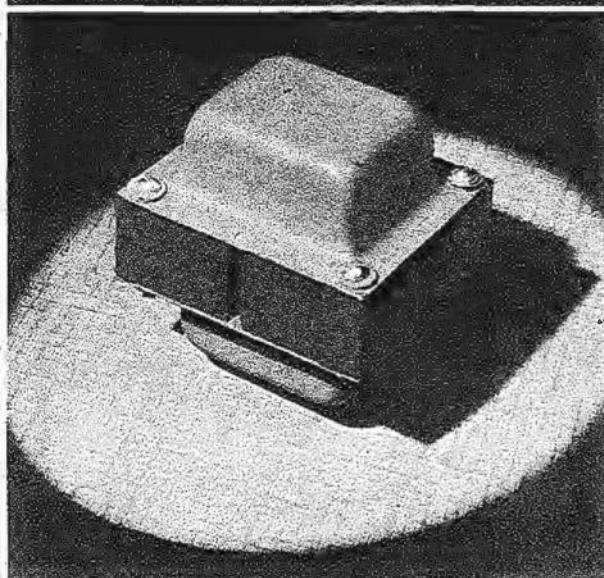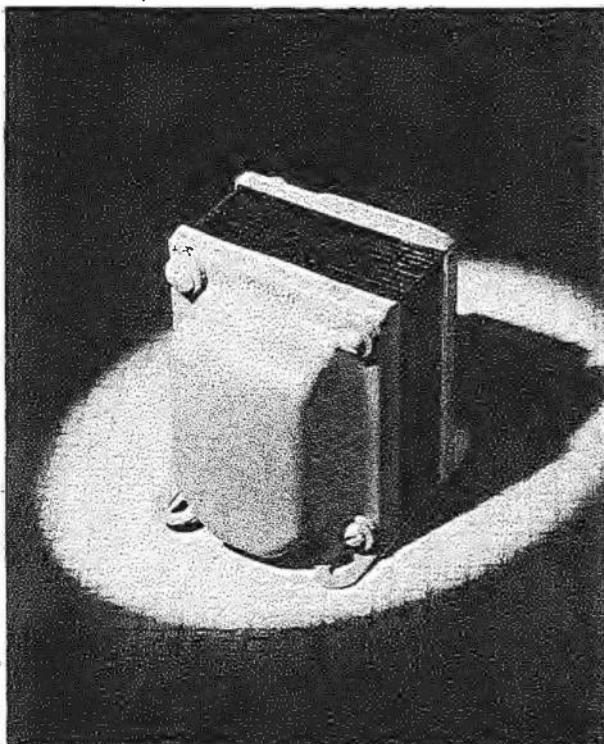

## VIBRATOR POWER TRANSFORMERS

Type No.	Primary	High-Voltage Secondary	Secondary No. 2	Mounting Centers	Dimensions		
					W	D	H
T-22R20	6-8V DC	250V DC, 50MA		2 x 1½	2½	2½	3½
T-22R22	6-8V DC	325V DC, 75MA		2 x 2½	2½	3	3½
T-22R24	6-8V DC or 117V AC	325V DC, 135MA	6.3V CT, 4.75A	3 x 3½	3½	4½	4½

## UNIVERSAL REPLACEMENT POWER

Type No.	Prim. VA	Secondary No. 1		Rect. Fil.	Fil. No. 2	Fil. No. 3	Mounting Centers	Dimensions		
		A.C. Volts	D.C. MA					W	D	H
T-22R00	45	250-0-250	40	5V-2A	6.3V CT-2A		2 x 2½	2½	3	1½
T-22R01	55	275-0-275	50	5V-2A	6.3V CT-2.5A		2 x 2½	2½	3	1½
T-22R02	65	300-0-300	70	5V-2A	6.3V CT-3A		2 x 2½	2½	3	2½
T-22R04	80	300-0-300	90	5V-2A	6.3V CT-3.5A		2½ x 2½	2½	3½	2½
T-22R05	95	300-0-300	120	5V-3A	6.3V CT-5A		2½ x 3½	3½	3½	2½
T-22R06	125	325-0-325	150	5V-3A	6.3V CT-5A		2½ x 3½	3½	3½	3
T-22R07	165	350-0-350	200	5V-3A	6.3V CT-6A		3 x 3½	3½	4½	2½
T-22R08	40	250-0-250	40	5V-2A	2.5V CT-4A		2 x 2½	2½	3	1½
T-22R09	55	275-0-275	50	5V-2A	2.5V CT-7.5A		2 x 2½	2½	3	1½
T-22R10	90	325-0-325	85	5V-2A	2.5V CT-9A	2.5V CT-3.5A	2½ x 3½	3½	3½	2½
T-22R11	125	325-0-325	120	5V-3A	2.5V CT-12.5A	2.5V CT-5A	2½ x 3½	3½	3½	3

## POWER TRANSFORMERS (UP-RIGHT)



Type No.	Prim. VA	Secondary No. 1		Rect. Fil.	Fil. No. 2	Fil. No. 3	Mounting Centers	Dimensions		
		A.C. Volts	D.C. MA					W	D	H
T-22R30	55	275-0-275	50	5V-2A	6.3V CT-2.5A		2 x 2½	2½	3½	3½
T-22R31	76	360-0-360	80	5V-2A	6.3V CT-2.5A		2 x 2½	2½	3½	3½
T-22R32	107	350-0-350	110	5V-2A	6.3V CT-3A	6.3V CT-3A	2½ x 2½	3½	3½	3½
T-22R33	145	375-0-375	160	5V-3A	6.3V CT-5A		3 x 3½	3½	4½	4½
T-22R34	186	385-0-385	225	5V-3A	6.3V CT-5A		3 x 3½	3½	4½	4½
T-22R35	290	400-0-400	340	5V-6A	6.3V CT-7A		3 x 4½	3½	5½	4½

# TRANSFORMERS

# THORDARSON

## OUTPUT TRANSFORMERS

Type No.	Applications	Primary Impedances Ohms	Primary Current Max. D.C., M.A. Per Side	Secondary Impedances Ohms	Audio Power Watts	Core Center Leg	Mtg. Dim. W D	Dimensions. W D H
<b>REPLACEMENT—SINGLE AND PUSH PULL PLATES TO VOICE COIL—LOW LEVEL</b>								
T-22S45	Single Plate to Voice Coil	1,500 to 3,000	55	3.2 to 4	3	½ x ½	2	2⅓ 1¼ 1¾
T-22S46	Single Plate to Voice Coil	3,000 to 6,000	35	3.2 to 4	3	½ x ½	2	2⅓ 1¼ 1¾
T-22S47	Single and Push Pull Plates to Voice Coil	6,000 to 12,000 CT	35	3.2 to 4	3	½ x ½	2	2⅓ 1¼ 1¾
T-22S48	Single and Push Pull Plates to Voice Coil	12,000 to 25,000 CT	10	8	3.2 to 4	3	½ x ½	2 2⅓ 1¼ 1¾
T-22S56	Single and Push Pull Plates to Voice Coil	8,000 or 10,000 CT	50	35	3.2 to 4-6 to 8	8	¾ x ¾	2⅓ 1¾ 2
T-22S58	Single and Push Pull Plates to Voice Coil	5,000 or 7,000 CT	50	45	3.2 to 4-6 to 8	8	¾ x ¾	2⅓ 1¾ 2
T-22S60	Single and Push Pull Plates to Voice Coil	2,500 or 4,000 CT	60	60	3.2 to 4-6 to 8	8	¾ x ¾	2⅓ 1¾ 2
<b>SPECIAL DUTY OUTPUT TO LINE AND VOICE COIL—HIGH LEVEL</b>								
T-22S64	Single and Push Pull Plates to Line and Voice Coil	10,000 CT	50	30	3.2 to 4-6 to 8-15-250-500	25	1 x 1	2 x 1 1⅛ 2⅓ 1¾ 3¾
T-22S66	Single and Push Plates to Line and Voice Coil	8,000 CT	50	30	3.2 to 4-6 to 8-15-250-500	25	1 x 1	2 x 1 1⅛ 2⅓ 1¾ 3¾
T-22S68	Single and Push Pull Plates to Line and Voice Coil	6,500 CT	70	40	3.2 to 4-6 to 8-15-250-500	25	1 x 1	2 x 1 1⅛ 2⅓ 1¾ 3¾
T-22S70	Single and Push Pull Plates to Line and Voice Coil	5,000 CT	80	45	3.2 to 4-6 to 8-15-250-500	25	1 x 1	2 x 1 1⅛ 2⅓ 1¾ 3¾
T-22S72	Single and Push Pull Plates to Line and Voice Coil	3,000 CT	90	50	3.2 to 4-6 to 8-15-250-500	25	1 x 1	2 x 1 1⅛ 2⅓ 1¾ 2¾
T-22S78	Single and Push Pull Plates to Line and Voice Coil	3,300 CT	180	150	3.2 to 4-6 to 8-15-250-500	60	1¼ x 1½	2½ x 2¾ 3½ 3⅓
<b>UNIVERSAL REPLACEMENT TO MULTIPLE VOICE COIL</b>								
T-22S74	Universal Single or Push Pull Plates to Voice Coil Pri.—14,000-10,000-8,000-6,600-5,000-3,000-2,500 CT	14,000 to 2,500 CT	80	60	I to 30	25	1 x 1	3⅓ 4 2½ 2¾
T-22S62	Universal Single Plate to Voice Coil Pri.—4,000-3,000-2,500-2,000-1,500	4,000 to 1,500	50	10	1 to 30	8	¾ x ¾	2⅓ 3⅓ 2 2
T-22S86	Universal Single Plate or Push Pull Plates to Voice Coil Pri.—14,000 CT-8,000 CT-3,500-2,000	14,000 to 2,000	50	10	3.2 to 4-6 to 8	3	½ x ½	2 2⅓ 1¼ 1¾
T-22S87	Universal Single Plate or Push Pull Plates to Voice Coil Pri.—14,000 CT-8,000 CT-3,500-2,000	14,000 to 2,000	50	10	3.2 to 4-6 to 8	6	¾ x ¾	1¾ 2¾ 1½ 1¾
T-22S88	Universal Single Plate or Push Pull Plates to Voice Coil Pri.—14,000 CT-8,000 CT-3,500-2,000	14,000 to 2,000	50	10	3.2 to 4-6 to 8	8	¾ x ¾	2⅓ 3⅓ 1¾ 2
<b>UNIVERSAL AND SPECIAL DUTY TO LINE</b>								
T-22S76	Universal or Push Pull Tubes to Line Pri.—14,000-12,000-10,000-8,000-5,000-3,000 CT	14,000 to 3,000 CT	80	60	500 to 600	25	1 x 1	3⅓ 4 2½ 2¾
T-22S90	Single or Push Pull Plates—Primary 20,000 CT	20,000 CT	10	10	125-200-500 to 600 CT	3	¾ x ¾	2¾ 2⅓ 1¾ 2¾
T-22S92	Single or Push Pull Plates—Primary 20,000 CT (Hum Bucking Coil and Core)	20,000 CT	10	10	125-200-500 to 600 CT	+10DB	Spec.	1¾ x 1½ 1¾ Dia. 2
<b>MATCHING-LINE OR LINES TO VOICE COIL</b>								
T-22S80	Single Line to Voice Coil	500 to 600		3.2 to 4-6 to 8-15	8	¾ x ¾	3⅓	3⅓ 2 2½
T-22S82	Multiple Lines to Voice Coil—Pri.—2,000-1,500-1,000-500	2,000 to 500		3.2 to 4-6 to 8-15	25	1 x 1	3⅓	4 2¾ 2¾
T-22S83	Multiple Lines to Voice Coil—Pri.—2,000-1,500-1,000-500	2,000 to 500		3.2 to 4-6 to 8-15	15	¾ x ¾	3⅓	3⅓ 2 2½
T-22S84	Multiple Lines to Voice Coil—Pri.—2,000-1,500-1,000-500	2,000 to 500		3.2 to 4-6 to 8-15	5	¾ x ¾	2⅓	3⅓ 1¾ 2
T-22S85	Multiple Lines to Voice Coil—Pri.—2,000-1,500-1,000-500	2,000 to 500		3.2 to 4-6 to 8-15	3	¾ x ¾	2¾	2¾ 1½ 1¾

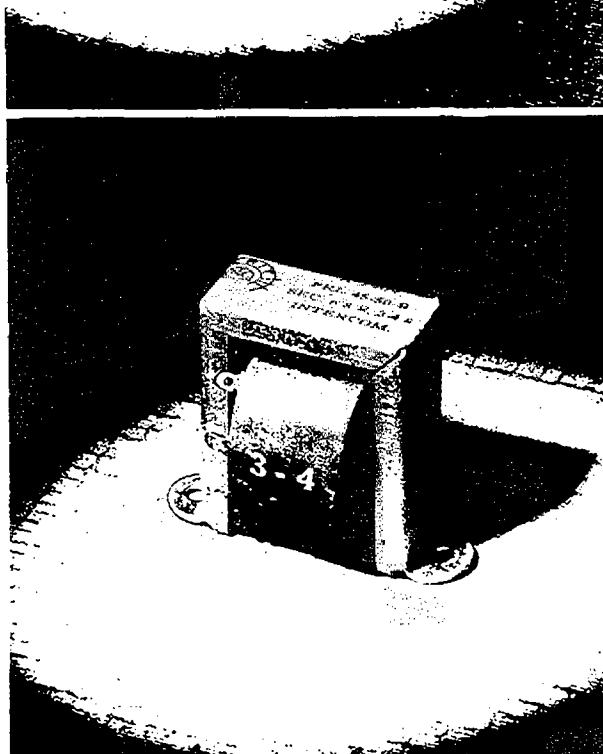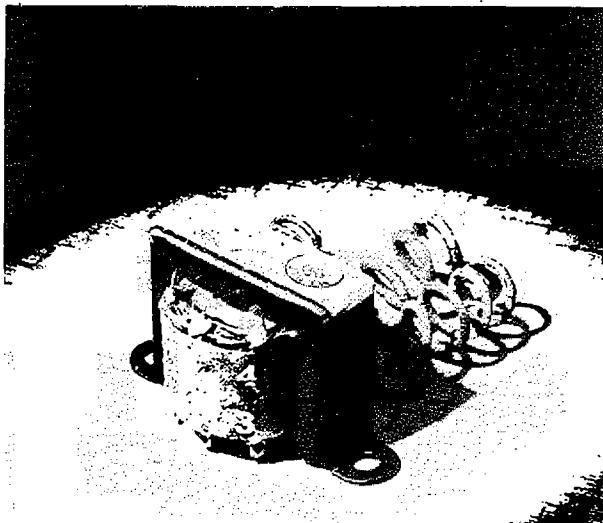

## OUTPUT TRANSFORMERS

Type No.	Tube	Class	Pri. Impedance	Pri. M.A.	Max. Watts	Mfg. Centers	H	Dimensions W	D
RECEIVER REPLACEMENT TYPE—TO COUPLE THE PLATE OR PLATES OF THE OUTPUT STAGE TO THE SPEAKER VOICE COIL SEC. IMPEDANCE—3.5 OHMS.									
A-2928	Single 2A3, 6A3, 6B4, 6Y6, 25AC5, 25B6, 25N6, 25L6, 35A5, 35L6, 50L6, 48	A	2,000	60	5	2	1½	2¾	1¼
A-2930	Single 6V6, 7C5, 12A, 12A5, 25A6, 25A7, 35A5, 35L6, 31, 45, 50, 59	A	5,000	40	5	2	1½	2¾	1¼
A-2935	PP 6L6	A	5,000 CT	150	18	2½	2	3¼	1¾
A-2931	Single 2A5, 6AC5, 6B5, 6F6, 6K6, 6N6, 7B5, 20, 31, 33, 42, 47, 59	A	7,000	30	5	2	1¾	2¾	1¼
A-2932	Single 1C5, 1Q5, 3C5, 6A4, 6G6, 6N7, 6R7, 12A, 38, 41, 49	A	10,000	30	5	2	1½	2¾	1¼
A-2938	Single 6G6, 19, 38	A	10,000 CT	40	5	2	1¾	2¾	1¼
A-2936	PP 6AC5 PP 6V6, 7C5	AB <sub>2</sub>	10,000 CT	40	10	2¾	1¾	2½	1½
A-2933	Single 1D8, 7B5, 6K6, 6G6	A	12,000	10	5	2	1¾	2¾	1¼
A-2934	Single 1D8, 1F4, 1F5, 1J5, 1T5, 6V7, 12A7, 85	A	15,000	10	5	2	1¾	2¾	1¼
A-2937	Single 1A5, 1N6, 6V7, 85 PP 1E7, 1J5, 5G6	A	25,000 CT	10	5	2	1¾	2¾	1¼

## UNIVERSAL OUTPUT TRANSFORMERS

Type No.	Tube	Ohms Impedance	Pri. Sec.	Pri. M.A.	Max. Watts	Mfg. Centers	H	Dimensions W	D
TO PROVIDE CORRECT COUPLING BETWEEN A VARIETY OF OUTPUT TUBES AND ANY SPEAKER VOICE COIL									
A-2900	Single or Push-pull	4,000-7,000-8,000-10,000-14,000 CT	.17 to 32	35	4	2	1¾	2¾	1¼
A-2901	Single or Push-pull	4,000-7,000-8,000-10,000-14,000 CT	.17 to 32	40	8	2¾	1¾	2½	1½
A-2902	Single	1,500-2,000-4,000-5,000-7,000-10,000	.1 to 40	55	10	2¾	1¾	2½	1½
A-2904	Single or Push-pull	4,000-7,000-8,000-10,000-14,000 CT	.17 to 32	40	18	2¾	2¼	2¾	1¾
A-2905	Single or Push-pull	3,000-5,000-7,000-8,000-10,000 CT	.17 to 32	90	24	3½	2¼	3½	2¾

## HEAVY DUTY OUTPUT TRANSFORMERS

Type No.	Tube	Class	Pri. Impedance	Pri. M.A. per side	Max. Watts	H	Dimensions W	D
HIGH LEVEL TYPE TO COUPLE TO LINE OR SPEAKER. SEC. IMPEDANCE: 4-8-15-250-500 OHMS								
A-3127	Single 6L6	A	2,500	80	8	3½	2¾	2½
A-3128	PPS6V6	AB <sub>2</sub>	8,000 CT*	50	14	3½	2½	3½
A-3129	PP6L6	AB <sub>2</sub>	4,300 CT*	95	25	3½	2½	3½
A-3130	PP6L6	AB <sub>2</sub>	6,600 CT*	80	34	3½	3½	3½
A-3131	PP6L6	A						
	PP2A3, 6A3, 45	AB	5,000 CT	80	30	3½	2½	3½
	PP6N7	B						
A-3132	PP6F6, 2A5 Single 6N7, 6A6	AB <sub>2</sub>	10,000 CT	40	25	3½	2½	3½

\*10% Feedback Winding.

## TRANSFORMERS

## INTERSTAGE TRANSFORMERS

Type No.	Pri.	Ohms Impedance	Sec.	Turns Ratio	Pri. M.A.	Mtg. Centers	H	Dimensions W	D
TO COUPLE A SINGLE PLATE TO A SINGLE GRID									
A-2910	10,000	90,000		3:1	10	2	1 $\frac{1}{2}$	2 $\frac{1}{4}$	1 $\frac{1}{4}$
A-2911	10,000	90,000		3:1	10	2 $\frac{1}{2}$	1 $\frac{1}{2}$	2 $\frac{1}{4}$	1 $\frac{1}{4}$
A-2912	10,000	90,000		3:1	10	2 $\frac{1}{2}$	2	3 $\frac{1}{4}$	1 $\frac{1}{4}$
TO COUPLE A SINGLE PLATE TO PUSH-PULL GRIDS									
A-2914	10,000	90,000 CT		3:1	10	2	1 $\frac{1}{2}$	2 $\frac{1}{4}$	1 $\frac{1}{4}$
A-2915	10,000	90,000 CT		3:1	10	2 $\frac{1}{2}$	1 $\frac{1}{2}$	2 $\frac{1}{4}$	1 $\frac{1}{4}$
A-2916	10,000	90,000 CT		3:1	10	2 $\frac{1}{2}$	2	3 $\frac{1}{4}$	1 $\frac{1}{4}$
TO COUPLE PUSH-PULL PLATES TO PUSH-PULL GRIDS									
A-2913	20,000 CT	20,000 CT		1:1	10 per side	2 $\frac{1}{2}$	1 $\frac{1}{2}$	2 $\frac{1}{4}$	1 $\frac{1}{4}$
A-2917	20,000 CT	45,000 CT		1.5:1	10 per side	2 $\frac{1}{2}$	2	3 $\frac{1}{4}$	1 $\frac{1}{4}$


## DRIVER TRANSFORMERS

Type No.	Driver	Output	Ratio Pri. to $\frac{1}{2}$ Sec.	Class	Pri. M.A.	Mtg. Centers	H	Dimensions W	D
TO COUPLE DRIVER PLATE TO AMPLIFIER GRIDS									
A-2920	6C5, 30, 49	Single 1J6, 19; Push-pull 30, 49	2.5:1	B	10	2 $\frac{1}{2}$	1 $\frac{1}{2}$	2 $\frac{1}{4}$	1 $\frac{1}{2}$
A-2921	6F6, 42	PP6F6, 6L6	1.7:1, 1.5:1, 1.3:1	AB	35	2 $\frac{1}{2}$	2	3 $\frac{1}{4}$	1 $\frac{1}{2}$
A-2922	6A6	Single 6A6	5:1, 4:1, 3:1, 2.5:1	B	10	2 $\frac{1}{2}$	2	3 $\frac{1}{4}$	1 $\frac{1}{2}$
A-3123	PP6A5 PP6C5	PP6N7 }	5:1*	{ AB <sub>2</sub>	10	2 x 1 $\frac{1}{2}$	3 $\frac{1}{4}$	3 $\frac{1}{4}$	2 $\frac{1}{2}$
A-3125	6F6	PP6L6	1.4:1*	AB <sub>2</sub>	40	2 $\frac{1}{2}$ x 2	3 $\frac{1}{2}$	2 $\frac{1}{4}$	3 $\frac{1}{4}$
A-3124	46, 6F6 2A5, 42	PP6L6	2.2:1	{ B	30	2 x 1 $\frac{1}{2}$	3 $\frac{1}{4}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$

\*Split Secondary

## POWER TRANSFORMERS

Type No.	H. V. Secondary Volts	D.C. M.A.	Rectifier Volts	Amps.	Fil. Wdgs.	Volts	Amps.	Mtg. Centers	H	Dimensions W	D
RECEIVER REPLACEMENT TYPE—PRIMARY FOR 115 V., 60 CY. LEADS R.M.A. COLOR CODED											
P-2948	240-240	40	5	2	6.3 CT	2	2 x 2 $\frac{1}{2}$	2 $\frac{1}{2}$	3	2 $\frac{1}{2}$	
P-2965	325-235	40	5	2	2.5 CT	4	2 x 2 $\frac{1}{2}$	2 $\frac{1}{2}$	3	2 $\frac{1}{2}$	
P-2966	350-350	70	5	3	{ 2.5 CT	9	2 $\frac{1}{4}$ x 2 $\frac{1}{2}$	2 $\frac{1}{2}$	3 $\frac{1}{4}$	3 $\frac{1}{4}$	
P-2967	350-350	90	5	3	2.5 CT	12.5	2 $\frac{1}{2}$ x 3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	4 $\frac{1}{2}$	
P-2968	400-400	110	5	3	{ 2.5 CT	15	3 x 3 $\frac{1}{2}$	3 $\frac{1}{2}$	4 $\frac{1}{2}$	3 $\frac{1}{2}$	
P-2950	325-325	40	5	2	6.3 CT	2	2 x 2 $\frac{1}{2}$	2 $\frac{1}{2}$	3	2 $\frac{1}{2}$	
P-2951	350-350	70	5	3	6.3 CT	2.5	2 x 2 $\frac{1}{2}$	2 $\frac{1}{2}$	3	3 $\frac{1}{2}$	
P-2952	350-350	90	5	3	6.3 CT	3.5	2 $\frac{1}{4}$ x 2 $\frac{1}{2}$	2 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{4}$	
P-2953	350-350	120	5	3	6.3 CT	4.7	2 $\frac{1}{2}$ x 3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	
P-2954	375-375	150	5	3	6.3 CT	5	2 $\frac{1}{2}$ x 3 $\frac{1}{2}$	3 $\frac{1}{2}$	3 $\frac{1}{2}$	4 $\frac{1}{2}$	
P-2955	400-400	200	5	3	6.3 CT	5	3 x 3 $\frac{1}{2}$	3 $\frac{1}{2}$	4 $\frac{1}{2}$	4	
P-2956	435-435 (80-volt Bias Tap)	250	{ 5	3	{ 6.3 CT	1.5	3 x 3 $\frac{1}{2}$	3 $\frac{1}{2}$	4 $\frac{1}{2}$	4 $\frac{1}{2}$	
			2.5		2.5 CT	10					

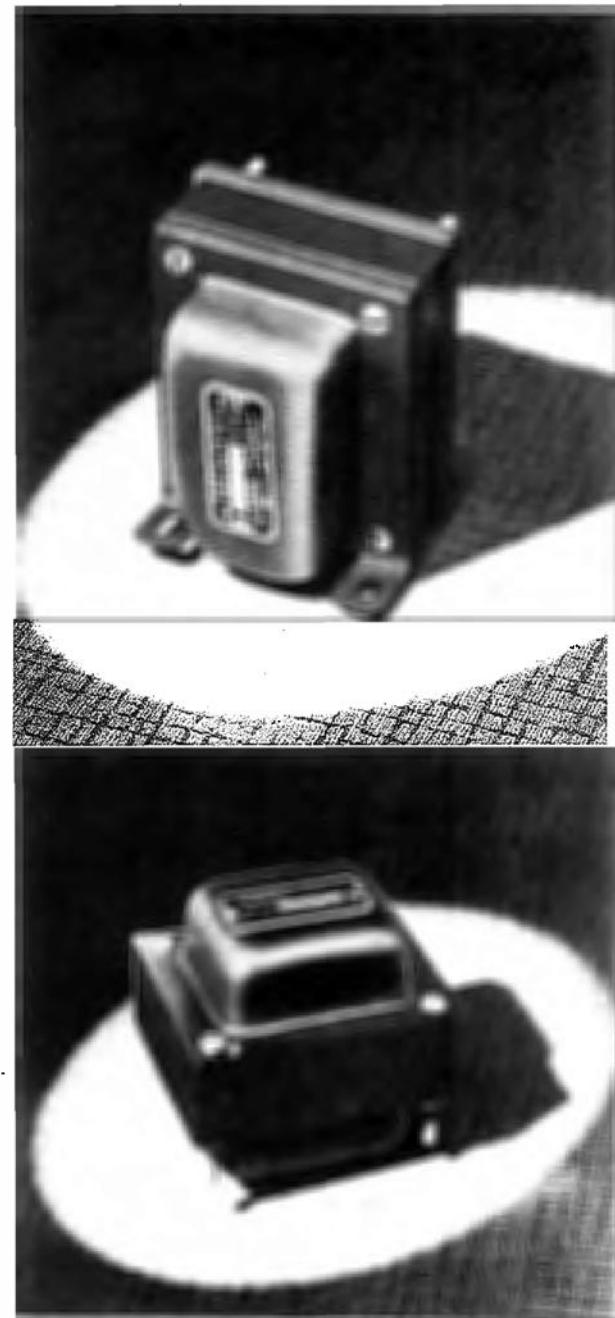

## POWER TRANSFORMERS (continued)

Type No.	H. V. Secondary Volts	D.C. M.A.	Rectifier Volts	Amps.	Fil. Wdg. Volts	Amps.	Mtg. Centers	Dimensions H	Dimensions W	D
FULLY SHIELDED UPRIGHT MOUNTING TYPE										
P-3149	240-240	40	5	2	6.3 CT	2	2 x 1 $\frac{1}{16}$	3 $\frac{1}{8}$	2 $\frac{1}{8}$	2 $\frac{1}{8}$
P-3150	325-325	40	5	2	6.3 CT	2	2 x 1 $\frac{1}{8}$	3 $\frac{1}{8}$	2 $\frac{1}{8}$	2 $\frac{1}{16}$
P-3160	350-350	50	5	2	6.3 CT	2.6	2 $\frac{1}{4}$ x 1 $\frac{1}{8}$	3 $\frac{1}{8}$	2 $\frac{1}{16}$	3 $\frac{1}{16}$
P-3151	350-350	70	5	3	6.3 CT	3	2 $\frac{1}{2}$ x 1 $\frac{1}{16}$	3 $\frac{7}{8}$	3 $\frac{3}{16}$	3 $\frac{3}{16}$
P-3152	350-350	90	5	3	6.3 CT	3.5	2 $\frac{1}{2}$ x 2 $\frac{1}{4}$	4 $\frac{1}{4}$	3 $\frac{1}{2}$	3 $\frac{7}{16}$
P-3153	350-350	110	5	3	6.3 CT	4.5	3 x 2 $\frac{1}{4}$	4 $\frac{1}{8}$	3 $\frac{1}{16}$	3 $\frac{7}{16}$
P-3155	400-400	200	5	3	6.3 CT	5	3 x 3 $\frac{1}{16}$	4 $\frac{1}{8}$	3 $\frac{1}{16}$	4 $\frac{1}{8}$
P-3156	435-435	250	5	3	6.3 CT	1.5	3 x 3 $\frac{3}{16}$	4 $\frac{1}{8}$	3 $\frac{1}{16}$	4 $\frac{1}{8}$
	(80-volt Bias Tap)				{ 2.5	{ 3	{ 2.5 CT	10		

## VIBRATOR TRANSFORMERS

Type No.	Sec. D.C. Volts to Filter	Sec. M.A.	H	Dimensions W	D
FOR OPERATION FROM 6 V. BATTERY AND VIBRATOR					
P-2969	150	40	2	3 $\frac{1}{4}$	1 $\frac{1}{4}$
P-2970	225	40	3 $\frac{1}{8}$	2 $\frac{1}{2}$	2 $\frac{1}{8}$
P-2971	250	50	3 $\frac{1}{8}$	2 $\frac{1}{2}$	2 $\frac{1}{8}$
P-2972	260	60	3 $\frac{1}{8}$	2 $\frac{1}{2}$	2 $\frac{1}{8}$

## REPLACEMENT TYPE FILTER CHOKES

Type No.	Inductance Henries	Current Rating M.A.	D.C. Res. Ohms	Volts Insul.	Mtg. Centers	Dimensions H	Dimensions W	D
INDUCTANCE RATINGS ARE AT 10 V. 60 CY. WITH RATED CURRENT FLOWING AS RECOMMENDED BY THE R.M.A.								
C-2977	4.5	50	200	1500	2 $\frac{1}{8}$	1 $\frac{1}{8}$	2 $\frac{1}{16}$	1 $\frac{1}{2}$
C-2975	5.5	50	330	1500	2	1 $\frac{5}{16}$	2 $\frac{1}{8}$	1 $\frac{1}{8}$
C-2981	8.5	50	400	1500	2 $\frac{1}{8}$	1 $\frac{1}{8}$	2 $\frac{1}{16}$	1 $\frac{1}{2}$
C-2985	20	15	900	1500	2 $\frac{1}{8}$	1 $\frac{1}{8}$	2 $\frac{1}{16}$	1 $\frac{1}{2}$
C-2987	16	50	550	1500	2 $\frac{1}{16}$	2	3 $\frac{1}{4}$	1 $\frac{1}{8}$
C-2990	15	75	400	1500	3 $\frac{1}{8}$	2 $\frac{1}{4}$	3 $\frac{1}{16}$	2 $\frac{1}{8}$
C-2993	10.5	110	220	1500	3 $\frac{1}{16}$	2 $\frac{1}{16}$	4	2 $\frac{1}{4}$

## FILTER CHOKES


Type No.	Inductance Henries	Current Rating M.A.	D.C. Res. Ohms	Volts Insul.	H	Dimensions W	D
FOR SMALL TRANSMITTER AND AMPLIFIER APPLICATIONS							
C-3192	15	85	325	1500	3 $\frac{1}{8}$	2 $\frac{1}{8}$	2 $\frac{1}{8}$
C-3193	10	110	200	1500	3 $\frac{1}{8}$	2 $\frac{1}{8}$	2 $\frac{1}{8}$
C-3194	12	150	230	1500	3 $\frac{1}{2}$	2 $\frac{1}{16}$	3 $\frac{1}{8}$
C-3195	15	150	180	2000	3 $\frac{7}{8}$	3 $\frac{3}{16}$	3 $\frac{3}{16}$
C-3196	5	200	80	1500	3 $\frac{1}{2}$	2 $\frac{1}{16}$	3 $\frac{1}{8}$

# BATTERIES

**EVEREADY**




Catalog Number	Voltage	Overall Dimensions L   W   H	Terminals
<b>"B" BATTERIES FOR PORTABLE RECEIVERS</b>			
455	45 Volt	2 <sup>2</sup> / <sub>3</sub> x 1 x 3 <sup>1</sup> / <sub>16</sub>	Snap Type; -, +45
467	67 <sup>1</sup> / <sub>2</sub> Volt	2 <sup>1</sup> / <sub>8</sub> x 1 <sup>1</sup> / <sub>8</sub> x 3 <sup>5</sup> / <sub>64</sub>	Snap Type; -, +67 <sup>1</sup> / <sub>2</sub>
482	45 Volt	3 <sup>1</sup> / <sub>8</sub> x 1 <sup>27</sup> / <sub>32</sub> x 5 <sup>1</sup> / <sub>2</sub>	Plug-in; -, +45
493	300 Volt	2 <sup>1</sup> / <sub>16</sub> x 2 <sup>7</sup> / <sub>32</sub> x 3 <sup>1</sup> / <sub>16</sub>	Pin Jack; -, +300
738	45 Volt	3 x 2 <sup>5</sup> / <sub>8</sub> x 4 <sup>1</sup> / <sub>8</sub>	Plug-in; -, +22 <sup>1</sup> / <sub>2</sub> , +45
<b>"A" BATTERIES FOR PORTABLE RECEIVERS</b>			
718	6 Volt	3 <sup>1</sup> / <sub>8</sub> x 2 <sup>3</sup> / <sub>8 x 5<sup>1</sup>/<sub>2</sub></sub>	Plug-in; -, +6
741	1 <sup>1</sup> / <sub>2</sub> Volt	3 <sup>7</sup> / <sub>8</sub> x 3 <sup>1</sup> / <sub>16</sub> x 5 <sup>1</sup> / <sub>8</sub>	Plug-in; -, +1.5
742	1 <sup>1</sup> / <sub>2</sub> Volt	2 <sup>1</sup> / <sub>8</sub> x 2 <sup>1</sup> / <sub>8</sub> x 4	Plug-in; -, +1.5
743	1 <sup>1</sup> / <sub>2</sub> Volt	3 <sup>1</sup> / <sub>8</sub> x 2 <sup>2</sup> / <sub>3</sub> x 4 <sup>1</sup> / <sub>8</sub>	Plug-in; -, +1.5
744	6 Volt	2 <sup>2</sup> / <sub>3</sub> x 2 <sup>3</sup> / <sub>8</sub> x 3 <sup>1</sup> / <sub>2</sub>	Plug-in; -, +6
745	1 <sup>1</sup> / <sub>2</sub> Volt	3 <sup>7</sup> / <sub>8</sub> x 1 <sup>7</sup> / <sub>16</sub> x 10 <sup>2</sup> / <sub>3</sub>	Plug-in; -, +1.5
746	4 <sup>1</sup> / <sub>2</sub> Volt	3 <sup>1</sup> / <sub>8</sub> x 1 <sup>9</sup> / <sub>16</sub> x 4 <sup>2</sup> / <sub>3</sub>	Plug-in; -, +4.5
747	6 Volt	3 <sup>7</sup> / <sub>8</sub> x 1 <sup>7</sup> / <sub>16</sub> x 10 <sup>2</sup> / <sub>3</sub>	Plug-in; -, +6
915	1 <sup>1</sup> / <sub>2</sub> Volt	3 <sup>5</sup> / <sub>8</sub> Diam. x 2 <sup>1</sup> / <sub>8</sub>	Flashlight
+935	1 <sup>1</sup> / <sub>2</sub> Volt	1 <sup>1</sup> / <sub>8</sub> Diam. x 2	Flashlight
950	1 <sup>1</sup> / <sub>2</sub> Volt	1 <sup>2</sup> / <sub>16</sub> Diam. x 2 <sup>7</sup> / <sub>64</sub>	Flashlight
<b>"A-B" PACK FOR 1.4 VOLT PORTABLE RECEIVERS</b>			
752	9 "A" 90 "B"	14 <sup>1</sup> / <sub>16</sub> x 2 <sup>1</sup> / <sub>16</sub> x 4 <sup>1</sup> / <sub>16</sub>	Recessed Plug; - "A," -9 "A," - "B," +90 "B"
752-W	9+1 <sup>1</sup> / <sub>2</sub> "A" **14 <sup>1</sup> / <sub>16</sub> x 2 <sup>1</sup> / <sub>16</sub> x 4 <sup>1</sup> / <sub>16</sub>	90 "B"	Recessed Plug; - "A," +10 <sup>1</sup> / <sub>2</sub> "A," - "B," +90 "B"
753	7 <sup>1</sup> / <sub>2</sub> & 9 "A"	97/ <sub>32</sub> x 2 <sup>23</sup> / <sub>32</sub> x 4 <sup>5</sup> / <sub>16</sub>	Plug-in; - "A," -7 <sup>1</sup> / <sub>2</sub> "A," -9 "A," - "B," +90 "B"
	90 "B"		Plug-in; - "A," -7 <sup>1</sup> / <sub>2</sub> "A," +9 "A," - "B," +90 "B"
754	7 <sup>1</sup> / <sub>2</sub> & 9 "A"	10 <sup>1</sup> / <sub>32</sub> x 3 <sup>1</sup> / <sub>4</sub> x 4	Plug-in; - "A," +7 <sup>1</sup> / <sub>2</sub> "A," +9 "A," - "B," +90 "B"
	90 "B"		
<b>"B" BATTERY FOR FARM TYPE RECEIVERS</b>			
487	45 Volt	5 <sup>1</sup> / <sub>8</sub> x 2 <sup>1</sup> / <sub>16</sub> x 7 <sup>1</sup> / <sub>4</sub>	Socket; +22 <sup>1</sup> / <sub>2</sub> , +45
<b>"A-B" PACK FOR 1.4 VOLT FARM TYPE RECEIVERS</b>			
758	1 <sup>1</sup> / <sub>2</sub> "A" 90 "B"	10 <sup>1</sup> / <sub>16</sub> x 4 <sup>3</sup> / <sub>16</sub> x 6 <sup>1</sup> / <sub>16</sub>	Plug-in; -, +1.5
			Plug-in; -, +90
<b>"A" BATTERIES FOR 2 VOLT RECEIVERS</b>			
*A-2600	2 <sup>1</sup> / <sub>2</sub> Volt	9 <sup>2</sup> / <sub>32</sub> x 6 <sup>1</sup> / <sub>8</sub> x 11 <sup>1</sup> / <sub>16</sub>	Screw; -, +2.5
*SA-2600	2 <sup>1</sup> / <sub>2</sub> Volt	9 <sup>2</sup> / <sub>8</sub> x 6 <sup>1</sup> / <sub>8</sub> x 11 <sup>1</sup> / <sub>16</sub>	Screw; -, +2.5
*A-2300	2 <sup>1</sup> / <sub>2</sub> Volt	8 <sup>1</sup> / <sub>8</sub> x 5 <sup>5</sup> / <sub>16</sub> x 8 <sup>5</sup> / <sub>16</sub>	Screw; -, +2.5
X-125	3 Volt	11 <sup>1</sup> / <sub>8</sub> x 4 <sup>1</sup> / <sub>16</sub> x 7 <sup>3</sup> / <sub>8</sub>	Fahnestock; -, +3
<b>"A" BATTERIES FOR 1.4 VOLT RECEIVERS</b>			
*A-1300	1 <sup>1</sup> / <sub>4</sub> Volt	5 <sup>5</sup> / <sub>16</sub> x 4 <sup>1</sup> / <sub>8</sub> x 8 <sup>5</sup> / <sub>16</sub>	Plug-in; -, +1.25
740	1 <sup>1</sup> / <sub>2</sub> Volt	4 <sup>1</sup> / <sub>8</sub> x 3 <sup>7</sup> / <sub>16</sub> x 7 <sup>1</sup> / <sub>4</sub>	Plug-in; -, +1.5
<b>"C" BATTERIES AND MISCELLANEOUS TYPES</b>			
768	22 <sup>1</sup> / <sub>2</sub> Volt	4 <sup>1</sup> / <sub>8 x 2<sup>17</sup>/<sub>32</sub> x 2<sup>9</sup>/<sub>16</sub></sub>	Plug-in; +, -3, -4 <sup>1</sup> / <sub>2</sub> , -16 <sup>1</sup> / <sub>2</sub> , -22 <sup>1</sup> / <sub>2</sub>
771	4 <sup>1</sup> / <sub>2</sub> Volt	4 <sup>1</sup> / <sub>8</sub> x 1 <sup>13</sup> / <sub>64</sub> x 3 <sup>1</sup> / <sub>8</sub>	Plug-in; +, -3, -4 <sup>1</sup> / <sub>2</sub>
773	7 <sup>1</sup> / <sub>2</sub> Volt	4 <sup>1</sup> / <sub>8</sub> x 2 <sup>9</sup> / <sub>32</sub> x 3 <sup>1</sup> / <sub>8</sub>	5 Screw; 1 wire +, -1 <sup>1</sup> / <sub>2, -3, -4<sup>1</sup>/<sub>2, -6, -7<sup>1</sup>/<sub>2</sub></sub></sub>
781	4 <sup>1</sup> / <sub>2</sub> Volt	2 <sup>1</sup> / <sub>8</sub> x 2 <sup>7</sup> / <sub>32</sub> x 3 <sup>1</sup> / <sub>8</sub>	Screw; +, -4 <sup>1</sup> / <sub>2</sub>
762-S	45 Volt	4 <sup>1</sup> / <sub>4</sub> x 2 <sup>9</sup> / <sub>16</sub> x 6 <sup>1</sup> / <sub>16</sub>	Screw; -, +22 <sup>1</sup> / <sub>2</sub> , +45
763	22 <sup>1</sup> / <sub>2</sub> Volt	3 <sup>1</sup> / <sub>2</sub> x 2 <sup>9</sup> / <sub>32</sub> x 2 <sup>1</sup> / <sub>16</sub>	Screw; -, +22 <sup>1</sup> / <sub>2</sub>
778	22 <sup>1</sup> / <sub>2</sub> Volt	4 <sup>1</sup> / <sub>8</sub> x 2 <sup>17</sup> / <sub>32</sub> x 3 <sup>1</sup> / <sub>8</sub>	Fahnestock; +, -3, -4 <sup>1</sup> / <sub>2, -6, -9, -10<sup>1</sup>/<sub>2</sub>, -16<sup>1</sup>/<sub>2</sub>, -22<sup>1</sup>/<sub>2</sub></sub>
**"All-Cell" "A" Battery		**Exclusive of "A" Cell	
		†Flashlight Types	

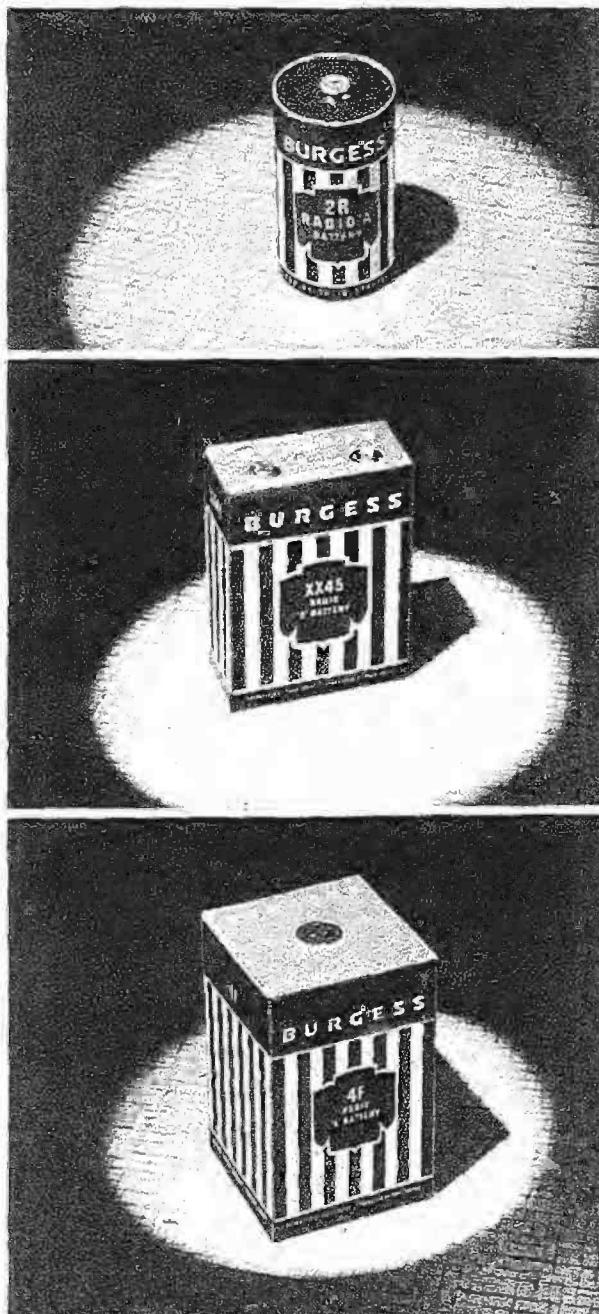

Cat. No.	Volts	Size in Inches	For Use With
<b>PORTABLE "A" BATTERIES</b>			
4F	1½	2¾ x 2¾ x 4¾	Universal Type
G3	4½	4 x 1¾ x 4⅓	Universal Type
F4P1	6	2½ x 2½ x 4½	Universal Type
6F	1½	4¾ x 2¾ x 4⅓	Universal Type
8F	1½	3¾ x 2¾ x 5½	Universal Type
2R	1½	2¾ x 1¾	Personal Portable Radio
2F4	6	3½ x 2¾ x 5¾	Heavy Duty Portable 'A'
2F4L	6	3¾ x 1¾ x 10½	Universal Type, Flat
G5	7½	3¾ x 2½ x 4¾	Admiral 336-5N
4FL	1½	3¾ x 1¾ x 5½	Flat Type
T5	7½	2½ x 2½ x 3¾	Crosley Model 56-PA
2F	1½	2½ x 1¾ x 4¾	Motorola 41-S, Learadio APR-1
F4L	6	4 x 17/16 x 5½	Flat Type
<b>PORTABLE "B" BATTERIES</b>			
XX45	6½	2½ x 1¾ x 3¾	All 'Personal' Radios
M30	45	3¾ x 1¾ x 5½	Universal Type
B30	45	4¾ x 2½ x 5¾	Universal Type
A30	45	3¾ x 2¾ x 4¾	Universal Type
Z30	45	3¾ x 2½ x 4¾	G. E. HB-402, 403
XX30	45	2½ x 2½ x 3¾	Camera Type Portable
*K20	30	1¼ x 1¾ x 2¾	Midget 'B'
*A60	90	4¾ x 3¾ x 4¾	Detrola 282
*A30M	45	3½ x 3¾ x 3¾	Garod
*Z59	88½	3¾ x 2½ x 5½	Learadio APR-1
<b>PORTABLE "A-B" PACKS</b>			
F6A60	7½A, 9A, 90B	9¾ x 2¾ x 4½	1946 Models
G6M60	7½A, 9A, 90B	10¾ x 3¾ x 4¾	1946 Models
G6B60	9A, 90B	13½ x 2½ x 4½	Zenith 66501; 505; 5G500R
G4B50	6A, 75B	12¾ x 2½ x 4½	Zenith 5G500; 501; 504
6TA60	1½A, 90B	10 x 2¾ x 4¾	Universal Type
4GA41	1½A, 61½B	9¾ x 2¾ x 3¾	Philco 41-81, 41-83
4GA42	1½A, 63B	9½ x 2¾ x 4¾	Philco 81T, Detrola 303
G5A42	7½A, 63B	9¾ x 2½ x 4½	Philco 87
*F4B50	6A, 90B	10¾ x 2¾ x 5	Zenith 5G401D; L; M; Y
F6A60	1½A, 90B	11½ x 6½ x 1½	Philco 88T
*F5A60	7½A, 90B	11½ x 2½ x 4½	Philco 41-841; 41-851
S0A60	1½A, 90B	5¾ x 2¾ x 7	Universal Type
*F4A41	6A, 61½B	9¾ x 4½ x 2¾	Crosley 549
*2F4A60	6A, 90B	12 x 2¾ x 4¾	Philco 41-84; 41-85
4TA60	1½A, 90B	8½ x 2½ x 4½	Sentinel 160; 170BL
*4FA60	1½A, 90B	7½ x 3½ x 4¾	Zenith 4K402; D, M, F; L
*G4B60	6A, 90B	10¾ x 2½ x 5	Fireside AC-DC
*3FA60	1½A, 90B	4¾ x 2½ x 10¾	Motorola B-150
*2GA60	1½A, 90B	9½ x 2½ x 4½	Universal Type
*D4A60	6A, 90B	5½ x 2½ x 7	Air King 4012
2TXX40	1½A, 60B	2½ x 11½ x 7½	Philco 41-PT89
*D5A60	7½A, 90B	9¾ x 2½ x 4½	Sky Chief 225-227
*2F4B60	6A, 90B	10¾ x 4 x 4¾	Sentinel 180XL
*F5M45	7½A, 67½B	9¾ x 2½ x 4½	1946 Models
<b>"A-B" FARM PACKS</b>			
17GD60	1½A, 90B	15½ x 4¾ x 7½	Standard 4 prong pack
*18GD60	1½A, 90B	5¾ x 6¾ x 12½	Zenith 8 prong pack
*3G4D50	6A, 75B	14½ x 4¾ x 6½	Zenith Sets 5G510, 534
*3G6D60	9A, 90B	8½ x 4½ x 14	Emerson Sets EB344, 359, EW391
*5F4D60	6A, 90B	16½ x 4½ x 6½	Crosley Set 43BT
*398	6A, 90B	8½ x 4¾ x 14	Zenith Sets 5G438, 441, 442, 461
*739	7½A, 90B	8½ x 4¾ x 14	Zenith Sets 5G537, 572, 500
<b>FARM "A" BATTERIES</b>			
*19G	1½	4¾ x 5½ x 6½	1939 Philco
*20F	1½	7¾ x 2¾ x 6½	Heavy Duty Standard
20F2	3	11½ x 4 x 6½	'A' for 2-Volt Farm Sets
*12F3	4½	10¾ x 3¾ x 6½	'A' for Mont.-Ward Sets
<b>FARM "B" AND "C" BATTERIES AND MISCELLANEOUS OTHERS</b>			
21308★	45	8½ x 4½ x 7½	Super Heavy Duty
10308★	45	8½ x 4½ x 7½	Heavy Duty
2308★	45	8½ x 2¾ x 7½	Standard Size
*D50	90	13½ x 3 x 8½	'B' Pack for Philco
*F90D6	135B, 9C	8½ x 6¾ x 13¾	'B-C' Pack for Philco

★ Available with plug-in or spring clip terminals. Specify type desired.  
\* Denotes Special Batteries Requiring Special Production.

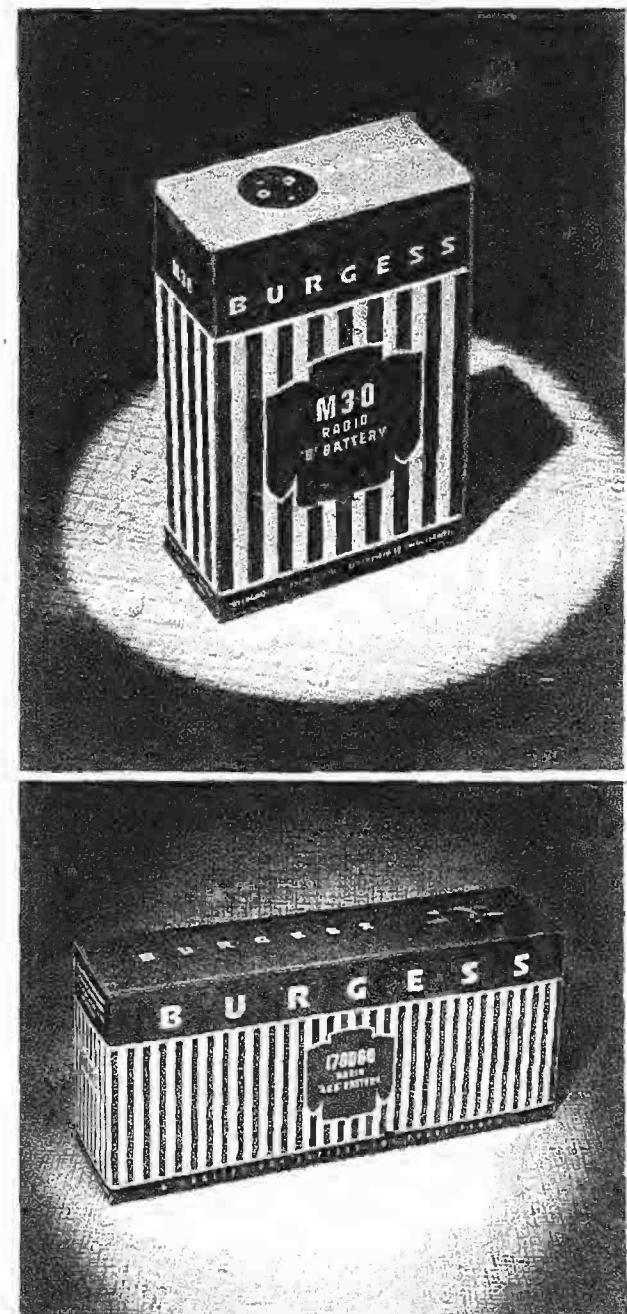

# IF COILS

MEISSNER

## NEW $\frac{3}{4}$ " SQUARE I.F. TRANSFORMER

Coil wound on HiQ powdered iron core. Compression type trimmers. Stable construction. Shield size is  $\frac{3}{4}$ " square by 2" long. Standard spade bolt type mounting. Frequency is 456 kc. R.M.A. coded push back leads.

- 16-6668 "Battery" type Input
- 16-6669 "Battery" type Output
- 16-6678 AC-DC type Input or Output

## FM-AM "COMPOSITE" I.F. TRANSFORMER

Contains a 456 kc. AM and a 10.7 mc. FM I.F. transformer. Each circuit tuned by separate HiQ powdered iron core. Terminals on base of the unit so various external circuit arrangements may be used. Two of these units, with the 17-3487 ratio detector coil listed below, recommended for an AM-FM set when minimum number of tubes is desired. Can size:  $1\frac{1}{8}$ " square by  $2\frac{1}{2}$ " long. Spade bolt mounting.

16-6675 10.7 mc.—456 kc. I.F. Trans.

## FM RATIO DETECTOR COIL

Companion coil to the above transformer or may be used with a straight 10.7 mc. I.F. transformer to make "FM" converters. Iron core tuning. Polyethylene twin wire secondary for balance and better stability. Shield  $1\frac{1}{8}$ " square by  $2\frac{1}{2}$ " long.

17-3487 FM Ratio Detector Coil

## 10.7 MC. FM I.F. TRANSFORMER AND FM DISCRIMINATOR COIL

Permeability tuned. Close tolerance, high stability shunt capacities. Mounted in a  $\frac{3}{8}$ " x  $1\frac{1}{16}$ " rectangular shield  $1\frac{1}{8}$ " high. Spade bolt mounting. Four I.F. transformers and one discriminator coil recommended for a 10.7 mc. FM I.F. channel.

- 16-6665 10.7 mc. I.F. Transformer,
- 17-3484 10.7 mc. Discriminator coil

## "ALIGN-AIRE" I.F. TRANSFORMERS

HiQ Iron-Cores are used for selectivity and sensitivity. All types are double-tuned. Wide individual coverage to answer practically any problem in replacement or new set design. Black crackle shields are  $2"$  x  $2"$  x  $4\frac{1}{8}$ ".

No.	Freq. Range (kc)	Peak Fact. Set.	Gain Fact. Set.	Selectivity			Use
				2x	10x	20x	
16-6643	415-540	456	77	7.0	16.0	22.0	Input
16-6123	415-540	456	29	7.0	18.0	24.4	Interstage
16-6645	415-540	456	105	9.0	25.6	36.2	Output
16-6139	415-540	456	100	9.5	23.2	33.5	Output CT

## HIQ IRON CORE I.F. TRANSFORMERS

$1\frac{1}{8}$ " square by 3" high

No.	Freq. Range	Peak Factory Setting	Use
16-5728	127-206	175	Input
16-5730	127-206	175	Output
16-5740	360-600	456	Input
16-5742	360-600	456	Output
16-8091	1050-2000	1500	Input-Interstage
16-8099	1050-2000	1500	Output

## STANDARD I.F. TRANSFORMERS

$1\frac{1}{8}$ " square by 3" high

No.	Freq. Range	Peak Factory Setting	Use
16-5700	121-235	175	Input
16-5702	121-235	175	Output
16-3731	121-235	175	Output CT
16-5704	220-360	262	Input
16-5706	190-325	262	Output
16-5712	425-650	456	Input
16-6133	435-1000	456	Interstage
16-5714	425-650	456	Output
16-3736	255-550	456	Output CT

## SMALL "PLASTIC" I.F. TRANSFORMERS

$1\frac{1}{8}$ " square,  $2\frac{1}{2}$ " high. 456 kc.

- 16-6666 Input I.F. Transformer
- 16-6667 Output I.F. Transformer

## "TWEET" FILTER OUTPUT I.F.


$1\frac{1}{4}$ " square,  $2\frac{1}{2}$ " high. Spade bolts spaced  $1\frac{1}{16}$ " and mounted inside of shield.

16-6670

## CARTWHEEL I.F.

$1\frac{1}{8}$ " by  $1\frac{1}{16}$ " by  $1\frac{1}{4}$ " high; for 456-kc only.

No. 16-6661

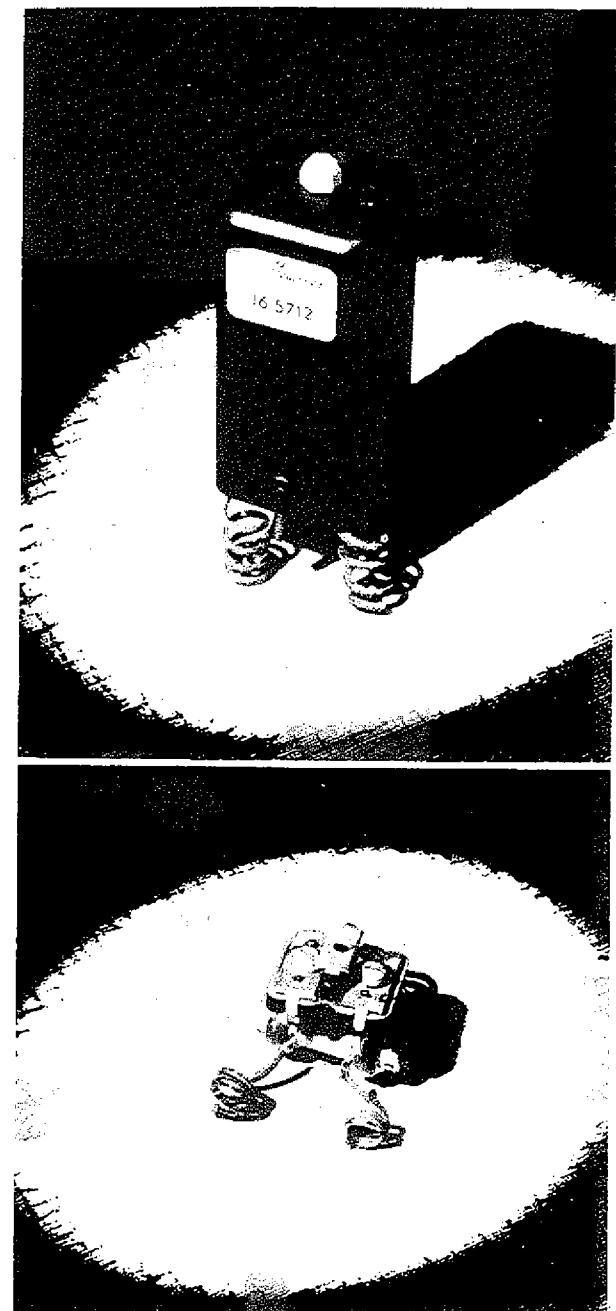

# MEISSNER

## IF COILS

### "PLASTIC" I. F. TRANSFORMERS


1/4" square by 1/2" high

No.	Freq. Range	Peak Factory Setting	Gain Factory Setting	Selectivity Band Width			Use
				2x	10x	20x	
16-6649	140-200	175	71	8.5	18.5	39.2	Input
16-6650	140-250	175	16	7.0	16.0	21.2	Interstage
16-6651	140-200	175	70	10.0	27.1	41.8	Output
16-6652	200-310	262	50	7.5	21.1	32.2	Input
16-6653	200-310	262	16	6.1	17.2	24.3	Interstage
16-6654	200-310	262	70	15.0	45.8	65.1	Output
16-6655	305-480	370	53	14.2	33.3	49.0	Input
16-6656	305-480	370	20	9.7	25.2	37.3	Interstage
16-6657	305-480	370	80	18.0	49.1	74.6	Output
16-6658	400-550	456	52	14.3	32.1	46.0	Input
16-6659	400-550	456	21	9.7	35.8	37.3	Interstage
16-6660	400-550	456	72	16.8	43.2	66.1	Output

### HIQ IRON-CORE "PLASTIC" I. F.'s

1/4" Square by 2 1/2" High

No.	Freq. Range	Peak Factory Setting	Gain Factory Setting	Selectivity Band Width			Use
				2x	10x	20x	
16-6662	380-600	456	80	10.8	26.5	38.7	Input
16-6663	380-600	456	85	11.8	36.2	51.0	Output

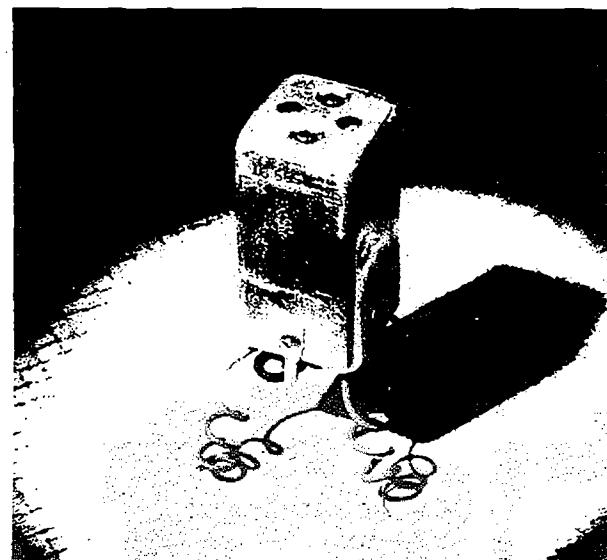

# ASTATIC

## PHONO CARTRIDGES

Model No.	Arm-Rest Button	Minimum Needle Pressure	Output Voltage	Frequency Range c.p.s.	Terminals	Needle Screw No.	Needle Type
TYPE "L" SERIES							
L-24A	Yes	2 1/2 oz.	2.95	50 to 6500	Lug	3258	Optional
L-26A	Yes	2 1/2 oz.	1.4	50 to 4500	Lug	3258	Optional
L-40A	Yes	1 1/4 oz.	0.6	50 to 4500	Lug	3530	Optional
L-46A	Yes	1 1/4 oz.	3.5	50 to 4000	Lug	3258	Optional
TYPE "LP" SERIES							
LP-6	(DISCONTINUED)—Replace with LT1-M						
LP-21	(DISCONTINUED)—Replace with "Nylon" Series or "QT" Series						
TYPE "M" SERIES							
M-22	No	2 1/2 oz.	2.9	50 to 6500	Lug	3258	Optional
TYPE "B" SERIES							
B-2	No	2 1/2 oz.	2.5	50 to 4000	Universal	3205 or 3207	Optional
B-4	No	2 1/2 oz.	2.5	50 to 4000	3" Pigtail	3205 or 3207	Optional
SPECIAL TYPE FOR RCA REPLACEMENT							
401-A	No	2 1/2 oz.	1.4	50 to 4500	Lug	3267	Optional

# PHONO CARTRIDGES

**ASTATIC**

Model No.	Arm-Rest Button	Minimum Needle Pressure	Output Voltage	Frequency Range c.p.s.	Terminals	Needle Screw No.	Needle Type
<b>TYPE "L-70" SERIES</b>							
L-70	No	1½ oz.	1.00	50 to 4000	Pin	3258	Optional
L-70A	Yes	1½ oz.	1.00	50 to 4000	Pin	3258	Optional
L-71	No	1 oz.	1.00	50 to 8000	Pin	3258	Optional
L-71A	Yes	1 oz.	1.00	50 to 8000	Pin	3258	Optional
L-72	No	1¼ oz.	3.5	50 to 4000	Pin	3258	Optional
L-72A	Yes	1¼ oz.	3.5	50 to 4000	Pin	3258	Optional
L-75	No	1¼ oz.	0.75	50 to 6000	Pin	3258	Optional
L-75A	Yes	1¼ oz.	0.75	50 to 6000	Pin	3258	Optional
L-76	No	1¼ oz.	1.00	50 to 3000	Pin	3258	Optional
L-76A	Yes	1¼ oz.	1.00	50 to 3000	Pin	3258	Optional
<b>TYPE "L-82" SERIES</b>							
L-82	No	2¾ oz.	3.5	50 to 5000	Pin	3258	Optional
L-82A	Yes	2¾ oz.	3.5	50 to 5000	Pin	3258	Optional
L-82V	No	2¾ oz.	3.5	50 to 5000	Pin	3258	Optional
<b>TYPE "MLP" SERIES</b>							
MLP-1J	(DISCONTINUED)—Replace with "Nylon" Series or "QT" Series						
MLP-2	(DISCONTINUED)—Replace with "QT" Series						
<b>TYPE "NYLON" SERIES</b>							
Nylon 1-J	No	1½ oz.	1.0	50 to 10,000	Pin	None	Nylon*
Nylon 1-M	No	1¼ oz.	1.0	50 to 10,000	Pin	None	Nylon†
NOTE: Exceptionally smooth response over entire frequency range with a gradual roll-off commencing at approximately 7,000 c.p.s.							
<b>TYPE "LT" SERIES</b>							
LT1-M	No	¾ oz.	1.0	50 to 10,000	Pin	3530	"T" Needle†
LT1-MA	Yes	¾ oz.	1.0	50 to 10,000	Pin	Set Screw	"T" Needle†
LT2-M	No	¾ oz.	1.0	50 to 10,000	Pin	3530	"T" Needle†
LT2-MA	Yes	¾ oz.	1.0	50 to 10,000	Pin	Set Screw	"T" Needle†
LT3-M	No	¾ oz.	1.0	50 to 10,000	Pin	3530	"T" Needle†
LT3-MA	Yes	¾ oz.	1.0	50 to 10,000	Pin	Set Screw	"T" Needle†
NOTE: Exceptionally smooth response over entire frequency range with a gradual roll-off commencing at approximately 4,000 c.p.s.							
<b>TYPE "QT" SERIES</b>							
QT-J	(DISCONTINUED)—Replace with QT3-J						
QT-M	(DISCONTINUED)—Replace with QT3-M						
QT2-J	No	1 oz.	0.85	50 to 10,000	Pin	None	"Q" Needle*
QT2-M	No	1 oz.	0.85	50 to 10,000	Pin	None	"Q" Needle†
QT3-J	No	1 oz.	0.85	50 to 10,000	Pin	None	"Q" Needle*
QT3-JA	Yes	1 oz.	0.85	50 to 10,000	Pin	None	"Q" Needle*
QT3-M	No	1 oz.	0.85	50 to 10,000	Pin	None	"Q" Needle†
QT3-MA	Yes	1 oz.	0.85	50 to 10,000	Pin	None	"Q" Needle†
NOTE: Exceptionally smooth response over entire frequency range with a gradual roll-off commencing at approximately 5,000 c.p.s.							
<b>"P. N." TYPES</b>							
L-73	No	1 oz.	1.00	50 to 5000	Pin	3258	Optional
L-73A	Yes	1 oz.	1.00	50 to 5000	Pin	3258	Optional
L-74	No	1½ oz.	1.4	50 to 4000	Pin	3258	Optional
L-74A	Yes	1½ oz.	1.4	50 to 4000	Pin	3258	Optional
L-78	(Special P. N. Crystal Cartridge for Seeburg Record Changers)						
L-80	No	1 oz.	0.3	50 to 6000	Pin	3258	Optional
BPN-2	No	2¾ oz.	1.25	50 to 4000	Universal	3205 or 3207	Optional
MLP-3	(DISCONTINUED)—Replace with QT3-J-PN						
QT2-J-PN	No	1 oz.	0.3	50 to 10,000	Pin	None	"Q" Needle*
QT2-M-PN	No	1 oz.	0.3	50 to 10,000	Pin	None	"Q" Needle†
QT3-J-PN	No	1 oz.	0.3	50 to 10,000	Pin	None	"Q" Needle*
QT3-M-PN	No	1 oz.	0.3	50 to 10,000	Pin	None	"Q" Needle†
Nylon 1-J-PN	No	1½ oz.	0.5	50 to 10,000	Pin	None	Nylon*
Nylon 1-M-PN	No	1½ oz.	0.5	50 to 10,000	Pin	None	Nylon†
††NOTE: Exceptionally smooth response over entire frequency range with a gradual roll-off commencing at approximately 5,000 c.p.s. in "PN" Types of "QT" Series, and at approximately 7,000 c.p.s. in "PN" Types of "Nylon" Series.							

\*Sapphire Tipped      †Precious Metal Tipped


Type "T" Precious Metal Tipped Needle for "LT" Series Cartridges

Type "Q" Sapphire Tipped Needle for "QT" Series Cartridges

Type "Q" Precious Metal Tipped Needle for "QT" Series Cartridges






Type Nylon 1-J Sapphire Tipped Nylon Needle for "Nylon" Series Cartridges

Type Nylon 1-M Precious Metal Tipped Nylon Needle for "Nylon" Series Cartridges

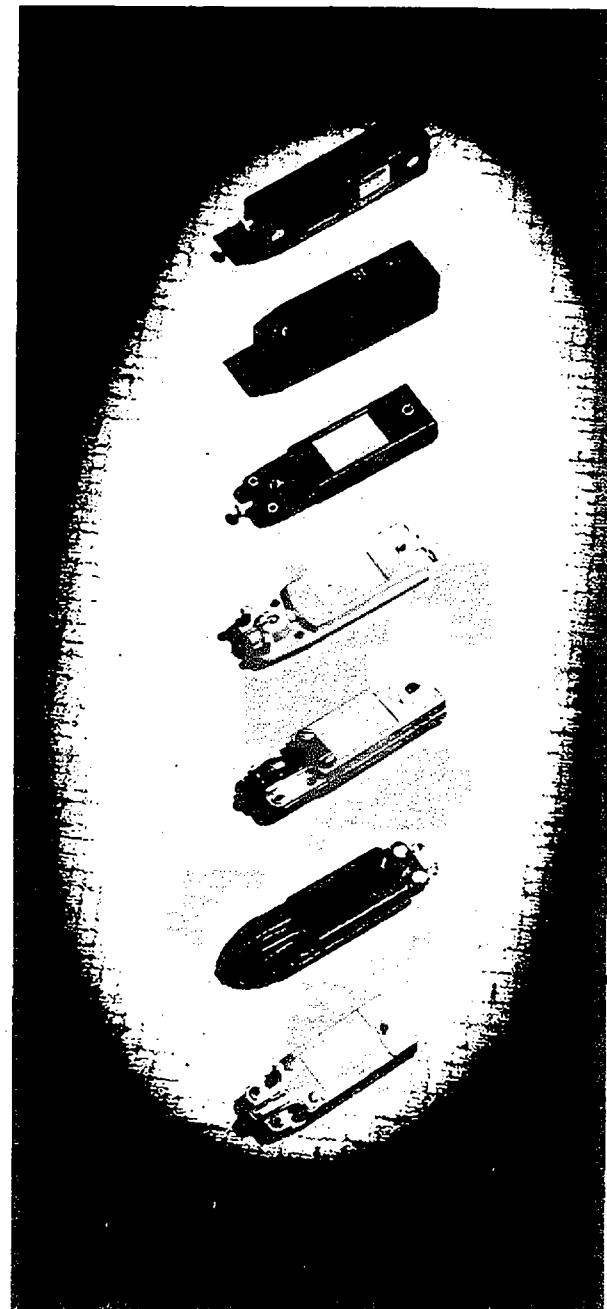

JENSEN

SPEAKERS

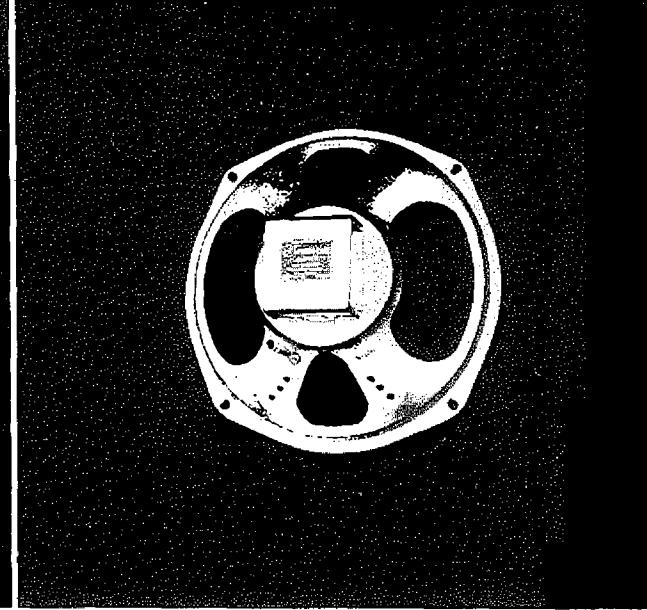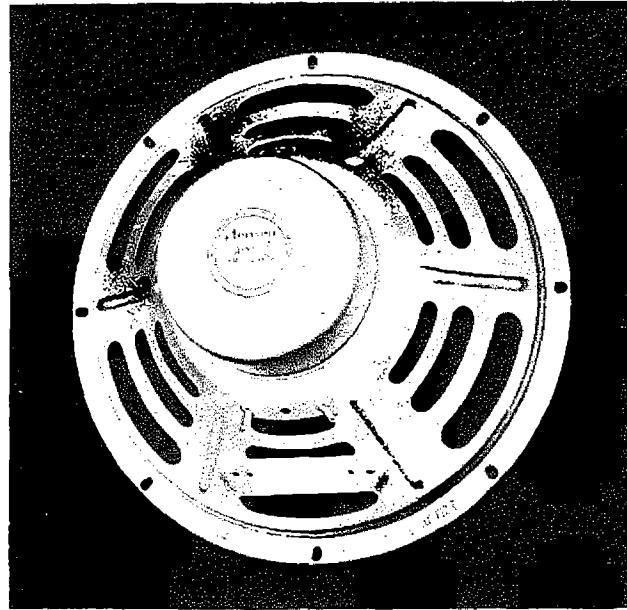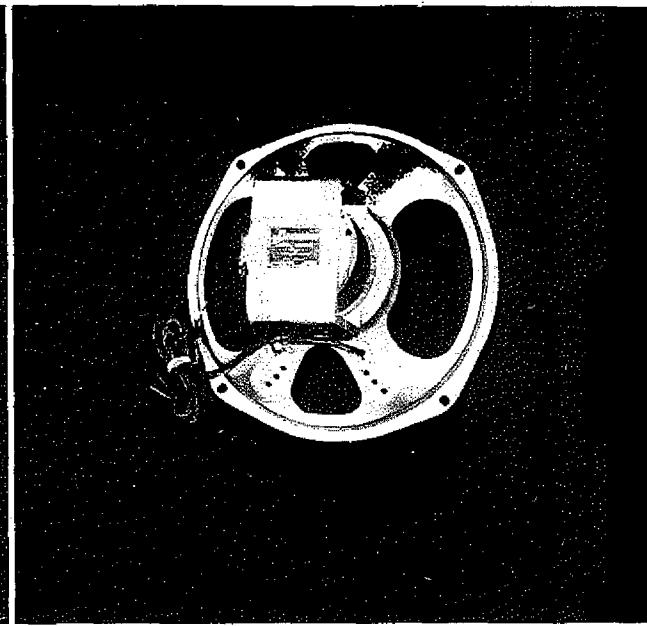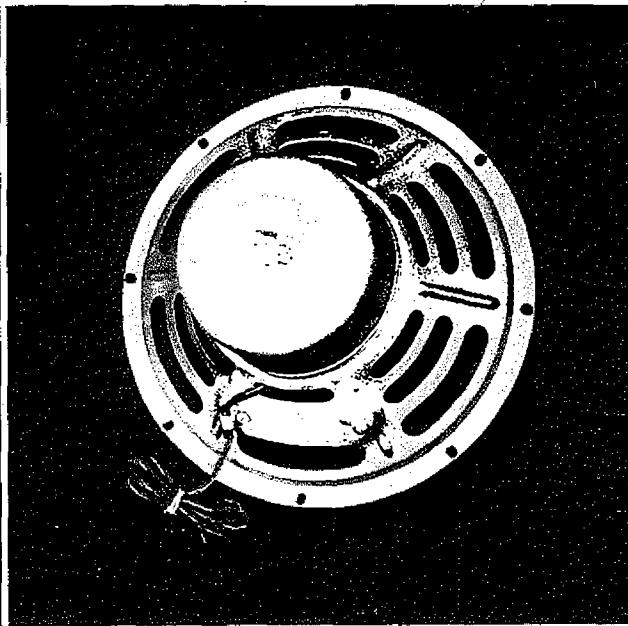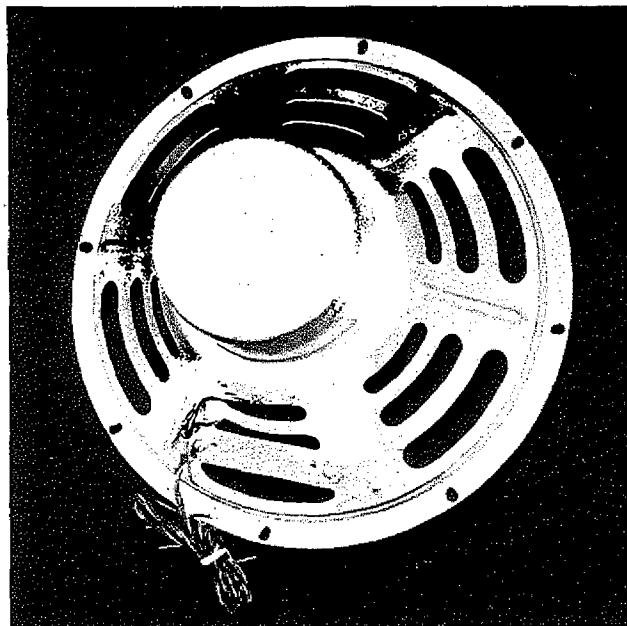

# SPEAKERS

JENSEN


## ALNICO 5 PM MODELS

Stock No.	Nominal Size	Dimensions In Inches		Voice Coil	
		O.D.	Depth	Imp. Ohms	Watts
ST-102	12	12 $\frac{1}{8}$	6 $\frac{1}{8}$	6-8	10.0
ST-101	12	12 $\frac{1}{8}$	6 $\frac{1}{8}$	6-8	9.0
ST-120	10	10 $\frac{1}{8}$	5 $\frac{1}{4}$	6-8	9.0
ST-119	10	10 $\frac{1}{8}$	5 $\frac{1}{4}$	6-8	8.0
ST-104	8	8 $\frac{1}{8}$	3 $\frac{1}{8}$	6-8	8.0
ST-117	8	8 $\frac{1}{8}$	3 $\frac{1}{8}$	3-4	7.0
ST-116	8	8 $\frac{1}{8}$	3 $\frac{1}{8}$	3-4	6.0
ST-115	8	8 $\frac{1}{8}$	3 $\frac{1}{8}$	3-4	5.0
ST-112	6	6 $\frac{1}{16}$	3 $\frac{1}{8}$	3-4	6.0
ST-110	6	6 $\frac{1}{16}$	2 $\frac{1}{16}$	3-4	4.0
ST-109	6	6 $\frac{1}{16}$	2 $\frac{1}{16}$	3-4	3.5
ST-108	6	6 $\frac{1}{16}$	2 $\frac{1}{16}$	3-4	3.0
ST-107	5	5	2 $\frac{1}{16}$	3-4	3.5
ST-105	5	5	2 $\frac{1}{16}$	3-4	2.5
ST-740	5	5	2 $\frac{1}{16}$	45-50	2.5
ST-113	4	5	2	3-4	2.0
ST-739	4	5	2	45-50	2.0

## FIELD COIL MODELS


Stock No.	Nominal Size	Dimensions In Inches		Voice Coil		Field	
		O.D.	Depth	Imp. Ohms	Watts	Res. Ohms	Watts
ST-744	12	12 $\frac{1}{8}$	6 $\frac{1}{8}$	3-4	10.0	1000	8.5
ST-173	12	12 $\frac{1}{8}$	6 $\frac{1}{8}$	3-4	10.0	1500	8.5
ST-745	10	10 $\frac{1}{8}$	5 $\frac{1}{4}$	3-4	9.0	750	8.5
ST-175	10	10 $\frac{1}{8}$	5 $\frac{1}{4}$	3-4	9.0	1500	8.5
ST-746	8	8 $\frac{1}{8}$	4 $\frac{1}{16}$	3-4	8.0	750	8.5
ST-177	8	8 $\frac{1}{8}$	4 $\frac{1}{16}$	3-4	8.0	1500	8.5
ST-179	8	8 $\frac{1}{8}$	4 $\frac{1}{16}$	3-4	7.0	1000	7.0
ST-756	8	8 $\frac{1}{8}$	4 $\frac{1}{16}$	3-4	7.0	1500	7.0
ST-180	8	8 $\frac{1}{8}$	4 $\frac{1}{16}$	3-4	7.0	1800	7.0
ST-736	8	8 $\frac{1}{8}$	3 $\frac{1}{8}$	3-4	4.0	1000	5.0
ST-737	8	8 $\frac{1}{8}$	3 $\frac{1}{8}$	3-4	4.0	1800	5.0
ST-186	6	6 $\frac{1}{16}$	3 $\frac{1}{8}$	3-4	5.0	1000	6.0
ST-187	6	6 $\frac{1}{16}$	3 $\frac{1}{8}$	3-4	5.0	1800	6.0
ST-189	6	6 $\frac{1}{16}$	2 $\frac{1}{16}$	3-4	3.0	450	4.5
ST-166	6	6 $\frac{1}{16}$	2 $\frac{1}{16}$	3-4	3.0	1000	4.5
ST-168	6	6 $\frac{1}{16}$	2 $\frac{1}{16}$	3-4	3.0	1800	4.5
ST-190	6	6 $\frac{1}{16}$	2 $\frac{1}{16}$	3-4	3.0	2800	4.5
ST-191	5	5	2 $\frac{1}{8}$	3-4	3.0	1000	5.0
ST-192	5	5	2 $\frac{1}{8}$	3-4	3.0	1800	5.0
ST-194	5	5	2 $\frac{1}{8}$	3-4	2.5	450	4.5
ST-165	5	5	2 $\frac{1}{8}$	3-4	2.5	1000	4.5
ST-167	5	5	2 $\frac{1}{8}$	3-4	2.5	1800	4.5
ST-195	5	5	2 $\frac{1}{8}$	3-4	2.5	2800	4.5
ST-196	4	5	2 $\frac{1}{8}$	3-4	2.0	450	4.5
ST-164	4	5	2 $\frac{1}{8}$	3-4	2.0	1000	4.5
ST-198	4	5	2 $\frac{1}{8}$	3-4	2.0	2800	4.5

†Tapped at 300 Ohms.

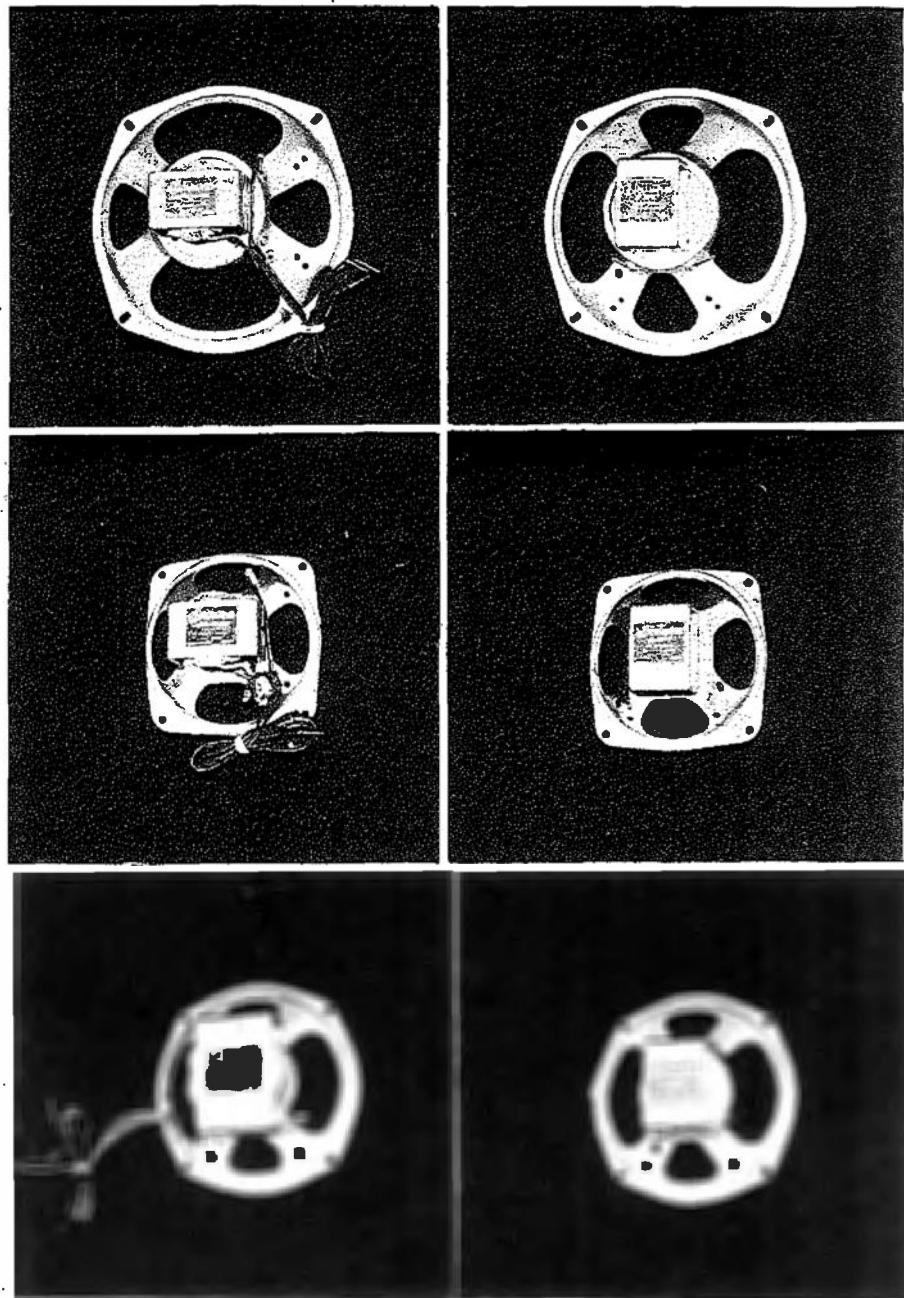

QUAM

SPEAKERS

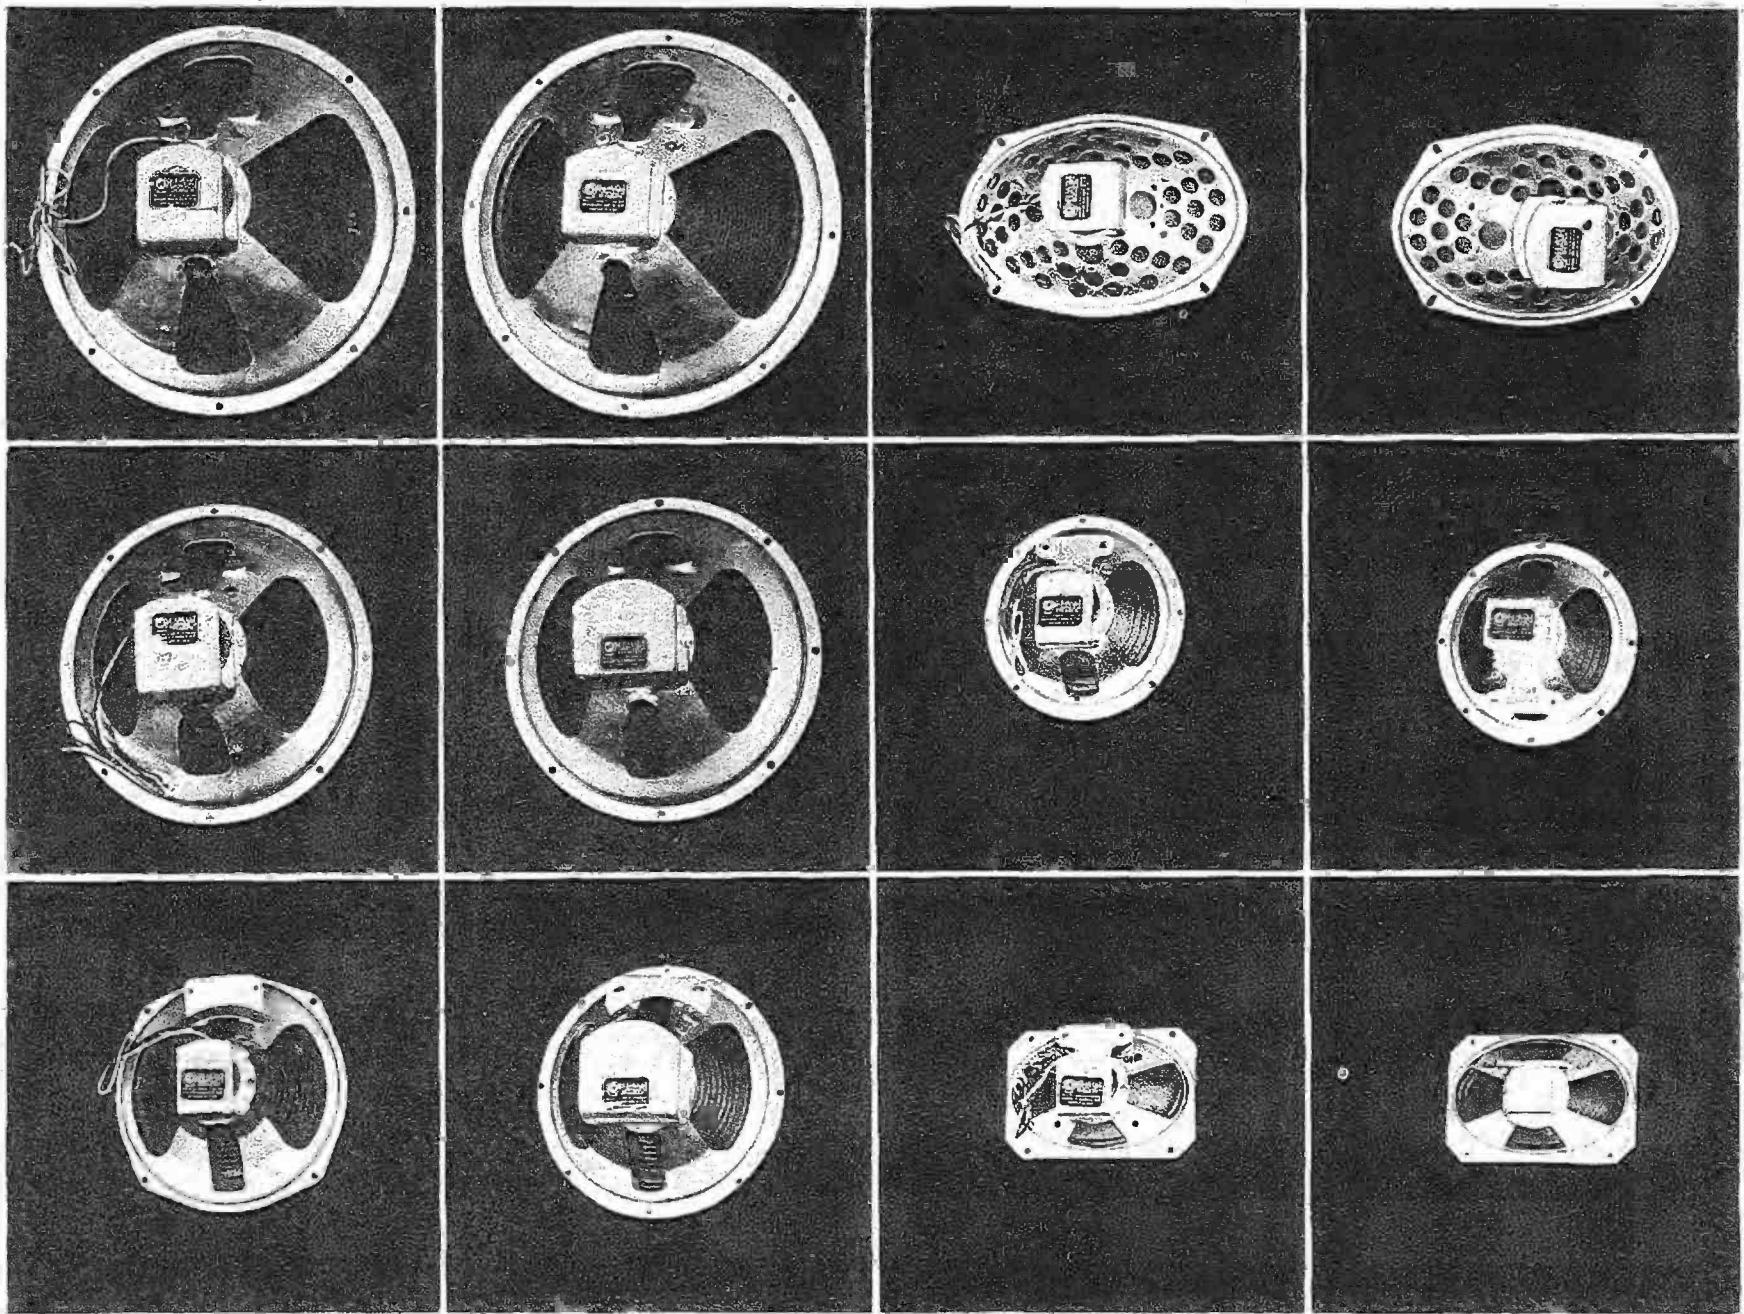

# SPEAKERS

QUAM


## PERMANENT MAGNET UNITS

Catalog No.	Nominal Size	O.D.	Dimensions In Inches Mount. Dim.	Depth	Voice Coil Imp. Ohms	Watts
3A07*	3½	3½ x 5½	3½ x 4½	1½	3.2	2-3
4A07	4	4¾	4½ x 5½	1½	3.2	2.5-3.75
4A1	4	4¾	4½ x 6	2½	3.2	2.5-3.75
4A15	4	4¾	4½ x 6	2½	3.2	2.5-3.75
46A07	4 x 6	4¾ x 6½	3½ x 4½	1½	3.2	3-4.5
46A1	4 x 6	4¾ x 6½	3½ x 4½	2¼	3.2	3-4.5
46A15	4 x 6	4¾ x 6½	3½ x 4½	2¼	3.2	3-4.5
5A07	5	5	4½ x 6	1½	3.2	3-4.5
5A1	5	5	4½ x 6	2½	3.2	3-4.5
5A15	5	5	4½ x 6	2½	3.2	3-4.5
6A1	6	6½	6½	2½	3.2	4-6
6A15	6	6½	6½	2½	3.2	4-6
6A21	6	6½	6½	2½	3.2	5-7.5
69A3	6 x 9	6½ x 9½	4½ x 6½	3½	3.2	8-10
7A21	7	6½	4½ x 5½	2½	3.2	5-7.5
7A31	7	6½	4½ x 5½	3½	3.2	6-8
8A21	8	7½	5½ x 5½	3¾	3.2	6-8
8A31	8	7½	5½ x 5½	3¾	3.2	8-10
8A4	8	8	7½	3¾	6-8	10-12
8A6	8	8	7½	3¾	6-8	12-15
10A31	10	10½	9½	4½	3.2	9-11
10A4	10	10½	9½	4½	6-8	11-13
10A6	10	10½	9½	4½	6-8	13-16
12A4	12	12½	11½	5½	6-8	12-15
12A6	12	12½	11½	5½	6-8	15-20

## ELECTRO-DYNAMIC UNITS

Catalog No.	Nominal Size	Field Ohms	O.D.	Dimensions In Inches Mount. Dim.	Depth	Voice Coil Imp., Ohms	Watts
3E45*	3½	450	3½ x 3½	3½ x 4½	1½	3.2	2.5-3.75
4E45	4	450	4¾	4½ x 5½	2	3.2	2.5-3.75
4E10	4	1000	4¾	4½ x 6	2	3.2	2.5-3.75
4E27	4	2700	4¾	4½ x 6	2	3.2	2.5-3.75
46E45	4 x 6	450	4¾ x 6½	3½ x 4½	2½	3.2	2.5-3.75
46E10	4 x 6	1000	4¾ x 6½	3½ x 4½	2½	3.2	2.5-3.75
46E15	4 x 6	1500	4¾ x 6½	3½ x 4½	2½	3.2	2.5-3.75
5EV6	5	6-Volt	5	4½ x 6	2½	3.2	2.5-3.75
5E45	5	450	5	4½ x 6	2½	3.2	2.5-3.75
SE10	5	1000	5	4½ x 6	2½	3.2	2.5-3.75
SE18	5	1800	5	4½ x 6	2½	3.2	2.5-3.75
SE27	5	2700	5	4½ x 6	2½	3.2	2.5-3.75
6EV6	6	6-Volt	6½	6½	2½	3.2	3.5-5
6E10	6	1000	6½	6½	2½	3.2	3.5-5
6E18	6	1800	6½	6½	2½	3.2	3.5-5
6E25	6	2500	6½	6½	2½	3.2	3.5-5
69EV6	6 x 9	6-Volt	6½ x 9½	4½ x 6½	3½	3.2	3.75-5.5
7EV6	7	6-Volt	6½	4½ x 5½	2½	3.2	3.75-5.5
8EV6	8	6-Volt	7½	5½ x 5½	3½	3.2	4-6
8E10	8	1000	7½	5½ x 5½	3½	3.2	4-6
8E18	8	1800	7½	5½ x 5½	3½	3.2	4-6
8E25	8	2500	7½	5½ x 5½	3½	3.2	4-6
10E60	10	600	10½	9½	5½	6-8	11-13
10E10	10	1000	10½	9½	5½	6-8	11-13
10E15	10	1500	10½	9½	5½	6-8	11-13
10E25	10	2500	10½	9½	5½	6-8	11-13
12E60	12	600	12½	11½	5½	6-8	12-18
12E10	12	1000	12½	11½	5½	6-8	12-18
12E15	12	1500	12½	11½	5½	6-8	12-18
12E25	12	2500	12½	11½	5½	6-8	12-18

\*Not an adjust-a-cone speaker.

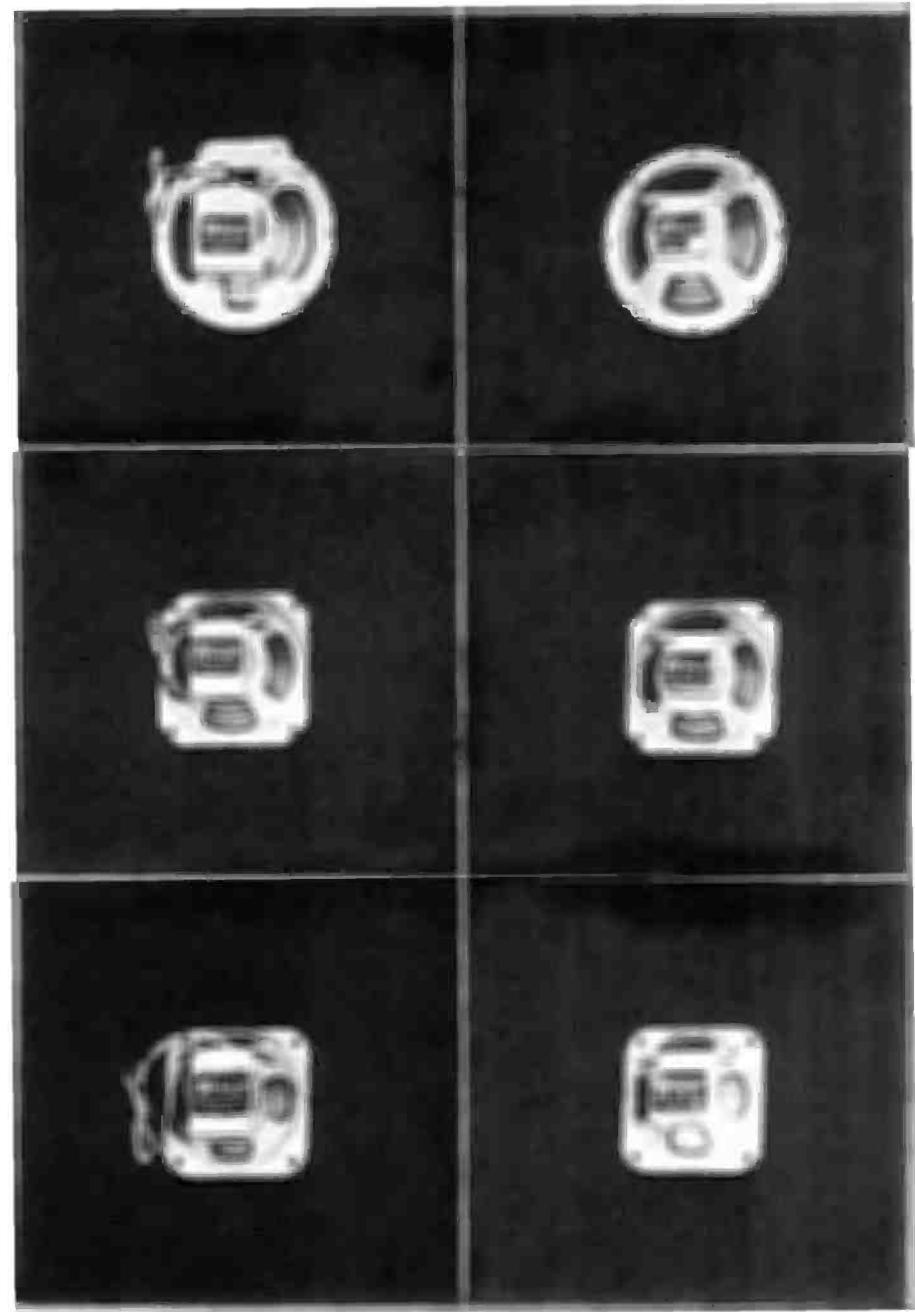


# CLAROSTAT

## CONTROLS



**SERIES "M" & "AM" STANDARD CONTROLS**

TYPE "M"—FIXED SHAFT		TYPE "AM"—AD-A-SHAFT		
Cat. No.	Cat. No.	Ohms	Curve	Suggested Use
M-5-S	AM-5-S	500	S	Std. Pot.
M-8-S	AM-8-S	1,000	S	Std. Pot.
M-11-S	AM-11-S	2,000	S	Std. Pot.
M-15-S	AM-15-S	3,000	S	Std. Pot.
M-19-S	AM-19-S	5,000	S	Std. Pot.
M-20-U	AM-20-U	5,000	U	Ant. & C-1 Tube
M-23-S	AM-23-S	7,500	S	Std. Pot.
M-27-S	AM-27-S	10,000	S	Std. Pot.
M-29-U	AM-29-U	10,000	U	Ant. & C-1 Tube
M-30-V	AM-30-V	10,000	V	C Bias Rheo.
M-31-W	AM-31-W	10,000	W	Sc. Grid & Phono.
M-81-Z	AM-81-Z	10,000	Z	Ant. Shunt
M-32-S	AM-32-S	15,000	S	Std. Pot.
M-33-U	AM-33-U	15,000	U	Ant. & C-1 Tube
M-34-V	AM-34-V	15,000	V	C Bias Rheo.
M-35-W	AM-35-W	15,000	W	Sc. Grid & Phono.
M-37-U	AM-37-U	20,000	U	Ant. & C-1 Tube
M-40-S	AM-40-S	25,000	S	Std. Pot.
M-41-W	AM-41-W	25,000	W	Sc. Grid & Phono.
M-72-V	AM-72-V	25,000	V	C Bias Rheo.
M-44-S	AM-44-S	50,000	S	Std. Pot.
M-45-W	AM-45-W	50,000	W	Sc. Grid & Phono.
M-46-Z	AM-46-Z	50,000	Z	Audio Grid & Tone
M-47-S	AM-47-S	75,000	S	Std. Pot.
M-48-V	AM-48-V	75,000	V	C Bias Rheo.
M-49-S	AM-49-S	100,000	S	Std. Pot.
M-51-Z	AM-51-Z	100,000	Z	Audio & Tone
M-52-S	AM-52-S	200,000	S	Std. Pot.
M-55-S	AM-55-S	250,000	S	Std. Pot.
M-64-Z	AM-64-Z	250,000	Z	Audio & Tone
M-58-S	AM-58-S	500,000	S	Std. Pot.
M-59-Y	AM-59-Y	500,000	Y	Audio Shunt
M-60-Z	AM-60-Z	500,000	Z	Audio & Tone
M-61-S	AM-61-S	1,000,000	S	Std. Pot.
M-63-Z	AM-63-Z	1,000,000	Z	Audio & Tone
M-66-Z	AM-66-Z	2,000,000	Z	Tone & AVC
M-67-Z	AM-67-Z	3,000,000	Z	Tone & AVC
M-68-Z	AM-68-Z	4,000,000	Z	Tone & AVC
M-69-Z	AM-69-Z	5,000,000	Z	Tone & AVC
M-79-Z	AM-79-Z	750,000	Z	Audio & Tone
M-83-S	AM-83-S	2,000,000	S	Audio & Tone
M-99-Z	AM-99-Z	10,000,000	Z	Tone & AVC

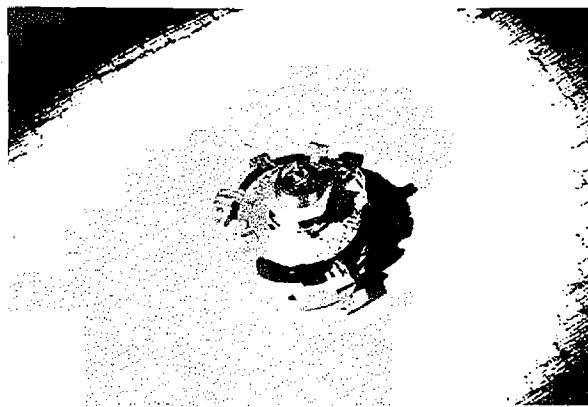

**SERIES "T" & "AT" TAPPED CONTROLS**

TYPE "T"—FIXED SHAFT		TYPE "AT"—AD-A-SHAFT		
Cat. No.	Cat. No.	Ohms	Tap No. 1	Tap No. 2
T-25	AT-25	50,000	25,000	
T-38	AT-38	200,000		100,000
T-39	AT-39	250,000	25,000	
T-42	AT-42	250,000		125,000
T-43	AT-43	250,000		50,000
T-44	AT-44	250,000	60,000	
T-45	AT-45	250,000	30,000	125,000
T-60	AT-60	350,000		25,000
T-69	AT-69	350,000	75,000	
T-70	AT-70	350,000		75,000
T-78	AT-78	500,000		100,000
T-80	AT-80	500,000		100,000
T-81	AT-81	500,000	25,000	
T-82	AT-82	500,000		200,000
T-88	AT-88	500,000	50,000	
T-90	AT-90	500,000		250,000
T-92	AT-92	500,000	100,000	
T-98	AT-98	1,000,000	250,000	
T-101	AT-101	1,000,000		50,000
T-102	AT-102	1,000,000	100,000	
T-103	AT-103	1,000,000		100,000
T-109	AT-109	1,000,000		225,000
T-110	AT-110	1,000,000		170,000
T-111	AT-111	1,000,000		200,000
T-112	AT-112	1,000,000		500,000
T-95	AT-95	1,500,000	250,000 @ 25% Rotation	500,000
T-125	AT-125	1,500,000		350,000
T-114	AT-114	2,000,000		100,000
T-115	AT-115	2,000,000		500,000
T-116	AT-116	2,000,000		1,000,000
T-118	AT-118	2,000,000	20,000	
T-119	AT-119	2,000,000		200,000
T-120	AT-120	2,000,000		400,000
T-121	AT-121	2,000,000	250,000	
T-124	AT-124	2,000,000	5,000 @ 25% Rotation	
T-126	AT-126	2,000,000	200,000	
T-129	AT-129	2,000,000	15,000	
T-123	AT-123	2,500,000	250,000	
T-128	AT-128	4,000,000		500,000

### SERIES 58 WIRE-WOUND CONTROLS

Cat. No.	Resistance in Ohms	Cat. No.	Resistance in Ohms	Cat. No.	Resistance in Ohms
58-1	1	58-60	60	58-5000	5,000
58-2	2	58-75	75	58-7500	7,500
58-4	4	58-100	100	58-10K	10,000
58-6	6	58-200	200	58-15K	15,000
58-10	10	58-300	300	58-20K	20,000
58-15	15	58-400	400	58-25K	25,000
58-20	20	58-500	500	58-30K	30,000
58-25	25	58-750	750	58-40K	40,000
58-30	30	58-1000	1,000	58-50K	50,000
58-40	40	58-2000	2,000	10-75K*	75,000
58-50	50	58-3000	3,000	10-100K*	100,000

If power switch is desired, the type of switch must be specified. Order as 58S. The S.P.S.T. switch is supplied as standard where no type is specified. All switches are permanently fastened to the control at the factory.

### AD-A-SHAFT SLIP DRIVE CONTROL (Clutch Type)

Available with your choice of Ad-A-Shaft



Catalog No.	Resistance
SD-64-Z	250,000
SD-60-Z	500,000
SD-63-Z	1,000,000
SD-66-Z	2,000,000
SD-42	250,000 Tapped 125,000
SD-78	500,000 Tapped 250,000
SD-98	1,000,000 Tapped 500,000
SD-115	2,000,000 Tapped 500,000

### DUAL SERIES DC CONTROLS

The Series DC controls are dual units—Two controls of the same resistance values and tapers, connected in tandem for joint operation.

Catalog No.	Panel Unit	Rear Unit
DC-5-S	50,000-S	50,000-S
DC-6-Z	100,000-Z	100,000-Z
DC-8-Z	250,000-Z	250,000-Z
DC-10-Z	500,000-Z	500,000-Z
DC-11-Z	1,000,000-Z	1,000,000-Z
DC-23-S	10,000-S	50,000-S
DC-29-S	250,000-S	250,000-S
DC-34-S	10,000-S	25,000-S

# CONTROLS

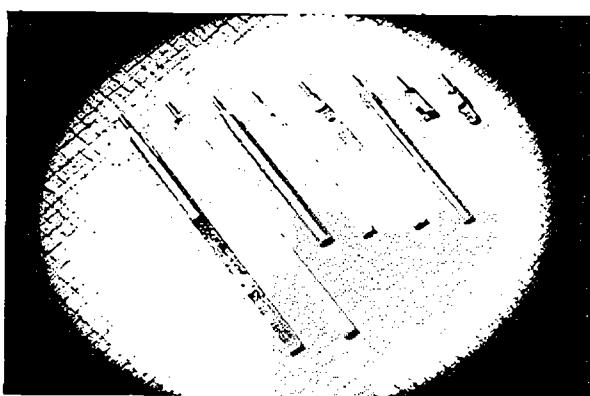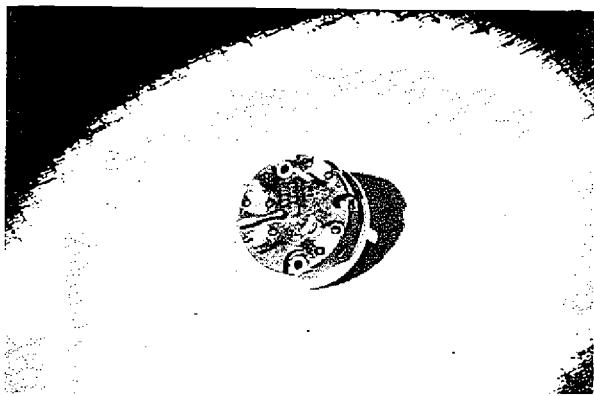

**THE ORIGINAL "AD-A-SWITCH"  
FEATURE FOR  
SERIES "M," "AM," "T," "AT," CONTROLS**


Catalog No.	Wiring
SW-A	Single-Pole Single-Throw
SW-A1	Three-Way, No "Off" position S.P.D.T.
SW-A2	Double-Pole Single-Throw
SW-A4	Four-wire (to control A, B and C voltages)
SW-A5	S.P.S.T. (reverse action)
SW-A6	S.P.S.T. with dummy lug

## CHOICE OF AD-A-SHAFTS

Catalog No.	Description
FS-3	Flattened shaft, 3" long
RS-3	Round shaft 3" long
KSS-3	Knurled, split shaft 3" long
DFS-½	Double Flattened Philco Type, ½" long
KSS-5	Knurled, split shaft, 5" long
RS-5	Round shaft, 5" long
FS-5	Flattened shaft, 5" long
RS-¾dia.	Round shaft, 3" long
SS-¾ length	(Male) To take female fitting

One selected shaft furnished FREE with each Ad-A-Shaft control.

# CLAROSTAT

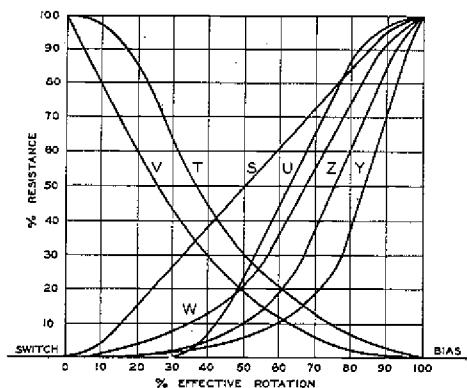

## STANDARD TAPERS

Type	Taper	Application
Curve "V"	Right Hand	"C" Bias Rheostat.
Curve "T"	Right Hand	Ant. & "C" bias control for 1 Tube with Bleeder or 2 Tubes without Bleeder.
Curve "U"	Left Hand	Ant. & "C" bias control for 1 Tube without bleeder.
Curve "W"	Left Hand	Screan Grid voltage, phone pickup, regeneration control.
Curve "Y"	Left Hand	Audio Shunt & A.V.C., when steep taper is desired.
Curve "Z"	Left Hand	Audio Shunt, A.V.C., tone, gain control.
Curve "S"	Linear	Standard Potentiometer.

# CONTROLS

I R C

Resistance Ohms	Tap	I R C Stock No.	Taper	Usual Application
500	—	D11-103	A	Potentiometer Voltage Divider
1M	—	D11-108	A	Potentiometer Voltage Divider
2M	—	D11-110	A	Potentiometer Voltage Divider
3M	—	D11-112	A	Potentiometer Voltage Divider
4M	—	D11-113	A	Potentiometer Voltage Divider
5M	—	D11-114	A	Potentiometer Voltage Divider
5M	N	D14-114	C	Antenna Control
5M	N	D14-114	D	*Antenna C Bias Control
7,500	—	D11-115	A	Potentiometer Voltage Divider
10M	—	D11-116	A	*Antenna Grid Bias Control
10M	—	D13-116	C	Antenna Control
10M	—	D14-116	D	*Antenna Grid Bias of 2 Tubes
10M	—	D16-116	F	*Antenna Grid Bias of 1 Tube
13M	3M	D18-117X	H	I.F. Shunting Control
15M	—	D14-118	D	*Antenna Grid Bias Control
15M	—	D16-118	F	*Antenna Grid Bias Control
20M	—	D16-119	F	*Antenna Grid Bias Control
25M	—	D11-120	A	Potentiometer Voltage Divider
25M	—	D14-120	D	*Grid Bias Control
25M	—	D16-120	F	Antenna Control
30M	6M	D18-122X	H	Audio Control with Tone Tap
44M	7M-14M	D18-123XX	Spec.	Audio Control with 2 Tone Taps
50M	—	D11-123	A	Potentiometer Voltage Divider
50M	—	D13-123	C	Tone Control

## UNIVERSAL TYPE D CONTROLS

Resistance Ohms	Tap	I R C Stock No.	Taper	Usual Application
50M	—	D14-123	D	*Antenna Grid Bias Control
75M	—	D13-125	C	Tone Control
75M	—	D14-125	D	*Grid Bias Control
100M	—	D11-128	A	Potentiometer Voltage Divider
100M	—	D13-128	C	Tone or Audio Circuit Control
200M	—	D11-129	A	Potentiometer Voltage Divider
200M	—	D14-129	D	*Grid Bias Control
250M	—	D11-130	A	Potentiometer Voltage Divider
250M	—	D13-130	C	Tone or Audio Circuit Control
250M	125M	D13-130X	Spec.	Audio Control with A.V.C. Tap
250M	—	D14-130	D	*Grid Bias Control
250M	25M	D17-130X	Spec.	Audio Control with Tone Tap
250M	60M-120M	D18-130X	Spec.	Audio Control with 2 Tone Taps
350M	—	D13-132	C	Tone or Audio Circuit Control
350M	35M	D17-132X	Spec.	Audio Control with Tone Tap
350M	75M	D18-132X	H	Audio Control with Tone Tap
500M	—	D11-133	A	Potentiometer Voltage Divider
500M	—	D13-133	C	Tone or Audio Circuit Control
500M	125M	D13-133X	H	Audio Control with Tone Tap
500M	—	D14-133	D	R.F. Plate Control
500M	25M	D17-133X	Spec.	Audio Control with Tone Tap
500M	50M	D18-133X	Spec.	Audio Control with Tone Tap
500M	250M	D19-133X	Spec.	Audio Control with Tone Tap


Resistance Ohms	Tap	I R C Stock No.	Taper	Usual Application
500M	100M-200M	D18-133XX	Spec.	Audio Control with 2 Tone Taps
1.0 meg.	—	D11-137	A	Potentiometer Voltage Divider
1.0 meg.	—	D13-137X	C	Tone or Audio Circuit Control
1.0 meg.	—	D14-137	H	Audio Control with Tone Tap
1.0 meg.	—	D17-137X	Spec.	Audio Control with Tone Tap
1.0 meg.	50M-100M	D17-137XX	Spec.	Audio Control with 2 Tone Taps
1.0 meg.	100M	D18-137X	Spec.	Audio Control with Tone Tap
1.0 meg.	250M-500M	D18-137XX	Spec.	Audio Control with 2 Tone Taps
1.0 meg.	100M	D19-137X	Spec.	Audio Control with Tone Tap
1.0 meg.	500M	DVC-539X	Spec.	Fader control for fading one circuit into another
2.0 meg.	—	D13-139	C	Tone or Audio Circuit Control
2.0 meg.	500M	D13-139X	H	Audio Control with Tone Tap
2.0 meg.	5M	D15-139X	Spec.	Audio Control with Tone Tap
2.0 meg.	500M-1.0 meg.	D13-139XX	Spec.	Audio Control with 2 Tone Taps
2.0 meg.	150M	D17-139X	Spec.	Audio Control with Tone Tap
2.0 meg.	1.0 meg.	D18-139X	Spec.	Audio Control with Tone Tap
2.0 meg.	250M-500M	D18-139XX	Spec.	Audio Control with 2 Tone Taps
2.0 meg.	50M	D19-139X	Spec.	Audio Control with Tone Tap
3.0 meg.	—	D13-140	C	Audio Control
5.0 meg.	—	D11-141	A	Potentiometer Voltage Divider
7.0 meg.	—	D11-142	A	Potentiometer Voltage Divider
10.0 meg.	—	D11-143	A	Potentiometer Voltage Divider

\*Supplied with 270 ohm BW½ (½ Watt) Insulated Wire Wound Resistor.



For miscellaneous service needs, all-purpose controls are available for use with IRC tap-in shafts. An A shaft is included with each control and shafts B, E, F, G, H, J, K, L, M and N may be had at slight extra cost.

Each D Control accommodates any of the eleven Tap-in Shaft types shown. Shaft flats may be located in any position.

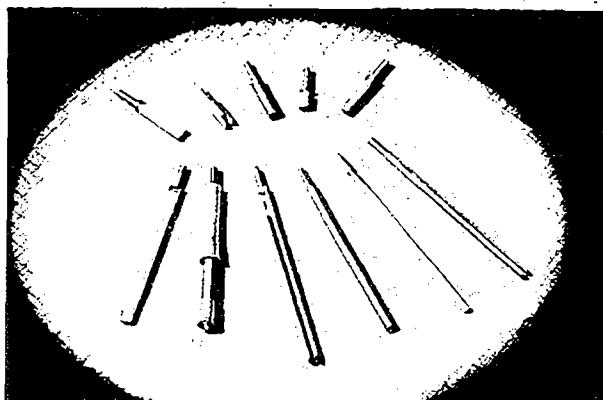

#### QUICKLY ATTACHED SWITCHES

	For D and DS Controls	For Dual Controls
S. P., S. T.	No. 41	No. 21
D. P., S. T.	No. 42	No. 22
S. P., D. T.	No. 43	No. 23
Three Point	—	No. 24
Four Point	No. 45	No. 25
S. P., D. T. at clockwise position	—	No. 26
S. P., S. T. with dummy lug	No. 47	No. 27



#### 8 CLUTCH-TYPE DC CONTROLS

Practical for auto radio use and many other applications. Controls have friction clutch-drive-arm and are equipped with a special shaft for use where either a slotted or tongued type shaft is required. Instructions tell how to cut shaft for either application. Switches cannot be used with friction clutch controls. Size same as Type D.

IRC Stock No.	Resistance Ohms	Resistance to Tap
DC13-130	250M	—
DC18-130X	250M	Tap 50M
DC13-133	500M	—
DC13-133X	500M	Tap 125M
DC13-137	1.0 meg.	—
DC13-137X	1.0 meg.	Tap 250M
DC13-139	2.0 meg.	—
DC13-139X	2.0 meg.	Tap 500M

#### 8 DUAL CONTROLS

Eight popular Dual Controls are included in IRC's new Century Line. Here is a small but carefully selected group of "duals" that will speed many an important repair job! Standard No. 20 series switches can be attached. 1 1/4" x 1 1/4".

IRC Stock No.	Unit	Resistance Ohms	Taper
35-1620	Panel	10,000	C
61-1623	Rear	25,000	E
33-2828	Panel	10,000	F
33-3030	Rear	50,000	A
33-3333	Panel	0.1 meg.	C
33-3737	Rear	0.1 meg.	C
33-3939	Panel	0.25 meg.	C
31-4141	Rear	0.25 meg.	C
33-3737	Panel	1.0 meg.	C
33-3939	Rear	1.0 meg.	C
31-4141	Panel	2.0 meg.	C
31-4141	Rear	2.0 meg.	C
33-3737	Panel	5.0 meg.	A
31-4141	Rear	5.0 meg.	A

#### TYPE "W" WIRE WOUND CONTROLS

IRC Control No.	Resistance Ohms	Max. Current (Amps.)	IRC Control No.	Resistance Ohms	Max. Current (Amps.)
W-2	2	1.000	W-100	100	.142
W-3	3	.815	W-200	200	.100
W-5	5	.630	W-300	300	.083
W-6	6	.560	W-400	400	.071
W-8	8	.500	W-500	500	.063
W-10	10	.450	W-750	750	.052
W-15	15	.370	W-1000	1000	.045
W-20	20	.320	W-2000	2000	.032
W-25	25	.285	W-3000	3000	.026
W-30	30	.260	W-4000	4000	.022
W-40	40	.225	W-5000	5000	.020
W-50	50	.200	W-7500	7500	.016
W-60	60	.183	W-10000	10000	.014
W-75	75	.164			


#### TYPE W SWITCHES FOR TYPE W CONTROLS

Number
51
52
53
54
55
56
57

S. P., S. T.  
D. P., S. T.  
S. P., D. T.  
Three Point  
Four Point  
S. P., D. T. at clockwise position  
S. P., S. T. with dummy lug


# CONTROLS

IRC

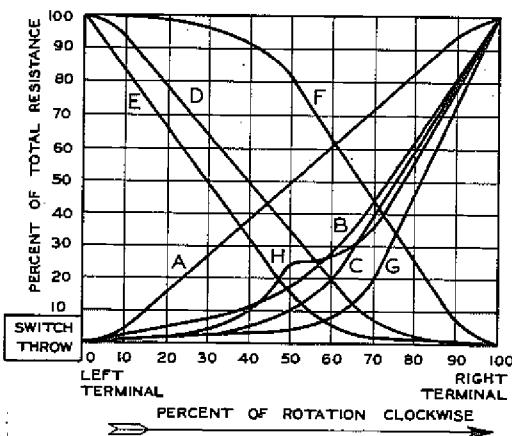

## 8 STANDARD TAPERS

- A**—Used as potentiometer or rheostat in any circuit where uniform resistance change is required.
- B**—A semi-logarithmic curve used as tone control or audio circuit control.
- C**—A logarithmic curve. Used as audio circuit control or antenna shunt control.
- D**—Tapered at both ends to provide control of grid bias and antenna circuit. Used where control of grid bias is of prime importance in controlling volume.
- E**—Used as a rheostat in cathode circuit to control grid bias.
- F**—Tapered at both ends to provide control of grid bias and antenna circuit. Used where control of grid bias is essential in controlling volume. Generally used where the control changes the grid bias of only one or two tubes. Must not be used with heavy currents.
- G**—A logarithmic curve with very gradual change in resistance from left terminal. Used as audio circuit control or antenna shunt control.
- H**—A tapped logarithmic curve used as audio level control for automatic bass compensation.

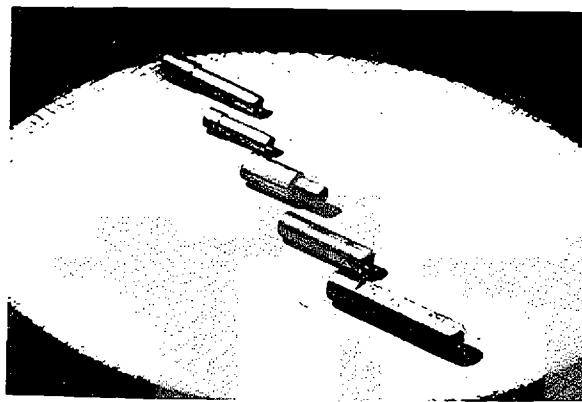

## SLEEVE BUSHINGS


**TYPE S1**—For use with standard controls.

**TYPE S2**—To provide bearing for switching mechanism.

**TYPE S3**—For use with standard controls to set control back from chassis or mounting bracket.  $1\frac{1}{2}$ "— $\frac{1}{8}$ " dia. for 1" unthd— $\frac{3}{8}$ " dia. for  $\frac{1}{2}$ " 32 thd—.344 flat.

**TYPE S4**—For use with standard controls to provide  $\frac{7}{16}$ " dia. bushing.  $1\frac{1}{8}$ "—thd  $\frac{7}{16}$ "—28 full length—1.375 dbl flat.

**TYPE S5**—For use with standard controls to provide  $\frac{1}{2}$ " dia. bushing.  $2\frac{1}{8}$ "— $\frac{1}{2}$ "—28 full length—.437 flat.

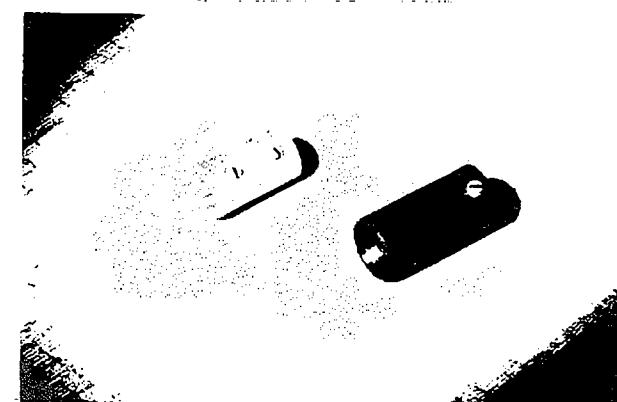

## PLAIN AND INSULATED SHAFT COUPLERS

For use with standard controls to meet special shaft requirements. Two set screws give rigid connection.

**TYPE C2**—Insulated coupler for use with square type shaft used by Motorola.

**TYPE C3**—Plain coupler to couple  $\frac{1}{4}$ " shafts; insert allows coupling of  $\frac{1}{4}$ " shaft to  $\frac{3}{16}$ " shaft.

## EXTENSION SHAFTS

These shafts attach to regular shafts, thus extending length to any needed size, and frequently make it possible to use standard controls for "special" jobs.

### Shaft No.

441	$4 \times \frac{1}{4}$ dia. x $\frac{1}{64}$ flat
442	$4 \times \frac{1}{4}$ dia. x $\frac{3}{64}$ flat
443	$4 \times \frac{3}{16}$ dia. x $\frac{1}{64}$ flat
444	$8 \times \frac{1}{4}$ dia. x $\frac{3}{64}$ flat for 4" length

## VIBRATORS


RADIART

Diagram	Number	Voltage	Freq.	Max. Load, Amps.	Diameter*	Height*
A-1	5300	6	115	.6	$1\frac{1}{2}$	$3\frac{1}{8}$
	5300-32	32	115	1.4	$1\frac{1}{2}$	$3\frac{1}{8}$
	5301	6	115	.6	$1\frac{1}{2}$	$2\frac{1}{8}$
	5307	6	150	.6	$1\frac{1}{2}$	$3\frac{1}{8}$
	5314	6	115	.6	$1\frac{1}{4}$	$2\frac{3}{8}$
	5320P	6	115	.6	$1\frac{1}{16}$	$3\frac{1}{8}$
	5321	6	115	.6	$1\frac{1}{16}$	$3\frac{1}{8}$
	5323P	6	115	.6	$1\frac{1}{8}$	$4\frac{1}{8}$
	5326P	6	115	.6	$1\frac{1}{2}$	$2\frac{1}{8}$
	5342M	6	115	.6	$1\frac{1}{2}$	$2\frac{1}{8}$
	5515	6	115	10	$1\frac{1}{2}$	$3\frac{1}{8}$
	5516	6	115	10	$1\frac{1}{2}$	$3\frac{1}{8}$
	5503-12	12	115	6	$1\frac{1}{2}$	$3\frac{1}{8}$

Diagram	Number	Voltage	Freq.	Max. Load, Amps.	Diameter*	Height*
A-1	5503-32	32	115	2.5	$1\frac{1}{2}$	$3\frac{1}{8}$
B	5343M	6	115	6	$1\frac{1}{16}$	$4\frac{1}{2}$
C-1	5309	6	115	6	$1\frac{1}{2}$	$2\frac{1}{2}$
	5331	6	115	6	$1\frac{1}{2}$	$3\frac{1}{8}$
D	5506	6	115	10	$1\frac{1}{2}$	$3\frac{1}{8}$
E	5308	6	115	6	$1\frac{1}{2}$	$3\frac{1}{8}$
F-1	5303	6	115	6	$1\frac{1}{8}$	$3\frac{1}{8}$
	5333	6	115	6	$1\frac{1}{2}$	$3\frac{1}{8}$
	5335	6	115	6	$1\frac{1}{2}$	$2\frac{1}{8}$
H-1	5328P-32	32	115	1.4	$1\frac{1}{8}$	$3\frac{1}{8}$
I	5304	6	115	6	$1\frac{1}{4}$	$3\frac{1}{8}$

Diagram	Number	Voltage	Freq.	Max. Load, Amps.	Diameter*	Height*
K-1	5409	6	115	4	$1\frac{1}{2}$	$3\frac{1}{8}$
	5409-4	.4	115	4	$1\frac{1}{2}$	$3\frac{1}{8}$
	5413	6	115	4	$1\frac{15}{16}$	$3\frac{1}{8}$
	5413-4	4	115	4	$1\frac{15}{16}$	$3\frac{1}{8}$
	5609-12	12	120	3	$1\frac{1}{2}$	$3\frac{1}{8}$
K-2	5604	6	115	6	$1\frac{15}{16}$	$4\frac{1}{2}$
L	5416	6	115	6	$1\frac{15}{16}$	$4\frac{1}{2}$
O-1	5410	6	115	4	$1\frac{1}{2}$	$3\frac{1}{8}$
O-2	5425	6	115	6	$1\frac{15}{16}$	$4\frac{1}{2}$
P-1	5426	6	115	6	$1\frac{15}{16}$	$3\frac{1}{8}$
P-3	5429	6	115	6	$1\frac{15}{16}$	$4\frac{1}{2}$


All Dimensions are in inches.

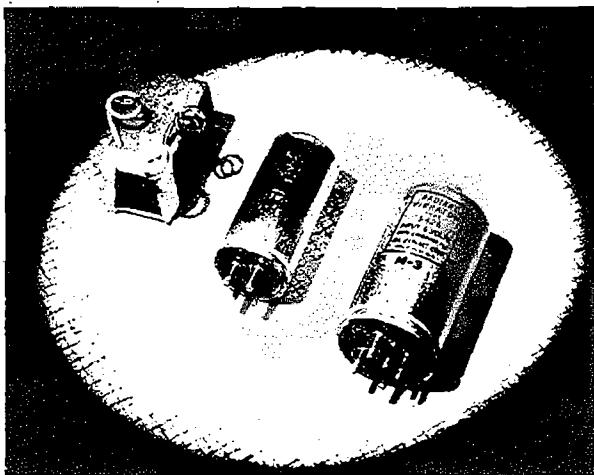

### VIBRATORS (continued)

Diagram	Number	Voltage	Freq.	Max. Load, Amps.	Diameter*	Height**
R-1	5366	6	115	6	1½	2½
T	5367-32	32	115	1.4	1½	3½
V-1	5411	6	115	4	1½	3½
	5421	6	115	4	1½	3½
	5435	6	115	4	1½	3½
	5435-4	4	115	4	1½	3½
	5436	6	180	5	1½	2½
	5610	6	115	6	1½	3½
	5610-12	12	115	3	1½	3½
	5615-12	12	180	3	1½	2½
	5615-24	24	180	1.5	1½	2½
W-1	5434	6	115	4	1½	3½
Y-1	5504P	6	115	6	1½	3½
AA-1	5443	6	115	6	1½	3½
	5443-32	32	115	1.4	1½	3½
AB-1	5400	6	115	6	1½	3½
	5407	6	180	5	1½	3½
	5408	6	140	6	1½	2½
	5437	6	180	5	1½	2½
	5438	6	140	6	1½	3½
	5440	6	115	6	1½	4½
AD-1	5406	6	115	6	1½	3½
	5454	6	115	6	1½	2½
	5605	6	115	10	1½	3½
	5605-12	12	115	6	1½	3½
	5605-32	32	115	2.5	1½	3½
	5614-12	12	115	4	1½	2½
AE-1	5422	6	115	4	1½	3½
AG	5431	4	115	4	1½	3½
AH-1	5404	6	130	6	1½	3½
AI-1	5464	6	115	6	1½	4½
AJ	5607	6	180	6	1½	3½
	5607-12	12	180	4	1½	3½
	5607-32	32	180	2	1½	3½
AK	5513-12	12	180	4	1½	3½

All Dimensions are in inches.

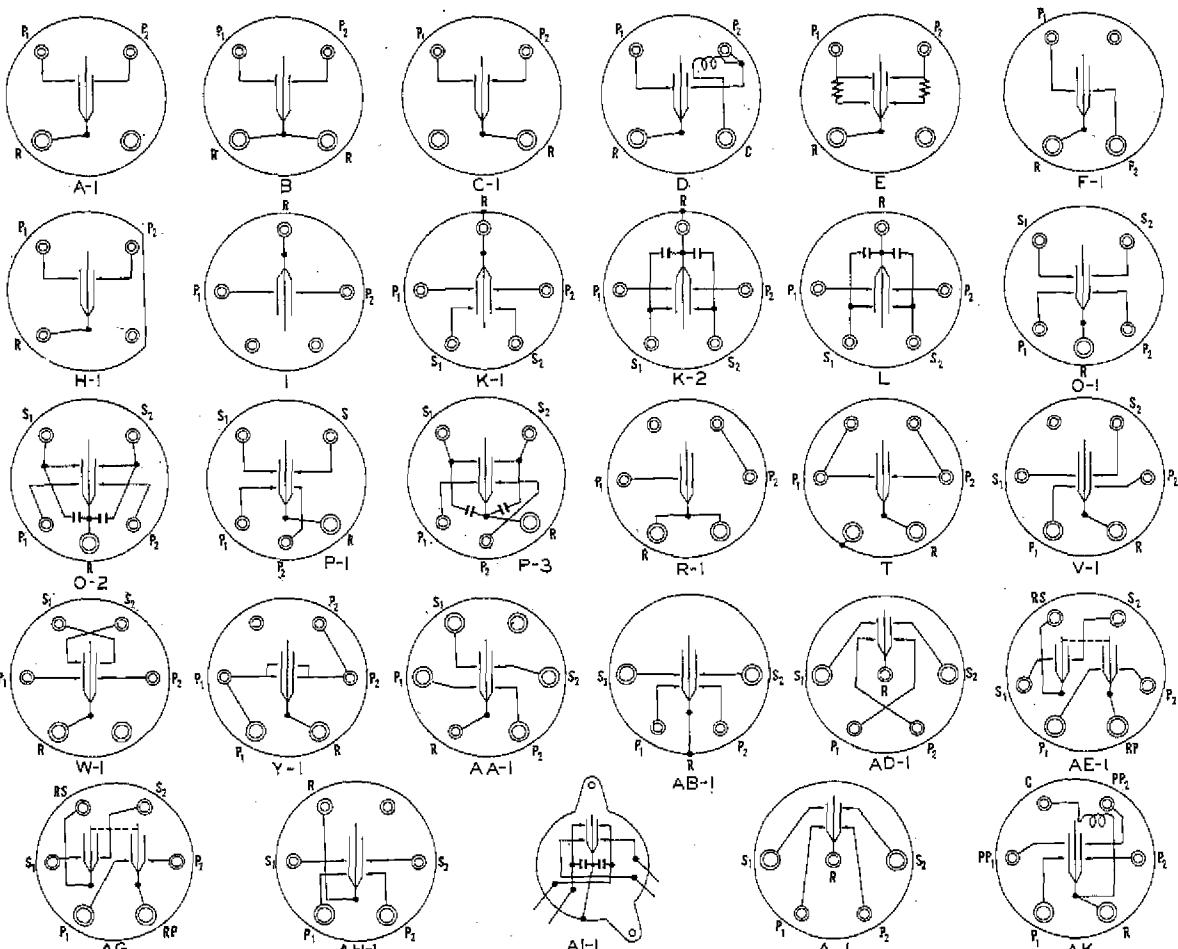

### SYMBOLS USED IN VIBRATOR BASE DIAGRAMS

**A** —A hot line into vibrator.

**B** —By-pass for driving point. A paper condenser is connected between this prong and the reed prong, R.

**C** —External coil lead in shunt vibrators (must be connected to reed R to operate).

**P<sub>1</sub>** —Primary contact, usually, but not necessarily connected to the magnet coil in shunt vibrators.

**P<sub>2</sub>** —Primary contact, may be the magnet coil connection instead of P<sub>1</sub>.

**R** —Vibrating reed in single-reed vibrators.

**RP** —Primary vibrating reed in split-reed vibrators.

**RS** —Secondary vibrating reed in split-reed vibrators.

**S<sup>1</sup>** —Secondary contact, closed when P<sub>1</sub> is closed.

**S<sub>2</sub>** —Secondary contact, closed when P<sub>2</sub> is closed.

# GRATITUDE—FOR A SPLENDID ACCOMPLISHMENT


The exacting requirements involved in the compilation of the RED BOOK, necessitating painstaking research and critical analysis to insure the accuracy of the many thousands of listings would be, to most people, sheer drudgery. Its original and complete coverage of essential components demanded broad factual knowledge of the products involved and precise interpretation of circuit design.

And all credit is justly due to the splendid staff who were assigned to this project for the completeness and accuracy of this unusual compilation.

Thanks are due, too, to the many manufacturers who cooperated wholeheartedly in supplying data vitally important to the accuracy of the listings.

To each member of the RED BOOK staff listed below and to the Typographer and Printer, without whose miraculous performance the production of this volume "on time" would have been impossible, I extend my sincere personal thanks.


EDITOR-IN-CHIEF . . . . .	E. L. Jordan
ASSISTANT EDITOR . . . . .	Harvey Kreipke
FIELD RESEARCH . . . . .	Marion Arvin W. W. Dehn B. V. K. French
COMPILATION STAFF . . . . .	Gene Bowden John Castetter Gilbert Curtis, Jr. John W. Merritt Garland Mowry Eugene Pulliam Richard Watson
STATISTICAL RESEARCH . . . . .	R. M. Ellis H. E. Henley
CONSULTANT . . . . .	D. I. Barnard W. D. Renner J. R. Ronk
PRODUCTION . . . . .	A. E. Cutshall

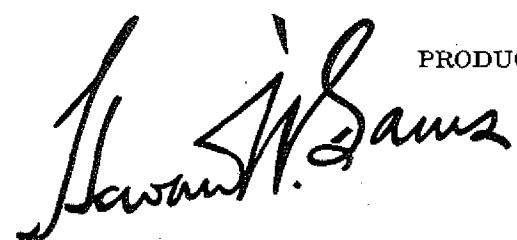A handwritten signature in black ink, appearing to read "Howard W. Sams".

# CORNELL-DUBILIER VIBRATORS

(SEE PAGE 6)

**For Replacement in All Radio and Electronic Equipment  
Embodying Outstanding New Features in Design**



Newly designed electronic micro-metric equipment permits production maintenance of what was formerly considered laboratory tolerances, thus producing uniform high quality production and long life units.



A newly developed pole coil piece permits reduced Reed amplitude thereby producing proper point pressure in relation to Reed amplitude and armature design, thus giving a perfectly balanced unit which reduces mechanical vibration and mechanical noise to an absolute minimum.




This new type base mounting gives the full floating unit. It reduces the mechanical vibration normally transmitted to the car and protects the life of the vibrator by reducing outside road shock.




Completely enclosed in sponge rubber, newly developed to eliminate harmful foreign materials. A new type base mounting, and hermetically sealed unit.

A cutaway view of the new C-D vibrator showing the internal construction.

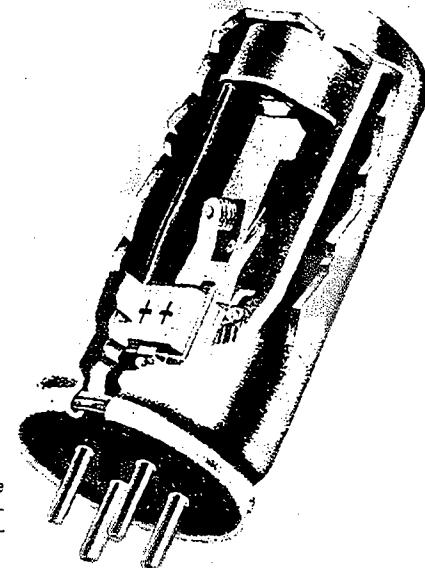

New indestructible stack which cannot be broken down by high peak voltages. Even peak voltages of approximately 4200 volts jumping the stack will result in no damage to the vibrator. Highest quality mica insulation is used in the stack.



New type of mounting in conjunction with more flexible leads to eliminate all danger of lead breakage.

All Cornell-Dubilier vibrator type numbers are prefixed with the letters "C" or "D" which designate that a unit is either a non-synchronous or synchronous type respectively. Either of these together with the letter "S" indicates that a unit is a Special as follows:

**C**=Non-Synchronous Type

**D**=Synchronous Type

**CS**=Non-synchronous, Special Type

**DS**=Synchronous, Special Type

## Standard Types of Cornell-Dubilier Vibrators for Every Radio Replacement Requirement

C00	C26P	CS03	D09	D31	D64
C00-32	C28P	CS03-12	D09-4	D34	DS04
C01	C31	CS03-32	D10	D35	DS05
C03	C33	CS04P	D11	D35-4	DS05-12
C04	C35	CS06	D13	D36	DS05-32
C07	C42M	CS10	D13-4	D37	DS07
C08	C43M	CS11-12	D16	D38	DS07-12
C09	C63	D00	D21	D40	DS07-32
C14	C66	D04	D22	D43	DS09-12
C20P	C67-32	D06	D25	D43-32	DS10
C21	CS00	D07	D26	D54	DS10-12
C23P	CS01	D08	D29	D63	DS14-12

QUAM-NICHOLS



SYLVANIA



THORDARSON



BURGESS

IRC



ASTATIC



Jensen

Jensen

Meissner

EVEREADY  
Radio Batteries



AEROVOX

IRC



SYLVANIA

ASTATIC



SPRAGUE

BURGESS

THORDARSON

Meissner

EVEREADY  
Radio Batteries

Meissner

QUAM-NICHOLS

AEROVOX