


# Popular Electronics®

WORLD'S LARGEST-SELLING ELECTRONICS MAGAZINE

AUGUST 1978/\$1

Audio Alarm Backs Up Car Warning Lights  
Build a Digital Darkroom Timer  
Personal Computers for Small Businesses

**Video Cassette Recorders**  
A RISING HOME-ENTERTAINMENT STAR

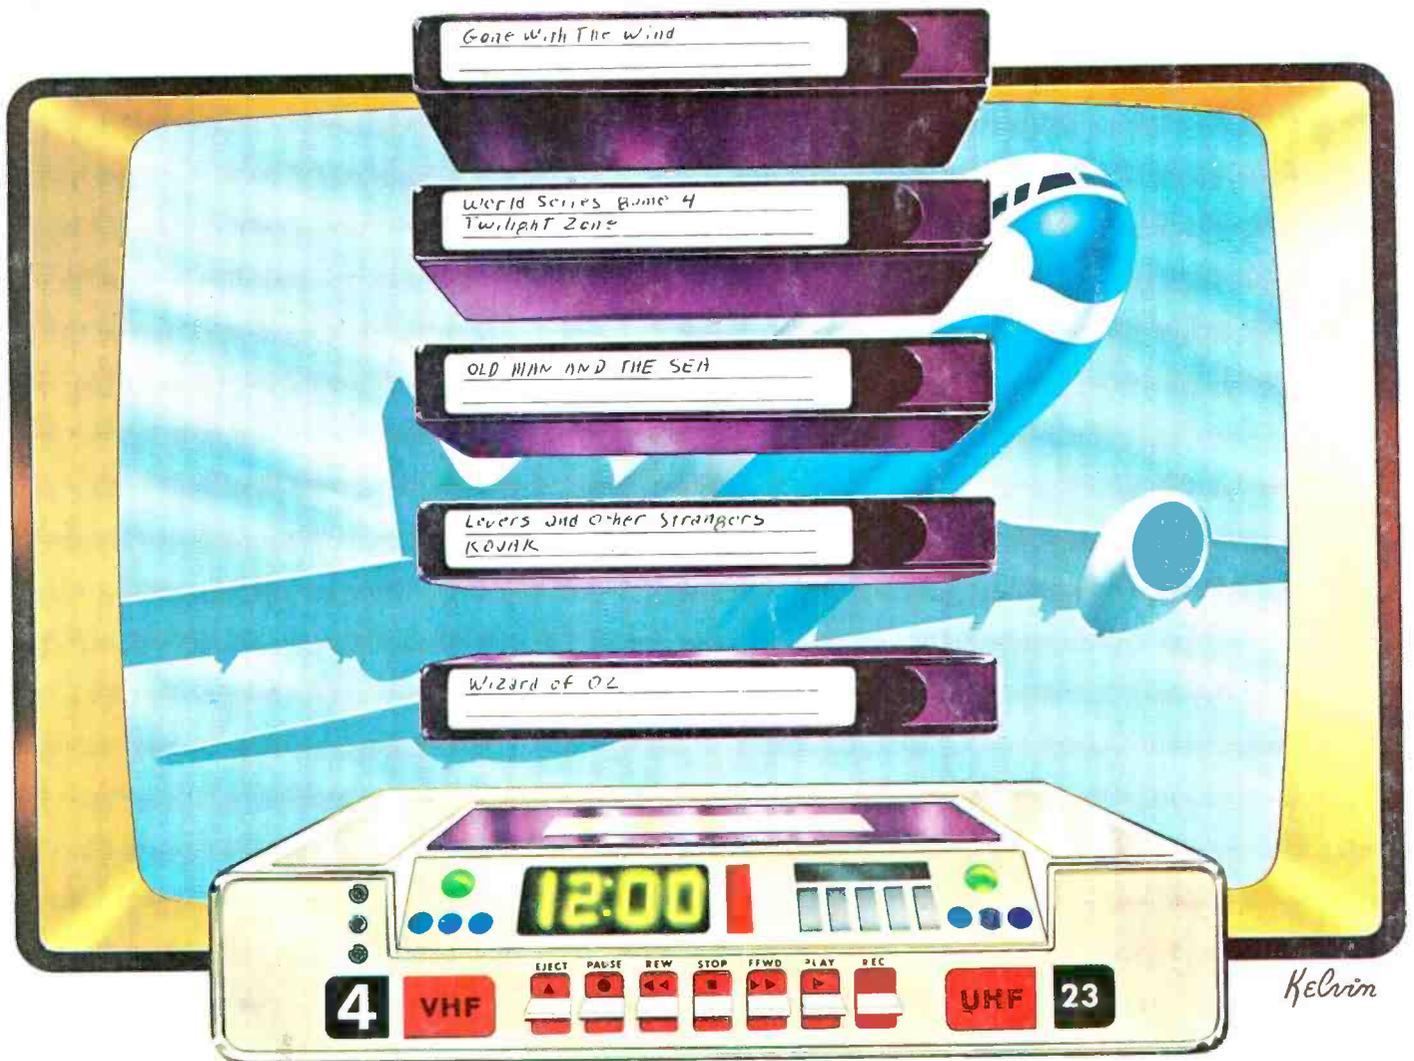

Popular Electronics

303196 DRK 6450M090 1410 NOV79  
L DARKNELL JR  
6450 WYRTLEWOOD DR  
SAN JOSE CA 95129

ad Cassette Deck  
shelf Speakers  
ereo FM/AM Receiver  
e AM/SSB CB Transceiver

# FOR THOSE OF YOU WHO ARE HAVING SECOND THOUGHTS ABOUT YOUR FIRST CB.

Move up to the all-new Cobra 29GTL. It's the third generation of the trucker-proven Cobra 29. And like the 29 and the 29XLR before it, it advances the state of the art.

Transmitter circuitry has been refined and updated to improve performance.

Receiver circuits have been redesigned to include dual FET mixers, a monolithic crystal filter and a ceramic filter to reduce interference and improve reception.

By improving the transmitter circuitry the 29GTL keeps you punching through loud and clear. By incorporating new features for better reception everything you copy comes back loud and clear.

So if you're having second thoughts about your first CB, make your next CB the Cobra 29GTL.

We back it with a guaranteed warranty and a nationwide network of Authorized Service Centers where factory-trained technicians are available to help you with installation, service and advice.

But more important than that, we sell it at a price you won't have second thoughts about.



**Punches through loud and clear.**

Cobra Communications Products  
DYNASCAN CORPORATION  
6460 W. Cortland St., Chicago, Illinois 60635

Write for color brochure  
EXPORTERS: Empire • Plainview, N.Y. • CANADA: Atlas Electronics • Ontario  
CIRCLE NO. 6 ON FREE INFORMATION CARD



# NEW ASTRO-FANTOM™



## CB ANTENNA

**GOES WHERE  
NO CB  
ANTENNA  
HAS GONE  
BEFORE!**

**SUPERIOR  
PERFORMANCE FOR  
AUTO, TRUCK, MARINE,  
RV, MOTORCYCLES AND  
HOME USE**



**avanti® antennas**

AVANTI RESEARCH AND DEVELOPMENT, INC.  
340 Stewart Avenue, Addison, IL 60101  
IN CANADA: Lenbrook Industries,  
1145 Bellamy, Scarborough, Ontario M1H 1H5

## It Mounts On Glass Transmits and Receives THRU Glass

Now from the AVANTI Research Laboratories comes a sleek, 22" full 1/2 wave antenna, so unique that it mounts on glass, transmits through glass and receives through glass...yet requires no grounding to metal as do conventional 1/4 wave antennas. No holes to drill...no clamps, clips or magnets to ever mar or scratch your car's finish! No pinched cables to run in through doors, windows or trunk. The Astro-Fantom is a handsome, low profile antenna that provides the ultimate in convenience!

**EASY INSTALLATION.** The Astro-Fantom is so uncomplicated that installation takes only five minutes and requires no tools. It bonds securely to the glass with an all weather tested 3M press-on adhesive, yet can be quickly transferred when desired. The fiberglass whip removes instantly for storage, car wash or theft protection.

**ONE MOUNT SATISFIES EVERY NEED.** Astro-Fantom's unique mount attaches anywhere there's a metal framed window. Front, side, or rear of vehicle, boat and motorcycle windshields, even home installation.

**CLEAREST COMMUNICATIONS.** Avanti's exclusive space age co-inductive™ coupling box actually rejects static and interference as it establishes a highly tuned circuit to transmit and receive radio signals through the glass.

**FULL 360° SIGNAL.** Astro-Fantom's full 1/2 wave design eliminates dead spots and directional problems found in conventional CB antennas.



PATENT PENDING **Model AV-200**  
Length 22"



© 1978, all rights reserved

CIRCLE NO. 48 ON FREE INFORMATION CARD



# Pocket Yellow Pages

*Let your fingers do the data entry with America's first computerized pocket telephone directory.*

You're stuck. You're at a phone booth trying to find a phone number, and people are waiting. You feel the pressure.

To the startled eyes of those around you, you pull out your calculator, press a few buttons, and presto—the phone number appears on the display of your calculator. A dream? Absolutely not.

Space-age technology has produced the Canon Directory—a calculator that stores 20 of your most frequently called numbers in its memory and let's you recall them simply by entering the person's name or initials.

The keyboard has letters as well as numbers (like the touch-tone pad on a telephone), so it's easy to enter data and use. Want to call Jim? You enter J I M, and your display shows Jim's phone number. Even when you shut your unit off, it retains your complete directory in its large memory.

Ever forget to shut your calculator off when you slipped it in your pocket? No problem with the Canon Directory. The system was built like a liquid crystal digital watch. Its display can remain on constantly without draining the two long-lasting hearing aid batteries which you get with your unit. A low battery indicator also warns you well enough in advance when it's time to change batteries.

#### STORE IN CONFIDENCE

If you lost your little black book with all those confidential numbers, you might get in trouble. Not so with the Directory. Without knowing the specific initials or name, you can't access the numbers.

And then there's convenience. You carry your calculator with you anyway. Why not add the convenience of a telephone directory to a full-function calculator? When it comes to calculating, the Canon is no slouch either.

There's a fully-addressable memory, square root, and an add-on discount percentage system.

#### EASY TO OPERATE

Just enter the name and number you want stored and press a few buttons. That's all there is to it. Changing an entry is just as easy. You can also store credit card numbers, important serial numbers, birthdays, and anniversaries. For example, enter the next birthday or important date you should remember under "DATE." This date will appear each time you enter the word "DATE." By getting in the habit of doing that each week, the Canon won't let you forget. Or have you ever been stuck at a phone booth with no pen to write your messages? With the Canon, you can enter them directly into your unit—name and number.

The Canon Directory is a new breakthrough in recent calculator technology. The large-scale integrated circuit is programmable by the user—something nearly impossible just a few short months ago.

#### TEST IT FOR A MONTH

Order the Directory. Quickly program it with your most frequently called numbers. (You'll be amazed at how many 20 numbers seem when you sort out your personal directory.) Then use it every day. Program those important dates, your social security number, the phone numbers of your favorite restaurants, airlines, or movie theaters. Test the batteries by leaving your unit on for a week.

See how easy it makes life. Then within 30 days, decide if you want to keep it. If not, no problem. Just slip it in its handy mailer and send it back. We won't be upset, and in fact, we'll thank you for at least giving our unique product a test.

JS&A is America's largest single source of space-age products—a substantial company which has been in business for over a decade. Canon is the famous company that manufactures quality cameras, calculators, and other precision quality instruments.

If service is ever required, just slip your three-ounce unit in an envelope and mail it to Canon's national service-by-mail center. It's just that easy. Service should never be required since practically all components are on a single integrated circuit, but we wanted to assure you that a service program is an established part of Canon's program. The unit is 2¾" x 5½" and only one centimeter thick.

To order your own Canon Directory, send \$79.95 plus \$2.50 for postage and handling to the address below (Illinois residents, please add 5% sales tax), or call our toll-free number below. By return mail you will receive your unit, a handy wallet-style carrying case, and a one-year limited warranty.

This year, let the sophistication of space-age technology and your fingers do all the walking. Order your Pocket Yellow Pages at no obligation, today.

**JS&A** NATIONAL SALES GROUP

Dept. PE One JS&A Plaza  
Northbrook, Ill. 60062 (312) 564-7000  
Call TOLL-FREE ..... 800 323-6400  
In Illinois Call ..... (312) 498-6900

©JS&A Group, Inc., 1978

POPULAR ELECTRONICS

## Coming Next Month

- THE NEW AMPLIFIER MEASUREMENT STANDARDS
- BUILD A DISCO MIXER
- NOW YOU CAN ENJOY HI-FI TV SOUND
- BUILD A LOW-COST A/D CONVERTER
- HOW TO DESIGN PC BOARDS FROM A SCHEMATIC

### TEST REPORTS:

Sony Class-D Amplifier  
Panasonic RF-2800 5-Band  
Portable Receiver

Cover Art by George Kelvin

POPULAR ELECTRONICS, August 1978, Volume 14, Number 2. Published monthly at One Park Avenue, New York, NY 10016. One year subscription rate for U.S. and Possessions, \$13.00; Canada, \$16.00; all other countries, \$18.00 (cash orders only, payable in U.S. currency). Second Class postage paid at New York, NY and at additional mailing offices. Authorized as second class mail by the Post Office Department, Ottawa, Canada, and for payment of postage in cash.

POPULAR ELECTRONICS including ELECTRONICS WORLD, Trade Mark Registered. Indexed in the Reader's Guide to Periodical Literature.

COPYRIGHT © 1978 BY ZIFF-DAVIS PUBLISHING COMPANY. ALL RIGHTS RESERVED.

Ziff-Davis also publishes Boating, Car and Driver, Cycle, Flying, Popular Photography, Skiing, Stereo Review, Electronic Experimenter's Handbook, Tape Recording & Buying Guide, Stereo Directory & Buying Guide, and Communications Handbook.

Material in this publication may not be reproduced in any form without permission. Requests for permission should be directed to Jerry Schneider, Rights and Permissions, Ziff-Davis Publishing Co., One Park Ave., New York, NY 10016.

Editorial correspondence: POPULAR ELECTRONICS, 1 Park Ave., New York, NY 10016. Editorial contributions must be accompanied by return postage and will be handled with reasonable care; however, publisher assumes no responsibility for return or safety of manuscripts, art work, or models.

Forms 3579 and all subscription correspondence: POPULAR ELECTRONICS, Circulation Dept., P.O. Box 2774, Boulder, CO 80302. Please allow at least eight weeks for change of address. Include your old address, enclosing, if possible, an address label from a recent issue.

The publisher has no knowledge of any proprietary rights which will be violated by the making or using of any items disclosed in this issue.



## Feature Articles

- 23 SOLID STATE COMPONENTS CHART
- 24 CASSETTE RECORDER TAPE COMPATIBILITY / *Julian Hirsch*
- 39 VIDEO CASSETTE RECORDERS: A RISING HOME ENTERTAINMENT STAR! / *Walter H. Buchsbaum*  
*Types and brands available, how they work, and distinguishing features.*
- 53 PERSONAL COMPUTERS FOR SMALL-BUSINESS APPLICATIONS / *Portia Isaacson*  
*More and more "home" computers are being used for commercial purposes.*
- 58 THE VERSATILE KEYPAD / *Clement Pepper*  
*Describes a variety of applications using a simple keypad.*

## Construction Articles

- 47 BUILD A DIGITAL DARKROOM TIMER / *Michael S. Robbins*  
*Precision interval timer controls an enlarger or other timed-powered device.*
- 64 AUDIO ALARM BACKS UP CAR WARNING LIGHTS OR METERS / *Gene Nelson*  
*Sounds an alarm so you won't miss your car's visual warning.*

## Columns

- 20 STEREO SCENE / *Ralph Hodges*  
*RFI and Other Matters.*
- 66 SOLID STATE / *Lou Garner*  
*On the Light Path.*
- 75 HOBBY SCENE Q&A / *John McVeigh*
- 76 EXPERIMENTER'S CORNER / *Forrest M. Mims*  
*Digital to Analog Converters, Part 2.*
- 81 DX LISTENING / *Glenn Hauser*  
*Current News and Future Plans.*
- 83 COMPUTER BITS / *Leslie Solomon*  
*Direct-Wire Remote Control.*

## Julian Hirsch Audio Reports

- 30 KENWOOD KX-1030 CASSETTE DECK
- 33 REALISTIC OPTIMUS-10 SPEAKER SYSTEM
- 35 PIONEER GX-5050 CAR STEREO FM/AM RECEIVER

## Electronic Product Test Reports

- 78 MOTOROLA CM-550 MOBILE AM/SSB CB TRANSCEIVER
- 80 LEADER LBO-508 DUAL-TRACE OSCILLOSCOPE

## Departments

- 4 EDITORIAL / *Art Salsberg*  
*The Light Traveller.*
- 6 LETTERS
- 8 NEW PRODUCTS
- 14 NEW LITERATURE
- 86 SOFTWARE SOURCES
- 104 OPERATION ASSIST
- 112 ELECTRONICS WORLD NEWS HIGHLIGHTS

**JOSEPH E. MESICS**  
*Publisher*

**ARTHUR P. SALSBERG**  
*Editorial Director*

**LESLIE SOLOMON**  
*Technical Director*

**JOHN R. RIGGS**  
*Managing Editor*

**IVAN BERGER**  
*Senior Editor*

**ALEXANDER W. BURAWA**  
*Features Editor*

**EDWARD I. BUXBAUM**  
*Art Director*

**JOHN McVEIGH**  
*Assistant Technical Editor*

**ANDRE DUZANT**  
*Technical Illustrator*

**CLAUDIA TAFARO**  
*Production Editor*

**RUTH POLSKY**  
*Editorial Assistant*

*Contributing Editors*

**Hal Chamberlin, Lou Garner, Glenn Hauser  
Julian Hirsch, Ralph Hodges, Forrest Mims  
Ray Newhall, Wilfred Scherer**

**CARMEN VELAZQUEZ**  
*Assistant to the Editor*

**LINDA BLUM**  
*Advertising Service Manager*

**KATHERINE REINHARDSEN**  
*Executive Assistant*

**EDGAR W. HOPPER**  
*Publishing Director*

ZIFF-DAVIS PUBLISHING COMPANY  
Philip B. Korsant, President  
Furman Hebb, Executive Vice President  
John R. Emery, Sr. Vice President, Finance  
Phillip T. Heffernan, Sr. Vice President  
Edward D. Muhlfeld, Sr. Vice President  
Philip Sine, Sr. Vice President, Secretary  
Lawrence Sporn, Sr. Vice President, Circulation and Marketing  
Arthur W. Butzow, Vice President, Production  
Frank Pomerantz, Vice President  
George Morrissey, Vice President  
Sydney H. Rogers, Vice President  
Sidney Holtz, Vice President  
Albert S. Traina, Vice President  
Paul H. Chook, Vice President  
Edgar W. Hopper, Vice President  
Robert N. Bavier, Jr., Vice President  
Selwyn Taubman, Treasurer  
W. Bradford Briggs, Vice Chairman

ZIFF CORPORATION  
William Ziff, Chairman  
I. Martin Pompadur, President  
Hershel B. Sarbin, Executive Vice President

ZIFF-DAVIS PUBLISHING COMPANY  
Editorial and Executive Offices  
One Park Avenue, New York, New York 10016  
212-725-3500  
Joseph E. Mesics (725-3568)  
John J. Corton (725-3578)  
Bonnie Kaiser (725-3580)

Midwestern Office  
Suite 1400, 180 N. Michigan Ave.,  
Chicago, IL 60601 (312 346-2000)  
Midwest Representative: Harry L. Vincent  
Western Office  
9025 Wilshire Boulevard, Beverly Hills, CA 90211  
213-273-8050; BRadshaw 2-1161  
Western Advertising Manager: Bud Dean  
Japan: James Yagi  
Oji Palace Aoyama; 6-25, Minami Aoyama  
6 Chome, Minato-Ku, Tokyo 407-1930/6821,  
582-2851




## Editorial

### THE LIGHT TRAVELLER

A few years ago, futurists were speculating that around the year 1990 we would enjoy a fantastic new communications technique using light travelling through glass fibers. This would provide enormous load capacity, immunity to noise and moisture, and very low cost.

On the way to the 1990's, fiber optics or "light communications" arrived—two decades early! The cost factor is still too high for many applications at this time (owing to high connector cost, I understand), but industry pundits are confident that it will be significantly cheaper than other communication links in the future. They say optical transmission of data and voice will likely bury copper cables one day.

A number of experimental lightwave systems are, in fact, up and running right now. Ma Bell has such a link in Atlanta, GA, for example, with the equivalent of 672 digitized voice channels on a single glass fiber. In another area, it's said that a typical fighter plane's 450 pounds of copper wire could be replaced by only 50 pounds of fiber cable. Fiber optics are being used in automobiles, too. DuPont, for exam-

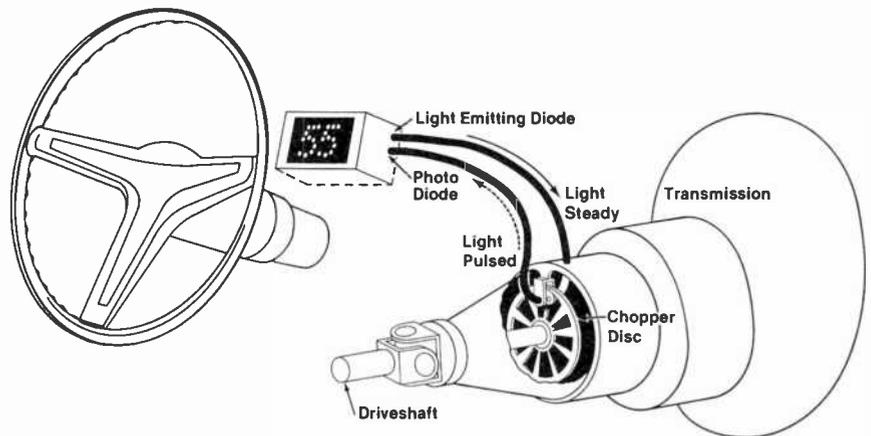

ple, has developed a photo-cybernetic system to monitor vehicle speed, eliminating less reliable mechanical linkages. Readout is by digital LED's. And just imagine what the potential clock rate of a computer would be with no impedance in inter-connecting circuitry! Clearly, it's a technology whose time has come.

Japan seems to be moving appreciably faster than we are toward implementing an optical fiber information transmission system. Test operations for an interactive CATV network in Japanese households began in 1976. The goal is to provide them with two-way services that include cashless shopping, request entertainment, police and fire protection, and remote telemetering. Field trials with 300 subscribers are supposed to be in operation now.

Light communications are not as esoteric as you might suspect from the above. Edmund Scientific Co., Barrington, NJ, for instance, sells fiber-optic kits and assembled units right now. Check Lou Garner's "Solid State" column this issue, too, to see what's happening out there in the light-communication field. It's the beginning of a new, exciting electronics field that will have an enormous impact on our lives in the not-too-distant future.

Part of the electronics action is always in the future. That's why it is so invigorating! And PE will continue to prepare you for what's coming up next.

*Art Salsberg*

POPULAR ELECTRONICS



Totally Integrated, Entirely Self-Contained

# THE PET™ PERSONAL COMPUTER

With technology so advanced,  
Concept so remarkable,  
Operation so utterly simple,  
Cost so incredibly low.  
The PET has given rise to a brand new era...  
The Age of the Personal Computer

HIGH SPEED PRINTER  
ACCESSORY

Immediate Delivery

FEATURING AN IEEE-488 BUS

THE PET has become the standard for the personal computer industry. Consumer and business publications have lauded its discovery. POPULAR SCIENCE and PLAYBOY have given special tribute to the "mind-boggling" PET.

#### IN A LEAGUE WITH IBM, HP AND WANG MINICOMPUTERS

THE PET is a minicomputer and should not be confused with game products that hook up to household T.V.'s. What sets it apart from other computers is price. While others cost from \$11,000 to \$20,000 and more, THE PET, with similar power, costs only \$795.00.

Features an IEEE-488 Bus - like HP's mini and full size computers. This standard data and control channel permits direct connection to many peripherals. Over 120 pieces of compatible equipment such as counters, timers, spectrum analyzers, digital voltmeters and printer plotters, from HP, Philips, Fluke, and Tectronix, etc. are currently available.

ROM Magazine, January 1978, writes, "THE PET comes out of the box, plugs into the wall, and is ready to use." It is equipped with a CRT video display with reverse and blink features, an alpha-numeric keyboard with complete graphics and a built-in standard cassette tape deck.

THE PET has 8K bytes of RAM (user memory). Optional equipment permits expansion to 32K. And, it has 14K bytes of ROM (program memory).

#### THE PET COMMUNICATES IN BASIC, THE EASIEST COMPUTER LANGUAGE

If THE PET wants you to press a key, it will flash, "Press such and such", on the display. You speak back to it through its full size 73-key keyboard.


#### EXTENSIVE CHARACTER ORIENTED GRAPHICS

The unit features a 9-inch, high resolution, 1000 character CRT. Characters are arranged 40 columns by 25 lines on an 8 x 8 matrix for superb graphics.


#### WHAT IS THE PET REALLY FOR?

It is the single most important teaching device for any computer related subject. It will entertain the most sophisticated data application, or the simplest inquiry/response assignment. IN THE LAB it handles instrumentation, process monitoring, and more. A number of Fortune 500 companies have already made it an integral part of their lab and general office system.


As a BUSINESS TOOL it will: Maintain ledgers. Keep payroll records. Create P & L's. Control inventory. Store and analyze sales data. Draw bar graphs. Issue invoices. Hook up to on-line computer system. AT-HOME it will: Compute state and federal tax returns. Make heat and insulation analyses. Keep Christmas lists. Keep checkbook and finances up to date. A variety of games, from Blackjack to Galaxy, is currently available.




Bar Graphs



Amortization Chart



Black Jack



Teaching Trigonometry

#### HIGH SPEED PET PRINTER

This powerful word processor prints hardcopies, invoices, computer correspondence. Faster than an IBM Selectric, THE PET Printer delivers 60 characters per second at a sustained rate - with upper and lower case capability. Characters are one-eighth inch tall and are printed in a 7 x 8 dot matrix. The printer uses a standard 8 1/2" wide paper roll. And, it is only \$599.95.

#### PERIPHERAL SECOND CASSETTE

This optional component expands storage and increases flexibility. Only \$99.95.

#### MILES OF SOFTWARE

Many programs are available now, including, "BASIC BASIC" which shows how to write a program. You can develop your own programs to meet personal requirements.

Cassette drive modified by Commodore for much higher reliability of recording and record retention  
High noise immunity, error detection, and correction  
Uses standard audio cassette tapes  
Tape files, named

#### OPERATING SYSTEM

Supports multiple languages (BASIC resident)  
Machine language accessibility  
File management in operating system  
Cursor control, reverse field, and graphics under simple BASIC control

Cassette file management from BASIC  
True random number generation or pseudo random sequence

#### INPUT/OUTPUT

All other I/O supported through IEEE-488 instrument interface for peripherals  
I/O automatically managed by operating system software  
Single character I/O with GET command  
Easy screen line-edit capability  
Flexible I/O structure for BASIC expansion with peripherals

#### BASIC INTERPRETER

8K BASIC: 20% faster than most other 8K BASICS  
Upward expansion from BASIC language  
Strings, integers, multiple dimension arrays  
10 significant digits; floating point  
Direct memory access: PEEK and POKE commands

#### DIMENSIONS

16" wide; 18 1/2" deep; 14" high. Weight: 44 lbs.

## TECHNICAL SPECIFICATIONS

### MEMORY

Random Access Memory (user memory); 8K internal, expandable to 32K bytes

Read Only Memory (operating system resident in the computer); 14K bytes

8K-BASIC interpreter program, 4K-Operating system, 1K-Diagnostic routine, 1K-Machine language monitor

### VIDEO DISPLAY UNIT

9" enclosed, black & white, high resolution CRT  
1000 character display, arranged 40 columns by 25 lines  
8 x 8 dot matrix for characters and continuous graphics  
Automatic scrolling from bottom of screen  
Winking cursor with full motion control  
Reverse field on all characters  
64 standard ASCII characters; 64 graphic characters

### KEYBOARD

9 1/2" wide x 3" deep; 73 keys  
All 64 ASCII characters available without shift.  
Calculator style numeric key pad  
All 64 graphic and reverse field characters accessible from keyboard (with shift)  
Screen Control: Clear and erase  
Editing: Character insertion and deletion

### CASSETTE STORAGE

Fast Commodore designed redundant-recording scheme, assuring reliable data recovery

#### GAME PROGRAMS ARE \$9.95 EACH:

- Black Jack
- Draw Poker
- Galaxy Games
- Space Flight
- Target Bong, Off-The-Wall
- Lunar Lander, Wumpus, Rotate, Tic-Tac-Toe
- Osero, Reverse
- Spacetrek
- Kingdom

#### PROGRAMS AT \$14.95 EACH:

- Mortgage Analysis
- Diet Planner and Biorhythm
- Basic Basic-by Lodewyck and James

#### PROGRAMS AT \$24.95 EACH:

- Basic Investment Analysis-loans, annuities, return on regular and irregular sequences of payments, calendar calculations
- Stock Portfolio Recordkeeping and Analysis-keeps track of buys, sells, and dividends. Calculates current value, rates of return
- Checkbook Recordkeeping and Analysis-keeps track of checks and deposits. Analyzes expenses by date and type

#### PROGRAMS AT \$29.95 EACH:

- Basic Math Package-matrix addition, multiplication, determinants and inverses to 16 x 16, solution of simultaneous linear equations, vector and plane geometry calculations, integration by trapezoidal, Simpson's rule or Gaussian quadrature, differentiation
- Basic Statistics Package-mean, median, variance, standard deviation, skewness, kurtosis, frequency distribution, linear regression, T-tests, correlation analyses

#### FREE ORIENTATION PACKAGE

Your PET comes complete with two programs and an easy-to-follow instruction manual. By working through the routines you will quickly discover how easy it is to gain command of your personal computer.

#### SERVICE WORLDWIDE

Because your PET is self-contained and compact, professional factory service is never far away. If major service is required, the unit can simply be returned by UPS to an authorized Commodore PET clinic.

To order your PET send check or money order for \$795.00 plus \$20.00 for shipping and insurance. To order the PET Printer, add \$599.95 plus \$12.00 for shipping and insurance. The Second Cassette is \$99.95. No shipping and insurance charges are required when ordering a second cassette or programs with your PET. Credit card orders are invited to call our toll free number below. Orders will be accepted on our TELEX, No. 25-5268.

Use THE PET for 30 days with no obligation. If, for any reason, you are not satisfied, return it for a prompt and courteous refund.

#### ORDER DIRECT

CREDIT CARD ORDERS CALL TOLL FREE  
**800-323-2272**


ILLINOIS RESIDENTS CALL: 312-595-0461

TELEX ORDERS: 25-5268

Order your PET, Printer Accessory, Second Cassette and Programs from Contemporary Marketing at:

790 MAPLE LANE DEPT. PE-8  
BENSENVILLE, ILLINOIS 60106

**Contemporary**  
Marketing Inc.  
CMI 1978185



# Letters

## ABOUT THAT ADAPTIVE SWEEP.

You chaps are a bit backward in your article "The Spectrum Analyzer in Hi-Fi Measurements" (January 1978), in which you cover "an intriguing and unique feature of the Hewlett-Packard 3580A Spectrum Analyzer"—its "adaptive sweep." I took out a British Patent in 1952 that covers a similar feature inasmuch as the relatively rapid frequency time-base is slowed down when a signal above a certain minimum level is present as a Y display. There is the obvious choice of simply switching between two preset scan rates or making the scan rate somewhat inversely proportional to the Y level, or perhaps rate of change of the Y level. I have never found it necessary to "back up" in frequency, because if the scan rate in the passband is adequately slow, the peak response is accurate. Although there may be some distortion in the

build-up to this value, this is not usually of interest. In our spectrum analyzers, which were research tools mainly for r-f, I also had a bandwidth for the crystal filters that could be varied in steps in a very simple manner using a single quartz crystal. *F.G. Clifford, Wynberg, S. Africa.*

## GOOD ITEMS FOR LIMITED READING TIME

I have just read with interest "Choosing a Mobile CB Antenna," by John J. McVeigh, and "How to Install Mobile CB Transceivers and Mobile CB Antennas," by Ivan Berger, in your April 1978 issue. They are outstanding both in detailed content and comprehensive accuracy. With limited reading time available, I have to select those publications providing the most usable information. **POPULAR ELECTRONICS** is such a publication, for which I thank you. —*R. R. Knierim, Lima, OH.*

## MULTIMETER REPLACEMENT IC'S

I'm delighted with my Sabtronics 2000 Digital Multimeter kit, which you reviewed in your December 1977 issue—as I'm sure are other readers. However, here is some useful information if they run into troubles resulting from such things as using the wrong scale and "zapping" the meter. The A/D converter IC (marked 20-786) is the Motorola 14433P; the

IC segment driver (marked 20-788) is Motorola MC14511B; and the Digit Drive is a 75492. The op amp in the ac converter (Z3) can be switched to a 741 if necessary. If the kit doesn't auto-zero in the 10V ac mode, it is because of the multiplex decimal point noise from the selector switches. Sabtronics sells a small "add-on" Low Noise Decimal Point Drive kit for about \$3.00, and it definitely works. —*R.B. Stillwater, Winnipeg, Manitoba, Canada.*

## A SIMPLER VERSION

I've found a simpler version of the pseudo-random data generator described in the January 1978 Experimenter's Corner. It eliminates the need for a second decade counter and timer and performs similar operation. Referring to Fig. 4 in the December 1977 Experimenter's Corner, you will find that connecting the DATA IN pins of the 7489 to the output pins of the 7490 decade counter in the same sequence (A to A, B to B, etc.) and switching WRITE ENABLE switch on for 10 clock pulses will result in the memory slots of the RAM's being loaded with the binary address. This provides an automatic form of obtaining a 0-to-9 binary at the DATA LED's, which is basically what the pseudo-random data generator does. —*Allan P. Saadus, Sunnyvale, CA.*

# FRESH FROM THE FACTORY!

MOTOROLA HEP/MRO SEMICONDUCTORS, KITS AND LITERATURE DIRECT TO YOU BY MAIL

## SEMICONDUCTORS

HEP and/or Standard Devices shipped directly from the factory. Here's a sampling of products and prices:

MC6802	- MPU, Clock and RAM	\$28.15
C6800P	- Microprocessor Unit	\$22.50
C4811	- 128 x 8 Static RAM	\$ 5.45
D1000T	- Liquid Crystal Display with Socket	\$18.90
MRF245	- 80W-175MHz RF Power Transistor	\$47.41
MRF450A	- 50W-30MHz RF Power Transistor	\$18.91
MRF455A	- 60W-30MHz RF Power Transistor	\$21.90

We also have Low-Power Schottky TTL I/C's, Linear I/C's, Zeners, Rectifiers, Power Transistors, Small Signal Transistors, CMOS I/C's, etc.

## KITS

Develop and Evaluate M6800 Microprocessor Systems with Motorola's MEK6800D2 Kit

- Featuring:
- 24-Key Keyboard
  - 7 Segment Display
  - Cassette Interface

All the parts necessary to complete the system and get you "on the air," except for the power supply, for only \$235.00 plus state and local taxes and include \$5.00 for shipping and handling.

### Educator II Power Supply Kit

- Featuring:
- Regulated 5.0 ± 5% Vdc Output @ 1.0 Amps
  - 60 Hz Real Time Clock Available (Approximately 5.1 V peak-to-peak)

The Educator II Power Supply Kit for \$29.95 plus state and local taxes and include \$2.00 for shipping and handling.

## LITERATURE

Data Books, Handbooks, Manuals, Catalogs, Engineering Bulletins, Selector Guides, etc. One of the most complete sources in the industry is available to you through the mail. Here are some samples of the more popular books and prices:

Basic Semiconductor Library (Vols 1, 2 & 3)	\$9.00
CMOS Data Book (Vol 5)	\$2.50
M6800 Microprocessor Applications Manual	\$25.00
M6800 Programming Reference Manual	\$3.00
MC14500B Industrial Control Handbook	\$3.00
Understanding Microprocessors	\$2.50

If you have some specific needs just write to us!

Add Local and State Sales Taxes to all orders for semiconductors and literature, plus \$1.00 for postage and handling (minimum order - \$10.00). We accept Master Charge and Visa Credit Cards. Please include card number and expiration date.



**MOTOROLA**  
Semiconductor Products Inc.

**MOTOROLA MAIL ORDER SALES** - P. O. Box 27605 - Tempe, AZ. 85282



# LCD Alarm Chronograph

The accuracy of the Greenwich observatory...with greater split-second precision than the finest Swiss stopwatch...plus the convenience of a 24-hour personal alarm reminder system.

This new LCD Chronograph is truly extraordinary. It does more, and does it better, than any other watch. With a strong, bold appearance that reflects this uncommon ability. The only little things about it are its thickness and its selling price, which is a real breakthrough at \$200.00 less than you'd pay for the only other watch even close to its functions and uses.

**Quartz Crystal Time...** It gives you accuracy to  $\pm 60$  seconds a year. A year! Quartz Crystal accuracy that would have been considered sensational *per month* in early micro-electronic watches. Accuracy which is still not available in many digitals that sell for \$500 or \$1,000.00!

**Electronic Calendar...** so, you always have exactly the right time on display—without pushing a button—in hours, minutes and running seconds. Then, at the touch of a button you can replace the seconds with the date or the day of the week, with the electronic calendar adjusting automatically for the number of days in any month. And you just light up the face to see perfectly when it's dim or you're in the dark.

### 24 Hour Alarm

You can set this alarm for any minute of any hour of the day or night. In all, 1440 positions are possible.

To wake you, remind you of an appointment, phone call or meeting (or to break one up that's been going on too long). The alarm will sound at the same time each day, unless you deactivate or change it. It will call you with an insistent, modulated beep, for a full minute unless you shut it off with a touch of the button sooner; and you can check to see if the alarm is set.

Is it any wonder that of all the features available in digital watches, a wrist alarm like this is the one that's most wanted? Really it's important enough to warrant your buying a new watch. And remarkable as it may seem, with this offer from Douglas Dunhill, it's like getting the alarm free!

### Three Different Chronographs

As to the chronograph, its precision is so fine, it borders on the infinitesimal. Splitting each second into a hundred parts! Actually you have three different chronographs, or stop action modes of measuring. So you can time any event in its entirety, stopping during pauses or breaks in the action. You can time an event, like a race, from beginning to end, getting the finishing time of each participant in the race, or interim times, for the quarter, say, while timing of the event continues.

And you can time portions of a continuing event, like each lap in a relay race or segment of a complex, continuing manufacturing operation.

All this, with a few of the possible uses, is explained in detail below. Even from this brief description, though, the extraordinary sophistication of the microcomputer chip of the LCD Alarm Chronograph is apparent.

### An Extraordinary Value

Right now, probably the only watch with all these features, its incredible accuracy, multiple function chronograph and wrist alarm, is the Seiko. And it regularly sells for \$200.00 more! \$299.95, even though the Seiko Chronograph is accurate to only a tenth of a second.

This extraordinary value is what convinced us, and we're one of the nation's oldest and largest mail merchandising firms, to secure the exclusive marketing rights. (After exhausting testing by our quality control experts.) We explained there was no way you would walk into a store and select a new brand from an unknown manufacturer.

How could you possibly be expected to appreciate its quality? Would you be in any position to understand and evaluate its virtually unique 3-function chronograph? Would you believe a sales clerk who told you it was really a finer, more accurate fully electronic, solid state watch than many that sell for as much as \$1,000.00?

### Wear it for 30 Days—Without Risk or Obligation

With us, buying by mail, you not only get all the facts, enjoy significant savings made possible by eliminating normal advertising and distribution costs, you can also try it for 30 days without risking one penny. We'll not only refund your money, but do so cheerfully.

You can wear the Advance LCD Chronograph Alarm for thirty days! Time to confirm the fact it won't gain or lose *five seconds* a month. To put the alarm to the test in your daily schedule. To satisfy yourself that the chronograph is as useful as it is easy to operate. More, to compare it with any watch at any price in any store. And to send it back if the value isn't as great as we say, if it doesn't win the admiration and fascination of your friends, earn your own pleasure and deep satisfaction.

Imagine, you can have one of the world's finest, most versatile watches for just \$100.00. That's complete, including shipping, handling, insurance and a handsome gift or presentation case. An exceptional bargain. Choose the chrome plated stainless steel model or gold-plated stainless steel one, each with a matching, extremely comfortable adjustable band.

Remember, your satisfaction is guaranteed. Your watch comes to you with a full *ONE YEAR* Limited Warranty. And you have our promise to service it to your satisfaction at any time. Remember, too, printed circuitry eliminates all moving parts and normal servicing, and will provide you with year after year after year of trouble-free performance.

With the LCD Alarm Chronograph you'll have the precise time, absolute control over time, plus ample warning when it's time to do anything. And the pride that comes with wearing a watch that's second to none.

Send your check (Illinois residents add 5% sales tax) to Douglas Dunhill, Dept. 78-2302 4225 Frontage Road, Oak Forest, IL 60452. Be sure to specify stainless steel or gold plate.

### CREDIT CARD BUYERS

may call our toll free number

**800-621-8318**

(Illinois residents call 800-972-8308)

Call now for your no-risk, no obligation 30-day trial.

### 3 Way Chronograph

The micro-electronic revolution has turned the chronograph from a bulky pocket watch or cumbersome wrist watch for specialists into a sleek, super sophisticated instrument that's become the preferred timepiece for doctors, pilots, motion picture photographers, sound and efficiency engineers, skiers and sportsmen, and ever-increasing number of executives and others who enjoy split second accuracy and the ability to command time to stand still.

No other instrument, at any price, gives you greater precision than the 1/100th of a second accuracy of the LCD Alarm Chronograph or greater flexibility in timing an event from a fraction of a second to one full hour.

**Add Time...** is the stop watch mode you'll use for everything from timing a phone call to the length of a meeting; how long your car's been at a parking meter, the time you've been running, jogging or exercising, even the time it takes for a quarterback to set up and throw. Then, because you can stop it when necessary and start counting again when the action begins again, you'll use it to prepare your speeches, time games or other events in which you want the actual accumulated times exclusive of any breaks in the action.

**Split Time...** is the mode you'll use to get the time for the 1/4 and 1/2, 3/4 in a race, and the individual times of each contestant across the finish line. Think of it! Stopping for split times does not stop the timing of the event itself from continuing. It's actually stopped and running at the same time, so you can use it to figure out the time of pit stop, for example, and still get the over-all running time of the race.

**Lap Time...** is even more ingenious. It stops to measure an event and simultaneously starts again from zero. In a relay race, for example, you stop the chronograph the instant the runner passes the baton; this gives you his time while the lap timer automatically starts counting the next runner's time. Similarly, in a football game, you can get the exact time it takes a punter to kick the ball, the time the ball's in the air, and then the time of the run back of the punt. Any event, from a rocket launch to a production process, can be split into its component parts this way. Separating the time of elements that cannot be separated in any other way!


Within minutes you'll be able to use each of these modes of operation perfectly. Within days, find innumerable uses in both business and your personal life.



Dept 78-2302

4225 Frontage Road • Oak Forest, IL 60452

CIRCLE NO. 50 ON FREE INFORMATION CARD




## New Products

Additional information on new products covered in this section is available from the manufacturers. Either circle the item's code number on the Free Information Card or write to the manufacturer at the address given.

### Toshiba Frequency Synthesized Receiver

Toshiba's SA-7150 AM/stereo FM receiver features a power-output rating of 150 W rms/channel into 8 ohms over 20-20,000 Hz with 0.05% maximum total harmonic distortion. Its tuner section incorporates

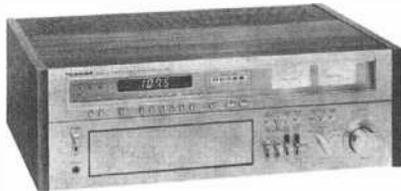

PLL frequency synthesis and also has six memory channels for instant selection of one of six AM or FM stations. The frequency tuned is displayed on green seven-segment LED's. The entire AM or FM broadcast bands can be scanned by using up and down buttons, with the process automatically reversing at the band ends. FM usable sensitivity is rated as 9.8 dBf. Other features are separate transformers for the class A and class B amplifier sections, five LED signal level indicators, built-in FM Dolby circuit, narrow and wide i-f band selection, peak-reading power meters, high and low filters, -10-dB and -20-dB audio muting, dual-direction tape duplication capability, multipath monitor, and phono impedance selector. \$995.

CIRCLE NO 89 ON FREE INFORMATION CARD

### Realistic Programmable Scanner

Radio Shack's new Realistic PRO-2001 programmable scanner offers coverage of 30-50, 144-174, and 430-512 MHz without the use of crystals. This microprocessor-controlled unit can scan 16 programmed channels or an entire band segment by entering its frequency limits. Frequency selection is accomplished with a front-panel keyboard, and each of the 16 channels has selectable lockout. A LED indicator lights



when a channel is being programmed, scanned, or monitored. Out-of-band or improper frequency selection is indicated by an error message. Other PRO-2001 features include switchable scan delay, a built-in 9-V battery that saves memory, and choice of manual or automatic scan with a high-speed scan rate of 15 channels/second. Variable squelch, built-in speaker, and jacks for headphones, tape recorders, external speakers, and uhf and vhf antennas round out the PRO-2001's provisions. Operation is from 120-V ac or 12-V dc. Dimensions are 3.4" x 10.2" x 10.9" (8.6 x 25.9 x 27.6 cm). Includes mobile mounting bracket and power cables. \$399.95.

CIRCLE NO 91 ON FREE INFORMATION CARD

### K40 Mobile CB Antenna

American Antenna's K40 is a base-loaded whip antenna with 56" radiating element of 17-7PH stainless steel. Its coil construction combines metal and plastic, and an isolation chamber is said to dampen static. The whip is adjustable over 2" with no cutting. A quarter-turn quick-release permits removing the antenna from its 30° rotating base. The K40 is supplied fully assembled with 18' of coaxial cable complete with connectors and trunk-clip mount. An optional universal mount permits mobile mounting in any location.

CIRCLE NO 92 ON FREE INFORMATION CARD

### Vector Graphic Video Display Board

FLASHWRITER is Vector Graphic's latest computer peripheral. This video display board generates 16 lines of 64 characters using a 7 x 9 dot matrix and is designed to operate with a 4-MHz clock frequency. Other capabilities are character-by-character generation, reverse video, reduced intensity, and block and line graph-



ics. It has its own screen-refresh memory and latched eight-bit parallel port, is S-100 compatible, and video output is available as composite video or separate video and sync. \$195 kit, \$235 assembled.

CIRCLE NO 93 ON FREE INFORMATION CARD

### Marantz Quartz-Lock Turntable

The new Marantz Model 6350Q direct-drive turntable uses a PLL servo system with quartz crystal timing reference for automatic speed control. Wow and flutter is rated below  $\pm 0.025\%$  wrms, and speed deviation is said to be less than  $\pm 0.003\%$ . In-



dependent speed control for 45 and 33 $\frac{1}{2}$  rpm modes allows  $\pm 3\%$  adjustment. The statically balanced tonearm features automatic lift and shut off, antiskating, and viscous damped cue control. The turntable comes with a hinged dust cover and anti-skid platter mat.

CIRCLE NO 94 ON FREE INFORMATION CARD


### Record Care Work Pad

Ball Corporation's Sound Guard Record Care Work Pad is a lint-free, non-slip, washable surface for use in LP record care. The pad is nonabsorptive and its high coefficient of friction prevents record slippage during inspection, cleaning, or coating of a record with a cleaner or preservative. A receptacle area holds excess fluids. \$7.99.

CIRCLE NO 95 ON FREE INFORMATION CARD

### Remote Coded Alarm Lock

A 12-key pad for remote "combination-lock" alarm operation has been announced by Mountain West Alarm Supply Co. The Model D14 features a field-replaceable, preprogrammed code key. The keypad operates on 6 to 24 volts ac or dc, and draws less than 2 mA standby current, including its red and green LED status lights. The beige, high-impact ABS case measures 4 $\frac{1}{8}$  x 3 $\frac{1}{2}$  x 1 $\frac{1}{8}$  in. (12.1 x

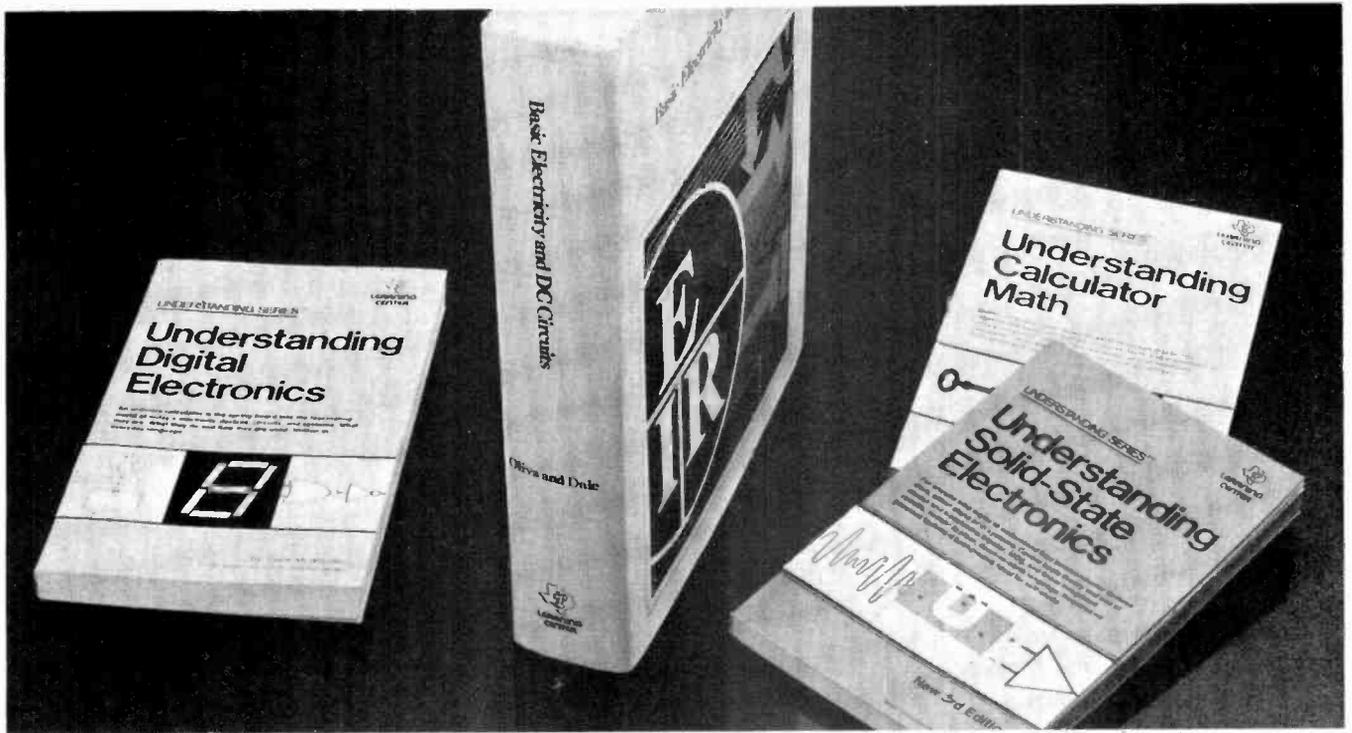

## Unlock the power of today's technology. The Understanding Series.™ From Texas Instruments.

Self-paced. Easy-to-understand. Practical. Texas Instruments introduces the Understanding Series — a family of lively, down-to-earth books written for anyone who wants to learn more about today's electronic technology and its impact on our everyday lives. Ideal for individualized learning, this quick and easy approach can put understanding of these latest technological subjects to work for you!

And Texas Instruments makes it even easier with this special offer. Now you can have your choice of any two or more of these books at a reduced price. Buy all four and save \$1.50. Mail your order form today! (Available for a limited time only.)

### Understanding Calculator Math

224 pages, \$3.95  
All the basic information, formulas, facts and mathematical tools you need to unleash the real power of your calculator. At home. On the job. In school or college. It's packed with practical, everyday applications for fast, efficient calculator problem-solving.

### Basic Electricity and DC Circuits

1026 pages, \$19.95  
The knowledge you will gain from this book will enable you to predict and control the behavior of the most basic and complex DC circuits. Written in clear precise language, with numerous supportive illustrations and examples. Easy, rewarding and fun.

### Understanding Solid-State Electronics

New third edition, 170 pages, \$3.95  
Explains semiconductor behavior and applications, diodes and transistors, uses and trends in integrated circuits. All in a simple, programmed-learning approach that will quickly familiarize you with this broad subject.

### Understanding Digital Electronics

265 pages, \$3.95  
An ordinary calculator is the springboard into the fascinating world of today's electronic devices, circuits and systems. Now you can see and easily understand how digital electronics has changed our everyday lives—and how it will affect your future.

- LCB-3361 Understanding Solid-State Electronics (3rd edition) \$3.95
  - LCB-3311 Understanding Digital Electronics \$3.95
  - LCB-3321 Understanding Calculator Math \$3.95
  - LCW-8161 Basic Electricity and DC Circuits \$19.95
- Add applicable sales tax (except AK, DE, HI, MT, NH, OR)

#### Special Offer:

- Purchase any two books and save \$ .50
- Purchase any three books and save \$ 1.00
- Purchase all four and save \$ 1.50

Mail your check or money order to Texas Instruments, P. O. Box 3640, M/S 84, Dallas, Texas 75285. Orders in Continental United States shipped prepaid. Foreign orders: Prepaid funds in U.S. dollars only. Include shipping costs.



Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Offer available for a limited time only. Prices effective June 1, 1978. Subject to change without notice.

PE-8

# TEXAS INSTRUMENTS

INCORPORATED

# In the Black II



Performance, beauty, quality – three attributes that have always been the hallmarks of SAE products. SAE systems in the past have had them, this system's predecessor had them, and the new In The Black system has them and much more.

The 2900 Parametric Preamplifier offers our new flexible parametric tone control system, full dubbing and tape EQ. New phono and line circuitry results in unparalleled clarity and definition with distortion of less than 0.01% THD & IM.


The 2200 Stereo Power Amplifier with fully complementary circuitry delivers 100 Watts RMS per channel from 20-20K at less than 0.05% Total Harmonic Distortion, from 250mW to full rated power.

The 8000 Digital FM Tuner has linear phase filters, phase-lock multiplex, and of course, our famous digital readout tuning indicator system.

Combine these products together and you have a system that ensures superior performance in all areas, excellent control flexibility, and the sonic quality that is typically SAE.

**SAE**  
**Scientific Audio Electronics, Inc.**  
 P.O. Box 60271 Terminal Annex, Los Angeles, CA 90060


CIRCLE NO 43 ON FREE INFORMATION CARD



8.9 x 2.86 cm), and is designed for surface mounting. \$53.00. Address: Mountain West Alarm Supply Co., Box 10780, Phoenix, AZ 85064.

## Anti-Static Desoldering Tool

Edsyn's Silverstat "Soldapull" desoldering tool incorporates a conductive plastic tip and barrel housing which, when used in a static-controlled work station, allow static charges to drain off to ground through the user's hand. This feature is said to protect

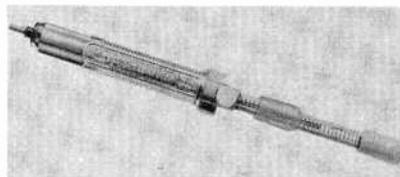

sensitive FET and MOSFET semiconductor devices from damage due to static electricity discharge. The device has a fully enclosed loading shaft, high-low vacuum adjustment, and bayonet-type disassembly.

CIRCLE NO 97 ON FREE INFORMATION CARD

## Digital S Meter

Digi-Comm's "Signal Hunter" is an S meter with three-digit numeric display of received signal strength to one-tenth of an S unit, with signals over S9 displayed directly in dB. The Signal Hunter also displays rel-



ative r-f power output when the attached transceiver is operated in the transmit mode and features a calibration control for matching it accurately to a CB transceiver. It requires a 12-V dc power source. Dimensions are 1.8"H x 4.3"W x 1.5"D (4.6 x 10.8 x 3.8 cm). A magnetic mount is included. Address: Digi-Comm, Ste. 110, 720 Ste-Catherine St. West, Montreal, Canada H3B 1B9.

## Nortronics Cassette Bulk Eraser

The QM-230 is a self-powered, hand-held bulk eraser for standard compact cassettes. Erasure is accomplished by ceram-



ic magnets within the bulk eraser, through whose field the cassette passes. Thus, no battery or ac power sources are required. The eraser is built into a contoured, Cyclo-lac case with a wood-grain finish. \$24.00.

CIRCLE NO 96 ON FREE INFORMATION CARD

## Isophon Miniature Speaker System

Walter Odemer Co.'s Isophon DIA-2000 miniature speaker system measures 5" x 6" x 7.5" (12.7 x 15.2 x 19.1 cm). The two-way speaker has a nominal impedance of 4 ohms. Peak power rating is 70 W while



power handling capability is 50 W. Cross-over frequency is 2000 Hz at 12 dB/octave. The DIA-2000 is finished in a black metallic case with a two-section, snap-in foam grille.

CIRCLE NO 98 ON FREE INFORMATION CARD

## Superex Base Station Microphone

The new Superex M-611 omnidirectional base station microphone features an electret element, FET preamplifier, and transistor output amplifier stage. Output gain is controlled with a slide potentiometer, and the extra large PTT paddle is lockable.

# FREE

The world's largest catalog  
of easy-to-build, money-saving  
electronic kits



- Personal Computer Systems now including Floppy Disk Storage
- Power Supplies
- Oscilloscopes
- Frequency Counters
- VTVM's and VOM's
- Ham Radio Gear
- Digital Programmable Color TV
- Hi-Fi Components
- Electronic Clocks and Weather Instruments
- Self-instruction Electronics Programs
- Auto, Fishing, Marine and Aircraft Accessories — nearly 400 kits in all!

Every Heathkit product comes with a fully-illustrated, step-by-step assembly manual that tells you everything you need to know to make kitbuilding fun and easy. Thousands of people have discovered the satisfaction—and value—of handcrafting electronic equipment. You can build it better... let us show you how.

**Send for your FREE Catalog today! ▶**

OR pick it up at the Heathkit Electronic Center (Units of Schlumberger Products Corporation) nearest you, where Heathkit products are sold, displayed and serviced. Retail prices on some products may be slightly higher. See the white pages of your phone book.

Heath Company, Dept. 010-440, Benton Harbor, Michigan 49022

HEATH Schlumberger	Heath Company, Dept. 010-440 Benton Harbor, Michigan 49022	<b>FREE</b>
Please rush me my FREE Heathkit Catalog. I am not on your mailing list.		
NAME _____		
ADDRESS _____		
CITY _____		STATE _____
CL-659		ZIP _____

CIRCLE NO. 5 ON FREE INFORMATION CARD




Power for the M-611 is provided by a self-contained "C" cell. The interchangeable microphone stem allows use of lapel microphone and acoustic tube microphone headset plug-in modules. Frequency response of the new Superex microphone is claimed to be 250-8000 Hz; sensitivity is rated at -45 dB. Comes with a 6' (1.8 m) unterminated six-conductor cable. \$44.95.

CIRCLE NO. 99 ON FREE INFORMATION CARD

## Heath Metal Locator

A new metal locator kit, the GD-1190

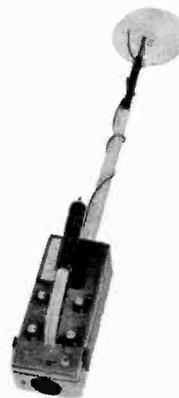

"Cointracker," has been introduced by Heath Company. It features adjustable discrimination, pushbutton tuning, waterproof search coil, and the length of its collapsible shaft is adjustable. Metal detection is signaled to the user via a built-in meter and through an adjustable-volume headphone output. A battery recharging jack is also provided. Weight is 3.5 lb (1.6 kg). \$149.95.

CIRCLE NO. 90 ON FREE INFORMATION CARD

## NEW LSI TECHNOLOGY FREQUENCY COUNTER

TAKE ADVANTAGE OF THIS NEW STATE-OF-THE-ART COUNTER FEATURING THE MANY BENEFITS OF CUSTOM LSI CIRCUITRY.

**FEATURES AND SPECIFICATIONS:**  
 DISPLAY: 8 RED LED DIGITS, .4" CHARACTER HEIGHT  
 GATE TIMES: 1 SECOND AND 1/10 SECOND  
 PRESCALER WILL FIT INSIDE COUNTER CABINET  
 RESOLUTION: 1 HZ AT 1 SECOND, 10 HZ AT 1/10 SECOND  
 FREQUENCY RANGE: 10 HZ TO 60 MHZ, (85 MHZ TYPICAL)  
 SENSITIVITY: 10 MV RMS TO 50 MHZ, 20 MV RMS TO 60 MHZ TYP.  
 INPUT IMPEDANCE: 1 MEGOHM AND 20 P  
 [DIODE PROTECTED INPUT FOR OVER VOLTAGE PROTECTION]  
 ACCURACY: ± 1 PPM (± .000%) AFTER CALIBRATION TYPICAL  
 STABILITY: WITHIN 1 PPM PER HOUR AFTER WARM UP (.001% XTAL)  
 IC PACKAGE COUNT: 8 (ALL SOCKETED)  
 INTERNAL POWER SUPPLY: 5 V DC REGULATED  
 INPUT POWER REQUIRED: 8-12 VDC OR 115 VAC AT 50/60 HZ  
 POWER CONSUMPTION: 4 WATTS

KIT #FC-50C IS COMPLETE WITH PREDRILLED CHASSIS ALL HARDWARE AND STEP-BY-STEP INSTRUCTIONS. WIRED & TESTED UNITS ARE CALIBRATED AND GUARANTEED.

KIT #FC-50C ..... 60 MHZ COUNTER WITH CABINET & P.S. **\$119<sup>95</sup> COMPLETE!**  
 KIT #PSL-650 ..... 650 MHZ PRESCALER [NOT SHOWN] ..... 29.95  
 MODEL #FC-50WT ..... 60 MHZ COUNTER WIRED, TESTED & CAL. .... 165.95  
 MODEL #FC-50/600 WT ..... 600 MHZ COUNTER WIRED, TESTED & CAL. .... 199.95

## AUTO BURGLAR ALARM KIT

AN EASY TO ASSEMBLE AND EASY TO INSTALL ALARM PROVIDING MANY FEATURES NOT NORMALLY FOUND. KEYLESS ALARM HAS PROVISION FOR PDS & GROUNDING SWITCHES OR SENSORS WILL PULSE HORN RELAY AT 1/2 RATE OR DRIVE SIREN. KIT PROVIDES PROGRAMMABLE TIME DELAYS FOR EXIT ENTRY & ALARM PERIOD. UNIT MOUNTS UNDER DASH - REMOTE SWITCH CAN BE MOUNTED WHERE DESIRED. CMOS RELIABILITY RESISTS FALSE ALARMS & PROVIDES FOR ULTRA DEPENDABLE ALARM. DO NOT BE FOOLED BY LOW PRICES! THIS IS A TOP QUALITY COMPLETE KIT WITH ALL PARTS INCLUDING DETAILED DRAWINGS AND INSTRUCTIONS OR AVAILABLE WIRED AND TESTED.



KIT #ALR-1  
\$9.95  
#ALR-1WT  
WIRED & TESTED  
\$19.95

## 60 HZ.

XTAL TIME BASE

Will enable  
Digital Clock Kits  
or Clock-Calendar  
Kits to operate  
from 12V DC.

Power Req: 5-15V  
(2.5 MA. TYP.)  
Easy 3 wire hookup  
Accuracy: ± 2PPM  
#TB-1 (Adjustable)

Complete Kit **\$4<sup>95</sup>** Wire & Cal **\$9.95**

## SEE THE WORKS Clock Kit

Clear Plexiglas Stand

- 6 Big 4" digits
- 12 or 24 hr. time
- 3 set switches
- Plug transformer
- all parts included

Plexiglas is  
Pre-cut & drilled  
Kit #850-4CP

Size: 6" H, 4 1/2" W, 3" D



KIT  
\$23<sup>50</sup> ea.  
Assembled  
\$29<sup>95</sup>

## PLEXIGLAS CABINETS

Great for Clocks or any LED Digital project. Clear-Red Chassis serves as Bezel to increase contrast of digital displays.

CABINET I  
3" H, 6 1/2" W, 5 1/2" D Black, White or Clear Cover  
CABINET II  
2 1/2" H, 5" W, 4" D \$6.50 ea.

REQ. OR GREY PLEXIGLAS FOR DIGITAL BEZELS  
3" x 6" x 1/8" 95¢ ea. 4/3

## MOBILE LED CLOCK

12/24 HR. 4" DIGITS!

MODEL 12 VOLT AC or #2001 DC POWERED

- 4 JUMBO 4" RED LED'S BEHIND RED FILTER LENS WITH CHROME RIM
- SET TIME FROM FRONT VIA HIDDEN SWITCHES • 12/24-HR. TIME FORMAT
- STYLISH CHARGOAL GRAY CASE OF MOLDED HIGH TEMP. PLASTIC
- BRIDGE POWER INPUT CIRCUITRY - TWO WIRE NO POLARITY HOOK-UP
- OPTIONAL CONNECTION TO BLANK DISPLAY (Use When Key Off in Car, Etc.)
- TOP QUALITY PC BOARDS & COMPONENTS - INSTRUCTIONS.
- MOUNTING BRACKET INCLUDED

KIT #2001 COMPLETE KIT **\$27<sup>95</sup>** OR **\$25<sup>95</sup>** 115 VAC **\$25<sup>95</sup>**  
EA. MORE OB. FAC-1 OR EA. EA.

ASSEMBLED UNITS WIRED & TESTED ORDER #2001 WT (LESS BV. BATTERY) **\$37<sup>95</sup>** OR **\$35<sup>95</sup>**  
Wired for 12V DC. Or, if not otherwise specified.

## VARIABLE REGULATED 1 AMP POWER SUPPLY KIT

- VARIABLE FROM 4 to 14V
- SHORT CIRCUIT PROOF
- 723 IC REGULATOR
- 2N3055 PASS TRANSISTOR
- CURRENT LIMITING AT 1 Amp
- KIT IS COMPLETE INCLUDING DRILLED & SOLDER PLATED FIBERGLASS PC BOARD AND ALL PARTS (Less TRANSFORMER) KIT #PS-01 \$8.95
- TRANSFORMER 24V CT will provide 300MA at 12V and 1 Amp at 5V. \$3.50

## Fairchild Super Digit FND-359

4" Char. Ht. 7 segment LED RED Com. Cath. Direct pin replacement for popular FND-70.

95¢ ea, 10/\$8.50

SET OF 6 FND-359 WITH MULTIPLEX PC BOARD \$6.95

## OPTOELECTRONICS, INC.

5821 N.E. 14TH AVE.  
FORT LAUDERDALE, FLA. 33334  
PHONE (305) 771-2050 / 771-2051

ORDERS TO USA & CANADA ADD 5% FOR SHIPPING, HANDLING & INSURANCE. ALL OTHERS ADD 10%. ADDITIONAL \$1.00 CHARGE FOR ORDERS UNDER \$15.00 - COD FEE \$1.00. FLA. RES. ADD 4% TAX.

CIRCLE NO. 36 ON FREE INFORMATION CARD

## 120-Minute Portable Microcassette

The Olympus Pearlcor SD2 is a two-speed (15/16 and 15/32 ips), capstan drive, modular, pocket-size cassette system providing 120-minute recording/playback capability with a Microcassette. Side-mounted controls include record, stop, pause, and four-way cue, review, rewind, and fast-forward. Features include automatic off, cassette eject, built-in electronic condenser microphone, and LED



battery-strength indicator. It comes with a Voice Actuator Module allowing VOX control of recording with three sensitivity positions. Optional plug-in modules offer reception of AM and FM broadcasts, as well as direct air-to-tape recording capability. Accessories include tie-clip mike, external speaker with built-in amp, and various adapters. Weight is only 12 oz. \$275.95.


CIRCLE NO. 100 ON FREE INFORMATION CARD

# Regency introduces the first low-price, no-crystal scanner

---

Our new Touch K100 will give you 10 channels to cover 15,757 frequencies: all without crystals. It's the first scanner to offer synthesized versatility at a low, low price.

---

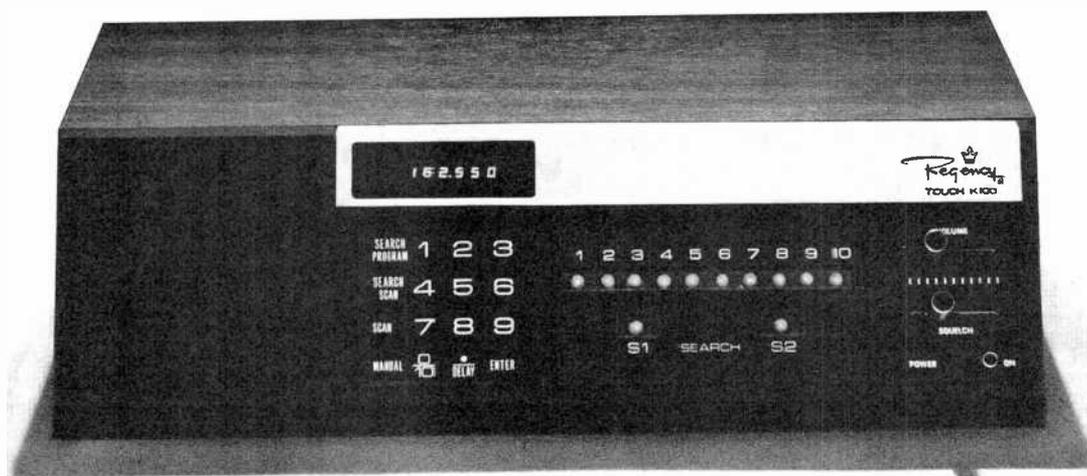

Regency has really done it this time. A genuine touch entry crystalless scanner at an affordable price. Now that's what we call exciting.

Even more than exciting, it's almost a challenge. Because from now on, there's really no reason for you not to enjoy the ease, convenience and remarkable capability of crystalless scanning.

One word of caution. Don't get the idea that our low price unit is short on features.

Not on your life. Like we said, it has 10 channels to cover 15,757 frequencies on 5 bands. And it can search for active calls through a whole band at a time. We've even included extras like programmable scan delay and direct entry from search to scan.

In fact, this radio has some distinct advantages over other units. For instance, the digital display lights up whenever *anything* happens. That even includes telling you when a programming error is made.

No cause for embarrassment though, because the programming on the Touch K100 is a whole lot easier to do. Which makes the radio much more fun to use.

Now, the way we see it, we've left you with precious few excuses not to move up to crystalless scanning. So stop in to see your Regency retailer. And find out just how much fun you can have saving money on a lot of crystals . . . and one radio . . . The Touch K100.

Regency Electronics, Inc. • 7707 Records St. Indianapolis, IN 46226  
CIRCLE NO 42 ON FREE INFORMATION CARD

Hobbyists! Engineers! Technicians! Students!

Write and run machine language programs at home, display video graphics on your TV set and design microprocessor circuits—the very first night—even if you've never used a computer before!

# ELF II featuring RCA COSMAC microprocessor/mini- computer

**\$99<sup>95</sup>**

Get "hands on" experience with a computer for just \$99.95. Then, once you've mastered computer fundamentals, expand ELF II with low cost add-ons and you've got an advanced personal computer powerful enough to solve business, industrial or scientific problems.

### Learning Breakthrough! A Short Course On Microprocessor And Computer Programming

Written for anyone! Minimal background needed!

Using advanced computers is now as easy as driving a car with an automatic transmission. We will teach you, step by step, instruction by instruction, how to use an RCA COSMAC computer.

Not only does our short course explain computers, it helps anyone write and run programs and solve complex problems requiring a computer. Knowing how a computer works can help you.

(1) Spot situations where a computer can assist you in business, industry, personal applications, etc. (2) Select the most economical computer (or microprocessor) and related hardware for your specific needs. (3) Write and run the programs you need, and (4) Keep your computer costs down. This course was written for ELF II users but it's a blockbuster for every RCA COSMAC user or owner!

Stop reading about computers and get your hands on one. ELF II is an outstanding trainer for anyone who needs to use a computer to maximize his or her personal effectiveness. But ELF II isn't just a trainer. Expanded, it becomes the heart of a powerful computer system.

For \$99.95 You Get All This—

No other small personal computer offers video output and ELF II's expansion capabilities for anywhere near \$99.95. ELF II can create graphics on your TV screen and play electronic games! It pays for itself over and over again in the fun it provides for your whole family. Engineers and hobbyists can use ELF II in microprocessor-based circuits as a counter, alarm, lock, thermostat, timer, telephone dialer, etc. The possibilities are endless!

The ELF II Explodes Into A Giant!

Once you've mastered computer fundamentals, ELF II can give you POWER! Plug in the GIANT BOARD™ and you can record and play back your programs, edit and debug programs, communicate with remote devices and make things happen in the real world. Add Kluge Board to solve specific problems such as operating a more complex alarm system or controlling a printing press. 4k memory units let you write longer programs and solve even more sophisticated business, industrial, scientific and personal finance problems.

Add ELF II Tiny BASIC And Keyboard!

To make ELF II easier to use, we've developed ELF II Tiny Basic. It lets you program ELF II with simple words you can type out on a keyboard such as PRINT, RUN and LOAD. ELF II responds by displaying answers on your printer, video monitor or TV screen.

Write And Run Programs The Very First Night!

The ELF II kit includes all components and everything you need to write and run your own programs plus the new Pixie Graphics chip that lets you display any 256 byte segment of memory on a video monitor or TV screen. No wonder ELF II is now being used as a trainer in many high schools and universities.

Easy instructions get you started right away, even if you've never used a computer before. The newly expanded ELF II Manual covers assembly, testing, programming, video graphics and games.

ELF II can be assembled in a single evening and you'll still have time to run programs including games, video graphics, etc. before going to bed!

### SEND TODAY!

NETRONICS R&D LTD., Dept. P.E 8 (203) 354-9375  
333 Litchfield Road, New Milford, CT 06776

YES! I want to run programs at home and have enclosed:  \$99.95 plus \$3 p&h for RCA COSMAC ELF II kit.  \$4.95 for power supply, required for ELF II kit  \$5.00 for RCA 1802 User's Manual

\$4.95 for Short Course on Microprocessor & Computer Programming.  
 ELF II connects to the video input of your TV set. If you prefer to connect ELF II to your antenna terminals instead, enclose \$8.95 for RF Modulator.

\$39.95 plus \$2 p&h for ELF GIANT BOARD™ kit.  
— 4k Static RAM kit, \$89.95 ea. plus \$3 p&h.

\$17.00 plus \$1 p&h for Prototype (Kluge) Board.  
 \$34.95 plus \$2 p&h for Expansion Power Supply kit.

— Gold plated 86-pin connectors at \$5.70 ea.  
 \$64.95 plus \$2 p&h for ASCII Keyboard kit.

\$14.95 for ELF II Tiny BASIC cassette.  
 I want my ELF II wired and tested with the power transformer, RCA 1802

User's Manual and Short Course on Microprocessor & Computer Programming for \$149.95 plus \$3 p&h.

Total enclosed (Conn. res. add tax) \$ \_\_\_\_\_  Check here if you are enclosing Money Order or Cashier's Check to expedite shipment.

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY \_\_\_\_\_

STATE \_\_\_\_\_ ZIP \_\_\_\_\_

Dealer Inquiries Invited!

ELF II by NETRONICS as featured in POPULAR ELECTRONICS shown with optional 4k Memory Boards, GIANT BOARD™, Kluge Board and ASCII Keyboard

### SPECIFICATIONS

ELF II features an RCA COSMAC COS/MOS 8-bit microprocessor addressable to 64k bytes with DMA, interrupt, 16 registers, ALU, 256 byte RAM, full hex keyboard, two digit hex output display, 5 slot plug-in expansion bus (less connectors), stable crystal clock for timing purposes and a double-sided, plated-through PC board plus RCA 1861 video IC to display any segment of memory on a video monitor or TV screen.

### EXPANSION OPTIONS


- ELF II GIANT BOARD™ with cassette I/O, RS 232-C/TTY I/O, 8-bit P I/O, decoders for 14 separate I/O instructions and a system monitor/editor. Turns ELF II into the heart of a full-size system with massive computing power! \$39.95 kit.
- 4k Static RAM. Addressable to any 4k page to 64k. Uses low power 2102's. Chip select circuit allows original 256 bytes to be used. Fully buffered Onboard 5 volt regulator. \$89.95 kit.
- Prototype (Kluge) Board accepts up to 36 I.C.'s including 40, 24, 22, 18, 16, 14 pin. Space available for onboard regulator. \$17.00.
- Gold plated 86-pin connector. \$5.70.
- ELF II Full ASCII Keyboard. Upper and lower case \$64.95 kit.
- 5 amp Expansion Power Supply. Powers the entire ELF II (Not required unless adding 4k RAM boards.) \$34.95 kit.

All of the above PC boards plug directly into ELF II's expansion bus.

### ELF II TINY BASIC

Communicate with ELF II in BASIC! ELF II Tiny BASIC is compatible with either ASCII keyboard and TV screen or standard teletype/video terminal utilizing RS 232-C or 20 mil TTY interface. Commands include SAVE and LOAD for storing programs on standard cassettes, a plot command to display graphic information and special commands for controlling ELF II I/O devices. 16-bit integer arithmetic, +, -, (\*), (/), 26 variables A-Z. Other commands include LET, IF/THEN, INPUT, PRINT, GOTO, GO SUB, RETURN, END, REM, CLEAR, LIST, RUN, PLOT, PEEK, POKE. Comes with maintenance documentation and excellent user's manual that allows even beginners to use ELF II for sophisticated applications (4k memory required.) \$14.95 on cassette tape.

Coming Soon . . . D-A, A-D Converter • Controller Board • Cabinet • Light Pen (Lets you write or draw anything on a TV screen. Imagine having a "magic wand" that writes like a crayon!)



## New Literature

### ROYCE CB GUIDE

The "1978 Royce CB Buyer's Guide" covers the company's complete line of CB transceivers, antennas, and accessories. A highlight of the guide is a glossary section describing over 50 CB features such as large-scale integrated circuitry, phase-locked loops, channel 9 scan and TV interference suppression. Address: Royce Electronics, 1746 Levee Rd., North Kansas City, MO 64116.

### NATCAM CATALOG

A new, 64-page catalog of tools, technical supplies and test instruments is now available from National Camera. With 13 categories of items, the catalog is useful to engineers, hobbyists, photographic and electronic specialists, do-it-yourselfers, and repair technicians. Address: National Camera, 2000 W. Union Ave., Dept. QRR, Englewood, CO 80110.

### GE 2-WAY RADIO FM SERVICE HANDBOOK

The "Test and Troubleshooting Handbook," for 2-way radio FM service technicians is available from General Electric for \$2.50. Applicable to mobile, base station, and personal/portable equipment, the 30-page publication stresses systematic approaches on how to run and interpret standard tests, and compare results with characteristics in the published specifications of equipment serviced. Address: General Electric Mobile Radio Dept., Box 4197, Lynchburg, VA 24502.

### ARGOS PACKAGED SOUND SYSTEMS BROCHURE


Argos Sound has released a four-page brochure on its line of packaged sound systems. Included are the Sound Pak II, a system for large groups; the Voice Director II, an outdoor cordless system; the Speech Director II, a compact lectern sound system; and the Executive, a sound system said to be as portable as a briefcase. Optional accessories are included in the brochure. Address: Argos Sound, 600 S. Sycamore St., Genoa, IL 60135.

### E-Z HOOK ELECTRONIC TEST ACCESSORY CATALOG

Now available from E-Z Hook is a 92-page guide describing its line of test hooks, probes, connectors, jumpers, test lead and coaxial cable assemblies, adaptors, breadboarding and harness board components. Address: E-Z Hook, Box 450, Arcadia, CA 91006.

"I'm very impressed with the way Radio Shack has translated latest technology into good looks and precision record playing in the 400."

Peter Nero  
Composer/  
Pianist




# "Direct" to you from Radio Shack



## Realistic® Direct-Drive Automatic . . . Finest Turntable We've Ever Offered

Two motors, damped cue/pause, S-shape tonearm, speed controls, \$39.95-value Realistic/Shure cartridge

The LAB-400 makes studio performance both affordable and convenient. Its massive die-cast platter rests directly atop a 16-pole brushless DC servomotor. The platter and motor rotate at the same speed, either 33 $\frac{1}{3}$  or 45 RPM — no idler wheels, reduction gears or belts to alter the music that's stored in your record's grooves. The result: wow and flutter is less than 0.03% WRMS and rumble is better than -63 dB (DIN B). The fully automatic tonearm has an effective length of 8 $\frac{1}{16}$ ", for flawless tracking down to  $\frac{1}{2}$  gram. Handsome walnut vinyl veneer base with ultra-modern, slim design. Elliptical-stylus magnetic cartridge and detachable hinged dust cover — significant "extras" that aren't extra. All for \$199.95.\*



### FREE! New '79 Catalog

Come in for your copy and see what's *really* new in electronics. Bigger than ever! 176 pages, over 100 in full color. 2000 exclusive items.


\* Price may vary at Individual stores and dealers.

### Fully Automatic Tonearm Operation

You need never touch the tonearm — just select record size and push start switch. An independent motor does the rest, cueing the arm, gently lowering it onto the record, and removing it at disc's end. With repeat mode, cue/pause, anti-skate and tracking force controls.



Two speeds with controls for  $\pm 4\%$  pitch adjustment.



Neon light with strobe disc for checking speed.



Low-profile styling with precision shock-mounts to stop acoustic feedback.

# Radio Shack®

A DIVISION OF TANDY CORPORATION • FORT WORTH, TEXAS 76102  
OVER 7000 LOCATIONS IN NINE COUNTRIES

# Learn digital computer

**NRI trains you on a real digital computer you actually assemble as you learn.**

Learn computer design, construction, maintenance and programming techniques on your own programmable digital computer.

Qualified technicians are urgently needed for careers in the exciting new field of digital and computer electronics . . . and the best way to learn digital logic and operations is now available to you in NRI's Complete Computer Electronics Course.

This exclusive course trains you at home on your own digital computer! This is no beginner's "logic trainer", but a complete programmable digital computer that contains a memory and is fully automatic. You build it yourself and use it to define and flow-chart a program, code your program, store your program and data in the memory bank. Press the start button and the computer solves your problem and

displays the result instantly.

The NRI digital computer is one of 10 kits you receive in the NRI Complete Computer Electronics Course. You build and use your own TVOM, and experiment with NRI's exclusive Electronics Lab. You perform hundreds of experiments, building hundreds of circuits, learning organization, operation, trouble-shooting and programming.

## **New NRI Memory Expansion Kit**

The Model 832 NRI Digital Computer now comes with a new Memory Expansion Kit. Installed and checked out in 45 minutes, it doubles the size of the computer's memory, significantly increasing the scope and depth of your knowledge of digital computers and programming. With the large-scale IC's you get the only home training in machine language programming . . . experience essential to trouble-shooting digital computers.



# electronics at home.

## NRI offers you five TV/Audio Servicing Courses

NRI can train you at home to service Color TV equipment and audio systems. You can choose from 5 courses, starting with a 48-lesson basic course, up to a Master Color TV/Audio Course, complete with designed-for-learning 25" diagonal solid state color TV and a 4-speaker SQ™ Quadraphonic Audio System. NRI gives you both TV and Audio servicing for hundreds of dollars less than the two courses as offered by another home study school.

All courses are available with low down payment and convenient monthly payments. All courses

provide professional tools and "Power-On" equipment along with NRI kits engineered for training. With the Master Course, for instance, you build your own 5" wide-band triggered sweep solid state oscilloscope, digital color TV pattern generator, CMOS digital frequency counter, and NRI electronics Discovery Lab.



™Trademark of CBS Inc

## NRI's Complete Communications Course includes your own 400-channel VHF transceiver

NRI's Complete Communications Course will train you at home for one of the thousands of service and maintenance jobs opening in CB; AM and FM transmission and reception; TV broadcasting; microwave, teletype, radar, mobile, aircraft, and marine electronics. The complete program includes 48 lessons, 9 special reference texts, and 10 training kits. Included are: your own "designed-for-learning" 400-channel VHF transceiver; electronics Discovery Lab™; CMOS digital frequency counter; and more. You also get your all



important FCC Radio-telephone License, or you get your money back.



## CB Specialist Course also available



NRI also offers a 37-lesson course in CB Servicing with your own CB Transceiver, AC power supply, and multimeter. Also included are 8 reference texts and 14 coaching units to make it easy to get your Commercial Radiotelephone FCC License.

### You pay less for NRI training and you get more for your money.

NRI employs no salesmen, pays no commissions. We pass the savings on to you in reduced tuitions and extras in the way of professional equipment, testing instruments, etc. You can pay more, but you can't get better training.

### More than one million students have enrolled with NRI in 62 years.

Mail the insert card and discover for yourself why NRI is the recognized leader in home training. Do it today and get started on that new career. No salesman will call.

If card is missing write:

**NRI** NRI SCHOOLS  
McGraw-Hill Continuing  
Education Center  
3939 Wisconsin Avenue  
Washington, D.C. 20016

to confirm or deny these reports because the equipment necessary to attempt a high-fidelity pick-up of TV audio has not been readily available.

Now Pioneer has stepped in with the TVX-9500 (Fig. 1), an attractive TV tuner that would seem to meet all the requirements for high-fidelity reception. According to Pioneer, the motivation for introducing this product was AT&T's recent increase of the bandwidth of audio long lines and microwave links from a dismal figure of about 5000 Hz to an FM-radio-quality of 15,000 Hz. And the motivation of AT&T's generous bandwidth extension was the need for relay facilities that could handle the requirements of the high-speed data transmission that computers thrive on.

**The Audiophile's Light Show.** It's not exactly an established fact that what the music listener desperately needs is a visual level indicator. But if he *does* truly need one, the alternatives are constantly getting better and cheaper.


Some years ago peak-reading level indicators, often employing illuminated displays of one sort or another, began appearing on professional recording consoles. Almost at once some of the more astute recordists began hailing them as an important assist to the recording arts. The professional standby, the venerable VU meter, was as useful as ever in communications work. However, it exhibited too many weaknesses for high-dynamic-range music recording, where its leisurely attack time (0.3 second to indicate full value) could not keep up with the abrupt transients of close-miked music; recordings were thus suffering.

Simultaneously the audiophile was getting his fair share of peak-level indicators, usually in the form of one or two LED's on the front panels of tape recorders that winked at the approximate point of tape overload. Very recently we've had entire metering systems made of such LED's on a few audiophile products (not to overlook some of the



Fig. 2. Nakamichi T-100 Audio Analyzer has plasma readout.

Fig. 3. Diagram of cathode-switching scheme for the Nakamichi T-100.

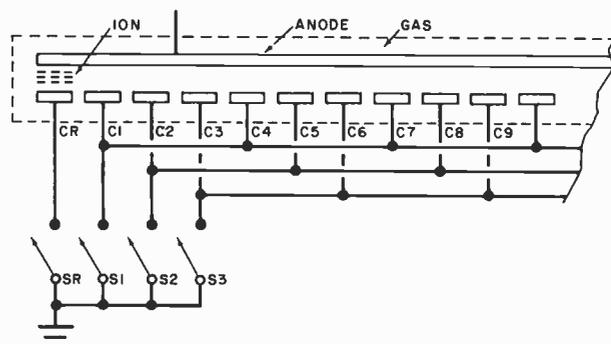

conventional meters driven by peak-indicating electronics, or Sony's unique light-beam galvanometer with similar electronic assistance). Such LED displays are complex to wire, however, each having its own separate leads to be contended with; and, of course, the associated circuitry must provide an individual electronic switch for each. Consequently, metering systems involving more than eight to ten LED's per channel are rare.

Now equipment manufacturers—several of them at this time—think they have some answers: the “fluorescent” and “plasma” indication systems. These innovations have recently turned up on Pioneer, Sony and Technics cassette decks, a JVC level indicator (not quite available as this is being written), and a Nakamichi “Audio Analyzer” (Fig. 2). The last is an interesting little item also containing the facilities for making total-harmonic-distortion and speed/wow-and-flutter measurements.

The plasma indicator renders an inert gas incandescent by means of an electrical discharge through it. Construction evidently involves a gas-filled glass tube with electrodes spaced along its length. In the displays seen so far, the user beholds little vertical bars of light working their way up and down a calibrated horizontal scale, often of considerable length. The JVC indicator (Model DS-7070), for example, can show up to thirty such bars for each channel, which provides good resolution over a fairly extensive dynamic range.

The operation of the Nakamichi device, Model T-100, gives an indication of the attractive economies that can be realized with the “plasma” technique. In this manufacturer's scheme, at least, it seems that *adjacent* electrodes must be charged in order to achieve any incandescence. Alternately spaced electrodes can remain on all day without producing anything visible. By wiring up appropriately alternating electrodes to

three basic control busses (Fig. 3), it is possible to simplify the switching required of the associated control IC's considerably. This is because the only condition of interest is when two adjacent electrodes receive power. Alternately spaced electrodes can receive power with no consequences.

Other advantages claimed for the plasma system include virtually instantaneous response of the indicators (0.02 millisecond is specified for the JVC unit), no parallax, and a wide variety of indicator shapes possible merely by changing the shape of the electrode. Furthermore, the number of electrodes can be increased without incurring ruinous costs. Naturally, the drive circuitry can incorporate any of the features available with other metering systems. These include a choice of peak, VU, or “average” level indication, “peak hold” (by which the highest level achieved by the monitored signal is stored for later reference), and the choice of various weighting systems. For a recent evaluation of direct-to-disc recordings in which I was a participant, the JVC DS-7070 was used extensively to determine relative dynamic ranges. There were great sighs of relief from all concerned because of the ease and repeatability of the measurements.






As for the fluorescent system, the concept is similar, but in this case the tube is evacuated. Internally there are a cathode, grid, and anode, plus phosphors on the interior wall that glow when bombarded with electrons—a rather familiar concept. I've not yet seen any specific claims made for the speed of this system, but it is probably adequate to its task.

All in all, a clear potential seems to be here for the best metering system to date, and without great agonies imposed on the pocketbook. To my knowledge this innovation is *not* yet to be found on the consoles and tape machines used by professionals. It may be interesting to see how they react. ◇


# SOLID STATE COMPONENTS CHART

AUGUST 1978

Illustrated are typical case configurations and schematic symbols for various solid-state components. Those at right are for diodes and rectifiers; directly below, for transistors and solid-state control devices; and below right, for integrated circuits and seven-segment, light-emitting diode displays.

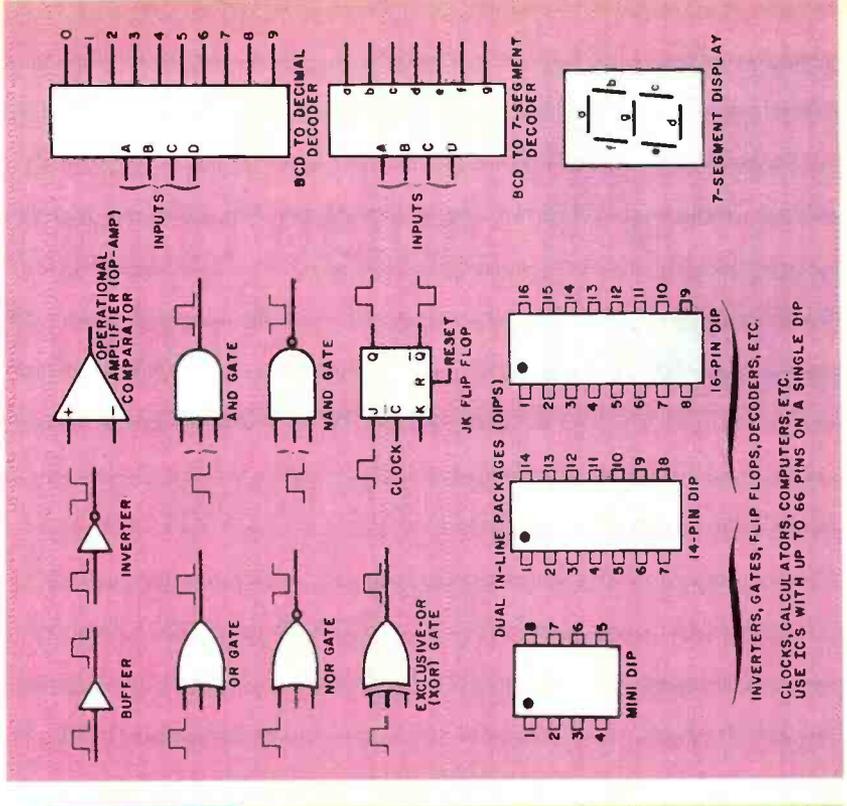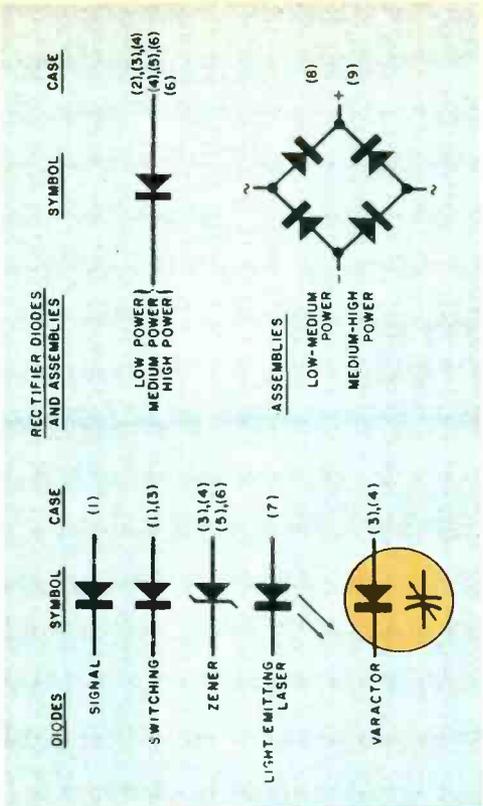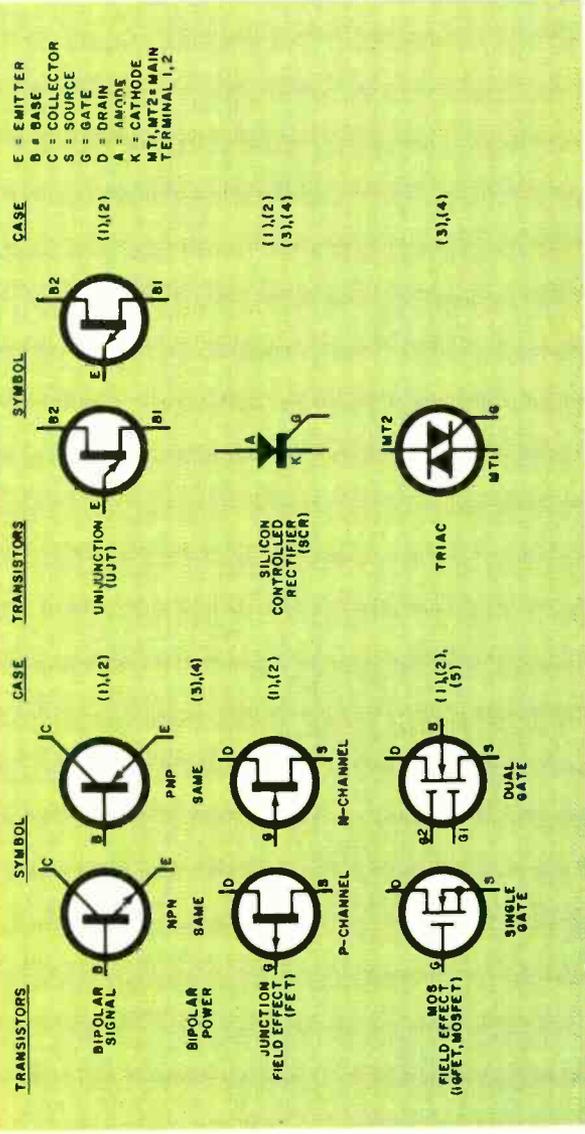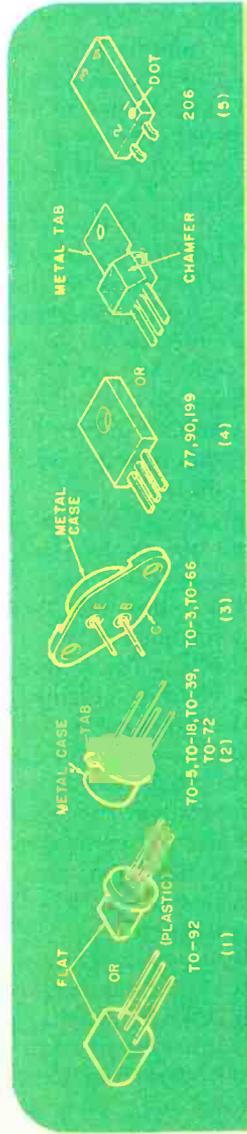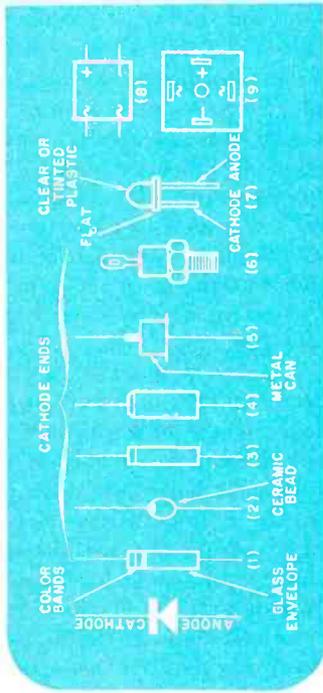

INVERTERS, GATES, FLIP FLOPS, DECODERS, ETC. CLOCKS, CALCULATORS, COMPUTERS, ETC. USE IC'S WITH UP TO 66 PINS ON A SINGLE DIP

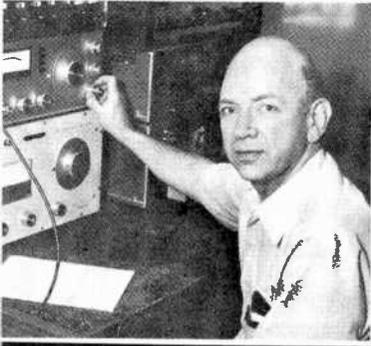

# Julian Hirsch

## Audio Report

### Cassette Recorder Tape Compatibility

As regular readers of our product test reports know, there is a potentially serious compatibility problem between a cassette recorder and the tape used in it (the same problem exists with open-reel recorders, but is very much less critical). This is why it is so important that the recorder manufacturer specify the tapes for which his machine has been adjusted, and why—in the absence of such information—we have to measure the record/playback frequency response with a considerable number of tapes to discover which are most suitable for that machine, and which, if any, should not be used with it.

A few cassette recorders, such as the Kenwood KX-1030 tested this month, have a convenient front-panel adjustment of recording bias. This is intended to match the tape's requirements more precisely than is possible with a simple two or three position BIAS switch (although that switch is still required). A somewhat similar feature is found on the Aiwa AD-6800 recorder, and no doubt will appear on others.

We have seen a few cassette decks whose bias adjustments, though not on the front panel, were at least accessible for screwdriver adjustment from the outside of the machine. Since such an adjustment requires external test equipment, it is of little value to the average consumer. The most practical way for a user to adjust the bias of a recorder is to monitor the playback from the tape as it is being recorded—in other words, a three-head recorder is imperative! The Kenwood KX-1030 has that feature, while the Aiwa AD-6800 has a third head dedicated solely to that purpose (in normal use, it is a conventional two-head machine).

In both units, the adjustment technique consists of recording two equal-amplitude audio tones at middle and high frequencies. The Kenwood records each tone on both channels at the same time, alternating them in bursts of about one-second duration, while the Aiwa records them continuously

and simultaneously with one tone on each channel. The adjustment is based on a small change of bias, about a nominally correct value, having little effect on output at low and middle frequencies (400 Hz is used in both machines), but with considerable effect on playback response at high frequencies. In the Aiwa, the upper frequency is 8000 Hz, and in the Kenwood it is 10,000 Hz. When the adjustment is made on the Aiwa recorder, the playback signals are displayed on its level meters, and the bias is varied until both meters read the same. The adjustment is common to both channels. Kenwood provides separate adjustments for each channel, and the two output signals are displayed alternately on the meters so that the bias can be set for minimum pointer movement as the tones are automatically switched.

A different approach to the compatibility problem is taken by JVC. They hold that, because of the effect of bias changes on the output level and distortion, this is not a desirable method of optimizing a two-head recorder (although they concede that it has some merit with a three-head machine). The changes in output level can affect the performance of the machine's noise-reducing circuits (Dolby or ANRS), for example. JVC maintains that the best way to match a machine to a tape is through an adjustment of the high-frequency recording equalization (EQ), and that this is the only satisfactory method to use with a two-head machine. This may be a largely academic consideration, since the other machines we have seen all use a three-head configuration, if only for purposes of adjustment.

Nevertheless, there can be no doubt that *both* recording bias and EQ have a profound effect on the ultimate performance of any tape recorder, and most especially a cassette deck. To see why this is so, we will use as an example the manufacturers' published data for two competitive ferric oxide tapes of good quality. Both have been plotted in

*“ . . . to adjust bias of a recorder . . . a three-head recorder is imperative!”*

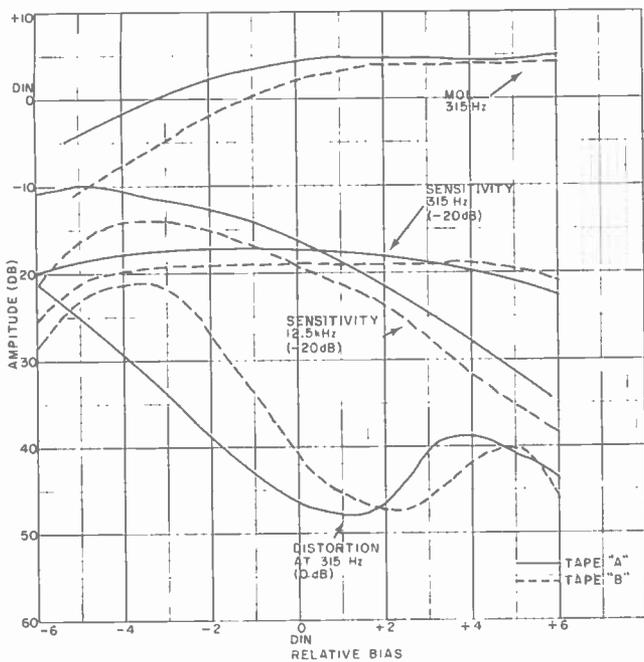


Fig. 1. Tape performance comparison is plotted here for two different tapes (A and B) to demonstrate effect of bias.

sponse (which we will define here as an equal output at 315 Hz and 12.5 kHz). If the machine had been set up for tape "B" at a +2.5-dB bias, the recording equalization boost at 12.5 kHz would have to be about 6 dB for the same "flat" response. Due to head losses, the actual boost would be greater in each case, but that need not concern us here.

Now, if that machine, set up for tape "A", were to be rebiased for "flat" response with tape "B", without changing the recording EQ, the bias would have to be reduced to about +0.5 dB. At this point, the 1.5-dB recording EQ would give the desired frequency response. If, on the other hand, the machine originally adjusted for tape "B" were to be re-biased for tape "A", the bias would now be +3 dB (so that the 6 dB of high-frequency recording EQ would give a "flat" response). As a result, the distortion would be increased by 6 dB!

Evidently, one cannot truly optimize a cassette recorder by a bias adjustment alone. How about JVC's method of adjusting recording EQ for flattest frequency response at a fixed bias level? In theory, this would appear to be no better than the bias adjustment technique. If it actually works better, this could only be because most tapes within a given performance category are designed to operate with very nearly the same bias. To the extent that this is so, the EQ adjustment should be fine. If it is *not* so, then we still have the possibility—even probability—that a tape will not be operating at its lowest distortion point even though it is delivering its "flat-test" frequency response.

In the case of the JVC method, which has been used on its KD-75 and other cassette decks, one must depend solely on hearing judgment to establish the correct recording equalization. If built-

Fig. 1 on the same coordinates, with the solid lines representing tape "A" and the dashed lines tape "B". The horizontal axis represents relative bias current, in decibels, with the 0-dB level corresponding to the recommended bias for the standard DIN tape that is the basis for tape specifications throughout the world. On the vertical axis, we note the various output conditions for the tapes.

The uppermost curves are the MOL, or *maximum output level*, which is the output corresponding to a playback distortion of 3% at a frequency of 315 Hz. As the curves show, when these tapes are biased to DIN level or slightly higher, they have achieved their maximum output level at low and middle frequencies, with tape "A" having perhaps one or two decibels more output than tape "B". One might think that any bias above, say, +2 dB, would result in optimum performance from either tape; but look at the distortion curves at the bottom of the graph! Both tapes achieve a minimum distortion of -48 dB (0.4%), though at different bias currents. Tape "B" requires about 1.5 dB more bias than tape "A" for its minimum distortion conditions. When so biased, its 315-Hz output is also at maximum and, perhaps, 1 dB less than the output from tape "A".

Based on this partial information, we might conclude that tape "B" should be operated at a bias 1.5 dB higher than tape "A". This is probably true, but it

is not the whole story. At about the -20-dB level, look at the sensitivity curves at 315 Hz for both tapes. They show the playback output at that frequency from a -20-dB recording level; it can be seen that this is nearly independent of bias, with tape "A" having about 2 dB more output than tape "B" at bias levels of 0 dB or less, and slightly less output than tape "B" at high bias levels. Intersecting the 315-Hz sensitivity curves are the downward sloping 12.5-kHz sensitivity curves. These show clearly the large effect of bias on the 12.5 kHz playback level from a -20-dB constant recording level. Let us assume that the recorder has been set up with tape "A" at a bias level of +1 dB. With an ideal recording head, it would still be necessary to boost the recording signal at 12.5 kHz by about 1.5 dB to give a "flat" re-

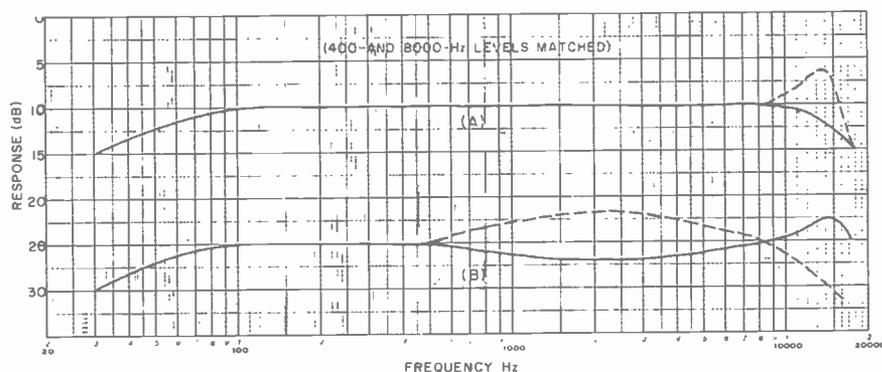


Fig. 2. Possible response variations between two tapes. Close match is obtained in (A), but variation can be as great as shown in (B).

---

# At CIE, you get electronics career training from specialists.

**If you're interested in learning how to fix air conditioners, service cars or install heating systems – talk to some other school. But if you're serious about electronics, come to CIE – The Electronics Specialists.**

---

*John E. Cunningham*

**Special Projects Director  
Cleveland Institute of Electronics**



**M**y father always told me that there were certain advantages to putting all your eggs in one basket. "John," he said, "learn to do one important thing better than anyone else, and you'll always be in demand."

I believe he was right. Today is the age of specialization. And I think that's a very good thing.

Consider doctors. You wouldn't expect your family doctor to perform open heart surgery or your dentist to set a broken bone, either. Would you?

For these things, you'd want a specialist. And you'd trust him. Because you'd know if he weren't any good, he'd be out of business.

### Why trust your education and career future to anything less than a specialist?

You shouldn't. And you certainly don't have to.

**FACT:** CIE is the largest independent home study school in the world that specializes exclusively in electronics.

We have to be good at it because we put all our eggs in one basket: electronics. If we hadn't done a good job, we'd have closed our doors long ago.

### Specialists aren't for everyone.

I'll tell it to you straight. If you think electronics would make a nice hobby, check with other schools.

But if you think you have the cool — and want the training it takes — to make sure that a sound blackout during a prime time TV show will be corrected in seconds — then answer this ad. You'll probably find CIE has a course that's just right for you!

### At CIE, we combine theory and practice. You learn the best of both.

Learning electronics is a lot more than memorizing a laundry list of facts about circuits and transistors. Electronics is interesting because it's based on some fairly recent scientific discoveries. It's built on ideas. So, look for a program that starts with ideas — and builds on them.

That's what happens with CIE's Auto-Programmed® Lessons. Each lesson uses world-famous "programmed learning" methods to teach you important principles. You explore them, master them completely... before you start to apply them!

But beyond theory, some of our courses come fully equipped with the electronics gear to actually let you perform hundreds of checking, testing and analyzing projects.

In fact, depending on the course you take, you'll do most of the basic things professionals do every day — things like servicing a beauty of a Zenith color TV set... or studying a variety of screen display patterns with the help of a color bar generator.

Plus there's a professional quality oscilloscope you build and use to "see" and "read" the characteristic waveform patterns of electronic equipment.

### You work with experienced specialists.

When you send us a completed lesson, you can be sure it will be reviewed and graded by a trained electronics instructor, backed by a team of technical specialists. If you need specialized help, you get it fast... in writing from the faculty specialists best qualified to handle your question.

### People who have known us a long time, think of us as the "FCC License School."

We don't mind. We have a fine record of preparing people to take... and pass... the government-administered FCC License exams. In fact, in continuing surveys nearly 4 out of 5 of our graduates who take

the exams get their Licenses. You may already know that an FCC License is needed for some careers in electronics — and it can be a valuable credential anytime.

### Find out more! Mail this card for your FREE CATALOG today!

If the card is gone, cut out and mail the coupon.

I'll send you a copy of CIE's FREE school catalog, along with a complete package of independent home study information.

For your convenience, I'll try to arrange for a CIE representative to contact you to answer any questions you may have.

Remember, if you are serious about learning electronics... or building upon your present skills, your best bet is to go with the electronics specialists — CIE. Mail the card or coupon today or write CIE (and mention the name and date of this magazine), 1776 East 17th Street, Cleveland, Ohio 44114.



Patterns shown on TV and oscilloscope screens are simulated.

## CIE Cleveland Institute of Electronics, Inc.

1776 East 17th Street, Cleveland, Ohio 44114  
Accredited Member National Home Study Council

**YES...** John, I want to learn from the specialists in electronics — CIE. Send me my FREE CIE school catalog — including details about troubleshooting courses — plus my FREE package of home study information. PE-68

Print Name \_\_\_\_\_

Address \_\_\_\_\_ Apt. \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

Age \_\_\_\_\_ Phone (area code) \_\_\_\_\_

Check box for G.I. Bill information:  Veteran  Active Duty

**Mail today!**

in oscillators and metering were provided, with a third head for playback, this adjustment could be made as it is in the Aiwa and Kenwood machines. However, the JVC deck has two heads. We can say, based on our experience with all three machines, that although the metering systems of the Kenwood and Aiwa machines work very well, it is at least as easy to make the adjustment by listening to the playback of a recording of interstation FM tuner hiss, in an A-B comparison against the incoming signal, as the bias (or EQ) is varied. In the case of the JVC recorder, this requires that the noise be recorded with several settings of the EQ switch, and comparison made on playback.

There is still another pitfall in any of these tape optimization methods. The Kenwood and Aiwa approach is based on obtaining equal response at only

two frequencies, one low and one high. This does not assure that the response will be the same at all intermediate frequencies, or above the high frequency. Figure 2A shows a response curve from a machine which has a slightly drooping high-end response. Also, its 8000-Hz and 400-Hz levels have been matched. The dashed line shows another condition, with exactly the same matching at 400 and 8000 Hz, but with a slight peak at higher frequencies. (Such a peak might result from using a "hotter" tape.) The two would certainly sound very different, of course. The higher the frequency used for the upper end of the adjustment, the less likely this is to happen, but it is equally possible to have the conditions shown in Fig. 2B. No matter how it is done, the fact that two tapes give the same output at two frequencies


does not mean that they will sound alike. This is an advantage of making the adjustment by ear, for the best *subjective* frequency response.

Probably the best approach to solving the compatibility problem (which we have not yet seen on the market) would be to use both bias and EQ adjustments, with several high-frequency signals available, and a third head-plus-meter read-out system. The bias could then be set for a maximum (or other specified) value of output at 400 Hz, and the EQ could be trimmed for equal output at two or three high-test frequencies. This, after all, is what the factory technician does when he sets up the machine in the first place. If the user could do the same, without recourse to external equipment, he could *really* enjoy optimum performance from his recorder, with any tape.

# Audio Test Reports

HIRSCH/HOUCK LABORATORIES

## Kenwood Model KX-1030 Cassette Deck

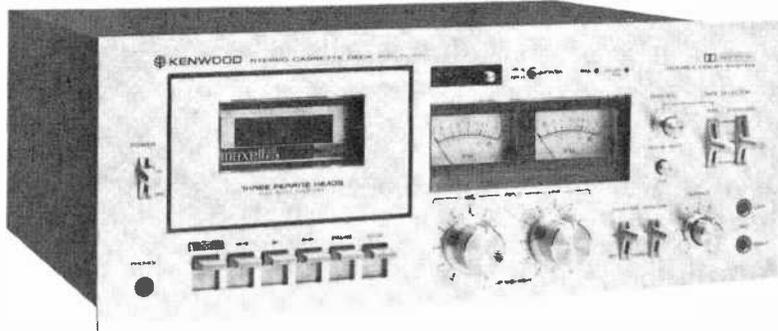

*Deck features a vernier bias adjustment, two test oscillators, and bias and equalization switches which allow a precise match to any tape formula.*



Kenwood's Model KX-1030 is a front loading cassette deck, with a single electronically controlled

dc motor for its capstan and hub drives. It is a three-head machine, on which the program can be monitored directly from the tape as it is being recorded. A vernier bias adjustment on the front panel operates with two built-in test oscillators to allow the recording bias to be optimized for tape formulation.

A genuine off-the-tape monitoring system requires separate Dolby circuits for recording and playback functions so that both can be used simultaneously; the KX-1030 has this "Double Dolby" feature. It also has a "memory rewind"

that stops the tape automatically in rewind when the index counter returns to a previously set "000" reading, and a full mechanical disengagement and "auto-stop" at the end of the tape, in any operating mode. Separate front-panel switching is provided for three basic tape formulations: chrome, ferric, and ferrichrome. The bias and equalization are separately switchable (in addition to the vernier bias adjustment).

The Kenwood deck's control panel has a pale gold finish, with matching metal knobs, to match the appearance of other Kenwood components. The recorder's dimensions are about 17"W x 6½"H x 12¾"D (43 x 16.7 x 32.5 cm), and it weighs 16.5 lb (7.5 kg). The suggested retail price is \$400.

**General Description.** The tape transport is located at the left side of the recorder, and the bottom-hinged cassette door has guide slots into which the cassette is loaded. The door can be removed easily for access to the heads. Most of the cassette is visible through a large window in the door. It has the usual array of mechanical "piano key" operating levers, located in a row below the cassette compartment. Unlike many cassette decks, the KX-1030 cassette door is not opened by pressing the STOP key or any other control. Instead, pressing in the upper portion of the cassette door and releasing it allows the door to spring open (the word PUSH appears at its upper left corner). This is similar to the "touch latch" found on some cabinet


doors, which use no external hardware. In the KX-1030, the door cannot be opened unless the tape is at a stop.

A lever switch to the left of the door turns on the POWER to the recorder; below it is a stereo PHONE jack. Two large meters occupy the center of the panel with a red PEAK LED between them. Above the meters is the index counter and the MEMORY REWIND button, as well as a red RECORD light and a green DOLBY light. The recording level controls are below the meters. They consist of two concentric pairs of large knobs, one for the microphone inputs and the other for the line inputs. Slip-clutch couplings in each pair allow separate adjustment of recording levels in the two channels. To their right are lever switches for DOLBY and tape MONITOR functions (the latter connects the LINE outputs, in the rear of the recorder, to the SOURCE input signal or to the output of the TAPE playback amplifier). There is also a concentric pair of playback OUTPUT level controls and a pair of MIC jacks for medium impedance dynamic microphones.

At the upper right of the panel are the two TAPE SELECTOR switches, providing separate BIAS and EQUALIZATION settings marked CHROME, NORMAL, and RESERVE (for ferrichrome tape). To the left of the BIAS switch are two small concentric knobs that vary recording bias separately for the two channels around the nominal values selected by the BIAS switch. Below them is a pushbutton switch marked osc.

To optimize recording bias for a specific tape, the machine is placed in a recording condition with the output set to maximum. The OSC button is engaged, and the MONITOR switch is set to TAPE. The recorder's internal oscillators record tones of 400 Hz and 10,000 Hz, alternately, in bursts of about one-second duration. The red REC light glows when the 10,000-Hz tone is on, and is off when the 400-Hz tone is being recorded. The meters display, alternately, the playback output from these signals. If bias is set correctly, they will play back at the same amplitude, and the meter readings will not change as the tones are switched. The quality of the tape (presence of dropouts, etc) may cause the higher frequency reading to fluctuate somewhat, but its average level should be the same as the 400-Hz tone. If not, the BIAS vernier knobs are adjusted separately for each channel until the meter reading does not change as the tones are switched. If the 10,000-Hz reading is higher than the 400-Hz reading, the bias

AUGUST 1978

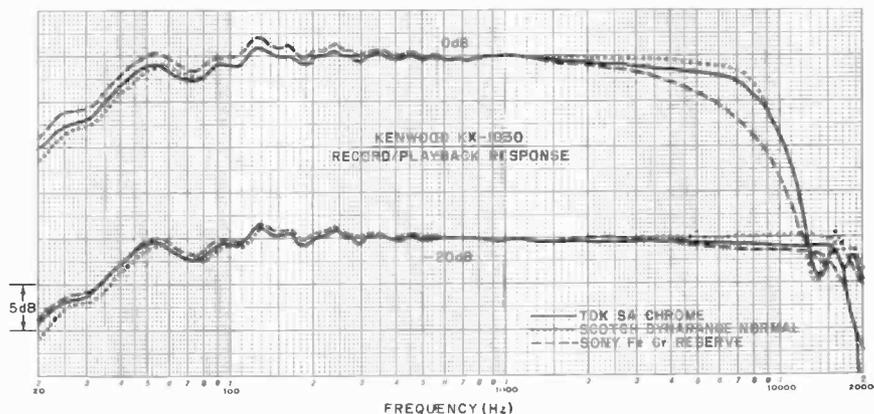

Frequency response at two recording levels using three tape formulations.

control is turned clockwise to increase the bias and reduce the high-frequency response; if it is lower, the knob is turned counter-clockwise to reduce the bias.

The "three head" configuration used in the Kenwood KX-1030 has a com-

bination record/playback head in which two electrically distinct heads, with separate and parallel gaps, are housed in a single case small enough to fit through the access hole in the edge of the cassette housing.

## Product Focus

Two interesting features of the Kenwood KX-1030 contribute greatly to its usefulness as well as its performance, although neither is really exclusive to this machine. A combination record/playback head, with separate gaps in a common housing, has been used in a number of cassette recorders. It is a reasonable and economical alternative to a true three-head construction. The latter requires a miniaturized playback head to fit through an opening in the cassette that was never meant to receive a head, and is further complicated by the need to adjust the record head azimuth to match that of the playback head for every cassette used. This process is simplified by built-in oscillators and indicators in the few recorders using this system, but it is undeniably a more expensive route.

In the combination head, two separate heads are packaged in the same shielding enclosure. Their gaps are spaced as closely as possible to avoid the alignment errors due to tape skewing (a problem with the true three-head machines), although the need to provide a reasonable degree of signal isolation between them sets a limit to this. More important, the two head gaps must be precisely parallel, since any deviation from parallelism will severely limit the high-frequency response of the machine. The combination head, however, does share the most basic and important advantage of a three-head machine (other than its monitoring function), which is the ability to optimize the two gap widths for recording and playback functions. In theory, at least, this should give any properly designed

three-head recorder a wider frequency response, more headroom, and generally superior performance to a recorder with a single gap combination record and playback head.

The second feature of the KX-1030 is its bias adjustment system that makes it possible to match the recorder to any tape, using its built-in test and adjustment facilities. Although both bias and equalization should be adjusted for truly optimum performance, this is difficult and undesirable for a product aimed at a broad and mostly nontechnical market. Fortunately, one can achieve a first approximation of correct operation by a bias adjustment alone, given a suitable setting of the recording equalization response. Kenwood has taken the logical step of supplying two different recording signals, at middle and high frequencies, from built-in test oscillators. On the assumption that the recording equalization is correct, it is reasonable to expect that biasing a tape for equal response at both frequencies will tend to give it the flattest overall frequency response. To aid in doing that, what could be more logical than to use the recorder's own meters (since it can play back while recording) to confirm that this equality exists? Although the merits and limitations of this approach have been argued extensively, the results speak eloquently for themselves in the KX-1030. Unlike some of the purists among us, we would agree with Kenwood (for surely they are well aware of the limitations of their technique) that a partial cure for a problem is better than none at all.

## Performance Specifications

Specification	Rating	Measured
Tape Speed Error	NA	+1.0%
Fast Winding Time (C-60)	80s	72s
Frequency Response (+3 dB)		
Normal	35-15,000 Hz	36-16,500 Hz
CrO <sub>2</sub>	35-18,000 Hz	35-17,000 Hz
FeCr	35-17,000 Hz	35-16,000 Hz
Signal-to-Noise Ratio (Mfr. figures above 5 kHz)		
Normal	55 dB (Dolby off) 65 dB (Dolby on)	61 dB (A-wtd) 67 dB (CCIR-wtd)
CrO <sub>2</sub>	57 dB (Dolby off) 67 dB (Dolby on)	61 dB (A-wtd) 67 dB (CCIR-wtd)
FeCr	NA	60.5 dB (A-wtd) 67 dB (CCIR-wtd)
Harmonic Distortion	Less than 1.3% at 0 VU (Normal) (NA-CrO <sub>2</sub> and FeCr)	0.5% Normal 0.7% CrO <sub>2</sub> 1.1% FeCr
Wow & Flutter	0.06% Wrms	0.07% Wrms ±0.10% Wtd. Peak (DIN)
Input Sensitivity (for 0 VU)	77.5 mV Line 0.19 mV Mic	88 mV 0.19 mV
Output Level (0 VU)	775 mV	760-840 mV (depending on tape)

**Laboratory Measurements.** The specifications of the Kenwood KX-1030 name the specific tape formulations used to establish its ratings. They are TDK SD (NORMAL), TDK SA (CHROME), and Sony Ferrichrome (RESERVE). We used these tapes to verify the machine's ratings except that, TDK SD having been discontinued, was replaced with a somewhat similar ferric tape, Scotch Dynarange.

Because of the ease of adjusting the KX-1030 for any tape, we actually measured the record/playback frequency response with some 15 different tapes. The differences between them were minor and confirmed that the machine can be adjusted to give perfectly satisfactory results with almost any tape sold today.

The playback frequency response (NORMAL, 120- $\mu$ s) was measured with a TDK AC-337 test tape. It was within +1, -2 dB over the 40-to-12,500-Hz range of the tape. The 70- $\mu$ s response, measured with the Teac 116SP tape, was within +1.5, -2 dB over the 40-to-10,000-Hz range of the tape. The record/playback frequency response, at a -20-dB recording level, was virtually identical for TDK SA and Scotch Dynarange tape. The recorder had a rather unusual configuration of low-frequency head contour response ripples, extending up to 400 Hz, but above that fre-

quency, the response was extremely flat, varying by less than 1 dB overall up to 15,000 Hz and beyond. At a 0-dB recording level, the usual high-frequency tape saturation effect caused the response to drop off, so that it intersected the -20-dB curve at about 12,500 Hz.

To our surprise, the Sony Ferrichrome tape's response had a slight downward slope with increasing frequency above 4000 Hz, and its 0-dB response curve showed noticeably greater saturation than the other tapes. Its overall numerical tolerances over the audio range were much the same as the others.

The Dolby-circuit tracking was outstanding. It exhibited less than 1 dB of difference between the frequency response curves made with and without the Dolby system at levels from -20 to -40 dB, up to 14,000 or 15,000 Hz. Crosstalk between channels, measured with a TDK AC-352 tape, was -43 dB at 1000 Hz.

For a 0-dB recording input, the required input was 88 mV (LINE) and 0.19 mV (MIC). The microphone input overloaded at a rather low 15 mV. The resulting maximum playback output was in the range of 0.76 to 0.84 volts, depending on the tape used. Distortion (third harmonic) was from 0.5% to 1.1%. (Dynarange gave the lowest distortion and Ferrichrome the highest.) The head-

room above 0 dB for a 3% playback distortion level was between 5 and 7 dB. Noise levels are given in the table of performance data, and were consistent with the performance of today's better cassette decks. The noise increased by 4.5 dB through the microphone input, at maximum gain.

The meters read about 85% of their steady-state readings when driven with 0.3-second tone bursts (this is somewhat slower than the VU standard, which requires a 99 to 100% reading under these conditions). The PEAK light began to glow at +5 dB, so that it is an effective indicator of the maximum safe recording level with any tape. Headphone volume was quite good, even with 200-ohm phones, which cannot be driven to useful listening levels by the headphone outputs of many recorders.

The tape transport operated about 1% fast (a normal tolerance for a cassette deck). The flutter was 0.07% in a weighted rms measurement, and ±0.1% in a DIN (weighted peak) measurement. The transport moved a C-60 cassette from end to end in 72 seconds.

**User Comment.** The Kenwood KX-1030 offers a combination of features and performance not commonly encountered in its price class. Although the three-head configuration, per se, makes little difference in the actual performance of the machine as compared to one with first-class combination record/playback heads, it does make it possible to optimize the recorder for any tape (within the limits of a bias-only adjustment). Lacking this feature, the user of a cassette recorder *must* use the specific tape for which his machine was set at the factory if he is to obtain the rated performance. This information is simply not available from many manufacturers, and is always subject to change without notice (or to obsolescence as new, improved tapes are developed).

When we recorded interstation FM tuner hiss at a level of about -15 dB and compared the playback to the input we could usually hear a trace of dulling at the highest frequencies. The effect was slight, to be sure, and could only be detected by a critical comparison to the original signal. We then trimmed the BIAS controls to minimize the audible difference, and found that an improvement was usually possible. In fact, this proved to be a more sensitive technique for setting the bias than using the recorder's own meters and test oscillators because we did not have to interpret the meter's fluctuating readings. That fluctuation, in

itself, however, is a clue to one of the major advantages of the Kenwood bias adjustment system. It is an ideal way to evaluate the homogeneity of a tape. All else being equal (or even somewhat unequal in respect to frequency response, etc), a tape with a steadier 10,000-Hz output in this adjustment has fewer dropouts and is likely to make a better-sounding recording than a "flatter" tape with a more irregular output.


Of course, most people who use the KX-1030 will select a suitable tape and

set up the machine for it in the beginning. There will be no need for regular use of the bias adjustment feature, and the recorder can be used just like any ordinary machine (with the "plus" that one will always be able to hear the recording as it is made). In its overall listening quality, the KX-1030 is at least the equal of any other machine we've tested in its price class, as well as some at considerably higher prices. Its modest price for the performance it offers is made possible by the omission of a few refine-

ments, we'd judge. For example, the transport control keys are stiff, requiring appreciable operating pressure. The single-motor transport, though adequate to move the tape smoothly at 1 $\frac{7}{8}$  ips, cannot match the fast speeds provided by some 2- or 3-motor transports. But these shortcomings are more than made up for, we believe, by the useful and novel features of this machine. We especially like the ability to adjust bias optimally according to the tape used.

CIRCLE NO 101 ON FREE INFORMATION CARD

## Realistic Optimus-10 Speaker System

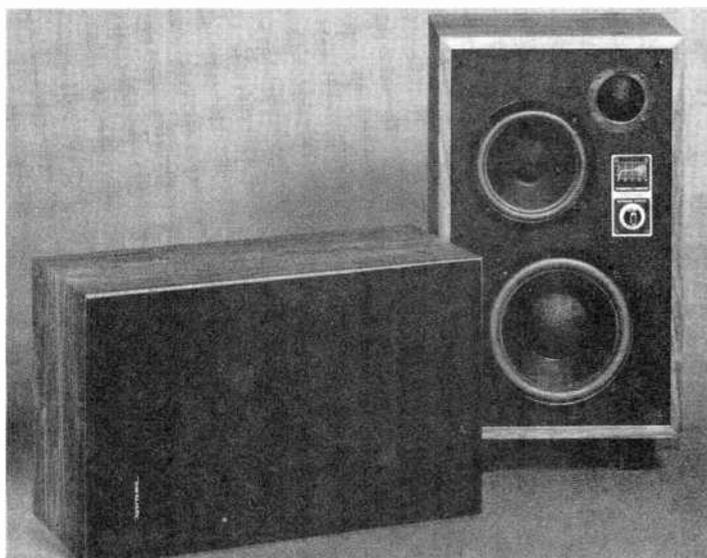

*Two-way vented bookshelf system employs a passive radiator for more efficient bass reproduction.*



Radio Shack's Realistic Optimus-10 "bookshelf" size speaker system features a two-

way design in an efficient vented enclosure. Its 8" (20.3-cm) woofer operates with a 10" (25.4-cm) passive radiator to deliver an extended low-bass response claimed to be comparable to the response obtainable from an acoustic-suspension design but at significantly higher efficiency.

The Optimus-10 measures 25" x 15 $\frac{3}{8}$ " x 10 $\frac{5}{8}$ "D (63.5 x 39.1 x 27 cm) and weighs 45 lb (20.5 kg). The system is priced at \$139.95.

**General Description.** The effective crossover between active and passive cones in the system occurs at 60 Hz.

Therefore, the passive radiator operates principally at frequencies between 45 and 60 Hz. A small cone tweeter takes over at frequencies beyond 2500 Hz. No physical crossover network is used, since the natural rolloff characteristics of the drivers provide the necessary crossover action.

The system's nominal impedance is rated at 8 ohms and its power-handling capacity is rated at 75 watts. Although the tweeter's natural low-frequency roll-off supplies the crossover action, the driver is protected against damage from high-magnitude low-frequency signals by a series capacitor. A variable series resistor serves as a BRILLIANCE control that can be used to adjust the output of the tweeter over a  $\pm 3$ -dB range. The cone tweeter is driven by a 1" (25.4-mm) voice coil formed of aluminum wire.

The 8" woofer has a four-layer aluminum voice coil whose inductance helps to roll off its response beyond 2500 Hz. The woofer's vent is a 10" passive cone (instead of the usual hole or ducted port in the speaker board) whose mass and compliance have been selected to cross over its response above 60 Hz to the driven cone. The passive cone resembles a conventional 10" loudspeaker without a magnet or voice coil. As used in this speaker system, it is equivalent to a 9" (22.9-cm) diameter port at the end of a 4 $\frac{1}{2}$ " (1.37-m) duct. Since such a large duct system would obviously be impractical in a compact speaker system, the passive radiator is a much more practical means of obtaining the same acoustical effect.

A major advantage of this type of low-frequency radiator design is the high

## Performance Specifications

Specification	Rated*
Frequency response (1 meter on axis; anechoic)	42-20,000 Hz $\pm 3$ dB
Dispersion at $-6$ -dB points	1 kHz, $125^\circ$ 10 kHz, $70^\circ$
System sensitivity	1 watt input of white noise produces 90 dB SPL at 1 meter
Power capacity	
Acoustic	60 Hz
Electrical	2.5 kHz
Nominal impedance	8 ohms
Minimum impedance	6.4 ohms

\*Manufacturer's specifications are given. Because of differences in test conditions, only impedance could be verified.

efficiency it makes possible, as compared to conventional sealed acoustic-suspension schemes. Although the driver is rated to handle up to 75 watts of program material, the manufacturer suggests that a 15- or 25-watt amplifier will adequately drive the system to produce good listening volume in a typical room, and amplifiers rated up to 100 watts can be used safely.

The BRILLIANCE control, together with a graphic display of its effect on the sys-

tem's response, is located behind the grille, where it is concealed from sight in normal use. The center of its range is indicated as the "flat" setting. The enclosure's black grille cloth is on a wooden frame and is held in place by plastic snap fasteners.

Connectors are located on the rear of the enclosure. They consist of a pair of screw terminals and a phono jack for easy connection to amplifiers and receivers fitted with phono-jack speaker

outputs. The inside of the enclosure has a single sheet of  $\frac{1}{2}$ "-thick padding on its rear wall, in contrast to the typically heavier use of sound absorbent material found in most speakers.


**Laboratory Measurements.** With the BRILLIANCE control set to its center position, frequency response of the speaker system measured in the reverberant field of the room was smooth and generally flat, with a gradual slope beyond 7000 or 8000 Hz. The output varied by about  $\pm 2$  dB from 150 to 9000 Hz, and was down another 5 dB or so at 15,000 Hz. The high-frequency response, measured both on-axis with the speaker and about  $30^\circ$  off-axis, was virtually the same in both cases, confirming the excellent dispersion characteristic of the tweeter.

The woofer's response was measured separately for the driven and passive cones, using close microphone spacing. After correcting for relative areas of both drivers, we combined their curves to form a single bass-response curve, which is equivalent to an anechoic measurement. We then joined this curve with the curve we obtained from our middle/high-frequency response measurements. The resulting curve revealed a broad, smooth frequency response void of significant peaks and dips. The curve varied less than  $\pm 3$  dB from 30 to 8000 Hz before dropping off to  $-7$  dB at 15,000 Hz.


The BRILLIANCE control's maximum setting boosted output in the upper registers by as much as 3 dB and cut it by about 2 dB. Although the manual that came with the speaker system states that the BRILLIANCE control's effect is principally in the 10,000-to-20,000-Hz range, it actually controlled the output levels at frequencies starting at about 2000 Hz, as would be expected from the system's crossover frequency. With the control set at maximum, the system's overall response was  $\pm 3$  dB from 30 to 13,000 Hz.

The system's impedance reached its minimum of about 8 ohms in the range between 100 and 300 Hz. It rose to 40 to 45 ohms at the two bass resonances of 26 and 66 Hz. Bass distortion, measured at a 1-watt nominal input level, was less than 1% from 100 down to 40 Hz. It rose to 5% at 34 Hz and to 10% at 31 Hz. With a 10-watt input, the distortion increased markedly, which is not unnatural, measuring 2% to 3.5% down to 40 Hz and 10% at 35 Hz.

The tone-burst response was good at

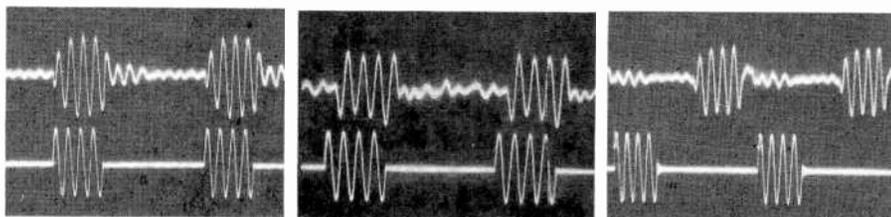

Tone-burst response (from left to right) 60, 500, and 5000 Hz.

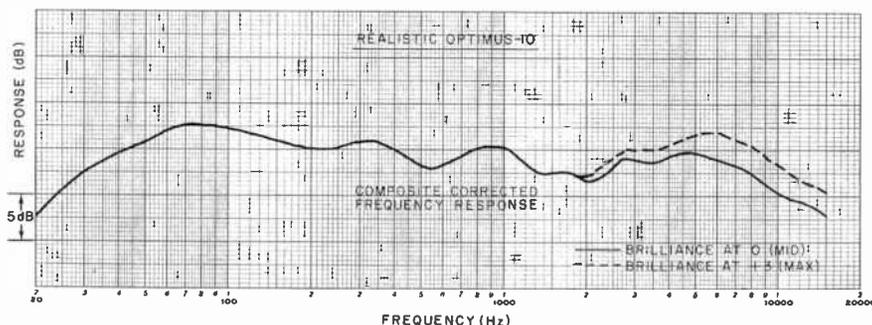

Composite frequency response for two brilliance control settings.

all frequencies, and system efficiency was very high. We measured a 93-dB SPL at a distance of 1 meter from the grille with the speaker system driven by one octave of random noise centered at 1000 Hz. This is about 3 dB better than the system's rated sensitivity. The difference is explainable by the fact that our measurement was made in a live room, while the rated sensitivity is based on the system's anechoic response.

**User Comment.** The speaker system sounded just as its frequency response curve suggests. Its sound is smooth and clean, although it lacks some of the "siz-

zle" that some speaker systems exhibit at the highest frequencies. We generally preferred to use it with the BRILLIANCE control fully advanced in our fairly absorbent listening room. In spite of the apparent loss of extreme high-end output, the speaker system certainly did not sound deficient in highs. Its overall sound was nicely balanced, and there was little or no midbass booming or heaviness, in spite of its very good deep-bass response.


We generally drove the speaker system(s) from medium-powered 50-to-80-watt receivers, but we also operated it with a 200-watt amplifier with no prob-

lems. There is little danger of blowing out the system, since it produces a very high sound level with power inputs far below its safe limits. Hence, one's ears would balk at the sound level before the power level reached the danger point for the system.

The Optimus-10 should probably be compared to other speaker systems that carry higher "list" prices, since it is not usually discounted the way most other systems are. Accordingly, it can hold its own nicely in the \$150 to \$200 speaker system market. The Optimus-10 is, at the least, a very listenable system that's well worth auditioning.

CIRCLE NO 102 ON FREE INFORMATION CARD

## Pioneer Model GX-5050 Car Stereo FM/AM Receiver

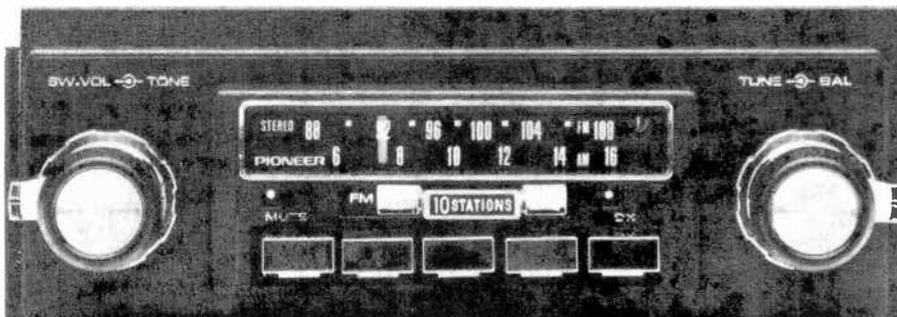

*Pioneer's in-dash automotive receiver provides high sensitivity, low distortion and excellent stereo separation.*



THE Model GX-5050 AM/stereo FM car receiver, to which Pioneer Electronics refers as a "Supertuner," has an FM performance claimed to be the equal of a good home component tuner. In spite of its very compact size, the receiver has pushbutton tuning for five each AM and FM stations. Other features include switchable interstation FM noise muting, nonswitchable afc (automatic frequency control), automatic mono/stereo switching, and a high/low sensitivity switch for received signal conditions.

The audio amplifier section of the receiver is EIA rated at 8 watts output into 4 ohms. The tone control is concentric with the combination volume control and power on/off switch. It gives flattest response at its clockwise limit. The left-to-right stereo balance control is concentric with the tuning knob.

The receiver is supplied with a front-panel bezel that permits in-dash installation in a number of Ford and GM cars. The receiver measures 7 $\frac{1}{8}$ "D × 5 $\frac{1}{4}$ "W × 2"H (18 × 13 × 5 cm) and weighs 3.1

lb (1.4 kg). Its nationally advertised value is \$149.95.

**General Description.** As might be expected of such a compact receiver, the Model GX-5050 takes advantage of the space-saving qualities of IC's. The discrete FM front end has a FET r-f amplifier and bipolar oscillator and mixer. All AM and FM tuning is accomplished by varying inductances, where ferrite cores slide into the coil forms. There are no variable capacitors in the tuning system. The FM afc is applied through a Varactor diode.

The balance of the basic FM tuner and audio amplifier functions are performed by IC's. One IC is used for i-f gain, another for limiting and quadrature detection, two more for multiplex demodulation, and a final two for separate audio channel amplification.


Separate transistors are used for interstation noise muting and voltage regulation. (Although the receiver operates from a nominal 13.8-volt dc supply, its allowable range is 11 to 16 volts, and all its circuits are designed to operate at a potential of roughly 9 volts. This poten-

tial can be obtained in a stable, regulated form with any rated input voltage.)


Surprisingly, the AM tuner section does not use the single IC "tuner on a chip" found in many home receivers. Instead, it employs four transistors and a number of passive components.

The AM/FM selection switch transfers the power supply bus to the selected tuner section and the diode switches that transfer the audio amplifier's inputs to the output of either tuner. It also transfers the mechanical pushbutton linkage to the coils of one tuner or the other. In spite of its very small size, the tuning assembly moves six cores as it is driven from the tuning knob.

The published specifications for the FM tuner include a 12-dBf usable sensitivity and a 50-dB quieting sensitivity of 14.3 dBf (1.1 and 1.4  $\mu$ V, respectively, into the 75-ohm antenna input). The 63-dB S/N specification is not quite what one would expect from a good home FM tuner, but it is more than adequate for the usually noisy environment of a vehicle. Other ratings include a 1.7-dB capture ratio, 74-dB alternate-channel selectivity (very good), 32-dB stereo chan-

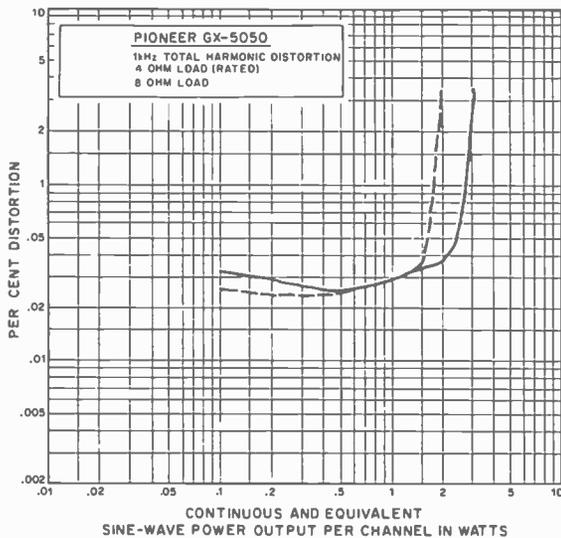

THD into 4 and 8 ohms.

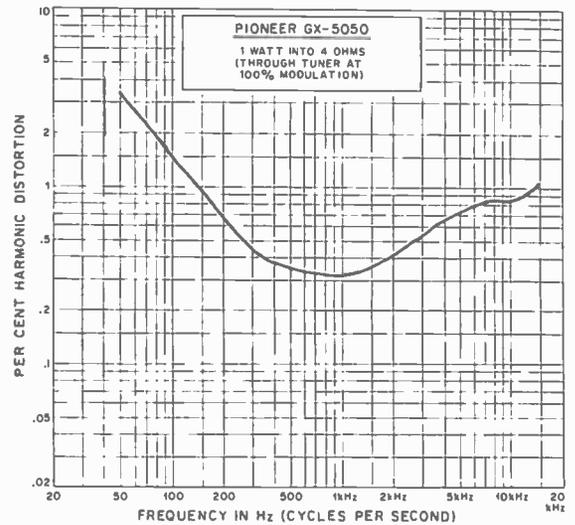

Harmonic distortion at 4 ohms.


nel separation, and 0.8% and 0.95% distortion in mono and stereo. The frequency response is rated at 50 to 12,000 Hz at the 3-dB down points.

**Laboratory Measurements.** Although we attempted to test the receiver as we would test a home receiver, some differences were unavoidable. This was particularly true in the audio section because it could be tested only through the FM tuner section and because it is rated by EIA rather than the usual IHF standards used for home hi-fi equipment.

We do not know the EIA standards for car radios offhand. The EIA standards for home-entertainment amplifiers allow power to be rated at 5% distortion at 1000 Hz and on a music power basis in which the supply voltages are maintained at their no-signal levels. This should give some indication of the fundamentally different approaches taken by the EIA and IHF.

Since we performed our measurements using IHF standards, we had no expectation of duplicating the published ratings for the receiver. Needless to say, there were many discrepancies in our test results when compared to the published specifications. We also used a fully charged 12-volt automotive battery as our power source instead of the nominal 13.8-volts normally found in a car's electrical system, which could account for a discrepancy of about 25% in output power measurements obtained versus the published rating.

With both channels driving 4 ohms and a mono signal applied via the antenna terminals, the output clipping power of the receiver measured 1.63 watts/

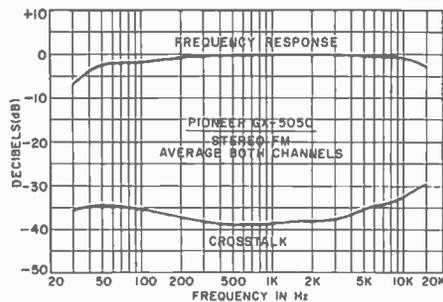


Frequency response and crosstalk.

channel. (Into 8 ohms, the clipping power was 1.02 watts/channel.) At low frequencies, the distortion rose appreciably, which caused us to elect to measure the distortion-versus-frequency characteristic at a 1-watt output level into 4 ohms. (Through any reasonably efficient speaker, as would likely be used in a car, this power can produce a very considerable listening level.) From a maximum of 3.6% at 50 Hz, the distortion diminished to just slightly greater than 0.3% in the midrange and rose to 1% at

15,000 Hz. The 1000-Hz distortion was 0.3% or less up to about 1 watt. It reached 1% at 1.8 watts into 8 ohms and 2.8% into 4 ohms. The audio frequency response could not be measured separately, because of the inaccessibility of the audio amplifier's inputs. Hence, it was included in our FM tuner response measurements.

The FM tuner section lived up to its "Supertuner" name, at least in those characteristics that are important in mobile service. The mono IHF usable sensitivity was 11 dBf, or 1.1  $\mu$ V. In stereo, it was set by the automatic switching threshold at 25 dBf (5  $\mu$ V). The 50-dB quieting sensitivity was 12 dBf (1.1  $\mu$ V) in mono and 36 dBf (18  $\mu$ V) in stereo. The respective distortion levels were 1.8% and 0.8%. The LOCAL/DX switch reduced the sensitivity by 20 dB, which might be desirable when driving by a powerful FM station, to avoid overloading the tuner's front end. The FM tuner distortion (including audio distortion, but

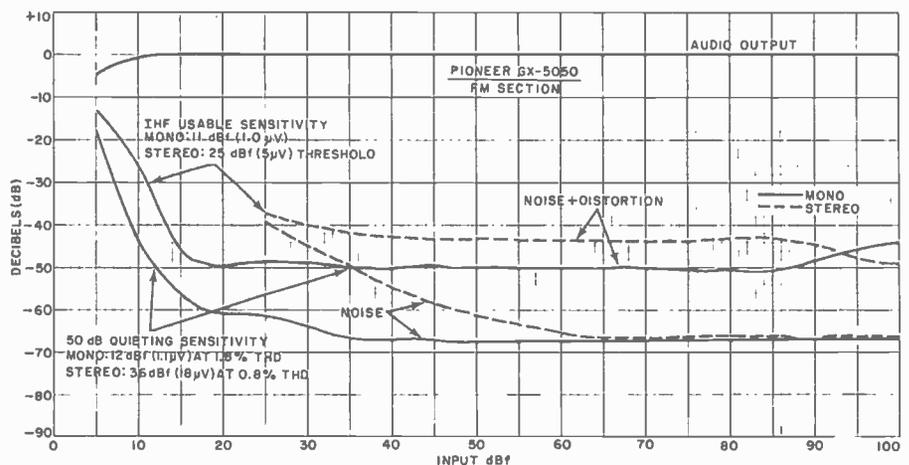

Noise and sensitivity curve for the Model GX-5050.

at a fraction of a watt) with a 65-dBf (500- $\mu$ V) input was 0.32% in mono and 0.68% in stereo. The S/N at a 65-dBf input was about 67 dB in both modes.

The FM capture ratio was 1.37 dB. AM rejection was 63 dB at 45-dBf (50  $\mu$ V) input and 57 dB at 65 dBf. Image rejection was about 50 dB. This was the only specification in which the tuner fell appreciably short of meeting its ratings; it is rated for 61 dB of image rejection. However, the alternate-channel selectivity was a very good 72.6 dB, and adjacent channel selectivity was 6.4 dB. The muting threshold was 9.7 dBf (0.8  $\mu$ V), which was sufficient to suppress noise between stations without interfering with the reception of any station capable of giving satisfactory quality. The 19-kHz pilot carrier leakage of -42 dB would be considered poor in a home receiver, where it could interfere with the operation of a Dolby circuit in a tuner or tape deck, but neither of these considerations apply in mobile service.

The FM frequency response, again including the audio amplifier section, with the tone control set to "flat," was down 2.5 dB at 45 and 15,000 Hz. The stereo channel separation was excellent and very uniform. It was between 34 and 38 dB from 30 to 6000 Hz and still 29 dB at 15,000 Hz. The AM frequency response was down 6 dB at 40 and 2200 Hz. The audio tone control rolled off above 500 Hz at a 6 dB/octave rate.

**User Comment.** We operated the receiver on our bench from the storage battery, using a 30" (76.2-cm) clip-lead antenna and a pair of highly efficient, high-quality speakers. Although this could hardly be considered an ideal receiving situation, we were pleasantly surprised to find that we could receive 48 fully listenable stations, most in stereo, with excellent audio quality. We have no doubt that the receiver would perform admirably in a car installation. It is easy to tune, with just enough AFC to make up for the lack of a tuning indicator but not enough to interfere with separating closely spaced signals.

Although the FM dial scale is calibrated at only 4-MHz intervals and is about 3" (7.6 cm) long, it is usually possible to identify the major stations. The high sensitivity of the tuner complicates matters a little, since the dial is filled with signals.

The receiver is a most impressive example of how much performance can be built into a very small and moderately priced package.

CIRCLE NO. 103 ON FREE INFORMATION CARD


AUGUST 1978

# Q • Where should you start in your search for better sound?

## A • At the beginning. With a new Audio-Technica Dual Magnet™ stereo phono cartridge.

Our AT12XE, for instance. Tracking smoothly at 1 to 1-3/4 grams, depending on your record player. Delivers smooth, peak-free response from 15 Hz to 28,000 Hz (better than most speakers available). With a minimum 24 dB of honest stereo separation at important mid frequencies, and 18 dB minimum separation even at the standard high-frequency 10 kHz test point. At just \$65 suggested list price, it's an outstanding value in these days of inflated prices.

Audio-Technica cartridges have been widely-acclaimed for their great sound, and for good reason. Our unique, patented\* Dual Magnet construction provides a *separate* magnetic system for *each* stereo channel. A concept that insures excellent stereo separation, while lowering magnet mass. And the AT12XE features a tiny 0.3 x 0.7-mil nude-mounted elliptical diamond stylus on a thin-wall cantilever to further reduce moving mass where it counts. Each cartridge is individually

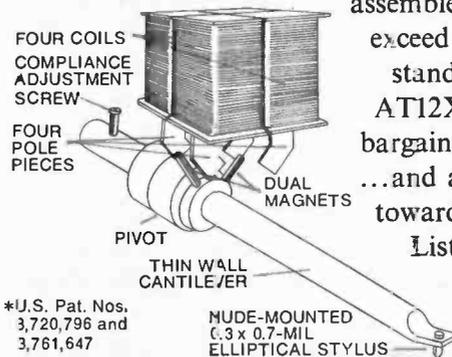

assembled and tested to meet or exceed our rigid performance standards. As a result, the AT12XE is one of the great bargains of modern technology...and a significant head start toward more beautiful sound.

Listen carefully at your Audio-Technica dealer's today.

**audio-technica**  
INNOVATION □ PRECISION □ INTEGRITY


AUDIO-TECHNICA U.S., INC., Dept. 88F, 33 Shiloh Avenue, Fairlawn, Ohio 44313  
In Canada: Superior Electronics, Inc.

# A \$\$ COMPETITIVE SYSTEM




YOU CAN OWN A VERSATILE  
6800 COMPUTER SYSTEM  
FOR AS LITTLE AS \$799.50!

- MP-68/1 Computer Kit ..... \$395.00
- CT-64 Terminal Kit (less monitor) ..... \$325.00
- AC-30 Cassette Interface Kit. .... \$ 79.50

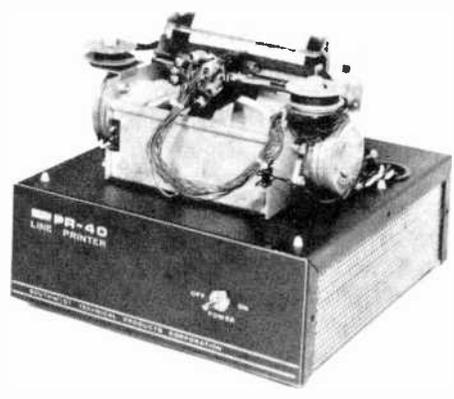

You can add a 40-column printer and a professional quality data terminal monitor for only \$460.00

- PR-40 Printer Kit ..... \$250.00
- MP-L Interface Kit ..... \$ 35.00
- CT-VM Data Terminal Monitor ..... \$175.00

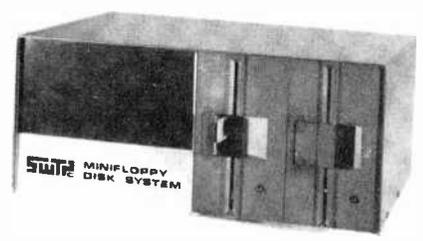


You can expand to a full-scale personal computer system with dual disk drives for only \$1,445.00

- MF-68 Dual Disk System Kit. .... \$995.00
- MP-16 16K Memory (assembled). .... \$450.00

...OR buy the complete system at our special low price of \$2,595.00

- YOU GET:**
- ▶ A 20K byte computer
  - ▶ A true "stand alone" data terminal and monitor
  - ▶ A 40-column dot matrix printer
  - ▶ A dual drive 200K byte disk system
  - ▶ Disk BASIC with file handling

These are the same proven, reliable components used in our industrial and business systems. Why settle for the limitations of a so-called "personal computer" or hobby system?

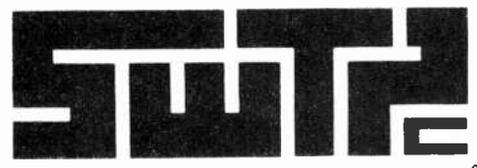

**SOUTHWEST TECHNICAL PRODUCTS CORPORATION**  
219 W. RHAPSODY  
SAN ANTONIO, TEXAS 78216

BY WALTER H. BUCHSBAUM

**Popular Electronics®**  
AUGUST 1978

# Video Cassette Recorders

## A RISING HOME- ENTERTAINMENT STAR!

*A detailed look at home VCR's—types and brands available, how they work, distinguishing features.*

**T**HE COMING of the home video tape recorder is being announced again, for at least the third time in 10 years. However, there is a difference this time. Consumers are actually buying the new machines. (About 200,000 recorders were said to have been sold in the U.S. during 1977, and more than twice that many are expected to be sold here this year.) What has made the difference now is that the prices for the new video cassette recorders (VCR's)—which now have full color capability—are in the reasonable price range of \$1000. The new machines are simple to load, thanks to drop-in tape cassettes.

Another difference between today's



successful systems and some of their unsuccessful predecessors is that the current crop of machines have built-in TV tuners. This eliminates the need for modifying existing TV receivers to feed programs to them. It also allows the system to tape one program while a different program is viewed. Timers, either built in or available as accessories, allow programs to be taped without human assistance. Classic movies, sporting events, and other forms of entertainment are now becoming available on prerecorded video cassettes, too.

You can also make your own "home movies" by plugging in a video camera. However, color cameras cost as much as, or more than, the recorders themselves, though camera prices are beginning to fall. And the cameras must be tied by cables to the recorders, so you lack the portability of a movie camera.

**There are Differences.** All the new VCR's have built-in r-f converters that feed signals to your TV receiver, usually on TV channel 3 or channel 4, whichever is unused in your area. (Channel 5-6 converters are available on special order for some models.) The cassettes all hold ½" (12.7-mm) magnetic tape, which can be played only in one direction. You do not, as with audio cassettes, flip the tape over to play the other side. But the similarity stops there.

There are three basic VCR systems on the market, all incompatible with each other. The tapes are available in three different types of cassettes. And they run at different speeds in the three VCR families (see Table opposite).

The first new-generation VCR to enter the U.S. market was the Betamax, developed by Sony and available or coming soon from Aiwa, Pioneer, Sanyo, Sears, Teac, Toshiba, and Zenith. Tapes for these VCR's are also available from Scotch and Ampex, and will be available from TDK next year. The Betamax tapes run at 4 cm/s (1.57 ips) for one hour in the standard-play mode. Newer two-speed Betamax decks can play tapes for two hours at 2 cm/s (0.79 ips), with slightly narrower tracks. (Betamax decks operating only at the slower speed are also available now.) This means that the two-speed machines can play tapes made on the earlier, single-speed models, but not vice-versa. Most Beta-format machines have names like "Betacord" and "Betavision," which makes them easy to identify.

The VHS system, developed and introduced by JVC, will also be marketed by Akai, GE, Hitachi, Magnavox, Curtis Mathes, MGA (Mitsubishi), Panasonic, Quasar, RCA, Sharp, and Sylvania. Tapes for these machines will be available from Fuji, 3M, and TDK. The cassette housing for the VHS tape is 30% larger than that for the Betamax. It runs for two hours at its higher 3.34-cm/s (1.3-ips) speed or for four hours at half speed.

The third competing VCR system is Quasar's Model VR-1000 "Great Time Machine" (not to be confused with Quasar's Model VH-5000, which is a VHS

machine). The Model VR-1000 runs at 5.2 cm/s (2.05 ips) and has several technical differences that set it apart from the Betamax and VHS machines.

Naturally, the differences between the three basic home VCR tape formats as embodied in the Betamax, VHS, and the Great Time Machine recorders do not permit a single, common playback mechanism.

**Recording Techniques.** As in high-fidelity audio recording, the object in video recording is to get several octaves of frequencies onto a slow-moving tape. In video, however, the frequencies are much higher and the bandwidth is much wider than in audio (4 MHz vs. 20,000 Hz, which is 17 vs. 10 octaves). Therefore, problems in video recording are more complex than in audio recording.

Achieving sufficient bandwidth for video is a challenge because the output of conventional playback heads is not linear. It rises at a rate of 6 dB/octave as the frequency increases, dropping suddenly when the recorded wavelengths become too short for the tape-head gap. Whereas a 60-dB difference between a head's maximum and minimum output within the audio range can be compensated for by fairly simple equalization, the 102-dB requirement for video bandwidth is not so easy to compensate for in this manner.

To solve the bandwidth problem, most VCR manufacturers select a carrier at about 3.4 MHz and frequency-modulate it with the video (luminance) signal. The color subcarrier is usually converted from 3.58 MHz to somewhere around 600 kHz and is recorded on the same track as the luminance signal. The resulting spectrum resembles that shown in Fig. 1. This approach narrows the fre-



Quasar VR-1000 "Great Time Machine."

RCA SelectaVision VBT200 (VHS).

## HOW VIDEO RECORDING SYSTEMS COMPARE

Recorder types	Tape width		Tape speed		Tape consumption per hour		Relative tape-to-head speed		Video track width	Audio track width	Drum diameter	Drum speed	Luminance frequency	Chroma frequency	Cassette dimensions	Cassette volume	Notes
	in.	ips	cm/s	ft <sup>2</sup>	m <sup>2</sup>	ft/s	m/s	μm	mm	mm	rpm	MHz	kHz	mm	cm <sup>3</sup>		
<b>Consumer VCR format:</b>																	
Betamax standard-play	½	1.5	4.0	19.7	1.83	22.6	6.9	58.5	1.05	74.5	1800	3.5-4.8	688	156x96x25	374	Note 1	
Betamax long-play	½	0.8	2.0	9.8	0.9	22.6	6.9	29.2	1.05	74.5	1800	---	---	156x96x25	374	Note 2	
VHS standard-play	¾	1.3	3.3	16.4	1.52	19.0	5.8	58	1.0	62	1800	3.4-4.4	629	188x104x25	489	Note 3	
VHS long-play	¾	0.7	1.67	8.2	0.8	19.0	5.8	35	1.0	62	1800	3.4-4.4	629	188x104x25	489	Note 4	
VR-1000 (VX-2000)	¾	2.1	5.2	25.6	2.4	29.8	9.1	48	0.4	48	3600	3.1-4.6	688	213x146x44	1368	Note 5	
<b>Institutional &amp; industrial:</b>																	
V-Cord II	¾	2.9	7.4	36.4	3.4	25.4	7.7	60	1.0	81.3	---	3.1-4.3	688	156x108x25	421		
V-Cord (skip-frame mode)	---	1.5	3.7	18.2	1.7	---	---	---	1.0	81.3	---	---	---	156x108x25	421		
U-Matic	¾	3.75	9.5	70.3	6.5	33.7	10.4	85	0.8	110	1800	3.8-5.4	688	222x140x32	995		
EIAJ open reel	¾	7.5	19.1	93.6	8.7	36.4	11.1	110	1.0	115.8	---	3.1-4.5	767	---	---		
<b>Audio recorder formats:</b>																	
Compact cassette	1/7	1.88	4.8	3.5	0.33	1.88	4.8	none	0.5	none	none	none	none	100x64x12	77		
8-track cartridge	¾	3.75	9.5	5.9	0.54	3.75	9.5	none	0.5	none	none	---	---	140x100x19	266		
Elcaset	¾	3.75	9.5	11.7	1.1	3.75	9.5	none	1.0	none	none	---	---	---	---		
7½ ips reel	¾	7.5	19.0	23.4	2.2	7.50	19.1	none	1.0	none	none	---	---	---	---		

Note 1: Video S/N: 43 dB; Resolution (lines): 250 B&W, 240 color; audio response: 50-10,000 Hz, S/N 40 dB, 3% HD; Play time: 30, 60

Note 2: Video S/N: 45 dB; audio response: 50-8000 kHz; Play time: 60, 120

Note 3: Video S/N: 45 dB; Resolution (lines): 300 B&W, 240 color; audio response: 40-10,000 Hz, S/N 43 dB; Play time: 60, 120

Note 4: Play time: 60, 120 minutes

Note 5: Play time: 60, 120 minutes

quency range down to only about 2.5 or 3 octaves.

Frequency-modulating the luminance signal makes it relatively insensitive to noise and dropouts since the constant-amplitude signal fully saturates the tape. At the same time, the high-frequency luminance signal serves as an ac bias for recording the chroma signal. This still leaves the problem of recording frequencies far higher than any in the audio range. The culprit is the short wavelengths resulting from the high frequencies, as shown in Fig. 2. The tape's motion past the heads can be speeded up to lengthen any frequency's recorded wavelength to make recording easier. But as tape speed is increased, so also is tape consumption. Narrowing the head gaps (to about 0.02 mil), applying


equalization, and employing other techniques certainly help, but higher head-to-tape speeds must still be used to solve the problem.

It takes a bit of trickery to increase the tape-to-head speed while maintaining an economical reel-to-reel tape consumption. This is accomplished by having the tape heads move, too. This is done with a rotating head drum around which the tape is wrapped during record and playback, as shown in Fig. 3. This allows tape-to-head "writing" speeds of 114 to 358 ips, using tape speeds of only 0.7 to 2.1 ips!


Video is transmitted in discrete "fields". (Two fields, one with odd and

the other with even lines, interlace on the screen of the picture tube to form each complete "frame" of video information.) Since there is a natural break after every field, home video recorders usually record each field as a separate track that runs diagonally across the tape, as in Fig. 4. The drum is, therefore, angled slightly to the tape path to make the diagonal tracks. Each track is a portion of a helix; hence, this track arrangement is called "helical scan." Two other tracks are recorded by stationary heads along each edge of the tape—an audio track along the upper edge and a control track along the lower edge, which synchronizes the drum in playback so that each video head will "read" its proper track.

Audio track widths are 1.0 and 1.05 mm in the VHS and Beta formats, respectively. These tracks could probably be split in two for stereo or bi-lingual use, as is now done with the 0.8-mm au-

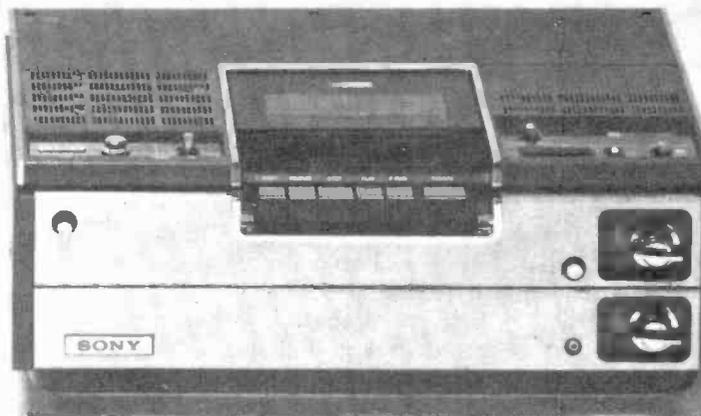

Sony Betamax SL-8200.

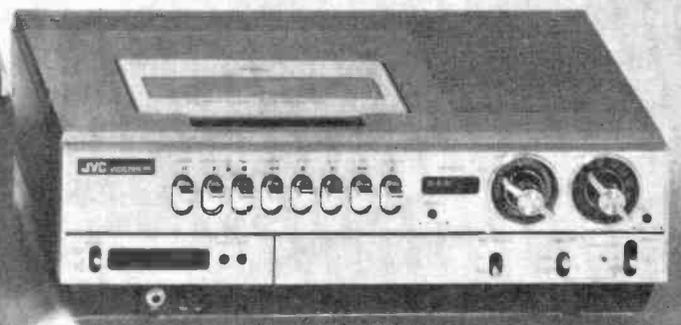

JVC Vidstar (VHS).

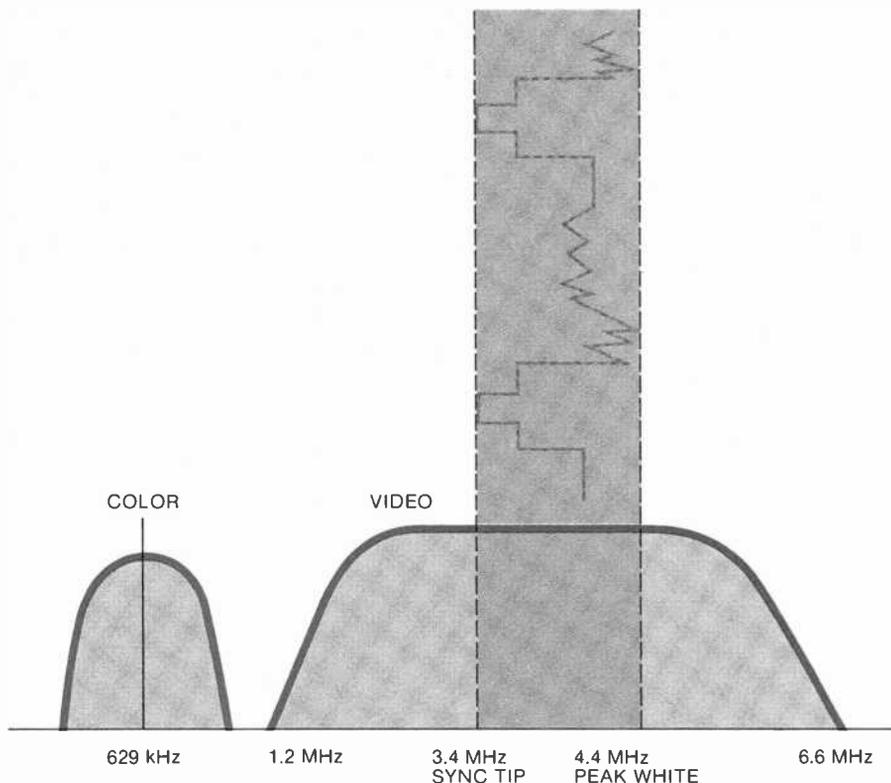


Fig. 1. Video signal spectrum of typical VCR. Luminance signal is recorded as constant-amplitude AM.

dio track of the U-Matic system. The 0.4-mm track of the VR-1000, however, would allow less successful double tracking. (For comparison, stereo sound cassettes have 0.53-mm tracks.) Both Betamax and VHS specify audio frequency ranges of 50-10,000 Hz at their higher speeds (about equivalent to audio cassette speed), with signal-to-noise ratios of 40 and 43 dB, respectively. This may prove inadequate for the full-fidelity TV sound now transmitted by networks and PBS (up to 15,000 Hz).

Another way to conserve tape is to use very narrow tracks of about 29 to 58 micrometers (1.2 to 2.3 mils) wide. This is only about one-tenth the width of a stereo sound track on a cassette tape. Under these conditions, crosstalk can become a severe problem. One way to avoid the problem is to leave blank "guard" bands (Fig. 5A) between adjacent tracks, as is done with audio and earlier video recorders. But this wastes tape area. Hence, the Betamax and VHS systems omit the guard bands, relying on differences between adjacent tracks to reduce crosstalk. (Fig. 5B)

One such difference relies upon the "azimuth" recording method. Here, the angle between the head gap and its path along the tape is offset slightly from the usual 90°. The two heads are offset in

opposite directions;  $\pm 7^\circ$  in Betamax and  $\pm 6^\circ$  in VHS recorders. At the high frequencies of the luminance signal, the 14° or 12° "misalignment" between the playback head and the crosstalk signals from the neighboring tracks greatly reduces the head's pickup of those undesired signals. (In the single-head

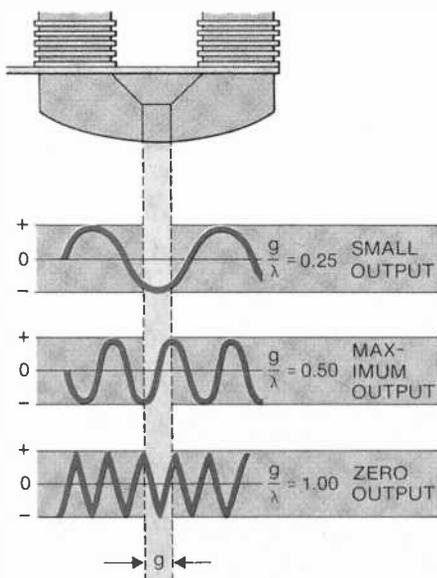


Fig. 2. Tape head output peaks when wavelength ( $\lambda$ ) is 2X head gap width ( $g$ ), drops to 0 when both are equal.

Quasar Model VR-1000, of course, this technique cannot be used. It uses guard bands instead.)

The lower frequencies and longer wavelengths of the chroma signal are less sensitive to azimuth differences. Therefore, another way of reducing crosstalk must be used. Here, the electrical phase of the recorded signal on adjacent tracks is changed so that phase cancellation can be used on playback. Phase changes are based on horizontal sweep periods so that crosstalk on adjacent scan lines will cancel out and not be visible on the screen.

But crosstalk is not the only problem caused by the narrow video tracks. There is also the problem of noise. This becomes worse in the extended-play machines, whose track width is only about half that of the "normal-play" Betamax and VHS systems. Both systems therefore incorporate nonlinear pre- and de-emphasis systems, somewhat similar in principle to Dolby noise-reduction. Extra high-frequency pre-emphasis is



Video color cameras, now costly, promise to drop in price.

added to the luminance signal during long-play recording. But, as in the Dolby system, this pre-emphasis is reduced when the high-frequency amplitude is already sufficient to override the noise. If the pre-emphasis were not reduced for strong high-frequency signals, the tape would be overmodulated. The playback de-emphasis circuit is also nonlinear, of course. Sony claims that this noise reduction is actually greater than the noise increase caused by the narrower track. In fact, they specify a signal-to-noise ratio 2 dB better at its slower than at its faster speed.

In playback, synchronizing the head drum with the tape so that each head scans its proper track correctly requires the special control track mentioned above. This is usually a 60-Hz square-wave signal. During recording, pulses

derived from the 60-Hz vertical sync pulse at the beginning of each TV field are recorded on this track. Then, during playback, this sync pulse is used to control the speed of the drum and tape transport (Fig. 6). It is also used to insure that the switchover from one head to the other occurs when it would not be visible on the screen. The head drum is controlled by a feedback servo system, usually with a manual "tracking" adjust trimmer in the servo loop to "fine tune" playback for tapes recorded on another machine or for stretched tapes. This is standard practice in video recorders, but it is important in the new home VCR's, where tracks are so narrow.

The use of narrow tracks can cause dropout problems. Dirt and minute tape imperfections that momentarily disturb tape-to-head contact cause these dropouts, which are seen as short streaks on the TV screen. Dropout-compensation circuits are used to combat this problem. A typical circuit stores each line in a delay circuit, where it can be used to substitute for the next line should a dropout occur. Up to three or four sequential lines can contain the same information before the viewer notices that something is amiss.

**Threading the Tape.** Since the tape inside the cassette must wrap around the head drum—just over half way in the two-head Betamax and VHS systems, and all the way in the Model VR-1000—fairly complex tape paths must be used. Most complex of these is Betamax's (Fig. 7A), a simplification of the "U-load" system used in professional U-Matic cartridge machines. Small arms in the transport pull the tape out from the cassette and wrap it around the head drum, audio and control-track heads, and several tape guides.

The VHS system's "M-load" scheme is simpler (Fig. 7B). Here, the tape is

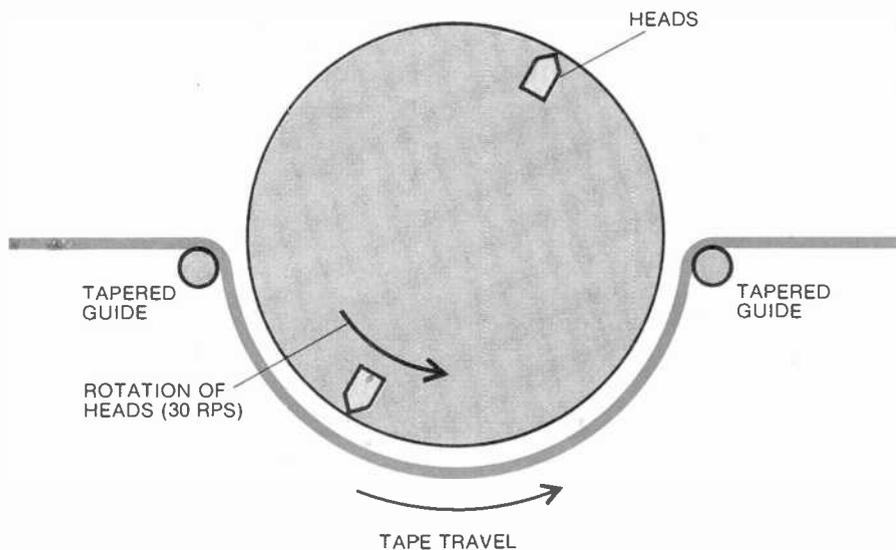


Fig. 3. Tape on rotating head drum allows second head to write second field as first head completes recording its field in this half-wrap helical scan format.

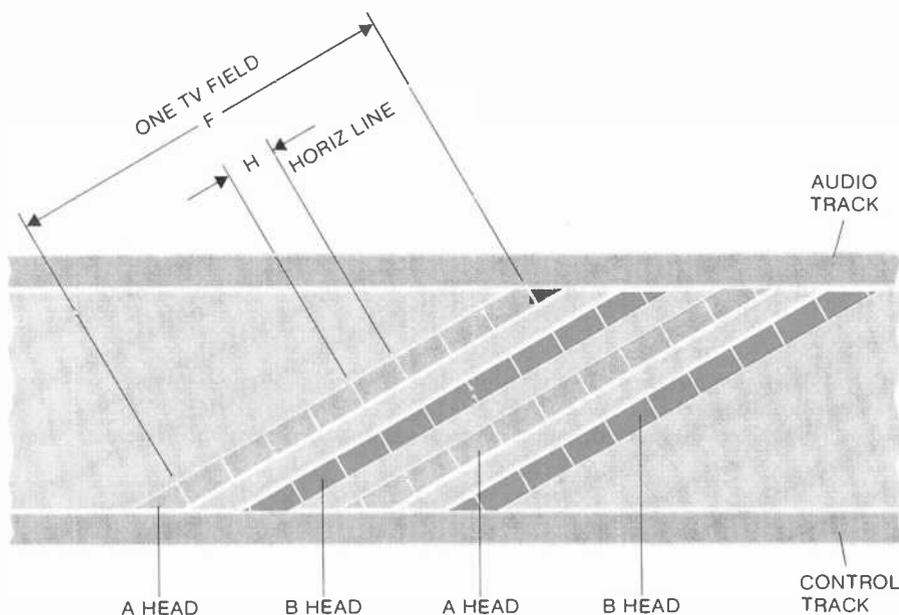


Fig. 4. Head drum axis is tilted so that video heads write diagonal tracks. Audio and control tracks are recorded by stationary heads.



Programmers are available (Panasonic shown) that can be set to automatically select channels and times for a week's recordings.

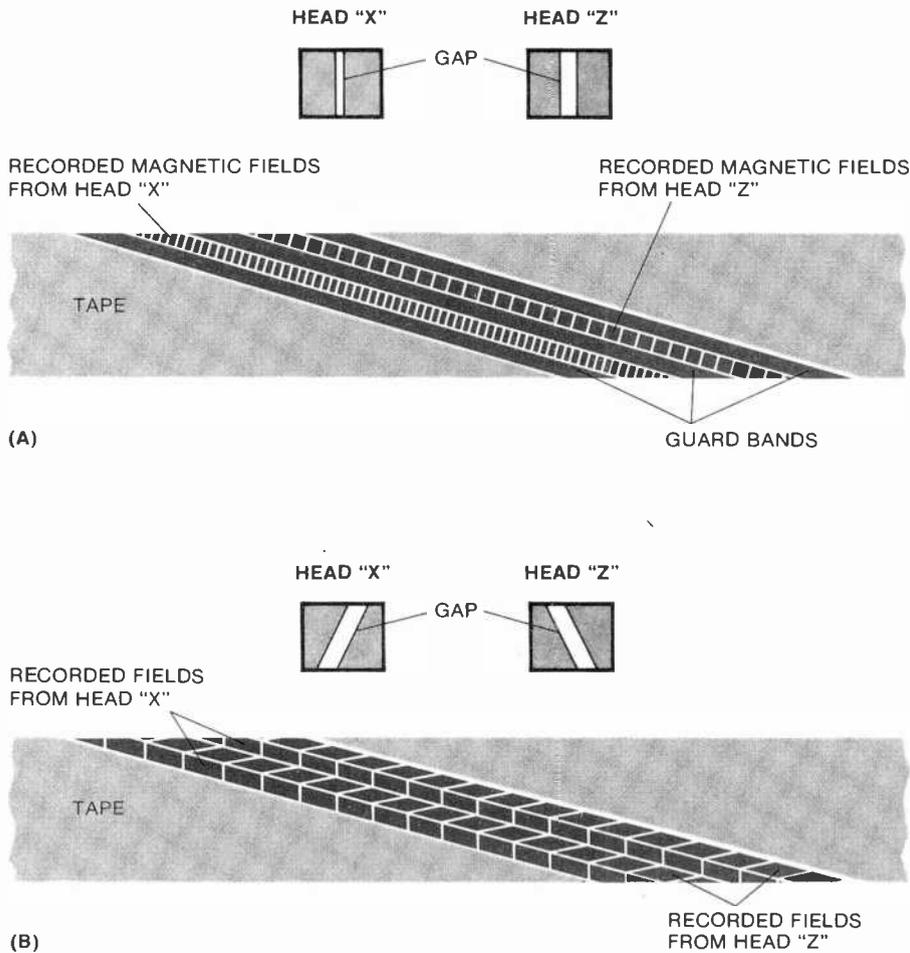


Fig. 5. Blank bands between tracks in early video recording (A) prevented crosstalk. Today's VCR's (B), except Quasar VR-100, incline video heads in opposite directions to eliminate blank areas.

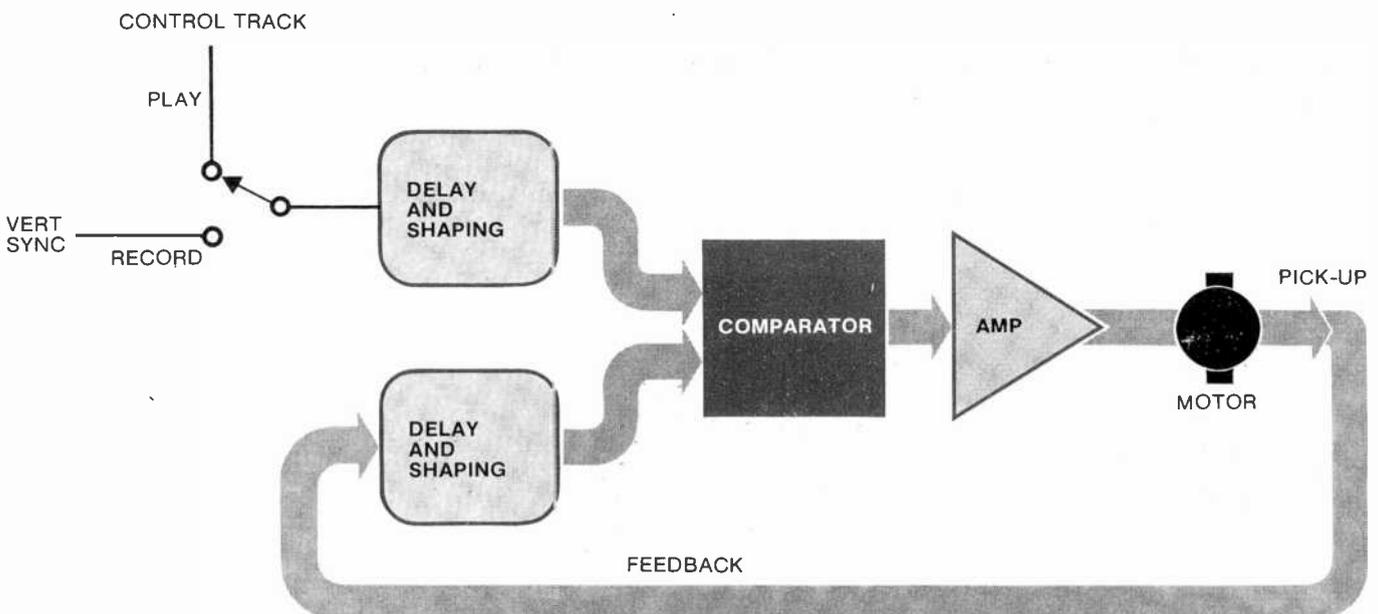



Fig. 6. Vertical sync signal on control track controls playback motor speed so video heads scan correct video tracks.

drawn almost straight out of the cassette at two points. Then it is wrapped halfway around the head drum.

The "Alpha-wrap" system employed in Quasar's Model VR-1000 is the simplest of all (Fig. 7C). The necessarily higher speed of the single-head drum permits the drum to be smaller for a given "writing" speed. Also, the faster tape speed requires more tape for the same running time and, thus, a larger cartridge. The small drum can easily fit inside the large cartridge. In loading, the cartridge is simply lowered over the drum. No arms are required to pull tape from the cartridge because the tape is already in its wrap position. The tape's full wrap around the head drum resembles the Greek character "alpha" ( $\alpha$ ), hence the origin of its name. The Model VR-1000's cartridge has another difference: its two tape hubs are arranged one above the other rather than side-by-side, as in Betamax, VHS, and audio cassettes.

Tape lengths vary. For the Betamax, there are tapes that run for 30, 60, and 90 minutes at standard-play speed or 60, 120, and 180 minutes at the long-play speed. In addition, an accessory changer with a two-cassette capacity may become available to effectively double these times, with a break of less than 15 seconds for the change cycle. VHS cassettes are available now in lengths running 60, 120, and (later) 180 minutes at normal speed and twice

Here's an example (Quasar VR-1000) of a video cassette recorder's control layout.

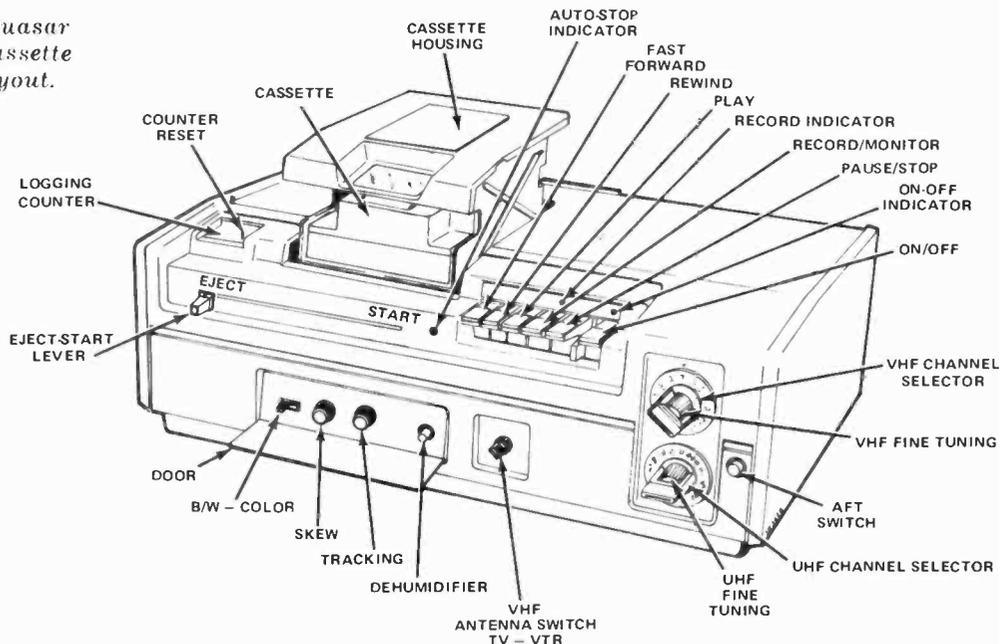


these times at slow speed. The single-speed Model VR-1000's cartridge offers either 60- or 120-minute lengths.

**What to Look For.** The home video cassette recorders on the market at this writing offer basically similar features. But there are some differences. First is the matter of recording time and tape cost. There's very little on the air that

runs more than two hours (and 3-hour cassettes are coming for the 2-hour machines), so longer recording time may or may not be a factor to consider. However, recording at a slower speed does lower tape cost, which almost certainly will count in your decision. Two-speed machines will also be more compatible with other video recorders than will a one-speed machine. On the other hand,

two-speed decks cost more (though the tape savings should take care of that). Decks operating only at the higher speed may have better picture quality, too, because of their wider track. (This will not be true when playing tapes made on a two-speed machine because the wider-track head will "read" some of the random noise between the narrow tracks.) When it comes to judging pic-

*The most popular VCR application is automatic taping of programs you'd miss because you're away, busy, or even watching another channel. But with the addition of a video camera, you can also make home "movies," as shown here.*

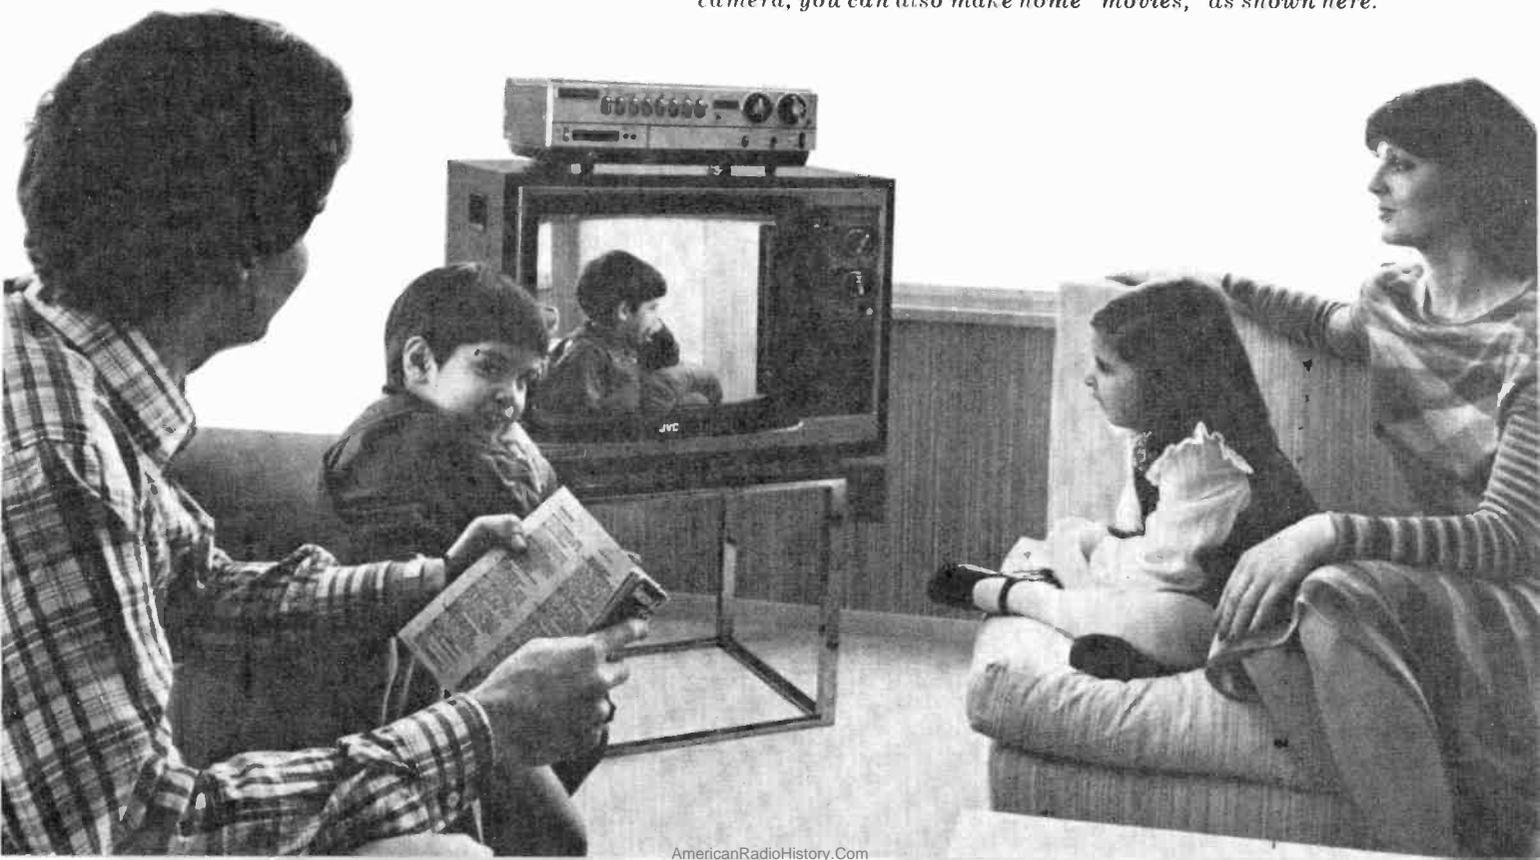

## HOW VCR FORMATS WORK

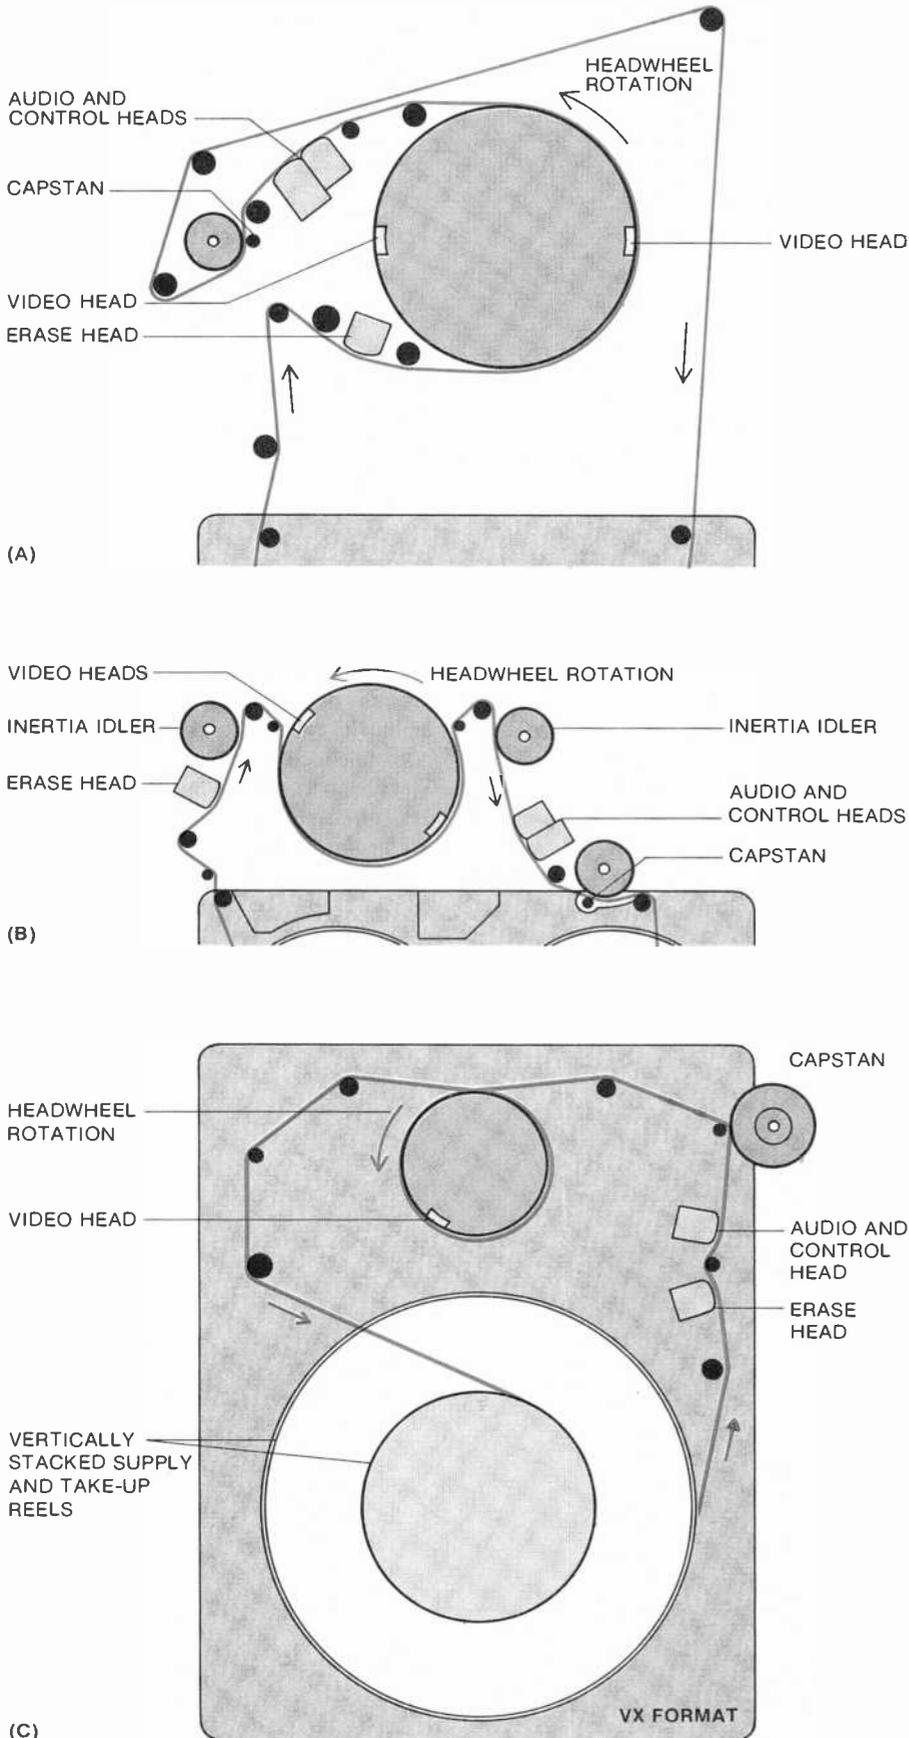


Fig. 7. Various ways of video-tape passage through VCR machine: (A) Betamax's modified "U-load;" (B) simpler "M-load" used by VHS; (C) "Alpha-wrap" on Quasar's VR-1000.

ture quality, you may have trouble spotting differences when looking at a small screen. If you want to be sure you get the best possible picture, try to find a store that uses a large-screen TV projection unit for its VCR demonstration.

In comparing VCR prices, check whether the timer is included in the price or not—it always is on models whose timers are built-in, but external timers may or may not be included in the price. You might prefer to get a unit without a timer if one of the new "programmer" units (which change channels as well as turning the set on and off at present times) has been announced for that VCR. Such a programmer makes a 4-hour recording capacity more worthwhile, too, as you can then record several programs on one tape. This can be done even if they're on different channels with time-gaps between them.

There are differences in weight and size, too—ranging from the Quasar VR-1000 (22½" x 16-½" x 8½", 44 lb.) to the compact JVC "VidStar" (17-¾" x 13-15/16" x 5-13/16", 30 lb.).


So, too, are there differences in tape cartridge prices and local availability. Depending on brand and tape length, a blank cartridge could cost anywhere from \$13 to \$28. Prerecorded movie prices retail from \$30 and up.

**In Closing.** In addition to the details given above, different manufacturers emphasize special features for their VCR's. These include audio dubbing, tape counters, a pause control, and a "dew" indicator and lockout circuit. Several VCR's, for example, contain amber lights that come on when there is excessive moisture in the area around the rotating drum. When this occurs, the drum will not rotate, in which case, the power must be left on until the moisture evaporates and the indicator extinguishes. Quasar's VR-1000 has a heater to accelerate evaporation.

Home VCR's have really been on the market only since 1977 in any quantity. So we can be fairly certain that advances and changes will occur as the market and product matures. For example, JVC has just introduced a variable-speed VCR that features stop-frame and slow motion. Also, portable video tape recorders show promise of being marketed. And, if camera prices decrease appreciably, one can take advantage of the "home movies" capability of VCR's, which costs only 20 cents a minute vs. \$3 a minute with photo equipment. ◇


# BUILD A DIGITAL DARKROOM TIMER

*A solid-state precision interval timer to control an enlarger or other time-powered device.*

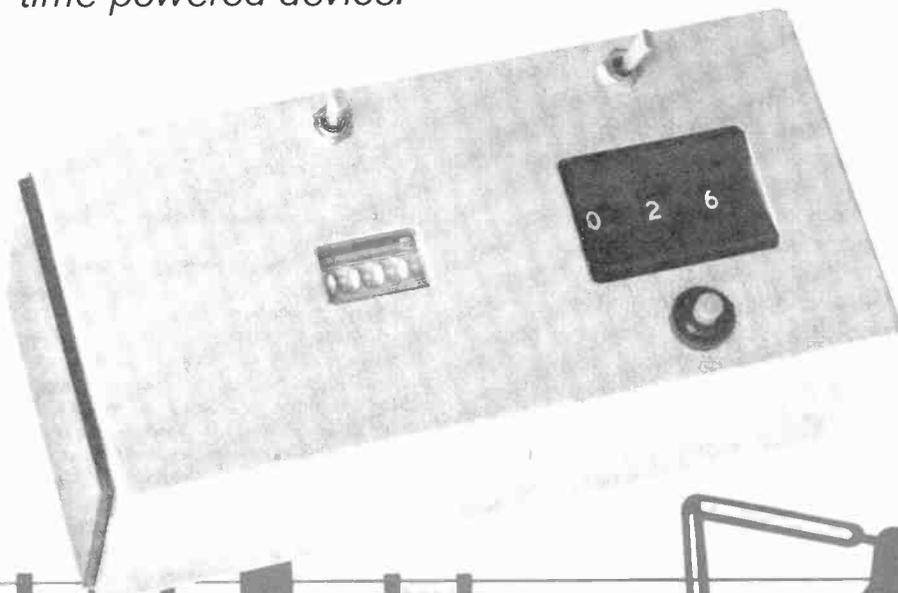

**A** DARKROOM or other precision-application timer should possess the following attributes: accuracy; precise repeatability; provisions for setting the timing interval in minutes and seconds or hours and minutes; and a method of displaying elapsed time clearly in low ambient light levels. Most commercially available timers are electromechanical devices which fall short in one or more of the cited areas. The "Digital Darkroom Timer" described here, however, offers all of these features.

Its accuracy and precise repeatability are ensured by the use of a digital clock IC whose timebase is the 60-Hz ac line frequency. The timing interval is easily set by rotating three thumbwheel switches calibrated in minutes (0-9) and seconds (0-59). At the flip of a switch, the calibration is changed to hours (0-9) and minutes (0-59). A three-digit LED

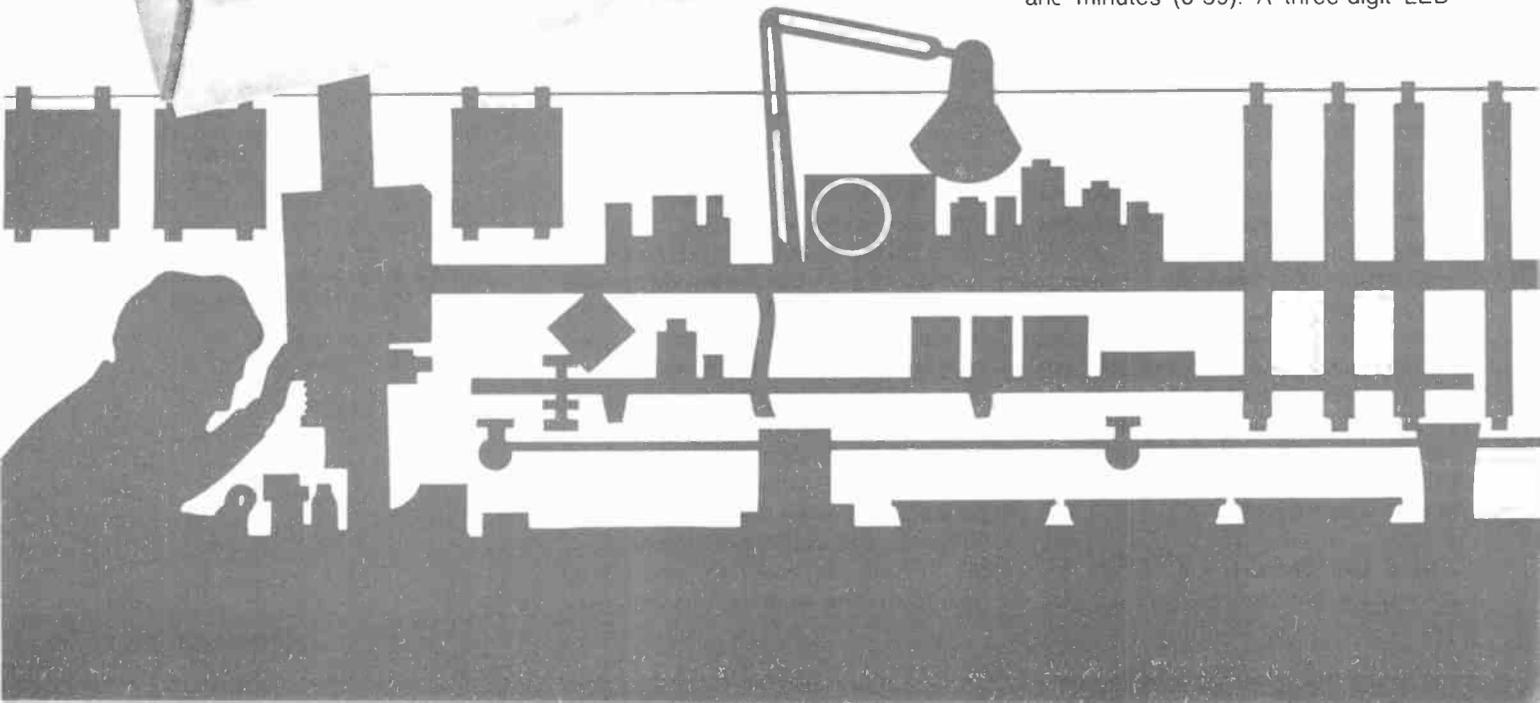

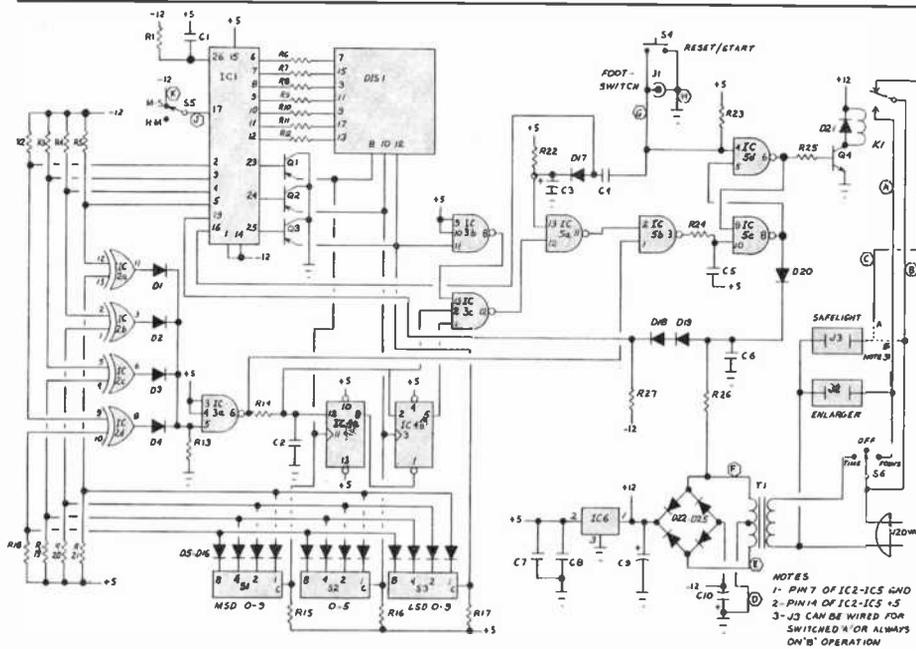


Fig. 1. Schematic diagram. PMOS clock chip IC1 counts 60-Hz pulses and produces seven-segment and BCD outputs.

display indicates elapsed time, and is useful when dodging or burning-in small areas of a print or when timing multiple-chemical processes. The display is rather small and not too bright, so it won't affect most black-and-white printing. (For film processing or work involving very sensitive paper, a deep red filter can be placed over the display.)

Two ac power sockets are mounted on the project enclosure, one for an enlarger and the other for a safe-light. The timer employs a three-position toggle switch labelled FOCUS/OFF/TIME. In the FOCUS position, the enlarger's power socket is energized. This allows the user to install a red filter under the enlarger lens and adjust the focus without exposing the photographic paper. In the TIME position, a panel-mounted pushbutton switch or optional footswitch resets the circuit and initiates the timing interval. In the OFF position, power is removed from the timer, the enlarger, and, at the builder's option, the safelight.

Of course, the timer can be used in many applications outside the darkroom. As is, it can function as a delayed turn-off switch for a radio, portable television, or a small lamp. When connected to an outboard relay or thyristor, the project can power a large television receiver, an audio system, home lighting, or even a coffee pot!

**About the Circuit.** A schematic diagram of the timer is shown in Fig. 1. The

heart of the project is IC1, a National Semiconductor MM5309 full-function PMOS clock chip. The MM5309 has multiplexed seven-segment and binary coded decimal (BCD) outputs as well as a reset input. These features make the IC ideally suited for use in this project.

Momentarily closing RESET/START switch S4 causes C4 to apply a negative-going pulse to pin 16, the RESET input of IC1. Upon receipt of this pulse, the clock chip resets its counters to 00:00:00. The ac waveform at the secondary of T1 is sampled by D18, D19, and R27. The resulting 60-Hz pulse train is applied to pin 19, the timebase input of IC1.

The clock chip counts the pulses and produces multiplexed seven-segment (pins 6 through 12) and BCD (pins 2 through 5) outputs. The seven-segment outputs are connected via current-limiting resistors R6 through R12 to the segment enable lines of DIS1, a nine-digit, calculator-type LED display. Of the nine digits in the display only three are used. Driver transistors Q1 through Q3 interface the appropriate digit enable outputs of the clock chip and digit enable lines of the display.

The BCD outputs of the clock are routed to one set of inputs of a digital comparator comprising the four exclusive-OR gates, a diode OR gate composed of D1 through D4 and R13, and NAND gate IC3A. The other set of comparator

## PARTS LIST

- C1—0.005- $\mu$ F disc ceramic
- C2, C4, C5, C7, C8—0.1- $\mu$ F disc ceramic
- C3—5- $\mu$ F, 12-volt electrolytic
- C6—0.01- $\mu$ F disc ceramic
- C9—1000- $\mu$ F, 16-volt electrolytic
- C10—100- $\mu$ F, 16-volt electrolytic
- D1 through D20—1N914 signal diode
- D21 through D25—1N4001 rectifier
- DIS1—9-digit common-cathode calculator display (National Semiconductor No. NSN-198 or equivalent)
- IC1—MM5309N PMOS digital clock chip (National Semiconductor)
- IC2—SN7486 quad exclusive-OR gate
- IC3—SN7410 triple three-input NAND gate
- IC4—SN7474 dual D-type flip-flop
- IC5—SN7400 quad 2-input NAND gate
- IC6—LM340T-5.0 5-volt regulator
- J1—RCA phono jack
- J2, J3—Ac power socket
- K1—Spdt 12-volt relay (Sigma No. 78RE1-12DC or equivalent)
- Q1, Q2, Q3—2N3906 pnp transistor
- Q4—2N3904 npn transistor

The following are 1/4-watt, 5% tolerance carbon-composition or film resistors:

- R1—330,000 ohms
- R2 through R5—7500 ohms
- R6 through R12—330 ohms
- R13—680 ohms
- R14—220 ohms
- R15 through R21—4700 ohms
- R22—22,000 ohms
- R23, R24—1000 ohms
- R25—10,000 ohms
- R26—100,000 ohms
- R27—1 megohm
- S1, S2, S3—Thumbwheel switches with BCD outputs

- S4—Normally open momentary contact push-button switch
- S5—Spst toggle switch
- S6—Spdt toggle switch
- T1—18-volt, 150-mA center-tapped transformer (Triad No. F161XP or equivalent)
- Misc.—Printed circuit board, IC sockets or Molex Soldercons, pc standoffs, suitable enclosure, hookup wire, line cord, strain relief, misc. hardware, solder, etc.

Note—The following are available from California Industrial, Box 3097, Torrance, CA 90503: Complete kit less enclosure (No. DTK), \$34.95; aluminum/hardwood cabinet (No. DTCAB), \$12.95; etched and drilled printed circuit board (No. DTPC), \$7.95; 9-digit display (No. DTDIS), \$1.39; Spdt 12-volt relay (No. DTRY5), \$1.39; thumbwheel switches with BCD outputs (No. DTS1), \$1.39 each (three required). California residents please add sales tax. Orders accompanied by check or money order will be shipped postpaid within the U.S.A.

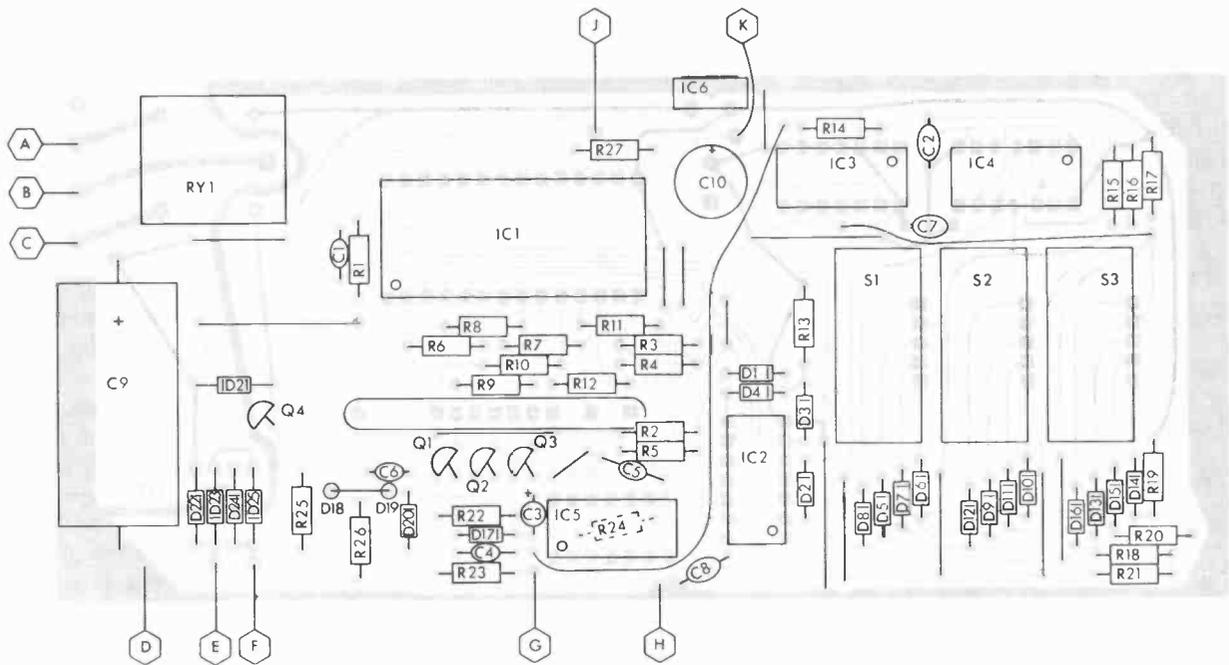
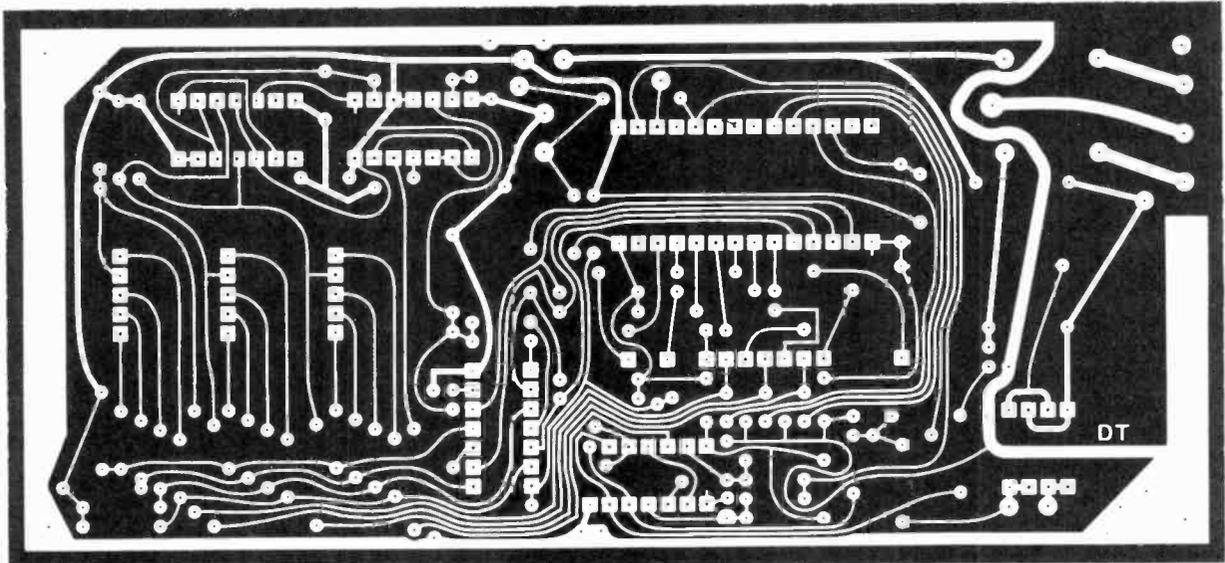



Fig. 2. Full-size etching and drilling (A) and parts placement (B) guides for a suitable printed circuit board.

inputs receives the BCD outputs of thumbwheel switches S1, S2 and S3. Because the BCD outputs of the clock are multiplexed, those produced by the

thumbwheel switches must be time-multiplexed in a synchronous manner.

This is accomplished by connecting the common (C) switch lugs to the dis-

play driver transistors Q1, Q2, and Q3. When, for example, the BCD equivalent of the first time digit is being applied to the comparator, Q1 simultaneously acti-

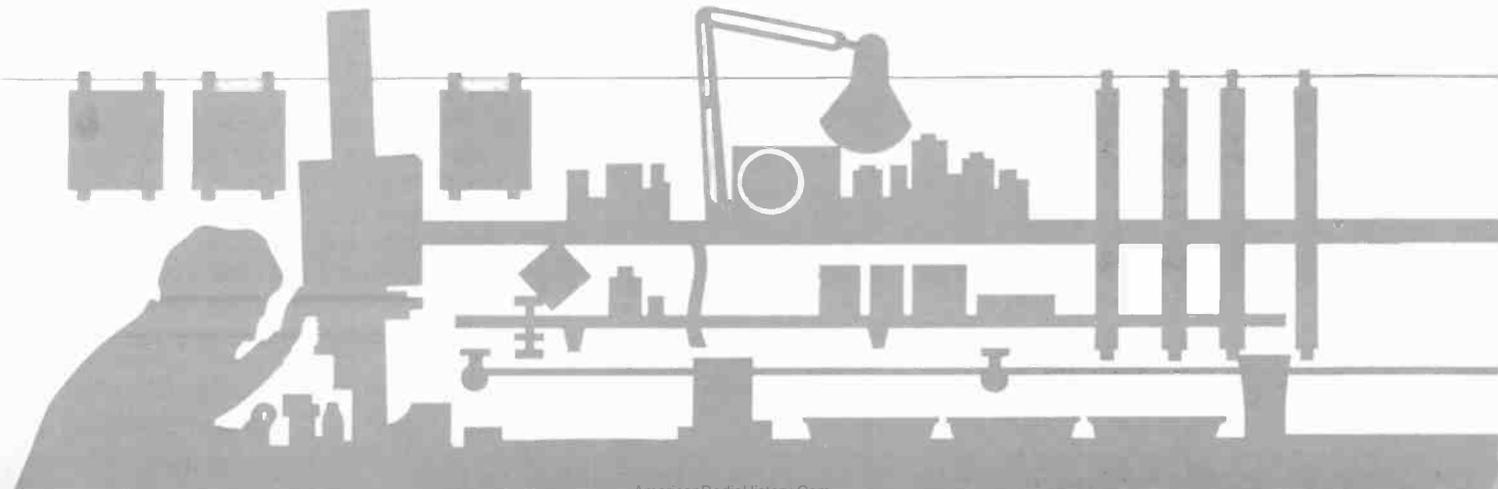

vates the appropriate display digit and thumbwheel switch *S1*. Diodes *D5* through *D16* are used to isolate the BCD outputs of the inactive switches from those of the thumbwheel switch activated at any given instant.

The digital comparator generates an output pulse each time the BCD output of the clock chip matches that produced by the corresponding thumbwheel switch. Because all the BCD numbers produced by both the clock chip and the thumbwheel switches are not available simultaneously (again, due to multiplexing), some means of "remembering" the coincidence pulses is required. This function is performed by a memory or latch comprising two D-type flip-flops (*IC4A* and *IC4B*), several NAND gates, and an RS flip-flop formed by two cross-coupled NAND gates (*IC5C* and *IC5D*).

The first D flip-flop is set when the most significant BCD number generated by the clock chip is the same as that generated by *S1*. Similarly, the second flip-flop (*IC4B*) is set when the BCD output of *S2* matches the next-most significant BCD number generated by the clock chip—only if *IC4A* has already been set. This is so because the Q output of *IC4A* is connected to the CLEAR input of *IC4B*, whose PRESET input is tied to +5 volts. Therefore, the Q output of

*IC4B* will be held low as long as that of *IC4A* is low.

If the least significant BCD number generated by the clock chip matches the BCD output of *S3* and the two D flip-flops have been set, the RS flip-flop formed by *IC5C* and *IC5D* will be set. Thus, when the elapsed time in BCD form equals the three BCD numbers generated by *S1*, *S2* and *S3*, the RS flip-flop changes state and deprives relay driver *Q4* of base current. The transistor then turns off and deenergizes the relay, removing line power from *J2*, the enlarger power socket. If the safelight power socket (*J3*) is connected using the "A" wiring (see schematic), power will be removed from it when the relay is energized. If *J3* is "B" wired, the relay will have no control over the flow of power to the socket. The safelight will remain powered no matter what position FOCUS/OFF/TIME switch *S6* is in, or whether *K1* is energized or not.

The RS flip-flop is also used to control the application of the 60-Hz timebase to the clock chip by means of a biased diode network (*D18*, *D19*, *D20* and *R27*). When the flip-flop is reset, 60-Hz pulses with high and low levels sufficient to drive the clock chip are applied to pin 19, the chip's timebase input. After the timing interval has elapsed, however, *IC5B*

changes state and the dc level at the cathode of *D18* shifts so that the 60-Hz pulse train can no longer trigger *IC1*. The clock chip no longer counts and the display is frozen at a three-digit number which matches the setting of the thumbwheel switches. The setting of *S5* determines the range of the timer—either hours/minutes or minutes/seconds.

Transformer *T1*, diodes *D22* through *D25* and electrolytic capacitors *C9* and *C10* comprise a bipolar, full-wave power supply which produces  $\pm 12$  volts dc. The relay requires +12 volts, and the clock chip's  $V_{DD}$  terminal -12 volts. A third supply voltage, +5 volts, is required by the TTL IC's. Also connected to +5 volts is the  $V_{SS}$  terminal of the PMOS clock chip. This allows the chip to drive the TTL IC's directly with no need for level shifting. Voltage regulator *IC6* derives the required +5 volts from the +12-volt supply. Capacitors *C7* and *C8* ensure the stability of the regulator IC and keep noise off the +5-volt line.

**Construction.** The use of a printed circuit board will simplify project assembly. Etching and drilling and parts placement guides for a suitable board are shown in Fig. 2. All components except the power transformer, switches *S4*, *S5* and *S6*, the power sockets and jack *J1* mount on the circuit board. Assembly is straightforward, but here are a few hints that will save you some time.

Begin by mounting the jumpers and fixed resistors on the pc board. Save the cut-off resistor leads to mount the display. Note the position of *R24* relative to that of *IC5*. If this IC is to be soldered directly to the board (which is not recommended) or mounted via a standard DIP socket, mount *R24* on the foil side of the board. However, if the IC is installed using Molex Soldercons, *R24* can be mounted on the component side. The resistor will sit in the "channel" formed by the Soldercons, which will also provide sufficient clearance between the bottom of the IC package and the top of the pc board to accommodate the body of the resistor.

Next, install the silicon diodes, using the minimum amount of heat consistent with the formation of good solder joints. Excessive heat can destroy delicate semiconductors like diodes, transistors and IC's. Also, avoid using too much solder when making a connection. Otherwise, solder bridges between adjacent foil areas might be formed inadvertently. Semiconductors and polarized capaci-

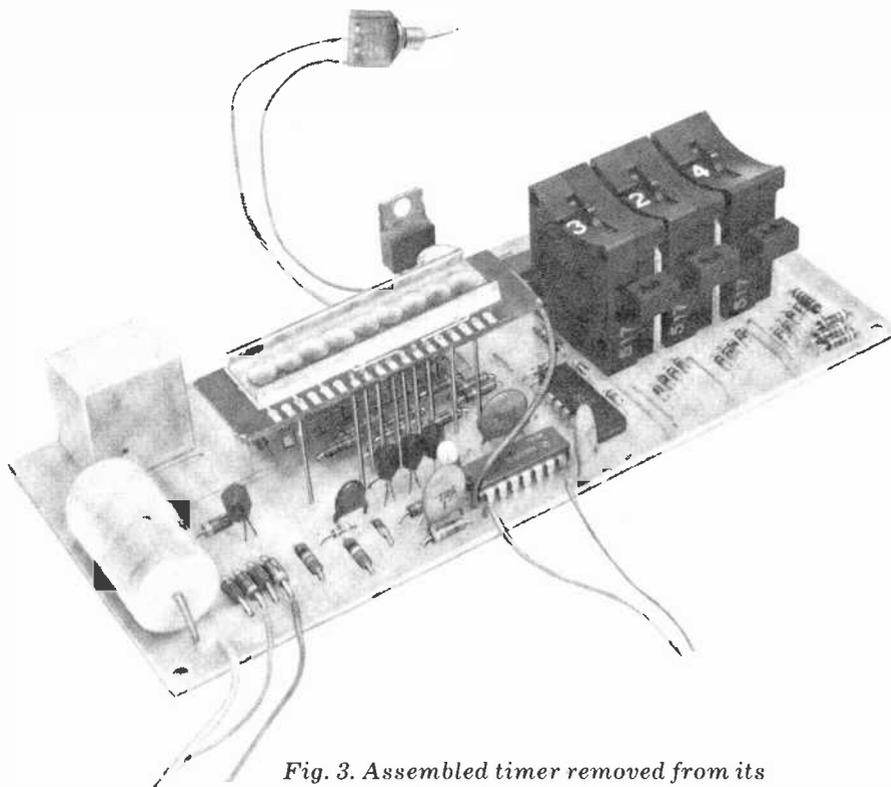



Fig. 3. Assembled timer removed from its enclosure shows how the display board mounts above main board. Cube at left rear is relay.

tors must be installed with due regard to pin basing or polarity. Be sure that the diodes are installed so that their banded ends (cathodes) are positioned as shown in Fig. 2. Diodes *D18* and *D19* must be mounted vertically. Install *D18* so that its cathode is down (banded end nearest the board) and *D19* so that its cathode is up. Connect the two remaining leads together.

The capacitors can now be installed, paying close attention to the polarities of *C3*, *C9* and *C10*. The remaining capacitors can be installed either way as they have no polarity. Using sockets or Molex soldercons, mount the TTL IC's, but do not mount the clock chip yet. (That should be the last step of the assembly procedure.) Also, install the digit driver transistors oriented as shown in Fig. 2.

The switches and display can be connected to the pc board using Figs. 3 (photo) and 4 as guides. The layout and pinout details of the display are shown in Fig. 4. No connections are made to holes 1, 2, 4, 5, 6, 14, 16 and 18, the decimal point anode and the cathodes (digit enable lines) of the three left- and right-most digits of the display. Either straight pins or the clipped resistor leads can be used to support the display (see Fig. 3). The supporting leads or pins should first be soldered to the display pads and then, after properly positioning the display, soldered to the row of square pads on the main circuit board just above digit driver transistors *Q1*, *Q2* and *Q3*. Clip off any excess lead length.

Connections between the pc board and those components not mounted on it are denoted in Figs. 2 and 3 by letters enclosed by hexagons. For example, a length of hookup wire should be connected to pad *A* on the board (normally open contact of *K1*) and the FOCUS lug of *S6* and one side of *J2*. The safelight outlet, *J3*, can be wired so that it is not powered when the enlarger is (A) on or so

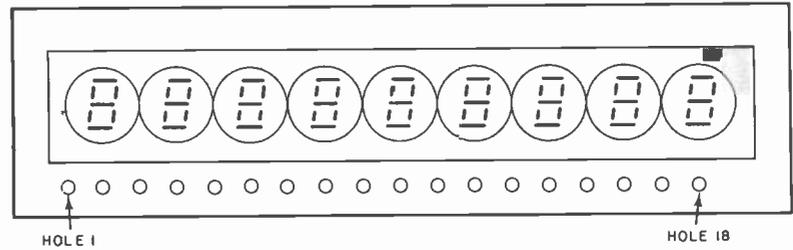

#### DISPLAY DETAILS

- |                       |                    |
|-----------------------|--------------------|
| 1-no connection       | 10-digit 5 cathode |
| 2-digit 1 cathode     | 11-segment D anode |
| 3-segment C anode     | 12-digit 6 cathode |
| 4-digit 2 cathode     | 13-segment G anode |
| 5-decimal point anode | 14-digit 7 cathode |
| 6-digit 3 cathode     | 15-segment B anode |
| 7-segment A anode     | 16-digit 8 cathode |
| 8-digit 4 cathode     | 17-segment F anode |
| 9-segment E anode     | 18-digit 9 cathode |

Fig. 4. No connections are made to holes 1, 2, 4, 5, 6, 14, 16, and 18 on display board.


that it remains powered (B). Jack *J1* is included to accommodate a footswitch. As shown in the schematic, the footswitch can be used to reset and start the timer. Alternatively, the "hot" side of *J1* can be connected to the collector of *Q4* for footswitch control of the relay—a great convenience for those who do a lot of dodging.

A heat sink must be provided for *IC6*, the 5-volt regulator. If the timer is housed in an aluminum enclosure, the tab of the IC can be fastened to it. A mica insulating washer is not required, but a small amount of silicone thermal compound should be spread on the back of the tab. This will improve the transfer of heat from the IC package to the project enclosure. If the timer is in a nonmetallic enclosure, a bolt-on heat sink should be used. Either a homebrew heat sink formed by bending aluminum stock or a preformed commercial heat sink is suitable. Again, a thin film of

silicone thermal compound should be smeared on the back of the IC's tab before it is secured to the heat sink.

**Using the Timer.** The project should be used as you would a mechanical timer, except that the timing interval is selected by three detented switches rather than by rotating one large knob. Having preset the timing interval, you should load and focus the enlarger, place *S6* in the TIME position, and start the timer by closing *S4* or the footswitch connected to *J1*.

Although the project has been designed with the darkroom in mind, it has many nonphotographic applications in the home, shop, lab or classroom. To name just a few, the project can be used to time chemical experiments, as a quiz timer, or as a delayed turn-off switch for a television receiver or audio system. Without a doubt, you'll be able to think of many more. ◇

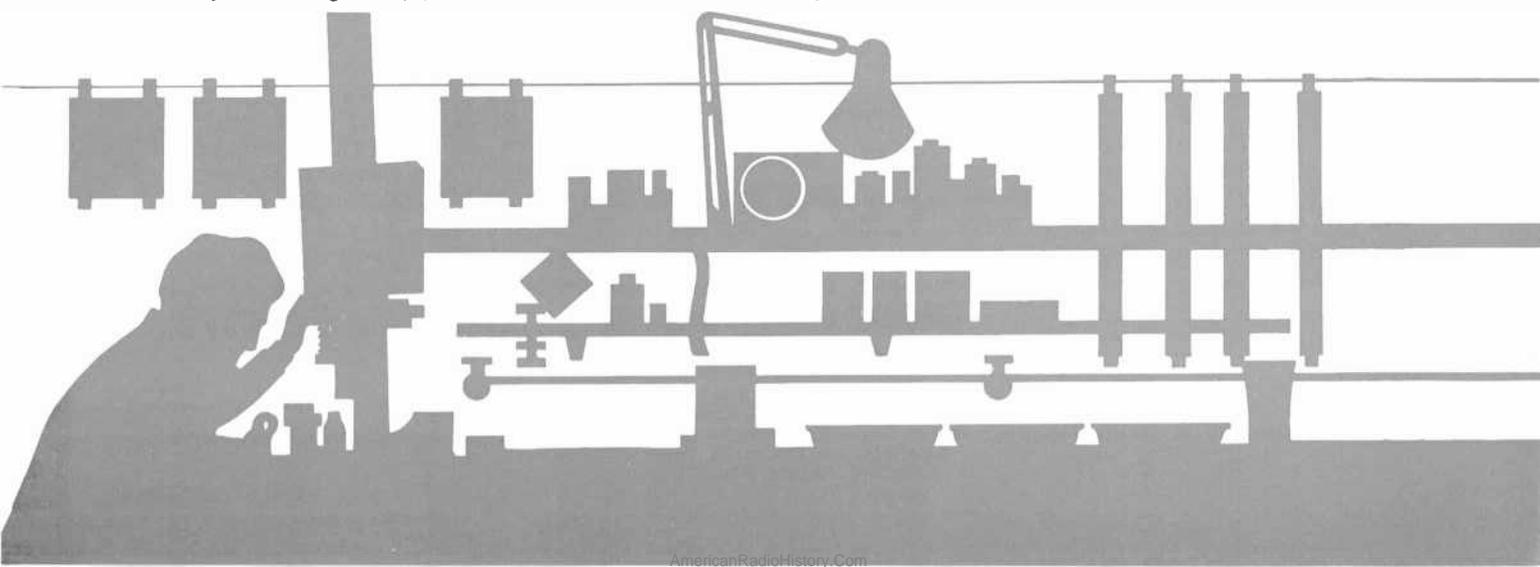

# FREQ OUT. FOR LESS.



100 Hz to 50 MHz.  
**\$89.95\***

Introducing CSC's new Mini-Max. It brings down the cost of counting up the frequency for CB-ers, hams, computer enthusiasts, audiophiles... just about any engineer, technician or hobbyist will find it indispensable. It's "mini"-sized, too — a pocketable 3 x 6 x 1½ inches.

But when it comes to performance, Mini-Max means maximum value. Measuring signals as low as 30 mV from 100 Hz to a *guaranteed* 50 MHz, with  $\pm 3$  ppm timebase accuracy and better than 0.2 ppm/°C stability from 0 to 50°C. *Completely automatically.* Advanced LSI circuitry with a crystal controlled timebase provides precise frequency readings on a bright, six-digit LED display, with automatic KHz/MHz indications. Mini-Max is versatile, too. You can connect it directly to the circuit under

test, or use its matching mini antenna for easy RF checking. Either way, the input is protected against overload to 50V (100V below 1 KHz).

Mini-Max is as inexpensive to use as it is to own. An ordinary 9 volt alkaline battery gives up to 8 hours of intermittent operation, and you have the flexibility of a battery eliminator for AC operation. For increased versatility, there's a complete line of accessories, including standard clip-lead cable and mini antenna — eliminator and carrying case are optional.

CSC's new, all-American made Mini-Max is everything you need for highly-accurate checking of frequencies up to 50 MHz. At a price that will Freq you out. *Order today.* Call 203-624-3103, 9 a.m. — 5 p.m. Eastern Standard Time. Major credit cards accepted. Or see your CSC dealer. Prices slightly higher outside U.S.A.

CONTINENTAL SPECIALTIES CORPORATION



\*Manufacturer's suggested retail price.  
© 1978 Continental Specialties Corporation

70 Fulton Terrace, Box 1942, New Haven, CT. 06509, 203-624-3103 TWX 710-465-1227  
WEST COAST: 351 California St., San Francisco, CA 94104, 415-421-8872 TWX 910-372-7992  
GREAT BRITAIN: CSC UK LTD., Spur Road, North Feltham Trading Estate, Feltham, Middlesex, England, 01-890-8782 Int'l Telex: 851-881-3669  
CANADA: Len Finkler Ltd., Ontario  
CIRCLE NO. 9 ON FREE INFORMATION CARD

**A**LTHOUGH there are no industry statistics on the percentage of personal microcomputer ( $\mu$ C) sales that are made to businesses, computer store owners generally agree that more than 50% of their local sales are for business purposes. [Among POPULAR ELECTRONICS subscribers, a recent study revealed that primary uses are: business, 37.1%; home, 31.3%; both, 29.6%. This includes computer store and mail-order purchases. And "business" here combines commercial, industrial and engineering uses.]

Lower cost is the major reason for a business man to choose a "personal-use"  $\mu$ C. A typical business  $\mu$ C system with 32 kilobytes of memory, dual floppy disks, and a hard-copy terminal can be bought for about \$6000. A similarly configured commercial  $\mu$ C system can cost as much as several times that price.

**Differences in Price.** There are several reasons why a commercial  $\mu$ C system (that is, business systems not sold through computer stores or by mail) costs more than a personal  $\mu$ C system. The major ones include small-industry pricing methods, lower sales overhead, less-stringent quality control measures, and less investment in software. Let's examine these in greater detail.

The personal  $\mu$ C industry was originally created around the S-100 bus. (The S-100 bus, as are other types, is a

# Personal Computers for Small-Business Applications

*More and more "home" computers are being used for commercial purposes. Here's why.*

BY PORTIA ISAACSON



set of electrical, mechanical, and logical specifications for the interconnections between the various plug-in subassemblies that transmit or receive data over the bus.) At this writing, there are more than 30 companies manufacturing computers using the S-100 bus and more than 150 companies with plug-in board subassemblies compatible with the S-100 bus. There are also some companies with S-50, IEEE and other bus systems. Since the competition centered on the S-100 bus and others is fierce, prices for personal-use computers and subassemblies are quite close to the lowest they can be set for the companies to realize a profit. Competition, therefore, tends to hold down prices for a personal-use computer, whether used at home or by the businessman.

Another reason for the price difference is the method of marketing used. A traditional commercial computer company might make several calls on a customer at the customer's location before making a sale. Following the sale, the customer will probably require assistance in using the system. These extra services cost money and raise the manufacturer's operating overhead.

A personal-use computer, in contrast, is marketed in a retail store where a salesperson's time is used much more efficiently, or by mail. Both methods of selling low-cost  $\mu$ C's make it possible to have a much lower markup and still realize a profit. Even such large companies as IBM have recognized the efficiency of the computer-store approach to marketing. IBM has opened several retail outlets for its small business computers, calling them "demonstration centers."

Though it is true that traditional commercial computer companies have more rigorous quality control, the experience of business users of personal-use computers has been very positive. This is supported by the fact that many computer stores offer a maintenance contract at nominal additional cost. Under the terms of the contract, the computer store agrees to repair any failure in the customer's system at the customer's location. Prices for the typical maintenance contracts are very competitive with those of the traditional commercial computer companies.

**Business Hardware.** A data-processing application typically requires a central-processing system, memory, dual-disk drives, and a hard-copy printer. (A CRT terminal might also be used for data observation and manipulation.) The

central-processing system and its associated memory make up the nucleus of the system, while the disks are required for random or rapid sequential access of the data. Dual disks are necessary for reasonable copying operations capability. A hard-copy printer generates the necessary paper forms.

A typical  $\mu$ C configuration may use an 8080 microprocessor unit (MPU). With seven central registers, eight-bit-wide data paths, eight-bit integer arithmetic, and an instruction execution time of 2 to 9  $\mu$ s, the 8080 can directly address 65K of memory. In terms of path width, instruction execution time, and memory size, the 8080 is roughly compatible to the IBM S/360 Mod 30, the workhorse computer of the 1960s. A 32K memory is usually sufficient for most business applications. In fact, 32K is the typical memory used in many IBM S/360 Mod 30 installations.

In personal or hobby  $\mu$ C systems, BASIC (the most commonly used high-level language) typically occupies 12 to 20K of memory, while the remainder of the memory is used for applications programs. Memory expansion to 65K is possible if an application requires it. Memory management software to support the use of greater than 65K of memory is not currently available. The memory speed is on the order of 500 ns access time, which is five times the speed of the S/360 Mod 30 system.

For most data processing applications, the most important decision will be the choice of a disk since the disk is approximately half the cost of the entire system. Disk performance ground rules are the same in low-cost computing as they have been in other forms of computing. Data processing applications tend to be limited by the disk, which determines the amount of data that can be accessed at one time and also determines the speed at which it can be accessed. Since the disk is largely mechanical, it will also be one of the least reliable components in the system. Another reason for caution in the selection of a disk is that, in mixed vendor systems, the system software comes from the manufacturer of the disk.

Floppy-disk sizes popularly used today are 8" (20.3 cm) and 5¼" (13.3 cm). Dual 8" floppy-disk drives, which store 500 to 600K total, have a 100-400-ms access time and 32-60K byte/second transfer rate. They cost about \$3000, including the required disk controller. Dual 5¼" floppy-disk drives in contrast, store about 150 to 630K and have an average

access time of 780 ms. This type of system has a transfer rate of 16-60K/second and it costs about \$1800, including the controller. Many personal computer makers offer these disk systems.

We can expect to see some significant increases in the amount of storage we can obtain per dollar in the near future. In fact, Motorola is already delivering its 5¼" dual-floppy disk drives that can store 630K for about \$1900, including controller. We can also expect to see hard disks for low-cost computers.

Most computers use the standard RS-232C serial interface for terminals and printers. This is the same interface used by time-sharing terminals, mini-computer terminals, and some printers. Since any terminal or printer that uses the RS-232C interface can be used with hobby computers, a wide selection of these terminals is available.

At the low end of the printer category useful in a business environment, is an impact printer that uses roll paper at 120 characters/second and sells for about \$750. The Digital Equipment Corp. DECwriter Model LA36 terminal accepts continuous forms, prints at 30 characters/second, and costs about \$1500. The Texas Instruments Model 810 impact printer prints 150 characters/second and costs \$2100. For word-processing applications, the Diablo terminal plots and prints at 30 characters/second and costs \$3000.

If a printer is chosen, a CRT terminal is also needed. It should be noted that the terminal and/or printer can be one of the most costly components in a computer system. And since the printer is largely mechanical, it may also be a source of maintenance problems.

Most personal computers sold to businesses are fully assembled, burned in, and tested. Such purchases are usually made through computer stores rather than mail order houses because of the convenience of having local support services. Where an owner or employee is also a computer enthusiast, a kit route may be taken, of course.

**Business Software.** When comparing the capability of personal-use computers to larger computers and time-sharing services, the most obvious shortcoming of the personal-use computer is in the software area. There is less business/industry application available compared to that from traditional computer makers.

BASIC is the language most often used in programming personal-use

computers for small business applications. Fundamentals can be learned in a few hours. COBOL, FORTRAN, PL/I, and APL are among the most popular languages used by the traditional computer makers. They're more difficult to learn, however. The use of BASIC is growing, here too, since it is a terminal-oriented language and is well-suited to time sharing.

Fortunately, many of the available BASIC's have been extended especially for business applications. These usually include formatted input/output, disk-file manipulation (including random access), decimal arithmetic, string processing, subroutine parameter passing, and chaining of programs. The cost of a BASIC interpreter is about \$100.

A few application packages are available. They include general ledger, payroll, inventory control, word processing, accounts payable, and accounts receivable. The prices of these programs vary greatly, but \$1000 to \$2000 is typical. Application software packages are available from the manufacturers in some cases. For the most part, however, they are offered by individual computer stores. Significant additional offerings can be expected soon, primarily packages for particular types of small businesses, such as medical clinics, personnel agencies, real-estate firms, lawyers, motorcycle shops, and astrologers.

If a business requires custom software for its own particular needs, the programs are usually written by the computer store or a consultant. Custom software can be very expensive, naturally. Since it is not uncommon for a consultant to charge \$1000 per week for writing programs, the cost of custom software can easily exceed the cost of the hardware.


Presently, the availability of software is the primary factor limiting the use of personal computers in business applications. Many more programs are needed than just the standard business book-keeping applications. Nearly an endless number of programs are needed to fill the requirements of specialized types of businesses. For example, a personnel agency needs an application package to maintain a file of job applicants and to search that file on command for applicants with certain job qualifications. A multiple-doctor clinic needs a program that can schedule appointments, answer inquiries, and each day print the doctors' schedules. A ready-mix concrete company needs a billing program that will take into account different mix formulas

delivered to different customers. The list goes on and on.

Programs for personal computers in business applications are and will likely continue to be written by independent consultants, computer stores, and business persons with programming ability. It's expected that there will be a growing number of companies to serve as a distribution center for these independently produced programs in much the same way that book companies publish the

Such a contract is similar to a health-care plan: for a fixed annual fee of, say, \$1000 to \$1500 for a \$10,000 business computer system, repairs and/or replacements will be effected in a timely manner at the customer's location.

A well-tested and burned-in personal computer is very reliable. One company that has 200 business computers in the field reports that, on the average, the cost of customer service for a system over a year's time has been \$90. As a

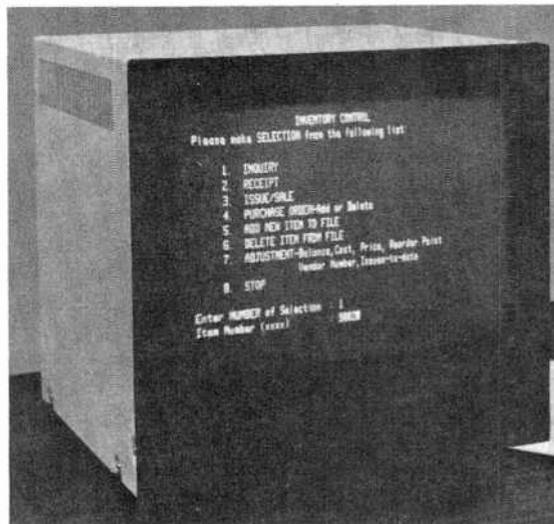

*Typical video display as used in small business systems. This is usually the entry point for the system operator. It is from the data seen on the screen that the operator selects the program, or part of the program, he wishes to run.*

work of independent authors and recording companies distribute the works of many independent musicians. Here, the original author of the program will be paid a royalty on each sale, while the distribution company will market and support the software nationally.

**Maintenance.** While a computer enthusiast may enjoy spending many hours getting an ailing computer back to working order, a business must get its computer operational as soon as possible. Since most businesses do not have the wherewithal to perform their own computer repairs, they must look to the computer store to provide the necessary service. (As a rule, the only service a personal computer manufacturer provides is through the mail or by phone, which is a time-consuming procedure.)

The degree of service offered by computer stores varies greatly. Some stores offer repair service only in the store, charging by the hour (typically \$20 or so) or by the type of board (usually a fixed percentage of the initial cost of the board). Some stores make service calls at the customer's location.

Many computer stores sell maintenance contracts on business computers.

result, many customers dropped their maintenance contracts.

### **The Role of the Computer Store.**

Without the computer store there would be virtually no business market for personal computers since typical businesses need help from the planning stages right on through to a maintenance contract.

Many computer enthusiasts are happy enough to master the enormous amount of information that must be assimilated before the various sections of a computer are selected. A hobbyist usually purchases one section at a time, testing the system as he builds it. Typically, there is no particular end use in mind and, therefore, no particular requirement for the size of his computer system—it just grows as his budget and new applications allow. Business, on the other hand, has a specific use or uses for the computer. Business executives want to be sure that the computer system selected will not only work, but do the required job. Thus, the computer store's first service to the business is to answer the question, "Will a personal computer do the job I want done?" If that answer is yes, the store proceeds to

configure (choose the parts of) an appropriate system. Some typical important considerations are the amount of disk storage, the size of memory, and the speed of the printer. The computer store must consider the business application very carefully in making these decisions.

The next service performed by the store is to put the computer system together. Some stores actually do the assembly from kits. If various boards are purchased assembled from manufacturers, the computer store will burn in and test the system before delivery to uncover any infant mortality problems.

Probably the most important service provided by computer stores to businesses is ongoing repair service. Businesses usually cannot do their own repairs, and service from manufacturers by mail is obviously not a satisfactory route to take.

Nearly all computer stores, certainly the older ones, originally saw their market as being only the computer hobbyist. However, when disks became available for personal computers in 1976, business applications rapidly became common. At first, computer enthusiasts started applying personal computers to business problems. Then computer stores started developing standard business software packages for less knowledgeable users with some stores starting to specialize in the business customer.

The physical appearance of some stores started to change, too. Instead of a tile floor and a repair counter in plain view, stores were remodeled to have carpeted floors and no service counter with IC's in view.

With the appearance of the disk drive on the consumer market, computer store owners and personal computer makers have been developing standard business software packages for the businessman. The most common commercial business applications for personal-use computers are bookkeeping and word processing.

The bookkeeping functions include general ledger, accounts receivable, accounts payable, and payroll. Different types of small businesses can make use of the same application software.

**Use of Personal Computers in Business.** Word processing is useful to many different businesses, including large companies. In word processing, the computer is used with a typewriter-like terminal to edit manuscript and print form letters.

Here are some examples of how personal computers have been used successfully in the small-business world.

**Savings and Loan.** A savings and loan association is an excellent example of a business that has a wealth of applications ideally suited to a  $\mu$ C. Two Dallas, Texas savings and loan associations recently installed  $\mu$ C's for their daily operations of taking deposits, paying interest, and making home loans. Software was developed by a consultant and a former savings and loan data processing manager.

The first of these companies to install a  $\mu$ C was a medium-sized operation with \$100-million in assets and about 50 employees. Most of its data-processing needs were satisfied by an on-line system provided by a service bureau. However, there were enough small applications not being performed by the service bureau to easily justify the  $\mu$ C. In fact, the savings and loan estimates a \$7000 annual savings based on just those applications initially delivered.

The  $\mu$ C system uses an 8080 microprocessor with 32K of main memory, dual 8" floppy disks that store 512K, and an extended BASIC interpreter, all for a total price of about \$5000. A DECwriter LA36 was leased, with maintenance, for \$86 per month to take care of input and output requirements.

Application software was written entirely in BASIC in less than four weeks. The package comprised eight different applications that consist of about 2700 BASIC statements.

One application for the  $\mu$ C system is the preparation of new account letters and closed account stuffers. Form letters are stored on the disk and written on demand to a list of names and addresses entered in a different disk file. The new account letters give the company a marketing advantage as well as a dollar savings on the required twice-yearly audits.

Employees of the savings and loan, including secretaries, accountants, and tellers who use the  $\mu$ C system have accepted it as a working member of their team. One reason for this was the use of a "people-oriented" user interface that gently guides the user through the programs. Each program was almost completely self-instructing.

The second Dallas savings and loan company to install a  $\mu$ C was a medium-size association having 35 employees. It uses an in-house IBM System/3 for most data-processing functions. Several

applications, however, were found to be more suited to the  $\mu$ C. The system identical to the one described above, uses most of the same software and has six additional applications. Including the hardware and the software, the system cost less than \$9000.

Before the  $\mu$ C was installed, the association's employees spent two days to prepare 30 required reports on loans sold to the Federal Home Loan Mortgage Association. The reports are now prepared in only two hours.

A card file that used to keep track of the due date on 10,000 insurance policies was replaced by a seven-page BASIC program that performs the function of the card file and also sorts the policies by insurance agents. Fewer checks are written, fewer errors are made, and a substantial amount of money is saved.

Before the  $\mu$ C was installed, the payroll was done manually by the controller. Now the controller still makes up the payroll, but he has a computer to assist him. The payroll program used consists of 750 BASIC statements, can handle up to 250 employees, and maintains a pass-word-protected file of information on employees. The 800 bytes of data maintained on each employee can be displayed and modified as required.

Possibly the most interesting application is a program that selects packages of loans for resale. A buyer of a loan package can specify a wide variety of parameter ranges that must be satisfied by the loans in the package. For example, all loans in a package might be required to be between 8½% and 8¾% and also satisfy several other conditions. In fact, any combination of 12 unique types of constraints can be applied to a given package.

Before the  $\mu$ C was in use, up to two days were required to select a loan package. Now the same operation can be done in only 40 minutes, giving the association a significant competitive advantage when several associations are bidding loan packages to the same buyer.

A set of ledger cards was previously used to keep track of real estate owned by the association. All transactions associated with each piece of property were recorded on the cards. Now the  $\mu$ C has replaced the ledger cards and provides timely, accurate reports on the status of each piece of real estate.

A tickler file for loan commitments was needed to plan cash requirements more accurately. The  $\mu$ C proved to be perfect for this application.

The association has calculated that its total saving due to the  $\mu\text{C}$  is \$450 per month. This compares favorably with the \$350 per month  $\mu\text{C}$  amortization cost over a three-year period.

**Tour Agency.** A tour agency that operates dedicated flights out of 16 U.S. airports to exotic vacation spots like the Bahamas, Jamaica, and Acapulco, recently installed a personal  $\mu\text{C}$  for business purposes. Bookings are accepted from travel agents from all parts of the country. Each booking involves the date and destination, hotel reservations, meal service, and other travel options. Follow-up paperwork and record keeping is extensive. Confirmations and invoices must be issued, alphabetized manifests are required by the airline, and hotel lists must be drawn up.

Seats can be sold right up to the time of departure, so there is little time for paperwork and error checking. Currently, the agency produces its manifests five days prior to tour departure and implements later changes by telephone. The agency may hold more than 20,000 individual reservations at any one time and may schedule 25 different flights during any one three-day weekend. The entire operation is controlled by five to eight clerks staffing the telephones and controlling the flight boards.

The computer setup consists of a distributed data processing network containing 10 personal  $\mu\text{C}$ 's and one mini-computer. An IBM Series-1 minicomputer controls a database that contains information on all flights and reservations, while 10 PolyMorphic  $\mu\text{C}$ 's (eight 8810's and two 8813's) interface with it (using a 9600-baud line) to provide reservation, documentation, accounting, and management information. Six of the 8810's, each with a 90K minifloppy diskette, serve as intelligent terminals (to the Series-1) for the individual travel clerks.

Documentation is by two Texas Instruments Model 810 printers under the control of an 8810 and an 8813 with two diskettes. A second 8813 provides support to the accounting function of the agency, while an 8810 provides on-line management information to the general manager. This terminal can also provide trend analysis and other statistical analyses of the database.

The interface between the personal computers and the IBM computer is a set of microprocessor-controlled RS-232 serial ports. There was no special hardware constructed for the system.

For the individual travel clerks, the

system can call up current availability of seating, options, and flights from the database on request and display it on a formatted screen at their location. When the system is first turned on, a list of available services is automatically presented. After signing on with an individual password (used to assign responsibility, prevent unauthorized use of the system, and limit access to some stored data), the operator selects the appropriate function. A formatted screen display is then presented, using software, with a blinking cursor to indicate the entries required. Reservation details are sent to the Series-1, which updates the database and instructs its printer to automatically produce the required confirmations and invoices.

The system provides excellent backup, too. The Series-1 automatically produces a magnetic tape of transactions as they are received from the operators' terminals. If the system "crashes," the tape can be used to recreate the data from the point of failure without having to return to the backup disk produced the preceding night.

If the Series-1 goes down, each  $\mu\text{C}$  can conduct limited business by retaining reservation requests on its own minifloppy disk. This allows the agency to continue near-normal operation. When the Series-1 comes back on-line, rapid transfer of information from the  $\mu\text{C}$ 's to the database can be accomplished.

The system also provides impressive growth potential. The starting six operator positions can be increased to about 18 without changing the configuration of the Series-1.

**The Future.** Several factors will contribute to the increasing usage of personal computers for small businesses. First, the new and much lower cost threshold for the feasibility of application will open many new areas. More and more packages that include hardware, software, maintenance, and training will be developed for particular types of business applications.

Next, a misconception held by some people that personal computers are not sufficiently powerful or reliable enough for business purposes will be dispelled. As noted earlier, today's personal computer compares quite favorably and closely to the IBM S/360 Mod 30 that was the data-processing workhorse of the late 1960's. And the cost of personal computers is much lower. So we can expect a rapidly increasing use of personal computers by businesses.  $\diamond$

## Learn Electronics along with MATHEMATICS

The Grantham Electronics-With-Mathematics SERIES — in five volumes, written in *home-study-course* style — now available by mail order...

- Introductory Electricity With Mathematics. Size, 7 x 10½. 288 p... \$12.75
- Fundamental Properties of AC Circuits. Size, 7 x 10½. 267 pages . . . . . \$12.75
- Mathematics for Basic Circuit Analysis. Size, 7 x 10½. 352 pages . . . \$12.75
- Basic Electronic Devices and Circuits. Size, 7 x 10½. 431 pages . . . . . \$14.75
- Antennas, Transmission Lines, & Microwaves. Size, 7 x 10½. 315 pages . . . . . \$12.75

The books listed above were written by Donald J. Grantham, whose 25 years of teaching—in print and in the classroom—enable him to anticipate questions in these subjects and thus answer them in these books. 16 lessons and 16 multiple-choice tests in each book (except for the last one, which has ten lessons and ten tests); many circuit diagrams with detailed explanations; many sample problems with step-by-step solutions; many practice problems with answers given; easy-to-understand language; *in-depth* explanations. Order from *GSE Technical Books* — address below.

### Prepare for Your F.C.C. LICENSE

- Grantham's FCC License Study Guide. Size, 7 x 10½. 377 pages . . . . . \$12.75

This not a Q & A book, not a correspondence course, but simply an authoritative down-to-earth presentation of what you should know to pass FCC license exams for 3rd, 2nd, and 1st class radiotelephone licenses. Four information sections. 1465 FCC-type multiple-choice questions, with more than 65,000 words "explaining" the correct answers. Self-study presentation. Order from GSE —address at bottom of page.

### OTHER GSE BOOKS

- Improve Your Technical Communication (How to write technical reports, manuals, proposals, articles, etc.). Size, 7 x 10½. 216 pages . . . . . \$4.95
- Geometry for Science and Technology. Size, 7 x 10½. 141 pages . . . . . \$5.95
- Modern Electronic Calculations. Size, 7 x 10½. 207 pages . . . . . \$6.95
- Answers in the Mail (The author, a correspondence instructor in electronics, physics, and math, gives examples of questions written in by students, along with his detailed replies.) Size, 6 x 9. 217 pages . . . . . \$4.95

**TO ORDER** any of the books listed above, check off the ones you want, compute the total price, *add only 75¢ (regardless of the number of books you are ordering) for postage and handling*, and mail this ad with your name and address and payment (no C.O.D.s) to:

**GSE Technical Books**  
(2000 Stoner Avenue)  
P.O. Box 25992, Los Angeles, CA 90025  
57

# THE VERSATILE KEYPAD

**T**HERE ARE an ever-increasing number and variety of low-cost decimal and hexadecimal keypads available to the electronics experimenter. To successfully use these keypads, one must observe certain criteria to be sure mutually compatible signals are available. You cannot just connect any keypad to any circuit and expect the system to operate properly. Either the keypad selected must be specifically designed for the digital circuit it is to drive, or the digital circuit must be designed to suit the specific keypad.

One major problem with keypads (and most other mechanical switches) is that they are not ideal switches. Instead of producing a single pulse when they are opened and closed, they produce a "train" of brief pulses as they mechanically settle. In ordinary switching applications, this "bouncing" is not a problem. But when switches are used with high-speed electronic counters, each pulse within a train (Fig. 1) can appear as a separate toggle signal, resulting in false counting.

Most keypads are decimal (0 to 9), while many electronic circuits require a

binary-coded-decimal (BCD) input. Hence, a decimal-to-binary decoding system to make the conversion is required. Too, many counting circuits also require a "start" or "sync" signal to "tell" them when a key has been depressed. Therefore, some kind of key-closure sensing system must be used.

**Debouncing.** A basic debouncing circuit for a switch is shown in Fig. 2, accompanied by its truth table. The circuit consists of an AND and an OR gate. When the switch is closed, input A goes low and forces the output of the AND gate low. This low signal is connected to the C input of the OR gate and is additionally used to toggle the bounce-inhibit monostable multivibrator. In response to the low at its input, the multivibrator sends a low signal to the D input of the OR gate for a period of time determined by the monostable time constant. Since both inputs to the OR gate are low, the output of the gate also goes low.


The switch can now be released, causing the A input to go high, due to the pull-up resistor. With the low output of the OR gate connected to the B input, the output of the AND gate remains low. The circuit will remain in this state until the monostable time constant times out and sends a high signal to the D input of the OR gate.

As explained above, the very first closure of the switch causes the circuit to operate but locks out any subsequent bounce-produced signals. The only thing to keep in mind is that the bounce-inhibit monostable time constant must produce an output slightly longer than any expected bounce interval.

The circuit shown in Fig. 3 illustrates the use of the debounce circuit with a BCD coding scheme. A function truth table is also shown. You may be surprised to see a hexadecimal table for a 10-key array. If you wish to obtain a hex A (10),

POPULAR ELECTRONICS

*How to interface these important mechanical devices with digital circuits.*

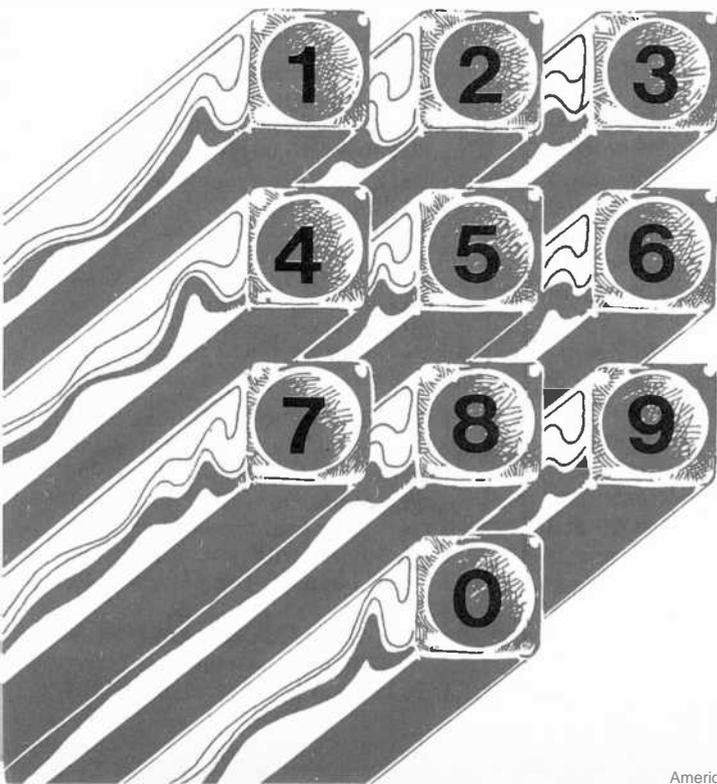


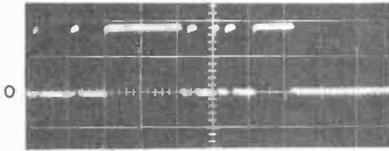


Fig. 1. Pulse train resulting from switch contact bounce. Sweep time is 50  $\mu$ s/div.

both the 8 and 2 keys must be pressed simultaneously. Similarly, a hex F (15) requires simultaneous operation of the 8 and 7 keys. If you plan to use a hex keypad, use the same AND-OR gate logic for all 16 switches and substitute the circuit shown in Fig. 4.

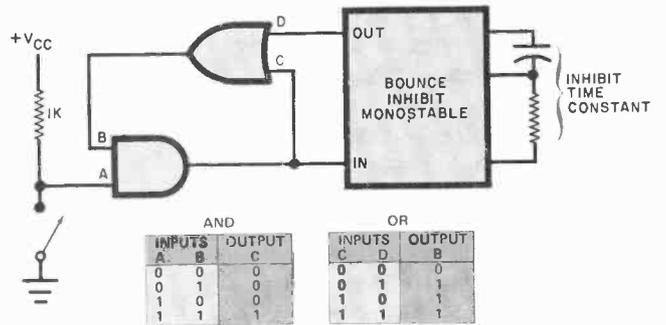

AND			OR		
INPUTS		OUTPUT	INPUTS		OUTPUT
A	B	C	C	D	B
0	0	0	0	0	0
0	1	0	0	1	1
1	0	0	1	0	1
1	1	1	1	1	1

Fig. 2. Switch debounce circuit is formed from AND-OR gate logic.

SWITCH CIRCUIT LOGIC					
STATE	A	B	C	D	
0	1	1	1	1	Switch open
1	0	1	0	1	Switch closure
2	0	0	0	0	Debouncer response
3	1	0	0	0	Switch bounce
0	1	1	1	1	Switch open, Debounce reset

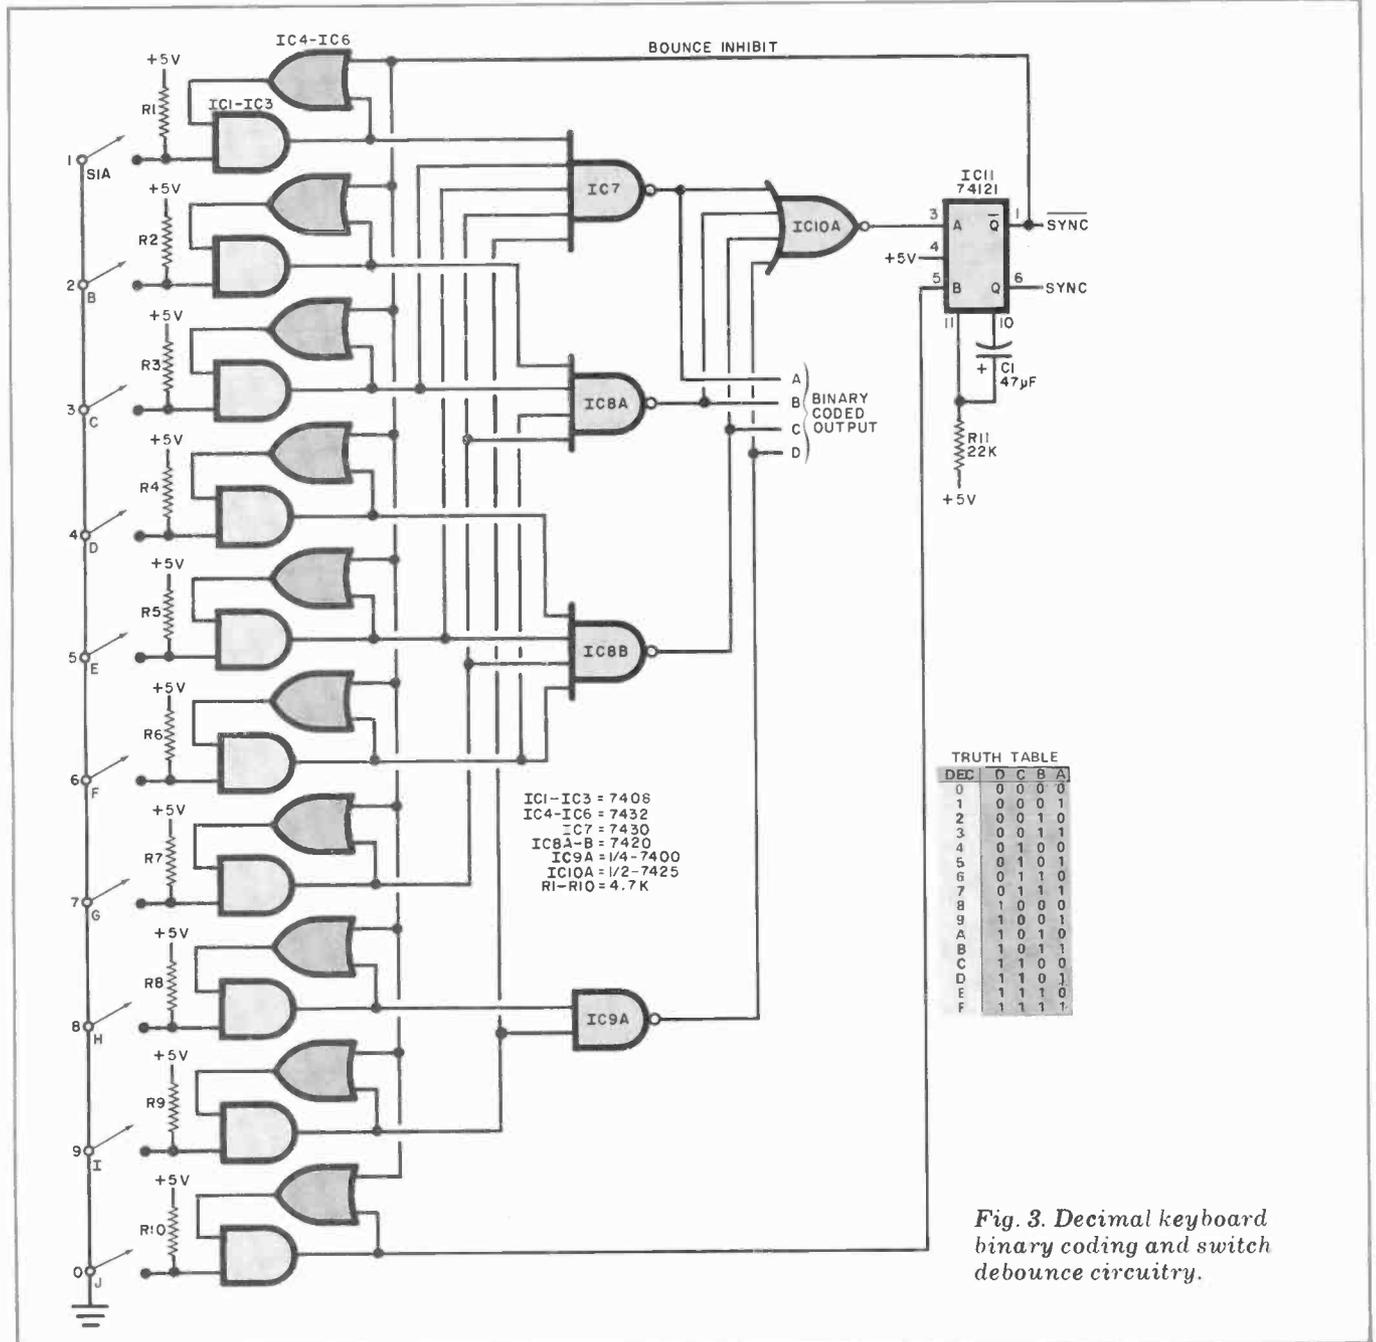


Fig. 3. Decimal keyboard binary coding and switch debounce circuitry.

Referring back to Fig. 3, when all keyswitches are open, their associated AND gate (IC1 through IC3) inputs are high. Hence, the outputs of the four encoding NAND gates (IC7 through IC9) are low. Closing any keyswitch except 0 forces at least one of the NAND gate inputs high.

The bounce-inhibit circuit uses a 4-input NOR gate (IC10A) to trigger bounce-inhibit monostable multivibrator IC11. When any of the four NOR gate inputs go high (any key closed), the output of the NOR gate goes low and triggers the multivibrator. The multivibrator, in turn, sends a low signal to the OR gate associated with each key. This implements the debounce function. For the RC values given in Fig. 3, the debounce period is about 700 ms. For the 74121 monostable multivibrator, the timing equation is  $T = 0.69RC$ , with R kept at a value of less than 40,000 ohms.

The circuit remains in the debounce condition and ignores any switch bounce until the monostable multivibrator times out. When this occurs, the circuit resets back to where another key can be operated. Note in Fig. 3 that the multivibrator also produces a "sync" signal in exact time step with the input pulse. This is for use with an external counting or other enabling circuit.

The 0 key requires a different approach from that discussed. Although it has the same debounce circuit as the other keys, when the 0 key is closed, a separate input trigger, B, on the multivibrator is used.

**Controlled Pulse Generator.** One use for a debounced and BCD-coded keypad is as a controlled pulse generator that delivers a number of output pulses determined by the decimal number inserted via the keypad. The basic logic for this circuit is shown in Fig. 5.

Pressing any key on the keypad in the Fig. 5 circuit sends a sync pulse to an enabling latch and the BCD-coded signal to the inputs of a binary down counter. The latch signal enables the counter's preset input and a controlled-pulse generator. The pulse generator is designed so that both pulse width and pulse period can be controlled. Each time a pulse appears at the output, the binary down counter is decremented by one. When the counter reaches zero, it resets the latch and stops the operation.

The actual circuit, shown in Fig. 6, is straightforward. The IC1A/IC1B latch is made from conventional TTL NAND gates, with RC coupling at the inputs to

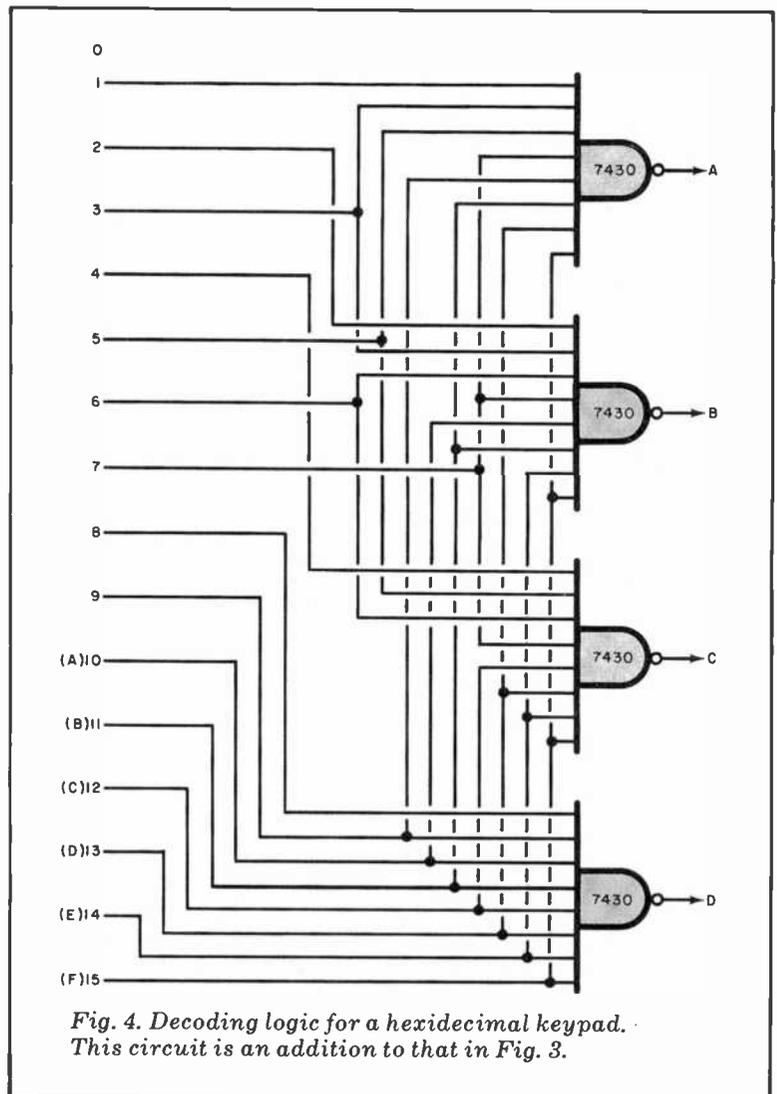


Fig. 4. Decoding logic for a hexadecimal keypad. This circuit is an addition to that in Fig. 3.

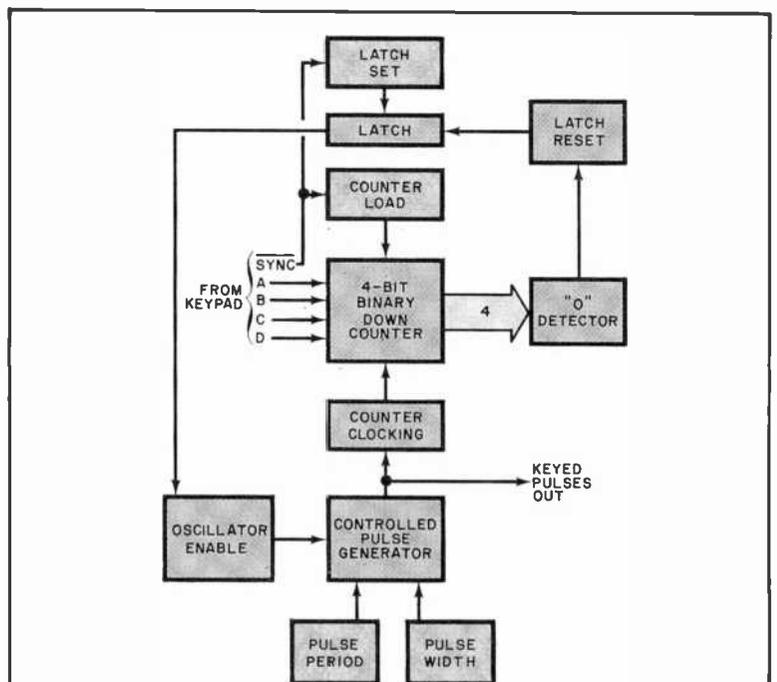


Fig. 5. Function diagram for a controlled-pulse generator.

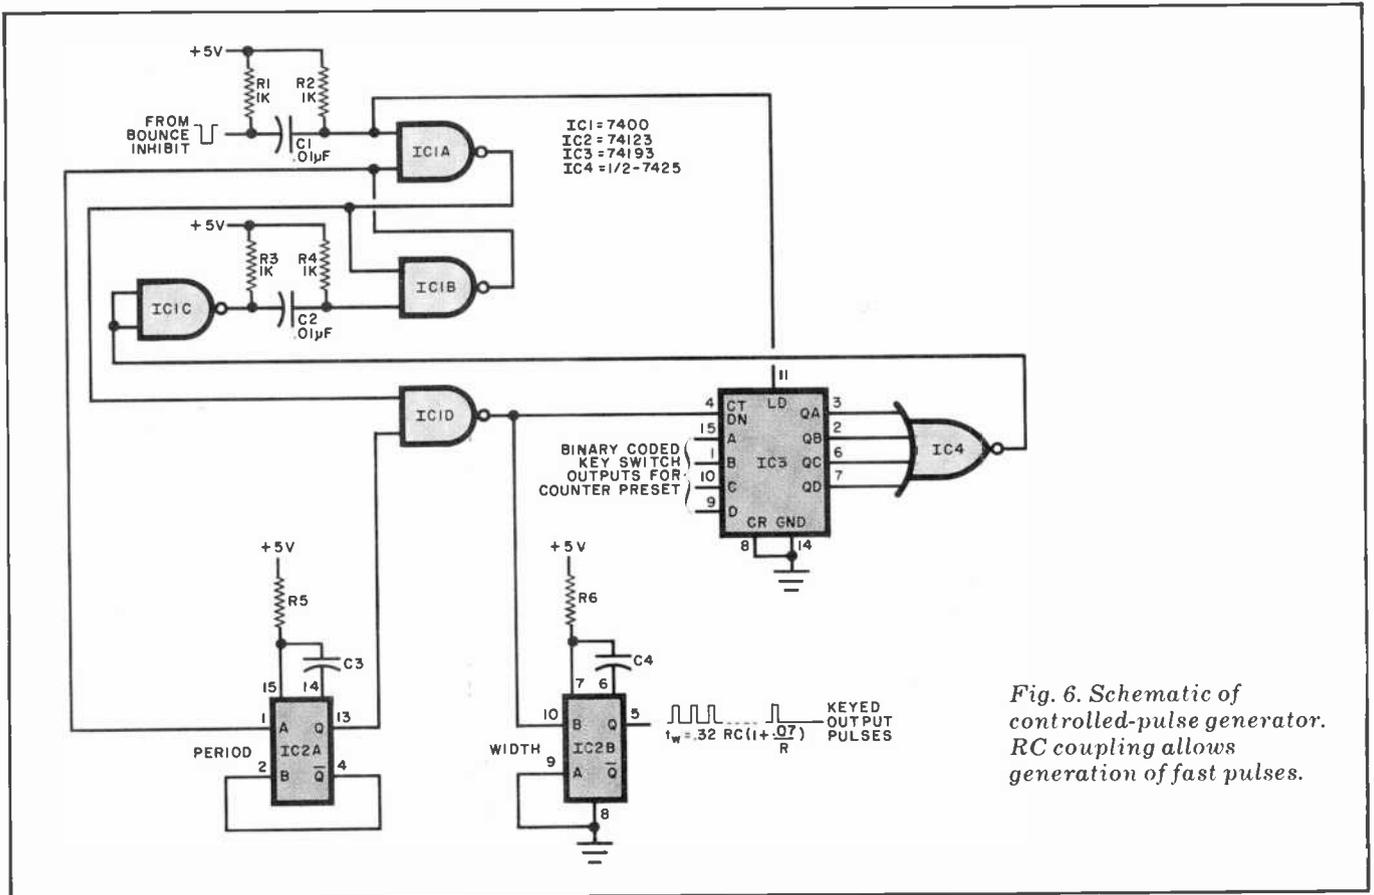


Fig. 6. Schematic of controlled-pulse generator. RC coupling allows generation of fast pulses.

allow rapid action—in fact, a complete pulse train can be generated within the width of the sync pulse. Without RC coupling, the latch would be locked for the duration of the sync time. A transient input is a must to avoid lockout. The IC3 down counter has its LOAD enable input RC coupled to the sync input. This input requires a transient input to operate.

The controlled-pulse generator (IC2) is made up of both halves of a 74123 dual monostable multivibrator. The RC timing of IC2A sets the pulse period. The Q output at pin 13 is connected to NAND gate IC1D, with the second input of this gate connected to the latch. With the latch reset, the NAND gate is locked and its output remains in the high state, regardless of what the multivibrator is doing. In reality, IC2A is not doing anything, since its A input trigger at pin 1 is also enabled by the latch.

The first cycle of the operation is initiated when the latch is set. This causes a high-to-low transition at the A input. When the multivibrator triggers, the Q output at pin 4 goes low. When the multivibrator times out, the low-to-high transition at the Q output retriggers the multivibrator. Because the transition is so fast, the multivibrator appears to be con-

tinuously in the triggered state.

The output of gate IC1D decrements the IC3 counter and triggers the second monostable multivibrator (IC2B). The timing of this circuit controls the width of the pulse.

The only limitation on the frequency and width of the keyed pulses are those determined by the multivibrators. Very long and very short pulses over almost any range can be generated once the counter is preset. The keypad plays no role in this part of the operation.

The oscilloscope waveforms for the Fig. 6 circuit are shown in Fig. 7. The upper trace shows switch contact bounce, while the lower trace shows four pulses initiated by the first switch closure. Note the immunity to switch noise and the fast response possible. The traces in Fig. 8 show the timing of those functions that will be helpful in understanding the operation of the circuit.

**Combination Lock.** The logic for a four-digit combination lock that can be operated only by someone who knows the code is shown in Fig. 9. This circuit can easily be expanded so that several functions can be derived from a single keypad. Appropriate interfacing must be

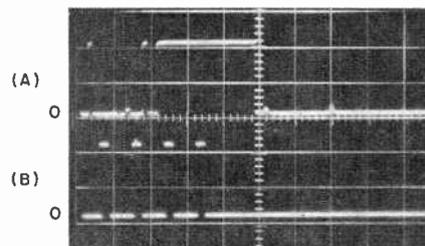


Fig. 7. Scope trace (A) shows switch bounce, while (B) shows four pulses initiated by switch closure. Sweep time is 50  $\mu$ s/div.

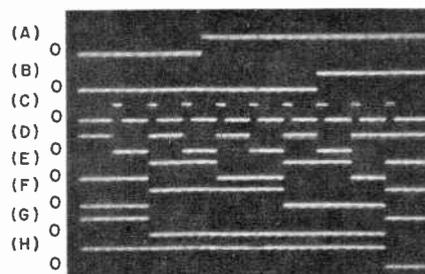


Fig. 8. Nine pulses generated by key switch closure (50 ms/div): (A) key closure; (B) sync; (C) outputs of 74123; (D) output QA; (E) output QB; (F) output QC; (G) output QD; all of IC3; and (H) latch input to IC1D.

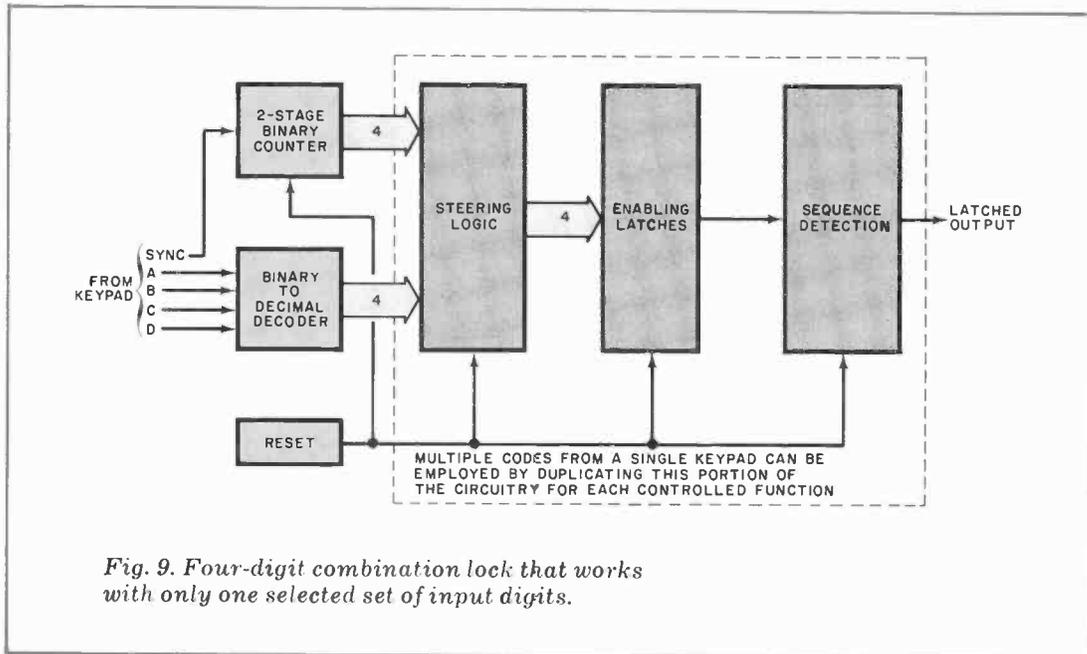


Fig. 9. Four-digit combination lock that works with only one selected set of input digits.

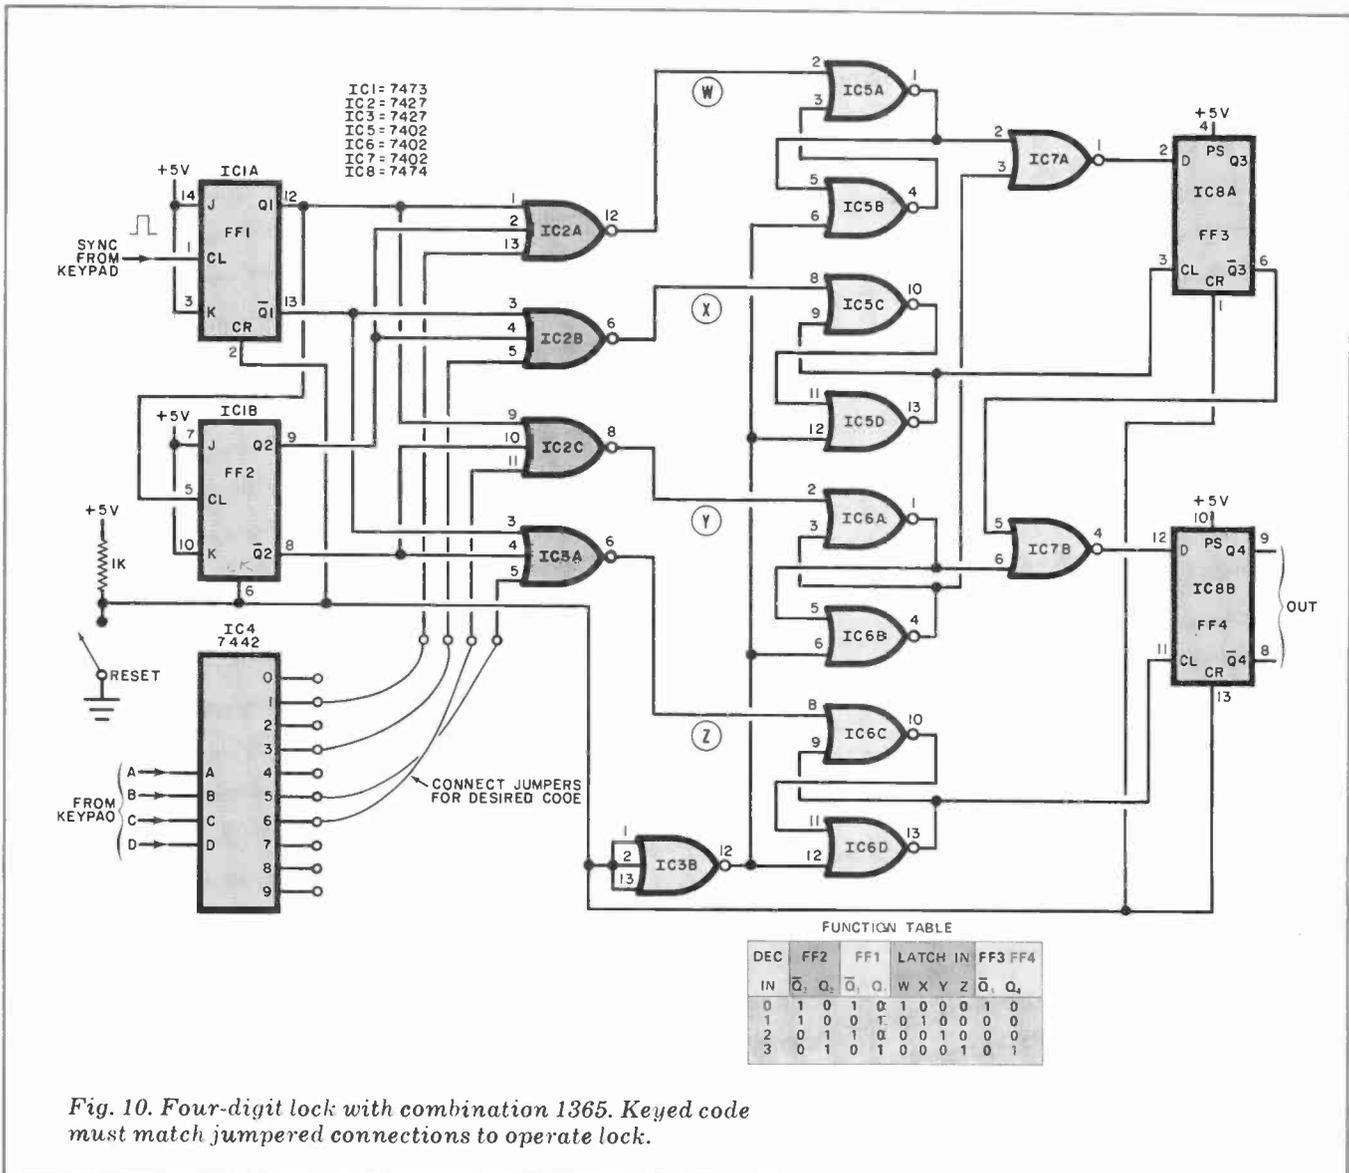


Fig. 10. Four-digit lock with combination 1365. Keyed code must match jumpered connections to operate lock.

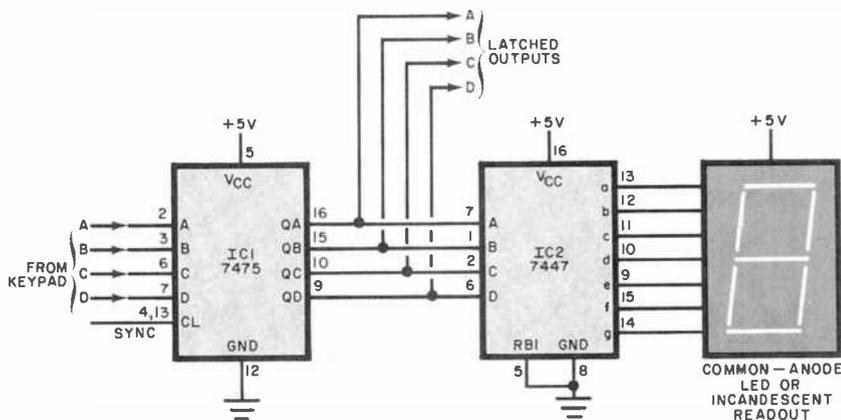


Fig. 11. Latched output for a keypad. Display is on a 7-segment LED readout.

added between the circuit and any external devices to be controlled. The actual circuit for the combination lock is shown in Fig. 10.

Operation of the lock begins with the reset mode. This is necessary because the reset can be initiated at any time in the event an incorrect digit is keyed. The output of a two-stage counter is decoded in the steering logic, and the BCD signals from the keypad are integrated into the counter's decoding logic so that a specific digit only can be passed through the enabling latches if both signals are coincident. It is mandatory that the four latches be set in the proper sequence (W,X,Y,Z) because any other combination will be defeated in the sequence detector.

A function table for the lock is given in Fig. 10. The 0 on the DEC IN line is the reset mode. The outputs of FF1 and FF2 assume a 0101 state. The FF1 and FF2 blocks are clocked flip-flops, with the clocking occurring on the trailing edge of the input pulse. The outputs of the keypad are fed to IC4, the outputs of which are selected to form the inputs to the associated NOR gates.

If the correct first digit is keyed in, line W goes to the high state, setting IC5A/IC5B. Both inputs to NOR gate IC7A are now low, setting the D input to FF3 (IC8A) to high.

The sync pulse from the keypad has once more clocked the counter. If the second digit is correctly keyed in, line X goes high and sets the IC5C/IC5D latch. This clocks a low to one input of (IC7B). Once again, the keypad is operated with the correct digit to cause the associated latch to operate and placing a high on the Y line. This puts a low on

the second input of IC7B. This sets the D input of IC8B to high.

The keypad is operated one more time with the final correct digit to set the Z line high. The Z latch clocks IC8B to change its output status. Either of the IC8B outputs can be used to interface to an external circuit.


If any of the four latches is set out of sequence, the clocking of IC8A and IC8B will be disrupted. The circuit is reset by operating the RESET switch.

Although the Fig. 10 circuit shows the use of a 1-to-10 decoder for the keypad input, a 1-of-16 decoder can be used for a hexadecimal input.

**Switch Latch & Display.** One difficulty with a keypad is that it is momentary. Once a key has been released, the action ceases. The addition of a quad latch, as shown in Fig. 11, will hold the switch outputs as long as dc power is applied. The IC1 quad latch is used to drive BCD-to-7-segment decoder/driver IC2 and a common-anode 7-segment LED display. This combination holds the last key depression and also produces a visible display of the digit depressed.

**In Conclusion.** In this article, we have described the major problems encountered when using mechanical switches—specifically keypad arrays—with digital circuits. We have offered some examples of how to deal with the problems and given hints on interfacing keypads with the electronic circuits. It is suggested that for further study and understanding of the material presented here you breadboard the circuits presented and do some experimenting on your own. ◇

# 5 GOOD REASONS FOR BUYING AN EMPIRE PHONO CARTRIDGE

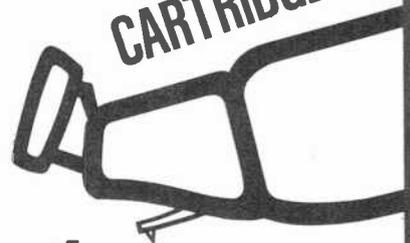

**1.** Your records will last longer. Empire cartridges are designed to track at lower forces. This imposes less weight on the record insuring longer record life.

**2.** Your records will sound better. Distortion is a mere .0005 at standard groove velocity. Therefore, reproduction is razor sharp with no wavering or fuzziness.

**3.** More cartridge for your money. We use 4 poles, 4 coils and 3 magnets in our cartridges (more than any other brand).

**4.** Inspection from head to toe. Every Empire cartridge, regardless of price, is fully inspected both visually and technically. Tests include frequency response, output balance, channel separation and tracking.

**5.** Diamond control. At Empire we cut, grind, polish and mount the diamonds to our own exacting specifications. We insure total quality of the product from start to finish by buying only the highest quality gems.

For more good reasons to buy an Empire cartridge, write for your free catalogue:  
EMPIRE SCIENTIFIC CORP.  
Garden City, N.Y. 11530

Mfd. U.S.A. **EMPIRE**

# AUDIO ALARM BACKS UP CAR WARNING LIGHTS OR METERS

*Easy-to-build circuit sounds an alarm  
so you won't miss your car's visual warning.*

**P**EOPLE often fail to notice immediately when a red indicator on the dashboard of a car lights to warn that service is required. The "Audible Car Protection Alarm" described here corrects this problem by simultaneously issuing an audio signal when a dashboard warning indicator is activated. It can spell the difference between a minor and a major car repair, or even save lives.

When any one or more of the warning indicators in your vehicle lights, the audio alarm sounds an insistent beeper. Then you can check the indicators to determine what service is required.

In addition to serving as an automatic fault monitor, the alarm can also remind

you to turn off headlights and rear-window defogger. The system can easily be expanded to monitor dozens of points in a vehicle's or boat's electrical system.


**About the Circuit.** As shown in Fig. 1, triple three-input NAND gate *IC1* serves three separate functions. Section A operates as a conventional three-input NAND gate. If one or more of its normally high A, B, and C inputs goes low, the pin-10 output of this gate also goes high.

Section B, also used as a three-input NAND gate, has a 1500-Hz signal applied to its pin-2 input, a 1-Hz signal applied to its pin-1 input, and the output from section A of *IC1* applied to its pin-8

input. Hence, when the output from section A goes high, the circuit oscillates at 1500 Hz and is gated on and off at approximately half-second intervals.

Section C of *IC1* is configured as an inverting amplifier whose output is coupled back to its input via *R1* and oscillates at a frequency determined by the values of *R1* and *C1*.

The output of section B drives *Q1*, whose collector load is a conventional miniature 8-ohm loudspeaker. The combination of *C3*, *R2*, and *R3* functions as the system's 1-Hz oscillator. Capacitor *C3* charges through *R2* and discharges through *R3*. This capacitor must be initially charged before the circuit can os-

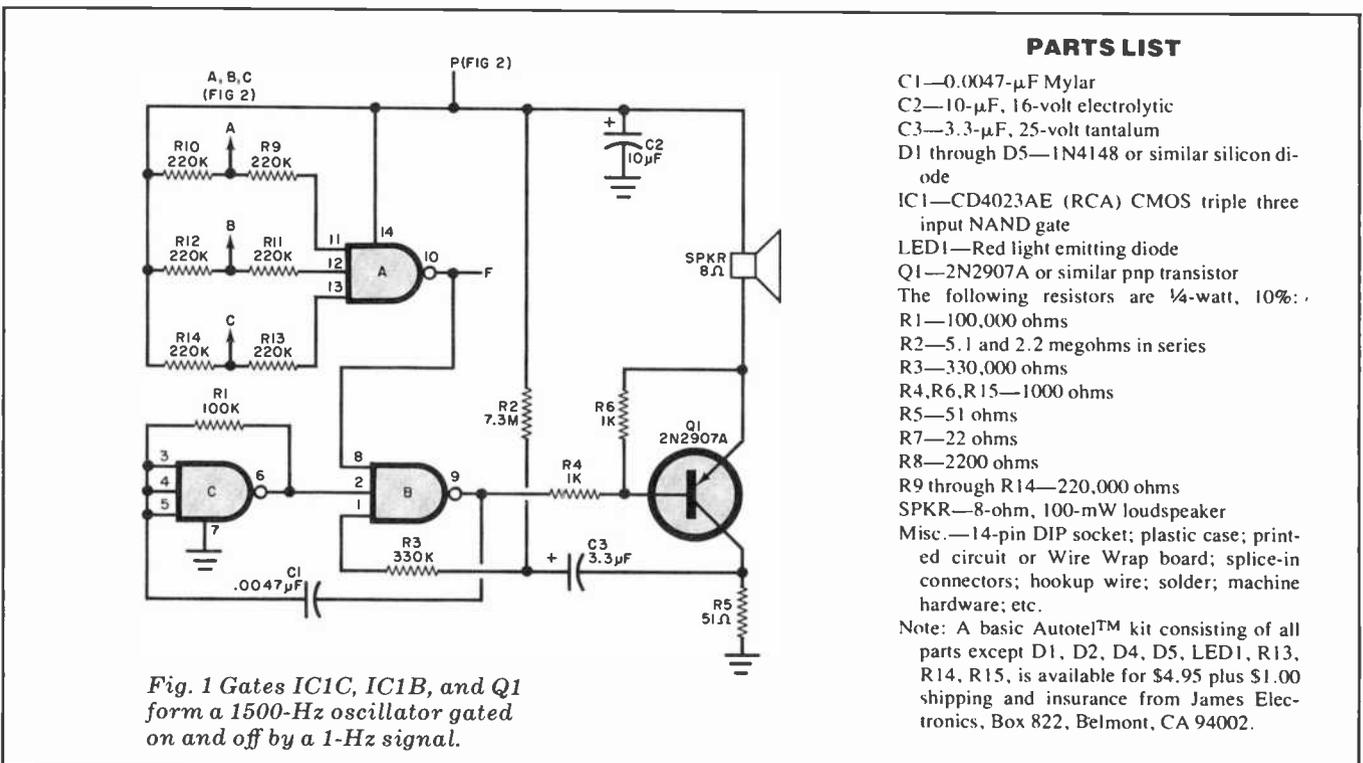

### PARTS LIST

- C1—0.0047- $\mu$ F Mylar
  - C2—10- $\mu$ F, 16-volt electrolytic
  - C3—3.3- $\mu$ F, 25-volt tantalum
  - D1 through D5—1N4148 or similar silicon diode
  - IC1—CD4023AE (RCA) CMOS triple three input NAND gate
  - LED1—Red light emitting diode
  - Q1—2N2907A or similar pnp transistor
  - The following resistors are 1/4-watt, 10%:
  - R1—100,000 ohms
  - R2—5.1 and 2.2 megohms in series
  - R3—330,000 ohms
  - R4,R6,R15—1000 ohms
  - R5—51 ohms
  - R7—22 ohms
  - R8—2200 ohms
  - R9 through R14—220,000 ohms
  - SPKR—8-ohm, 100-mW loudspeaker
  - Misc.—14-pin DIP socket; plastic case; printed circuit or Wire Wrap board; splice-in connectors; hookup wire; solder; machine hardware; etc.
- Note: A basic Autote!™ kit consisting of all parts except D1, D2, D4, D5, LED1, R13, R14, R15, is available for \$4.95 plus \$1.00 shipping and insurance from James Electronics, Box 822, Belmont, CA 94002.


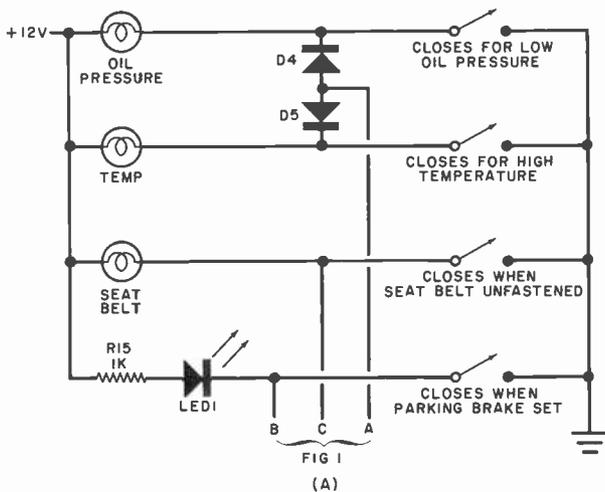


Fig. 2 Function sensing is shown at (A) while (B) shows how dc power is applied to the alarm circuit.

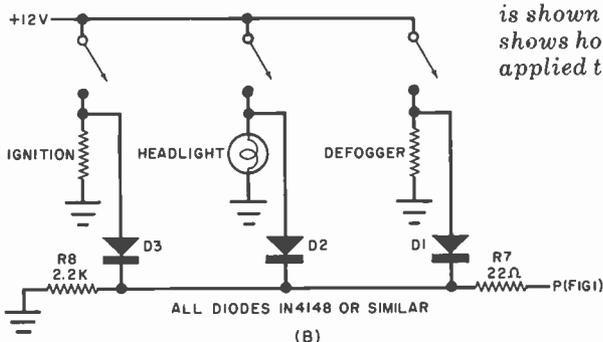

cillate. With the value shown for C3, a delay of about 15 seconds is provided before the alarm enables. This allows time for normal engine starting and the build-up of oil pressure. Consequently, during normal operation, the alarm will not sound.

To see how the circuit operates under actual in-use conditions, let us assume that the oil pressure drops. As shown in Fig. 2A, the oil-pressure sender grounds the oil-pressure lamp, which then comes on. Simultaneously, the cathode of D4 is placed at ground potential. At this point, D4 conducts through R10 and pin 11 of IC1A goes low, causing the output of this gate to go high. As long as C3 is charged, IC1A allows the 1500-Hz oscillator to operate. When the potential across C3 reduces sufficiently, the oscillator ceases operating until C3 recharges. Therefore, the 1500-Hz oscillator is gated on and off by the R2, R3, C3 circuit at 0.5-second intervals. The beeping of the alarm continues until all of the circuit's A, B, or C inputs are ungrounded.

In Fig. 2B, diodes D1 through D3 are connected to the ignition, headlights, and defogger (if any) circuits so that when any of these switches is closed, the associated diode is forward biased

and conducts to apply power to the alert circuit via R7 and its associated C2 filter capacitor.

As an example of the foregoing, assume that the ignition is turned off, but either the headlights or the defogger is left on. The alarm will then receive power through the diode attached to the headlight or defogger switch, thereby sounding off and continuing to do so until the headlight or defogger switch is turned off. This is because when the engine is turned off, the oil pressure drops to close its sensor switch, thus activating the alarm. This action will also occur even if the oil-pressure lamp is burnt out, since the A input will still be grounded. The rear window defogger is also included since in many cars, this accessory will still operate when the ignition is turned off.

**Construction.** The simple circuit that makes up the system can be wired by any convenient means, including a printed circuit board, Wire Wrap, and point-to-point. Since there are no high frequencies with which to contend, lead dress is not critical.

The alarm can be mounted in any box that will accommodate it and the speaker. A barrier strip, mounted on the en-

sure, can then be used to make all power, ground, and sensor connections.

The diode coupling technique shown in Fig. 2A can be used to increase the number of sensing points to monitor other elements in a mobile system. Each NAND-gate input can handle a large number of inputs, connected in parallel.

Note in Fig. 2A how a LED parking brake set circuit can be added to the alarm circuit. The switch associated with this sensor can be a conventional microswitch mounted so that, when the parking brake is set, the switch closes. The LED can be mounted on the dashboard and suitably identified.


**Installing the System.** Before the alarm is installed in a vehicle, it should be tested for proper operation. Connect a 9-volt battery between the ignition input and ground. Temporarily connect sensor input A to ground. After about 15 seconds, the alarm should begin to beep. Disconnect the sensor input from ground; the alarm should cease beeping. Repeat this procedure with sensor inputs B and C. The positive terminal of the battery can be connected with a jumper wire to the headlight and defogger inputs to test the operation of these functions.

Make all connections to the various points in the vehicle's electrical system securely and with care, preferably with splice-in connectors where possible. If you use a strip-and-wrap splice, make sure you cover each connection with vinyl electrical tape.

Dress all wires to protect them from mechanical and heat damage. Do not connect the ignition input to the ignition coil; otherwise, it may be damaged by transients from the coil. It goes to some accessory that is powered only when the ignition switch is turned on. Make sure that the headlight and defogger input power connections are made as shown in Fig. 2B.

After installation is complete, turn on the ignition but do not start the engine. (Set the ignition switch to the ON position only.) Since the low-oil pressure switch will be closed, after the delay period, the alarm should begin to beep. Turn on the headlights and turn off the ignition. The alarm should continue to beep and stop only when you switch off the headlights.

The alarm circuit can be used for monitoring other dc electrical systems. If failure modes are indicated by a "high" voltage, these can be diode OR'ed at input F (see Fig. 1) with the output of IC1A. ◇

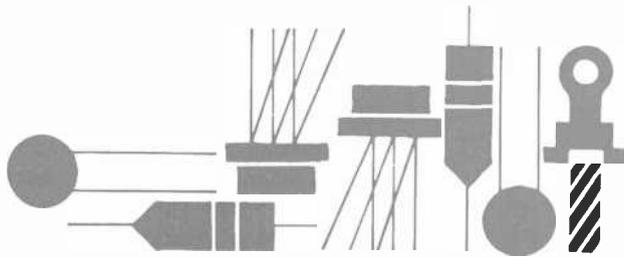

# Solid State

## ON THE LIGHT PATH

By Lou Garner

**A** FEW OF THE advantages that fiber-optic coupled communications systems offer over conventional wired systems are greater noise immunity, smaller diameter, and absence of crosstalk. As a result, subsidiaries of the enormous Bell System have installed optical systems in a number of locations for exhaustive field tests. Several major electronics manufacturers, including industry giant *RCA*, are now offering fiber-optic communications systems and components as standard "off-the-shelf" products. If present trends continue, then, the wave-of-the-future might well be a light wave, at least as far as communications links are concerned. What's more, the increasing interest in optical communications and the resulting improved availability of special optoelectronic components and devices has opened new and exciting areas for the serious experimenter and hobbyist.

Illustrated diagrammatically in Fig. 1, *RCA's* new optical communications link, Type C86003E, is designed specifically for digital data applications. With a 20-megabit (Mbs) capability, it can be used in computer links, digital telephone, data processing and process control systems as well as in high-voltage optically-isolated systems. The system consists of two basic units—a transmitter and a receiver. These are connected to opposite ends of a suitable optical fiber cable (*Dupont* type PFXS120R or equivalent), which can range in length from a few meters up to one kilometer. Self-contained within a two-inch square by one-inch thick module, the transmitter requires only a signal source and a 5-volt dc power supply. It includes a TTL buffer, a GaAlAs LED and LED modulator/driver circuits. Housed in a similar-size package, the receiver comprises a silicon *pin* photodiode, an amplifier, threshold detector circuitry, and a TTL buffer. Supplying digital output signals, it requires a dual  $\pm 6$  V dc power source in addition to a +6 to +45 V dc bias supply for operation.

Although excellent for many commercial, industrial and laboratory applications, *RCA's* C86003E system, which is cur-

rently priced at \$850 each (exclusive of optical fiber cable), is rather on the expensive side for typical experimenter and hobbyist projects. Even where cost is not a factor, however, most experimenters prefer to assemble their own circuits and systems using individual devices. With a little imagination, a little care, a willingness to modify and adapt standard circuits, and a modicum of skill, such projects are well within the reach of the average experimenter's budget and can be assembled using readily available commercial components.

As a general rule, IR (infrared) emitting diodes or injection diode lasers are used as transmitting sources. These are more efficient than visible light LED's and can develop higher peak output levels. As a further advantage, the silicon photodiodes used as detectors are more sensitive to infrared than to visible radiation. A typical IR emitter driver circuit is illustrated in Fig. 2. Using standard devices, this circuit was abstracted from *RCA's* 24-page booklet *Solid State IR Emitters and Injection Lasers*, publication No. OPT-113C. In addition to this and other practical circuits, the publication includes outline drawings of typical devices, condensed specifications, definitions of special terms, a discussion of safety considerations, characteristic curves, and a valuable review of basic theory.

Featuring a CA3085A/B positive voltage regulator IC, the simple driver circuit given in Fig. 2(A) permits IR emitters to be driven by unregulated dc sources of from 7 to 11 volts. It provides adequate voltage regulation and limits maximum forward current to protect the emitter diode. This basic circuit may be modified for use as an optical digital data transmitter by keying the IR emitter on and off using a series control transistor or other switching device capable of handling currents of up to 100 mA.

Much higher radiant flux outputs may be obtained from IR emitters when they are operated in pulsed rather than dc (CW) modes. For example, the *RCA* SG1010A will deliver approximately 7.0 mW when driven at its maximum continu-

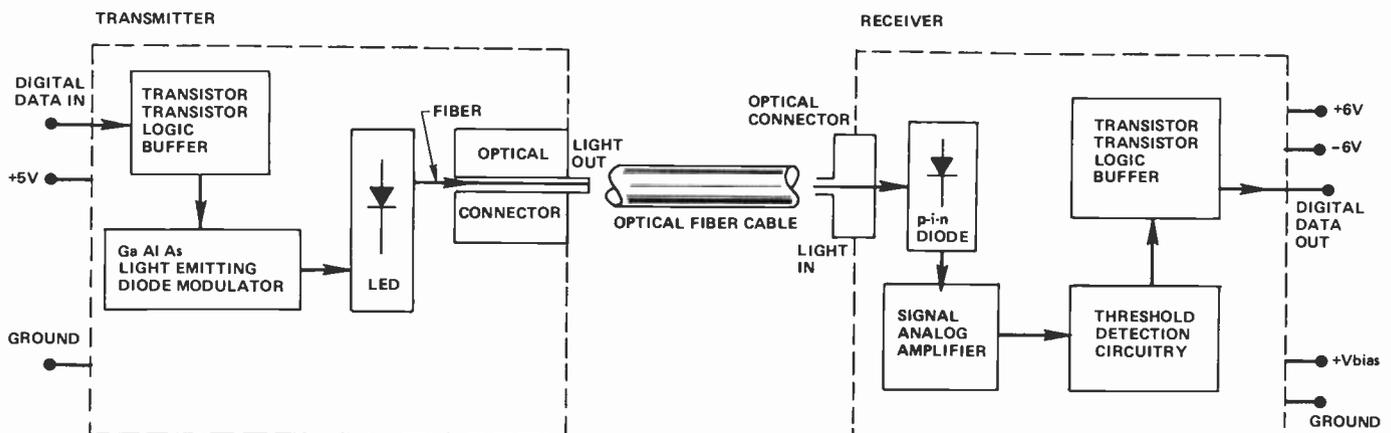


Fig. 1. Block diagram of *RCA's* C86003E fiber-optic data link.

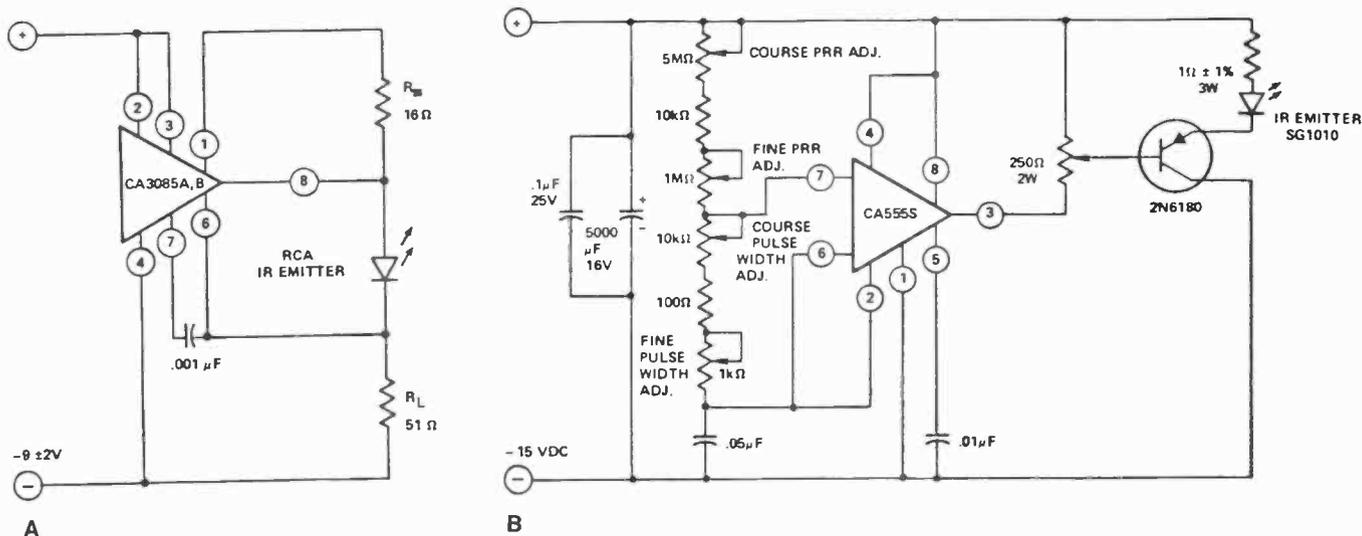


Fig. 2. Basic IR emitter-driver circuits: (A) direct current; (B) simple pulser.

ous forward dc rating of 100 mA. If pulsed with a peak forward current of, say, 3.5 A, however, its peak radiant flux output is better than 120 mW. Naturally, when an IR emitter is operated in a pulsed mode, the pulse width and pulse repetition rate (PRR) must be adjusted so that the average power dissipation is within the maximum limits of the device. In addition, heat sinking may be required for some applications.

A simple pulser for IR emitter diodes is shown in Fig. 2(B). Here, a CA555 timer IC serves as the pulse oscillator. The oscillator output is applied through a 250-ohm drive amplitude

control potentiometer to the base of a 2N6180 *pnp* transistor which, in turn, furnishes the drive current to the IR emitter diode. Coarse and fine adjustments are provided for both the pulse width and pulse repetition rate (PRR). With the component values specified, the pulse width can be adjusted from 4  $\mu$ s to 250  $\mu$ s while the PRR range is from 6 Hz to 3 kHz. In practice, the pulse width is adjusted first, then the PRR for optimum performance without exceeding the diode's rated power dissipation. When operated on a 15-volt dc source, this circuit can supply pulse currents of up to 3.5 amperes.

(Continued on page 72)

# ok® wire wrapping center ok®

**NEW HOBBY WRAP**  
MODEL BW 630



Battery  
wire  
wrapping  
tool


**\$34.95**  
ONLY  
COMPLETE WITH BIT  
AND SLEEVE

**STRIP/WRAP/UNWRAP**  
TOOL MODEL WSU-30




**\$6.95\***

**RIBBON CABLE**  
ASSEMBLY



**DIP SOCKETS**




**DIP IC INSERTION**  
TOOL WITH PIN  
STRAIGHTENER

MODEL  
INS-1416



**\$3.49\***

**WIRE DISPENSER**  
MODEL  
WD-30-B




**\$3.95\***

**PRE-CUT**  
PRE-STRIPPED WIRE



**WIRE WRAPPING KIT**



**\$15.45\***

\*MINIMUM ORDER \$25.00, SHIPPING CHARGE \$1.00, N.Y. CITY AND STATE RESIDENTS ADD TAX

## OK MACHINE AND TOOL CORPORATION

3455 CONNER STREET, BRONX, NEW YORK, N.Y. 10475 U.S.A.  
PHONE (212) 994-6600 TELEX NO. 125091

# ANNOUNCING ... A New CREI Program: Minicomputer & Microprocessor Technology Including A Microprocessor Laboratory

Now you can learn at home  
the new technology that is  
revolutionizing electronics

The microprocessor has ushered in the age of microtechnology and electronics will never again be the same. The microprocessor has made possible the placing of an entire computer on a silicon chip one quarter inch square. The microprocessor "miracle chip" is in the process of changing the world. Soon all technical personnel in electronics will have to understand and work with the microprocessor. It is invading virtually every area of electronics. And it is profoundly affecting your electronics career.

### **Brand New Program**

CREI has a brand new program to help you learn how to work effectively with this revolutionary electronics development. CREI's new program in Minicomputer and Microprocessor Technology is designed to prepare you for this field by giving you the education and practical experience you need.

The program provides solid preparation in electronics engineering technology with a specialization in minicomputers and microprocessors. In addition, it includes a microprocessor laboratory which features a fully programmable microcomputer which utilizes the Motorola 6802 microprocessor chip. This is an extremely important element of your program.

### **Programming Essential**

As you may well know, you must learn how to *program* the microprocessor in order to design, service or troubleshoot microprocessor electronic systems. There is only one effective way to learn this all-important skill of programming, and that is by actually *doing it*. CREI's new program gives you this opportunity as you work with the exciting microprocessor laboratory.

### **Programming Is Easy**

With CREI's new program, learning the skill of programming is simple. Within a few hours you'll be programming the microprocessor and in a short time you'll learn how to program it in three languages: BASIC, assembly and machine languages. In addition, you will learn how to interface the microprocessor with other systems and to test and debug specialized programs.

# Preparation at Home

## Wide Choice of Programs

Please note, however, that CREI's new program is only one of 16 state-of-the-art programs in advanced electronic technology offered by CREI. So even if you choose not to specialize in micro-processor technology, CREI has an advanced electronics program to meet your needs.

With CREI, you may choose from any of the following areas of specialization in advanced electronics:

- Microprocessor Technology
- Computer Engineering
- Communications Engineering
- Digital Communications
- Electronic Systems
- Automatic Controls
- Industrial Electronics
- Television Engineering
- Microwave Engineering
- Cable Television
- Radar and Sonar
- Nuclear Instrumentation
- Satellite Communications
- Aeronautical and Navigational
- Solid State Theory
- Nuclear Engineering

## Unique Lab Program

An exclusive option available with CREI programs in electronic engineering technology is CREI's unique Electronic Design Laboratory program. It gives you actual experience in designing practical electronic circuits. It also helps you to understand the theories of advanced electronics and gives you extensive experience in such areas as tests and measurements, breadboarding, prototype construction, circuit operation and behavior, characteristics of electronics components and how to apply integrated circuits. Only CREI offers this unique Lab Program.

## Practical Engineering

CREI programs give you a practical engineering knowledge of electronics. That is, each part of your training is planned for your "use on the job." By using your training, you reinforce the learning process. And by demonstrating your increased knowledge to your employer, you may qualify for faster career advancement.

## Free Book

There isn't room here to give you all of the facts about career opportunities in advanced electronics and how CREI prepares you for them. So we invite you to send for our free catalog. This fully illustrated, 56 page book describes in detail the programs, equipment and services of CREI.

## Qualifications

You may be eligible to take a CREI college-level program in electronics if you are a high school graduate (or the true equivalent) and have previous training or experience in electronics. Program arrangements are available depending upon whether you have extensive or minimum experience in electronics.

Send for this **FREE** Book describing your opportunities and CREI college-level programs in electronics

CREI Home Study Programs in  
**ELECTRONIC ENGINEERING TECHNOLOGY**

CREI Introduces Program 680:  
**MINICOMPUTER & MICROPROCESSOR TECHNOLOGY**  
INCLUDING MICROPROCESSOR LABORATORY PROGRAM

CAPITOL RADIO ENGINEERING INSTITUTE  
McGraw-Hill Continuing Education Center  
Washington, D. C. 20016

Mail card or write describing qualifications to

**CREI** **CAPITOL RADIO ENGINEERING INSTITUTE**

McGraw-Hill Continuing Education Center  
3939 Wisconsin Avenue Northwest  
Washington, D.C. 20016

Accredited Member National Home Study Council

## GI Bill

*CREI programs are approved for training of veterans and servicemen under the G.I. Bill.*





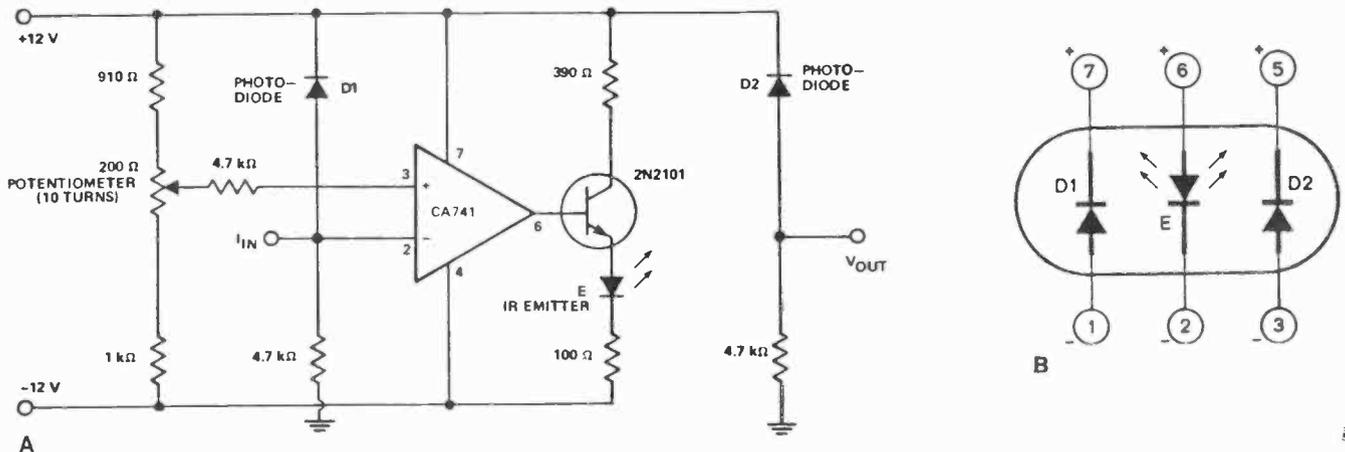


Fig. 4. RCA's C30121 optically coupled isolator: (A) driver circuit; (B) lead connections.


their own test instruments. According to Tom, his design is accurate to within  $\pm 10\%$  and is capable of measuring units ranging in value from 10 pF to 10  $\mu$ F. Tom also indicates that his circuit, illustrated in Fig. 5, can be assembled for well under 20 dollars, exclusive of the external meter used as a null indicator.

Referring to the schematic, Tom has used the ubiquitous 555 timer, IC1, as an oscillator. Transistor Q1 provides a discharge path for range capacitor CK complementary to the IC's internal discharge circuit (pin 7) across the unknown test capacitor, Cx. The RK-CK and RF-Cx networks are connected from IC1's output terminal 3 to each side of the power source,

B1, with the voltage here applied through "L" filter R4C2 to an external zero-center meter, M, where it is compared to the source's mid-point voltage, established by voltage-divider R2-R3. Shunt diodes D1 and D2 limit the maximum voltage across the meter.

The values of capacitor CK and resistor RF are preselected for the desired measurement range. In operation, then, potentiometer RK is adjusted for a 50% duty cycle, as indicated by a "0" reading on the null meter, M. At this point, RK's value will be directly proportional to the value of the unknown test capacitor, Cx, permitting it to be calibrated directly in the desired capacitance values.

# Save even more when you build your own ACE.

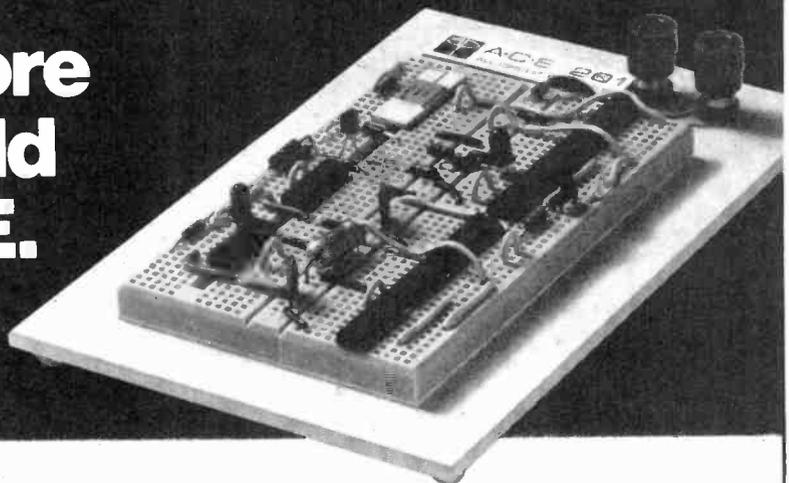

Yes, now you can save even more when you build an ACE from one of our two ACE Models kits. ACE is the better solderless breadboard from A P Products. There's just no faster or easier way of building and testing circuits and circuit ideas.

Order from your A P distributor today. Our distributor list is growing daily. For the name of the distributor nearest you call Tol-Free 800-321-9668.

Part No.	ACE Model No.	Tie Points	DIP Capacity	No. Buses	No. Posts	Board Size (inches)	Price Each
923333	200-K (kit)	728	8 (16s)	2	2	4 $\frac{1}{16}$ x 5 $\frac{1}{16}$	\$18.95
923334	201-K (kit)	1032	12 (14s)	2	2	4 $\frac{1}{16}$ x 7	\$24.95



Send for our complete A P catalog, the **Faster and Easier Book.**

## A P PRODUCTS INCORPORATED

Box 110 • 72 Corwin Dr., Painesville, OH 44077 • (216) 354-2101 TWX: 810-425-2250

Neither layout nor lead dress should be overly critical, so the circuit can be duplicated using point-to-point wiring on perf board, wire-wrap, or a suitable board, at the builder's option. The fixed resistors are half-watt types, *C1* a low-voltage ceramic or plastic film capacitor, and *C2* a 10- to 15-volt electrolytic. Jacks *J1* through *J4* may be binding post or plug-in types. Standard general purpose diodes are used for *D1* and *D2*, but the 555 timer, *IC1*, and type 2N2222 *npn* transistor, *Q1*, should be high-quality, low-leakage devices. The critical components are *CK*, *RK*, *RF*, *R2* and *R3*. Of these, *CK* should be a high-quality, low-tolerance polystyrene or Mylar plastic film capacitor, while *RK* consists of a 68K fixed resistor in series with a 1-megohm potentiometer, the latter a good-quality unit with a linear taper. Resistors *RF*, *R2* and *R3* should be low tolerance (5%, 2%, or lower) types. Different values are used for *CK* and *RF*, depending on the measurement range needed, as specified in the table below. If a full-range instrument is preferred, the basic design may be modified by adding a multi-section, multi-position rotary switch, wired to select any of the listed values in order.

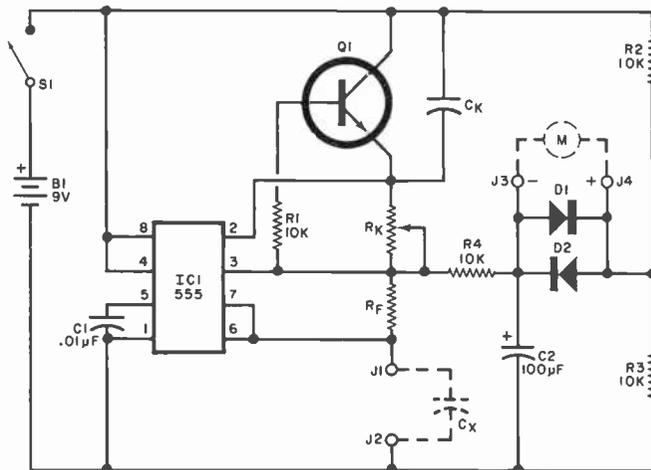


Fig. 5. Capacitance measurement circuit is said to be accurate to within 10%, in either direction, and will measure values from 10 picofarads to 10 microfarads.

Once the instrument's assembly and wiring have been completed and double checked for errors, shorts, opens and correct polarities, *RK*'s scale may be calibrated by measuring known capacitors within each range. Intermediate values may be interpolated easily as needed to complete the scale. The external null meter, *M*, should be a high impedance VTVM or FET voltmeter with a 1.5 V range, adjusted to zero at the center of the scale. ◇

RANGE	Cx	RF	CK
A	8 pF - 130 pF	820K	100 pF
B	80 pF - 1300 pF	82K	100 pF
C	800 pF - 0.013 μF	82K	1000 pF
D	0.008 μF - 0.13 F	8200	1000 pF
E	0.08 μF - 1.3 μF	8200	0.001 μF
F	0.8 μF - 13 μF	820	0.001 μF

## WIREWRAP

**PRECUT WIRE**  
Why buy wire on rolls?  
**PRECUT & STRIPPED WIRE IS:**

- Fast - No more cutting & stripping by hand
- Reliable - Good, clean, uniform strip
- Economical - Cheaper than using bulk wire

Precut Wire	Bulk Wire
100 pcs of 3" at \$ 82 3 1/4/LT	50 ft roll at \$ 99 46/LT
100 pcs of 6" at 1.06 26/LT	100 ft roll at 2.95 36/LT

\* 30 Kynar stripped 1" on each end. Lengths are overall. Colors: Red, Blue, Green, Yellow, Black, Orange, White. Wire packaged in plastic bags. Add 25¢/length for tubes.

	100	500	1000	5000
2 1/2 in	76	2 40	4 30K	3 89/K
3 in	82	2 60	4 71K	4 22/K
3 1/2 in	86	2 80	5 12K	4 55/K
4 in	90	3 00	5 52K	4 88/K
4 1/2 in	94	3 21	5 93K	5 21/K
5 in	98	3 42	6 34K	5 52/K
5 1/2 in	102	3 65	6 75K	5 86/K
6 in	106	3 85	7 16K	6 19/K
6 1/2 in	115	4 05	7 57K	6 52/K
7 in	120	4 25	7 98K	6 85/K
7 1/2 in	125	4 45	8 39K	7 18/K
8 in	129	4 65	8 80K	7 53/K
8 1/2 in	132	4 85	9 21K	7 84/K
9 in	136	5 05	9 62K	8 17/K
9 1/2 in	140	5 25	10 03K	8 50/K
10 in	145	5 51	10 44K	8 83/K
Add in	10	41	82/K	66/K

**WIRE KITS**

# 1	\$6.95	# 2	\$19.95
2 1/2" 3" 100 4"	250 2" 250 4"	250 6"	
2 1/2" 3" 100 5"	500 3" 250 5"	100 6"	
100 4" 100 6"	500 3" 100 5"	100 7"	
	100 4" 1 250 ft. Roll Bulk		

Choose One Color or Assortment

**WIRE WRAP SOCKETS**

	1-9	10-24	25-99	100-249	250-999	1K-5K
8 pin	41	38	35	31	29	27
14 pin	42	39	36	32	29	27
16 pin	46	43	39	35	32	30
18 pin	63	58	54	47	44	41
20 pin	84	78	71	63	59	54
22 pin	130	120	110	95	90	84
24 pin	91	84	78	68	64	59
28 pin	125	115	108	95	89	82
40 pin	185	155	142	125	115	109

Gold 3-level Closed Entry Sockets. All prices include gold. End & Side Stackable. Tin sockets and 2-level sockets available.

**WIRE WRAP TOOLS**

**\$34.95**  
HOBBY WRAP Model BW 630 With Free Wire Kit 1 (\$6.95 Value)

Batteries & Charger \$11.00  
WSU 30 Hand Wrap-Unwrap Strip Tool 5.95  
WSU 30M, for Modified Wrap 6.95  
BT 30 Extra Bit 2.95

**INTERCONNECT CABLES**  
Ribbon cable connectors for connecting boards to front panels or board to board

	SINGLE ENDED	DOUBLE ENDED
	14 pin	16 pin
	24 pin	14 pin
	16 pin	16 pin
	16 pin	24 pin
6	1.24	1.34
12	1.33	1.44
24	1.52	1.65
48	1.91	2.06

Ordering Information:  
 • Orders under \$25 and COD's, add \$2  
 • All others, shipped Ppd in U.S. via UPS  
 • For Blue Label (Air) or 1st Class, add \$1  
 • We accept Visa & Mastercard  
 • Most orders shipped same day  
 Dealer Inquiries Invited

**PAGE DIGITAL ELECTRONICS**  
135 E. Chestnut Street 4A  
Monrovia, California 91016  
Phone (213) 357-5005

For  
faster  
service  
  
USE  
ZIP  
CODE  
  
on  
all  
mail

## TAPE DISCOUNTS

Minimum order 10 tapes

**CASSETTES**

TDK-DC-45	1.09
TDK-DC-60	1.29
TDK-DC-90	1.69
TDK-DC-180	2.99
TDK-SAC-60	1.99
TDK-SAC-90	2.99
TDK-ADC-80	1.79
TDK-ADC-90	2.89

**8-TRACK**

TDK-45 D 8tk	1.59
TDK-90 D 8tk	1.99
TDK-45 AD 8tk	2.29
TDK-90 AD 8tk	2.99

**OPEN REEL**

TDK-L 1800	5.29
TDK-S 1800	4.29

**MEMOREX** MEMOREX 60

**CASSETTES**

C-45	1.99
C-60	2.19
C-90 3pk.	3 for 4.99
C-120	4.50
Cass. Head Cleaner	1.49

**8-TRACK**

60 MIN. 8tk 2pk.	2 for 3.99
90 " 8tk 2pk.	2 for 4.99
45 " 8tk	2.69

**OUR BRAND! C-90 CASSETTES, 3 for \$1.59;**  
40 Min 8TR CART. - 99¢ ea.

LIFETIME PRODUCT GUARANTEE!

ORDER NOW! Orders shipped within 1-3 days  
Please add \$2.00 for shipping and handling per  
order. N.Y.S. Res. add sales tax. NO C.O.D.  
FREE CATALOG!

**CONSUMERS CO**  
P.O. Box 550 Dept. P-8  
Mt. Vernon, N.Y. 10551 Phone: (914) 664-2909

# Hobby Scene



By John McVeigh

## LONGWAVE IMAGE

**Q.** Recently, while tuning across my shortwave receiver's longwave band, I picked up WOAI, a local radio station, at a frequency of 280 kHz. Is this some type of relay broadcast or is my receiver faulty?—Troy Hollan, Fowleston, TX.

**A.** My copy of the World Radio and TV Handbook (available from Gilfer Associates, Box 239, Park Ridge, NJ 07656, for \$11.95 postpaid) lists WOAI as operating on 1200 kHz with a transmitter power output of 50,000 watts. The station broadcasts from San Antonio. I don't know how far that is from Fowleston, but you say it's a local.


If your receiver has an i-f of 460 kHz, then its local oscillator is running at 740 kHz. The AM broadcaster's signal is probably so strong that a portion of it is

getting past the front end and into the receiver's mixer. The signal is there heterodyning with the local oscillator to produce a frequency-shifted version of WOAI's program at 460 kHz—the i-f frequency. The i-f stage can't distinguish this *image* signal from one original at 280 kHz, so it amplifies the signal and passes it to the detector. Actually, most receivers have a 455-kHz i-f, not one at 460 kHz. If this is the case with your receiver, you are actually tuned to 290 kHz if the image is twice the i-f away at 1200 kHz. Perhaps your receiver's calibration is off somewhat on the longwave band.

Considering the strength of the image station, I don't think that you should consider your receiver "faulty." A 455-kHz i-f can result in image problems on the higher shortwave bands, where the im-

age is less than one octave away from the desired one. However, 1200 kHz is almost five octaves above the frequency to which the receiver is tuned, so the front end will attenuate the broadcast-band signal to a high degree. The signal is so strong that, even after this attenuation, enough is getting to the mixer to produce the image.

You can supplement your receiver's image rejection by installing the wave trap shown in the figure at the antenna input. The inductor is a ferrite-loop antenna coil such as the Radio Shack No. 270-1430, and the capacitor a 365-pF variable tuning capacitor. Mount the components in a metallic box. The antenna lead-in can be connected to the wave trap via a binding post. Be sure that both the wave trap enclosure and the receiver chassis are grounded to earth ground by way of a direct, low-resistance path. To attenuate the image-causing station, simply tune the capacitor so that the circuit resonates at that frequency. (Some capacitors come equipped with knobs with frequency markings for the AM band imprinted on them, making tuning a simple task.) The same circuit can be used to alleviate the cross modulation that strong, local AM stations produce in some receivers on the lower shortwave bands. ◇



## DR33C Professional Receiver

New From  
McKay Dymek

- A full general coverage international receiver that delivers solid-state instrumentation sophisticated enough for the professional, yet easily operated by any radio enthusiast, all at a price far below what you'd expect to pay.
- It's designed for extremely low distortion (1.5% at 90% modulation).
- Quartz Crystal Phase Lock control makes tuning automatic, accurate (to within 100Hz), and drift-free; even on


- difficult to receive SSB transmissions.
- An original noise limiter effectively combats interference from power lines and automobiles on both AM and SSB-CW reception.
- Highly selective Collins Mechanical Filters are used for interference-free reception even under difficult conditions.
- The DR33C will tune you in to such contrasting international transmissions as foreign ships at sea, international

- aircraft in flight, and the latest breaking news from many world capitals.
- DR33C options include CW and RTTY Mechanical Filters and Rackmount Hardware.

**For more information write or call today.** Nationwide California  
Toll Free 800/854-7769 800/472-1783



**McKay Dymek Company**  
111 S. College Ave, Box 5000  
Claremont, CA 91711

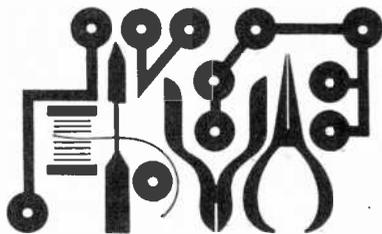

# Experimenter's Corner

## DIGITAL TO ANALOG CONVERTERS, PART 2

By Forrest M. Mims

**L**AST MONTH, we saw how an  $R$ - $2R$  resistor ladder network can be used as a rudimentary digital-to-analog (D/A) converter. We're now going to expand it into a full-fledged D/A converter and connect the converter to a few digital IC's. First, let's look at the circuit we'll be using to provide a binary input to the D/A converter.

**A Simple Binary Input Circuit.** A BCD (binary coded decimal) counter makes a convenient input circuit for the D/A converter. If you prefer, however, you can use a 4-bit RAM (such as the 7489) or any other chip with a 4-bit output. You can assemble both the binary input circuit and D/A converter on a plastic solderless breadboard.

Figure 1 shows the counter circuit along with a simple clock oscillator made from two of the inverters in a 74C04 hex inverter. I used CMOS chips, but you can use the TTL equivalents for the specified IC's. The pin numbers are the same for both.

If you use TTL chips, be sure to use a 5-volt power supply. If you don't have a suitable supply, use a 6-volt battery. Insert a 1N4001 diode in series with the positive power supply lead to reduce the battery voltage to about 5 volts.

You can vary the clock frequency and

count rate of the decade counter by varying the values of  $R1$  or  $C1$  or both. Increasing the capacitance of  $C1$  from 0.1 to 1.0 should give enough range.

**The D/A Converter.** Figure 2 shows how to add an operational amplifier to the  $R$ - $2R$  resistor ladder network we experimented with last month. After you assemble the circuit, connect the binary inputs of the ladder network to the BCD counter outputs and then connect the probe of an oscilloscope between the output of the op-amp and ground. (If you don't have access to a scope, we'll shortly show you how to observe the operation of the circuit with a voltmeter.) With the clock running, you'll see a scope trace something like the diagram shown in Fig. 3. Obviously, the scope is showing the stepped voltage ramp coming from the op amp as the counter cycles through its 0000-1001 sequence.

Notice the ramp has not sixteen (as you would have expected from a 4-bit D/A converter), but ten, voltage levels.

The reason for this, of course, is that the 74C90 is a BCD and not a pure binary (0000-1111) counter. Use a binary counter and you'll get a ramp with sixteen voltage steps.

The simple circuit in Fig. 2 can be used to synthesize waveforms digitally. A capacitor across the output will smooth the stepped waveform. The sequentially counting 74C90 will produce only ramps, but you can program a 7489 16-by-4-bit RAM to produce more complex waveforms.

**Improving the D/A Converter.** It's possible to improve the performance of the basic D/A converter by adding a second op-amp. The output voltage from the first swings from negative to positive as the ramp is created by the stepped voltage. It would be convenient to be able to adjust the ramp so that its baseline is ground, or any voltage you specify. The offset adjustment available to the first 741 isn't adequate for this purpose.

The second op amp (Fig. 4) makes adjusting the baseline of the ramp easy. In operation, the BCD counter is allowed to reach a count of 0000. The clock is then disabled to stop the count and the output of the second 741 is adjusted for any desired voltage. When the clock is reactivated, the output voltage will step through a ramp of ten voltage levels and automatically recycle as before.

You can set the 0000 count to equal 0 volt, so it's easy to use a voltmeter to

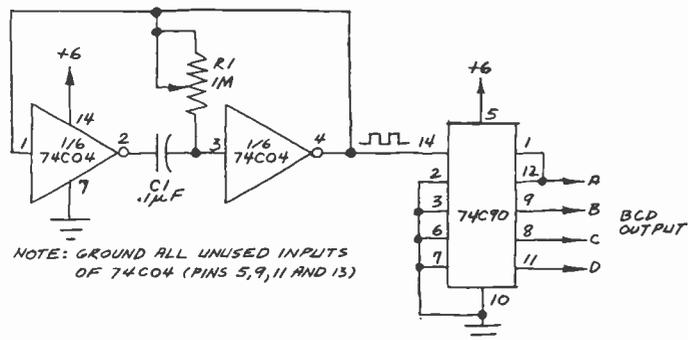


Fig. 1. CMOS clock and BCD counter for supplying binary inputs to D/A converter.

Fig. 2 How to connect an op amp to the resistor ladder D/A converter.

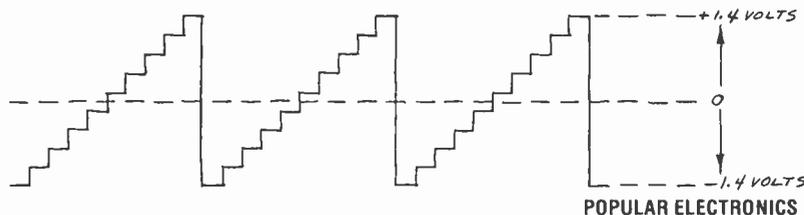
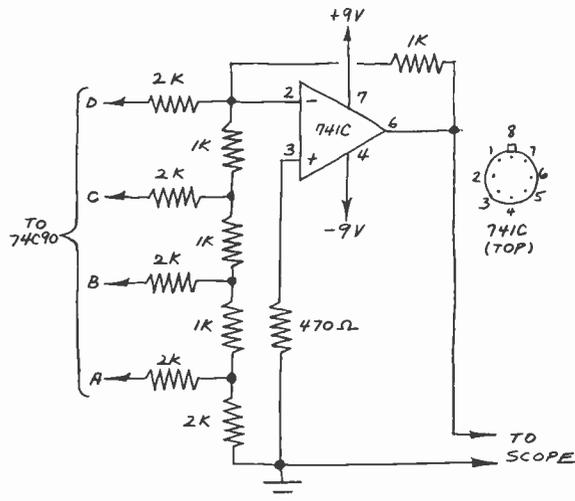


Fig. 3. Ramp voltage output from D/A converter in Fig. 2.

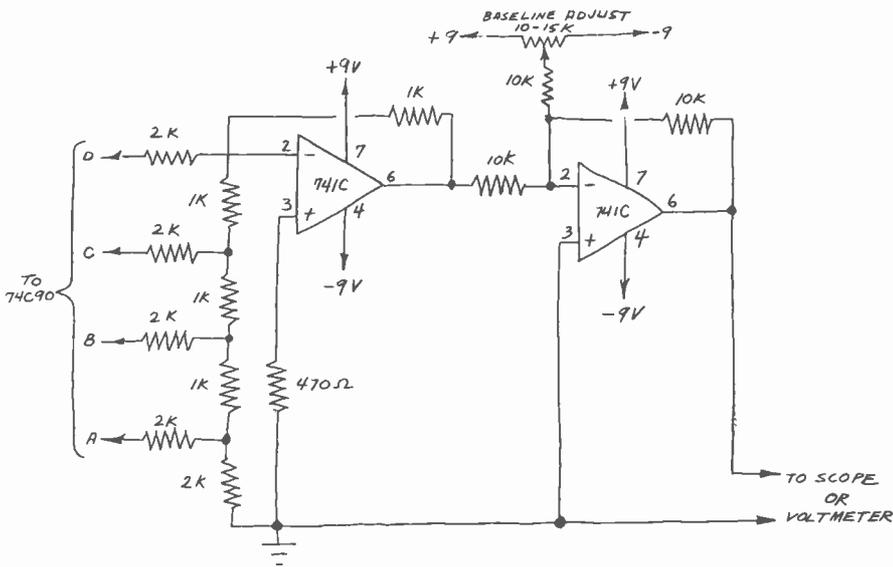


Fig. 4. Schematic of an improved D/A converter.

see the circuit in operation if you don't have access to a scope. First, insert a 10- $\mu$ F capacitor in parallel with C1 to slow down the clock to a few hertz. Then connect a voltmeter between pin 6 of the second 741 and ground. The needle on the meter will jump to about 3 volts and fall toward 0 volt in equally spaced increments. The cycle will then repeat.

Notice that the second 741 reverses the slope of the voltage ramp. The ramp from the first 741 goes from a low to a high voltage, while the ramp from the second 741 goes from high to low.

It's possible to reverse the slope of the ramp by inverting the binary input to the resistor ladder. The clock circuit uses only two of the inverters in the 74C04, so you have four uncommitted inverters, just enough to do the trick. Simply connect one inverter between each BCD counter output and the respective input to the resistor ladder.

**Using the D/A Converter.** By now, you should have a good understanding of the operation of a basic D/A converter. Let's use the circuit we've built in a practical application. Last month we noted that a D/A converter permits you to control the brightness of a lamp *digitally*.

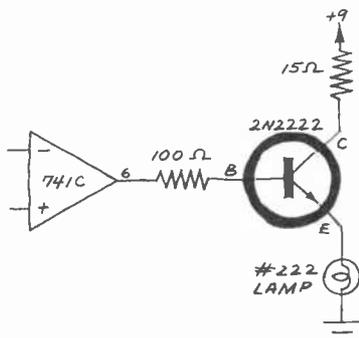


Fig. 5. Driver added to converter.

Figure 5 shows how a single driver transistor can be connected to the second 741 in our D/A converter to control the brightness of a 222 lamp.

Be sure to adjust the D/A converter so that a 0000 input gives an output of 0 volt. This will ensure that the lamp receives the highest voltage for a binary input of 1001. The lamp I used with the prototype circuit displayed six distinct brightness levels for binary inputs of 0100-1001. The counts 0000, 0001, 0010, and 0011 produced too little voltage to light the lamp.

You can also use the driver transistor circuit to power a small dc motor. In this mode, the D/A converter functions as a digital-motor speed controller. When the clock is slowed to a rate of less than a few Hz, you can easily observe the speed variations as the motor slows from a relatively fast clip to a full stop.

Remember, you can supply binary inputs to the D/A converter with a 4-bit memory such as the 7489 (see "Experimenter's Corner," December 1977 and January 1978). This means you can program any sequence of analog voltages you choose.

**Further Reading.** In a future column we'll explore the world of analog-to-digital (A/D) converters. Meanwhile, if you've found these experiments with D/A converters interesting, you'll want to read more on the subject. For starters, see "The How's and Why's of D/A and A/D Converters" by Robert D. Pascoe in the April 1977, *POPULAR ELECTRONICS*. For more details about resistor ladder networks, see "Fundamentals and Applications of Digital Logic Circuits" by Sol Libes (Hayden Book Company, 1975, pp. 131-138). ◇

includes  
Functional  
Tilt Stand!

## NEW EICO 270 3 1/2 DIGIT DMM KIT ONLY \$79<sup>95</sup>

**Introductory Offer—FREE AC ADAPTOR**

The first and only lab accuracy portable DMM Kit featuring MOS/LSI IC economy and reliability. Measures DC/AC Volts, Kilohms, DC/AC milliamps in 21 ranges. Polarity indicators and overload protection are provided, and 0.5 inch LED displays give easiest-to-read digital readout to 1999. The 270 features a basic 0.5% DC accuracy, 10 Megohm input impedance, low voltage drop in all current ranges and automatically-flashing overrange indicator. **Assembled \$109.95**

**FREE '78 EICO CATALOG**  
Check reader service card or send 50¢ for first class mail. See your local EICO Dealer or call (516) 681-9300, 9:00 a.m.-5:00 p.m. EST. Major credit cards accepted.

**EICO-108 New South Rd. Hicksville, N.Y. 11801**

CIRCLE NO 12 ON FREE INFORMATION CARD

## Our new Bearcat® 250!

has all the fantastic space age features of our super popular Bearcat® 210, but **now we've added:**

- 50 synthesized crystalless channels
- User selectable scanning speeds
- Priority channel
- Digital time clock—accurate to seconds
- Automatic or user controlled squelch
- Search Direction—Search "up" or "down" for quicker return to desired frequencies
- Transmission activity counter—tells you how busy each frequency has been
- Search & Store—Will find and "remember" up to 64 active frequencies for later recall
- Direct channel select—Advance directly to a channel without stepping through interim channels
- Non volatile memory—No batteries required to retain memory, even when scanner is unplugged
- Auxiliary—On/Off control of equipment (tape deck, alarms, lights, etc.) when transmissions occur on programmed channels

To reserve your space-age Bearcat® 250 and receive your order priority number for spring-summer delivery, send \$389.00 plus \$5.00 for U.S. U.P.S. shipping. Foreign orders invited at slightly higher cost. Visa and Master Charge card holders may call toll free 800-521-4414 to order. Outside the U.S. and Michigan dial 313-994-4441. To order by mail or for a free catalog completely describing the fantastic crystalless Bearcat® 250 write: COMMUNICATIONS ELECTRONICS, Box 1002—Dept. 8, Ann Arbor, Michigan 48106 U.S.A.

©1978 Communications Electronics

CIRCLE NO 7 ON FREE INFORMATION CARD



# Product Test Reports

## MOTOROLA MODEL CM550 MOBILE AM/SSB CB TRANSCEIVER

*Switchable noise blanker provides good range on AM and SSB.*



**T**HE Motorola Model CM550 is a mobile AM/SSB 40-channel transceiver for Citizens Band communications. Full-band operation is accomplished with the aid of the usual phase-locked-loop (PLL) frequency synthesis system.

The transceiver's features include: large numeric LED channel display; r-f, audio, and squelch controls; S/r-f/SWR meter; clarifier control; switchable noise blanker; transmit indicator; AM/LSB/USB mode indicators; PA operation; external-speaker jacks; detachable push-to-talk microphone with built-in preamplifier and gain control; top-facing speaker; electronic voltage regulation; operation from a nominal 13.8-volt, negative-ground dc source; and reverse-polarity protection.

The transceiver measures 9"D x 7"W x 2 3/8"H (22.9 x 17.8 x 6 cm). Price is \$319.95.

**Technical Description.** A 10,695-kHz i-f is employed in the receiver, with selectivity obtained with crystal and ceramic filters. Dual-gate MOSFET's in the r-f amplifier and mixer stages assure good signal-handling capabilities. IC's are employed in the AM and product-detector and agc circuits, while amplified squelch is obtained with transistors.

A full-time automatic noise limiter (anl) is provided for AM, with part of the audio system using transistors and an IC that contains the power-output stage. The power-output stage is also used to modulate the transmitter in the AM mode.

A signal derived from a 10,240-kHz crystal oscillator provides the standard reference for the PLL system. The signal at the mixer from the local heterodyning oscillator is 10,695 kHz above the CB signal and is initiated by the voltage-controlled oscillator (vco). The PLL system employs an IC for the various divide functions.

On transmit, the signal derived from the vco is sum-mixed with a 10,695- or 10,700-kHz signal, depending on the selected transmitting mode. This produces the on-channel frequency at a mixer output, which for AM goes directly to an r-f amplifier stage and then to a driver and the r-f power-amplifier stages. The driver and power-amplifier stages are collector-modulated.

The SSB signal is generated in an IC balanced modulator and a crystal filter. The modulator and filter are located ahead of the mixer.

Automatic modulation control (amc) is provided to prevent overmodulation on AM. An automatic level control (alc) sys-

tem provides the same thing on SSB.

The output from the power amplifier goes through a multisection network that provides correct impedance matching to 50-ohm loads and that greatly attenuates spurious responses. This network also serves as part of the input circuit for the receiver to enhance image and other unwanted-signal responses and to minimize receiver-antenna radiation.

The antenna circuit also contains a transformer-coupled directional wattmeter for providing SWR indications. Transmit/receive transfer is conducted via a relay and diode switches.

**Laboratory Measurements.** No specifications were provided with our test transceiver. Hence, we had nothing against which we could compare our test results.

The sensitivity of the receiver measured better than is the usual case. It was 0.4  $\mu$ V for 10 dB (S + N)/N on AM at 30% modulation at 1000 Hz and 0.1  $\mu$ V on SSB. The squelch threshold range was 0.5  $\mu$ V on AM and 0.2  $\mu$ V on SSB up to a nominal 1000  $\mu$ V. The S meter registered S1 with a 0.5- $\mu$ V signal and S9 with a nominal 30- $\mu$ V signal. Image and spurious- and adjacent-channel rejection were excellent at 90, 80, and 65 to 70 dB, respectively. I-f signal rejection was 63 dB, while unwanted-sideband suppression was 50 dB on LSB and 60 dB on USB at 1000 Hz.

The overall 6-dB audio response was 400 to 2000 Hz on AM and nominally 500 to 3800 Hz on SSB. The audio output measured 2.5 watts with a sine-wave input into 8 ohms at 10% THD on AM and 2% THD on SSB. With slight clipping, the output was as high as 3 watts.

Operating the transceiver from a 13.8-volt dc source, the AM carrier output measured 3.9 watts. Using an audio tone of 1000 Hz, modulation was limited to 85% to 90% with a THD of 1.75% and 2.75%, respectively, with inputs of 16 and 25 dB greater than required for 50% modulation. Under these conditions, splatter was 60 dB down at 1000 Hz and 55 dB down at 2500 Hz. During dynamic operation (voice), the modulation kicked slightly beyond 100% on both the positive and the negative peaks, with the microphone gain control at its maximum setting. At that point, splatter was 55 to 60 dB down. The overall 6-dB response, not including that of the microphone preamplifier, was 500 to 4500 Hz.

On SSB, the output measured 11 watts PEP with a two-tone test signal. It

was 14 to 16 watts PEP during dynamic operation. The overall 6-dB response was nominally 600 to 2700 Hz. Side-band suppression at 1000 Hz was a minimum of 60 dB, while carrier suppression was 55 dB on LSB and 60 dB on USB. The third-order distortion products were 30 dB below PEP.

The output frequency tolerance of the transmitter held to within  $\pm 10$  Hz of +30 Hz on any channel.

**User Comment.** This rig's symmetrical front-panel layout is certainly neat. We would have liked to have seen larger rotary control knobs, however, as well as easy-to-see position markers. The CLARIFIER control, though, has a detented center position, which helps when making adjustments. Also, the mode switch's detents are quite tight on our sample, which can make operation somewhat stiff with the very small control knob. The small edgewise-mounted meter's black background against its white pointer provides an easy-to-read contrast.

During operation, the use of the noise blanker effectively extended the range of the receiver on weak signals by attenuating certain noises to improve the sensitivity-versus-S/N under adverse man-made noise conditions. From the circuit diagram, it was noted that a full-time anl is provided for AM, but in our on-the-road experience, it was not quite as effective as we have come to expect. On the other hand, switching in the noise blanker gave us excellent noise suppression. Even on SSB, the noise blanker was very effective.

As was apparent from our audio output tests, the distortion on AM was somewhat greater than on SSB. Hence, AM signals at fairly high levels may not sound as clean as SSB signals.

In on-the-road tests, this transceiver provided high-quality performance, with high sensitivity, excellent signal-handling capabilities, and fine rejection of unwanted signals. We also produced good-quality transmissions. We did note, however, that on transmit, the microphone gain had to be reduced on occasion to prevent excessive modulation, particularly on SSB. A built-in modulation indicator would have aided in setting the proper mike level, of course.

As with other new CB SSB models, the Motorola CM550 gave clear evidence that SSB performance is greatly superior to AM.

CIRCLE NO. 104 ON FREE INFORMATION CARD

(Test Reports continued overleaf.)

AUGUST 1978

# The Computer Revolution

Read about it in... **INTERFACE AGE**



Don't miss a single issue. Subscribe NOW. Your future may depend on it. Every issue jam-packed with articles on:

- Fundamentals of Computers
- Software Programs & Games
- Languages & Systems Designs
- Exciting New Products

Computing for Home and Business Applications.

Please enter my subscription to Interface Age for:

<input type="checkbox"/> 1 year U.S. \$14.00	<input type="checkbox"/> 2 years U.S. \$24.00
<input type="checkbox"/> Canada/Mexico \$16.00	<input type="checkbox"/> Canada/Mexico \$28.00
<input type="checkbox"/> International \$24.00 Surface Mail	
<input type="checkbox"/> International \$50.00 Airmail	

Make Check or Money Order (U.S. Funds drawn on U.S. Bank) payable to:  
**INTERFACE AGE MAGAZINE P.O. Box 1234, Dept. PE8 Cerritos, CA 90701**

Charge my:  Visa Card  Master Charge  American Express

Card No. \_\_\_\_\_ Expiration Date \_\_\_\_\_

Signature \_\_\_\_\_

Name (print) \_\_\_\_\_

Company \_\_\_\_\_ Title \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

## FREE McIntosh CATALOG and FM DIRECTORY

Get all the newest and latest information on the new McIntosh Solid State equipment in the McIntosh catalog. In addition you will receive an FM station directory that covers all of North America.



### MX 113

FM/FM STEREO - AM TUNER AND PREAMPLIFIER

**SEND TODAY!**

McIntosh Laboratory, Inc.  
 East Side Station P.O. Box 96  
 Binghamton, N.Y. 13904  
 Dept. PE


NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
 CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

If you are in a hurry for your catalog please send the coupon to McIntosh.  
 For non rush service send the Reader Service Card to the magazine.

CIRCLE NO. 30 ON FREE INFORMATION CARD

## LEADER ELECTRONICS MODEL LBO-508 OSCILLOSCOPE

*Dual-trace, triggered-sweep 5" scope has 20-MHz bandwidth.*

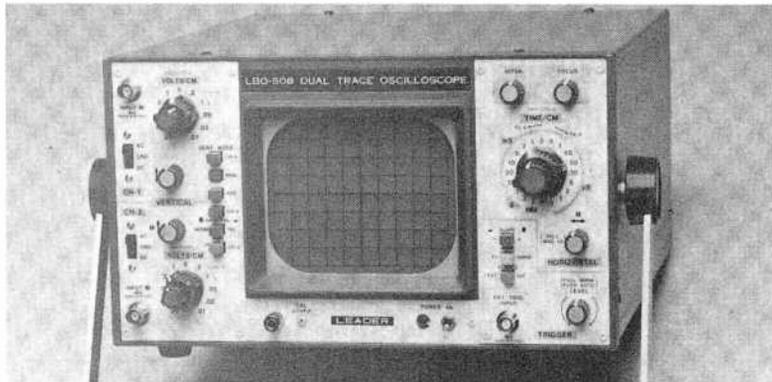

**D**URING the past few years, a number of excellent laboratory-grade oscilloscopes have come onto the market at moderate prices. Most of them offer a host of functions and features that just a decade ago were found only in true laboratory instruments at a cost of several thousand dollars. A good example of the current crop of high-performance scopes selling for moderate prices is the Leader Electronics Model LBO-508 dual-trace, triggered-sweep scope, at a suggested selling price of \$769.95. Included with the Model LBO-508 oscilloscope is a pair of low-capacitance probes.

The Model LBO-508 is a multifunction 5" (12.7-cm) oscilloscope whose rated bandwidth is dc to 20 MHz. It measures about 15"D × 11½"W × 6"H (37.5 × 29 × 16 cm) and weighs about 15.5 lb (7 kg). The scope is equipped with a carrying handle that doubles as a tilt stand.

**General Description.** The two vertical amplifier channels of the scope have a rated bandwidth of dc to 20 MHz in the dc mode and 2 Hz to 20 MHz in the ac mode. The input sensitivity in both cases is rated at 10 mV/cm. An 11-step attenuator, with a 1-2-5 sequence, allows the user to observe input signals with magnitudes up to 50 V/cm at full attenuation, using the associated variable-gain control. Accuracy is specified to be within 3%. Rise time is rated at 17.5 ns.

The input impedance of each vertical channel is 1 megohm shunted by 35 pF. The maximum safe input potential to the scope is 600 volts dc plus peak-to-peak ac. The polarity of channel 2 can be inverted as required by test conditions. The inputs to the vertical channels are BNC type connectors.

The two input channels can be used independently of each other, singly, simultaneously for a conventional dual-channel display, in an X-Y vector mode, or in an algebraically add mode.

The triggered-sweep time base contains an 18-step speed selector, with the speed positions arranged in a 1-2-5 sequence. Its range is from 0.5 μs/cm to 200 ms/cm, with an accuracy of 5%. A 5× magnifier allows observation of 100-ns/cm waveforms.

Both alternate and chopped modes are provided for displaying both channels simultaneously on the 8-x-10-cm screen of the CRT. The chopped mode is automatically selected by the scope with sweep speeds between 200 and 0.5 ms/cm, while the alternate mode is used between 200 and 0.5 μs/cm.

In the vector mode, the frequency response is from dc or 2 Hz to 800 kHz, depending on whether dc or ac coupling is selected. The phase difference in the two input channels is rated at less than 3% at 100 kHz.

Sweep synchronization can be switch selected to be either manual or automatic. The sync can be obtained from either an internal or an external source. Both positive and negative slopes are also selectable. A built-in TV sync clipper allows synchronization from TV-type video. Internal trigger sensitivity is from 2 Hz to 20 MHz with a 1-cm screen signal. External sensitivity covers the same range from a 150-mV peak-to-peak external signal. A built-in line-frequency, 0.5-volt peak-to-peak calibration signal, whose accuracy is rated at 3%, is also available.

**Test Results.** We used a laboratory-grade dc voltage standard to investigate

accuracy of the two vertical channels for attenuation and control operation. Both channels checked out well within published specifications. We performed this test with both channels set to the dc mode and connecting both signal probes simultaneously to our voltage reference. This allowed us to observe the trace positions above (positive) and below (negative) the zero line.

For our frequency-response test, we injected signals from our crystal-controlled audio and low-rf signal generators. At the same time, we took careful note of the stability of the sweep trigger and linearity. The sweep remained stable at frequencies beyond 30 MHz, which is the limit of our burst tester. When we switched from positive to negative slope and back, there was no drift.

Excellent sweep linearity was noted when we used a crystal-controlled square-wave generator. The square waves from our tunnel-diode generator were displayed with neither low-frequency deficiency tilting nor excessive high-frequency response ringing. The 4-MHz upper limit square wave from our generator revealed that the scope had an excellent response out to 40 MHz. At this frequency, the sync was steady and both polarities could be selected.

A sine-wave source was fed through a phase-shift network to check the vector display mode of the scope. Both vertical channels tested very close to each other in phase shift, and clear circles were produced at a number of selected frequencies during our test.


**User Comment.** Leader's LBO-508 oscilloscope was a very easy instrument to use. Its front panel is extremely clean, and the various controls and switches are color coded and clearly identified according to channel and function. This, plus the fact that each control and switch has plenty of room around it for easy manipulation, greatly simplified operation under most any working condition.

We used this oscilloscope for several weeks in our lab after performing initial tests to determine just how useful it really is under actual working conditions. It performed flawlessly during the whole time. In fact, we often found ourselves using it preference to our 10-year-old true laboratory scope.

Before returning the scope to its manufacturer, we ran a few quick tests to determine if any changes in calibrated performance had resulted. There were no detectable changes.

CIRCLE NO. 105 ON FREE INFORMATION CARD

POPULAR ELECTRONICS

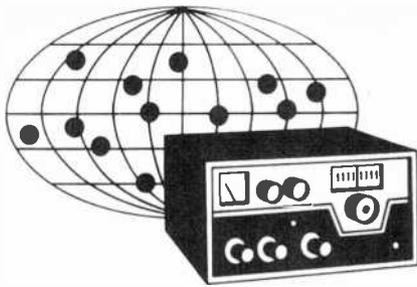

# DX Listening

By Glenn Hauser

## CURRENT NEWS AND FUTURE PLANS

**A**DVENTIST World Radio plans to put on a 20-kW shortwave transmitter in Guatemala this year, probably operating on the 9- and 11-MHz bands. This may give us a chance to hear the AWR DX program, so far limited to Europe. The Autonomous University of Nuevo León plans to add not only an FM station in Monterrey, Mexico, but also a shortwave station on 5.97 MHz, no later than September.

Brazil still intends to close down all private shortwave stations on the bands to clear frequencies for Brasilia's big new international service, expected to begin later this year. Radio Renascença, the Catholic station in Portugal, has purchased shortwave transmitters, expected on the air in early 1979, to reach emigrants wherever possible.

Radio RSA is considering resuming a transmission for western North America. They are heard well there at present, but at inconvenient times.

Radio Australia is rebuilding its cyclone-damaged Darwin relay, actually on the Cox Peninsula, and also installing their transmitters for a Northern Territory domestic shortwave service. A new site in the North West Cape region is also being sought.

Voice of America plans to close down its Dixon CA and Bethany OH sites as satellite feeds to overseas relays make the shortwave feeds obsolete.

France, which has conspicuously ignored us for years, and only recently condescended to broadcast a home service relay in our mornings, has registered with the ITU six frequencies beamed to North, Central and South America for the summer season at 2300-0400 GMT: 9.505, 11.735, 11.745, 11.755, 11.925, 15.135 MHz. There's little prospect of an English program any time in this block. To lobby for this, the Radio France International Listeners Club has been formed. For details, send 26¢ in stamps to Matthew Brown, 3310 Picardy Ct., Mequon, WI 53092.

**SSB Broadcasting Update.** Switzerland's year-long test began May 7. In addition to the usual AM frequencies, check 17.74 MHz at 1315 GMT and 11.78 at 0145. Then send them a reception report comparing the results. Radio Sweden's home service relay in Swedish on SSB, even though not beamed to North America, often comes in better than Radio Sweden's English programs, which are beamed to North America. The current schedule: 0500-0830 on 21.55, 0930-1600 on 21.555, 1600-2000 on 17.785, 2000-2130 on 15.19 MHz.

**DX Conventions.** All the following clubs welcome interested nonmembers to their conventions; send an SASE when inquiring. Aug. 4-6, Louisville, KY, Worldwide TV-FM DX Association; details from Box 202, Whiting, IN 46394. Aug. 11-13, Portland, OR, International Radio Club of America (MW only); information from Frank Aden, 1535 NW Ithaca Ave., Bend, OR 97701. Sept. 1-3, Atlanta, GA, National Radio Club (MW only); information from Karl Jeter, 2816 Frontier Trail, N.E., Atlanta, GA 30341.

**DX Programs.** For the very latest DX news, don't miss our two weekly reports on alternating Sunday broadcasts of Radio Canada International. Also, Clarin-DX, GMT-Sundays at 0000-0030 on 11.70 MHz, includes my regular reports. George Wood is doing an extra DX program, through August only, on Radio Sweden's Thursday broadcasts. After much urging, Austrian Radio has scheduled its "SW Panorama" when North Americans can hear it—GMT Sundays at 0300-0315 on 6.155 and 9.77 MHz. Immediately following, try for "Radio Monitors International" from Sri Lanka, at 0315-0330 on 15.425. It's repeated Mon. at 1115 on 17.85, 15.12, 11.835 and Sun. at 1900 on 17.85, 15.120, 15.115, and 11.87. Also good is 0400 GMT Wed. and Sat. is Radio Budapest's "Calling DX'ers and Radio Amateurs."

**Pirate Activity Rising.** "From the frozen north," Voice of the Voyage(u)r

# SAVE!

MONEY • TIME • FREIGHT

- ♪ QUALITY STEREO EQUIPMENT AT LOWEST PRICES.
- ♪ YOUR REQUEST FOR QUOTATION RETURNED SAME DAY.
- ♪ FACTORY SEALED CARTONS—GUARANTEED AND INSURED.
- ♪ SAVE ON NAME BRANDS LIKE:

PIONEER	SANSUI
KENWOOD	DYNACO
SHURE	SONY
MARANTZ	KOSS

AND MORE THAN 50 OTHERS  
BUY THE MODERN WAY  
BY MAIL—FROM

**illinois audio**

12 East Delaware  
Chicago, Illinois 60611  
312-664-0020

CIRCLE NO 20 ON FREE INFORMATION CARD

# SCANNER OWNERS REJOICE!

Finally, there's an exclusive club for scanner owners in North America... a united voice dedicated to the advancement of scanning... with dozens of special membership benefits!

- Feature packed quarterly newsletter with news, tech tips, great feature stories and more!
  - Exciting contests with super prizes!
  - Membership in the SCAN Buyer's Co-op... group buying power on items of special interest!
  - Award program for public safety officials you nominate!
  - FCC frequency assignment chart!
  - Handsome Official Membership Certificate, I. D. card, and vehicle decal!
- Plus much, much more!  
All for only \$5.00 annual dues.

**ACT NOW WHILE WE'RE ACCEPTING CHARTER MEMBERSHIPS AT A SPECIAL \$4.00 ANNUAL RATE!**

SEND CHECK OR MONEY ORDER TODAY... OR WRITE FOR FREE DETAILS.

SCANNER ASSOCIATION OF NORTH AMERICA

**SCAN**

Dept. 8, 111 East Wacker Drive, Chicago, IL 60601

CIRCLE NO 14 ON FREE INFORMATION CARD

## BEST IN NEW ELECTRONICS BOOKS!

- The Handbook of Telephones & Accessories. 432 p., 215 il. \$9.95
- Install Electronic in Cars, Boats, Planes, Trucks & RV's. 364 p. \$7.95
- The BASIC Cookbook. 140 p. \$4.95
- How to Repair Video Games. 270 p., 182 il. \$7.95
- Beginner's Gde.-Designing/Building Trans. Radios. 140 p. \$4.95
- 101 Practical Uses for Propane Torches. 140 p., 98 il. \$3.95
- Towers' International FET Selector. 140 p. \$4.95
- How to Design/Build Electr. Instrumentation. 420 p., 210 il. \$9.95
- Automotive Air Conditioning Handbook. 280., 157 il. \$6.95
- How to Repair Movie & Slide Projectors. 304 p., 270 il. \$7.95
- Closed-Circuit TV Install., Mainten., & Repair. 304 p., 220 il. \$8.95
- Understanding Sound, Video & Film Recording. 140 p., 74 il. \$5.95
- Build-It Book of Solar Heating Projects. 196 p., 111 il. \$4.95
- Hdbk. of Solar Flare Monitoring/Propag. Forecasting. 196 p. \$6.95
- 57 Practical Programs & Games in BASIC. 210 p., 611 il. \$7.95
- Beginner's Guide to Microprocessors. 182 p., 106 il. \$5.95
- Hearing Aid Handbook. 432 p., 224 il. \$8.95
- CMOS Databook. 280 p., 270 il. \$6.95
- Master OP-AMP Applications Handbook. 476 p., 320 il. \$9.95
- Miniprocessors: From Calculators to Computers. 196 p., 67 il. \$5.95
- Complete Hdbk. of Public Address Sound Systems. 272 p. \$7.95
- Modern Transistor Radios. 64 p., 112 il. \$2.50
- Microwave Oven Service & Repair. 420 p., 210 il. \$9.95
- IC Function Locator. 224 p. \$5.95
- Hdbk. of Marine Electronic/Electrical Systems. 546 p., 338 il. \$9.95
- Solid-State Motor Controls. 322 p., 162 il. \$8.95
- Master Handbook of Ham Radio Circuits. 392 p., 301 il. \$8.95
- How to Completely Secure Your Home. 224 p., 162 il. \$5.95
- Towers' International Transistor Selector. 200 p., 179 il. \$6.95
- Ham Radio Incentive Licensing Guide. 154 p., 70 il. \$4.95
- Programming Microprocessors. 280 p., 102 il. \$6.95
- The "Computer" Book—Build Super Calculators/Minicomputer Hardware with Calculator Chips. 322 p., 227 il. \$7.95
- Master Transistor/IC Substitution Handbook. 518 p., 165 il. \$7.95
- Modern Crystal Radios (Make and Use Series). 64 p., 101 il. \$2.50
- Home-Brew HF/VHF Antenna Handbook. 210 p., 143 il. \$5.95
- CBER's Handy Manual of SSB. 80 p., 42 il. \$2.25
- Beginner's Gde.-Making Electronic Gadgets. 140 p., 113 il. \$4.95
- Modern Digital Communications. 308 p., 122 il. \$6.95
- Microprocessor Progr.-Computer Hobbyists. 378 p., 219 il. \$8.95
- Illus. Dict.-Broadcast—CATV—Telecommunications. 420 p. \$8.95
- Linear IC Applications Handbook. 280 p., 183 il. \$6.95
- Build-It Book of Optoelectronic Projects. 238 p., 175 il. \$5.95
- Photo Guide to AM/FM Stereo Repair. 288 p., 281 il. \$6.95
- Servicing Medical & Bioelectronic Equipment. 350 p., 165 il. \$8.95
- How to Use AF & RF Signal Generators. 238 p., 162 il. \$5.95
- Model Railroad Electronics. 308 p., 218 il. \$5.95
- The ABC Book of Hi-Fi/Audio Projects. 182 p., 131 il. \$4.95
- Complete Hdbk. of Electrical/House Wiring. 476 p., 197 il. \$6.95
- 88 Practical Op Amp Circuits You Can Build. 140 p., 120 il. \$4.95
- How to Build Metal/Treasure Locators. 140 p., 60 il. \$3.95
- Home Audio Systems Schematic/Servicing Manuals. each 200 p. \$5.95
- Vol. 1 Capehart, Zenith, Vol. 2 Channel Master, Coronado, Hitachi, Vol. 3 Automatic Radio, Admiral, Midland, Sharp.

SEND NO MONEY! We'll invoice you on 10-DAY FREE TRIAL. Clip entire ad to order. 100% guaranteed or your money refunded.

**TAB BOOKS** DEPT PE-88  
BLUE RIDGE SUMMIT, PA. 17214

CIRCLE NO 47 ON FREE INFORMATION CARD

## SPEAKER INFORMATION KIT.



Get 70 pages of speaker facts in three fact-packed publications.

Speakerlab's Speaker Operating Manual covers everything you need to know to get the best performance out of any loudspeaker, including placement, wire gauges and allowable lengths, amp overloads, room acoustics, L-pad adjustments and impedances.

Our 54-page color catalog covers enclosures, designing your own speakers and driver principles as well as our line of nine easy-to-build speaker kits ranging from a miniature two-way system only ten inches high to a massive all-horn corner system.

"How To Hook Up Your System" spends twelve pages of text and diagrams really explaining system hookup. From where to place your electronics for maximum cooling to the intricacies of installing a cartridge, from eliminating hum to proper record care.

Get all three for just a dollar from the folks who take speakers and speaker information seriously...



Here's a buck! I can really use 70 pages of speaker information from the world's largest manufacturer of speaker kits. Dept. PE-M

name \_\_\_\_\_  
address \_\_\_\_\_  
city \_\_\_\_\_ state \_\_\_\_\_ zip \_\_\_\_\_

maintained a regular schedule on 5.85 MHz this spring, GMT Sat. and/or Sun. between 0400 and 0500. The wild-sounding announcers loved to play old, old records. Each time they broadcast a different phone number for listeners to call, and rewarded them with hand-made QSL sheets. Several other pirates have been operating just above 6.20 MHz.

**Cuban Clandestines, Too.** Most likely using ham equipment, Radio Abdala and Radio Rebelde have both been heard around 7.08 MHz with anti-Castro speeches. Another one bearing the same name as a Cuban government network is La Voz de Cuba, heard in Argentina on 6.100 MHz.

**Buzz, Buzz.** It seems the FCC does not require private U.S. shortwave broadcasters to monitor their own signals on an ordinary receiver. As a result, for well over a year, WYFR has been broadcasting a "ripple," "hum," or "buzz" on many frequencies, making their signal a pain to listen to. The synthesizer problem cannot be detected on the FCC type-approved direct demodulation monitors they are required to use! Also, their old Scituate plant barely survived an ice storm in February, making them more eager to move to Florida.

**HF Happiness.** The rapid upswing in the sunspot count this year has led to much improved propagation above 15 MHz. More and more flea-powered harmonics can be heard on a good day in the 23-25- and 30-31-MHz ranges. The 15- and 17-MHz bands stay open all night between Europe and North America. The 21-MHz band is open at very unusual times, such as from Pakistan at 0230-0245, heard in North America on 21.59 with dictation-speed English news. A few more stations are likely to venture into the 25-MHz band, besides Israel on 25.605, Radio Liberty on 25.69 and VOA Greenville on 26.04. During the last sunspot peak, 25 MHz provided excellent reception from the few countries using it. This time, however, we must cope with CB interference. And as in every solar activity peak, while conditions can be excellent, there are also more blackouts in store rather than the generally mediocre reception of the past few years. Various estimates place the peak of Cycle 21 in late 1979 or early 1980 at a maximum of about 150 sunspots. ◇

BLANK TAPES & ACCESSORIES  
AT WHOLESALE PRICES!

**J&R**

**BLANK TAPES CASSETTE TAPES**

TDK DC 90	1.56
TDK DC 130	1.98
TDK DC 180 (180 minutes)	2.88
BASF Studio C 90	2.39
BASF Professional II or III C 90	2.99
Maxell UD XL I or II C 60	2.47
Maxell UD XL I or II C 90	3.47
Maxell UD C 90	2.84
Memorex C-90 3 pk. 5.99 for 3	
Scotch C-90 3 pk. 4.99 for 3	
Scotch Master II or III C 90	3.29
Sony Ferracore C 90	3.22
TDK SA C 60	1.98
TDK SA C 90	2.88

**REEL-TO-REEL**

Scotch 207 1800 II	4.99
Scotch 212 1800 II	3.79
TDK L 1800 1800 II	4.64

Write for our SUPER low prices on other Maxell Tapes not listed.  
Minimum Order 12 Tapes - 100% Guaranteed.

**CARTRIDGES audio-technica.**

AT 20 SLA	120.00
AT 15 SA	78.00
AT 14 SA	45.00
AT 12 SA	28.00
AT 10	12.00

**STANTON**

8815	72.50
881EE-S	55.00
881EE	42.50
880E	20.80
800E	14.40

**EMPIRE**

2000Z	60.00
2000E	30.00
2000EII	16.25
2000EII	15.00

**SHURE**

V15 Type IV	90.00
V15 III	53.50
M95E	26.50
M91E	21.00

**PICKERING**

XSV-3000	42.95
XV 15 1200E	34.40
XV 15 825E	19.18
XV 15 400E	16.35

**HEADPHONES audio-technica.**

AT 701	26.40
AT 702	38.40
AT 703	51.20
AT 705	63.90
AT 706	95.88

**SENNHEISER**

HD 400	24.99
HD 414X	39.97
HD 424X	59.95

**KOSS**

Pro 4AA	37.05
Pro 4AAA (new)	45.00
HVI	24.00
HVIA	32.97
HVILC	36.97
KSLC	20.97
TECH VFR	48.00
Phase/2	51.00

HOW TO ORDER: For shipment within 48 hours, send money order or certified check. Two weeks delay on personal checks. Please add \$2.50 per order for shipping & handling. (\$5.50 for orders outside U.S.). N.Y.S. residents add tax. No C.O.D.'s. All merchandise 100% guaranteed, brand new & factory fresh.

**J&R MUSIC WORLD**

33 Park Row, Dept. PE, N.Y.C. 10038  
(212) 732-8600—Write For Free Catalog.

CIRCLE NO 23 ON FREE INFORMATION CARD

Put Professional Knowledge and a COLLEGE DEGREE in your Electronics Career through

## HOME STUDY




**Earn Your DEGREE** by correspondence, while continuing your present job. No commuting to class. Study at your own pace. Learn from complete and explicit lesson materials, with additional assistance from our home-study instructors. Advance as fast as you wish, but take all the time you need to master each topic. Profit from, and enjoy, the advantages of directed but self-paced home study.

The Grantham electronics degree program begins with basics, leads first to the A.S.E.T. degree, and then to the B.S.E.E. degree. Our free bulletin gives complete details of the program itself, the degrees awarded, the requirements for each degree, and how to enroll. Write for *Bulletin E78*.

**Grantham College of Engineering**  
2000 Stoner Avenue  
P. O. Box 25992  
Los Angeles, CA 90025

Worldwide Career Training thru Home Study  
CIRCLE NO 18 ON FREE INFORMATION CARD

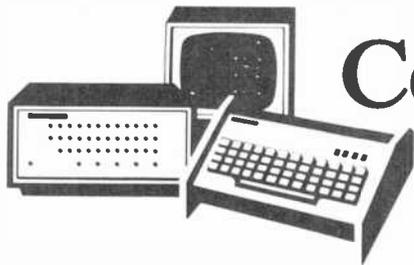

# Computer Bits

By Leslie Solomon

## DIRECT-WIRE REMOTE CONTROL

AT VARIOUS times, POPULAR ELECTRONICS has introduced ideas and circuits for using a computer as a remote-control device. Published circuits used the ac power line as the interface between the computer and the remote electrical appliance being controlled. This approach was taken because we assumed that most users would not wish to rewire their homes to accept direct remote control.

Now we find that many readers do wish to direct-wire their systems. This way, any possible signal malfunction due to power-line noise and other unwanted signals on the ac line will not affect the program being transmitted. Moreover, the "bill of materials" would be lower doing it this way. Many readers have also told us that they were either building a new house or renovating an old one, so that direct wiring could easily be included. Here is information on some direct-wire control systems to assist these readers.

**Direct-Wiring Accessories.** Gimix, Inc. (1337 West 37 Pl., Chicago, IL 60609; Tel: 312-927-5510) has such a system and had, in fact, built a computer-controlled house in the Chicago area. The Gimix system is based on a Driver Relay board that can be obtained directly from the company or a local computer store. The board is designed to drive up to 31 GE RR8 power relays, each of which can handle up to 20 amperes at 250 volts ac. Since this mechanically latched relay requires a 1/120-second (8.33-ms) pulse to turn on or off, standby current is negligible.

The Relay Driver board measures a large 24" x 5" (61 x 12.7 cm). Relays are mounted on a separate bracket. Both the pc board assembly and metal relay bracket can be housed in a conventional 30" x 12" x 6" (76.2 x 30.5 x 15.9 cm) electrical case. The only other item required is a low-current 24-volt transformer to supply relay power.

The system is driven from a conventional 20-mA current-loop serial port. Up

to four of these boards can be driven in series, and each board is assigned its own specific port number.

A board-generated relay status signal allows the processor to detect faulty relays and permits the use of manual-override switches. Since the data rate can be up to 1200 baud, up to 120 relays can be activated in one second.

The board operates in either the active or the scan mode, as specified by the computer. In the active mode, the board interprets the 8-bit data received as a command to turn on or off a particular relay. Following a brief interval to allow the selected relay to operate, the board senses that relay's status (on or off). If the status is other than expected, the computer takes appropriate action, as determined by the program.

A command received in the scan mode has the same results, except for relay activation. This allows the mode to check relay status at any time.

If the on-board UART detects a transmission error, such as in framing, parity, or overrun, no relays are activated and no status scan occurs.

The Gimix catalog contains listings for a number of other interesting remote-control items. Among them is an Opto-Board, which is a general-purpose interface between 34 switches and the computer. The switches can be from a keyboard, an intrusion alarm system, fire-alarm devices, clocks, timers, thermostats, lighting circuits, etc. Each switch input is through an optical isolator that has a rated 1500-volt isolation.

All switch ports are constantly scanned by an on-board circuit (no processor time required), with 0.9 ms required to scan all ports. A built-in memory buffer saves up to 64 closed-switch signals, permitting the processor to complete lengthy tasks between interruptions. The board connects to any 8-bit parallel port.

Another remote-control Gimix board is its Tone Receiver Board, which converts standard DTMF (telephone) tones into binary signals. This allows the use of

## 4-for-1 SALE!

Top Quality J.I.L. 4-in-1  
IN-DASH

AM-FM CAR STEREO with  
8-TRACK or CASSETTE  
PLUS 40-CHANNEL CB!

AS LOW AS **\$149<sup>00</sup>** WHILE SUPPLY LASTS



From J.I.L. a leader in car entertainment centers... a modular, compact, first quality 4-in-1 unit at a price you might pay for a radio only! Get stereo high-fidelity FM Radio, AM Radio, 8-Track or Cassette and CB all for one low price. Tens of thousands sold nationally. Order while supplies last!

#853/102 In-Dash Combination 8-Track Stereo, AM/FM/Stereo Radio and 40-Channel Digital Touch-Tuning AM-CB. Features LO/DX switch, Stereo light, 8-track program lights, CB standby switch, LED channel readout. Plus many other features -while supply lasts only... **\$149.00**

#610/102 In Dash Combination Stereo Cassette Player, AM/FM/Stereo Radio and 40-Channel Digital Touch-Tuning AM-CB. Features cassette eject/FF button, CB selector, CB standby switch Plus many other features -while supply lasts only... **\$159.00**

#202-SSB Single Sideband 40-Channel CB featuring Digital Touch-Tuning AM-SSB CB for 120 effective channels with greater clarity and reach. All functions right on the mike. A top-notch unit. Choose SSB instead of standard 40-channel CB with #853 or #610 above. Please add ..... **\$50.00**

### ACCESSORIES

- AM/FM/CB Retractable Antenna (mounts like reg. car antenna)  
List \$39.95 ..... **NOW \$29.95**
- 5 1/2" Full-tone Coaxial Speakers  
10 oz. magnet per speaker.  
List \$39.95 pr. .... **NOW \$19.95 pr.**
- 6"x 9" Full-tone Coaxial Speakers  
20 oz. magnet per speaker  
List \$69.95 pr. .... **NOW \$29.95 pr.**
- Field Strength/SWR Meter to test Ant.  
List \$29.95 ..... **NOW \$19.95**

CLIP AD AND ATTACH TO LETTER  
Pa. Res. Add 6% Sales Tax.

**LESLIE PAULING INC.** 0200  
"DISCOUNT MAIL ORDER!"

70 James Way, Southampton, Pa. 18966  
Phone Orders Call (215) 322-8599

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

BankAmericard/Visa, Master Charge-

Card # \_\_\_\_\_ Exp. Date \_\_\_\_\_

CIRCLE NO 26 ON FREE INFORMATION CARD

# ADVANCING the state of the art



in automatic percussion units... the **PROGRAMMABLE DRUM SET** features: score editing, bridges, intro's, external sync. to sequencers foot controls, memory save switch & much more.

Enter scores in seconds - **NO PROGRAMMING KNOWLEDGE IS REQUIRED!**

High Fidelity describes the 3750 as "an easy project... fun to do and yields delightful results... an excellent educational tool and versatile aid to the musician who can't afford a live rhythm section."

#3750 ..... \$84.95... (+\$3 shipping)

Another Great Kit from: **FA&A**  
8 P 1020 WEST WILSHIRE BLVD. OKLAHOMA CITY, OK 73116

- Send Programmable Drum Set Kit (\$84.95+ shipping enclosed)  
 TELL ME MORE... Send the instruction manual first (\$2.00 refundable upon kit purchase)

name: \_\_\_\_\_

address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

SEND FREE CATALOG

CIRCLE NO 37 ON FREE INFORMATION CARD

conventional Touch-Tone telephones for remote control. The board also uses an 8-bit parallel port. A 16-button remote-control keypad that can work at distances of up to a mile from the computer is also available.

**Z80 Controller.** Manufactured by Dynabyte (4020 Fabian, Palo Alto, CA 94303; Tel: 415-494-7817) the Z80-based Basic Controller sells for \$750 assembled and tested. The Controller features a variation of BASIC, called ZIBL, which is a proprietary language specifically written for control applications. This single board divides the world into six categories: sense inputs, flag outputs, lights, relays, A/D conversions, and D/A conversions. ZIBL implements 64 channels of each in such a way that the user need know nothing about them, other than their names.

The file structure allows multiple programs to be written into RAM, and each program can be individually loaded, renamed, and run. Any program can access another program as a subroutine while still retaining its own line numbers and variables. Listing, printing, and inputting can be from either the serial or the parallel I/O channel or the built-in CRT I/O. Interaction with the controller is via the user's keyboard and video monitor that can be "plugged" into a board connector.

On-board hardware includes a Z80 microprocessor that operates at 2.5 MHz, 4K of RAM (expandable to 16K), 4K of EPROM with programmer, two RS-232 I/O ports configurable via software with one port having a 20-mA current loop, one parallel input and one parallel output port, 300-baud cassette interface with file handling and motor control, and a keyboard-input port.

The internal video interface generates 16 lines of 64 characters and has standard video output. There are also 32 individual memory-mapped flag outputs, 32 individual memory-mapped sense inputs, and eight relays, four of which handle 0.75 amperes and four of which handle 5 amperes. Other visual outputs include eight individual memory-mapped LED's and one 8-bit light port for displaying the data.

**Floppy Update.** Southwest Technical Products Corp. (219 West Rhapsody, San Antonio, TX 78216; Tel: 512-344-0241) has announced availability of its Model DMAF1 dual-drive, single-density, double-sided 8" (20.3-cm) floppy-disk system. It sells for \$2095 as-

# Telephones Galore

## Free Catalog



Have decorating fun with this amazing array of phones you can really own. Styles and colors to express your every mood. Elegant onyx, 24 K gold-plate, polished wood; nostalgic 20's 'n 30's styles; contemporary acrylic 'n chrome and frankly functional... from \$17.95 to \$2,500. All government FCC approved, ready for existing jack. Answering machines, dialers and telephone accessories, too. Write today for 16 page, full color catalog. **FREE.**


### THE TELEPHONE BOOTH

One Tandy Center, Dept. AR,  
Fort Worth, Texas 76102

A Division of Tandy Corporation

CIRCLE NO 54 ON FREE INFORMATION CARD

## THE MEAN LITTLE KIT

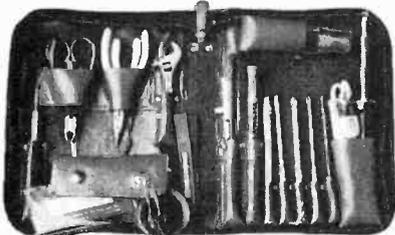

New compact 24-piece kit of electronic tools for engineers, scientists, technicians, students, executives. Includes 7 sizes screwdrivers, adjustable wrench, 2 pair pliers, wire stripper, knife, alignment tool, stainless rule, hex-key set, scissors, 2 flexible files, burnisher, miniature soldering iron, solder aid, coil of solder and desoldering braid. Highest quality padded zipper case, 6 x 9 x 1-3/4" inside. Satisfaction guaranteed. Send check, company purchase order or charge BankAmericard or Mastercharge. We pay the shipping charges **JTK-6 TOOL KIT.....\$65.00**

### FREE CATALOG

152 pages of hard-to-find precision tools. Also contains 10 pages of useful "Tool Tips" to aid in tool selection. Send for free copy today!



**JENSEN TOOLS & ALLOYS**  
1230 S. PRIEST DR. TEMPE, AZ. 85281

CIRCLE NO 26 ON FREE INFORMATION CARD

### Electronic Warning Flasher Kit

This battery operated device continuously emits bursts of intense light. Great safety device for bicycle riders, skiers, hikers, boaters & campers. Comes complete w/ all electronic parts, quality glass-epoxy P-C board & easy to understand instructions. Uses high-output xenon flash tube which flashes 2 times per second when batteries are fresh. Operates continuously for 12 hours on 2 alkaline "C" batteries. You need only to supply the batteries and, if desired, a battery holder & case.



C23207 \$6.95  
(3 for \$18.00)

#### Strobe Light Kit



COMPLETE variable rate strobe light kit. Contains all parts, including one cord, P-C board and instructions. Operates on 115 VAC. \$7.50 each

#### 6 KV TRIGGER COILS 2 for \$1



required to "fire" xenon flash tubes

#### Green Neon

Same as NE2 but glows GREEN. Operates on 120V.

6 for \$1.00

#### Liquid Crystal Watch Display

WITH SPECS \$1.25  
MOTOROLA MLC500

#### Slide Switch Assortment

20 for \$1.00

#### MV109 Tuning Diode

2 for \$1.00

#### LASCR

200 VOLT .3 AMP. C23063 4 for \$1.00

#### Micro-Miniature Rotary Switch

1 POLE, 8 POSITION 79¢

#### Honeywell Strobe

14" SHUTTER CORD \$1.00

### Electronic Flash Unit



\$3.95 C27267

Guide no. 28 ASA 25. These were to be installed in cases but the final assembly was never completed. You get a complete working flash unit. Operates on 2 AA penlight batteries. You need only supply a shutter cord, battery holder & batteries, & if desired, some sort of case. Approx. overall size of circuit board, reflector & capacitor: 3" x 2 1/2" x 1 1/2"

#### PHOTOFL/HA CAPS

350 mf 330V 100  
720 mf 360V 150  
520 mf 500V 2.00

#### REFLECTOR

Metal matte finish round reflector for electronic flash, strobes, slave lights, etc. 3 3/4" Dia. x 1 7/8" \$ 2.00

#### STROBE TUBE ASSY.

Brand new factory prime strobe tubes. Assortment of 5 strobe tubes w/ schematics C23280 \$ 2.00

#### 5V REED RELAY SPST

\$1.00  
5V REED RELAY SPDT 1.50  
JUMBO YELLOW LED 5/51.00  
78L05 5V REG. 5/51.00

### CHANEY electronics

P.O. BOX 27038, DENVER, CO. 80227 Ph: 303/781-5750  
Send for our **FREE GIANT CATALOG** of unique items!!!!

CIRCLE NO 55 ON FREE INFORMATION CARD

# BUY FROM THE BIGGEST

10 DAY RETURN PRIVILEGE

sembled and tested or \$2000 in kit form. The hardware consists of an SS-50 bus-compatible DMA controller that is capable of handling up to four drives, two CalComp 143M double-density rated disk drives, both enclosed in a 20 1/2" D x 17 1/8" W x 5 3/8" H (52.1 x 43.5 x 13.7 cm) aluminum chassis that also contains a regulated power supply, drive-motor control board, cooling fan, diskette, etc.

Software includes a DOS, 8K BASIC with disk file and string function capability. Each diskette holds approximately 600K. Hence, with dual disks, more than one megabyte is provided.

**Video News.** TDL (Research Park, Bldg. H, 1101 State Rd., Princeton, NJ 08540; Tel: 609-921-0321) has released its VDB at \$369 assembled and tested. Consisting of two board assemblies, one piggybacked on the other, only one S-100 connector is used.

The VDB contains its own display buffer with two pages of 25 80-character lines. Since the display memory does not employ a memory address, the entire computer memory is left intact for user programs. In addition to the 96 upper- and lower-case ASCII characters (with descenders), 64 unique display symbols are provided to permit graphic resolution with 160 horizontal and 75 vertical elements. The display can accept data at a 400,000-character/second rate. The blinking cursor is addressable, and a mode register allows any combination of characters to blink, insert, or do both simultaneously.

Ohio Scientific (1333 S. Chillicothe Rd., Aurora, OH 44202; Tel: 216-562-3101) has introduced a Model 540 video display board for the company's Challenger III line. Costing \$249, this display features a 32-row by 64-column display of the standard 64-character ASCII display font in a 5 x 7 dot-matrix form. Standard features include programmable 32 x 32 or 32 x 64 formatting. The board also has a keyboard port. The Model 540 also supports a graphics character generator that features lower-case and about 170 special characters for plotting and gaming.

**Z80 Board.** The company to take up the "standard" for putting a Z80 into every S-100 bus computer is Vector Graphic Inc. (790 Hampshire Rd., Westlake Village, CA 91361; Tel: 805-497-6853) with its Z-80 CPU board that sells for \$175 in kit form or \$215 assembled. This new board offers fully blocked design with on-board wait-state

## BALLY ARCADE

• 280 based processor unit  
• 8K ROM in RAM  
• High resolution color display - 1600 x 1200 pixels - 1600 horizontal lines  
• 2 player joystick - 1600 horizontal lines  
• 2 games included (Carnegie Chess, Chess)

**TINY BASIC (IN ROM) \$49.95**  
Commands include: Go, Freeze, Run, List, Run, Test, Help, Goals, Run, Lists, ABS, B, Set, Run, Run, Date, State, Print.

**AUDIO CASSETTE CONTROLLER \$49.95**  
Includes cassette language system save your Tiny BASIC programs.

**PROGRAMS IN CARTRIDGE (ROM)**

ARCADER BOARD	\$199.95
SPORTS SERIES VIDEOGAMES	\$19.95
2001 200 Yard and Diagram	\$19.95
2002 Sea Wolf and Missile Attack	\$19.95
2003 Calcutt Attack and Red Baron	\$19.95
2004 Queens and Eskador	\$19.95
2005 Sabre Race	\$29.95

**ACTION/ROLL SERIES VIDEOGAMES**

3001 Tornado Fighter	\$29.95
3002 Mountain	\$29.95
3003 Grand Prix and Demolition Derby	\$19.95
3004 Descent and Drag Race	\$19.95

**EDUCATION SERIES VIDEOGAMES**

4001 World Map and Soccer Match	\$19.95
4002 Letter Master, Spelling and Crosswords	\$29.95
4003 Astronomy	\$49.95

**STRATEGY SERIES VIDEOGAMES**

5002 Backgammon and Army Quizzes	\$29.95
5003 Backgammon and Checkers	\$19.95

**FUNCTIONAL SERIES VIDEOGAMES**

6002 Samy BASIC	\$19.95
6003 Casualty audio interface to Bally BASIC	\$19.95

Available September - 1978

## KIM-1

The original 1K expansion single board computer

Assembled \$245  
With power supply \$269

**EXPAND YOUR KIM SYSTEM:**

KIM-1	\$125
Kit	\$160
Connector set	\$15
KIM-1 Expansion board	\$110

**8K BYTABLE MEMORY FOR KIM-1**  
Assembled \$269  
Cassette Recorder (SANYO) \$85  
connector set \$12

**MICRO TECH POWER SUPPLY**  
Assembled \$29.95

**KIM ENCLOSURE \$23.50**  
Give your Kim appearance appearance the alterations required. Includes 10x10 Black Blue Top & Vents.

## VIM-1

From Synertek \$269.00

• 70 Double character display including 1600 x 1200 pixels  
• 2 player joystick - 1600 horizontal lines  
• 2 games included (Carnegie Chess, Chess)

• Enhanced software  
• Standard interfaces include:  
• Audio cassette recorder interface with Remote Control  
• Full 2800 2801 Transfer interface  
• System Expansion Bus interface  
• TV Computer board interface  
• CRT Composite video interface  
• 500 Lines in the basic system

## INTEGRAL DATA

IP-125 IMPACT PRINTER \$799

• High quality printing  
• 100% reliable  
• Local remote in real status  
• Compact, cableless terminal  
• Multiple integration at terminal level  
• High speed and remote print  
• Low noise level  
• 100% reliability  
• Size 21" wide x 21" deep x 10" high  
• 100% reliability  
• 100% reliability

Documentation \$10  
AS-15 \$195  
Working \$195  
RETURNED \$195

## CompuColor II

Model 4 \$1,795

• Includes Disk Basic 8001 with extended statement expander  
• 16K graphics, 32 line alphanumeric  
• 8000 based 16K ROM, 8K RAM, expand to 64K  
• Integral mini disc drive 51.2K bytes/side

• 25 I/O Ports standard (expand to 32)  
• RS-232C asynchronous I/O  
• Editing, File commands, multiple baud rates  
• Color 10 x 17 display  
• Variety of pre-programmed Databases available

## XITEX

Single board video terminal \$1,100

• 16 Ln x 64 char display 128 printable characters  
• Software: UASB (ASCII or Baudot) 3 serial interfaces - 1 character ID true composite video  
• ASCII expanded operator input, full compatible raster power connection

Assembled & tested NOW \$117  
Kit No. MSC-TRX-254

## TELETYPE MODEL 43 TELEPRINTER

Dot matrix impact 30 or 10 cps prints full 84 char x ASCII set. Spooler type 115 interface \$116

Sprocket re-ET interface \$137

## THE PET CONNECTION

PET with 8K user memory \$789.00

Second Cassette drive \$99.95

RS-232 Printer Adapter - assembled board \$99.50  
With power supply, cable & DB25 \$149.00  
Printer - P-1 controlled base \$18.95  
Video Buffer - add a conventional monitor \$18.95

BETS - PET to S-100 I/O Motherboard \$100.00  
Kit \$160.00

## MATROX VIDEO RAMS S-100

ALT-2480 48Ln x 80Ch display \$299  
ALT-2481 24Ln x 75Ch dot display \$295

## ROYTRON

NEW ASCII INTERFACES for Reader/Punch

8 LEVEL PAPER TAPE/READER PUNCH  
NEW in original box \$295.00  
USED 90 day warranty \$175.00  
Documentation Package \$25.00

Board Cables Power Supply Parallel \$490  
RS232 Serial \$350 Serial \$415

Board Cables Power Supply Enclosure Control Panel Parallel \$578  
Serial \$790

## TC-71 SELECTRIC TERMINALS

Reduce your heavy duty selective terminal maintenance costs. See catalog for detailed easy maintenance information. See our literature for more on this link.

Rebuilt \$495  
Classified Working \$350  
ASIS \$330  
Operational \$130

**ASCII INTERFACE FOR TC-71**  
30 day delivery Normally \$199 NOW \$169  
Dipcom - acoustic Coupler for use with ASCII TC-71 \$225

## Autocomp

Reduce Fuel costs - monitor your engines performance in real time

NEW! \$129.50

The Autocomp 280P mounts into your dash and by push-button control provides LED readouts of the following driving functions: instantaneous RPM, mileage, MPH, Fuel Used, Distance Traveled and Correct Time.

AUTOCOMP can be installed on most American and Japanese make autos and vans except those with fuel injection and is NOT recommended for European imports.

## GRI ASCII KEYBOARD

55 keys on compact 85R-33 layout \$129.95  
Assembled \$179.95  
Enclosure \$149.95

## SANYO MONITOR

VN-420P 9" quality monitor \$149

## HI PLOT<sup>TM</sup> DIGITAL PLOTTER

Printer and plotter \$1,100

• 100% reliability  
• 100% reliability  
• 100% reliability

FINIEVERTER \$9.95

## TI PROGRAMMER

Hexadecimal octal decimal calculator converter  
Reg. \$59.95 NOW \$39.95

## Books

DESCRIPTION	CAT. NO.	PRICE
Telephone Accessories The Car Book	4.00	
The First Book on 8088 Micro Computers	6.95	
Basic BASIC: An Introduction	7.95	
Advanced BASIC: Application and Software	8.95	
Home Computers & Beginners Guide	8.95	
An Introduction to Microcomputers V. 1	7.50	
An Introduction to Microcomputers V. 2	15.00	
1000 Prog. for Logic Design	7.50	
1000 Prog. for Logic Design	8.95	
Some Examples BASIC Programs	7.50	
WORKBOOKS FOR PET 2801		
Develop your own many practical and unique programs		
Books Started with Your PET	4.00	
PET String and Array Handling	3.95	
PET Graphics	4.95	
PET Cassette I/O	1.95	
Microcomputers PET Features	3.95	
Kit No. MSC-BUS-10		
PET LITERATURE PACKAGE		
A collection of three valuable publications relating to the PET 2801		
CPETS The PAPER PET User Notes	5.00	

select and is jumper-selectable for operation at 2 or 4 MHz. All Z80 lines are fully buffered, and the board will operate with 8080 software without modifications.

### Upcoming Meetings.

July 22-23

Amateur Computing 78,  
Sheraton National Motor Hotel  
Arlington, VA

Aug 24-27

Personal Computing 78,  
Civic Center, Philadelphia, PA

Sept 15-17

2nd National Microcomputer

Expo and Conference,  
Coliseum, New York, NY

Sept 29-Oct 1

International Microcomputer Expo,  
Dallas Convention Center,  
Dallas, TX

Oct 5-8

Midwest Personal Computing Expo,  
Expocenter, Chicago, IL

Oct 12-15

Mid-America Personal Compr Show,  
O'Hare Expo Center, Chicago, IL

Nov 3-5

3rd West Coast Computer Faire,  
Los Angeles, CA



## Software Sources

### THE MICROCOMPUTER MART COMPUTER RETAIL STORES

#### CALIFORNIA

Byte Shop #1  
1063 West El Camino Real  
Mountain View, California 94040  
(415) 969-5464

Rainbow Computing, Inc.  
Complete Apple II Line  
10723 White Oak Avenue  
Granada Hills, California 91344  
(213) 360-2171

#### GEORGIA

Datamart, Inc.  
Apple Specialists  
3001 North Fulton Drive, NE  
Atlanta, Georgia 30305  
(404) 266-0336

#### ILLINOIS

American Microprocessors  
Equipment and Supply Corp.  
At the Chicagoland Airport  
20 North Milwaukee Avenue  
Half Day, Illinois 60069  
(312) 634-0076

#### INDIANA

Audio Specialists  
Stock Commodore PET  
415 North Michigan Street  
South Bend, Indiana 46601  
(219) 234-5001

#### MICHIGAN

The Computer Mart  
Personal/Professional Systems  
1800 West 14 Mile Road  
Royal Oak, Michigan 48073  
(313) 576-0900

United Microsystems Corp.  
Professional Computer Store  
2601 South State Street  
Ann Arbor, Michigan 48104  
(313) 668-6806

#### NEW JERSEY

Computer Mart of New Jersey  
The Microcomputer People™  
501 Route 27  
Iselin, New Jersey 08830  
(201) 283-0600

#### NEW YORK

Byte Shop of New York  
Small Business Systems & Software  
130 East 40th Street  
Corner of Lexington Avenue  
New York, New York 10016  
(212) 889-4204

Computer Factory  
Low Prices/Home & Office Computers  
485 Lexington Avenue  
New York, New York 10017  
(212) 249-1666 or (212) PE-T-2001

Readout Computer Stores  
6 Winspear Avenue  
Buffalo, New York 14214  
(716) 835-7750

#### PENNSYLVANIA

Personal Computer Corp.  
First in Pennsylvania  
Frazer Mall  
Lancaster Avenue and Route 352  
Frazer, Pennsylvania 19355

#### TEXAS

Compushop  
Computers for Home & Business  
13933 North Central Expressway  
Dallas, Texas 75243  
(214) 234-3412

KA Electronics Sales  
Computers and Components  
1220 Majesty Drive  
Dallas, Texas 75247  
(214) 634-7870

The Computer Shop  
6812 San Pedro  
San Antonio, Texas 78216  
(512) 828-0553

#### VIRGINIA

Computer Systems Store  
Processor Technology & PET  
1984 Chain Bridge Road  
McLean (Tysons Corner), Virginia 22101  
(703) 821-8333

The Computer Hardware Store, Inc.  
818 Franklin Street  
Alexandria, Virginia 22314  
(703) 548-8085

The Computer Workshop of Northern Virginia  
5240 Port Royal Road #203  
Springfield, Virginia 22151  
(703) 321-9047

Dealers: For information about how to have your store listed in THE MICROCOMPUTER MART, please contact: POPULAR ELECTRONICS, One Park Ave., New York, N.Y. 10016 • (212) 725-7056

**8080 Inventory Package.** Inventory-1 is an interactive inventory control system for S-100 bus computers. It is designed to run on Shugart Mini-Floppy drives. The program provides three-second access to any item in the inventory file. "HELP" and "EXPLAIN" commands are available to prompt the firsttime user. The system includes a set of "skeleton" programs which can be used to implement special, user-defined commands; using these "skeleton" programs, the system is claimed to make it possible to produce the software necessary to generate a special report within 5 minutes. \$99.95. Write: The Software Works, Inc., Box 4386, Mountain View, CA 94040.

**1802 Cosmac Elf Music and Games.** This 44-page book includes music programming instructions and several "scores," utility subroutines, random numbers, Tic-Tac-Toe, and others. \$2.50 (Connecticut residents add 7% tax). Paul C. Mosers, 39 Mansfield Apts., Storrs, CT 06268.

**6502 Assembler/Text Editor & Relocating Loader.** The Assembler/Editor portion of this program produces relocatable object code on tape (with checksum) and can store executable code in memory during assembly. It can assemble source programs from tape or memory, and has 17 user commands (including tape control and one user-definable command) and 16 pseudops. Labels may be up to 10 characters in length. Lines are automatically numbered, and there are 18 error codes. A manuscript feature allows the program to generate letters and other text. The Relocating Loader can reload relocatable object code at practically any location. The program resides in less than 4K of RAM or ROM (specify hex starting addresses of 0200, 0400, 1000 or 2000), and support up to two tape decks. It is pre-configured for TIM-based systems, but information is supplied on modifying it for other systems. Hex listing and operators manual, \$25. C.W. Moser, 3239 Linda Dr., Winston-Salem, NC 27106.

# SUMMER MADNESS SALE

## Active Electronic Sales Corp.

### TTL HIGH SPEED PLASTIC DUAL-IN-LINE I.C.'s

Stock level	Part No.	Price
46000	74H00	.16
1300	74H01	.16
11600	74H02	.16
8900	74H03	.16
51000	74H04	.17
9000	74H05	.17
1500	74H08	.22
17000	74H10	.16
4400	74H11	.22
1000	74H12	.16

Stock level	Part No.	Price
4000	74H15	.17
12000	74H20	.16
6000	74H22	.16
2000	74H30	.18
24000	74H40	.16
3000	74H50	.16
2000	74H51	.17
1000	74H52	.17
6000	74H53	.17
1000	74H54	.18

Stock level	Part No.	Price
2000	74H55	.18
3000	74H60	.18
2000	74H61	.18
2000	74H62	.18
2000	74H64	.16
6000	74H65	.16
1000	74H71	.35
2000	74H72	.31
2000	74H73	.49
24000	74H74	.24

Stock level	Part No.	Price
1200	74H76	.55
1000	74H78	.55
1500	74H87	2.75
1000	74H101	.35
1000	74H102	.35
1000	74H103	.50
2000	74H106	.45
1000	74H108	.49
3000	74H113	.24
2000	74H114	.24
1200	74H183	2.25


### TTL PLASTIC DUAL-IN-LINE I.C.'s

Stock level	Part No.	Price
36000	7400	.09
22000	7404	.09
6800	7423	.07
13000	7425	.12
43000	7437	.09
57000	7438	.09
22000	7443	.15
38000	7445	.19
23000	7454	.07
32000	7460	.07
41000	7472	.12

Stock level	Part No.	Price
15000	7480	.19
26000	7482	.15
56000	7491	.19
45000	74150	.39
69000	74151	.29
12000	74152	.89
90000	74153	.29
33000	74154	.49
2900	74155	.29
23000	74156	.19
42000	74157	.29

Stock level	Part No.	Price
41000	74162	.34
90000	74174	.39
21000	74175	.39
11000	74180	.34
13000	74181	.79
31000	74182	.29
30000	74190	.34
48000	74191	.34
16000	74194	.34
56000	74195	.29
8000	74199	.69
33000	74283	.49

### Dual In-line Sockets



- PLUGGABLE SOCKET FOR IC PACKAGES WITH LEADS
- LOW COST - NO GOLD IS USED IN THE RECEPTACLE OR NEEDED ON THE LEADS
- HIGH RELIABILITY GAS-TIGHT JOINT FOR "GOOD AS GOLD" PERFORMANCE
- COMPACT - LOW PROFILE DESIGN
- NO WICKING WHEN SOLDERED TO PC BOARD
- FLAMMABILITY RATING - UL 94V-0

Stock level	Contacts	Price
185,000	8 PIN	.11
245,000	14 PIN	.13
190,000	16 PIN	.15
29,000	18 PIN	.19
80,500	22 PIN	.27
60,000	24 PIN	.28
30,000	28 PIN	.36
65,000	40 PIN	.48

### NEW 1978 CATALOGUE

Our new and expanded comprehensive 1978 catalogue (144 pages), listing complete descriptions, illustrations and monolithic pricing on over 10,000 items is available on request.

- Subject to prior sale
- Prices valid only till September 15th, 1978
- Standard 1978 catalogue prices on the above devices will once again take effect September 15th, 1978.

### MICROPROCESSOR CHIPS

#### CPU's

Stock level	Part No.	Price
7100	8080A	7.95
5500	6800	9.95

#### UV EPROM

Stock level	Part No.	Price
11900	2708	8.99

#### MOS STATIC RAM's

Stock level	Part No.	Price
13500	2114 4K 450NS	9.95
84600	2102LFPC 1K 350NS	1.19 (Low power)

#### MOS DYNAMIC RAM's

Stock level	Part No.	Price
7200	4060/9060 4K 300NS	3.95
2800	416 16K 250NS	19.95

#### UART's


Stock level	Part No.	Price
16500	AY5-1013A	4.95
12300	AY3-1015	5.95

### INTERFACE SUPPORT CIRCUITS

Stock level	Part No.	Price
8300	8212	1.98
3500	8214	4.95
25200	8216	1.98
3300	8224	2.75
2400	8226	1.98
3100	8228	4.75
1400	8238	4.75
5700	8251	5.95
1100	8253	14.95
2700	8255	5.95
1000	8257	9.95
840	8259	14.95
4500	6810	3.95
8000	6820	4.95
9600	6850	5.95
1500	6852	5.95

### BRAND NEW 1978 IC MASTER

Complete integrated circuit data selector. New 1978 edition (2200 pages) is twice as big as last year. Master guide to the latest I.C.'s including microprocessors and consumer circuits.



Free quarterly updates.

**\$24.95**

Lowest price available



**Active Electronic Sales Corp.**

P.O. BOX 1035 FRAMINGHAM, MASSACHUSETTS 01701

Over-the-counter sales,  
12 Mercer Rd., Natick, Mass. 01760  
Behind Zayres on Rte. 9  
Telephone Orders & Enquires (617) 879-0077

IN CANADA 3 LOCATIONS

5651 Ferrier St.  
Montreal, Quebec  
Tel. (514) 735-6425

44 Fasken Dr. Unit 25  
Rexdale, Ontario  
Tel. (416) 675-3311

Baxter Centre  
1050 Baxter Road  
Ottawa, Ontario  
Tel. (613) 820-9471

MINIMUM ORDER \$10.00 • ADD \$2.00 TO COVER POSTAGE & HANDLING • Canadian customers add 30% for exchange and handling. All federal and provincial taxes extra.  
Foreign customers please remit payment on an international bank draft or international postal money order in American dollars.

### 7400 TTL

SN7400N	16	SN7472N	29	SN74160N	89
SN7401N	18	SN7473N	35	SN74161N	89
SN7402N	18	SN7474N	35	SN74162N	195
SN7404N	18	SN7475N	49	SN74163N	89
SN7405N	20	SN7476N	35	SN74164N	89
SN7406N	29	SN7477N	50	SN74165N	89
SN7407N	29	SN7478N	50	SN74166N	89
SN7408N	20	SN7479N	50	SN74167N	195
SN7409N	20	SN7480N	59	SN74170N	159
SN7410N	18	SN7481N	59	SN74172N	60
SN7411N	25	SN7482N	55	SN74173N	125
SN7412N	18	SN7483N	59	SN74174N	89
SN7413N	40	SN7484N	45	SN74175N	79
SN7414N	20	SN7485N	55	SN74176N	79
SN7415N	75	SN7486N	43	SN74177N	79
SN7416N	25	SN7487N	43	SN74179N	195
SN7417N	25	SN7488N	59	SN74180N	195
SN7418N	25	SN7489N	59	SN74181N	195
SN7419N	25	SN7490N	30	SN74182N	79
SN7420N	25	SN7491N	30	SN74183N	195
SN7421N	29	SN7492N	35	SN74184N	195
SN7422N	39	SN7493N	35	SN74185N	195
SN7423N	39	SN7494N	35	SN74186N	95
SN7424N	29	SN7495N	35	SN74187N	95
SN7425N	29	SN7496N	35	SN74188N	95
SN7426N	29	SN7497N	35	SN74189N	95
SN7427N	25	SN7498N	35	SN74190N	125
SN7428N	25	SN7499N	35	SN74191N	125
SN7429N	25	SN7500N	35	SN74192N	79
SN7430N	25	SN7501N	35	SN74193N	79
SN7431N	25	SN7502N	35	SN74194N	89
SN7432N	25	SN7503N	35	SN74195N	89
SN7433N	25	SN7504N	35	SN74196N	89
SN7434N	25	SN7505N	35	SN74197N	89
SN7435N	20	SN7506N	35	SN74198N	149
SN7436N	25	SN7507N	35	SN74199N	149
SN7437N	25	SN7508N	35	SN74200N	149
SN7438N	25	SN7509N	35	SN74201N	149
SN7439N	25	SN7510N	35	SN74202N	149
SN7440N	20	SN7511N	35	SN74203N	149
SN7441N	89	SN7512N	35	SN74204N	149
SN7442N	49	SN7513N	35	SN74205N	149
SN7443N	49	SN7514N	35	SN74206N	149
SN7444N	49	SN7515N	35	SN74207N	149
SN7445N	49	SN7516N	35	SN74208N	149
SN7446N	69	SN7517N	35	SN74209N	149
SN7447N	59	SN7518N	35	SN74210N	149
SN7448N	59	SN7519N	35	SN74211N	149
SN7449N	59	SN7520N	35	SN74212N	149
SN7450N	20	SN7521N	35	SN74213N	149
SN7451N	20	SN7522N	35	SN74214N	149
SN7452N	20	SN7523N	35	SN74215N	149
SN7453N	20	SN7524N	35	SN74216N	149
SN7454N	20	SN7525N	35	SN74217N	149
SN7455N	25	SN7526N	35	SN74218N	149
SN7456N	20	SN7527N	35	SN74219N	149
SN7457N	20	SN7528N	35	SN74220N	149

### C/MS

CD4000	23	CD4070	55
CD4001	23	CD4071	23
CD4002	23	CD4072	49
CD4006	19	CD4076	139
CD4007	19	CD4081	23
CD4008	49	CD4082	139
CD4010	49	CD4093	99
CD4011	23	CD4098	249
CD4012	25	MC14049	1495
CD4013	49	MC14050	1495
CD4014	39	MC14411	1495
CD4015	119	MC14419	1495
CD4016	49	MC14433	995
CD4017	19	MC14434	75
CD4018	49	MC14504	1495
CD4019	49	MC14562	1450
CD4020	119	MC14583	300
CD4021	39	CD4508	395
CD4022	119	CD4512	39
CD4023	23	CD4519	995
CD4024	23	CD4560	1495
CD4025	23	CD4566	1495
CD4026	23	CD4567	1495
CD4027	69	CD4568	23

### 7400

7400	39	74C163	300
7402	55	74C164	300
7404	75	74C165	300
7408	75	74C192	275
7410	65	74C193	275
7411	65	74C195	275
7420	65	74C207	275
7420	65	74C207	275
7420	65	74C211	275
7422	215	74C214	300
7424	475	74C215	215
7427	150	74C216	300
7427	150	74C217	300

### LINEAR

LM300H	80	LM723N	100
LM301H	35	LM731N	119
LM301CN	35	LM741CN	35
LM302H	75	LM741CN	35
LM304H	100	LM741CN	35
LM305H	60	LM747H	79
LM307CMH	35	LM748H	39
LM308H	100	LM748H	39
LM308CN	100	LM748H	39
LM309H	110	LM750N	39
LM309CN	110	LM750N	39
LM309N	125	LM750N	39
LM310H	115	LM750N	39
LM311H	125	LM750N	39
LM312H	125	LM750N	39
LM313H	125	LM750N	39
LM317H	85	LM750N	39
LM318CN	150	LM750N	39
LM319H	100	LM750N	39
LM320K-5	135	NE501N	495
LM320K-12	135	NE502A	495
LM320K-15	135	NE503A	495
LM320K-18	135	NE504	600
LM320K-24	135	NE505	600
LM320T-5	125	NE550N	39
LM320T-12	125	NE551V	39
LM320T-15	125	NE552V	39
LM320T-18	125	NE553V	39
LM320T-24	125	NE554V	39
LM320T-30	125	NE555V	39
LM320T-36	125	NE556V	39
LM320T-48	125	NE557V	39
LM320K-5	135	NE558V	39
LM320K-12	135	NE559V	39
LM320K-15	135	NE560V	39
LM320K-18	135	NE561V	39
LM320K-24	135	NE562V	39
LM320K-30	135	NE563V	39
LM320K-36	135	NE564V	39
LM320K-48	135	NE565V	39
LM320K-60	135	NE566CN	175
LM320K-75	135	NE567H	175
LM320K-90	135	NE568H	175
LM320K-105	135	NE569H	175
LM320K-120	135	NE570	1050
LM320K-135	135	LM703CNH	45
LM320K-150	135	LM709N	29
LM320K-165	135	LM709N	29
LM320K-180	135	LM711N	39
LM320K-210	135	LM723N	35
LM320K-240	135	LM723N	35

### 74LS00 TTL

74LS00	23	74LS139	69
74LS01	23	74LS151	69
74LS02	23	74LS155	69
74LS03	23	74LS156	69
74LS04	23	74LS157	69
74LS05	23	74LS158	69
74LS06	23	74LS159	69
74LS07	23	74LS160	69
74LS08	23	74LS161	69
74LS09	23	74LS162	69
74LS10	23	74LS163	69
74LS11	23	74LS164	69
74LS12	23	74LS165	69
74LS13	23	74LS166	69
74LS14	23	74LS167	69
74LS15	23	74LS168	69
74LS16	23	74LS169	69
74LS17	23	74LS170	69
74LS18	23	74LS171	69
74LS19	23	74LS172	69
74LS20	23	74LS173	69
74LS21	23	74LS174	69
74LS22	23	74LS175	69
74LS23	23	74LS176	69
74LS24	23	74LS177	69
74LS25	23	74LS178	69
74LS26	23	74LS179	69
74LS27	23	74LS180	69
74LS28	23	74LS181	69
74LS29	23	74LS182	69
74LS30	23	74LS183	69
74LS31	23	74LS184	69
74LS32	23	74LS185	69
74LS33	23	74LS186	69
74LS34	23	74LS187	69
74LS35	23	74LS188	69
74LS36	23	74LS189	69
74LS37	23	74LS190	69
74LS38	23	74LS191	69
74LS39	23	74LS192	69
74LS40	23	74LS193	69
74LS41	23	74LS194	69
74LS42	23	74LS195	69
74LS43	23	74LS196	69
74LS44	23	74LS197	69
74LS45	23	74LS198	69
74LS46	23	74LS199	69
74LS47	23	74LS200	69
74LS48	23	74LS201	69
74LS49	23	74LS202	69
74LS50	23	74LS203	69
74LS51	23	74LS204	69
74LS52	23	74LS205	69
74LS53	23	74LS206	69
74LS54	23	74LS207	69
74LS55	23	74LS208	69
74LS56	23	74LS209	69
74LS57	23	74LS210	69
74LS58	23	74LS211	69
74LS59	23	74LS212	69
74LS60	23	74LS213	69
74LS61	23	74LS214	69
74LS62	23	74LS215	69
74LS63	23	74LS216	69
74LS64	23	74LS217	69
74LS65	23	74LS218	69
74LS66	23	74LS219	69
74LS67	23	74LS220	69

### BUGBOOK®

Continuing Education Series

the BUGBOOK I

the BUGBOOK II

the BUGBOOK III

**THE 555 TIMER APPLICATIONS SOURCEBOOK WITH EXPERIMENTS** by Howard M. Berlin W3HB \$6.95

This book shows you what the 555 timer is and how to use it. Includes over 100 various design techniques, equations and graphs to get you ready to go. Includes: generator, power supplies, measurement and control circuits, party games. Circuit for the home and automation. Philosophy, music, and Amateur Radio.

**INSTRUCTOR'S MANUAL** by David G. Larson, Peter R. Reay, Jonathan A. Files \$9.00

Necessary for instruction of Bugbook I and II. Includes questions requiring experiments, suggestions for further reading, philosophy of authors approach to digital electronics. A must for self-teaching individuals.

**IC AMP MANUAL** by Howard H. Berlin W3HB \$9.00

An expert guide to the application of operational amplifiers. Over 25 experiments of all phases of Op Amp.

**DRUG** \$5.00

8000 interactive debugger. A program for entering debugging and storing assembly language programs.

**COMPLETE MANUAL FOR DIGITAL CLOCKS** by John Weiss and John Brooks \$3.95

Familiarizes technician or hobbyist with basic theories behind digital clocks. Includes trouble shooting guides, circuit characteristics of clocks, splicing techniques, clock component data sheets and construction tips.

TYPE	POLARITY	HT PRICE	TYPE	POLARITY	HT PRICE			
MAN 1	Common Cathode-red	270	235	MAN 6680	Common Cathode orange	56	99	
MAN 2	5 x 7 Dot Matrix red	300	495	MAN 6710	Common Cathode-red-D	56	99	
MAN 3	Common Cathode red	125	25	MAN 6730	Common Anode-red	1	56	99
MAN 4	Common Cathode-red	187	195	MAN 6740	Common Cathode-red-D	56	99	
MAN 5	Common Anode green	300	125	MAN 6750	Common Cathode-red	1	56	99
MAN 6	Common Cathode-red	300	125	MAN 6760	Common Cathode-red	56	99	
MAN 7	Common Anode-red	300	99	MAN 6780	Common Cathode-red	56	99	
MAN 8	Common Cathode-red	300	125	DL701	Common Anode-red	1	30	99
MAN 9	Common Anode-yellow	300	99	DL702	Common Cathode-red	300	125	
MAN 10	Common Anode-yellow	300	99	DL703	Common Cathode-red	300	99	
MAN 11	Common Anode-red	300	99	DL707	Common Anode-red	300	99	
MAN 12	Common Anode-red	300	99	DL741	Common Anode-red	60	125	
MAN 13	Common Anode-red	300	99	DL746	Common Anode-red	1	63	99
MAN 14	Common Anode-red	300	99	DL747	Common Anode-red	1	63	99
MAN 15	Common Anode-red	300	99	DL749	Common Cathode-red	1	63	99
MAN 16	Common Anode-red	300	99	DL750	Common Anode-red	60	149	
MAN 17	Common Anode-red	300	99	DL751	Common Cathode-red	11	35	99
MAN 18	Common Anode-red	300	99	DL752	Common Cathode-red	25	69	99
MAN 19	Common Anode-red	300	99	DL753	Common Cathode-red	50	75	99
MAN 20	Common Anode-red	300	99	DL754	Common Cathode-red	50	75	99
MAN 21	Common Anode-red	300	99	DL755	Common Cathode-red	50	75	99
MAN 22	Common Anode-red	300	99	DL756	Common Cathode-red			



## ELPAK POWER SUPPLIES

Completely Assembled

### SPECIFICATIONS:

105-125/210-250 Vac, 47-440 Hz Input

- Line Regulation = 0.1%
- Load Regulation = 0.1% no-load to rated-load
- Output Ripple and Noise = 0.1mV-p.p.c to 10 MHz
- Input/Output Isolator 100 megohm dc, 900 Vac
- Short Circuit Current 35% rated current

PART NO.	RATINGS			PRICE
	WATTS	VOLTS	AMPS	
SOLV15-5*	15	5	3	\$36.95
SOLV15-12*	15	12	1.5	36.95
SOLV30-5	30	5	6	59.95
SOLV30-12	30	12	3	59.95
*OVP1 over voltage protection for SOLV30-5, -12				9.95
*SOLV15-5, -12 includes OVP Installed				

## NEW! BULB-ENERGY SAVER



BULB-ENERGY SAVERS used for years by major industrial users... now available for home or office use. Bulb Savers can cut electrical bills by as much as 3%.

BULB-SAVERS lengthens light life by:

1. Acting as an electrical "stock absorber" turns the bulb on slowly, eliminating the "thermal shock". Built life increases 300 percent.
2. Bypasses Current! Surges. Cushions line voltage surges when other loads cut power line.
3. Reduces Energy Consumption

Bulb lasts 3 or more times longer!  
Fits Standard Socket  
6 watts to 200 watts

BES-1	1-9	10+
	1.39 ea.	1.20

## CRYSTALS

THESE FREQUENCIES ONLY

PART NO.	FREQUENCY	CASE	PRICE
CY1A	1.000MHz	HC33	5.95
CY1.84	1.8432MHz	HC33	5.95
CY2A	2.000MHz	HC33	5.95
CY2.01	2.010MHz	HC33	1.95
CY2.50	2.500MHz	HC33	4.95
CY3.27	3.2768MHz	HC33	4.95
CY3.57	3.579545MHz	HC33	4.95
CY3A	4.000MHz	HC18	4.95
CY4.91	4.918MHz	HC18	4.95
CY7A	5.000MHz	HC18	4.95
CY5.18	5.185MHz	HC18	4.95
CY6.14	6.144MHz	HC18	4.95
CY6.40	6.400MHz	HC18	4.95
CY6.55	6.5536MHz	HC18	4.95
CY12A	10.000MHz	HC18	4.95
CY14A	14.31818MHz	HC18	4.95
CY19A	19.000MHz	HC18	4.95
CY18.43	18.432MHz	HC18	4.95
CY22A	20.000MHz	HC18	4.95
CY30A	32.000MHz	HC18	4.95

## TRIMMERS

10MM size trimmers - .394" Dia.  
Part No. 1-9 10-24 25-49 100+  
TR-11(valve).35 30 25 20

Resistance values - 100, 500, 1K, 2K, 5K, 10K, 20K, 50K, 100K, 200K, 1 meg

## TRIMPOTS

Single-Turn - 1/2 Watt  
Square - Top Adjust - 3/8" Size  
Part No. 1-9 10-24 25-49 50-99  
63P(value) .99 .89 .80 .70

Resistance Values - 50, 100, 50K, 1K, 2K, 5K, 10K, 20K, 50K, 100K, 200K, 500K, 1 meg

## 15-Turn - 3/4 Watt

Rectangular Side Adjust 3/4" x 1/4" Size  
Part No. 1-9 10-24 25-49 50-99  
43P(value) 1.35 1.25 1.20 1.15

Resistance Values - 50, 100, 50K, 1K, 2K, 5K, 10K, 20K, 50K, 100K, 200K, 500K, 1 meg

## 1/16 VECTOR BOARD

PHENOLIC	Part No	P-Pattern		Price
		L	W	
64P44	062RXXP	4.50	6.50	1.72 1.54
169P44	062RXXP	4.50	17.00	3.69 3.32
64P44	062WE	4.50	6.50	2.07 1.86
GLASS	84P44	4.50	8.50	2.56 2.31
	169P44	4.50	17.00	5.04 4.53
	169P44	8.50	17.00	9.23 8.26
EPoxy GLASS	169P44	4.50	17.00	6.80 6.12
	062WEC1			

## CONNECTORS

25 Pin-D Subminiature

DB25P(as pictured)	PLUG	\$3.25
DB25S	SOCKET	4.95
DB51226-1	Cover for DB25 P or S	1.75

## MOLEX CONNECTOR PINS

M-530-1	\$1.95/100 pins (minimum order)
	\$16.00/1000 pins

Pre-packaged in strips

## INSTRUMENT/CLOCK CASE

Injection molded unit. Complete with red bezel. 4 1/4" x 4" x 1 1/16"

\$3.49

## MICROPROCESSOR COMPONENTS

P8085 CPU		CDP 1802 CPU		PROMS	
8080A	CPU	10.95	Z80	24.95	24.95
8212	8-Bit Input/Output	4.95	2650	MU	26.50
8214	Priority Interrupt Control	7.95	MC6800	MU	19.95
8216	Bi-Directional Bus Driver	4.95	MC6810A	128 x 8 Static Ram	5.95
8224	Clock Generator/Driver	5.95	MC6820	Periph. Interface Adapter	7.95
8228	System Controller/Bus Driver	5.95	MC6821	Periph. Interface Adapter	11.50
8251	Prog. Comm. Interface	9.95	MC6830L8	1024 x 8 Bit ROM	14.95
8255	Prog. Periph. Interface	10.95	MC6850	Asynchronous Comm. Adapter	14.95

RAM'S		PROMS			
1101	256 x 1 Static	\$ 1.49	1702A	2048 x 1 Famous	\$ 5.95
1103	1024 x 1 Dynamic	.99	5203	2048 x 1 Famous	14.95
2101	256 x 4 Static	5.95	82523	32 x 8 Open C	5.00
2102	1024 x 1 Static	1.75	825115	4096 x 1 Bipolar	19.95
2107/5280	4096 x 1 Dynamic	4.95	825123	32 x 8 Tri-state	5.00
2111	256 x 4 Static	6.95	745287	1024 x 1 Static	7.95
2112	256 x 4 Static	5.95	2708	8- EPROM	10.95
2114	4K x 1 Static 450ns	9.95	2716 T.1	16K EPROM	29.95
2114L	4K x 1 Static 450ns Low Power	10.95	2716 Intel	16K EPROM	59.95
2114-3	1K x 4 Static 300ns	10.95	5300-1	1024 x 1 Tr-State Bipolar	3.49
2114L-3	1K x 4 Static 300ns Low Power	11.95	6330-1	256 x 1 Open C Bipolar	2.95
7489	16 x 4 Static	1.75	74186	512 x 1 TTL Open Collector	9.95
8101	256 x 4 Static	5.95	74188	256 x 1 TTL Open Collector	3.95
8111	256 x 4 Static	6.95			
8599	16 x 4 Static	3.49	MM5013N	1024 Bit/Commutator Dynamic	8.95
21102	1024 x 1 Static	1.95	MM5016H	500-512 Bit Dynamic	2.95
74200	256 x 1 Static	6.95	MM5017N	Qual 500-512 Bit Dynamic	2.95
83421	256 x 1 Static	2.95	2541	1024 Dynamic	3.95
83425	256 x 1 Dynamic	31.00	2518	Hex 32 Bit Static	4.95
MM4027 (UPD414)	4K DYNAMIC 16 PIN	5.95	2519	Hex 40 Bit Static	4.00
MM4116 (UPD4161)	16K DYNAMIC 16 PIN	29.95	2522	Qual 132 Bit Static	2.95
IMS4044-ASNL	4K STATIC	14.95	2524	512 Dynamic	9.95
			2525	1024 Dynamic	2.95
			2527	Qual 256 Bit Static	2.95
2513(2140)	Character Generator (upper case)	5.95	2529	Qual 240 Bit Static	4.00
2513(3021)	Character Generator (lower case)	5.95	2532	Quad 80 Bit Static	2.95
2516	Character Generator	10.95	2533	1024 Static	1.95
MM5230N	2048 Bit Read Only Memory	1.95	3241	4 X 4 Register	6.95

USER MANUALS:		UART'S	
1802M	CDP1802 Manual	\$ 7.50	
280M	Z80 Manual	7.50	30K UART
2650M	2650 Manual	5.00	AV-5-1013

## SPECIAL REQUESTED ITEMS

TELEPHONE	ICM CHIPS	NMOS READ ONLY	MISCELLANEOUS
KEYBOARD CHIPS	ICM7045	\$24.95	11090
AV-5-9100	ICM7205	19.95	\$19.95
AV-5-9200	ICM7207	7.50	MM4024C4
AV-5-9500	ICM7208	19.95	MC3051P
AV-5-2376	ICM7205	6.95	MC1408L8
HD0165	TV GAME CHIP SET	\$7.95	LD110111
74C392	AV-3-8500-1 Chip and 2 010 MHz Crystal	\$7.95	MC01674416

## PARATRONICS Logic Analyzer Kit Model 100A \$229.00/kit

Model 100A Model 10

- Analyzes any type of digital system
- Checks data rates in excess of 8 million words per second
- Trouble shoot TTL CMOS, DTL, RTL, Schottky and MOS families
- Displays 16 logic states up to 8 digits wide
- See ones and zeros displayed on your CRT, octal or hexadecimal format
- Tests circuits under actual operating conditions
- Easy to assemble - comes with step-by-step construction manual which includes 80 pages on logic analyzer operation.

(Model 100A Manual - \$4.95)

## PARATRONICS TRIGGER EXPANDER - Model 10

Adds 16 additional bits. Provides digital delay and qualification of Input clock and 24-bit trigger word. - Connects direct to Model 100A for integrated unit.

Model 10 Kit - \$229.00  
Baseprice - \$9.95  
Model 10 Manual - \$4.95

### 3 1/2-Digit Portable DMM

- Overload Protected
- 3 high LED Display
- Battery or AC operation
- Auto Zeroing
- 1mv 1Vx 0.1 ohm resolution
- Overrange reading
- 10 meg input impedance
- DC Accuracy 1% typical
- DC Voltage: 0-1000V
- AC Voltage: 0-100V
- Freq Response: 50,000 Hz
- DC/AC Current: 0-100mA
- Resistance: 0.10 meg ohm
- Size: 6 1/2" x 4 1/2"

Model 2800 \$99.95

Accessories:  
AC Adapter BC-28 \$9.00  
Rechargeable Batteries BP-26 20.00  
Carrying Case LC-28 7.50

### 100 MHz 8-Digit Counter

- 20 MHz-100 MHz Range
- 6 LED Display
- Cystal-controlled timebase
- Fully Automatic
- Portable - completely self contained
- Size - 1 7/8" x 7 3/8" x 5 6/8"

MAX-100 \$134.95

ACCESSORIES FOR MAX 100:  
Mobile Charger/Eliminator \$10.00  
Carrying Case \$10.00  
Model 100 - CLA \$3.95  
Model 100 - CAI \$9.95

## KEYBOARDS

63-Key Unencoded Hexadecimal Encoder

This is a 63-key, terminal keyboard newly manufactured by a large computer manufacturer. It is unencoded with SPST keys, unattached to any kind of PC board. A very solid molded plastic 13 x 4" base suits most application. IN STOCK

\$29.95/each

19-key pad Includes 1-10 keys, ABCDEF and 2 optional keys and a shift key. \$10.95/each

\$5.00 Minimum Order - U.S. Funds Only  
California Residents - Add 6% Sales Tax

Spec Sheets - 25¢  
1978A Catalog Available - Send 35¢ stamp

## Jameco ELECTRONICS

MAIL ORDER ELECTRONICS - WORLDWIDE  
1021 HOWARD AVENUE, SAN CARLOS, CA 94070  
Advertised Prices Good Thru August

PHONE ORDERS WELCOME (415) 592-8097

## The Incredible "Pennywhistle 103"

\$129.95 Kit Only

The Pennywhistle 103 is capable of recording data and from audio tape without critical speed requirements for the recorder and it is able to communicate directly for the deaf. In addition, it is free of critical adjustments and is built with non-precision, readily available parts.

Data Transmission Method: Frequency-Shift Keying, full-duplex (half-duplex selectable)

Maximum Data Rate: 300 Baud

Data Format: Asynchronous Serial (return to mark level required between each character)

Receive Channel Frequencies: 2025 Hz for space, 2225 Hz for mark

Transmit Channel Frequencies: Switch selectable. Low (normal) = 1070 space, 1270 mark, high 025 space, 2225 mark.

Receive Sensitivity: -46 dbm acoustically coupled

Transmit Level: 15 dbm nominal. Adjustable from -6 dbm to -20 dbm

Receive Frequency Tolerance: Frequency reference automatically adjusts to allow for operation between 1800 Hz and 2400 Hz.

Digital Data Interface: EIA RS-232C or 20 mA current loop (receiver is isolated and non-polar)

Power Requirements: 120 VAC, single phase, 10 Watts

Physical: All components mounted on a single 5" by 9" printed circuit board. All components included.

Requires a VOM, Audio Oscillator, Frequency Counter and/or Oscilloscope to align.

## The Original the 3rd Hand \$9.95 each

\*Leaves two hands free for working

\*Clamps on edge of bench, table or work bench

\*Position board on angle or flat position for soldering or clipping

\*Sturdy, aluminum construction for hobbyist, manufacturer or school rooms

## DIGITAL STOPWATCH

- Bright 6 Digit LED Display
- Times to 99 minutes 59 seconds
- Crystal Controlled Time Base
- Three Stopwatches in One
- Times Single Event - Split & Taylor
- Size 4 1/2" x 2 1/2" x 90 (4 1/2 ounces)
- Uses 3 Penrite Cells

Kit - \$39.95  
Assembled - \$49.95  
Heavy Duty Carry Case \$5.95

Stop Watch Chip Only (7205) \$19.95

## 3 1/2 DIGIT DPM KIT

12 or 24 Hour

- New Bipolar Unit
- Auto Zeroing
- 5" LED
- Auto Polarity
- Low Power
- Single IC Unit

## Model KB500 DPM Kit \$49.00

## Model KB503 5V Power Kit \$17.50

## JE700 CLOCK

The JE700 is a low cost digital clock, but is a very high quality unit. The unit features a simulated woodgrain case with dimensions of 6" x 7 1/2" x 1". It utilizes a MAN72 high brightness readout and the MM5314 clock chip.

115 VAC KIT ONLY \$16.95

## JE803 PROBE

The Logic Probe is a unit which is for the most part indispensable in trouble shooting logic families. TTL, DTL, RTL, CMOS. It derives the power it needs to operate directly off of the circuit under test. Drawing a scant 10 mA max. It takes a MAX72 readout to indicate any of the following states: this symbol (H) 1 (LOW) 0 (PULSE) P. The Probe can detect high frequency pulses to 45 MHz. It can be used at CMOS levels or circuit damage will result.

\$9.95 Per Kit  
printed circuit board

## T-1 5V 1A Supply

This is a standard T-1 power supply using the well known 1A 300K regulator IC to provide a solid 1 AMP of current at 5 volts. We try to make things easy for you by providing everything you need in one package, including the hardware or only JE225 \$9.95 Per Kit

## PROTO BOARDS

PROTO BOARD 6	Price
PB100 - 4.5" x 6"	\$ 19.95
PB101 - 5.8" x 4.5"	29.95
PB102 - 7" x 4.5"	39.95
PB103 - 9" x 6"	59.95
PB104 - 9.5" x 8"	79.95
PB203 - 9.75 x 6 1/2 x 2 1/4	80.00
PB203A - 9.75 x 6 1/2 x 2 1/4	129.95 (includes power supply)

PROTO CLIPS	Price
14 PIN	\$4.50
24 PIN	4.75
16 PIN	8.50
40 PIN	13.75

# MORE THAN 20,000 DIFFERENT COMPONENTS

## 7400 TTL

7400	.18	7442	1.08	74107	.49
7401	.21	7448	1.15	74121	.55
7402	.21	7450	.26	74122	.49
7404	.21	7451	.27	74123	1.06
7405	.24	7453	.27	74125	.60
7407	.45	7454	.41	74126	.81
7408	.25	7460	.22	74132	3.00
7409	.25	7472	.39	74141	1.15
7410	.20	7473	.45	74150	1.10
7411	.30	7474	.45	74151	1.25
7413	.85	7475	.80	74153	1.35
7416	.43	7482	1.75	74154	1.54
7417	.43	7483	1.15	74157	1.30
7420	.21	7485	1.12	74161	1.45
7422	1.50	7486	.45	74164	1.55
7425	.43	7489	2.49	74165	1.65
7427	.37	7490	.69	74166	1.70
7428	.35	7491	1.20	74174	1.95
7430	.26	7492	.82	74175	1.95
7432	.31	7493	.82	74180	1.05
7437	.47	7494	.91	74181	3.55
7438	.40	7495	.91	74191	1.50
7440	.21	7496	.91	74195	1.00
7441	1.10	74100	1.25	74197	1.00

## 741 SERIES TTL

74L00	.33	74LS04	.45	74LS113	.98
74L10	.33	74LS10	.39	74LS138	1.89
74L30	.33	74LS20	.39	74LS174	2.50
74L42	1.50	74LS51	.39	74LS386	5.50
74L86	.69	74LS74	.65	74LS153	2.25
74LS00	.39	74LS112	.85	74S387	1.95

## 74H00 TTL

74H00	.33	74H11	.33	74H53	.39
74H01	.33	74H20	.33	74H55	.39
74H04	.33	74H21	.33	74H73	.59
74H05	.35	74H30	.33	74H74	.59
74H10	.33	74H40	.33	74H76	.65

## MOTOROLA

MC663P	2.50	MC1460	3.95
MC666P	1.60	MC1469R	2.50
MC670P	1.60	MC1489	4.60
MC679P	2.50	MC1496	1.65
MC725P	1.50	MC1510G	8.00
MC789P	1.50	MC1514L	4.50
MC790P	1.50	MC1595L	6.25
MC817P	1.30	MC1723CL	3.60
MC836P	1.35	MC1741CG	1.20
MC844	1.25	MC1810P	1.25
MC853P	2.25	MC3004L	2.25
MC876P	2.25	MC3007P	2.25
MC1004L	1.25	MC3021L	2.15
MC1010L	1.25	MC3060L	2.65
MC1305	1.95	MC3062L	3.00
MC1352P	1.55	MC4024P	2.80
MC1357	1.70	MC4044P	4.80
MC1371	1.85	MC14507CP	1.25
MC1439	2.65	MC14511CP	2.76
MC1458P	.50	MC14512CP	1.70

## CMOS

4001AE	.29	4023AE	.29
4002AE	.29	4024AE	1.50
4007AE	.29	4025AE	.35
4010AE	.58	4028AE	1.60
4011AE	.29	4029AE	2.90
4012AE	.29	4030AE	.65
4015AE	1.25	4037AE	4.50
4016AE	.65	4040AE	2.40
4018AE	1.10	4044AE	1.50
4019AE	.65	4049AE	.75
4020AE	1.75	4050AE	.75
4021AE	1.50		

## LINEAR

754508P	.49	LM301H	.35	LM741CH	.45
754518P	.39	LM307H	.35	LM747	.90
754528P	.39	LM309K	1.25	LM748H	.45
754538P	.39	LM311H	.90	LM1458N	.80
754548P	.39	LM318N	1.50	N5558V	1.50
754918P	.79	LM339N	.85	NE5558	1.00
754928P	.85	LM351AN	.65	NE555V	.60
CA3005	1.80	LM370N	1.25	NE556	1.50
CA3006	3.50	LM380N	1.45	UA702	.80
CA3018	1.10	LM566	2.25	UA703CH	.45
CA3018A	1.80	LM711CH	.80	UA709CH	.40
CA3028	1.50	LM723H	.75	UA749CH	.45
CA3046	.35	LM741CN	.45		

## IC'S ON THE MOVE

BBD BUCKET BRIGADE DEVICE  
MM3001 19.50 MN3002 11.70  
MM3003 9.45

HALL IC:DN834 1.25 DN837 1.50  
DN835 1.35 DN838(NEW)

## ZENER DIODES

1/2 Watt, ± 10% ..... \$ .30 each to 33 V  
1 Watt, ± 10% ..... \$ .40 each to 33 V  
Voltages to 200V, and ± 5% Available

1 Megohm Potentiometer - Made by Clarostat. 1/4" diam., split, knurled shaft 1/2" long.  
NT544 \$ .39 Three for \$1.00

## 5400 SERIES

## VOLT. REG.

5400	1.00	5475	1.50	LM340K-5	1.70
5404	1.25	5486	1.90	LM340K-6	1.70
5410	1.00	5493	2.00	LM340K-8	1.70
5426	1.25	54100	1.80	LM340K-15	1.70
5473	1.50	54LS04	1.00	LM340K-18	1.70
				LM340K-24	1.70
				LM340T-5	1.50
				LM340T-6	1.50
				LM340T-8	1.50
				LM340T-12	1.50
				LM340T-15	1.50
				LM340T-18	1.50
				LM340T-24	1.50

## RESISTORS

1/4 Watt ± 5% Packed 5 of any one value ..... \$ .25  
1/2 Watt ± 5% Packed 5 of any one value ..... \$ .30  
STANDARD RESISTANCE VALUES

SEE OUR AD ON JAPANESE TRANSISTORS AND IC'S IN THIS ISSUE.

## MINIMUM ORDER \$5.00

All orders add \$1.50 Postage & Handling  
Canada \$2.00  
N.J. Residents add 5% Sales Tax.

## ELECTROLYTIC CAPACITORS

2.2MF50	Axial Leads	.15	30MF25	Axial Leads	.18
3.3MF10	Axial Leads	.15	47MF50	Radial Leads	.19
3.3MF10	No Polarity	.15	47MF50	Radial Leads	.24
10MF25	Axial Leads	.15	100MF16	Radial Leads	.19
10MF50	Axial Leads	.16	100MF25	Radial Leads	.24
10MF150	Axial Leads	.20	500MF50	Axial Leads	.60
25MF35	Axial Leads	.18	1000MF35	Axial Leads	.65

## MICROPROCESSOR

C1702A	9.95	2708	34.95	8008	19.95
2101	5.75	C5101-3	4.50	8080A	19.95
2102	1.75	MM5013	3.25	8224	10.45

Contact us for all your microprocessor needs.

## NEW FROM NEW-TONE

**Tiny Meter** - Small enough to add to almost any equipment, this 300 uA S-meter has a removable scale. Use it as is or in a voltmeter, as a tuning indicator, battery tester, etc. Meter face is 1/2" x 3/4". Body over-all is a 3/4" cube. Mounting centers 1 1/8". NT579 \$2.29 3 for \$6.00

**12-Volt DC Relay** - Rugged 12-volt SPDT relay, with a 5 amp contact rating, housed in a tough white nylon case. NT 565 \$1.79

**Pioneer 6" Speaker** - 7 1/2-watt, 3.2-ohm speaker made the way speakers should be made. Has heavy-duty treated paper cone, protected magnet housing, and a ceramic terminal strip marked with polarity. A beautiful speaker at half the price you'd expect. NT526 \$2.39 Three for \$6.00

**PC Boards** - MIL grade, 1/16" glass-epoxy boards with 2-ounce copper on one side. NT521 6"x3" \$.50, NT522 6"x6" \$.90 NT523 6"x8" \$1.20

**Regulated Power Supply Components Kit** - Contains the components needed to build a fixed-voltage regulated supply including: 117/17V-1 ampere Transformer, Bridge Rectifier, 2000 uF Capacitor, and a 1 ampere LM340 3-terminal IC Regulator. Makes a fine "on board" supply or use it for breadboarding. Components only. Specify 5, 6, 8, 12 or 15 volts NT525 \$4.99

**Dry Transfer Patterns for PC Boards** - Includes 0.1" spaced IC pads, donuts, angles, and 3-and 4-conductor pads. Over 225 patterns on a 2"x7 1/4" sheet NT520 \$1.49

**5" Taut-Band Meter** - One milliamper full scale, 3 1/2", scale length. Coil resistance 465 ohms. Made by Modutec for Bose. Meter scale in VUs (-20 to +3). Meter is designed to be mounted coil up. Complete with "smoke" plastic cover. Over-all 5 1/8"x4". Meter face mounts in a 5 1/8"x2 1/2" cutout: A beautiful meter. NT539 \$4.89

## NEW FROM NEW-TONE

### HIGH FIDELITY SPEAKERS

#### 8-INCH COAXIAL

Combines a high quality 8" woofer and a tweeter into a pre-phased sound reproducer. Built-in cross-over network. Excellent choice for a low cost Hi-Fi system for autos, vans, or in your home. Frequency response is a smooth 80-15000 Hz. 8-ohm VC. 10 oz. ceramic ring magnet. 25 W rating. NT577 \$13.99 plus 40 cents postage

#### 10-INCH WOOFER

The speaker for your "big sound" system. Frequency response is 20-4000 Hz; 8-ohm aluminum VC; powerful 20 oz. ceramic ring magnet and a rubberized accordion-edge suspension for excellent compliance. Handles 50 W max. Use with the NT576 for a super system. NT578 \$17.99 plus 40 cents postage

#### 50 W DOME TWEETER

Here is the super tweeter. A rugged 10 cm (4") dome tweeter which handles 50 W max. Frequency response is 4000-20000 Hz. 8-ohm VC. 8 oz. ceramic magnet. Your system can have a brilliance you never imagined. NT576 \$6.99

## RECTIFIERS

## UNIUNCTIONS

## HARDWARE - SOCKETS

1N4001	.60	2N2160	.65	MU4892.50	
1N4002	.70	2N2646	.45	MU4893.50	
1N4003	.80	2N2647	.55	MU4894.50	
1N4004	.90	2N4851	.75	2N6027	.55
1N4005	1.00	2N4852	.75	2N6028	.70
1N4006	1.10	2N4870	.50	D5E37	.35
1N4007	1.20	2N4871	.50	MU10	.35
		MU4891.50		MU20	.40

Nylon Screws, Nuts and Rivets - 50 piece assortment \$1.99  
MK 20 TO-3 Mounting Kit 5 for \$9.99  
NT-505 Mica and bushing. Specify TO-3, TO-66 or TO-220  
IC Socket 14-Pin DIL 10 sets for \$9.9  
IC Socket 16-Pin DIL \$.25 each  
Wire Wrap 16-Pin DIL \$.32 each

## POPULAR JEDEC TYPES

1N34	.25	2N1540	.90	2N2712	.18	2N3394	.17	2N3856	.20	2N4402	.16
1N60	.25	2N1544	.80	2N2894	.40	2N3414	.17	2N3866	1.25	2N4403	.20
1N270	.25	2N1554	1.25	2N2903	3.30	2N3415	.18	2N3903	.16	2N4409	.20
1N914	.25	2N1560	2.80	2N2904	.25	2N3416	.19	2N3904	.16	2N4410	.16
1N4148	.25	2N1605	1.75	2N2904A	.30	2N3417	.20	2N3905	.16	2N4416	.75
1S1555	.35	2N1613	.50	2N2905	.25	2N3442	1.85	2N3906	.16	2N4441	1.00
		2N1711	.50	2N2905A	.30	2N3553	1.50	2N3954A	3.75	2N4442	1.15
2N173	1.75	2N1907	4.10	2N2906	.25	2N3563	.20	2N3955	2.45	2N4443	1.35
2N338A	1.05	2N2102	1.70	2N2906A	.30	2N3565	.20	2N3957	1.25	2N4452	.55
2N404	.75	2N2160	.65	2N2907	.25	2N3638	.20	2N3958	1.20	2N5061	.30
2N443	2.50	2N2218	.25	2N2907A	.30	2N3642	.20	2N4037	.60	2N5064	.50
2N508A	.45	2N2218A	.30	2N2913	.75	2N3643	.20	2N4093	.35	2N5130	.20
2N706	.25	2N2219	.25	2N2914	1.20	2N3645	.20	2N4124	.16	2N5133	.15
2N718	.25	2N2219A	.30	2N3019	1.00	2N3646	.14	2N4126	.16	2N5138	.15
2N718A	.30	2N2221	.25	2N3053	.30	2N3731	3.75	2N4141	.20	2N5294	.50
2N918	.60	2N2221A	.30	2N3054	.70	2N3740	1.00	2N4142	.20	2N5296	.50
2N930	.25	2N2222	.25	2N3055	.75	2N3771	1.75	2N4143	.20	2N5306	.20
2N956	.30	2N2222A	.30	2N3227	1.00	2N3772	1.90	2N4220A	1.00	2N5400	.40
2N1302	1.25	2N2270	.40	2N3247	3.40	2N3773	3.00	2N4234	.95	2N5401	.50
2N1305	.75	2N2369	.25	2N3250	.50	2N3819	.40	2N4400	.16	2N5457	.35
2N1420	.20	2N2484	.32	2N3393	.20	2N3823	.70	2N4401	.16	2N5458	.35

ALL PARTS GUARANTEED WRITE FOR FREE CATALOG



# NEW-TONE ELECTRONICS

PO BOX 1738A BLOOMFIELD, N.J. 07003  
PHONE: (201) 748-6171, 6172, 6173

# DIGI-KEY TOLL FREE CORPORATION

## 800-345-4444

MINNESOTA RESIDENTS 218-681-6674

Quality Electronic Components

IC'S • RESISTORS • TRANSISTORS • CAPACITORS • DIODES • I.C. SOCKETS & PINS • SWITCHES  
CLOCK MODULES • OPTOELECTRONICS • BREADBOARDING & TESTING DEVICES • DRAFTING SUPPLIES  
DATA BOOKS • HEAT SINKS • WIRE • TOOLS ... AND MORE ... WRITE FOR FREE CATALOG ...

**DON'T FORGET OUR DISCOUNTS WHEN COMPARING PRICES**

### INTEGRATED CIRCUITS

7400	7401	7402	7403	7404	7405	7406	7407	7408	7409	7410	7411	7412	7413	7414	7415	7416	7417	7418	7419	7420	7421	7422	7423	7424	7425	7426	7427	7428	7429	7430	7431	7432	7433	7434	7435	7436	7437	7438	7439	7440	7441	7442	7443	7444	7445	7446	7447	7448	7449	7450	7451	7452	7453	7454	7455	7456	7457	7458	7459	7460	7461	7462	7463	7464	7465	7466	7467	7468	7469	7470	7471	7472	7473	7474	7475	7476	7477	7478	7479	7480	7481	7482	7483	7484	7485	7486	7487	7488	7489	7490	7491	7492	7493	7494	7495	7496	7497	7498	7499	7500
7400	7401	7402	7403	7404	7405	7406	7407	7408	7409	7410	7411	7412	7413	7414	7415	7416	7417	7418	7419	7420	7421	7422	7423	7424	7425	7426	7427	7428	7429	7430	7431	7432	7433	7434	7435	7436	7437	7438	7439	7440	7441	7442	7443	7444	7445	7446	7447	7448	7449	7450	7451	7452	7453	7454	7455	7456	7457	7458	7459	7460	7461	7462	7463	7464	7465	7466	7467	7468	7469	7470	7471	7472	7473	7474	7475	7476	7477	7478	7479	7480	7481	7482	7483	7484	7485	7486	7487	7488	7489	7490	7491	7492	7493	7494	7495	7496	7497	7498	7499	7500

### NEW!



**The "NIBBLER"**  
A MICROCOMPUTER AT A MICROPRICE!

**FEATURES:**

- Assembled and Tested, yet only \$149.95
- Standard 4.5" by 6.5" card with 72 pin edge connector pattern
- All IC's are socketed for easy maintenance
- Memory expandable to 28K
- 110 Baud Serial I/O
- It Speaks Basic Beautifully
- 4K NIBL Basic in ROM and 2K of RAM
- Easily Interfaced with CRT or Teletype

### The "NIBBLER"

The NIBBLER is Dig-Key's new low cost personal/home computer. Based on National Semiconductor's SC/MP-11 microprocessor, the NIBBLER includes 4K NIBL Basic in ROM and 2K of RAM. The NIBBLER requires 5 volts at 1/2 amp providing 110 baud serial ASCII I/O which is easily interfaced with a CRT or Teletype. And our low price of \$149.95 is for an assembled and tested system. Software/Hardware manual included with NIBBLER available separately for \$5.00.

**CATALOG NUMBER NIBI-ND** ..... \$149.95 (not discountable)

**SOFTWARE/HARDWARE MANUAL MANI-ND** \$5.00 (not discountable)

### SILICON TRANSISTORS

2N3638	2N3639	2N3640	2N3641	2N3642	2N3643	2N3644	2N3645	2N3646	2N3647	2N3648	2N3649	2N3650	2N3651	2N3652	2N3653	2N3654	2N3655	2N3656	2N3657	2N3658	2N3659	2N3660	2N3661	2N3662	2N3663	2N3664	2N3665	2N3666	2N3667	2N3668	2N3669	2N3670	2N3671	2N3672	2N3673	2N3674	2N3675	2N3676	2N3677	2N3678	2N3679	2N3680	2N3681	2N3682	2N3683	2N3684	2N3685	2N3686	2N3687	2N3688	2N3689	2N3690	2N3691	2N3692	2N3693	2N3694	2N3695	2N3696	2N3697	2N3698	2N3699	2N3700
2N3638	2N3639	2N3640	2N3641	2N3642	2N3643	2N3644	2N3645	2N3646	2N3647	2N3648	2N3649	2N3650	2N3651	2N3652	2N3653	2N3654	2N3655	2N3656	2N3657	2N3658	2N3659	2N3660	2N3661	2N3662	2N3663	2N3664	2N3665	2N3666	2N3667	2N3668	2N3669	2N3670	2N3671	2N3672	2N3673	2N3674	2N3675	2N3676	2N3677	2N3678	2N3679	2N3680	2N3681	2N3682	2N3683	2N3684	2N3685	2N3686	2N3687	2N3688	2N3689	2N3690	2N3691	2N3692	2N3693	2N3694	2N3695	2N3696	2N3697	2N3698	2N3699	2N3700

### MA1002 0.5" High Digits



Actual Size: 1.375" x 1.65"

### MA1010 0.84" High Digits



Actual size: 1.25" x 2.25"

### POWERACE



POWERACE 103 \$124.95

POWERACE 101 \$231.01

POWERACE 102 \$231.00

POWERACE 104 \$231.00

POWERACE 105 \$231.00

POWERACE 106 \$231.00

POWERACE 107 \$231.00

POWERACE 108 \$231.00

POWERACE 109 \$231.00

POWERACE 110 \$231.00

POWERACE 111 \$231.00

POWERACE 112 \$231.00

POWERACE 113 \$231.00

POWERACE 114 \$231.00

POWERACE 115 \$231.00

POWERACE 116 \$231.00

POWERACE 117 \$231.00

POWERACE 118 \$231.00

POWERACE 119 \$231.00

POWERACE 120 \$231.00

POWERACE 121 \$231.00

POWERACE 122 \$231.00

POWERACE 123 \$231.00

POWERACE 124 \$231.00

POWERACE 125 \$231.00

POWERACE 126 \$231.00

POWERACE 127 \$231.00

POWERACE 128 \$231.00

POWERACE 129 \$231.00

POWERACE 130 \$231.00

POWERACE 131 \$231.00

POWERACE 132 \$231.00

POWERACE 133 \$231.00

POWERACE 134 \$231.00

POWERACE 135 \$231.00

POWERACE 136 \$231.00

POWERACE 137 \$231.00

POWERACE 138 \$231.00

POWERACE 139 \$231.00

POWERACE 140 \$231.00

POWERACE 141 \$231.00

POWERACE 142 \$231.00

POWERACE 143 \$231.00

POWERACE 144 \$231.00

POWERACE 145 \$231.00

POWERACE 146 \$231.00

POWERACE 147 \$231.00

POWERACE 148 \$231.00

POWERACE 149 \$231.00

POWERACE 150 \$231.00

POWERACE 151 \$231.00

POWERACE 152 \$231.00

POWERACE 153 \$231.00

POWERACE 154 \$231.00

POWERACE 155 \$231.00

POWERACE 156 \$231.00

POWERACE 157 \$231.00

POWERACE 158 \$231.00

POWERACE 159 \$231.00

POWERACE 160 \$231.00

POWERACE 161 \$231.00

POWERACE 162 \$231.00

POWERACE 163 \$231.00

POWERACE 164 \$231.00

POWERACE 165 \$231.00

POWERACE 166 \$231.00

POWERACE 167 \$231.00

POWERACE 168 \$231.00

POWERACE 169 \$231.00

POWERACE 170 \$231.00

POWERACE 171 \$231.00

POWERACE 172 \$231.00

POWERACE 173 \$231.00

POWERACE 174 \$231.00

POWERACE 175 \$231.00

POWERACE 176 \$231.00

POWERACE 177 \$231.00

POWERACE 178 \$231.00

POWERACE 179 \$231.00

POWERACE 180 \$231.00

POWERACE 181 \$231.00

POWERACE 182 \$231.00

POWERACE 183 \$231.00

POWERACE 184 \$231.00

POWERACE 185 \$231.00

POWERACE 186 \$231.00

POWERACE 187 \$231.00

POWERACE 188 \$231.00

POWERACE 189 \$231.00

POWERACE 190 \$231.00

POWERACE 191 \$231.00

POWERACE 192 \$231.00

POWERACE 193 \$231.00

POWERACE 194 \$231.00

POWERACE 195 \$231.00

POWERACE 196 \$231.00

POWERACE 197 \$231.00

POWERACE 198 \$231.00

POWERACE 199 \$231.00

POWERACE 200 \$231.00

POWERACE 201 \$231.00

POWERACE 202 \$231.00

POWERACE 203 \$231.00

POWERACE 204 \$231.00

POWERACE 205 \$231.00

POWERACE 206 \$231.00

POWERACE 207 \$231.00

POWERACE 208 \$231.00

POWERACE 209 \$231.00

POWERACE 210 \$231.00

POWERACE 211 \$231.00

POWERACE 212 \$231.00

POWERACE 213 \$231.00

POWERACE 214 \$231.00

POWERACE 215 \$231.00

POWERACE 216 \$231.00

POWERACE 217 \$231.00

POWERACE 218 \$231.00

POWERACE 219 \$231.00

POWERACE 220 \$231.00

POWERACE 221 \$231.00

POWERACE 222 \$231.00

POWERACE 223 \$231.00

POWERACE 224 \$231.00

POWERACE 225 \$231.00

POWERACE 226 \$231.00

POWERACE 227 \$231.00

POWERACE 228 \$231.00

POWERACE 229 \$231.00

POWERACE 230 \$231.00

POWERACE 231 \$231.00

POWERACE 232 \$231.00

POWERACE 233 \$231.00

POWERACE 234 \$231.00

POWERACE 235 \$231.00

POWERACE 236 \$231.00

POWERACE 237 \$231.00

POWERACE 238 \$231.00

POWERACE 239 \$231.00

POWERACE 240 \$231.00

POWERACE 241 \$231.00

POWERACE 242 \$231.00

POWERACE 243 \$231.00

POWERACE 244 \$231.00

POWERACE 245 \$231.00

POWERACE 246 \$231.00






# THE HOT LINE FROM ANCRONA


All Our AMD Parts Meet Quality Requirement MIL-M-38510

MOS Microprocessor	AM2918PC \$ 5.40	AM91102PC \$ 3.60	P2112 \$ 8.20	AM2813DC \$ 21.00	AM2804PC \$ 4.42	AM251338PC 64	93L40DC 16.80	9312PC 64
CR800A \$ 12.95	AM2915DC 2.95	AM91114PC 4.25	P8111 2.90	AM2814PC 8.25	AM2806PC 7.00	AM251275PC 82	93L40PC 6.50	9314PC .90
CR800A 1 8.95	AM2903DC 7.85	AM91124PC 3.70	Intertec	AM2814PC 10.50	AM2808PC 3.52	AM250855PC 12.66	93L51PC 4.50	9316PC 8.00
CR800A-1PC 12.95	AM2710PC 5.65	AM9112PC 4.45	AM2602 1.50	3341APC 8.25	AM2810PC 9.00	AM25510PC 3.00	93L60PC 1.70	9318PC 1.10
P212 3.26	AM2701PC 5.00	AM9112PC 5.05	AM2614DM 12.60	3341APC 8.50	AM2815PC 7.15	93L00PC 1.08	93L60PC 1.70	9321PC 8.00
AM8224PC 4.00	AM271500PC 6.20	AM9112PC 5.05	AM2614PC 5.56	3341PC 8.25	D/A 8.25	93L01PC 1.58	96L20PC 2.40	9322PC 4.64
AM8226PC 3.06	AM271500PC 6.20	AM9112PC 5.05	96L4DM 4.46	MOS Shift Register 8.25	AM1408L6 2.25	93L08DC 3.76	AM2502DC 7.20	9324DC 1.60
AM8228PC 2.05	AM271500PC 6.20	AM9112PC 5.05	96L4PC 2.06	1407A 9.42	Linear 14.25	93L09PC 6.4	AM2502PC 6.60	9324PC 1.00
AM9551DC 12.10	MOS PROM 18.30	AM9112PC 5.05	96L5PC 2.06	1402APC 5.80	AM685DL 13.49	93L10PC 1.50	AM2503DM 14.40	9328PC 1.20
AM9555DC 7.70	C1302A 2 24.15	AM9112PC 5.05	96L6PC 1.80	1403A 4.67	AM685HL 14.25	93L11PC 2.28	AM2503PC 6.60	9328PC 1.20
Bi-phase Microprocessor	C1302A 2 24.15	AM9112PC 5.05	96L7PC 2.00	1404A 5.80	AM686HL 13.49	93L12PC 1.58	AM2504DC 11.20	9330PC 6.90
AM2901DC 29.40	C1302AL 2 23.20	AM9112PC 5.05	96L7PC 2.00	1404APC 5.42	AM687AD7 28.50	93L14PC 1.48	AM2505DC 13.34	9334PC 1.50
AM2901DM 168.00	C1302AL 2 23.20	AM9112PC 5.05	AM26123PC 1.20	1305A 5.80	AM1500DC 9.00	93L16PC 1.42	9300PC 1.36	9334PC 1.00
AM2902PC 1.56	MOS RAM 76.60	P1101A 1 4.80	AM26123PC 2.00	1406 10.20	AM1500DL 22.50	93L18PC 3.10	9301PC 1.08	9336PC 1.10
AM2905DC 8.66	AM91101ADC 6.50	P2101-1 4.20	AM26123PC 3.00	1407 10.20	Logic 10.20	93L21PC 1.58	9304PC 1.96	AM9600DC 1.70
AM2907PC 6.34	AM91101ADC 4.25	P2101-2 4.20	AM26123PC 3.35	1506 10.70	AM25L02DC 7.20	93L22DC 1.76	9306PC 3.30	AM9610DC .98
AM2908DC 38.25	AM91101BPC 4.45	P2101-3 4.20	AM26123PC 3.90	1507 15.07	AM25L04DC 11.20	93L22PC 1.10	9308PC 3.70	AM9610PC 1.8
AM2909PC 8.95	AM91101CPC 5.05	P2102-1 3.45	MOS FIFO 1.50	MOS FIFO 1.50	AM25L06DM 14.20	93L28PC 3.20	9308DC 2.70	AM9602DC 1.60
AM2911PC 5.95	AM91102PC 4.00	P2111-1 2.50	AM2812ADC 24.00	AM2802DC 7.35	AM25L14PC 7.00	93L34PC 3.80	9309PC 6.4	AM9602PC 1.00
AM2914DC 60.00	AM91102PC 4.20	P2111A 3.20	AM2812DC 27.00	AM2803PC 4.42	AM25L138PC 64	93L38PC 4.28	9311PC 2.28	



## HYBRID AUDIO POWER AMPLIFIERS


- Multi-purpose linear amplifiers for commercial and industrial applications.
- Less than 0.5% harmonic distortion at full power level.
- 1/2 dB response from 20 to 100,000 Hz.
- Single or split (dual) power supply.
- Rugged, compact and lightweight packages.
- Built-in current limiting for SI-1050G and efficient heat radiating construction.

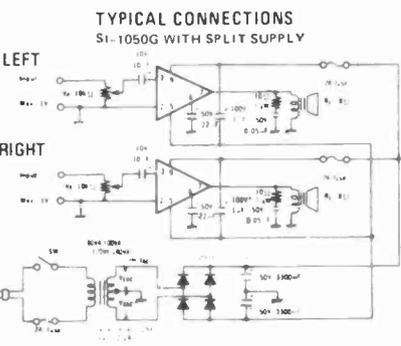

SANKEN Series SI-1000G amplifiers are self-contained power hybrid amplifiers designed for Hi-Fi, stereo, musical instruments, public address systems and other audio applications. The amplifiers have quasi-complementary class B output. The circuit employs flip-chip transistors with high reliability and passivated chip power transistors with excellent secondary breakdown strength. Built-in current limiting is provided for SI-1050G and all devices can be operated from a single or split power supply.

SI-1010G (110W output)	\$ 6.80
SI-1020G (20W output)	\$13.95
A SI-8 (Socket for above)	.95
SI-103G (30W output)	\$19.00
SI-1050G (50W output)	\$27.80
A SI-10 (Socket for above)	.95
Data with Application Notes	.50

## MS-215 DUAL TRACE MINISCOPE

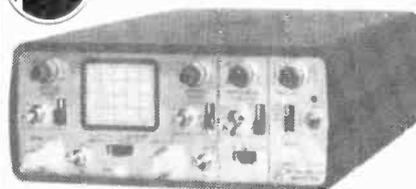

### 15MHz PORTABLE OSCILLOSCOPE


- 15 megahertz bandwidth.
- External and internal trigger.
- Time Base—0.1 microsecond to 0.5 Sec/div—21 settings.
- Battery or line operation.
- Automatic and line sync modes.
- Power consumption less than 15 W.
- Vertical Gain—0.01 to 50 volts/div—12 settings.
- Weight is only 3 pounds.

RECHARGEABLE \$395.00  
PORTABLE 2.7" H x 6.4" W x 7.5" D  
With Rechargeable Batteries & Charger Unit

MS-15 SINGLE TRACE 15 MHz PORTABLE OSCILLOSCOPE \$289.00

OPTIONS: usable on both MS-215 or MS-15  
41-140 Leather Carrying Case \$30.00  
41-141 10 to 1 Probe with 10 Megohm Input \$24.50

## Use a POWERACE for faster and easier prototyping of all types of electronic circuits



POWERACE 103 \$124.95  
TRIPLE-OUTPUT POWER SUPPLY has outputs of: -5 VDC at 750 mA; +15 VDC at 250 mA; and -15 VDC at 250 mA. Ripple/noise is <math>\le 10\text{ mV}</math> at full load for all outputs. Line and load regulation is 1% for all outputs. 15-watt outputs track.

METER is built in. 15-0-15 VDC. Input is accessible at the point block on control panel which allows monitoring power supplies or circuits. Meter accuracy is 5% of full scale.

TWO LOGIC INDICATORS (LED's) have buffered inputs that require 1 microamp max.

TWO LOGIC SWITCHES, momentary, with debounce circuitry. Both D and G outputs can sink 15 mA, and source 5 mA.


TWO DATA SWITCHES with logic 1 and logic 0 outputs have unlimited sinking capabilities and can source 10 mA.

- CHECK THESE IMPORTANT FEATURES
- 1680 solderless, plug-in tie points... will hold up to 18 14-pin DIP's.
  - Breadboard elements accept all DIP sizes... including TTL, DTL, TTL and CMOS devices; TO-5's and discretes with leads up to .032" dia.
  - All connections to/from switches, indicators, power supplies and meters are made via solderless, plug-in, tie-point blocks on control panels.
  - Interconnect with any solid 20 to 30 AWG wire.
  - Breadboard elements are mounted on ground planes... ideal for high-frequency and high speed/low noise circuits.
  - Short circuit-proof fused power supplies.
  - Operate on 110 to 130 VAC at 60 Hz.
  - Space-age compact styling and high-grade components permit convenient, organized and quick prototyping.

ALSO AVAILABLE FROM ANCRONA  
POWERACE 101 \$ 84.95  
POWERACE 102 \$114.95

## USE OUR TOLL FREE LINE FOR ORDERING

## VIM-1 THE COMPLETE MICROCOMPUTER SYSTEM



The VIM-1 is a fully assembled and completely integrated system that features KIM-1 hardware compatibility utilizing the powerful 6502 Microprocessor. The VIM-1 includes — a 28 double-function keypad (with audio response) — easy-to-view 6 digit HEX LED display — three on-board programmable interval timers — 4K byte ROM-resident monitor — 1K bytes of 2114 static RAM (expandable to 4K bytes on-board — 3 PROM/ROM expansion sockets for 2316/2332/2716 EPROMs. Standard Interface include — Audio Cassette Recorder Interface (Two Modes; 135 baud — KIM-1 compatible and Hi-speed 2400 baud) — Full Duplex 20 ma TTY Interface — System Expansion Bus Interface

(KIM-1 compatible) — TV Controller Board Interface — CRT compatible interface — Additional Application Port with 15 Bi-directional TTL lines for user applications. Requires a single 5 Volt supply.

Planned VIM-1 Expansion Features — TV Interface Card (with ASCII Keyboard and Numeric Pad) — Basic Interpreter — Resident Assembler/Editor — Port Expansion Kit — RAM Expansion Kit.

VIM-1 \$269.00

## Over 20,000 in Use Field Proven Lab Accuracy DPM



PM-4 \$170  
0.02% Accuracy

- ±1, ±10, ±100 or ±1000V range.
- Auto zero & polarity.
- Programmable decimal.
- Range change capability.
- Protected Input.
- 1"H x 2.5"W x 3.25"D
- Large 0.3" LED display.

## COUNT ON NLS! PC-4 EVENT COUNTER



Unit Quantity: \$54.50

- Standard Features:
- Count to 1999 events.
  - LED display — 0.3" in height.
  - Programmable reset.
  - PEL or switch input.
  - Clockwise reset.
  - Display inhibit, dimming and lamp test.
  - Leading zero suppression capability.
  - Multiplexed (BCD) output.
  - Small size: 1.7" x 2.5" W x 3.25" D.
  - Operates on -15 VDC ± 0.75 V.
  - Optional ±15 VDC operation.

NLS adds to its counter line — the new, small Model PB-5 solid state preset counter.



Unit Quantity—\$149

- Features include:
- Five-digit LED display of count plus 3-digit preset.
  - Change in 100-1000 preset & 100 Hz constant clearance.
  - Small size: 2.25" W x 3.25" H x 1.7" D.
  - Break the rules of your trade.
  - Secure multiple presets.
  - Universal hardware parts for steady operation.
  - Solid state 1301 microchip with high noise immunity.

## DATA AND TECHNICAL BOOKS

TTL Data Books (Hardbound)	21416	IC Timer Cookbook	9.95	
LCC4112	\$ 4.95	21447	8080A Bugbook	10.50
LCC4131	8.50			
LCC4200	2.95	HAYDEN		
LCC4241	2.95	5104-2	BASIC Workbook	5.50
LCC4270A	2.95	5109-3	Basic BASIC	8.95
		5119-0	Game Playing with BASIC	9.00
		5855-1	The First Book of KIM	6.00
		5748-2	Advanced BASIC	7.95
RCA	2.00	5761-X	Telephone Accessories You Can Build	4.95
CP1279	5.00		How to Profit From Your Personal Computer	7.95
MPM201B	5.00		I/O Design (Hardbound)	17.50
MPM206	5.00			
MPM217	10.00			
SSD240	6.00			
TRM445	5.00	TAB		
VIP300	5.00	597	RTTY Handbook	6.95
		708	Modern Applications of Linear IC's	9.95
		743	Electronic Music Guidebook	6.95
SAMS	12.95	787	OP-AMP Circuit Design	6.95
20969	9.50	841	Build Your Own Working Robot	5.95
21035	4.95	856	OP-AMP Application Handbook	9.95
21161	14.95	859	Handbook of SSTV	9.95
21168	9.95	905	Built In Book of Digital Timepieces	6.95
21313	10.50	984	CMOS Data Book	6.95
21398				

PLACE YOUR PHONE ORDERS ON OUR TOLL FREE WATTS LINE 800-421-6813

ELECTRONICS Market Place

# BRAND NEW 1978 EDMUND SCIENTIFIC CATALOG

PACKED WITH  
SCIENCE  
BARGAINS



Thousands of Items...  
Telescopes, Binoculars, Weather Instruments, Biofeedback, Magnets, Optics, Surplus Bargains, and Much More.

GET YOUR COPY **FREE!**

We'll send your Free personal copy of the brand new 172-page Edmund Scientific Catalog just as soon as we receive your name and address. You'll find over 4,000 amazing and unique products available from no other single source. It's our biggest and best catalog in our 36-year history.

SEND COUPON TODAY FOR YOUR VALUE-PACKED COPY.

**EDMUND SCIENTIFIC COMPANY**  
Dept. AV16, Edscorp Building, Barrington, N.J. 08007

Name \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

## SUMMER SALE

LOW POWER SCHÖTTKY 74LS...  
PRIME MOTOROLA IC's

Buy \$15 -any mix- deduct 10%  
Buy \$25 -any mix- deduct 15%

74LS00 \$1.18	74LS54 \$1.18	74LS157 \$1.44	74LS251 \$1.66
74LS01 \$1.18	74LS55 \$1.18	74LS158 \$1.44	74LS252 \$1.66
74LS02 \$1.18	74LS56 \$1.18	74LS159 \$1.44	74LS253 \$1.66
74LS03 \$1.18	74LS57 \$1.18	74LS160 \$1.44	74LS254 \$1.66
74LS04 \$1.18	74LS58 \$1.18	74LS161 \$1.44	74LS257 \$1.44
74LS05 \$1.18	74LS59 \$1.18	74LS162 \$1.44	74LS258 \$1.66
74LS06 \$1.18	74LS60 \$1.18	74LS163 \$1.44	74LS259 \$1.66
74LS07 \$1.18	74LS61 \$1.18	74LS164 \$1.44	74LS260 \$1.66
74LS08 \$1.18	74LS62 \$1.18	74LS165 \$1.44	74LS266 \$1.66
74LS09 \$1.18	74LS63 \$1.18	74LS166 \$1.44	74LS267 \$1.66
74LS10 \$1.18	74LS64 \$1.18	74LS167 \$1.44	74LS279 \$1.66
74LS11 \$1.18	74LS65 \$1.18	74LS168 \$1.44	74LS283 \$1.66
74LS12 \$1.18	74LS66 \$1.18	74LS169 \$1.44	74LS290 \$1.66
74LS13 \$1.18	74LS67 \$1.18	74LS170 \$1.44	74LS293 \$1.66
74LS14 \$1.18	74LS68 \$1.18	74LS171 \$1.44	74LS295 \$1.66
74LS15 \$1.18	74LS69 \$1.18	74LS172 \$1.44	74LS298 \$1.66
74LS16 \$1.18	74LS70 \$1.18	74LS173 \$1.44	74LS305 \$1.66
74LS17 \$1.18	74LS71 \$1.18	74LS174 \$1.44	74LS306 \$1.66
74LS18 \$1.18	74LS72 \$1.18	74LS175 \$1.44	74LS307 \$1.66
74LS19 \$1.18	74LS73 \$1.18	74LS176 \$1.44	74LS308 \$1.66
74LS20 \$1.18	74LS74 \$1.18	74LS177 \$1.44	74LS316 \$1.66
74LS21 \$1.18	74LS75 \$1.18	74LS178 \$1.44	74LS317 \$1.66
74LS22 \$1.18	74LS76 \$1.18	74LS179 \$1.44	74LS318 \$1.66
74LS23 \$1.18	74LS77 \$1.18	74LS180 \$1.44	74LS319 \$1.66
74LS24 \$1.18	74LS78 \$1.18	74LS181 \$1.44	74LS320 \$1.66
74LS25 \$1.18	74LS79 \$1.18	74LS182 \$1.44	74LS321 \$1.66
74LS26 \$1.18	74LS80 \$1.18	74LS183 \$1.44	74LS322 \$1.66
74LS27 \$1.18	74LS81 \$1.18	74LS184 \$1.44	74LS323 \$1.66
74LS28 \$1.18	74LS82 \$1.18	74LS185 \$1.44	74LS324 \$1.66
74LS29 \$1.18	74LS83 \$1.18	74LS186 \$1.44	74LS325 \$1.66
74LS30 \$1.18	74LS84 \$1.18	74LS187 \$1.44	74LS326 \$1.66
74LS31 \$1.18	74LS85 \$1.18	74LS188 \$1.44	74LS327 \$1.66
74LS32 \$1.18	74LS86 \$1.18	74LS189 \$1.44	74LS328 \$1.66
74LS33 \$1.18	74LS87 \$1.18	74LS190 \$1.44	74LS329 \$1.66
74LS34 \$1.18	74LS88 \$1.18	74LS191 \$1.44	74LS330 \$1.66
74LS35 \$1.18	74LS89 \$1.18	74LS192 \$1.44	74LS331 \$1.66
74LS36 \$1.18	74LS90 \$1.18	74LS193 \$1.44	74LS332 \$1.66
74LS37 \$1.18	74LS91 \$1.18	74LS194 \$1.44	74LS333 \$1.66
74LS38 \$1.18	74LS92 \$1.18	74LS195 \$1.44	74LS334 \$1.66
74LS39 \$1.18	74LS93 \$1.18	74LS196 \$1.44	74LS335 \$1.66
74LS40 \$1.18	74LS94 \$1.18	74LS197 \$1.44	74LS336 \$1.66
74LS41 \$1.18	74LS95 \$1.18	74LS198 \$1.44	74LS337 \$1.66
74LS42 \$1.18	74LS96 \$1.18	74LS199 \$1.44	74LS338 \$1.66
74LS43 \$1.18	74LS97 \$1.18	74LS200 \$1.44	74LS339 \$1.66
74LS44 \$1.18	74LS98 \$1.18	74LS201 \$1.44	74LS340 \$1.66
74LS45 \$1.18	74LS99 \$1.18	74LS202 \$1.44	74LS341 \$1.66
74LS46 \$1.18	74LS00 \$1.18	74LS203 \$1.44	74LS342 \$1.66
74LS47 \$1.18	74LS01 \$1.18	74LS204 \$1.44	74LS343 \$1.66
74LS48 \$1.18	74LS02 \$1.18	74LS205 \$1.44	74LS344 \$1.66
74LS49 \$1.18	74LS03 \$1.18	74LS206 \$1.44	74LS345 \$1.66
74LS50 \$1.18	74LS04 \$1.18	74LS207 \$1.44	74LS346 \$1.66
74LS51 \$1.18	74LS05 \$1.18	74LS208 \$1.44	74LS347 \$1.66
74LS52 \$1.18	74LS06 \$1.18	74LS209 \$1.44	74LS348 \$1.66
74LS53 \$1.18	74LS07 \$1.18	74LS210 \$1.44	74LS349 \$1.66
74LS54 \$1.18	74LS08 \$1.18	74LS211 \$1.44	74LS350 \$1.66
74LS55 \$1.18	74LS09 \$1.18	74LS212 \$1.44	74LS351 \$1.66
74LS56 \$1.18	74LS10 \$1.18	74LS213 \$1.44	74LS352 \$1.66
74LS57 \$1.18	74LS11 \$1.18	74LS214 \$1.44	74LS353 \$1.66
74LS58 \$1.18	74LS12 \$1.18	74LS215 \$1.44	74LS354 \$1.66
74LS59 \$1.18	74LS13 \$1.18	74LS216 \$1.44	74LS355 \$1.66
74LS60 \$1.18	74LS14 \$1.18	74LS217 \$1.44	74LS356 \$1.66
74LS61 \$1.18	74LS15 \$1.18	74LS218 \$1.44	74LS357 \$1.66
74LS62 \$1.18	74LS16 \$1.18	74LS219 \$1.44	74LS358 \$1.66
74LS63 \$1.18	74LS17 \$1.18	74LS220 \$1.44	74LS359 \$1.66
74LS64 \$1.18	74LS18 \$1.18	74LS221 \$1.44	74LS360 \$1.66
74LS65 \$1.18	74LS19 \$1.18	74LS222 \$1.44	74LS361 \$1.66
74LS66 \$1.18	74LS20 \$1.18	74LS223 \$1.44	74LS362 \$1.66
74LS67 \$1.18	74LS21 \$1.18	74LS224 \$1.44	74LS363 \$1.66
74LS68 \$1.18	74LS22 \$1.18	74LS225 \$1.44	74LS364 \$1.66
74LS69 \$1.18	74LS23 \$1.18	74LS226 \$1.44	74LS365 \$1.66
74LS70 \$1.18	74LS24 \$1.18	74LS227 \$1.44	74LS366 \$1.66
74LS71 \$1.18	74LS25 \$1.18	74LS228 \$1.44	74LS367 \$1.66
74LS72 \$1.18	74LS26 \$1.18	74LS229 \$1.44	74LS368 \$1.66
74LS73 \$1.18	74LS27 \$1.18	74LS230 \$1.44	74LS369 \$1.66
74LS74 \$1.18	74LS28 \$1.18	74LS231 \$1.44	74LS370 \$1.66
74LS75 \$1.18	74LS29 \$1.18	74LS232 \$1.44	74LS371 \$1.66
74LS76 \$1.18	74LS30 \$1.18	74LS233 \$1.44	74LS372 \$1.66
74LS77 \$1.18	74LS31 \$1.18	74LS234 \$1.44	74LS373 \$1.66
74LS78 \$1.18	74LS32 \$1.18	74LS235 \$1.44	74LS374 \$1.66
74LS79 \$1.18	74LS33 \$1.18	74LS236 \$1.44	74LS375 \$1.66
74LS80 \$1.18	74LS34 \$1.18	74LS237 \$1.44	74LS376 \$1.66
74LS81 \$1.18	74LS35 \$1.18	74LS238 \$1.44	74LS377 \$1.66
74LS82 \$1.18	74LS36 \$1.18	74LS239 \$1.44	74LS378 \$1.66
74LS83 \$1.18	74LS37 \$1.18	74LS240 \$1.44	74LS379 \$1.66
74LS84 \$1.18	74LS38 \$1.18	74LS241 \$1.44	74LS380 \$1.66
74LS85 \$1.18	74LS39 \$1.18	74LS242 \$1.44	74LS381 \$1.66
74LS86 \$1.18	74LS40 \$1.18	74LS243 \$1.44	74LS382 \$1.66
74LS87 \$1.18	74LS41 \$1.18	74LS244 \$1.44	74LS383 \$1.66
74LS88 \$1.18	74LS42 \$1.18	74LS245 \$1.44	74LS384 \$1.66
74LS89 \$1.18	74LS43 \$1.18	74LS246 \$1.44	74LS385 \$1.66
74LS90 \$1.18	74LS44 \$1.18	74LS247 \$1.44	74LS386 \$1.66
74LS91 \$1.18	74LS45 \$1.18	74LS248 \$1.44	74LS387 \$1.66
74LS92 \$1.18	74LS46 \$1.18	74LS249 \$1.44	74LS388 \$1.66
74LS93 \$1.18	74LS47 \$1.18	74LS250 \$1.44	74LS389 \$1.66
74LS94 \$1.18	74LS48 \$1.18	74LS251 \$1.44	74LS390 \$1.66
74LS95 \$1.18	74LS49 \$1.18	74LS252 \$1.44	74LS391 \$1.66
74LS96 \$1.18	74LS50 \$1.18	74LS253 \$1.44	74LS392 \$1.66
74LS97 \$1.18	74LS51 \$1.18	74LS254 \$1.44	74LS393 \$1.66
74LS98 \$1.18	74LS52 \$1.18	74LS255 \$1.44	74LS394 \$1.66
74LS99 \$1.18	74LS53 \$1.18	74LS256 \$1.44	74LS395 \$1.66
74LS00 \$1.18	74LS54 \$1.18	74LS257 \$1.44	74LS396 \$1.66
74LS01 \$1.18	74LS55 \$1.18	74LS258 \$1.44	74LS397 \$1.66
74LS02 \$1.18	74LS56 \$1.18	74LS259 \$1.44	74LS398 \$1.66
74LS03 \$1.18	74LS57 \$1.18	74LS260 \$1.44	74LS399 \$1.66
74LS04 \$1.18	74LS58 \$1.18	74LS261 \$1.44	74LS400 \$1.66
74LS05 \$1.18	74LS59 \$1.18	74LS262 \$1.44	74LS401 \$1.66
74LS06 \$1.18	74LS60 \$1.18	74LS263 \$1.44	74LS402 \$1.66
74LS07 \$1.18	74LS61 \$1.18	74LS264 \$1.44	74LS403 \$1.66
74LS08 \$1.18	74LS62 \$1.18	74LS265 \$1.44	74LS404 \$1.66
74LS09 \$1.18	74LS63 \$1.18	74LS266 \$1.44	74LS405 \$1.66
74LS10 \$1.18	74LS64 \$1.18	74LS267 \$1.44	74LS406 \$1.66
74LS11 \$1.18	74LS65 \$1.18	74LS268 \$1.44	74LS407 \$1.66
74LS12 \$1.18	74LS66 \$1.18	74LS269 \$1.44	74LS408 \$1.66
74LS13 \$1.18	74LS67 \$1.18	74LS270 \$1.44	74LS409 \$1.66
74LS14 \$1.18	74LS68 \$1.18	74LS271 \$1.44	74LS410 \$1.66
74LS15 \$1.18	74LS69 \$1.18	74LS272 \$1.44	74LS411 \$1.66
74LS16 \$1.18	74LS70 \$1.18	74LS273 \$1.44	74LS412 \$1.66
74LS17 \$1.18	74LS71 \$1.18	74LS274 \$1.44	74LS413 \$1.66
74LS18 \$1.18	74LS72 \$1.18	74LS275 \$1.44	74LS414 \$1.66
74LS19 \$1.18	74LS73 \$1.18	74LS276 \$1.44	74LS415 \$1.66
74LS20 \$1.18	74LS74 \$1.18	74LS277 \$1.44	74LS416 \$1.66
74LS21 \$1.18	74LS75 \$1.18	74LS278 \$1.44	74LS417 \$1.66
74LS22 \$1.18	74LS76 \$1.18	74LS279 \$1.44	74LS418 \$1.66
74LS23 \$1.18	74LS77 \$1.18	74LS280 \$1.44	74LS419 \$1.66
74LS24 \$1.18	74LS78 \$1.18	74LS281 \$1.44	74LS420 \$1.66
74LS25 \$1.18	74LS79 \$1.18	74LS282 \$1.44	74LS421 \$1.66
74LS26 \$1.18	74LS80 \$1.18	74LS283 \$1.44	74LS422 \$1.66
74LS27 \$1.18	74LS81 \$1.18	74LS284 \$1.44	74LS423 \$1.66
74LS28 \$1.18	74LS82 \$1.18	74LS285 \$1.44	74LS424 \$1.66
74LS29 \$1.18	74LS83 \$1.18	74LS286 \$1.44	74LS425 \$1.66
74LS30 \$1.18	74LS84 \$1.18	74LS287 \$1.44	74LS426 \$1.66
74LS31 \$1.18	74LS85 \$1.18	74LS288 \$1.44	74LS427 \$1.66
74LS32 \$1.18	74LS86 \$1.18	74LS289 \$1.44	74LS428 \$1.66
74LS33 \$1.18	74LS87 \$1.18	74LS290 \$1.44	74LS429 \$1.66
74LS34 \$1.18	74LS88 \$1.18	74LS291 \$1.44	74LS430 \$1.66
74LS35 \$1.18	74LS89 \$1.18	74LS292 \$1.44	74LS431 \$1.66
74LS36 \$1.18	74LS90 \$1.18	74LS293 \$1.44	74LS432 \$1.66
74LS37 \$1.18	74LS91 \$1.18	74LS294 \$1.44	74LS433 \$1.66
74LS38 \$1.18	74LS92 \$1.18	74LS295 \$1.44	74LS434 \$1.66
74LS39 \$1.18	74LS93 \$1.18	74LS296 \$1.44	74LS435 \$1.66
74LS40 \$1.18	74LS94 \$1.18	74LS297 \$1.44	74LS436 \$1.66
74LS41 \$1.18	74LS95 \$1.18	74LS298 \$1.44	74LS437 \$1.66
74LS42 \$1.18	74LS96 \$1.18	74LS299 \$1.44	74LS438 \$1.66
74LS43 \$1.18	74LS97 \$1.18	74LS300 \$1.44	74LS439 \$1.66
74LS44 \$1.18	74LS98 \$1.18	74LS301 \$1.44	74LS440 \$1.66
74LS45 \$1.18	74LS99 \$1.18	74LS302 \$1.44	74LS441 \$1.66
74LS46 \$1.18	74LS00 \$1.18	74LS303 \$1.44	74LS442 \$1.66
74LS47 \$1.18	74LS01 \$1.18	74LS304 \$1.44	74LS443 \$1.66
74LS48 \$1.18	74LS02 \$1.18	74LS305 \$1.44	74LS444 \$1.66
74LS49 \$1.18	74LS03 \$1.18	74LS306 \$1.44	74LS445 \$1.66
74LS50 \$1.18	74LS04 \$1.18	74LS307 \$1.44	74LS446 \$1.66
74LS51 \$1.18	74LS05 \$1.18	74LS308 \$1.44	74LS447 \$1.66
74LS52 \$1.18	74LS06 \$1.18	74LS309 \$1.44	74LS448 \$1.66
74LS53 \$1.18	74LS07 \$1.18	74LS310 \$1.44	74LS449 \$1.66
74LS54 \$1.18	74LS08 \$1.18	74LS311 \$1.44	74LS450 \$1.66
74LS55 \$1.18	74LS09 \$1.18	74LS312 \$1.44	74LS451 \$1.66
74LS56 \$1.18	74LS10 \$1.18	74LS313 \$1.44	74LS452 \$1.66
74LS57 \$1.18	74LS11 \$1.18	74LS314 \$1.44	74LS453 \$1.66
74LS58 \$1.18	74LS12 \$1.18	74LS315 \$1.44	74LS454 \$1.66
74LS59 \$1.18	74LS13 \$1.18		



# POLY PAKS' 1978 REBELLINE

WE'RE FIGHTING BACK INFLATION WITH THIS EXCLUSIVE 1¢ SALE

**RIBBON CABLE!**  
Order by Cat. #E3939 and Conductors

Cond.	1¢ Sale	1¢ Sale
26	4-ft. 1.98	8-ft. 1.99
40	4-ft. 1.98	6-ft. 1.99
40	3-ft. 1.98	6-ft. 1.99

ELECTRONICS Market Place

**PENNIES FOR YOUR MEMORIES!**

Type	Description	Sale	1¢ Sale!	Order by Cat. No.
1103	1K Dynamic RAM	1.29	1.30	E83459 & 4
5202	2K Dynamic RAM	2.95	2.96	
5262	2K x 1 Dynamic RAM	.99	1.00	
1702A	256 x 8 EPROM	4.95	4.96	

## TTL'S AT "CENT-CIBLE" PRICES

Order By Cat. No. E81981	& Type No.	Each	2 For	Type No.	Each	2 For	Type No.	Each	2 For
	SN7400	\$ .19	\$ .20	SN7462	.35	.36	SN74140	.49	.50
	SN7401	.19	.20	SN7464	.19	.20	SN74141	1.79	1.80
	SN7403	.25	.26	SN7470	.19	.20	SN74145	.69	.70
	SN7404	.19	.20	SN7475	.19	.20	SN74151	1.29	1.30
	SN7405	.19	.20	SN7471	.35	.36	SN74153	1.29	1.30
	SN7406	.19	.20	SN7472	.19	.20	SN74154	1.75	1.76
	SN7407	.39	.40	SN7473	.59	.60	SN74155	.79	.80
	SN7409	.39	.40	SN7474	.59	.60	SN74156	.39	.40
	SN7410	.25	.26	SN7475	.69	.70	SN74157	.99	1.00
	SN7411	.79	.80	SN7476	.79	.80	SN74158	.99	1.00
	SN7416	1.19	1.20	SN7477	.19	.20	SN74161	1.25	1.26
	SN7417	.35	.36	SN7482	.29	.30	SN74163	1.39	1.40
	SN7420	.35	.36	SN7483	.99	1.00	SN74164	.79	.80
	SN7421	.35	.36	SN7485	.49	.50	SN74165	.99	1.00
	SN7422	.35	.36	SN7488	.79	.80	SN74166	.99	2.00
	SN7423	.29	.30	SN7489	3.49	3.50	SN74173	.99	1.00
	SN7426	.19	.20	SN7490	.99	1.00	SN74174	1.79	1.80
	SN7430	.45	.46	SN7491	1.29	1.30	SN74175	.99	1.00
	SN7432	.45	.46	SN7492	.79	.80	SN74177	.79	.80
	SN7437	.19	.20	SN7493	.69	.70	SN74179	2.99	3.00
	SN7438	.25	.26	SN7494	.79	.80	SN74180	.49	.50
	SN7440	.69	.70	SN7496	.29	.30	SN74182	.49	.50
	SN7443	.59	.60	SN7498	.79	.80	SN74190	1.99	2.00
	SN7444	1.25	1.26	SN7499	.79	.80	SN74191	1.75	1.76
	SN7446	.19	.20	SN74100	1.99	2.00	SN74192	.95	.86
	SN7447	.25	.26	SN74107	.29	.30	SN74193	.99	1.00
	SN7448	1.35	1.36	SN74113	.39	.40	SN74194	1.25	1.26
	SN7450	.19	.20	SN74114	.25	.26	SN74197	.75	.76
	SN7451	.19	.20	SN74115	.59	.60	SN74199	.69	.70
	SN7453	.19	.20	SN74123	.69	.70	SN74200	3.50	3.51
	SN7454	.29	.30	SN74126	.99	1.00	SN74251	.79	.80
	SN7455	.19	.20	SN74132	1.35	1.36	SN74284	5.99	6.00
	SN7460	.35	.36	SN74136	.49	.50	SN74298	3.75	3.76

## POP-AMPS AT "CENT-CIBLE" PRICES

Case code: T=TO-220 Power Tab; V=Mini dip; K=TO-3; H=TO-5; N=DIP

Type No.	Each	2 for	Type No.	Each	2 for	Type No.	Each	2 for
LM300H	\$ .79	\$ .80	LM340T-6	1.49	1.50	LM703H	.59	.60
LM300N	.45	.46	LM340T-8	1.49	1.50	LM704H	.29	.30
LM301V	.45	.46	LM340T-12	1.49	1.50	LM709H	.19	.20
LM301H	.45	.46	LM340T-15	1.49	1.50	LM709N	.49	.50
LM303V	.45	.46	LM340T-18	1.49	1.50	LM733H	.79	.80
LM308V	.29	.30	LM340T-24	1.49	1.50	LM733N	.29	.30
LM308H	.69	.70	LM350N	.49	.50	LM741H	.30	.31
LM309K	1.49	1.50	LM370N	1.99	2.00	LM747H	.59	.60
LM311V	.29	.30	LM376V	.29	.30	LM1304	1.49	1.50
LM311H	1.49	1.50	LM377H	2.25	2.26	LM1310	1.79	1.80
LM313V	.99	1.00	LM380N	1.39	1.40	LM1312	2.49	2.50
LM320H-5	.99	1.00	LM381H	1.49	1.50	LM1414V	.19	.20
LM320H-12	.99	1.00	LM386N	1.49	1.50	LM1458V	.39	.40
LM320H-15	.99	1.00	LM381H	1.49	1.50	LM1810N	.79	.80
LM320T-6	1.49	1.50	LM532N	.25	.26	LM3028H	.65	.66
LM322N	1.19	1.20	LM532H	.25	.26	LM3900N	.49	.50
LM324N	1.79	1.80	NE5M	5.95	5.96	LM3909V	1.25	1.26
LM339N	1.79	1.80	LM555V	.75	.76	LM4250V	1.00	1.21
LM340K-5	1.49	1.50	LM556V	1.79	1.80	LM75451	.69	.70
LM340K-6	1.49	1.50	LM558V	.39	.40	LM75453	.69	.70
LM340K-8	1.49	1.50	LM559H	.99	1.00	LM75491	.81	.82
LM340K-12	1.49	1.50	LM561H	1.00	1.01	LM75492	.80	.81
LM340K-15	1.49	1.50	LM565H	1.00	1.01	LM75494	.60	.61
LM340K-18	1.49	1.50	LM565H	1.00	1.01	PA263	1.50	1.51
LM340K-24	1.49	1.50	LM567	2.49	2.50	DM864N	1.29	1.30
LM340T-5	1.49	1.50	LM567	2.39	2.40			

## 25 AMP BRIDGE RECTIFIERS

Order by Cat. No. and 1¢ SALE!

Order No. E82273 & voltage	V	Each	1¢ SALE
50	50	\$1.95	2 for \$1.96
100	100	1.48	2 for 1.50
200	200	1.68	2 for 1.70
400	400	1.99	2 for 2.00
600	600	2.25	2 for 2.26
800	800	2.50	2 for 2.51

## 1N4000 Epoxy Rectifiers

Order by Cat. No. and 1¢ SALE!

Cat. No.	Type	Volts	Sale	1¢ SALE!	and
E82377	1N4001	50	10 for \$ .75	20 for \$ .76	None
E82378	1N4002	100	10 for .85	20 for .86	+ 1.5
E82379	1N4003	200	10 for .95	20 for .96	Ampl
E82380	1N4004	400	10 for 1.19	20 for 1.20	+ Mini
E82381	1N4005	600	10 for 1.39	20 for 1.40	ature!
E82382	1N4006	800	10 for 1.49	20 for 1.50	
E82383	1N4007	1000	10 for 1.59	20 for 1.60	

## BULLET RECTIFIERS!

Order by Cat. No. E86084 & voltage 1.5 AMP

50V	10 for \$5.9	20 for \$6.0
100V	10 for .69	20 for .70
200V	10 for .89	20 for .90
400V	10 for .89	20 for .90

## TOGGLE SWITCHES!

3 Amps, 125 VAC contacts. MICRO MINI with chrome handles, complete with mounting hardware.

Cat. #	Sale	1¢ Sale!	CENTER OFF
E84036	SPDT	\$1.29	\$1.30
E85085	SPDT	1.39	1.40

## LYTIC KLINIC

1 Order No. E83269 and value

10 V	Style	Sale	1¢ SALE
10	15 P.C.	10 for \$1.00	20 for \$1.01
10	50 P.C.	8 for 1.00	16 for 1.01
10	25 P.C.	8 for 1.00	16 for 1.01
10	50 P.C.	6 for 1.00	12 for 1.01
10	15 Atrial	10 for 1.00	20 for 1.01
10	25 P.C.	10 for 1.00	20 for 1.01

## 6 AMP CARTWHEEL RECTIFIERS

Cat. #E83584

V	Each	1¢ SALE
50	\$ .36	2 for \$ .37
100	.45	2 for .46
200	.61	2 for .62
400	.79	2 for .80
600	.90	2 for .91
800	1.19	2 for 1.20
1000	1.39	2 for 1.40

## 10 AMP - POWER TABS!

Order by Cat. No. E83448 - TRIACS E83590 - QUADRACS

PRV	Sale	2 for
50	\$ .55	\$ .56
100	.69	.70
200	.88	.89

Quant. Description (Order by Cat. No. in parentheses)

Quant.	Description	1¢ Sale	1¢ SALE
1-40	CHANNEL CB SELECTOR, w/knob, for PLL circuits (#E85045)	1.00	2 for 1.01
1-23	CHANNEL CB SELECTOR, w/knob, for PLL & xtal (#E85044)	1.00	2 for 1.01
10-1C	"DICE", microscopic circuits, teaches theory (#E85065)	1.19	20 for 1.20
1-6"	HI-FI SPEAKER, full range, for car-in-home (#E85294)	4.95	2 for 4.96
1-LED	WATCH GUYS, men's, how good? We don't know (#E85267)	1.00	2 for 1.01
1-1W	WIRE WOUND, 100 ohms, 1W, 5% (#E85297)	1.00	2 for 1.01
10-SLIDE	SWITCHES, ass't pop styles (#E851495)	1.00	20 for 1.01
4-TANTALUM	CAPACITORS, 6.8 uF 35V, clipped (#E85281)	1.00	8 for 1.01
5-	PANCAKE PHOTOCELLS, 50 uA 15K ohms (#E82939)	1.00	10 for 1.01
1-	100X33 MARKER CRYSTALS, approx for marker gen. (#E83896)	.95	2 for 1.96
1-	MOTHERBOARD EDGE CONNECTOR, 106 pins, 125" (#E83987)	3.50	2 for 3.51
1-	8-PIN EDGE CONNECTOR, 156" appling (#E3963)	1.95	2 for 1.96
1-	METEX, 500A, 1/2" square, 0-200 ohms (#E85054)	1.99	2 for 1.99
1-	SPST RELAY, norm. open 12VDC, 1250 ohms, dip style (#E85175)	1.00	2 for 1.01
1-	VEEDER ROVER COUNTER, #00-999, resettable, panel mt. (#E85081)	1.49	2 for 1.50
2-	DUAL GATE MDSFT, sim. to 3N200, 3N187, for RF & Mixer (#E85101)	1.00	4 for 1.01
2-	LCD THERMAL INDICATORS, 88-108°F, 7x, Resizable (#E85195)	1.00	4 for 1.01
1-	30-PL. WIRE WOUND, 200 ohms, 1W, 5% (#E83308)	4.95	2 for 4.96
1-	ECCO THUMBWHEEL SWITCH, BCD, #7 (#E82670A)	1.49	2 for 1.50
15-	"POP" OPTICAL LENSES, plano-convex, 1" dia, plastic (#E5043)	1.19	30 for 9.96
1-	PLESSEY TV SIDEBAND FILTER, for chan. 3 or 4 (#E83975)	1.95	2 for 1.96
30-PL.	WIRE WOUND, 200 ohms, 1W, 5% (#E83308)	1.00	60 for 1.01
2-9V	NI-CAD CHARGER PAK, plug-in, 125ma, 125 VAC (#E84098)	1.49	2 for 1.50
20-	DATA ENTRY PUSH-SWITCHES, apat. norm. open, for keyboards (#E85279)	2.00	40 for 2.01
75-	SN7400 TTL ICs, untested 50%+ yield, pop types (#E82415)	2.00	150 for 2.01
100-	5-10VDC, 100mA, linear, untested 50%+ yield, pop types (#E82425)	2.00	200 for 2.01
100-	LINERS, OP. AMPs, untested 50%+ yield, amp-dips-minidips (#E82416)	2.00	150 for 2.01
100-	TTLs & LINEAR MIXED, with 7400s, 50%+ yield (#E82431)	2.00	200 for 2.01
1-	JOYSTICK, two 10K pots, for computers, TV games (#E85037)	2.50	2 for 2.51
1-	TRACER TAPE HEAD, with plug for card (#E3468)	2.00	20 for 2.01
150-	PERFORMED DISC CAPACITORS, marked values, ass't'd (#E82605)	2.00	300 for 2.01
150-	TRIMMER CAPACITORS, mica compression, plated, ass't'd (#E83714)	2.00	120 for 2.01
60-	YELLOW JACKET MYLAR CAPACITORS, marked, pop values (#E83476)	2.00	150 for 2.01
150-	GLASS ZENERS, 400mW, untested, better than 50% yield (#E82740)	2.00	150 for 2.01
250-	UNMARKED CAPACITORS, polystyrene, molded, pop values (#E83805)	2.00	500 for 2.01
300-	SILICON SIGNAL DIODES, micro, glass, zeners to 50% yield (#E82628)	2.00	600 for 2.01
8-	IC SOCKETS, 14, 18, 24, 28, 40, 48, 84, 160 pin (#E82740)	2.00	50 for 2.01
100-	10-100VDC, 100mA, linear, untested 50%+ yield, pop types (#E82415)	2.00	200 for 2.01
30-	PC TRIM POTENTIOMETERS, thumbwheel, acridrider ass't'd (#E83345)	2.00	60 for 2.01
15-	SLIDE VOLUME CONTROLS, ass't'd values, duals, singles (#E83057)	2.00	30 for 2.01
7-	8-1/2" CARTRIDGE, 1500 rpm, 15" (#E82151)	2.00	150 for 2.01
10-	CALCULATOR KEYBOARDS, 20 keys and more (#E83524)	2.00	20 for 2.01
10-	CRYSTALS, may include CB, Ham & more (#E8250)	2.00	20 for 2.01
100-	TERMINAL STRIPS, from 2 lugs up to 8 (#E8336)	2.00	200 for 2.01
30-	NE-ZNEON LAMPS, all 100% good (#E82415)	2.00	50 for 2.01
50-	SHIELDED CABLES, long lead, plastic, phone, (#E83577)	2.00	80 ft. for 2.01
50-	TRANSISTOR ELECTROS, ass't'd values, styles (#E82747)	2.00	100 for 2.01
3-	SOUND TRIGGERS, sound triggers scr w/amp (#E83625)	2.00	6 for 2.01
10-	CB CRYSTALS, for phase lock loop, HAM, 100K (#E8250)	2.00	20 for 2.01
100-	DISC CAPACITORS, long lead, metal, ass't'd (#E82598)	2.00	200 for 2.01
10-	VOLTAGE REGULATORS, hobby LM120, 340, TD-3 (#E8330)	2.00	20 for 2.01
30-	PANEL SWITCHES, slides, rotaries, mod, etc (#E83268)	2.00	60 for 2.01

# Radio Shack: No. 1 Parts Place

## Low Prices and New Items Everyday!

Top-quality devices, fully functional, carefully inspected. Guaranteed to meet all specifications, both electrically and mechanically. All are made by well-known American manufacturers, and all have to pass manufacturer's quality control procedures. These are not rejects, not fallouts, not seconds. In fact, there are none better on the market! Always count on Radio Shack for the finest quality electronic parts!

### Linear ICs

By National Semiconductor and Motorola — first quality

Type	Cat. No.	ONLY
301CN	276-017	49¢
324N	276-1711	1.49
339N	276-1712	1.49
385CN	276-1731	99¢
555CN	276-1723	79¢
556CN	276-1728	1.39
566CN	276-1724	1.69
567CN	276-1721	1.99
723CN	276-1740	69¢
741CN	276-007	49¢
741H	276-010	49¢
3900N	276-1713	99¢
3909N	276-1705	99¢
3911N	276-1706	1.99
4558CN	276-038	79¢
75491	276-1701	99¢
75492	276-1702	99¢
7805	276-1770	1.29
7812	276-1771	1.29
7815	276-1772	1.29

### Computer Chip



8-Bit Data Bus,  
16-Bit Address Bus

8080A Microprocessor. 100% prime CPU handles up to 65K bytes memory. 276-2510. Reg. 17.95 Sale 12.95

### RAM Memory IC



Under 450 nS  
Access Time

2102 1K Static RAM. Low power version. 16-pin DIP. Buy 8 and save! 276-2501 2.49 Ea. or 8/14.95

### TTL and CMOS Logic ICs

Full-Spec Devices  
Direct from  
Motorola and  
National Semiconductor



Type	Cat. No.	ONLY
7400	276-1801	35¢
7402	276-1811	39¢
7404	276-1802	35¢
7406	276-1821	49¢
7410	276-1807	39¢
7413	276-1815	79¢
7420	276-1809	39¢
7427	276-1823	49¢
7432	276-1824	49¢
7441	276-1804	99¢
7447	276-1805	99¢
7448	276-1816	99¢
7451	276-1825	39¢
7473	276-1803	49¢
7474	276-1818	49¢
7475	276-1806	79¢
7476	276-1813	59¢
7485	276-1826	1.19
7486	276-1827	49¢
7490	276-1808	79¢
7492	276-1819	69¢
74123	276-1817	99¢
74145	276-1828	1.19
74150	276-1829	1.39
74154	276-1834	1.29
74192	276-1831	1.19
74193	276-1820	1.19
74194	276-1832	1.19
74196	276-1833	1.29
4001	276-2401	49¢
4011	276-2411	49¢
4013	276-2413	89¢
4017	276-2417	1.49
4020	276-2420	1.49
4027	276-2427	89¢
4049	276-2449	69¢
4050	276-2450	69¢
4511	276-2447	1.69
4518	276-2490	1.49

## NEW EDITION!

Update Your Semiconductor Library Now!




**BONUS OFFER**  
Only 99¢  
With Any \$5  
Parts Purchase

REGULARLY \$1.95. Archer® Semiconductor Reference and Application Handbook. Complete specs and application data on every Archer semiconductor — display devices, too! 46,000 cross-reference/substitution listings plus glossary of words, symbols, abbreviations. 276-4002 . . . With Any \$5 Parts Purchase, Only 99¢

Offer good at participating Radio Shack stores and dealers

### Wire Wrapping Accessories

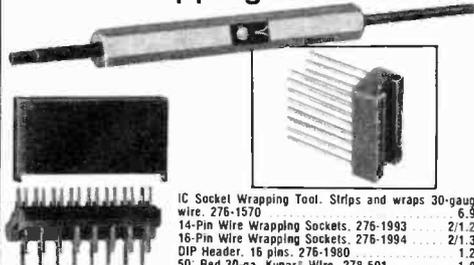

IC Socket Wrapping Tool. Strips and wraps 30-gauge wire. 276-1570 . . . 6.95  
14-Pin Wire Wrapping Sockets. 276-1993 . . . 2/1.29  
16-Pin Wire Wrapping Sockets. 276-1994 . . . 2/1.39  
DIP Header. 16 pins. 276-1980 . . . 1.29  
50' Red 30-ga. Kynar® Wire. 278-501 . . . 1.99  
50' White 30-ga. Kynar Wire. 278-502 . . . 1.99  
50' Blue 30-ga. Kynar Wire. 278-503 . . . 1.99

### Metal Project Cabinets



NEW  
Slope Front. Sloping top panel — ideal for lab projects. 1 3/8" to 2 3/4" x 7 7/8" x 5 7/8". 270-265 . . . 6.99  
Project Cabinet. 20 ga. steel cover with 16 ga. aluminum chassis. 2 7/8" x 4 9/16" x 6 5/8". 270-268 . . . 5.99  
3 1/2" x 7 7/8" x 5 1/16". 270-269 . . . 7.99

### Low-Cost Power Transformers

- Primaries Designed to Operate from 120VAC, 60 Hz
- Solder Lugs for Easy Wiring or PC Board Mounting

Volts	Current	Cat. No.	Each	Volts	Current	Cat. No.	Each
6.3	1.2A	273-050	2.49	6.3 CT	3A	273-1510	3.99
6.3	300 mA	273-1384	1.99	12.6 CT	3A	273-1511	4.69
12	300 mA	273-1385	1.99	25.2 CT	2A	273-1512	4.99
24	300 mA	273-1386	2.49	12	5A	273-1513	8.95
24	1.2A	273-1480	2.99	18 CT*	4A	273-1514	8.95
12.6 CT	1.2A	273-1505	2.89				

\*Ideal for 5V (using CT) or 12V solid-state regulators

### Solar Cell

NEW


2 1/4" Round  
Silicon  
Device



High efficiency — provides approximately 0.5 volt at 400 mA. For higher voltage or current outputs use several in series or parallel. 276-121 . . . 5.99

### Archer® Project-Boards — Ready to Build

All Include Finished Circuit Board, Front Panel Trim and Manual



5V, 3-Amp Power Supply. Metered output current, foldback limiting. Remote sensing. For all 5V TTL projects. 277-119 (PCB less parts, case) . . . 7.95



Time Base Generator. Built-in 10 MHz xtal or ext. input. Decade selector. switch. TTL output. Requires 5VDC. Reg. \$5.99. 277-115. (PCB less parts, case) . . . Sale 3.99



2-Watt IC Stereo Amp. Uses LM377 IC for 2 watts RMS/channel into 8 ohms. Dual volume controls, headphone jack, phono/tape inputs. Output current limiting, thermal protection. Reg. \$5.99. 277-118. (PCB less parts, case) . . . Sale 3.99

Shown Built with Recommended Parts and Cases

### Electret Mike Element



Condenser mike element for new or replacement use. Built-in FET preamp. 30-15,000 Hz audio response. Requires 2 to 10VDC. 270-092 . . . 2.49

### Epoxy-Glass Plug-In PC Boards




NEW  
For 22-pin connectors. 4 1/2" x 4 1/8" grid. 3 styles available. Standard. 276-155 . . . 4.99  
Digital. 276-156 . . . 4.99  
Op-Amp. 276-157 . . . 4.99  
22-Pin Connector. 276-1551 . . . 2.99

### High-Brightness Neon Panel Lamp



NEW  
High-intensity rectangular lamp assembly can be seen across the room. Mounts in 9/16" dia. hole. For 120VAC. 272-706 . . . 1.89

### Extra Length Test Clips



NEW  
1 Red, 1 Black  
Ideal clips for precision testing of components on PC boards or chassis. 3" each. 270-352 . . . Pkg. of 2, 1.59

WHY WAIT FOR MAIL ORDER DELIVERY?  
IN STOCK NOW AT OUR STORE NEAR YOU!

Prices may vary at individual stores and dealers

# Radio Shack®

A DIVISION OF TANDY CORPORATION • FORT WORTH, TEXAS 76102  
OVER 7000 LOCATIONS IN NINE COUNTRIES

# COMPUTER INTERFACES & PERIPHERALS

For free catalog including parts lists and schematics, send a self-addressed stamped envelope.

## APPLE II SERIAL I/O INTERFACE \*




Part no. 2  
 • Baud rates up to 30,000 • Plugs into Apple Peripheral connector • Low-current drain • RS-232 Input and Output. SOFTWARE • Input and Output routine from monitor or BASIC to teletype or other serial printer. • Program for using an Apple II for a video or an intelligent terminal. Also can output in correspondence code to interface with some selectrics. Board only — \$15.00; with parts — \$42.00; assembled and tested — \$62.00.


## T.V. TYPEWRITER

Part no. 106

• Stand alone TVT  
 • 32 char/line, 16 lines, modifications for 64 char/line included • Parallel ASCII (TTL) input • Video output • 1K on board memory • Output for computer controlled cursor • Auto scroll • Non-destructive cursor • Cursor inputs: up, down, left, right, home, EOL, EOS • Scroll up, down • Requires +5 volts at 1.5 amps. and -12 volts at 30 mA • All 7400, TTL chips • Char. gen. 2513 • Upper case only • Board only \$39.00; with parts \$145.00



## 8K STATIC RAM




Part no. 300  
 • 8K Altair bus memory • Uses 2102 Static memory chips • Memory protect • Gold contacts • Wait states • On board regulator • S-100 bus compatible • Vector input option • TRI state buffered • Board only \$22.50; with parts \$160.00

## MODEM \*

Part no. 109

• Type 103 • Full or half duplex • Works up to 300 baud • Originate or Answer • No coils, only low cost components • TTL input and output-serial • Connect 8 ohm speaker and crystal mic. directly to board • Uses XR FSK demodulator • Requires +5 volts • Board \$7.60; with parts \$27.50




## RF MODULATOR \*

Part no. 107

• Converts video to AM modulated RF, Channels 2 or 3. So powerful almost no tuning is required. On board regulated power supply makes this extremely stable. Rated very highly in Doctor Dobbs' Journal. Recommended by Apple. • Power required is 12 volts AC C.T., or +5 volts DC • Board \$7.60; with parts \$13.50



## TIDMA \*

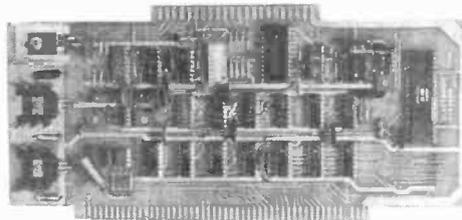

Part no. 112

• Tape Interface Direct Memory Access • Record and play programs without bootstrap loader (no prom) has FSK encoder/decoder for direct connections to low cost recorder at 1200 baud rate, and direct connections for inputs and outputs to a digital recorder at any baud rate. • S-100 bus compatible • Board only \$35.00; with parts \$110.00

## DC POWER SUPPLY \*

Part no. 6085

• Board supplies a regulated +5 volts at 3 amps., +12, -12, and -5 volts at 1 amp. • Power required is 8 volts AC at 3 amps., and 24 volts ACC.T. at 1.5 amps. • Board only \$12.50; with parts excluding transformers \$42.50



## RS 232/TTY INTERFACE \*

Part no. 600


• Converts RS-232 to 20mA current loop, and 20mA current loop to RS-232 • Two separate circuits • Requires +12 and -12 volts • Board only \$4.50, with parts \$7.00



## TAPE INTERFACE \*

Part no. 111


• Play and record Kansas City Standard tapes • Converts a low cost tape recorder to a digital recorder • Works up to 1200 baud • Digital in and out are TTL-serial • Output of board connects to mic. in of recorder • Earphone of recorder connects to input on board • No coils • Requires +5 volts, low power drain • Board \$7.60; with parts \$27.50



## UART & BAUD RATE GENERATOR \*

Part no. 101


• Converts serial to parallel and parallel to serial • Low cost on board baud rate generator • Baud rates: 110, 150, 300, 600, 1200, and 2400 • Low power drain +5 volts and -12 volts required • TTL compatible • All characters contain a start bit, 5 to 8 data bits, 1 or 2 stop bits, and either odd or even parity. • All connections go to a 44 pin gold plated edge connector • Board only \$12.00; with parts \$35.00 with connector add \$4.00



## RS 232/TTL INTERFACE \*

Part no. 232

• Converts TTL to RS-232, and converts RS-232 to TTL • Two separate circuits • Requires -12 and +12 volts • All connections go to a 10 pin gold plated edge connector • Board only \$4.50; with parts \$7.00 with connector add \$3.00



# ELECTRONIC SYSTEMS

Dept. PE, P.O. Box 21638, San Jose, Calif. USA 95151

## To Order:

Mention part number and description. For parts kits add "A" to part number. In USA, shipping paid for orders accompanied by check, money order, or Master Charge, BankAmericard, or VISA number, expiration date and signature. Shipping charges added to C.O.D. orders. California residents add 6.5% for tax. Outside USA add 10% for air mail postage. No C.O.D.'s. Checks and money orders must be payable in US dollars. Parts kits include sockets for all ICs, components, and circuit board. Documentation is included with all products. All items are in stock, and will be shipped the day order is received via first class mail. Prices are in US dollars. To eliminate tariff in Canada boxes are marked "Computer Parts." Dealer inquiries invited. 24 Hour Order Line: (408) 226-4064



\* Designed by John Bell

FOR ALL CUSTOMERS EXCEPT CALIF. CALL TOLL FREE 800-421-5809

21L02 (450 ns) Static Rams 100 @ \$1.10 ea.	1702A E-PROM 8 @ \$3.75 ea.	6502 Microprocessor 5 @ \$11.00 ea.	2708 (450 ns) E-PROM 8 @ \$11.00 ea.	21L02 (250 ns) Static Rams 100 @ \$1.36 ea.	Z-80A Microprocessor 5 @ \$25.00 ea.	8212 8 Bit I/O Port 25 @ \$3.00 ea.	4116 (200 ns) 16 K Dyn. Ram 16 @ \$24.00 ea.
Z-80 Microprocessor 5 @ \$20.00 ea.	8224-4 Clk.Gen.&Dvr. 25 @ \$8.75 ea.	410D (200 ns) Static Ram 100 @ \$8.75 ea.	4096 Dynamic Ram 100 @ \$3.50 ea.	4200A (200 ns) Static Rams 25 @ \$10.00 ea.	74LS367 Hex Buffer 100 @ .70¢ ea.	74LS368 Hex Inverter 100 @ .70¢ ea.	2513 (5v) Character Gen. 5 @ \$9.00 ea.

## MICROCOMPUTER COMPONENTS

### MICROPROCESSOR'S

F8	16.95
Z80	22.00
820A	28.00
CDP1802CD	19.95
2650	24.95
AM9901	22.95
6502	11.95
8800	18.95
8802	25.00
8008-1	9.95
8035	22.00
8080A	11.95
8085	27.00
TMS9900TL	75.00

### 8080A SUPPORT DEVICES

8212	3.50
8214	9.00
8216	3.75
8224	5.50
8224-4	9.95
8226	3.95
8228	3.95
8238	7.50
8251	4.95
8253	21.95
8255	21.95
8257	21.95
8259	3.95
8275	75.00
8279	20.00

### FLOPPY DISC CONTROLLER

1771B	55.95
1770B-01	29.95

### KEYBOARD CHIPS

AY5-2376	13.75
AY5-3600	13.75

### PROM'S

1702A	4.00
2704	15.00
2708	12.00
2716	30.00
2716 int'l	36.00
2728	26.60
D3601	4.50
D3604	13.00
5203AQ	5.00
5204AQ	7.50
6834	17.50
6814-1	19.95
8252B	4.00
825129B	4.25
8223B	3.50

### 6800 SUPPORT

6810P	4.95
68B10P	6.00
6820P	7.50
6821P	7.50
6828P	11.25
6834P	16.95
6850P	8.75
6852P	11.75
6860P	10.00
6862P	14.50
6871P	28.00
6875P	5.75
6880P	6.50

### Z80 SUPPORT DEVICES

3881	12.95
3882	12.95

### STATIC RAMS

21L02	1.50	1.24	1.18
21L02 (350)	1.60	1.35	1.25
21L02 (250)	1.75	1.50	1.50
410D	10.75	10.00	9.25
1101A	1.00	.90	.80
2101-1	2.95	2.75	2.60
2102	1.25	1.15	1.00
2111-1	3.95	3.50	3.25
2112-1	2.95	2.80	2.69
2114-3	11.00	10.00	9.25
2125L	11.10	9.00	8.30
2147	37.25		
31L01	2.50	2.35	2.00
3106	3.95	3.70	3.25
3107	3.95	3.70	3.25
TMS4044	9.95	9.00	8.95
4200A	12.95		
TMS4045	11.10	10.00	9.25
5101	8.30	7.40	7.25
74C89	3.25	3.05	2.85
7489	2.25	2.10	1.90
74S201	4.50	4.00	3.75
PC101	4.20	3.40	2.80
PC155	17.00	14.00	13.00
PC156	4.00	13.00	
8599	1.88	1.75	1.60
9102BPC	1.65	1.45	1.30

### CHARACTER GENERATORS

2513	6.75
2513 5v upper	9.75
2513 5v lower	9.75
2516	10.95
MC6M571	10.95
MC6M571A	10.95
MC6M574	13.25
MC6M575	13.25

### WAVEFORM GENERATOR

8038	3.50
MC1024	2.25
566	1.50

### DYNAMIC RAMS

416D/416	32.00
1103	1.00
2104	4.00
2107B	4.25
2107B-4	3.95
TMS4050	4.00
TMS4060	4.50
TMS4070-2	32.00
4096	32.00
4116/416D	32.00
MMS270	4.50
MC6M605	4.50

### UART'S

AY5-1013A	5.25
AY5-1014A	8.25
TR1602B	5.25
TMS5011	10.80
IM6402	10.80
IM6403	10.80

**JADE 8080A KIT**  
\$100.00 KIT  
BARE BOARD \$30.00

## MISC. OTHER COMPONENTS

N8T20	3.39
N8T26	2.10
N8T95	1.35
N8T96	1.35
N8T97	1.35
N8T98	1.35
81LS95	2.00
81LS97	2.00
1488	1.75
1489	1.75
D3205	4.20
D3207A	4.55
D3208A	14.20
D3211	10.00
B3222	9.75
B3242	10.15
D3245	5.60
C3404	6.75
PC408A	12.00
PC201A	6.75
MMS320	7.50
MMS369	1.90
TMS501	24.95
DM8130	2.30
DM8131	2.75
DM8833	2.50
DM8835	2.50
DM8837	1.75
MKS0240	20.00
MKS0250	15.00

## E-PROM BOARDS

MH B 18K (w/2708) KIT	\$99.50
MH 16T 16K (w/2716) KIT	\$99.50
MH 16 16K (w/2708) KIT	\$99.00
RAM-N-ROM 16K (w/2708) KIT	\$117.00
JG 816 (w/2708 w/ 2716) KIT	\$59.95
BARE BOARD	\$30.00

## TU-1

Convert T.V. set to Video Monitor.  
KIT ..... \$8.95

## STATIC RAM BOARDS

8K	
250ns ASSEMBLED & TESTED	\$189.95
450ns ASSEMBLED & TESTED	\$149.75
250ns KIT	\$169.95
450ns KIT	\$125.00
BARE BOARD	25.00
6800 ADAPTER to S-100 System KIT	\$12.95
16K	
250ns ASSEMBLED & TESTED	\$435.00
450ns ASSEMBLED & TESTED	\$380.00
450ns KIT	\$335.00
32K	
250ns ASSEMBLED & TESTED	\$850.00
450ns ASSEMBLED & TESTED	\$775.00
450ns KIT	\$675.00

On board Refresh power is provided with no wait states or cycle stealing required.  
\*BVDC 400MA DC -18VDC 400MA DC and 18VDC 30MA DC

## DYNAMIC RAM BOARDS

EXPANDABLE 32K	
8K (375ns) KIT	\$151.00
16K (375ns) KIT	\$259.00
24K (375ns) KIT	\$367.00
32K (375ns) KIT	\$425.00
EXPANDABLE 64K	
16K (375ns) KIT	\$281.00
32K (375ns) KIT	\$519.00
48K (375ns) KIT	\$757.00
64K (375ns) KIT	\$995.00

## MOTHER BOARD'S - S-100 Style

13 slot - w/front panel slot	
BARE BOARD	\$35.00
KIT	\$95.00
22 slot	\$149.95
ASSEMBLED & TESTED	

## THE PROM SETTER

WRITE & READ EPROM	
1702A - 2708 - 2716	
5204 - 6834	

- Plug directly into your ALTAIR IMSAI Computer. Includes Main Module Board and External EPROM Socket Unit.
- The EPROM Socket Unit is connected to the Computer through a 25 pin connector.
- Programming is accomplished by the Computer. Just load the Program to be Written on the EPROM into your Processor and let the Computer do the rest.
- Use Socket Unit to Read EPROM's Connected into your Computer.
- Software included.
- No external power supplies. Your's computer does it all.
- Doubles as an Eight Bit Parallel I/O.
- Manual included.

KIT	\$210.00
ASSEMBLED	\$375.00

## KIM-1

ASSEMBLED & TESTED	\$245.00
--------------------	----------

## MEMORY PLUS

for KIM-1	
8K RAM (21L02)	
8K EPROM	
ASSEMBLED & TESTED	\$245.00

## JADE Z80 KIT

with PROVISIONS for ONBOARD 2708 and POWER ON JUMP

\$135.00 EA. (2MHz)  
\$149.95 EA. (4MHz)

BARE BOARD \$35.00

## JADE Z80 "UPGRADE" KIT

Change your JADE Z80 to a 4MHz version with this simple kit.

only \$17.95 with trade \$49.95 purchase.

To trade, you must give your 2MHz Z80 chip and 8274 clock driver.

The "UPGRADE KIT" includes:  
Z80A chip, 1.8K resistor, 8274-4 clock driver, 20 pf. capacitor, 36MHz crystal.

COMPU/TIME CT 100

## COMPU/TIME CT 100

TIME & CALENDAR

Microprocessors need the power that a real-time clock can offer. Date and time becomes instantly available. COMPU/TIME does not have to be initialized every time the system is powered up. It possesses a crystal-controlled time base to obtain superior accuracy and has two settable counter functions. Time, date, and counters are set via software.

COMPUTATIONAL FUNCTION

Microprocessors need to be complemented by hardware arithmetics to free up memory pages dedicated to floating point routines and mathematical software. COMPU/TIME provides a 40 function calculator array so that algebraic, trigonometric, basic arithmetic problems can be solved without the need of developing sophisticated software.

Buy It Your Way

COMPU/TIME CT100	\$199	KIT	\$245	Assembled	
COMPU only	C101	\$169	KIT	\$189	Assembled
TIME only	T101	\$185	KIT	\$205	Assembled
COMPU/TIME PC Board only				\$80	

## JADE VIDEO INTERFACE KIT

FEATURES \$99.95

- S-100 Bus Compatible
- 32 or 64 Characters per line
- 16 lines
- Graphics (128 x 48 matrix)
- Parallel & Composite video
- On board low-power memory

Powerful software included for cursor, home, EOL, Scroll Graphics/Character, etc.

Upper case, lower case & Greek  
Black-on-white & white-on-black

## full ASCII PROFESSIONAL KEYBOARDS

Full 128 Character ASCII  
Te-Mode MOD Encoding  
MOS DI: TTL Compatible  
"wakeup" rollover  
Level and Pulse Strobe  
Shift and Alpha Lock  
Selectable Parity  
Positive or Negative Logic

MODEL	PRICE
756	\$75.95
756	64.95
702 Enclosure	29.95
710 Numeric Pad	9.95
756MF Mig. Frame	6.95

Model 756 (assembled) \$75.95  
Model 750K (kit) 64.95  
Model 702 Enclosure 29.95  
Model 710 Numeric Pad 9.95  
Model 756MF Mig. Frame 6.95

## CONNECTORS

DB - 25P	\$3.00
DB - 25S	\$4.00

COVER \$1.50

44 Pin - PC & EYE	\$1.95
44 Pin - WW	\$2.50
86 Pin - (6800) PC	\$5.00
86 Pin - (COSMAC ELF) PC	\$5.00
100 Pin - (Altair) PC	\$4.50
100 Pin - (Imesai) PC	\$3.75
100 Pin - (Imesai) WW	\$4.25

## JADE Computer Products

5351 West 144th Street  
LAWDALE, CALIFORNIA 90260  
(213) 679-3313

RETAIL STORE HOURS: Monday - Friday 9-7  
Saturday 9-5

Discounts available at OEM quantities ADD \$1.50 under 10 lbs. for shipping. California residents add 6% sales tax.

NEW CATALOG NOW AVAILABLE

## JADE REAL TIME CLOCK FOR S-100 BUS

- 1MHz Crystal Oscillator
- Two independent interrupts
- One interrupt uses 16 bit counter in 10 USEC steps
- Other interrupt is in decade steps from 100 USEC to 10 sec.
- Both software programmable
- Board can be selected by 128 device code pairs.
- Complete documentation includes software to display time of day.
- Double sided solder mask
- Silk screen parts layout

JG-RT ASSEMBLED & TESTED	\$179.95
JG-RT KIT	\$124.95
BARE BOARD with Manual	\$30.00

## TARBELL CASSETTE INTERFACE

- Plugs directly into your IMSAI or ALTAIR
- Fastest transfer rate - 187 (standard) to 540 bytes/second
- Extremely Reliable - Phase encoded (self-clocking)
- 4 Extra Status Lines, 4 Extra Control Lines
- 37 page manual included
- Device Code Selectable by DIP-switch
- Capable of Generating Kansas City tapes also
- No modification required on audio cassette recorder

JADE KIT	\$99.95	ASSEMBLED	\$175.00
*16 month warranty from JADE MANUAL \$4.00			

## JADE PARALLEL/SERIAL INTERFACE KIT

S-100 \$124.95 KIT

2 Serial Interfaces with RS232C interfaces or 1 Kansas City cassette interface.

Serial interfaces are crystal controlled. Selectable baud rates. Cassette works up to 1200 baud. 1 parallel port.

## DATA COMMUNICATIONS ADAPTER

80 103A Serial I/O and FSK modem for professional and hobby communications.

- Completely compatible with your IMSAI, ALTAIR, SOLL or other S-100 microcomputers.
- Frameworks of "MITS," "Processor Technology"
- Designed for use on the dial telephone or TWX networks, or 2wire dedicated lines, meets all FCC regulations when used with a CBT coupler.
- All digital modulation and demodulation with on board crystal clock and precision filter mean that NO ADJUSTMENTS ARE REQUIRED
- Bell 103 standard frequencies
- Automated dial (full) and answer
- Originate and answer mode
- 110 or 300 BPS speed select
- Complete self test capability
- Character length, stop bit, and parity
- 90 day warranty and full documentation

PRICES: BARE BOARD and Manual	\$49.95
Assembled (48 hr. burn in)	\$279.95
JG DCA KIT	\$159.95

## NUMBER CRUNCHER

The CT200 is a number-oriented microprocessor intended for use in those applications that require fast versatile mathematical solutions. THIS IS NOT A CALCULATOR CHIP. THERE ARE NO KEY DELAYS.

The CT200 has a unique architecture that is designed to be a TASK processing system within a system. This unique architecture will allow the CT200 to work and run with ANY S-100 BUS microprocessor system. It is completely compatible with Z80, 4MHz version also, 8080, 6800, 6502 microprocessor. A micro encoded instruction set allows programming in a calculator like language. The instruction set includes a full set of test and branch instructions. All decoding of S-100 bus signals (for select or control functions) is performed with strobed latches to eliminate the possibility of glitches.

PRICE: \$249.00
Includes - Manual, ASSEMBLED & TESTED.

## JADE Computer Products

5351 West 144th Street  
LAWDALE, CALIFORNIA 90260  
(213) 679-3313

RETAIL STORE HOURS: Monday - Friday 9-7  
Saturday 9-5

Discounts available at OEM quantities ADD \$1.50 under 10 lbs. for shipping. California residents add 6% sales tax.

NEW CATALOG NOW AVAILABLE

## COMPU/TIME CT 100

COMPU/TIME offers  
A Real Darn Clever Enhancement to users of  
IMSAI/ALTAIR  
Microprocessors

\$100 BUS COMPATIBLE

### TIME & CALENDAR

COMPU/TIME CT100	\$199 Kit	\$245 Assembled
COMPU only	C101 \$149 Kit	\$189 Assembled
TIME only	T102 \$165 Kit	\$205 Assembled
COMPU/TIME PC Board only		\$ 80

### MM16 EPROM

- Utilizing up to 16 2708 EPROMS
- S-100 Bus Computer Systems
- Memory capacity of 8K or 16K bytes by DIP
- 8K boundary addressing by DIP Switch
- 0 to 4 wait cycles by DIP Switch
- Data output address input lines fully buffered
- Hi-grade glass-epoxy with plated thru holes
- Epoxy solder masked

**\$99.00**

**PCS 8000A** — 3 1/2 Digit 8 Display  
New! 75 pin version with color & pm pin module  
Connects almost any  
for one with 381, 3817A  
or D-1817 assembly at  
\$5.00 each  
1 1/2" height, current  
limit circuit, 10 pins  
8, 9, and 10 pin 4 & 3  
which are 16 MA  
• Forward voltage drop  
CURRENT 25 mA 1.5 volts

**Vector**  
**SLIT-WRAP WIRE WRAP TOOL**  
• Slits and opens insulation exposing bare wire  
• No pre-cutting or pre-stripping  
• Comes complete with two 100 ft spools  
• #28 AWG wire  
Model P180 **\$24.50**

**Vector**  
**Plugboards 8800V**  
Universal Microcomputer/Processor plugboard use with S-100 bus complete with heat sink & hardware 5 1/2 x 10 x 1 1/2  
**\$19.95**

**CHANNEL F**  
• Freeze Action • Speed Option  
• Automatic time and scorekeeping  
• Battery free AC operation  
• Dual controls with B-way action  
• Built-in Pro Hockey and Tennis games  
• Easy hook-up on any B/W or Color TV  
• Factory warranty

**CHANNEL F**  
**\$129.95**

**ADJUSTABLE VIDEO ENHANCEMENT SYSTEM**  
• Freeze Action • Speed Option  
• Automatic time and scorekeeping  
• Battery free AC operation  
• Dual controls with B-way action  
• Built-in Pro Hockey and Tennis games  
• Easy hook-up on any B/W or Color TV  
• Factory warranty

**Channel F — additional cartridges — \$17.95 ea.**

0811 — Tic Tac Toe/Shooting Gallery	0815 — Spacewar! (2 players)	0813 — Backgammon (1 or 2 players)
0812 — Desert Fox Shooting Gallery	0818 — Magic Numbers (computer logic)	0814 — Spill (1 or 2 players)
	0819 — Drag strip (1 or 2 players)	0816 — Maze (2 players)
	0822 — Baseball (2 players)	

### D-SUB CONNECTORS

NO. PINS	PART NO.	PRICE	COVER PRICE
9	DE-9P	1.49	1.25
9	DE-9S	2.15	
15	DA-15P	2.11	1.50
15	DA-15S	3.10	
25	DB-25P	3.00	1.50
25	DB-25S	4.00	
37	DE-37P	4.14	2.00
37	DE-37S	6.00	
50	DD-50P	5.40	2.25
50	DD-50S	8.00	

### EDGE CONNECTORS

NO. PINS	TYPE	PRICE
20	DUAL 10 PIN	GOLD \$ 5.50
30	DUAL 15 PIN	GOLD 7.75
44	DUAL 22 PIN	GOLD 1.95
44	DUAL 22 PIN	GOLD 2.50
44	DUAL 22 PIN	GOLD 4.95
80	DUAL 40 PIN	GOLD 5.00
100	DUAL 50 PIN	GOLD (IMSAI/ALTAIR) 4.25
100	DUAL 50 PIN	GOLD (IMSAI/ALTAIR) 4.95
100	DUAL 50 PIN	GOLD (IMSAI/ALTAIR) 3.50
100	DUAL 50 PIN	TIN (1" SPACING) 3.25

### CLOCK CHIPS

MM5308	6 Digit BCD Outputs, Reset Pin	\$9.95
MM5311	8 Digit BCD Outputs, 12 or 24 Hour	4.95
MM5312	4 Digit BCD Outputs, 1 PPS Output	4.95
MM5314	8 Digit, 12 or 24 Hour, 50 or 60 Hz	4.95
MM5316	4 Digit Alarm 1 PPS Output	6.95
MM5318	Video Clock Chip For Use With MM5311	\$9.95
CT7801	8 Digit Calendar Alarm 12 or 24 Hour	5.95

### IC SOCKETS

Wire Wrap	1k	25-99	100-999	1k & Up
10	1.24	25.99	100.999	1k
14	39	36	32	26
16	36	33	31	29
18	36	34	32	30
20	70	80	54	40
28	88	75	67	55
32	95	80	72	59
36	98	84	77	63
38	1.08	1.25	1.08	83
40	1.36	1.40	1.20	80

## 7400 TTL Series

7400 18	7443 1.20	74100 1.75	74162 1.90
7401 20	7444 1.05	74102 1.40	74163 1.40
7402 20	7446 1.05	74109 4.5	74164 1.50
7403 20	7447 85	74110 80	74165 40
7404 20	7448 95	74116 2.00	74166 1.50
7405 25	7450 20	74120 3.5	74167 3.00
7406 25	7451 20	74121 3.5	74168 3.00
7407 35	7453 20	74122 4.5	74172 9.75
7408 25	7454 20	74123 9.5	74173 1.50
7409 25	7459 20	74125 5.5	74174 1.50
7410 20	7470 40	74126 60	74175 1.50
7411 25	7471 40	74127 60	74176 1.50
7412 40	7472 35	74132 1.50	74177 90
7413 75	7474 40	74136 1.80	24180 1.00
7414 10	7475 40	74137 1.15	74181 2.00
7415 35	7476 40	74142 4.00	74182 90
7416 40	7479 2.00	74144 4.00	74184 2.00
7417 20	7480 65	74145 65	74185 1.50
7422 15	7482 1.50	74147 2.50	74186 12.00
7426 30	7483 85	74148 1.75	74189 1.40
7427 35	7486 40	74151 1.10	74192 1.10
7428 40	7489 1.50	74153 1.10	74193 1.10
7429 40	7490 5.5	74154 1.10	74194 1.20
7430 25	7491 1.10	74155 1.10	74195 1.00
7432 40	7492 60	74156 1.10	74196 1.00
7433 40	7493 60	74157 1.20	74197 1.30
7434 30	7494 85	74158 1.75	74198 1.50
7436 35	7495 95	74159 2.60	74199 1.75
7439 36	7496 80	74160 1.30	
7440 20	7497 4.00	74161 1.30	
7441 20			
7442 50			

## CMOS

34001 20	4050 61	4517 8.50	MM74C133N 1.39
4000 25	4052 1.10	4519 1.65	MM74C134N 1.39
4001 25	4053 1.10	4519 1.65	MM74C135N 1.39
4002 25	4056 3.25	4521 3.25	MM74C137N 1.71
4003 25	4061 7.00	4522 1.75	MM74C138N 1.71
4004 25	4062 2.50	4523 3.00	MM74C139N 1.61
4007 48	4066 8.50	4528 1.75	MM74C200N 10.45
4010 18	4068 75	4583 1.45	MM74C217N 2.70
4012 25	4070 85	4584 75	MM74C901N 84
4013 60	4071 35		MM74C902N 84
4014 25	4072 35		MM74C903N 84
4015 25	4073 35		MM74C905N 11.20
4016 59	4075 35	MM74C00N 38	MM74C008N 84
4017 25	4076 1.95	MM74C02N 38	MM74C028N 84
4018 1.25	4077 47	MM74C10N 38	MM74C108N 84
4019 70	4078 35	MM74C20N 38	MM74C208N 84
4021 25	4081 35	MM74C40N 38	MM74C408N 84
4022 25	4085 1.35	MM74C47N 1.47	MM74C478N 4.19
4023 4.00	4086 1.45	MM74C478N 2.13	MM74C4788N 12.00
4025 35	4093 1.75	MM74C13N 84	MM74C138N 12.00
4026 2.25	4096 1.75	MM74C15N 84	MM74C158N 12.00
4027 60	4160 1.75	MM74C16N 84	MM74C168N 12.00
4028 1.25	4161 1.75	MM74C85N 7.00	MM74C858N 12.00
4029 1.50	4162 1.75	MM74C86N 9.99	MM74C868N 12.00
4030 60	4163 1.75	MM74C89N 3.22	MM74C898N 12.00
4032 2.00	4174 1.75	MM74C90N 3.22	MM74C908N 12.00
4033 2.00	4175 1.60	MM74C90N 3.22	MM74C908N 12.00
4034 1.50	4194 1.80	MM74C95N 1.61	MM74C958N 84
4035 1.60	4501 3.80	MM74C107N 1.89	MM74C1078N 84
4038 1.60	4502 1.75	MM74C150N 5.67	
4040 1.50	4503 1.15	MM74C151N 3.80	
4041 1.45	4506 7.00	MM74C154N 5.67	
4042 1.75	4507 1.00	MM74C156N 3.40	
4043 1.70	4508 4.00	MM74C157N 3.40	
4044 1.25	4510 1.75	MM74C161N 1.71	
4045 2.50	4512 2.00	MM74C162N 1.71	
4046 1.95	4517 1.50	MM74C163N 1.71	
4047 2.50	4514 4.75	MM74C164N 1.61	
4048 1.00	4515 1.75	MM74C165N 1.61	
4049 61	4516 1.75	MM74C165N 1.61	

## 74LS00

74LS00 29	74LS151 1.75	74LS244 2.60
74LS01 29	74LS152 1.75	74LS245 2.60
74LS02 29	74LS153 1.75	74LS246 2.60
74LS03 29	74LS154 1.75	74LS247 2.60
74LS04 29	74LS155 1.75	74LS248 1.71
74LS05 29	74LS156 1.75	74LS249 1.71
74LS06 29	74LS157 1.75	74LS250 1.71
74LS07 29	74LS158 1.75	74LS251 1.71
74LS08 29	74LS159 1.75	74LS252 1.71
74LS09 29	74LS160 1.75	74LS253 1.71
74LS10 29	74LS161 1.75	74LS254 1.71
74LS11 29	74LS162 1.75	74LS255 1.71
74LS12 29	74LS163 1.75	74LS256 1.71
74LS13 29	74LS164 1.75	74LS257 1.71
74LS14 29	74LS165 2.00	74LS258 1.71
74LS15 29	74LS166 2.00	74LS259 1.71
74LS16 29	74LS167 2.00	74LS260 1.71
74LS17 29	74LS168 2.00	74LS261 1.71
74LS18 29	74LS169 2.00	74LS262 1.71
74LS19 29	74LS170 4.00	74LS263 1.71
74LS20 29	74LS171 4.00	74LS264 1.71
74LS21 29	74LS172 4.00	74LS265 1.71
74LS22 29	74LS173 4.00	74LS266 1.71
74LS23 29	74LS174 1.87	74LS267 1.71
74LS24 29	74LS175 1.87	74LS268 1.71
74LS25 29	74LS176 1.87	74LS269 1.71
74LS26 29	74LS177 1.87	74LS270 1.71
74LS27 29	74LS178 1.87	74LS271 1.71
74LS28 29	74LS179 1.87	74LS272 1.71
74LS29 29	74LS180 1.87	74LS273 1.71
74LS30 29	74LS181 1.87	74LS274 1.71
74LS31 29	74LS182 1.87	74LS275 1.71
74LS32 29	74LS183 1.87	74LS276 1.71
74LS33 29	74LS184 1.87	74LS277 1.71
74LS34 29	74LS185 1.87	74LS278 1.71
74LS35 29	74LS186 1.87	74LS279 1.71
74LS36 29	74LS187 1.87	74LS280 1.71
74LS37 29	74LS188 1.87	74LS281 1.71
74LS38 29	74LS189 1.87	74LS282 1.71
74LS39 29	74LS190 1.87	74LS283 1.71
74LS40 29	74LS191 2.49	74LS284 1.71
74LS41 29	74LS192 2.49	74LS285 1.71
74LS42 29	74LS193 2.49	74LS286 1.71
74LS43 29	74LS194 2.49	74LS287 1.71
74LS44 29	74LS195 1.87	74LS288 1.71
74LS45 29	74LS196 1.87	74LS289 1.71
74LS46 29	74LS197 1.87	74LS290 1.71
74LS47 29	74LS198 1.87	74LS291 1.71
74LS48 29	74LS199 1.87	74LS292 1.71
74LS49 29	74LS200 1.87	74LS293 1.71
74LS50 29	74LS201 1.87	74LS294 1.71
74LS51 29	74LS202 1.87	74LS295 1.71
74LS52 29	74LS203 1.87	74LS296 1.71
74LS53 29	74LS204 1.87	74LS297 1.71
74LS54 29	74LS205 1.87	74LS298 1.71
74LS55 29	74LS206 1.87	74LS299 1.71
74LS56 29	74LS207 1.87	74LS300 1.71
74LS57 29	74LS208 1.87	74LS301 1.71
74LS58 29	74LS209 1.87	74LS302 1.71
74LS59 29	74LS210 1.87	74LS303 1.71
74LS60 29	74LS211 1.87	74LS304 1.71
74LS61 29	74LS212 1.87	74LS305 1.71
74LS62 29	74LS213 1.87	74LS306 1.71
74LS63 29	74LS214 1.87	74LS307 1.71
74LS64 29	74LS215 1.87	74LS308 1.71
74LS65 29	74LS216 1.87	74LS309 1.71
74LS66 29	74LS217 1.87	74LS310 1.71
74LS67 29	74LS218 1.87	74LS311 1.71
74LS68 29	74LS219 1.87	74LS312 1.71
74LS69 29	74LS220 1.87	74LS313 1.71
74LS70 29	74LS221 1.87	74LS314 1.71
74LS71 29	74LS222 1.87	74LS315 1.71
74LS72 29	74LS223 1.87	74LS316 1.71
74LS73 29	74LS224 1.87	74LS317 1.71
74LS74 29	74LS225 1.87	74LS318 1.71
74LS75 29	74LS226 1.87	74LS319 1.71
74LS76 29	74LS227 1.87	74LS320 1.71
74LS77 29	74LS228 1.87	74LS321 1.71
74LS78 29	74LS229 1.87	74LS322 1.71
74LS79 29	74LS230 1.87	74LS323 1.71
74LS80 29	74LS231 1.87	74LS324 1.71
74LS81 29	74LS232 1.87	74LS325 1.71
74LS82 29	74LS233 1.87	74LS326 1.71
74LS83 29	74LS234 1.87	74LS327 1.71
74LS84 29	74LS235 1.87	74LS328 1.71
74LS85 29	74LS236 1.87	74LS329 1.71
74LS86 29	74LS237 1.87	74LS330 1.71
74LS87 29	74LS238 1.87	74LS331 1.71
74LS88 29	74LS23	



# RADIO HUT

## 1-800-527-2304

Use Our Toll Free Watts Line  
For Master Charge and BankAmericard Orders



### Jumbo LED Car Clock Kit

FEATURES:  
A. Bowmar Jumbo .5 inch LED array.  
B. MOSTEK — 50250 — Super clock chip.  
C. On board precision crystal time base.  
D. 12 or 24 hour Real Time format.  
E. Perfect for cars, boats, vans, etc.  
F. PC board and all parts (less case) inc.  
Alarm option — \$1.50  
AC XFMR — \$1.50



**\$16.95**

### MUSICAL HORN

One tune supplied with each kit. Additional tunes — \$6.95 each. Special tunes available. Standard tunes now available: — Dixie — Eyes of Texas — On Wisconsin — Yankee Doodle Dandy — Notre Dame — Pink Panther — Aggie War Song — Anchors Away — Never on Sunday — Yellow Rose of Texas — Deep in the Heart of Texas — Boomer Sooner — Bridge over River Kwai.  
Special Design Assembled  
CAR & BOAT KIT HOME KIT Case \$3.50 & Tested  
34.95 29.95 Add \$10.00

### TELEPHONE RELAY

Assembled & Tested **\$29.95**

Automatically Starts & Stops Tape Recorders  
Surreptitious Interception of telephone conversation is a violation of Federal Law and this device is not intended for such use.

### 6 DIGIT ALARM CLOCK KIT

Features: Litronix dual 1/2" displays, Mostek 50250 super clock chip, single I.C. segment driver, SCR digit drivers. Kit includes all necessary parts (except case). Xfmr optional. Eliminate the hassle.  
AC XFMR — \$1.50 Case \$3.50

**\$12.95**



### NEW IMPROVED UNSCRAMBLER!

**\$25.00**

Punched and Printed Case

Plugs into earphone or external speaker of any Scanner or Monitor. Guaranteed to unscramble any 1085 call.

\* Easily tuned  
\* Full instruction included  
\* Drilled fiberglass P.C. Board  
\* One Hour Assembly

### 12V 1 AMP POWER SUPPLY

INPUT VOLTAGE 25V MAX. OUTPUT CURRENT 1 AMP MAX. LOAD REGULATION 50mV. OUTPUT VOLTAGE 12V. LINE REGULATION 0.01%. KIT CONTAINS ALL PARTS EXCEPT FOR LINE CORD AND TRANSFORMER.

**ONLY \$4.50**

### 7400 TTL DIGITAL CIRCUITS

7400	11	7442	47	7490	85	74156	89
7401	13	7443	59	7491	61	74157	55
7402	13	7444	59	7492	43	74160	55
7403	13	7447	68	7493	43	74161	65
7404	15	7448	71	7494	67	74163	65
7404L	29	7450	13	7495	67	74164	85
7404A	44	7451	13	7496	57	74165	89
7406	16	7453	13	74100	30	74174	85
7408	19	7460	19	74104	49	74175	85
7410	13	7470	27	74107	26	74180	85
7411	18	7472	25	74109	31	74181	93
7412	26	7473	29	74121	29	74182	68
7416	15	7474	29	74123	48	74191	96
7420	13	7475	47	74133	61	74193	81
7430	23	7476	31	74136	99	74193	81
7425	29	7480	31	745136	95	74194	81
7433	26	7481	55	74141	75	74195	69
7437	23	7482	27	74153	61	9310	95
7438	23	7483	67	74153	61	9601	35
7440	13	7485	89	74154	98	9104	35
7441	76	7489	125	74155	89		

### LINEARS

709	Operational Amplifier	25
710	Differential Comparators	40
711	Dual Differential Comp.	35
712	Half Adder	25
719	Stereo Pre-Amp by Fairchild 2:1	21
LM 301	Operational Amplifier	30
LM 307	Operational Amplifier	30
LM 308	Operational Amplifier	95
LM 309K	5Vamp Regulator	1.49
LM 710	Voltage Comparator	25
LM 311	Voltage Comparator	85
LM 318	Operational Amplifier	1.15
LM 723	Voltage Comparator	69
LM 324	Quad Operational Amplifier	1.20
LM 377	Dual Op Amp	1.60
LM 3900	Quad Op Amp	1.60
LM 741	Operational Amplifier	25
LM 748	Operational Amplifier	25
NE 553	Quad Timer	1.95
NE 555	Timer	40
NE 556	Dual Timer	1.25
NE 567	Tone Decoder	1.25
1458	Dual Op-Amp/Driver	35
75491	Quad Segment Driver	35
75492	Hex Digit Driver	35
3043	IF Amplifier	75
8038	Voltage Cont. Osc.	3.95

### MICROPROCESSOR SUPPORT CHIPS

8212	- I/O port	3.50
8214	- P.I.C.	12.95
8216	- Non Invert Bus	4.95
8224	- Clock Gen.	4.95
8226	- Invert Bus	3.95
PIC for Z-80		14.95
8228	Sys. Controller	8.20
8251	Prog. comm. Interface	10.95
8255	Prog. perp. interface	13.50
8820	Dual-Line Recv.	1.75
8830	Dual Line Dr.	1.75
2513	Char. Gen.	7.50
74LS138N	- 1/8 decoder	2.00
8137	Hex 74LS State Buffer	1.25
1488/1489	RS232	1.50
TR1602B	UART	3.95
TR1863	UART	8.50

### CLOCK & COUNTER CHIPS

MK50252	Clock Chip	\$4.99
MK50250	Alarm Clock	3.75
MK50380	Alarm Chip	2.95
FCM7010	Direct Drive Clock Chip	4.95
MK5005	4 Digit Counter w/Latch	8.50
MK5002	4 Digit Counter	8.95
MK50395	6 Digit UP/Down Counter	12.95
MK50397	6 Digit Elapsed Timer	8.95
CT5005	Calculator Chip w/Specs	1.25
MK5021	Cal. Chip w/Specs	2.50

SOCKET SPECIAL!  
28 PIN IC SOCKET  
5 FOR \$1  
WHEN PURCHASED  
W/ICLOCK IC

### HOUSE # TTL IC's

7400	10/10	Please specify	7437	6/10
7404	10/10		7438	6/10
7408	10/10	that you	74141	3/10
7420	10/10	are ordering	74153	3/10

### CRYSTALS

300 KHz	\$1.50
3.57945	1.25

### TRANSISTORS

INTERVAL DUAL TRANSISTORS  
Originally Cost \$3 each  
Similar to 2N913

GENERAL PURPOSE	POWER TRAN
2N 2905 PNP	4 \$1 115 W 200V NPN 95
2N 3904 NPN	6/61 TIP 29 (E967) NPN 4/51
2N 3906 PNP	6/51 TIP 30 (E929) PNP 4/51
2N 3392 PNP	25 \$1 TIP 31 P.C. Leads NPN 5/51
2N 4400 NPN	10 \$1 MJE 2370
2N 4402 PNP	10 \$1 2N 3055
EN 2222 NPN	8 \$1 T N 2217 by RCA
EN 2907 PNP	8 \$1 FET TIS 75 HOUSE # 5/31

### 74LS00 LOW POWER SCHOTTKY

74LS00	21	74LS47	73	74LS136	37	74LS258	71
74LS02	21	74LS51	26	74LS138	71	74LS260	26
74LS03	21	74LS54	26	74LS139	71	74LS266	26
74LS04	28	74LS56	26	74LS145	00	74LS279	55
74LS05	28	74LS73	35	74LS151	70	74LS290	75
74LS08	21	74LS74	35	74LS153	70	74LS293	61
74LS09	28	74LS76	49	74LS155	69	74LS295	95
74LS10	21	74LS82	73	74LS156	70	74LS298	95
74LS11	21	74LS85	135	74LS157	75	74LS365	55
74LS13	45	74LS86	36	74LS158	71	74LS366	55
74LS14	99	74LS89	55	74LS160	85	74LS367	55
74LS15	26	74LS92	55	74LS161	85	74LS368	55
74LS20	24	74LS93	55	74LS162	85	74LS390	175
74LS21	28	74LS99	38	74LS163	85	74LS393	145
74LS22	28	74LS112	38	74LS164	49	74LS670	230
74LS23	32	74LS114	38	74LS168	85	74LS192	95
74LS27	32	74LS116	38	74LS169	85	74LS193	95
74LS30	36	74LS122	49	74LS170	169	74LS194	95
74LS32	32	74LS124	99	74LS171	110	74LS195	85
74LS37	32	74LS125	49	74LS174	100	74LS196	85
74LS38	32	74LS126	47	74LS175	81	74LS197	85
74LS40	26	74LS132	79	74LS180	95	74LS251	85
74LS42	65	74LS133	35	74LS191	95	74LS252	71

### TTL SPECIAL!

9002/7400 10/10 00  
9003/7410 10/10 00  
9004/7420 10/10 00  
9006/7460 6/10 00  
9007/7430 10/10 00  
9009/7440 10/10 00  
9016/7404 8/10 00  
9024/74109 3/10 00  
9300/74155 3/10 00

9000 series parts  
Prime from ITT  
Pin for Pin  
compatible with  
7400 series

### ITT LED DRIVERS

ITT 501	Quad Seg. Dr	35
ITT 502	Hex Digit Dr	49
ITT 503	Quad Seg. Dr	49
ITT 506	Hex Digit Dr	49
ITT 508	8 Digit Dr	49
ITT 509	8 Seg. Dr	49
ITT 511	Quad Seg. Dr	59
ITT 514	8 Digit Dr	59

### FAIRCHILD RTL's

The most popular digital IC's ever Produced. Very hard to find!  
UL914 DUAL 2 INPUT NOR .99  
UL923 JK FLIP FLOP \$1.19

### PROMS

1702A	- 1K - 1.5us 3.95 or 10/35.
2708	- 8K Intel - 450ns 14.95
5204	- 4K 7.95
82S129	- 1K 2.50
2708S	- 8K sigmetrics 650ns 9.95

### DIODES

IN 4002	1 Amp 100 PIV	40/\$1
IN 4004	1 Amp 400V	15/\$1
IN 4007	1 Amp 1000V	10/\$1

### GERMANIUM DIODES

IN 574	\$8/\$1
IN 540	10/\$1

### ZENER DIODES

IN 746	3.3V 400M	4/\$1
IN 752	5.6V 400M	4/\$1
IN 1958	8.2V 400M	4/\$1
IN 5271	30V 500M	10/\$1
IN 5271	100V 500M	10/\$1
IN 5280	180V 500M	10/\$1

### HOUSE # ZENER

4.7V	500 MW	10/\$1
9.1V	500 MW	10/\$1
10V	1 Watt	8/\$1
15V	500 MW	10/\$1
22V	5 Watt	6/\$1

### SWITCHING DIODES

IN 4148/IN914	Long Leads	20/\$1
IN 4148/IN914	Cut Leads	40/\$1
IN 4148/IN914	PC Leads	100/\$2

### CMOS

CD4001	19	CD4017	95	CD4040	1.00	CD4071	19
CD4001	19	CD4018	95	CD4041	69	CD4081	19
CD4002	19	CD4019	19	CD4042	69	CD4087	35
CD4006	1.20	CD4020	97	CD4043	60		
CD4007	19	CD4021	97	CD4044	60	CD4510	1.00
CD4009	47	CD4022	73	CD4045	1.39	CD4512	1.00
CD4010	39	CD4023	19	CD4047	1.50	CD4516	79
CD4011	19	CD4024	75	CD4049	35	CD4518	1.10
CD4012	29	CD4025	19	CD4050	39	CD4520	69
CD4013	32	CD4027	85	CD4051	1.19	CD4528	85
CD4014	78	CD4028	85	CD4053	1.19	74C02	45
CD4015	78	CD4029	99	CD4056	1.15	74C04	32
CD4016	32	CD4030	35	CD4066	78	74C107	79

### SOCKETS

• 8 Pin Low Profile	20	• 18 Pin Low Profile	30
• 14 Pin Low Profile	22	• 28 Pin Low Profile	69
• 16 Pin Low Profile	25	• 40 Pin Low Profile	89

### Bowmar 4 Digit LED Readout Array

Full 1/2" Litronix Jumbo Dual Digit LED Displays  
4 JUMBO .50" DIGITS ON ONE STICK!  
WITH COLONS & AM/PM INDICATOR  
\$3.95  
DL 722 - C.C. DL 728 - C.C.  
DL 721 B.C.A. DL 727 - C.A.  
99c \$1.29

### UNMARKED 1702A EPROMS

3.50 Ea. or 10/\$32.00 LIMITED SUPPLY

### IMSAI SPECIAL

S-100 Connector \$3.95 Ea.

### CAPACITORS ELECTROLYTIC


AXIAL TYPE	5/51	RADIAL TYPE	10/\$1
20MFD 25V	5/51	47MFD 35V PC Leads	10/\$1
35MFD 25V	15/51	68MFD 25V PC Leads	8/51
500MFD 35V	5/51	330MFD 50V PC Leads	5/51
		1000MFD 35V PC Leads	4/51
		150 PF MICA 5%	10/51

### COMPUTER GRADE

1.900MFD 35VWDC (Mini)	3/52		
8.000MFD 15VWDC	95 cents each		
33.000MFD 40VWDC	\$4.00 Each		
TANTALUM	CERAMIC DISC		
1MFD 20VWDC PC Leads	15/51	88PF 50V	001MFD 50V
4.7MFD 10VWDC PC Leads	5/51	100PF 100V	.002MFD 200V
33MFD 10VWDC	6/51	150PF 50V	.01MFD 200V
22PF 10	10/51	220PF 50V	0.2MFD 200V
		330PF 50V	3.3PF 500V
		001MFD 500V	100PF 500V



# 8-TRACK TAPE DECK CHASSIS



AS-IS

# 850

RA-617

Reg. 990

- Stereo Play Back
- As-Is Needs Repairs
- Schematic Included
- Experimenter's Delight
- Size: 8" x 5" x 3 1/2"
- 117 VAC • Wt. 5 lbs.



## NI-CAD RECHARGEABLE "AA" BATTERY

- 1.2 Volt Rechargeable
- Made By 3 Famous Mfr's
- Ideal for Radios, Calculators & Similar Devices
- Rechargeable Over & Over

BA-341



TA-879

## 60 MINUTE BLANK CASSETTES

# 79c

- Less Than 1c Per Minute
- Ideal for Voice or Music

- CB Adapt. 117V to 6.75 & 9VDC. BA-159 ..... 3.99
- CB Gutter Mount Antenna. AA-929 ..... 6.99
- CB Trunk Mount Antenna. AA-999 ..... 5.99
- "Message Minder" Tape Recorder As-Is. RA-731 ..... 7.99
- 1800-Ft. Ampex Recording Tape. 7" Reel. TA-993 ..... 1.59
- 500' Hookup Wire Kit. WW-579 ..... 1.99
- Volume Controls. Pkg. of 12 Assorted VC-274 ..... 59c
- Capacitors. Low Voltage Elect. 50 Pct. CD-407 ..... 1.79
- Terminal Strps. Solder Type. 40 Assorted XM-501 ..... 69c
- Resistors. 100 Assorted Carton RR-077 ..... 79c
- 2" PM Speaker. 8-10 Ohm 2 for 1.00. SS-295 ..... 79c
- 8-Track Tape. 40 Minute TA-907 ..... 49c
- Earphones. 8 Ohm. Less Cord. Pkg. of 4. PH-405 ..... 49c
- 8" Poly Planar Speaker. Pair. SP-434 ..... 3.99 Pr.
- 12 Volt-12 Amp. Hour. Wet Cell Battery. BA-404 ..... 9.99
- Ceramic Capacitors. Pkg. of 100 CC-211 ..... 1.00
- RED LED. 2 Volt. 10mA. Pkg. of 5 PL-233 ..... 59c
- Black Light Bulb. XM-291 ..... 79c
- 4-Digit Mechanical Counter. XM-367 ..... 99c
- Digital Clock Movement. SW-876 ..... 2.99
- Camera Electric Eye. XM-767 ..... 1.99
- S.P.D.T. Mercury Switch. SW-586 ..... 59c
- Cassette Lapid Mike. 3.5mm Plug. MM-174 ..... 1.00
- 12 Volt DC Relay S.P.S.T., N.O. SW-854 ..... 59c
- 6 to 12 Volt DC Converter. 6V. Acc. On 12V. Batt. AU-297 ..... 4.99
- 117 Volt AC Relay S.P.D.T. 2 Amp. SW-641 ..... 99c
- 117 Volt AC Solenoid. 1/2" Travel. SW-872 ..... 59c
- TV Tuner Motor. 14 RPM. 120VAC. MO-392 ..... 1.59
- 3" Fan and 120VAC Motor. MO-416 ..... 2.49
- CDS Photo Cell. 1300 to 4 Meg. Ohm. TR-567 ..... 59c
- 20 Key Calculator Keyboard. KM-339 ..... 1.50
- Assorted Knobs. Kit of 25. KN-030 ..... 69c
- 3" 7 Seg. L.E.D. Comm. Anode. Green. XM-341 ..... 1.39
- 3" 7 Seg. L.E.D. Comm. Anode. Red. XM-370 ..... 1.39
- 100 MFD. Elect. Capacitor. 50 VDC. CC-216 ..... 59c
- 12K Ohm Globar Resistor. RS-241 ..... 59c
- Mini Poly-Styrene Caps. 500 pf @ 125V. Pkg. of 5. CC-234 ..... 59c
- Mini Poly-Styrene Caps. 1000 pf @ 125V. Pkg. 5. CC-235 ..... 59c
- Siphon Pump. Squeeze Action. XM-675 ..... 39c
- 2" Waterproof Speaker. 8 Ohms. SP-471 ..... 1.49
- 80-40-20 MFD @ 150V. Elect. Cap. CC-144 ..... 59c
- 100-150 MFD @ 150-50V. Elect. Cap. CC-213 ..... 59c
- 3VDC Buzzer. 1 1/2" Diameter. XM-756 ..... 59c
- Wire Terminal Lug. 50 Pcs. Solderless. XM-735 ..... 99c

OFFER GOOD ONLY IN THE CONTINENTAL U.S.



electronics  
260 S. Forge St.  
Dept. IE Akron, Ohio 44327

NAME \_\_\_\_\_  
ADDRESS \_\_\_\_\_  
CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

Qty. Stk. # Description Price Ea. Total

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

FREE  Please Send Catalog  Tax Postage TOTAL

# OUTSIDE OF JAPAN...

## NEW-TONE ELECTRONICS Has the Largest

### Inventory of Original Japanese Components

Anywhere!

PARTIAL LIST - CALL US FOR ALL YOUR DEVICE NEEDS

2SA49	49	2SB492	1.00	2SC775	1.90	2SC1628	1.10	40081	1.50	S6087A	3.80
2SA101	49	2SB495	.75	2SC776	2.50	2SC1669	1.25	40082	3.00	S6087B	3.80
2SA102	49	2SB507	1.40	2SC777	4.95	2SC1674	.49	AN136	2.90	STK011	7.50
2SA200	49	2SB511	1.50	2SC778	3.50	2SC1675	.49	AN214	3.35	STK015	6.50
2SA221	.79	2SB528	1.40	2SC781	2.50	2SC1678	2.00	AN239	6.50	STK025	12.50
2SA234	59	2SB536	1.50	2SC783	2.95	2SC1679	2.95	AN241	2.40	STK032	14.20
2SA353	69	2SB539A	4.70	2SC784	.49	2SC1684	.49	AN245	5.50	STK036	19.00
2SA377	1.89	2SB541	4.70	2SC785	.65	2SC1728	1.85	AN247	4.80	STK050	24.50
2SA387A	69	2SB554	8.00	2SC788	2.95	2SC1730	.95	AN271	3.20	STK056	11.35
2SA473	1.25	2SB561	6.00	2SC789	1.00	2SC1756	2.75	AN289	7.90	STK405	9.20
2SA483	2.79	2SB627	2.95	2SC790	1.50	2SC1750	1.60	AN315	3.50	STK415	8.50
2SA484	2.44			2SC793	2.50	2SC1816	3.50	AN331	5.40	STK433	9.25
2SA485	1.95	2SC32	1.35	2SC798	3.95	2SC1908	.49	AN343	3.90	STK435	9.50
2SA489	1.39	2SC116	3.00	2SC799	3.25	2SC1909	3.75	AN360	2.50	STK437	11.50
2SA495	60	2SC172	1.75	2SC815	5.5	2SC1957	1.00	AN380	7.50	STK439	11.60
2SA496	99	2SC206	2.50	2SC828	.49	2SC1964	3.95	BA302	2.50	TA7028M	3.50
2SA497	1.44	2SC237	1.75	2SC829	.49	2SC1969	4.70	BA511	3.00	TA7045M	3.25
2SA509	50	2SC281	50	2SC830	2.95	2SC1973	90	BA521	3.40	TA7051P	3.00
2SA525	1.95	2SC284	1.20	2SC838	50	2SC1974	3.50	C3001A	2.95	TA7054P	3.05
2SA537A	1.95	2SC287	1.25	2SC839	50	2SC1975	3.50	CX075B	2.95	TA7055P	3.00
2SA539	60	2SC291	3.95	2SC853	90	2SC2020	4.95	CX100D	8.50	TA7060P	1.40
2SA561	.48	2SC325	3.95	2SC866	5.00	2SC2027	6.00	CX101G	8.50	TA7061P	1.50
2SA562	.45	2SC367	.85	2SC867	6.00	2SC2028	.80	CX103D	8.50	TA7062P	1.50
2SA564	50	2SC371	49	2SC870	50	2SC2029	3.40	CX104A	8.50	TA7063P	1.50
2SA565	1.05	2SC372	49	2SC871	50	2SC2034	2.95	CX121A	7.50	TA7072	3.00
2SA566	3.20	2SC373	49	2SC900	50	2SC2074	2.50	CX130A	7.00	TA7074	2.90
2SA606	1.69	2SC374	49	2SC922	.69	2SC2075	4.00	CX148	11.70	TA7075	3.75
2SA624	99	2SC375	49	2SC929	.49	2SC2091	2.50	CX149A	14.00	TA7076	3.75
2SA628	.49	2SC380	49	2SC930	.49	2SC2092	3.25	DN834	1.50	TA7089	2.90
2SA634	1.00	2SC381	50	2SC938	95	2SC2098	3.90	DN835	1.60	TA7102P	5.80
2SA636	1.25	2SC382	55	2SC943	1.00	2SC2166	3.75	DN837	1.50	TA7106P	3.25
2SA640	.49	2SC384	60	2SC945	.49	2SD45	4.95	DN838	1.70	TA7120P	1.50
2SA643	.60	2SC385	70	2SC959	1.35	2SD68	.90	HA1151	3.20	TA7122	1.50
2SA659	.49	2SC386	70	2SC960	2.95	2SD72	.80	HA1157	4.20	TA7124	1.85
2SA663	4.75	2SC387	50	2SC984	.80	2SD77	1.50	HA1158	4.20	TA7146P	3.75
2SA666	.69	2SC394	49	2SC1000	.49	2SD81	3.95	HA1159	5.00	TA7148	3.90
2SA671	1.50	2SC403	49	2SC1013	95	2SD88	4.80	HA1199	3.25	TA7149P	3.90
2SA672	70	2SC454	50	2SC1014	95	2SD118	3.00	HA1202	2.20	TA7150P	3.75
2SA673	70	2SC458	49	2SC1017	1.20	2SD130	1.20	HA1306	4.90	TA7153	6.90
2SA678	65	2SC460	49	2SC1018	1.00	2SD170	1.50	HA1308	4.50	TA7167	6.20
2SA679	4.95	2SC461	49	2SC1030	2.80	2SD180	2.50	HA1312	3.40	TA7200P	3.50
2SA680	4.95	2SC478	80	2SC1034	5.60	2SD187	.40	HA1314	4.20	TA7201P	4.50
2SA682	1.49	2SC481	1.50	2SC1047	.59	2SD188	2.70	HA1316	3.50	TA7202	4.50
2SA683	60	2SC482	1.40	2SC1060	1.40	2SD201	4.50	HA1318	5.00	TA7203	4.25
2SA684	60	2SC484	2.60	2SC1061	1.25	2SD213	4.95	HA1322	4.20	TA7204	3.70
2SA695	60	2SC485	1.40	2SC1079	3.95	2SD217	3.80	HA1325	3.20	TA7205	3.60
2SA699	1.30	2SC486	1.50	2SC1080	3.95	2SD218	3.90	HA1334	4.95	TA7207	3.50
2SA699A	1.45	2SC493	3.50	2SC1096	80	2SD227	.48	HA1342	4.50	TA7208	3.50
2SA705	75	2SC494	4.50	2SC1098	1.00	2SD234	.85	HA1366	4.20	TA7209	3.80
2SA706	1.45	2SC495	85	2SC1114	4.92	2SD235	85	HA11112	8.90	TA7210	6.50
2SA715	1.35	2SC496	85	2SC1115	3.00	2SD257	3.50	HA11113	6.50	TB800	4.40
2SA719	59	2SC497	1.40	2SC1116	4.25	2SD261	1.00	HD3113	4.90	TB810DS	4.40
2SA720	59	2SC502	1.50	2SC1116A	4.75	2SD287	3.70	HD3127	7.80	TC4081P	1.75
2SA721	59	2SC503	1.75	2SC1124	1.20	2SD288	1.50	LA1201	4.25	TC5080P	5.80
2SA733	49	2SC504	1.75	2SC1162	1.00	2SD313	1.05	LA1240	3.30	TC5081P	3.60
2SA740	1.95	2SC509	75	2SC1166	.48	2SD314	1.50	LA1364	3.70	TC5082P	4.00
2SA745	4.50	2SC515	1.95	2SC1170B	4.95	2SD315	1.20	LA1366	4.25	TC9100P	8.50
2SA747	5.75	2SC517	3.60	2SC1172	5.25	2SD318	1.95	LA1369	4.25	TD3400P	1.55
2SA750	49	2SC535	55	2SC1173	.75	2SD325	.90	LA3155	2.25	TD3441P	5.10
2SA756	3.30	2SC536	49	2SC1175	.75	2SD330	1.50	LA3201	1.95	TM4312P	1.00
2SA758	5.60	2SC537	49	2SC1209	.75	2SD337	1.50	LA3301	3.40	UH1C001	6.50
2SA777	99	2SC538	60	2SC1211	.59	2SD356	1.00	LA3310	4.20	UH1C003	6.50
2SA816	70	2SC563	90	2SC1212	1.65	2SD358	1.10	LA3350	3.30	UH1C004	6.50
2SA839	1.95	2SC580	1.95	2SC1213	.59	2SD360	1.05	LA4000	7.50	UH1C005	6.50
		2SC608	5.95	2SC1226A	.85	2SD382	1.20	LA4030	5.40	UH1C006	6.50
2SB222	65	2SC609	5.95	2SC1237	4.00	2SD427	2.55	LA4031P	3.20	UPC16C	2.50
2SB54	49	2SC614	3.95	2SC1239	3.50	2SD525	1.50	LA4032P	4.20	UPC20C	3.75
2SB56	95	2SC619	6.5	2SC1306	3.50	2SCF6	1.25	LA4051P	3.20	UPC30C	3.75
2SB75	48	2SC620	.49	2SC1307	4.75	2SCF8	3.50	LA4101	3.20	UPC41C	2.80
2SB77	48	2SC627	2.95	2SC1308	5.75	2SF8	3.00	LA4201	3.25	UPC48C	3.95
2SB111	59	2SC632	60	2SC1312	.49	2SK19	1.25	LA4400	3.40	UPC157CA	2.50
2SB156	95	2SC634A	60	2SC1313	.49	2SK23A	1.00	LA4420	3.40	UPC554C	2.50
2SB172	60	2SC644	49	2SC1317	.49	2SK30A	.75	LAAD001	3.20	UPC555H	2.20
2SB175	60	2SC645	60	2SC1318	.49	2SK33	.90	LD3040	1.60	UPC563H2	8.00
2SB186	49	2SC674	60	2SC1327	.49	2SK34	.90	LD3120	2.40	UPC566H	1.25
2SB187	55	2SC680	2.60	2SC1330	1.35	2SK40	1.30	M5112	8.40	UPC573C	3.25
2SB202	1.50	2SC684	1.20	2SC1342	.49	2SK55	1.00	M5151PR	7.80	UPC575C	2.60
2SB227	2.95	2SC693	.49	2SC1344	.49	3SK22	2.20	M5152L	2.75	UPC576	3.25
2SB234	2.95	2SC696	1.75	2SC1347	.85	3SK22Y	2.20	M5192	4.80	UPC587C2	2.95
2SB235	7.95	2SC699	5.95	2SC1359	.65	3SK35	2.00	M5171L	2.00	UPC592H2	1.4

# PLANNING TO MOVE?

Let us know 8 weeks in advance so that you won't miss a single issue of **POPULAR ELECTRONICS**. Attach old label where indicated and print new address in space provided. Also include your mailing label whenever you write concerning your subscription. It helps us serve you promptly.

Write to: P.O. Box 2774, Boulder, CO 80322 giving the following information:

Change address only  Extend my subscription

**ENTER NEW SUBSCRIPTION**

1 year \$13.00  Payment enclosed (1 extra BONUS issue) Allow 30-60 days for delivery.  Bill me later

AFFIX OLD LABEL

If you have no label handy, print OLD address here.

Name \_\_\_\_\_ please print

Address \_\_\_\_\_ Apt. \_\_\_\_\_

City \_\_\_\_\_ Zip \_\_\_\_\_

State \_\_\_\_\_

NEW ADDRESS HERE 0224

Name \_\_\_\_\_ please print

Address \_\_\_\_\_ Apt. \_\_\_\_\_

City \_\_\_\_\_ Zip \_\_\_\_\_

State \_\_\_\_\_

Additional postage on foreign orders: add \$3 a year for Canada, \$5 a year for all other countries outside the U.S. and its possessions. Cash only on foreign orders, payable in U.S. currency.

**Same day shipment.** First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

## INTEGRATED CIRCUITS

74001TL	74LS00N	41	LM3090T-15	1.10	CD4511	94	2112-2	3.95
74004N	74LS03N	25	LM3090T-18	1.10	CD4515	23	2114	3.50
74004N	74LS03N	25	LM333H	1.40	CD4516	10	2116	2.95
74009N	74LS24N	41	LM333H	1.40	CD4517	10	2118	4.95
74101N	74LS123N	41	LM333H	1.40	CD4518	10	2119	4.95
74141N	74LS190N	51	LM333H	1.40	CD4519	10	2120	4.95
74201N	74LS201N	51	LM333H	1.40	CD4520	10	2121	4.95
74201N	74LS201N	51	LM333H	1.40	CD4521	10	2122	4.95
74201N	74LS201N	51	LM333H	1.40	CD4522	10	2123	4.95
74201N	74LS201N	51	LM333H	1.40	CD4523	10	2124	4.95
74201N	74LS201N	51	LM333H	1.40	CD4524	10	2125	4.95
74201N	74LS201N	51	LM333H	1.40	CD4525	10	2126	4.95
74201N	74LS201N	51	LM333H	1.40	CD4526	10	2127	4.95
74201N	74LS201N	51	LM333H	1.40	CD4527	10	2128	4.95
74201N	74LS201N	51	LM333H	1.40	CD4528	10	2129	4.95
74201N	74LS201N	51	LM333H	1.40	CD4529	10	2130	4.95
74201N	74LS201N	51	LM333H	1.40	CD4530	10	2131	4.95
74201N	74LS201N	51	LM333H	1.40	CD4531	10	2132	4.95
74201N	74LS201N	51	LM333H	1.40	CD4532	10	2133	4.95
74201N	74LS201N	51	LM333H	1.40	CD4533	10	2134	4.95
74201N	74LS201N	51	LM333H	1.40	CD4534	10	2135	4.95
74201N	74LS201N	51	LM333H	1.40	CD4535	10	2136	4.95
74201N	74LS201N	51	LM333H	1.40	CD4536	10	2137	4.95
74201N	74LS201N	51	LM333H	1.40	CD4537	10	2138	4.95
74201N	74LS201N	51	LM333H	1.40	CD4538	10	2139	4.95
74201N	74LS201N	51	LM333H	1.40	CD4539	10	2140	4.95
74201N	74LS201N	51	LM333H	1.40	CD4540	10	2141	4.95
74201N	74LS201N	51	LM333H	1.40	CD4541	10	2142	4.95
74201N	74LS201N	51	LM333H	1.40	CD4542	10	2143	4.95
74201N	74LS201N	51	LM333H	1.40	CD4543	10	2144	4.95
74201N	74LS201N	51	LM333H	1.40	CD4544	10	2145	4.95
74201N	74LS201N	51	LM333H	1.40	CD4545	10	2146	4.95
74201N	74LS201N	51	LM333H	1.40	CD4546	10	2147	4.95
74201N	74LS201N	51	LM333H	1.40	CD4547	10	2148	4.95
74201N	74LS201N	51	LM333H	1.40	CD4548	10	2149	4.95
74201N	74LS201N	51	LM333H	1.40	CD4549	10	2150	4.95
74201N	74LS201N	51	LM333H	1.40	CD4550	10	2151	4.95
74201N	74LS201N	51	LM333H	1.40	CD4551	10	2152	4.95
74201N	74LS201N	51	LM333H	1.40	CD4552	10	2153	4.95
74201N	74LS201N	51	LM333H	1.40	CD4553	10	2154	4.95
74201N	74LS201N	51	LM333H	1.40	CD4554	10	2155	4.95
74201N	74LS201N	51	LM333H	1.40	CD4555	10	2156	4.95
74201N	74LS201N	51	LM333H	1.40	CD4556	10	2157	4.95
74201N	74LS201N	51	LM333H	1.40	CD4557	10	2158	4.95
74201N	74LS201N	51	LM333H	1.40	CD4558	10	2159	4.95
74201N	74LS201N	51	LM333H	1.40	CD4559	10	2160	4.95
74201N	74LS201N	51	LM333H	1.40	CD4560	10	2161	4.95
74201N	74LS201N	51	LM333H	1.40	CD4561	10	2162	4.95
74201N	74LS201N	51	LM333H	1.40	CD4562	10	2163	4.95
74201N	74LS201N	51	LM333H	1.40	CD4563	10	2164	4.95
74201N	74LS201N	51	LM333H	1.40	CD4564	10	2165	4.95
74201N	74LS201N	51	LM333H	1.40	CD4565	10	2166	4.95
74201N	74LS201N	51	LM333H	1.40	CD4566	10	2167	4.95
74201N	74LS201N	51	LM333H	1.40	CD4567	10	2168	4.95
74201N	74LS201N	51	LM333H	1.40	CD4568	10	2169	4.95
74201N	74LS201N	51	LM333H	1.40	CD4569	10	2170	4.95
74201N	74LS201N	51	LM333H	1.40	CD4570	10	2171	4.95
74201N	74LS201N	51	LM333H	1.40	CD4571	10	2172	4.95
74201N	74LS201N	51	LM333H	1.40	CD4572	10	2173	4.95
74201N	74LS201N	51	LM333H	1.40	CD4573	10	2174	4.95
74201N	74LS201N	51	LM333H	1.40	CD4574	10	2175	4.95
74201N	74LS201N	51	LM333H	1.40	CD4575	10	2176	4.95
74201N	74LS201N	51	LM333H	1.40	CD4576	10	2177	4.95
74201N	74LS201N	51	LM333H	1.40	CD4577	10	2178	4.95
74201N	74LS201N	51	LM333H	1.40	CD4578	10	2179	4.95
74201N	74LS201N	51	LM333H	1.40	CD4579	10	2180	4.95
74201N	74LS201N	51	LM333H	1.40	CD4580	10	2181	4.95
74201N	74LS201N	51	LM333H	1.40	CD4581	10	2182	4.95
74201N	74LS201N	51	LM333H	1.40	CD4582	10	2183	4.95
74201N	74LS201N	51	LM333H	1.40	CD4583	10	2184	4.95
74201N	74LS201N	51	LM333H	1.40	CD4584	10	2185	4.95
74201N	74LS201N	51	LM333H	1.40	CD4585	10	2186	4.95
74201N	74LS201N	51	LM333H	1.40	CD4586	10	2187	4.95
74201N	74LS201N	51	LM333H	1.40	CD4587	10	2188	4.95
74201N	74LS201N	51	LM333H	1.40	CD4588	10	2189	4.95
74201N	74LS201N	51	LM333H	1.40	CD4589	10	2190	4.95
74201N	74LS201N	51	LM333H	1.40	CD4590	10	2191	4.95
74201N	74LS201N	51	LM333H	1.40	CD4591	10	2192	4.95
74201N	74LS201N	51	LM333H	1.40	CD4592	10	2193	4.95
74201N	74LS201N	51	LM333H	1.40	CD4593	10	2194	4.95
74201N	74LS201N	51	LM333H	1.40	CD4594	10	2195	4.95
74201N	74LS201N	51	LM333H	1.40	CD4595	10	2196	4.95
74201N	74LS201N	51	LM333H	1.40	CD4596	10	2197	4.95
74201N	74LS201N	51	LM333H	1.40	CD4597	10	2198	4.95
74201N	74LS201N	51	LM333H	1.40	CD4598	10	2199	4.95
74201N	74LS201N	51	LM333H	1.40	CD4599	10	2200	4.95

P.O. Box 4430C Santa Clara, CA 95054

For will call only: (408) 988-1640

2322 Walsh Ave.



**West ELECTRONICS**

CD4511	94	2112-2	3.95
CD4515	23	2114	3.50
CD4516	10	2116	2.95
CD4517	10	2118	4.95
CD4518	10	2119	4.95
CD4519	10	2120	4.95
CD4520	10	2121	4.95
CD4521	10	2122	4.95
CD4522	10	2123	4.95
CD4523	10	2124	4.95
CD4524	10	2125	4.95
CD4525	10	2126	4.95
CD4526	10	2127	4.95
CD4527	10	2128	4.95
CD4528	10	2129	4.95
CD4529	10	2130	4.95
CD4530	10	2131	4.95
CD4531	10	2132	4.95
CD4532	10	2133	4.95
CD4533	10	2134	4.95
CD4534	10	2135	4.95
CD4535	10	2136	4.95
CD4536	10	2137	4.95
CD4537	10	2138	4.95
CD4538	10	2139	4.95
CD4539	10	2140	4.95
CD4540	10	2141	4.95
CD4541	10	2142	4.95
CD4542	10	2143	4.95
CD4543	10	2144	4.95
CD4544	10	2145	4.95
CD4545	10	2146	4.95
CD4546	10	2147	4.95
CD4547	10	2148	4.95
CD4548	10	2149	4.95
CD4549	10	2150	4.95
CD4550	10	2151	4.95
CD4551	10	2152	4.95
CD4552	10	2153	4.95
CD4553	10	2154	4.95
CD4554	10	2155	4.95
CD4555	10	2156	4.95
CD4556	10	2157	4.95
CD4557	10	2158	4.95
CD4558	10	2159	4.95
CD4559	10	2160	4.95
CD4560	10	2161	4.95
CD4561	10	2162	4.95
CD4562	10	2163	4.95
CD4563	10	2164	4.95
CD4564	10	2165	4.95
CD4565	10	2166	4.95
CD4566	10	2167	4.95
CD4567	10	2168	4.95
CD4568	10	2169	4.95
CD4569	10	2170	4.95
CD4570	10	2171	4.95
CD4571	10	2172	4.95
CD4572	10	2173	4.95
CD4573	10	2174	4.95
CD4574	10	2175	4.95
CD4575	10	2176	4.95
CD4576	10	2177	4.95

manual, and parts source. Bill Stottlemeyer, Box A, Trezevant, TN 38258

Collins 51J-4, Collins 51-J, Hallicrafters 5X62. Operating manuals. Carl McCormick, Rt. 5, Box 403A, Shreveport, LA 71107.

Jackson Electrical Instrument, Co., model TVG2, television signal generator, sweep and marker tube type. Schematic and operating instructions. Box Grauch, 13946 Stroud St., Van Nuys, CA 91402.

Textronix type 512 oscilloscope. Schematic and manual. W.E. Schwartz, 2137 S. Wichita, Wichita, KS 67213.

Heathkit receiver model AR-3. Schematics and instruction manual. R.A. Sittler, 415 W. Governor Rd., Hershey, PA 17033.

Jackson model 637 dynamic output tube tester. Instruction manual, schematic and calibration data, parts list. Elco 615 adaptor (for tube tester). Any available information and/or complete unit. Capehart Panamuse model 19M3. Schematic, parts list, alignment information and/or any available information. William E. Paterson, 5006 Wilshusen Ave., Shrewsbury, St. Louis, MO 63119.

Waterman oscilloscope model S-11A. Need schematic diagram of unit. R.O. Liedtke, 973 Pool Ave., Vandalia, OH 45377.

Solar Exam-Eter model CF capacitor analyzer. Schematic and operating manual. Manuel Gonzalez, 911 Urban, Laredo, TX 78040.

Concord model MTC-15 closed circuit TV camera. Schematic and service information. Roland Jordan, 812 Young St., Selma, AL 36701.

Elan Industries, flame detector model FD22. Need hook-up diagram. C. Vorlicek, 25181 Treadwell Ave., Euclid, OH 44117.

Regency model DR-200 HI-20 vhf monitor radio. Operation manual and schematic. John Rudick, 330 Gallivan Blvd., Dorchester, MA 02124.

Knight-Kit R100 shortwave receiver. Need oscilloscope and r-f coils. G. Lenarz, 1424 165th Ave., San Leandro, CA 94578.

Hewlett-Packard oscilloscope model 150A. Operation manual. R. Maslow, 100 Richard St., West Haven, CT 06516.

Hallicrafters HT-32A amateur transmitter. Need transmitter and manual. Lance Stronk, 27 Ralph Rd., Bethany, CT 06525.

Dumont oscilloscope model 401B. Schematic. A. Reges, 16W761 White Pines, Bensenville, IL 60106.

Ballantine 320/S-Z true-rms voltmeter. Schematic, manual. John Pearsall, 225 S.W. Whitaker, Portland, OR 97201.

Radio Mfg. Engineers model RME-84 AM/shortwave receiver. Operator's manual and any other information. Dale Pomerantz, 5941 Franmar Circle, Huntington Beach, CA 92649.

Triumph 830 oscilloscope. Schematic. S. Goldhor, 1014 B St., Hayward, CA 94541.

Dumont oscilloscope model 164E, serial #3316. Manual and schematics. Frank Smith, 33 Westminster Ave., Arlington, MA 02174.

Hycon color-bar-dot generator model 616. Operating manual and schematic. Robert Vigil, 2760 Corabel Ln., #57, Sacramento, CA 95821.

Friden electronic calculator model 130. Schematic, parts list, service information. P.J. Mischkot, 2510 Turtlecreek Dr., Sherman, TX 75090.

Dokorder 9020V open-reel recorder. Schematic, parts source for plug-in or remote-control unit. Ron Garrison, Box 891, Hot Springs, SD 57747.

Friden electronic calculator model 130. Manual and schematic. Lester Viles, 21255 Bon Huer St., St. Clair, MI 48081.

Magnavox electrostatic headphone power supply, model 1A9217. Ken Mossman #3 1205 Bay Victoria, B.C. Canada V8T1S7.

RCA receiver made for Royal Canadian Air Force. Model GR-10. Manuals and any other information. Chris Pallen, 67 Gables Ct., Beaconsville, Quebec, Canada. H9W-5H3.

Linear System mobile power supply for KWM-2 model century 400. Robert B. Monteith WHDB/4, 307 Sunset Blvd., Melbourne Beach FL 32951.

Hallicrafters model CR-3000 stereo and shortwave receiver. Schematic. N. Sabo, Avenue Du Domaine, 67 Brussels, Belgium.

RCA Superheterodyne model BT-42. Manual, schematic and voltage requirements. John Jones, 1030 Wood Eden Dr., Kingsport, TN 37660.

Sony model M-5-24 solid-state TV. Schematic diagram. Ben Marlo Suarez, 135-D Lopez Jaena Street, La Paz, Iloilo City, Philippines.

Hallicrafters model SBT-20 SSB/CW transceiver. Manual or schematic. Ralph Irish, Box 122, Uto, MI 48087.

Gonset Communicator II, 2-meter vhf, vhf power amplifier model 3063. Schematic and instruction manual. Richard Dawson, 1308-F St., The Dales, OR 97058.

McMurdo Silver signal generator model 906. Manual and schematic. H.W. Brown, K1TQ, 1015 Concord Circle, Hadonfield, NJ 08033.

Knight model 83YZ-144 oscilloscope. Operating and servicing instruction. Samuel J. Benveniste, 434 Briarwood Pl., Highland Park, IL 60035.

Baylor radio model SD15-6. Schematic. Roosevelt Jones, Route 4, Box 139, Huntsville, TX 77340.

Zenith Radio Corp. multi-band AM radio receiver. Chicago Coin "Home Run" pinball machine. Schematics and parts lists. Chuck O'Connor, Box 264, Santa Clara, CA 95052

Teleguipment model SG-1 Canadian signal generator. Jackson tube tester model 648A. Manuals and schematics. S. Lear, Box 566, Pomoho Capreol, Ontario, Canada.

Superior Instrument Co., model 670-A. Parts list, schematic and operating manual. Roy P. Swanger, 104 Valley Dr., Bridgeport, CT.



# EDLIE TUBE BONANZA

**BUY BRAND NEW MANUFACTURER'S  
BOXED TUBES (Raytheon, Dumont, IEC  
Mullard, GE, Elmenco, etc.)  
AT 70% OFF LIST!**

**1 YEAR MFRS. GUARANTEE**

Terms: Minimum order \$10.00. Include postage.  
Either full payment with order or 30% deposit,  
balance C.O.D. F.O.B. Levittown, N.Y.

12AT6	1.43	17J28	2.04
12AT7	1.65	17KV6	3.50
12AU6	1.64	19CG3	1.89
12AU7	1.47	20AQ3	1.71
12AV6	1.41	20LF6	3.96
12AV7	2.21	21GY5	2.45
12AX7	1.52	21HB5	2.36
12AZ7	1.97	21JS6	4.32
12BE6	1.40	21JZ6	2.54
12BE6	1.26	21LR8	2.39
12BF11	2.85	21LU8	2.39
12BH7	1.92	22JF6	3.20
12BY7	1.71	22JR6	3.41
12BZ6	2.40	23Z9	2.58
12DQ6	2.61	24J6	3.84
12DQ8	1.77	25C5	1.85
12DW7	1.75	25CG3	1.67
12FX5	1.61	25EH5	1.71
12GE5	2.42	26HU5	4.40
12GN7	2.70	27	5.40
12HL7	2.34	27GB5	1.67
12JB6	3.12	30AE3	1.86
12MD8	2.27	31JS6	3.48
12SK7	4.75	31LZ6	4.07
12SQ7	4.75	33GY7	3.11
12T10	2.81	34CE3	1.92
13FM7	1.97	35C5	1.47
13J10	3.08	35L6	2.27
13BL11	3.54	35LR6	3.69
14BR11	2.90	35W4	1.22
15BD11	2.70	35Z5	1.64
15CW5	1.71	36KD6	4.04
15DQ8	1.92	38HE7	3.53
15KY8	3.50	38KH7	3.53
15MF8	2.72	42KN6	3.38
16A8	2.49	50B5	1.41
167L8	3.59	50C5	1.47
17AY3	1.82	50L6	2.22
17BE3	1.82	80	2.10
17BFU	2.88	62E7	1.58
17BR3	1.64	69T3	2.33
17BW3	1.64	70Z5	1.52
17CT3	1.67	7189	1.97
17DW4	1.82	7199	2.63
17EW8	1.28	7247	1.85
17JB6	2.73	7408	1.92
17JM6	2.91	7543	1.64
17JN6	2.63	7581	3.42
		7591	2.51



**DE102 ANOTHER EDLIE SUPER TAPE SPECIAL JUST ARRIVED. A TRAILER LOAD OF OVER 50,000 REELS OF 1800 FT. QUALITY TAPE.** Made by Scotch, Ampex or Soundcraft. These tapes come on 7" reels regular. They were bought surplus and are of excellent grade.

79c ea.; 3 reels for 2.25  
6 reels for \$3.99;  
100 for \$59.95



**#20 WIRE STRANDED.** Red, White, Grey, Off-White (Clear), Orange, Black with White. Please Specify Color Desired.

100 ft. rolls.  
Price only \$1 per roll  
10 rolls assorted  
Price only \$8.95

**WRITE FOR FREE  
VALUE PACKED CATALOG**

**EDLIE ELECTRONICS, INC. 2700-AP HEMPSTEAD TPKE, LEVITTOWN, N.Y. 11756**

# INTEGRATED ELECTRONICS

540 Weddell Drive, #4, Sunnyvale, CA 94086 (408)734-8470

CMOS	74C08	65	7427	.35	74161	1.00	8973	2.95	8334	4.00
	74C10	25	7430	.15	74163	1.30	8974	2.95	8553	6.50
4000	74C14	1.75	7432	.30	74164	1.45	8976	2.95	8556	3.25
4001	74C20	26	7437	.44	74165	1.35	75107	3.25	8599	3.25
4002	74C30	26	7440	.18	74166	1.20	75450	1.00		
4007	74C32	30	7442	1.00	74173	1.70	75451	.80		
4010	74C42	1.40	7445	.70	74175	1.05	75452	.80	LINEAR	
4011	74C48	2.75	7446	.70	74177	.90	75453	.80	301N	.35
4012	74C73	1.25	7448	.70	74182	.95	75491	1.25	307N	.35
4013	74C74	1.75	7450	.25	74191	1.20	75492	1.40	308M	1.00
4014	74C86	1.00	7451	.25	74192	1.45	75494	1.50	309K	1.25
4015	74C90	1.10	7453	.25	74193	1.35			309H	1.00
4016	74C93	1.25	7454	.35	74195	1.00	8212	3.50	320H-5	.88
4017	74C121	1.75	7460	.22	74196	1.10	8214	8.50	320T-5	1.25
4018	74C154	3.00	7472	.40	74197	1.10	8216	3.75	320T-12	1.25
4019	74C157	2.10	7473	.40	74199	2.25	8224	4.75	324N	1.75
4020	74C160	1.40	7474	.40	74367	.90	8228	9.90	340T-5	1.25
4022	74C162	1.70	7475	.55			8251	11.50	340T-12	1.25
4023	74C164	1.75	7476	.45	Interface		8025	3.50	340T-15	1.25
4024	74C165	1.75	7483	1.05	0025	3.50	8255	10.50	340T-24	1.25
4025	74C174	1.50	7485	1.10	0026	1.75	2513	9.50	387N	1.25
4027	74C902	85	7486	1.40	8640	1.25	2516	9.50	388N	1.15
4028	74C904	85	7489	2.00	8641	2.75	1013	6.50	555N	.35
4029	74C905	3.00	7492	.75	8806	3.00			556N	.85
4030	74C914	1.95	7493	.65	8819	1.25	8720	3.25	558N	2.80
4035			7495	.78	8820	5.00	8092	1.75	561N	5.00
4040	TTL		7496	.85	8830	4.90	8092	.95	566N	1.70
4041	7400	.16	74121	.35	8833	2.45	8094	.60	567N	1.65
4042	7401	.17	74122	.49	8835	2.45	8095	.80	709N	.30
4044	7403	.17	74123	.65	8836	1.25	8095	.80	709N	.30
4049	7404	.19	74126	.65	8837	2.45	8096	.90	741H	2.5
4051	7406	.40	74132	1.25	8838	2.45	8098	.90	3035	2.40
4066	7407	.40	74141	1.15	8859	1.50	8121	2.25	3401	1.25
4068	7409	.25	74145	1.10	8865	1.50	8136	3.25		
4069	7410	.18	74148	1.20	8866	1.50	8220	1.25	74LSxx	.25
4075	7413	.78	74150	.90	8867	1.95	8231	2.75		
4082	7414	.68	74153	1.10	8869	1.75	8242	1.75	74LS00	.25
74C00	7417	.38	74154	1.25	8879	2.25	8250	1.75		
74C02	7420	.18	74155	.75	8880	2.75	8260	2.25		
74C04	7421	.35	74157	1.00	8884	2.45	8281	1.00	74LS670	3.95

\* For more 74LSxx, refer to our ad in the June issue of this magazine. If what you need is not listed, ask for it. Send self-addressed stamped envelope.

SPECIAL - 21L02/450ns (1.50/10up; 1.35/50up; 1.25/100up)  
 ±3 Digit A/D LD130 \$5.50  
 MM5865 Universal Timer \$7.50


Minimum order \$5.00 US currency. Check or money order only. Add 5% to cover shipping and handling charges. Calif. residents add 6% sales tax. Santa Clara County residents add 6.5% sales tax.

## RADAR Detector

### HAWKEYE RADAR DETECTOR

This all-new radar detector gives you a very early audio/visual warning... as much as 3 miles from the radar source. Detects all X-band radar, around corners, over hills, etc. Smartly styled unit mounts atop dashboard in a special quick-release bracket, so that it may be removed while auto is left unattended. 12VDC operation, comes complete with cigarette lighter adapter; just plug it in and you're ready to go! Original price for the detector was \$79.95... now priced at a super-low B&F price of only \$28.88! Sh. Wt. 3 oz.

#8K30262... \$28.88 each



Visual Signal  
Audio Signal  
Quick remove screws  
Adjustable Mount  
Selector Switch  
Lighter Adapter

## SPEAKER KITS

These unique systems were designed for direct dispersion of the high frequencies and wide dispersion of the low tones. Cabinet measures 17 x 10 1/2 x 9 1/2" deep. Kit includes: 2 cabinets; 2-8" woofers; 2-4" dome tweeters; crossovers; grill cloth & instructions. Assembled systems deliver freq. resp. of 30 to 20,000 Hz. Buy the complete kit or just the cabinets!

COMPLETE KIT Order No. 72U70242  
 Sh. Wt. 35 Lbs. .... \$49.50/pair  
 CABINETS Only ..... 70B70200  
 Sh. Wt. 25 Lbs. .... \$25.00/pair




## Video Monitor

Used checked-out monitors outfitted with brand new 12" CRT. Solid state monitors will display 80 characters x 16 lines. Std. comp. video signal input, SO-239 connector. 115VAC. Qty. Ltd. Great for your CCTV or Micro Computer!

Sh. Wt. 40 Lbs. .... \$A30200... \$98.88 each

12" DIAGONAL  
 NEW CRT INSTALLED  
 RECONDITIONED



## VIDEO GAME PARTS

A complete video game except the TV interface. Includes: 2 joystick controls; 12V @ 200ma xformer; two 7-segment 0.5" LED displays; LS and CD CMOS chips; 555 timers; 2" 8 ohm speaker; 3-panel 12V regulator; large control panel & case, & more! Wt. 5 Lbs.

#8GV80028... \$7.88

Use Your BA-MC or AE for telephone orders. No C.O.D.'s please.  
 Please add POSTAGE - UPS or Parc. Post.

Send orders to:  
**B&F ENTERPRISES**  
 Dept. "P-8"  
 119 Foster Street  
 Peabody, MA. 01960  
 (617) 531-5774

WHERE SURPLUS REIGNS SUPREME

CIRCLE NO 19 ON FREE INFORMATION CARD

CIRCLE READER SERVICE CARD FOR FREE JUMBO CATALOG CIRCLE NO 4 ON FREE INFORMATION CARD

# FORDHAM BEST BUYS

### BK PRECISION 3 1/2-Digit Portable DMM

- Overhead Protected • Battery or AC operation • 3" high LED Display
- Auto Zeroing

Model 2800  
 comes complete with test leads, operating manual and spare fuses  
**\$85**

### TECO 3 1/2 Digit DMM

- Flashing Over-Range Indicator
- Auto Polarity • Overload Protected

Model 270 wired Rev. 580.00  
**Kit \$65.00**

### Weller Xcelite

Service Master Attache Style Tool Kit  
 Model 99SM  
**\$39.95**

Tool Cases  
 MODEL TC-100/ST  
 Reg. \$283.00  
**\$239.50**

Roll Kit  
 Model 99PR  
**\$13.95**

### WAHL NEW ISO-TIP "Quick Charge"

12 units \$27.95  
 3 or more \$26.95

- Model 7500 Cordless Soldering Iron \$17.95
- Model 5800 Thermal Spot Circuit Tester \$22.50

### NLS 15 MHz Mini Oscilloscope

Model MS-15  
**\$246.50**

- Battery or line operation
- Automatic and line sync modes
- Power consumption less than 15 W
- Vertical Gain 0.01 to 50 volts/div - 12 setting
- External or internal trigger

NOW AVAILABLE MS-215 Reg. \$395.00  
 (Dual Trace Version of MS-15) **\$349.95**

### RCA Color Generator

Model 99SM  
 Reg. \$89.50  
**\$59.95**

Model WR 508

### ESE QT Sockets & Bus Strips

QT Type	#Holes	Price
QT-595	590	12.50
QT-598	bus strip	2.50
QT-475	470	10.00
QT-478	bus strip	2.25
QT-355	350	8.50
QT-358	bus strip	2.00
QT-185	180	4.75
QT-125	120	3.75
QT-85	80	3.25
QT-75	70	3.00

### BSR Record Changer

Model BSR-129  
**\$24.95**

### ESE Logic Probe

Model LP-1  
**\$40.00** complete

- Compact, circuit powered
- Multi-family compatibility DTL/TTL/HTL/CMOS
- Detects pulses as short as 50 nSec

### LEADER Instruments Corp. 20 MHz. Dual Trace

Model LBO-508  
 Reg. \$769.95  
**\$615.95** with accessories

- Add, subtract modes on CH 1 & CH 2
- Front panel X-Y operation
- 17.5 nSec. rise time

### Econo-Lamp

Colors: Red, yellow, blue, black, oyster white U.L. listed  
 Model XL-334A **\$14.95**

### The Hobby Wrap Wire Wrapping Tool

Battery Operated (not included)  
 • Wraps 30 AWG wire onto std DIP sockets (L25-1)  
 • Complete with built-in bit and sleeve  
 Model BW-630 **\$32.00**

### Voltage Spike Protector

Limits voltage transients that might damage equipment. Plugs into any 120 volt grounded AC  
 Model GESP-752  
**\$7.95**

### Vector Complete line available

520 MHz Frequency Counter  
 Model 1850  
 Reg. \$450.00  
**\$382.50**

### Magnifier LAMP

Model MG 10A  
**\$42.50**

700 Series Precision ground and polished magnification lens. Uses 22W T-9 Circline fluorescent.  
**\$17.95** with mirrored scale.

Call TOLL FREE (800) 645-9518  
 For N.Y. State call (516) 752-0050  
 Before you buy test equipment - any make or model - check our prices  
 Master Charge, BankAmericard & C.O.D.'s accepted

## FORDHAM

855 Conklin St. Farmingdale, N.Y. 11735  
 New York State residents add approx sales tax  
 Add \$3.00 for shipping and insurance (continental USA only)

CIRCLE NO. 16 ON FREE INFORMATION CARD

# Introducing Prime 4000 Series CMOS At Lowest Prices Anywhere

In our continuous effort to offer you all your components' needs, at lowest possible prices, this selection of these devices, offered anywhere, as usual, we guarantee that these and every other month we are introducing 4000-Series CMOS ICs. Besides this being one of the most complete item purchased from us, to be of Prime, First-Run quality with full manufacturers' markings.

74xx TTL		74LSxx TTL		74Sxx TTL		74Cxx TTL		4xxx CMOS	
7400	\$.04	7400	\$.04	7400	\$.04	7400	\$.04	4000	\$.16
7401	\$.15	7401	\$.15	7401	\$.15	7401	\$.15	4001	\$.16
7402	\$.15	7402	\$.15	7402	\$.15	7402	\$.15	4002	\$.16
7403	\$.15	7403	\$.15	7403	\$.15	7403	\$.15	4006	\$.85
7404	\$.16	7404	\$.16	7404	\$.16	7404	\$.16		
7405	\$.16	7405	\$.16	7405	\$.16	7405	\$.16		
7406	\$.24	7406	\$.24	7406	\$.24	7406	\$.24		
7407	\$.24	7407	\$.24	7407	\$.24	7407	\$.24		
7408	\$.17	7408	\$.17	7408	\$.17	7408	\$.17		
7409	\$.17	7409	\$.17	7409	\$.17	7409	\$.17		
7410	\$.15	7410	\$.15	7410	\$.15	7410	\$.15		
7411	\$.18	7411	\$.18	7411	\$.18	7411	\$.18		
7412	\$.20	7412	\$.20	7412	\$.20	7412	\$.20		
7413	\$.25	7413	\$.25	7413	\$.25	7413	\$.25		
7414	\$.55	7414	\$.55	7414	\$.55	7414	\$.55		
7416	\$.22	7416	\$.22	7416	\$.22	7416	\$.22		
7420	\$.15	7420	\$.15	7420	\$.15	7420	\$.15		
7421	\$.17	7421	\$.17	7421	\$.17	7421	\$.17		
7423	\$.25	7423	\$.25	7423	\$.25	7423	\$.25		
7424	\$.25	7424	\$.25	7424	\$.25	7424	\$.25		
7426	\$.22	7426	\$.22	7426	\$.22	7426	\$.22		
7427	\$.19	7427	\$.19	7427	\$.19	7427	\$.19		
7430	\$.15	7430	\$.15	7430	\$.15	7430	\$.15		
7432	\$.23	7432	\$.23	7432	\$.23	7432	\$.23		
7437	\$.21	7437	\$.21	7437	\$.21	7437	\$.21		
7438	\$.21	7438	\$.21	7438	\$.21	7438	\$.21		
7439	\$.25	7439	\$.25	7439	\$.25	7439	\$.25		
7440	\$.15	7440	\$.15	7440	\$.15	7440	\$.15		
7441	\$.70	7441	\$.70	7441	\$.70	7441	\$.70		
7442	\$.38	7442	\$.38	7442	\$.38	7442	\$.38		
7443	\$.55	7443	\$.55	7443	\$.55	7443	\$.55		
7444	\$.55	7444	\$.55	7444	\$.55	7444	\$.55		
7446	\$.62	7446	\$.62	7446	\$.62	7446	\$.62		
7447	\$.57	7447	\$.57	7447	\$.57	7447	\$.57		
7448	\$.60	7448	\$.60	7448	\$.60	7448	\$.60		
7450	\$.15	7450	\$.15	7450	\$.15	7450	\$.15		
7451	\$.15	7451	\$.15	7451	\$.15	7451	\$.15		
7453	\$.15	7453	\$.15	7453	\$.15	7453	\$.15		
7454	\$.15	7454	\$.15	7454	\$.15	7454	\$.15		
7459	\$.15	7459	\$.15	7459	\$.15	7459	\$.15		
7460	\$.15	7460	\$.15	7460	\$.15	7460	\$.15		
7470	\$.27	7470	\$.27	7470	\$.27	7470	\$.27		
7472	\$.24	7472	\$.24	7472	\$.24	7472	\$.24		
7474	\$.24	7474	\$.24	7474	\$.24	7474	\$.24		
7475	\$.45	7475	\$.45	7475	\$.45	7475	\$.45		
7476	\$.29	7476	\$.29	7476	\$.29	7476	\$.29		

### VOLUME DISCOUNT SCHEDULE

Merchandise Total	Discount
\$ 0.00 - \$ 9.99	NET
\$ 10.00 - \$ 24.99	LESS 5%
\$ 25.00 - \$ 99.99	LESS 10%
\$ 100.00 - \$ 499.99	LESS 15%
\$ 500.00 - \$ 999.99	LESS 20%
\$ 1000.00 and Up	LESS 25%

### STANDARD SHIPPING CHARGES

If your Merchandise Total is between:

\$ 0.00 - \$ 4.99	add \$2.00
\$ 5.00 - \$24.99	add \$1.00
\$ 25.00 - \$49.99	add \$0.75
\$ 50.00 - \$99.99	add \$0.50
\$100 and Up	NO CHARGE

The above charges include shipping via First Class Mail or UPS (your choice), and insurance on all domestic shipments.

### SPECIAL SHIPPING CHARGES

COD	\$1.00-additional
UPS Blue	\$1.00-additional
Postal Insurance	\$1.00-additional
Special Delivery	\$1.25-additional

## INTERNATIONAL COMPONENTS CORPORATION

P. O. BOX 1837  
COLUMBIA, MO 65201  
PHONE: (314) 874-1150



CIRCLE NO. 21 ON FREE INFORMATION CARD



## YOU'RE READING POPULAR ELECTRONICS.

That already says a lot about you. That you're fascinated by the diversity of electronics. Everything from microcomputers to audio. From construction projects to ham radio. Who knows what area of electronics will catch your interest next? That's why you read P.E. To keep in touch with all that's new and best in the many worlds of consumer electronics.

# Popular Electronics

### PRINTED CIRCUIT BOARD

4 1/2 x 6 1/2 SINGLE SIDED EPOXY BOARD 1/16" thick, unetched \$.60 ea. 5/52-60

### 7 WATT LD 65 LASER DIODE IR \$8.95

2N 3820 PFEET ..... \$ .45  
2N 5457 N PFEET ..... \$ .45  
2N 2646 UJT ..... \$ .45  
ER 900 TRIGGER DIODES ..... 4/\$1.00  
2N 6028 PNP UJT ..... \$ .65

### MINIATURE MULTI TURN TRIM POTS

100, 1K, 2K, 5K, 10K, 25K, 50K, 100K, 200K, 500K, 1Meg, 2Meg, \$.75 each 3/\$2.00

### VERIPAC PC BOARD

This board is a 1/16" single sided paper epoxy board, 4 1/2" x 6 1/2" DRILLED and ETCHED which will hold up to 21 single pin IC's or 8, 16, or LSI DIP IC's with buses for power supply connector. \$4.00

### RED, YELLOW, GREEN or AMBER LARGE LED'S 2" 6/51.00

TIL-118 OPTO-ISOLATOR \$.75  
MOLEX PINS 100/\$1.00 1000/\$8.00

### Silicon Power Rectifiers

PRV	1A	3A	17A	50A	125A	240A
100	06	14	30	80	170	5.00
200	07	20	35	115	4.25	6.50
400	09	25	50	140	6.50	9.50
600	11	30	70	180	8.50	12.50
800	15	35	90	230	10.50	16.50
1000	20	45	110	275	12.50	20.00

### SAD 1024-a REDICON 1024 stage analog "Bucket Brigade" sn film register. \$18.95

IN 4148 (100) \$1.00  
2708 BK EPROM (450) \$ 9.75  
2522 STATIC SHIF. REG. \$ 1.95  
2513 CONTACTOR \$ 6.75  
MCM 6217A 7" Voper & Nover \$5  
2518 HEX 3T SHIF. \$ 2.20  
2502 2K EPROM \$ 4.50  
2100 1K EPROM \$ .99  
2100 1K EPROM \$ 1.25  
M65270 AKKI DYN \$ 3.45  
M65270 AKKI DYN \$ 1.99  
TIS 6206 \$ 3.95  
5204 AKI PROM \$ 10.99  
8253 \$ 1.95  
AV 5103 UART \$ 1.95  
M6880 MODEM CHIP \$ 9.95  
8703C TRELIN STAGE \$ 1.95  
BINARY BIT A/D CONVERTER \$13.90  
8080A \$11.95  
2101 1.25K 4 STARIC \$ 4.50  
3111 1.25K 4 STARIC \$ 3.45  
7112 75K 4 STARIC \$ 2.75  
5207 210K AKI DYN \$ 4.25

### ALP BOARDS USED FOR SOLDERLESS BREADBOARDING

264L - 128 I/O POINT ..... \$12.50  
212R - POWER BOARD ..... \$ 2.50  
228B - 96 I/O POINT ..... \$10.00  
209R - POWER BOARD ..... \$ 2.25

### IC TEST CLIPS

TC-14 - \$4.50 TC-16 - \$4.75

### REGULATORS

309K ..... \$ .95 340K-12, 15 ..... \$ .95  
320K-5, 12 or 24V ..... \$ 2.50 or 24V ..... \$ 2.50  
15V ..... \$1.00 340T-5, 6, 8, 12 ..... \$ .95  
320T-5, 15 or 24V ..... \$ 2.75 78M of 75 ..... \$1.20  
24V ..... \$ .95

### CHARGED COUPON DEVICES

CCD 321 AHD-512 Analog Shift Register \$95.00  
CCD 201C 100x100 Image Sensor \$95.00  
CCD 202C 100x100 Image Sensor \$145.00

### TRANSISTOR SPECIALS

2N6233-NPN SWITCHING POWER \$1.95  
MRF 9004 A CBF RF Transistor NPN \$1.50  
2N3772 NPN S. TO 3 \$1.00  
2N1546 PNP GE TO 3 \$ .75  
2N4108 PNP S. TO 3 \$1.00  
2N6056 PNP S. TO 3 \$1.70  
2N1420 NPN SI TO 5 \$4.75  
2N3919 NPN S. TO 3 \$1.50  
2N3137 RF \$ .85  
2N3767 NPN S. TO 18 \$6.95  
2N7272 NPN S. TO 18 \$1.00  
2N3055 NPN S. TO 3 \$ .50  
2N3904 NPN S. TO 9 \$1.00  
2N3906 PNP S. TO 9 \$1.00  
2N5296 NPN S. TO 7 \$ .50  
2N6109 PNP S. TO 7 \$ .55  
2N3638 PNP S. TO 5 \$1.00

### TTL IC SERIES

7400	13	7430	12	7490	42	7464	85
7401	13	7432	32	7491	55	7465	85
7402	13	7437	21	7492	43	7470	185
7403	13	7438	21	7493	43	7472	320
7404	15	7440	12	7494	62	7474	89
7405	15	7441	31	7495	65	7475	85
7406	16	7442	37	7496	65	7477	75
7407	20	7443	74	7497	28	7478	78
7408	18	7446	68	7471	39	7479	65
7409	18	7447	58	7472	38	7481	90
7410	13	7448	68	7473	45	7490	100
7411	18	7450	15	7475	40	7491	100
7412	13	7452	25	7476	40	7492	79
7413	26	7453	28	7477	45	7493	79
7414	60	7474	28	7478	61	7494	85
7415	26	7475	30	7479	61	7495	86
7416	26	7476	30	7480	58	7496	86
7417	26	7477	30	7481	58	7497	86
7418	26	7478	30	7482	58	7498	86
7419	26	7479	30	7483	58	7499	86
7420	26	7480	31	7484	58	7500	86
7421	26	7481	31	7485	58	7501	86
7422	26	7482	31	7486	58	7502	86
7423	26	7483	31	7487	58	7503	86
7424	26	7484	31	7488	58	7504	86
7425	26	7485	31	7489	58	7505	86
7426	26	7486	31	7490	58	7506	86
7427	26	7487	31	7491	58	7507	86
7428	26	7488	31	7492	58	7508	86
7429	26	7489	31	7493	58	7509	86
7430	26	7490	31	7494	58	7510	86

### SILICON SOLAR CELLS

24" diameter .4V at 500 mW \$4.00

### FND 359 C.C. 4" x 50. LED READOUTS

FCS 8024 4 digit DL 707.3" C.A. \$1.85  
C.C. B' display \$5.95 DL 747 C.A. \$1.65  
FND 503 C.C. 5" x 85 FND 800 C.C. 8" \$1.95  
FND 510 C.A. 5" x 85 FND 807 C.A. 8" \$1.95  
DL 704 3" C.C. \$ .85

### DATA CASSETTES .95

### 44 Pin Solder Tail Connector 156" Spacing \$1.95

### RS232 DB 25P male \$2.95

### CONNECTORS DB 25S female \$3.50

MS 3387AA new clock chip which will directly drive LED's 12/24 hrs. 1 supply & alarm. \$5.95  
CTS 206 8 digit position dip switch \$1.90  
CTS 206 4 four position dip switch \$1.75

### ALCO MINIATURE TOGGLE SWITCHES

MTA 106 SPOT \$1.05  
MTA 206 DPOT \$1.45  
MTA 206 P-DPOT Center Off \$1.85

### Full Wave Bridges

PRV	1A	6A	25A
100	.75	1.25	2.00
200	.95	1.50	3.00
600	1.20	1.75	4.00

### DIP SOCKETS

8 PIN 17 24 PIN 35
14 PIN 20 28 PIN 40
16 PIN 22 40 PIN 60
18 PIN 25

### SANKEN AUDIO POWER AMPS

5 1010 G 10 WATTS	\$ 7.80
5 1020 G 20 WATTS	\$15.70
5 1050 G 50 WATTS	\$28.50

### TANTULUM CAPACITORS

22UF 35V 5/51 00	6.8UF 35V 4/51 00
47UF 35V 5/51 00	10UF 10V 5/25
68UF 35V 5/51 00	22UF 25V 5/40
2.2UF 20V 5/51 00	30UF 6V 5/51 00
3.3UF 15V 4/51 00	47UF 20V 5/35
4.7UF 15V 5/51 00	68UF 15V 5/50

### 74LS SERIES

74LS00	20	74LS137	70
74LS01	21	74LS138	70
74LS02	21	74LS139	70
74LS03	21	74LS14	70
74LS04	21	74LS15	70
74LS05	21	74LS16	70
74LS06	21	74LS17	70
74LS07	21	74LS18	70
74LS08	21	74LS19	70
74LS09	21	74LS20	70
74LS10	21	74LS21	70
74LS11	21	74LS22	70
74LS12	21	74LS23	70
74LS13	21	74LS24	70
74LS14	21	74LS25	70
74LS15	21	74LS26	70
74LS16	21	74LS27	70
74LS17	21	74LS28	70
74LS18	21	74LS29	70
74LS19	21	74LS30	70
74LS20	21	74LS31	70
74LS21	21	74LS32	70
74LS22	21	74LS33	70
74LS23	21	74LS34	70
74LS24	21	74LS35	

# Electronics Classified

**REGULAR CLASSIFIED: COMMERCIAL RATE:** For firms or individuals offering commercial products or services, \$2.40 per word. Minimum order \$36.00. **EXPAND-AD\* CLASSIFIED RATE:** \$3.60 per word. Minimum order \$54.00. Frequency discount: 5% for 6 months; 10% for 12 months paid in advance. **PERSONAL RATE:** For individuals with a personal item to buy or sell, \$1.40 per word. No minimum! **DISPLAY CLASSIFIED:** 1" by 1 column (2-1/4" wide), \$280.00. 2" by 1 column, \$560.00. 3" by 1 column, \$840.00. Advertiser to supply film positives. For frequency rates, please inquire. **COLOR:** Color avail. for all classified ad styles at earned rate plus additional 25%. Color choice Publisher's option and subject to availability. Publisher reserves right to run ad in black if color not avail. on classified pages. In such cases color charge will be refunded or credited. **GENERAL INFORMATION:** Ad copy must be typewritten or clearly printed. Payment must accompany copy except when ads are to be billed on credit cards — American Express, Diners Club, Master Charge, VISA — or when ads are placed by accredited advertising agencies. First word in all ads set in caps. All copy subject to publisher's approval. All advertisers using Post Office Boxes in their addresses **MUST** supply publisher with permanent address and telephone number before ad can be run. Advertisements will not be published which advertise or promote the use of devices for the surreptitious interception of communications. Ads are not acknowledged. They will appear in first issue to go to press after closing date. Closing Date: 1st of the 2nd month preceding cover date (for example, March issue closes January 1st). Send order and remittance to Classified Advertising, **POPULAR ELECTRONICS**, One Park Avenue, New York, N.Y. 10016. For inquiries, contact Gladys Mathieu at (212) 725-3926.

## FOR SALE

**FREE! Bargain Catalog—**I.C.'s, LED's, readouts, fiber optics, calculators parts & kits, semiconductors, parts. Poly Paks, Box 942PE, Lynnfield, Mass. 01940.

**GOVERNMENT and industrial surplus receivers, transmitters, snooper scopes, electronic parts.** Picture Catalog 25 cents. Meshna, Nahant, Mass. 01908.

**LOWEST Prices Electronic Parts.** Confidential Catalog Free. KNAPP, 4750 96th St N., St. Petersburg, FL 33708.

**ELECTRONIC PARTS, semiconductors, kits.** FREE FLYER. Large catalog \$1.00 deposit. BIGELOW ELECTRONICS, Bluffton, Ohio 45817.

**RADIO—T.V. Tubes—**36 cents each. Send for free catalog. Cornell, 4213 University, San Diego, Calif. 92105.

**AMATEUR SCIENTISTS, Electronics Experimenters, Science Fair Students . . .** Construction plans — Complete, including drawings, schematics, parts list with prices and sources . . . Robot Man — Psychedelic shows — Lasers — Emotion/Lie Detector — Touch Tone Dial — Quadraphonic Adapter — Transistorized Ignition — Burglar Alarm — Sound Meter . . . over 60 items. Send 50 cents coin (no stamps) for complete catalog. Technical Writers Group, Box 5994, University Station, Raleigh, N.C. 27607.

**ROTARY SWITCH 4P11P 5/5S; 6P11P 5/7.25.** Dip Switch 10-SPST 10/\$15. Transistors 12.2 V CT-6A plus 8, 5V-5A \$6.95. 24V-5A \$5.95. 10' RG58/U 12/\$10. Fertiks, 5400 Ella St., Philadelphia, PA 19120.

**SOUND SYNTHESIZER KITS—**Surf \$14.95. Wind \$14.95. Wind Chimes \$19.95. Musical Accessories, many more. Catalog free. PAIA Electronics, Box J14359, Oklahoma City, OK 73114.

**HEAR POLICE FIRE Dispatchers!** Catalog shows exclusive directories of "confidential" channels, scanners. Send postage stamp. Communications, Box 56-PE, Commack, N.Y. 11725.

**UNSCRAMBLERS:** Fits any scanner or monitor, easily adjusts to all scrambled frequencies. Only 4" square \$29.95, fully guaranteed. Dealer inquiries welcomed. PDQ Electronics, Box 841, North Little Rock, Arkansas 72115.

**POLICE/Fire scanners, large stock scanner crystals, antennas.** Harvey Park Radio, Box 19224, Denver, CO 80219.

**BUILD AND SAVE TELEPHONES, TELEVISION, DETECTIVE, BROADCAST Electronics.** We sell construction plans with an Engineering Service. Speakerphones, Answering Machines, Carphones, Phonevision, Dialers, Color TV Converters, VTR, Games, \$25 TV Camera, Electron Microscope, Special Effects Generator, Time Base Corrector, Chroma Key, Engineering Courses in Telephone, Integrated Circuits, Detective Electronics. PLUS MUCH MORE. NEW Super Hobby Catalog PLUS year's subscription to Electronic News Letter, \$1.00. Don Britton Enterprises, 6200 Wilshire Blvd., Los Angeles, Calif. 90048.

**NAME BRAND Test Equipment.** Up to 50% discount. Free catalog. Salen Electronics, Box 82, Skokie, Illinois 60076.

**SURPLUS COMPONENTS.** Communication and test equipment. Illustrated catalog 25 cents. E. French, P.O. Box 249, Aurora, Illinois 60505.

**TELEPHONES UNLIMITED, Equipment Supplies.** All types, Regular, Keyed, Modular. Catalog 50 cents. Box 1147E, San Diego, California 92112.

**CARBON FILM RESISTORS 1/4W, 1/2W - 1.7 cents each.** FREE sample / specifications. Other components. COMPONENTS CENTER, Box 295, W. Islip, New York 11795.

**TELETYPE EQUIPMENT** for sale for beginners and experienced computer enthusiast. Teletype machines, parts, supplies. Catalogue \$1.00 to: ATLANTIC SALES, 3730 Nautilus Ave., Brooklyn, NY 11224. Tel: (212) 372-0349.

**WHOLESALE C.B., Scanners, Antennas.** Catalog 25 cents. Crystals: Special cut, \$4.95. Monitor \$3.95. Send make, model, frequency. G. Enterprises, Box 461P, Clearfield, UT 84015.



**ORGAN KITS  
KEYBOARDS**  
THE ULTIMATE IN DESIGN  
AND SOUND

Demo Record & Brochure \$1.00

**DEVTRONIX ORGAN PRODUCTS, Dept. C**  
5872 Amapola Dr. • San Jose, CA 95129

**UNSCRAMBLE CODED MESSAGES** from Police, Fire and Medical Channels. Same day service. Satisfaction guaranteed. Don Nobles Electronics, Inc., Rt. 7, Box 265B, Hot Springs, Arkansas 71901. (501) 623-6027.

**USED TEST EQUIPMENT —** Tektronix, HP, GR. Write: PTI, Box 8699, White Bear Lake, MN 55110. Phone: (612) 429-2975.

**WEATHER MAP RECORDERS:** Copy Satellite Photographs, National-Local Weather Maps. Learn How! \$1.00. Atlantic Sales, 3730 Nautilus Ave., Brooklyn, N.Y. 11224. Tel: (212) 372-0349.

**AUDIO EXPERIMENTERS, Serious Music Synthesizer Stuff:** literature, kits, components, circuits and more. Send SASE for FREE INFO. CFR Associates, POB F, Newton, NH 03858.

**NAME BRAND TEST EQUIPMENT** at discount prices. 72 page catalogue free. Write: DEPT. PE, North American Electronics, 1468 West 25th Street, Cleveland, OH 44113.

**UNSCRAMBLERS FOR any scanner.** Several models available. Free literature. Capri Electronics, 8753T Windom, St. Louis, MO 63114.

**RADIO SHACK Authorized Sales Center** offering 10% discount off catalog prices. \$25.00 or more delivered. 1117 Conway, Mission, TX 78572.

**TRANSISTORS FOR CB REPAIR, IC's and diodes.** TV audio repairs, 2SC799 — \$3.00, 2SC1306 — \$2.95, 2SC1307 — \$3.85, TA7205 — \$3.50, more. Free catalog and transistor. B&D Enterprises, Box 32, Mt. Jewett, PA 16740.

**UNSCRAMBLER KIT.** Tunes all scramble frequencies, may be built-in most scanners. 2-3/4 x 2-1/4 x 1/2. \$19.95. Factory built Code-Breaker. \$29.95. Free Catalog: KRYSTAL KITS, Box 445, Bentonville, Ark. 72712. (501) 273-5340.

**SUMMER SPECIAL! Complete CARTRIVISION TELEVISION RECORDER ELECTRONIC ASSEMBLY.** (see previous issues) \$11.50 plus \$3.50 S&H. Master Charge, BankAmericard. M.E.C., 369, Madison, Alabama 35758.

**SEEKING ORIGINAL JAPANESE TRANSISTORS** for CB, TV, STEREO REPAIR. Request complete list. Compare 1 to 9 prices: 2SC710 .45, 2SC517 3.95, 2SC799 3.60, 2SC1306 2.90, 2SC1678 2.25, TA7205P 3.90, BA521 2.90, SG613 5.95. Fuji-Svea Enterprises, Dept. P, P.O. Box 40325, Cincinnati, OH 45240.

VIDEO TO RF  
MODULATORS  
B&W • COLOR  
AUDIO

TV  
CAMERAS  
&  
KITS

SPECIAL  
APPLE II  
UH F RF  
COLOR MOD.

VIDEO  
MONITORS

**COMPUTER/GCTV INTERFACES**

Free Catalog - Phone or Write  
Dial: 402-987-3771

1301 BROADWAY **ATV Research** DAKOTA CITY, NE. 68731

**B&K Test Equipment.** Free catalog. Free Shipping. Dinosaur discounts. Spacetron-AH, 948 Prospect, Elmhurst, IL 60126.

**SURPLUS ELECTRONICS**

ATTENTION HOBBYISTS — SEND FOR  
YOUR FREE CATALOG

Great buys in tape drives, keyboards, power supplies, and transformers. We also have heat sinks, steel cabinets, I/O terminals, video displays, printers, and equipment cases. And of course components, fans, wire, and cable. Write now to

10 Flagstone Drive  
Worldwide Electronics Hudson, NH 03051

**THE UNRUSTABLES**




**Now carry up to 40 extra gallons with auxiliary tanks for Pickups & Vans**

**econo-tank**

**DETROIT APPROVED:** No rust or weld sediment • install one hour—lightweight, no bodywork required • Complete Kit • Guaranteed life of vehicle • Meets Federal & State standards

For FREE Catalog-TOLL FREE 800/433-2386 (In TEXAS call 817/756-6221)

**PICKUP & VAN EQUIPMENT CO.**  
Dept. PE, P.O. Drawer C, Hewitt, TX 76643

**BUILD THE ARTISAN ELECTRONIC ORGAN . . .** The 20th century successor to the classic pipe organ. Kits feature modular construction, with logic controlled stops and RAM Pre-Set Memory System. Be an ar-ti-san. Write for our free brochure. AOK Manufacturing, Inc., Box 445, Kenmore, WA 98028.

**SMALL WONDER**

You can get a virtual wall of sound out of just one of our high fidelity stereo speakers only ten inches high. With 1" dome tweeter and 4" woofer the Speakerlab P-1000 outperforms the expensive imported monitor systems yet only costs \$59 each. Because you assemble it in less than an hour with only a tube of special adhesive. See it on our 24 page color catalog manual of kits, tone speakers and accessories. Send \$0.00 to

**Speakerlab**  
Dept. PE-S,  
735 N. Northlake Way  
Seattle, WA 98103

**RECONDITIONED TEST EQUIPMENT.** Catalog \$1.00. James Walter Test Equipment, 2697 Nickel, San Pablo, CA 94806.

**AUTOMOTIVE PARTS AND EQUIPMENT.** Nationally advertised brands at discounted prices for mechanics. Send stamped envelope for specials. Associated Distributors, 401 Augusta St., Cincinnati, OH 45202. Dept. Z.

**SMALL ECONOMICAL TEST EQUIPMENT.** Decade Resistance Box, Counter, Pulse Generator, Regulated Power Supplies, Scope Calibrator, and many more priced from \$20.00 to \$70.00. Free Catalog — Cincinnati ElectroSystems, 469 Wards Corner Road, Loveland, Ohio 45140.

TUBES: "Oldies", Latest. Supplies, components, schematics. Catalog Free (stamp appreciated). Steinmetz, 7519-PE Maplewood, Hammond, Ind. 46324.

TUBES-RECEIVING, Industrial and Semiconductors Factory Boxed. Free price sheet including TV, Radio and audio parts list. Low, low prices. Transelectronic, Inc., 1365 39th St., Brooklyn, New York 11218. Telephone: (212) 633-2800. Toll free: 800-221-5802.

TUBES 29 cents up, also have industrials, obsoletes. 25 cents for catalog and \$1 credit certificate. Connolly, Box 1333P, Sun Valley, CA 91352.

## TAPE AND RECORDERS

8-TRACK and CASSETTE BELTS — money back guarantee. Long wearing. Free Catalog — \$3 minimum order. PRB Corp., Box 176, Whitewater, Wisconsin 53190. (800) 558-9572 except WI.

TAPE HEAD CLEANER. 8 oz. — \$2.30. Includes postage and handling. Write: "Cleaner", Box 176, Whitewater, WI 53190. 800-558-9572 except WI.

RECORDS — TAPES! Discounts to 73%; all labels, no purchase obligations; newsletter; discount dividend certificates; 100% guarantees. Free details. Discount Music Club, 650 Main St., Dept. 5-0678, New Rochelle, New York, N.Y. 10801.

SAVE \$\$\$ on blank cassettes. First line state-of-the-art quality guaranteed. No minimum. Easy ordering. Fast, free shipping. Sample C-46, \$1.00. Larkson, Box 641, Point Arena, CA 95468.

PARANOID ABOUT SPECS? Prove or disprove playback performance cassette or record player with surprising new technique developed by Emory Cook. Test cassette or record, instructions \$3.95 (Connecticut residents add tax). COOK LABORATORIES, Inc., 375 Ely Avenue, Norwalk, CT 06854.

## PERSONALS

MAKE FRIENDS WORLDWIDE through international correspondence, illustrated brochure free. Hermes-Verlag, Box 110660Z, D-1000 Berlin 11, Germany.

## INVENTIONS WANTED

# INVENTORS

**RECOGNITION...FINANCIAL  
REWARD...OR CREDIT  
FOR "INVENTING IT FIRST" MAY BE YOURS!**

If you have an idea for a new product, or a way to make an old product better, contact us, "the idea people" We'll develop your idea, introduce it to industry, negotiate for cash sale or royalty licensing.

Write now without cost or obligation for free information. Fees are charged only for contracted services. So send for your FREE "Inventor's Kit." It has important Marketing Information, a special "Invention Record Form" and a Directory of 1001 Corporations Seeking New Products.



**RAYMOND LEE ORGANIZATION**  
230 Park Avenue North, New York, NY 10017

At no cost or obligation, please rush  
my FREE "Inventor's Kit No. A-112"

Name \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
Phone No \_\_\_\_\_ Area Code \_\_\_\_\_

YOU CAN make money from your ideas!!! FREE details. Write: Advanced Research Scientific, P.O. Box 19041-R, Detroit, MI 48219.

## INSTRUCTION

SCORE high on F.C.C. Exams . . . Over 300 questions and answers. Covers 3rd, 2nd, 1st and even Radar. Third and Second Test, \$14.50; First Class Test, \$15.00. All tests, \$26.50. R.E.I., Inc., Box 806, Sarasota, Fla. 33577.

SELF-STUDY CB RADIO REPAIR COURSE. THERE'S MONEY TO BE MADE REPAIRING CB RADIOS. This easy-to-learn course can prepare you for a career in electronics enabling you to earn as much as \$16.00 an hour in your spare time. For more information write: CB RADIO REPAIR COURSE, Dept. PE088, 531 N. Ann Arbor, Oklahoma City, Okla. 73127.

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D's. Free revealing details. Counseling, Box 317-PE08, Tustin, California 92680.

FCC License Study Course prepares you to pass examinations for 1st, 2nd, 3rd and radar. Study Guide manual gives examples, problems and solutions. Question-Answer manual provides hundreds of practice questions. \$9.95 each or both manuals \$14.95. Postpaid. Oeffinger, Box 1240, Garden Grove, Calif. 92642.

LEARN WHILE ASLEEP! HYPNOTIZE! Astonishing details, strange catalog free! Autosuggestion, Box 24-ZD, Olympia, Washington 98507.

GRANTHAM'S FCC LICENSE STUDY GUIDE — 377 pages, 1465 questions with answers/discussions — covering third, second, first radiotelephone examinations. \$13.50 postpaid. GSE, P.O. Box 25992, Los Angeles, California 90025.

INTENSIVE 5 week course for Broadcast Engineers. FCC First Class license. Student rooms at the school. Radio Engineering Inc., 61 N. Pineapple Ave., Sarasota, FL 33577 and 2402 Tidewater Trail, Fredericksburg, VA 22401.

1978 "TESTS - ANSWERS" for FCC First Class License. Plus - "Self Study Ability Test." Proven! \$9.95 Moneyback Guarantee. Command Productions, Box 26348-P, San Francisco, CA 94126.

LEARN ELECTRONICS Capsule Course basic d.c. textbook plus taped instruction. Details send to: Box 4457, Ind. Sta., St. Paul, MN 55104.

## GOVERNMENT SURPLUS

MANUALS for Govt Surplus radios, test sets, scopes. List 50 cents (coin). Books, 7218 Roanne Drive, Washington, D.C. 20021.

JEEPS—\$59.30! — CARS—\$33.50! — 200,000 ITEMS! — GOVERNMENT SURPLUS — Most COMPREHENSIVE DIRECTORY AVAILABLE tells how, where to buy — YOUR AREA — \$2.00 — MONEYBACK GUARANTEE — Government Information Services, Department GE-30, Box 99249, San Francisco, California 94109 (433 California).

GOVERNMENT SURPLUS. Buy in your Area. How, where. Send \$2.00. Surplus, 30177-PE Headquarters Building, Washington, D.C. 20014.

## BUSINESS OPPORTUNITIES

I MADE \$40,000.00 Year by Mailorder! Helped others make money! Free Proof. Torrey, Box 318-NN, Ypsilanti, Michigan 48197.

FREE CATALOGS. Repair air conditioning, refrigeration Tools, supplies, full instructions. Doolin, 2016 Canton, Dallas, Texas 75201.

ELECTRONICS ASSEMBLY, Lowest wages in hemisphere, skilled operators. Information: J. D. Herter, Box 33, Port-Aur-Prince, Haiti, W.I.

**HIGHLY  
PROFITABLE**

## ONE-MAN ELECTRONIC FACTORY

Investment unnecessary, knowledge not required,  
sales handled by professionals. Postcard brings  
facts about this unusual opportunity. Write today!  
Barta-DH, Box 248, Walnut Creek, CA 94597.

NEW LUXURY Car Without Cost. Free Details! Codex-ZZ, Box 6073, Toledo, Ohio 43614.

GET RICH!!! Secret law erases debts. Free report exposes millionaire \$\$ secrets. Blueprints, No. EE8, 453 W. 256, NYC 10741.

MILLIONS in Mail!!! Free Secrets. \$100 weekly/kitchen table! Free brochure. American, Box 428-ZG, Pomona, Kansas 66076.

EARN \$1000 monthly stuffing envelopes! No gimmicks, guaranteed!!! Free details: L.O.E. Box ZD-06180, Portland, OR 97206.

HOW TO MAKE \$100.00 weekly/kitchen table! Free Brochure. American, Box 428-ZD, Pomona, Kansas 66076.

\$650 WEEKLY for beginners!! Free report: Mailorder Consultants MEEB, 453 W256, NYC 10471.

MECHANICALLY INCLINED Individuals desiring ownership of Small Electronic Manufacturing Business — without investment. Write: BUSINESSSES, 92-K2 Brighton 11th, Brooklyn, New York 11235.

## REPAIRS AND SERVICES

SERVICEMEN — Cleaners, Lubricants, Adhesives for all electronic repairs. Write for FREE catalog. Projector-Recorder Belt Corp., Box 176, Whitewater, WI 53190. 800-558-9572 except WI.

HOBBYIST give your project the professional look. PRINTED CIRC-JIT boards from your sketch or artwork. Affordable prices. Free details. DANOCINTHS, Box 261, Westland, MI 48185.

CATALOGS GALORE! Your name sent to over 100 mailorder advertisers. \$1. "Lists", 19-14 Pond Way, Manorville, NY 11949.

## EMPLOYMENT OPPORTUNITIES

ELECTRONICS/AVIONICS EMPLOYMENT OPPORTUNITIES. Report on jobs now open. Details FREE. Aviation Employment Information Service, Box 240E, Northport, New York 11768.

SALES REPS. WANTED. KEDMAN COMPANY is expanding their sales operations, seeking more intensive national coverage on Quick-Wedge screwholding screwdrivers and Huntsman welding helmets, face shields and accessories. Some choice territories are open. If you are interested, send complete information and resumes — lines carried, territories covered, etc. to: Kedman Company, P.O. Box 25667, Salt Lake City, Utah 84125.

ELECTRONICS TECHNICIANS. Min. Experience. No Degree Start as high as \$21,000 yr. or more! Jobs throughout U.S. Free details. Write: TJM, Box 13832, Sacramento, CA 95813.

## DO-IT-YOURSELF

MODULAR TELEPHONES now available. Sets and components, compatible with Western Electric concept. Catalog 50 cents. Box 1147W, San Diego, California 92112.

FREE MANUALS of 25 to 250 WATT amplifier kits. MOONLIGHTER ELECTRONICS, 117 Inverness, San Francisco, CA 94132.

## TELEPHONES & PARTS

CORDLESS TELEPHONES: Operate 300 ft. from base. Factory rechecked, schematics included for personal maintenance. Originally \$399.50 — now \$179.00. Check M.O. or Credit Card. Telephone Marketers, P.O. Box 216, Brookfield, WI 53005.

## REAL ESTATE

BIG . . . FREE . . . CATALOG! Over 2,500 top values coast to coast!!! UNITED FARM AGENCY, 612-EP, West 47th, Kansas City, MO 64112.

## RUBBER STAMPS

RUBBER STAMPS FOR PC BOARDS. Free marking devices catalog. Jackson's, Brownsville Road — E-100, Mt. Vernon, IL 62864.

## MOTION PICTURE FILMS

JULY SPECIALS: S8 400' Sound feature films. "Thoroughly Modern Millie" with Mary Tyler Moore/Julie Andrews. "Machine Gun McCain" with Peter Falk, 1976 World Series (Reds/Yankees) in Eastman color/sound only \$42.95 ea + \$1.50 shipping limited offer. Save \$7.00. "Fail Safe" with Walter Matthau. "Creature with the Atom Brain" (science-fiction) + Charles Bronson in "Breakout!". Super 8 400' b&w/sound \$24.95 + \$1.25 shipping. Save \$5.00 Walter Lantz's choice "Woody Woodpecker Fowled Falcon" or "Bats In The Belfry" S8 color sound 200' reel \$29.95 ea ppd. Ali/Spinks (title changes hands) one S8 400' color sound film \$49.95 ppd or complete light four 400' reels at \$189.95 + 2.50 shipping. Save \$10.00. A.J. Foyt (glorious 4th) 1977 Indy "500". Spectacular 200' S8 color w/script \$19.95 + 95¢ shipping. SportLite Films, Ring Classics, Columbia order forms 35¢ each. SPORTLITE FILMS, Elect-8/78, 20 N. Wacker, Chicago, Ill. 60606.

FREE CATALOG HUGE DISCOUNTS Stereos, Coax, Cassettes, MATV, Nema Electronics, Box 402712, Miami, FL. RG 58 59F \$7.95/100 ft. Postpaid Visa. (305) 531-5017.

**THE BEST CB ANTENNA**  
SEND FOR FREE **PAL** FULL LINE CATALOG AND DECAL

**PAL 'Firestik' Antenna Corp.**  
2614 EAST ADAMS · PHOENIX, ARIZONA 85034

**ELECTRONIC SURPLUS**  
FREE CATALOGS  
**ETCO ELECTRONICS**, Dept. EB  
North Country Shopping Center  
Rt. 9N, Plattsburgh, N.Y. 12901

**BREAKERLESS ELECTRONIC Ignition:** Auburn Sparkplugs, Synthetic Lubricants, Wheel Stabilizers. Information 26 cents. Anderson Engineering, Epsom, N.H. 03234.

**NEW WIREWRAP BOARDS, Connectors, other goodies,** send SSAE for list to: RLP, 18U Fernwood Dr., Bolingbrook, IL 60439.

**CONVERT TV INTO 7 Foot Pictures!** Projector Lens/Plans. \$19.95. Mailine, P.O. Box 570, Wall Street Station, N.Y. N.Y. 10005.

**PHONE CALL RECORDING ADAPTER**

Record incoming and outgoing calls automatically with this all solid state unit connected to your telephone jack and tape recorder. Tape becomes a permanent record. Don't depend on your memory to recall important details of business and personal calls. Easily installed. No extra monthly phone chgs. FCC Approved

**AMAZING ELECTRONIC MICRO MINI MIKE**  
World's smallest, solid state, self contained with 1.3V Merc. Bat. furn. Picks up most sounds and transmits without wires up to 300 ft. thru FM Radio, Tunesite. Use as mike, ampl., alarm & alert system, baby sitter, hot line, etc. Mike \$18.95\*, Phone Call Adapter \$24.50\* (\* plus \$1.00 ea. for pstg. & hdg.) Cal. res. add tax. Free data. Mail Order, B/A, M/C, cod's o.k. Qty. disc. avail. AMC SALES, Dept. 24 - 9335 Lubec St., Box 928, Downey, CA 90241.

**HOW TO READ RESISTOR COLOR CODES**

Color	1st Digit	2nd Digit	Multiplier	Tolerance
Black	0			
Brown	1			±1%
Red	2			±2%
Orange	3			±3%
Yellow	4			±4%
Green	5			±5%
Blue	6			±6%
Violet	7			±7%
Purple	8			±8%
Gold			÷10	±5%
Silver			÷100	±10%
None				±20%

**FULL 18"x24" B&W WALL POSTER**  
Shop or school (know values at a glance). \$1.00.  
McIntyre Enterprises  
2630 X Street  
Sacramento, Calif. 95816

**PRINTED CIRCUITRY.** From copying without photography to gold plating. Catalog \$1.00 refundable. CIRCOLEX, Box 198, Marcy, NY 13403.

**LOWEST PRICES.** CPUs: 3001 \$14, 3002 \$9, 3003 \$10, 8035 \$21, 8035-B \$16, 8080A Zus \$7.85, 8080A-1 1.3us \$11, 8080A-2 1.5us \$8.95, 8085 1.3us \$18, 8085A-2 .8us \$29.95, 8748-4 2.5us \$49.95, 8748-8 5us \$45.95, Pace 16 bit \$38; PROMs: 2716 \$39.95, 3621-150ns \$5.95, 8755 eeprom \$65; RAMs: 1103A .95, 2114 \$11.15, 2115-2 45ns \$6, 2116 \$49, 2117-4 \$52, 2125A 45ns \$5.95, 3106A \$3.20, 5101L cmos \$8, 8080/8085 Back up: 8155 \$17, 8156 \$18, 8251 \$10, 8253 \$22, 8255 \$8, 8257 \$15, 8259 \$16, 8275 \$75, 8279 \$17, 8741 \$72; Terms: Money Order or Certified Check, Calif. Residents, add 6% tax. **BYTE ELECTRONICS**, Box 8603-E, San Jose, CA 95155.

**SAVE 15% or more NORTHSTAR, CROMEMCO, others. MINI MICRO MART, 1618 James, Syracuse, N.Y. 13203. (315) 422-4467.**

**ULTRA MINI WIRELESS MICROPHONE**  
Amazing new model features both ultra-miniature size & a battery saving on-off switch. Picks up & transmits sounds without wires up to 300 ft. through any FM radio. Use as remote mike, intercom, baby sitter, alert/alarm syst., hot line etc. Great at parties. FCC appd. Compl. w. batt. Money back guar. Only \$19.95 + \$1.50 post-hdg. Mass. Res. add tax. Order Today. M/C, COO ok

**MLI INDUSTRIES, Dept. PE**  
50 HUNT ST., WATERTOWN, MASS. 02172

**FREE CATALOG** POWERFUL NEGATIVE ION GENERATOR (Kit) — \$189.00. (Fascinating details — \$1.00). Golden Enterprises, Box 1282-PE, Glendale, Arizona 85311.

**CAR STEREO NAME BRANDS AT DIRECT-TO-YOU PRICES!**  
CRAIG, CLARION, JENSEN AND MORE.  
SEE OUR CATALOG FOR BEST SELECTION — WHOLESALE PRICES!

Imagine—a name brand AM/FM 8 Track in-dash stereo w/channel indicator, local-distant switch, auto repeat (installation kit incl.) for only \$47. Master Charge & Visa accepted. Satisfaction guaranteed on all merchandise.  
**SEND \$1.00 (REFUNDABLE ON FIRST ORDER) WITH YOUR NAME & ADDRESS TO:**  
**CCS DISTRIBUTORS, INC.**  
DEPT. 104, P.O. BOX 262  
OAK FOREST, IL. 60452

**PLANS AND KITS**

**QUALITY KITS, over 7,000 schematics.** \$1 (refundable) for illustrated catalog. Tek-Devices, Box 19154c, Honolulu, HI 96817.

**AMAZING ELECTRONIC PRODUCTS**

LASERS SUPER POWERED, RIFLE, PISTOL, POCKET — SEE IN DARK - PYRO-TECHNICAL, DE-BUGGING - UNCRAMBLERS - GIANT TESLA - STUNWARD - TV DISRUPTER - ENERGY PRODUCING, SCIENTIFIC DETECTION, ELECTRIFYING, CHEMICAL, ULTRASONIC, CB, AERO, AUTO AND MECH DEVICES, HUNDREDS MORE - ALL NEW PLUS INFO UNLTD PARTS SERVICE.

**INFORMATION unlimited**  
Box 626 Lord Jeffrey PZ. • Amherst, N.H. 03031

**FREE KIT Catalog** contains Test and Experimenter's Equipment. Dage Scientific Instruments, Box 1054P, Livermore, CA 94550.

**TIGER SST SIMPLI-KIT**

**FOR THE DO-IT-YOURSELFER NOW!** a high quality CD Electronic Ignition System in kit form.

Contains all components and solder to build complete Solid-State Electronic CD Ignition System for your car. Assembly requires less than 3 hours.

- Increases MPG 15%
- Increases horsepower 15%
- Plugs and Points last 50,000 miles
- Eliminates 4 of 5 tune-ups
- Instant starting, any weather
- Dual system switch

Fits only 12 volt neg. ground... Only **\$21.95** postpaid  
**Tri-Star Corporation**  
P.O. Box 1727 Grand Junction, Colorado 81501

**BUILD YOUR OWN SYMPHONY OF SOUND!**

It's fun and easy—takes just minutes a day! Complete kits for organs, pianos, strings, rhythms, amplifiers, synthesizers. Also factory assembled. 104-page catalog \$2.00

**WERSI**  
Wersi Electronics, Inc.  
Dept. 2D, 1720 Hempstead Road  
Lancaster, PA 17601

**MODIFY YOUR P.L.L. or Crystal Synthesis C.B.** for extra channels, linear and antenna tips. Send \$12.95 for instruction book. Action Protection Systems, RD1, Box 6003, Milford, PA 18337.

**BUILD YOUR OWN COLOR ORGAN** for under \$10.00. Send \$1.25 for plans. PPG, 14725 Oxnard, Van Nuys, CA 91401.

**LASER-SOLAR-ELECTRONIC-PLANS:** WELDING-Burning Laser — \$9.00, Five Laser Plans — \$8.00, Laser Light Show — \$19.00, Incredible "Wild Ideas" Catalog — \$2.00. Solaser, "PE878", Box 1015, Claremont, CA 91711.

**KITS.** 500 MHz Frequency Counter \$79.95. 650 MHz pre-scaler, \$17.95. Flashing LED, \$1.00. SASE, Lectornic, Box 42, Madison Heights, MI 48071.

**ELECTRONIC HELP JUST A PHONE CALL AWAY.** We'll help you design projects, find components, advice. Low rates, first 2 minutes free. 24 hours a day, 7 days a week. BAC, VISA, MASTERCHARGE; Don Britton Enterprises, (808) 395-7458.

**SECRET CB — VOLUME I or II Confidential Factual Report — Schematics, Tune Up Procedures, Switch Kits, Etc.** Pre-paid \$12.95 each. Send a check or money order to: Selman Enterprises, P.O. Box 8189, Corpus Christi, TX 78412.

**"FUNDAMENTALS" OF ROBOT DESIGN \$10.00.** Write: Advanced Research Scientific, P.O. Box 19041-R, Detroit, Michigan 48219.

**TESLA COIL — 40" SPARKS!** Plans \$7.50. Information 75 cents. Huntington Electronics, Box 2009-P, Huntington, Conn. 06484.

**RAIN-BRAIN Moisture Sensitive switch,** to control your car's wipers. For plans including schematic, parts list, construction hints, and installation tips, send \$5.00 to: Rain-Brain, 615 N. Pike, Shelbyville, Indiana 46176.

**ALARMS**

**QUALITY BURGLAR-FIRE ALARM EQUIPMENT** at discount prices. Free Catalog! Steffens, Box 624K, Cranford, N.J. 07016.

**DON'T PURCHASE alarm equipment** before getting our free value packed catalog. Sasco, 5619-C St. John, Kansas City, MO 64123. (816) 483-4612.

**ALARM DEVICE —** generates weird, eerie, penetrating sound. Hooks up to DC and amplifier. One minute cassette \$3.00. Schematic \$1.50. Parts package \$3.50. All three \$6.50. DAY Enterprises, 148 Bennington Rd., Amherst, NY 14226.

**MUSICAL INSTRUMENTS**

**UP TO 60% DISCOUNT.** Name brand instruments catalog. Freeport Music, 114 G, Mahan St., W. Babylon, N.Y. 11704.

**HIGH FIDELITY**

**DIAMOND NEEDLES and Stereo Cartridges** at Discount prices for Shure, Pickering, Stanton, Empire, Grado and ADC. Send for free catalog. LYLE CARTRIDGES, Dept. P, Box 69, Kensington Station, Brooklyn, New York 11218. For Fast Service call Toll Free 800-221-0906.

**Lambda Series II by SpeakerKit, Ltd.**

Woofers with built-in surrounds. Transmission lines. Open dome midrange and tweeters. Infra-woofers and ultra-tweeters. Accurate sound at a reasonable price. Send \$5 for Series II catalog and manual.

Speakerkit, Box 12PE, Menomonie, WI 54751

**MICROCOMPUTERS**

**NEW! 1978 MICROCOMPUTER CATALOG**

Giant, information-packed catalog lists 1,000's of mini/micro computer products plus books & periodicals for professionals & beginners alike

**NCE/Compumart**  
Dept. PED Box 8610 Ann Arbor, MI 48107

**FREE Norm. \$1.00**

**HYPNOTISM**

**FREE Hypnotism. Self-Hypnosis. Sleep Learning Catalog!** Drawer H400, Ruidoso, New Mexico 88345.

**TUBES**

**RADIO & T.V. Tubes—**36 cents each. Send for free Catalog. Cornell, 4213 University, San Diego, Calif. 92105.

# quantities of quality

## MEET THE ECONORAM FAMILY . . .

These static memory kits (one for the H8 buss, all others S-100 compatible) deliver outstanding performance at prices even the dynamics can't match. What others consider "extras" we consider necessities, such as full buffering on all lines, reliable DMA, sockets for all ICs, gold-plated card fingers, prime ICs . . . and all the other signs of quality that make up an Econoram. No matter what machine you use, we want to be your memory supplier; and we know the best way to do that is to offer a superior product at the lowest possible price.

### NEW! 16K x 8 ECONORAM IV™ KIT (\$329)

Guaranteed current consumption under 2000 mA. Manual write protect switches for 4K blocks; use with or without phantom line. Fully static. Comes with sockets and bypass caps soldered in place for easy assembly. Add \$35 for assembled/tested.

### NEW! 24K x 8 ECONORAM VII™ KIT (\$490)

Our densest board is your best value in 24K memory. Current consumption under 2500 mA; configured as two 4K blocks and two 8K blocks with independent manual write protect switches for each block. Use with or without phantom lines. Comes with sockets and bypass caps soldered in place for easy assembly. Add \$35 for assembled/tested.

### 8K x 8 ECONORAM II™ KIT (\$135)


A truly cost-effective package that has drawn raves from both owners and reviewers (see the 1/78 Kilobaud for an example). If you have the space in your motherboard, there's no better way to get 24K of memory than taking advantage of our quantity offer (3 kits for \$375). Add \$20 to single kit price for assembled/tested.

### H8 COMPATIBLE ECONORAM VI™ KIT (\$235)

12K x 8 for the H8, with the same features that have made our S-100 boards so popular. Additionally, all sockets and bypass capacitors are already soldered in place so you can get right into the best part of kit building.

### TRS-80 16K CONVERSION KIT

This kit contains 8 uPD416 1x16K dynamic memories and instructions on converting your 4K TRS-80 to a 16K machine. You could pay up to \$290 elsewhere, but our kit is only \$190!

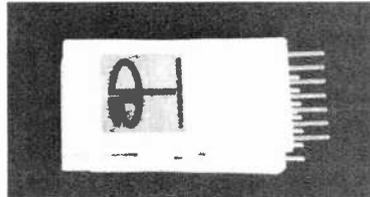

**SOMETHING TO MAKE LIFE EASY:** We carry AP test clips for both 14 pin and 16 pin ICs. Gold plated wiping action; sturdy pins for scope probes; also removes ICs from sockets without damage. Model TC-14 (14 pin): \$4.50; Model TC-16 (16 pin): \$4.75. We also carry the A.C.E. 201K breadboarding kit (with 1,032 solderless plug-in tie point capacity) for only \$24.95.

## MORE? Send for our flyer

**TERMS:** Please allow up to 5% for shipping; excess refunded. Add \$1 handling for orders under \$10. Cal res add tax. COD OK with street address for UPS. For VISA® /Mastercharge® orders call our order desk (24 hrs) at (415) 562-0636. Prices good through cover month of magazine.

# GODBOUT

BILL GODBOUT ELECTRONICS  
BOX 2355, OAKLAND AIRPORT, CA 94614

CIRCLE NO 17 ON FREE INFORMATION CARD

## BOOKS AND MAGAZINES

FREE book prophet Elijah coming before Christ. Wonderful bible evidence. MEGIDDO Mission, Dept. 64, 481 Thurston Rd., Rochester, N.Y. 14619.

**HOW DOES THE OPERATOR KNOW** your telephone number without you telling her. Ten digit, state of the art, call tracing systems and Telco operation detailed in depth. Government and C.C.I.T.T. publications tell it all. For comprehensive listing send s.a.s.e. and \$2.00 to: Tell It, Box 523, Westbrook, CT 06498.

**HAD IT WITH McINTOSH'S FREE FM LIST?** Let the FM Atlas and Station Directory help you enjoy more FM stations at home or on the go. \$3.95. FM Atlas, Adolph, MN 55701.

## WANTED

**GOLD, Silver, Platinum, Mercury, Tantalum** wanted. Highest prices paid by refinery. Ores assayed. Free circular. Mercury Terminal, Norwood, MA 02062.

**DOKORDER 9200 IN MINT** condition. Write or call anytime (613) 376-3642. Randall Hook, RR #1, Sydenham, Ontario, Canada.

## WANTED! CB DEALERS AND DISTRIBUTORS

**PAL 'Firestik' Antenna Corp.**

2614 EAST ADAMS • PHOENIX, ARIZONA 85034

## MISCELLANEOUS

**MPG INCREASED!** Bypass Pollution Devices easily. REVERSIBLY!! Free details — Posco GEE8, 453 W. 256, NYC 10471.

**PERSONALIZED BOUTIQUE SUNGLASSES** for guys and gals. Glamorous, tinted lenses. Details free. Products International, Box 8327, St. Louis, MO 63132.

# Popular Electronics

## ADVERTISERS INDEX

READER SERVICE NO.	ADVERTISER	PAGE NO.
1	AP Products, Inc. . . . .	73
2	Active Electronic Sales Corp. . . . .	87
3	Ancrona Corp. . . . .	92, 93
	Audio-Technica U.S., Inc. . . . .	37
48	Avanti Research & Development, Inc. . . . .	1
4	B & F Enterprises . . . . .	106
	CREI, Capitol Radio Engineering Institute . . . . .	68, 69, 70, 71
55	Chaney Electronics . . . . .	84
	Cleveland Institute of Electronics Inc. . . . .	26, 27, 28, 29
6	Cobra, Product of Dynascan . . . . .	SECOND COVER
7	Communications Electronics . . . . .	77
52	Consumers Company . . . . .	74
8	Contemporary Marketing, Inc. . . . .	5
9	Continental Specialties Corporation . . . . .	52
10	Digi-Key Corporation . . . . .	91
11	Digital Research Corp. . . . .	94
50	Douglas Dunhill . . . . .	7
12	EICO . . . . .	77
13	Edlie Electronics . . . . .	105
	Edmund Scientific Co. . . . .	94
14	Electra Company . . . . .	81
	Electronic Systems . . . . .	99
15	Empire Scientific Corp. . . . .	63
16	Fordham Radio Supply . . . . .	106
17	Godbout Elecs, Bill . . . . .	111
18	Grantham College of Engineering . . . . .	82
	GSE Technical Books . . . . .	57
5	Heath Company . . . . .	11
19	I E Integrated Electronics . . . . .	106
20	Illinois Audio . . . . .	81
	Interface Age . . . . .	79
21	International Components Corp. . . . .	107
22	International Electronics Unlimited . . . . .	94
23	J & R Music World . . . . .	82
49	JS&A National Sales Group . . . . .	2
24	Jade Computer Products . . . . .	100, 101
25	Jameco Electronics . . . . .	88, 89
26	Jensen Tools and Alloys . . . . .	84
27	Lafayette Radio Electronics . . . . .	FOURTH COVER
28	Leslie Paul, Inc. . . . .	83
30	McIntosh Laboratory Inc. . . . .	79
53	McKay Dymek Co. . . . .	75
	Micro Computer Mart . . . . .	86
29	Motorola Semiconductor Products Inc. . . . .	6
	NRI Schools . . . . .	16, 17, 18, 19
31	Netronics R & D Ltd. . . . .	14
56	Newman Computer Exchange . . . . .	85
32	New-Tone Electronics . . . . .	90
33	New-Tone Electronics . . . . .	103
34	OK Machine & Tool Corporation . . . . .	67
35	Olson Electronics . . . . .	103
36	Optoelectronics . . . . .	12
37	PAIA Electronics, Inc. . . . .	84
38	Page Digital Electronics . . . . .	74
39	Poly Paks . . . . .	97
40	Quest Electronics . . . . .	104
41	Radio Hut . . . . .	102
	Radio Shack . . . . .	15, 98
42	Regency Electronics . . . . .	13
51	Sabtronics International, Inc. . . . .	THIRD COVER
43	Scientific Audio Electronics, Inc. . . . .	10
44	Solid State Sales . . . . .	107
45	Southwest Technical Products Corp. . . . .	38
	Speakerlab, Inc. . . . .	82
46	Stanton Magnetics, Inc. . . . .	21
47	Tab Books . . . . .	82
54	Telephone Booth . . . . .	84
	Texas Instruments Inc. . . . .	9
	CLASSIFIED ADVERTISING . . . . .	108, 109, 110, 111

## ABOUT YOUR SUBSCRIPTION

Your subscription to POPULAR ELECTRONICS is maintained on one of the world's most modern, efficient computer systems, and if you're like 99% of our subscribers, you'll never have any reason to complain about your subscription service.

We have found that when complaints do arise, the majority of them occur because people have written their names or addresses differently at different times. For example, if your subscription were listed under "William Jones, Cedar Lane, Middletown, Arizona," and you were to renew it as "Bill Jones, Cedar Lane, Middletown, Arizona," our computer would think that two separate subscriptions were involved, and it would start sending you two copies of POPULAR ELECTRONICS each month. Other examples of combinations of names that would confuse the computer would include: John Henry Smith and Henry Smith; and Mrs. Joseph Jones and Mary Jones. Minor differences in addresses can also lead to difficulties. For example, to the computer, 100 Second St. is not the same as 100 2nd St.

So, please, when you write us about your subscription, be sure to enclose the mailing label from the cover of the magazine—or else copy your name and address exactly as they appear on the mailing label. This will greatly reduce any chance of error, and we will be able to service your request much more quickly.

## Protection for Private Data

Protecting private data in computer files is becoming a more and more serious problem both for businesses who want to keep their plans and figures from competitors, and individuals who want to keep their personal data limited to the organizations to which that data was originally given. As a result, last year the National Bureau of Standards selected an official Data Encryption Standard as a way of scrambling data so that only those with the authorized key could understand the results. IBM has already produced hardware and software for use of the new standard on its System 370 computers; DES equipment and programs for other computer systems are doubtless in the works. Unscrambling data encrypted according to the new standard requires a key of 56 binary digits. Since more than 70 quadrillion ( $7 \times 10^{16}$ ) such keys are possible, and the key can be changed frequently, getting unauthorized access to data should be difficult.

## Electronic Voices for the Voiceless

A portable speech synthesizer called "Phonic Mirror HandiVoice" from HC Electronics, a subsidiary of American Hospital Supply Corp., can actually talk for a vocally impaired person. The synthesizer is pre-programmed with the English alphabet, 13 morphemes (word prefixes/suffixes), 16 short phrases ("My name is . . .," "I want . . ." and so on), 45 phonemes (speech sounds) and a selection of complete words. The



lap-board-style Model HC 110 has a vocabulary of 373 words (in addition to those which can be created with morphemes and phonemes), and a "keyboard" with 128 touch-sensitive pads. Another model, HC120, which resembles a calculator, uses 3-digit numeric coding from a 10-digit keypad and has a pre-programmed vocabulary of 893 words.

## Keeping It Clean

Radio waves are used for more than communication: Western Electric uses them to weld, heat, and clean in industrial applications. And to ensure that these operations do not interfere with normal radio and TV reception, airplane navigation equipment, public service radio and the like, they have a watchdog, Jerry Schaeffer.

His job is to develop machinery r-f emission standards and to continually monitor the level of stray r-f emissions from Western Electric's industrial machinery. Once every three years he visits each plant in his mobile laboratory to make sure they're not polluting the r-f spectrum with "radio garbage." To see Jerry operating his mobile lab you'd think he was a Smokie operating a radar trap, but he's not. He's just Western Electric's "radio garbage man" keeping the airwaves clean.

## New Antennas for Voice of America

The Voice of America's relay station at Delano, California, has a new antenna—a dipole-curtain array type. Currently operating in the 49-Meter (6-MHz) and 31-Meter (9-MHz) bands, with a 250-kW transmitter, the antenna is designed for operation in the 40-meter (7-MHz) band as well. The antenna, a standard Model 611 from Technology for Communications International (TCI), is rated for up to 22 dBi of gain, providing high signal levels in targeted reception areas. The antenna's wideband design will allow VOA to use it for additional frequencies, should the 1979 World Administrative Radio Conference (WARC-79) expand the current short-wave broadcast bands.

## Careers in Organ Repair

Electronic organs are becoming increasingly commonplace. More than 200,000 are now sold in this country every year, according to the National Association of Electronic Organ Manufacturers (150 East Huron, Chicago IL 60611). As a result, there is a strong demand for qualified electronic-organ service technicians. How do you learn organ repair? According to NAEOM president Byron Melcher, many technical schools offer courses on the subject, which should include electronics and computer training. Moreover, most manufacturers in the field offer two-day workshops, usually free (though you must pay your way to the workshop). A music background is not necessary, though it would obviously be helpful. An NAEOM spokesman estimates that salary or fees for a full-time career in electronic organ repair and maintenance is \$14,000 to \$18,000 today.

## New Automobile Sound System

Soon to be introduced in some new cars from the Ford Motor Company is a sound system, claimed to be fully electronic and possessing "ultra-fidelity." An AM/stereo FM radio will be combined with a quadrasonic 8-track tape player and high-compliance-cone rear speakers. Other features include: quartz-crystal tuning, memory storage and recall of favorite stations, digital display of frequencies, four tuning modes, and four audio channels. The amplifier will provide 12 watts rms per channel for the rear speakers.

# We've done the impossible again!

## A versatile and superior frequency counter kit for only \$89.95



Now you can forget about price/performance trade-offs when you select a frequency counter. In Sabtronics' Model 8100 you get features you once expected to pay several hundreds of dollars for. But you pay only our low, low price of \$89.95!

**Dare to Compare.** This frequency counter, using LSI technology, has the performance and input characteristics you demand. Note the specifications: You will see that the frequency range is guaranteed all the way to 100 MHz; and a high or low input impedance allows you to select for high-frequency operation. And you'll see a sensitivity that holds well over the frequency range; convenient selectable gate-time for best resolution; and selectable attenuation; and even an optional pre-scaler. Note the highly accurate time base, and its excellent ageing and temperature characteristics. And a full 8-digit LED display with floating decimal point, leading zero suppression, and overflow indicator.

You would expect to find all these features together only on a much higher-priced instrument. But Sabtronics' advanced digital technology combines with your own skill — you assemble this kit from our easy-to-follow instructions — to make it possible for you to have this fine frequency counter at a fraction of what you would otherwise expect to pay.

### Free 10-day trial

Examine the 8100 Frequency Counter Kit for 10 days. If not completely satisfied, return unassembled for full refund of \$89.95 purchase price.

**sabtronics**   
INTERNATIONAL INC.

13426 Floyd Circle • Dallas, Texas 75243  
Telephone 214/783-0994

### Brief Specifications

- Frequency Range: 20 Hz to 100 MHz guaranteed (10 Hz to 120 MHz typical)
- Sensitivity: 25 mV RMS, 20 Hz to 70 MHz (20 mV typical); 45 mV RMS, 70 MHz to 120 MHz (30 mV typical)
- Selectable Impedance: 1 M $\Omega$  at 25 pF, or 50  $\Omega$
- Selectable Attenuation: X1, X10, or X100
- Accuracy:  $\pm 1$  Hz plus time-base accuracy
- Ageing rate:  $\pm 5$  ppm/yr
- Temperature stability:  $\pm 10$  ppm, 0 $^{\circ}$  to 50 $^{\circ}$ C
- Selectable Gate-time: 0.1 sec, 1 sec., or 10 sec.
- 8-digit LED display with floating D.P., overflow indication
- Input: 9-15 VDC, 350 mA (550 mA with optional prescaler)
- Input protection: 150 V RMS, 20 Hz to 10 kHz; 30 V RMS to 2 MHz; and 3 V RMS to 100 MHz
- Optional prescaler extends frequency range to 650 MHz. (Available soon)

To: Sabtronics International, Inc.  
13426 Floyd Circle, Dallas, TX 75243

PE 8

Please send me \_\_\_\_\_ Sabtronics Model 8100  
Frequency Counter Kit(s) at \$89.95 each \$ \_\_\_\_\_  
Texas Residents add Sales Tax \$ \_\_\_\_\_  
Shipping and handling, \$5.00 per unit  
(USA only)\* \$ \_\_\_\_\_  
Payment enclosed  \$ \_\_\_\_\_  
Charge my Master Charge   
    Visa

Account No. \_\_\_\_\_ Exp. Date \_\_\_\_\_


Name \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

\*Canada \$6.50. All other countries \$19.00 Airmail.

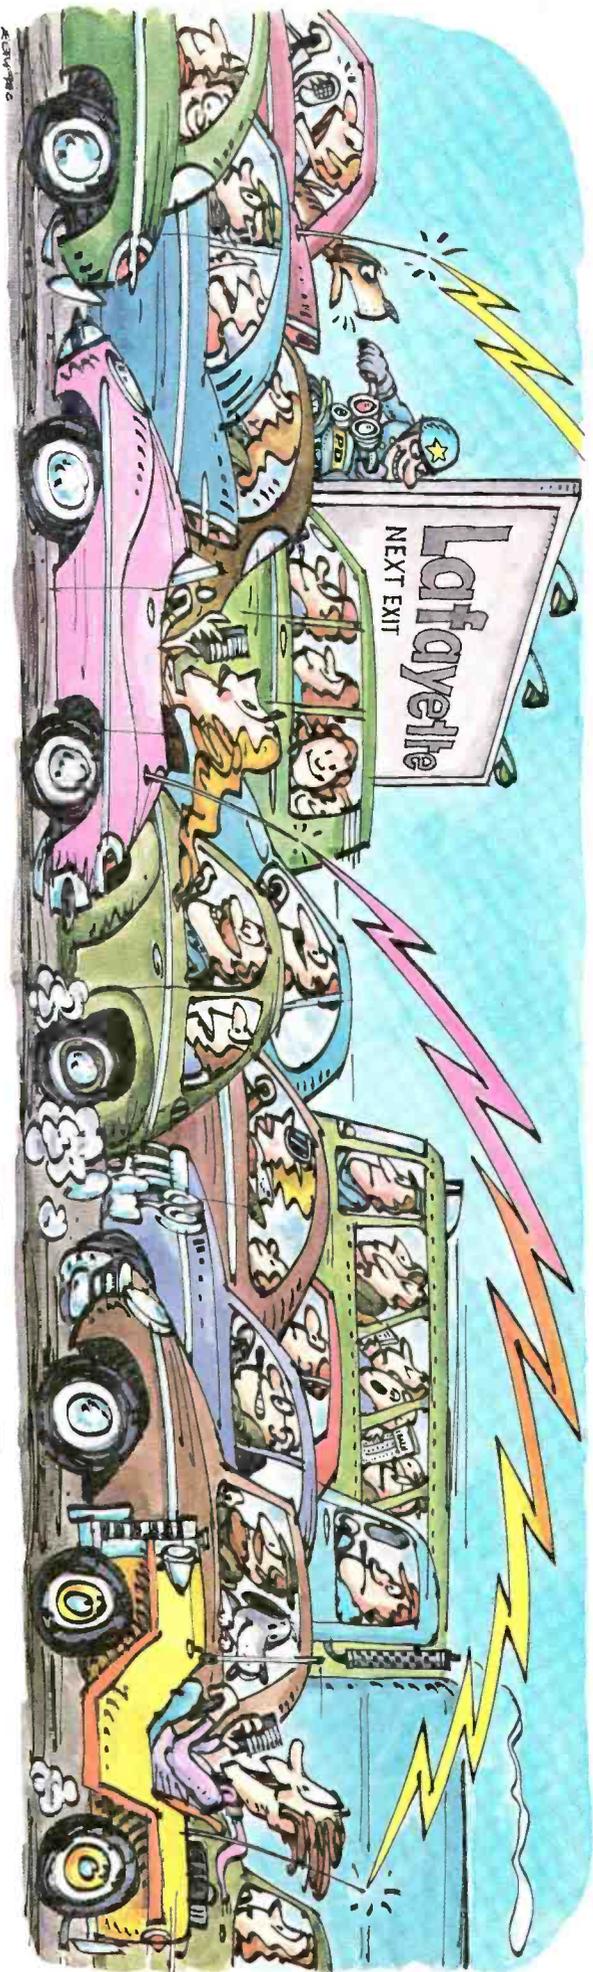

# The Beeper vs. The Leaper

**Most CBs confine you to one channel. Some beep to signal activity on another channel. (So you decide whether to switch there.) Others lead you automatically to where the activity is.**

**Now, for the first time, there's a way to have it both ways: Get our new LM-300.**



You know how it is sometimes. You're modulating on your main channel, but if any activity sits (particularly on Channel 9) you want in, without delay.

You know how it is other times. You're talking on your main channel. If the activity on Channel 9 (or elsewhere) heats up, you want to be notified — but you don't want to be interrupted.

**Lafayette's new LM-300 is the only CB in the world that lets you scan secondary channels in both modes.**

You can set it for priority scan. While you're on your primary channel, your LM-300 scans Channel 9 — or any other channel. If anything comes up, you're switched over. Automatically.

Or, you can set the beeper — the audible tone indicator. If activity occurs off your primary channel, the beeper will beep, but it won't yank you out of your talk. That's your option.

While you're on your primary channel, you'll get a solid read-out: your LED will be on all the time. When you're scanning the secondary channel, the secondary LED will blink. When you lock onto a signal on the secondary channel, the LED will give a solid readout.

The LM-300 is loaded. SWR meter and calibration. RF Gain. Tone control. Scanning Sensitivity control. Noise Blanker/ANL. PA. Dimmer. The works.

The LM-300 costs just \$170 with the dual scanner. That's about what other CBs cost without the dual scanner. Lafayette buffs won't be surprised at the bargain. For 20 years — good times and bad in the CB business — Lafayette has come up with the extras that other companies rarely think of.

**FREE 1979 CATALOG.** Lafayette's catalog is all new for 1979! 172 illustrated pages — over half in full color. Features everything Lafayette makes or sells. Write Lafayette Dept. No. 35088, 111 Jericho Turnpike, Syosset, N.Y. 11791. Allow several weeks for delivery.

# Lafayette

**Who says you can't have it both ways?**

CIRCLE NO. 27 ON FREE INFORMATION CARD