


Fig.5 - Overlay diagram of Vision Switcher PCB

every five minutes when the repeater is not in use. Care should be taken by repeater groups to prevent the repeater locking-up for long periods when not used for FM traffic. It should be appreciated that the UK repeater frequencies are deliberately non-standard in an attempt to avoid interference to ATV operators. There seems no reason why individual repeaters cannot be switched off during an ATV contest by prior arrangement with the repeater group and the RSGB.

It is felt that publicity of these 'codes of practice' and of the need to be aware of each others existence will

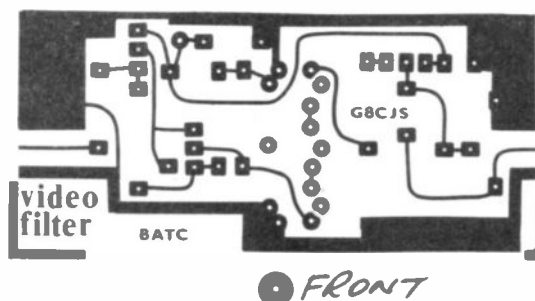

Foil Patterns for the Video Low Pass Filter and Vision Switching PCBs.

