



The RADIART Corp.
CLEVELAND, OHIO, PLANTS



C-D PROVIDENCE, R.I., PLANT



C-D BROOKLINE, MASS., PLANT



C-D WORCESTER, MASS., PLANT



C-D INDIANAPOLIS, IND., PLANT



C-D SOUTH PLAINFIELD, N.J. PLANT



C-D NEW BEDFORD, MASS., PLANT

Vol. 16

JULY, 1951

No. 7

CORNELL-DUBILIER ELECTRIC CORP.
Hamilton Boulevard, South Plainfield, N. J.

POSTMASTER: If undeliverable for any reason,
notify stating reason, on Form 3547 postage for
which is guaranteed.

Sec. 34.66 P.L.&R.
U. S. POSTAGE
PAID
So. Plainfield, N. J.
Permit No. 1

OFFICIAL

NEW - JUST OFF THE PRESS

Cornell-Dubilier

Television CAPACITOR REPLACEMENT Guide

A BIG 4 Section—32 page—8½ x 11

REFERENCE MANUAL

with Capacitor Service Replacement
Data for over a thousand Television
RECEIVERS — loaded with everyday
useful information.



SECTION I Numerical Listing of over 1025 models of TV RECEIVERS made by 68 manufacturers — with manufacturer's ORIGINAL CAPACITOR RATING and its C-D recommended REPLACEMENT.

SECTION II Numerical Listing of over 350 C-D twist prong REPLACEMENT CAPACITORS for TV Receivers.

SECTION III Complete Listing of 379 C-D CAPACITORS Types UP, UPE, UPT with their rated capacity, working voltage, dimensions, LIST PRICES and DEALER NET.

SECTION IV Listing of OLD vs. NEW C-D Replacement Capacitor PART NUMBERS.

SPECIAL - for "CAPACITOR" readers. A 50-cent value for ONLY 25¢. Just cut out the coupon below, enclose with 25¢ in stamps or coin and drop it in the mail. BE SURE YOUR NAME AND ADDRESS APPEARS ON THE BACK OF THE COUPON.

----- TEAR HERE -----

➡ ADDRESS ENVELOPE TO
Cornell-Dubilier Electric Corp.
DEPT. 50
➡ SOUTH PLAINFIELD, NEW JERSEY

O K! . . . Please send my copy of the
"C-D TELEVISION CAPACITOR REPLACEMENT GUIDE"
right away. The SPECIAL PRICE of 25¢* is enclosed.

My name and address is on the reverse of this coupon.

* Stamps or Coin.

Name.....

SERVICING VIDEO AMPLIFIERS

The video amplifier is a key link in any television receiver. Situated between the video detector on one end and the picture tube and synchronizing circuits on the other, this amplifier is called upon to pass the entire composite video signal — all frequencies between 60 cycles and 4 megacycles. Picture elements, sync pulses, and blanking pulses must be transmitted by the video amplifier. In TV receivers of the intercarrier type, sound information also passes through the video amplifier.

The basic circuit arrangement of the video amplifier as a receiver channel with very wide band pass does not change, although the final circuitry may vary somewhat in receivers of different manufacture. Some sets employ a single video stage, while others use two or more. Figure 1 shows the

video circuit of Hallicrafters Model 513 receiver. Here, a 6AU6 1st video amplifier after the video detector is followed by a 6AQ5 video output stage. The signal output is sync negative and accordingly is applied to the picture tube grid. If an odd number of video stages were employed, instead of the even number shown in Figure 1, the output signal phase would of course be reversed and the signal would be applied to the picture tube cathode.

Both series and shunt peaking are employed in the video channel shown. Inductors L_3 and L_5 are the series peaking coils, while L_4 and L_6 are shunt peaking. Note that each of these coils is shunted by a fixed resistor (R_3 , R_4 , R_5 , and R_6) for Q reduction to prevent overemphasized high-frequency peaking. Frequency response of the video

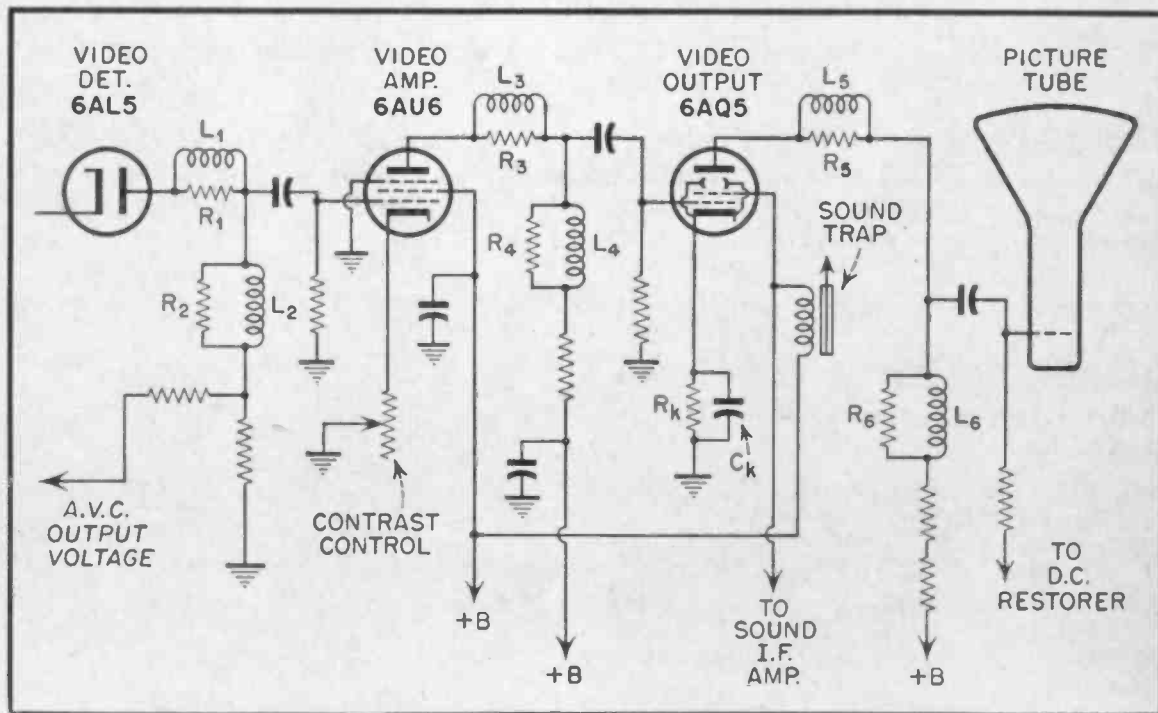


Fig. 1. Typical video amplifier.

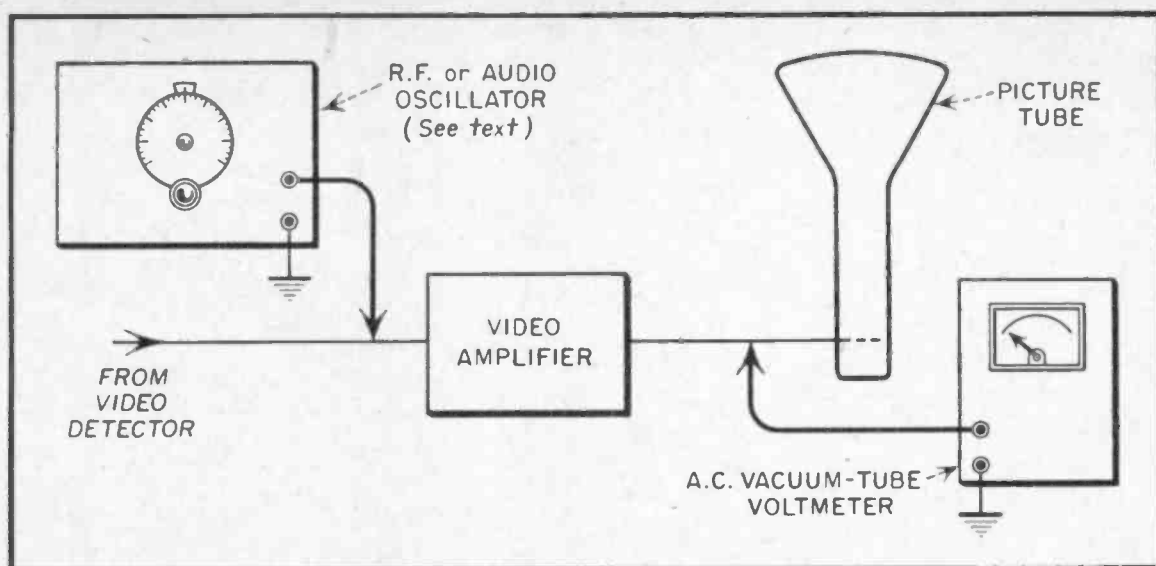


Fig. 2. Setup for point-by-point check of video response.

channel throughout the desired wide pass band is governed by the circuit constants, especially the characteristics of the peaking coils, shunting resistors, plate load resistances, and the 6AQ5 cathode R-C network, $R_k C_k$. Gain of the video amplifier is controlled by the variable cathode resistor in the 6AU6 stage. This component is the *contrast control* of the receiver.

Since the video amplifier must handle a wide range of frequencies, the common tendency is to think of its response as perfectly flat from zero to 4 megacycles. A sharp drop-off to zero is expected at 4.5 Mc. to prevent sound channel interference. But few video amplifiers outside of the laboratory actually exhibit such response. Experience shows that a sharp, live picture is produced when the response is peaked toward the high-frequency end of the pass band, just before the 4.5 Mc. drop-off. An absolutely flat curve usually does not give a sharp picture. The best practical response curve more nearly resembles Figure 5(B).

When checking TV receivers for overall performance, the video amplifier response must be considered. Pre-

vious literature has described several times the use of a standard test pattern to check bandwidth of the receiver. When no pattern is being telecast, or when the front end of the receiver is inoperative, the service technician must use instruments to check video amplifier response. This article explains both point-by-point and visual methods of checking.

Point-by-Point Method

The point-by-point method of checking video amplifier response is the same technique employed for point-by-point determination of an audio amplifier response curve. The only difference is that both radio and audio frequencies must be used in checking the video amplifier.

Figure 2 shows the instrument setup for making this test. An audio oscillator is required for the low frequencies, and an unmodulated RF oscillator or signal generator for the high frequencies of the video pass band. Both oscillators must be capable of delivering 0.1 volt r. m. s. output. An AC vacuum tube voltmeter, having good accuracy at 4 megacycles, is used as the indicator.

The output signal from the oscillator is fed into the video channel of the receiver directly after the output load circuit of the video detector. The VT voltmeter is connected to the grid of the picture tube. (In some sets, the video signal is applied to the cathode of the picture tube, and in such cases the VT voltmeter also must be connected to the cathode).

A constant 0.1-volt signal is applied to the video amplifier input, and the corresponding output voltage is measured throughout the video range. As many test frequencies as possible are used. In this way, the video response curve (output volts plotted against frequency) may be determined. Peaks, dips, and flat portions will be readily apparent.

The following test procedure is recommended: (1) Set up the equipment as shown in Figure 2. Switch-on the receiver and instruments and allow at least 15 minutes warmup time. (2) Set the receiver contrast control at maximum and the brilliance control at

about $\frac{1}{2}$ maximum. Disconnect the antenna or detune the receiver from any channel being used for telecasting at the time of the test. (3) With the audio oscillator connected to the video amplifier input and set to 60 cycles, adjust the oscillator output voltage *exactly* to 0.1 volt. (4) Record the VT voltmeter reading at the picture tube. (5) Set the test frequency to 100 cycles, re-set the signal voltage to 0.1 v., and note the new VT voltmeter reading. (6) Repeat at each 100-cycle point from 100 to 1000 cycles, then at each 1000 cycles to 10 kc., and finally at each 10 kc. to 50 kilocycles. (7) Next; substitute the unmodulated RF signal generator for the audio oscillator and repeat the entire procedure (with constant 0.1-volt output signal) at each 100 kc. point up to 1 Mc., and then at each 1-megacycle point to 5 Mc. It may be advisable to check several closely-spaced points around 3 to 4 Mc., in order to detect sharp peaking of the curve in this region.

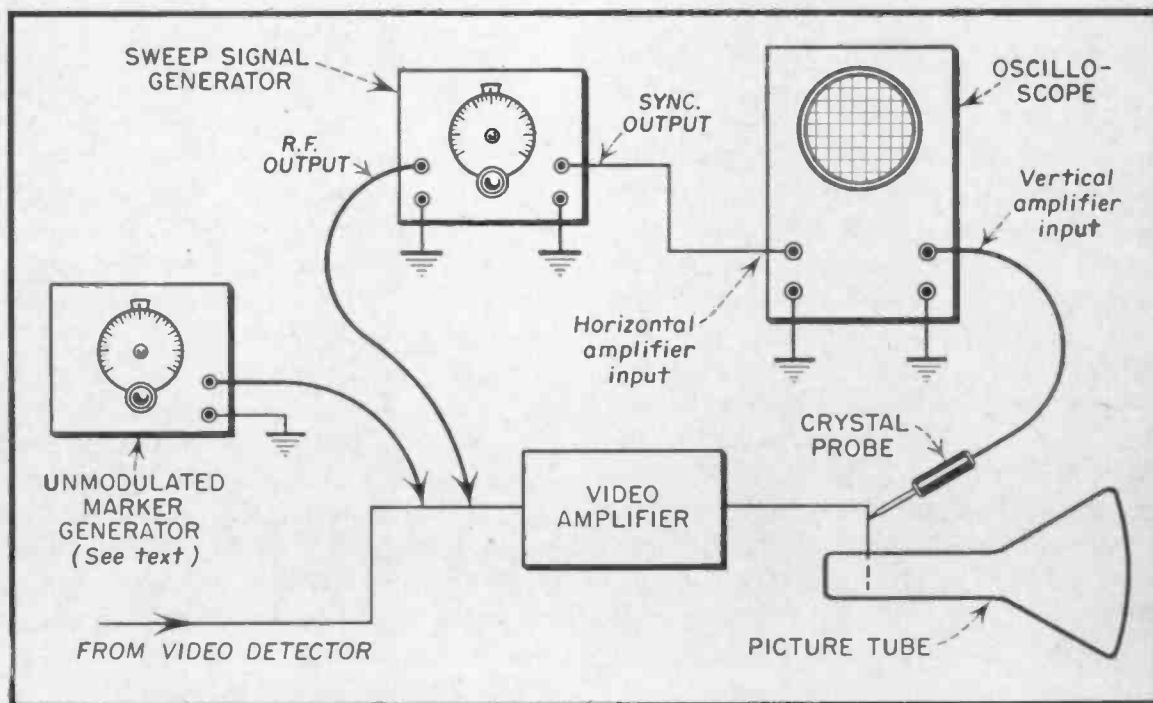


Fig. 3. Setup for visual checking of video amplifier.

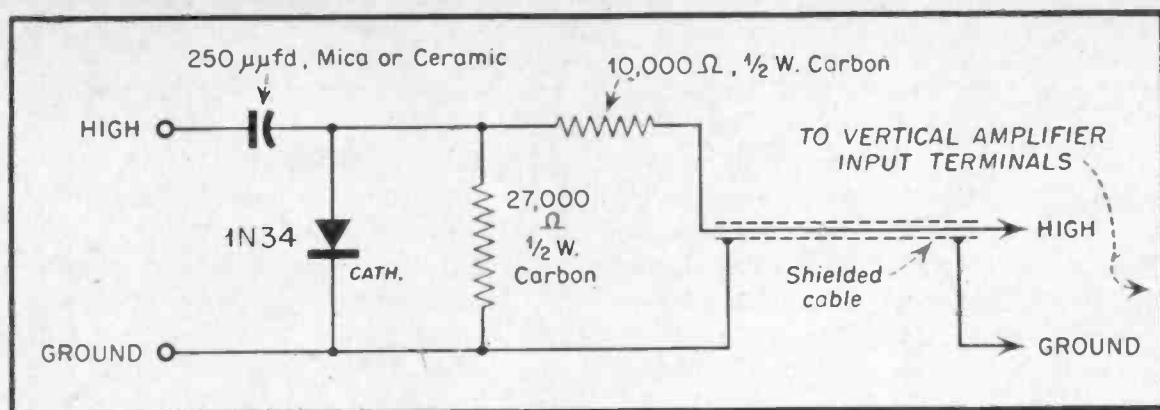


Fig. 4. Circuit of oscilloscope test probe.

Voltage gain of the video channel may be determined simply by multiplying the output VT voltmeter reading by 10. Thus an indication of 10 volts indicates a voltage gain of 100, since a 0.1-volt input signal is used.

Spot Check Method

A complete point-by-point check, such as just described is exceedingly laborious and time consuming. Except in cases of bad video trouble, the service technician may not be able to devote the time required for a complete frequency run of this type. A simpler, faster spot check involving fewer frequencies will be adequate in most instances.

The same technique and instruments are used as described in the previous Section. However, the spot frequencies for testing should be 60, 100, 500, 1000, 5000, 10,000, 25,000, and 50,000 cycles; 100, 500, and 1000 kc.; and 2, 3, 4, and 4.5 Mc. Here, as in the previous case, it will be desirable to check at several closely-spaced frequencies between 3 and 4 megacycles, in order to detect peaking of the response curve in this region.

The Editors believe that the 15 spot frequencies will give a good indication of video amplifier performance. Some service technicians report success when using even fewer test frequencies. One

correspondent, for example, uses an unmodulated RF signal generator for spot checks at 50 kc.; 1, 3, and 4.5 Mc.; and the 400-cycle separate output of the same signal generator for a single-frequency check in the audio end of the video range.

Visual Method

For speed and convenience, the visual method of checking frequency response has no equal. The entire response curve is reproduced instantaneously (as far as the eye is concerned) on an oscilloscope screen. Figure 3 shows the instrument setup for visual checking of video amplifiers. The sweep signal generator must have a sweep width of at least 5 megacycles and must supply sync output voltage for the oscilloscope. The marker generator is used to produce frequency-identifying pips of the response curve viewed on the oscilloscope screen. For marking purposes, an audio oscillator will be required for frequencies up to about 50 kc., and an unmodulated r. f. signal generator for frequencies from 50 kc. to 5 Mc. A crystal-type demodulator probe must be provided for the vertical amplifier input of the oscilloscope. The circuit of a satisfactory probe of this kind is shown in Figure 4.

The following procedure is recommended for checking by the visual

method: (1) Set up the equipment as shown in Figure 3. Switch-on the receiver and instruments and allow at least 15 minutes warmup time. Set the receiver contrast control to maximum and the brightness control to about $\frac{1}{2}$ maximum. Disconnect the antenna or detune the receiver from any channel being used for transmissions. (2) Turn down the marker generator output to zero. (3) Prepare the oscilloscope: (a) switch-off the internal sweep oscillator, (b) set the SYNC switch to INTERNAL, (c) Set the HORIZONTAL and VERTICAL GAIN controls at about $\frac{1}{2}$ maximum, (d) set the SYNC AMPLITUDE control at about $\frac{3}{4}$ maximum. (4) Set the sweep generator frequency to 2 Mc. and the sweep generator output voltage to approximately 0.1 volt. Under these conditions, the output frequency will be swept from zero to 4 Mc. Adjust the phasing control of the sweep generator and the horizontal and vertical gain controls of the oscilloscope to give a single-traced, clear response curve on the oscilloscope screen. (5) Since no blanking is employed, two complete curves (See Fig-

ure 5-C) probably will appear. By adjusting the horizontal gain control and horizontal beam centering control of the oscilloscope to spread the pattern across the screen, the extra curves may be displaced off the screen and a single curve (See Figure 5-D) made to fill the entire screen. (6) To identify frequencies at various points along the response curve, turn up the output of the marker generator and tune upward from its lowest frequency. Note that a beat-note pip, such as is shown in Figure 5-E, will appear somewhere on the curve. The frequency represented by this point on the curve then may be read from the dial of the marker generator. Always use the weakest marker signal which will produce a visible pip on the curve. Strong marker pips distort the response curve and give a false indication of amplifier characteristics. (7) After reaching the upper frequency limit of the audio oscillator, remove this instrument from the setup, and connect in its place an unmodulated RF signal generator. The latter then may be used as a signal marker up to the top end of the video response curve.

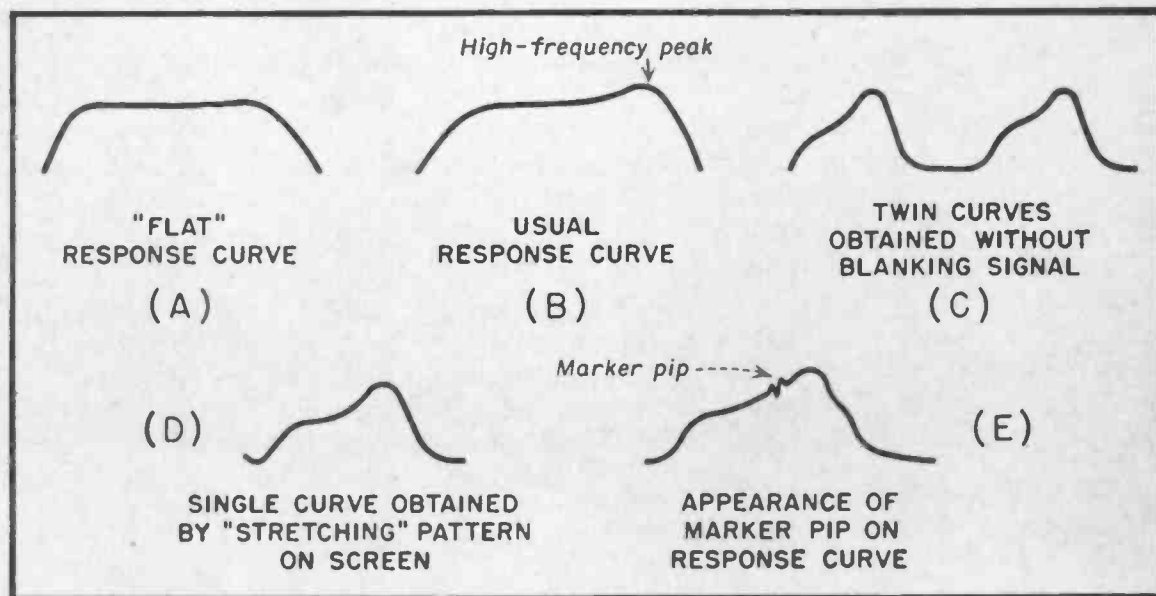



Fig. 5. Video amplifier response curves.



CD's Tiny Mike

takes 30,000 volts with a grin!

The famous ceramic body made by C-D with an original engineering job inside and out! More dependable, longer lasting than any previous TV high-voltage ceramic capacitor! Can be used at *full rated voltage*, because it's *conservatively* rated for DC flash test up to 2x rated working voltage!

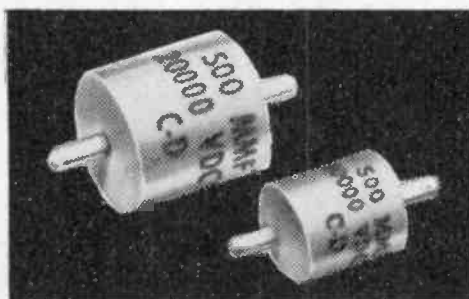

Send for Bulletin 2-614
Department
Cornell-Dubilier Electric Corp.
South Plainfield, N. J.



SUBSIDIARY

ONSISTENTLY **CORNELL-DUBILIER** EPENDABLE
CAPACITORS

Plants in South Plainfield, N. J.; New Bedford, Worcester, and Cambridge, Mass.; Providence, R. I.; Indianapolis, Ind.; Fuquay Springs, N. C.; and subsidiary, The Radiart Corp., Cleveland, Ohio



This CORNELL-DUBILIER Advertising Service is FREE to "Capacitor" readers. If there is anything of general interest or appeal that you want to BUY — SELL — or SWAP . . . if you want a job or need help, these columns are at your service.

Please PRINT or TYPE your Ad clearly and limit it to 40 words including your name and address.

If you have a "CHANGE OF ADDRESS" — give both your OLD and NEW and mark your request "For C-D Capacitor Mailing List."

Ads are published in the order received and as space permits. If your Ad does not appear in one of the two issues following the month in which you submit your Ad — please RESUBMIT it.

CORNELL-DUBILIER ELECTRIC CORP. reserves the right to edit your Ad to conform to its policies and is the final judge of its suitability for publication. We do not assume any liability or responsibility for any transaction that results. Make your deal direct with the advertiser listed in the Ad.

WANTED—115V a.c. Variac 500 to 1,000 watt capacity. Will pay cash or trade radio equipment. G. E. Howarth, 216 1st Ave. E., Oskaloosa, Iowa.

WANTED—10 or 12" TV set. Will pay reasonable price. Give price, make and model number of set. Paul Taras, 326 East 155 Street, Bronx 51, New York.

FOR SALE—BC-654-A used transmitter and receiver. Wm. W. Meinhardt, 4400 Nesho St., St. Louis 16, Mo.

WANTED—Glass dial scale for Goodyear wings model 1173. W. E. Menehan, 7416 - 5th Ave., North Bergen, N. J.

FOR SALE—New 10th Edition Radio Operating Questions and Answers by Nelson and Hornung. Excellent condition, \$3.50. Le Roy Barnes, Camden, Tenn.

FOR SALE—Airline model 94BR-3017B 7" TV set, used 4 months, in working condition, best offer. Carl W. Firestone, R. R. 3, Lebanon, Indiana.

WANTED—Motor and control head for double stack TV aerial; Oak Ridge sig. gen. 103 or 104. Have multitestors, TV sets, amplifiers and cash. John Arnold, P.O. B. 84, Bluffs, Ill.

FOR SALE—Supreme 542 multimeter in metal case with protective metal cover for meter, d.c. volts to 1500, a.c. to 600V. Best offer. Louis Fialkoff, 143-48 41 Ave., Flushing L. I., N. Y.

SELL OR SWAP—Eastman C 16mm proj., 9 reels and 20-14" records; Rem. 38-40 73 rifle; 200 blank records; typewriter; adding mach.; foreign tubes. Want Riders above 15 or ? Wm. F. O'Brien, 3928 1/2 S. Harvard Bl., Los Angeles 37, Calif.

FOR SALE—Riders vols. 1-12; Supreme 1-14; auto radio service power pack; sig. gen.; tube tester. Also other equip and technical books. William G. Bonnot, R. R. 3, Jefferson City, Mo.

SELL OR TRADE—Masco 25 watt amplifier with two 25 watt speakers for good NC173 or similar receiver. Also have complete radio servicing and communications course by NRI. Make an offer. J. D. Knight, 905 W. Morton, Denison, Texas.

FOR SALE—TV chassis, RCA (TRK-120) prewar 12" with all tubes, including 12AP4 picture tube and separate power chassis, in working condition on channel 3 only. Also some spare parts. James Trauger, 18 Penna. Ave., Haverstown, Pa.

WANTED—Technical manual on Solar capacitor analyzer, model CE, Serial No. 70054. C. Masciarelli, 565 Main St., Clinton, Mass.

SELL OR TRADE—Deluxe Remington noiseless portable typewriter with communications keyboard for portable with Elite type standard keyboard or AM sig. gen. Joe R. Ferg, 1947 AACS Sqdn., APO 633, N. Y., N. Y.

SWAP—German P-38 automatic pistol, excellent. Want R.C.P. 802N tester or NRI No. 1175-B all purpose tester. Clinton Weddle, P.O. Box 265, Bassett, Va.

WANTED—Surplus 829B, 832A, 8012 tubes; Also one 2.1 to 3 megacycle 274N or ARC5 transmitter. Will buy or swap radio equipment. R. M. Smith, 3534 1st Ave N.E., Cedar Rapids, Iowa.

FOR SALE—Hallicrafter Ham rec. with base reflex cabinet and speaker, \$45; walnut cabinet and 10BP4 tube to fit RCA 6-30 TV chassis, \$35. G. H. White, 276 First St., Mineola, L. I., N. Y.

TRADE—National 1-10 rec. with power supply, \$35; Miller High Fidelity AM tuner, \$40. Want test equipment, oscilloscope, VTVM, or sig. gen. Lt. R. G. Kuck, USMCR, MCEB, Marine Corps Schools, Quantico, Va.

FOR SALE—Heath bat. eliminator; Heath sig. gen.; Heath tube tester. Duane Vaught, R.F.D. 8, Bloomington, Ind.

FOR SALE—Complete set Rider Manuals, 1-5 and up to including 14 with all reference books, everything in excellent condition, hardly used. \$125 cash. C. R. Thornrose, 3819 Greenview Ave., Chicago 13, Ill.

FOR SALE—Bogen 8w amp., 10" spkr. and cry. mike, \$25; Federal No. 250 photo enlg. and easel, \$30; 12 x 28 Lott photo dryer, \$10; Fund. of Vacuum Tubes by Eastman, \$2. Arthur Cherry, Jr., Box 65, North Branch, New York.

FOR SALE—10" and 12" walnut speaker baffles, \$2 and \$3; 500 mixed cabinets; blanks and cuts. John White, 3rd and Market St., Lewes, Dela.

WANTED—Gonset convertor, 3-30 or Tri-band. State price and condition. Epps Griffin, R. 2, Box 172-A, Pittsburg, Texas.

FOR SALE—Transcriptions, music only, double faced, 16" vinylite 15 minute programs. 3 for \$1; 10 for \$3 f.o.b. Visalia. Hinz Radio Lab, 821 Rinaldi, Visalia, Calif.

TRADE OR SWAP—Electric needle used by doctors for burring and cutting, etc. Want car converter receiver 1 to 30 mc, or what have you? Hobert Kiser, Box 175, Ravenswood, W. Va.

WANTED—Hallicrafters Panoramic Adapter that can be used with model SX-42; in good working condition. State price. Richard R. Heilman, 323 Canal St., Lebanon, Pa.

WANTED—Communication receiver. Chas. Larson, Ada, Kans.

FOR SALE—1937 Buick custom built radio in good condition, new vibrator, \$22.50. Ship c.o.d. on \$2 deposit, or will trade for 15 Sam's Photofact folders, No. 58 up. James J. Walters, Box 251, Smith-ton, Pa.

TRADE OR SELL—Kodak 16mm silent projector; mod. transformer 6L6 P.P. Want sig. tracer, VTVM, radio, or standard tubes. Ray Andersen, 1033 Indiana Ave., Racine Wis.

WANTED—German Wehrmacht radio tubes; DCH11, DF11, DL11, DAF11, UYN power. Also 92 lessons Radio and TV Course (National), sell or swap. Bill Hagara, Box 224, Slickville, Pa.

FOR SALE—Dumont type 274 cathode ray oscillograph, 5" cathray tube, with instructions, excellent. Any reasonable offer over \$100, or? Frank Siegel, 107 Rodney St., Brooklyn 11, N. Y.

TRADE—Bell and Howell 16mm movie camera; 35mm Retina; Ansco Speedex, 4 x 5 B & J press camera; two Weston meters; etc. All excellent. Want good TV service equip. and parts. William H. Bockman, 400 Single Ave., Collins Park, New Castle, Delaware.

FOR SALE OR TRADE—Hollins 16mm sound on film projector, used one mo., \$300. Or trade for radio test equip. or supplies. J. A. Quarles, R. 7, Box 781, Pine Bluff, Ark.

SELL OR TRADE—Hallicrafters SX25; Webster wire recorder less amplifier, 20 spools of wire; converted BC645, SCR522, several components of SCR274N. Want automatic pistols or broadcast quality audio equip. Richard Davis, 401 N. Sergeant, Joplin, Missouri.

SWAP—German Luger and P-38 pistols in perfect shape. Want Revere 8mm magazine movie camera, or equiv. in good condition. LeRoy Mehr, 1512 Wildwood Ave., Camden, N. J.

FOR SALE OR TRADE—NRI model 33 sig. tracer; NRI radio course; Shavemaster electric shaver. Best offer or trade for a good tube tester. E. J. Kostelnak, 5033 So. Seeley Ave., Chicago 9, Ill.

FOR SALE—Dynamax portable record player, complete with tone and volume controlled amplifier, speaker, and carrying case. Worth \$45, best offer. Ronald Wasserman, 1239 Findlay Ave., Bronx 56, N. Y.

WANTED—NRI course with all parts and manuals. I. Heskowitz, 7222 Jackson St., Philadelphia 35, Pa.

FOR SALE OR TRADE—2 diamond phono needles. Want VOM, signal generator, or tubes. J. W. Landon, Wayne, W. Va.

FOR SALE—Heathkit battery eliminator; Heathkit sig. gen., model G1, complete assembly; Sams photofact folders, 20 to 30. \$35 for all. W. D. Love., Box 27, La France, S. C.

SELL OR TRADE—Triplett VOMA; Philco multitester; asst. tubes; sound projectors; film; and many other radio and electrical items. Want record changer, recorder, 16mm film, guns, or what have you? Jack Grant, Box 42, Olney, Okla.

FOR SALE—C-D capacitor bridge, model BN, excellent, in original carton, instruction booklet included, \$15. Leon J. Kamienski, 2051 N. Kilbourn, Chicago 39, Ill.

FOR SALE—Argus C3 35mm camera with synchronized flash gun, case, and two filters, good condition, \$45; DeJur exposure meter, \$10. Jack's Radio Service, 296 Wainwright St., Newark 8, N. J.

WANTED—Signal tracer in good condition. Also Supreme manuals, all volumes except 1940 and 1941. State lowest price. Wm. T. Foran, 403 Main St., Pottsville, Pennsylvania.

FOR SALE—Radio tubes, large stock, especially older types. List price plus postage. Turner's Radio Service, 2019 Sherman St., Anderson, Indiana.

FOR SALE—Precision EV-10P VTVM with probe, very good, \$75. Jack Newland, 1503-16th St., Bedford, Indiana.

SWAP—RCA oscilloscope, model 151-2, good condition with spare CR tube and instruction manual for 8mm 500 watt projector. Must be in working condition. Owen's Radio Service, Box 5, Fayetteville, N. C.

SELL OR TRADE—Sam's Photo-facts, 38 thru 70; Rider's vol. 16; Ghirardi's Modern Radio Servicing; Supreme Diagrams 1926-38, 1939, 1940. \$40, or trade for model railroad equip., H-O gauge. Harold Maylone, RD 2, Wellsville, Ohio.

SELL OR TRADE—BC654 transmitter-rec., excellent shape; Abbott trans-receiver, 2 meters. Interested in instruments, TV parts, or what have you? C. F. Albertoni, 2629 Paxton St., Akron 12, Ohio.

SELL OR TRADE—Three phase motors, 1/2 to 3 h.p.. Want single phase capacitor type motors, 110V high amperage rectifier, VTVM. C. B. Gardner, RD 2, Box 107A, Catskill, New York.

FOR SALE—Tubes: 802, \$4; 803, \$21; 829B, \$14; five 6L6, \$1.50 each. Merton Iwerks, P.O. Box 44, Forest City, N. C.

FOR SALE—Precision model EV-10P VTVM, excellent condition, \$50. Johnnie J. Johnson, 612 Maple St., Mobile 16, Ala.

FOR SALE—Vomax VTVM, excellent condition, complete with instructions, \$35 f.o.b. Santa Cruz. Television Center, 877 41st Ave., Santa Cruz, Calif.

SELL OR SWAP—Oscilloscope components. Write for details. J. J. Bobrow, 1045 Woodycrest Ave., Bronx 52, N. Y.

FOR SALE—First \$100 takes 630TS TV kit with all tubes except CRT, in original cartons, never used. E. W. Radio Service, 6629 No. Rockwell St., Chicago 45, Illinois.

FOR SALE—50 very good 1F7 radio tubes, \$2 ea. Overstocked, other tubes, all numbers. Also speakers and other parts. Tom Brown Radio Service, 1220 Eighth St., New Orleans, La.

FOR SALE—Transmitting parts, tubes, meters. Also have radio tubes for sale. Leo F. Kersey, White Sulphur Springs, W. Va.

FOR SALE—Complete Deforest master course, plus laboratory, \$160. List of tubes on request. Atlas, c.p. 5 Hauteville, Levis, P.Q., Canada.

TRADE—Kodak 35 with 5.6 anastigmat lens, Kodex shutter, in good condition, for vacuum tube voltmeter or kit, or what have you? W. Bender, 350 East 77th Street, N. Y. C.

FOR SALE—10 RCA coin radios, model MI-13174, price \$35 ea. f.o.b. Clayton. Roy M. Sadler, Clayton, New Mexico.

FOR SALE OR TRADE—Transformer 1000V each side of center tap 750 mils with chokes to match; two 866 tubes with fil. trans. to match; two WE 261A tubes; two WE 284D tubes; two WE 211E tubes; One WE output trans. to match 211E tubes 50 watts. H. H. Harrison, 300 37th Way, Sacramento, Calif.

WANTED—One 4D32. Pay cash or swap two 813's. R. E. Toldrian, 36 N. Spring Garden Ave., Nutley, N. J.

FOR SALE—Circuit diagrams and data for individual model or chassis, TV - 75 cents, others - 60 cents each. Raymond Conover, Stone Ridge, N. Y.

FOR SALE—Weston model 798 tube checker. Modernized for Naval type tubes. Excellent condition. Spring Electronics, 128 Spring St., Passaic, N. J.

SELL OR SWAP—8" circular saw; sixty power microscope; 3-way portable. Want amateur receiver, 5" scope or what in test equipment? Paul Pancio, 1009 Homer St., Olean, New York.

FOR SALE—BK Brush Soundmirror tape recorder, excellent condition, ten reels tape free, \$175; 2 LP pickups, \$12; RCA wire recorder, \$50; Wilcox Gay A-70 console radio, recorder, and playback, \$55. Many other bargains. John Nowak, 33 Parker Ave., Passaic, New Jersey.

FOR SALE—1951 Sprayberry TV training course complete with 29 TV lessons, 10 demonstration manuals, and 7" TV receiver. \$150 or best offer. James Hurst, 22 June St., Fall River, Mass.

FOR SALE—Meissner 3 tube a.c.-d.c. regenerative receiver, with 4 plug-in coils from 17 to 545 meters, and 1 set of headphones, \$13. Kenneth Guthrie, Reasnor, Iowa.

FOR SALE—Triplett portable model 1175B multimeter and signal generator, 0-1500 volts a.c. and d.c., 0-20 meg., 0-15 amp., 130kc. to 28mc. \$35 f.o.b. L. E. Bollinger, 61 Winthrop Road, Columbus 2, Ohio.

SELL OR SWAP—German stamps, tubes, diagrams. Please send International Reply coupon for reply. Gerhard Kensy, Nurnberg, (13a), Siemensstr. 40, Germany.

FOR SALE—Silver-tone 3-way portable with batteries, model 101 .823-1, phone jack in rear, \$25. Or what have you? William Hintz, R. 4, Hutchinson, Minn.

FOR SALE—200 popular scarce type receiving tubes. Best offer. Barney Loebe, Grenada, Mississippi.

SWAP—Have many radio magazines. Want home-workshop magazines. Send your list. Mine will follow. F. L. Revie, Box 411, Lemon Grove, California.

TRADE—Have surplus known brand 6T8 tubes. Will exchange for 6BG6, 5V4, 5U4, 1B3 tubes. List value. Write for details. Ben Marconi, 120 Gatling Pl., Brooklyn 9, N. Y.

FOR SALE—Ex German Navy transceiver, first class cond., complete with mike, cables, power pack for 110/220 a.c. and 12V batt., extern. xtal QRG control pack, range in CW and Phone 2-5 Mc/s. perfect. Hans Wahnschaffe, Hamburg-Blankenese, Ferdinandshohe 11, Germany.

SELL OR TRADE—Lab type 10 tube tester, \$20. Also have 16mm sound movie films and tubes. Harold Wurm, 1009 W. Barnes Ave., Appleton, Wis.

SALE OR TRADE—Eico 425 5" scope, \$60; 1/4" elect. drill, \$8. Want 250 watt ISO TRAN and "A" batt. eliminator. Dale Henry, 1915 El Cajon Blvd., San Diego 4, Calif.

SALE OR TRADE—Zenith 7G605 Trans-Oceanic portable; Hammarlund Comet Pro short-wave receiver; automatic record changer, ten or twelve inch; Riders Manuals. Want Tweeters for Scott XXX; Super Pro, any condition; or what? Glenn Watt, 415 West First, Chanute, Kans.

WANTED—Precision model E-200-C signal generator in A-1 shape, and one small portable Diathermy outfit in good shape. Cash for same. Chas. S. Brotzman, 173 Main St., Mexico, Maine.

WANTED—Good used "S" meter for Hallicrafters S-20R. State condition and price. Dorsey Lehman, Radio Shop, Culbertson, Nebr.

FOR SALE—487 diagram and instruction sheets covering all models record players, FM-AMtuners, intercoms, tape and wire recorders from 1947 to 1950. Also PA systems. Parts list included with every diagram, \$116.80. John Keller, 411 South Market Street, Martinsburg, Pa.

TRADE OR SELL—Ashaway or Humphrey Spinning reels for late radio tubes. Also have 35mm camera, battery type tube bargains, B-flat clarinet, and glass fishing rod. Want tubes or cash. Frank E. Popma, Orange City, Iowa.

FOR SALE—Heavy duty Philco power transformers, 6.3V filament; lots of hard to get tubes; all kinds of radio parts. State your needs. E. L. Somers Radio Service, North Somerset Avenue, Crisfield, Maryland.

TRADE—Packard Bell radio, PA system, recorder, playback, pushbutton control, with short wave band, in leather carrying case. Want communications rec. Albert H. Kaiser, 1973 1/2 Hillcrest Road, Hollywood 28, California.

FOR SALE—National N.C. 46 high freq. receiver and speaker, excellent cond., \$50. Russell M. John, Jr., RD 2, State Rd., New Castle, Delaware.

FOR SALE—Modern Radio Servicing by Ghirardi, \$2.50; FM Transmission and Reception by Rider and Uslan, \$2.50; TV Servicing by Manly, \$2.50; Math. for Elect. and Radiomen by Cooke, \$3.50; Radioman's Guide by Audel, \$2.50. John Comstock Wellsboro, Penna.

WANTED—SX-42, speaker not necessary, in top condition. State condition, cost, and method of delivery. Frank McCafferty, 149 W. Godfrey Ave., Philadelphia 20, Pa.

TRADE—German Voigtlander Kodak No. 120, 3.5 lens, very compact. Want radio test equipment, or what have you? S. C. Constable, 633 Ave. "B" S.W., Winter Haven, Fla.

FOR SALE—Army surplus PU-8 gasoline motor driven generator unit, 110 volts, 1400 watts, 400 c.p.s., and 28 volts d.c., 400 watts, with spare parts, new condition, \$100. S. J. Solms, 132 Franklin Turnpike, Ramsey, N. J.

TRADE OR SELL—Want 8mm movie equip., radio correspondence course, Linguiphone French course, and other items. Have radio gear to trade or sell. Send your list — I'll send mine. D. D. Bulkley, 405 Weaver Street, Larchmont, N. Y.

TRADE—Webster wire recorder model 80 in excellent working condition, a year old. Want disc recorder, or what have you? S. T. Jazowski, 335 17th Ave., Irvington 11, N. J.

FOR SALE—Dynamic microphone, electro-voice model 725, 30-10,000 cps, hi-impedance, output 53 DB, variable pick-up pattern, built-in on-off switch. Complete with 20 ft. low cap. cable and sturdy adjustable floor stand, never used, \$20. N. Hulemark, 130 - 75th St., Brooklyn 9, N. Y.

FOR SALE—274 TV diagrams covering 929 models. Diagrams contain parts list, voltage and resistance measurements, alignment data. Plus 79 wiring diagrams covering 446 models, no service data 1946 to 1950. \$215.50. John Keller, 411 South Market St., Martinsburg, Pa.

WANTED—Millen Grid Dipper, good condition. Prefer on swap basis. Have new 250th, tuning condenser, and filter condensers that go with it. Or what do you need? Molyneux, 53 Gulf St., Chickasaw, Ala.

WANTED—Test equipment for TV and radio service. Late models. Give full details and prices. Joseph Konecny, P.O. Box 4011, Jacksonville, Fla.

WANTED—Globe King, Lysco, 32V-2, SR-75, HT-9. Trade RCA 663, S-72, two 344-D, ART with a.c. sup., Amer. Variac 0-150V 20 amp., 0-220V 4.55 amp., 779B with sup., Bausch Lomb 6 x 30mm binoc., Webster portable Model 80-1 wire recorder. B. Armstrong, 18425 - 4th S. W., Seattle, Washington.

FOR SALE—Rider publications, all perfect: TV Manual No. 1, FM Transmission and Reception, Servicing by Signal Tracing, the Oscillator at Work, the Meter at Work, Vacuum Tube Voltmeters, Automatic Freq. Control Systems, Aligning Philco Recs. (2 vols.), Hour a Day (4 vols.), Philco TV Servicing. Everything, \$20. P. Rosenblatt, Paterson Plank Rd., Carlstadt, N. J.

FOR SALE—RCA 1" CR oscillograph with built-in AF oscillator and attenuator, plus excellent RCA 2" interchangeable CR tube and operating manual, \$18. Also G.E. 1/4 h.p. 115V d.c. motor with pump and shaft coupling, \$9. M. P. Ross, 2420 Sedgwick Ave., University Heights 63, New York, N. Y.

FOR SALE—Hammarlund Super Pro, SP-400X. Three years old, used very little, excellent condition, matching speaker. Best cash offer, no trade, f.o.b. Bob Horst, 954 County Road B-2, St. Paul 8, Minnesota.

WANTED—CREI correspondence books on Radio Engineering, complete course. State condition, number of volumes and price. W. H. Smith, 115 Eastern Ave., Bellmore, L. I., New York.

FOR SALE—Supreme sig. gen. and freq. modulator, model 581; Supreme oscilloscope, model 535; Superior X-rayometer, VOM capac.; Superior model T-53 dynamic mutual conductance tube tester. Also 10 old radios. Robert Bilek, 10407 Grandview Ave., Cleveland 4, Ohio.

WANTED—AN/APR-4 recr., tuning units; ARC-1, ARC-3, TS-174/U, ART-13, other "TS-" radar, lab equip., manuals, tubes, etc. Give description and price. Charles C. Littell, Jr., Farhills Box 26, Dayton 9, Ohio.

WANTED—Several TV sets, 10" or larger, in operating condition. Cabinet condition immaterial. To be used for instructional purposes. State model, condition, and bottom price. School of Industrial Technology, 149 East 26th St., New York 10, New York.

FOR SALE—NRI signal tracer, model 33, new condition, \$35. Or will trade for Precision E-200C sig. gen. and give \$15 difference. Obern Vanover, Wise, Va.

WANTED—2, 3, 5, horsepower gas engine, in reasonably good condition, suitable for small farm equipment. Have radio and TV parts, test equipment, and Hallicrafter rec. H. Miller, 5030 Sprague Rd. E., Cleveland 9, Ohio.

WANTED—One of the better Scott receivers. Write full description, model, type, price. James H. Littig, Kasota, Minnesota.

FOR SALE—Model 502 Supreme tube and set tester, excellent condition, manuals and tube test sheets and tube adapters, \$30 postpaid. Albert C. Hart, 207 N. Raymond St., Griffith, Indiana.

FOR SALE—Silicon Steel Strip, Trans. Grade 58, 3000# .003 x 11/8" x coils, immediate delivery. N. E. Slavin & Co., 80 Federal St., Boston 10, Mass.

SELL OR TRADE—Sound projectors, 16 and 35mm sound films, test equip., amplifier 18W, lot of 85 tubes, other items. Want recorder, record changer, radios, guns, watches, etc. Jack Grant, Olney, Okla.

WANTED—Wheatstone bridge. Also will trade 3 phase 220 volt motor generator 250 amp. d.c. General Electric welder for best TV set offered. H. E. Roberts, RR 4, Wapakoneta, Ohio.

FOR SALE—Excellent rear seat speaker assembly, complete; Ford auto radio series, part No. 51A-18875 and 59A-18875, \$4 f.o.b. Norfolk. Raymond H. Ives, 663 Kempsville Rd., Norfolk 2, Va.

FOR SALE—Superior Instrument Co., tube tester, model 450, instructions. This tester hasn't been used very much. First \$25 takes it. Postpaid. Morton's Radio, P.O. Box 43, Potsdam, N. Y.

SWAP—Rider 1 and 2 for volumes later than No. 3. State condition. Mine are very good. H. A. Nickerson, 435 N. Main St., Sharon, Mass.

SWAP—FMETTE FM radio for service instruments. Blais' Radio Service, 282 Pleasant, Berlin, N. H.

WANTED—A 7" TV set for \$25. I have a signal generator with a condenser checker which I will sell for \$10 plus postage. Tunes from 100kc. to 6.5mc. M. Brown, 525 Penna. Ave., Elmira, N. Y.

FOR SALE—200 watt phone, CW, all band transmitter, custom built in floor cabinet. Sell to highest bidder over \$100. Frank's Radio Lab., Box 252, W. Burlington, Iowa.

TRADE—BC 221C freq. meter, perfect shape complete with calibration books, spare set of matched tubes and crystal and converted to a.c. Want Meissner sig. shifter with NBFM or small commercial fone-cw transmitter. Henry A. Galbraith, 1101 East Franklin, Evansville, Indiana.

SELL OR SWAP—G.I. 78 r.p.m. recorder and playback unit. Want electronic test equipment. Make offer. Paul Schiffres, 1 Jennis Court, Brooklyn 26, N. Y.

WANTED—To buy or swap, new radio, TV, transmitting, and special-purpose vacuum tubes. Send detailed list for cash offer. What do you need? B. N. Gensler, 136 Liberty St., New York 6, N. Y.

FOR SALE—BC-412B oscilloscope in excellent condition. Best cash offer. N. I. Wolk, 1411 Avenue N, Brooklyn 30, N. Y.

SELL OR SWAP—Large list of test instruments and parts (electronic). List sent on request. Like to trade for complete enlarger or Speed Graphic type camera. M. J. Kolo, 9315 Brockton St., Detroit 11, Mich.

FOR SALE—Limited quantity of 70L7 radio tubes, \$1.10 ea. postpaid. Also 78 r.p.m. record player, \$5.50. Jones Radio Co., Box 93, Douglassville, Pa.

WANTED—Good K&E or P&E slide rule and Ciroflex or good camera. Will buy or trade for S-40 in excellent cond. Dan De Leon, 39-49 45th St., L. I. City 4, N. Y.


WANTED—Will buy radio and TV tubes by the lot. Also need dial scale for Silvertone chassis No. 110.454. Can use several 5 tube radio sets or kits, will swap. Ben's Radio, Dept. CD, North Tonawanda 2, N. Y.

FOR SALE—Precision 10-20P tube and set tester, latest roll chart, \$80. Precision E-200C sig. gen., \$45. Supreme model 574 Electronic set tester (VTVM), \$45. All excellent condition. Milan Rafayko, 355 N. Limestone, Lexington, Ky.


FOR SALE OR TRADE—Radio shop with very good stock of hard-to-get tubes, in lively TV area, competition practically nil. Will sell for \$1500, or trade for house trailer 22' or smaller, less than 5 years old. Radio Clinic, 215 E. Mich. Ave., Marshall, Mich.

Dependability is the word for

CORNELL-DUBILIER VIBRATORS

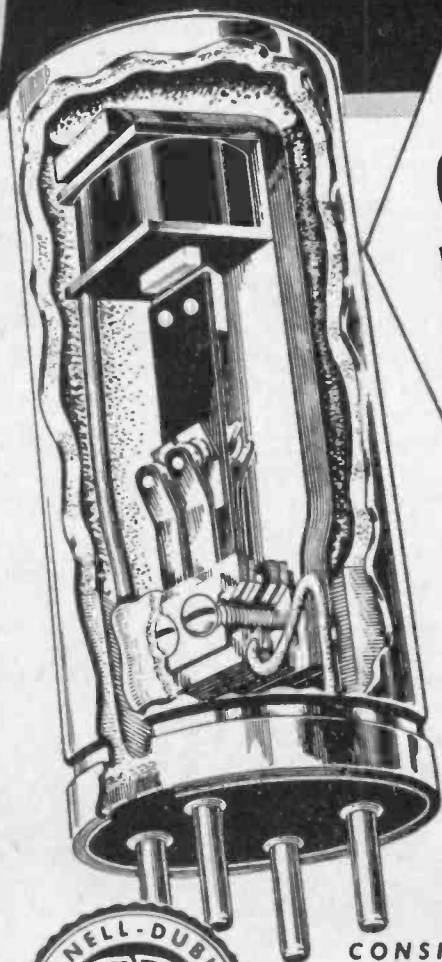



CORNELL-DUBILIER...the name that stands for quality — assures you of the finest in vibrators. A type for every replacement need...engineered for dependable peak performance under even the most adverse conditions. And they are QUIETER...affording the maximum...yet at no extra cost.



CONSISTENTLY DEPENDABLE
CORNELL-DUBILIER
SOUTH PLAINFIELD, NEW JERSEY



- ROTATORS
- CAPACITORS
- VIBRATORS
- ANTENNAS
- CONVERTERS

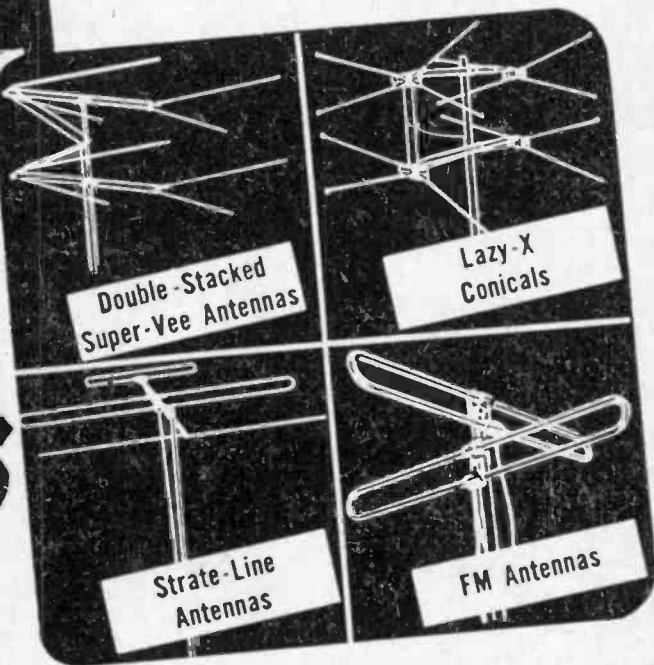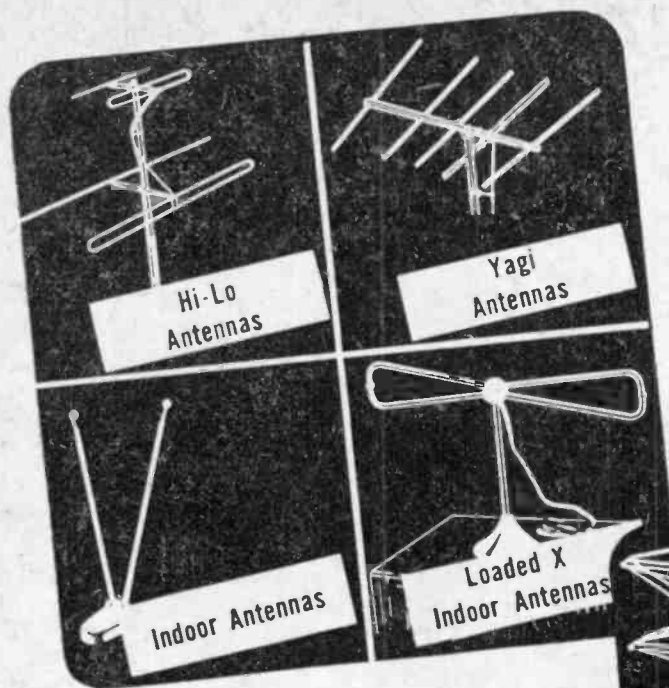

8 Good Reasons

for you to **CHOOSE
CORNELL-DUBILIER**

Skyhawk



TV ANTENNAS

One of the reasons for the splendid acceptance of C-D SKYHAWK antennas is the completeness of the line. Whatever the application... whatever the situation... THERE IS A CORRECT C-D ANTENNA FOR EVERY NEED. No need to accept inferior makes or substitute types when the C-D antenna line offers a full variety... each doing a specific job... BETTER!

CORNELL-DUBILIER ELECTRIC CORP.
SOUTH PLAINFIELD, NEW JERSEY